



FCC RADIO TEST REPORT

FCC ID : QYL8265FB
Equipment : Tablet
Brand Name : Getac
Model name : F110
Applicant : Getac Technology Corporation.
5F., Building A, No. 209, Sec. 1, Nangang Rd.,
Nangang Dist., Taipei City 11568, Taiwan, R.O.C.
Standard : FCC Part 15 Subpart E §15.407

The product was received on Jun. 09, 2018 and testing was started from Jun. 22, 2018 and completed on Aug. 02, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	11
3.2 Maximum Conducted Output Power Measurement	14
3.3 Power Spectral Density Measurement	15
3.4 Unwanted Emissions Measurement.....	18
3.5 AC Conducted Emission Measurement.....	23
3.6 Automatically Discontinue Transmission	25
3.7 Antenna Requirements	26
4 List of Measuring Equipment.....	27
5 Uncertainty of Evaluation	29
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)
3.1	15.403 (i)	6dB & 26dB Bandwidth	Pass
3.1	2.1049	99% Occupied Bandwidth	Reporting only
3.2	15.407 (a)	Maximum Conducted Output Power	Pass
3.3	15.407 (a)	Power Spectral Density	Pass
3.4	15.407(b)	Unwanted Emissions	Pass
3.5	15.207	AC Conducted Emission	Pass
3.6	15.407 (c)	Automatically Discontinue Transmission	Pass
3.7	15.203 & 15.407 (a)	Antenna Requirement	Pass

Reviewed by: Joseph Lin

Report Producer: Polly Tsai



1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, GNSS, and Digitizer.

Product Specification subjective to this standard	
Integrated WLAN Module	Brand Name: Intel Model Name: 8265NGW
Antenna Type	WLAN: PIFA Antenna Bluetooth: PIFA Antenna GPS/Glonass: PATCH Antenna Digitizer: Loop Antenna

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.



1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane for Ant. 1 and Y plane for Ant. 1+2) were recorded in this report.

- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

- 1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
- 2. The above Frequency and Channel in "#" were 802.11ac VHT80.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Single Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0
802.11ac VHT80	MCS0

MIMO Mode

Modulation	Data Rate
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (5GHz) Link + TF + TC
Remark:	
1. TF stands for Test Function, and consists of H-Pattern, Front Camera, Digitizer, Smart Card Reader, GPS Rx, and MPEG4.	
2. TC stands for Test Configuration, and consists of USB3.0 HD, Monitor (HDMI out), Earphone, RJ-45 Link, Battery, and AC Adapter.	

Ch. #	Band IV : 5725-5850 MHz		
	802.11n HT20	802.11n HT40	802.11ac VHT80
L Low	149	151	-
M Middle	157	-	155
H High	165	159	-

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	GPS Station	Pendulum	GSG-54	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
4.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
5.	iPhone Earphone	Apple	N/A	Verification	Unshielded, 1.2 m	N/A
6.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
7.	LCD Monitor	DELL	P2715Qt	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
8.	HD USB 3.0	Lenovo	F310S	FCC DoC	Shielded, 0.5 m	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “DRTU” was installed in EUT which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset}(dB) &= \text{RF cable loss}(dB) + \text{attenuator factor}(dB). \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

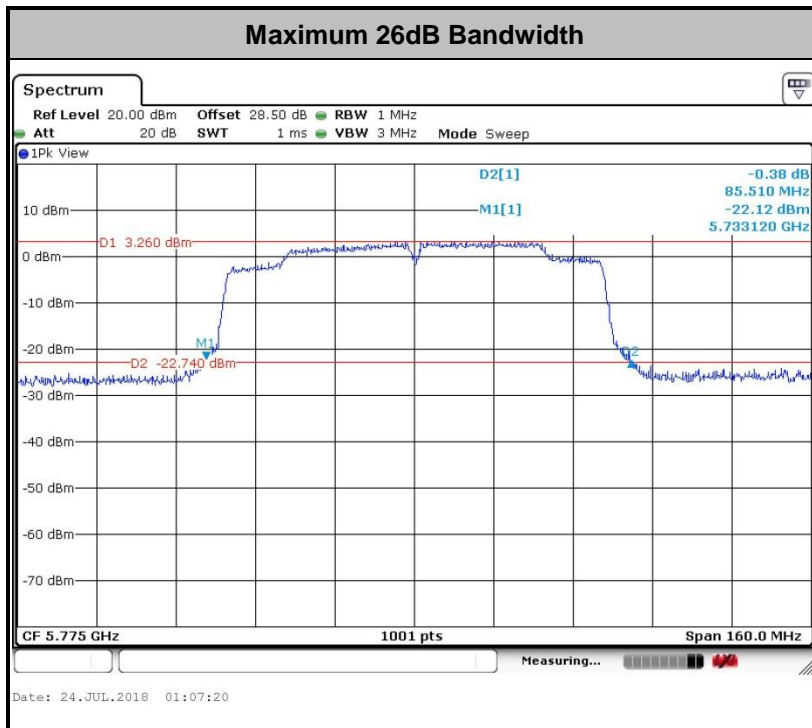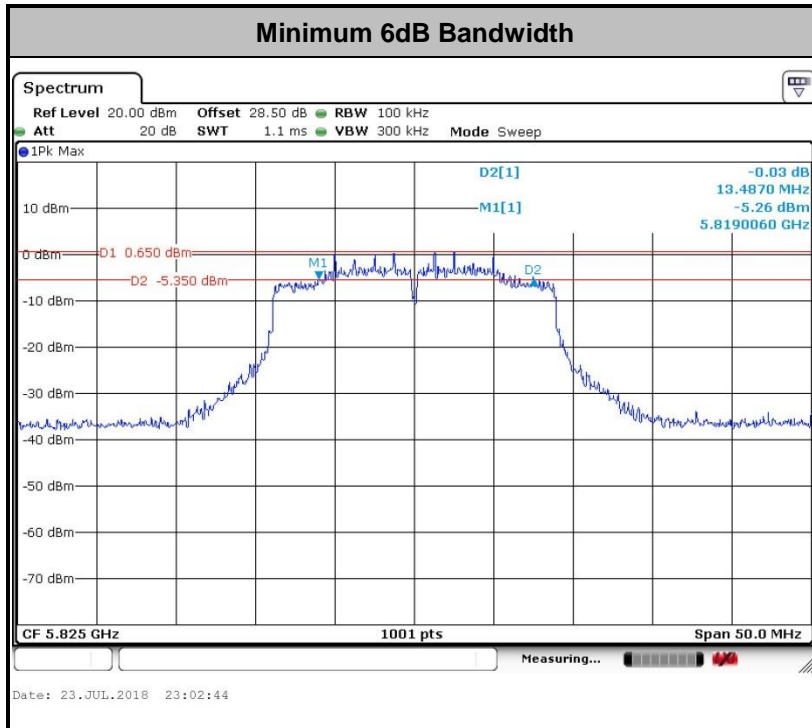

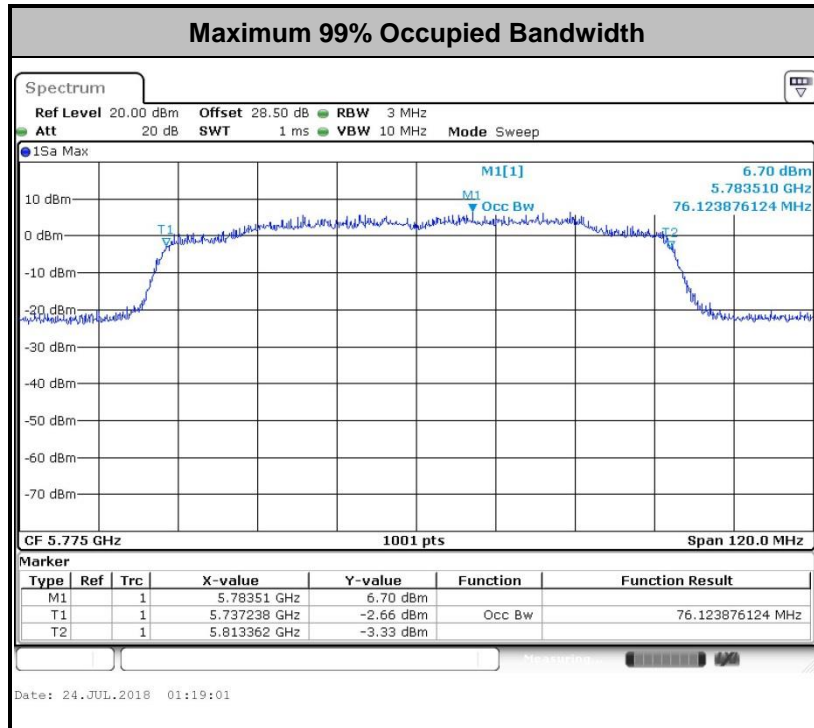

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

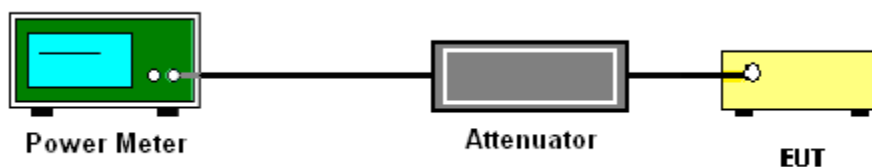

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{ANT})$ dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{ANT})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{ANT})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{ANT}^{\text{th}}$ of the PSD limit.



3.3.4 Test Setup

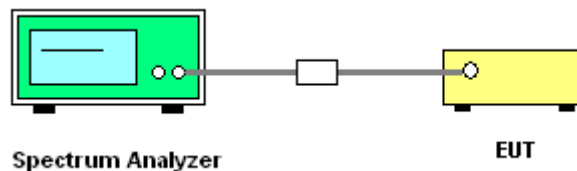



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

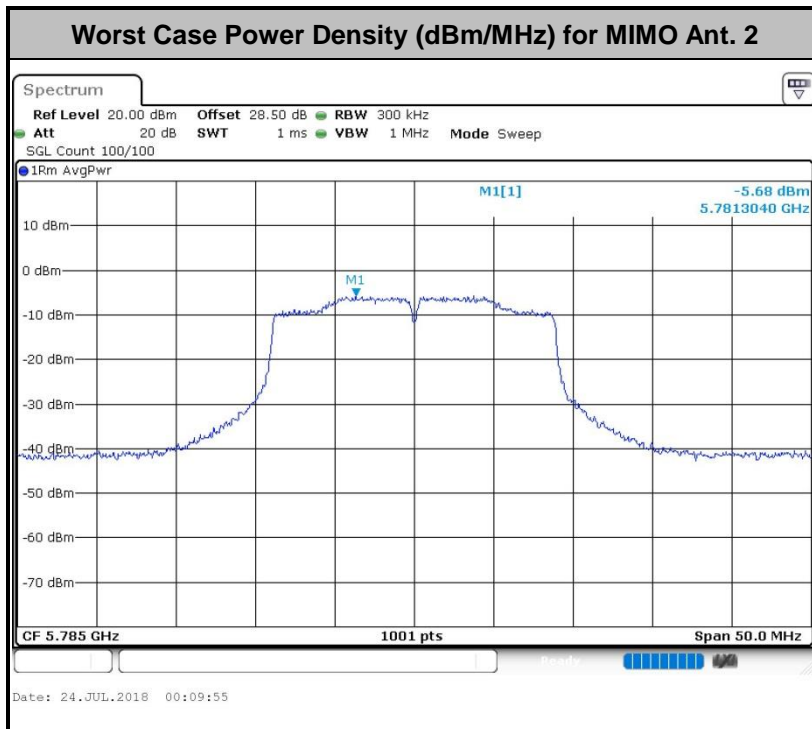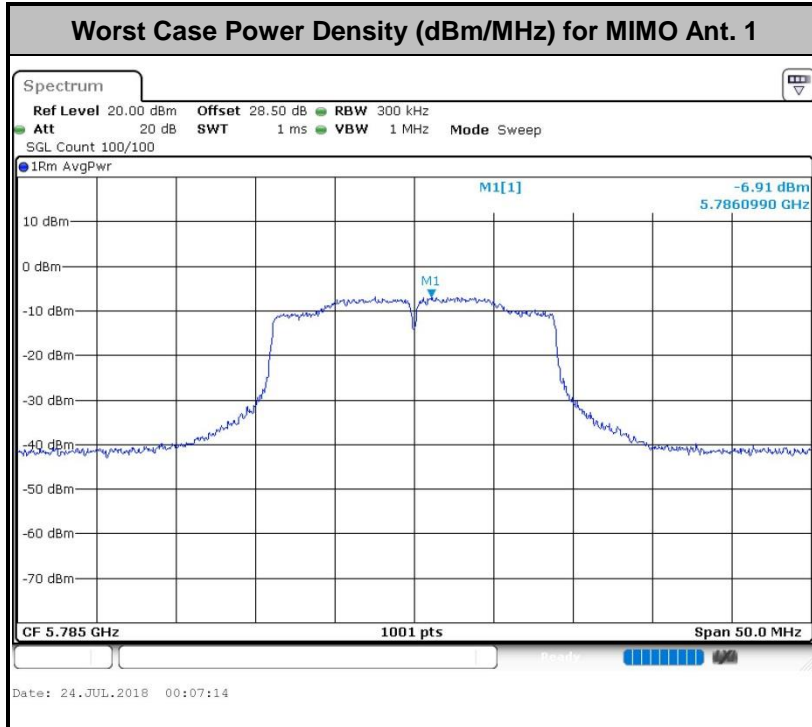



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:
 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3



(3) KDB789033 D02 v02r01 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup

For radiated emissions below 30MHz

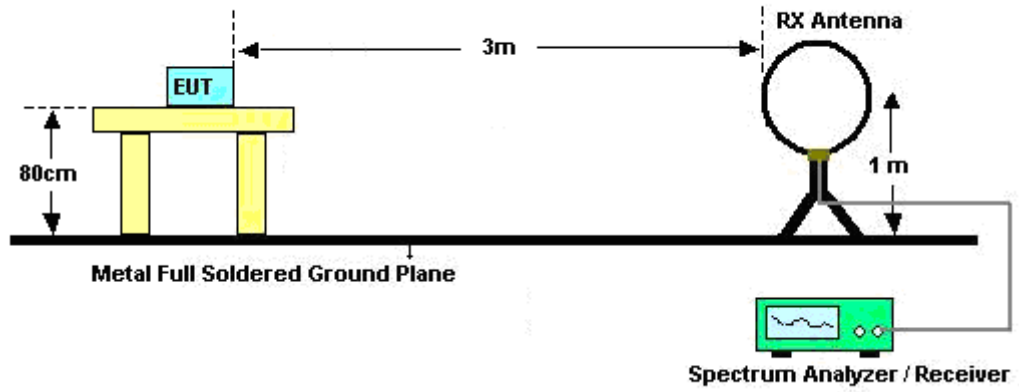

For radiated emissions from 30MHz to 1GHz

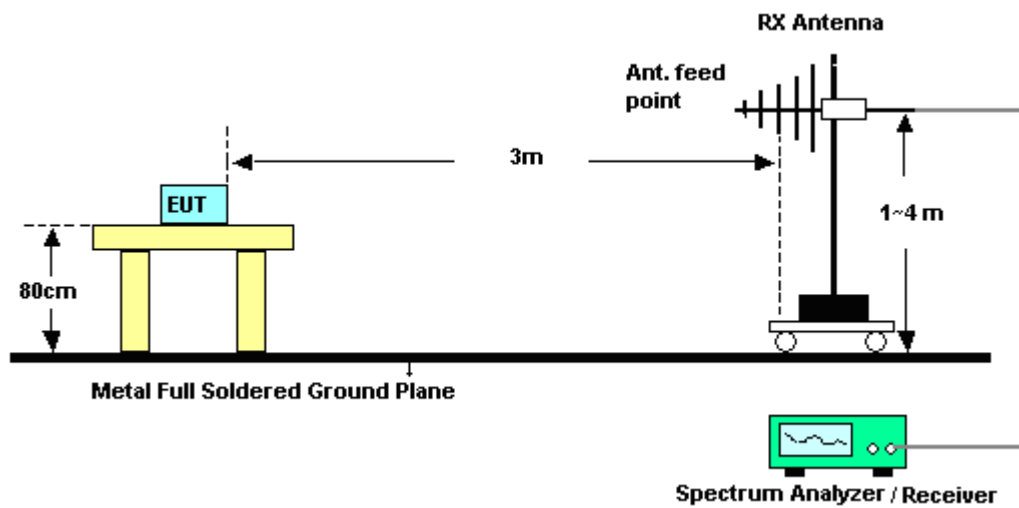

For radiated emissions above 1GHz



3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

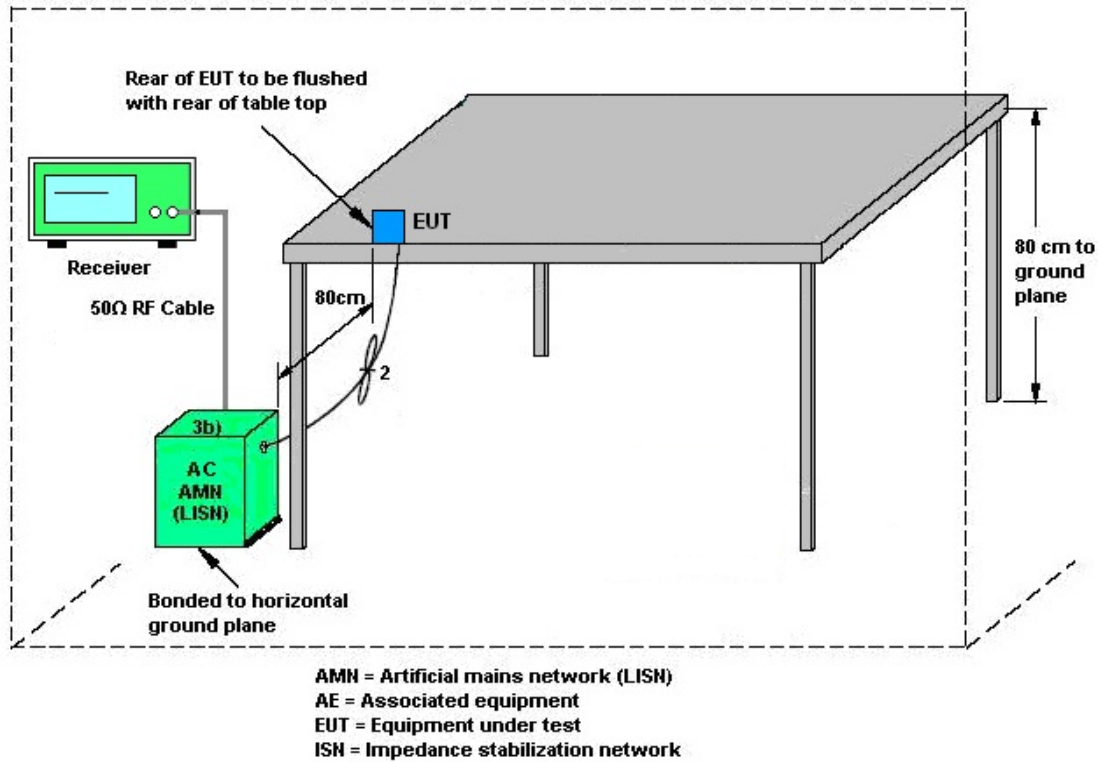

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes>

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 1 (dBi)	Ant. 2 (dBi)				
Band IV	2.80	1.11	2.80	5.01	0.00	0.00

Power Limit Reduction = DG(Power) – 6dBi, (min = 0)

PSD Limit Reduction = DG(PSD) – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1240001	N/A	Sep. 07, 2017	Jun. 22, 2018~ Jul. 24, 2018	Sep. 06, 2018	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1207349	300MHz~40GHz	Sep. 07, 2017	Jun. 22, 2018~ Jul. 24, 2018	Sep. 06, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 21, 2017	Jun. 22, 2018~ Jul. 24, 2018	Nov. 20, 2018	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 09, 2017	Jun. 22, 2018~ Jul. 24, 2018	Nov. 08, 2018	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC130048 4	N/A	Mar. 01, 2018	Jun. 22, 2018~ Jul. 24, 2018	Feb. 28, 2019	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jul. 02, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	3.6GHz	Dec. 08, 2017	Jul. 02, 2018	Dec. 07, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Jul. 02, 2018	Nov. 29, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Dec. 08, 2017	Jul. 02, 2018	Dec. 07, 2018	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jul. 02, 2018	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 03, 2018	Jul. 02, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 03, 2018	Jul. 02, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Jul. 31, 2018~ Aug. 02, 2018	Nov. 22, 2018	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-0 6	35414&AT- N0602	30MHz~1GHz	Oct. 14, 2017	Jul. 31, 2018~ Aug. 02, 2018	Oct. 13, 2018	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-132 6	1GHz ~ 18GHz	Oct. 16, 2017	Jul. 31, 2018~ Aug. 02, 2018	Oct. 15, 2018	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Nov. 27, 2017	Jul. 31, 2018~ Aug. 02, 2018	Nov. 26, 2018	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Jan. 16, 2018	Jul. 31, 2018~ Aug. 02, 2018	Jan. 15, 2019	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03	171000180 0054001	1GHz~18GHz	Apr. 16, 2018	Jul. 31, 2018~ Aug. 02, 2018	Apr. 15, 2019	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Jan. 16, 2018	Jul. 31, 2018~ Aug. 02, 2018	Jan. 15, 2020	Radiation (03CH11-HY)
Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 16, 2018	Jul. 31, 2018~ Aug. 02, 2018	Jul. 15, 2019	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz ~ 44GHz	Oct. 19, 2017	Jul. 31, 2018~ Aug. 02, 2018	Oct. 18, 2018	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	Jul. 31, 2018~ Aug. 02, 2018	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jul. 31, 2018~ Aug. 02, 2018	N/A	Radiation (03CH11-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Software	Audix	E3 6.2009-8-24	RK-00104 2	N/A	N/A	Jul. 31, 2018~ Aug. 02, 2018	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz-30MHz	Mar. 14, 2018	Jul. 31, 2018~ Aug. 02, 2018	Mar. 13, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 14, 2018	Jul. 31, 2018~ Aug. 02, 2018	Mar. 13, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	30MHz-18GHz	Mar. 14, 2018	Jul. 31, 2018~ Aug. 02, 2018	Mar. 13, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 14, 2018	Jul. 31, 2018~ Aug. 02, 2018	Mar. 13, 2019	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1 530-8000-40S S	SN11	1G Low Pass	Sep. 18, 2017	Jul. 31, 2018~ Aug. 02, 2018	Sep. 17, 2018	Radiation (03CH11-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000 -40ST	SN3	6.75GHz High Pass	Sep. 18, 2017	Jul. 31, 2018~ Aug. 02, 2018	Sep. 17, 2018	Radiation (03CH11-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Eason Huang / Rebecca Li / Shiang Wang	Temperature:	21~25	°C
Test Date:	2018/6/22~2018/7/24	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	149	5745	17.83	-	25.18	-	14.99	-	0.5	Pass
11a	6Mbps	1	157	5785	17.93	-	26.57	-	14.89	-	0.5	Pass
11a	6Mbps	1	165	5825	17.83	-	25.87	-	15.93	-	0.5	Pass
HT20	MCS0	1	149	5745	17.88	-	26.47	-	13.84	-	0.5	Pass
HT20	MCS0	1	157	5785	17.88	-	26.72	-	14.39	-	0.5	Pass
HT20	MCS0	1	165	5825	17.88	-	25.13	-	13.49	-	0.5	Pass
HT40	MCS0	1	151	5755	36.56	-	46.30	-	35.07	-	0.5	Pass
HT40	MCS0	1	159	5795	36.66	-	44.15	-	35.07	-	0.5	Pass
VHT80	MCS0	1	155	5775	76.00	-	85.51	-	70.01	-	0.5	Pass
HT20	MCS0	2	149	5745	17.93	17.98	27.27	26.02	15.93	15.04	0.5	Pass
HT20	MCS0	2	157	5785	17.93	17.93	27.62	26.97	17.58	16.58	0.5	Pass
HT20	MCS0	2	165	5825	17.98	17.93	26.67	27.82	14.04	15.14	0.5	Pass
HT40	MCS0	2	151	5755	36.86	36.96	46.75	48.73	35.07	35.07	0.5	Pass
HT40	MCS0	2	159	5795	36.66	36.96	48.55	46.93	35.07	35.07	0.5	Pass
VHT80	MCS0	2	155	5775	76.12	75.88	84.56	84.56	72.57	62.66	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	0.08	-	12.01	-		30.00	-	2.80	1.11	Pass
11a	6Mbps	1	157	5785	0.08	-	11.90	-		30.00	-	2.80	1.11	Pass
11a	6Mbps	1	165	5825	0.08	-	12.29	-		30.00	-	2.80	1.11	Pass
HT20	MCS0	1	149	5745	0.07	-	12.30	-		30.00	-	2.80	1.11	Pass
HT20	MCS0	1	157	5785	0.07	-	12.14	-		30.00	-	2.80	1.11	Pass
HT20	MCS0	1	165	5825	0.07	-	12.46	-		30.00	-	2.80	1.11	Pass
HT40	MCS0	1	151	5755	0.14	-	11.73	-		30.00	-	2.80	1.11	Pass
HT40	MCS0	1	159	5795	0.14	-	11.70	-		30.00	-	2.80	1.11	Pass
VHT20	MCS0	1	149	5745	0.09	-	12.28	-		30.00	-	2.80	1.11	Pass
VHT20	MCS0	1	157	5785	0.09	-	12.10	-		30.00	-	2.80	1.11	Pass
VHT20	MCS0	1	165	5825	0.09	-	12.40	-		30.00	-	2.80	1.11	Pass
VHT40	MCS0	1	151	5755	0.16	-	11.69	-		30.00	-	2.80	1.11	Pass
VHT40	MCS0	1	159	5795	0.16	-	11.67	-		30.00	-	2.80	1.11	Pass
VHT80	MCS0	1	155	5775	0.29	-	11.75	-		30.00	-	2.80	1.11	Pass
HT20	MCS0	2	149	5745	0.09	0.09	9.41	10.09	12.77	30.00		2.80		Pass
HT20	MCS0	2	157	5785	0.09	0.09	9.00	10.30	12.71	30.00		2.80		Pass
HT20	MCS0	2	165	5825	0.09	0.09	9.30	10.24	12.81	30.00		2.80		Pass
HT40	MCS0	2	151	5755	0.16	0.19	9.40	9.94	12.69	30.00		2.80		Pass
HT40	MCS0	2	159	5795	0.16	0.19	8.91	10.23	12.63	30.00		2.80		Pass
VHT20	MCS0	2	149	5745	0.11	0.09	9.40	10.05	12.75	30.00		2.80		Pass
VHT20	MCS0	2	157	5785	0.11	0.09	8.95	10.20	12.63	30.00		2.80		Pass
VHT20	MCS0	2	165	5825	0.11	0.09	9.24	10.14	12.72	30.00		2.80		Pass
VHT40	MCS0	2	151	5755	0.19	0.16	9.21	9.86	12.56	30.00		2.80		Pass
VHT40	MCS0	2	159	5795	0.19	0.16	8.87	10.17	12.58	30.00		2.80		Pass
VHT80	MCS0	2	155	5775	0.36	0.34	9.29	10.05	12.70	30.00		2.80		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	0.08	-	2.22	-	-4.64	-		30.00	-	2.80	1.11	Pass
11a	6Mbps	1	157	5785	0.08	-	2.22	-	-4.48	-		30.00	-	2.80	1.11	Pass
11a	6Mbps	1	165	5825	0.08	-	2.22	-	-4.03	-		30.00	-	2.80	1.11	Pass
HT20	MCS0	1	149	5745	0.07	-	2.22	-	-7.75	-		30.00	-	2.80	1.11	Pass
HT20	MCS0	1	157	5785	0.07	-	2.22	-	-4.31	-		30.00	-	2.80	1.11	Pass
HT20	MCS0	1	165	5825	0.07	-	2.22	-	-4.17	-		30.00	-	2.80	1.11	Pass
HT40	MCS0	1	151	5755	0.14	-	2.22	-	-7.84	-		30.00	-	2.80	1.11	Pass
HT40	MCS0	1	159	5795	0.14	-	2.22	-	-7.62	-		30.00	-	2.80	1.11	Pass
VHT80	MCS0	1	155	5775	0.29	-	2.22	-	-10.30	-		30.00	-	2.80	1.11	Pass
HT20	MCS0	2	149	5745	0.09	0.09	2.22		-7.31	-7.38	-2.08	30.00		5.01		Pass
HT20	MCS0	2	157	5785	0.09	0.09	2.22		-6.82	-5.59	-0.36	30.00		5.01		Pass
HT20	MCS0	2	165	5825	0.09	0.09	2.22		-6.57	-5.93	-0.70	30.00		5.01		Pass
HT40	MCS0	2	151	5755	0.16	0.19	2.22		-10.55	-9.47	-4.24	30.00		5.01		Pass
HT40	MCS0	2	159	5795	0.16	0.19	2.22		-10.22	-8.99	-3.76	30.00		5.01		Pass
VHT80	MCS0	2	155	5775	0.36	0.34	2.22		-12.41	-11.42	-6.19	30.00		5.01		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Kai-Chun Chu	Temperature :	25~27°C
		Relative Humidity :	50~52%

EUT Information

Report NO : 391803-51
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

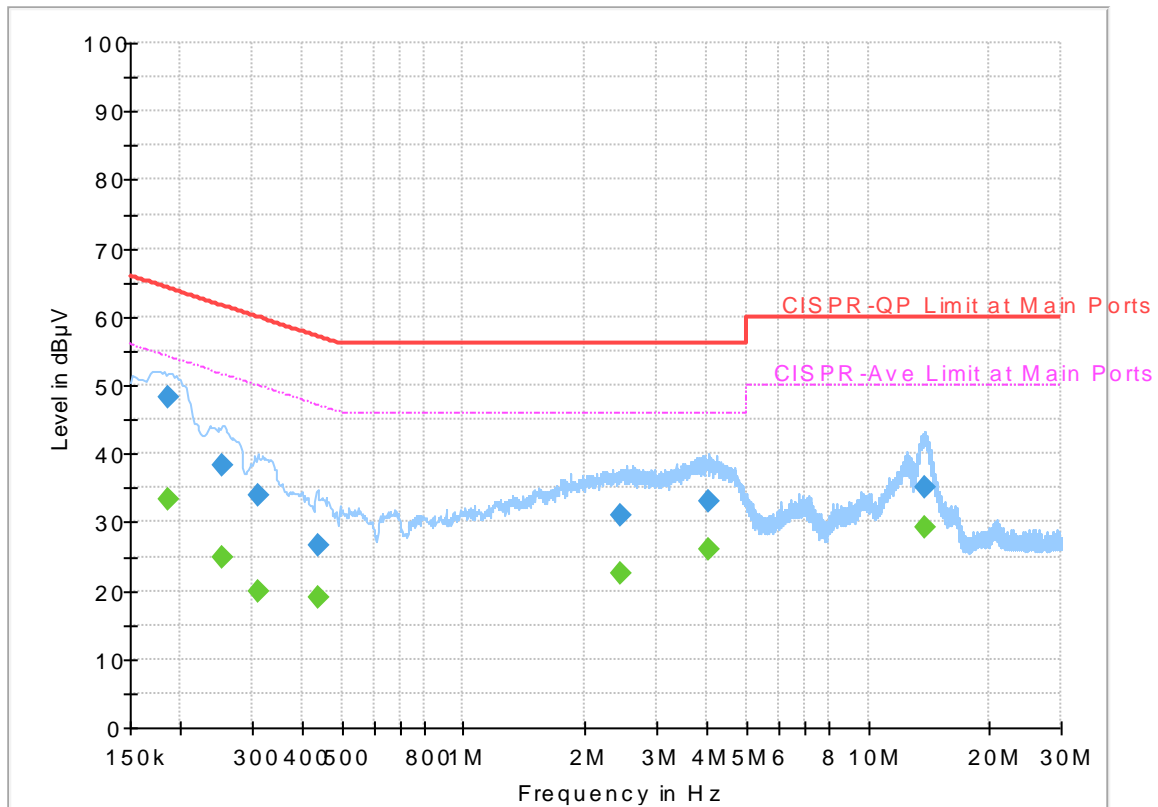


Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.186000	---	33.42	54.21	20.79	L1	OFF	19.5
0.186000	48.26	---	64.21	15.95	L1	OFF	19.5
0.253500	---	24.71	51.64	26.93	L1	OFF	19.5
0.253500	38.19	---	61.64	23.45	L1	OFF	19.5
0.309750	---	19.92	49.98	30.06	L1	OFF	19.5
0.309750	34.00	---	59.98	25.98	L1	OFF	19.5
0.435750	---	19.12	47.14	28.02	L1	OFF	19.5
0.435750	26.63	---	57.14	30.51	L1	OFF	19.5
2.438250	---	22.62	46.00	23.38	L1	OFF	19.5
2.438250	31.00	---	56.00	25.00	L1	OFF	19.5
4.044750	---	25.91	46.00	20.09	L1	OFF	19.6
4.044750	33.00	---	56.00	23.00	L1	OFF	19.6
13.800750	---	29.19	50.00	20.81	L1	OFF	19.7
13.800750	35.13	---	60.00	24.87	L1	OFF	19.7

EUT Information

Report NO : 391803-51
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

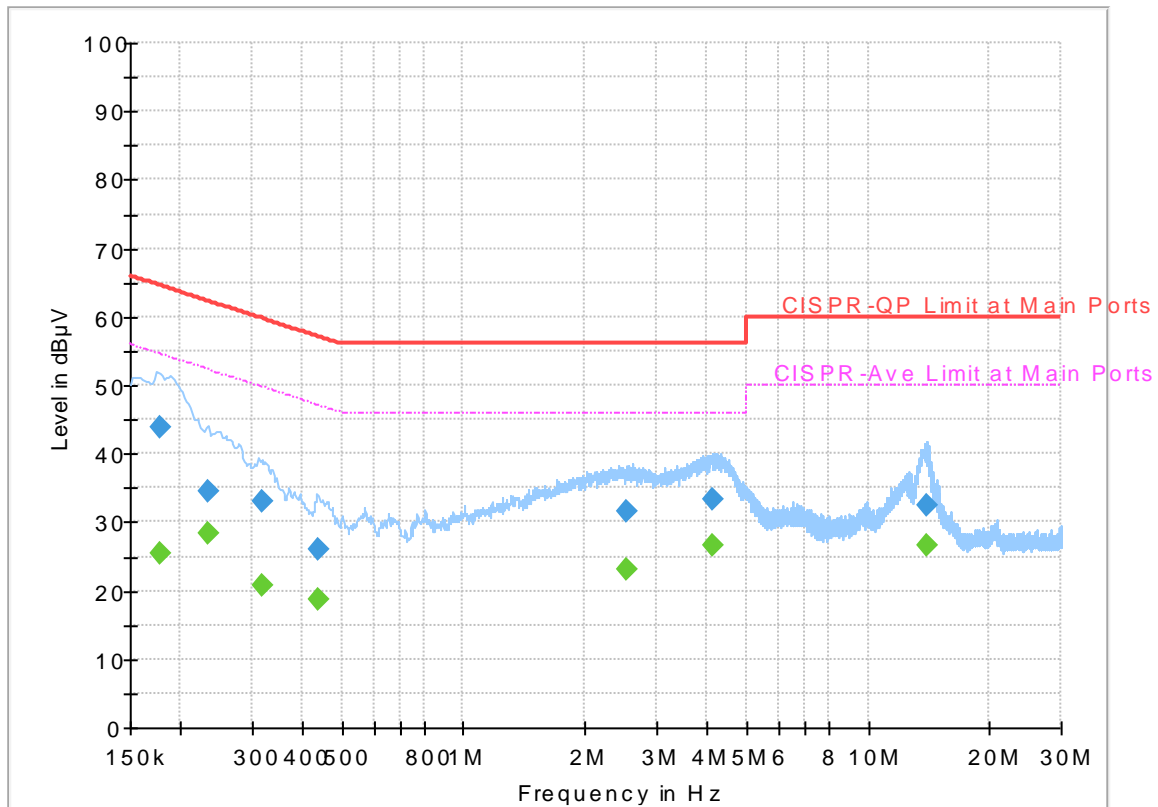

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.177000	---	25.49	54.63	29.14	N	OFF	19.5
0.177000	43.93	---	64.63	20.70	N	OFF	19.5
0.233250	---	28.34	52.33	23.99	N	OFF	19.5
0.233250	34.41	---	62.33	27.92	N	OFF	19.5
0.316500	---	20.69	49.80	29.11	N	OFF	19.5
0.316500	33.15	---	59.80	26.65	N	OFF	19.5
0.438000	---	18.82	47.10	28.28	N	OFF	19.5
0.438000	26.10	---	57.10	31.00	N	OFF	19.5
2.537250	---	23.09	46.00	22.91	N	OFF	19.5
2.537250	31.56	---	56.00	24.44	N	OFF	19.5
4.141500	---	26.70	46.00	19.30	N	OFF	19.6
4.141500	33.24	---	56.00	22.76	N	OFF	19.6
13.953750	---	26.54	50.00	23.46	N	OFF	19.8
13.953750	32.53	---	60.00	27.47	N	OFF	19.8



Appendix C. Radiated Spurious Emission

Test Engineer :	Hao Hsu and Chuan Zhu	Temperature :	22~25°C
		Relative Humidity :	52~57%

Band 4 - 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11n HT20 CH 149 5745MHz		5625.2	49.33	-18.87	68.2	40.54	32.32	33.08	9.55	397	91	P	H	
		5698.6	50.31	-53.86	104.17	41.24	32.44	33.12	9.75	397	91	P	H	
		5719.8	55.42	-55.32	110.74	46.24	32.5	33.13	9.81	397	91	P	H	
		5723.6	57.14	-61.87	119.01	47.96	32.5	33.13	9.81	397	91	P	H	
	*	5745	104.95	-	-	95.69	32.53	33.15	9.88	397	91	P	H	
	*	5745	98.31	-	-	89.05	32.53	33.15	9.88	397	91	A	H	
														H
														H
			5640	49.21	-18.99	68.2	40.35	32.35	33.1	9.61	100	211	P	V
			5661	50.06	-26.31	76.37	41.11	32.38	33.11	9.68	100	211	P	V
			5718.4	52.05	-58.3	110.35	42.87	32.5	33.13	9.81	100	211	P	V
			5723.2	53.41	-64.69	118.1	44.23	32.5	33.13	9.81	100	211	P	V
	*		5745	99.68	-	-	90.42	32.53	33.15	9.88	100	211	P	V
	*		5745	93.2	-	-	83.94	32.53	33.15	9.88	100	211	A	V
													V	
													V	



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5633.75	48.84	-19.36	68.2	39.98	32.35	33.1	9.61	353	91	P	H
		5698.5	49.51	-54.58	104.09	40.44	32.44	33.12	9.75	353	91	P	H
		5715.25	49.75	-59.72	109.47	40.6	32.47	33.13	9.81	353	91	P	H
		5721.25	49.38	-64.27	113.65	40.2	32.5	33.13	9.81	353	91	P	H
	*	5785	103.57	-	-	94.13	32.6	33.17	10.01	353	91	P	H
	*	5785	97.08	-	-	87.64	32.6	33.17	10.01	353	91	A	H
		5854.5	49.77	-62.17	111.94	40.19	32.75	33.19	10.02	353	91	P	H
		5856	50.29	-60.23	110.52	40.71	32.75	33.19	10.02	353	91	P	H
		5892.25	50.8	-41.6	92.4	41.19	32.81	33.22	10.02	353	91	P	H
		5935	49.54	-18.66	68.2	39.88	32.88	33.24	10.02	353	91	P	H
802.11n													H
HT20													H
CH 157		5650	49.4	-18.8	68.2	40.51	32.38	33.1	9.61	100	214	P	V
5785MHz		5650	49.4	-18.8	68.2	40.51	32.38	33.1	9.61	100	214	P	V
		5715.5	49.21	-60.33	109.54	40.06	32.47	33.13	9.81	100	214	P	V
		5720.25	48.23	-63.14	111.37	39.05	32.5	33.13	9.81	100	214	P	V
	*	5785	98.89	-	-	89.45	32.6	33.17	10.01	100	214	P	V
	*	5785	92.54	-	-	83.1	32.6	33.17	10.01	100	214	A	V
		5853.75	49.44	-64.21	113.65	39.86	32.75	33.19	10.02	100	214	P	V
		5866.5	49.18	-58.4	107.58	39.62	32.75	33.21	10.02	100	214	P	V
		5906	49.64	-32.58	82.22	40	32.84	33.22	10.02	100	214	P	V
		5936.75	50.55	-17.65	68.2	40.89	32.88	33.24	10.02	100	214	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 165 5825MHz	*	5825	103.77	-	-	94.24	32.69	33.18	10.02	363	102	P	H	
	*	5825	97.57	-	-	88.04	32.69	33.18	10.02	363	102	A	H	
		5854.4	51.09	-61.08	112.17	41.51	32.75	33.19	10.02	363	102	P	H	
		5863.6	52.48	-55.91	108.39	42.92	32.75	33.21	10.02	363	102	P	H	
		5923.6	49.91	-19.32	69.23	40.24	32.88	33.23	10.02	363	102	P	H	
		5933	49.27	-18.93	68.2	39.6	32.88	33.23	10.02	363	102	P	H	
														H
														H
	*	5825	99.05	-	-	89.52	32.69	33.18	10.02	100	217	P	V	
	*	5825	92.44	-	-	82.91	32.69	33.18	10.02	100	217	A	V	
		5850.4	50.02	-71.27	121.29	40.47	32.72	33.19	10.02	100	217	P	V	
		5874.2	50.61	-54.81	105.42	41.02	32.78	33.21	10.02	100	217	P	V	
		5877.6	50.63	-52.64	103.27	41.04	32.78	33.21	10.02	100	217	P	V	
		5925.8	49.88	-18.32	68.2	40.21	32.88	33.23	10.02	100	217	P	V	
														V
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	44.9	-29.1	74	50.58	40	61.68	15.44	100	0	P	H
		17235	46.43	-21.77	68.2	43.8	40.54	57.87	19.24	100	0	P	H
													H
													H
		11490	45.01	-28.99	74	50.69	40	61.68	15.44	100	0	P	V
		17235	45.86	-22.34	68.2	43.23	40.54	57.87	19.24	100	0	P	V
													V
													V
802.11n HT20 CH 157 5785MHz		11570	45.62	-28.38	74	51.49	39.86	61.78	15.49	100	0	P	H
		17355	46.54	-21.66	68.2	43.01	40.96	57.48	19.31	100	0	P	H
													H
													H
		11570	46.16	-27.84	74	52.03	39.86	61.78	15.49	100	0	P	V
		17355	45.93	-22.27	68.2	42.4	40.96	57.48	19.31	100	0	P	V
													V
													V
802.11n HT20 CH 165 5825MHz		11650	46.31	-27.69	74	52.34	39.72	61.87	15.56	100	0	P	H
		17475	48.45	-19.75	68.2	44.03	41.38	57.09	19.37	100	0	P	H
													H
													H
		11650	46.23	-27.77	74	52.26	39.72	61.87	15.56	100	0	P	V
		17475	47.75	-20.45	68.2	43.33	41.38	57.09	19.37	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5632	49.51	-18.69	68.2	40.68	32.32	33.1	9.61	373	93	P	H
		5684.75	50.68	-43.27	93.95	41.61	32.44	33.12	9.75	373	93	P	H
		5720	56.39	-54.41	110.8	47.21	32.5	33.13	9.81	373	93	P	H
		5723.25	57.38	-60.83	118.21	48.2	32.5	33.13	9.81	373	93	P	H
	*	5755	101.62	-	-	92.32	32.57	33.15	9.88	373	93	P	H
	*	5755	93.5	-	-	84.2	32.57	33.15	9.88	373	93	A	H
		5850.25	49.53	-72.1	121.63	39.98	32.72	33.19	10.02	373	93	P	H
		5866.75	50.08	-57.43	107.51	40.52	32.75	33.21	10.02	373	93	P	H
		5881	52.29	-48.45	100.74	42.7	32.78	33.21	10.02	373	93	P	H
		5932	49.64	-18.56	68.2	39.97	32.88	33.23	10.02	373	93	P	H
802.11n													H
HT40													H
CH 151		5647	50.29	-17.91	68.2	41.43	32.35	33.1	9.61	100	205	P	V
5755MHz		5659.25	50.48	-24.59	75.07	41.53	32.38	33.11	9.68	100	205	P	V
		5715.5	52.36	-57.18	109.54	43.21	32.47	33.13	9.81	100	205	P	V
		5722.5	55.95	-60.55	116.5	46.77	32.5	33.13	9.81	100	205	P	V
	*	5755	96.14	-	-	86.84	32.57	33.15	9.88	100	205	P	V
	*	5755	87.71	-	-	78.41	32.57	33.15	9.88	100	205	A	V
		5850.5	49.27	-71.79	121.06	39.72	32.72	33.19	10.02	100	205	P	V
		5874.75	51.24	-54.03	105.27	41.65	32.78	33.21	10.02	100	205	P	V
		5884.25	50.34	-47.99	98.33	40.76	32.78	33.22	10.02	100	205	P	V
		5943.25	49.41	-18.79	68.2	39.72	32.91	33.24	10.02	100	205	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5622.75	49.65	-18.55	68.2	40.86	32.32	33.08	9.55	350	93	P	H
		5692.75	50.77	-49.09	99.86	41.7	32.44	33.12	9.75	350	93	P	H
		5716	49.28	-60.4	109.68	40.13	32.47	33.13	9.81	350	93	P	H
		5723.75	49.72	-69.63	119.35	40.54	32.5	33.13	9.81	350	93	P	H
	*	5795	100.92	-	-	91.45	32.63	33.17	10.01	350	93	P	H
	*	5795	92.37	-	-	82.9	32.63	33.17	10.01	350	93	A	H
		5851.75	50.36	-67.85	118.21	40.81	32.72	33.19	10.02	350	93	P	H
		5862.5	50.29	-58.41	108.7	40.73	32.75	33.21	10.02	350	93	P	H
		5887.5	51.53	-44.39	95.92	41.92	32.81	33.22	10.02	350	93	P	H
		5945.75	50.58	-17.62	68.2	40.89	32.91	33.24	10.02	350	93	P	H
802.11n													H
HT40													H
CH 159		5601.25	49.13	-19.07	68.2	40.36	32.29	33.07	9.55	100	214	P	V
5795MHz		5663.5	48.74	-29.48	78.22	39.79	32.38	33.11	9.68	100	214	P	V
		5716.25	50.98	-58.77	109.75	41.83	32.47	33.13	9.81	100	214	P	V
		5720.75	47.8	-64.71	112.51	38.62	32.5	33.13	9.81	100	214	P	V
	*	5795	96.11	-	-	86.64	32.63	33.17	10.01	100	214	P	V
	*	5795	87.66	-	-	78.19	32.63	33.17	10.01	100	214	A	V
		5852	50.88	-66.76	117.64	41.33	32.72	33.19	10.02	100	214	P	V
		5866.5	49.78	-57.8	107.58	40.22	32.75	33.21	10.02	100	214	P	V
		5882.75	50.97	-48.47	99.44	41.38	32.78	33.21	10.02	100	214	P	V
		5928.5	48.88	-19.32	68.2	39.21	32.88	33.23	10.02	100	214	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5638.25	50.35	-17.85	68.2	41.49	32.35	33.1	9.61	351	92	P	H
		5698	52.08	-51.65	103.73	43.01	32.44	33.12	9.75	351	92	P	H
		5707.5	55.73	-51.57	107.3	46.58	32.47	33.13	9.81	351	92	P	H
		5722	56.14	-59.22	115.36	46.96	32.5	33.13	9.81	351	92	P	H
	*	5775	97.94	-	-	88.55	32.6	33.16	9.95	351	92	P	H
	*	5775	89.57	-	-	80.18	32.6	33.16	9.95	351	92	A	H
		5852	50.75	-66.89	117.64	41.2	32.72	33.19	10.02	351	92	P	H
		5872.5	51.28	-54.62	105.9	41.69	32.78	33.21	10.02	351	92	P	H
		5882.25	49.66	-50.16	99.82	40.07	32.78	33.21	10.02	351	92	P	H
		5937.75	49.92	-18.28	68.2	40.26	32.88	33.24	10.02	351	92	P	H
													H
													H
802.11ac VHT80 CH 155 5775MHz		5647	49.58	-18.62	68.2	40.72	32.35	33.1	9.61	102	211	P	V
		5700	50.71	-54.49	105.2	41.64	32.44	33.12	9.75	102	211	P	V
		5717.25	52.37	-57.66	110.03	43.22	32.47	33.13	9.81	102	211	P	V
		5722	52.89	-62.47	115.36	43.71	32.5	33.13	9.81	102	211	P	V
	*	5775	92.97	-	-	83.58	32.6	33.16	9.95	102	211	P	V
	*	5775	84.81	-	-	75.42	32.6	33.16	9.95	102	211	A	V
		5850.5	50.21	-70.85	121.06	40.66	32.72	33.19	10.02	102	211	P	V
		5863.75	49.74	-58.61	108.35	40.18	32.75	33.21	10.02	102	211	P	V
		5906	50.3	-31.92	82.22	40.66	32.84	33.22	10.02	102	211	P	V
		5935.75	50.18	-18.02	68.2	40.52	32.88	33.24	10.02	102	211	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
5GHz 802.11n HT40 LF		170.13	26.51	-16.99	43.5	41.85	15.37	32.42	1.61	-	-	P	H	
		231.69	27.34	-18.66	46	41.48	16.22	32.38	1.95	-	-	P	H	
		264.09	27.49	-18.51	46	38.13	19.57	32.38	2.09	-	-	P	H	
		311.9	39.13	-6.87	46	49.93	19.17	32.37	2.31	100	0	P	H	
		456.1	34.99	-11.01	46	41.53	23.08	32.36	2.7	-	-	P	H	
		743.8	34.67	-11.33	46	35.72	27.76	32.34	3.4	-	-	P	H	
														H
														H
														H
														H
														H
														H
			73.74	27.93	-12.07	40	46.83	12.35	32.49	1.22	100	0	P	V
			177.15	29.24	-14.26	43.5	44.95	14.92	32.41	1.69	-	-	P	V
			210.09	29.95	-13.55	43.5	45.57	14.99	32.39	1.72	-	-	P	V
			532.4	29.66	-16.34	46	35.16	23.92	32.41	2.91	-	-	P	V
			552	32.32	-13.68	46	36.42	25.25	32.42	2.98	-	-	P	V
			950.3	33.79	-12.21	46	30.39	30.61	31.2	3.82	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Band 4 - 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11n HT20 CH 149 5745MHz		5648.8	49.02	-19.18	68.2	40.16	32.35	33.1	9.61	218	186	P	H	
		5682.8	50.51	-42	92.51	41.47	32.41	33.12	9.75	218	186	P	H	
		5710.8	50.6	-57.63	108.23	41.45	32.47	33.13	9.81	218	186	P	H	
		5722.8	53.96	-63.22	117.18	44.78	32.5	33.13	9.81	218	186	P	H	
	*	5745	104.48	-	-	95.22	32.53	33.15	9.88	218	186	P	H	
	*	5745	96.43	-	-	87.17	32.53	33.15	9.88	218	186	A	H	
														H
														H
			5638.6	49.12	-19.08	68.2	40.26	32.35	33.1	9.61	199	150	P	V
			5685.2	49.86	-44.42	94.28	40.79	32.44	33.12	9.75	199	150	P	V
			5719	50.88	-59.64	110.52	41.7	32.5	33.13	9.81	199	150	P	V
			5724.8	52.86	-68.88	121.74	43.68	32.5	33.13	9.81	199	150	P	V
	*		5745	105.08	-	-	95.82	32.53	33.15	9.88	199	150	P	V
	*		5745	96.97	-	-	87.71	32.53	33.15	9.88	199	150	A	V
														V
													V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5638	48.85	-19.35	68.2	39.99	32.35	33.1	9.61	233	180	P	H
		5681.5	49.48	-42.07	91.55	40.44	32.41	33.12	9.75	233	180	P	H
		5714	49.5	-59.62	109.12	40.35	32.47	33.13	9.81	233	180	P	H
		5724.25	49.94	-70.55	120.49	40.76	32.5	33.13	9.81	233	180	P	H
	*	5785	105.34	-	-	95.9	32.6	33.17	10.01	233	180	P	H
	*	5785	97.29	-	-	87.85	32.6	33.17	10.01	233	180	A	H
		5851.75	49.49	-68.72	118.21	39.94	32.72	33.19	10.02	233	180	P	H
		5861.5	49.61	-59.37	108.98	40.05	32.75	33.21	10.02	233	180	P	H
		5903.75	49.99	-33.9	83.89	40.38	32.81	33.22	10.02	233	180	P	H
		5938.25	49.6	-18.6	68.2	39.94	32.88	33.24	10.02	233	180	P	H
802.11n													H
HT20													H
CH 157		5632.5	50.37	-17.83	68.2	41.54	32.32	33.1	9.61	222	157	P	V
5785MHz		5651.75	48.79	-20.71	69.5	39.9	32.38	33.1	9.61	222	157	P	V
		5700.5	49.4	-55.94	105.34	40.33	32.44	33.12	9.75	222	157	P	V
		5725	48.06	-74.14	122.2	38.88	32.5	33.13	9.81	222	157	P	V
	*	5785	106.21	-	-	96.77	32.6	33.17	10.01	222	157	P	V
	*	5785	97.69	-	-	88.25	32.6	33.17	10.01	222	157	A	V
		5851.75	48.98	-69.23	118.21	39.43	32.72	33.19	10.02	222	157	P	V
		5856.75	49.91	-60.4	110.31	40.33	32.75	33.19	10.02	222	157	P	V
		5881.75	51.09	-49.1	100.19	41.5	32.78	33.21	10.02	222	157	P	V
		5940.75	50.82	-17.38	68.2	41.13	32.91	33.24	10.02	222	157	P	V
													V
													V



WiFi Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 165 5825MHz	*	5825	106.38	-	-	96.85	32.69	33.18	10.02	248	180	P	H	
	*	5825	97.72	-	-	88.19	32.69	33.18	10.02	248	180	A	H	
		5850.2	51.58	-70.16	121.74	42.03	32.72	33.19	10.02	248	180	P	H	
		5856.8	51.38	-58.92	110.3	41.8	32.75	33.19	10.02	248	180	P	H	
		5898.2	50.26	-37.73	87.99	40.65	32.81	33.22	10.02	248	180	P	H	
		5935.6	51.08	-17.12	68.2	41.42	32.88	33.24	10.02	248	180	P	H	
														H
														H
	*	5825	106.64	-	-	97.11	32.69	33.18	10.02	234	158	P	V	
	*	5825	98.29	-	-	88.76	32.69	33.18	10.02	234	158	A	V	
		5850.8	51.84	-68.54	120.38	42.29	32.72	33.19	10.02	234	158	P	V	
		5869.4	51.24	-55.53	106.77	41.68	32.75	33.21	10.02	234	158	P	V	
		5898.2	50.9	-37.09	87.99	41.29	32.81	33.22	10.02	234	158	P	V	
		5927	49.21	-18.99	68.2	39.54	32.88	33.23	10.02	234	158	P	V	
														V
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	45.56	-28.44	74	51.24	40	61.68	15.44	100	0	P	H
		17235	46.88	-21.32	68.2	44.25	40.54	57.87	19.24	100	0	P	H
													H
													H
		11490	46.22	-27.78	74	51.9	40	61.68	15.44	100	0	P	V
		17235	46.85	-21.35	68.2	44.22	40.54	57.87	19.24	100	0	P	V
													V
802.11n HT20 CH 157 5785MHz		11570	46.44	-27.56	74	52.31	39.86	61.78	15.49	100	0	P	H
		17355	47.46	-20.74	68.2	43.93	40.96	57.48	19.31	100	0	P	H
													H
													H
		11570	45.78	-28.22	74	51.65	39.86	61.78	15.49	100	0	P	V
		17355	46.45	-21.75	68.2	42.92	40.96	57.48	19.31	100	0	P	V
													V
802.11n HT20 CH 165 5825MHz		11650	47.51	-26.49	74	53.54	39.72	61.87	15.56	100	0	P	H
		17475	49.08	-19.12	68.2	44.66	41.38	57.09	19.37	100	0	P	H
													H
													H
		11650	46.27	-27.73	74	52.3	39.72	61.87	15.56	100	0	P	V
		17475	48.89	-19.31	68.2	44.47	41.38	57.09	19.37	100	0	P	V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5631.5	49.84	-18.36	68.2	41.01	32.32	33.1	9.61	216	183	P	H
		5666.5	49.7	-30.75	80.45	40.75	32.38	33.11	9.68	216	183	P	H
		5718.75	54.15	-56.3	110.45	44.97	32.5	33.13	9.81	216	183	P	H
		5724.25	57.34	-63.15	120.49	48.16	32.5	33.13	9.81	216	183	P	H
	*	5755	101.43	-	-	92.13	32.57	33.15	9.88	216	183	P	H
	*	5755	93.14	-	-	83.84	32.57	33.15	9.88	216	183	A	H
		5855	49.41	-61.39	110.8	39.83	32.75	33.19	10.02	216	183	P	H
		5855	49.41	-61.39	110.8	39.83	32.75	33.19	10.02	216	183	P	H
		5884	50.41	-48.11	98.52	40.83	32.78	33.22	10.02	216	183	P	H
		5937.5	50.12	-18.08	68.2	40.46	32.88	33.24	10.02	216	183	P	H
802.11n													H
HT40													H
CH 151		5620.75	49.63	-18.57	68.2	40.84	32.32	33.08	9.55	210	151	P	V
5755MHz		5679.5	50.49	-39.58	90.07	41.45	32.41	33.12	9.75	210	151	P	V
		5718.25	56.49	-53.82	110.31	47.31	32.5	33.13	9.81	210	151	P	V
		5722.25	56.65	-59.28	115.93	47.47	32.5	33.13	9.81	210	151	P	V
	*	5755	102.1	-	-	92.8	32.57	33.15	9.88	210	151	P	V
	*	5755	93.66	-	-	84.36	32.57	33.15	9.88	210	151	A	V
		5854.75	50.19	-61.18	111.37	40.61	32.75	33.19	10.02	210	151	P	V
		5860.5	50.64	-58.62	109.26	41.08	32.75	33.21	10.02	210	151	P	V
		5884.25	51.77	-46.56	98.33	42.19	32.78	33.22	10.02	210	151	P	V
		5949.25	49.69	-18.51	68.2	40	32.91	33.24	10.02	210	151	P	V
													V
													V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5616	49.35	-18.85	68.2	40.56	32.32	33.08	9.55	207	185	P	H
		5678.5	49.72	-39.61	89.33	40.67	32.41	33.11	9.75	207	185	P	H
		5716.5	49.81	-60.01	109.82	40.66	32.47	33.13	9.81	207	185	P	H
		5722.25	49.19	-66.74	115.93	40.01	32.5	33.13	9.81	207	185	P	H
	*	5795	101.45	-	-	91.98	32.63	33.17	10.01	207	185	P	H
	*	5795	93.01	-	-	83.54	32.63	33.17	10.01	207	185	A	H
		5850.75	48.82	-71.67	120.49	39.27	32.72	33.19	10.02	207	185	P	H
		5858.75	49.58	-60.17	109.75	40.02	32.75	33.21	10.02	207	185	P	H
		5923	49.88	-19.79	69.67	40.21	32.88	33.23	10.02	207	185	P	H
		5927.25	49.67	-18.53	68.2	40	32.88	33.23	10.02	207	185	P	H
802.11n													H
HT40													H
CH 159		5647.75	49.16	-19.04	68.2	40.3	32.35	33.1	9.61	207	148	P	V
5795MHz		5693.75	49.72	-50.87	100.59	40.65	32.44	33.12	9.75	207	148	P	V
		5714.25	49.15	-60.04	109.19	40	32.47	33.13	9.81	207	148	P	V
		5723	47.34	-70.3	117.64	38.16	32.5	33.13	9.81	207	148	P	V
	*	5795	102.57	-	-	93.1	32.63	33.17	10.01	207	148	P	V
	*	5795	93.82	-	-	84.35	32.63	33.17	10.01	207	148	A	V
		5850	51.53	-70.67	122.2	41.98	32.72	33.19	10.02	207	148	P	V
		5872	50.09	-55.95	106.04	40.5	32.78	33.21	10.02	207	148	P	V
		5894.5	51.68	-39.05	90.73	42.07	32.81	33.22	10.02	207	148	P	V
		5941.75	49.32	-18.88	68.2	39.63	32.91	33.24	10.02	207	148	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
		5640.25	48.29	-19.91	68.2	39.43	32.35	33.1	9.61	234	180	P	H	
		5695	53.52	-47.99	101.51	44.45	32.44	33.12	9.75	234	180	P	H	
		5717.25	55.82	-54.21	110.03	46.67	32.47	33.13	9.81	234	180	P	H	
		5722.5	57.16	-59.34	116.5	47.98	32.5	33.13	9.81	234	180	P	H	
	*	5775	99.18	-	-	89.79	32.6	33.16	9.95	234	180	P	H	
	*	5775	89.69	-	-	80.3	32.6	33.16	9.95	234	180	A	H	
		5851	49.86	-70.06	119.92	40.31	32.72	33.19	10.02	234	180	P	H	
		5863.25	50.16	-58.33	108.49	40.6	32.75	33.21	10.02	234	180	P	H	
		5887	49.64	-46.65	96.29	40.06	32.78	33.22	10.02	234	180	P	H	
		5936.5	49.63	-18.57	68.2	39.97	32.88	33.24	10.02	234	180	P	H	
802.11ac VHT80 CH 155 5775MHz													H	
													H	
			5625	48.79	-19.41	68.2	40	32.32	33.08	9.55	240	155	P	V
			5696.25	53.37	-49.07	102.44	44.3	32.44	33.12	9.75	240	155	P	V
			5718.75	54.58	-55.87	110.45	45.4	32.5	33.13	9.81	240	155	P	V
			5724.25	56.21	-64.28	120.49	47.03	32.5	33.13	9.81	240	155	P	V
		*	5775	98.79	-	-	89.4	32.6	33.16	9.95	240	155	P	V
		*	5775	89.74	-	-	80.35	32.6	33.16	9.95	240	155	A	V
			5853.25	53.01	-61.78	114.79	43.46	32.72	33.19	10.02	240	155	P	V
			5871.5	50.98	-55.2	106.18	41.39	32.78	33.21	10.02	240	155	P	V
			5878.75	50.7	-51.71	102.41	41.11	32.78	33.21	10.02	240	155	P	V
			5927.75	49.85	-18.35	68.2	40.18	32.88	33.23	10.02	240	155	P	V
														V
														V
	Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11n HT20 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
5GHz 802.11n HT20 LF		73.74	27.64	-12.36	40	46.54	12.35	32.49	1.22	-	-	P	H	
		217.11	29.23	-16.77	46	44.78	15.06	32.39	1.72	-	-	P	H	
		264.09	26.49	-19.51	46	37.13	19.57	32.38	2.09	-	-	P	H	
		311.9	38.74	-7.26	46	49.54	19.17	32.37	2.31	100	0	P	H	
		696.2	33.91	-12.09	46	36.51	26.39	32.47	3.35	-	-	P	H	
		743.8	33.99	-12.01	46	35.04	27.76	32.34	3.4	-	-	P	H	
														H
														H
														H
														H
														H
														H
			47.55	27.85	-12.15	40	44.01	15.31	32.49	1.02	-	-	P	V
			173.37	27.92	-15.58	43.5	43.41	15.14	32.41	1.69	-	-	P	V
			180.39	31.52	-11.98	43.5	47.4	14.75	32.41	1.69	-	-	P	V
			503.7	37.58	-8.42	46	43.36	23.71	32.38	2.84	100	0	P	V
			533.1	36.8	-9.2	46	42.28	23.94	32.41	2.91	-	-	P	V
			552	36.54	-9.46	46	40.64	25.25	32.42	2.98	-	-	P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Hao Hsu and Chuan Zhu	Temperature :	22~25°C
		Relative Humidity :	52~57%

Band 4 - 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CHI1-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120d-HF HORIZONTAL Detector : Peak Project : 391803-51</p>	<p>Site : 03CHI1-HY Condition : PEAK(UNIT) 3m HORN 9120d-HF HORIZONTAL Detector : Peak Project : 391803-51</p>



WIFI	Band 4 5725-5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Vertical	Fundamental
<p>Peak</p>	<p>Date: 2018.08.01 PEAK: 115.21</p> <p>Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	<p>Date: 2018.08.01 PEAK: 115.21</p> <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWF:Auto Detector : Peak Project : 391803-51</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWF:Auto Detector : Peak Project : 391803-51</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWF:Auto Detector : Peak Project : 391803-51</p>	Left blank





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	<p>Site : 03CH11-HY Condition : PEAK(FB) 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	Left blank

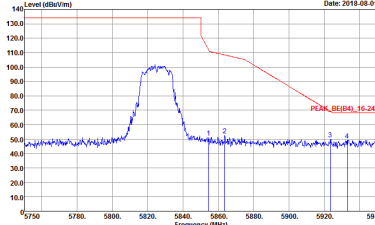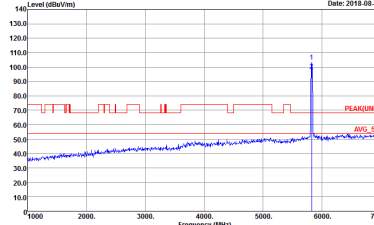

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	 <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>

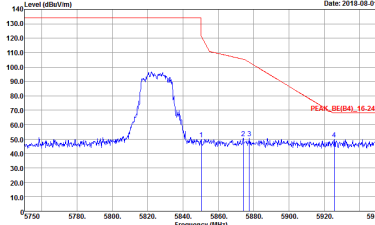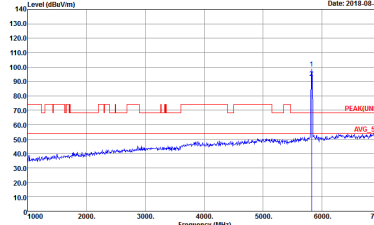

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	 <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
<p align="center">1</p>	<p align="center">Horizontal</p> <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 391803-51</p>	<p align="center">Fundamental</p> <p>Site : 03CH11-HY Condition : PEAK(UMB) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 391803-51</p>
<p align="center">Peak</p>	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 391803-51</p>	<p align="center">Left blank</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	Left blank






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWF:Auto Detector : Peak Project : 391803-51</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWF:Auto Detector : Peak Project : 391803-51</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWF:Auto Detector : Peak Project : 391803-51</p>	Left blank






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	Left blank



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

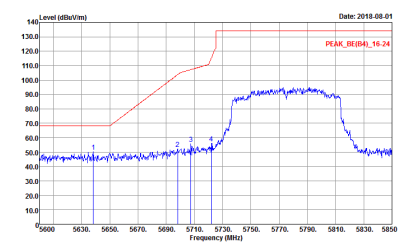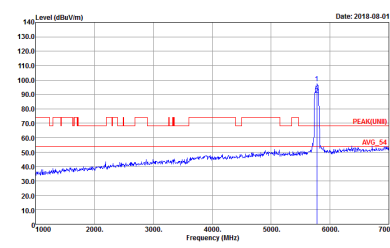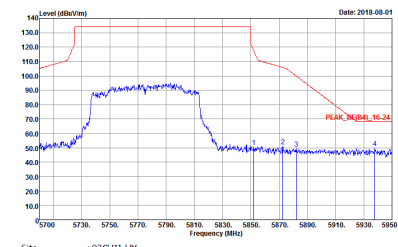WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 391803-51</p>	 <p>Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 391803-51</p>
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 391803-51</p>	Left blank

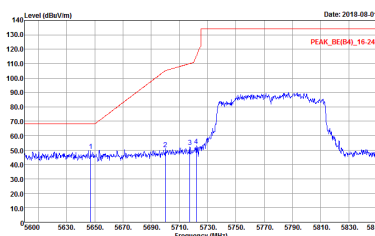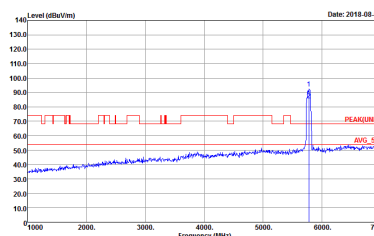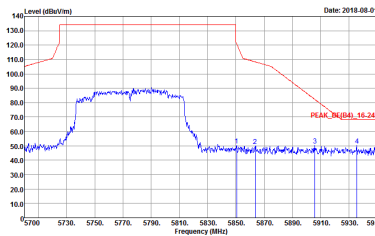

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	 <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	Left blank





Band 4 - 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-4#Y Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 391803-51</p>	<p>Site : 03CH11-4#Y Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 391803-51</p>





WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK(UNED) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 391803-51</p>	<p>Site : 03CH11-HY Condition : PEAK(UNED) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 391803-51</p>

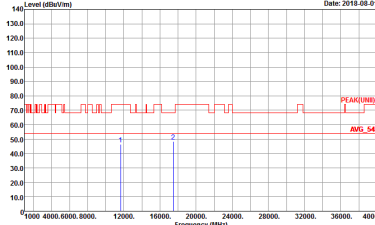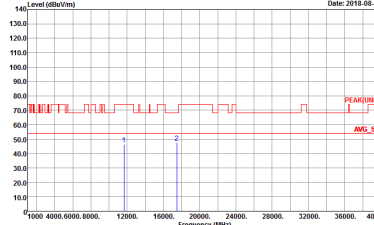

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH11-HY Condition : PEAK(UNED) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 391803-51</p>	 <p>Site : 03CH11-HY Condition : PEAK(UNED) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 391803-51</p>



Emission below 1GHz
5GHz WIFI 802.11n HT40 (LF)

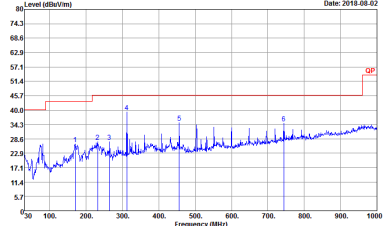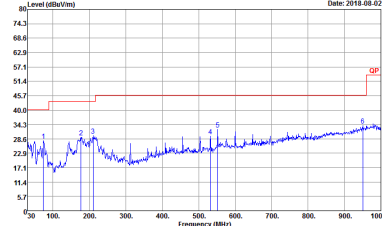WIFI	5GHz 5725~5850MHz	
ANT	802.11n HT40 LF	
1	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH11-4FY Condition : QP 3m BT-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 391803-51</p>	 <p>Site : 03CH11-4FY Condition : QP 3m BT-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 391803-51</p>



Band 4 - 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1+2	Horizontal	Fundamental
Peak	<p> Site : 03CH11-4FY Condition : PEAK_BE(84)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 391803-51 </p>	<p> Site : 03CH11-4FY Condition : PEAK(UNII)_3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 391803-51 </p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1+2	Vertical	Fundamental
Peak	<p>Date: 2018.08.01 PEAK: 85.045, 75.23</p> <p>Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	<p>Date: 2018.08.01 PEAK: 85.045, 75.23</p> <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Horizontal	Fundamental
Peak	<p>Date: 2018.08.01</p> <p>PEAK_BE(B4)_16.24</p> <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	<p>Date: 2018.08.01</p> <p>PEAK(B4)</p> <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>
Peak	<p>Date: 2018.08.01</p> <p>PEAK_BE(B4)_16.24</p> <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	Left blank

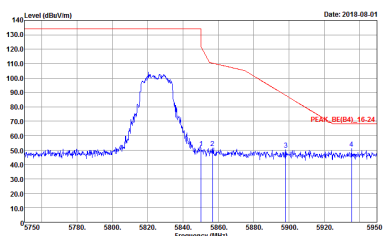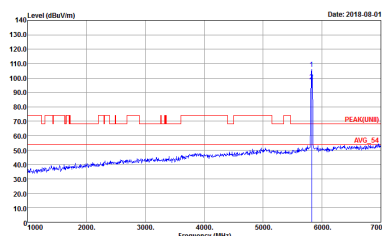

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 391803-51</p>	 <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 391803-51</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>






**Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 391803-51</p>	<p>Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 391803-51</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 391803-51</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	Left blank

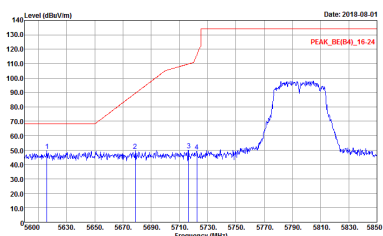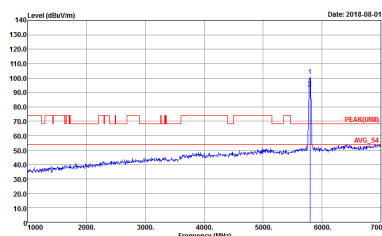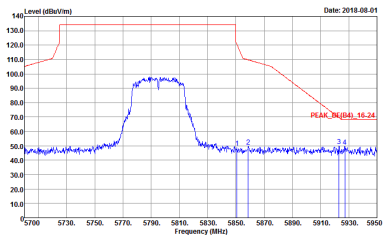

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	 <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>
<p>Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	<p>Left blank</p>






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	Left blank



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 391803-51</p>	<p>Site : 03CH11-HY Condition : PEAK(UM) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 391803-51</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_N(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 391803-51</p>	Left blank

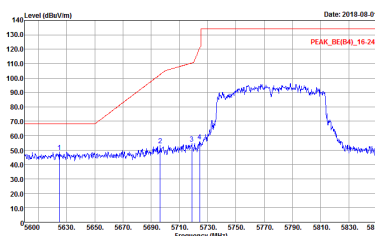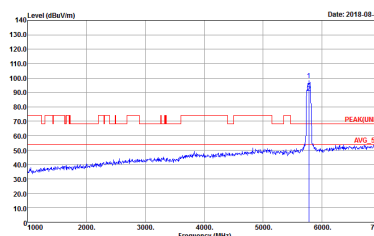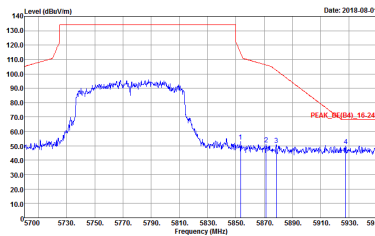

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	 <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>
<p>Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 391803-51</p>	<p>Left blank</p>





Band 4 - 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-4FY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 391803-51</p>	<p>Site : 03CH11-4FY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 391803-51</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK(UNED) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 391803-51</p>	<p>Site : 03CH11-HY Condition : PEAK(UNED) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 391803-51</p>

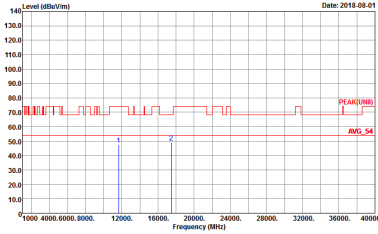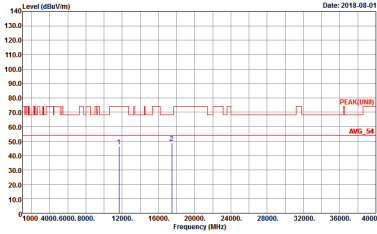

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH11-HY Condition : PEAK(UNED) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 391803-51</p>	 <p>Site : 03CH11-HY Condition : PEAK(UNED) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 391803-51</p>



Emission below 1GHz
5GHz WIFI 802.11n HT20 (LF)

Table with 2 columns: Horizontal and Vertical. Each column contains a spectral plot showing Level (dBuV/m) vs Frequency (MHz) from 50 to 1000 MHz. The plots show a red line for the limit and a blue line for the actual emission. A 'QP' marker is present at the end of the spectrum in both plots.

QP / Peak

Site : 03CH11-4FY
Condition : QP 3m BT-LOG 6111D-LF_ETC HORIZONTAL
Detector : Peak
Project : 391803-51

Site : 03CH11-4FY
Condition : QP 3m BT-LOG 6111D-LF_ETC VERTICAL
Detector : Peak
Project : 391803-51




Appendix E. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
1	802.11a	98.09	-	-	10Hz	0.08
1	5GHz 802.11n HT20	98.46	-	-	10Hz	0.07
1+2	5GHz 802.11n HT20 for Ant. 1	97.95	1910.00	0.52	1kHz	0.09
1+2	5GHz 802.11n HT20 for Ant. 2	97.96	1920.00	0.52	1kHz	0.09
1	5GHz 802.11n HT40	96.89	936.00	1.07	3kHz	0.14
1+2	5GHz 802.11n HT40 for Ant. 1	96.30	936.00	1.07	3kHz	0.16
1+2	5GHz 802.11n HT40 for Ant. 2	95.68	930.00	1.08	3kHz	0.19
1	5GHz 802.11ac VHT20	97.96	1920.00	0.52	1kHz	0.09
1+2	5GHz 802.11ac VHT20 for Ant. 1	97.46	1915.00	0.52	1kHz	0.11
1+2	5GHz 802.11ac VHT20 for Ant. 2	97.96	1920.00	0.52	1kHz	0.09
1	5GHz 802.11ac VHT40	96.30	936.00	1.07	3kHz	0.16
1+2	5GHz 802.11ac VHT40 for Ant. 1	95.73	942.00	1.06	3kHz	0.19
1+2	5GHz 802.11ac VHT40 for Ant. 2	96.32	942.00	1.06	3kHz	0.16
1	5GHz 802.11ac VHT80	93.44	456.00	2.19	3kHz	0.29
1+2	5GHz 802.11ac VHT80 for Ant. 1	92.00	460.00	2.17	3kHz	0.36
1+2	5GHz 802.11ac VHT80 for Ant. 2	92.37	460.00	2.17	3kHz	0.34




<Ant. 1>

802.11a

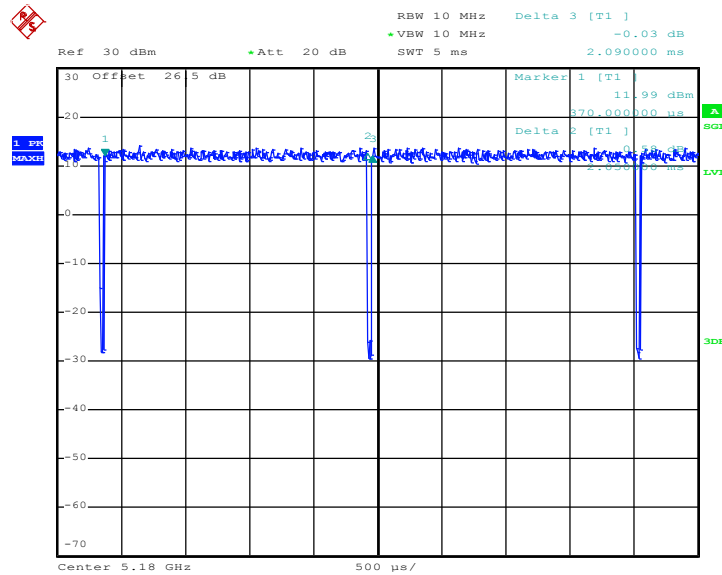

Date: 28.JUN.2018 14:59:00


802.11n HT20

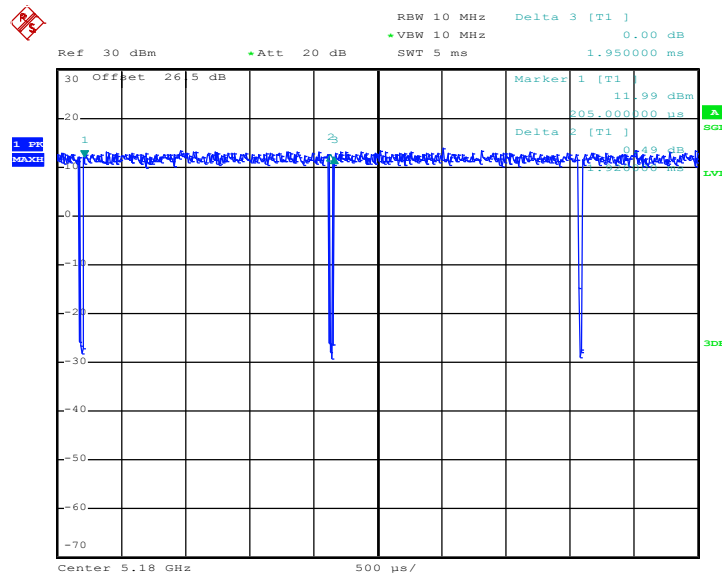

Date: 28.JUN.2018 15:00:26




802.11n HT40

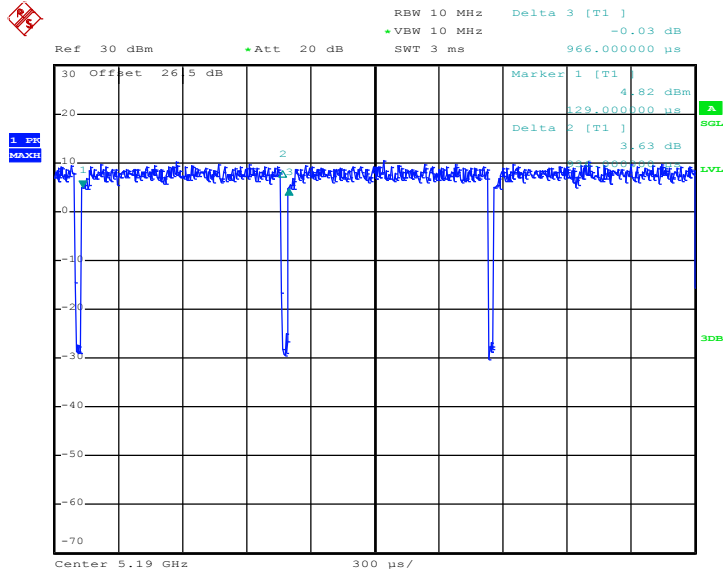

Date: 28.JUN.2018 15:13:12


802.11ac VHT20

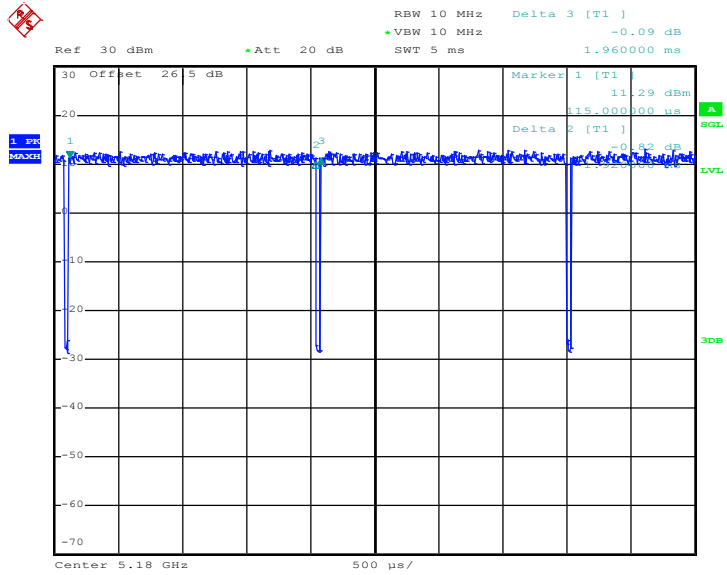

Date: 28.JUN.2018 15:05:58




802.11ac VHT40

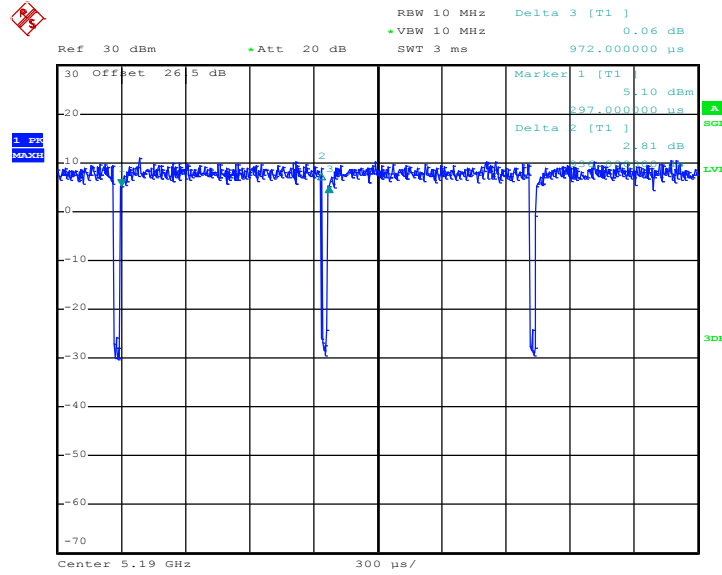

Date: 28.JUN.2018 15:08:13

802.11ac VHT80

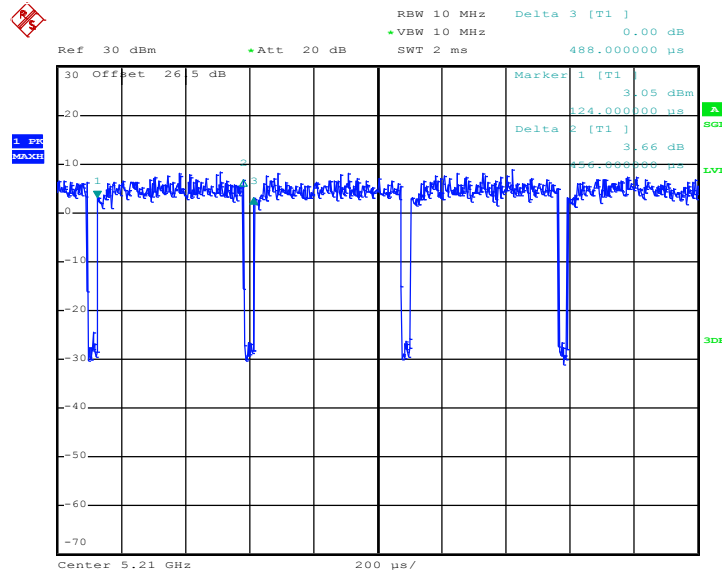


Date: 28.JUN.2018 15:15:33




MIMO<Ant. 1>

802.11n HT20

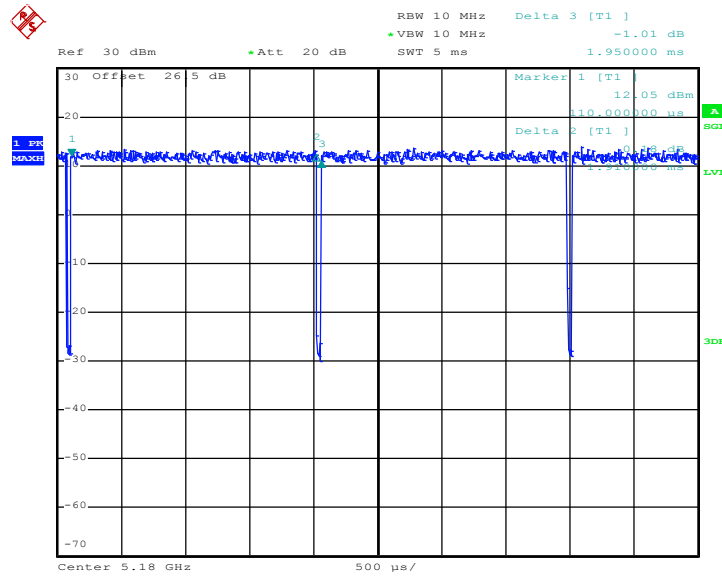

Date: 28.JUN.2018 15:01:58


802.11n HT40

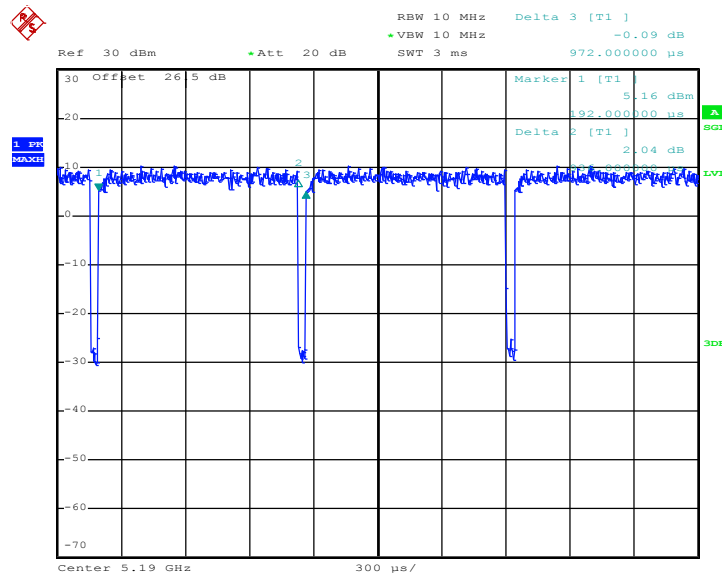

Date: 28.JUN.2018 15:11:51




802.11ac VHT20

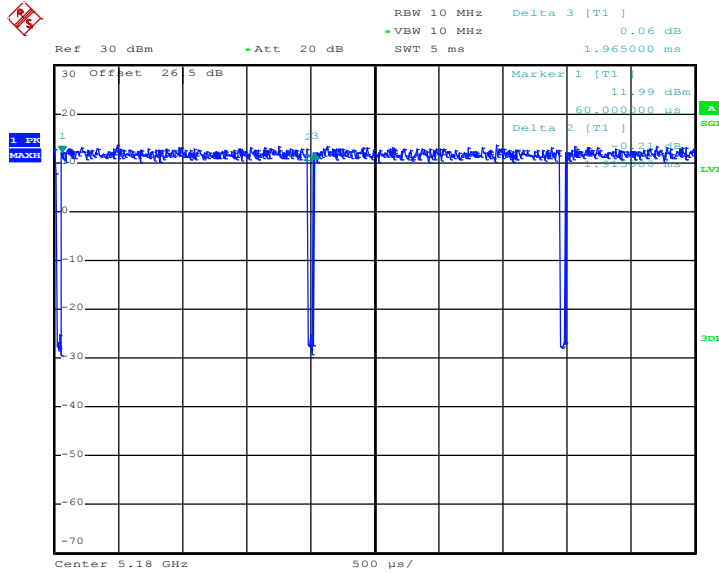

Date: 28.JUN.2018 15:03:50


802.11ac VHT40

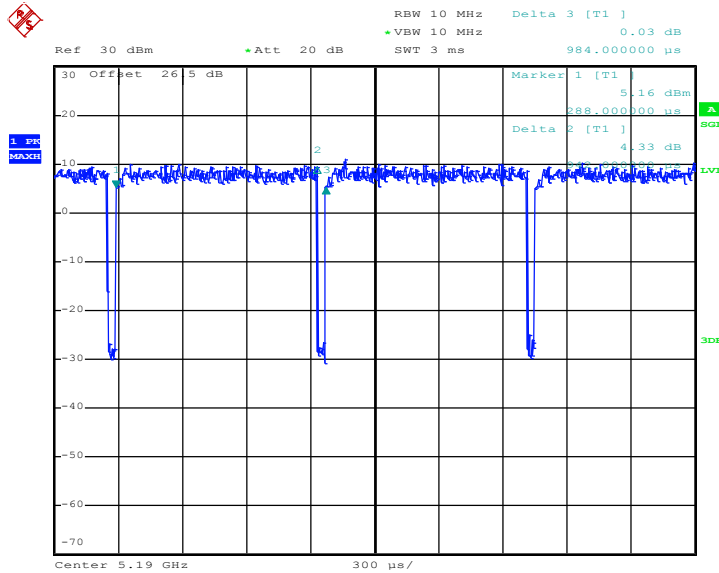

Date: 28.JUN.2018 15:09:52



802.11ac VHT80

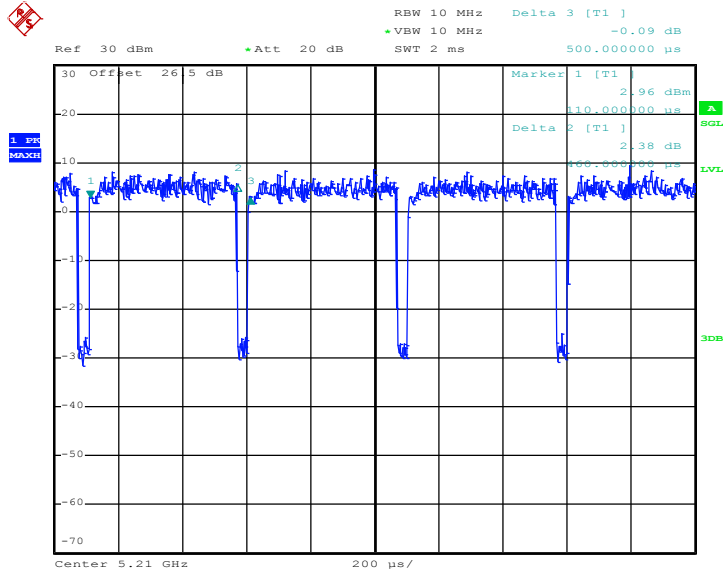


Date: 28.JUN.2018 15:16:48




MIMO<Ant. 2>

802.11n HT20

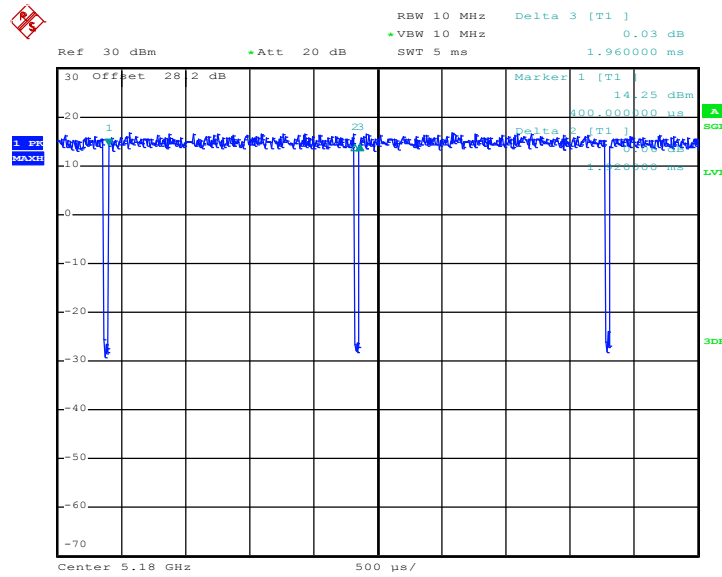

Date: 21.JUN.2018 14:58:34


802.11n HT40

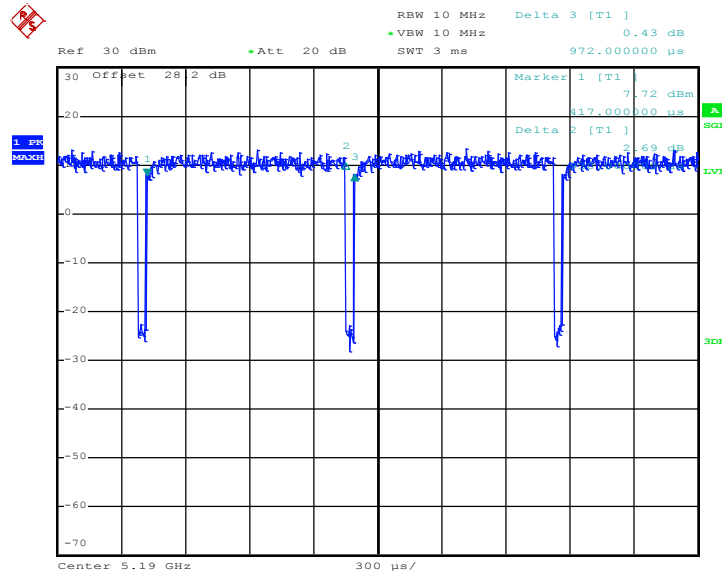

Date: 22.JUN.2018 09:35:46




802.11ac VHT20

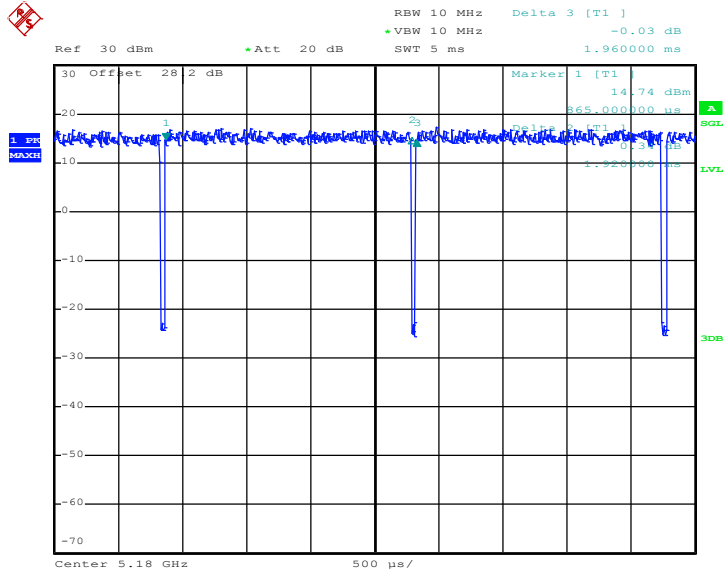

Date: 22.JUN.2018 11:45:25


802.11ac VHT40

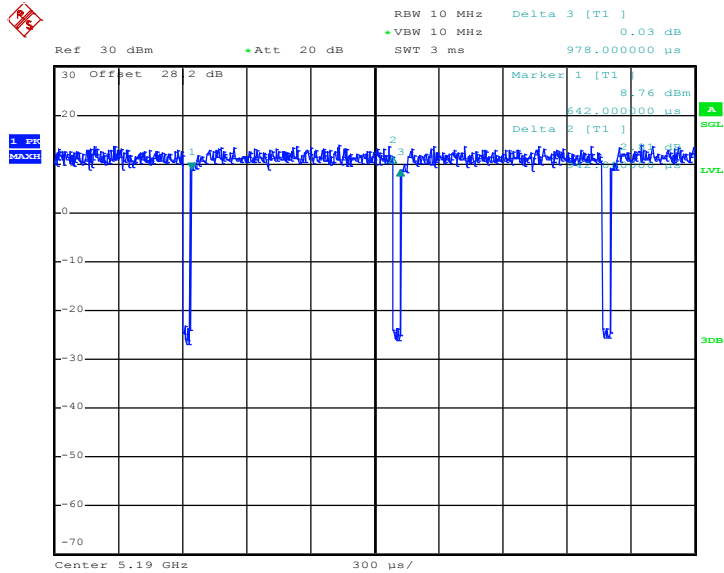

Date: 22.JUN.2018 14:29:55



802.11ac VHT80

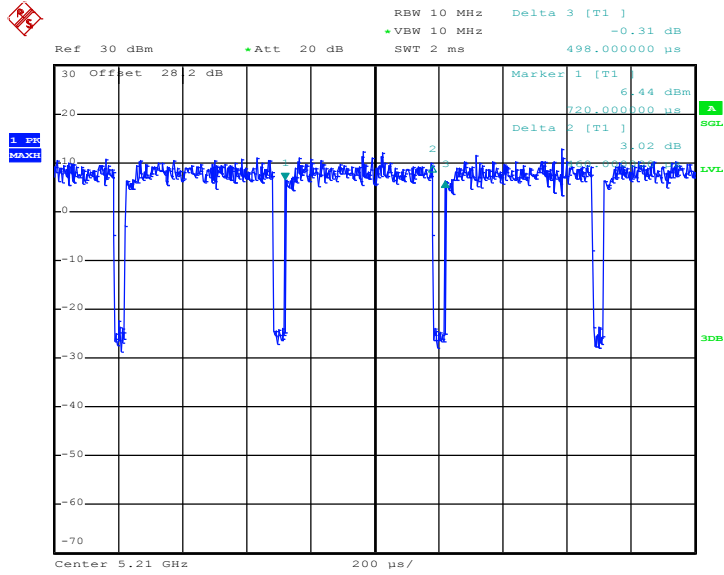

Date: 22.JUN.2018 15:16:27