



FCC RF Test Report

APPLICANT : Getac Technology Corporation.
EQUIPMENT : WLAN module
BRAND NAME : Getac
MODEL NAME : 8265NGW
FCC ID : QYL8265NG
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

This is a partial report. The product testing was completed on Jul. 08, 2018. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Laboratory SPORTON INTERNATIONAL INC.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.



Approved by: Eric Shih / Manager

Sporton International (Shenzhen) Inc.

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City
Guangdong Province 518055 China**



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION.....5

 1.1 Applicant5

 1.2 Product Feature of Equipment Under Test.....5

 1.3 Modification of EUT5

 1.4 Testing Location6

 1.5 Applicable Standards.....6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....7

 2.1 Carrier Frequency Channel7

 2.2 Test Mode.....8

 2.3 Connection Diagram of Test System.....9

 2.4 Support Unit used in test configuration and system9

 2.5 EUT Operation Test Setup9

3 TEST RESULT10

 3.1 Output Power Measurement.....10

 3.2 Radiated Band Edges and Spurious Emission Measurement11

 3.3 Antenna Requirements.....15

4 LIST OF MEASURING EQUIPMENT.....16

5 UNCERTAINTY OF EVALUATION.....17

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED SPURIOUS EMISSION

APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR570164-39A	Rev. 01	Initial issue of report	Jul. 31, 2018



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(b)(1)	Peak Output Power	≤ 125 mW	Pass	-
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 7.42 dB at 33.88 MHz
3.3	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Remark : Except Conducted output power and Radiated Spurious Emission is carrying out, for the other test data please refer to modular report “160321-01.TR03”.



1 General Description

1.1 Applicant

Getac Technology Corporation.

5F., Building A, No. 209, Sec.1, Nangang Rd.,Nangang Dist., Taipei City 11568, Taiwan, R.O.C.

1.2 Product Feature of Equipment Under Test

WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, NFC, GNSS and Digitizer.

Product Specification subjective to this standard	
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna GPS: PATCH Antenna NFC: Loop Antenna Digitizer: Loop Antenna

The product was installed into Tablet (Brand Name: Getac, Model Name: RX10) during test, and all tests were performed with SKU A.

SKU Table		
RX10 SKU		
	SKU A	SKU B
CPU	i5	M3
DDR	8G	4G
SSD	256GB	128GB
Panel	FHD	FHD
Digitizer	Support	Not Support
WLAN/BT	Support	Not Support
WWAN	Support	Not Support
GPS	Support	Not Support
RFID	Support	Not Support
Battery	5800mAh & 2160mAh	2160mAh

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

SPORTON INTERNATIONAL INC. is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and under the FCC-recognized accredited testing laboratories by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist. Taoyuan City Taiwan Tel: 886-3-327-3456 FAX: +886-3-327-0978		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	TH05-HY	TW1190	553509

Note: Test data subcontracted Conducted power in section 3.1 of this report.

Sporton International (Shenzhen) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0) and the FCC designation No is CN5019.

Test Site	Sporton International (Shenzhen) Inc.	
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District Shenzhen City Guangdong Province 518055 China TEL: +86-755-3320-2398	
Test Site No.	Sporton Site No.	FCC Test Firm Registration No.
	03CH01-SZ	577730

Note: The test site complies with ANSI C63.4 2014 requirement.

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-




2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Radiated Test Cases	Bluetooth BR 1Mbps GFSK
	Mode 1: CH39_2441 MHz
Summary table of Test Cases	
<p>Remark: For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission.</p>	

2.3 Connection Diagram of Test System

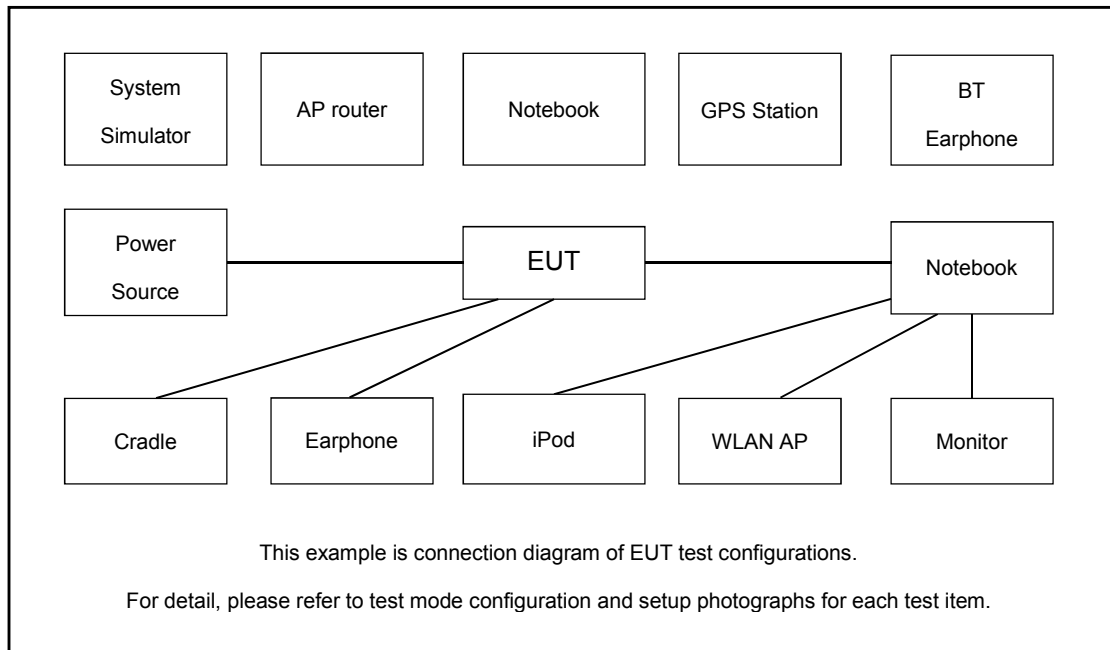

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CBT	N/A	N/A	Unshielded, 1.8 m
2.	Earphone	Apple	MC690ZP/A	N/A	Shielded, 1.0m	N/A

2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit/receive.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:
(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
1. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power with cable loss and record the results in the test report.
4. Measure and record the results in the test report.

3.1.4 Test Setup

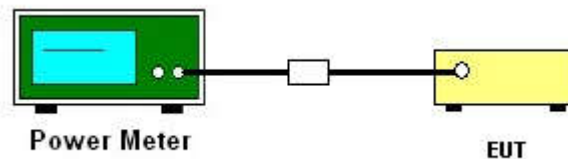

3.1.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.1.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.



3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1\text{GHz}$; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.2.4 Test Setup


For radiated emissions below 30MHz

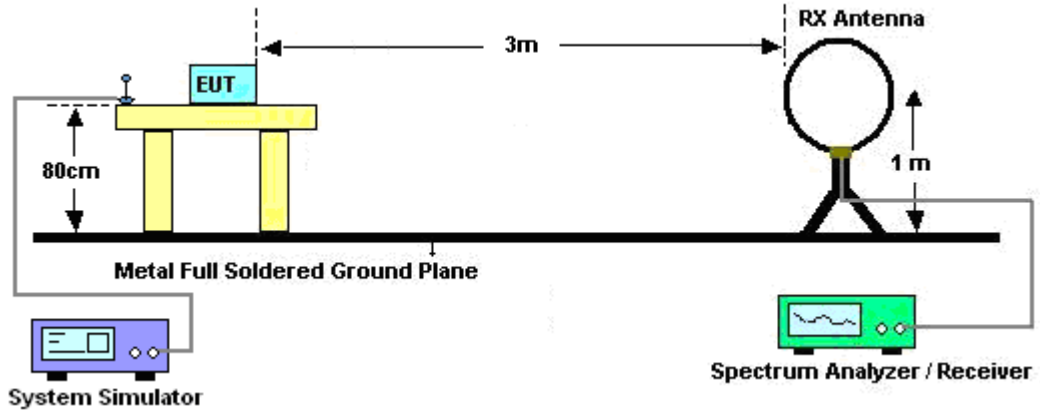

For radiated emissions from 30MHz to 1GHz

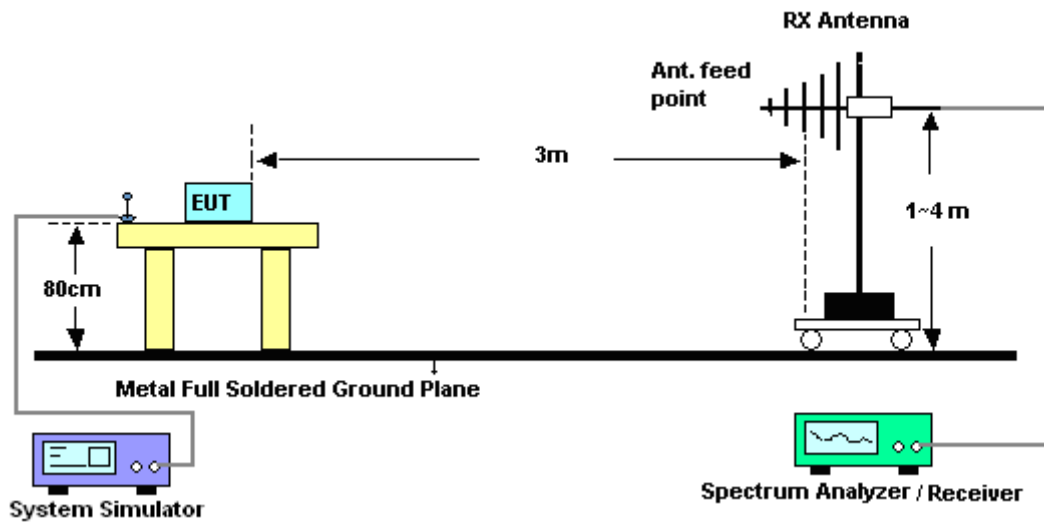

For radiated emissions above 1GHz

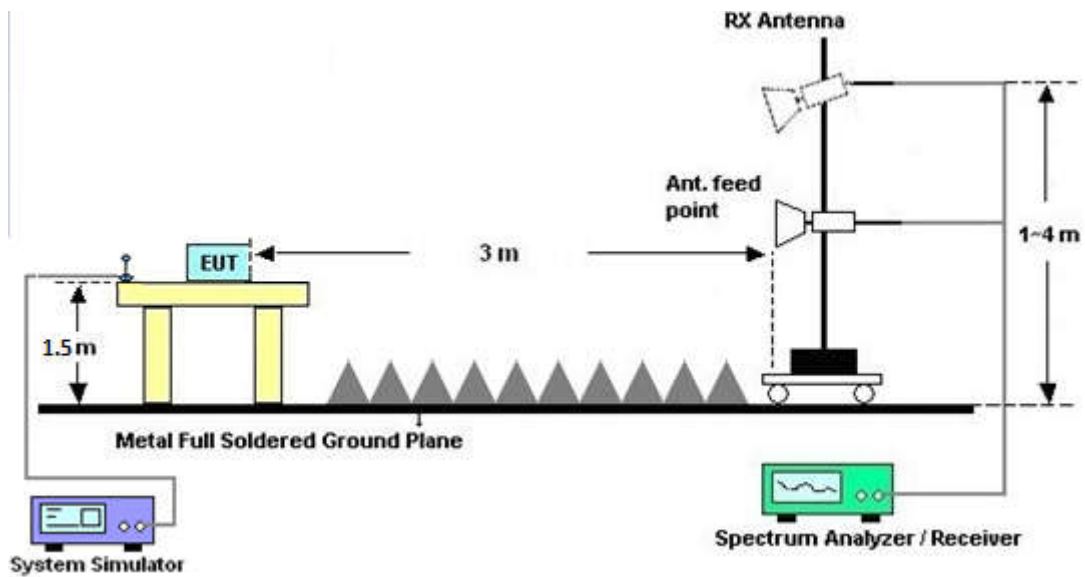

3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.2.7 Duty Cycle

Please refer to Appendix D.

3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.3 Antenna Requirements

3.3.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	DTM-303A	TP157075	N/A	Mar. 06, 2018	Jun.15, 2018~ Jun.16, 2018	Mar. 05, 2019	Conducted (TH05-HY)
Power Meter	Agilent	E4416A	GB412923 44	N/A	Dec. 20, 2017	Jun.15, 2018~ Jun.16, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US404415 48	50MHz~18GHz	Dec. 20, 2017	Jun.15, 2018~ Jun.16, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 20, 2017	Jun.15, 2018~ Jun.16, 2018	Jun. 19, 2018	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC130048 4	N/A	Mar. 01, 2018	Jun.15, 2018~ Jun.19, 2018	Feb. 28, 2019	Conducted (TH05-HY)
EMI Test Receiver&SA	Agilent	N9038A	MY522601 85	20Hz~26.5GHz	Apr. 19, 2018	Jul. 06, 2018~ Jul. 08, 2018	Apr.18, 2019	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May.14, 2018	Jul. 06, 2018~ Jul. 08, 2018	May.13, 2019	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	Apr. 19, 2018	Jul. 06, 2018~ Jul. 08, 2018	Apr. 18, 2019	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	119436	1GHz~18GHz	Jul. 28, 2017	Jul. 06, 2018~ Jul. 08, 2018	Jul. 27, 2018	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Mar.30, 2018	Jul. 06, 2018~ Jul. 08, 2018	Mar.29, 2019	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 19, 2018	Jul. 06, 2018~ Jul. 08, 2018	Apr.18, 2019	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1707137	1GHz~18GHz	Oct.19, 2017	Jul. 06, 2018~ Jul. 08, 2018	Oct 18, 2018	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY532701 04	0.5GHz~26.5GHz	Oct.19, 2017	Jul. 06, 2018~ Jul. 08, 2018	Oct 18, 2018	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul.18.2017	Jul. 06, 2018~ Jul. 08, 2018	Jul.17.2018	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001 985	N/A	NCR	Jul. 06, 2018~ Jul. 08, 2018	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jul. 06, 2018~ Jul. 08, 2018	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.3dB
---	-------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Eason Huang	Temperature:	21~25	°C
Test Date:	2018/6/15~2018/6/19	Relative Humidity:	51~54	%

TEST RESULTS DATA

Peak Power Table

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH3	0	1	9.76	20.97	Pass
	39	1	9.92	20.97	Pass
	78	1	9.73	20.97	Pass
2DH3	0	1	8.74	20.97	Pass
	39	1	8.83	20.97	Pass
	78	1	8.67	20.97	Pass
3DH3	0	1	8.13	20.97	Pass
	39	1	8.21	20.97	Pass
	78	1	8.12	20.97	Pass

TEST RESULTS DATA

Average Power Table
(Reporting Only)

DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH3	0	1	9.69	3.60
	39	1	9.90	3.60
	78	1	9.68	3.60
2DH3	0	1	6.39	3.56
	39	1	6.58	3.56
	78	1	6.36	3.56
3DH3	0	1	5.64	3.59
	39	1	5.74	3.59
	78	1	5.62	3.59



Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 39 2441MHz		2361.1	55.7	-18.3	74	50.25	31.54	6.73	32.82	279	115	P	H
		2361.1	30.91	-23.09	54	-	-	-	-	-	-	A	H
	*	2441	110.2	-	-	104.36	31.71	6.86	32.73	279	115	P	H
	*	2441	85.41	-	-	-	-	-	-	-	-	A	H
		2484.04	49.52	-24.48	74	43.44	31.86	6.91	32.69	279	115	P	H
		2484.04	24.73	-29.27	54	-	-	-	-	-	-	A	H
		2361.1	54.49	-19.51	74	49.04	31.54	6.73	32.82	165	164	P	V
		2361.1	29.7	-24.3	54	-	-	-	-	-	-	A	V
	*	2441	106.63	-	-	100.79	31.71	6.86	32.73	165	164	P	V
	*	2441	81.84	-	-	-	-	-	-	-	-	A	V
		2489.92	48.93	-25.07	74	42.76	31.93	6.91	32.67	165	164	P	V
		2489.92	24.14	-29.86	54	-	-	-	-	-	-	A	V



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 39 2441MHz		4882	42.04	-31.96	74	57.41	31.78	10.95	58.1	161	360	P	H
		4882	17.25	-36.75	54	-	-	-	-	-	-	A	H
		7323	48.77	-25.23	74	57.66	35.69	13.29	57.87	152	309	P	H
		7323	23.98	-30.02	54	-	-	-	-	-	-	A	H
		4882	43.43	-30.57	74	56.83	33.75	10.95	58.1	150	258	P	V
		4882	18.64	-35.36	54	-	-	-	-	-	-	A	V
		7323	47.71	-26.29	74	56.6	35.69	13.29	57.87	152	309	P	V
		7323	22.92	-31.08	54	-	-	-	-	-	-	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		34.85	30.13	-9.87	40	40.06	21.35	0.32	31.6	100	45	P	H
		247.28	25.96	-20.04	46	36.67	18.45	1.85	31.01	-	-	P	H
		322.94	26.62	-19.38	46	35.82	19.78	2.12	31.1	-	-	P	H
		386.96	33.6	-12.4	46	40.97	21.38	2.35	31.1	-	-	P	H
		418.97	32.48	-13.52	46	39.07	22.05	2.46	31.1	-	-	P	H
		760.41	32.29	-13.71	46	34.34	25.76	3.49	31.3	-	-	P	H
		33.88	32.58	-7.42	40	41.94	21.94	0.3	31.6	100	16	P	V
		107.6	21.44	-22.06	43.5	34.75	17.26	0.92	31.49	-	-	P	V
		179.38	17.23	-26.27	43.5	31.79	15.24	1.48	31.28	-	-	P	V
		368.53	24.29	-21.71	46	32.19	20.92	2.28	31.1	-	-	P	V
		570.29	32.18	-13.82	46	36.13	24.34	2.91	31.2	-	-	P	V
		839.95	28.53	-17.47	46	29.76	26.4	3.67	31.3	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- 1. Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- 2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- 1. Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- 2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- 1. Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- 2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Note symbol

-L	Low channel location
-R	High channel location



2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

	Horizontal	Fundamental
Peak	<p>Date: 1 Level (dBuV/m) Date: 2018-07-06</p> <p>Site : 03CWB1-SZ Condition : PEAK_01_74 3m HF_ANT(3117)_119436 HORIZONTAL Project : 862789 Mode : Mode 1 SN : 870088026 Plane : Z_METH Accessory : DHS</p>	<p>Date: 2 Level (dBuV/m) Date: 2018-07-06</p> <p>Site : 03CWB1-SZ Condition : PEAK_01_74 3m HF_ANT(3117)_119436 HORIZONTAL Project : 862789 Mode : Mode 1 SN : 870088026 Plane : Z_METH Accessory : DHS</p>
Peak	<p>Date: 3 Level (dBuV/m) Date: 2018-07-06</p> <p>Site : 03CWB1-SZ Condition : PEAK_01_74 3m HF_ANT(3117)_119436 HORIZONTAL Project : 862789 Mode : Mode 1 SN : 870088026 Plane : Z_METH Accessory : DHS</p>	-



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Horizontal	Fundamental
Peak	<p>Date: 4 Date: 2018-07-06</p> <p>Site : 03CH01-S2 Condition : PEAK_BE_74 3m HF_ANT(3117)_119436 VERTICAL Project : 862789 Mode : Mode 1 SN : 875000026 Plane : Z With Accessory : DMS</p>	<p>Date: 5 Date: 2018-07-06</p> <p>Site : 03CH01-S2 Condition : PEAK_74 3m HF_ANT(3117)_119436 VERTICAL Project : 862789 Mode : Mode 1 SN : 875000026 Plane : Z With Accessory : DMS</p>
Peak	<p>Date: 6 Date: 2018-07-06</p> <p>Site : 03CH01-S2 Condition : PEAK_BE_74 3m HF_ANT(3117)_119436 VERTICAL Project : 862789 Mode : Mode 1 SN : 875000026 Plane : Z With Accessory : DMS</p>	-





2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH39 2441MHz	
	Horizontal	Vertical
Peak	<p>Date: 11 Date: 2018-07-08</p> <p>Site : 83CH81-S2 Condition : PEAK_74 3m HF_ANT_91280_1355_83 HORIZONTAL Product : 862789 Mode : Mode 1 SM : 81260806 Plane : 2 With Accessory : om</p>	<p>Date: 12 Date: 2018-07-08</p> <p>Site : 83CH81-S2 Condition : PEAK_74 3m HF_ANT_91280_1355_83 VERTICAL Product : 862789 Mode : Mode 1 SM : 81260806 Plane : 2 With Accessory : om</p>




Emission below 1GHz

2.4GHz BT (LF)

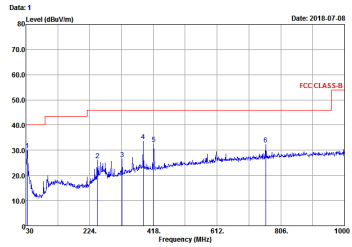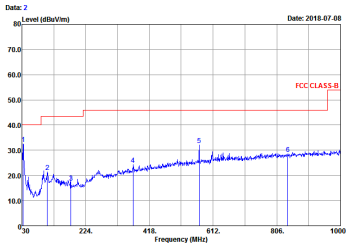
BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
	Horizontal	Vertical
QP / Peak	 <p>Site : 83CH1-SZ Condition : FCC CLASS-B 3m LF_ANT(35487)_6 HORIZONTAL Product : 862709 Mode : Mode 2 SM : 812400006 Plane : Z With Accessory : om</p>	 <p>Site : 83CH1-SZ Condition : FCC CLASS-B 3m LF_ANT(35487)_6 VERTICAL Product : 862709 Mode : Mode 2 SM : 812400006 Plane : Z With Accessory : om</p>

Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 39

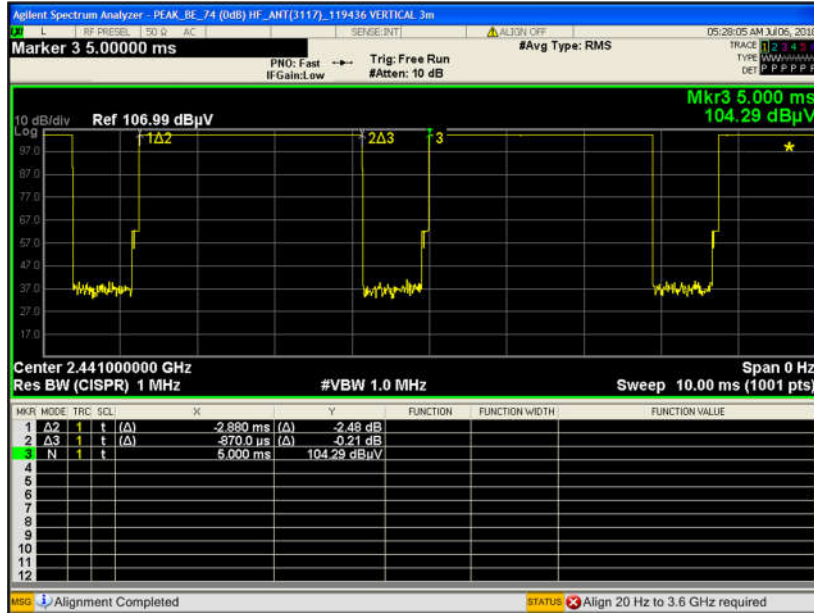

on time (Count Pulses) Plot on Channel 39

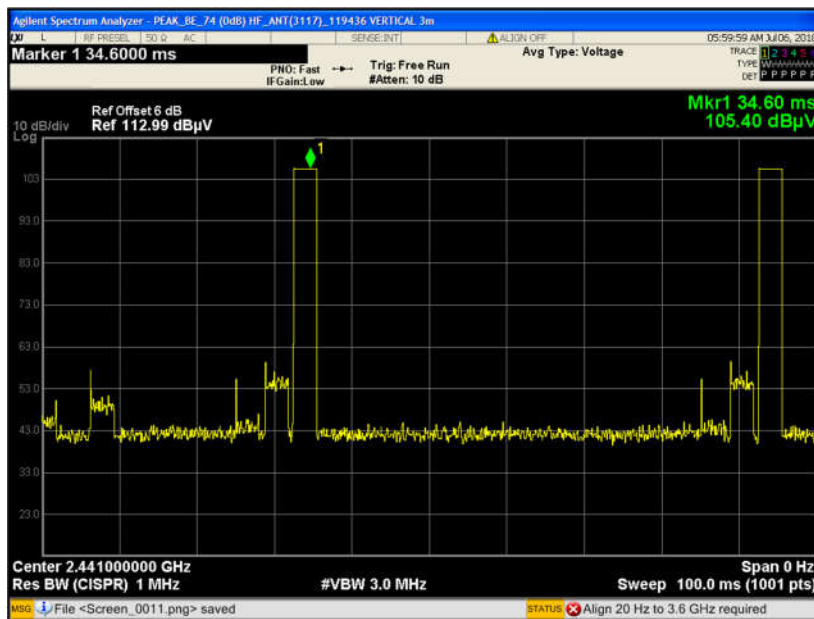

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2$ hops

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$$