



FCC RADIO TEST REPORT

FCC ID : QYL9260NG
Equipment : WLAN module
Brand Name : Getac
Model name : 9260NGW
Applicant : Getac Technology Corporation.
5F., Building A, No. 209, Sec. 1, Nangang Rd.,
Nangang Dist., Taipei City 11568, Taiwan, R.O.C.
Standard : FCC Part 15 Subpart E §15.407

The product was received on Apr. 09, 2019 and testing was started from Apr. 19, 2019 and completed on May 06, 2019. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description 5

 1.1 Product Feature of Equipment Under Test..... 5

 1.2 Modification of EUT 5

 1.3 Testing Location 6

 1.4 Applicable Standards..... 6

2 Test Configuration of Equipment Under Test 7

 2.1 Carrier Frequency and Channel 7

 2.2 Test Mode..... 7

 2.3 Connection Diagram of Test System 8

 2.4 Support Unit used in test configuration and system 8

 2.5 EUT Operation Test Setup 8

3 Test Result 9

 3.1 Maximum Conducted Output Power Measurement 9

 3.2 Unwanted Emissions Measurement 10

 3.3 Antenna Requirements 15

4 List of Measuring Equipment..... 16

5 Uncertainty of Evaluation 17

Appendix A. Conducted Test Results

Appendix B. Radiated Spurious Emission

Appendix C. Radiated Spurious Emission Plots

Appendix D. Duty Cycle Plots

Appendix E. Setup Photographs



History of this test report

Report No.	Version	Description	Issued Date
FR391803-53E	01	Initial issue of report	May 29, 2019



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)
3.1	15.407 (a)	Maximum Conducted Output Power	Pass
3.2	15.407(b)	Unwanted Emissions	Pass
3.3	15.203 & 15.407 (a)	Antenna Requirement	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Elise Chang



1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, and Wi-Fi 5GHz 802.11a/n/ac

Product Specification subjective to this standard	
Antenna Type	WLAN: PIFA Antenna Bluetooth: PIFA Antenna

The product was installed into Tablet (Brand Name: Getac, HVIN: F110, F110_G5, F110-Ex) during test, which can be referred the following information:

Report Sample	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5
F110 SKU	SKU D	SKU E	SKU F	SKU G	SKU F
CPU	I5-8265U	i7-8565U	i7-8565U	I5-8365U	i7-8565U
DDR	4G	8G	16G	16G	16G
SSD	128GB	256GB	512GB	1TB	512GB
Panel	AUO HD B116XAN05	FHD,KD116N11-30 NP-A9	FHD,KD116N11-30 NP-A9	FHD,KD116N11-30 NP-A9	FHD,KD116N11-30 NP-A9
Digitizer	Getac	Getac	Getac	not Support	Getac
Option Bay	RS232+LAN	LAN	BCR	LAN	BCR
Expansion Bay	SMART CARD or SSD Easily removable + Smart Card	HID RFID	Finger print	not Support	HID RFID
WLAN/BT	Support(9260NGW)	Support(9260NGW)	Support(9260NGW)	Support(9260NGW)	Support(9260NGW)
WWAN	not Support	Support(EM7455)	Support(EM7511)	not Support	Support(EM7455)
GPS	GPS(MC-1010)	GPS(MC-1010)	GPS(MC-1010)	GPS(MC-1010)	GPS(MC-1010)
Webcam FHD	Support	not Support	not Support	Support	not Support
Rear 8M Camera	Support	Support	Support	Support	Support
IR Webcam	not Support	Support	Support	not Support	Support
RFID	not Support	Support(OMNIKEY 5127 CK MINI)	not Support	not Support	Support(OMNIKEY 5127 CK MINI)
Default IO (USB 3.0 port)	Support	Support	Support	Support	Support
Default IO (HDMI)	Support	Support	Support	not Support	Support
Default IO (Audio)	Support	Support	Support	Support	Support
Default IO (USB3.1 Type-C Gen 1)	not Support	not Support	not Support	Support	not Support
Explosion-proof cover	not Support	not Support	not Support	not Support	Support

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH15-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Single Mode


Modulation	Data Rate
802.11ac VHT80	MCS0

Remark:

1. For Radiated Test Cases, the tests were performed with Sample 3.
2. The tests were performed with Battery (Model: BP3S1P2290 A) and Adapter (Model: FSP065-RBBN3).

Ch. #		Band IV : 5725-5850 MHz
		802.11ac VHT80
M	Middle	155

2.3 Connection Diagram of Test System

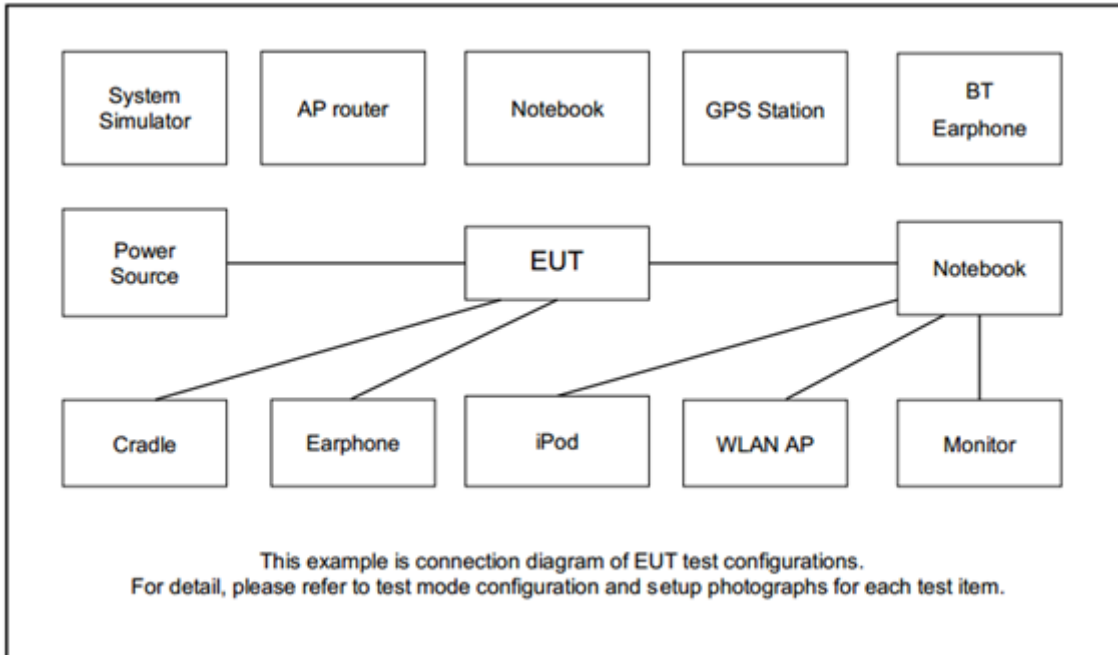

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “DRTU” was installed in Tablet which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Maximum Conducted Output Power Measurement

3.1.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.


3.1.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.1.4 Test Setup

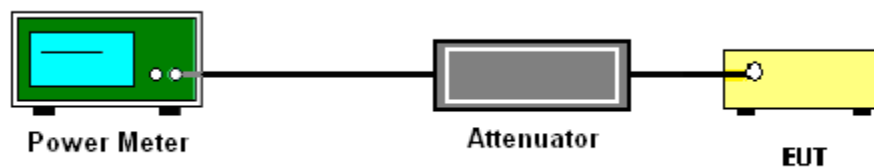

3.1.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.2 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.2.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:
 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3



- (3) KDB789033 D02 v02r01 G)2)c)
 - (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
 - (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW ≥ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.2.4 Test Setup


For radiated emissions below 30MHz

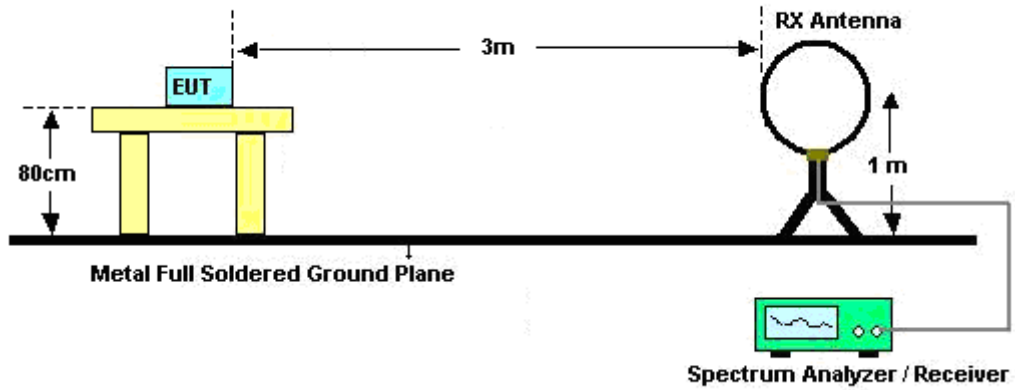

For radiated emissions from 30MHz to 1GHz

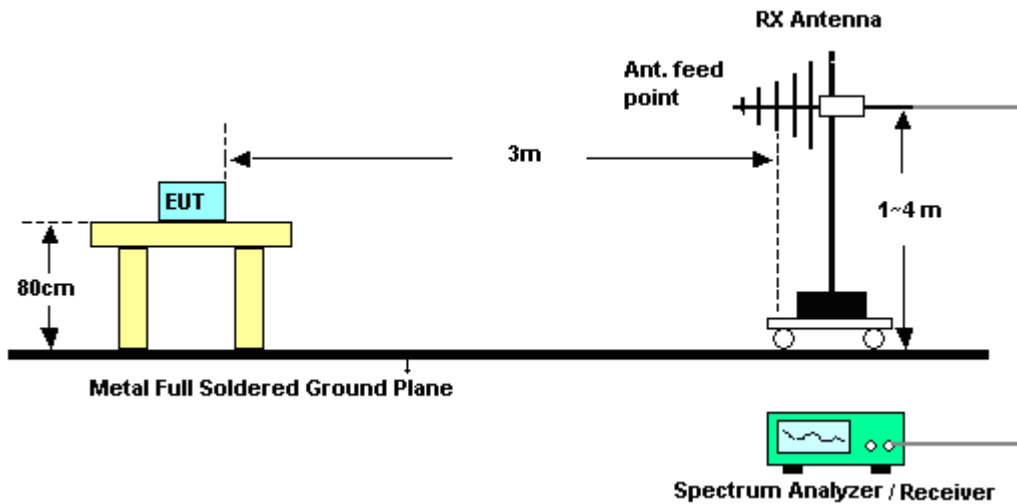

For radiated emissions above 1GHz

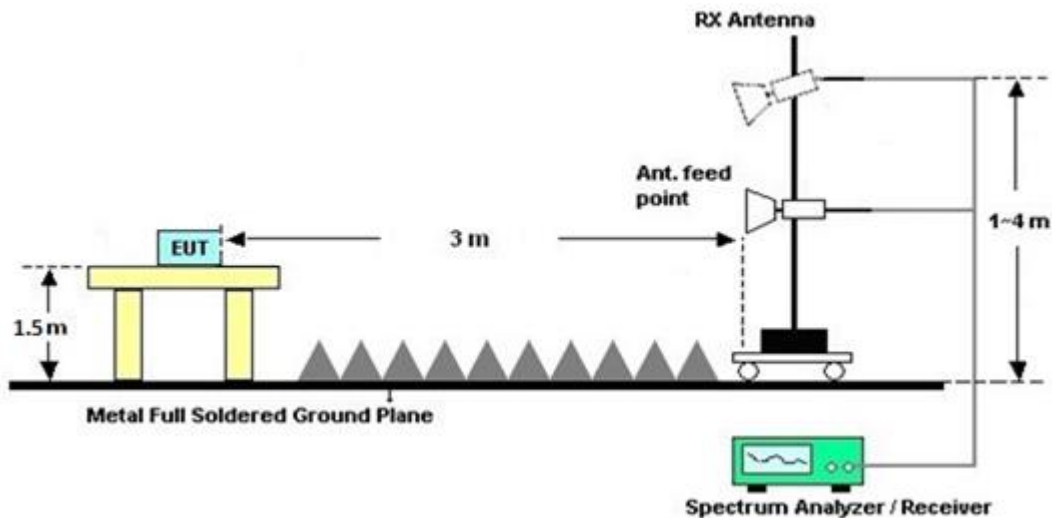



3.2.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.2.6 Test Result of Radiated Band Edges

Please refer to Appendix B and C.

3.2.7 Duty Cycle

Please refer to Appendix D.

3.2.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.3 Antenna Requirements

3.3.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>				
			DG for Power (dBi)	Power Limit Reduction (dB)
	Ant. 1 (dBi)	Ant. 2 (dBi)		
Band IV	0.80	1.11	1.11	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Sensor	DARE	RadiPower	15100041SNO09	10MHz~6GHz	May 07, 2018	Apr. 19, 2019~Apr. 30, 2019	May 06, 2019	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 21, 2018	Apr. 19, 2019~Apr. 30, 2019	Nov. 20, 2019	Conducted (TH05-HY)
Switch Box & RF Cable	EM	EMSW18	SW1070903	N/A	Dec. 19, 2018	Apr. 19, 2019~Apr. 30, 2019	Dec. 18, 2019	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 07, 2019	May 04, 2019~May 06, 2019	Jan. 06, 2020	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL6111D&0802N1D01N-06	47020&06	30MHz to 1GHz	Oct. 13, 2018	May 04, 2019~May 06, 2019	Oct. 12, 2019	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1620	1G~18GHz	Oct. 17, 2018	May 04, 2019~May 06, 2019	Oct. 16, 2019	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz ~ 40GHz	May 08, 2018	May 04, 2019~May 06, 2019	May 07, 2019	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 28, 2018	May 04, 2019~May 06, 2019	Dec. 27, 2019	Radiation (03CH15-HY)
Preamplifier	Jet-Power	JAP00101800-30-10P	160118550004	1GHz~18GHz	Apr. 25, 2019	May 04, 2019~May 06, 2019	Apr. 24, 2020	Radiation (03CH15-HY)
Preamplifier	Keysight	83017A	MY53270195	1GHz~26.5GHz	Aug. 23, 2018	May 04, 2019~May 06, 2019	Aug. 22, 2019	Radiation (03CH15-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 06, 2018	May 04, 2019~May 06, 2019	Dec. 05, 2019	Radiation (03CH15-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Apr. 18, 2019	May 04, 2019~May 06, 2019	Apr. 17, 2020	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	May 04, 2019~May 06, 2019	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	May 04, 2019~May 06, 2019	N/A	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24	RK-000451	N/A	N/A	May 04, 2019~May 06, 2019	N/A	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY36980/4	30M-18G	Apr. 15, 2019	May 04, 2019~May 06, 2019	Apr. 14, 2020	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9838/4	30M-18G	Apr. 15, 2019	May 04, 2019~May 06, 2019	Apr. 14, 2020	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	MTJ	000000-MT18 A-100D3210	30M-18G	Apr. 15, 2019	May 04, 2019~May 06, 2019	Apr. 14, 2020	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 13, 2019	May 04, 2019~May 06, 2019	Mar. 12, 2020	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 13, 2019	May 04, 2019~May 06, 2019	Mar. 12, 2020	Radiation (03CH15-HY)
Filter	Wainwright	WHKX8-5872.5-6750-18000-40ST	SN3	6.75 GHz Highpass	Sep. 16, 2018	May 04, 2019~May 06, 2019	Sep. 15, 2019	Radiation (03CH15-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40S	SN11	1G Low Pass	Sep. 16, 2018	May 04, 2019~May 06, 2019	Sep. 15, 2019	Radiation (03CH15-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Richard Qiu	Temperature:	21~25	°C
Test Date:	2019/4/19~2019/4/30	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

Band IV												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	15.80	15.90		30.00	30.00	2.80	1.11	Pass
11a	6Mbps	1	157	5785	15.90	15.90		30.00	30.00	2.80	1.11	Pass
11a	6Mbps	1	165	5825	15.80	15.80		30.00	30.00	2.80	1.11	Pass
HT20	MCS0	1	149	5745	15.90	15.90		30.00	30.00	2.80	1.11	Pass
HT20	MCS0	1	157	5785	15.90	15.80		30.00	30.00	2.80	1.11	Pass
HT20	MCS0	1	165	5825	15.80	15.90		30.00	30.00	2.80	1.11	Pass
HT40	MCS0	1	151	5755	15.90	15.90		30.00	30.00	2.80	1.11	Pass
HT40	MCS0	1	159	5795	15.90	15.90		30.00	30.00	2.80	1.11	Pass
VHT20	MCS0	1	149	5745	15.80	15.80		30.00	30.00	2.80	1.11	Pass
VHT20	MCS0	1	157	5785	15.80	15.70		30.00	30.00	2.80	1.11	Pass
VHT20	MCS0	1	165	5825	15.70	15.80		30.00	30.00	2.80	1.11	Pass
VHT40	MCS0	1	151	5755	15.80	15.80		30.00	30.00	2.80	1.11	Pass
VHT40	MCS0	1	159	5795	15.80	15.80		30.00	30.00	2.80	1.11	Pass
VHT80	MCS0	1	155	5775	15.80	15.90		30.00	30.00	2.80	1.11	Pass
HT20	MCS0	2	149	5745	13.20	12.70	15.97	30.00		2.80		Pass
HT20	MCS0	2	157	5785	13.00	12.80	15.91	30.00		2.80		Pass
HT20	MCS0	2	165	5825	13.10	12.80	15.96	30.00		2.80		Pass
HT40	MCS0	2	151	5755	13.00	12.70	15.86	30.00		2.80		Pass
HT40	MCS0	2	159	5795	13.00	12.60	15.81	30.00		2.80		Pass
VHT20	MCS0	2	149	5745	13.10	12.60	15.87	30.00		2.80		Pass
VHT20	MCS0	2	157	5785	12.90	12.70	15.81	30.00		2.80		Pass
VHT20	MCS0	2	165	5825	13.00	12.70	15.86	30.00		2.80		Pass
VHT40	MCS0	2	151	5755	12.90	12.60	15.76	30.00		2.80		Pass
VHT40	MCS0	2	159	5795	12.90	12.50	15.71	30.00		2.80		Pass
VHT80	MCS0	2	155	5775	13.00	12.60	15.81	30.00		2.80		Pass



Appendix B. Radiated Spurious Emission

Test Engineer :	Watt Tseng	Temperature :	23~26°C
		Relative Humidity :	50~57%

Band 4 - 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5609.6	53.59	-14.61	68.2	42.01	31.8	9.99	30.21	231	155	P	H
		5692.2	59.24	-40.21	99.45	47.68	31.8	10.01	30.25	231	155	P	H
		5717	59.99	-49.97	109.96	48.37	31.87	10.01	30.26	231	155	P	H
		5725	64.24	-57.96	122.2	52.56	31.93	10.01	30.26	231	155	P	H
	*	5775	104.37	-	-	92.51	32.13	10.02	30.29	231	155	P	H
	*	5775	96.38	-	-	84.52	32.13	10.02	30.29	231	155	A	H
		5852.2	58.17	-59.01	117.18	46.19	32.2	10.11	30.33	231	155	P	H
		5856.2	57.66	-52.8	110.46	45.65	32.23	10.11	30.33	231	155	P	H
		5875.4	54.83	-50.07	104.9	42.76	32.27	10.14	30.34	231	155	P	H
		5936	52.66	-15.54	68.2	40.44	32.37	10.23	30.38	231	155	P	H
		5617.4	54.51	-13.69	68.2	42.96	31.77	9.99	30.21	233	133	P	V
		5687.6	59.61	-36.44	96.05	48.05	31.8	10.01	30.25	233	133	P	V
		5704	59.75	-46.57	106.32	48.12	31.87	10.01	30.25	233	133	P	V
		5724.2	65.07	-55.31	120.38	53.39	31.93	10.01	30.26	233	133	P	V
	*	5775	105.74	-	-	93.88	32.13	10.02	30.29	233	133	P	V
	*	5775	97.76	-	-	85.9	32.13	10.02	30.29	233	133	A	V
		5851.8	61.26	-56.84	118.1	49.28	32.2	10.11	30.33	233	133	P	V
		5858.2	60.46	-49.44	109.9	48.46	32.23	10.11	30.34	233	133	P	V
		5876.2	54.91	-49.4	104.31	42.84	32.27	10.14	30.34	233	133	P	V
	5943.8	53.88	-14.32	68.2	41.62	32.4	10.24	30.38	233	133	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT80 CH 155 5775MHz		11550	49.53	-24.47	74	57.87	40.05	14.66	63.05	100	0	P	H	
		17325	49.05	-19.15	68.2	51.34	41.07	18.82	62.18	100	0	P	H	
													H	
													H	
			11550	48.68	-25.32	74	57.02	40.05	14.66	63.05	100	0	P	V
			17325	47.75	-20.45	68.2	50.04	41.07	18.82	62.18	100	0	P	V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
5GHz 802.11ac VHT80 LF		30.97	22.35	-17.65	40	29.4	24.81	0.76	32.62	-	-	P	H	
		99.84	26.28	-17.22	43.5	41.41	15.97	1.41	32.51	-	-	P	H	
		191.99	25.72	-17.78	43.5	41.4	14.8	2.01	32.49	-	-	P	H	
		312.27	29.77	-16.23	46	40.58	19.35	2.38	32.54	-	-	P	H	
		449.04	28.62	-17.38	46	35.31	23.08	2.79	32.56	-	-	P	H	
		943.74	32.88	-13.12	46	29.45	30.52	4.18	31.27	100	0	P	H	
														H
														H
														H
														H
														H
														H
			30.97	22.68	-17.32	40	29.73	24.81	0.76	32.62	-	-	P	V
			97.9	26.88	-16.62	43.5	42.29	15.7	1.4	32.51	-	-	P	V
			312.27	22.35	-23.65	46	33.16	19.35	2.38	32.54	-	-	P	V
			449.04	31.22	-14.78	46	37.91	23.08	2.79	32.56	-	-	P	V
			538.28	30.88	-15.12	46	36.12	24.17	3.17	32.58	-	-	P	V
			828.31	39.2	-6.8	46	38.97	28.4	3.88	32.05	100	0	P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Watt Tseng	Temperature :	23~26°C
		Relative Humidity :	50~57%

Band 4 - 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
2	Horizontal	Fundamental
Peak	<p>Site : 03CH15-HY Condition : PEAK_BE(B4)_16-24 3m 91200_15_1620 HORIZONTAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 391803-53 Mode : 3</p>	<p>Site : 03CH15-HY Condition : PEAK(LUNIII) 3m 91200_15_1620 HORIZONTAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 391803-53 Mode : 3</p>
Peak	<p>Site : 03CH15-HY Condition : PEAK_BE(B4)_16-24 3m 91200_15_1620 HORIZONTAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 391803-53 Mode : 3</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
2	Vertical	Fundamental
Peak	<p>Date: 2019-05-04 PEAK_BE(04)_15-24</p> <p>Site : 03CH15-HY Condition : PEAK_BE(04)_16-24 3m 91200_15_1620 VERTICAL Detector : Peak Project : 391803-53 Mode : 3</p>	<p>Date: 2019-05-04 PEAK(04)_15-24</p> <p>Site : 03CH15-HY Condition : PEAK(UNII) 3m 91200_15_1620 VERTICAL Detector : Peak Project : 391803-53 Mode : 3</p>
Peak	<p>Date: 2019-05-04 PEAK_BE(04)_16-24</p> <p>Site : 03CH15-HY Condition : PEAK_BE(04)_16-24 3m 91200_15_1620 VERTICAL Detector : Peak Project : 391803-53 Mode : 3</p>	Left blank





Band 4 - 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

Table with 3 columns: WIFI, ANT, and measurement results for Horizontal and Vertical orientations. Includes two graphs showing Level (dBuV/m) vs Frequency (MHz) and associated metadata like Site, Condition, and Detector.



Emission below 1GHz
5GHz WIFI 802.11ac VHT80 (LF)

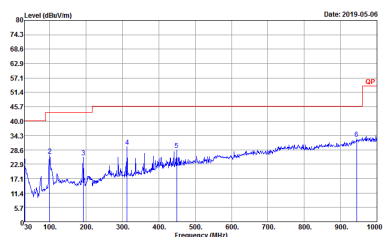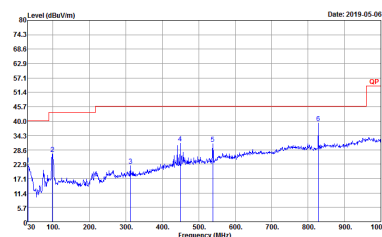WIFI	5GHz 5725~5850MHz	
ANT	802.11ac VHT80 LF	
2	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH15-HY Condition : QP 3m BTL0G_15_41912 HORIZONTAL Detector : Peak Project : 391803-53 Mode : 4</p>	 <p>Site : 03CH15-HY Condition : QP 3m BTL0G_15_41912 VERTICAL Detector : Peak Project : 391803-53 Mode : 4</p>




Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
2	5GHz 802.11ac VHT80	89.72	454.00	2.20	3kHz	0.47

<Ant. 2>

802.11ac VHT80

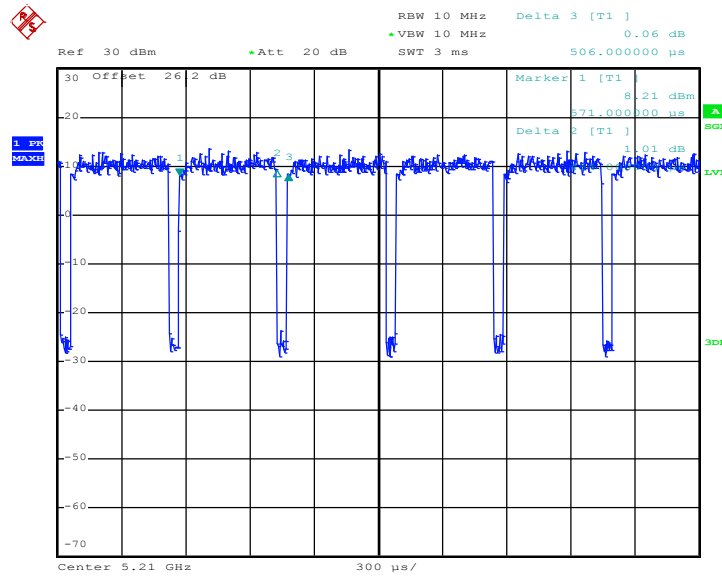

Date: 20.APR.2019 06:43:43