

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom Face_0mm_Ch11


Communication System: 802.11b ; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: MSL_2450_170309 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.996 \text{ S/m}$; $\epsilon_r = 54.019$;
 $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.6 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(7.41, 7.41, 7.41); Calibrated: 2016/5/11;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2017/1/6
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7373)

Area Scan (61x101x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
Maximum value of SAR (interpolated) = 0.399 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 12.76 V/m ; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.538 W/kg
SAR(1 g) = 0.248 W/kg ; SAR(10 g) = 0.109 W/kg
Maximum value of SAR (measured) = 0.409 W/kg

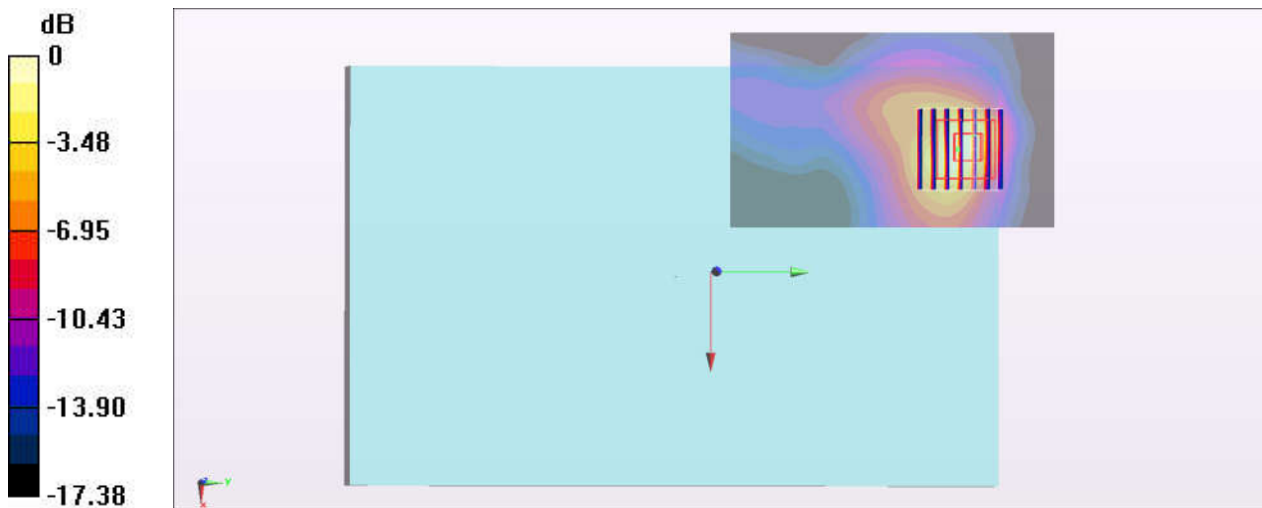

$0 \text{ dB} = 0.409 \text{ W/kg} = -3.88 \text{ dBW/kg}$

#02_WLAN5GHz_802.11n-HT40 MCS0_Edge 2_0mm_Ch62


Communication System: 802.11n ; Frequency: 5310 MHz;Duty Cycle: 1:1.16
Medium: MSL_5G_170308 Medium parameters used: $f = 5310$ MHz; $\sigma = 5.576$ S/m; $\epsilon_r = 46.709$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.73, 4.73, 4.73); Calibrated: 2016/5/11;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2017/1/6
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7373)

Area Scan (101x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.891 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 8.425 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 1.62 W/kg
SAR(1 g) = 0.419 W/kg; SAR(10 g) = 0.143 W/kg
Maximum value of SAR (measured) = 0.988 W/kg

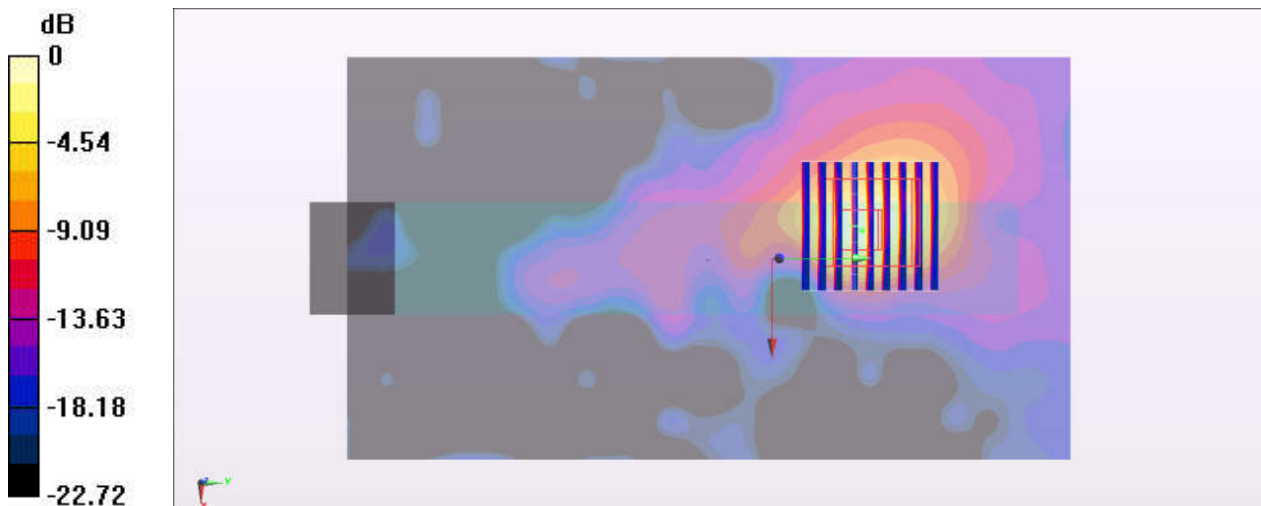

0 dB = 0.988 W/kg = -0.05 dBW/kg

#03_WLAN5GHz_802.11a 6Mbps_Edge 2_0mm_Ch100


Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1.079
Medium: MSL_5G_170308 Medium parameters used: $f = 5500$ MHz; $\sigma = 5.824$ S/m; $\epsilon_r = 46.383$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.4, 4.4, 4.4); Calibrated: 2016/5/11;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2017/1/6
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

Area Scan (101x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.977 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 8.593 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 1.82 W/kg
SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.149 W/kg
Maximum value of SAR (measured) = 1.12 W/kg

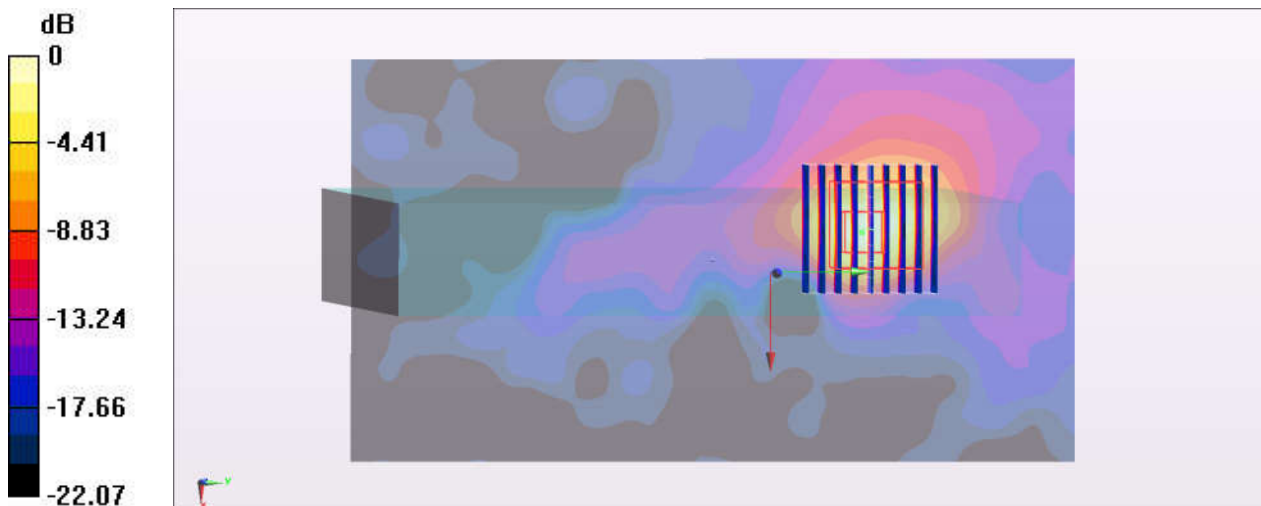

0 dB = 1.12 W/kg = 0.49 dBW/kg

#04_WLAN5GHz_802.11n-HT40 MCS0_Edge 2_0mm_Ch151

Communication System: 802.11n ; Frequency: 5755 MHz;Duty Cycle: 1:1.16

Medium: MSL_5G_170308 Medium parameters used: $f = 5755$ MHz; $\sigma = 6.178$ S/m; $\epsilon_r = 45.955$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.42, 4.42, 4.42); Calibrated: 2016/5/11;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2017/1/6
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1131
- Measurement SW: DASY52, Version 52.8 (8);SEMCAD X Version 14.6.10 (7373)

Area Scan (101x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.35 W/kg


Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.470 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.69 W/kg

SAR(1 g) = 0.621 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 1.61 W/kg

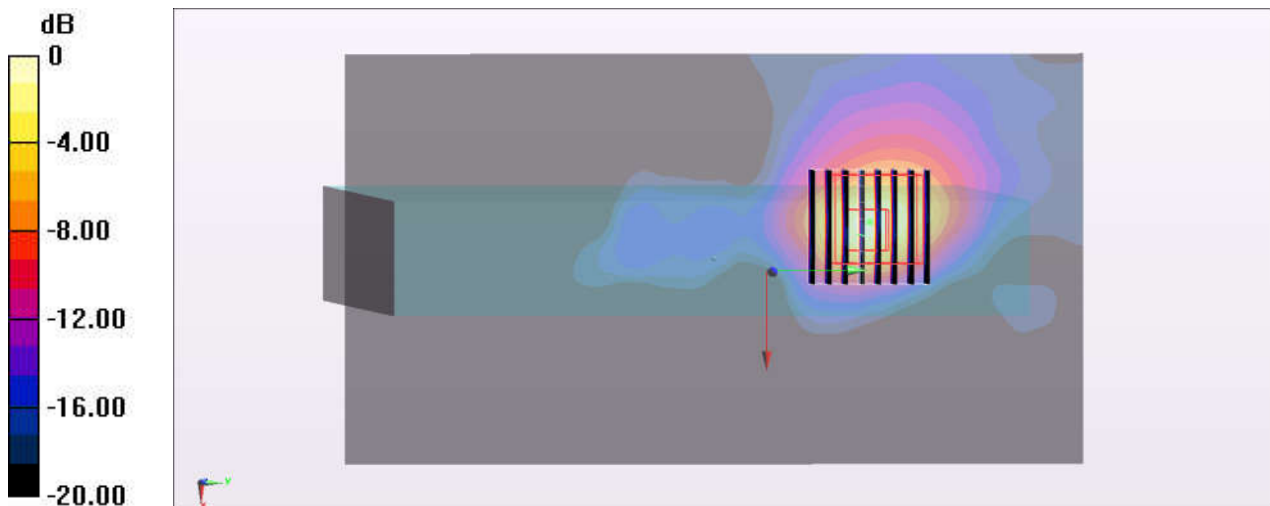

0 dB = 1.61 W/kg = 2.07 dBW/kg