



FCC RADIO TEST REPORT

FCC ID : QYLAX210NG
Equipment : WLAN Module
Brand Name : Getac
Model Name : AX210NGW
Applicant : Getac Technology Corporation.
5F., Building A, No. 209, Sec. 1, Nangang Rd.,
Nangang Dist., Taipei City 11568, Taiwan, R.O.C.
Standard : FCC Part 15 Subpart C §15.247

The product was received on Nov. 15, 2021 and testing was performed from Nov. 27, 2021 to Jan. 11, 2022. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	7
1.3 Testing Location	7
1.4 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	11
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
3 Test Result	12
3.1 Output Power Measurement.....	12
3.2 Radiated Band Edges and Spurious Emission Measurement	13
3.3 AC Conducted Emission Measurement.....	18
3.4 Antenna Requirements	20
4 List of Measuring Equipment.....	21
5 Uncertainty of Evaluation	23
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR1O0537C	01	Initial issue of report	Jan. 27, 2022
FR1O0537C	02	1. Revise Appendix A, C and D 2. Add description in section 2.2 3. Revise test setup in section 3.1.3 and 3.1.4 4. Revise List of Measuring Equipment	Mar. 01, 2022



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.247(a)(2)	6dB Bandwidth	-	See Note
-	2.1049	99% Occupied Bandwidth	-	See Note
3.1	15.247(b)	Power Output Measurement	Pass	-
-	15.247(e)	Power Spectral Density	-	See Note
-	15.247(d)	Conducted Band Edges	-	See Note
		Conducted Spurious Emission	-	See Note
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	-
3.3	15.207	AC Conducted Emission	Pass	-
3.4	15.203 & 15.247(b)	Antenna Requirement	Pass	--

Note: The module (Model: AX210NGW) makes no difference after verifying output power, this report reuses test data from the module report.

Declaration of Conformity:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
- The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Tina Chuang



1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax and Wi-Fi 6GHz 802.11a/n/ac/ax

Product Feature	
Sample 1	EUT with Host 1
Sample 2	EUT with Host 2
Sample 3	EUT with Host 3
Sample 4	EUT with Host 4
Sample 5	EUT with Host 5
Antenna Type	WLAN: <Main>: PIFA Antenna <Aux.>: PIFA Antenna Bluetooth: PIFA Antenna

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	Main: 0.54 Aux.: 2.86

Remark: The EUT's information above is declared by manufacturer. Please refer to Comments and Explanations in report summary.



The product was installed into Notebook (Brand Name: Getac, Model Name: X600, X600 Pro X600Y (Y= 10 characters, Y can be 0-9, a-z, A-Z, “-“, “_” or blank for marketing purpose and no impact safety related critical components and constructions.)) during test, which can be referred the following information:

Host Information	
Host 1	SKU A
Host 2	SKU B
Host 3	SKU C
Host 4	SKU D
Host 5	SKU E

SKU List					
DVT SKUs	SKU A (STD)	SKU B (STD)	SKU C (STD)	SKU D (Pro)	SKU E (Pro)
CPU	I5-11500H	I5-11500H	I5-11500H	I7-11850H	I7-11850H
Display	B156HTN03.8 , AUO	B156HTN03.8 , AUO	B156HTN03.8 , AUO	B156HTN03.8 , AUO	B156HTN03.8 , AUO
Camera	FO20FF-790H , FOXLINK	FO20FF-790H , FOXLINK	FO20FF-790H , FOXLINK	FN20FF-679H, FOXLINK	FN20FF-679H, FOXLINK
MXM	w/o MXM	Nvidia RTX3000	Nvidia GTX1650	Nvidia RTX3000	Nvidia GTX1650
Memory	16GB	16GB	16GB	32GB	32GB
Main storage	512GB	512GB	512GB	1TB	1TB
Second storage	512GB	512GB	512GB	1TB	1TB
Third storage	512GB	512GB	512GB	1TB	1TB
Touch pad	TP-PCT3854	TP-PCT3854	TP-PCT3854	TP-PCT3854	TP-PCT3854
Smart card	Yes	Yes	Yes	Yes	Yes
SD card	No	No	No	Yes	Yes
PCMCIA/EXPRESS card	PCMCIA	PCMCIA	PCMCIA	N/A	N/A
Wifi+BT	AX210NGW	AX210NGW	AX210NGW	AX210NGW	AX210NGW
WWAN	w/o WWAN	EM7511	EM7511	EM7511	EM7511
GPS/GNSS	Mc-1010-V2b	combo with WWAN	combo with WWAN	combo with WWAN	combo with WWAN
AC adapter	FSP150-ABBN3	FSP230-AJAN3	FSP230-AJAN3	FSP230-AJAN3	FSP230-AJAN3
	THP0K15W4A5-1 G	THP0K23W4A5-1 G	THP0K23W4A5-1 G	THP0K23W4A5-1 G	THP0K23W4A5-1 G
FPR	ETU-811JG	ETU-811JG	ETU-811JG	N/A	ETU-811JG
RFID	NA	NA	NA	NA	NA
Main Battery	BP3S2P3450P-0 2	BP3S2P3450P-0 2	BP3S2P3450P-0 2	BP3S2P3450P-0 2	BP3S2P3450P-0 2
Optional IO	RS232	RS232	RS232	VGA	VGA
Pass through	No	No	No	Yes	Yes
Expansion	NA	NA	NA	RS232/RS422 x1	RS232/RS422 x1
				PCMCIA x1 + Express card x1	PCMCIA x1 + Express card x1
ODD	NA	NA	NA	BDR-UD03ASW, PIONEER	BDR-UD03ASW, PIONEER
2nd Battery	NA	NA	NA	BP3S2P2100S-0 3	BP3S2P2100S-0 3
Connectivity module	NA	NA	NA	4 RJ45 module	4 RJ45 module



1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY (TAF Code: 1190)
Remark	The Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, 03CH11-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

The final test modes consider the modulation and the worst data rates as shown in the table below.

Single Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0

MIMO Antenna

Modulation	Data Rate
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0

Test Cases	
AC Conducted Emission	Mode 1: WLAN (2.4GHz) Link + Bluetooth Link + H-Pattern + Earphone + USB Cable + Adapter 1 + Battery 1 for Sample 1 Mode 2: LTE Band 7 Link + WLAN (2.4GHz) Link + Bluetooth Link + H-Pattern + Earphone + USB Cable + Adapter 2 + Battery 1 for Sample 2 Mode 3: LTE Band 7 Link + WLAN (2.4GHz) Link + Bluetooth Link + H-Pattern + Earphone + USB Cable + Adapter 4 + Battery 1 + Battery 2 for Sample 4 Mode 4: LTE Band 7 Link + WLAN (2.4GHz) Link + Bluetooth Link + H-Pattern + Earphone + USB Cable + Adapter 4 + Battery 1 + Battery 2 for Sample 5
Remark:	
1. The worst case of Conducted Emission is mode 2 only the test data of it was reported. 2. For Radiated Test Cases, the tests were performed with Adapter 2, Battery 1 and Sample 2.	



<Ant. 1>

Ch. #	2400-2483.5 MHz	
	802.11ax HE20	802.11ax HE40
Low	-	03
Middle	07	-

<Ant. 2>

Ch. #	2400-2483.5 MHz	
	802.11ax HE20	802.11ax HE40
Middle	07	07


MIMO<Ant. 1+2>

Ch. #	2400-2483.5 MHz	
	802.11ax HE20	802.11ax HE40
Middle	07	07

Remark:

1. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.
2. Ant. 1 means Chain A (Aux.) and Ant. 2 means Chain B (Main).

2.3 Connection Diagram of Test System

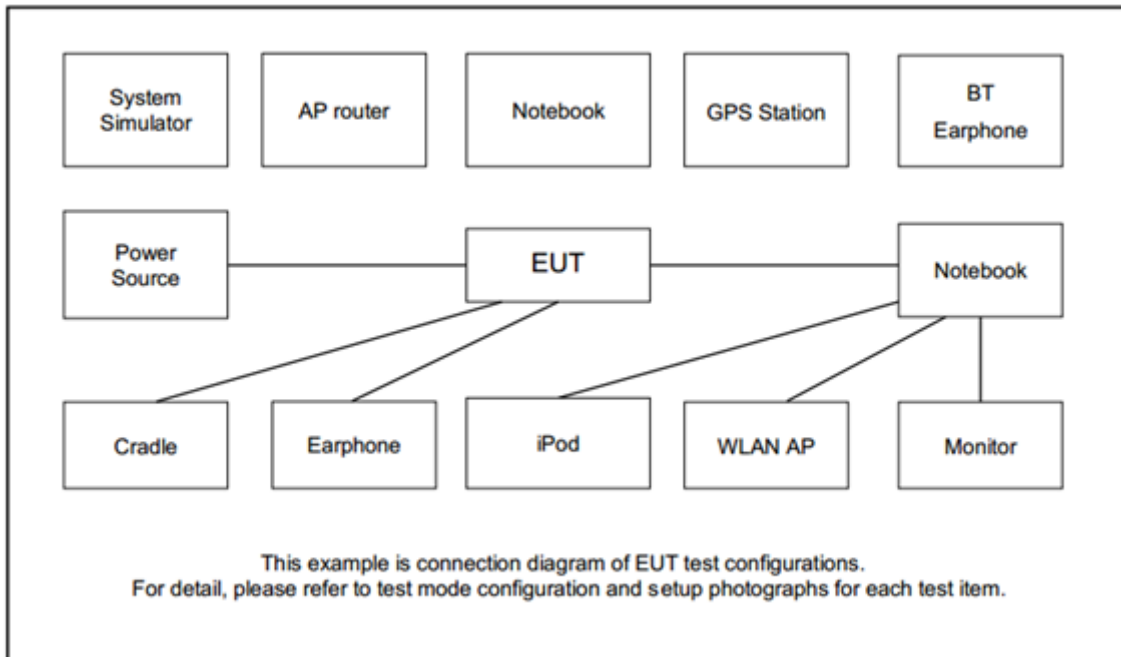

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY700A2029	N/A	N/A
3.	WLAN AP	ASUS	GT-AXE11000	MSQ-RTAXJF00	N/A	Unshielded, 1.8m
4.	iPod Earphone	Apple	A1285	FCC DoC	Unshielded, 1.2m	N/A
5.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

The RF test items, utility “DRTU Version 22.21070.0.0-OEM.DRTU12463” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.1.4 Test Setup

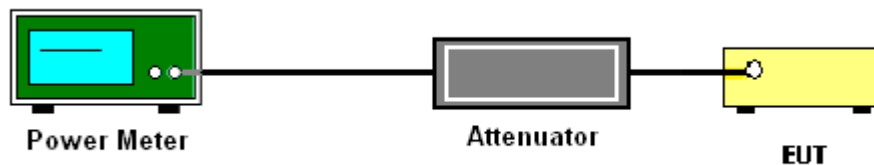

3.1.5 Test Result of Average Output Power

Please refer to Appendix A.



3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

**3.2.3 Test Procedures**


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, $VBW = 3$ MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.2.4 Test Setup


For radiated emissions below 30MHz

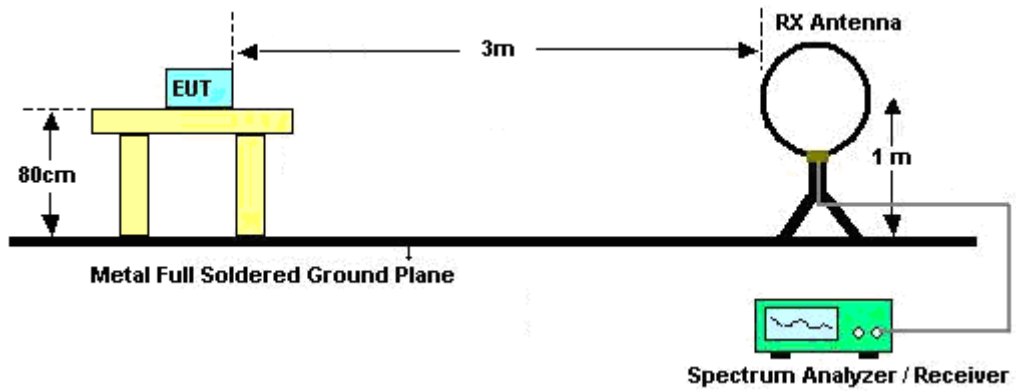


For radiated emissions from 30MHz to 1GHz

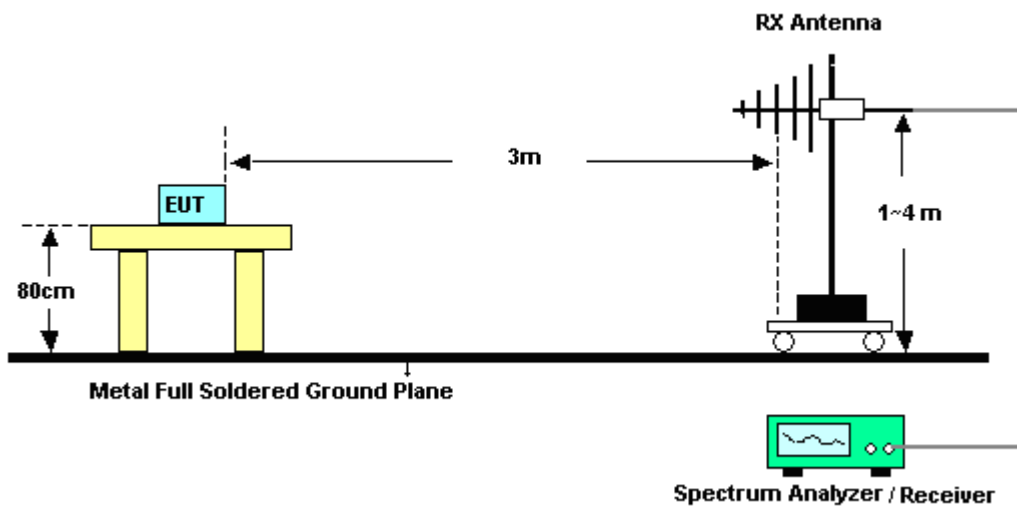

For radiated test from 1GHz to 18GHz

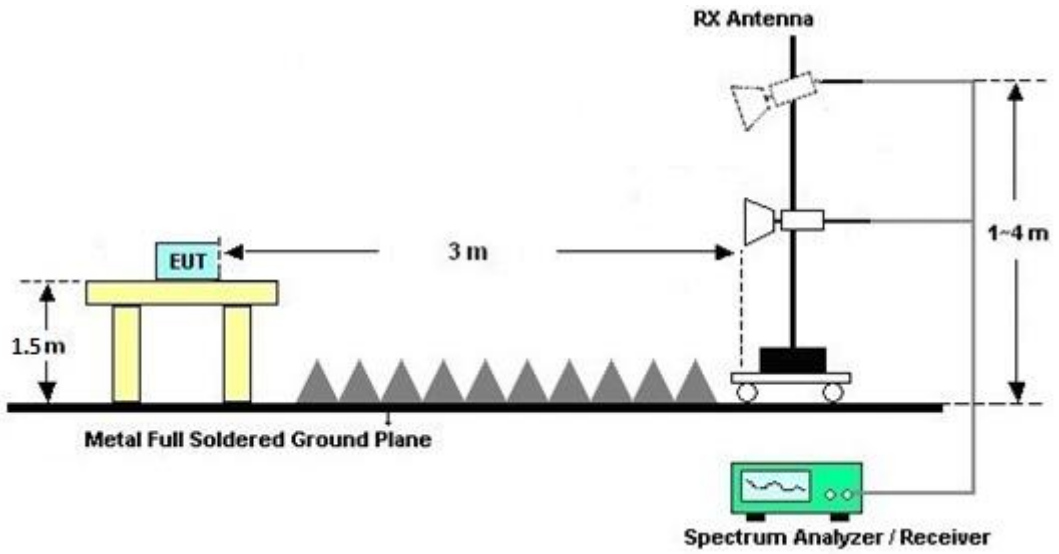

For radiated test above 18GHz

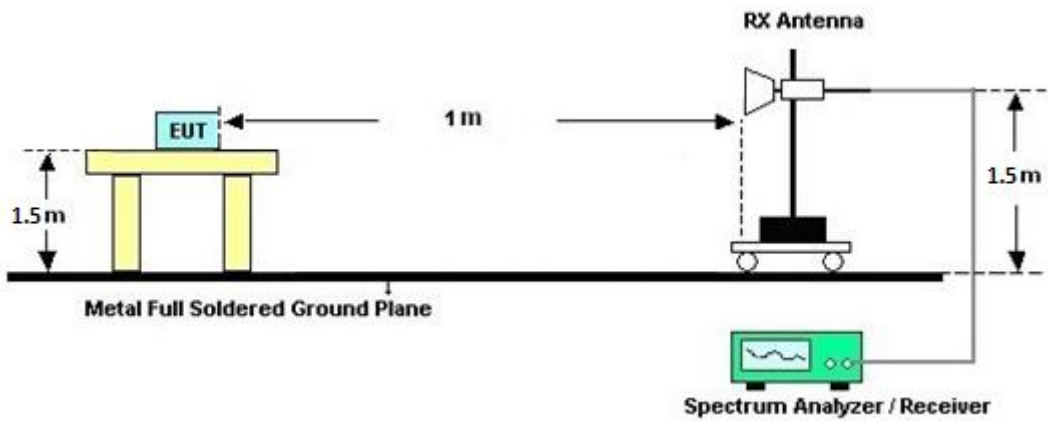



3.2.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.2.7 Duty Cycle

Please refer to Appendix E.

3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.3 AC Conducted Emission Measurement

3.3.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.3.4 Test Setup

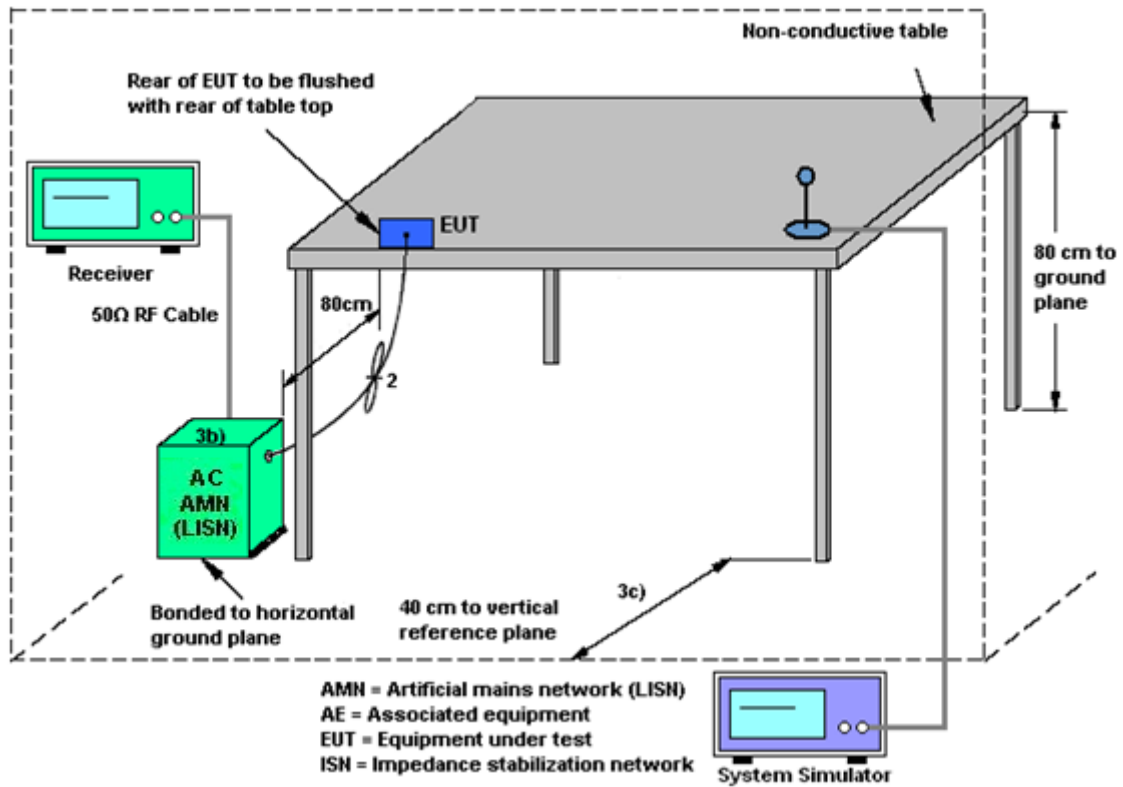

3.3.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.4 Antenna Requirements

3.4.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.4.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 09, 2021	Dec. 11, 2021~ Dec. 15, 2021	Oct. 08, 2022	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz~18GHz	Oct. 25, 2021	Dec. 11, 2021~ Dec. 15, 2021	Oct. 24, 2022	Radiation (03CH11-HY)
Hygrometer	TECEPEL	DTM-303B	TP140325	N/A	Nov. 26, 2021	Dec. 11, 2021~ Dec. 15, 2021	Nov. 25, 2022	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 07, 2021	Dec. 11, 2021~ Dec. 15, 2021	Sep. 06, 2022	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 10, 2021	Dec. 11, 2021~ Dec. 15, 2021	Nov. 09, 2022	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-303	1710001800055007	1GHz~18GHz	Jun. 16, 2021	Dec. 11, 2021~ Dec. 15, 2021	Jun. 15, 2022	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 15, 2021	Dec. 11, 2021~ Dec. 15, 2021	Oct. 14, 2022	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN3	3GHz High Pass Filter	Sep. 13, 2021	Dec. 11, 2021~ Dec. 15, 2021	Sep. 12, 2022	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1.53GHz Low Pass Filter	Sep. 13, 2021	Dec. 11, 2021~ Dec. 15, 2021	Sep. 12, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 11, 2021	Dec. 11, 2021~ Dec. 15, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz~40GHz	Mar. 11, 2021	Dec. 11, 2021~ Dec. 15, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102 , SUCOFLEX 104	811852/4,MY2859/2,MY9837/4PE	30MHz~18GHz	Nov. 15, 2021	Dec. 11, 2021~ Dec. 15, 2021	Nov. 14, 2022	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Dec. 11, 2021~ Dec. 15, 2021	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Dec. 11, 2021~ Dec. 15, 2021	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Dec. 11, 2021~ Dec. 15, 2021	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.09824_20191225	RK-000992	N/A	N/A	Dec. 11, 2021~ Dec. 15, 2021	N/A	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 28, 2020	Dec. 11, 2021~ Dec. 15, 2021	Dec. 27, 2021	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Dec. 12, 2021~ Jan. 11, 2022	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 01, 2021	Dec. 12, 2021~ Jan. 11, 2022	Nov. 30, 2022	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 17, 2021	Dec. 12, 2021~ Jan. 11, 2022	Nov. 16, 2022	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 03, 2021	Dec. 12, 2021~ Jan. 11, 2022	Dec. 02, 2022	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Dec. 12, 2021~ Jan. 11, 2022	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 28, 2021	Dec. 12, 2021~ Jan. 11, 2022	Jul. 27, 2022	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 31, 2020	Dec. 12, 2021~ Dec. 29, 2021	Dec. 30, 2021	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 30, 2021	Dec. 30, 2021~ Jan. 11, 2022	Dec. 29, 2022	Conduction (CO05-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 16, 2021	Nov. 27, 2021~ Nov. 30, 2021	Nov. 15, 2022	Conducted (TH05-HY)
Power Meter	Agilent	E4416A	GB41292344	N/A	Jan. 14, 2021	Nov. 27, 2021~ Nov. 30, 2021	Jan. 13, 2022	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 30, 2021	Nov. 27, 2021~ Nov. 30, 2021	Aug. 29, 2022	Conducted (TH05-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW191204(B OX8)	N/A	Jan. 07, 2021	Nov. 27, 2021~ Nov. 30, 2021	Jan. 06, 2022	Conducted (TH05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.4 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.9 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Junyu Jhou	Temperature:	21.3~25.5	°C
Test Date:	2021/11/27~2021/11/30	Relative Humidity:	52.1~63.2	%

Remark: For Conducted Test Items, Ant. 1 means Chain A (Aux.) and Ant. 2 means Chain B (Main).

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	20.90	20.90		30.00	30.00	2.86	0.54	23.76	21.44	36.00	36.00	Pass
11b	1Mbps	1	7	2442	21.20	21.20		30.00	30.00	2.86	0.54	24.06	21.74	36.00	36.00	Pass
11b	1Mbps	1	11	2462	21.30	21.20		30.00	30.00	2.86	0.54	24.16	21.74	36.00	36.00	Pass
11b	1Mbps	1	12	2467	19.20	18.70		30.00	30.00	2.86	0.54	22.06	19.24	36.00	36.00	Pass
11b	1Mbps	1	13	2472	17.20	16.90		30.00	30.00	2.86	0.54	20.06	17.44	36.00	36.00	Pass
11g	6Mbps	1	1	2412	19.10	19.20		30.00	30.00	2.86	0.54	21.96	19.74	36.00	36.00	Pass
11g	6Mbps	1	7	2442	21.00	21.30		30.00	30.00	2.86	0.54	23.86	21.84	36.00	36.00	Pass
11g	6Mbps	1	11	2462	18.90	18.80		30.00	30.00	2.86	0.54	21.76	19.34	36.00	36.00	Pass
11g	6Mbps	1	12	2467	13.90	13.90		30.00	30.00	2.86	0.54	16.76	14.44	36.00	36.00	Pass
11g	6Mbps	1	13	2472	11.90	11.60		30.00	30.00	2.86	0.54	14.76	12.14	36.00	36.00	Pass
HT20	MCS0	1	1	2412	19.00	18.60		30.00	30.00	2.86	0.54	21.86	19.14	36.00	36.00	Pass
HT20	MCS0	1	7	2442	20.90	20.80		30.00	30.00	2.86	0.54	23.76	21.34	36.00	36.00	Pass
HT20	MCS0	1	11	2462	18.20	18.30		30.00	30.00	2.86	0.54	21.06	18.84	36.00	36.00	Pass
HT20	MCS0	1	12	2467	13.90	13.80		30.00	30.00	2.86	0.54	16.76	14.34	36.00	36.00	Pass
HT20	MCS0	1	13	2472	11.60	11.80		30.00	30.00	2.86	0.54	14.46	12.34	36.00	36.00	Pass
HT40	MCS0	1	3	2422	16.40	16.30		30.00	30.00	2.86	0.54	19.26	16.84	36.00	36.00	Pass
HT40	MCS0	1	7	2442	17.30	16.90		30.00	30.00	2.86	0.54	20.16	17.44	36.00	36.00	Pass
HT40	MCS0	1	9	2452	16.30	15.80		30.00	30.00	2.86	0.54	19.16	16.34	36.00	36.00	Pass
HT40	MCS0	1	10	2457	11.70	11.80		30.00	30.00	2.86	0.54	14.56	12.34	36.00	36.00	Pass
HT40	MCS0	1	11	2462	11.80	11.90		30.00	30.00	2.86	0.54	14.66	12.44	36.00	36.00	Pass

2.4GHz Band MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
HT20	MCS0	2	1	2412	17.00	16.90	19.96	30.00	30.00	2.86	2.86	22.82	22.82	36.00	36.00	Pass
HT20	MCS0	2	7	2442	20.70	20.50	23.61	30.00	30.00	2.86	2.86	26.47	26.47	36.00	36.00	Pass
HT20	MCS0	2	11	2462	17.20	17.20	20.21	30.00	30.00	2.86	2.86	23.07	23.07	36.00	36.00	Pass
HT20	MCS0	2	12	2467	13.40	13.20	16.31	30.00	30.00	2.86	2.86	19.17	19.17	36.00	36.00	Pass
HT20	MCS0	2	13	2472	10.50	10.70	13.61	30.00	30.00	2.86	2.86	16.47	16.47	36.00	36.00	Pass
HT40	MCS0	2	3	2422	15.40	15.40	18.41	30.00	30.00	2.86	2.86	21.27	21.27	36.00	36.00	Pass
HT40	MCS0	2	7	2442	15.90	16.00	18.96	30.00	30.00	2.86	2.86	21.82	21.82	36.00	36.00	Pass
HT40	MCS0	2	9	2452	15.30	15.40	18.36	30.00	30.00	2.86	2.86	21.22	21.22	36.00	36.00	Pass
HT40	MCS0	2	10	2457	9.80	9.80	12.81	30.00	30.00	2.86	2.86	15.67	15.67	36.00	36.00	Pass
HT40	MCS0	2	11	2462	10.40	10.20	13.31	30.00	30.00	2.86	2.86	16.17	16.17	36.00	36.00	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	1	1	2412	Full	18.10	18.40		30.00	30.00	2.86	0.54	20.96	18.94	36.00	36.00	Pass
HE20	MCS0	1	7	2442	Full	20.90	20.60		30.00	30.00	2.86	0.54	23.76	21.14	36.00	36.00	Pass
HE20	MCS0	1	11	2462	Full	17.80	17.60		30.00	30.00	2.86	0.54	20.66	18.14	36.00	36.00	Pass
HE20	MCS0	1	12	2467	Full	13.90	14.40		30.00	30.00	2.86	0.54	16.76	14.94	36.00	36.00	Pass
HE20	MCS0	1	13	2472	Full	12.40	11.80		30.00	30.00	2.86	0.54	15.26	12.34	36.00	36.00	Pass
HE40	MCS0	1	3	2422	Full	16.70	16.30		30.00	30.00	2.86	0.54	19.56	16.84	36.00	36.00	Pass
HE40	MCS0	1	7	2442	Full	16.50	16.80		30.00	30.00	2.86	0.54	19.36	17.34	36.00	36.00	Pass
HE40	MCS0	1	9	2452	Full	16.50	15.80		30.00	30.00	2.86	0.54	19.36	16.34	36.00	36.00	Pass
HE40	MCS0	1	10	2457	Full	12.00	11.80		30.00	30.00	2.86	0.54	14.86	12.34	36.00	36.00	Pass
HE40	MCS0	1	11	2462	Full	11.80	11.60		30.00	30.00	2.86	0.54	14.66	12.14	36.00	36.00	Pass

2.4GHz Band MIMO																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	2	1	2412	Full	16.50	16.60	19.56	30.00		2.86		22.42		36.00		Pass
HE20	MCS0	2	7	2442	Full	20.70	20.40	23.56	30.00		2.86		26.42		36.00		Pass
HE20	MCS0	2	11	2462	Full	16.20	16.30	19.26	30.00		2.86		22.12		36.00		Pass
HE20	MCS0	2	12	2467	Full	13.20	13.30	16.26	30.00		2.86		19.12		36.00		Pass
HE20	MCS0	2	13	2472	Full	10.80	11.00	13.91	30.00		2.86		16.77		36.00		Pass
HE40	MCS0	2	3	2422	Full	15.10	15.30	18.21	30.00		2.86		21.07		36.00		Pass
HE40	MCS0	2	7	2442	Full	15.50	15.80	18.66	30.00		2.86		21.52		36.00		Pass
HE40	MCS0	2	9	2452	Full	14.50	14.80	17.66	30.00		2.86		20.52		36.00		Pass
HE40	MCS0	2	10	2457	Full	9.50	9.40	12.46	30.00		2.86		15.32		36.00		Pass
HE40	MCS0	2	11	2462	Full	9.90	9.90	12.91	30.00		2.86		15.77		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 100537
 Test Mode : Mode 2
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

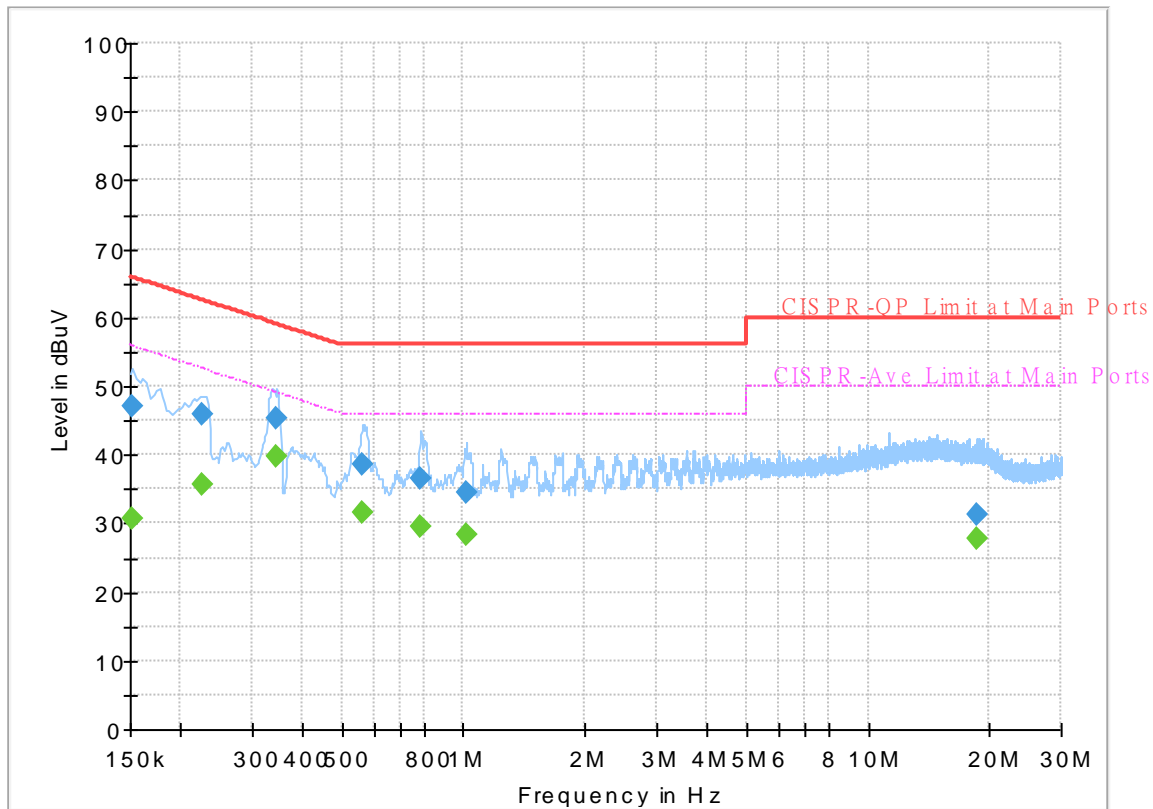


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	30.71	55.88	25.17	L1	OFF	19.6
0.152250	47.19	---	65.88	18.69	L1	OFF	19.6
0.226500	---	35.55	52.58	17.03	L1	OFF	19.6
0.226500	45.76	---	62.58	16.82	L1	OFF	19.6
0.345750	---	39.71	49.06	9.35	L1	OFF	19.6
0.345750	45.25	---	59.06	13.81	L1	OFF	19.6
0.561750	---	31.57	46.00	14.43	L1	OFF	19.8
0.561750	38.61	---	56.00	17.39	L1	OFF	19.8
0.786750	---	29.52	46.00	16.48	L1	OFF	20.0
0.786750	36.66	---	56.00	19.34	L1	OFF	20.0
1.014000	---	28.31	46.00	17.69	L1	OFF	20.1
1.014000	34.46	---	56.00	21.54	L1	OFF	20.1
18.593250	---	27.70	50.00	22.30	L1	OFF	20.4
18.593250	31.23	---	60.00	28.77	L1	OFF	20.4

EUT Information

Report NO : 100537
 Test Mode : Mode 2
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

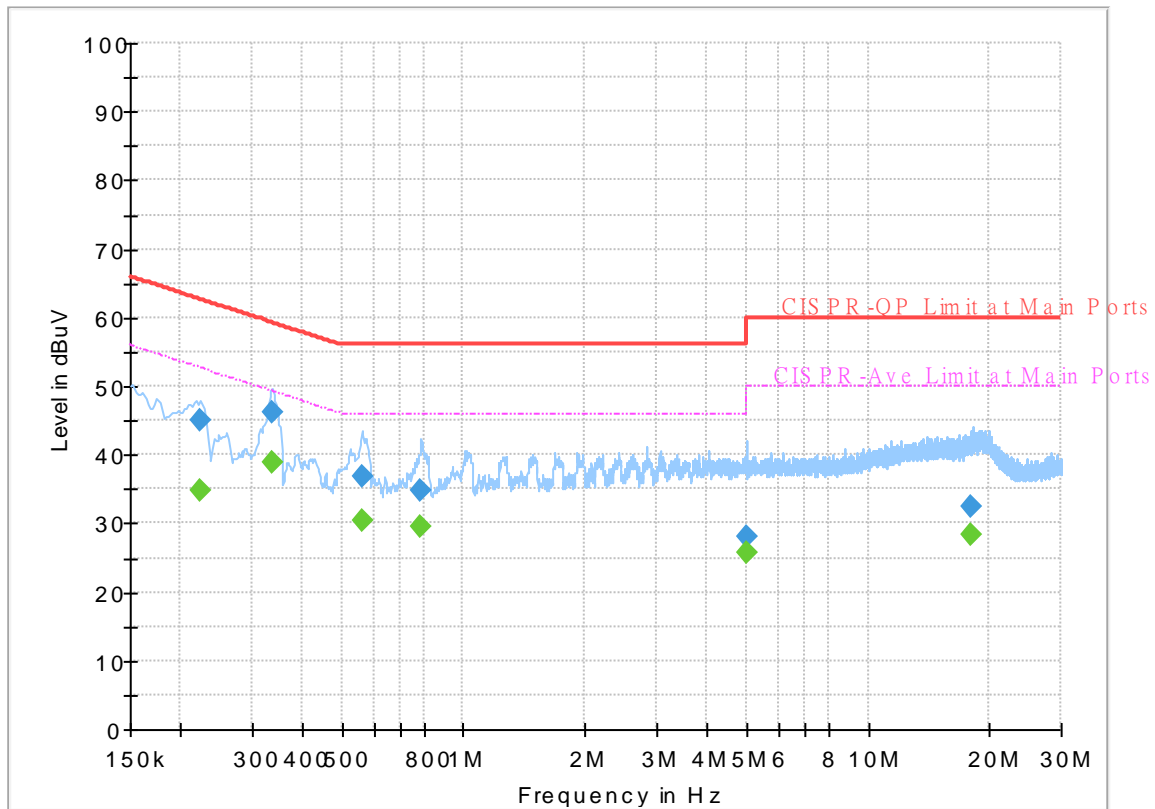

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.224250	---	34.69	52.66	17.97	N	OFF	19.6
0.224250	44.90	---	62.66	17.76	N	OFF	19.6
0.336750	---	38.99	49.28	10.29	N	OFF	19.6
0.336750	46.05	---	59.28	13.23	N	OFF	19.6
0.559500	---	30.36	46.00	15.64	N	OFF	19.8
0.559500	36.74	---	56.00	19.26	N	OFF	19.8
0.786750	---	29.48	46.00	16.52	N	OFF	20.0
0.786750	34.73	---	56.00	21.27	N	OFF	20.0
5.014500	---	25.63	50.00	24.37	N	OFF	20.0
5.014500	27.94	---	60.00	32.06	N	OFF	20.0
17.952000	---	28.33	50.00	21.67	N	OFF	20.5
17.952000	32.50	---	60.00	27.50	N	OFF	20.5



Appendix C. Radiated Spurious Emission

Test Engineer :	Daniel Lee, Hayden Wu, James Chiu, Troye Hsieh	Temperature :	20.1~21.4°C
		Relative Humidity :	55.2~67.3%

Remark: For Radiated Spurious Emission Test Items, Ant. 1 means Chain A (Aux.) and Ant. 2 means Chain B (Main).

2.4GHz 2400~2483.5MHz

WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE20 Full CH 07 2442MHz		2389.36	57.15	-16.85	74	46.42	27.62	17.06	33.95	250	117	P	H
		2390	45.48	-8.52	54	34.75	27.62	17.06	33.95	250	117	A	H
	*	2442	116.36	-	-	105.64	27.52	17.14	33.94	250	117	P	H
	*	2442	107.51	-	-	96.79	27.52	17.14	33.94	250	117	A	H
		2484	66.05	-7.95	74	55.34	27.43	17.2	33.92	250	117	P	H
		2483.52	49.87	-4.13	54	39.16	27.43	17.2	33.92	250	117	A	H
		2389.68	54.28	-19.72	74	43.55	27.62	17.06	33.95	300	189	P	V
		2390	43.47	-10.53	54	32.74	27.62	17.06	33.95	300	189	A	V
	*	2442	114.52	-	-	103.8	27.52	17.14	33.94	300	189	P	V
	*	2442	105.71	-	-	94.99	27.52	17.14	33.94	300	189	A	V
		2483.84	62.5	-11.5	74	51.79	27.43	17.2	33.92	300	189	P	V
		2483.52	49.77	-4.23	54	39.06	27.43	17.2	33.92	300	189	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11 ax HE20 Full (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11ax HE20 Full CH 07 2442MHz		4884	44.96	-29.04	74	60.05	31.27	12.12	58.48	-	-	P	H	
		7326	42.44	-31.56	74	50.45	36.6	14.56	59.17	-	-	P	H	
		17985	53.08	-20.92	74	40.08	46.56	23.08	56.64	-	-	P	H	
		17985	43.03	-10.97	54	30.03	46.56	23.08	56.64	-	-	A	H	
													H	
													H	
			4884	42.93	-31.07	74	58.02	31.27	12.12	58.48	-	-	P	V
			7326	42.35	-31.65	74	50.36	36.6	14.56	59.17	-	-	P	V
			17925	52.31	-21.69	74	40.47	45.6	23.02	56.78	-	-	P	V
			17925	41.96	-12.04	54	30.12	45.6	23.02	56.78	-	-	A	V
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. The emission level close to 18GHz is checked that the average emission level is noise floor only. 													



**2.4GHz 2400~2483.5MHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE40 Full CH 03 2422MHz		2389.36	67.22	-6.78	74	56.49	27.62	17.06	33.95	239	114	P	H
		2390	53.32	-0.68	54	42.59	27.62	17.06	33.95	239	114	A	H
	*	2422	108	-	-	97.28	27.56	17.1	33.94	239	114	P	H
	*	2422	99.99	-	-	89.27	27.56	17.1	33.94	239	114	A	H
		2487.2	53.02	-20.98	74	42.3	27.43	17.21	33.92	239	114	P	H
		2483.52	42.23	-11.77	54	31.52	27.43	17.2	33.92	239	114	A	H
		2381.04	54.93	-19.07	74	44.19	27.64	17.05	33.95	300	167	P	V
		2385.04	43.71	-10.29	54	32.97	27.63	17.06	33.95	300	167	A	V
	*	2422	102.39	-	-	91.67	27.56	17.1	33.94	300	167	P	V
	*	2422	92.3	-	-	81.58	27.56	17.1	33.94	300	167	A	V
		2491.92	52.71	-21.29	74	42	27.42	17.21	33.92	300	167	P	V
		2483.92	41.88	-12.12	54	31.17	27.43	17.2	33.92	300	167	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11 ax HE40 Full (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE40 Full CH 03 2422MHz		4844	39.67	-34.33	74	54.84	31.21	12.09	58.47	-	-	P	H
		7266	41.97	-32.03	74	50.03	36.6	14.53	59.19	-	-	P	H
		17865	52.04	-21.96	74	41.34	44.67	22.95	56.92	-	-	P	H
		17865	41.76	-12.24	54	31.06	44.67	22.95	56.92	-	-	A	H
													H
													H
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. The emission level close to 18GHz is checked that the average emission level is noise floor only. 												



Emission below 1GHz
2.4GHz WIFI 802.11ax HE40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant. 1		(MHz)	(dBμV/m)	(dB)	Line (dBμV/m)	Level (dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)	
2.4GHz 802.11ax HE40 LF		54.25	23.15	-16.85	40	42.16	12.43	1.13	32.57	-	-	P	H	
		140.58	29.08	-14.42	43.5	42.61	17.18	1.79	32.5	-	-	P	H	
		272.5	34.11	-11.89	46	45.3	18.76	2.49	32.44	-	-	P	H	
		556.71	35.33	-10.67	46	38.66	25.77	3.51	32.61	-	-	P	H	
		717.73	33.43	-12.57	46	35.02	26.84	4.02	32.45	-	-	P	H	
		972.84	34.12	-19.88	54	29.55	30.88	4.74	31.05	-	-	P	H	
														H
														H
														H
														H
														H
														H
			30	31.57	-8.43	40	39	24.27	0.79	32.49	-	-	P	V
			157.07	28.2	-15.3	43.5	42.4	16.41	1.89	32.5	-	-	P	V
			419.94	36.21	-9.79	46	43.04	22.53	3.05	32.41	-	-	P	V
			509.18	38.97	-7.03	46	44.33	23.88	3.35	32.59	-	-	P	V
			675.05	32.2	-13.8	46	34.38	26.34	3.89	32.41	-	-	P	V
			979.63	35.65	-18.35	54	31.24	30.62	4.76	30.97	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against limit line. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only. 													



2.4GHz 2400~2483.5MHz

WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant. 2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	Avg. (P/A)	(H/V)
802.11ax HE20 Full CH 07 2442MHz		2389.68	54.83	-19.17	74	44.1	27.62	17.06	33.95	300	241	P	H
		2390	43.09	-10.91	54	32.36	27.62	17.06	33.95	300	241	A	H
	*	2442	114.07	-	-	103.35	27.52	17.14	33.94	300	241	P	H
	*	2442	104.14	-	-	93.42	27.52	17.14	33.94	300	241	A	H
		2483.52	54.87	-19.13	74	44.16	27.43	17.2	33.92	300	241	P	H
		2483.52	43.67	-10.33	54	32.96	27.43	17.2	33.92	300	241	A	H
		2388.08	54.41	-19.59	74	43.68	27.62	17.06	33.95	300	156	P	V
		2390	43.46	-10.54	54	32.73	27.62	17.06	33.95	300	156	A	V
	*	2442	111.36	-	-	100.64	27.52	17.14	33.94	300	156	P	V
	*	2442	102.66	-	-	91.94	27.52	17.14	33.94	300	156	A	V
		2483.68	53.32	-20.68	74	42.61	27.43	17.2	33.92	300	156	P	V
	2483.6	42.72	-11.28	54	32.01	27.43	17.2	33.92	300	156	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11 ax HE20 Full (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
2		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11ax HE20 Full CH 07 2442MHz		4884	39.77	-34.23	74	54.86	31.27	12.12	58.48	-	-	P	H	
		7326	43.87	-30.13	74	51.88	36.6	14.56	59.17	-	-	P	H	
		17895	51.68	-22.32	74	40.42	45.12	22.99	56.85	-	-	P	H	
		17895	41.52	-12.48	54	30.26	45.12	22.99	56.85	-	-	A	H	
													H	
													H	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. The emission level close to 18GHz is checked that the average emission level is noise floor only. 													



**2.4GHz 2400~2483.5MHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE40 Full CH 07 2442MHz		2386.16	55.6	-18.4	74	44.86	27.63	17.06	33.95	277	241	P	H
		2390	44.26	-9.74	54	33.53	27.62	17.06	33.95	277	241	A	H
	*	2442	107.3	-	-	96.58	27.52	17.14	33.94	277	241	P	H
	*	2442	98.06	-	-	87.34	27.52	17.14	33.94	277	241	A	H
		2484.4	59.38	-14.62	74	48.67	27.43	17.2	33.92	277	241	P	H
		2483.52	46.96	-7.04	54	36.25	27.43	17.2	33.92	277	241	A	H
		2389.84	54.48	-19.52	74	43.75	27.62	17.06	33.95	290	169	P	V
		2390	43.98	-10.02	54	33.25	27.62	17.06	33.95	290	169	A	V
	*	2442	105.34	-	-	94.62	27.52	17.14	33.94	290	169	P	V
	*	2442	96.43	-	-	85.71	27.52	17.14	33.94	290	169	A	V
	2484.08	58.69	-15.31	74	47.98	27.43	17.2	33.92	290	169	P	V	
	2483.52	45.63	-8.37	54	34.92	27.43	17.2	33.92	290	169	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11 ax HE40 Full (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE40 Full CH 04 2442MHz		4884	39.22	-34.78	74	54.31	31.27	12.12	58.48	-	-	P	H
		7326	42.25	-31.75	74	50.26	36.6	14.56	59.17	-	-	P	H
		11295	46.72	-27.28	74	51.22	39.69	17.66	61.85	-	-	P	H
		14295	47.92	-26.08	74	50	41.4	19.81	63.29	-	-	P	H
		17985	53.15	-20.85	74	40.15	46.56	23.08	56.64	-	-	P	H
		17985	43.24	-10.76	54	30.24	46.56	23.08	56.64	-	-	A	H
		4884	43.09	-30.91	74	58.18	31.27	12.12	58.48	-	-	P	V
		7326	42.79	-31.21	74	50.8	36.6	14.56	59.17	-	-	P	V
		11295	46.03	-27.97	74	50.53	39.69	17.66	61.85	-	-	P	V
		14295	48.05	-25.95	74	50.13	41.4	19.81	63.29	-	-	P	V
		14295	38.88	-15.12	54	40.96	41.4	19.81	63.29	-	-	A	V
		17970	51.9	-22.1	74	39.18	46.32	23.07	56.67	-	-	P	V
		17970	42.86	-11.14	54	30.14	46.32	23.07	56.67	-	-	A	V
	Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. The emission level close to 18GHz is checked that the average emission level is noise floor only. 											



2.4GHz 2400~2483.5MHz

WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant. 1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	Avg. (P/A)	(H/V)
802.11ax HE20 Full CH 07 2442MHz		2386.48	55.36	-18.64	74	44.62	27.63	17.06	33.95	250	117	P	H
		2390	44.6	-9.4	54	33.87	27.62	17.06	33.95	250	117	A	H
	*	2442	118.47	-	-	107.75	27.51	17.14	33.93	250	117	P	H
	*	2442	108.04	-	-	97.32	27.51	17.14	33.93	250	117	A	H
		2484.24	64.53	-9.47	74	53.82	27.43	17.2	33.92	250	117	P	H
		2483.52	48.93	-5.07	54	38.22	27.43	17.2	33.92	250	117	A	H
		2389.68	56.69	-17.31	74	45.96	27.62	17.06	33.95	300	190	P	V
		2389.84	44.64	-9.36	54	33.91	27.62	17.06	33.95	300	190	A	V
	*	2442	116.55	-	-	105.83	27.52	17.14	33.94	300	190	P	V
	*	2442	107.5	-	-	96.78	27.52	17.14	33.94	300	190	A	V
		2483.68	63.75	-10.25	74	53.04	27.43	17.2	33.92	300	190	P	V
	2483.52	49.42	-4.58	54	38.71	27.43	17.2	33.92	300	190	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11 ax HE20 Full (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE20 Full CH 07 2442MHz		4884	44.25	-29.75	74	59.34	31.27	12.12	58.48	-	-	P	H
		7326	45.23	-28.77	74	53.24	36.6	14.56	59.17	-	-	P	H
		11295	46.21	-27.79	74	50.71	39.69	17.66	61.85	-	-	P	H
		14295	47.6	-26.4	74	49.68	41.4	19.81	63.29	-	-	P	H
		17985	53.94	-20.06	74	40.94	46.56	23.08	56.64	-	-	P	H
		17985	43.34	-10.66	54	30.34	46.56	23.08	56.64	-	-	A	H
		4884	40.64	-33.36	74	55.73	31.27	12.12	58.48	-	-	P	V
		7326	43.94	-30.06	74	51.95	36.6	14.56	59.17	-	-	P	V
		11295	46.98	-27.02	74	51.48	39.69	17.66	61.85	-	-	P	V
		14295	47.91	-26.09	74	49.99	41.4	19.81	63.29	-	-	P	V
	17970	52.65	-21.35	74	39.93	46.32	23.07	56.67	-	-	P	V	
	17970	42.86	-11.14	54	30.14	46.32	23.07	56.67	-	-	A	V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. The emission level close to 18GHz is checked that the average emission level is noise floor only. 												



**2.4GHz 2400~2483.5MHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE40 Full CH 07 2442MHz		2389.36	55.17	-18.83	74	44.44	27.62	17.06	33.95	250	118	P	H
		2390	43.89	-10.11	54	33.16	27.62	17.06	33.95	250	118	A	H
	*	2442	109.51	-	-	98.79	27.52	17.14	33.94	250	118	P	H
	*	2442	99.42	-	-	88.7	27.52	17.14	33.94	250	118	A	H
		2484.4	58.42	-15.58	74	47.71	27.43	17.2	33.92	250	118	P	H
		2483.52	47	-7	54	36.29	27.43	17.2	33.92	250	118	A	H
		2389.68	54.74	-19.26	74	44.01	27.62	17.06	33.95	300	253	P	V
		2390	43.92	-10.08	54	33.19	27.62	17.06	33.95	300	253	A	V
	*	2442	108.18	-	-	97.46	27.52	17.14	33.94	300	253	P	V
	*	2442	99.24	-	-	88.52	27.52	17.14	33.94	300	253	A	V
	2483.92	59.09	-14.91	74	48.38	27.43	17.2	33.92	300	253	P	V	
	2483.52	48.07	-5.93	54	37.36	27.43	17.2	33.92	300	253	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11 ax HE40 Full (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE40 Full CH 07 2442MHz		4884	39.95	-34.05	74	55.04	31.27	12.12	58.48	-	-	P	H
		7326	42.42	-31.58	74	50.43	36.6	14.56	59.17	-	-	P	H
		11295	46.04	-27.96	74	50.54	39.69	17.66	61.85	-	-	P	H
		14295	48.69	-25.31	74	50.77	41.4	19.81	63.29	-	-	P	H
		14295	39.15	-14.85	54	41.23	41.4	19.81	63.29	-	-	A	H
		17985	52.2	-21.8	74	39.2	46.56	23.08	56.64	-	-	P	H
		17985	43.12	-10.88	54	30.12	46.56	23.08	56.64	-	-	A	H
		4884	40.13	-33.87	74	55.22	31.27	12.12	58.48	-	-	P	V
		7326	42.81	-31.19	74	50.82	36.6	14.56	59.17	-	-	P	V
		11295	46.66	-27.34	74	51.16	39.69	17.66	61.85	-	-	P	V
		14295	47.91	-26.09	74	49.99	41.4	19.81	63.29	-	-	P	V
		17970	53.15	-20.85	74	40.43	46.32	23.07	56.67	-	-	P	V
		17970	42.95	-11.05	54	30.23	46.32	23.07	56.67	-	-	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. The emission level close to 18GHz is checked that the average emission level is noise floor only. 												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.		(MHz)	(dBμV/m)	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1				(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Daniel Lee, Hayden Wu, James Chiu, Troye Hsieh	Temperature :	20.1~21.4°C
		Relative Humidity :	55.2~67.3%

Remark: For Radiated Spurious Emission Test Items, Ant. 1 means Chain A (Aux.) and Ant. 2 means Chain B (Main).





Note symbol

-L	Low channel location
-R	High channel location





2.4GHz 2400~2483.5MHz

WIFI 802.11ax HE20 Full (Band Edge @ 3m)

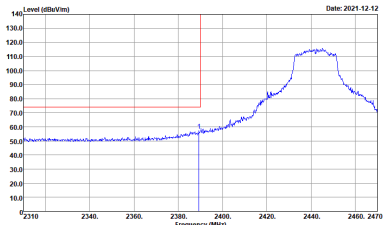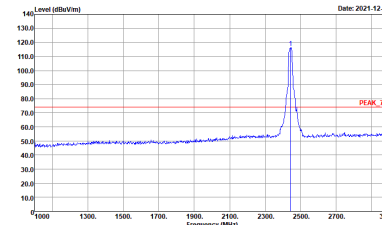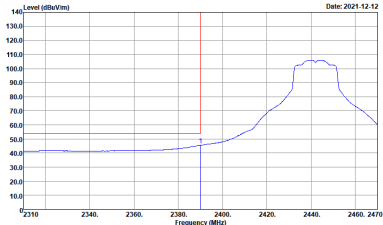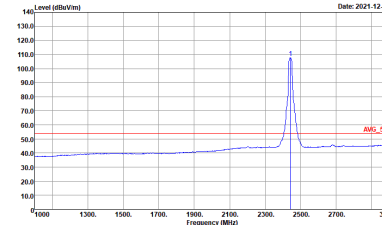WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH07 2442MHz - L	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SW1:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SW1:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SW1:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SW1:Auto</p>

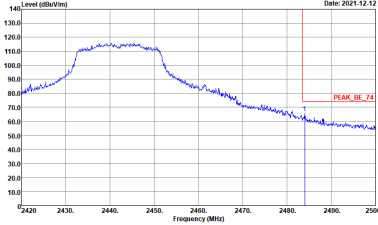
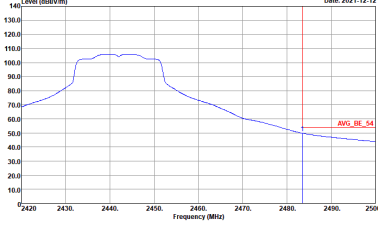


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH07 2442MHz - R	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-FY Condition : PEAK_BE_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-FY Condition : AVG_BE_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	Left blank



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH07 2442MHz - L	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>



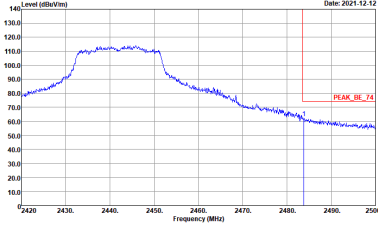
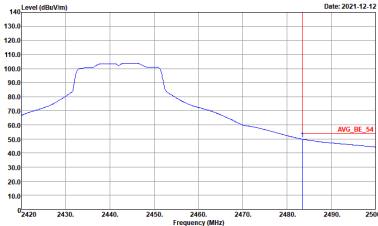


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH07 2442MHz - R	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH11-FY Condition : PEAK_BE_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-FY Condition : AVG_BE_54 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	Left blank





2.4GHz 2400~2483.5MHz





WIFI 802.11ax HE40 Full (Band Edge @ 3m)

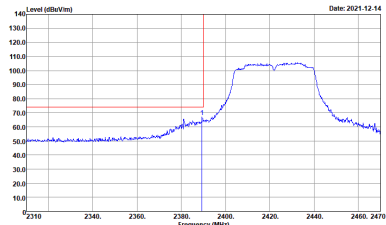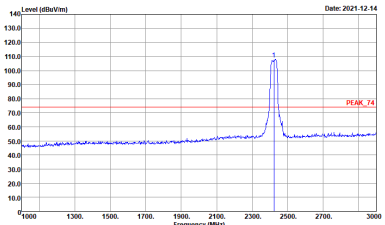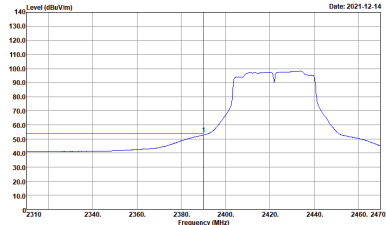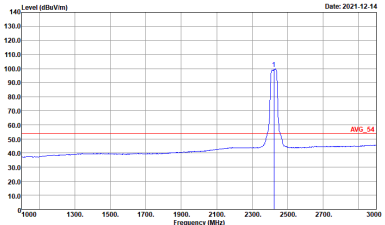WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH03 2422MHz - L	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 HORIZONTAL Detector : Peak</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1326_20211025 HORIZONTAL Detector : Peak</p>

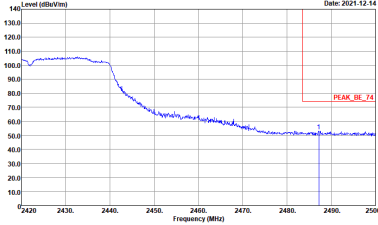
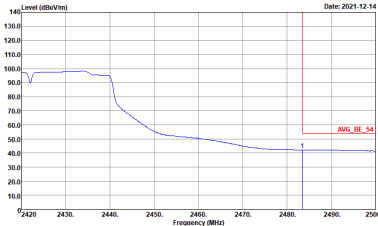


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH03 2422MHz - R	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-FY Condition : PEAK_BE_74 3m 91200_1326_20211025 HORIZONTAL Detector : Peak</p>	Left blank
Avg.	 <p>Site : 03CH11-FY Condition : AVG_BE_54 3m 91200_1326_20211025 HORIZONTAL Detector : Peak</p>	Left blank

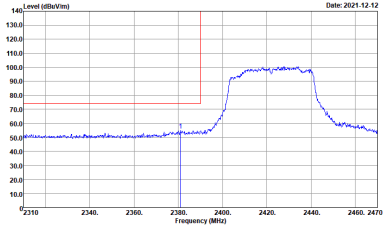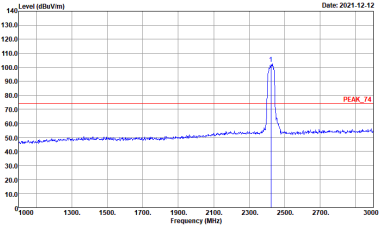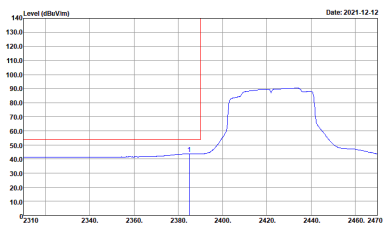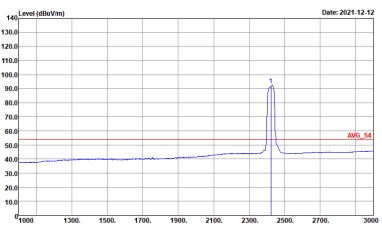

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH03 2422MHz - L	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 VERTICAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL Detector : Peak</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 VERTICAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1326_20211025 VERTICAL Detector : Peak</p>

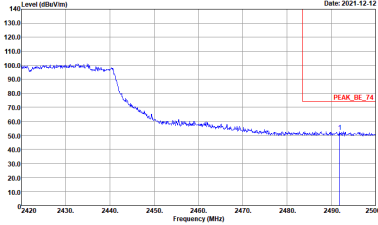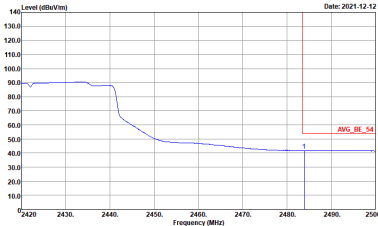

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH03 2422MHz - R	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH11-FY Condition : PEAK_BE_74 3m 91200_1326_20211025 VERTICAL Detector : Peak</p>	Left blank
Avg.	 <p>Site : 03CH11-FY Condition : AVG_BE_54 3m 91200_1326_20211025 VERTICAL Detector : Peak</p>	Left blank





2.4GHz 2400~2483.5MHz
WIFI 802.11 ax HE20 Full (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11 ax HE20 Full CH07 2442MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL Detector : Peak</p>





2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE40 Full (Harmonic @ 3m)

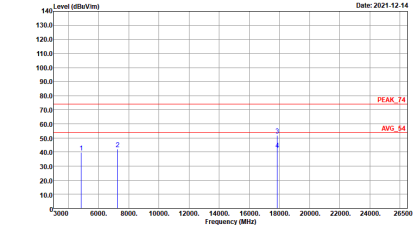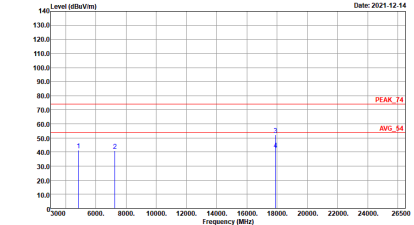WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11 ax HE40 Full CH03 2422MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL Detector : Peak</p>



Emission below 1GHz
WIFI 802.11 ax HE40 Full (LF)

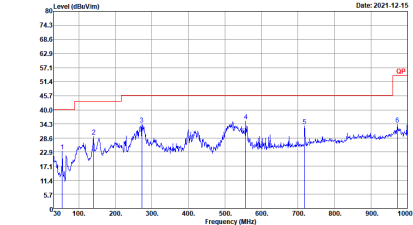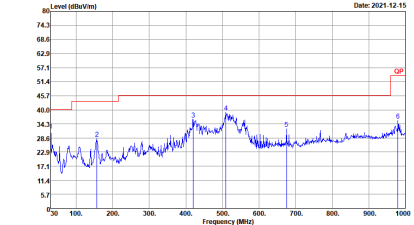WIFI	2.4GHz 2400~2483.5MHz LF @ 3m	
ANT	802.11 ax HE40 Full	
1	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH11-HY Condition : QP 3m BE-LOG 35414-211009 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : QP 3m BE-LOG 35414-211009 VERTICAL Detector : Peak</p>





2.4GHz 2400~2483.5MHz





WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH07 2442MHz - L	
2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>

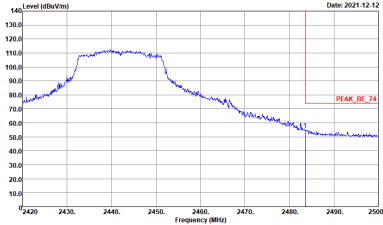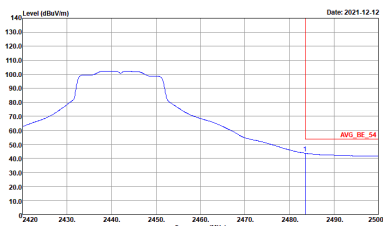

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH07 2442MHz - R	
2	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	Left blank

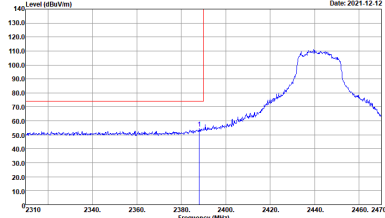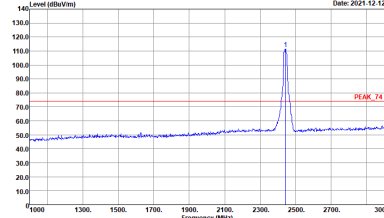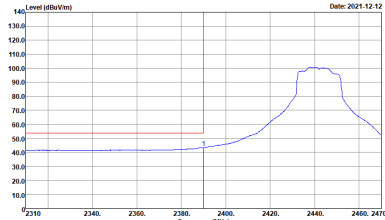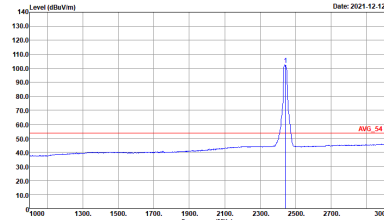

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH07 2442MHz - L	
2	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH07 2442MHz - R	
2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank



2.4GHz 2400~2483.5MHz





WIFI 802.11ax HE40 Full (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH07 2442MHz - L	
2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH07 2442MHz - R	
2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	Left blank

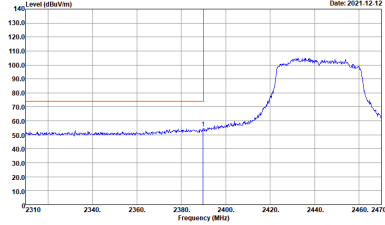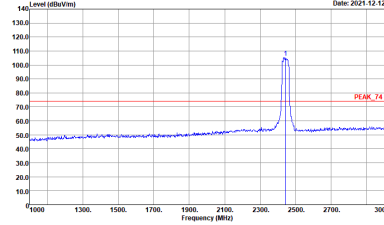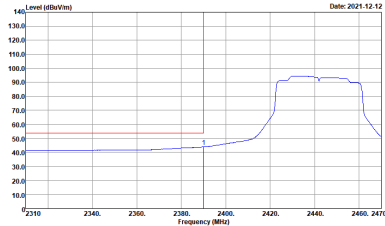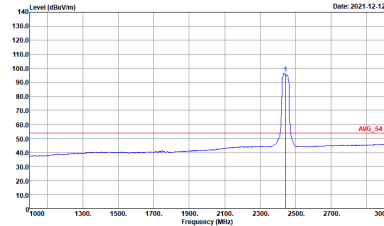

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH07 2442MHz - L	
2	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH07 2442MHz - R	
2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	Left blank



2.4GHz 2400~2483.5MHz
WIFI 802.11 ax HE20 Full (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11 ax HE20 Full CH07 2442MHz	
2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL Detector : Peak</p>



2.4GHz 2400~2483.5MHz
WIFI 802.11 ax HE40 Full (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11 ax HE40 Full CH07 2442MHz	
2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL Detector : Peak</p>





2.4GHz 2400~2483.5MHz





WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH07 2442MHz - L	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>

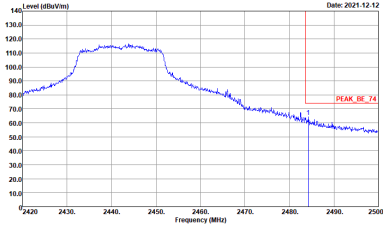
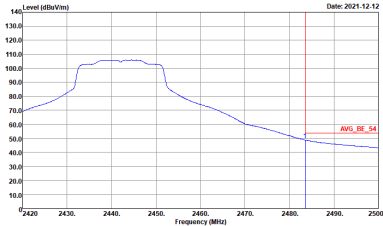


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH07 2442MHz - R	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	Left blank

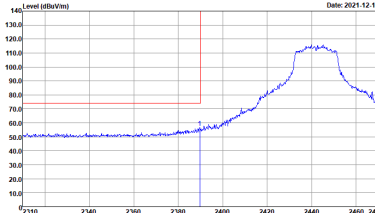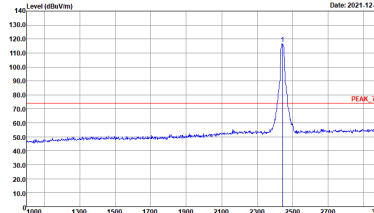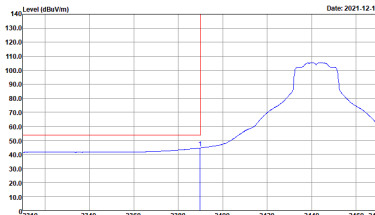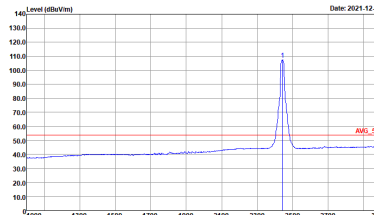

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH07 2442MHz - L	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>

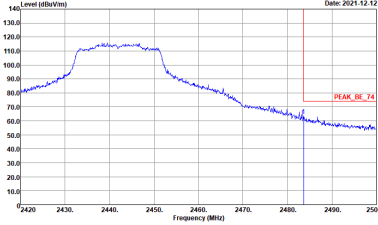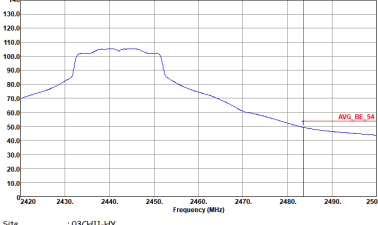

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH07 2442MHz - R	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	Left blank





2.4GHz 2400~2483.5MHz





WIFI 802.11ax HE40 Full (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH07 2442MHz - L	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1326_20211025 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>

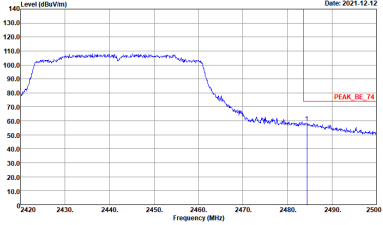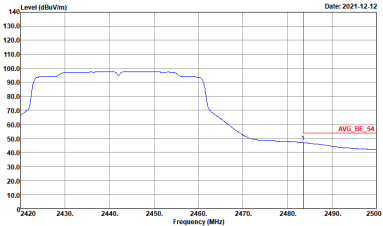

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH07 2442MHz - R	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	Left blank

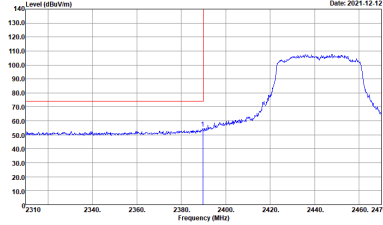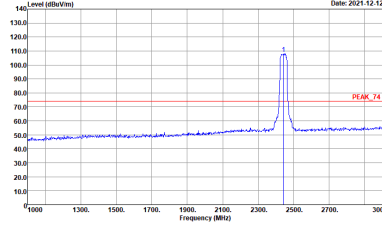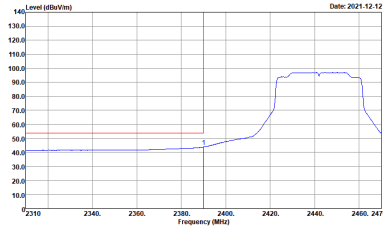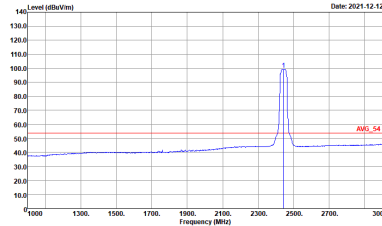



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH07 2442MHz - L	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m 91200_1326_20211025 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH07 2442MHz - R	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m 91200_1326_20211025 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m 91200_1326_20211025 VERTICAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	Left blank



2.4GHz 2400~2483.5MHz
 WIFI 802.11 ax HE20 Full (Harmonic @ 3m)

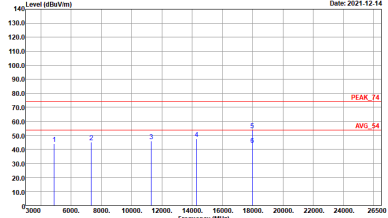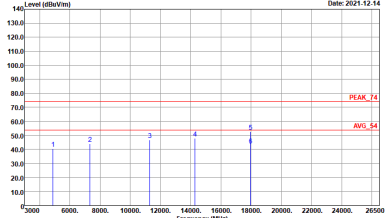WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11 ax HE20 Full CH07 2442MHz	
1+2	Horizontal	Vertical
<p>Peak Avg.</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 91200_1326_20211025 VERTICAL Detector : Peak</p>



2.4GHz 2400~2483.5MHz
WIFI 802.11 ax HE40 Full (Harmonic @ 3m)

Table with 2 columns: Horizontal and Vertical. Each column contains a graph of Level (dBuV/m) vs Frequency (MHz) with peak markers and labels like PEAK_74 and AHS_54. Includes site and condition details for each graph.


Peak
Avg.



Appendix E. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1	2.4GHz 802.11ax HE20 Full RU	98.47	-	-	10Hz
1	2.4GHz 802.11ax HE40 Full RU	98.47	-	-	10Hz
2	2.4GHz 802.11ax HE20 Full RU	98.47	-	-	10Hz
2	2.4GHz 802.11ax HE40 Full RU	98.47	-	-	10Hz
1+2	2.4GHz 802.11ax HE20 Full RU	98.47	-	-	10Hz
1+2	2.4GHz 802.11ax HE40 Full RU	98.10	-	-	10Hz

<Ant. 1>

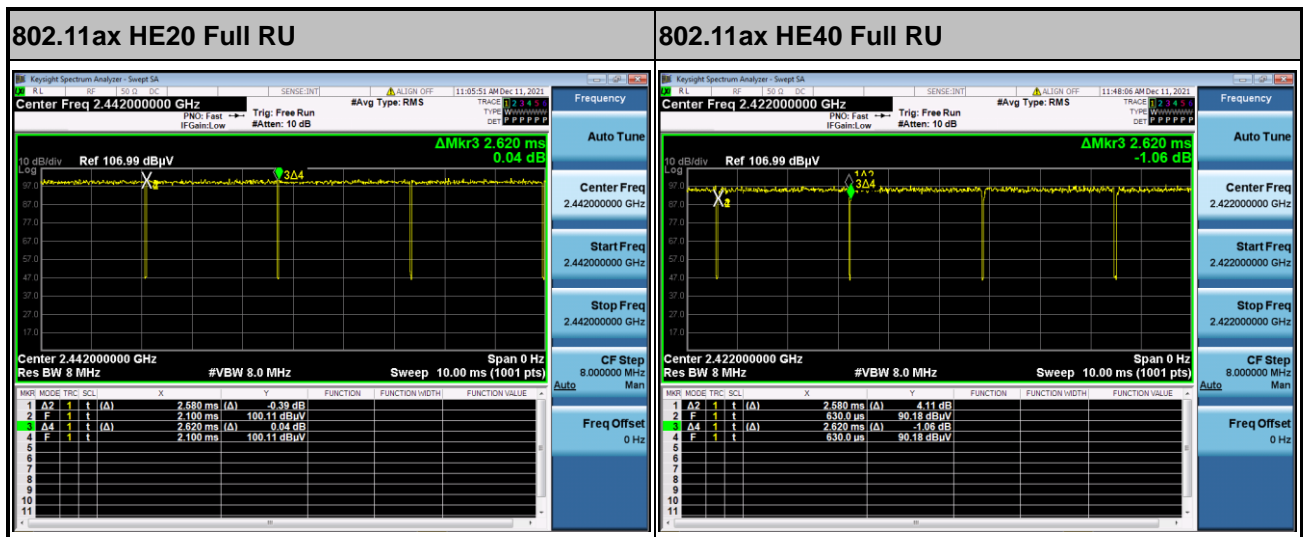



<Ant. 2>

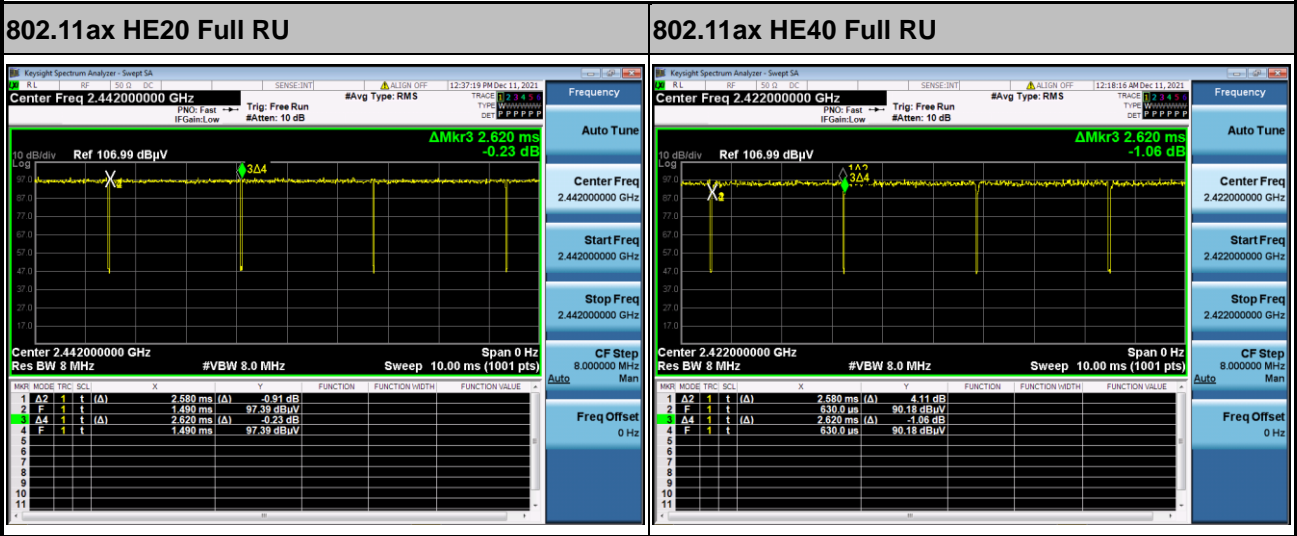

<Ant. 1+2>

