

## RF Test Report

Applicant : Getac Technology Corporation

Product Name : Wireless Module

Trade Name : Getac

Model Number : AX211NGW

Applicable Standard : FCC 47 CFR PART 15 SUBPART E  
ANSI C63.10:2013

Received Date : Oct. 13, 2022

Test Period : Nov. 01 ~ Nov. 07, 2022

Issued Date : Jan. 04, 2023

### Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 334025, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330  
Frequency Range : 9 kHz to 40 GHz  
Test Firm MRA designation number: TW0010

#### Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

### Revision History

Version	Issued Date	Revisions	Revised By
00	Dec. 23, 2022	Initial Issue	Snow Wang
01	Jan. 04, 2023	Update chapter 3.1 (P.10) Update chapter 4.6 (P.26)	Snow Wang

## Verification of Compliance

Applicant : Getac Technology Corporation

Product Name : Wireless Module

Trade Name : Getac

Model Number : AX211NGW

FCC ID : QYLAX211NG

Applicable Standard : FCC 47 CFR PART 15 SUBPART E  
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 334025, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190  
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : \_\_\_\_\_  
(Kai Yu Yang)

## TABLE OF CONTENTS

<b>1</b>	<b>General Information.....</b>	<b>5</b>
	1.1. Summary of Test Result .....	5
	1.2. Testing Location .....	6
	1.3. Measurement Uncertainty .....	6
<b>2</b>	<b>EUT Description.....</b>	<b>7</b>
<b>3</b>	<b>Test Methodology.....</b>	<b>10</b>
	3.1. Mode of Operation .....	10
	3.2. EUT Test Step .....	12
	3.3. Configuration of Test System Details .....	12
	3.4. Test Instruments.....	13
	3.5. Test Site Environment .....	15
<b>4</b>	<b>Measurement Procedure.....</b>	<b>16</b>
	4.1. Transmitter Radiated Emissions Measurement.....	16
	4.2. Maximum Output Power Measurement.....	21
	4.3. Contention Based Protocol Measurement.....	23
	4.4. Operational restrictions for 6 GHz U-NII devices .....	25
	4.5. Automatically discontinue transmission.....	25
	4.6. Antenna Requirement .....	25
<b>5</b>	<b>Test Results .....</b>	<b>27</b>
	5.1. Radiated Emission Measurement .....	27
	5.2. Conducted Test Results .....	247
	5.2.1. Maximum Output Power Measurement.....	247
	5.2.2. Contention Based Protocol Measurement .....	252

### Appendix A. Test Setup Photographs

## 1 General Information

### 1.1. Summary of Test Result

Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	N/A	Note 1
15.407(b) 15.205 / 15.209	Transmitter Radiated Emissions	PASS	---
15.407(a)	Maximum Output Power	PASS	---
15.407(a)	Emission Bandwidth	N/A	Note 1
15.407(a)	Maximum Power Spectral Density	N/A	Note 1
15.407(b)	In-Band Emission (Mask)	N/A	Note 1
15.407(g)	Frequency Stability	N/A	Note 1
15.407(d)	Contention based Protocol	PASS	---
15.407(d)	Operational restrictions for 6 GHz U-NII devices	N/A	Note 1
15.407(a)	Dual Client Proper Power Adjustment	N/A	Note 1
15.407(c)	Automatically discontinue transmission	N/A	Note 1
15.203	Antenna Requirement	PASS	---

Note 1: Class II permissive change. No need for verification.

#### Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033 D02 v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
KDB 987594 D02 v01r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure 6 GHz (U-NII) Devices Part 15, Subpart E

## 1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address:  No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Site Address:  No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

## 1.3. Measurement Uncertainty

sTest Item	Frequency Range	Uncertainty
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB
Radiated Emission	9 kHz ~ 30 MHz	2.2 dB
	30 MHz ~ 1000 MHz	5.1 dB
	1000 MHz ~ 18000 MHz	5.2 dB
	18000 MHz ~ 26500 MHz	4.6 dB
	26500 MHz ~ 40000 MHz	4.6 dB
Conducted Output Power		1.1 dB
RF Bandwidth		4.7 %
Power Spectral Density		1.1 dB
Frequency Stability		$1.3 \times 10^{-7}$
Duty Cycle		1.1 %
Time Occupancy		1.5 %

## 2 EUT Description

Applicant	Getac Technology Corporation 5F., Building A, No.209, Sec.1 Nangang., Rd., Taipei City, 11568, Taiwan			
Product Name	Wireless Module			
Trade Name	Getac			
Model No.	AX211NGW			
FCC ID	QYLAX211NG			
Host Information	Product Name: Tablet Trade Name: Getac Model Name: UX10, UX10G3, UX10-301, UX10-321, UX10-Ex, UX10Y(Y= 10 characters, Y can be 0 to 9, A to Z, a to z, "/", "\", "-", "_ " or blank for marketing purpose) (Different model numbers are for market purpose.)			
Operate Frequency	Frequency Band		Frequency Range (MHz)	Number of Channels
	IEEE 802.11ax 20 MHz	U-NII Band 5	5955 – 6415	24
		U-NII Band 6	6435 – 6515	5
		U-NII Band 7	6535 – 6855	17
		U-NII Band 8	6875 – 7115	13
	IEEE 802.11ax 40 MHz	U-NII Band 5	5965 – 6405	12
		U-NII Band 6	6445 – 6485	2
		U-NII Band 7	6525 – 6845	9
		U-NII Band 8	6885 – 7085	6
	IEEE 802.11ax 80 MHz	U-NII Band 5	5985 – 6385	6
		U-NII Band 6	6465 – 6545	2
		U-NII Band 7	6625 – 6785	2
		U-NII Band 8	6865 – 7025	3
	IEEE 802.11ax 160 MHz	U-NII Band 5	6025 – 6345	2
		U-NII Band 6	6505	1
		U-NII Band 7	6665	1
U-NII Band 8		6985	1	
Modulation Type	OFDMA			

	ANT	Model Number	Type	Max. Gain (dBi)	
Antenna information	ANT-0 (AUX)	UX10G3 AUXWIFI ANT	PIFA Antenna	5925 – 6425	-0.13
				6425 – 6525	0.37
				6525 – 6875	0.51
				6875 – 7125	1.22
	ANT-1 (MAIN)	UX10G3 WIFI MAIN ANT	PIFA Antenna	5925 – 6425	1.86
				6425 – 6525	0.76
				6525 – 6875	1.11
				6875 – 7125	1.56
Antenna Delivery	Reference section 3.1				
Operate Temp. Range	-10 ~ 55 °C				
EUT Power Rating	DC 3.3 V				

The above information is provided by customers.



Frequency Band		Maximum Output Power (e.i.r.p.)	
		(dBm)	(W)
IEEE 802.11ax 20 MHz	U-NII Band 5	5.990	0.004
	U-NII Band 6	5.667	0.004
	U-NII Band 7	5.096	0.003
	U-NII Band 8	5.686	0.004
IEEE 802.11ax 40 MHz	U-NII Band 5	9.016	0.008
	U-NII Band 6	8.475	0.007
	U-NII Band 7	8.742	0.007
	U-NII Band 8	9.213	0.008
IEEE 802.11ax 80 MHz	U-NII Band 5	11.416	0.014
	U-NII Band 6	10.661	0.012
	U-NII Band 7	10.770	0.012
	U-NII Band 8	11.754	0.015
IEEE 802.11ax 160 MHz	U-NII Band 5	14.277	0.027
	U-NII Band 6	13.901	0.025
	U-NII Band 7	13.901	0.025
	U-NII Band 8	14.111	0.026

Equipment Type	
Indoor access point	---
Subordinate device	V
Indoor Client devices	---

**EUT Modify Description :**

Modify Description: Added Host Model: UX10, UX10G3, UX10-301, UX10-321, UX10-Ex, UX10Y(Y= 10 characters, Y can be 0 to 9, A to Z, a to z, "/", "\", "-", "_ " or blank for marketing purpose)  After our evaluation, the retest of Transmitter Radiated Emissions 、 Maximum Output Power 、 Contention based Protocol is required. The other test data refer to the original report.
---

### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Transmit Mode
802.11ax HE20
802.11ax HE40
802.11ax HE80
802.11ax HE160

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that “Y axis” position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Test Mode	ANT-0	ANT-1	ANT-0+1
802.11ax HE20	V	V	V
802.11ax HE40	V	V	V
802.11ax HE80	V	V	V
802.11ax HE160	V	V	V


Test Mode	Antenna Delivery	Data Rate (Mbps)	Band	Test Channel
802.11ax HE20	2TX (SISO/MIMO)	MCS0	U-NII Band 5	1, 45, 93
			U-NII Band 6	97, 105, 113
			U-NII Band 7	117, 149, 181
			U-NII Band 8	185, 209, 229, 233
802.11ax HE40	2TX (SISO/MIMO)	MCS0	U-NII Band 5	3, 43, 91
			U-NII Band 6	99, 107
			U-NII Band 7	115, 147, 179
			U-NII Band 8	187, 227
802.11ax HE80	2TX (SISO/MIMO)	MCS0	U-NII Band 5	7, 39, 87
			U-NII Band 6	103, 119
			U-NII Band 7	135, 167
			U-NII Band 8	183, 199, 215
802.11ax HE160	2TX (SISO/MIMO)	MCS0	U-NII Band 5	15, 79
			U-NII Band 6	111
			U-NII Band 7	143
			U-NII Band 8	207

### 3.2. EUT Test Step

The EUT is operated in the engineering mode to fix the TX frequency for the purposes of measurement. According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

1.	Setup the EUT shown on "Configuration of Test System Details".
2.	Turn on the power of all equipment.
3.	Turn on TX function.
4.	EUT run test program.

### 3.3. Configuration of Test System Details

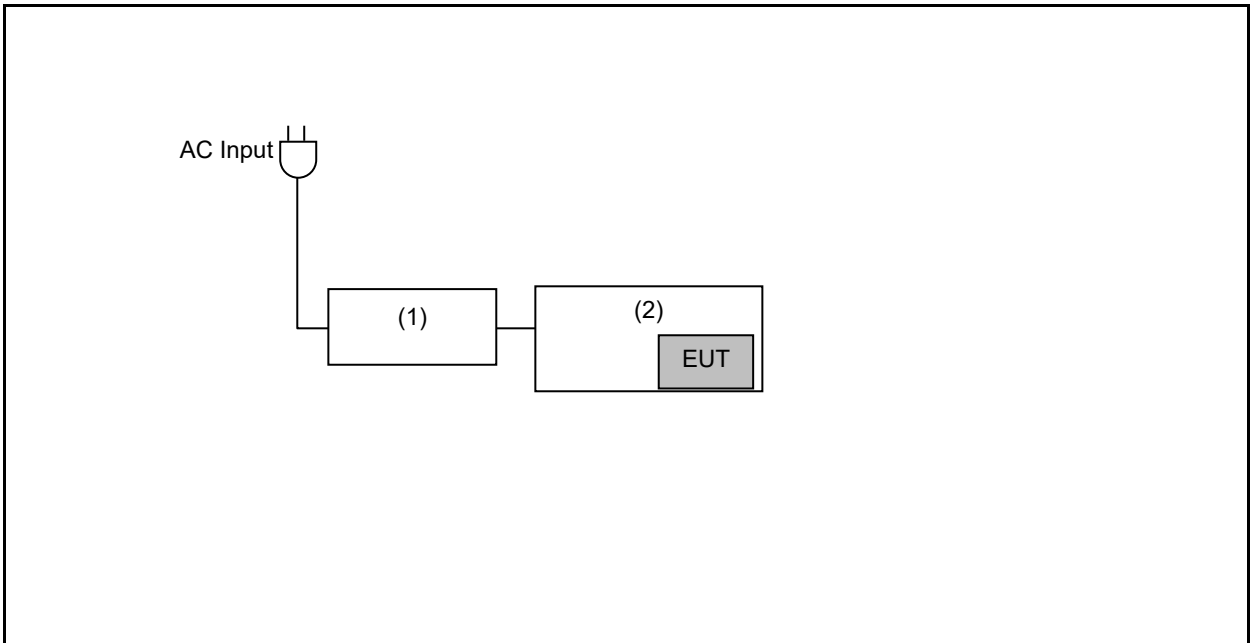

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Power Cord
(1)	Adapter	FSP	FSP065-RBBN3	---	---
(2)	Tablet	Getac	UX10G3	---	---

### 3.4. Test Instruments

For Conducted

Test Period: Nov. 01 ~ Nov. 05, 2022

Testing Engineer: Peter Shui, Luke.Yang

Test Site		RF01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input type="checkbox"/>	Power Sensor	Anritsu	MA2411B	1126022	Sep. 04, 2022	1 year
<input type="checkbox"/>	Power Meter	Anritsu	ML2495A	1135009	Sep. 04, 2022	1 year
<input checked="" type="checkbox"/>	Power Sensor	Agilent	N1921A	MY45241957	Dec. 06, 2021	1 year
<input checked="" type="checkbox"/>	Power Meter	Agilent	N1911A	MY45101619	Dec. 06, 2021	1 year
<input checked="" type="checkbox"/>	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY59071418	Mar. 16, 2022	1 year
<input type="checkbox"/>	Spectrum Analyzer (9 kHz~26.5 GHz)	Agilent	N9010A	MY48030518	Jul. 21, 2022	1 year
<input type="checkbox"/>	Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	Sep. 01, 2022	1 year
<input type="checkbox"/>	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Jan. 05, 2022	1 year
<input type="checkbox"/>	Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	Mar. 28, 2022	1 year
<input checked="" type="checkbox"/>	Signal Generator	Keysight	N5182B	MY53052569	Apr. 16, 2022	1 year
<input checked="" type="checkbox"/>	Signal Generator	Keysight	N5182BX07	MY59360221	Apr. 16, 2022	1 year
<input type="checkbox"/>	Bluetooth Tester	R&S	CBT	100350	Mar. 17, 2021	2 years
<input type="checkbox"/>	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 01, 2022	1 year
<input type="checkbox"/>	Power Supply	KEITHLEY	2303	4045290	Jan. 19, 2022	1 year

Note: N.C.R. = No Calibration Request.

For Radiated Emissions

Test Period: Nov. 05 ~ Nov. 07, 2022

Testing Engineer: Louis Shen, Marc Yeh, Hung Chou

Test Site		96603-BD				
Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input type="checkbox"/>	Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	Jan. 13, 2022	1 year
<input type="checkbox"/>	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Jan. 05, 2022	1 year
<input type="checkbox"/>	Spectrum Analyzer (2 Hz~50 GHz)	Keysight	N9030B	MY57143537	Apr. 14, 2022	1 year
<input checked="" type="checkbox"/>	Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9020B	MY60112363	Feb. 27, 2022	1 year
<input checked="" type="checkbox"/>	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	Jan. 14, 2022	1 year
<input type="checkbox"/>	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A10961	Jul. 07, 2022	1 year
<input type="checkbox"/>	Broadband Amplifier (100 kHz~1 GHz)	Titan	T0910E00014330 A1F	001	Jul. 21, 2022	1 year
<input checked="" type="checkbox"/>	Broadband Amplifier (1 GHz~26.5 GHz)	Titan	T0912E01263025 A1F	002	Jul. 21, 2022	1 year
<input checked="" type="checkbox"/>	Preamplifier (26.5 GHz~40 GHz)	EMCI	EMC2654045	980028	Sep. 02, 2022	1 year
<input checked="" type="checkbox"/>	Loop Antenna (9 kHz~30 MHz)	COM-POWER CORPORATION	AL-130	121014	Mar. 28, 2022	1 year
<input type="checkbox"/>	Active Loop Antenna (9 kHz~30 MHz)	Schwarzbeck Mess-Elektronik	FMZB 1513-60	1513-60-031	Feb. 17, 2022	1 year
<input type="checkbox"/>	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	01146	Jul. 22, 2022	1 year
<input checked="" type="checkbox"/>	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	416	Nov. 17, 2021	1 year
<input checked="" type="checkbox"/>	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	02207	Jul. 13, 2022	1 year
<input type="checkbox"/>	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	9120D-550	Aug. 25, 2022	1 year
<input checked="" type="checkbox"/>	Broadband Horn Antenna (18 GHz~40 GHz)	Schwarzbeck Mess-Elektronik	9170	9170-320	Aug. 25, 2022	1 year

Note: N.C.R. = No Calibration Request.

Test Site		96603-BD				
Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input type="checkbox"/>	Horn Antenna (18 GHz~40 GHz)	ETS	3116	00086467	Dec. 03, 2021	1 year
<input type="checkbox"/>	RF Cable	EMCI	EMC104-N-N-600 0	TE01-1	Feb. 18, 2022	1 year
<input type="checkbox"/>	Microwave Cable	EMCI	EMC104-SM-SM- 13000	170814	Feb. 18, 2022	1 year
<input type="checkbox"/>	Microwave Cable	EMCI	EMC102-KM-KM- 14000	151001	Feb. 18, 2022	1 year
<input checked="" type="checkbox"/>	Coaxial Cable	Titan	T0710AT327A10A 100	J11005	Aug. 04, 2022	1 year
<input checked="" type="checkbox"/>	Coaxial Cable	Titan	T0710AT327A10A 900	J11004	Aug. 04, 2022	1 year
<input checked="" type="checkbox"/>	Coaxial Cable	Titan	CFD400NL-LW	001	Aug. 04, 2022	1 year
<input type="checkbox"/>	Bluetooth Tester	R&S	CBT	100350	Mar. 17, 2021	2 years
<input type="checkbox"/>	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 01, 2022	1 year
<input type="checkbox"/>	Power Supply	KEITHLEY	2303	4045290	Jan. 19, 2022	1 year
<input checked="" type="checkbox"/>	Software	EZ EMC	1.1.4.4	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request.

### 3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

## 4 Measurement Procedure

### 4.1. Transmitter Radiated Emissions Measurement

■ Limit

(1)Undesirable emission limits. Except as shown in paragraph (b)(9) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (a) For transmitters operating in the band 5925~6425 MHz, 6425~6525 MHz, 6525~6875 MHz and 6875~7125 MHz all emissions outside the band 5925~7125 MHz shall not exceed -27 dBm/MHz E.I.R.P..

E.I.R.P. (dBm/MHz)	Avg Field Strength at 3 m(dBuV/m)
-7 (Peak)	88.2 (Peak)
-27 (AVG)	68.2 (AVG)

(2)Limits of Radiated Emission Measurement

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:


Frequency Range (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	10	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

- Note: 1. The lower limit shall apply at the transition frequencies.  
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).  
3. As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.




■ Setup


9 kHz ~ 30 MHz

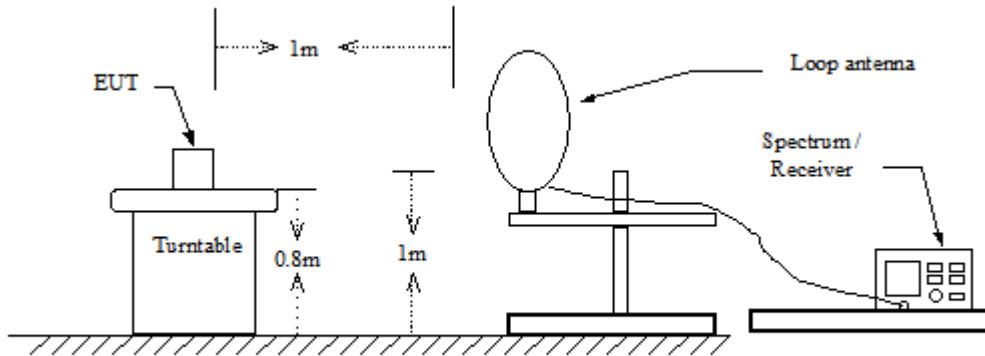

30 MHz ~ 1 GHz

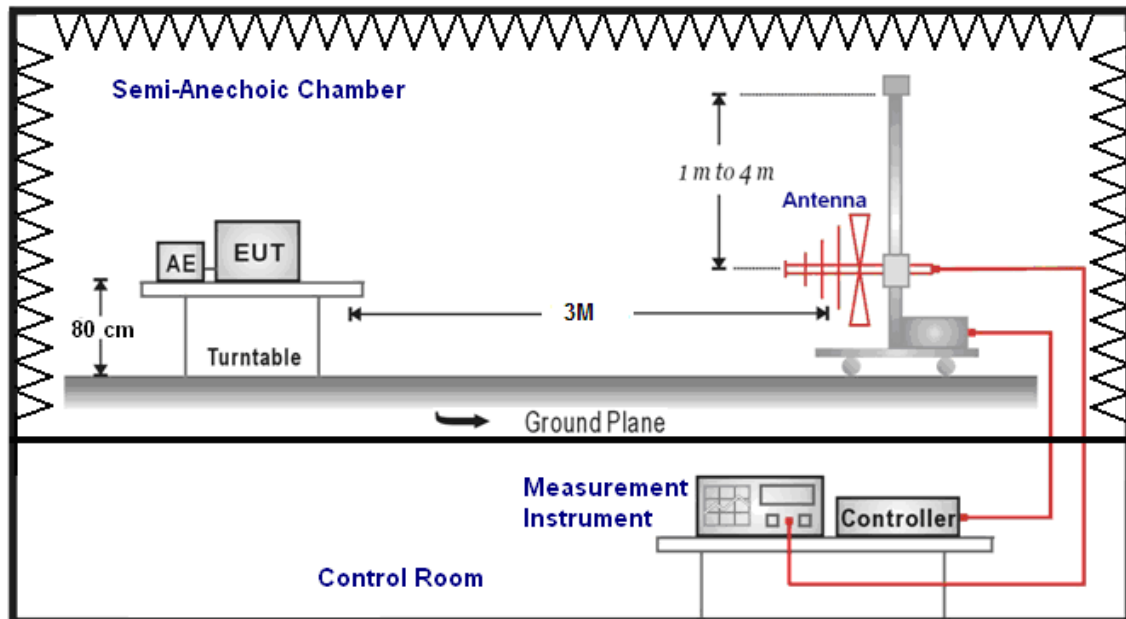

Above 1 GHz

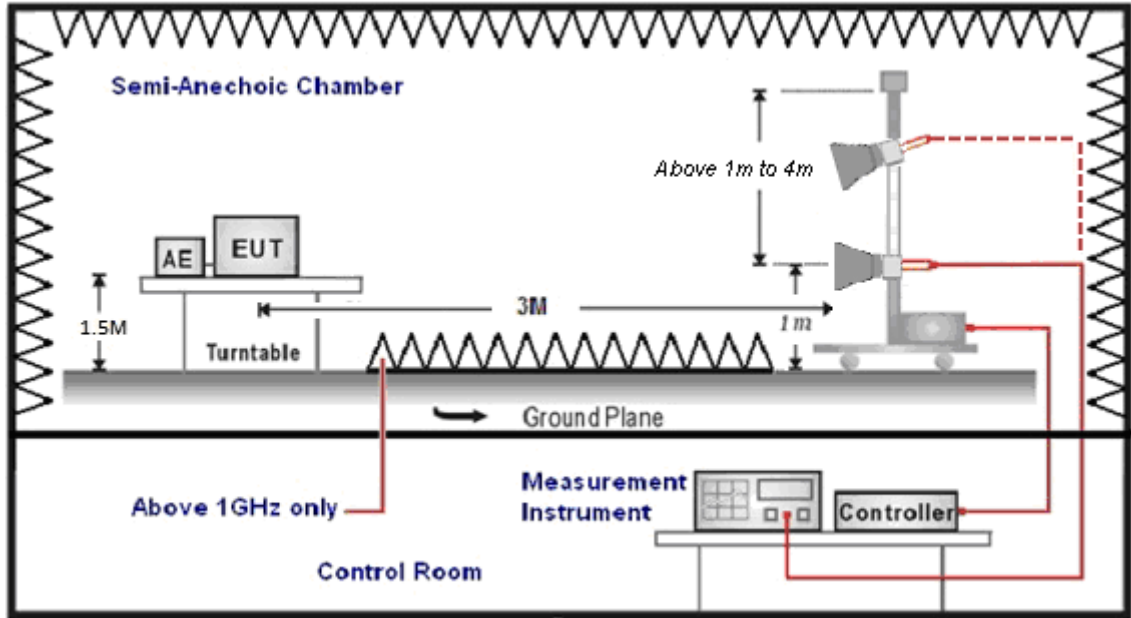

### ■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1 GHz use 0.8 m turntable / above 1 GHz use 1.5 m turntable), top surface 1.0 x 1.5 meter. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 40 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For restricted measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle > 0.98 / 1/T for average measurements when Duty cycle < 0.98.

For out of band measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Trilog-Broadband Antenna at 3 Meter and the ETS-Lindgren Double-Ridged Waveguide Horn antenna Schwarzbeck Mess-Elektronik Broadband Horn Antenna was used in frequencies 1 – 40 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

The actual field intensity referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB/m), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

- (1) Amplitude (dBuV/m) = FI (dBuV) +AF (dB/m) +CL (dB)  
 FI= Reading of the field intensity.  
 AF= Antenna factor.  
 CL= Cable loss.  
 P.S Amplitude is auto calculate in spectrum analyzer.

### Measuring Instruments and setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW/VBW(Emission in restricted band)	1 MHz / 3 MHz for Peak 1 MHz / (1/T) for Average
RBW/VBW(Emission in non-restricted band)	1 MHz / 3 MHz for Peak 1 MHz / (1/T) for Average (Only WLAN 6G)


## 4.2. Maximum Output Power Measurement

### ■ Limit

Frequency Range (GHz)		Maximum Output Power Limit	
■	5.925 ~ 6.425	<input type="checkbox"/>	For standard power access point and fixed client device : e.i.r.p. $\leq$ 36dBm, For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125mW (21dBm).
		<input type="checkbox"/>	For indoor access point : e.i.r.p. $\leq$ 30dBm.
		<input type="checkbox"/>	For subordinate device control of an indoor access point : e.i.r.p. $\leq$ 30dBm.
		<input type="checkbox"/>	For client device control of a standard power access point : e.i.r.p. $\leq$ 30dBm.
		<input checked="" type="checkbox"/>	For client device control of an indoor access point : e.i.r.p. $\leq$ 24dBm.
■	6.425 ~ 6.525	<input type="checkbox"/>	For indoor access point : e.i.r.p. $\leq$ 30dBm.
		<input checked="" type="checkbox"/>	For client device control of an indoor access point : e.i.r.p. $\leq$ 24dBm.
■	6.525 ~ 6.875	<input type="checkbox"/>	For standard power access point and fixed client device : e.i.r.p. $\leq$ 36dBm, For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125mW (21dBm).
		<input type="checkbox"/>	For indoor access point : e.i.r.p. $\leq$ 30dBm.
		<input type="checkbox"/>	For subordinate device control of an indoor access point : e.i.r.p. $\leq$ 30dBm.
		<input type="checkbox"/>	For client device control of a standard power access point : e.i.r.p. $\leq$ 30dBm.
		<input checked="" type="checkbox"/>	For client device control of an indoor access point : e.i.r.p. $\leq$ 24dBm.
■	6.875 ~ 7.125	<input type="checkbox"/>	For indoor access point : e.i.r.p. $\leq$ 30dBm.
		<input checked="" type="checkbox"/>	For client device control of an indoor access point : e.i.r.p. $\leq$ 24dBm.

## For Radiation Method

### ■ Test Setup

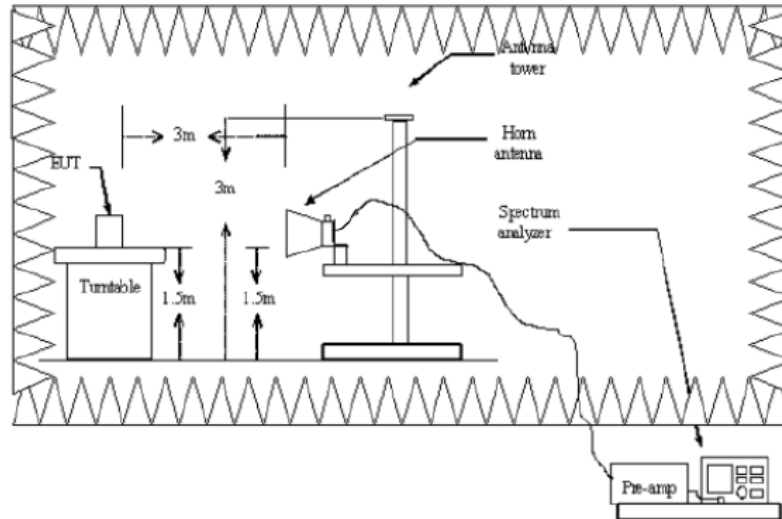

### ■ Test Procedure

The test is performed in accordance with ANSI C63.10:2013 section 12.3.2, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices.

Accordance with ANSI C63.10:2013 section 12.1.2 use radiated compliance measurements.

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a antenna tower.
3. The height of antenna is fixed 1.5 meter , Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. Perform a EIRP level measurement and record the worse read value, is the EIRP level value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor.

### 4.3. Contention Based Protocol Measurement


■ **Limit**

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ( $f_{c1} = f_{c2}$ )
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within $BW_{EUT}$
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within $BW_{EUT}$	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel

■ **Test Setup**

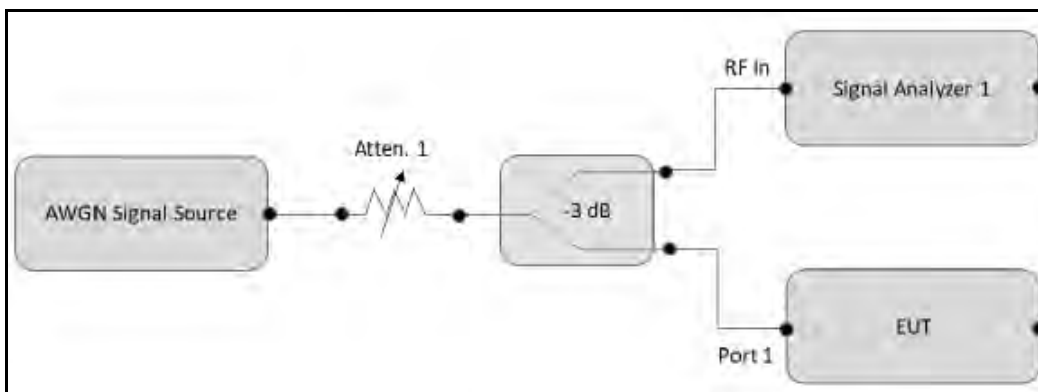

**■ Test Procedure**

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
4. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
5. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB divider, to the signal analyzer 1 and the EUT as shown in Test Setup.
6. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
7. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
8. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
9. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 4, choose a different center frequency for the AWGN signal and repeat the process.



#### 4.4. Operational restrictions for 6 GHz U-NII devices

- **Limits**

In the 5.925-7.125 GHz band, client devices, except fixed client devices, must operate under the control of a standard power access point, indoor access point or subordinate devices; Subordinate devices must operate under the control of an indoor access point.

- **Declare**

Device is an indoor client device under the control of a low power indoor access point. Please refer to the declaration letter exhibit supplied within this application.

#### 4.5. Automatically discontinue transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

- **Declare**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

#### 4.6. Antenna Requirement

- **Limit**

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.407 (a), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

- **Antenna Connector Construction**

See section 2 – antenna information.

**Directional Gain Calculated**
**For Maximum Conducted Output Power**

(Completely uncorrelated)

$$\text{Directional Gain} = 10 \cdot \log\left\{\frac{10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_n/10}}{NANT}\right\}$$

\* G is the gain of the antenna having the highest gain.

Operate Freq. Band		Directional Gain (dBi)
IEEE 802.11ax 20 MHz	U-NII Band 5	1.86
	U-NII Band 6	0.76
	U-NII Band 7	1.11
	U-NII Band 8	1.56
IEEE 802.11ax 40 MHz	U-NII Band 5	1.86
	U-NII Band 6	0.76
	U-NII Band 7	1.11
	U-NII Band 8	1.56
IEEE 802.11ax 80 MHz	U-NII Band 5	1.86
	U-NII Band 6	0.76
	U-NII Band 7	1.11
	U-NII Band 8	1.56
IEEE 802.11ax 160 MHz	U-NII Band 5	1.86
	U-NII Band 6	0.76
	U-NII Band 7	1.11
	U-NII Band 8	1.56


## 5 Test Results

### 5.1. Radiated Emission Measurement

SISO


Below 1 GHz

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	Transmit Mode		
Remark:			

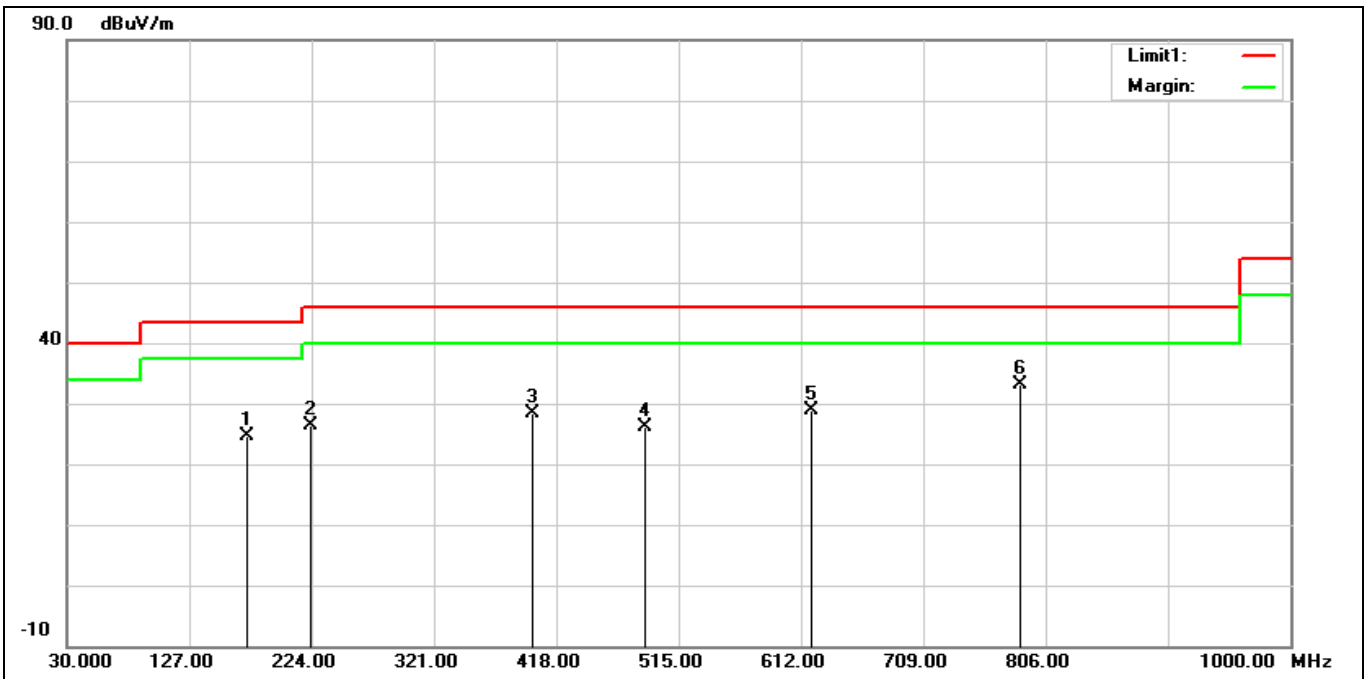

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	172.5900	32.59	-8.04	24.55	43.50	-18.95	QP
2	223.0300	36.46	-10.02	26.44	46.00	-19.56	QP
3	399.5700	32.72	-4.33	28.39	46.00	-17.61	QP
4	488.8100	28.47	-2.33	26.14	46.00	-19.86	QP
5	619.7600	28.60	0.36	28.96	46.00	-17.04	QP
6*	785.6300	29.54	3.59	33.13	46.00	-12.87	QP

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	Transmit Mode		
Remark:			

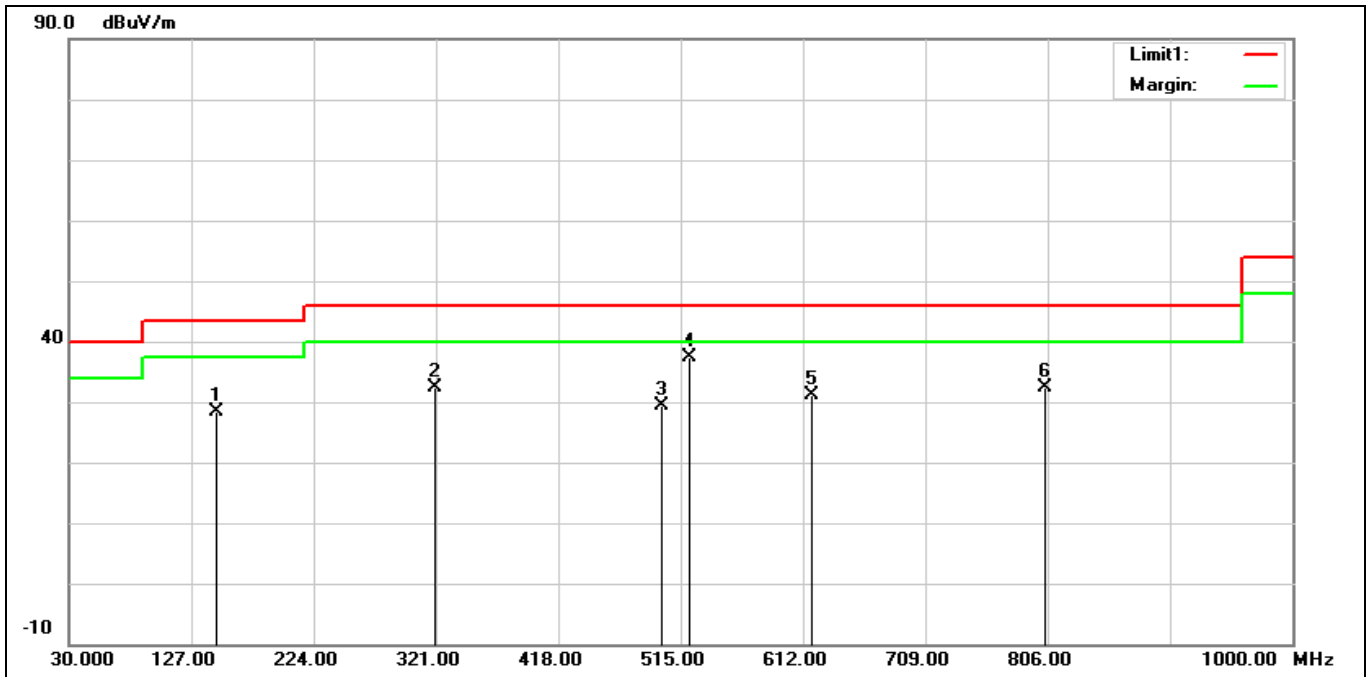


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	147.3700	35.67	-7.40	28.27	43.50	-15.23	QP
2	320.0300	38.82	-6.37	32.45	46.00	-13.55	QP
3	499.4800	31.58	-2.13	29.45	46.00	-16.55	QP
4*	521.7900	39.15	-1.84	37.31	46.00	-8.69	QP
5	618.7900	30.83	0.36	31.19	46.00	-14.81	QP
6	804.0600	28.47	3.90	32.37	46.00	-13.63	QP

Harmonic


Above 1 GHz

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5955 MHz		
Remark:			

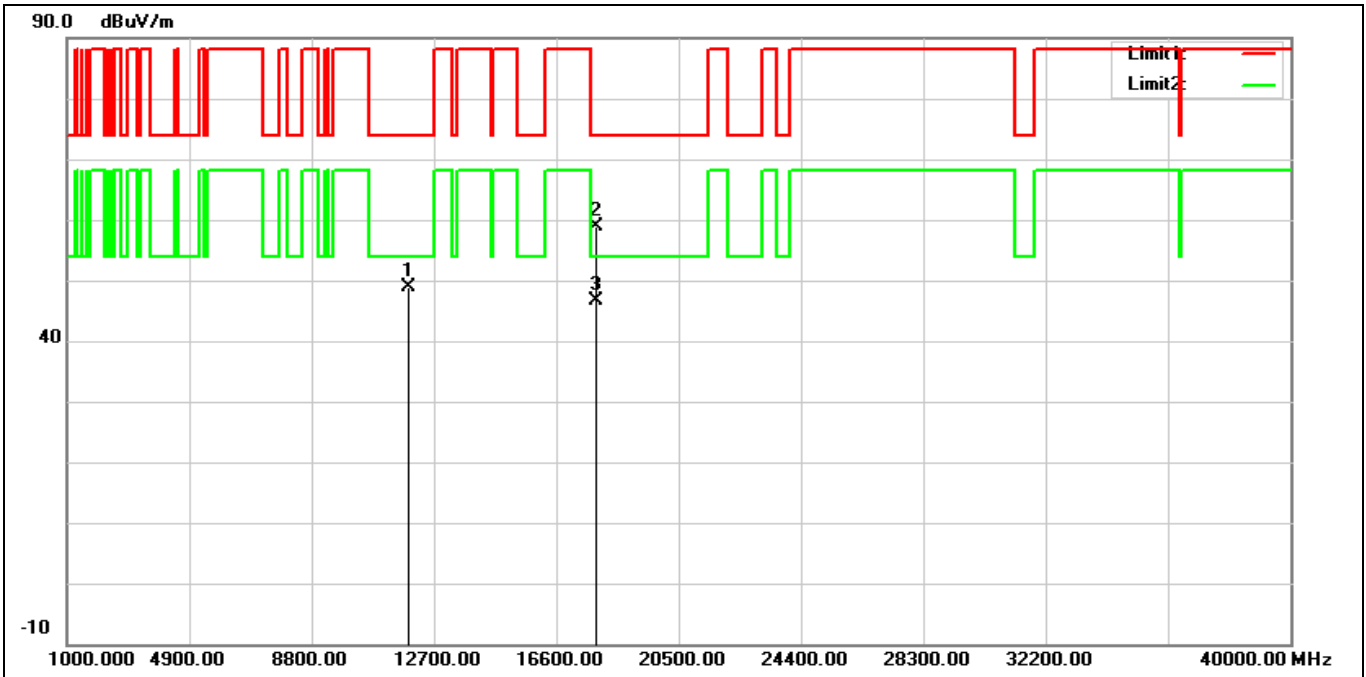


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11910.000	34.01	14.80	48.81	74.00	-25.19	peak
2	17865.000	31.84	27.02	58.86	74.00	-15.14	peak
3*	17865.000	19.52	27.02	46.54	54.00	-7.46	AVG

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5955 MHz		
Remark:			

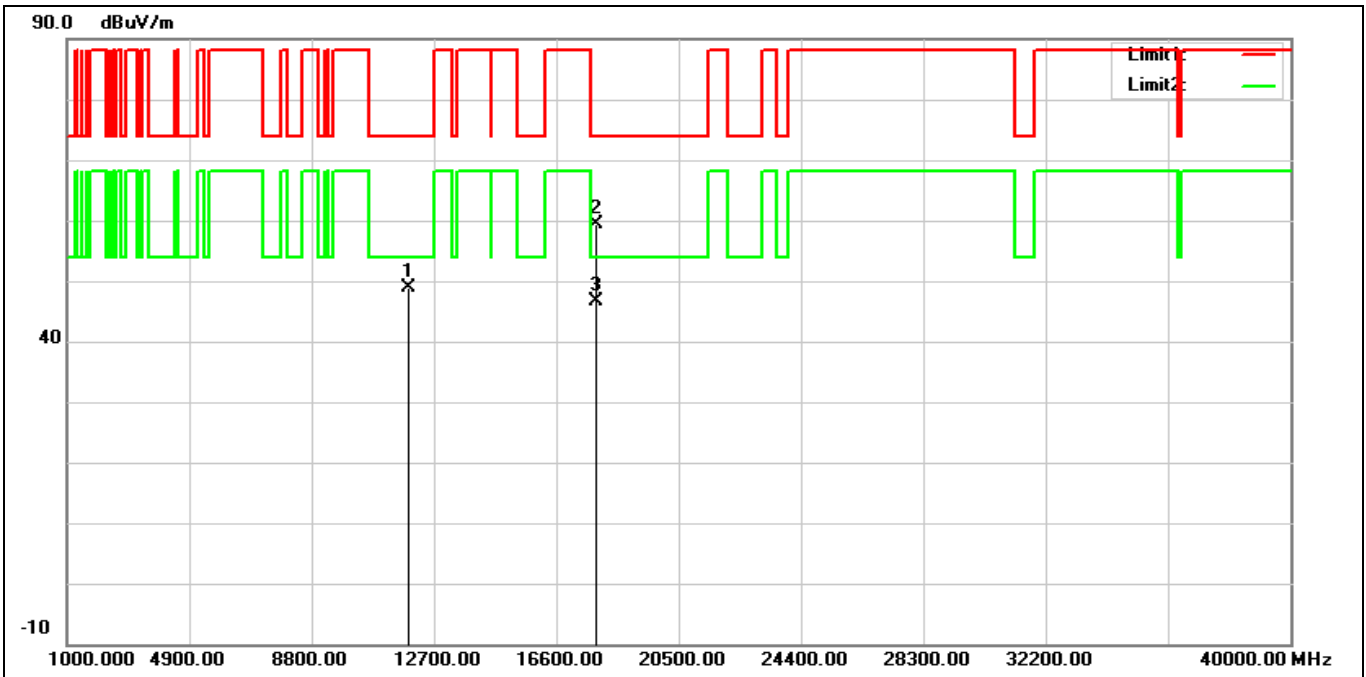


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11910.000	34.14	14.80	48.94	74.00	-25.06	peak
2	17865.000	32.47	27.02	59.49	74.00	-14.51	peak
3*	17865.000	19.69	27.02	46.71	54.00	-7.29	AVG

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6175 MHz		
Remark:			

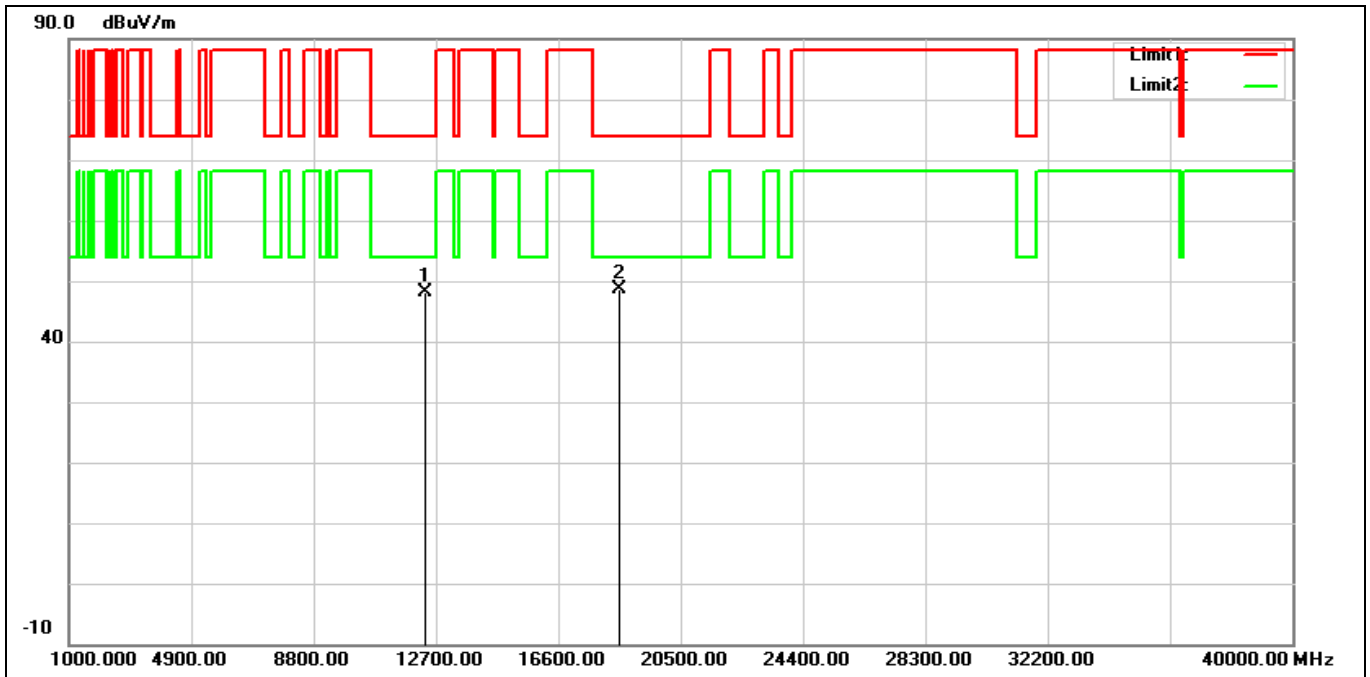

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12350.000	33.15	15.01	48.16	74.00	-25.84	peak
2*	18525.000	30.60	17.99	48.59	74.00	-25.41	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6175 MHz		
Remark:			

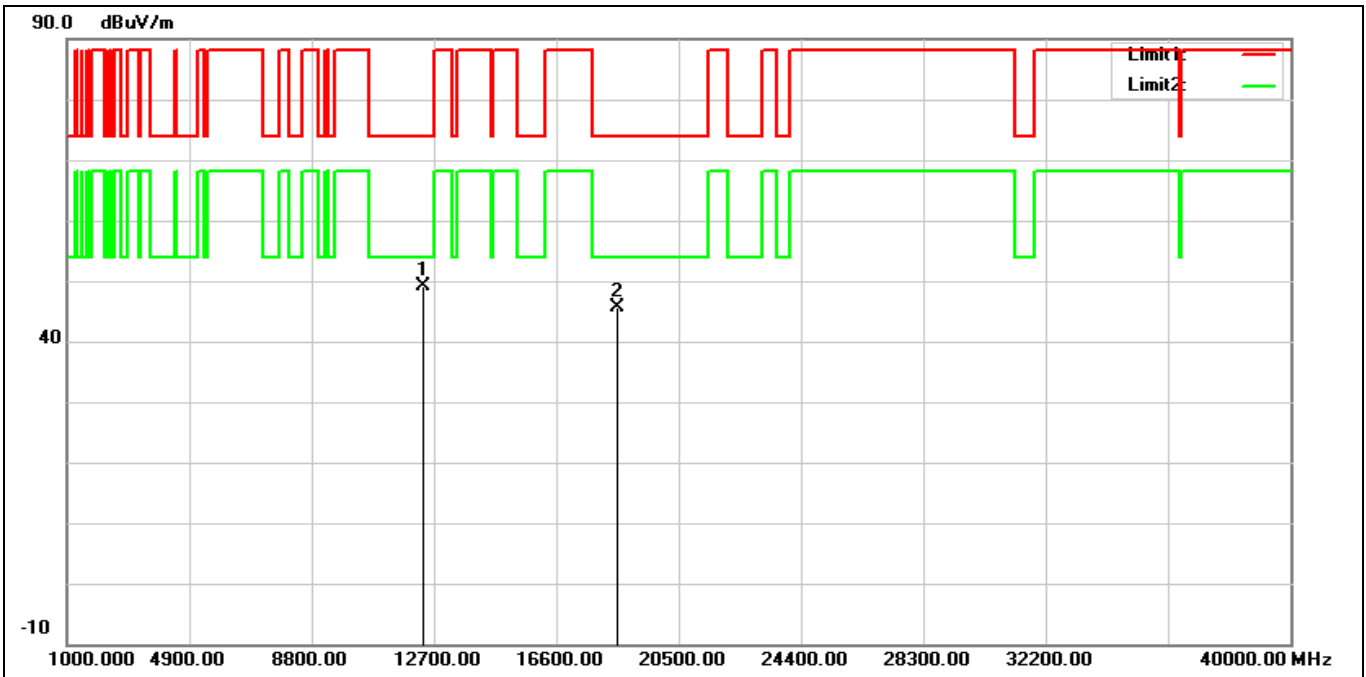

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12350.000	34.11	15.01	49.12	74.00	-24.88	peak
2	18525.000	27.55	17.99	45.54	74.00	-28.46	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6415 MHz		
Remark:			

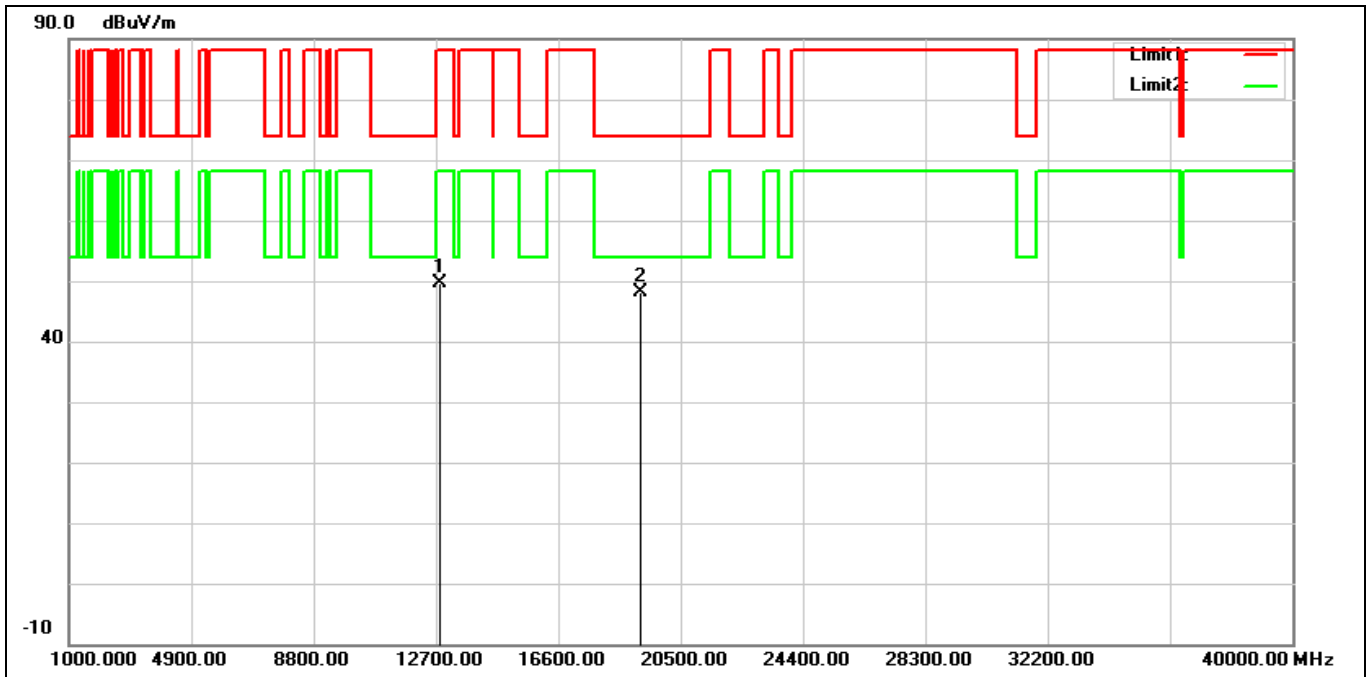


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12830.000	33.92	15.71	49.63	88.20	-38.57	peak
2*	19245.000	29.58	18.58	48.16	74.00	-25.84	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6415 MHz		
Remark:			

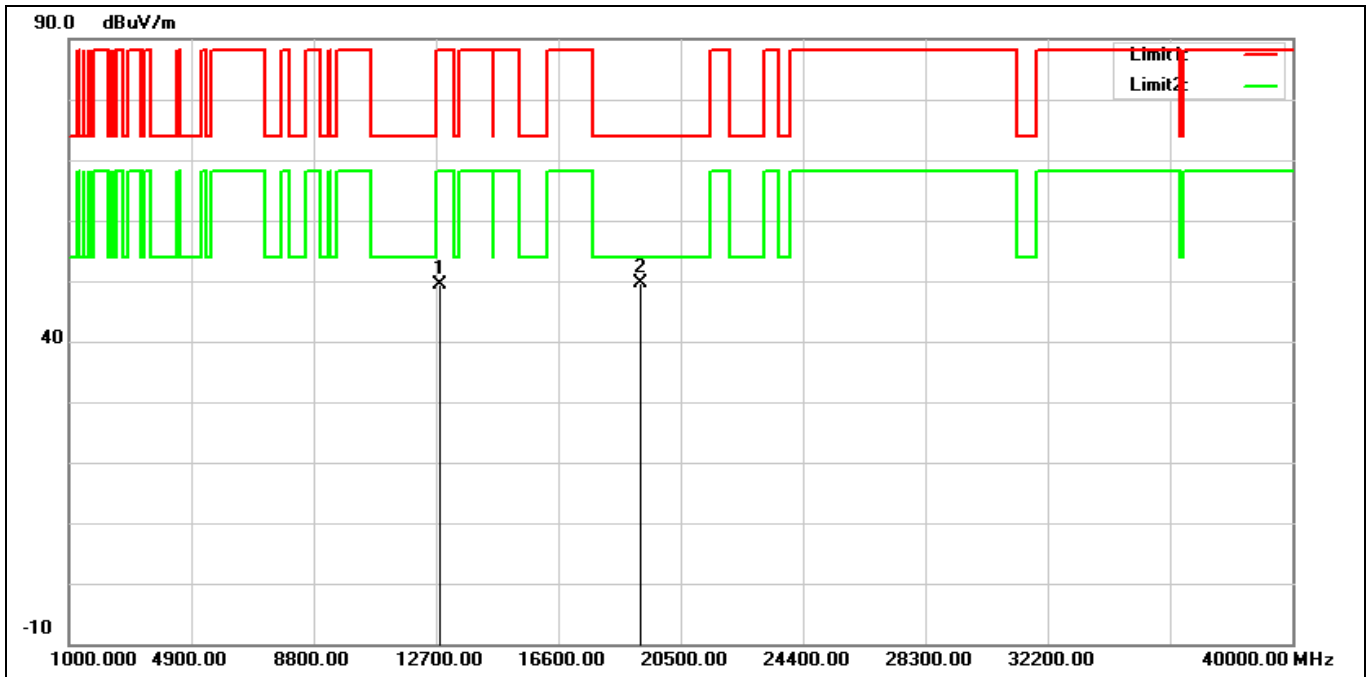


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12830.000	33.61	15.71	49.32	88.20	-38.88	peak
2*	19245.000	30.95	18.58	49.53	74.00	-24.47	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6435 MHz		
Remark:			

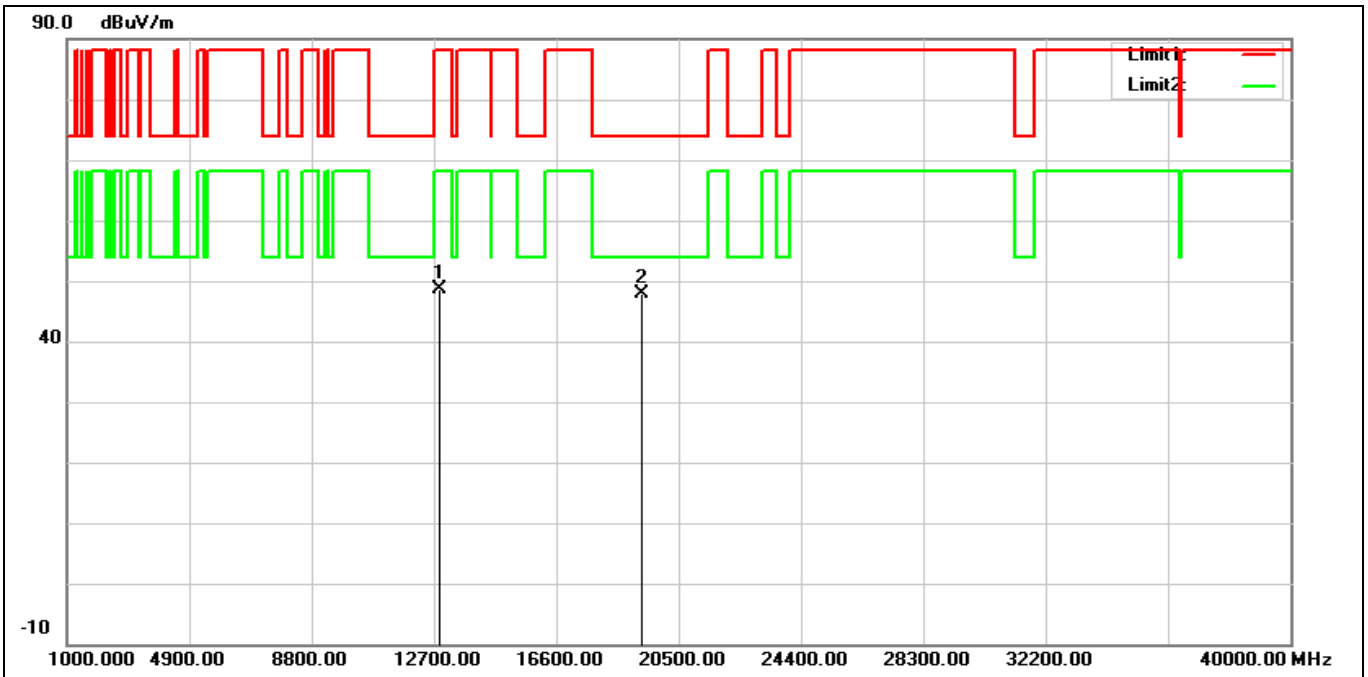


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12870.000	32.89	15.79	48.68	88.20	-39.52	peak
2*	19305.000	29.12	18.65	47.77	74.00	-26.23	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6435 MHz		
Remark:			

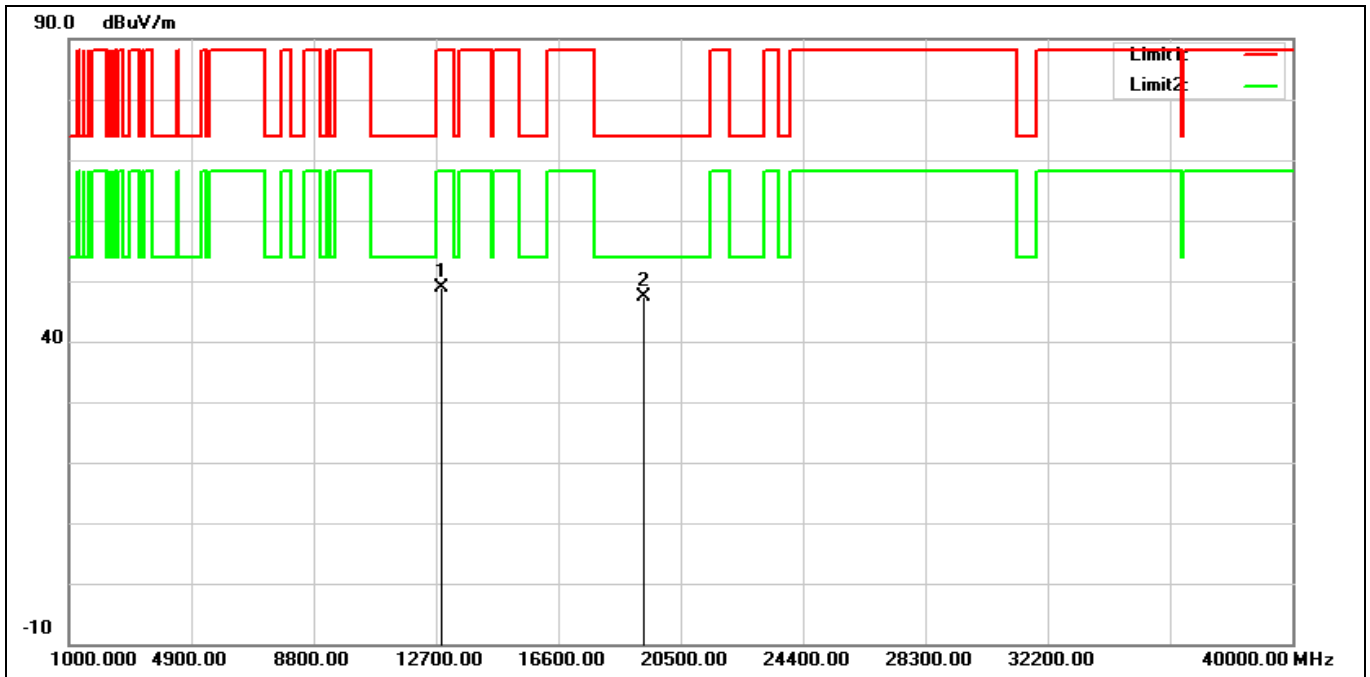


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12870.000	33.01	15.79	48.80	88.20	-39.40	peak
2*	19305.000	28.71	18.65	47.36	74.00	-26.64	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6475 MHz		
Remark:			

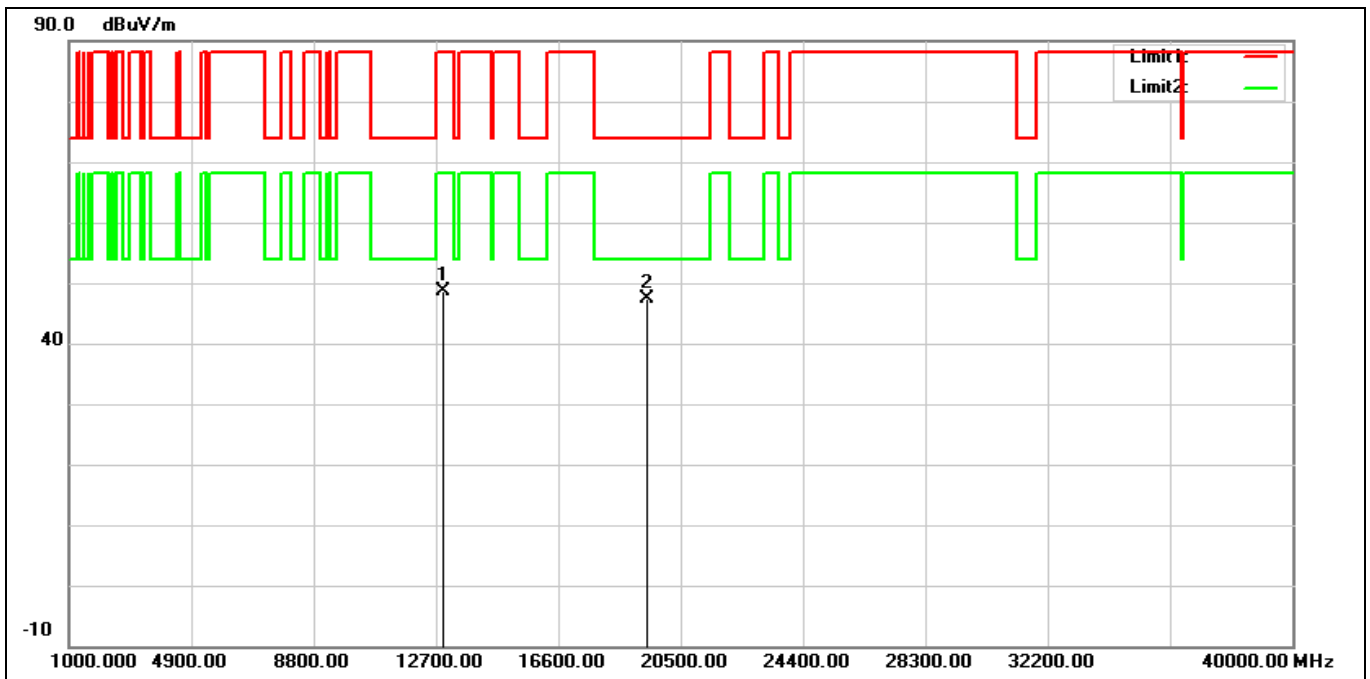


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12950.000	32.78	15.79	48.57	88.20	-39.63	peak
2*	19425.000	28.47	18.79	47.26	74.00	-26.74	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6475 MHz		
Remark:			

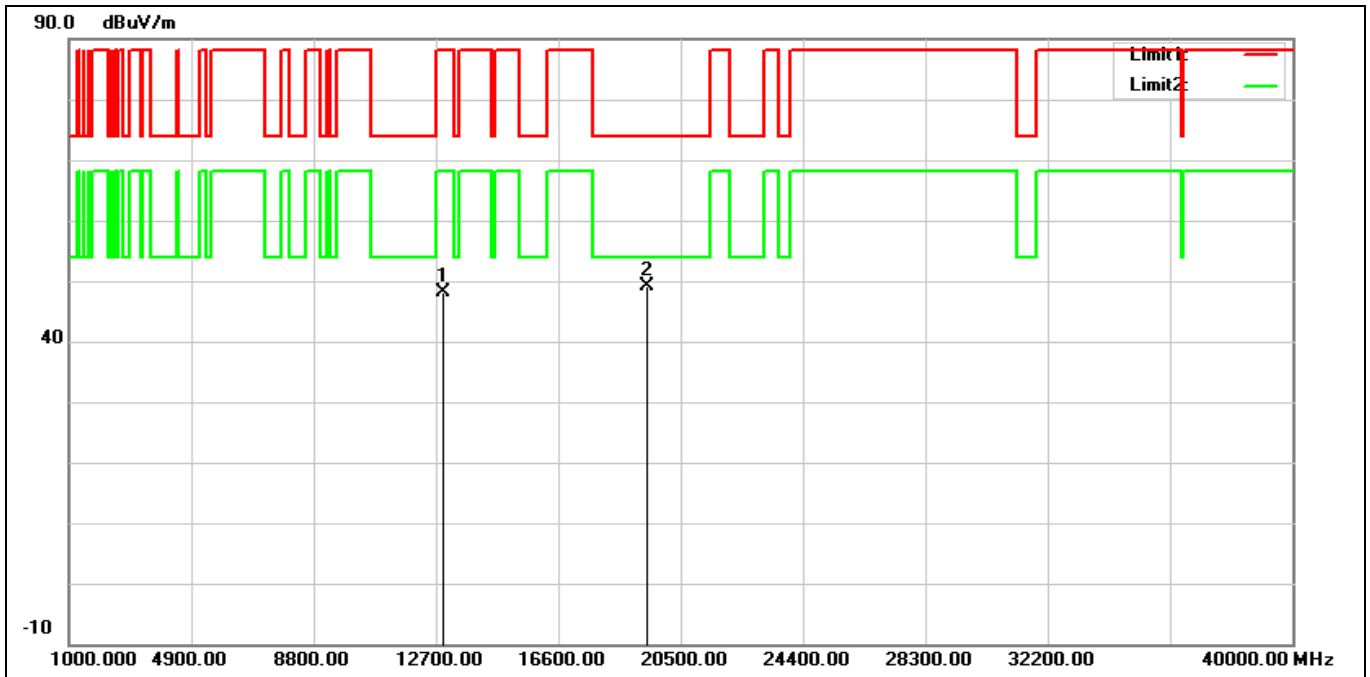


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12950.000	32.41	15.79	48.20	88.20	-40.00	peak
2*	19425.000	30.30	18.79	49.09	74.00	-24.91	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6515 MHz		
Remark:			

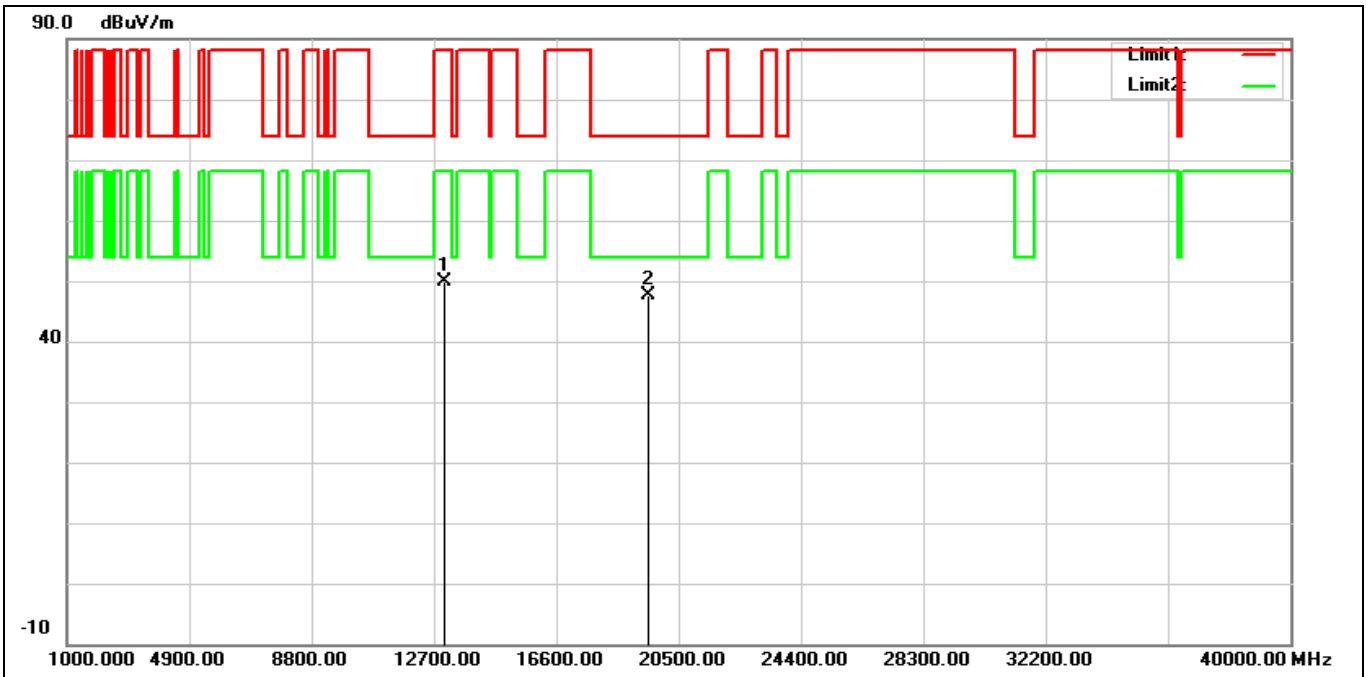

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13030.000	34.11	15.71	49.82	88.20	-38.38	peak
2*	19545.000	28.76	18.88	47.64	74.00	-26.36	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6515 MHz		
Remark:			

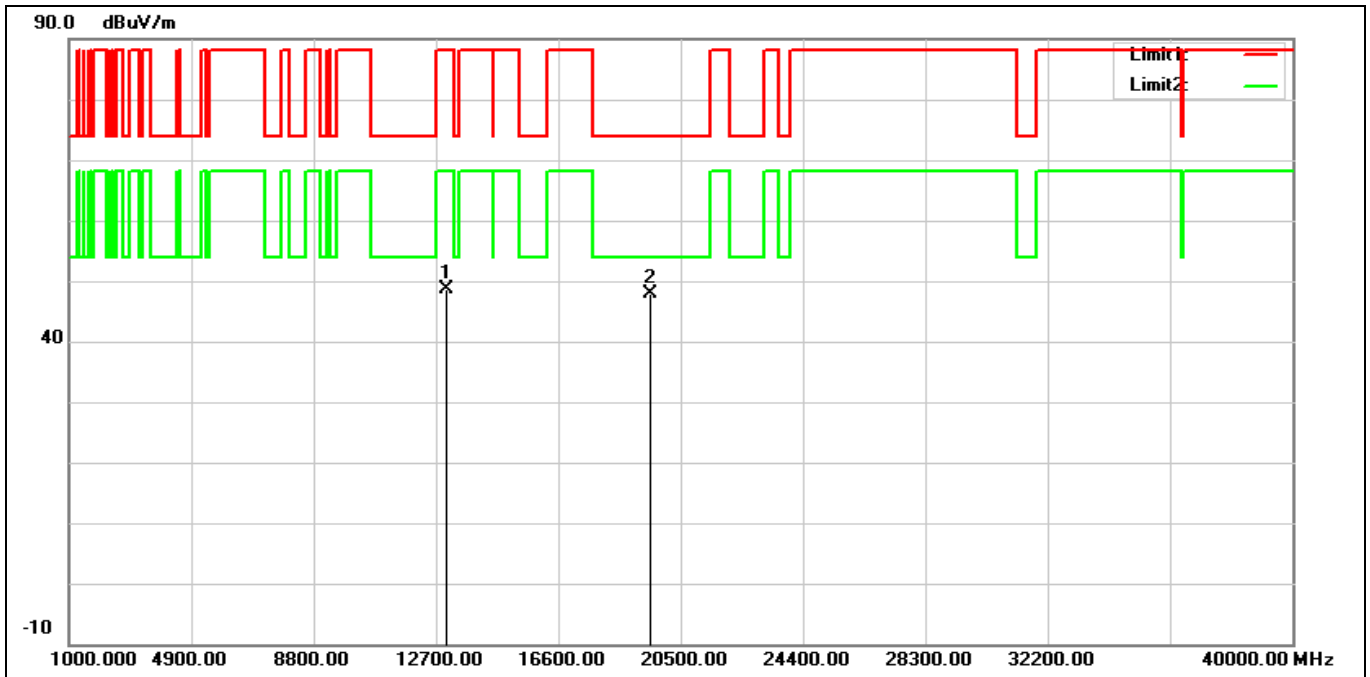

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13030.000	33.00	15.71	48.71	88.20	-39.49	peak
2*	19545.000	29.08	18.88	47.96	74.00	-26.04	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6535 MHz		
Remark:			

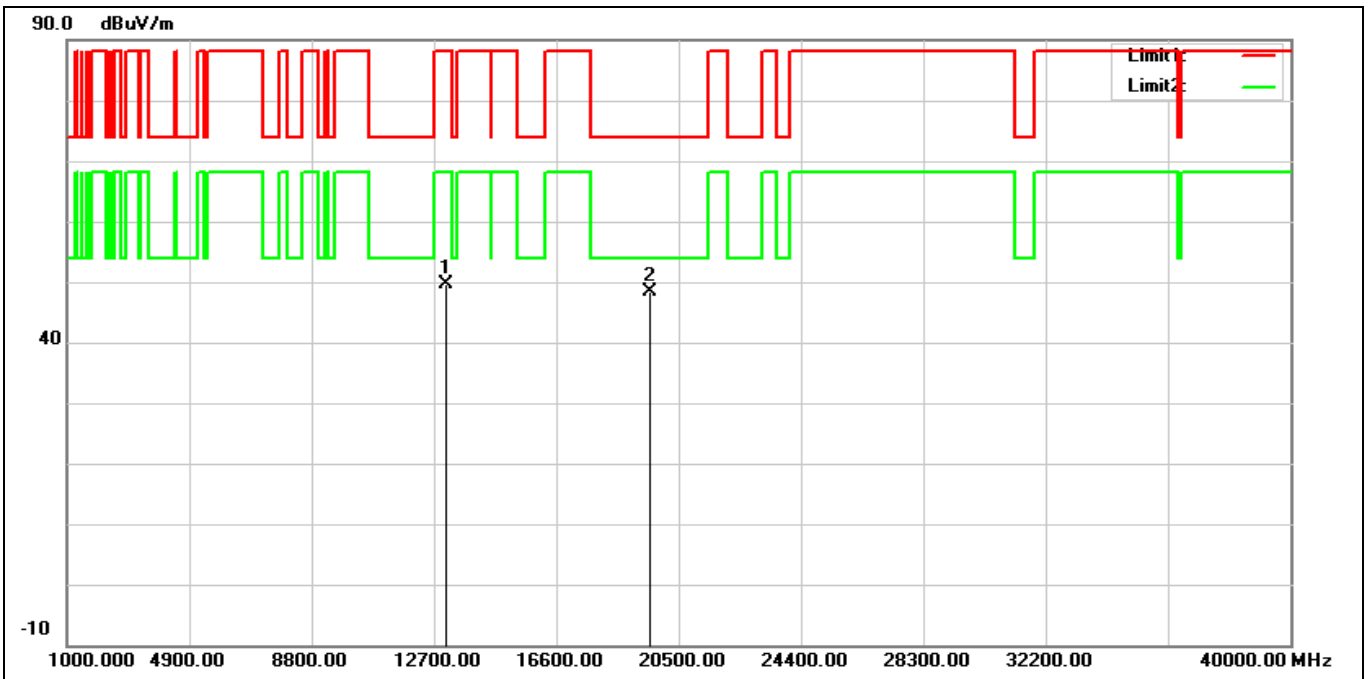


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13070.000	33.92	15.68	49.60	88.20	-38.60	peak
2*	19605.000	29.57	18.89	48.46	74.00	-25.54	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6535 MHz		
Remark:			

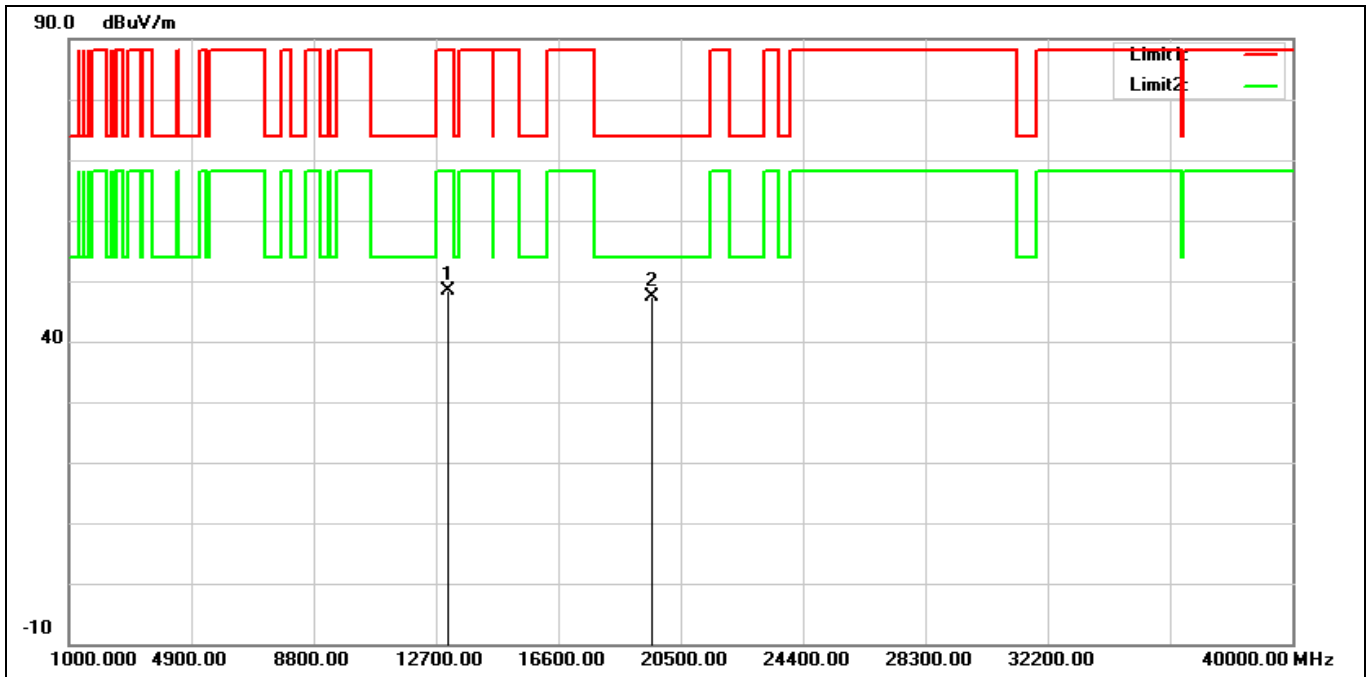


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13070.000	32.65	15.68	48.33	88.20	-39.87	peak
2*	19605.000	28.55	18.89	47.44	74.00	-26.56	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6695 MHz		
Remark:			

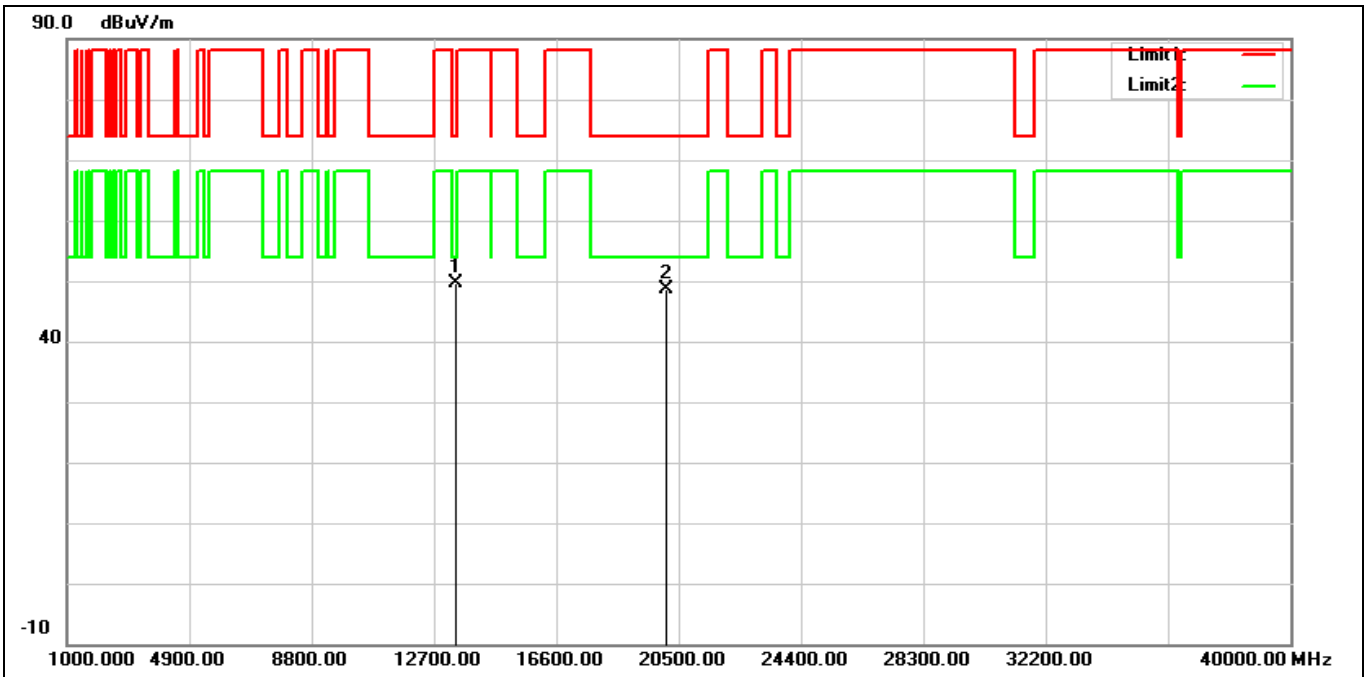


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	13390.000	33.09	16.53	49.62	74.00	-24.38	peak
2	20085.000	29.64	19.01	48.65	74.00	-25.35	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6695 MHz		
Remark:			

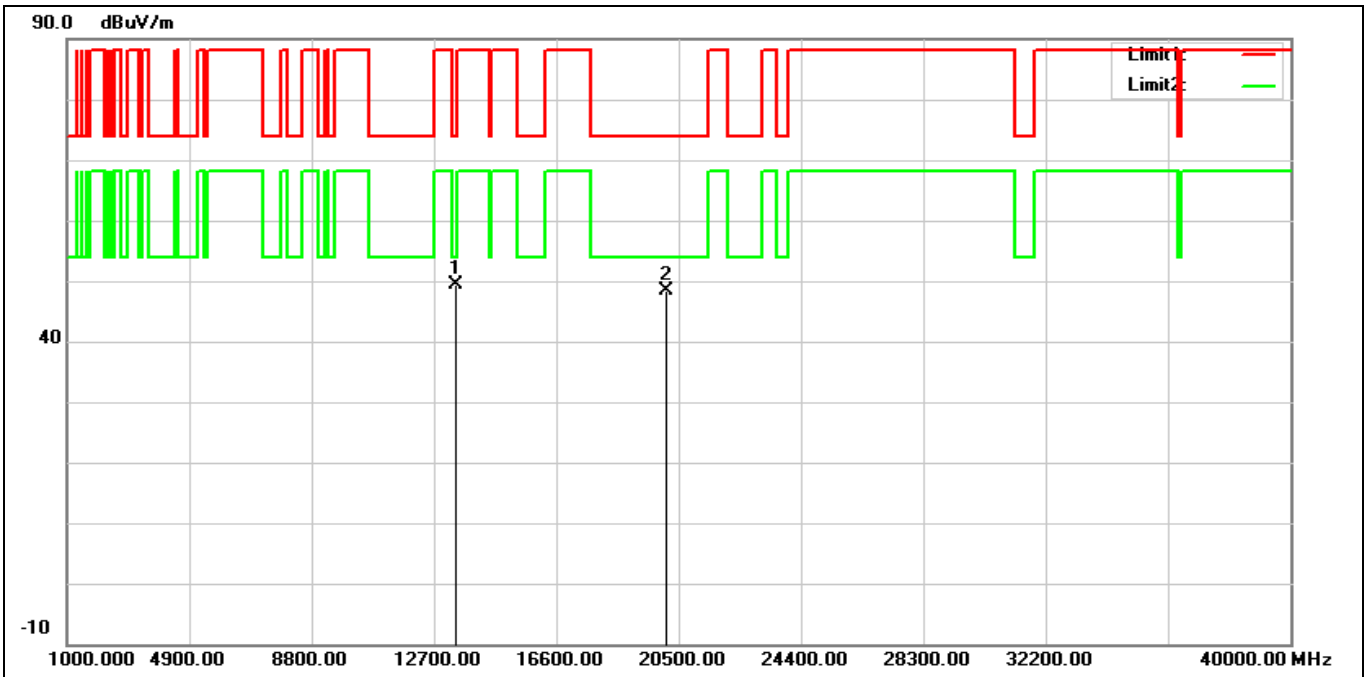


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	13390.000	32.81	16.53	49.34	74.00	-24.66	peak
2	20085.000	29.46	19.01	48.47	74.00	-25.53	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6855 MHz		
Remark:			

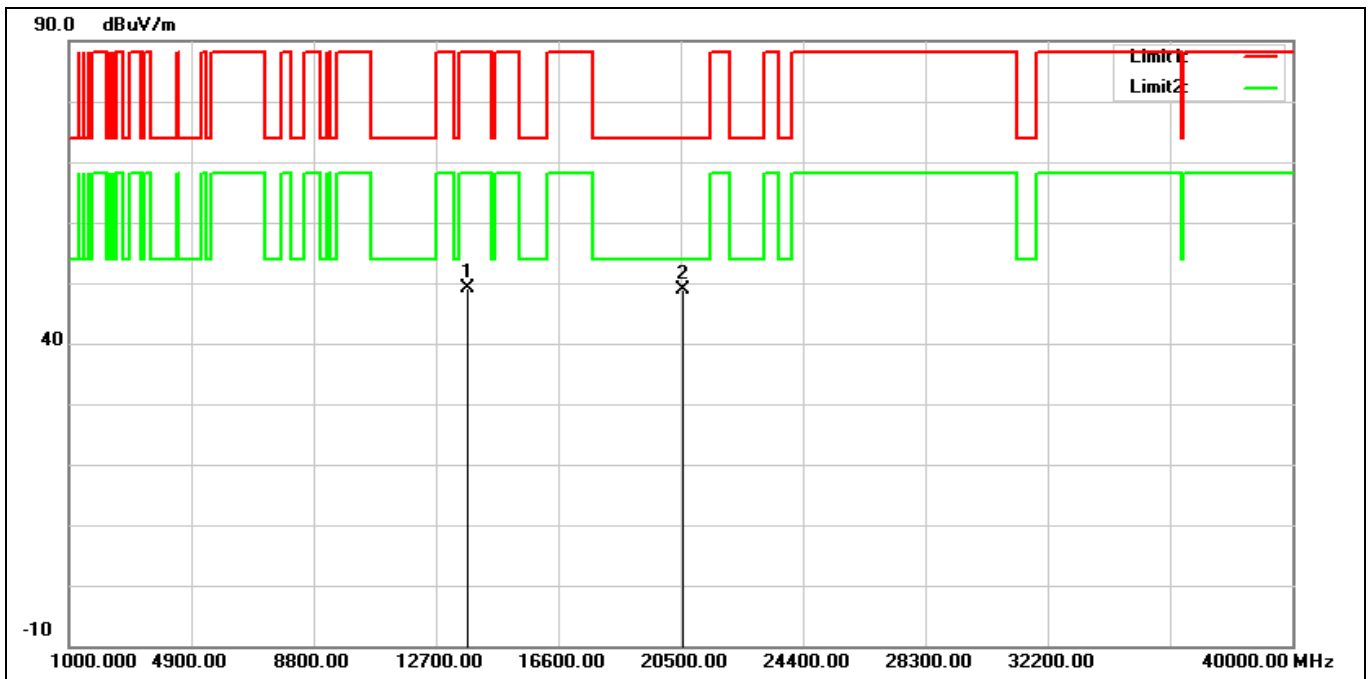


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13710.000	31.84	17.26	49.10	88.20	-39.10	peak
2*	20565.000	29.29	19.58	48.87	74.00	-25.13	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6855 MHz		
Remark:			

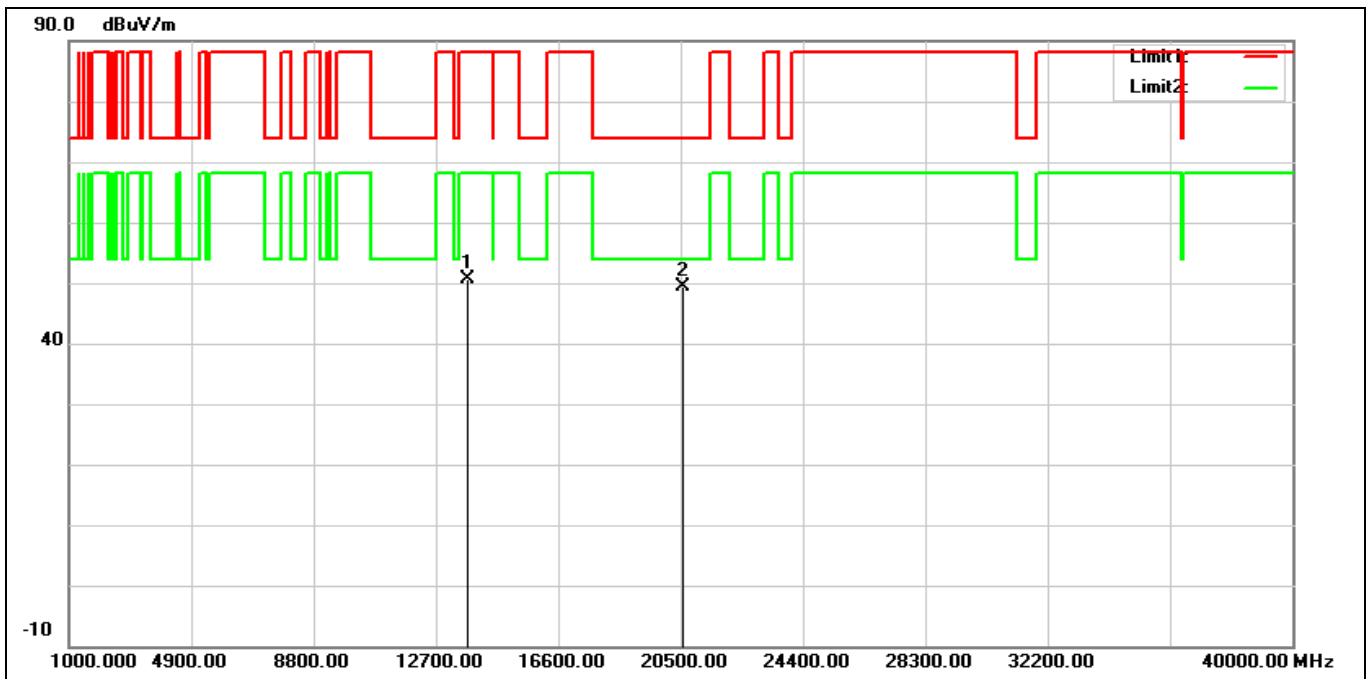


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13710.000	33.46	17.26	50.72	88.20	-37.48	peak
2*	20565.000	29.84	19.58	49.42	74.00	-24.58	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6875 MHz		
Remark:			

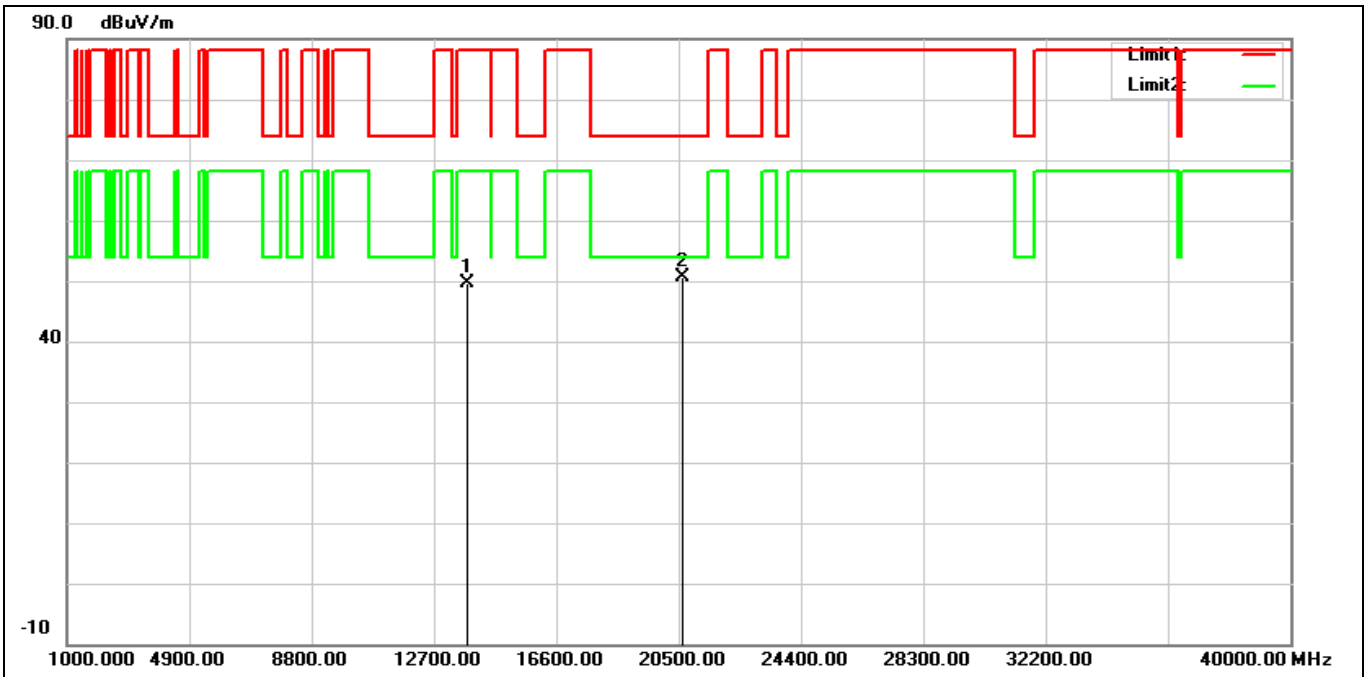

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13750.000	32.58	17.17	49.75	88.20	-38.45	peak
2*	20625.000	30.99	19.61	50.60	74.00	-23.40	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6875 MHz		
Remark:			

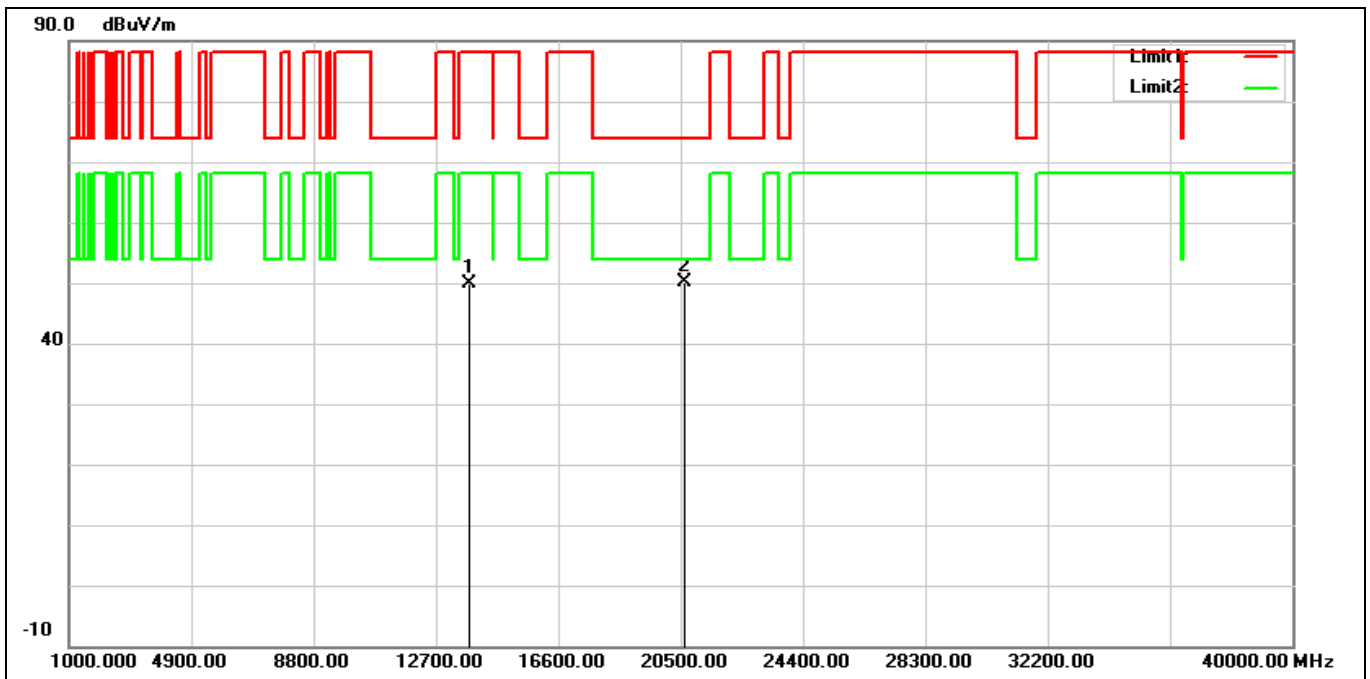

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13750.000	32.75	17.17	49.92	88.20	-38.28	peak
2*	20625.000	30.60	19.61	50.21	74.00	-23.79	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6895 MHz		
Remark:			

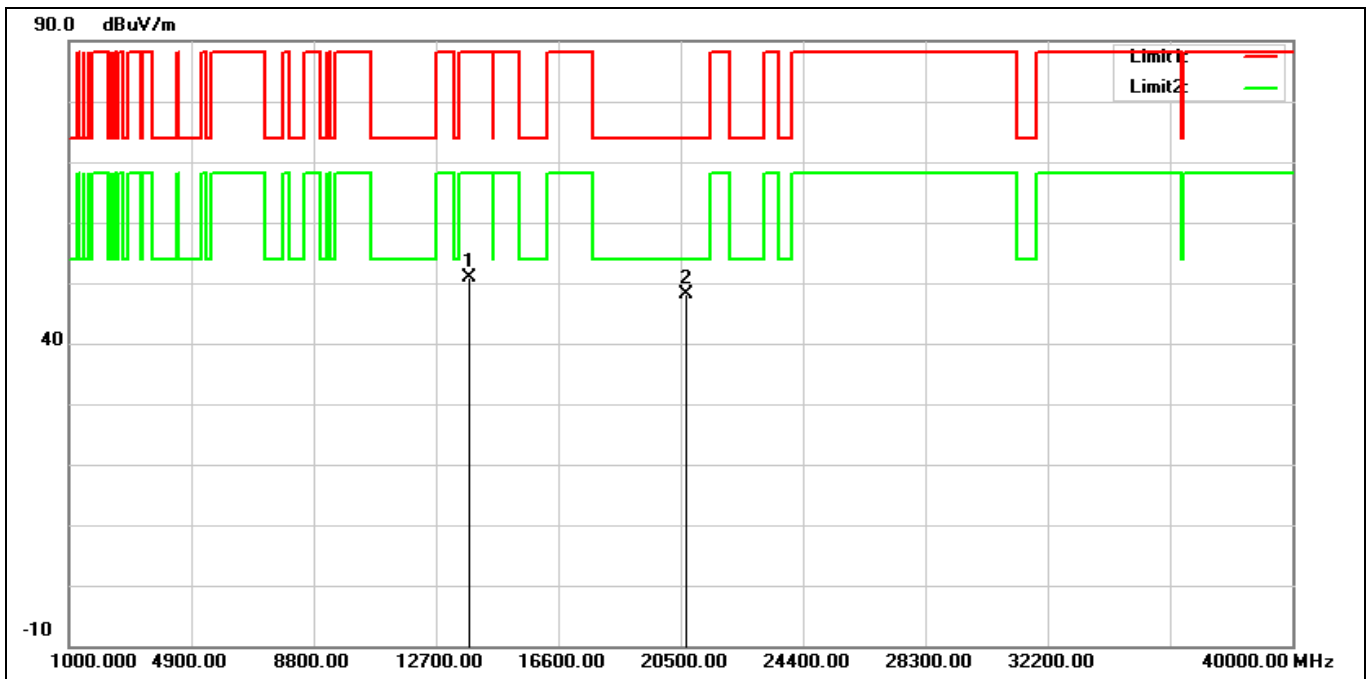


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13790.000	33.71	17.10	50.81	88.20	-37.39	peak
2*	20685.000	28.41	19.63	48.04	74.00	-25.96	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6895 MHz		
Remark:			

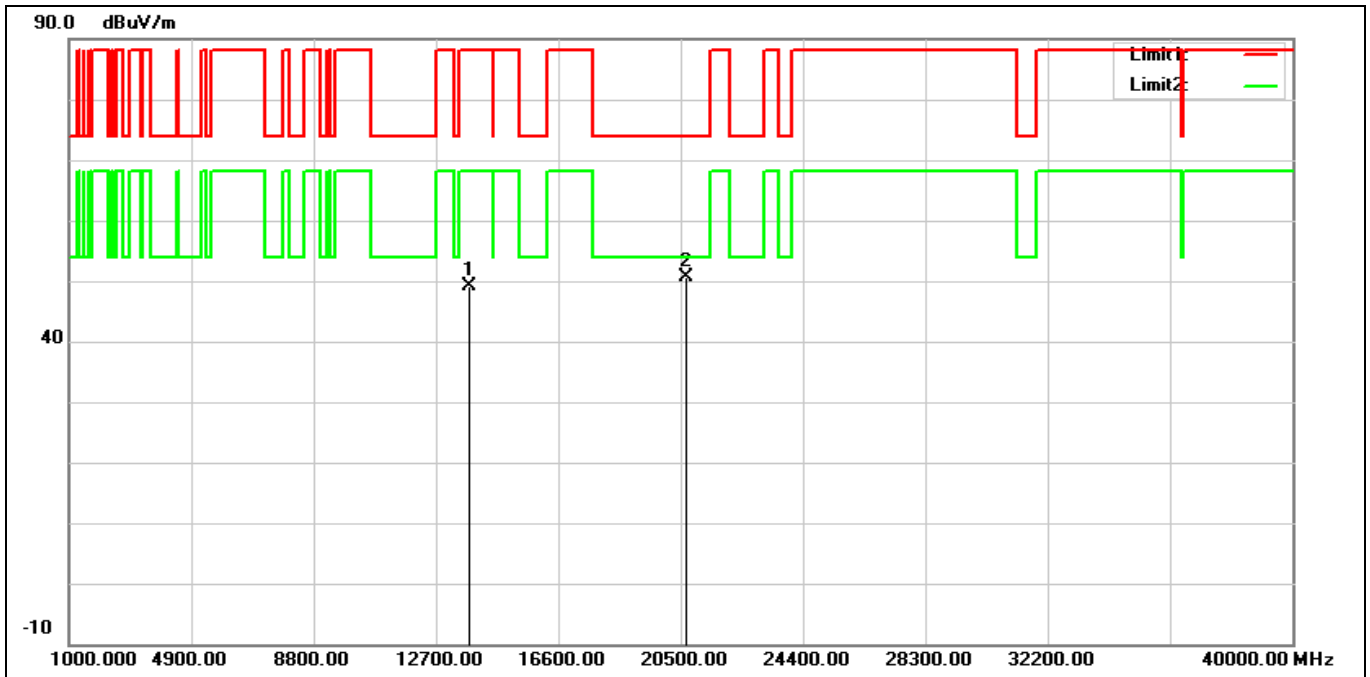


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13790.000	32.08	17.10	49.18	88.20	-39.02	peak
2*	20685.000	31.09	19.63	50.72	74.00	-23.28	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6995 MHz		
Remark:			

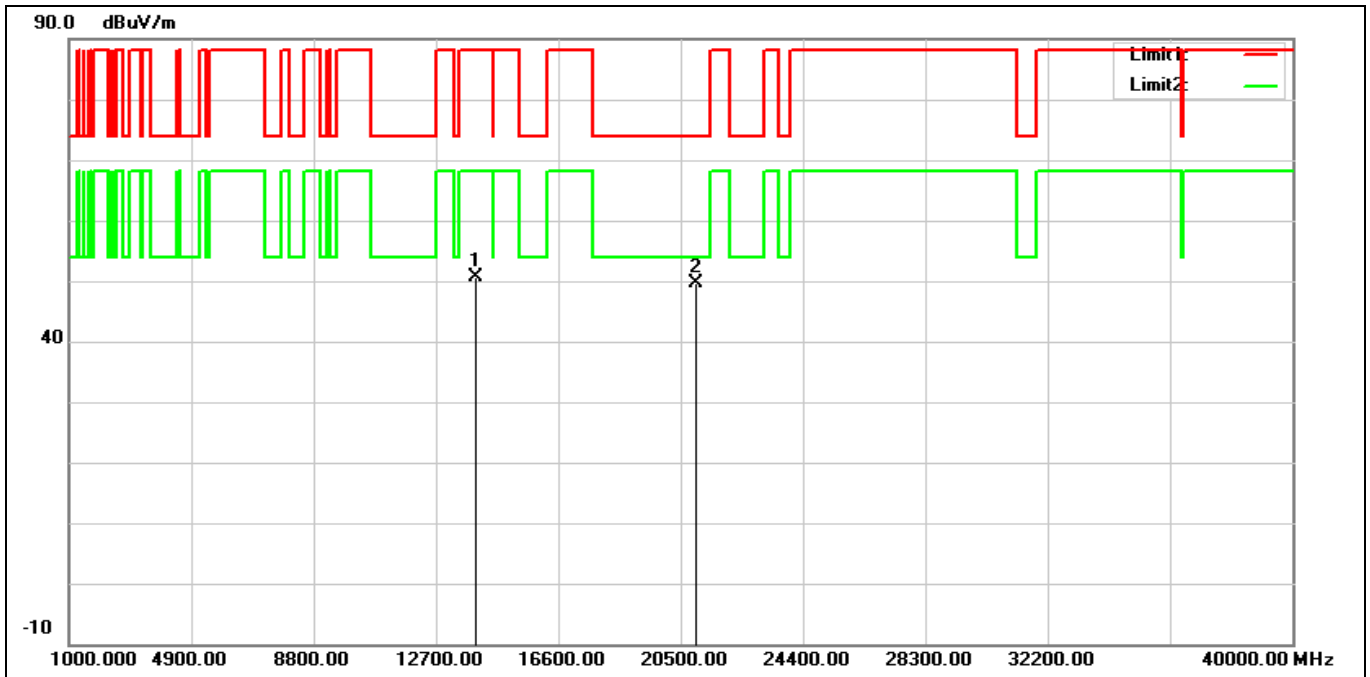


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13990.000	32.81	17.85	50.66	88.20	-37.54	peak
2*	20985.000	29.96	19.79	49.75	74.00	-24.25	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6995 MHz		
Remark:			

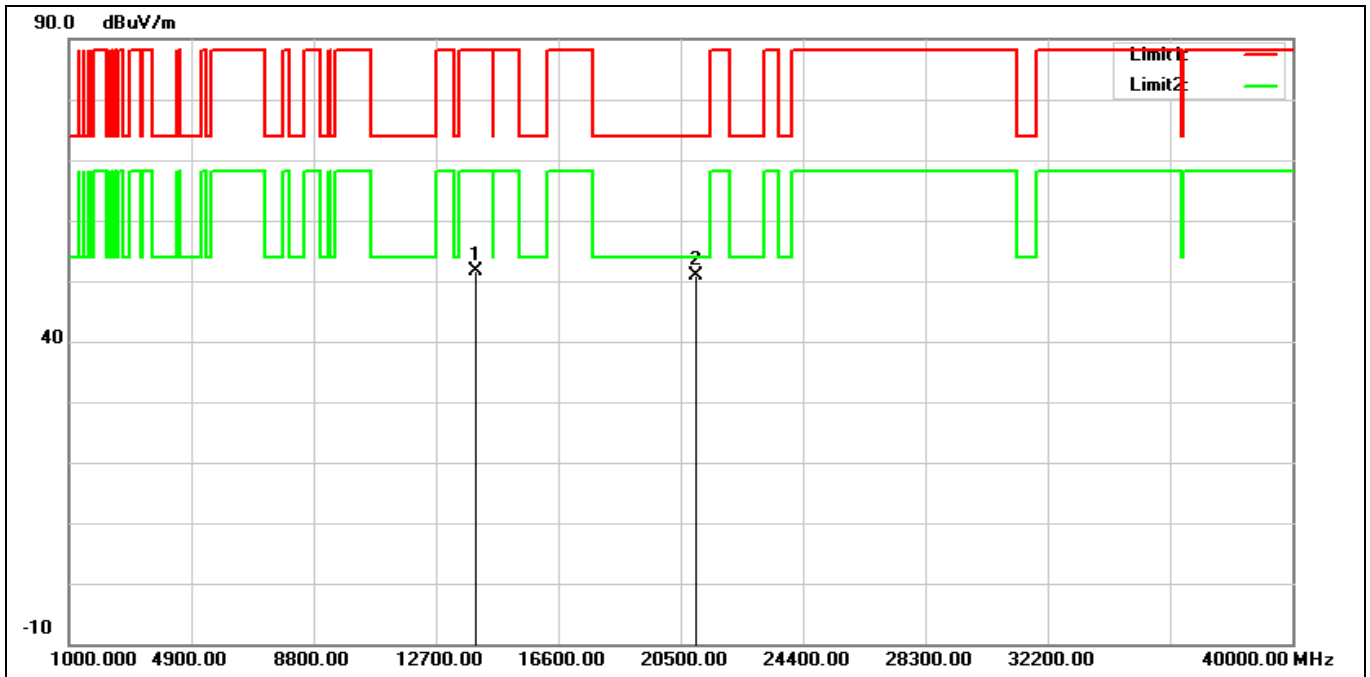


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13990.000	33.75	17.85	51.60	88.20	-36.60	peak
2*	20985.000	31.14	19.79	50.93	74.00	-23.07	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 7115 MHz		
Remark:			

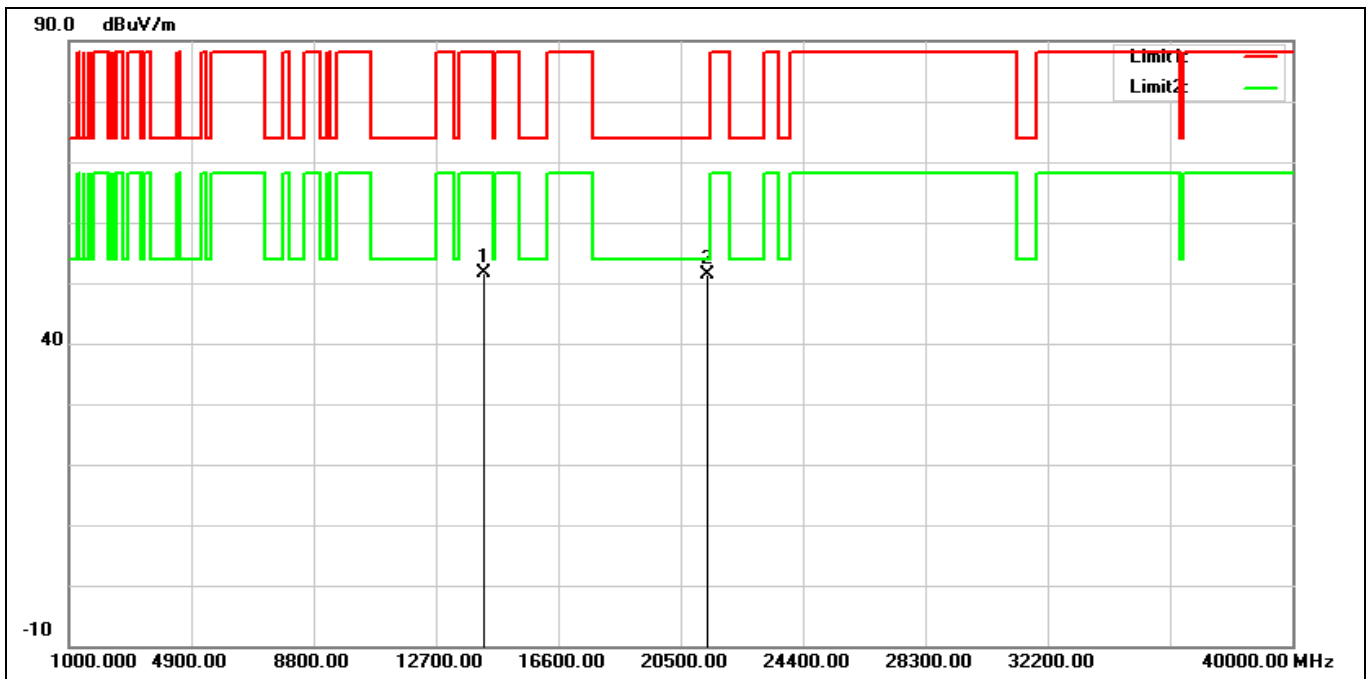


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14230.000	33.09	18.53	51.62	88.20	-36.58	peak
2*	21345.000	31.91	19.35	51.26	74.00	-22.74	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 7115 MHz		
Remark:			

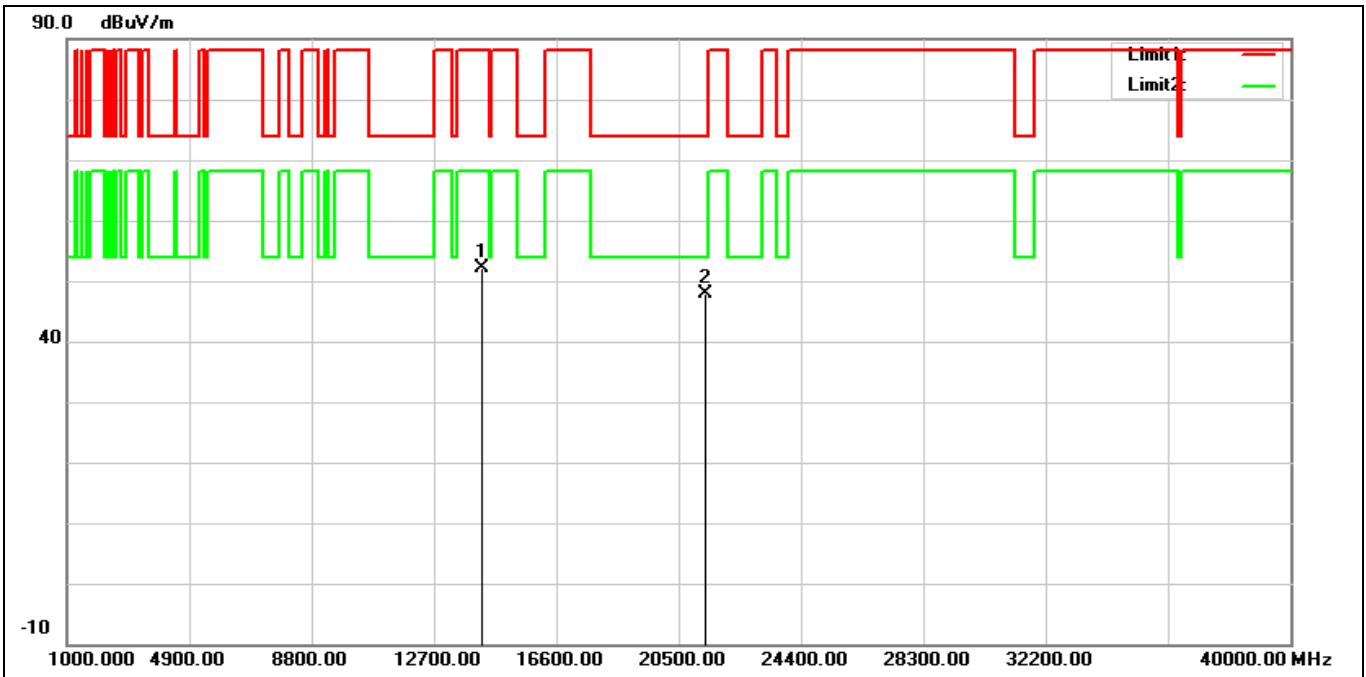


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14230.000	33.54	18.53	52.07	88.20	-36.13	peak
2*	21345.000	28.47	19.35	47.82	74.00	-26.18	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5965 MHz		
Remark:			

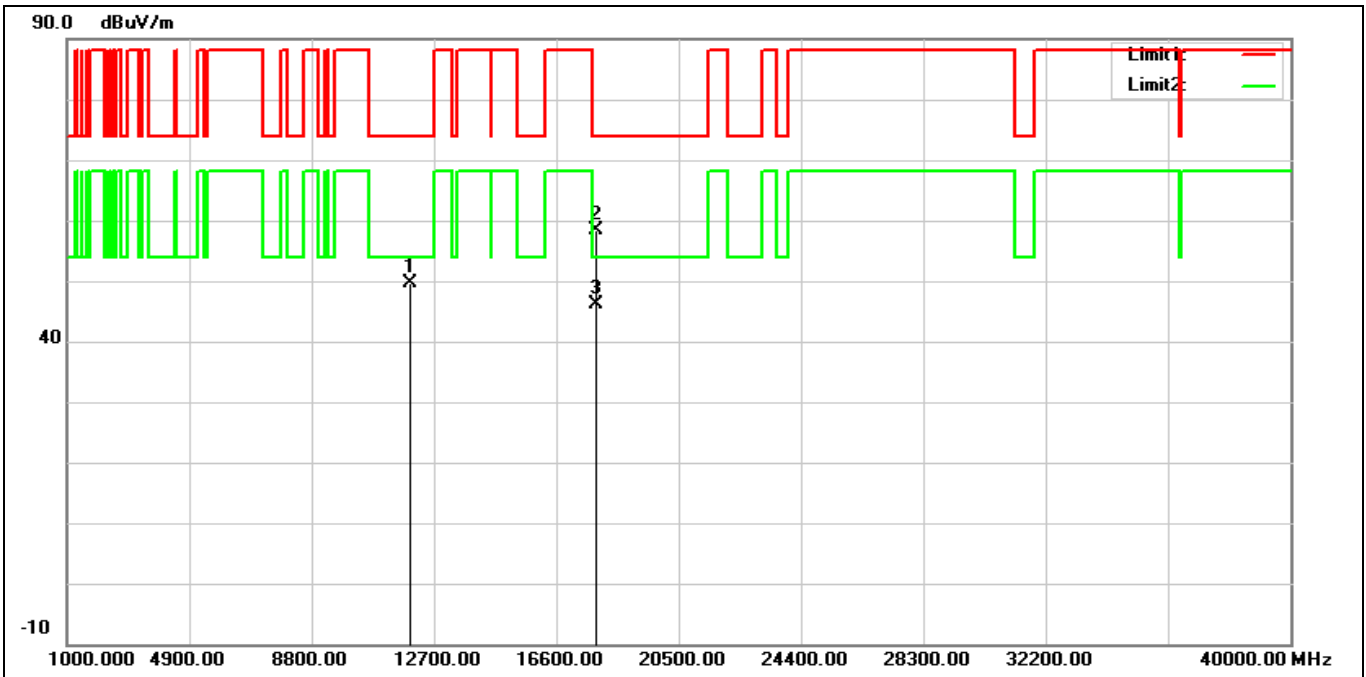

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11930.000	34.93	14.81	49.74	74.00	-24.26	peak
2	17895.000	30.98	27.39	58.37	74.00	-15.63	peak
3*	17895.000	18.81	27.39	46.20	54.00	-7.80	AVG


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5965 MHz		
Remark:			

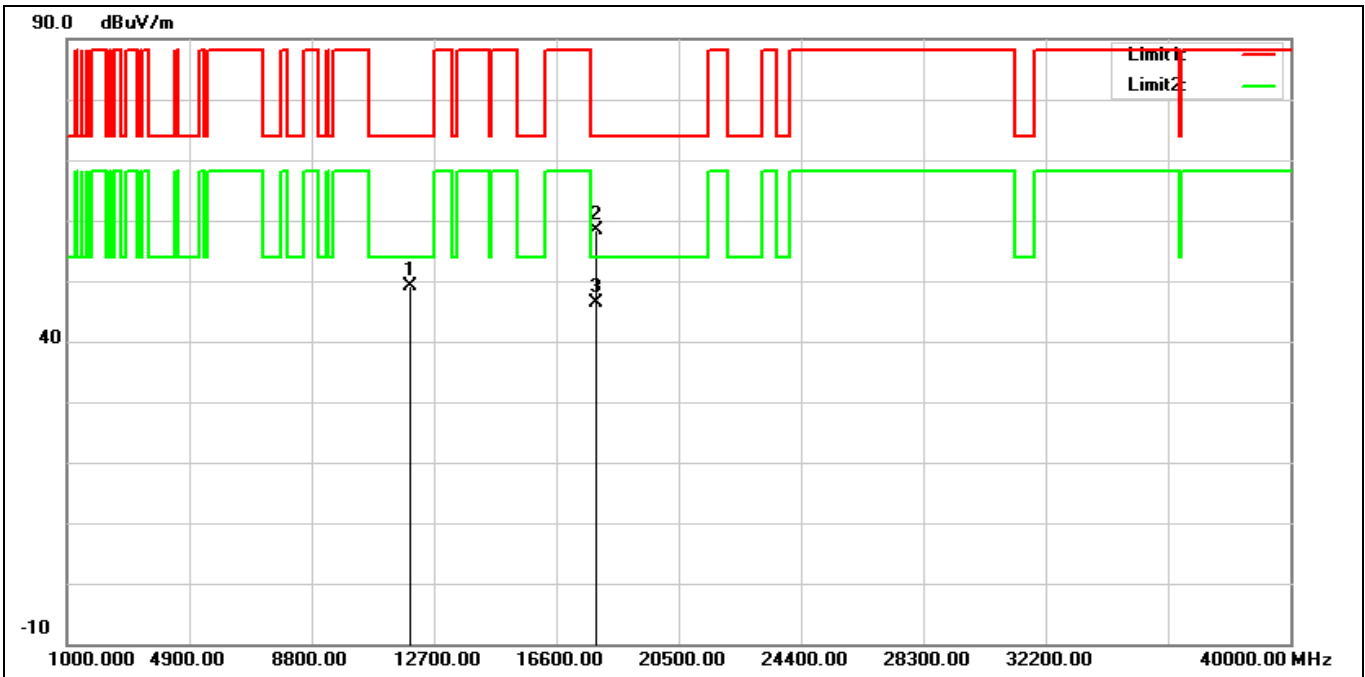

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11930.000	34.20	14.81	49.01	74.00	-24.99	peak
2	17895.000	31.11	27.39	58.50	74.00	-15.50	peak
3*	17895.000	18.98	27.39	46.37	54.00	-7.63	AVG




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6165 MHz		
Remark:			

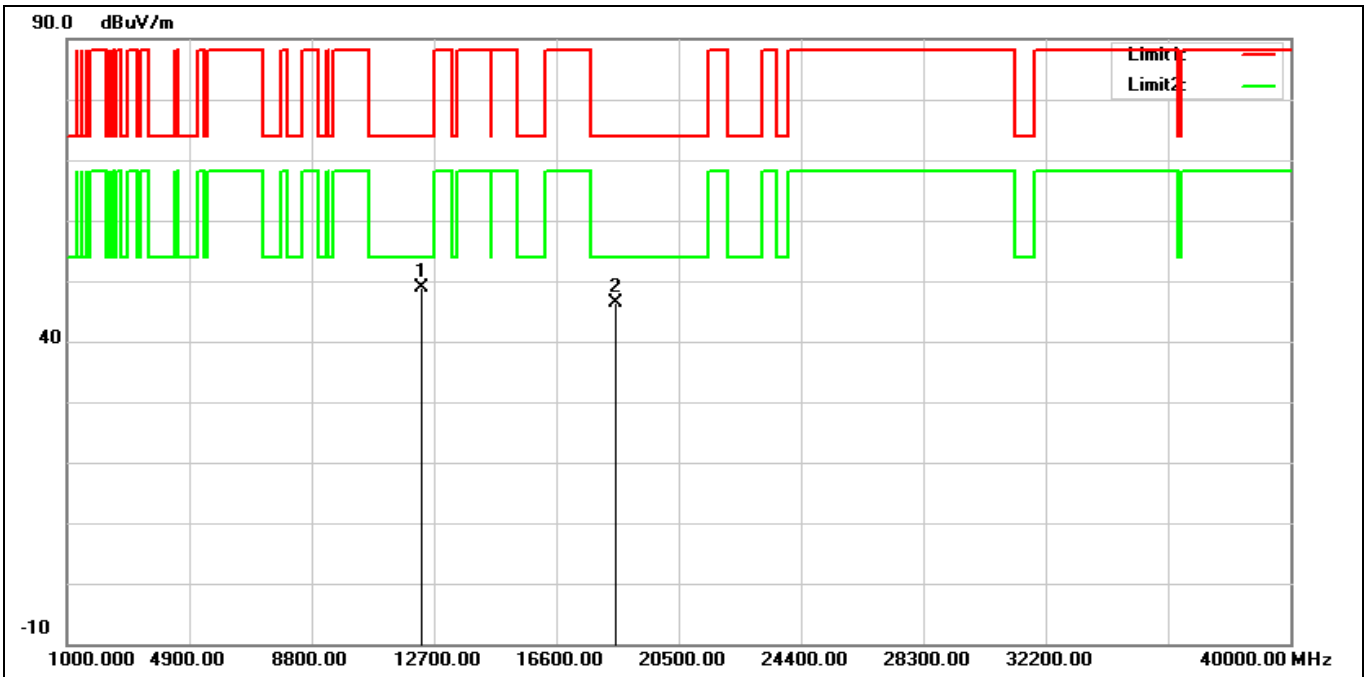


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12330.000	33.84	15.07	48.91	74.00	-25.09	peak
2	18495.000	28.31	17.97	46.28	74.00	-27.72	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6165 MHz		
Remark:			

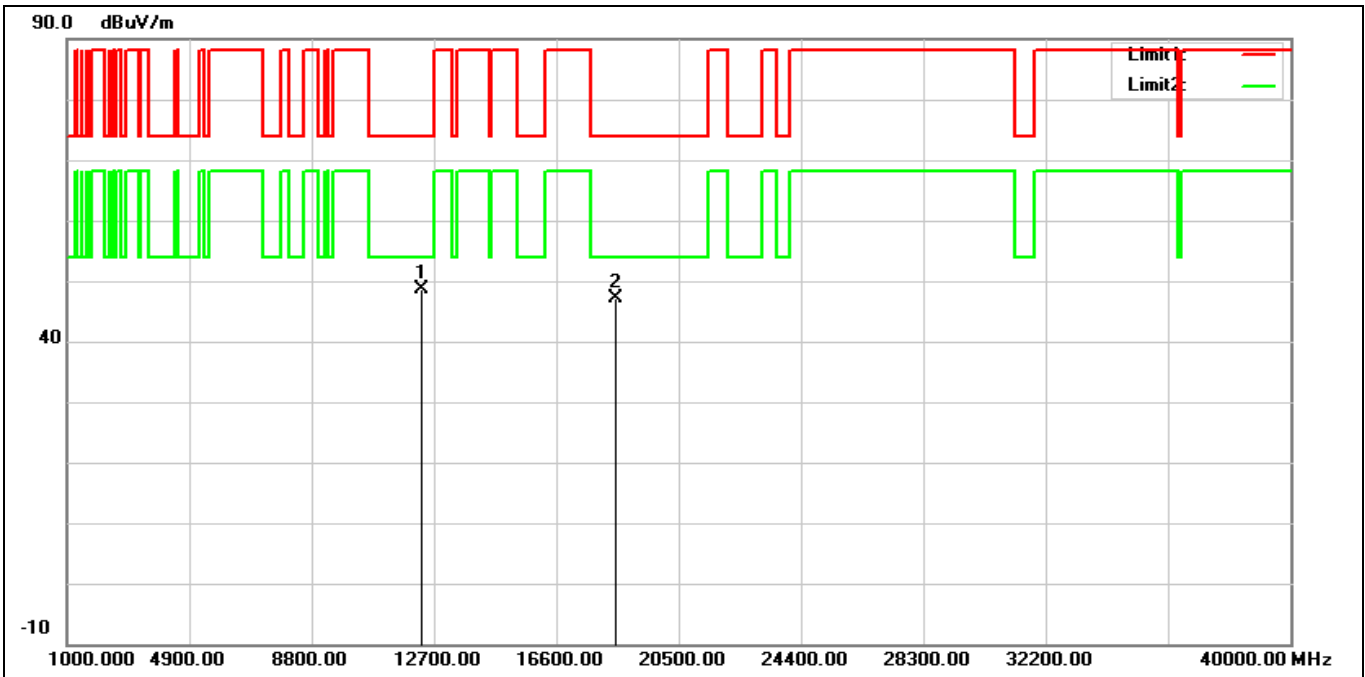


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12330.000	33.46	15.07	48.53	74.00	-25.47	peak
2	18495.000	29.21	17.97	47.18	74.00	-26.82	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6405 MHz		
Remark:			

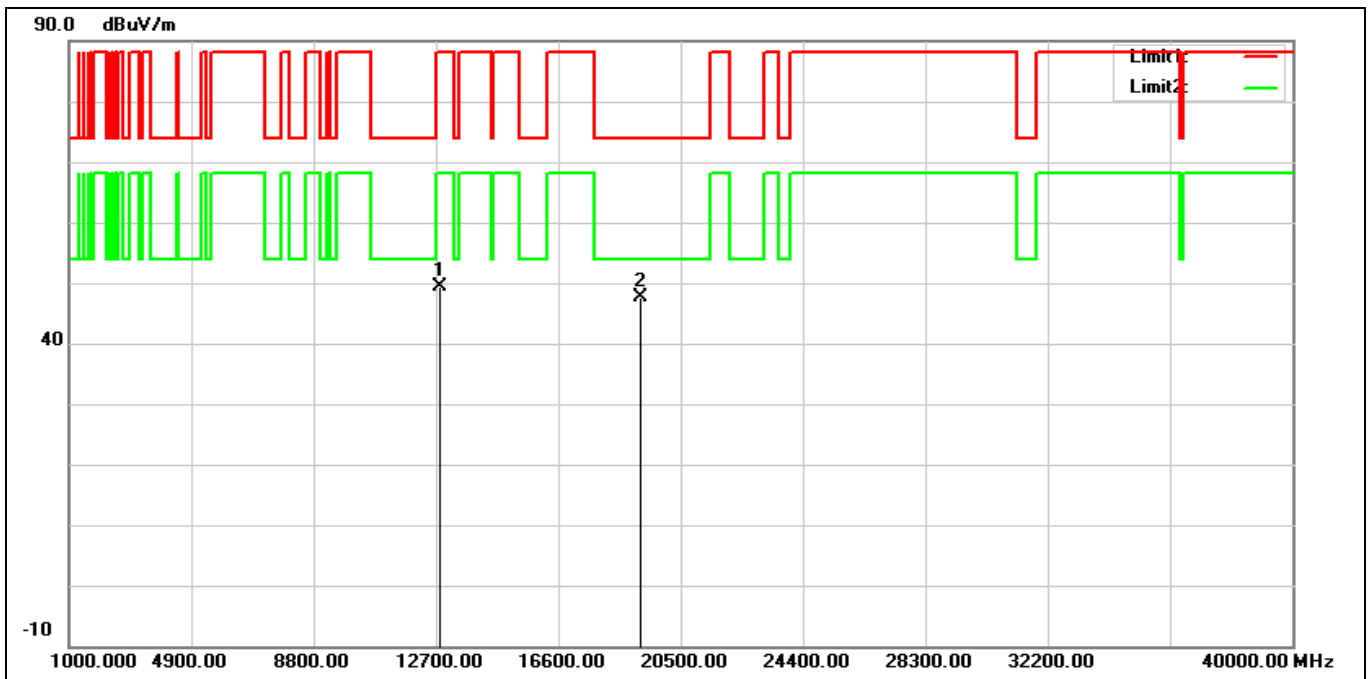


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12810.000	33.60	15.67	49.27	88.20	-38.93	peak
2*	19215.000	28.99	18.55	47.54	74.00	-26.46	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6405 MHz		
Remark:			

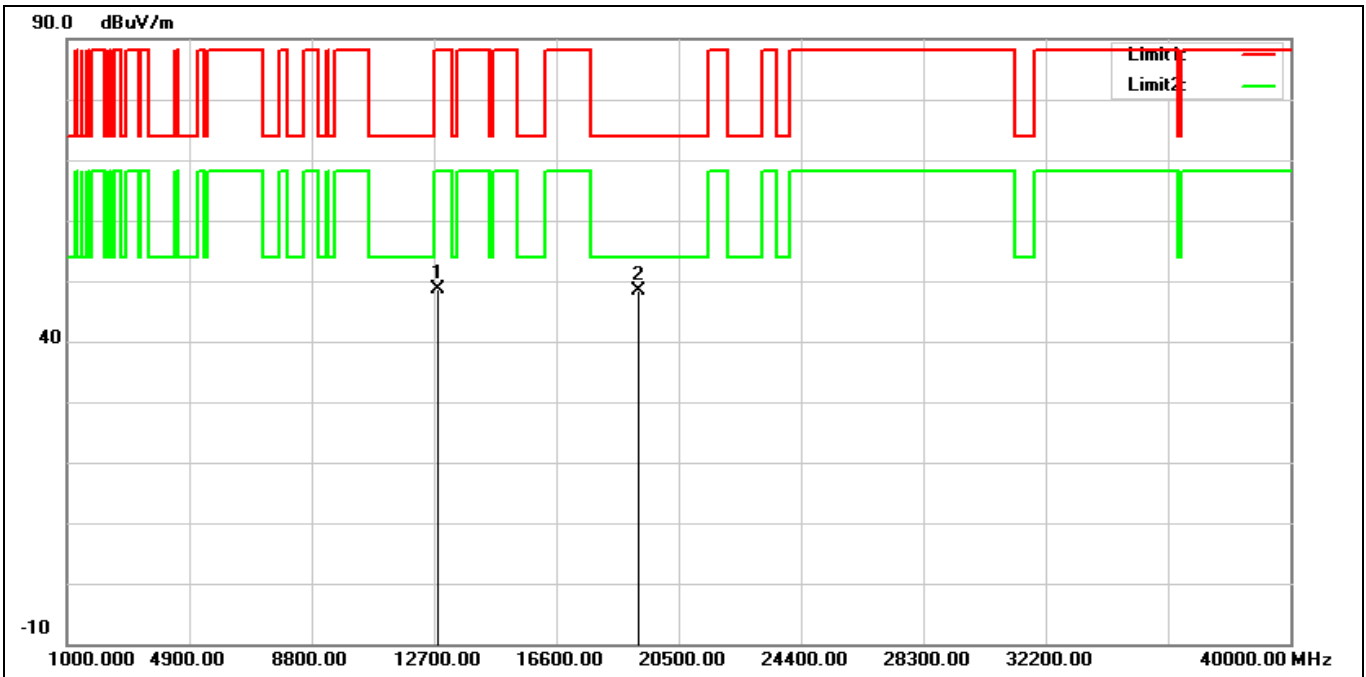


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12810.000	33.06	15.67	48.73	88.20	-39.47	peak
2*	19215.000	29.71	18.55	48.26	74.00	-25.74	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6445 MHz		
Remark:			

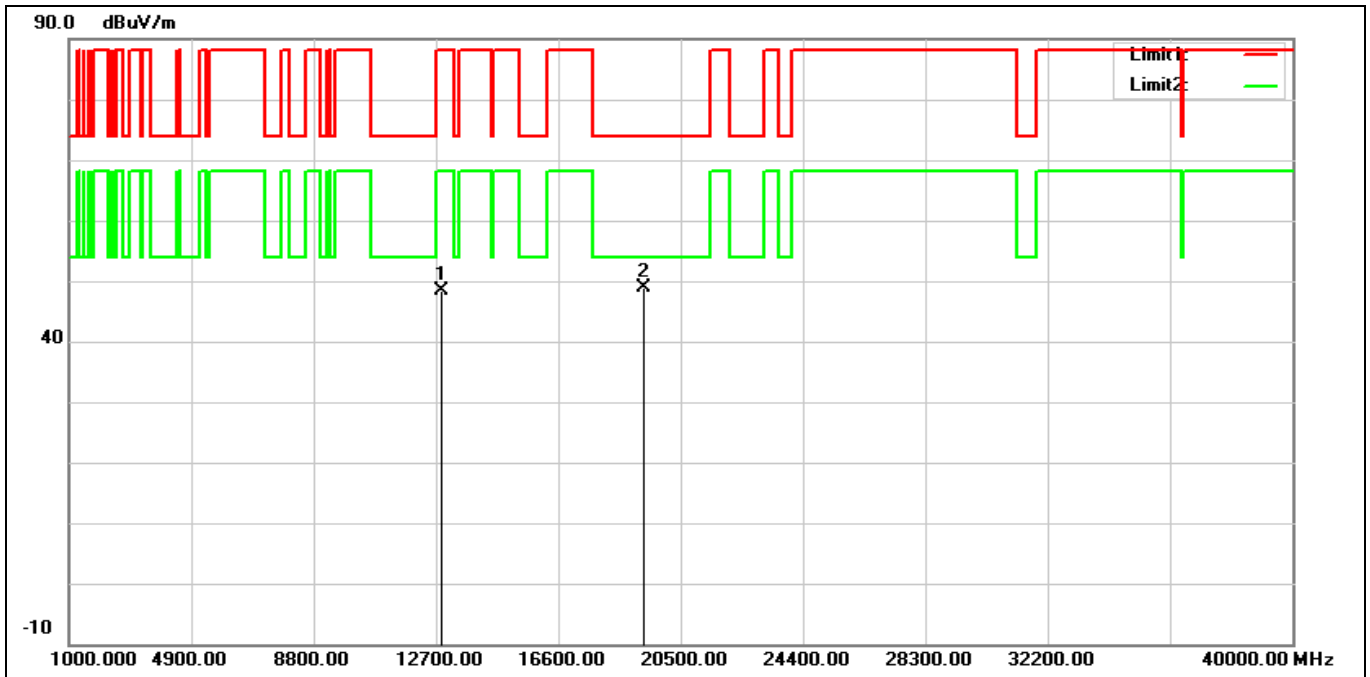


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12890.000	32.49	15.83	48.32	88.20	-39.88	peak
2*	19335.000	30.26	18.69	48.95	74.00	-25.05	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6445 MHz		
Remark:			

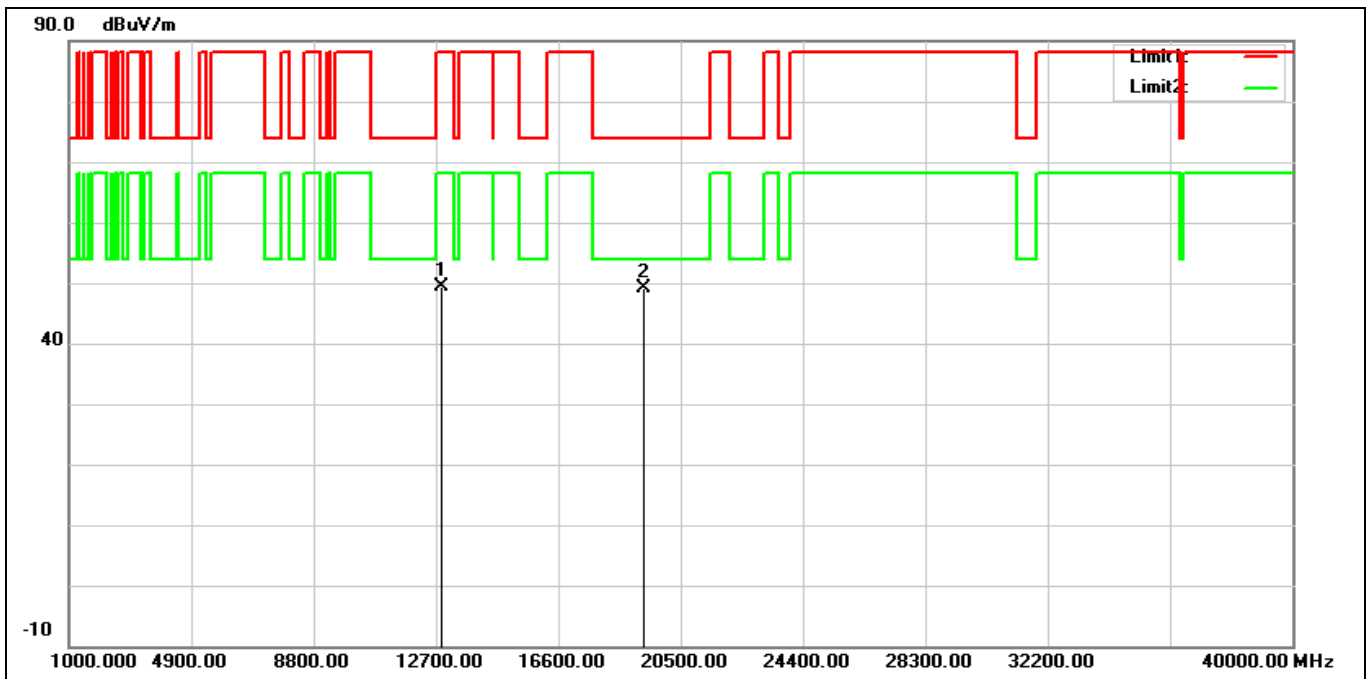


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12890.000	33.56	15.83	49.39	88.20	-38.81	peak
2*	19335.000	30.36	18.69	49.05	74.00	-24.95	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6485 MHz		
Remark:			

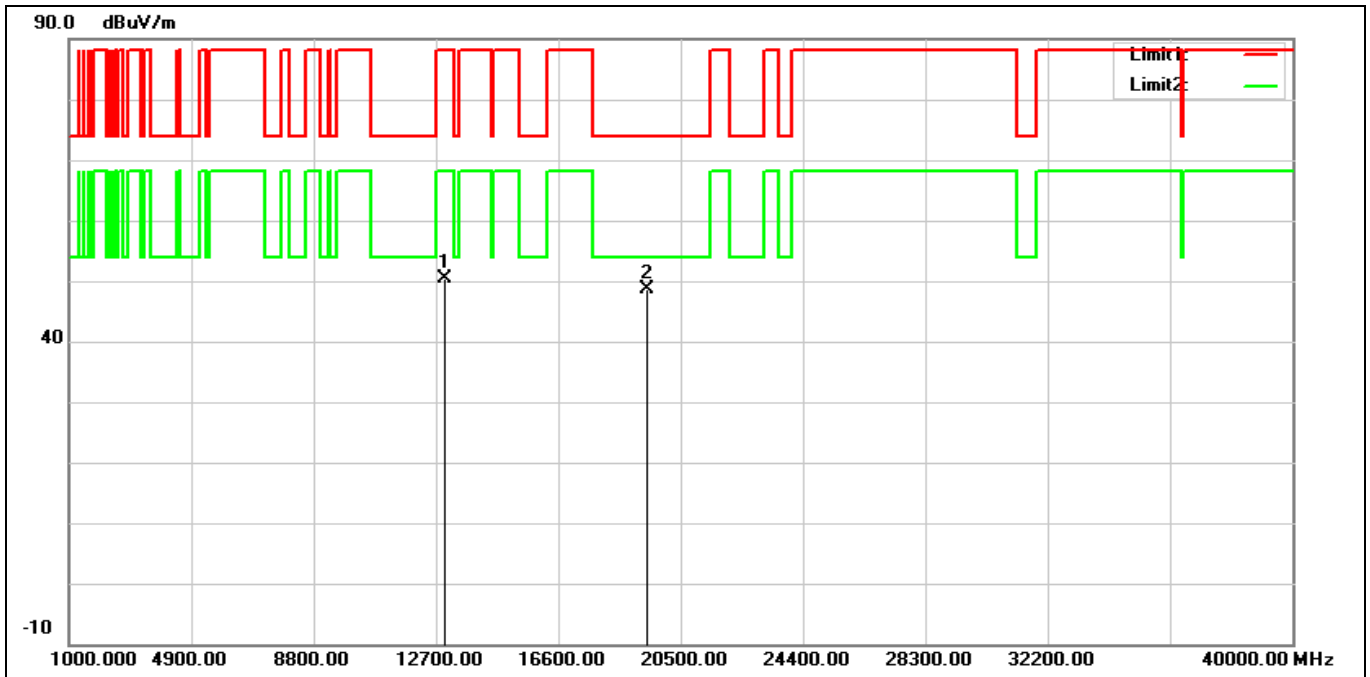

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12970.000	34.55	15.77	50.32	88.20	-37.88	peak
2*	19455.000	29.78	18.83	48.61	74.00	-25.39	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6485 MHz		
Remark:			

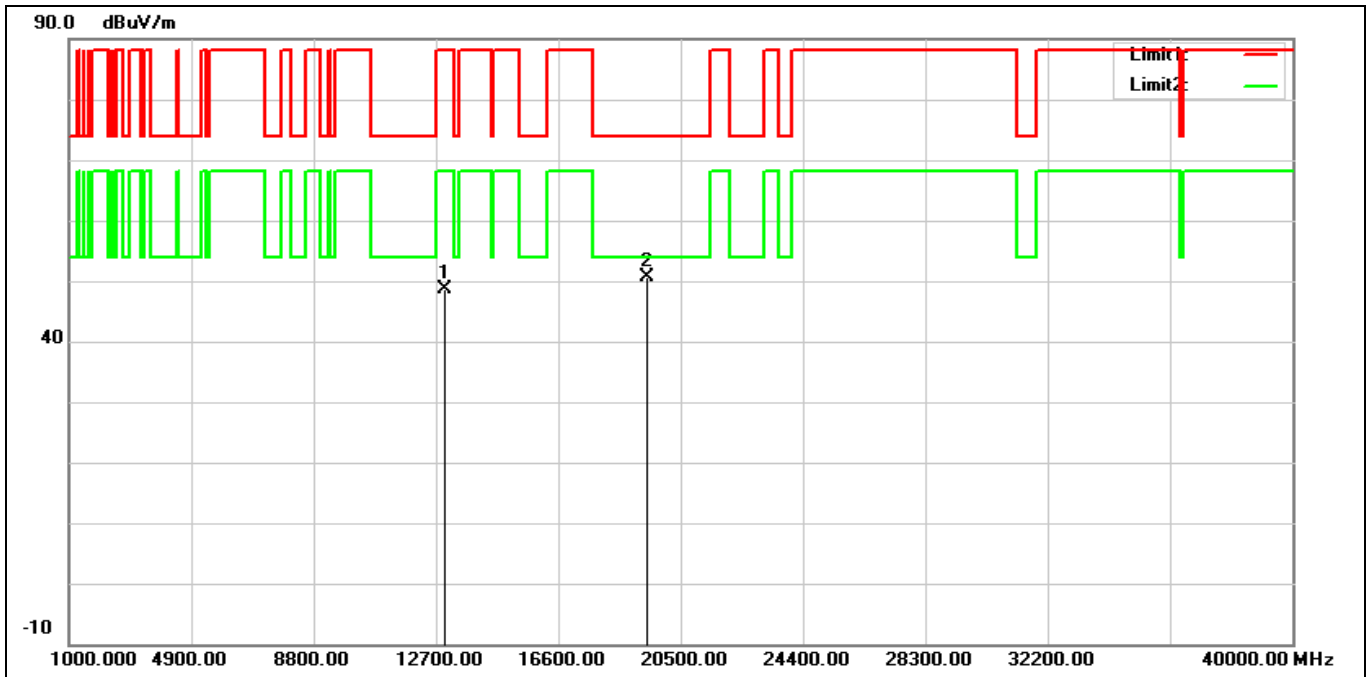

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12970.000	32.95	15.77	48.72	88.20	-39.48	peak
2*	19455.000	31.73	18.83	50.56	74.00	-23.44	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6525 MHz		
Remark:			

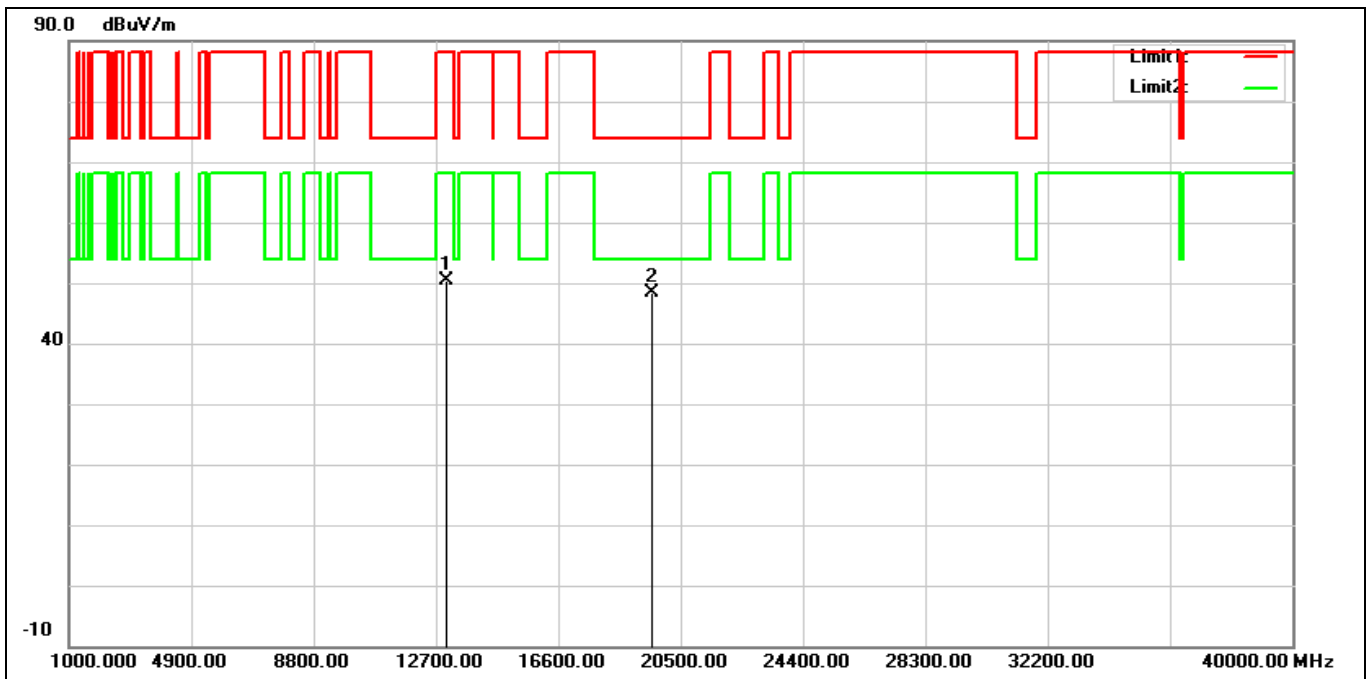


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13050.000	34.62	15.69	50.31	88.20	-37.89	peak
2*	19575.000	29.44	18.89	48.33	74.00	-25.67	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6525 MHz		
Remark:			

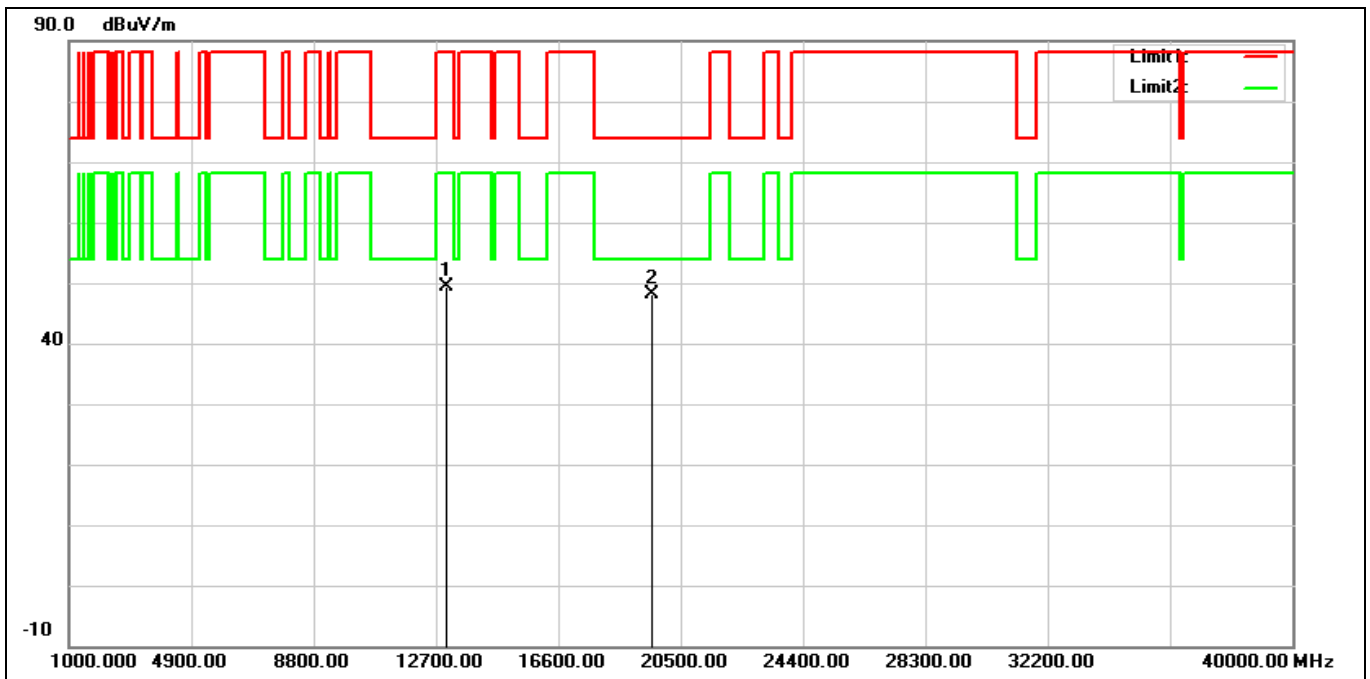


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13050.000	33.72	15.69	49.41	88.20	-38.79	peak
2*	19575.000	29.24	18.89	48.13	74.00	-25.87	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6565 MHz		
Remark:			

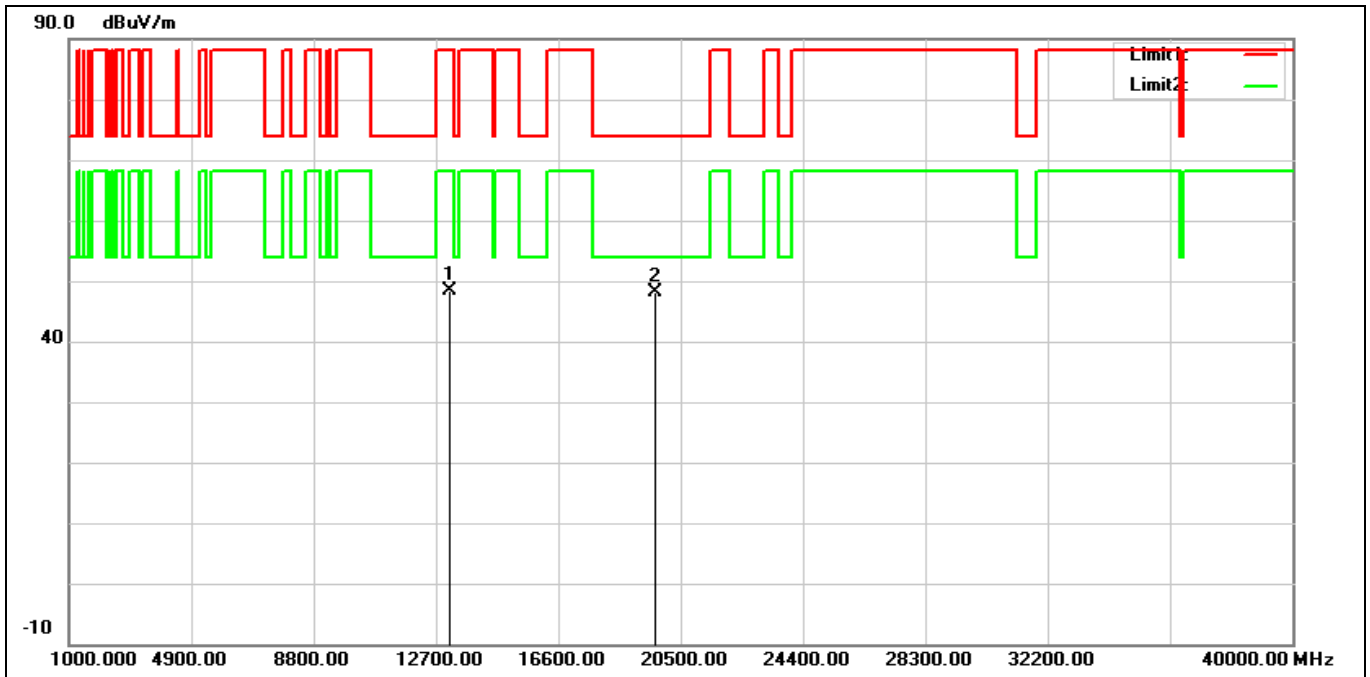


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13130.000	32.73	15.71	48.44	88.20	-39.76	peak
2*	19695.000	29.25	18.89	48.14	74.00	-25.86	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6565 MHz		
Remark:			

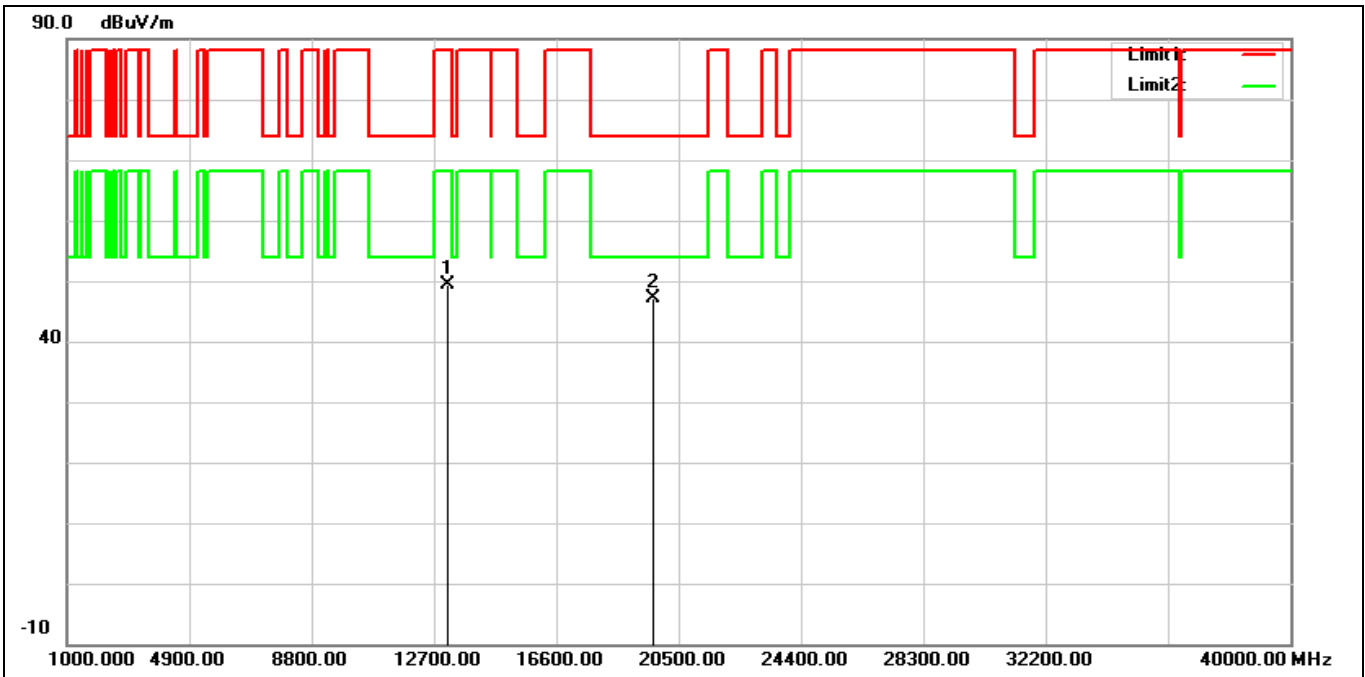


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13130.000	33.66	15.71	49.37	88.20	-38.83	peak
2*	19695.000	28.35	18.89	47.24	74.00	-26.76	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6685 MHz		
Remark:			

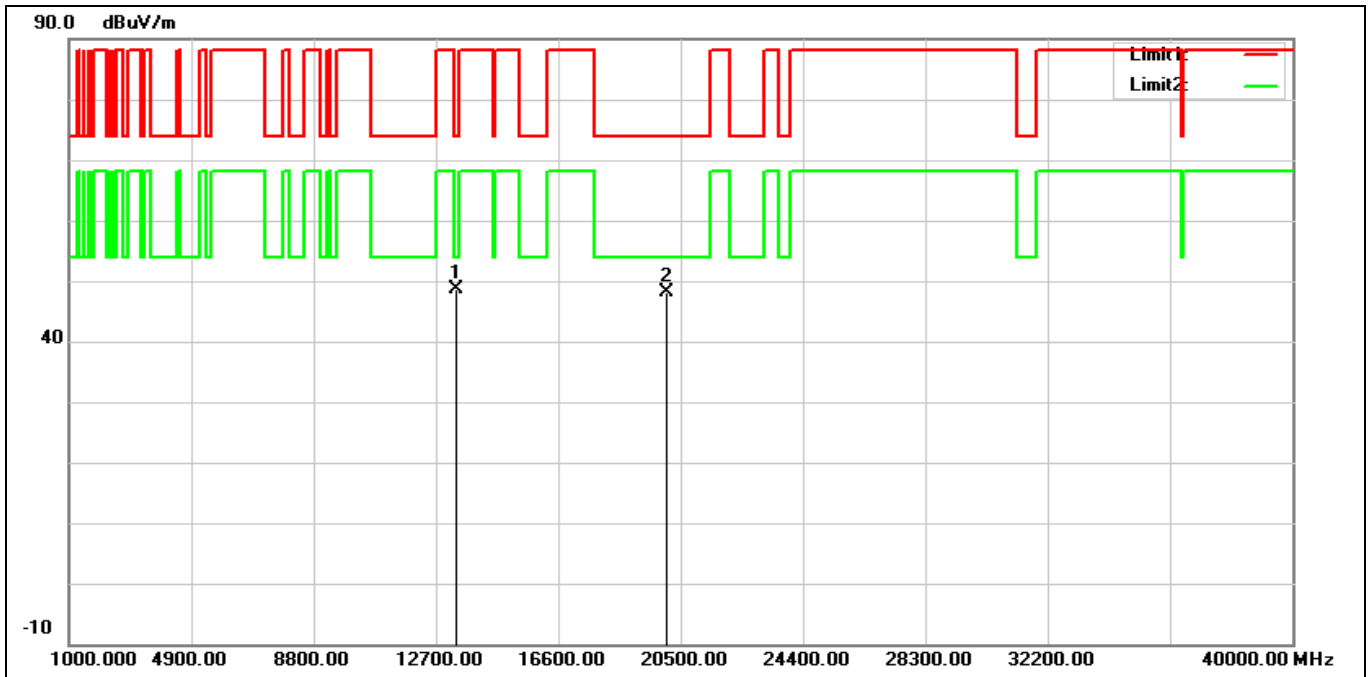


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	13370.000	32.22	16.43	48.65	74.00	-25.35	peak
2	20055.000	29.08	18.97	48.05	74.00	-25.95	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6685 MHz		
Remark:			

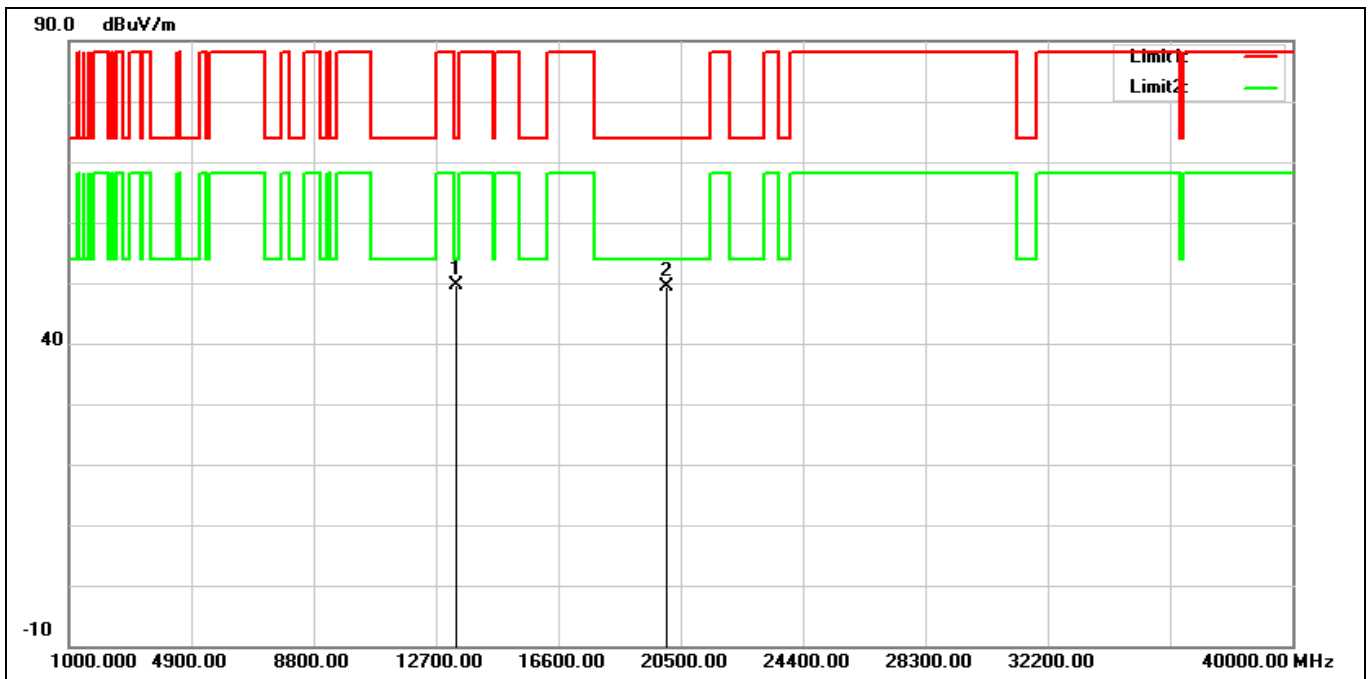


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	13370.000	33.20	16.43	49.63	74.00	-24.37	peak
2	20055.000	30.34	18.97	49.31	74.00	-24.69	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6845 MHz		
Remark:			

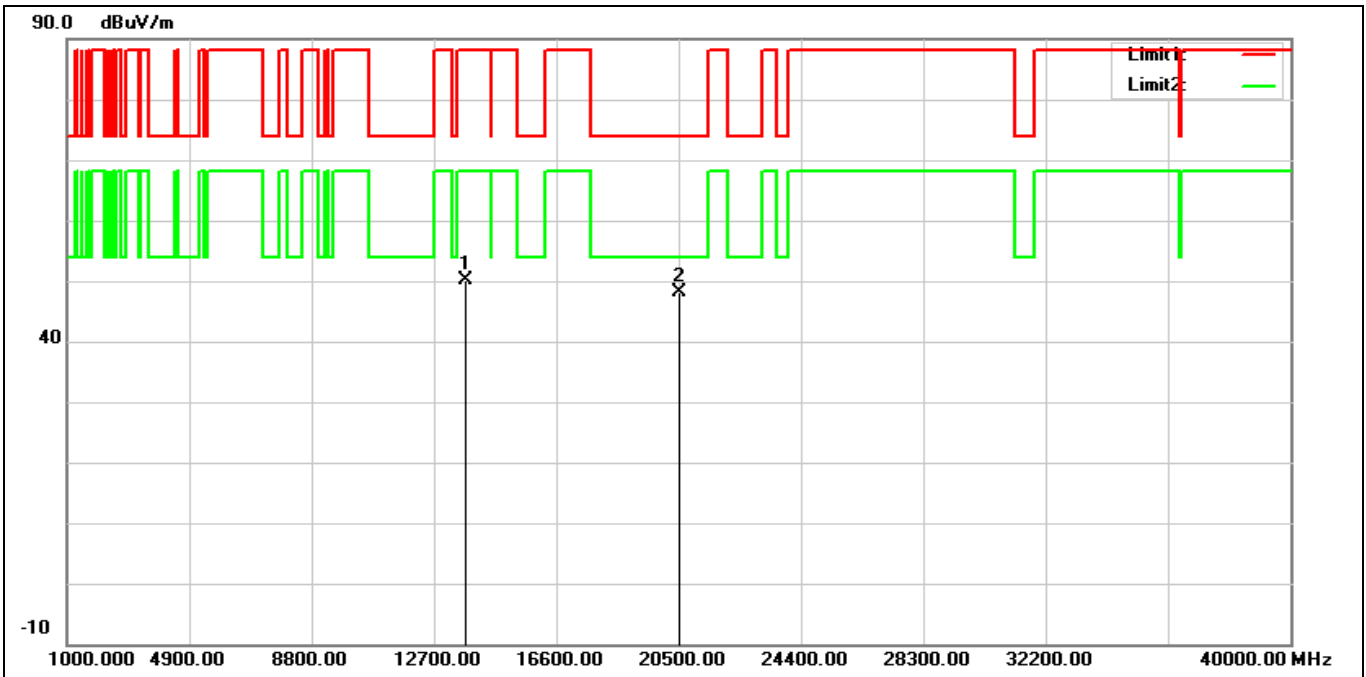

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13690.000	32.82	17.27	50.09	88.20	-38.11	peak
2*	20535.000	28.58	19.55	48.13	74.00	-25.87	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6845 MHz		
Remark:			

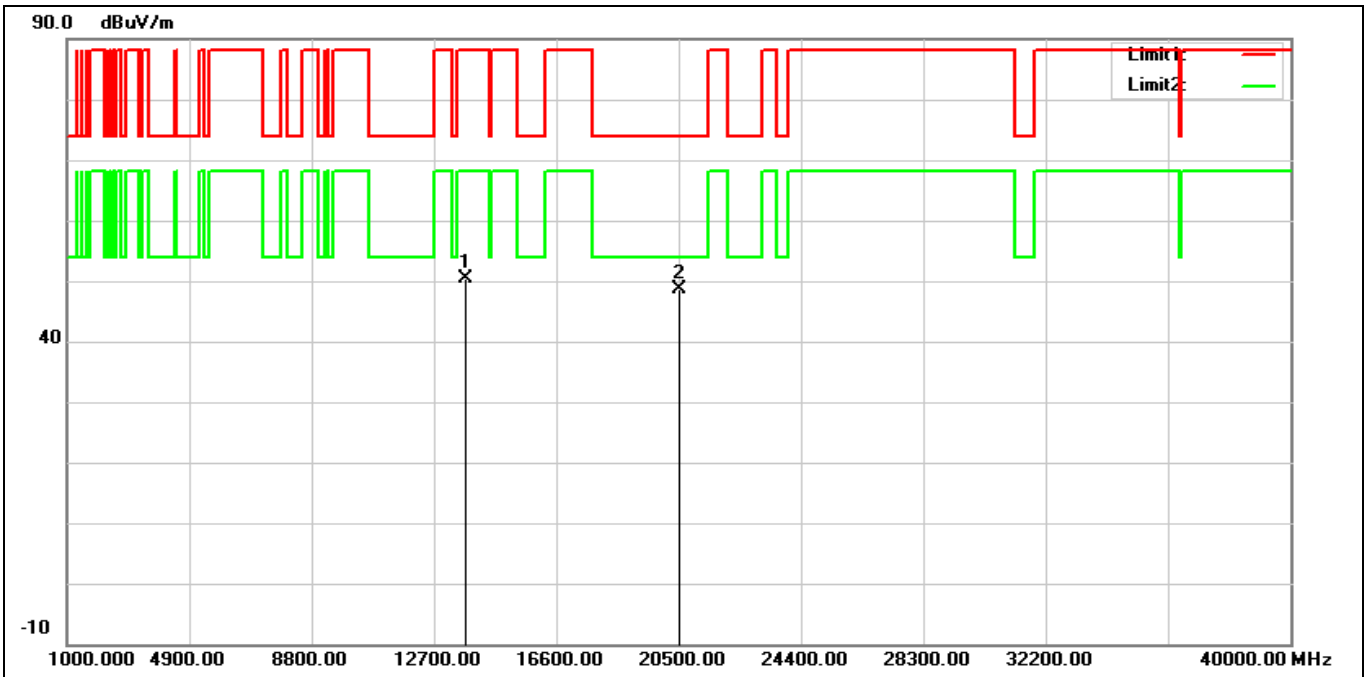

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13690.000	32.99	17.27	50.26	88.20	-37.94	peak
2*	20535.000	29.15	19.55	48.70	74.00	-25.30	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6885 MHz		
Remark:			

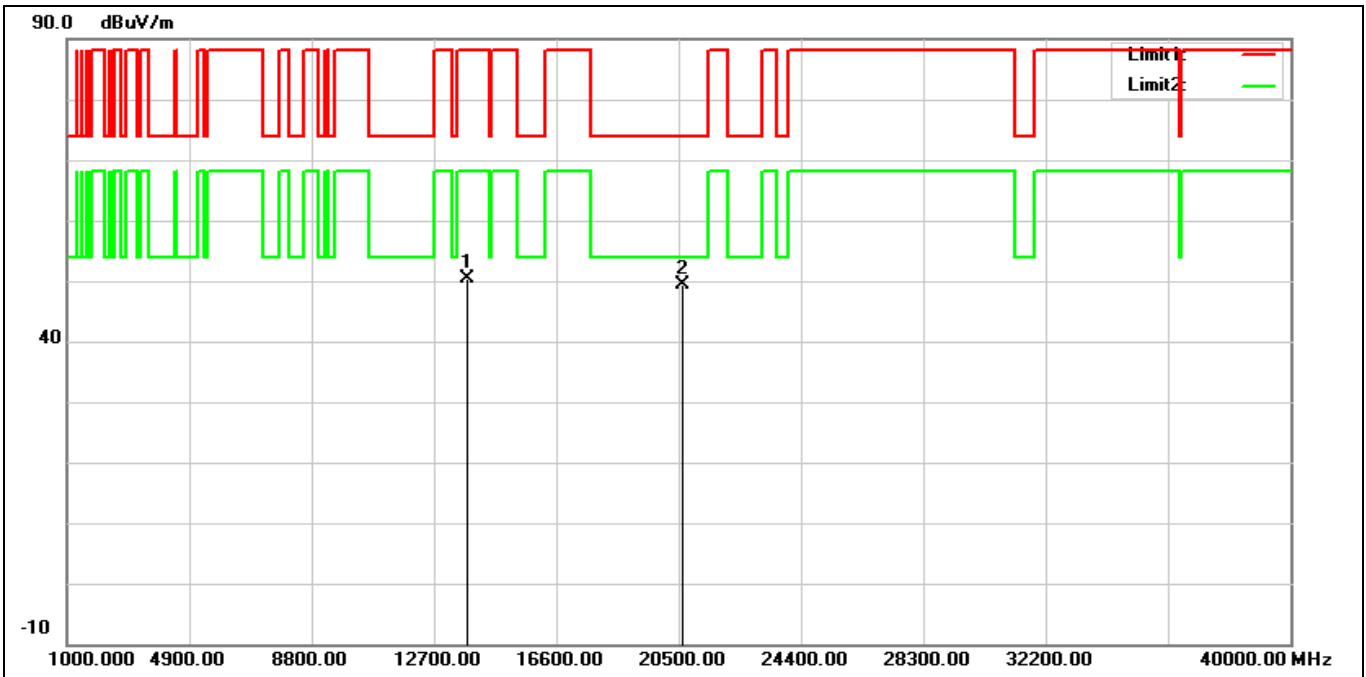


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13770.000	33.20	17.14	50.34	88.20	-37.86	peak
2*	20655.000	29.82	19.62	49.44	74.00	-24.56	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6885 MHz		
Remark:			

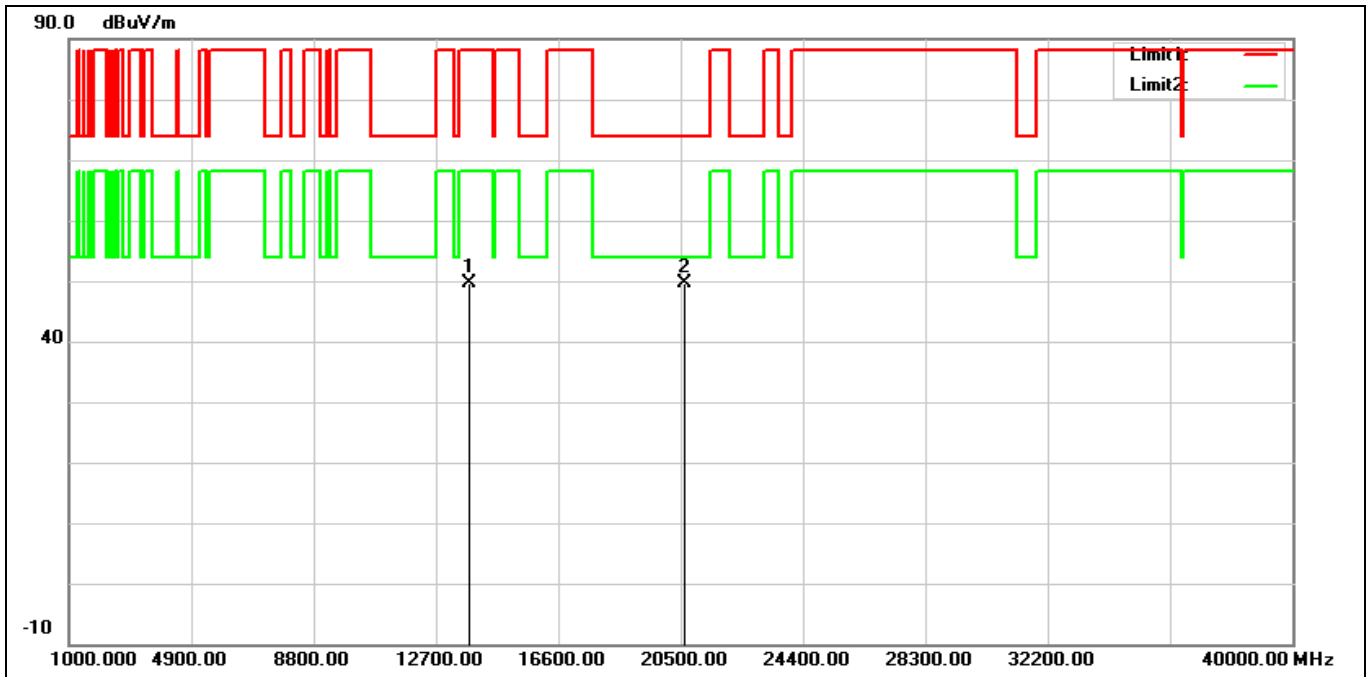


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13770.000	32.41	17.14	49.55	88.20	-38.65	peak
2*	20655.000	30.10	19.62	49.72	74.00	-24.28	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6925 MHz		
Remark:			

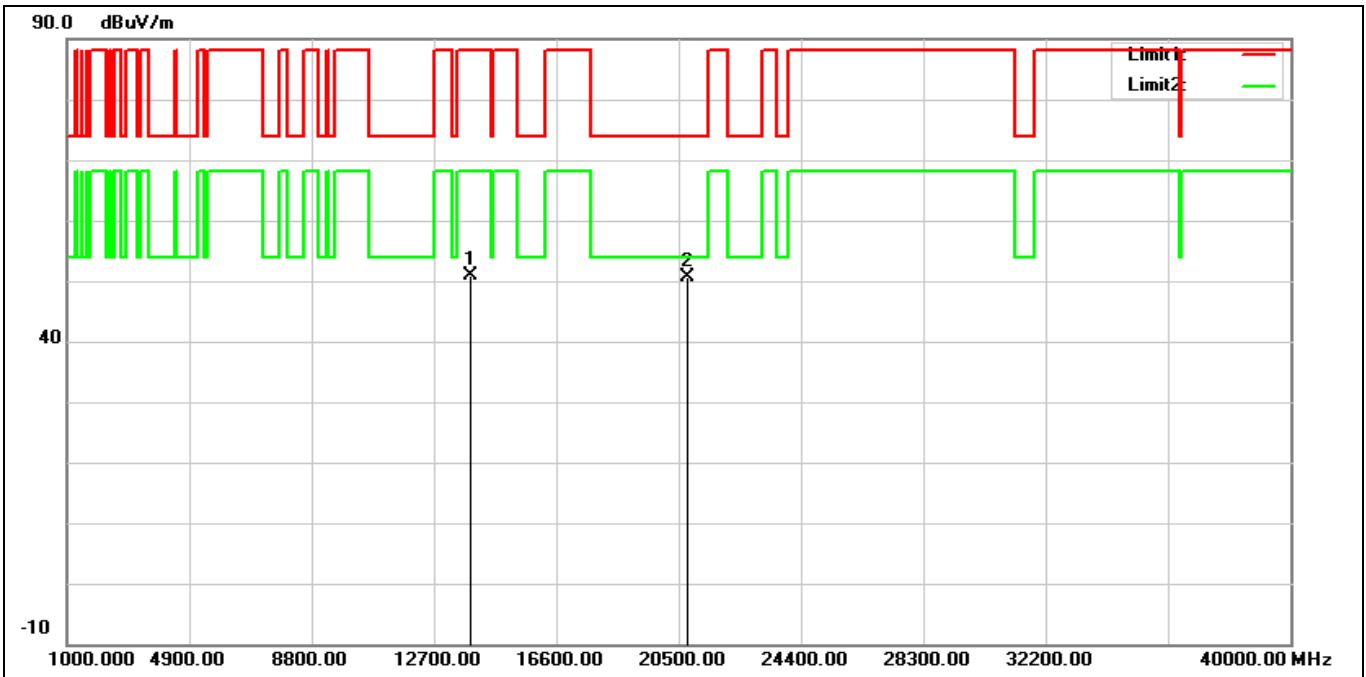


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13850.000	33.45	17.38	50.83	88.20	-37.37	peak
2*	20775.000	31.00	19.69	50.69	74.00	-23.31	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6925 MHz		
Remark:			

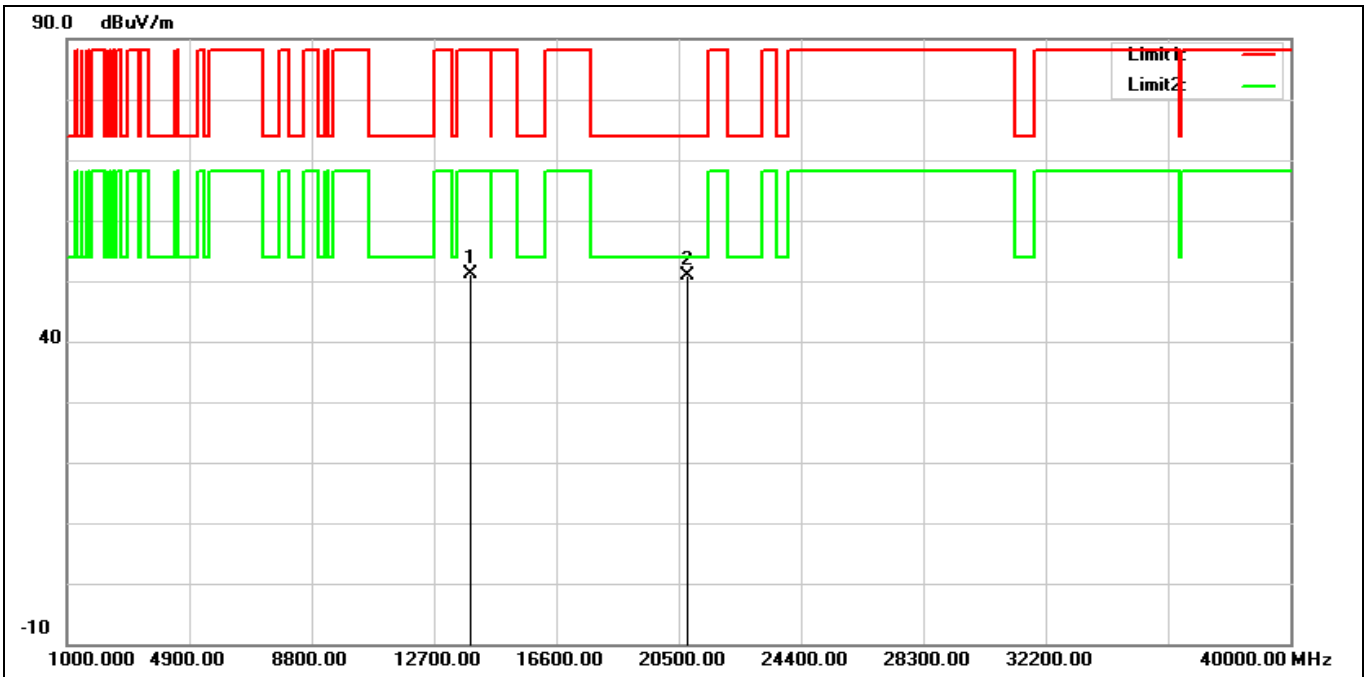


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13850.000	33.74	17.38	51.12	88.20	-37.08	peak
2*	20775.000	31.30	19.69	50.99	74.00	-23.01	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 7005 MHz		
Remark:			

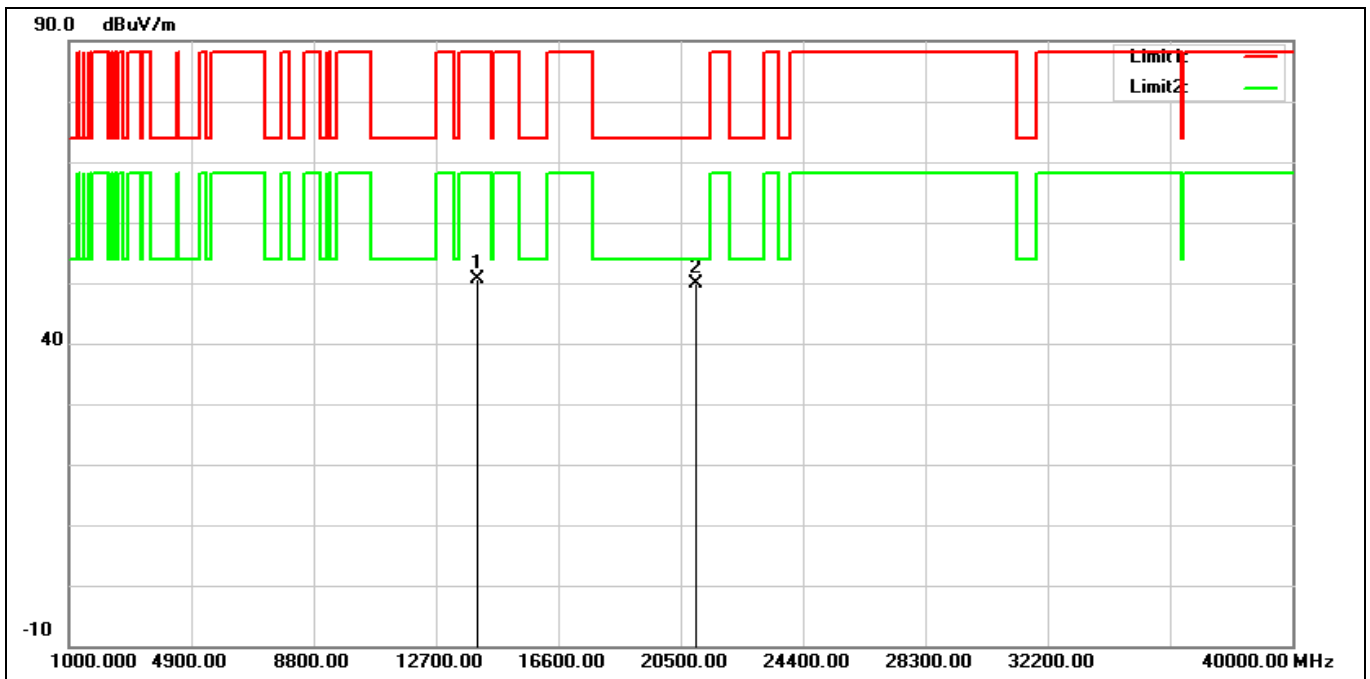


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14010.000	32.76	17.91	50.67	88.20	-37.53	peak
2*	21015.000	30.04	19.79	49.83	74.00	-24.17	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 7005 MHz		
Remark:			

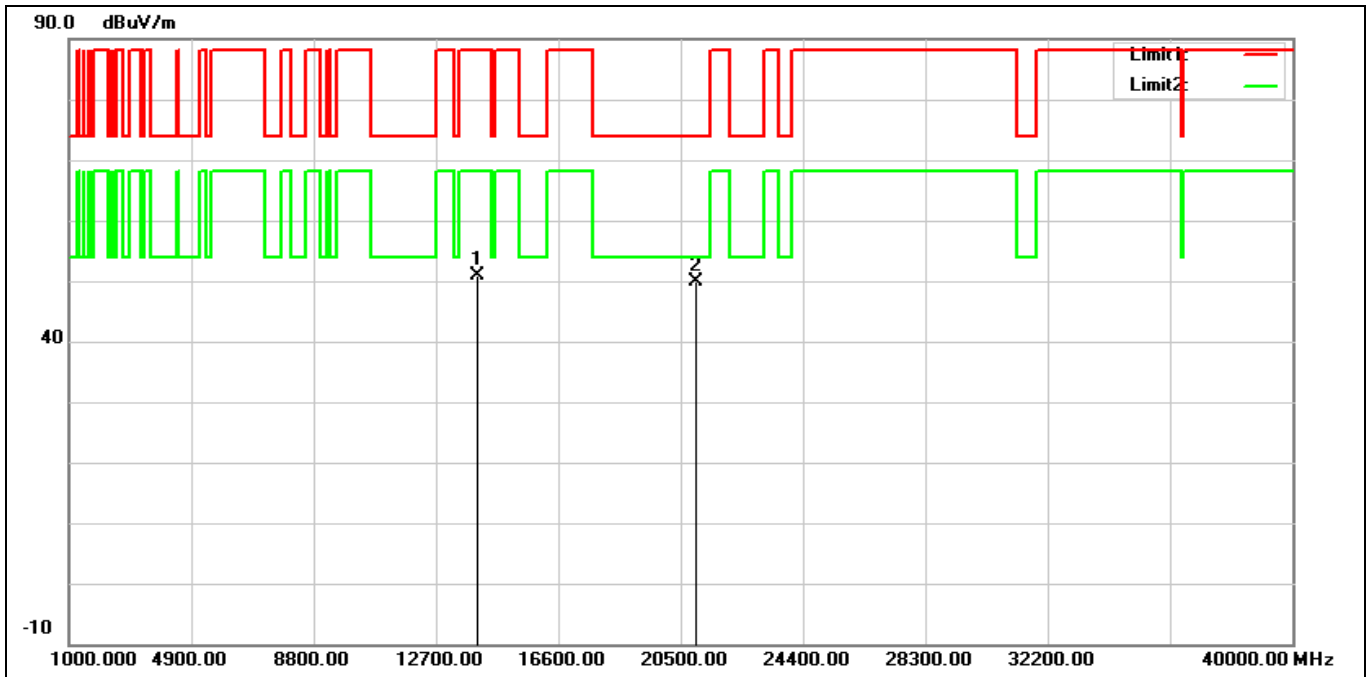


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14010.000	32.85	17.91	50.76	88.20	-37.44	peak
2*	21015.000	30.03	19.79	49.82	74.00	-24.18	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 7085 MHz		
Remark:			

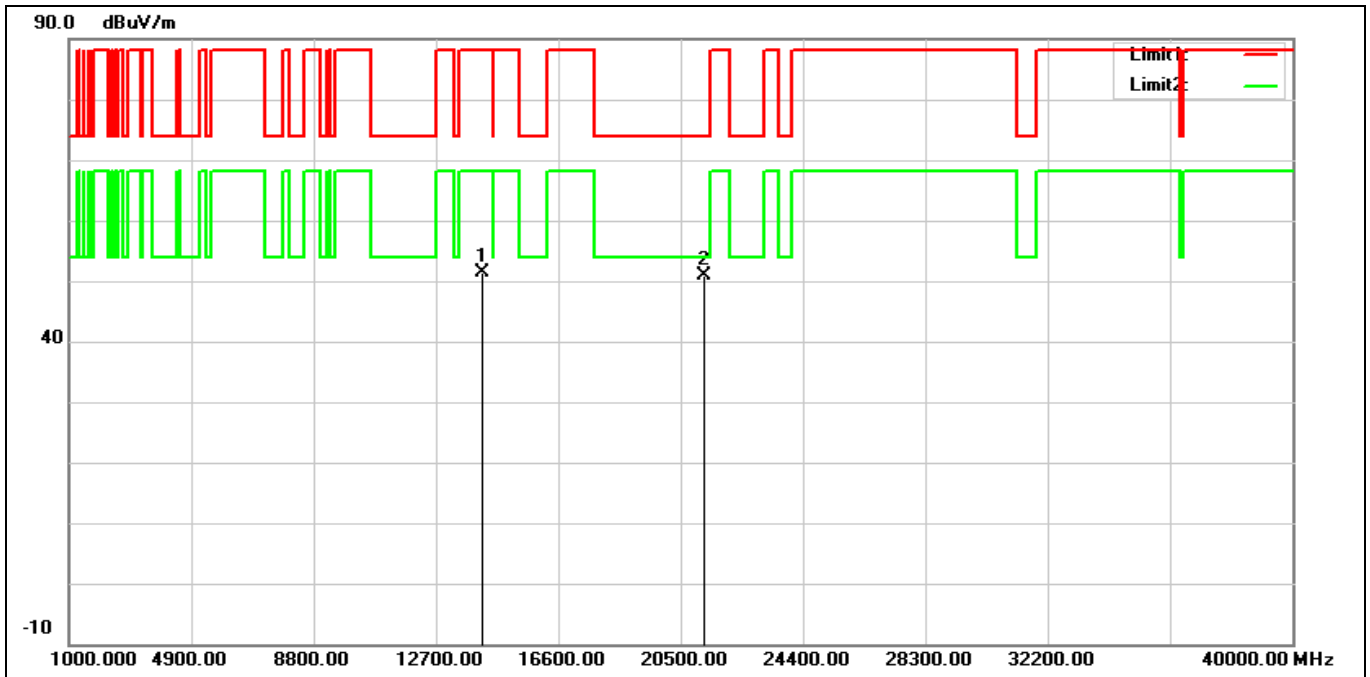

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14170.000	32.92	18.44	51.36	88.20	-36.84	peak
2*	21255.000	31.29	19.47	50.76	74.00	-23.24	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 7085 MHz		
Remark:			

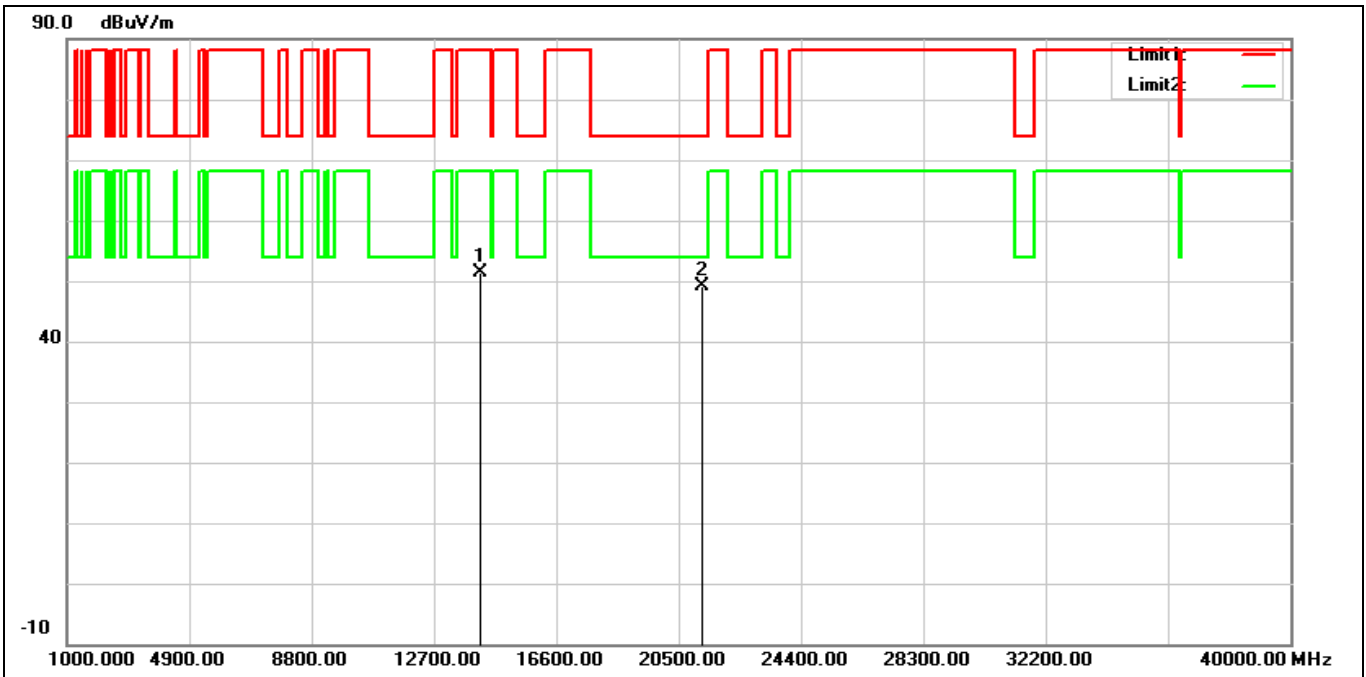

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14170.000	33.06	18.44	51.50	88.20	-36.70	peak
2*	21255.000	29.59	19.47	49.06	74.00	-24.94	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5985 MHz		
Remark:			

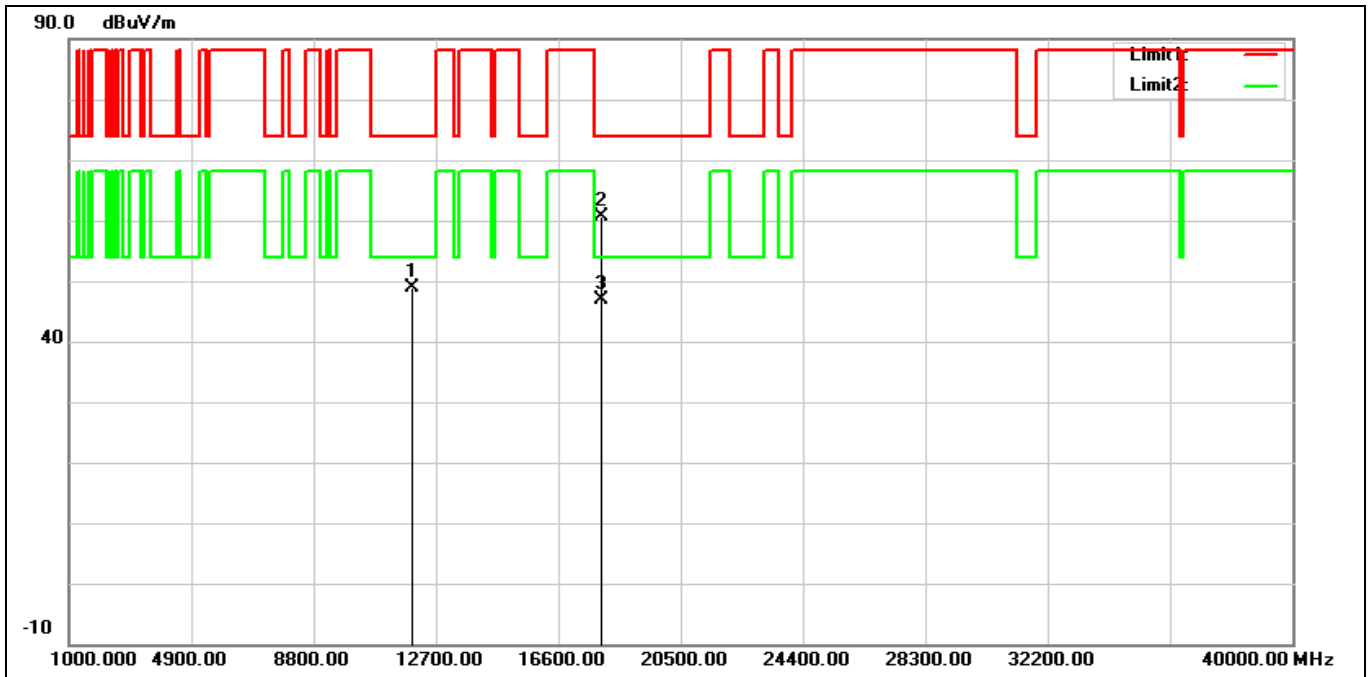


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11970.000	34.01	14.83	48.84	74.00	-25.16	peak
2	17955.000	32.32	28.19	60.51	74.00	-13.49	peak
3*	17955.000	18.67	28.19	46.86	54.00	-7.14	AVG

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5985 MHz		
Remark:			

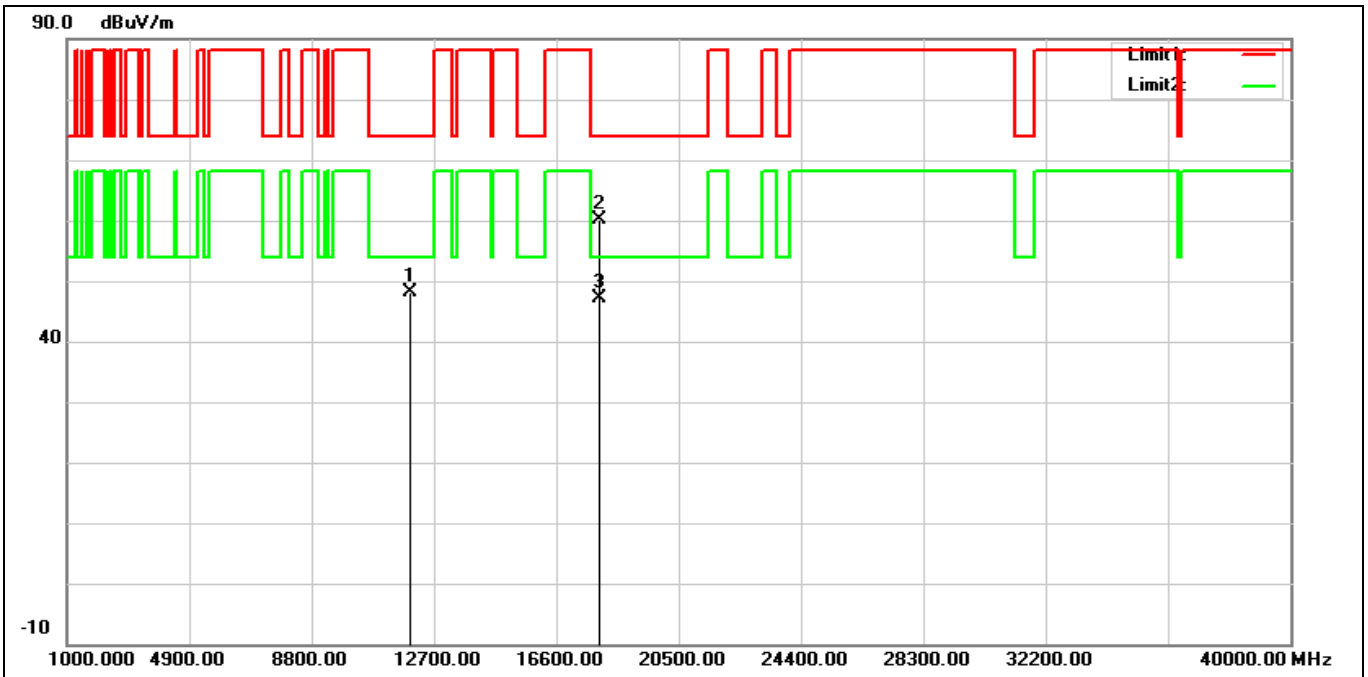


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11970.000	33.25	14.83	48.08	74.00	-25.92	peak
2	17955.000	32.05	28.19	60.24	74.00	-13.76	peak
3*	17955.000	18.89	28.19	47.08	54.00	-6.92	AVG

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6145 MHz		
Remark:			

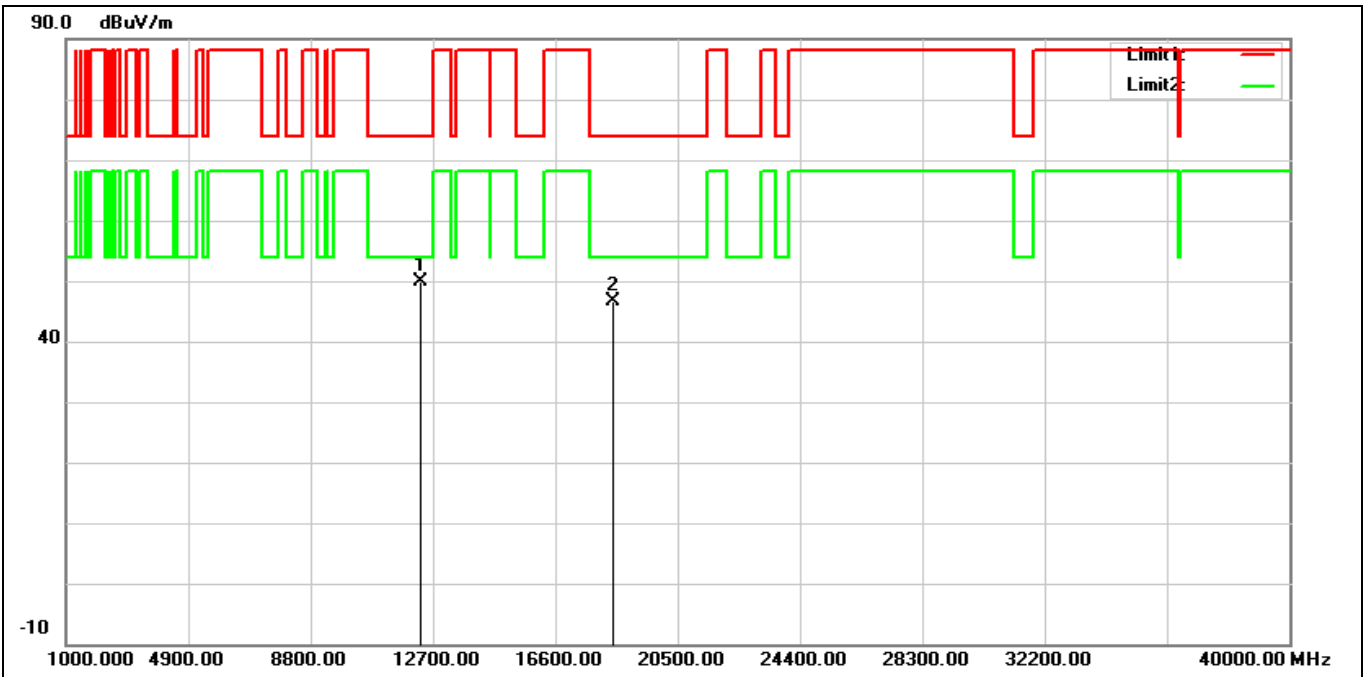


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12290.000	34.62	15.18	49.80	74.00	-24.20	peak
2	18435.000	28.90	17.82	46.72	74.00	-27.28	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6145 MHz		
Remark:			

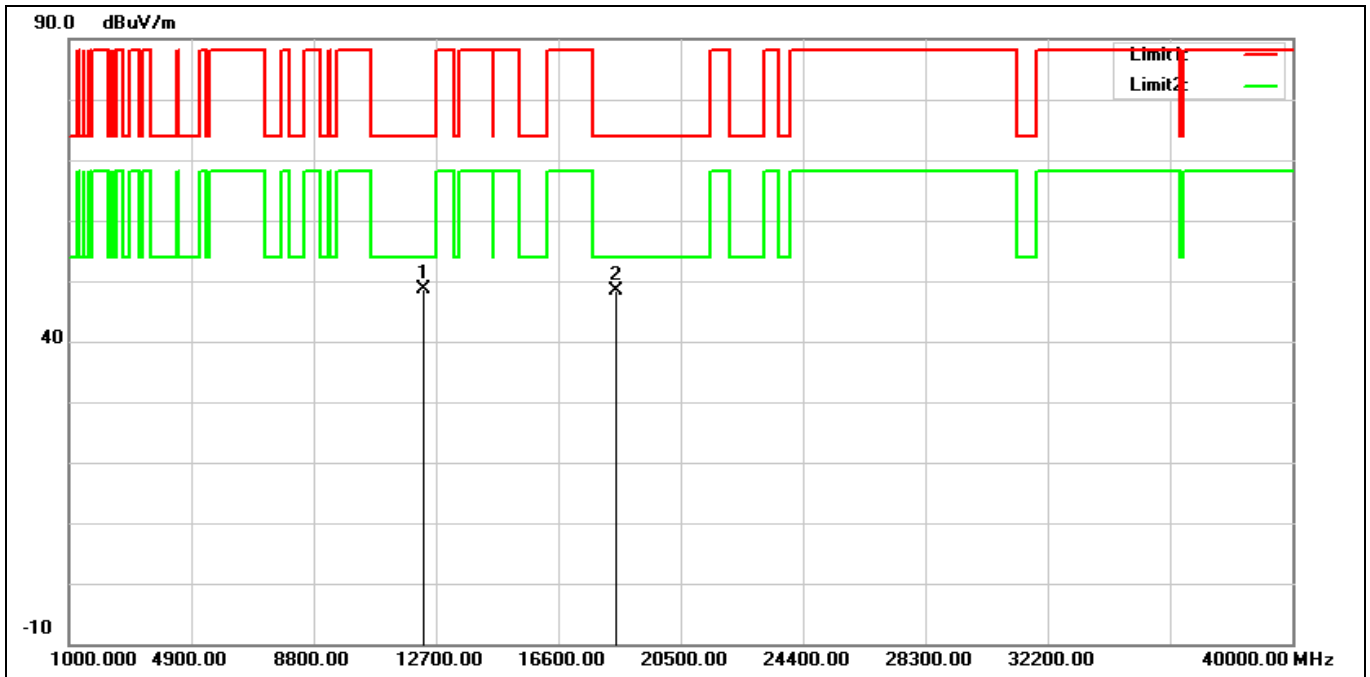


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12290.000	33.52	15.18	48.70	74.00	-25.30	peak
2	18435.000	30.47	17.82	48.29	74.00	-25.71	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6385 MHz		
Remark:			

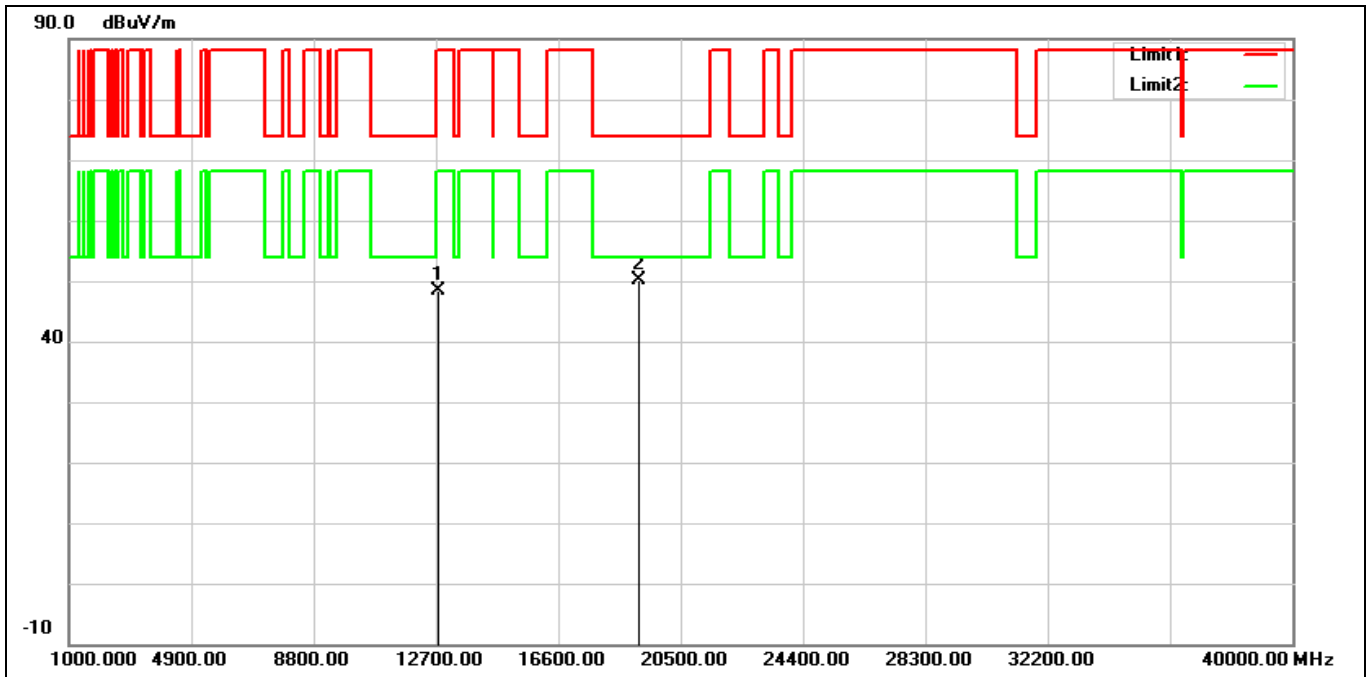


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12770.000	32.86	15.59	48.45	88.20	-39.75	peak
2*	19155.000	31.67	18.48	50.15	74.00	-23.85	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6385 MHz		
Remark:			

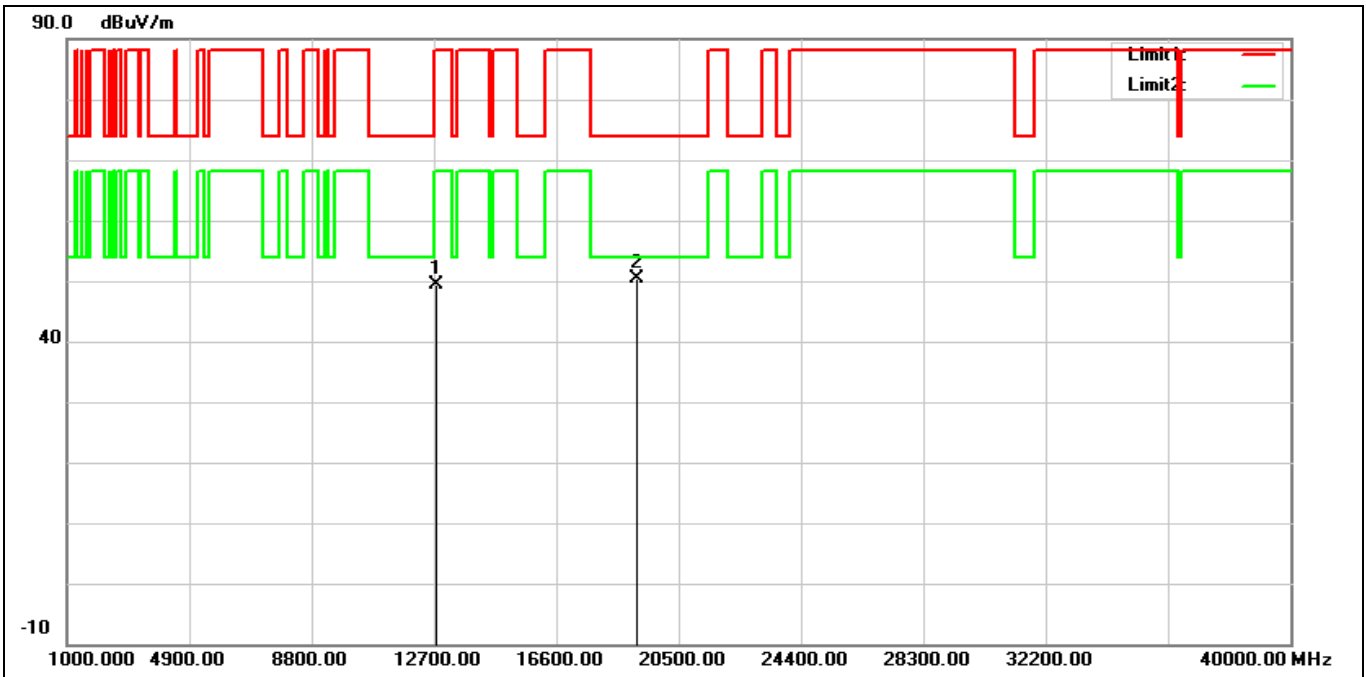


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12770.000	33.81	15.59	49.40	88.20	-38.80	peak
2*	19155.000	31.85	18.48	50.33	74.00	-23.67	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6415 MHz		
Remark:			

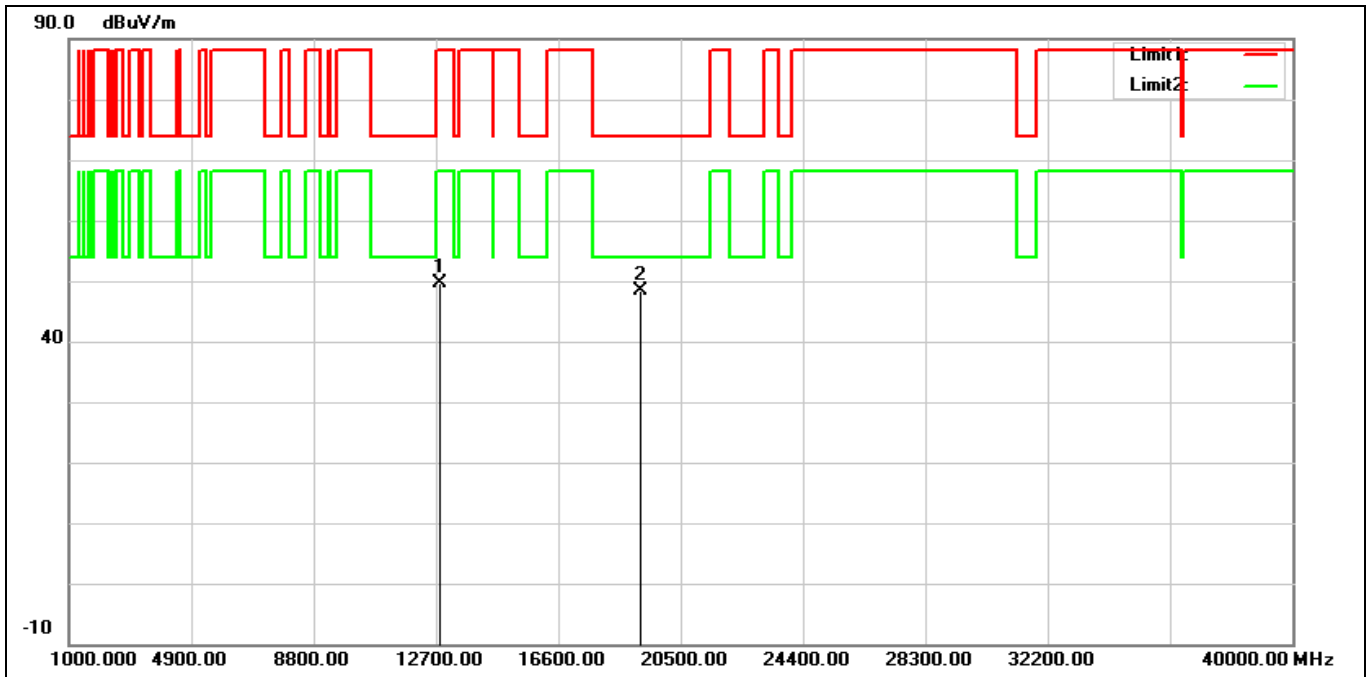

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12830.000	33.84	15.71	49.55	88.20	-38.65	peak
2*	19245.000	29.77	18.58	48.35	74.00	-25.65	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6415 MHz		
Remark:			

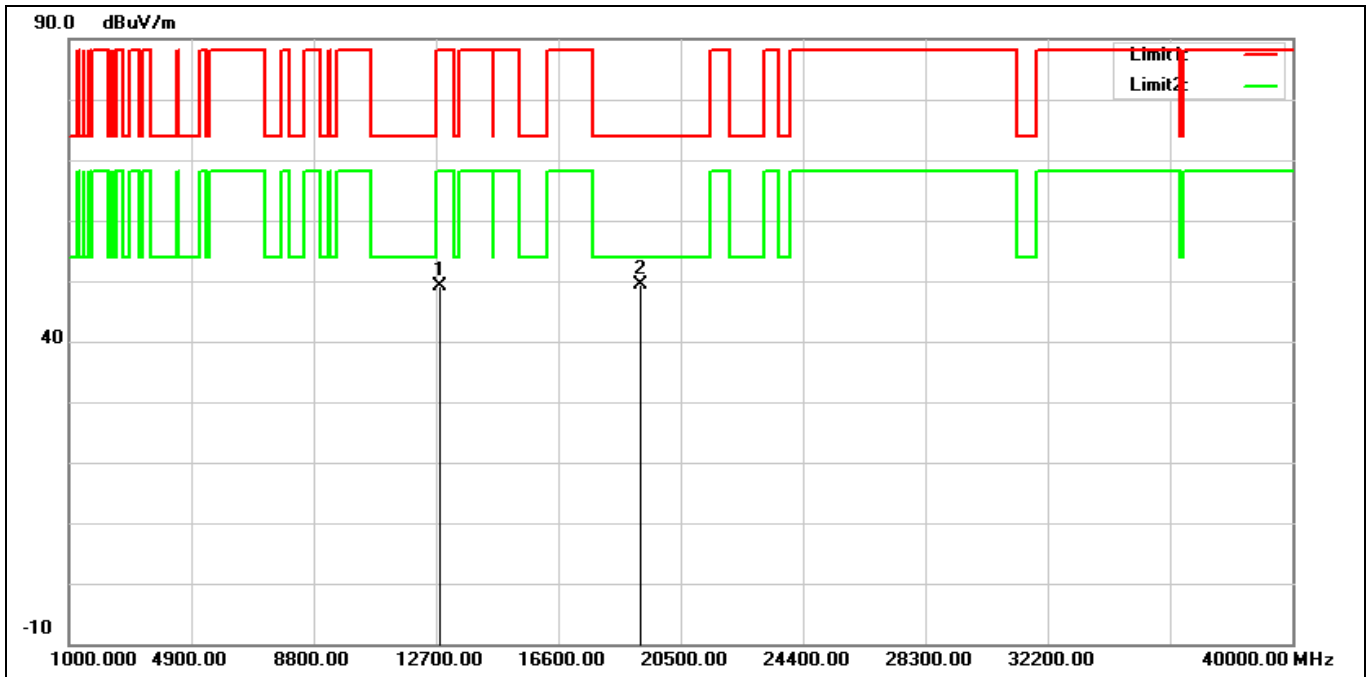

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12830.000	33.52	15.71	49.23	88.20	-38.97	peak
2*	19245.000	30.70	18.58	49.28	74.00	-24.72	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6465 MHz		
Remark:			

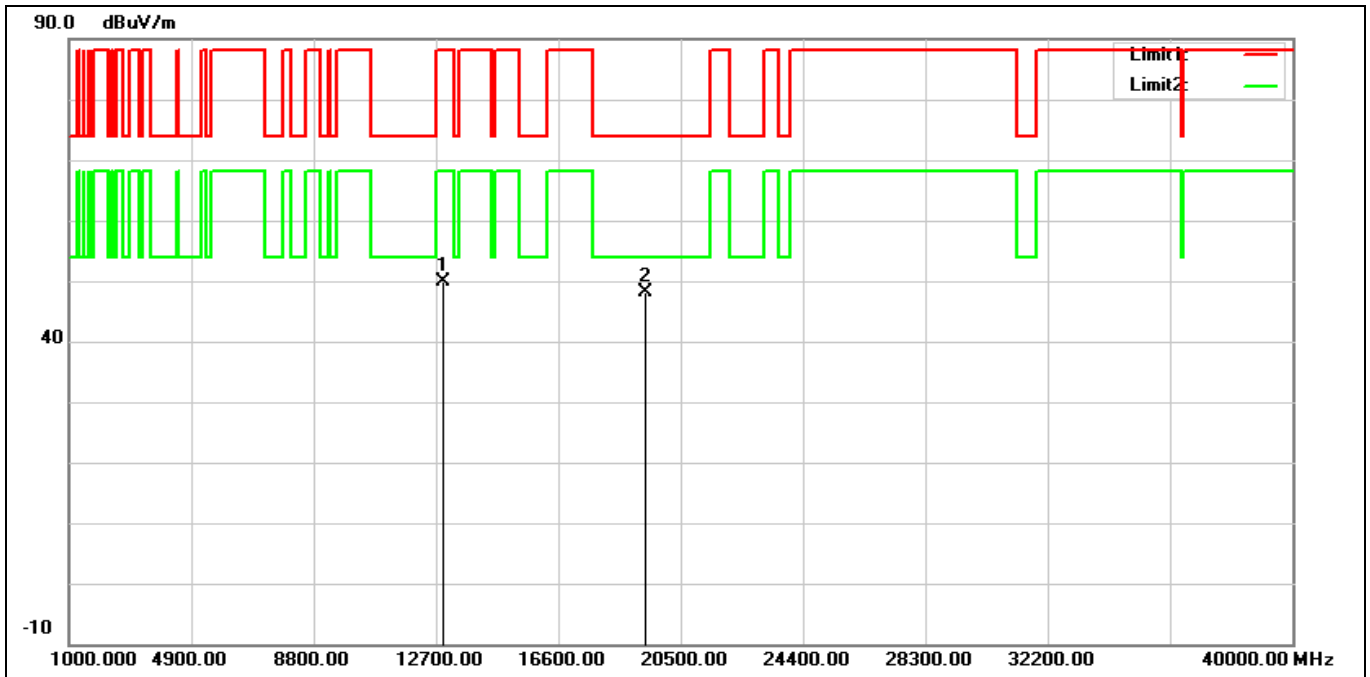


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12930.000	34.02	15.82	49.84	88.20	-38.36	peak
2*	19395.000	29.36	18.76	48.12	74.00	-25.88	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6465 MHz		
Remark:			

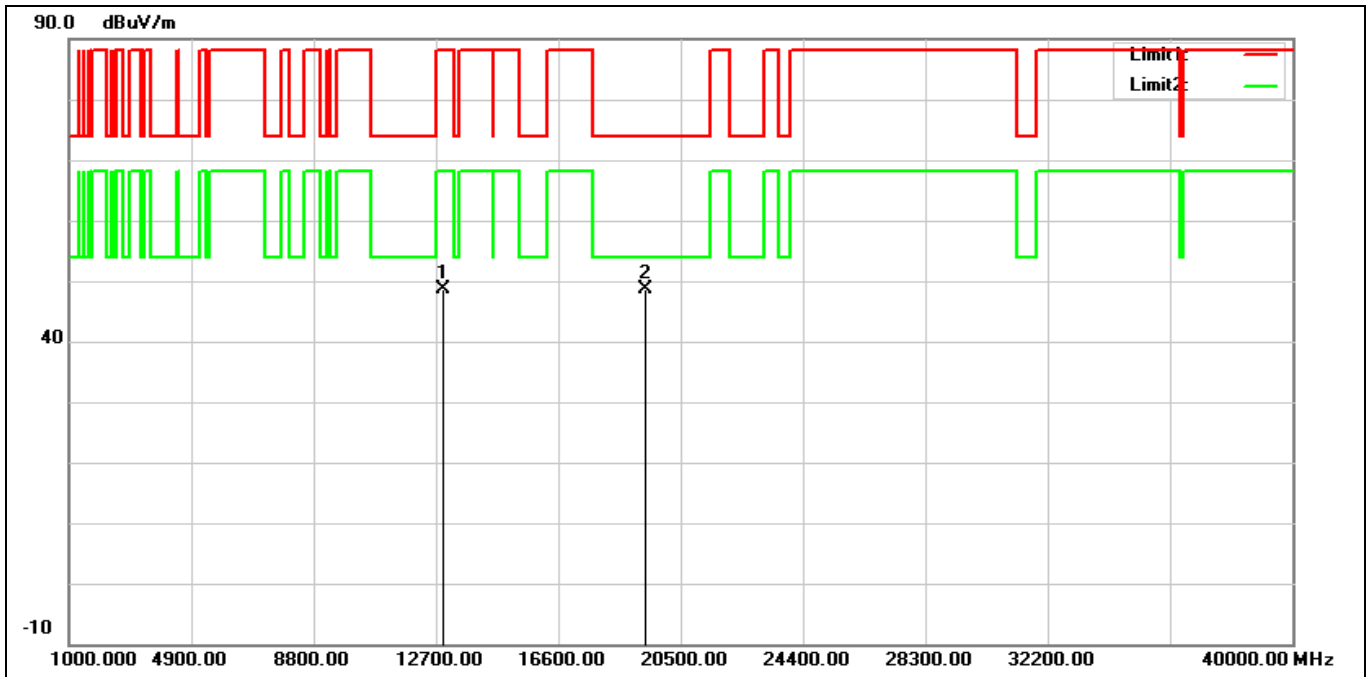


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12930.000	32.84	15.82	48.66	88.20	-39.54	peak
2*	19395.000	29.85	18.76	48.61	74.00	-25.39	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6545 MHz		
Remark:			

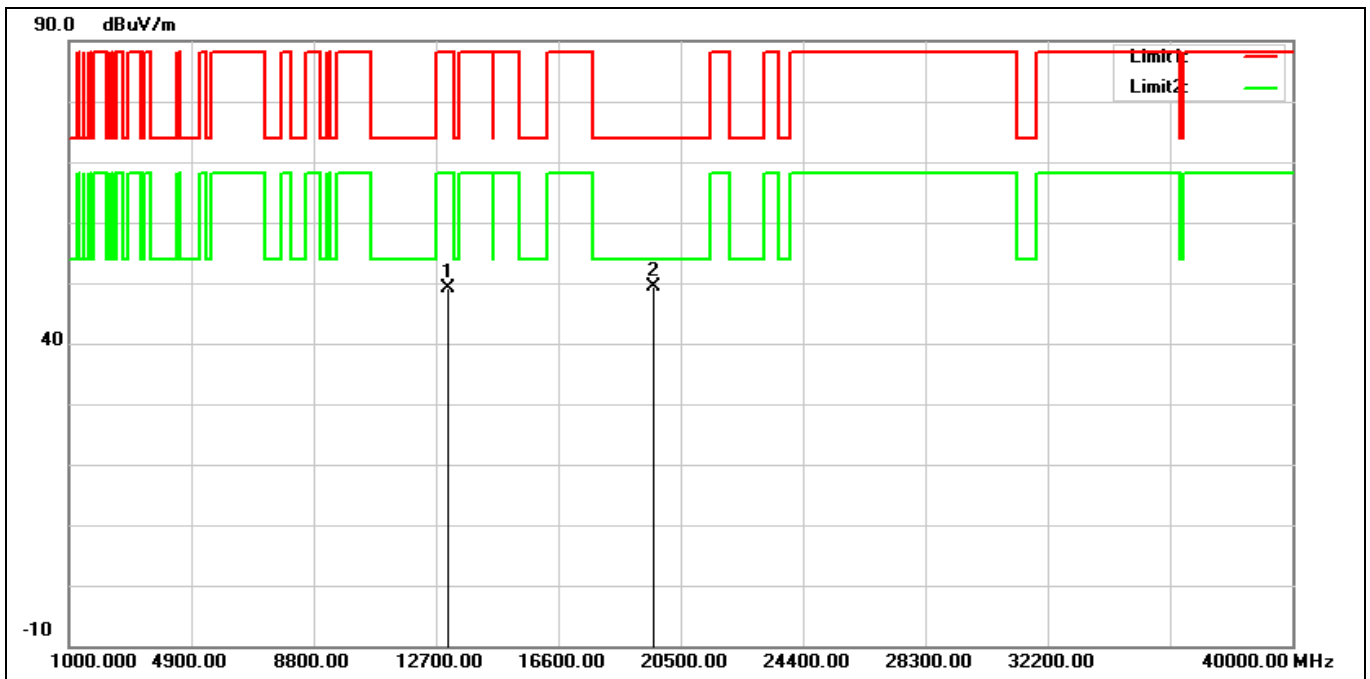


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13090.000	33.39	15.66	49.05	88.20	-39.15	peak
2*	19635.000	30.55	18.89	49.44	74.00	-24.56	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6545 MHz		
Remark:			

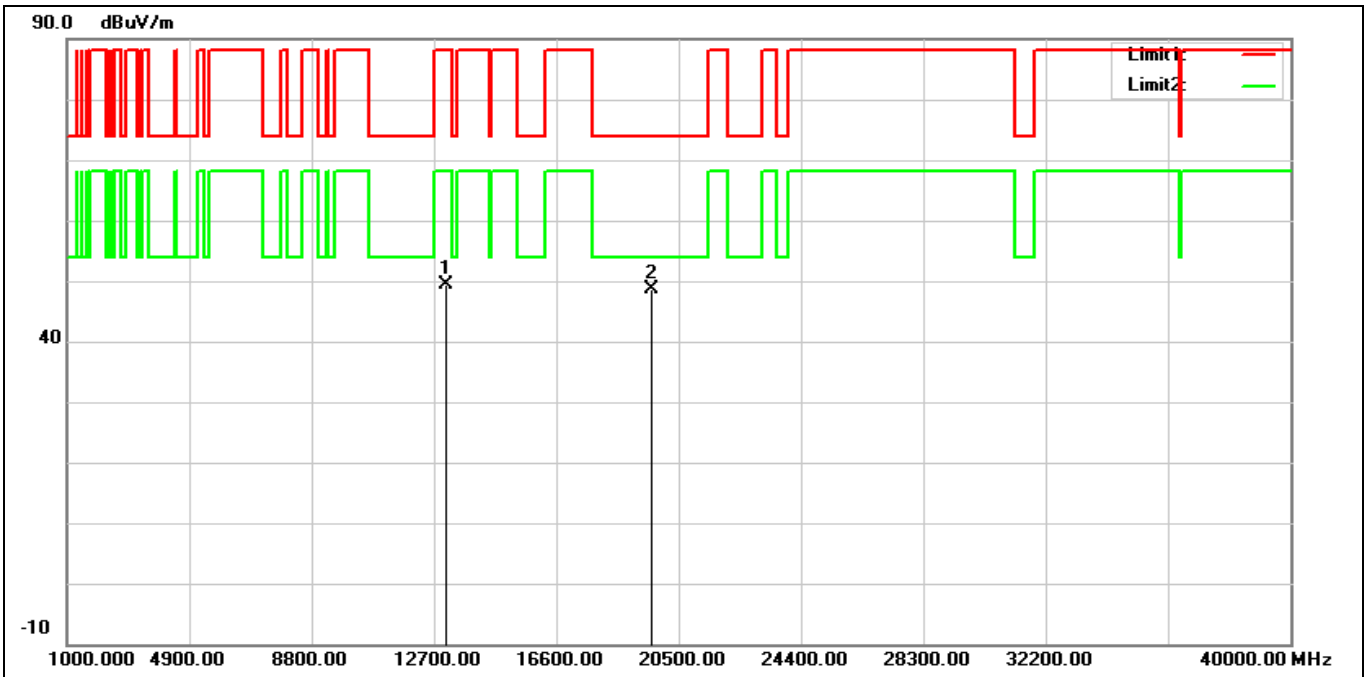


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13090.000	33.82	15.66	49.48	88.20	-38.72	peak
2*	19635.000	29.66	18.89	48.55	74.00	-25.45	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6625 MHz		
Remark:			

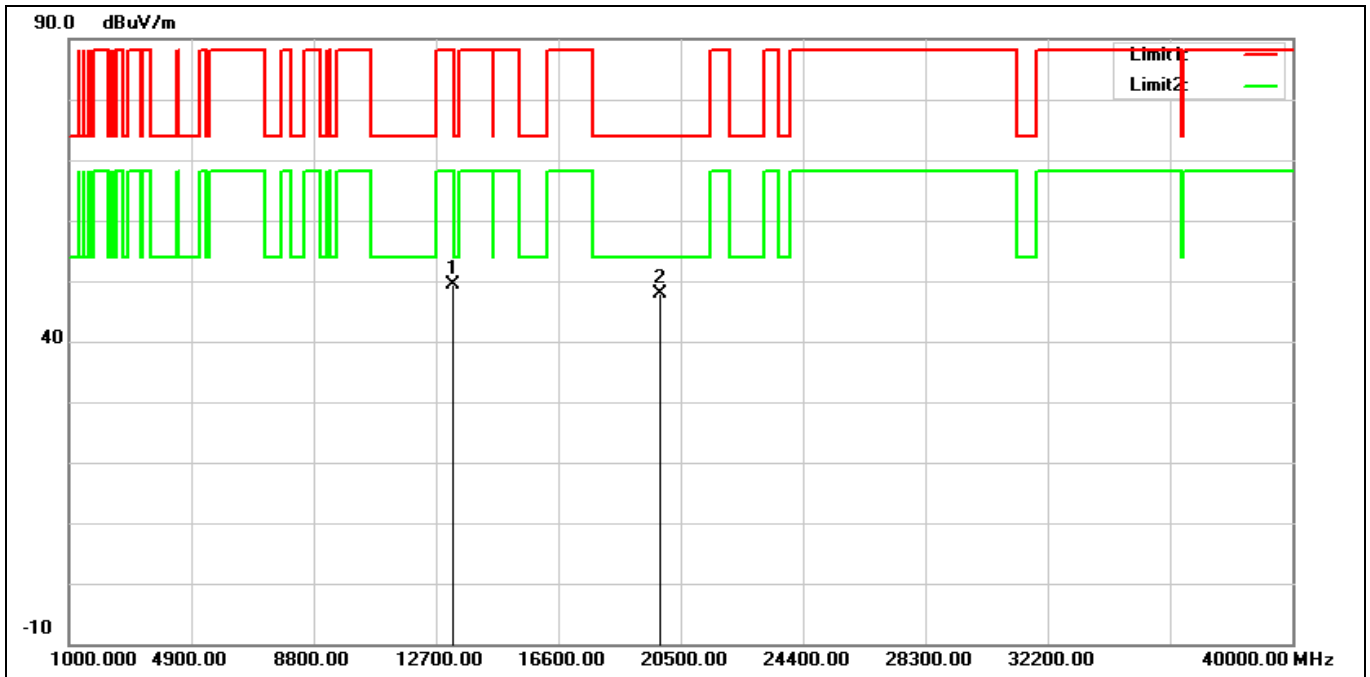


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	13250.000	33.40	15.97	49.37	74.00	-24.63	peak
2	19875.000	28.90	18.90	47.80	74.00	-26.20	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6625 MHz		
Remark:			

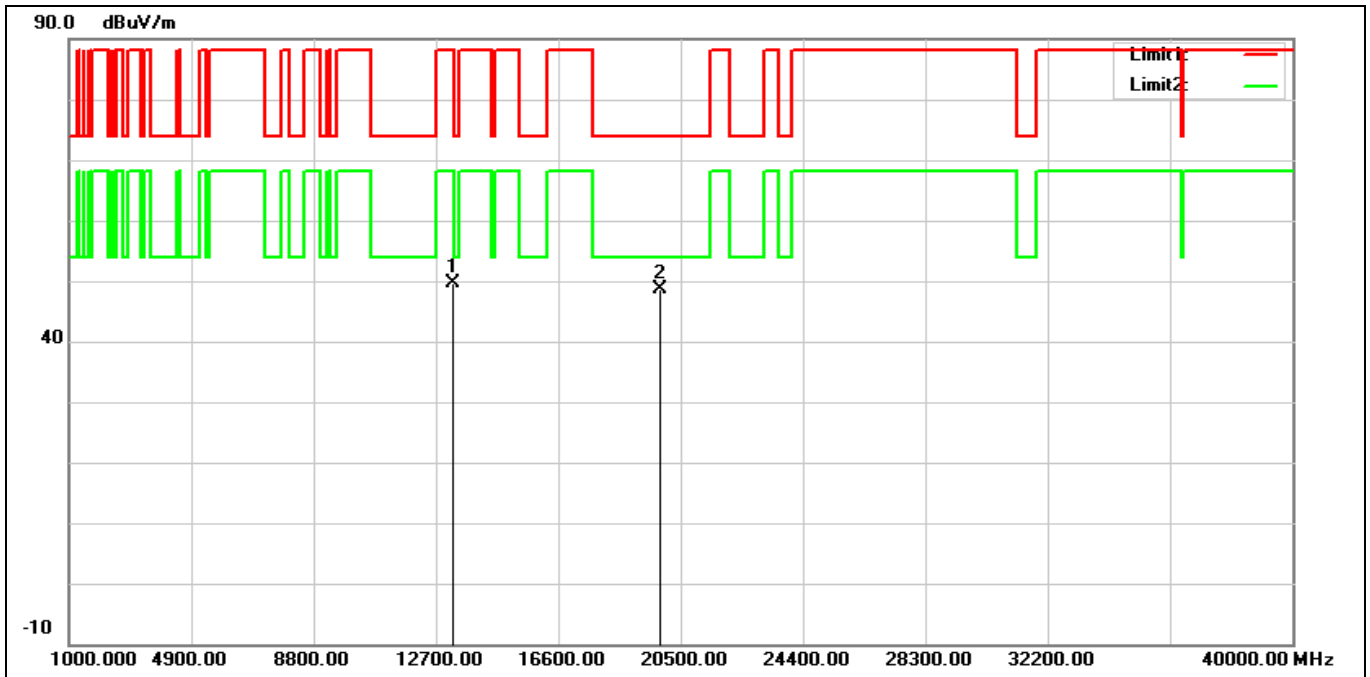


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	13250.000	33.60	15.97	49.57	74.00	-24.43	peak
2	19875.000	29.67	18.90	48.57	74.00	-25.43	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6705 MHz		
Remark:			

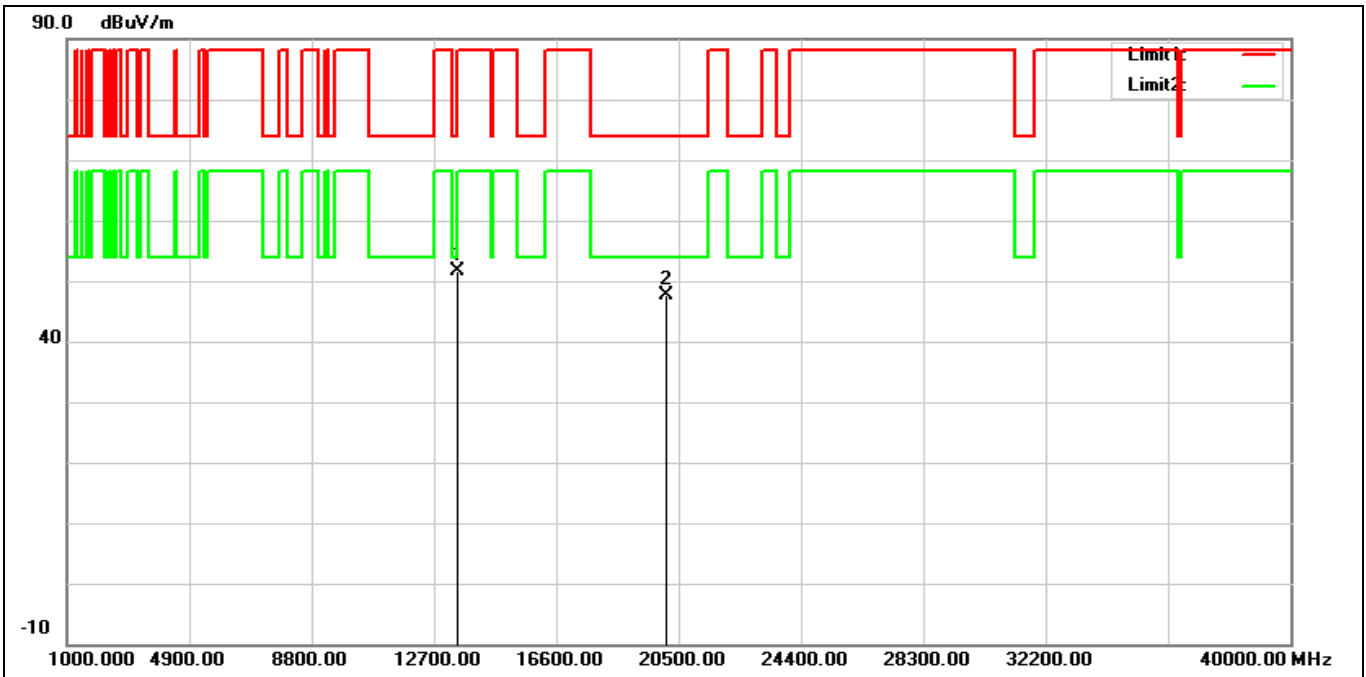

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13410.000	34.89	16.63	51.52	88.20	-36.68	peak
2*	20115.000	28.46	19.05	47.51	74.00	-26.49	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6705 MHz		
Remark:			

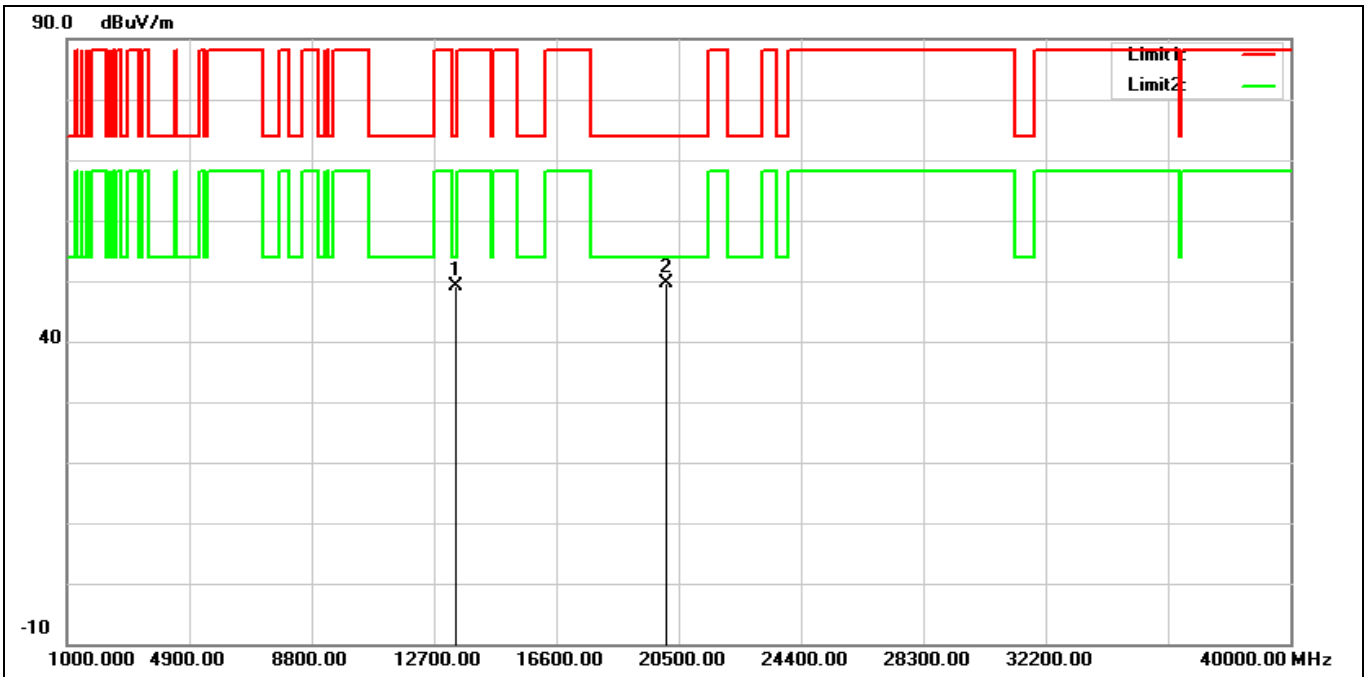

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13410.000	32.49	16.63	49.12	88.20	-39.08	peak
2*	20115.000	30.66	19.05	49.71	74.00	-24.29	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6785 MHz		
Remark:			

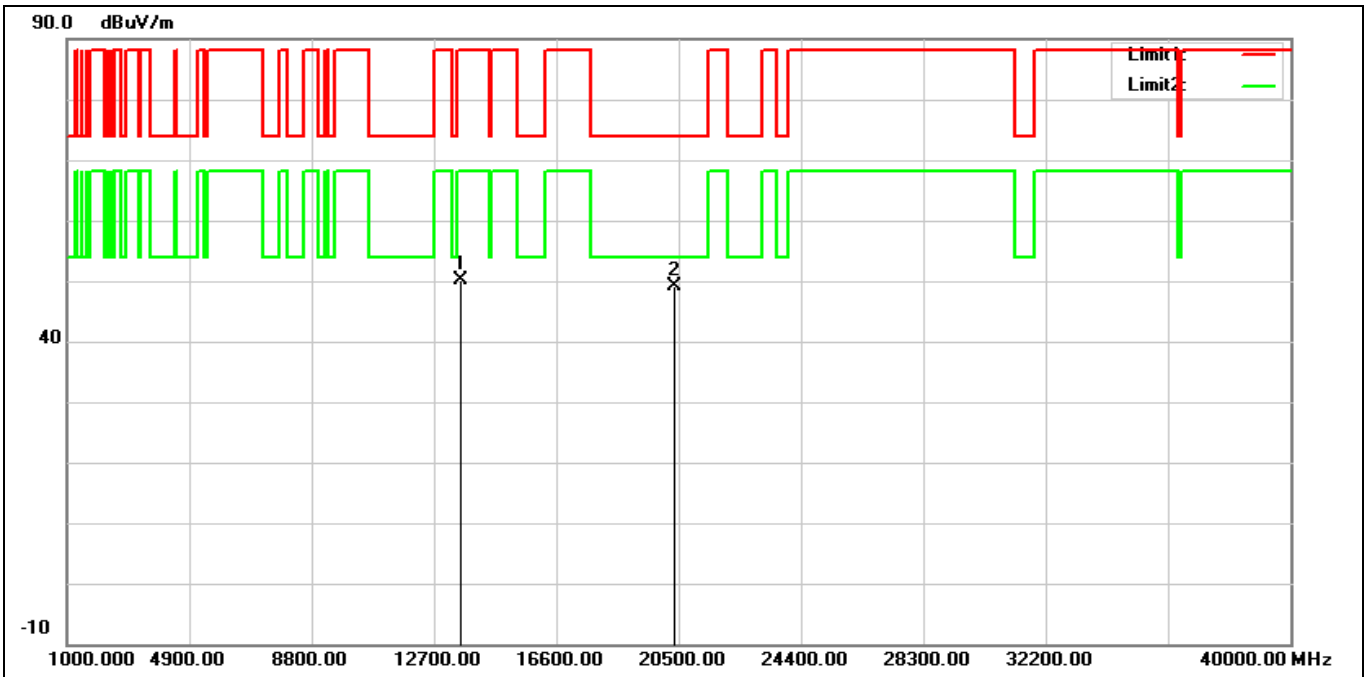


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13570.000	32.86	17.16	50.02	88.20	-38.18	peak
2*	20355.000	29.67	19.36	49.03	74.00	-24.97	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6785 MHz		
Remark:			

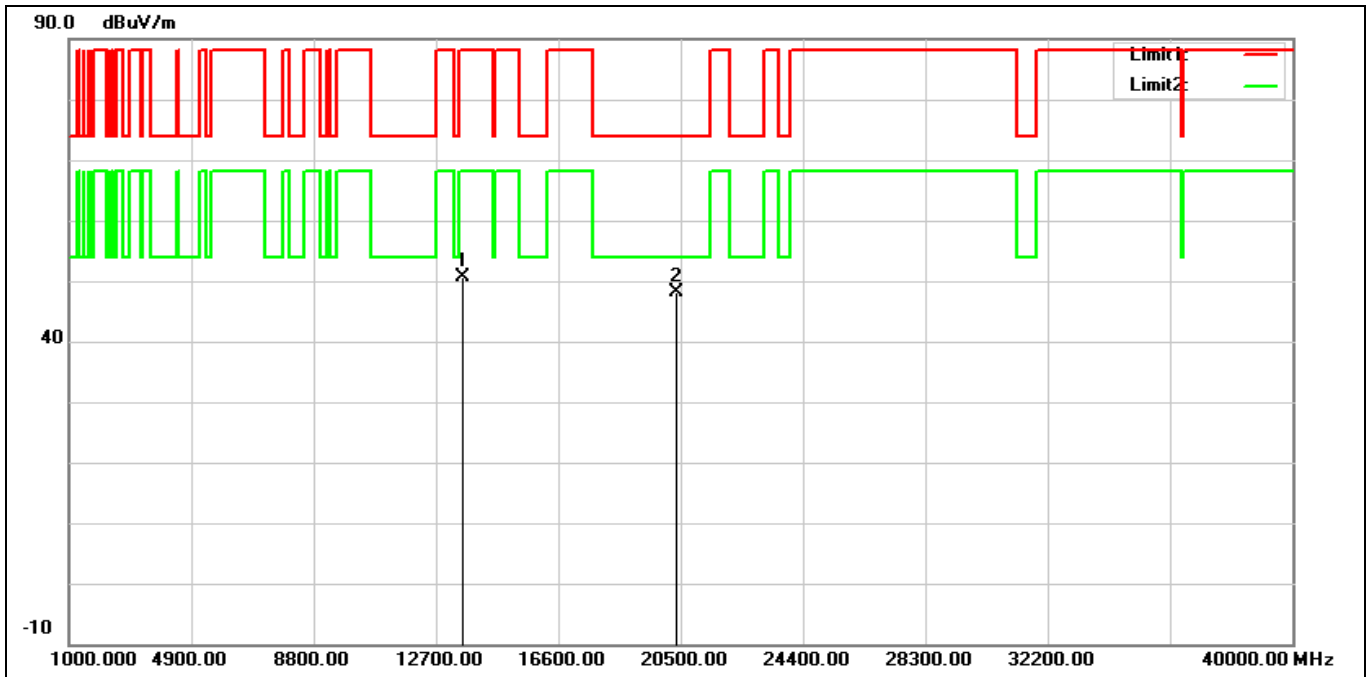


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13570.000	33.44	17.16	50.60	88.20	-37.60	peak
2*	20355.000	28.87	19.36	48.23	74.00	-25.77	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6865 MHz		
Remark:			

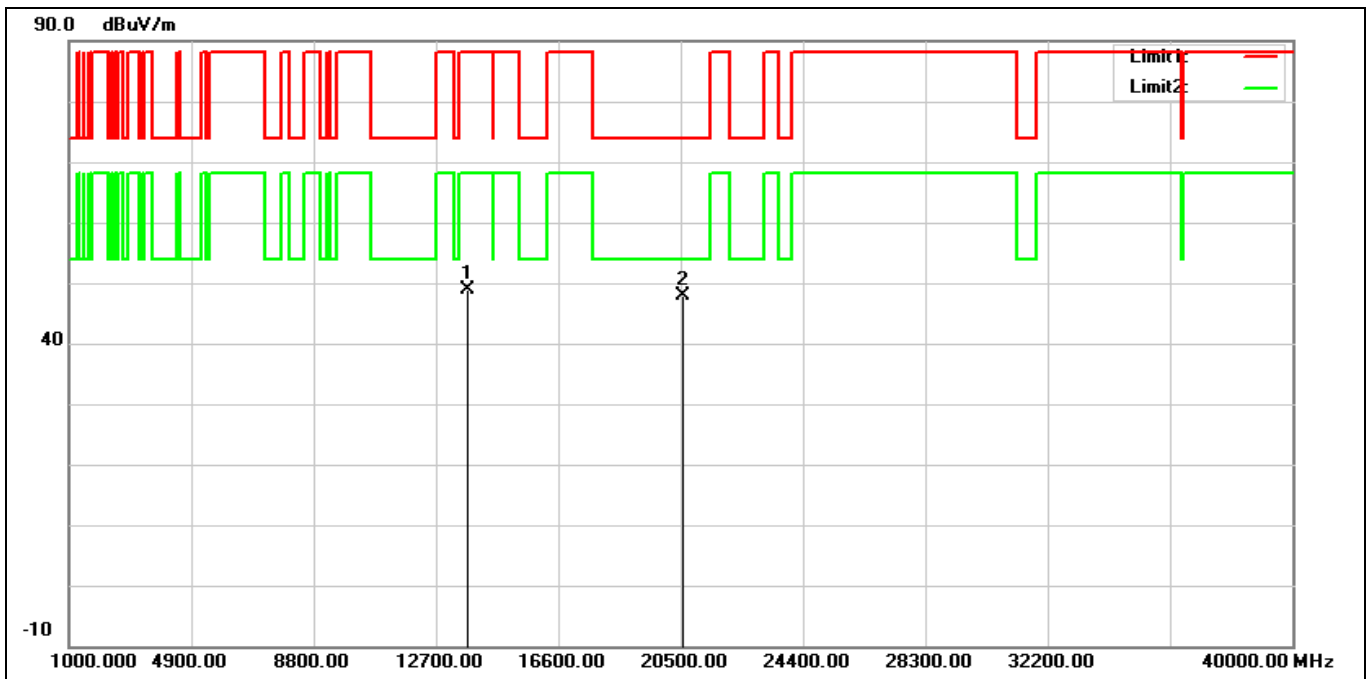


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13730.000	31.76	17.22	48.98	88.20	-39.22	peak
2*	20595.000	28.41	19.59	48.00	74.00	-26.00	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6865 MHz		
Remark:			

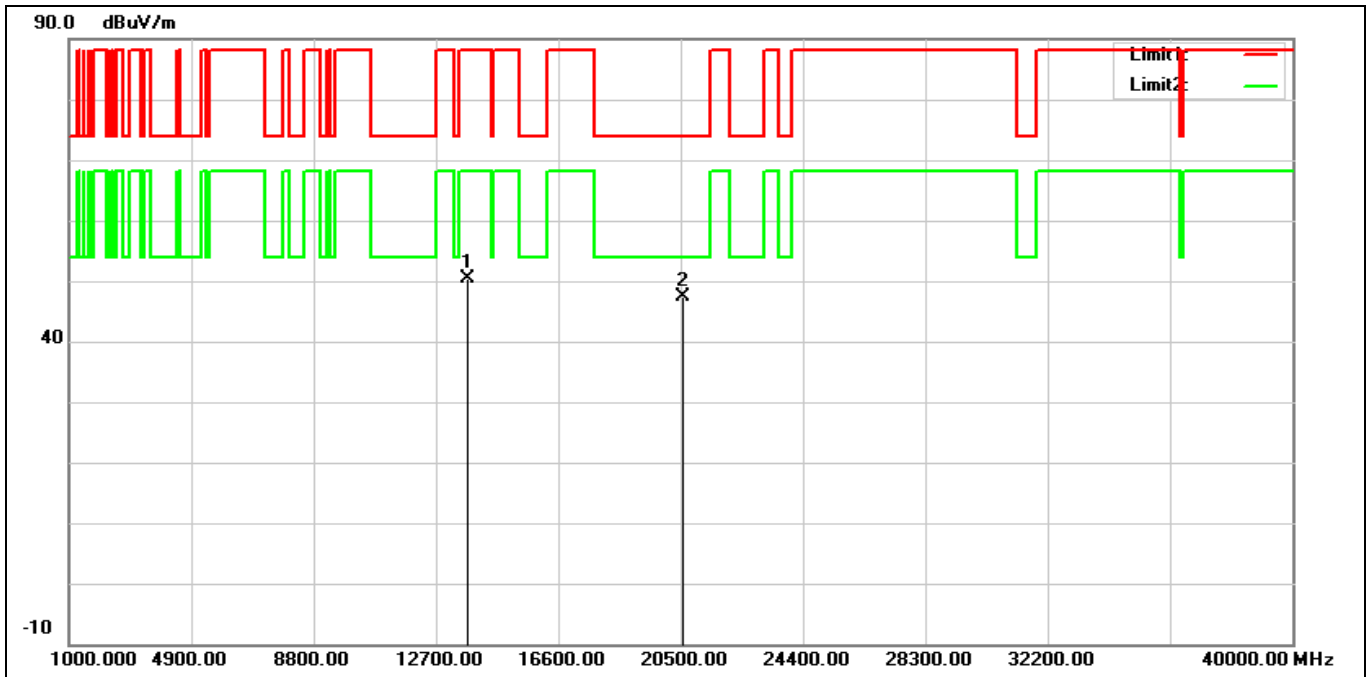


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13730.000	33.08	17.22	50.30	88.20	-37.90	peak
2*	20595.000	27.79	19.59	47.38	74.00	-26.62	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6945 MHz		
Remark:			

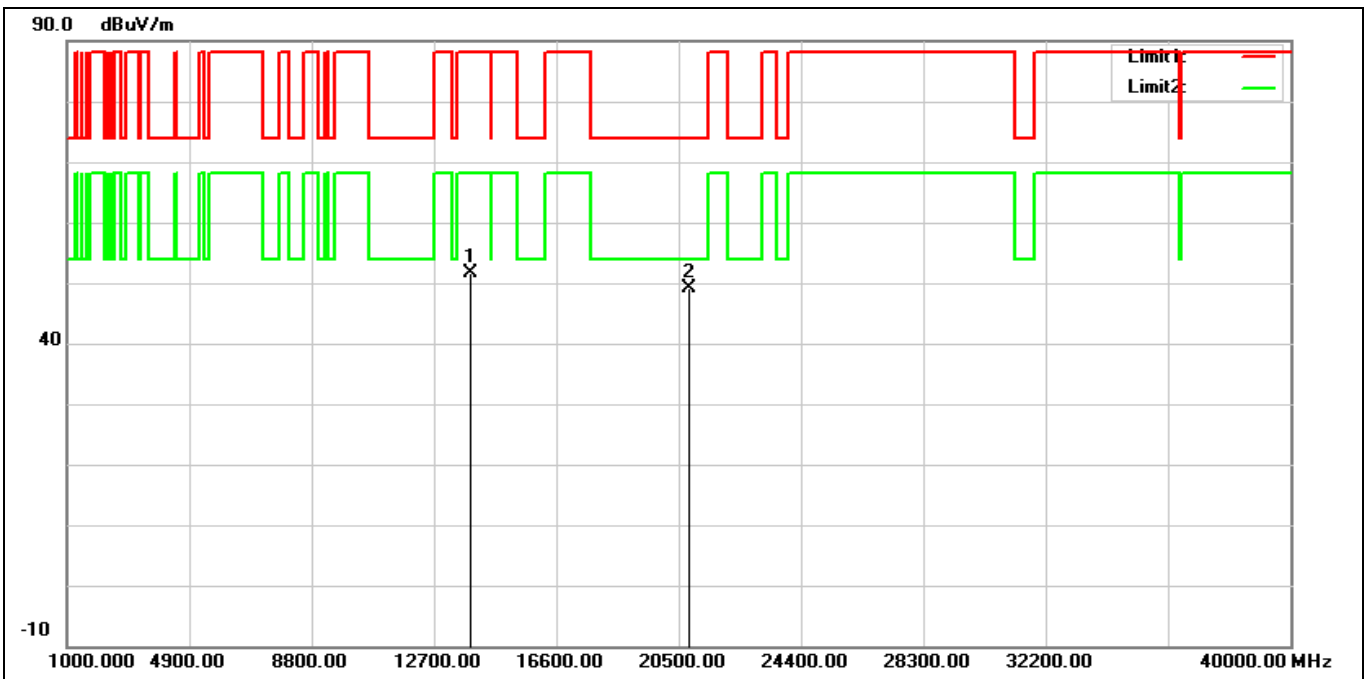


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13890.000	33.99	17.61	51.60	88.20	-36.60	peak
2*	20835.000	29.50	19.71	49.21	74.00	-24.79	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6945 MHz		
Remark:			

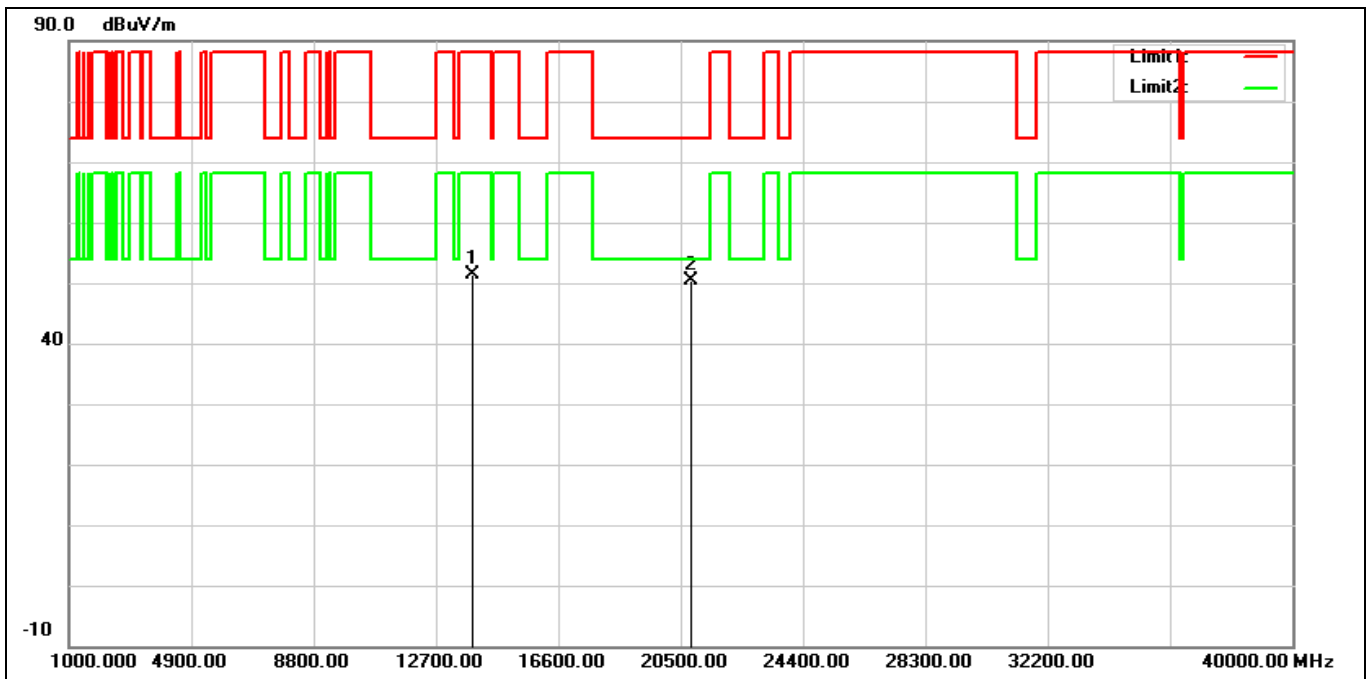


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13890.000	33.87	17.61	51.48	88.20	-36.72	peak
2*	20835.000	30.59	19.71	50.30	74.00	-23.70	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 7025 MHz		
Remark:			

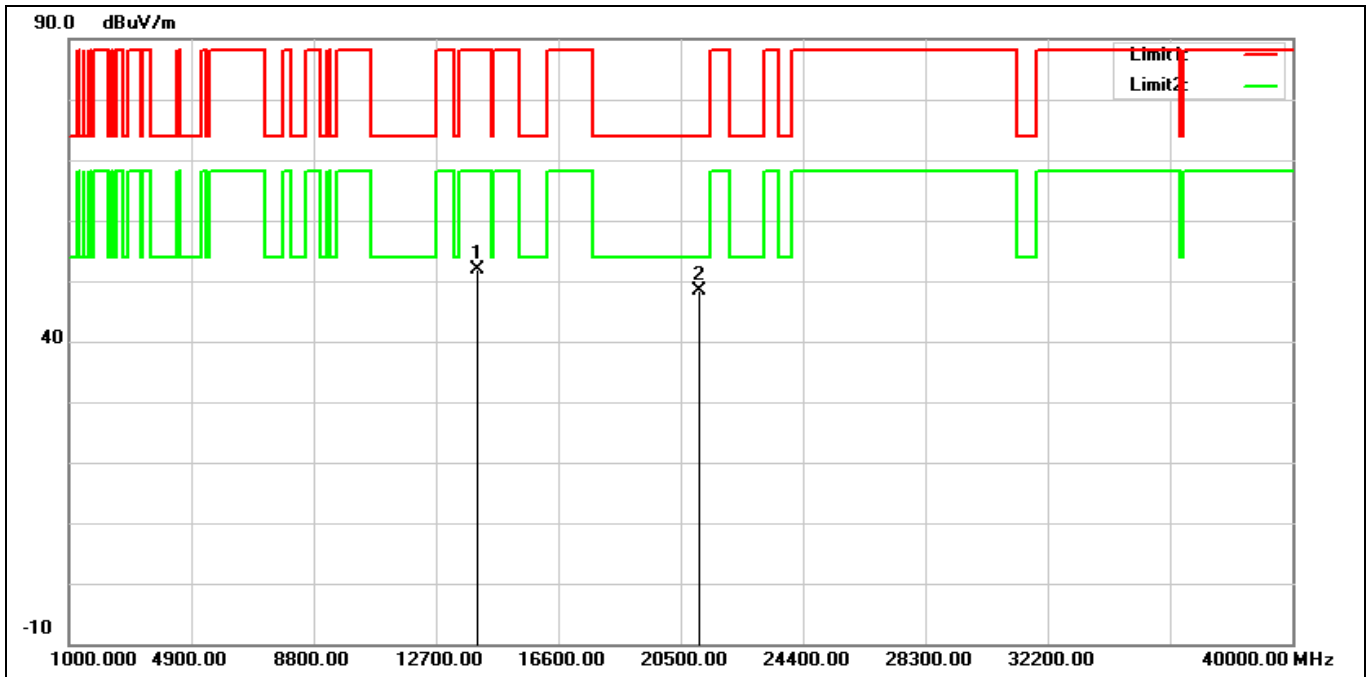

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14050.000	33.88	18.08	51.96	88.20	-36.24	peak
2*	21075.000	28.71	19.69	48.40	74.00	-25.60	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 7025 MHz		
Remark:			

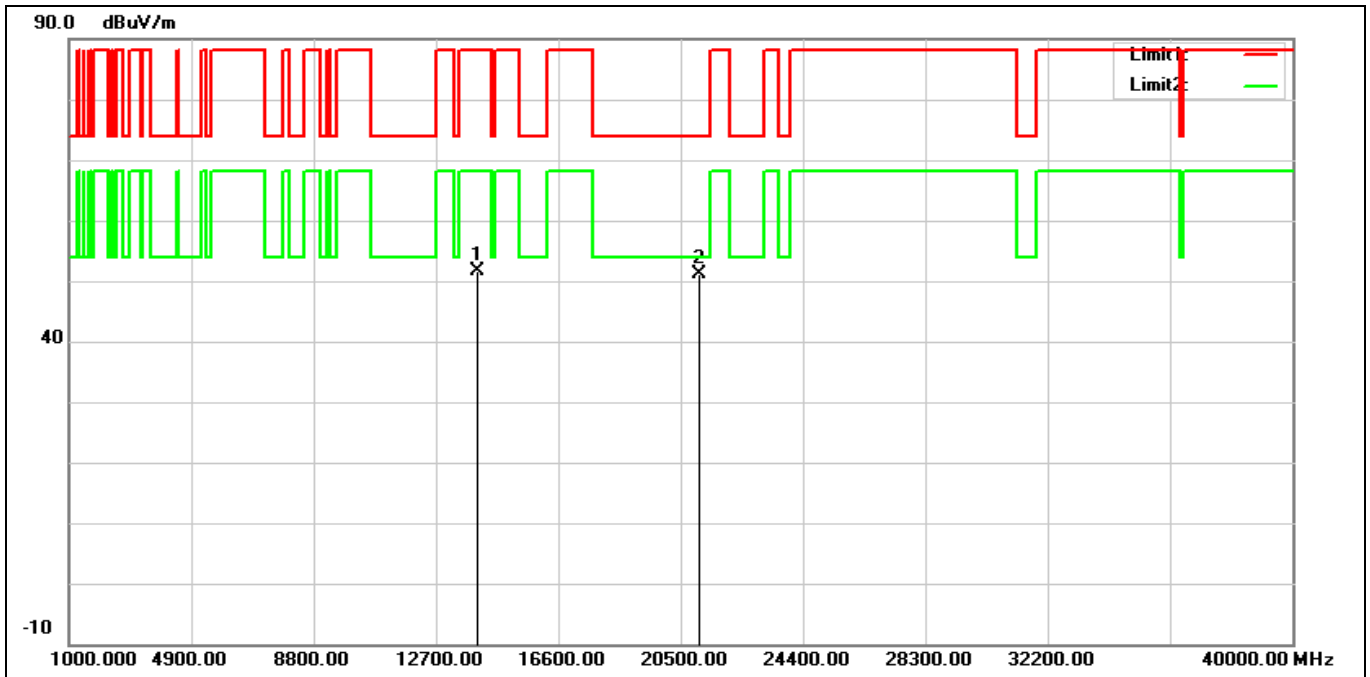

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14050.000	33.65	18.08	51.73	88.20	-36.47	peak
2*	21075.000	31.52	19.69	51.21	74.00	-22.79	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 6025 MHz		
Remark:			

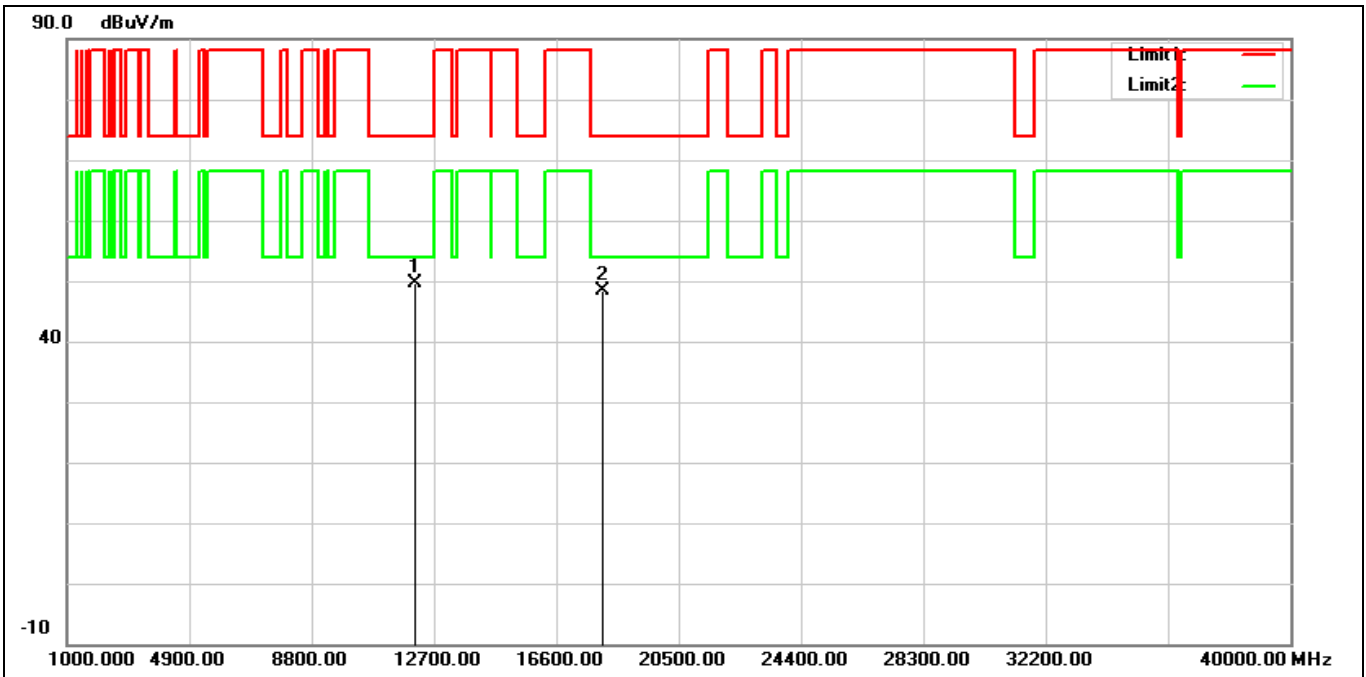


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12050.000	34.78	14.95	49.73	74.00	-24.27	peak
2	18075.000	31.44	17.06	48.50	74.00	-25.50	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 6025 MHz		
Remark:			

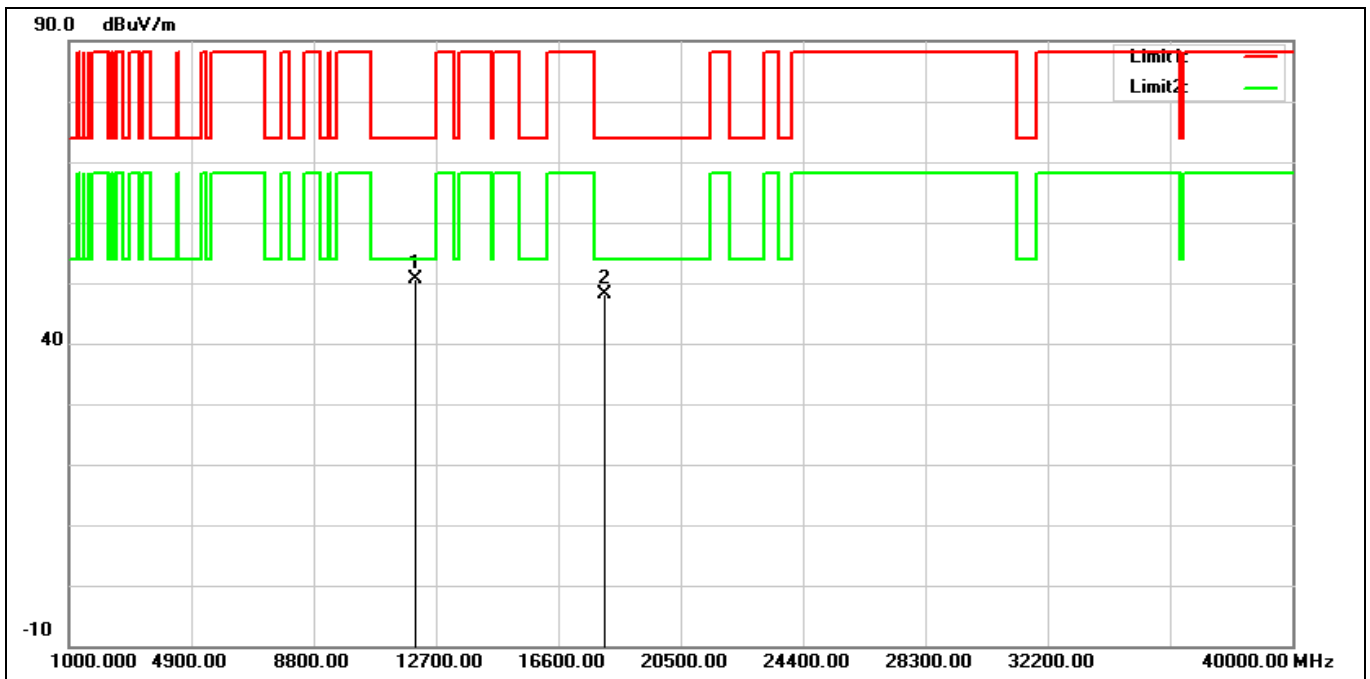


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12050.000	35.61	14.95	50.56	74.00	-23.44	peak
2	18075.000	31.09	17.06	48.15	74.00	-25.85	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 6185 MHz		
Remark:			

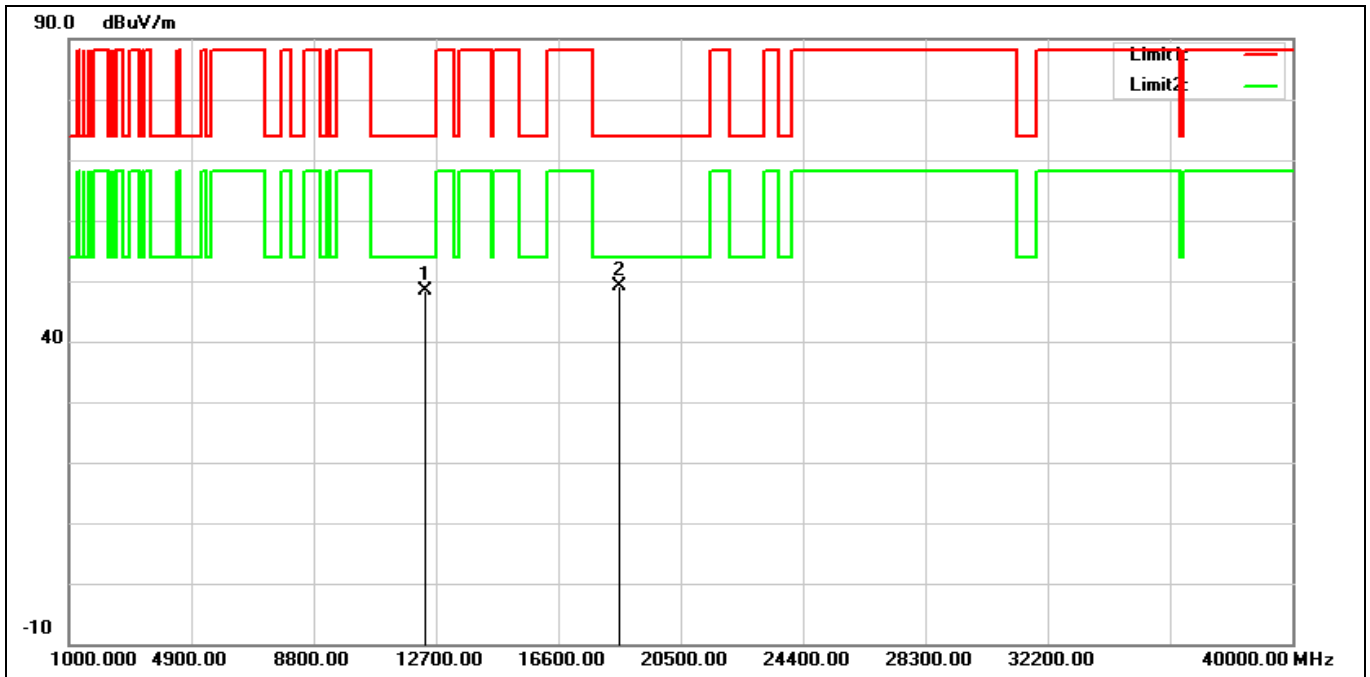


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12370.000	33.54	14.96	48.50	74.00	-25.50	peak
2*	18555.000	31.08	18.01	49.09	74.00	-24.91	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 6185 MHz		
Remark:			

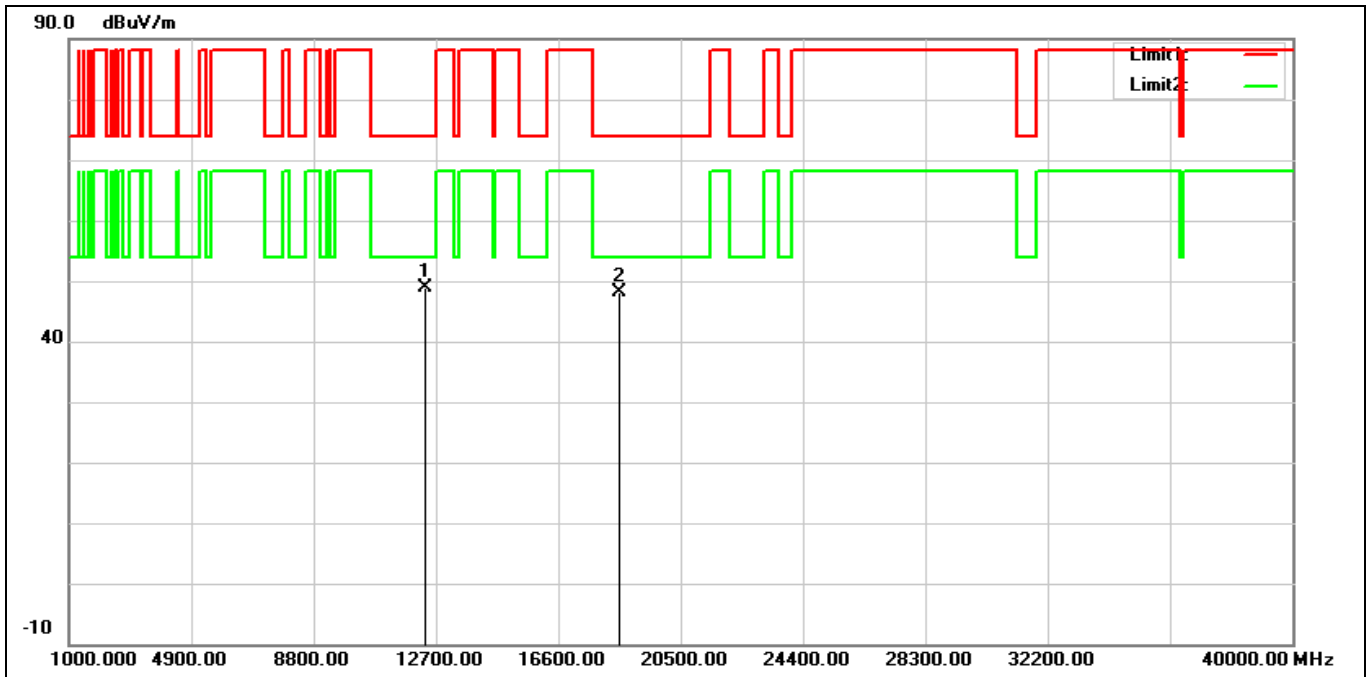


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12370.000	33.88	14.96	48.84	74.00	-25.16	peak
2	18555.000	30.11	18.01	48.12	74.00	-25.88	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 6345 MHz		
Remark:			

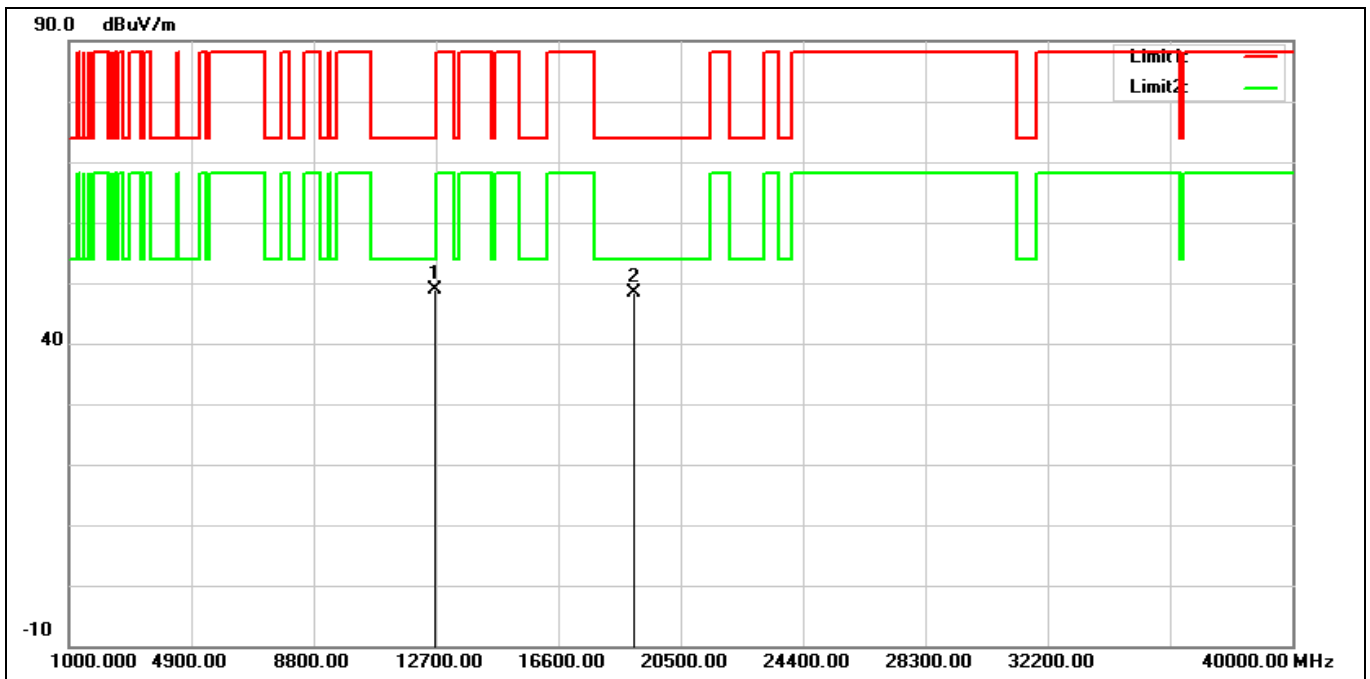


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12690.000	33.37	15.42	48.79	74.00	-25.21	peak
2	19035.000	30.00	18.34	48.34	74.00	-25.66	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 6345 MHz		
Remark:			

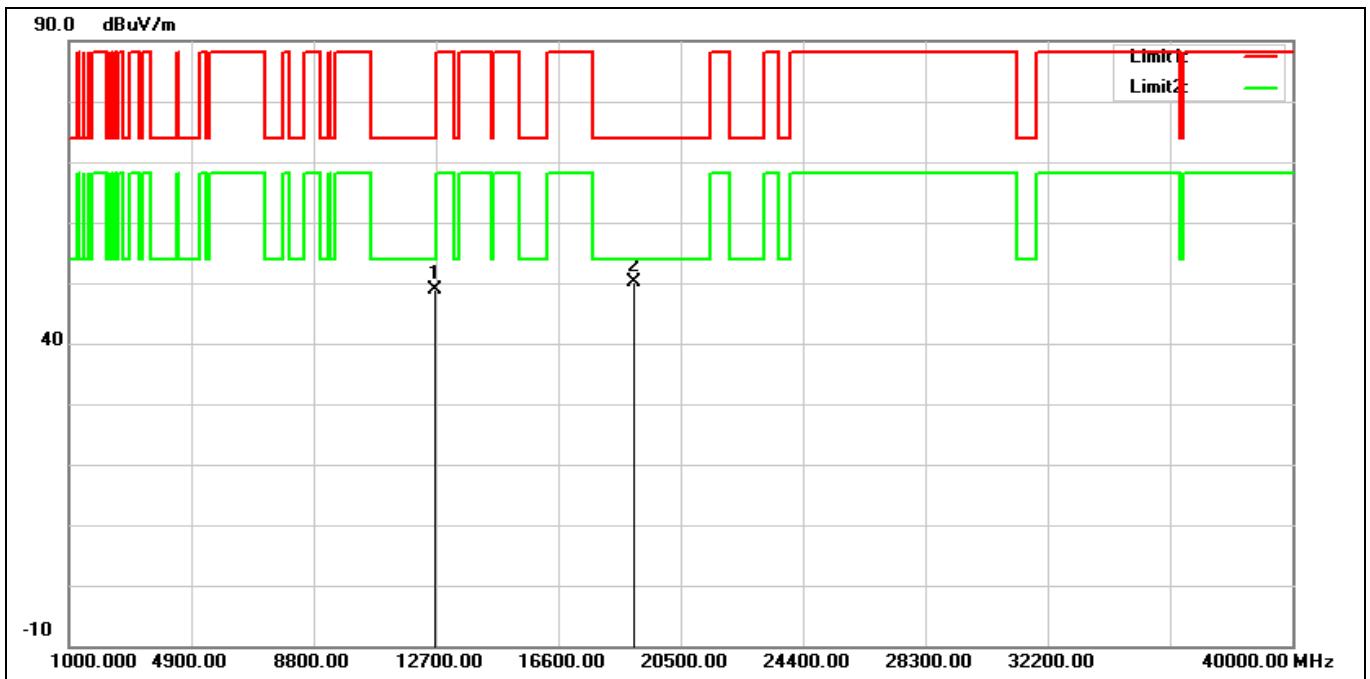


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12690.000	33.58	15.42	49.00	74.00	-25.00	peak
2*	19035.000	31.78	18.34	50.12	74.00	-23.88	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 6505 MHz		
Remark:			

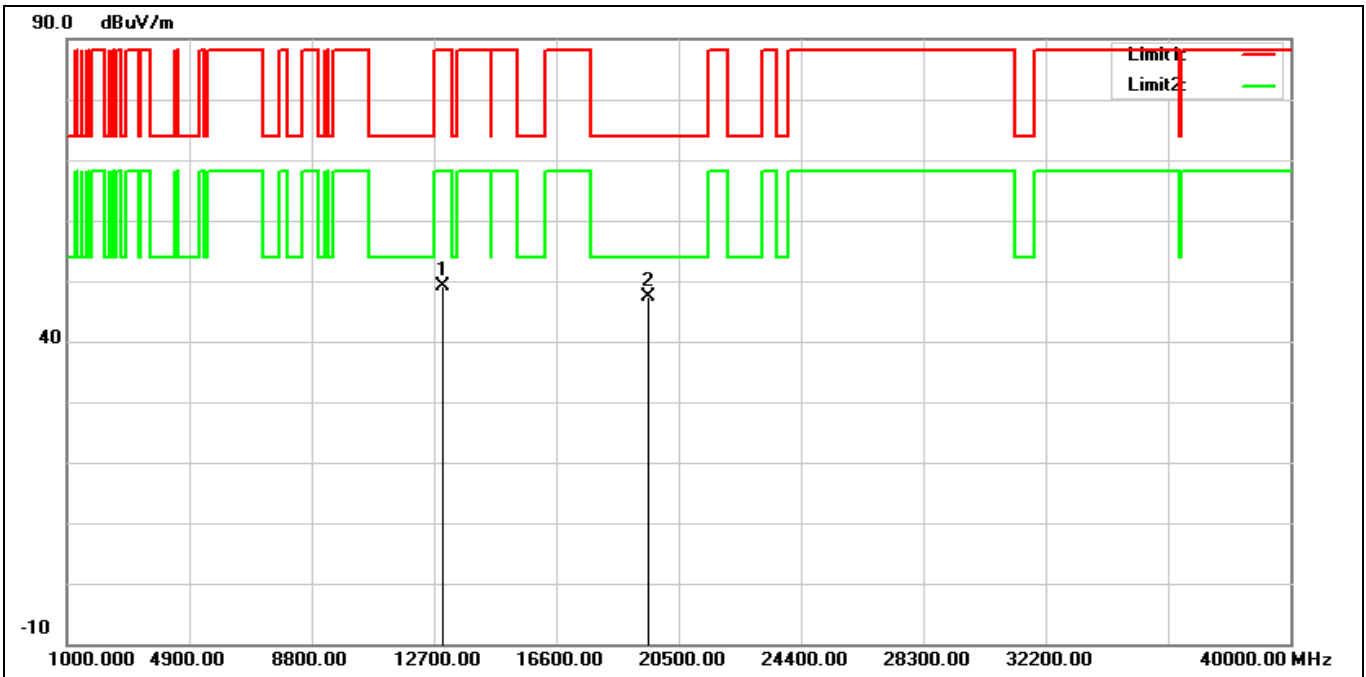

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13010.000	33.51	15.73	49.24	88.20	-38.96	peak
2*	19515.000	28.49	18.87	47.36	74.00	-26.64	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 6505 MHz		
Remark:			

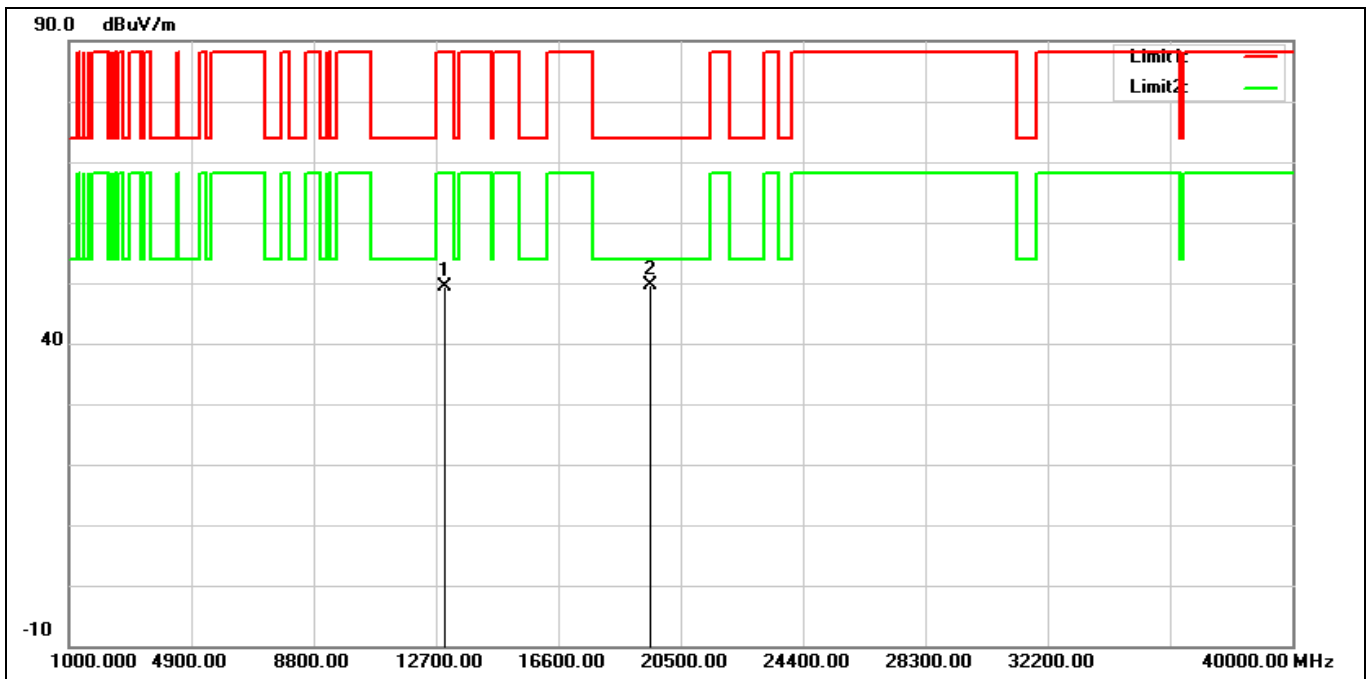

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13010.000	33.66	15.73	49.39	88.20	-38.81	peak
2*	19515.000	30.82	18.87	49.69	74.00	-24.31	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 6665 MHz		
Remark:			

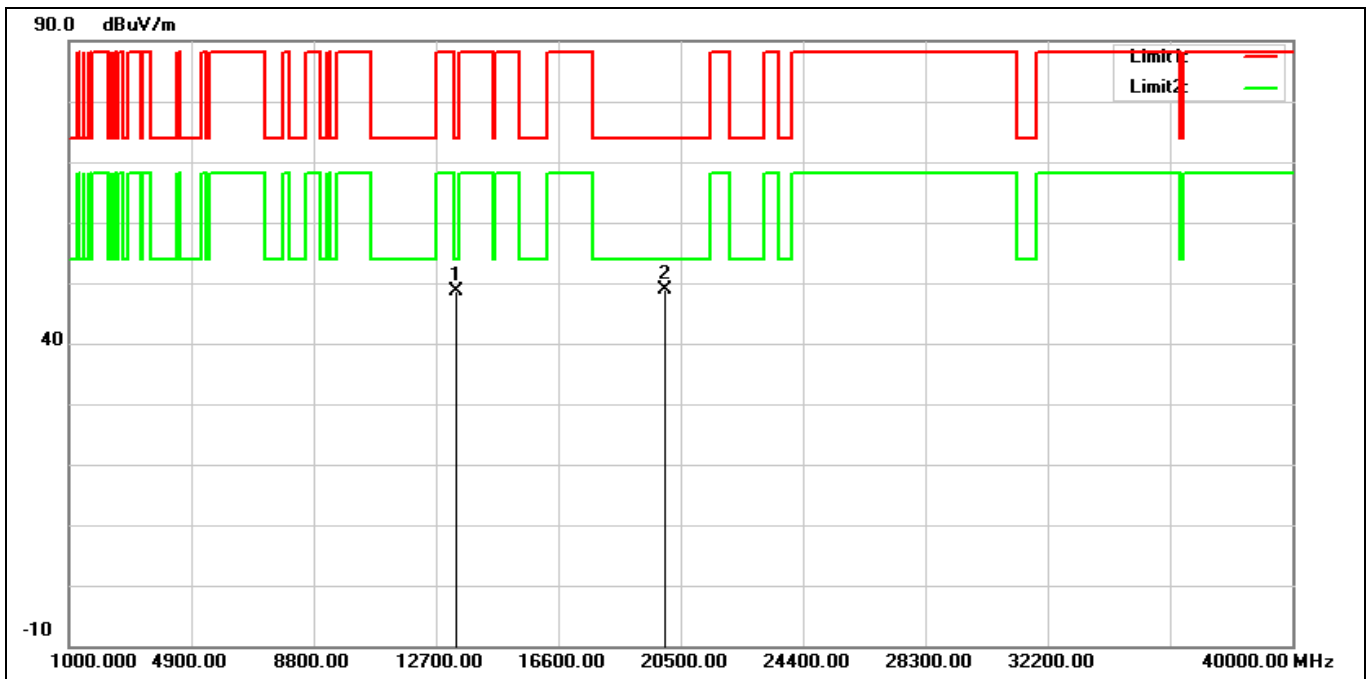


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13330.000	32.31	16.22	48.53	74.00	-25.47	peak
2*	19995.000	30.03	18.90	48.93	74.00	-25.07	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 6665 MHz		
Remark:			

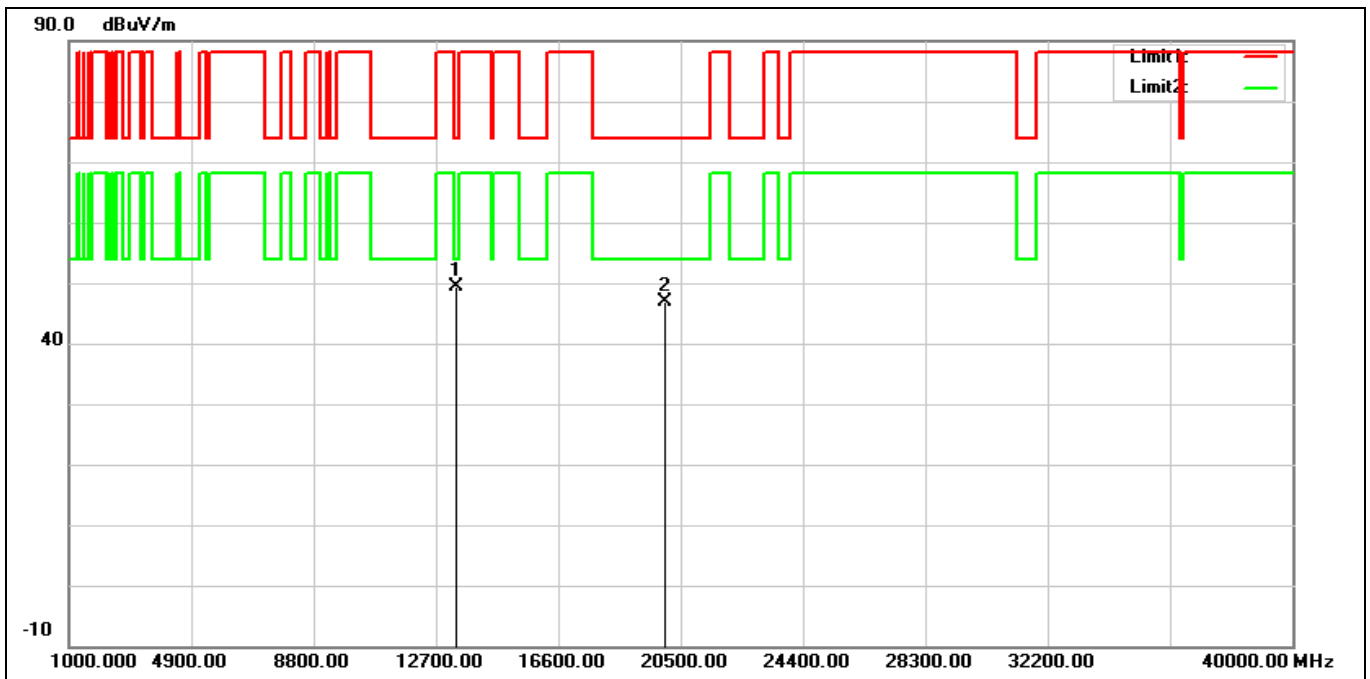


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	13330.000	33.04	16.22	49.26	74.00	-24.74	peak
2	19995.000	27.98	18.90	46.88	74.00	-27.12	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 6825 MHz		
Remark:			

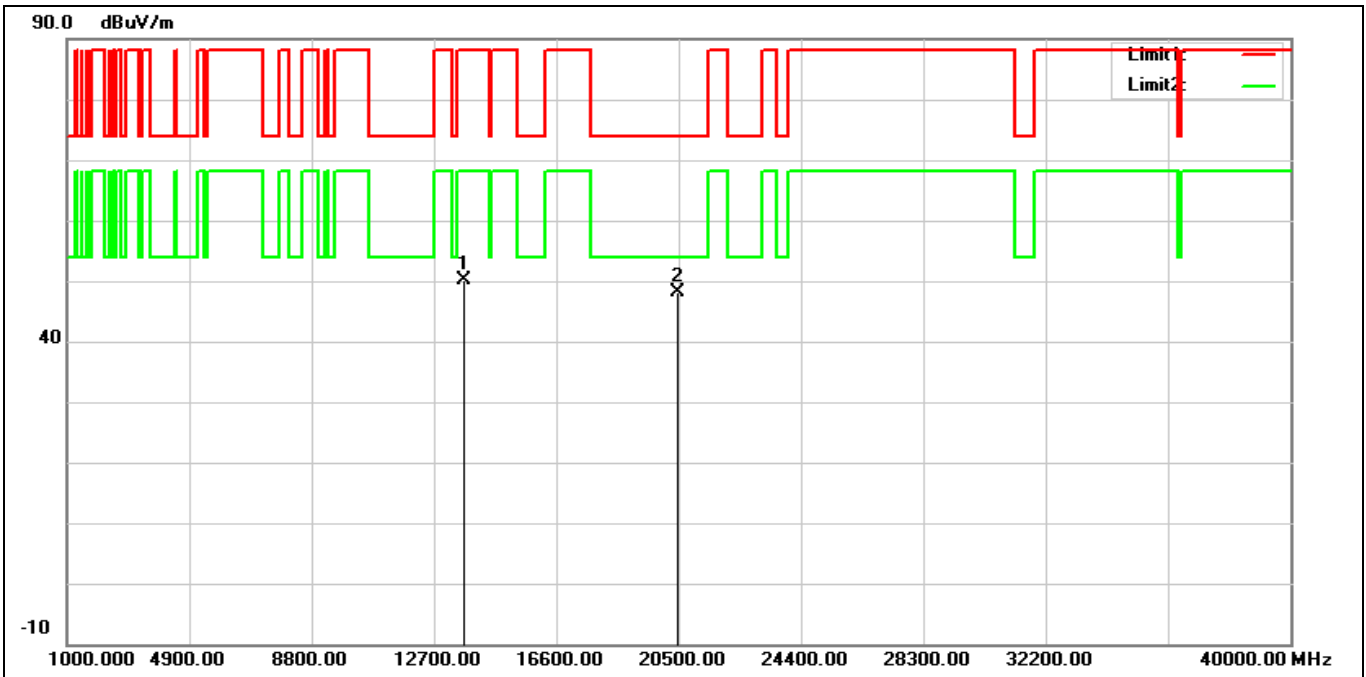


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13650.000	32.86	17.23	50.09	88.20	-38.11	peak
2*	20475.000	28.54	19.51	48.05	74.00	-25.95	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 6825 MHz		
Remark:			

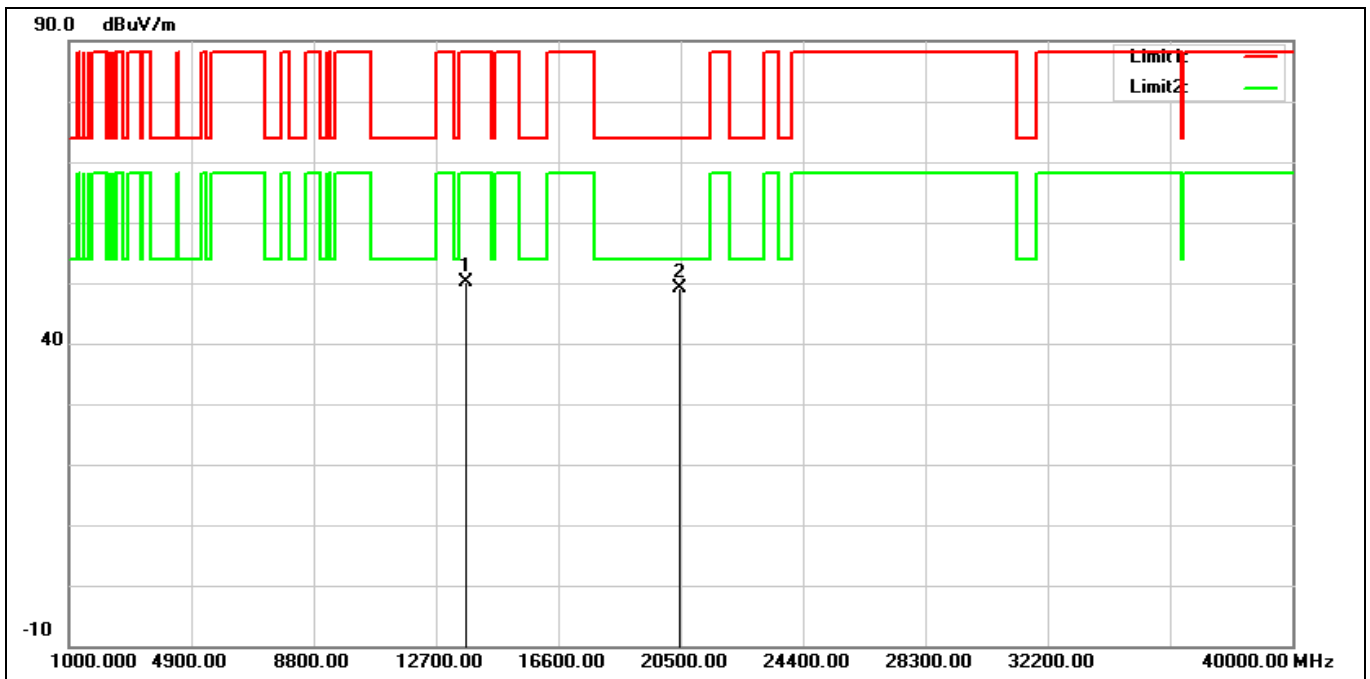


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13650.000	32.95	17.23	50.18	88.20	-38.02	peak
2*	20475.000	29.64	19.51	49.15	74.00	-24.85	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 6985 MHz		
Remark:			

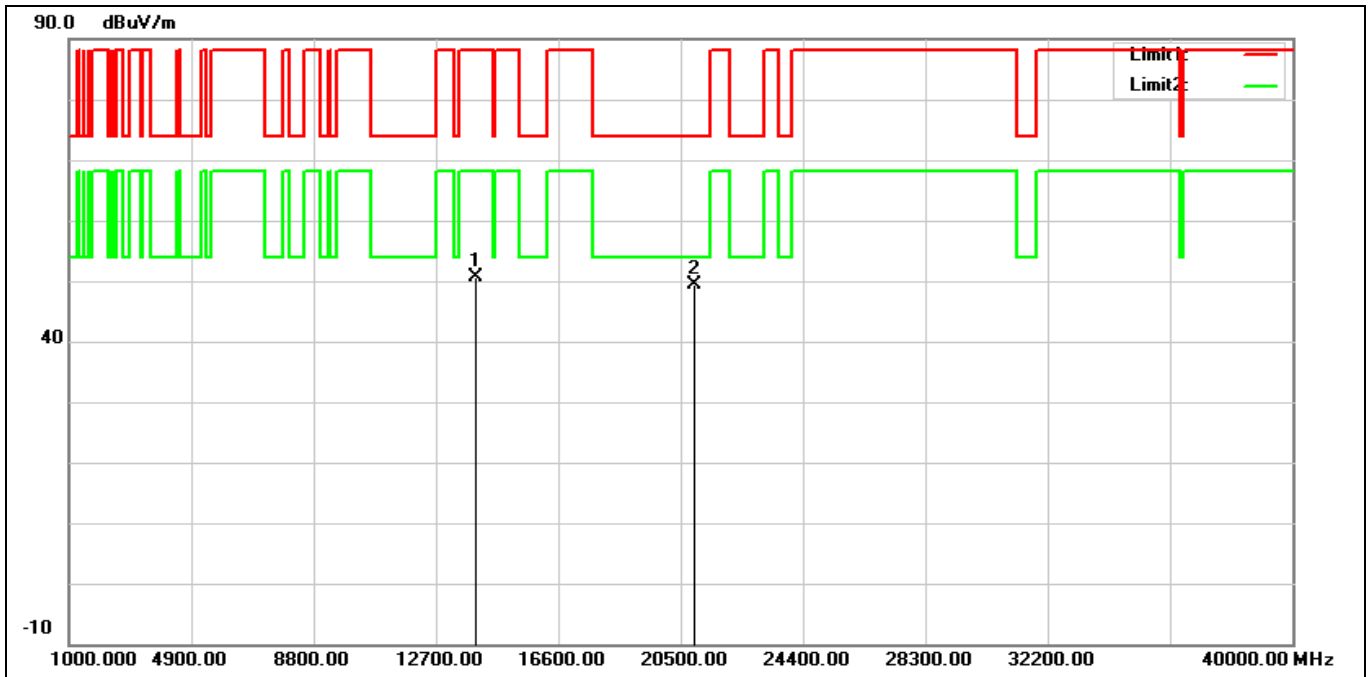

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13970.000	32.71	17.81	50.52	88.20	-37.68	peak
2*	20955.000	29.53	19.77	49.30	74.00	-24.70	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 6985 MHz		
Remark:			

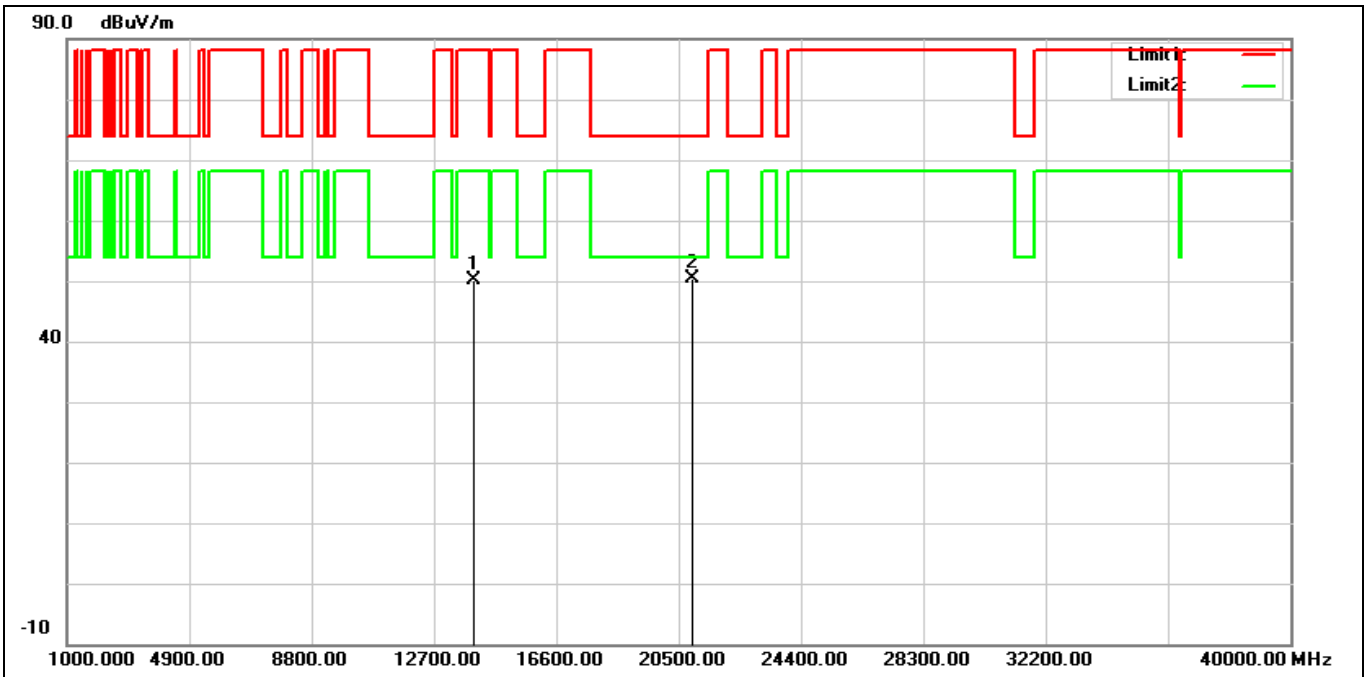

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13970.000	32.34	17.81	50.15	88.20	-38.05	peak
2*	20955.000	30.56	19.77	50.33	74.00	-23.67	peak


Band Edge

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax 20 5955MHz		
Remark:	Z 軸_ANT-A(AUX)		

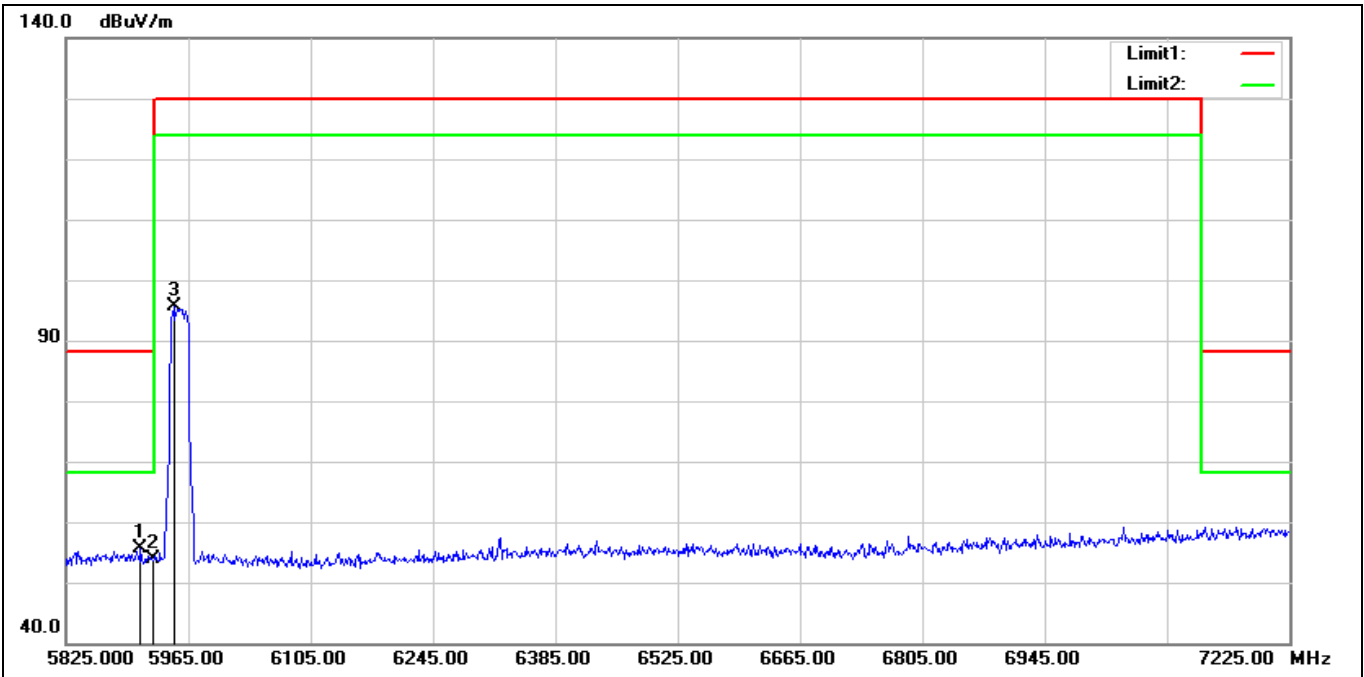

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5910.400	52.37	3.14	55.51	88.20	-32.69	peak
2	5925.000	50.90	3.10	54.00	88.20	-34.20	peak
3	5949.600	92.54	3.02	95.56	130.00	-34.44	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax 20 5955MHz		
Remark:	Z 軸_ANT-A(AUX)		

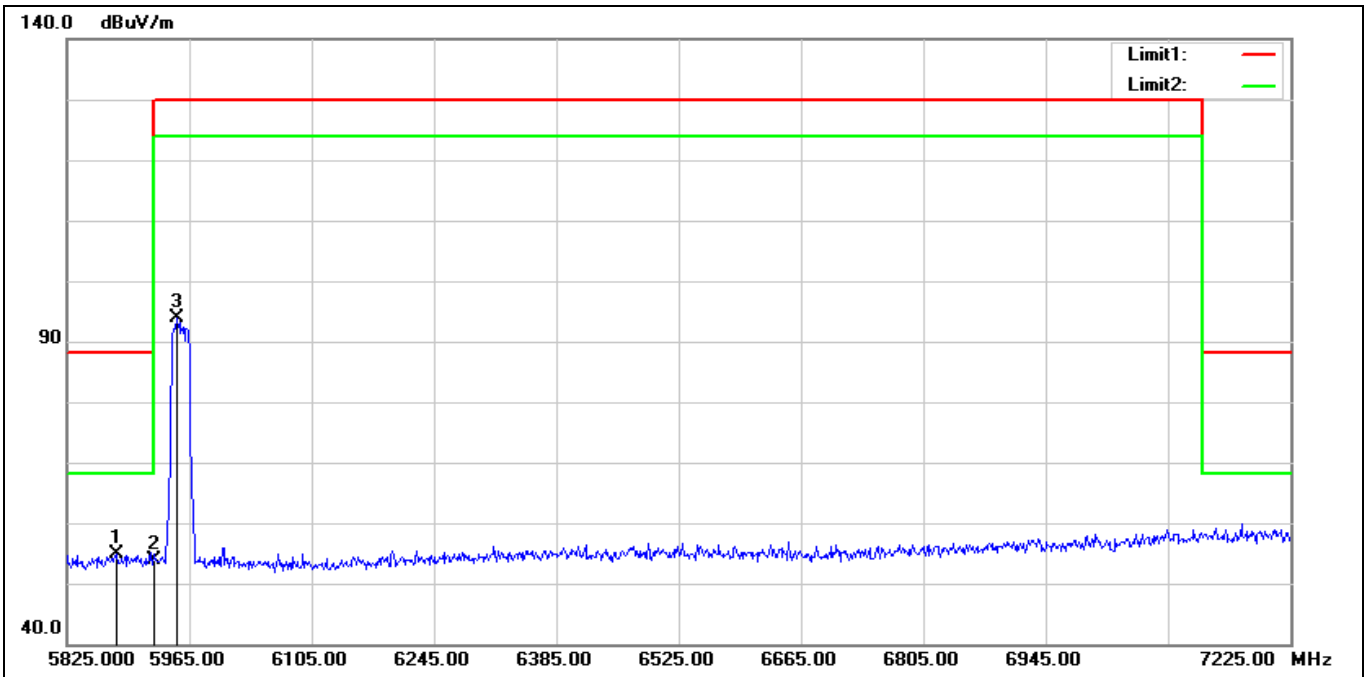

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5882.400	51.66	3.10	54.76	88.20	-33.44	peak
2	5925.000	50.82	3.10	53.92	88.20	-34.28	peak
3	5951.000	90.87	3.02	93.89	130.00	-36.11	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax 20 7115MHz		
Remark:	Z 軸_ANT-A(AUX)		

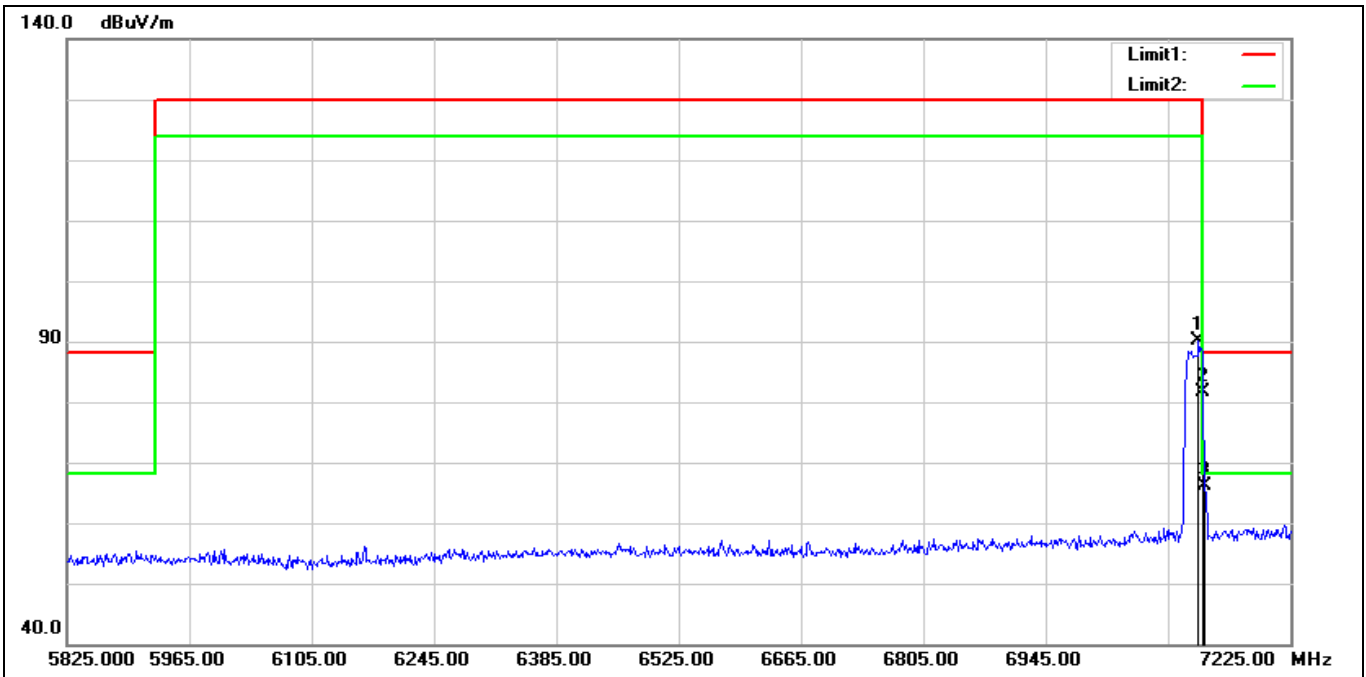


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7120.000	82.75	7.48	90.23	130.00	-39.77	peak
2*	7125.000	74.08	7.49	81.57	88.20	-6.63	peak
3	7127.000	58.60	7.49	66.09	88.20	-22.11	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax 20 7115MHz		
Remark:	Z 軸_ANT-A(AUX)		

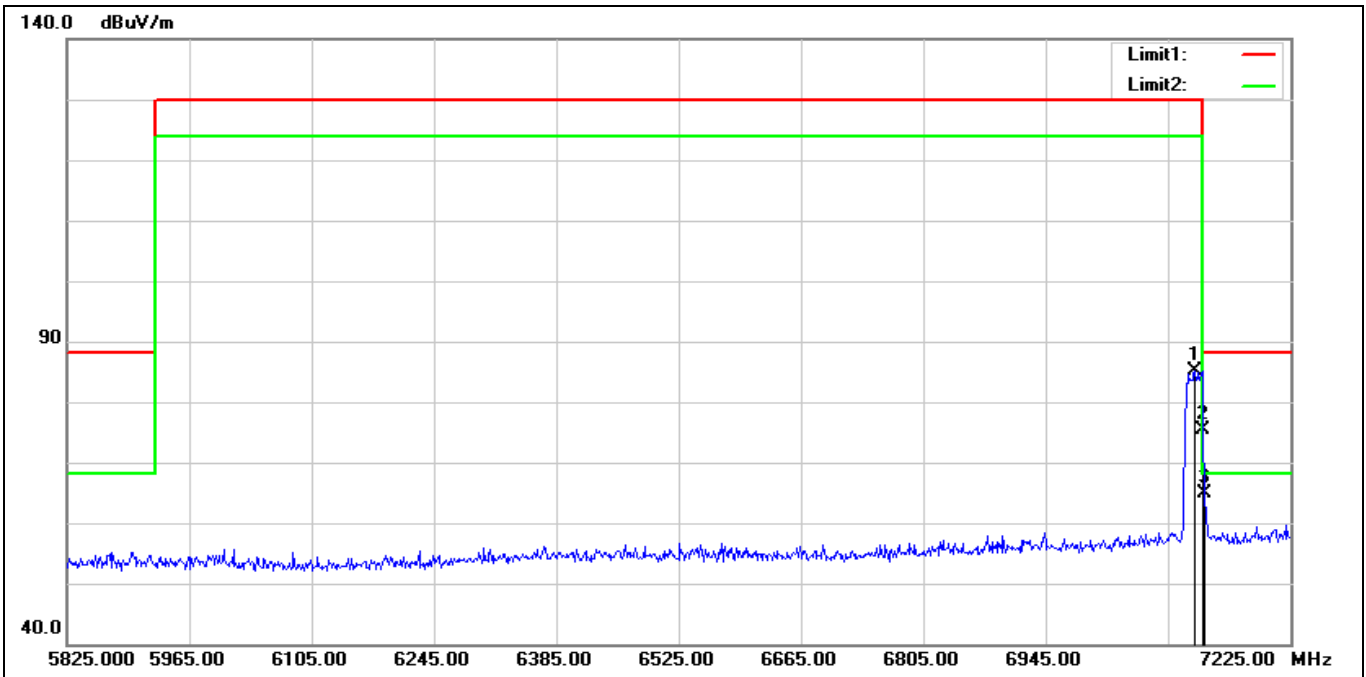


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7115.800	77.65	7.45	85.10	130.00	-44.90	peak
2*	7125.000	67.94	7.49	75.43	88.20	-12.77	peak
3	7127.000	57.41	7.49	64.90	88.20	-23.30	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax 40 5965MHz		
Remark:	Z 軸_ANT-A(AUX)		

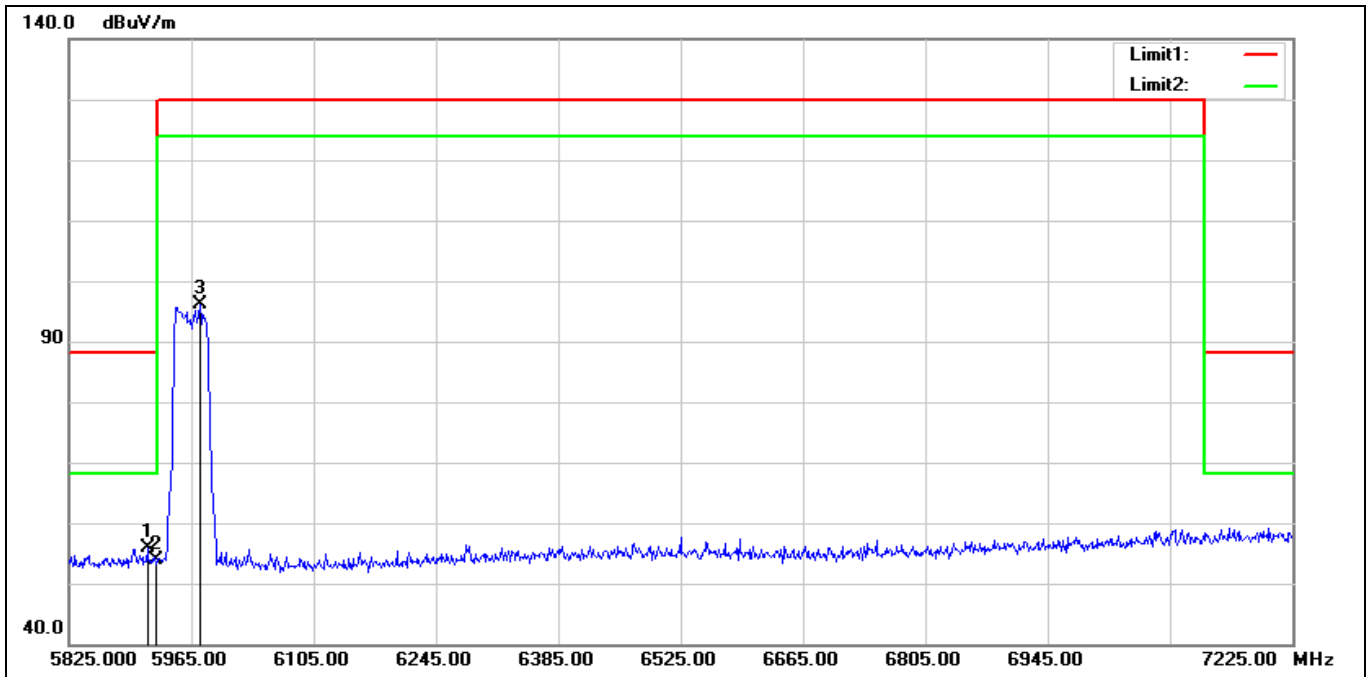


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5914.600	52.72	3.12	55.84	88.20	-32.36	peak
2	5925.000	50.79	3.10	53.89	88.20	-34.31	peak
3	5974.800	92.90	3.16	96.06	130.00	-33.94	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax 40 5965MHz		
Remark:	Z 軸_ANT-A(AUX)		

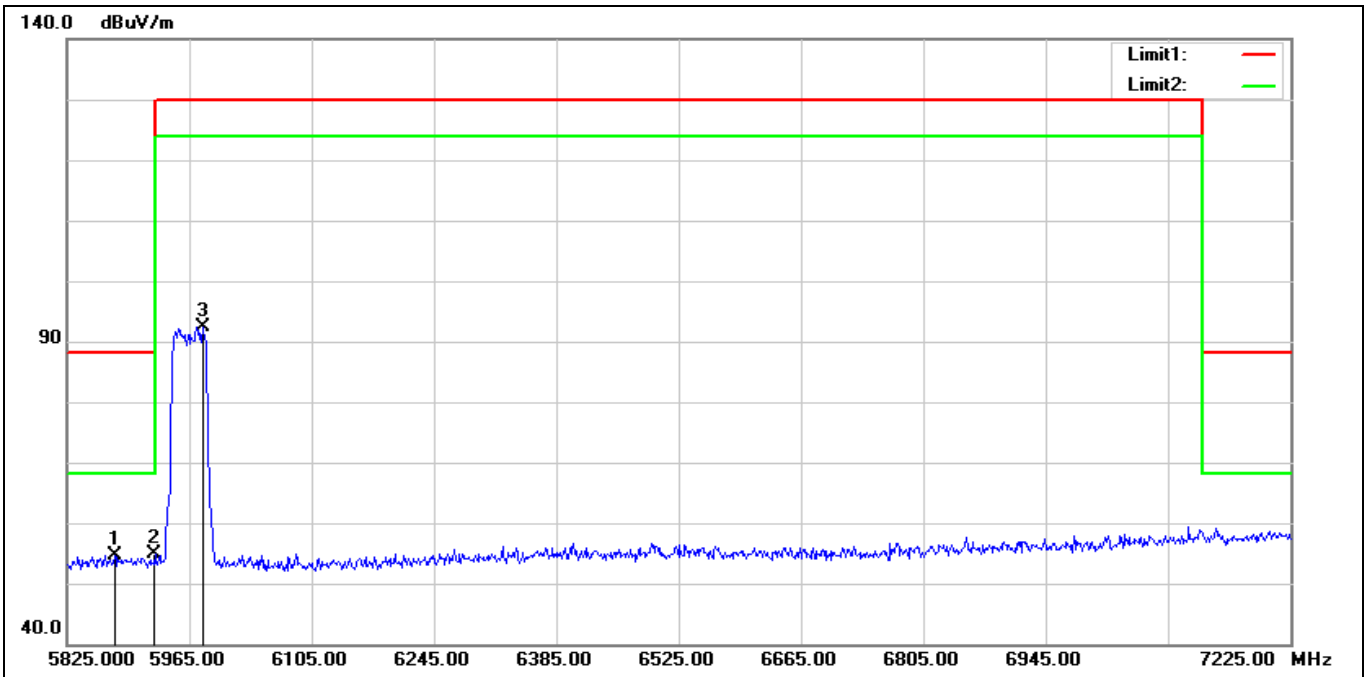


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5879.600	51.54	3.08	54.62	88.20	-33.58	peak
2*	5925.000	51.70	3.10	54.80	88.20	-33.40	peak
3	5980.400	89.11	3.20	92.31	130.00	-37.69	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax 40 7085MHz		
Remark:	Z 軸_ANT-A(AUX)		

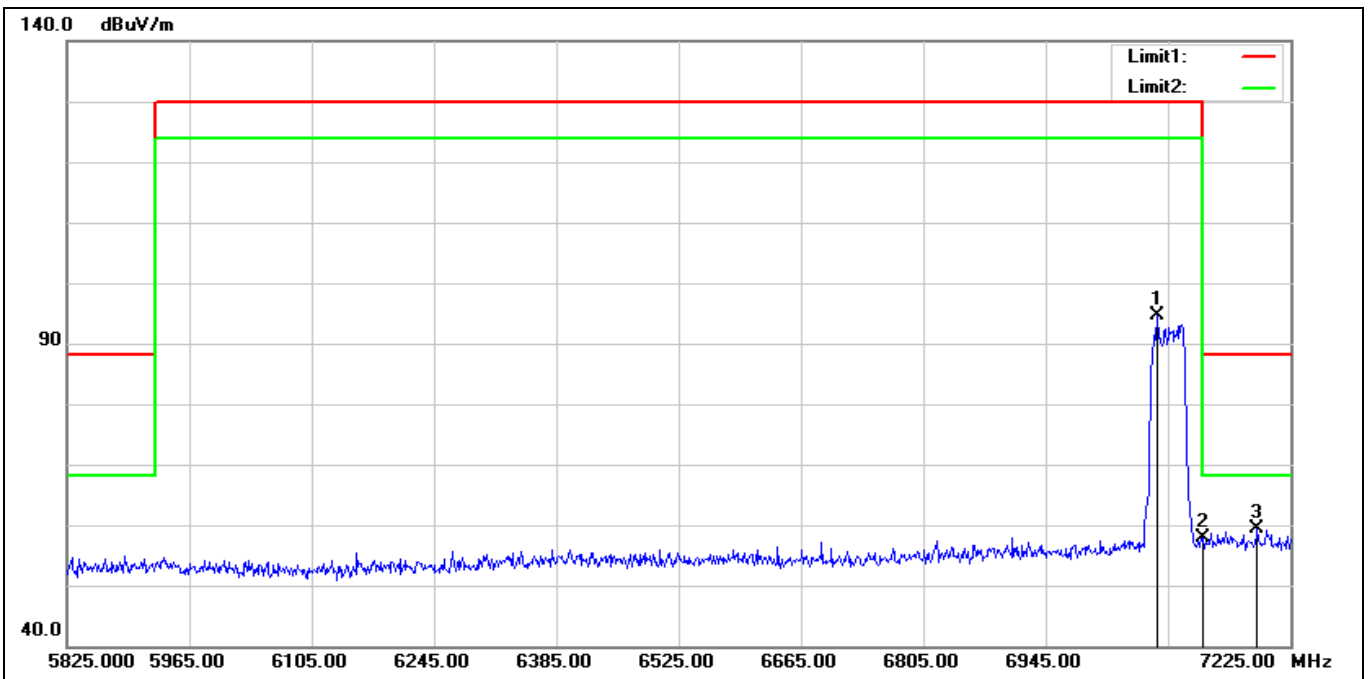


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7072.400	87.33	7.18	94.51	130.00	-35.49	peak
2	7125.000	50.34	7.49	57.83	88.20	-30.37	peak
3*	7187.200	51.61	7.73	59.34	88.20	-28.86	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax 40 7085MHz		
Remark:	Z 軸_ANT-A(AUX)		

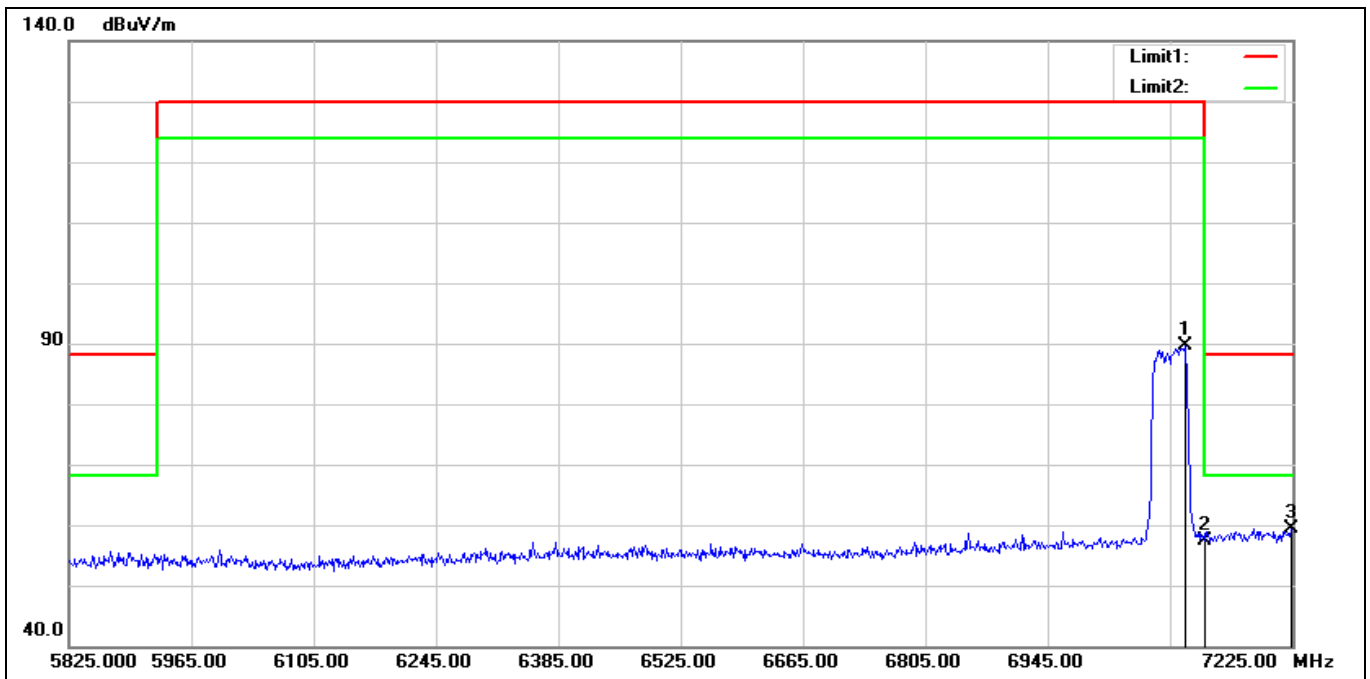


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7101.800	82.17	7.42	89.59	130.00	-40.41	peak
2	7125.000	49.93	7.49	57.42	88.20	-30.78	peak
3*	7223.600	51.54	7.91	59.45	88.20	-28.75	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax 80 5985MHz		
Remark:	Z 軸_ANT-A(AUX)		

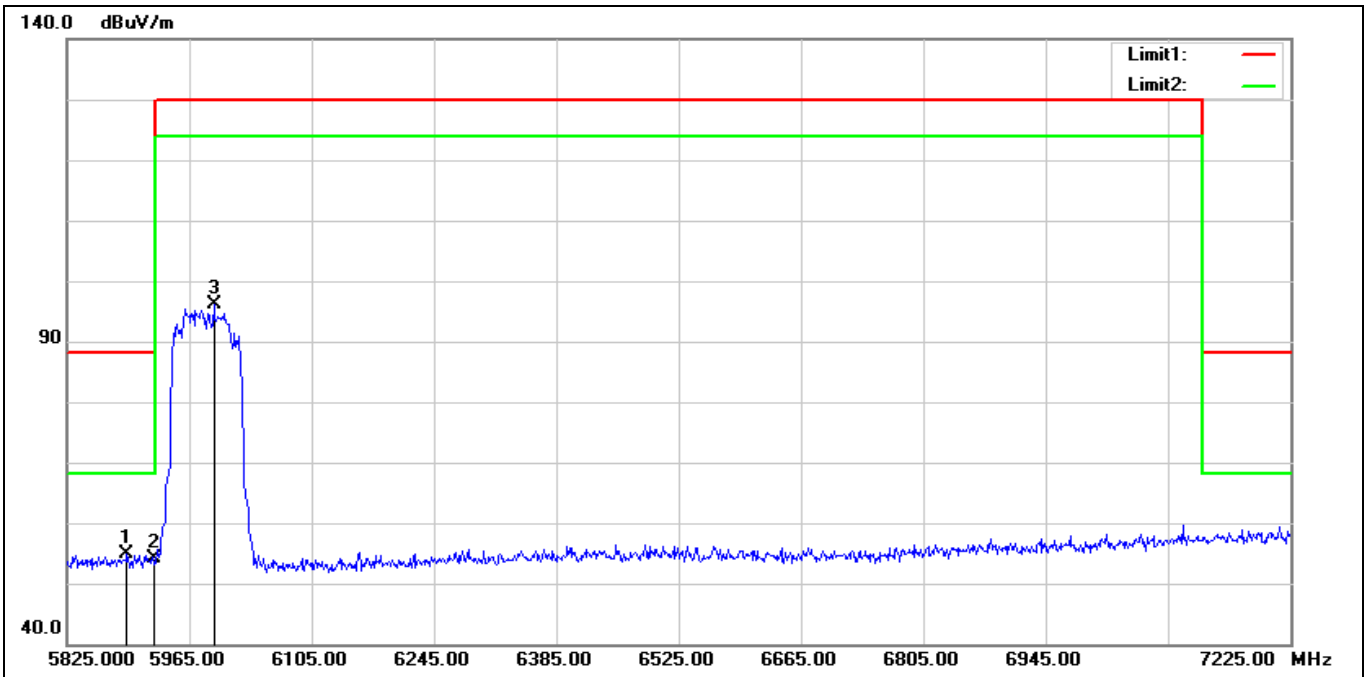

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5893.600	51.70	3.13	54.83	88.20	-33.37	peak
2	5925.000	50.92	3.10	54.02	88.20	-34.18	peak
3	5993.000	92.89	3.25	96.14	130.00	-33.86	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax 80 5985MHz		
Remark:	Z 軸_ANT-A(AUX)		

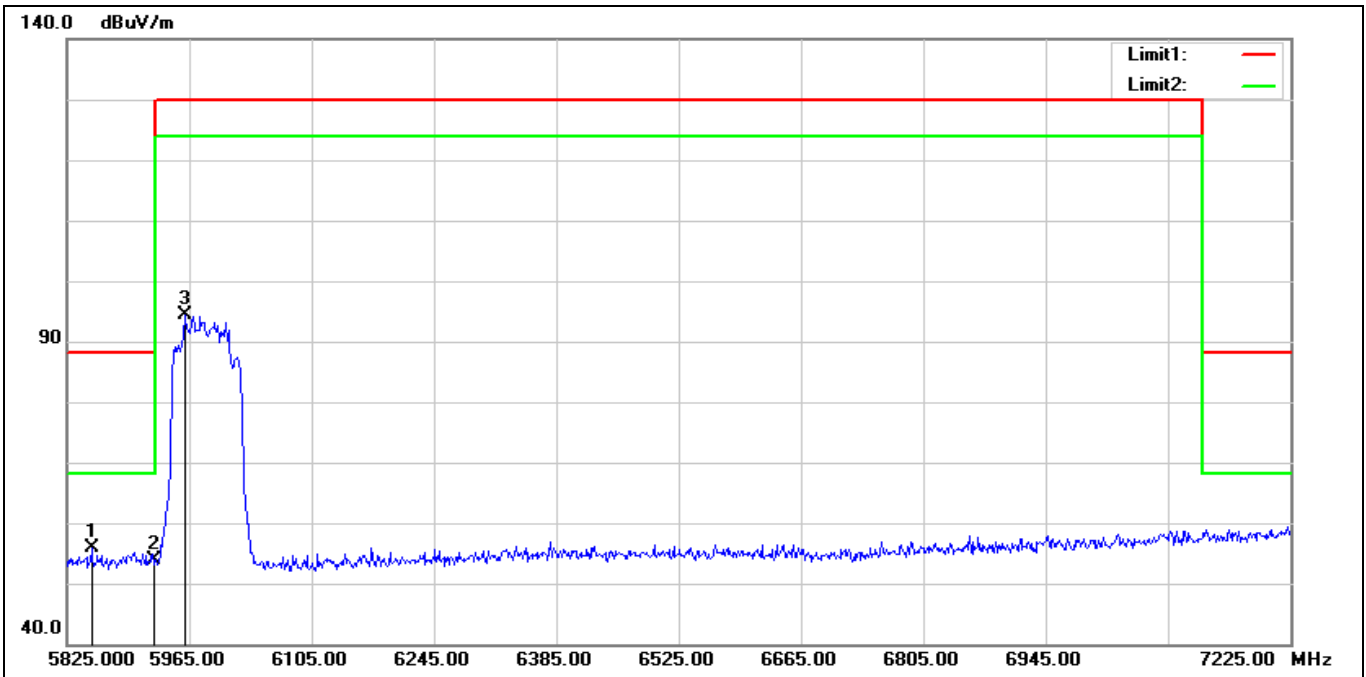

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5853.000	52.89	2.99	55.88	88.20	-32.32	peak
2	5925.000	50.75	3.10	53.85	88.20	-34.35	peak
3	5959.400	91.35	3.08	94.43	130.00	-35.57	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax 80 7025MHz		
Remark:	Z 軸_ANT-A(AUX)		

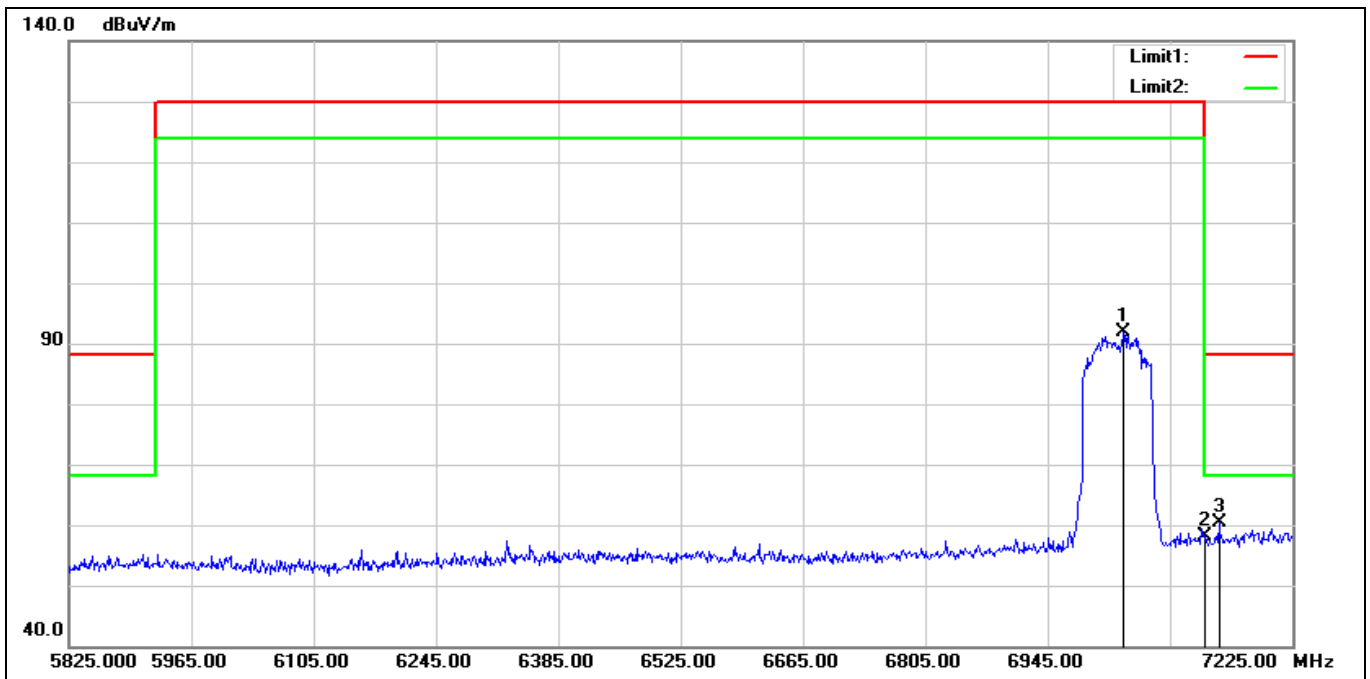


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7031.800	85.04	6.82	91.86	130.00	-38.14	peak
2	7125.000	50.57	7.49	58.06	88.20	-30.14	peak
3*	7141.000	52.95	7.53	60.48	88.20	-27.72	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax 80 7025MHz		
Remark:	Z 軸_ANT-A(AUX)		

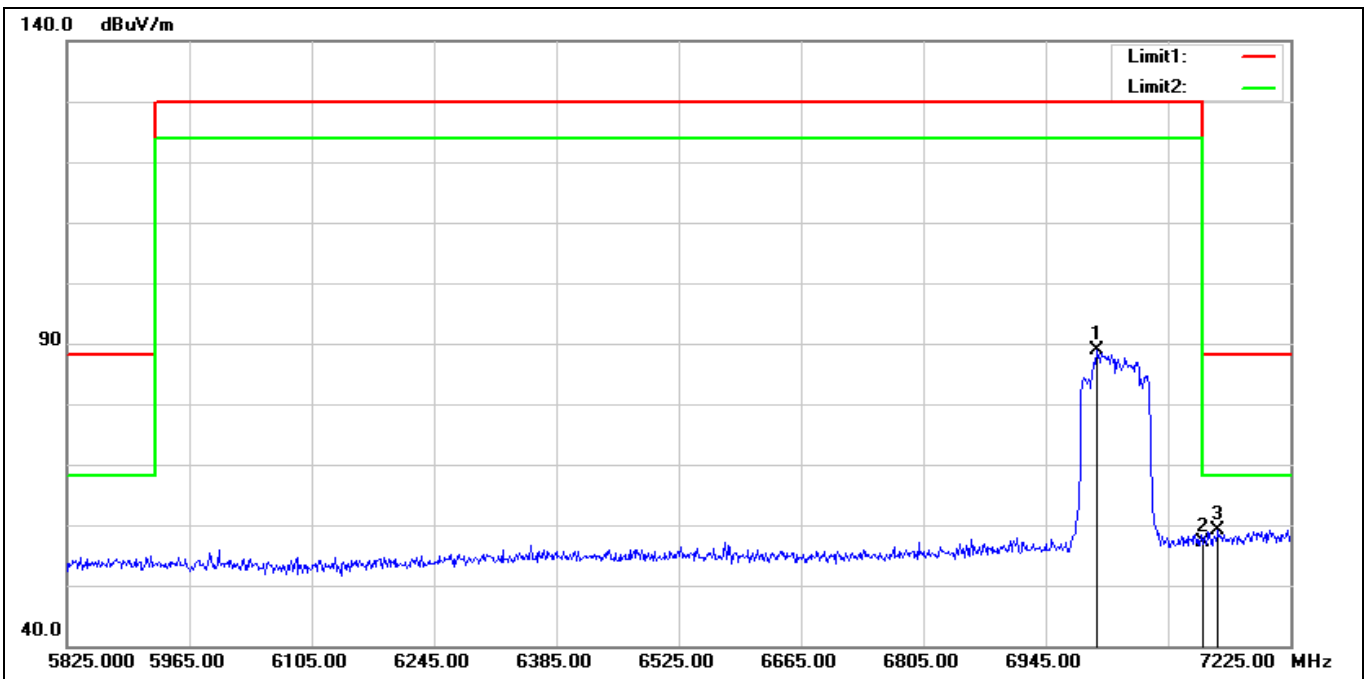


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7003.800	82.28	6.57	88.85	130.00	-41.15	peak
2	7125.000	49.53	7.49	57.02	88.20	-31.18	peak
3*	7142.400	51.66	7.53	59.19	88.20	-29.01	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax 160 6025MHz		
Remark:	Z 軸_ANT-A(AUX)		

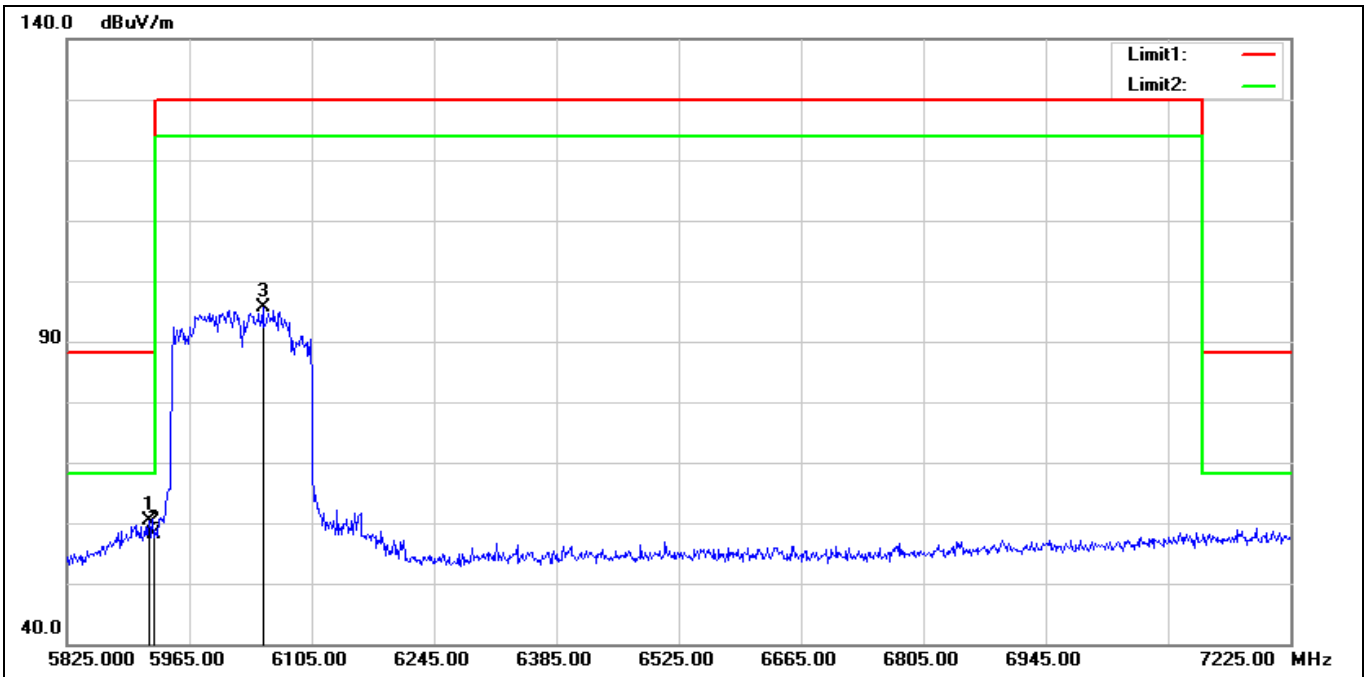


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5918.800	57.28	3.10	60.38	88.20	-27.82	peak
2	5925.000	54.98	3.10	58.08	88.20	-30.12	peak
3	6049.000	92.31	3.24	95.55	130.00	-34.45	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax 160 6025MHz		
Remark:	Z 軸_ANT-A(AUX)		

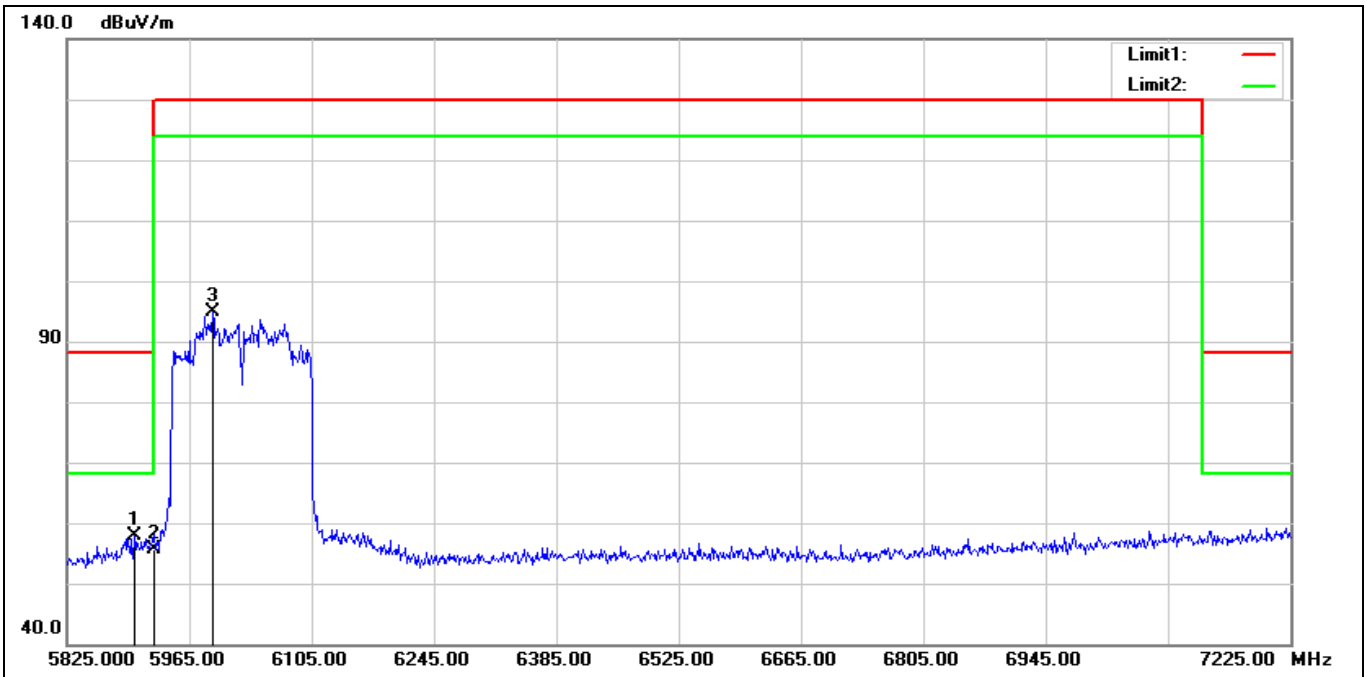


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5902.000	54.75	3.15	57.90	88.20	-30.30	peak
2	5925.000	52.52	3.10	55.62	88.20	-32.58	peak
3	5991.600	91.72	3.25	94.97	130.00	-35.03	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax 160 6985MHz		
Remark:	Z 軸_ANT-A(AUX)		

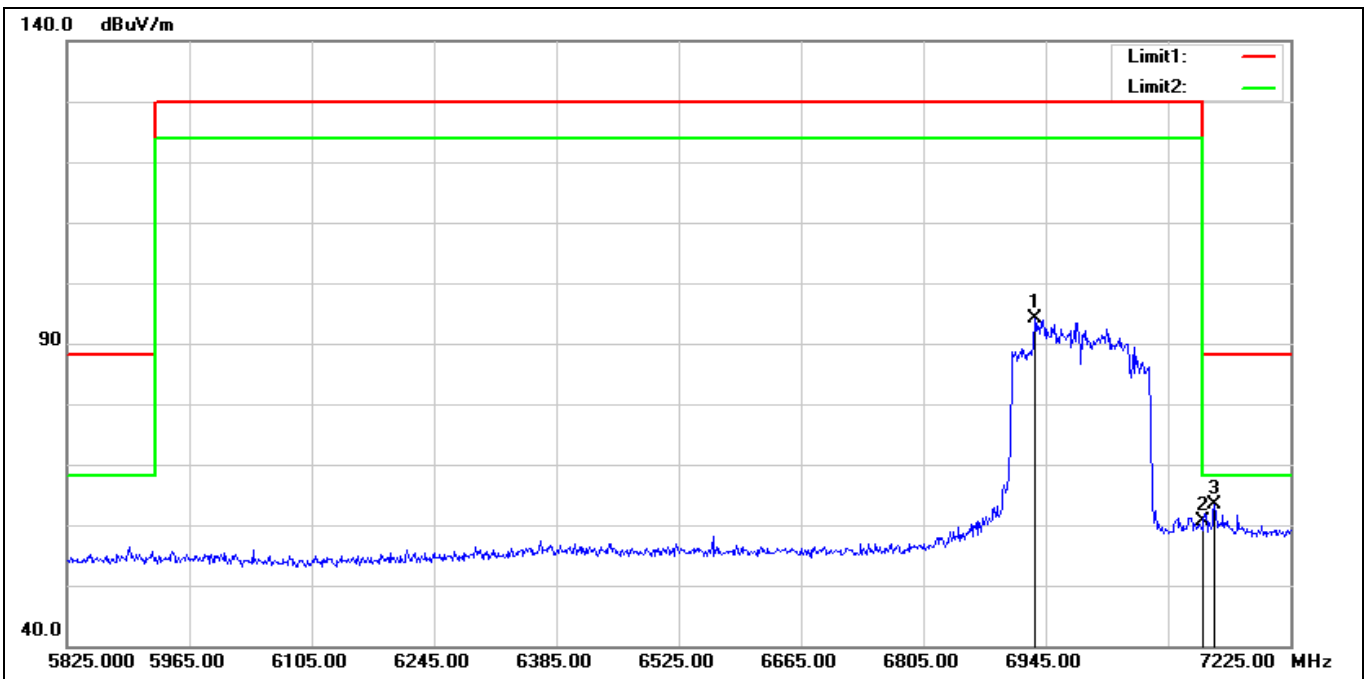

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6932.400	87.66	6.54	94.20	130.00	-35.80	peak
2	7125.000	53.05	7.49	60.54	88.20	-27.66	peak
3*	7138.200	55.82	7.53	63.35	88.20	-24.85	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax 160 6985MHz		
Remark:	Z 軸_ANT-A(AUX)		

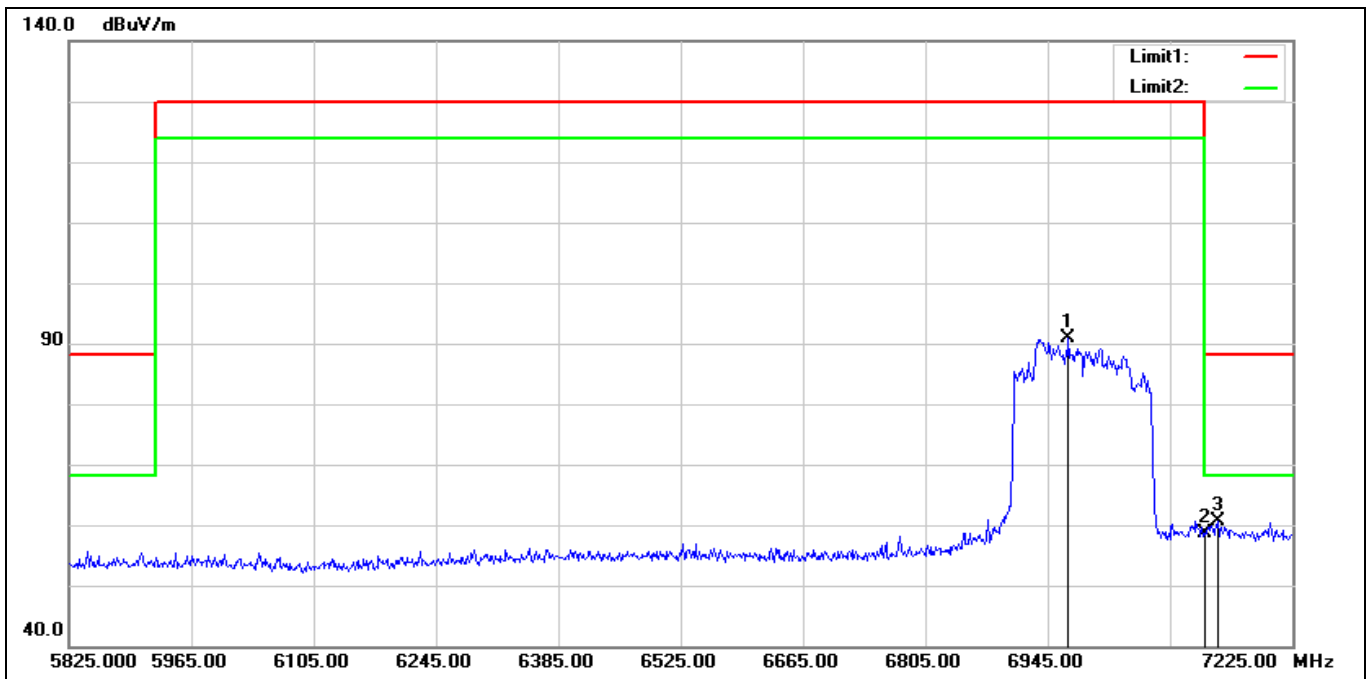


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6968.800	84.21	6.58	90.79	130.00	-39.21	peak
2	7125.000	51.23	7.49	58.72	88.20	-29.48	peak
3*	7139.600	53.01	7.53	60.54	88.20	-27.66	peak

MIMO


Below 1 GHz

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	Transmit Mode		
Remark:			

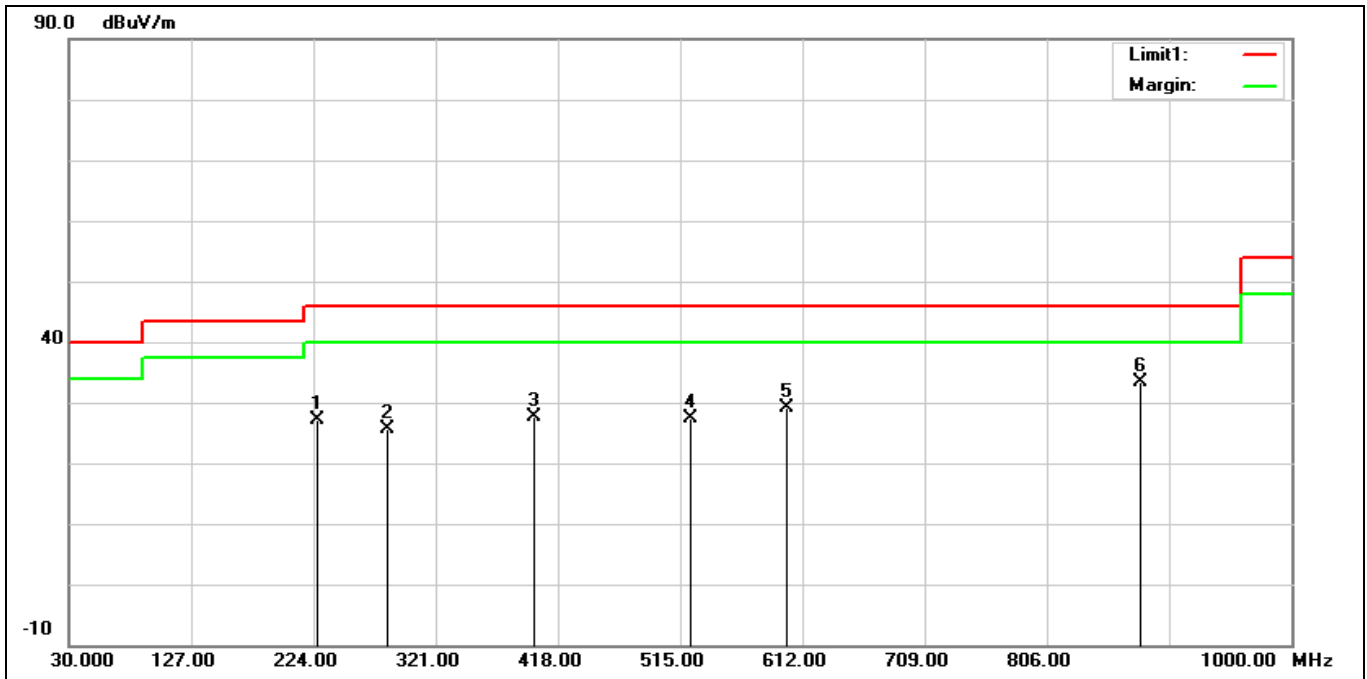

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	226.9100	37.12	-10.02	27.10	46.00	-18.90	QP
2	282.2000	32.75	-7.08	25.67	46.00	-20.33	QP
3	399.5700	31.89	-4.33	27.56	46.00	-18.44	QP
4	523.7300	29.18	-1.82	27.36	46.00	-18.64	QP
5	599.3900	29.10	0.13	29.23	46.00	-16.77	QP
6*	880.6900	28.29	5.14	33.43	46.00	-12.57	QP

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	Transmit Mode		
Remark:			

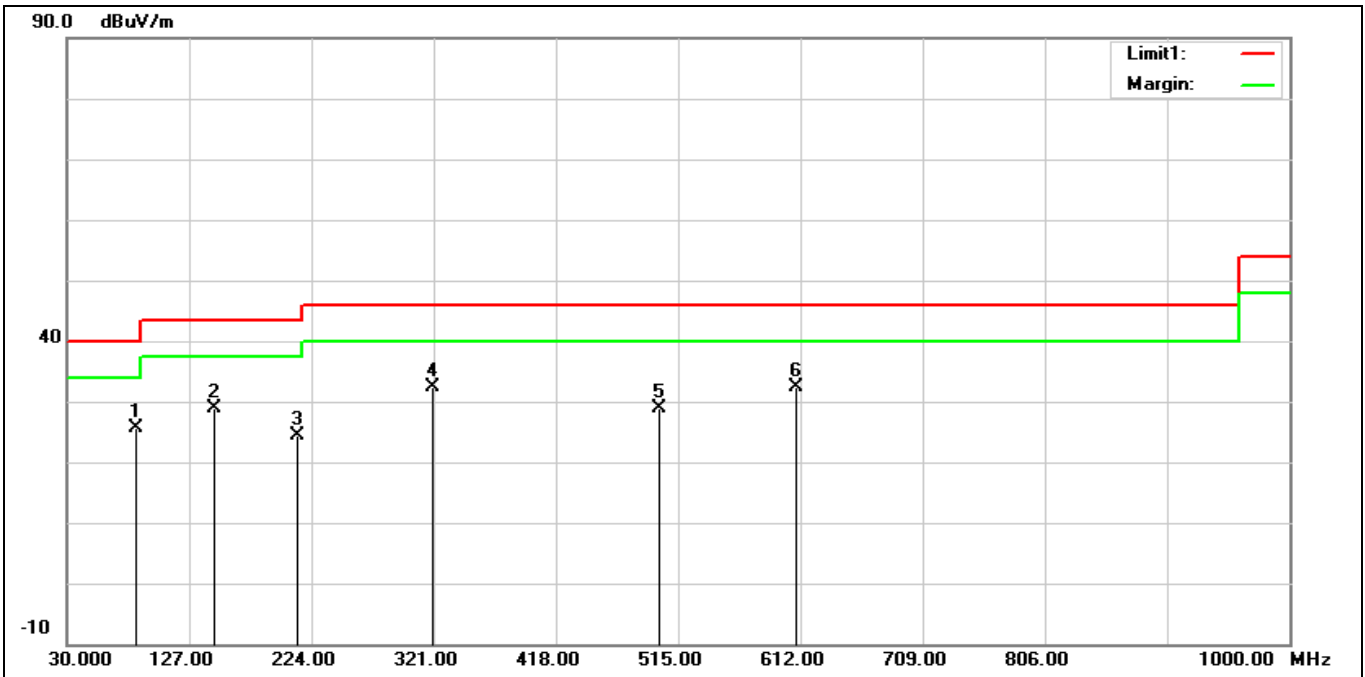


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	85.2900	38.33	-12.81	25.52	40.00	-14.48	QP
2	147.3700	36.37	-7.40	28.97	43.50	-14.53	QP
3	212.3600	34.62	-10.14	24.48	43.50	-19.02	QP
4*	320.0300	38.72	-6.37	32.35	46.00	-13.65	QP
5	499.4800	31.04	-2.13	28.91	46.00	-17.09	QP
6	608.1200	32.05	0.24	32.29	46.00	-13.71	QP



Harmonic


Above 1 GHz

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5955 MHz		
Remark:			

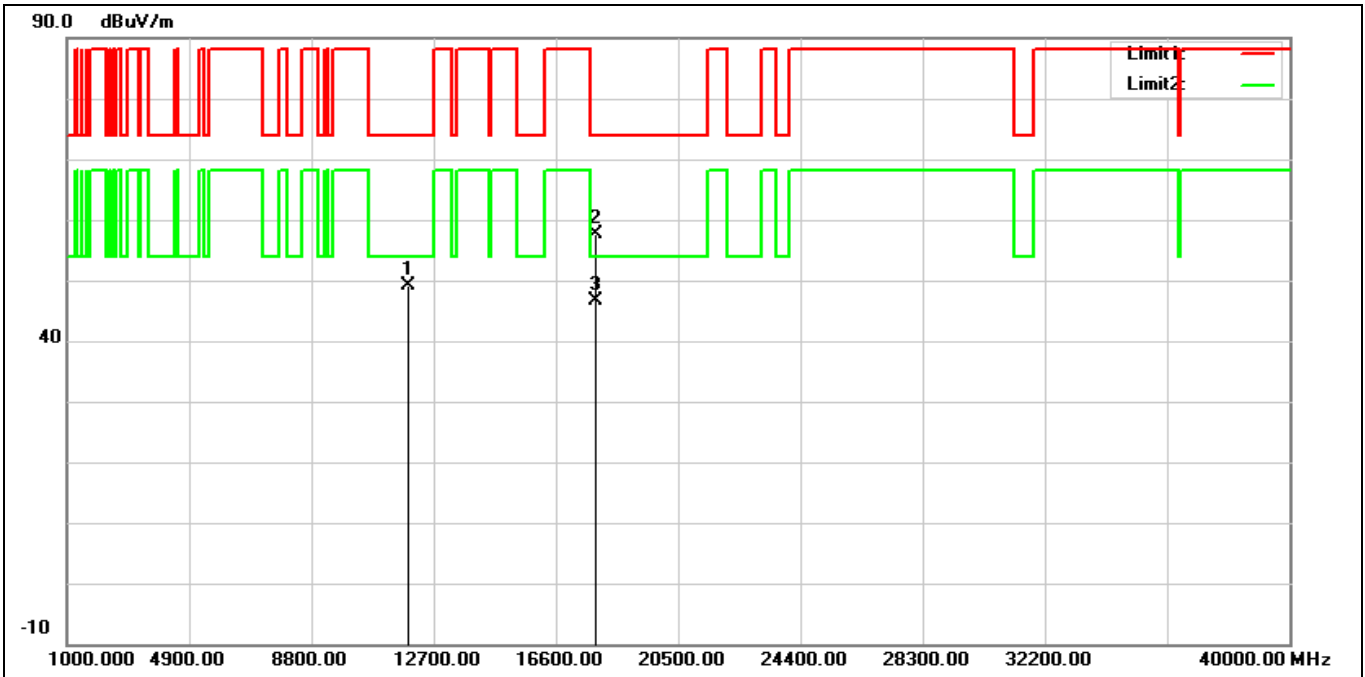


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11910.000	34.45	14.80	49.25	74.00	-24.75	peak
2	17865.000	30.59	27.02	57.61	74.00	-16.39	peak
3*	17865.000	19.64	27.02	46.66	54.00	-7.34	AVG

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5955 MHz		
Remark:			

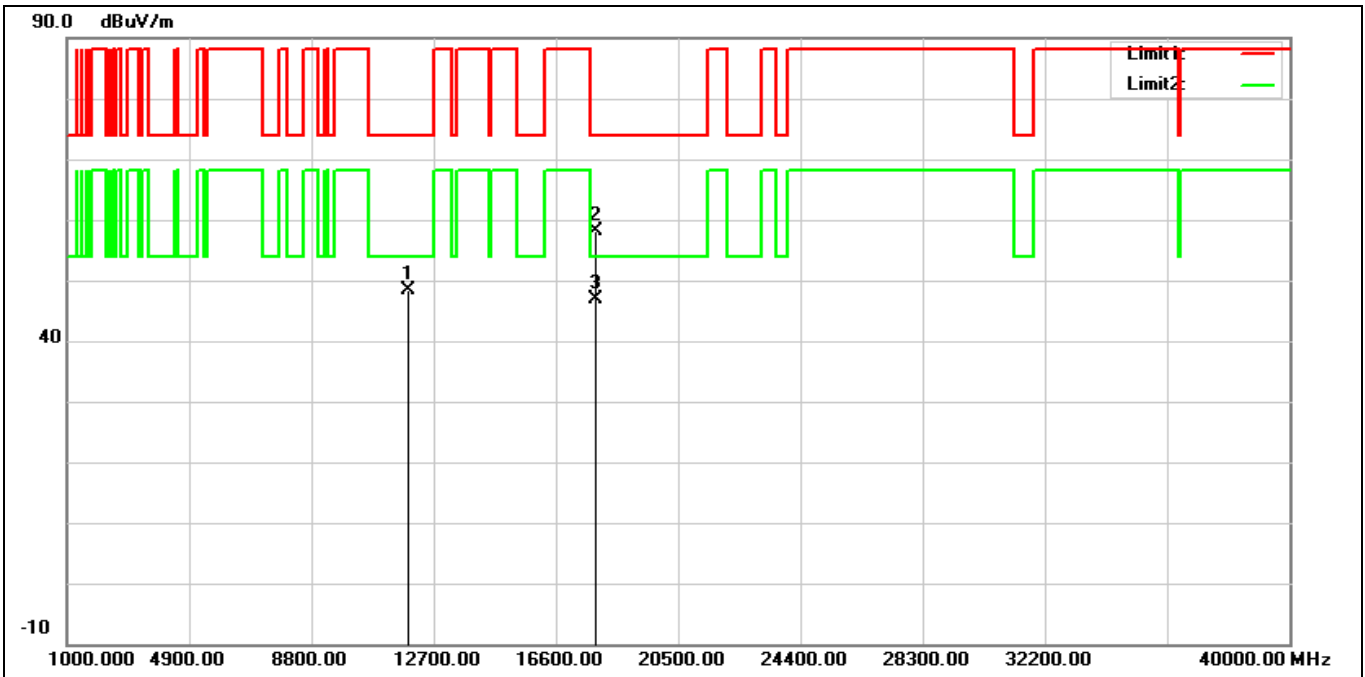


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11910.000	33.46	14.80	48.26	74.00	-25.74	peak
2	17865.000	31.04	27.02	58.06	74.00	-15.94	peak
3*	17865.000	19.95	27.02	46.97	54.00	-7.03	AVG

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6175 MHz		
Remark:			

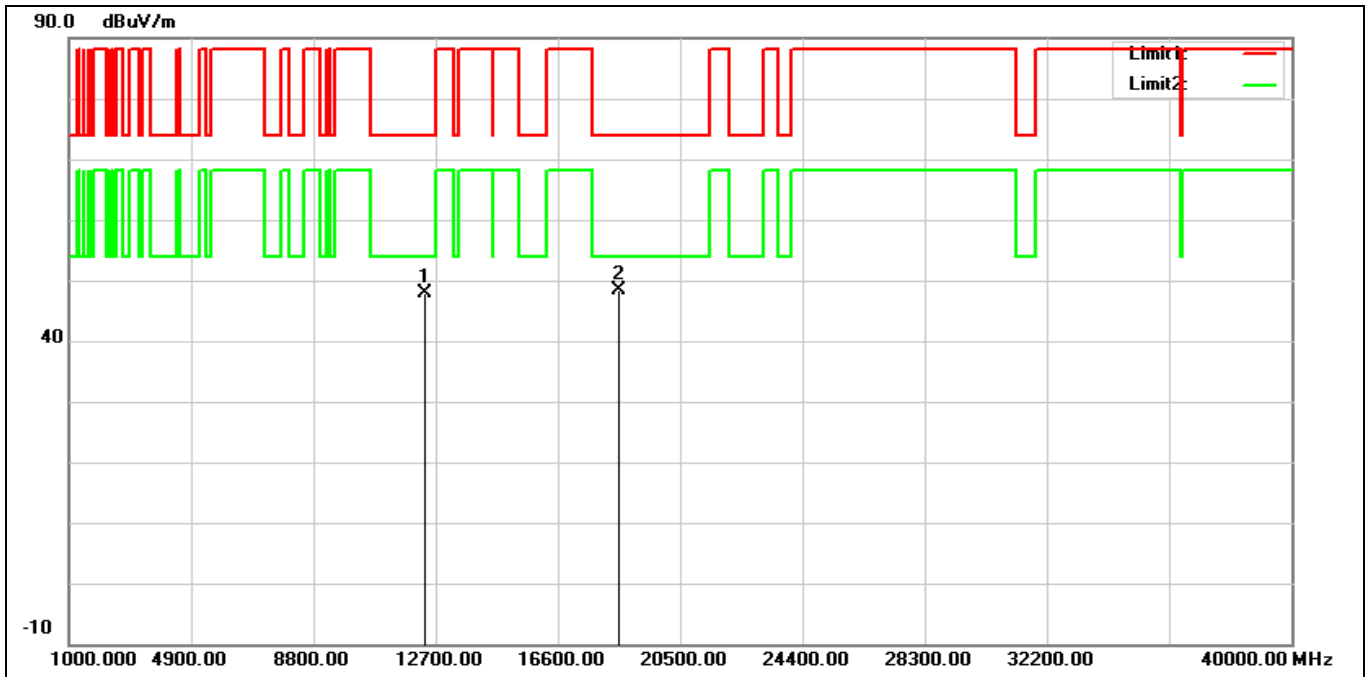


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12350.000	32.92	15.01	47.93	74.00	-26.07	peak
2*	18525.000	30.31	17.99	48.30	74.00	-25.70	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6175 MHz		
Remark:			

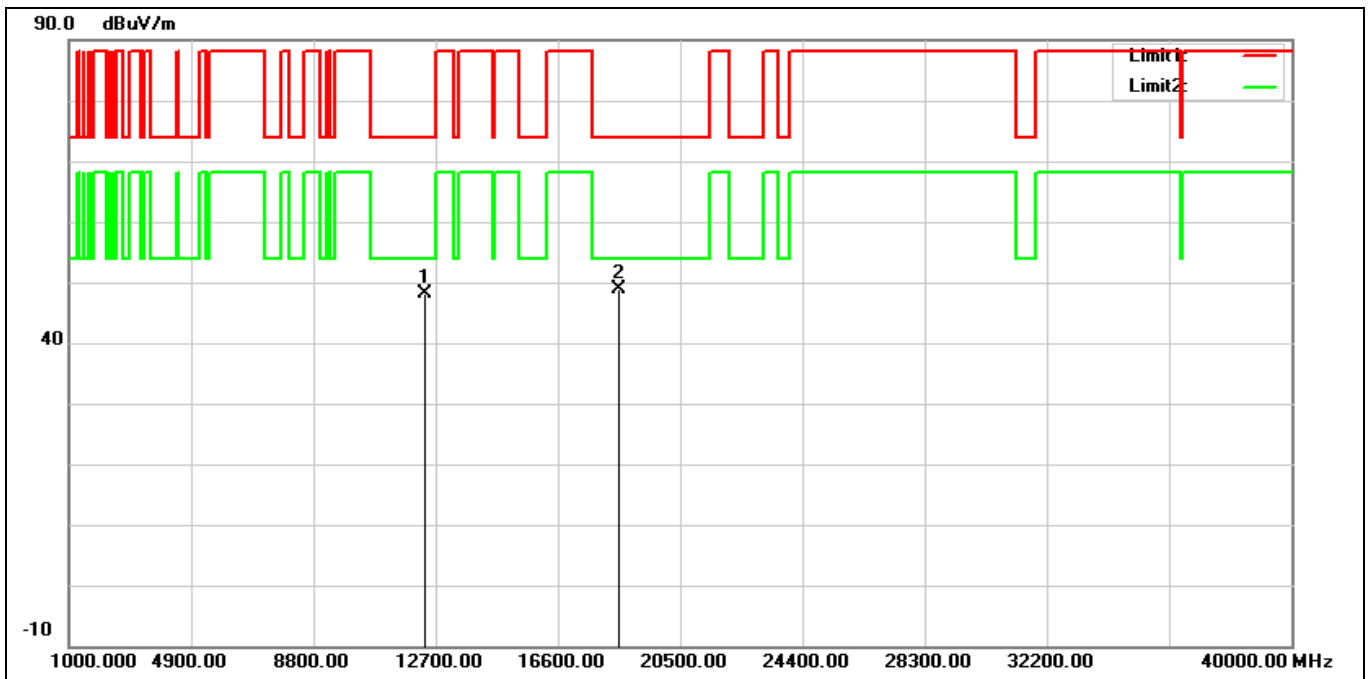


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12350.000	33.15	15.01	48.16	74.00	-25.84	peak
2*	18525.000	30.93	17.99	48.92	74.00	-25.08	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6415 MHz		
Remark:			

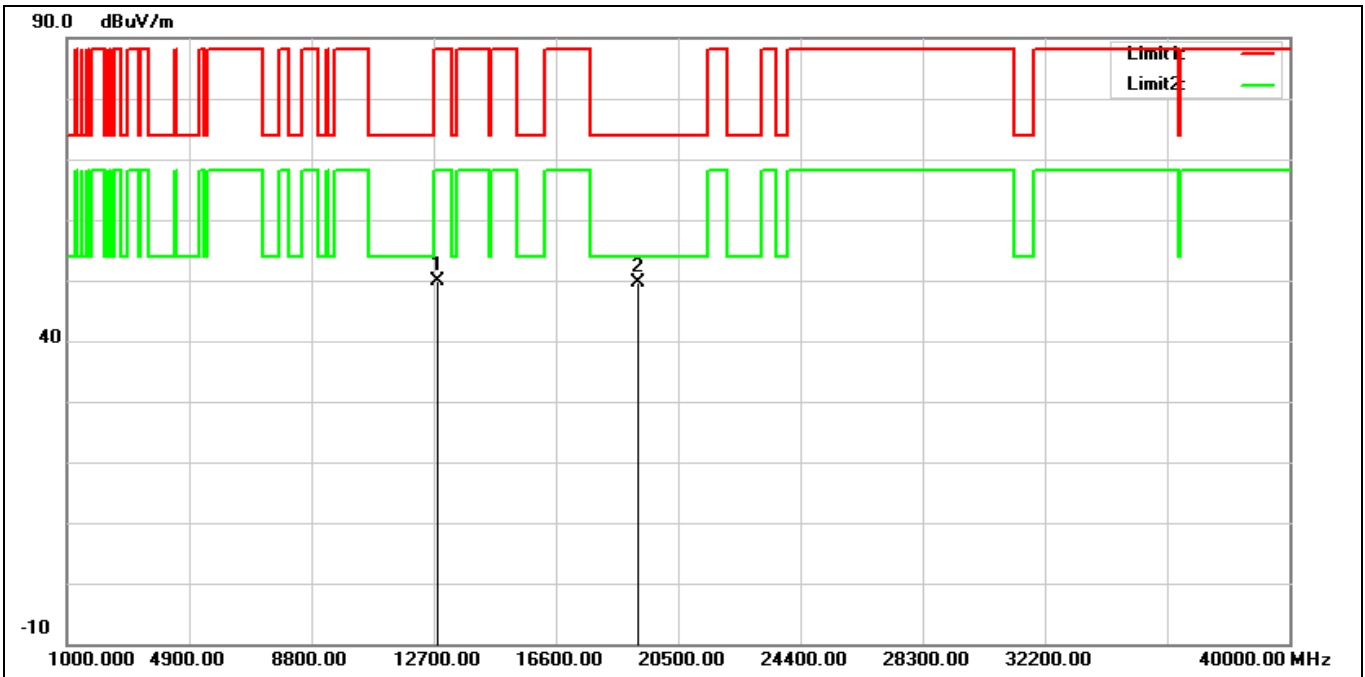


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12830.000	34.15	15.71	49.86	88.20	-38.34	peak
2*	19245.000	30.97	18.58	49.55	74.00	-24.45	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6415 MHz		
Remark:			

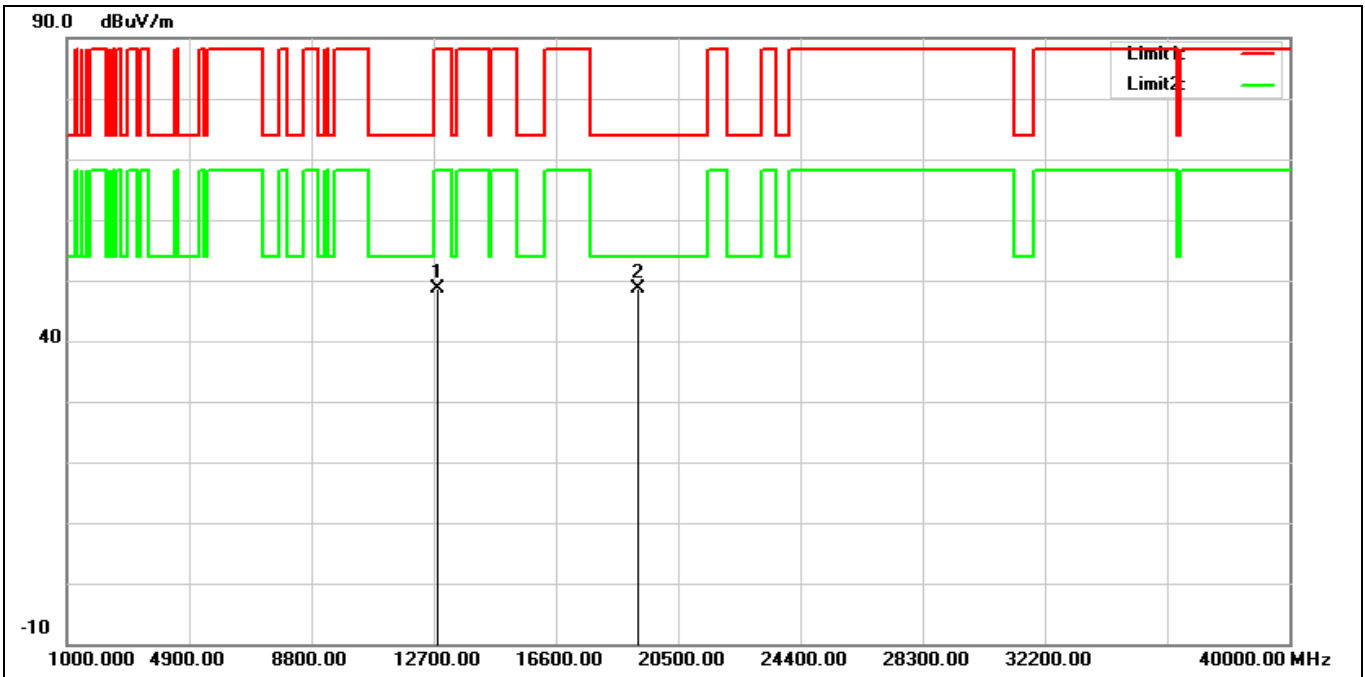


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12830.000	33.02	15.71	48.73	88.20	-39.47	peak
2*	19245.000	29.98	18.58	48.56	74.00	-25.44	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6435 MHz		
Remark:			

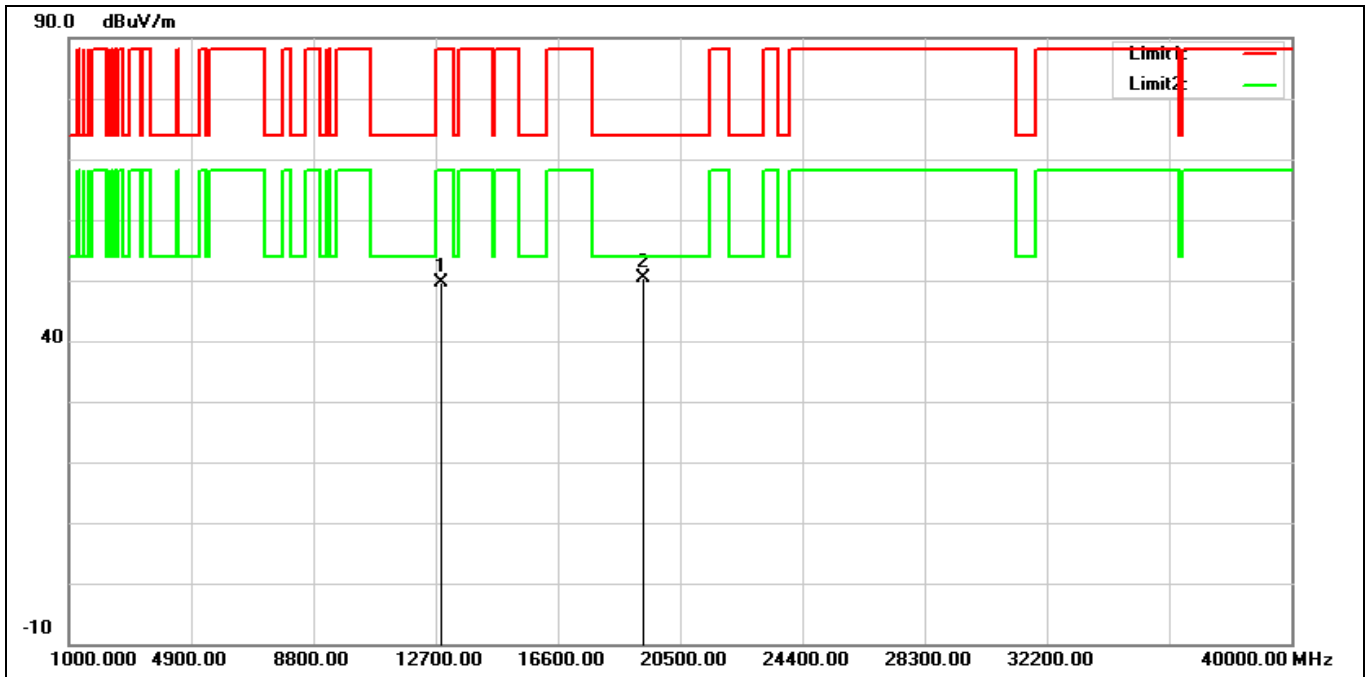

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12870.000	33.72	15.79	49.51	88.20	-38.69	peak
2*	19305.000	31.68	18.65	50.33	74.00	-23.67	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6435 MHz		
Remark:			

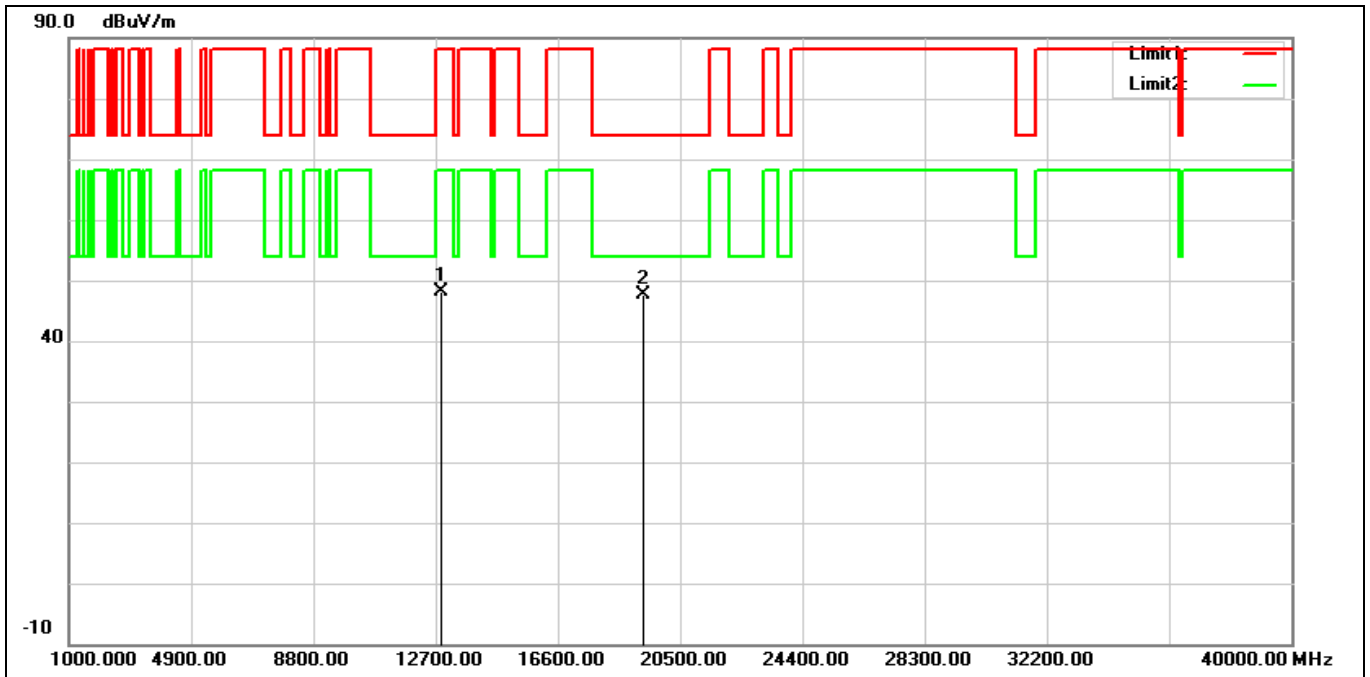

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12870.000	32.42	15.79	48.21	88.20	-39.99	peak
2*	19305.000	28.87	18.65	47.52	74.00	-26.48	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6475 MHz		
Remark:			

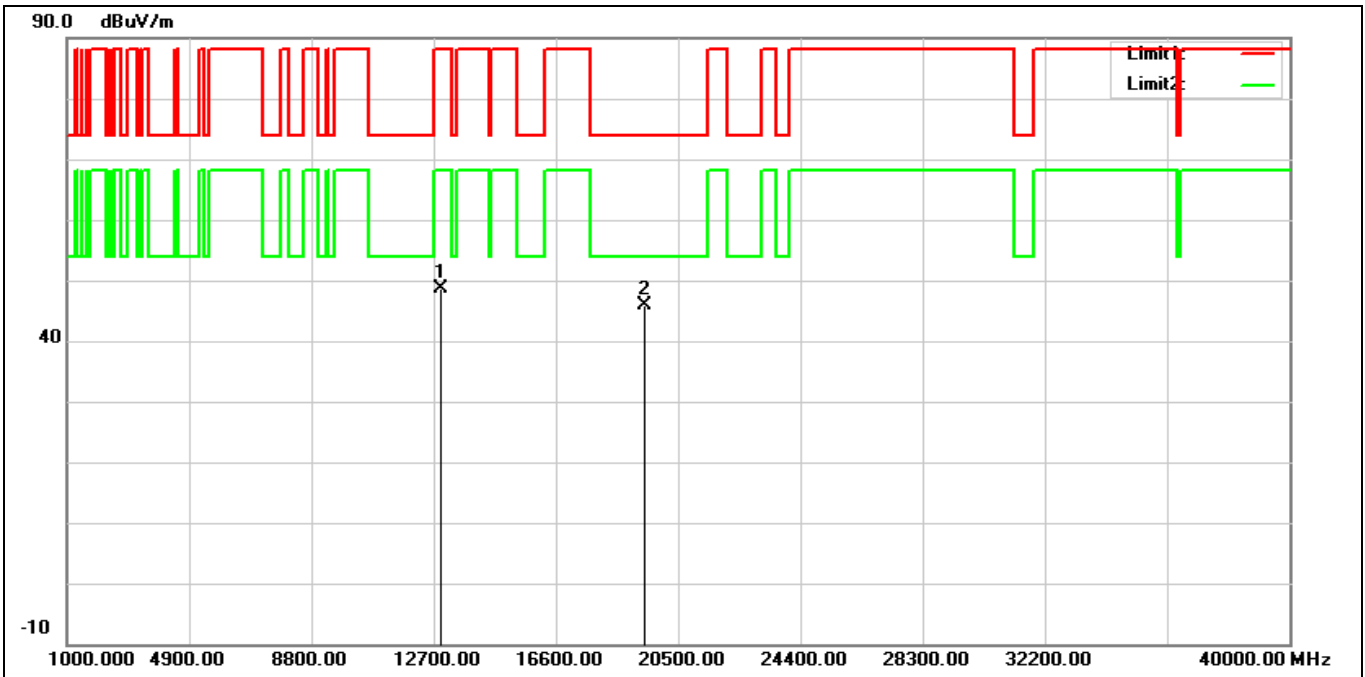


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12950.000	32.90	15.79	48.69	88.20	-39.51	peak
2*	19425.000	26.98	18.79	45.77	74.00	-28.23	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6475 MHz		
Remark:			

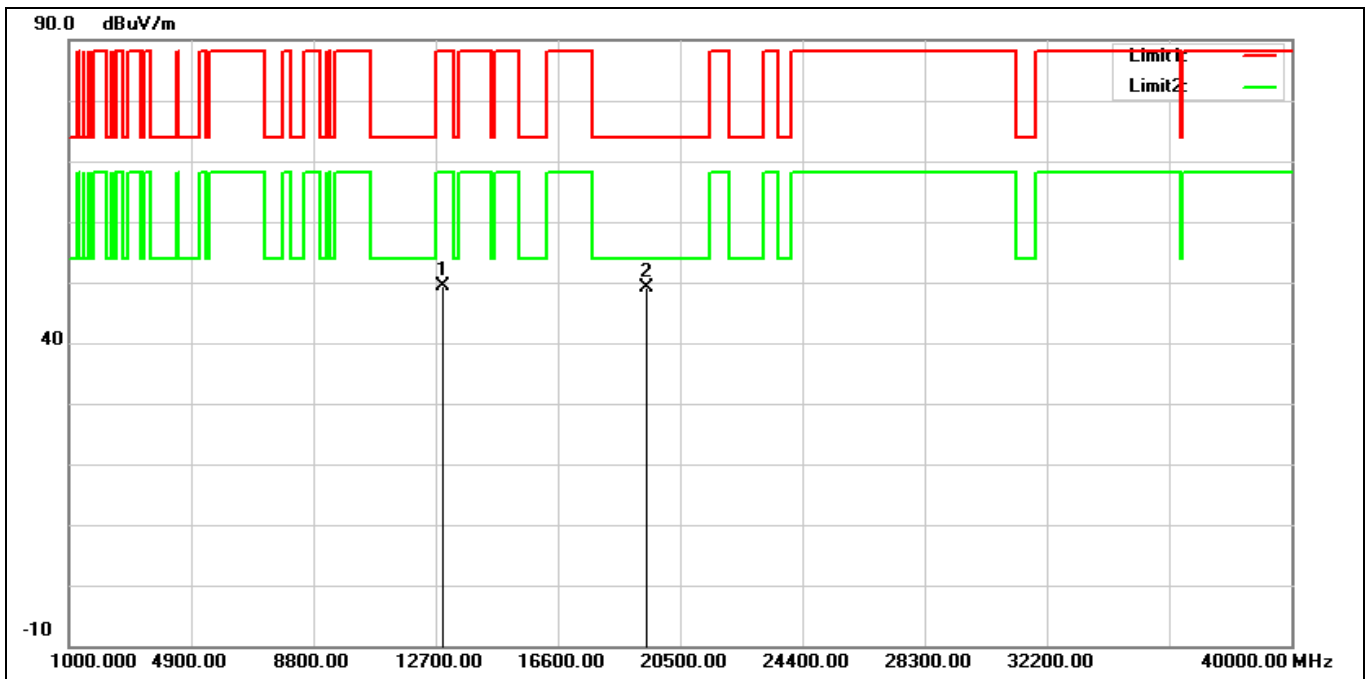


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12950.000	33.52	15.79	49.31	88.20	-38.89	peak
2*	19425.000	30.26	18.79	49.05	74.00	-24.95	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6515 MHz		
Remark:			

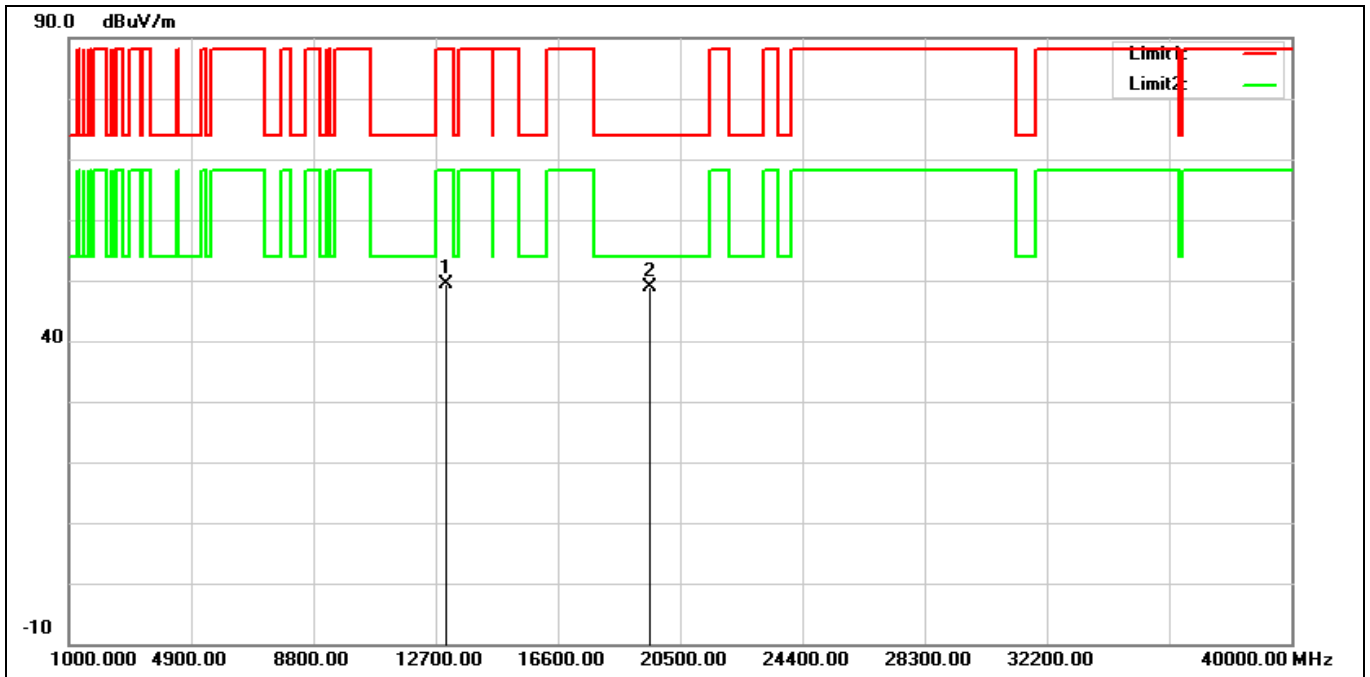


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13030.000	33.60	15.71	49.31	88.20	-38.89	peak
2*	19545.000	29.88	18.88	48.76	74.00	-25.24	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6515 MHz		
Remark:			

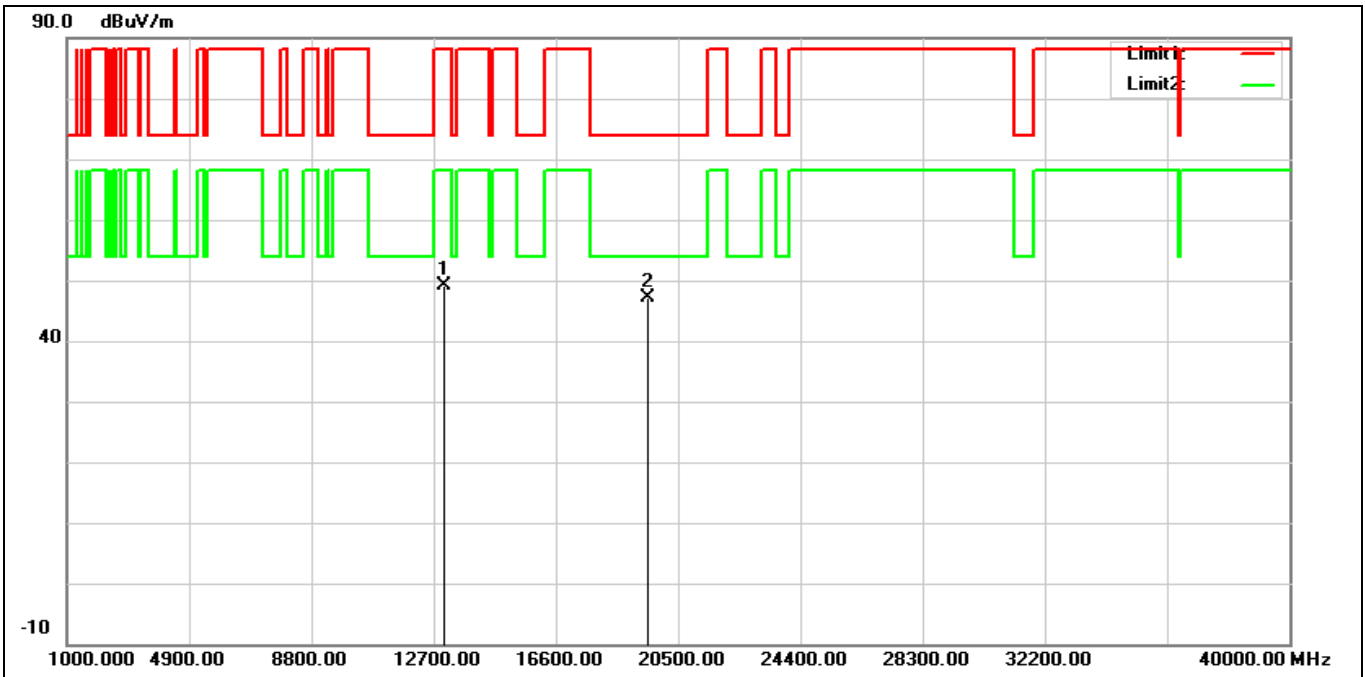


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13030.000	33.52	15.71	49.23	88.20	-38.97	peak
2*	19545.000	28.17	18.88	47.05	74.00	-26.95	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6535 MHz		
Remark:			

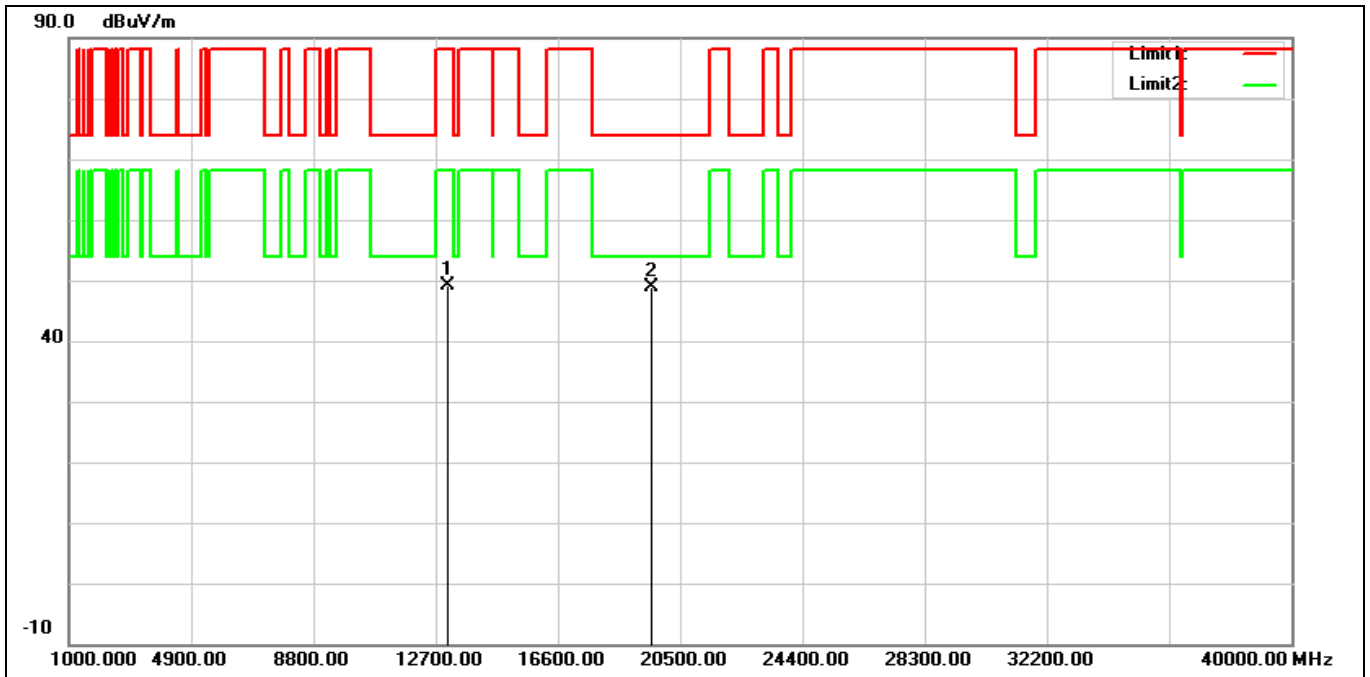


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13070.000	33.38	15.68	49.06	88.20	-39.14	peak
2*	19605.000	29.90	18.89	48.79	74.00	-25.21	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6535 MHz		
Remark:			

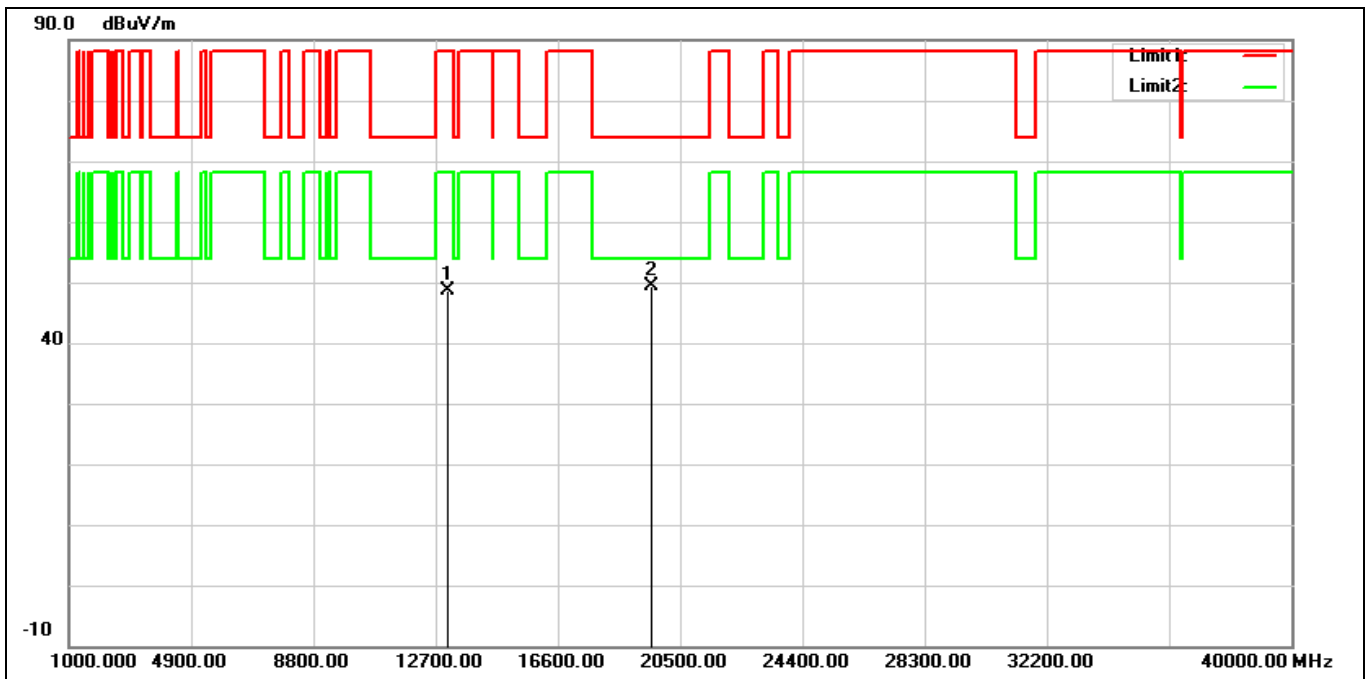


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13070.000	32.93	15.68	48.61	88.20	-39.59	peak
2*	19605.000	30.54	18.89	49.43	74.00	-24.57	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6695 MHz		
Remark:			

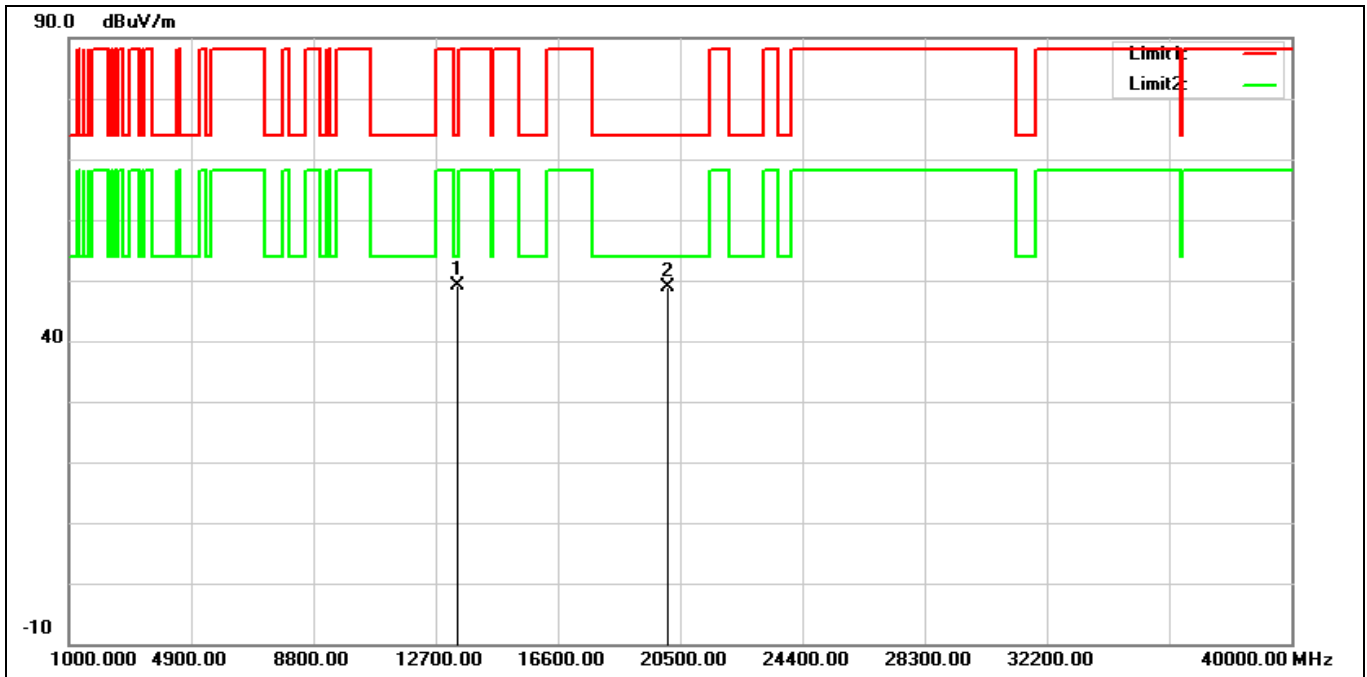

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	13390.000	32.67	16.53	49.20	74.00	-24.80	peak
2	20085.000	29.91	19.01	48.92	74.00	-25.08	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6695 MHz		
Remark:			

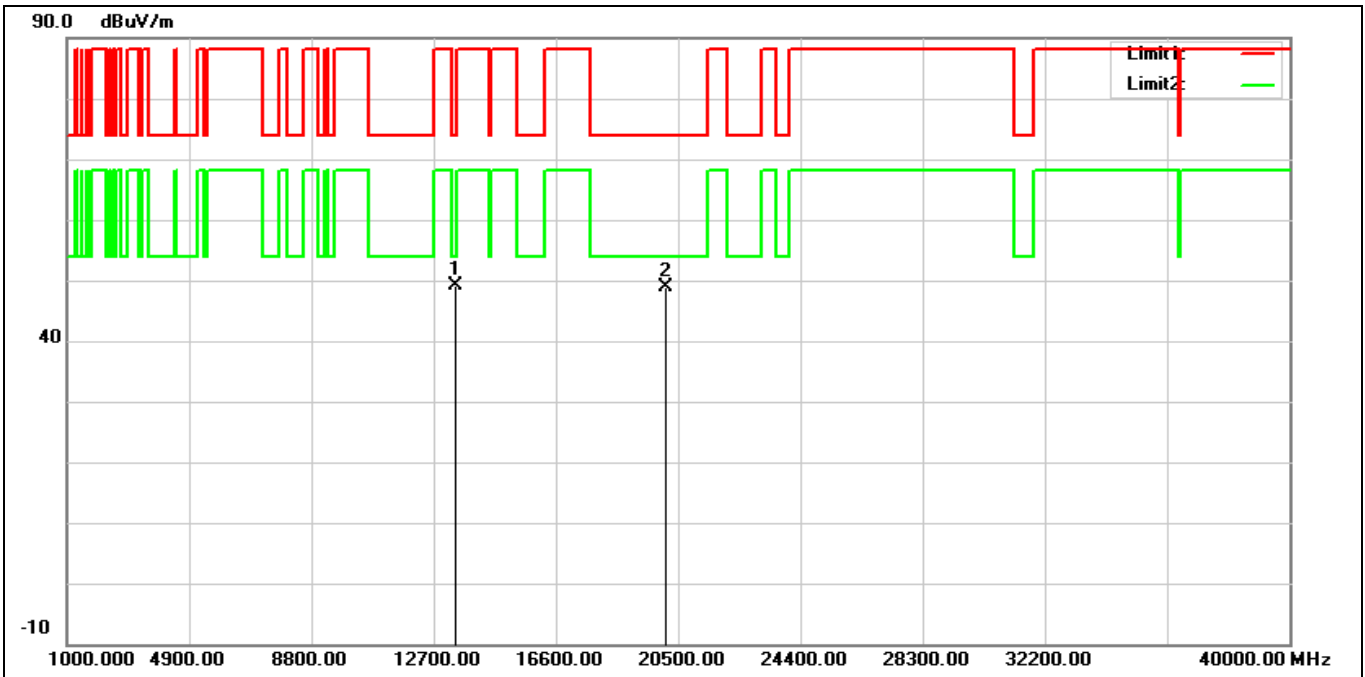

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	13390.000	32.65	16.53	49.18	74.00	-24.82	peak
2	20085.000	29.81	19.01	48.82	74.00	-25.18	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6855 MHz		
Remark:			

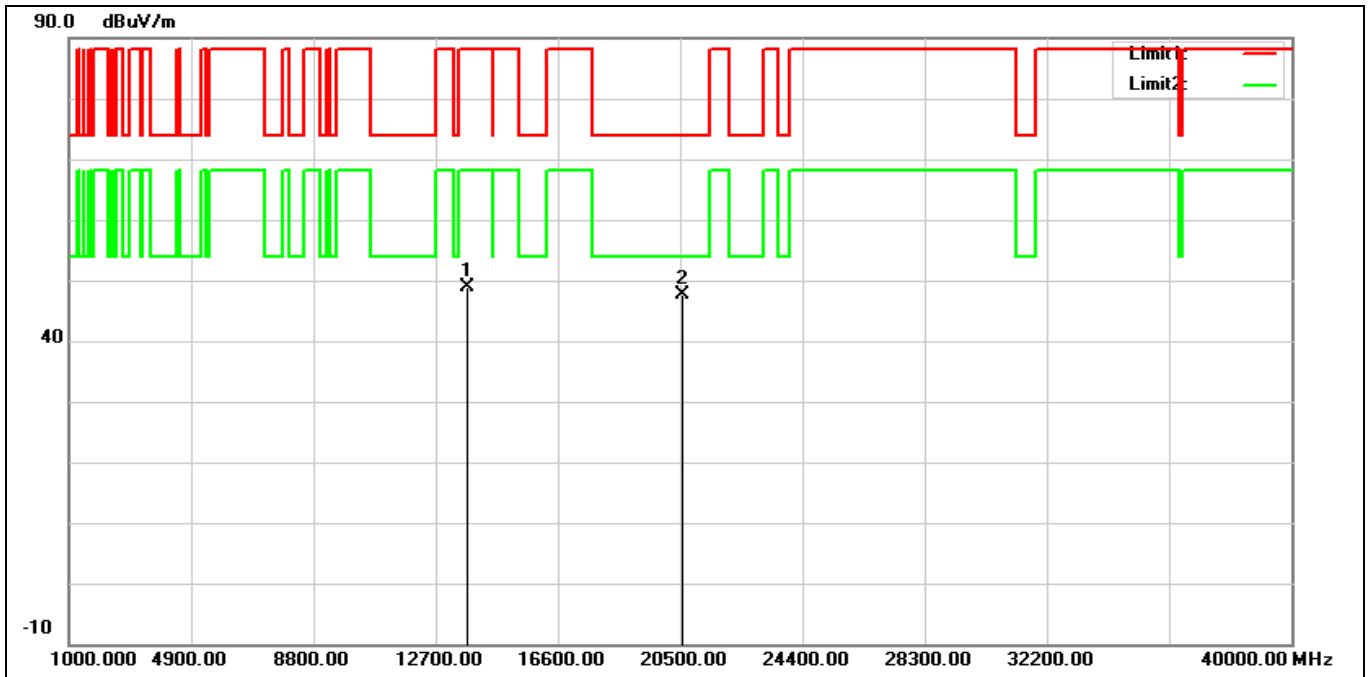


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13710.000	31.70	17.26	48.96	88.20	-39.24	peak
2*	20565.000	28.10	19.58	47.68	74.00	-26.32	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6855 MHz		
Remark:			

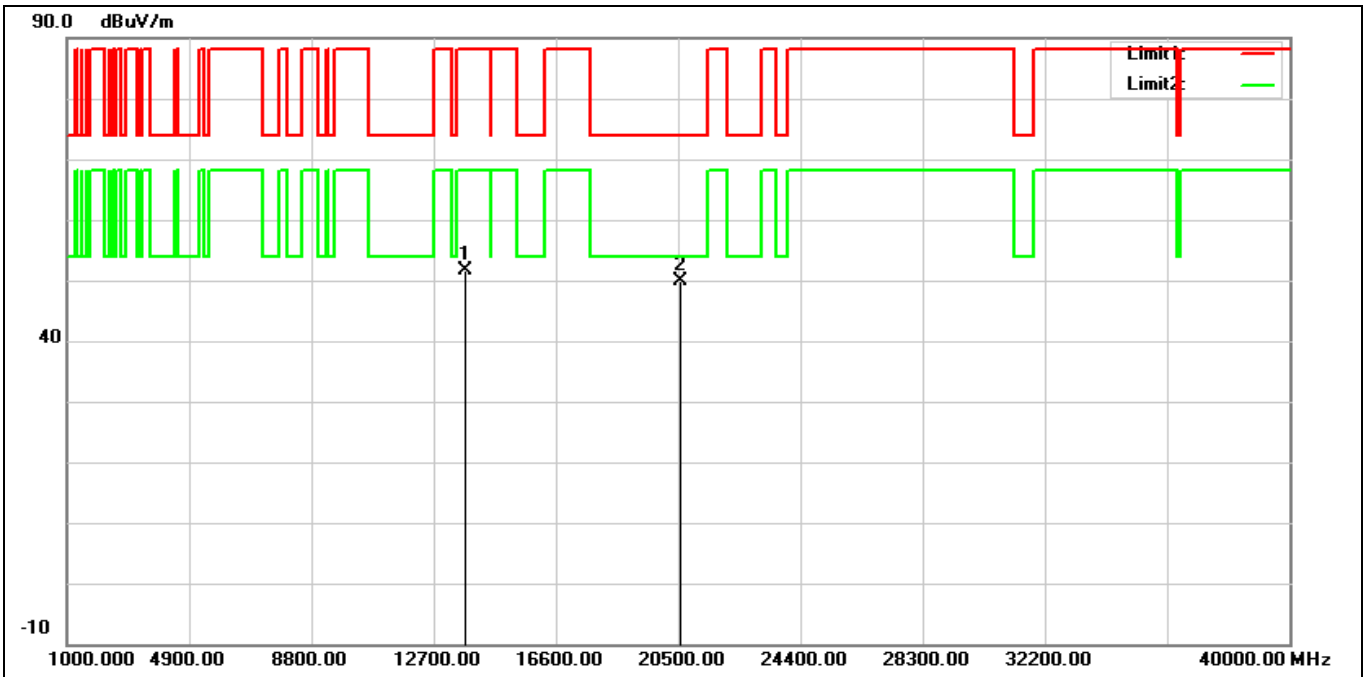


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13710.000	34.41	17.26	51.67	88.20	-36.53	peak
2*	20565.000	30.19	19.58	49.77	74.00	-24.23	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6875 MHz		
Remark:			

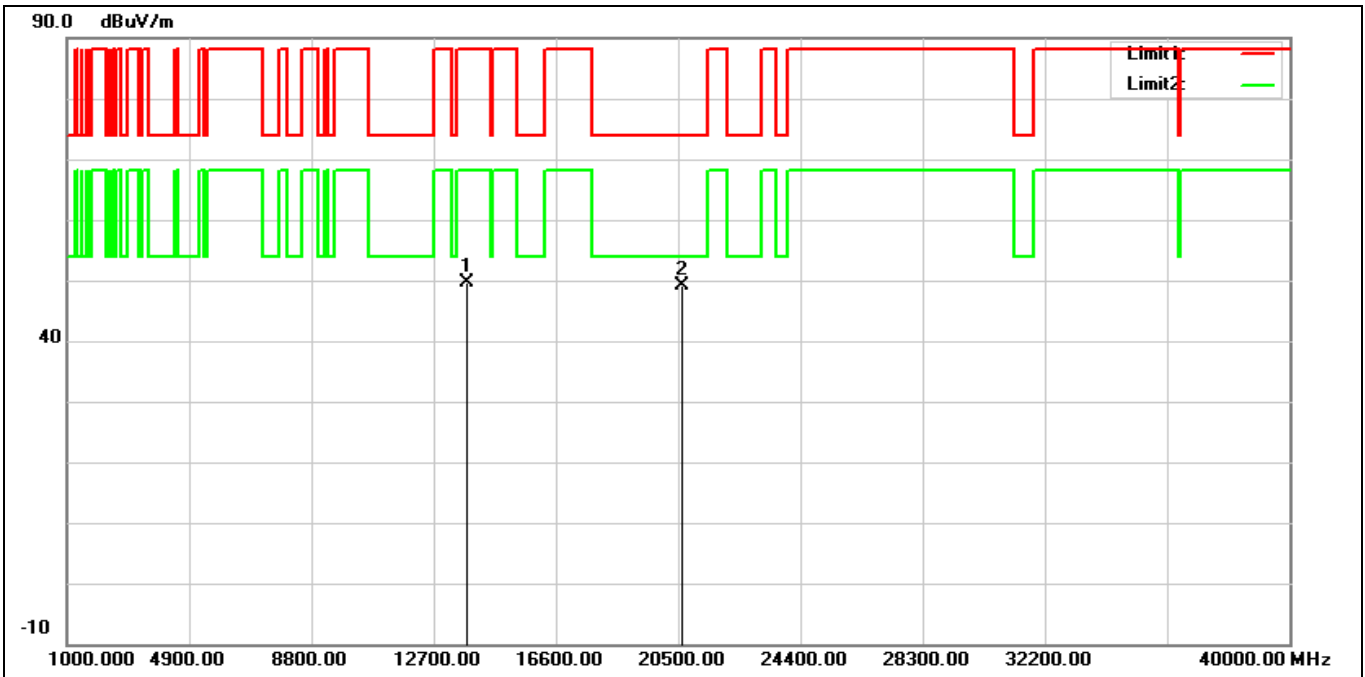


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13750.000	32.56	17.17	49.73	88.20	-38.47	peak
2*	20625.000	29.47	19.61	49.08	74.00	-24.92	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6875 MHz		
Remark:			

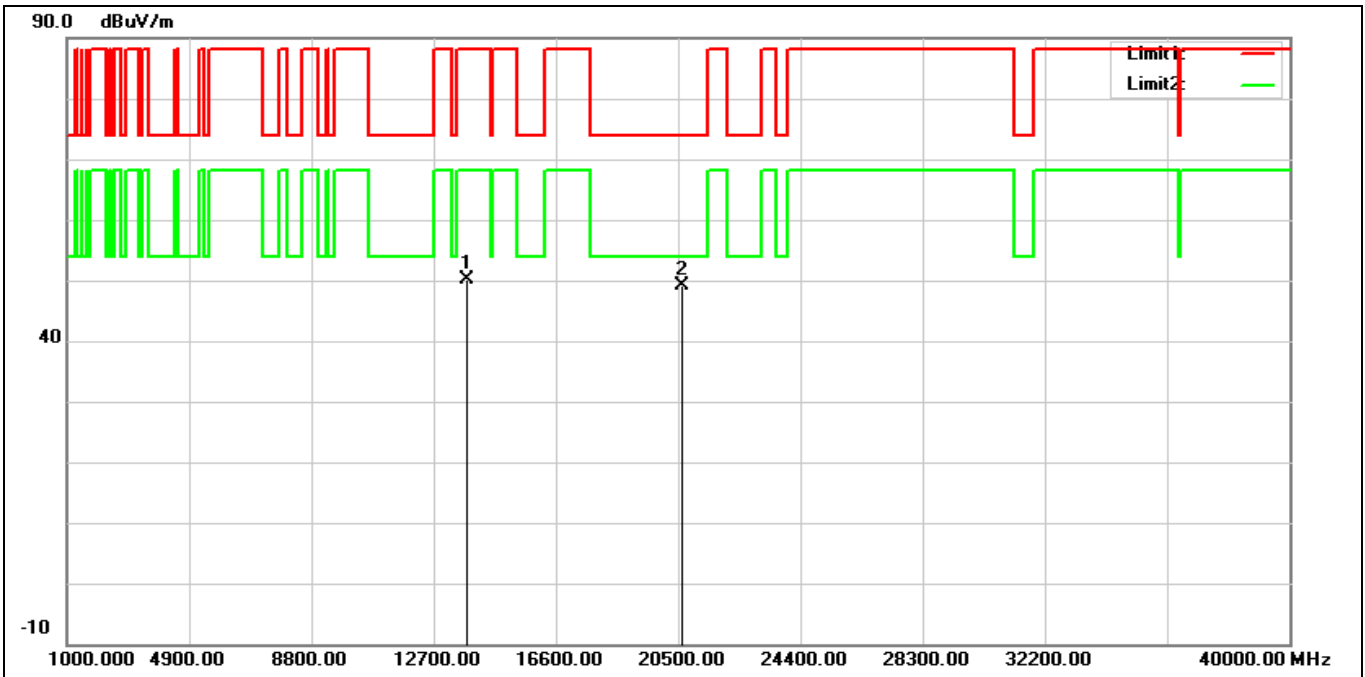


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13750.000	32.90	17.17	50.07	88.20	-38.13	peak
2*	20625.000	29.51	19.61	49.12	74.00	-24.88	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6895 MHz		
Remark:			

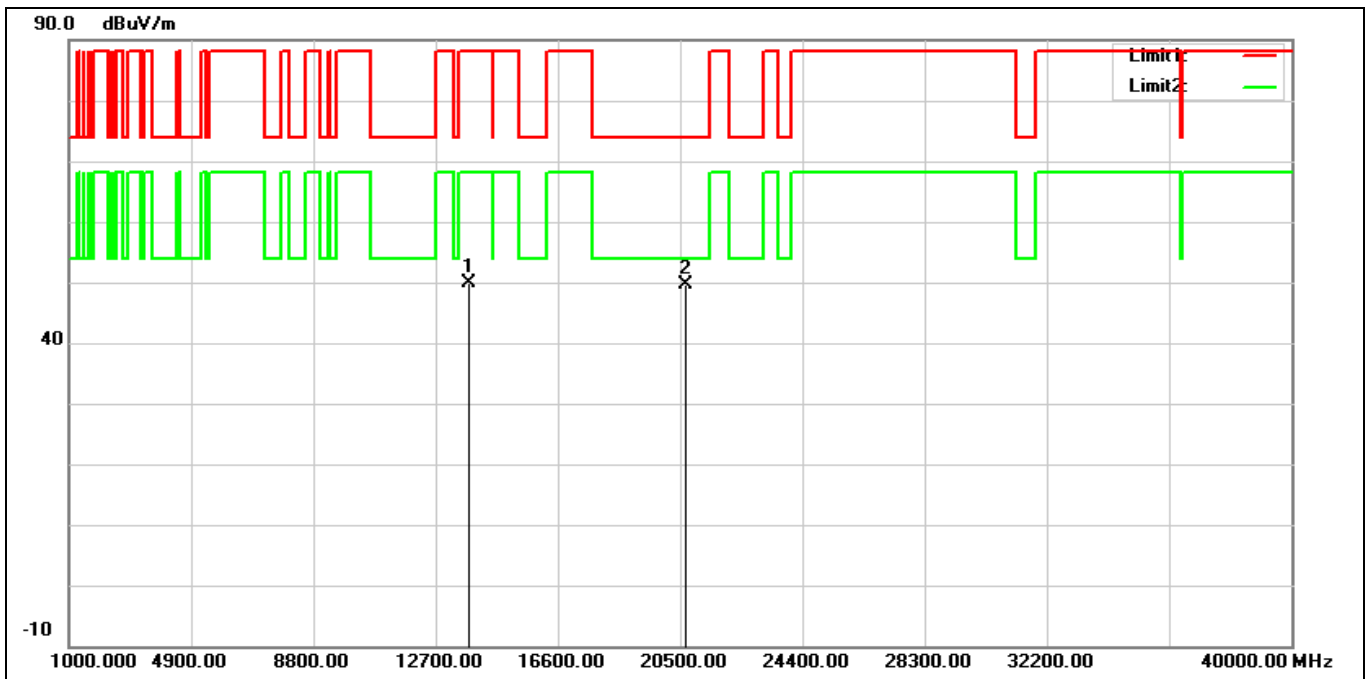


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13790.000	32.67	17.10	49.77	88.20	-38.43	peak
2*	20685.000	30.09	19.63	49.72	74.00	-24.28	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6895 MHz		
Remark:			

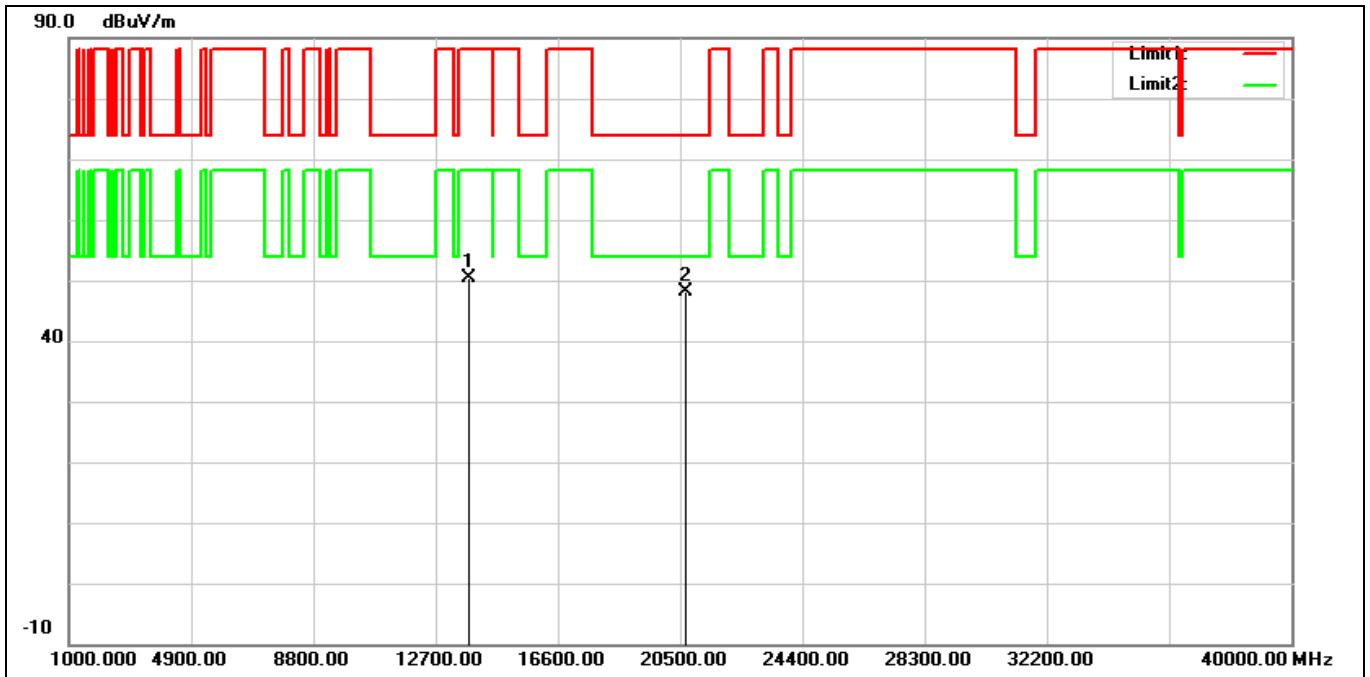


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13790.000	33.22	17.10	50.32	88.20	-37.88	peak
2*	20685.000	28.59	19.63	48.22	74.00	-25.78	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 6995 MHz		
Remark:			

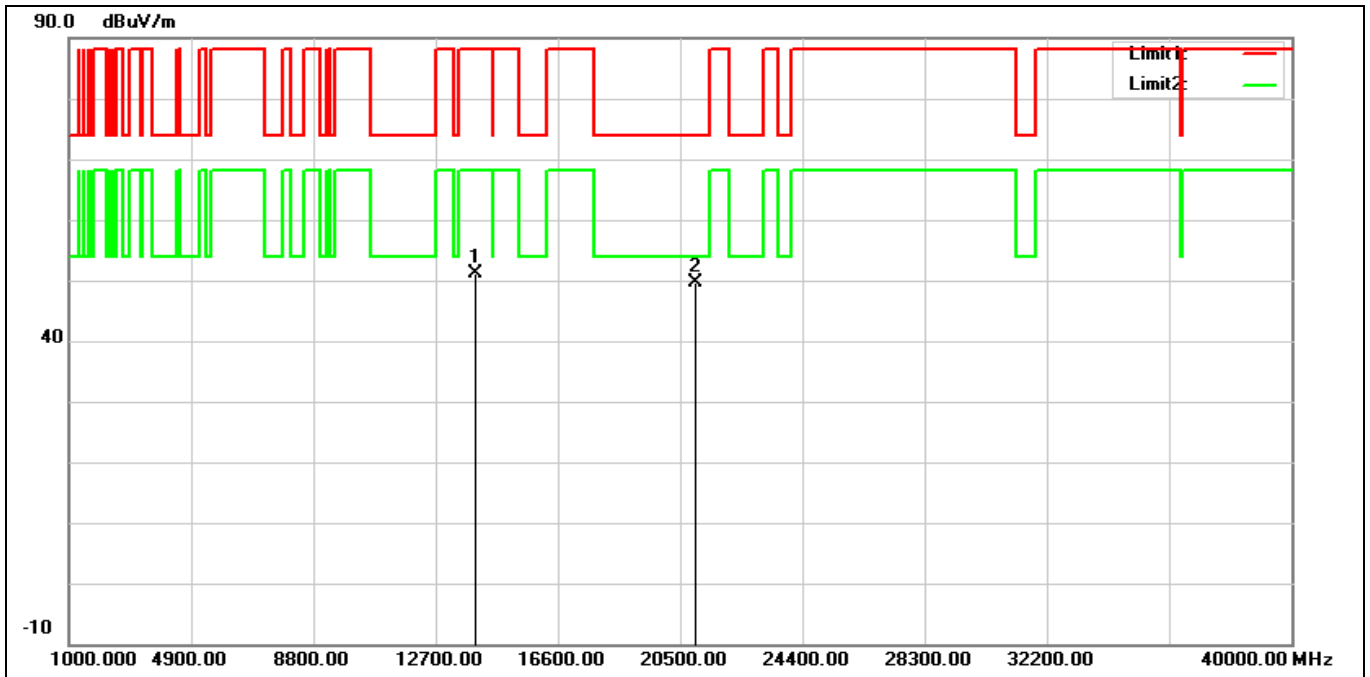

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13990.000	33.21	17.85	51.06	88.20	-37.14	peak
2*	20985.000	29.94	19.79	49.73	74.00	-24.27	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 6995 MHz		
Remark:			

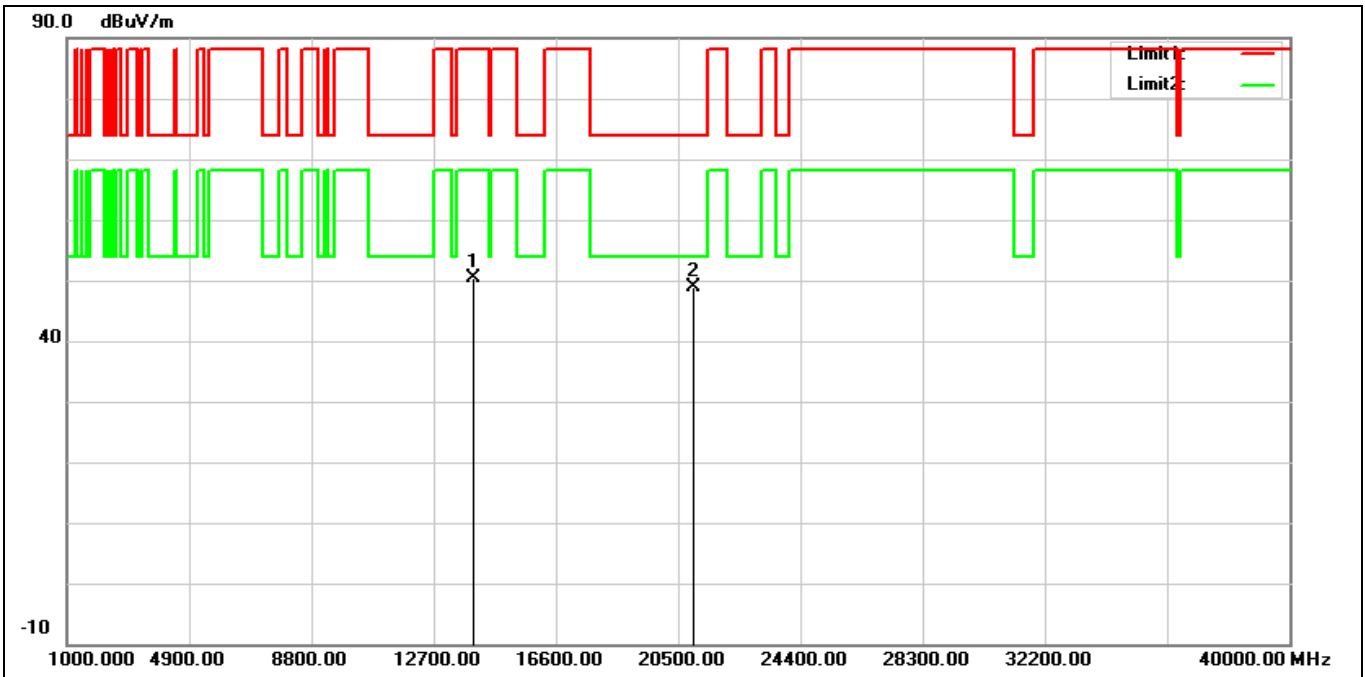

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13990.000	32.43	17.85	50.28	88.20	-37.92	peak
2*	20985.000	29.18	19.79	48.97	74.00	-25.03	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 7115 MHz		
Remark:			

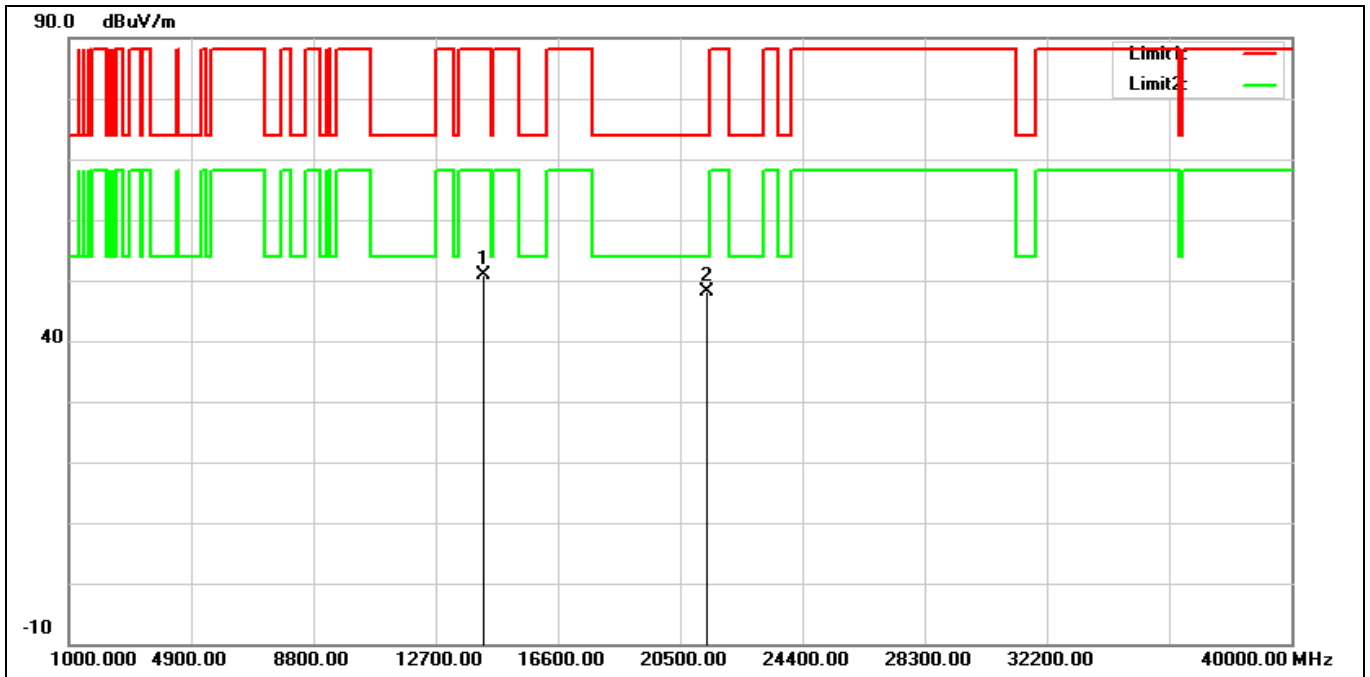


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14230.000	32.28	18.53	50.81	88.20	-37.39	peak
2*	21345.000	28.74	19.35	48.09	74.00	-25.91	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 7115 MHz		
Remark:			

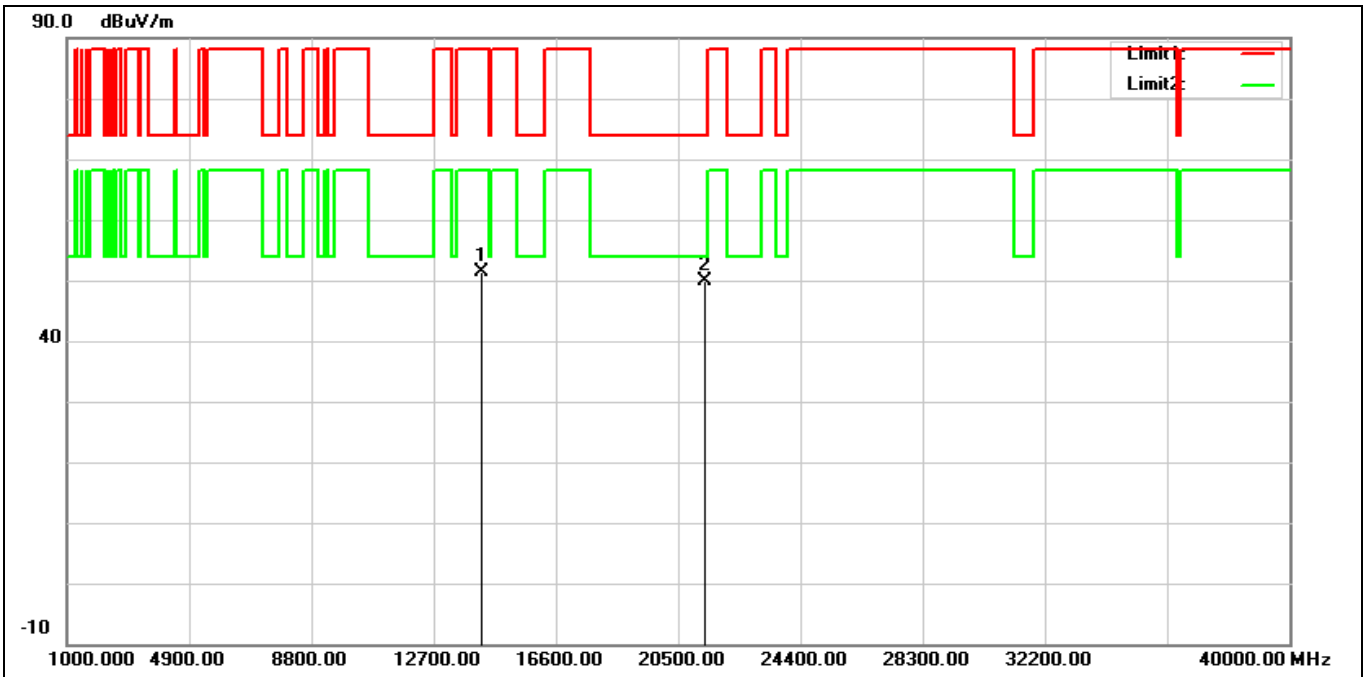


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14230.000	32.84	18.53	51.37	88.20	-36.83	peak
2*	21345.000	30.56	19.35	49.91	74.00	-24.09	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5965 MHz		
Remark:			

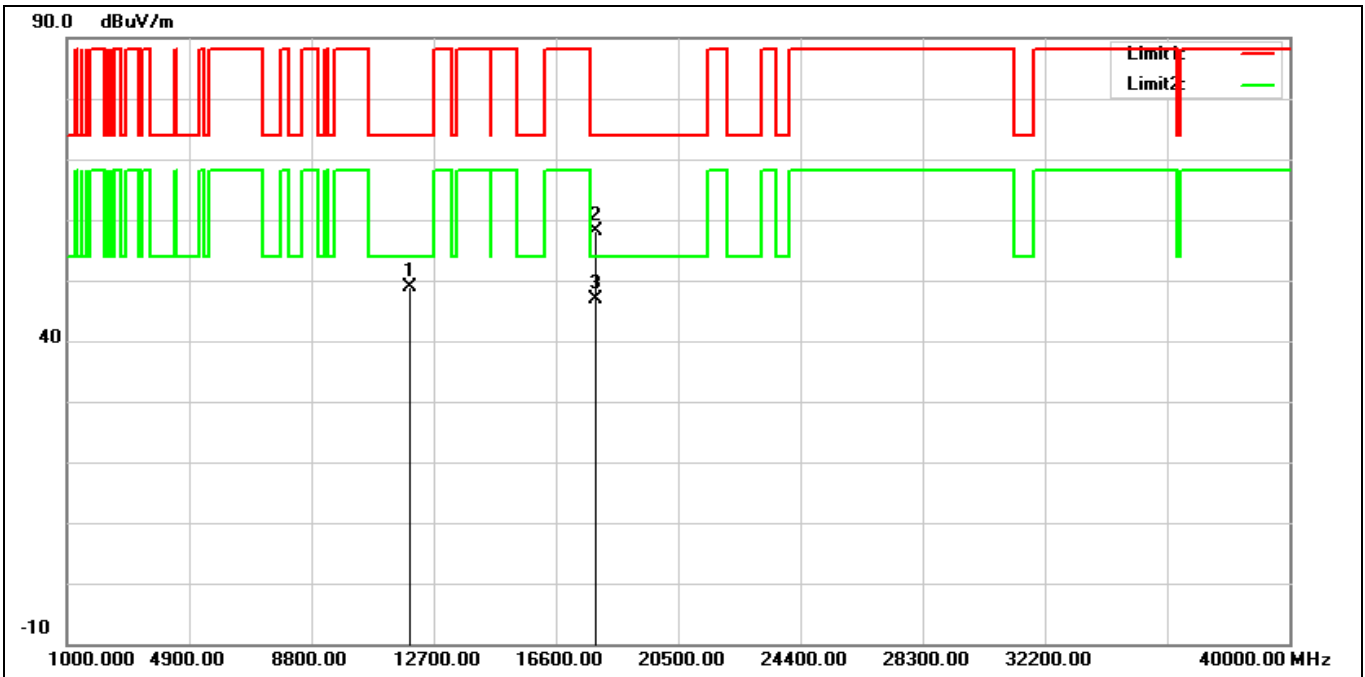


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11930.000	34.15	14.81	48.96	74.00	-25.04	peak
2	17895.000	30.84	27.39	58.23	74.00	-15.77	peak
3*	17895.000	19.47	27.39	46.86	54.00	-7.14	AVG

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5965 MHz		
Remark:			

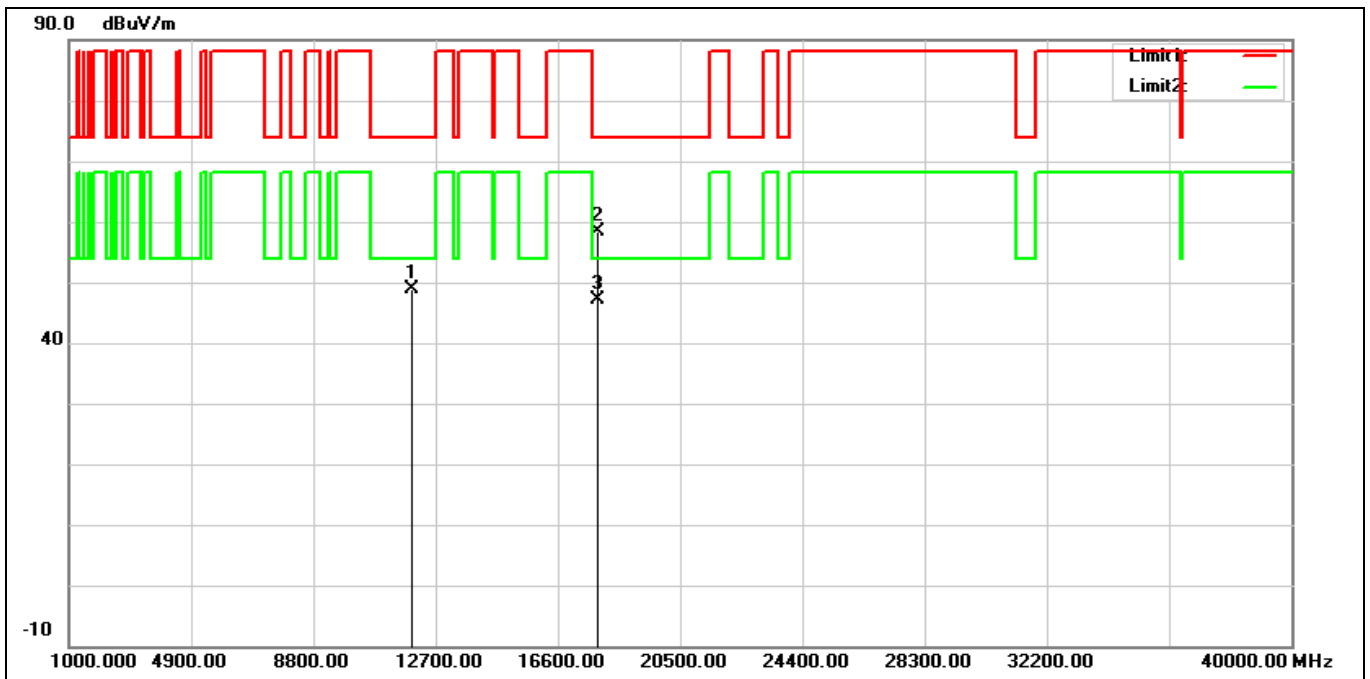


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11930.000	34.15	14.81	48.96	74.00	-25.04	peak
2	17895.000	31.10	27.39	58.49	74.00	-15.51	peak
3*	17895.000	19.69	27.39	47.08	54.00	-6.92	AVG

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6165 MHz		
Remark:			

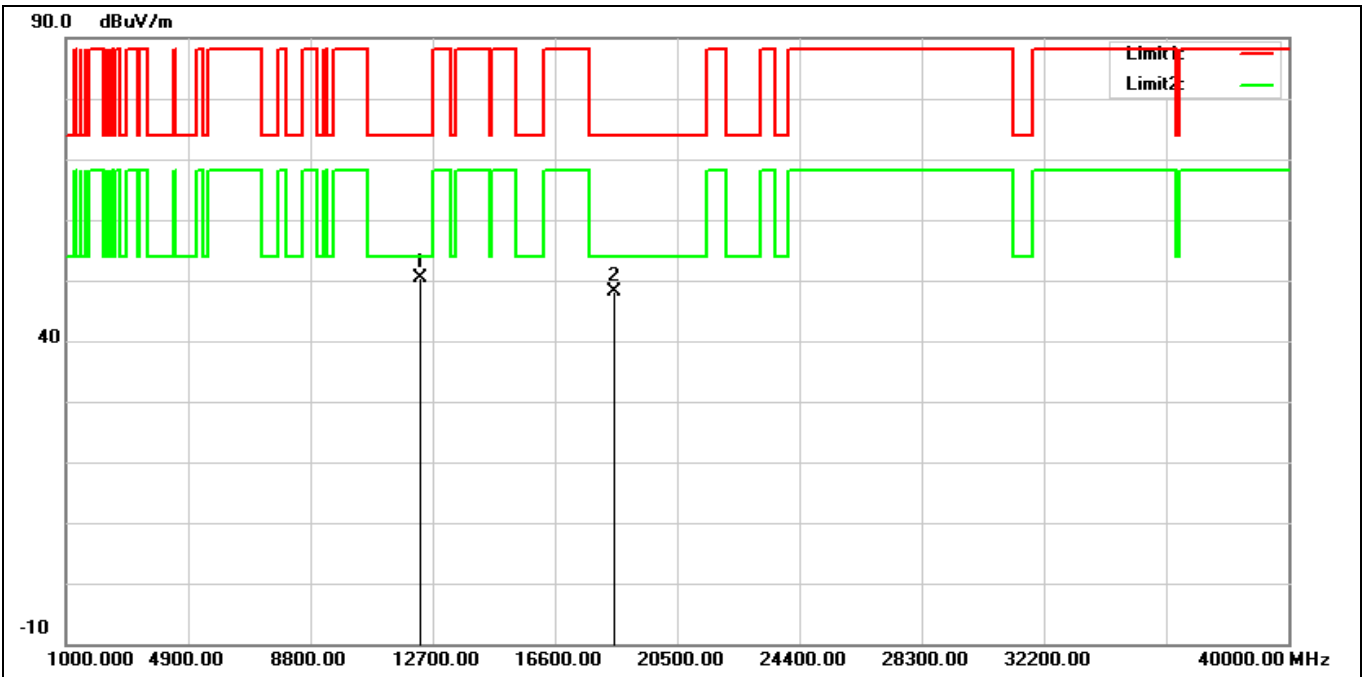


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12330.000	35.31	15.07	50.38	74.00	-23.62	peak
2	18495.000	30.21	17.97	48.18	74.00	-25.82	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6165 MHz		
Remark:			

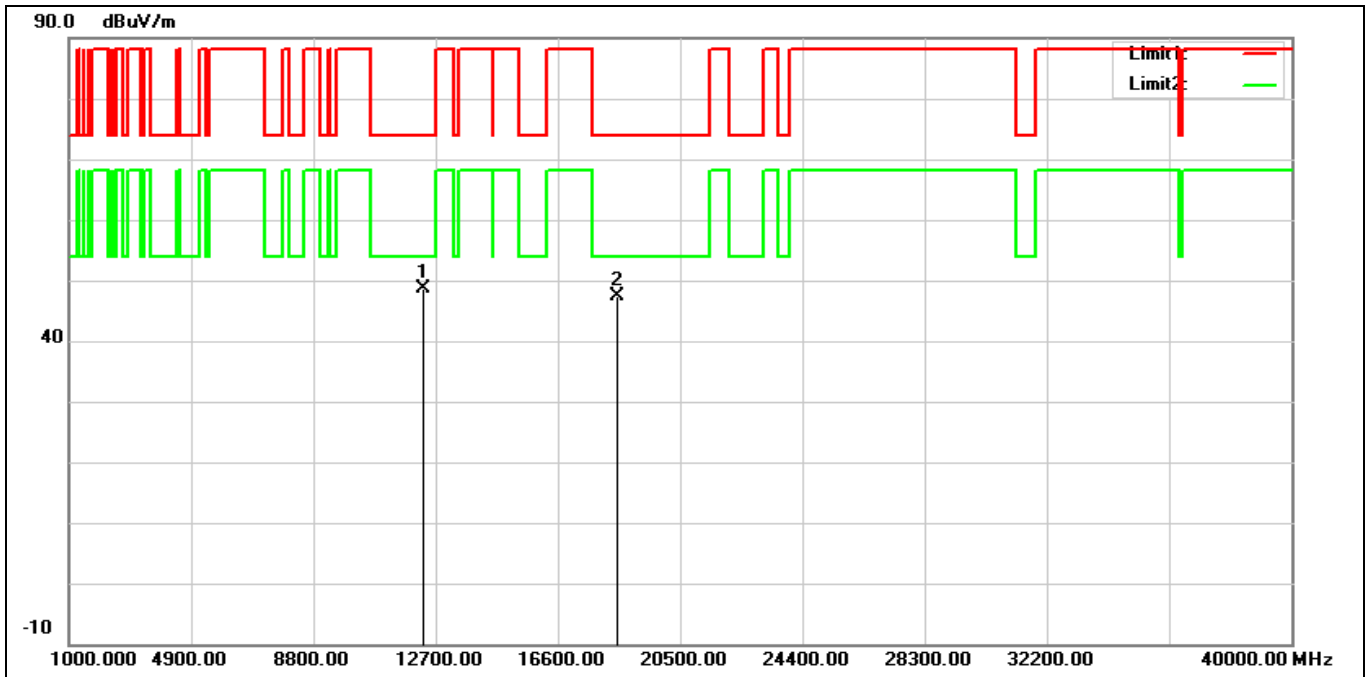


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12330.000	33.57	15.07	48.64	74.00	-25.36	peak
2	18495.000	29.53	17.97	47.50	74.00	-26.50	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6405 MHz		
Remark:			

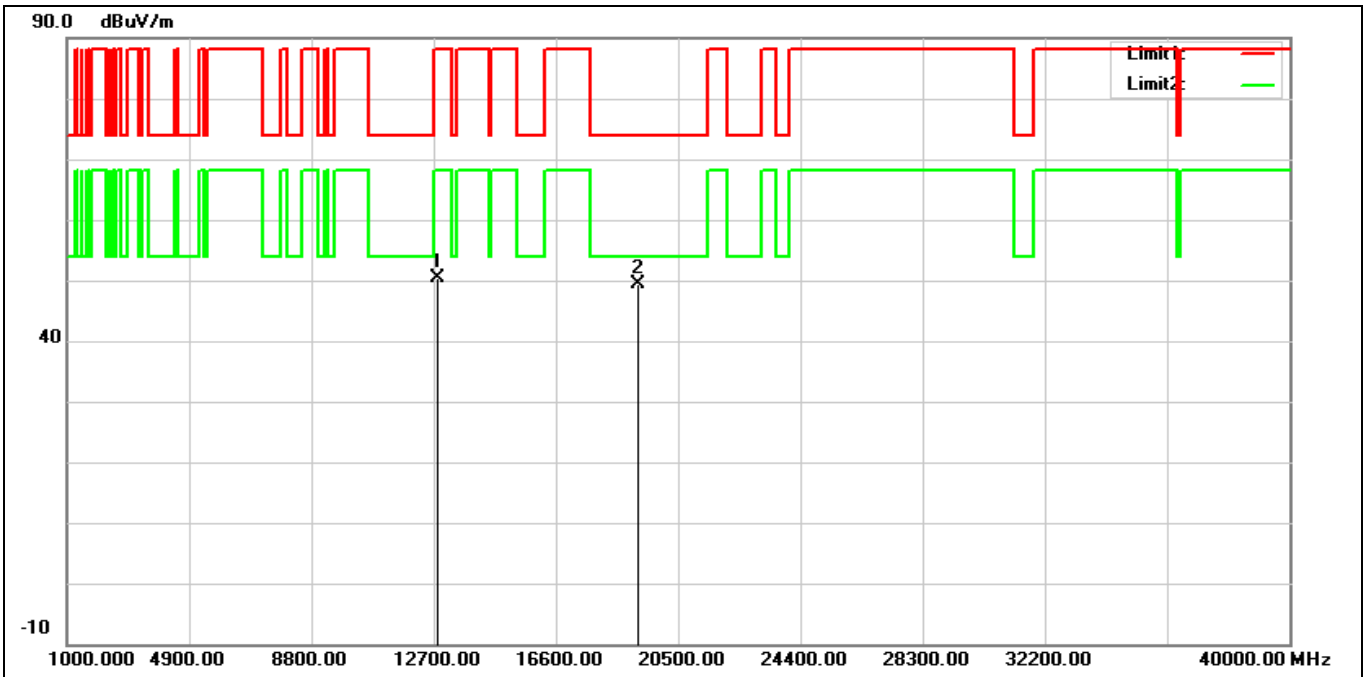

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12810.000	34.82	15.67	50.49	88.20	-37.71	peak
2*	19215.000	30.90	18.55	49.45	74.00	-24.55	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6405 MHz		
Remark:			

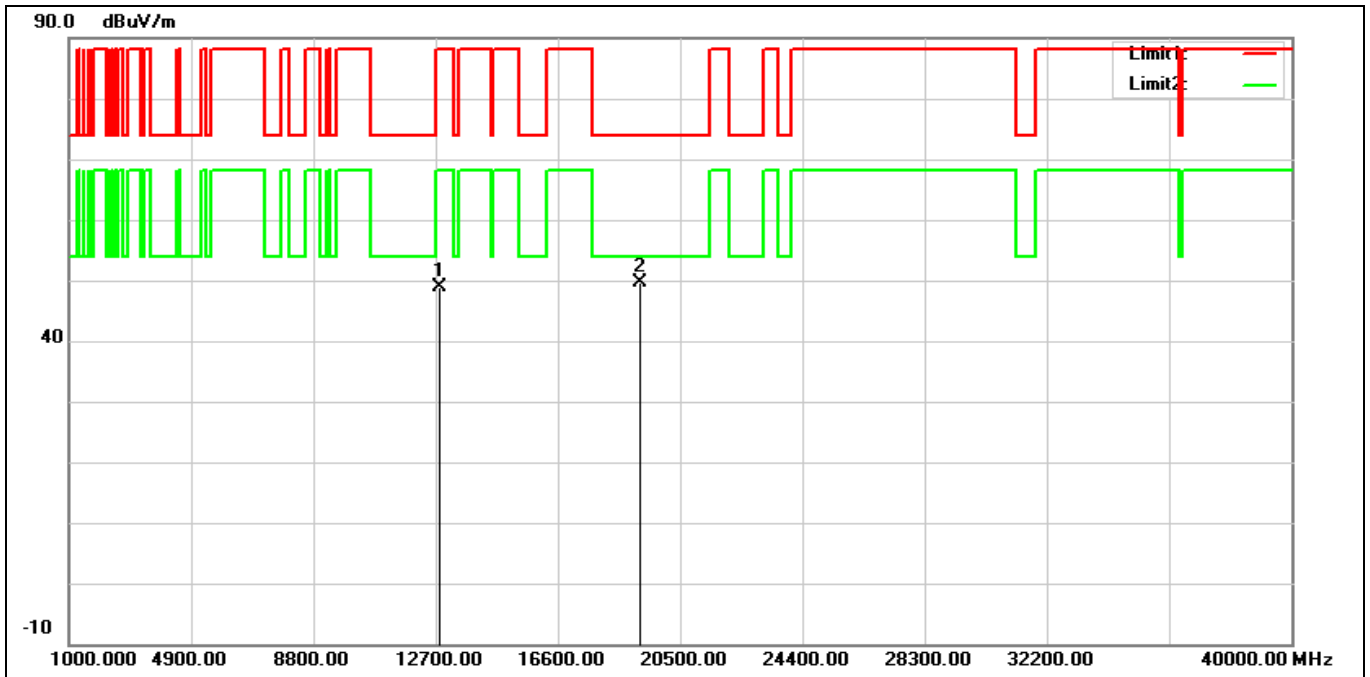

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12810.000	33.09	15.67	48.76	88.20	-39.44	peak
2*	19215.000	31.17	18.55	49.72	74.00	-24.28	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6445 MHz		
Remark:			

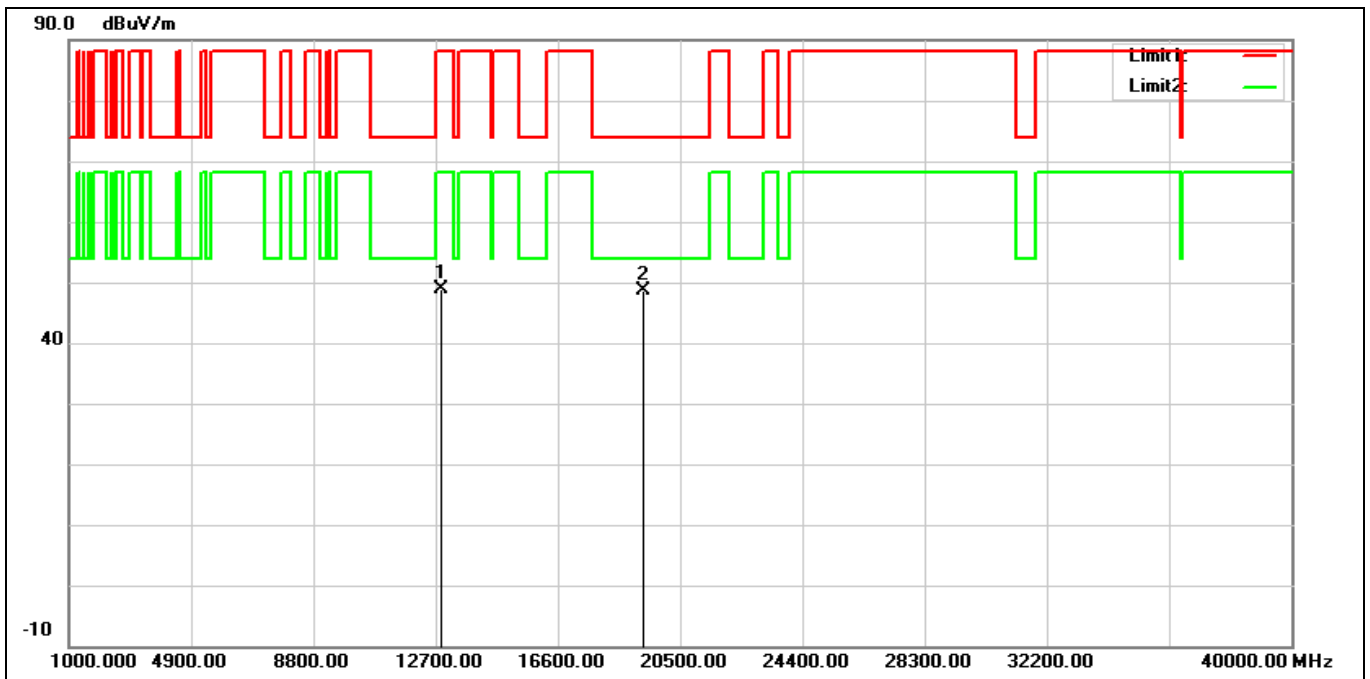


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12890.000	33.07	15.83	48.90	88.20	-39.30	peak
2*	19335.000	29.86	18.69	48.55	74.00	-25.45	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6445 MHz		
Remark:			

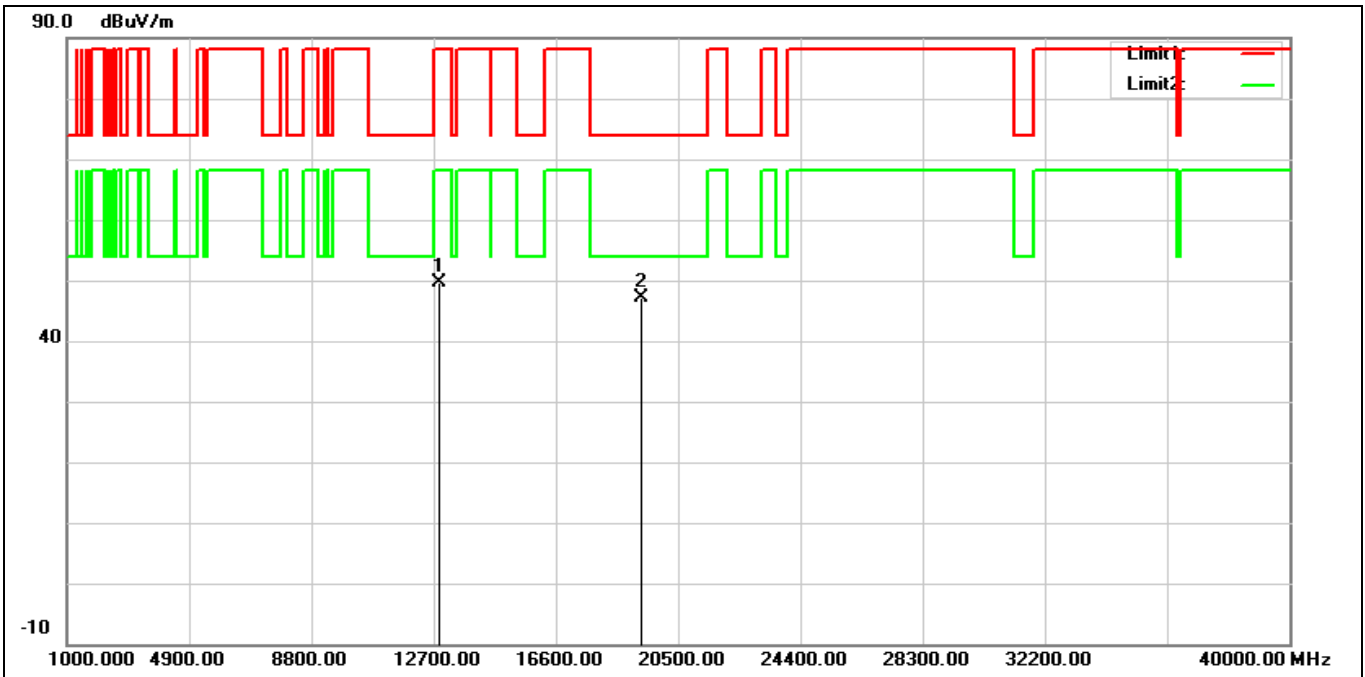


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12890.000	33.86	15.83	49.69	88.20	-38.51	peak
2*	19335.000	28.55	18.69	47.24	74.00	-26.76	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6485 MHz		
Remark:			

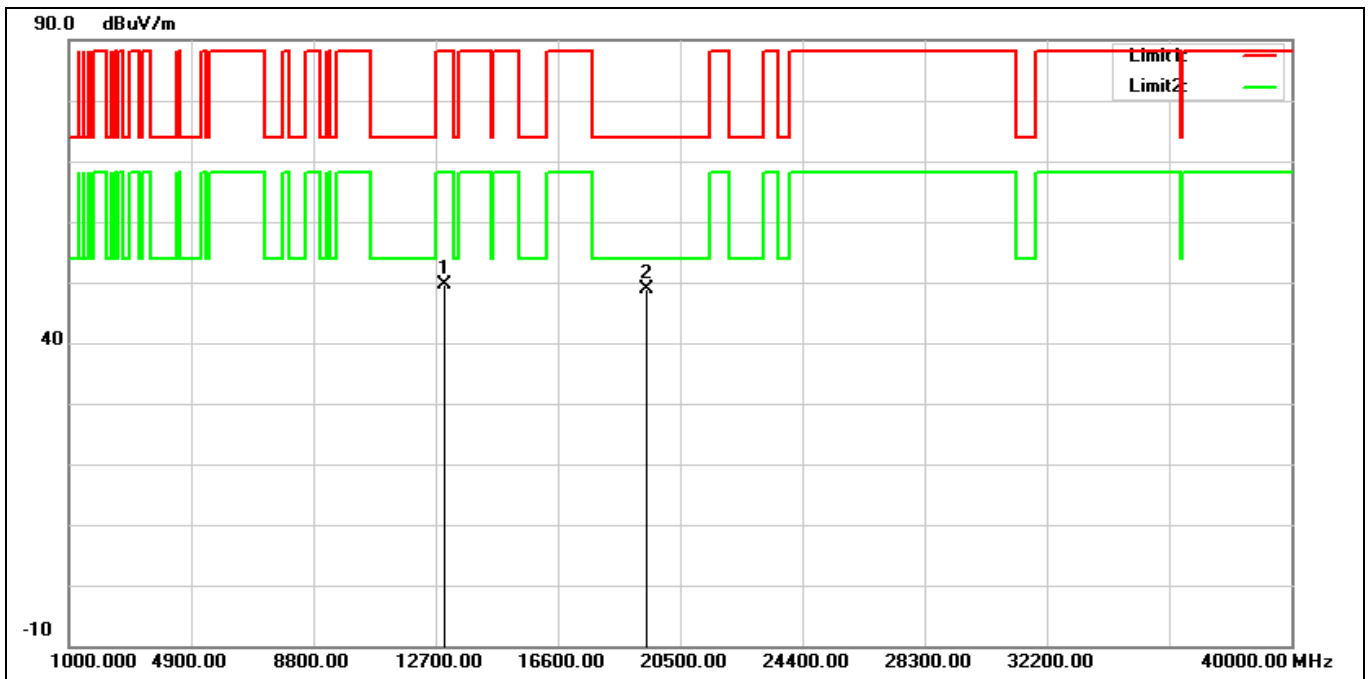


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12970.000	33.97	15.77	49.74	88.20	-38.46	peak
2*	19455.000	30.14	18.83	48.97	74.00	-25.03	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6485 MHz		
Remark:			

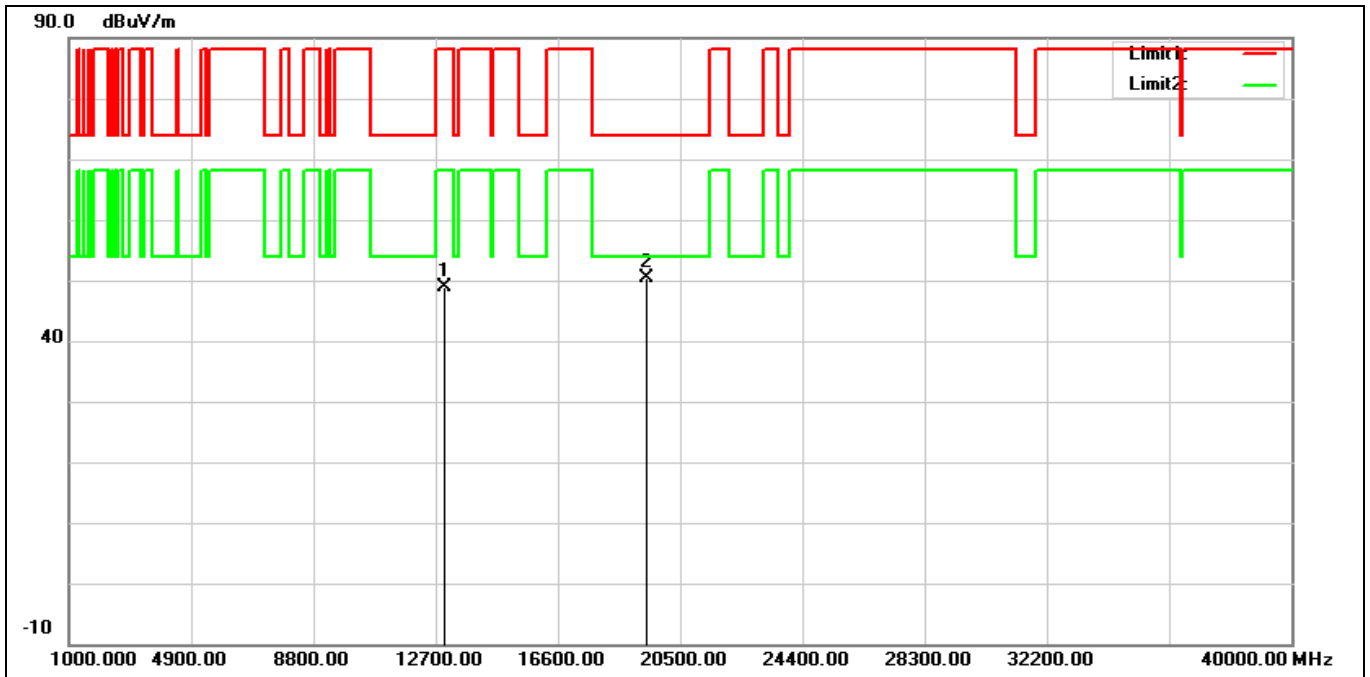


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12970.000	33.00	15.77	48.77	88.20	-39.43	peak
2*	19455.000	31.60	18.83	50.43	74.00	-23.57	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6525 MHz		
Remark:			

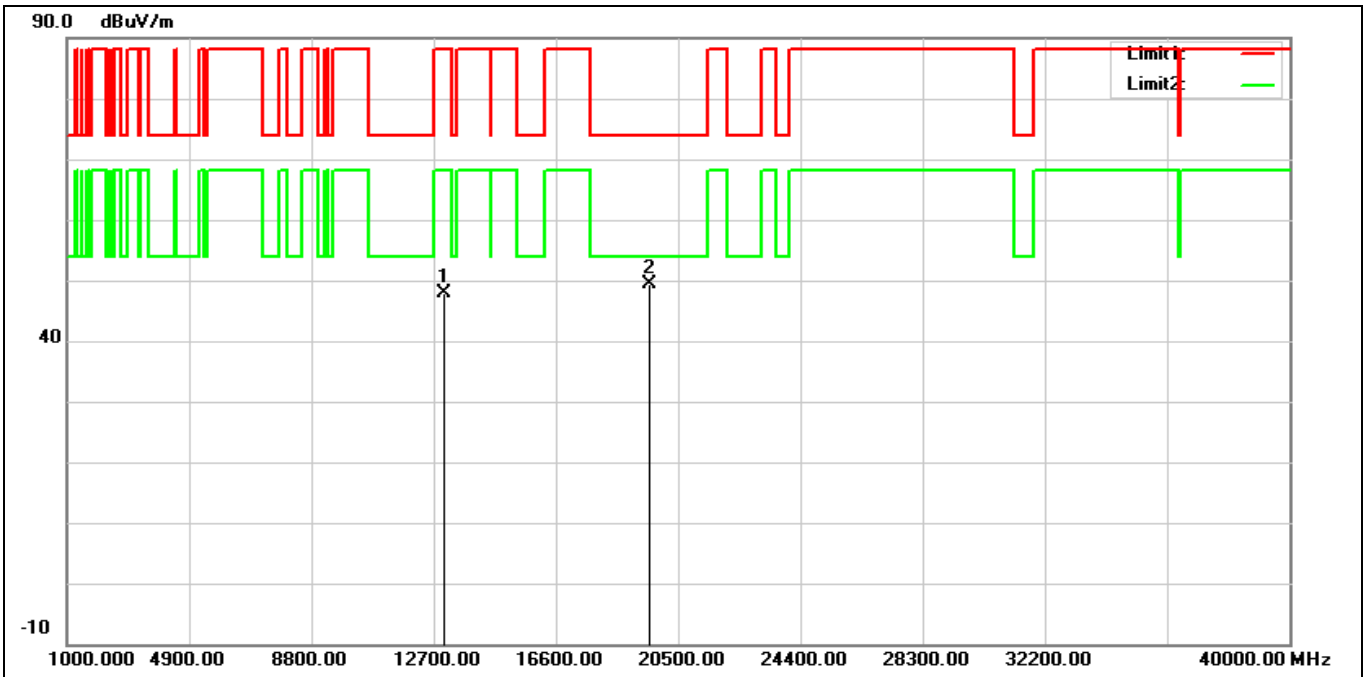


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13050.000	32.31	15.69	48.00	88.20	-40.20	peak
2*	19575.000	30.51	18.89	49.40	74.00	-24.60	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6525 MHz		
Remark:			

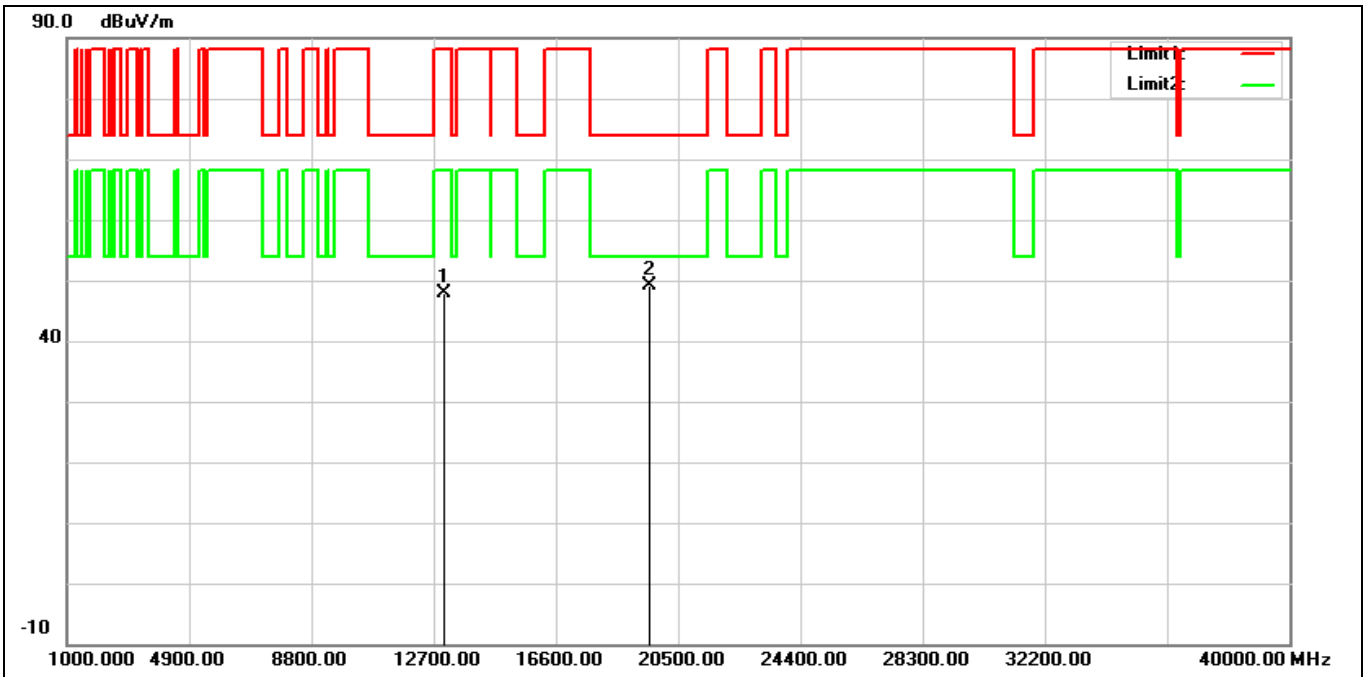


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13050.000	32.29	15.69	47.98	88.20	-40.22	peak
2*	19575.000	30.34	18.89	49.23	74.00	-24.77	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6565 MHz		
Remark:			

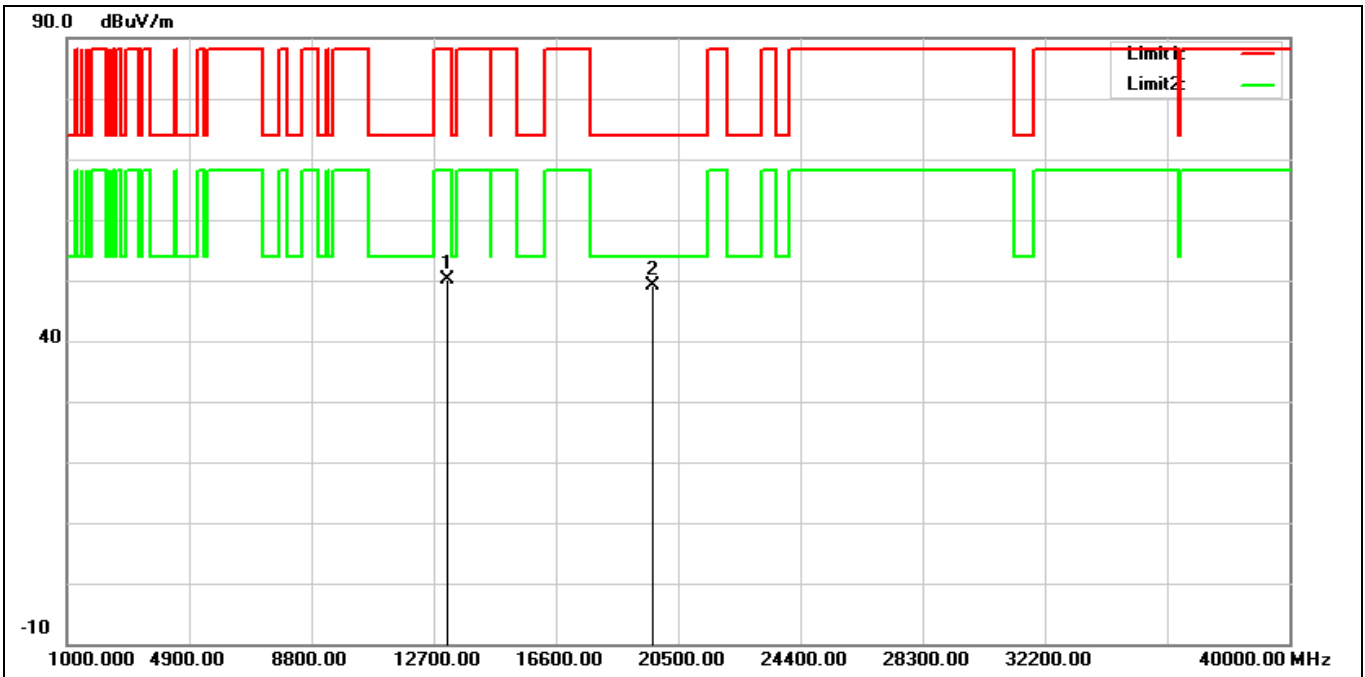

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13130.000	34.35	15.71	50.06	88.20	-38.14	peak
2*	19695.000	30.17	18.89	49.06	74.00	-24.94	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6565 MHz		
Remark:			

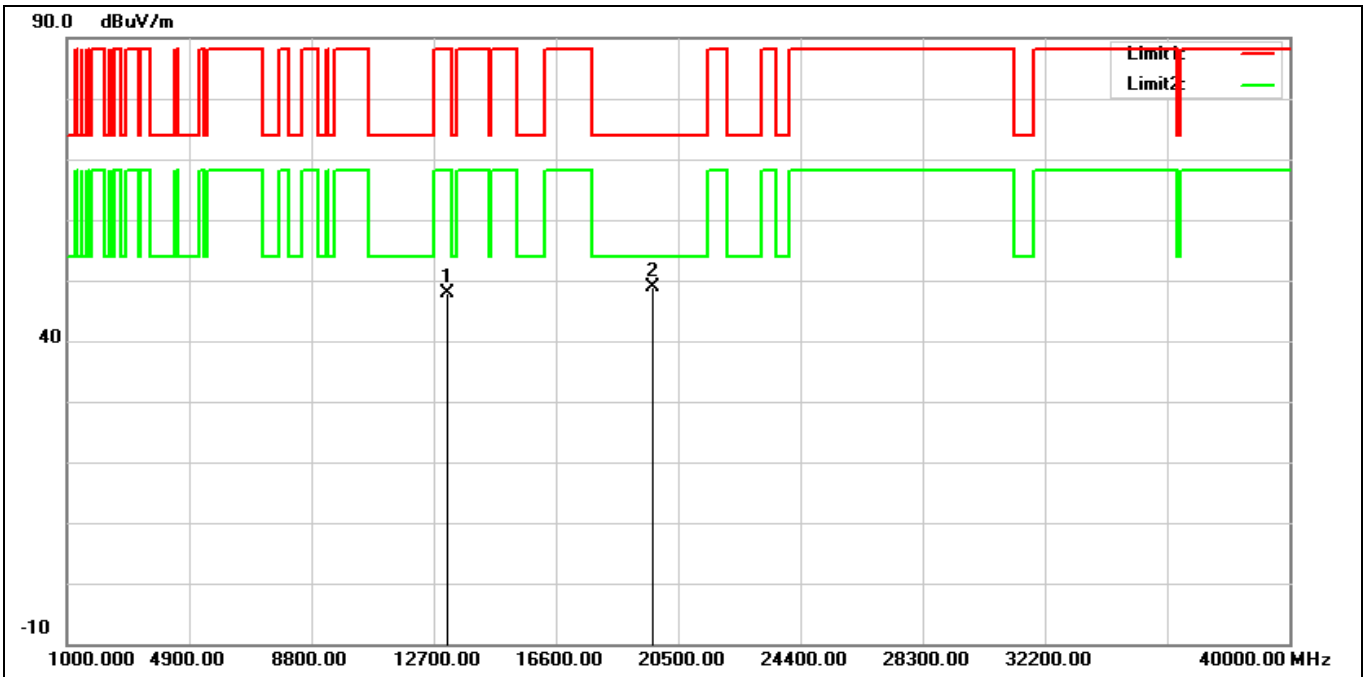

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13130.000	32.22	15.71	47.93	88.20	-40.27	peak
2*	19695.000	29.99	18.89	48.88	74.00	-25.12	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6685 MHz		
Remark:			

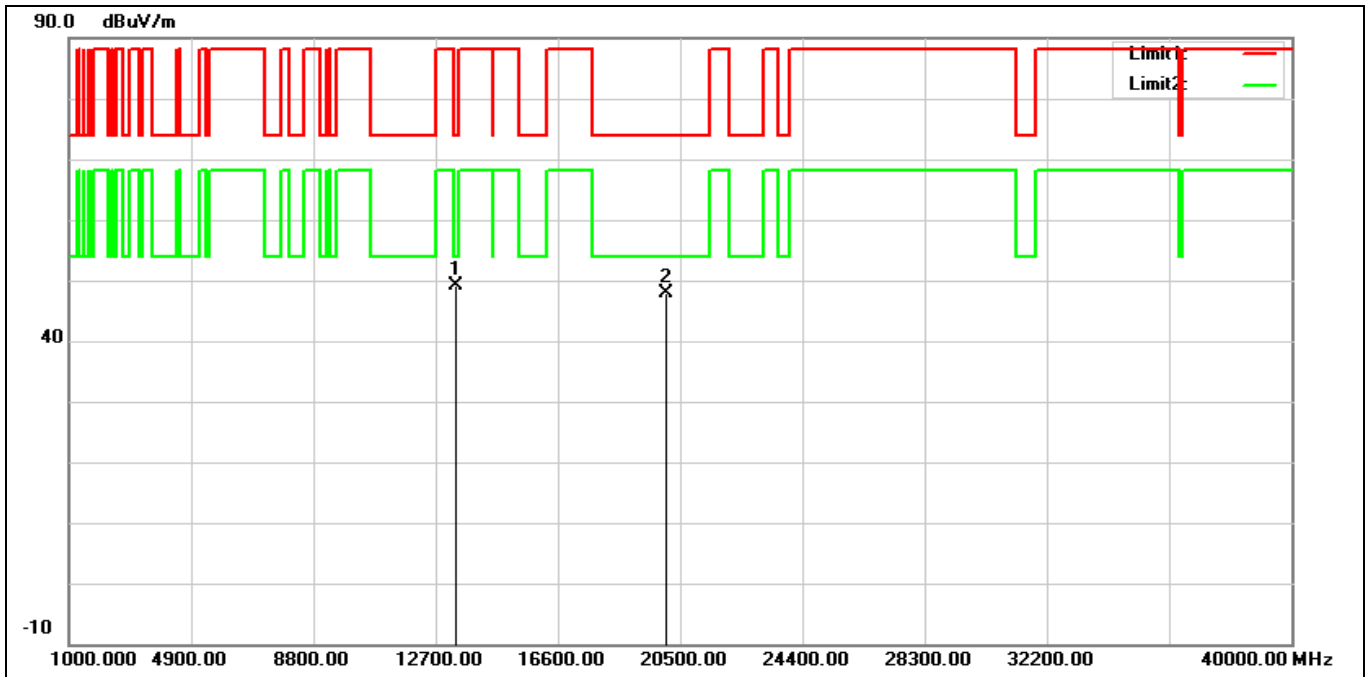


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	13370.000	32.68	16.43	49.11	74.00	-24.89	peak
2	20055.000	28.90	18.97	47.87	74.00	-26.13	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6685 MHz		
Remark:			

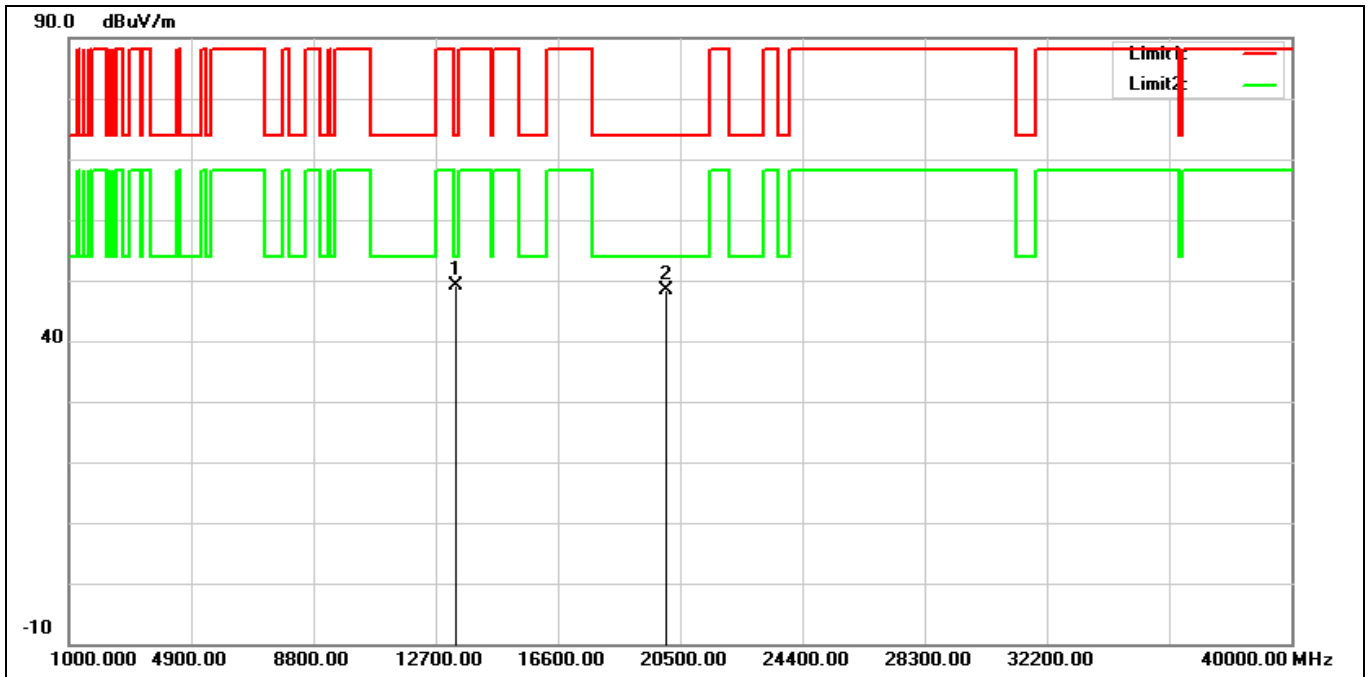


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	13370.000	32.66	16.43	49.09	74.00	-24.91	peak
2	20055.000	29.44	18.97	48.41	74.00	-25.59	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6845 MHz		
Remark:			

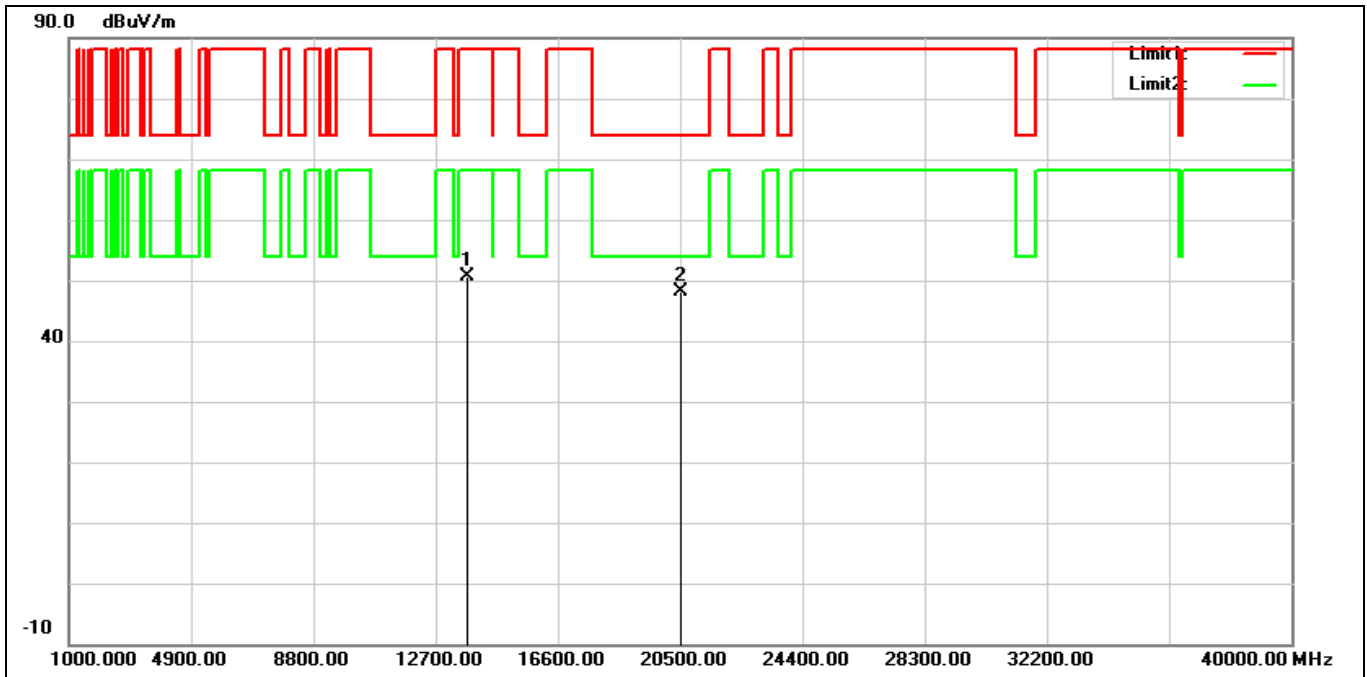


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13690.000	33.24	17.27	50.51	88.20	-37.69	peak
2*	20535.000	28.56	19.55	48.11	74.00	-25.89	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6845 MHz		
Remark:			

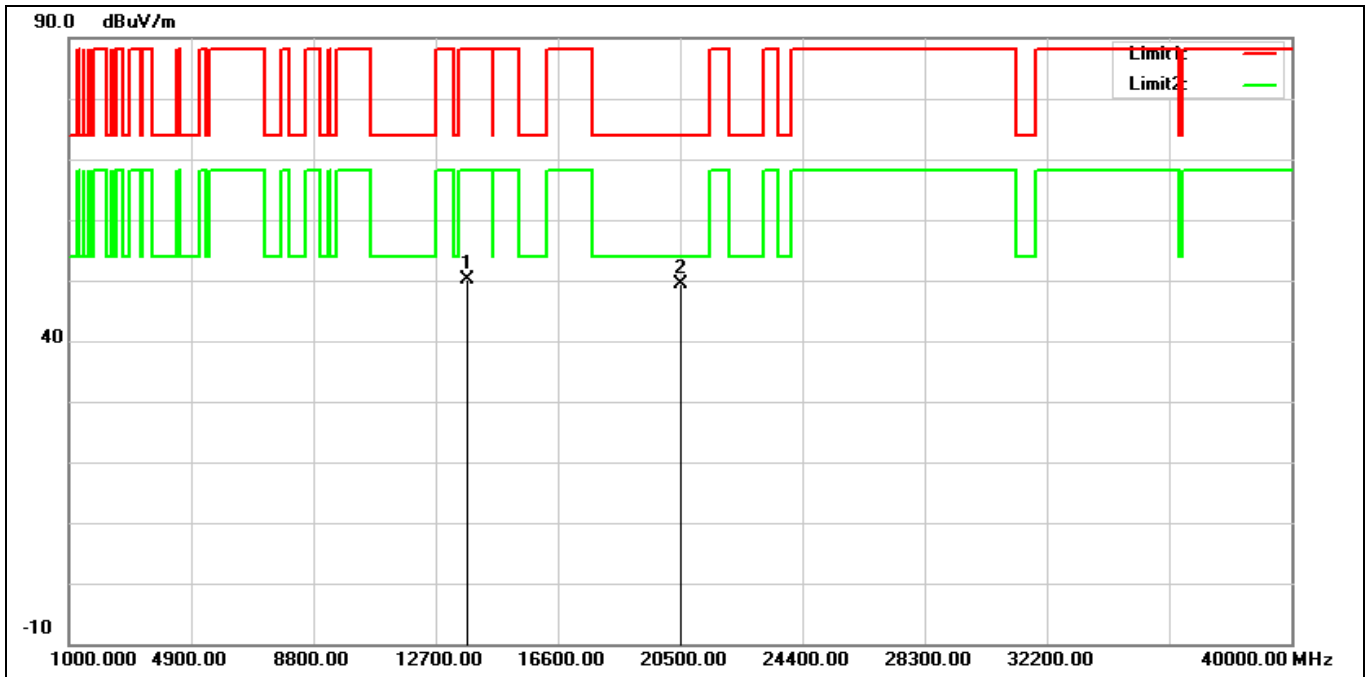


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13690.000	32.77	17.27	50.04	88.20	-38.16	peak
2*	20535.000	29.75	19.55	49.30	74.00	-24.70	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6885 MHz		
Remark:			

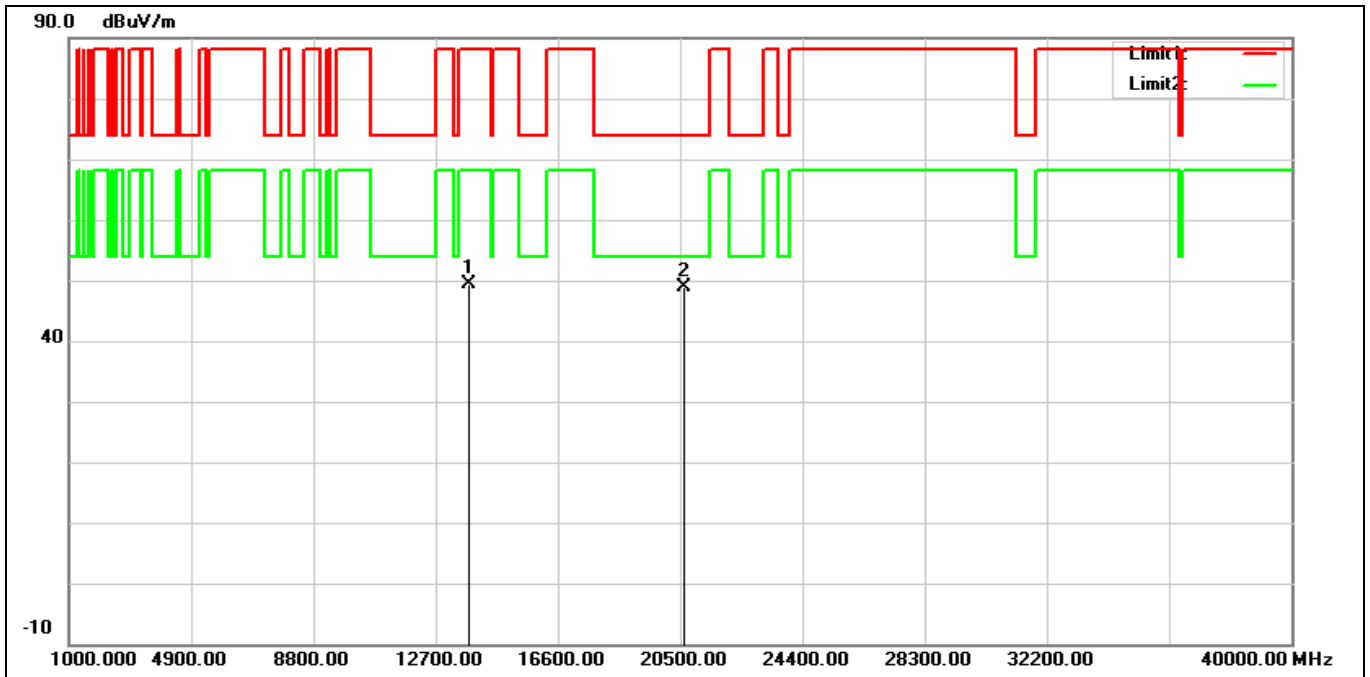


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13770.000	32.22	17.14	49.36	88.20	-38.84	peak
2*	20655.000	29.26	19.62	48.88	74.00	-25.12	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6885 MHz		
Remark:			

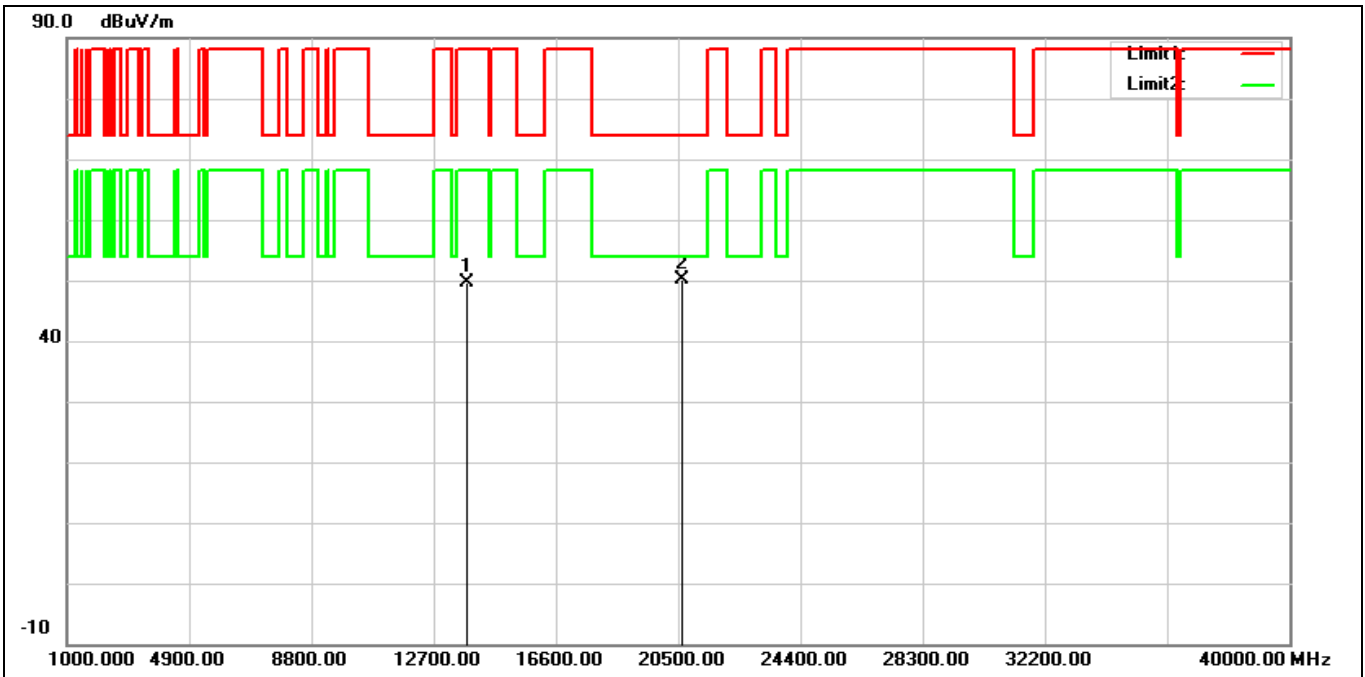


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13770.000	32.38	17.14	49.52	88.20	-38.68	peak
2*	20655.000	30.54	19.62	50.16	74.00	-23.84	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 6925 MHz		
Remark:			

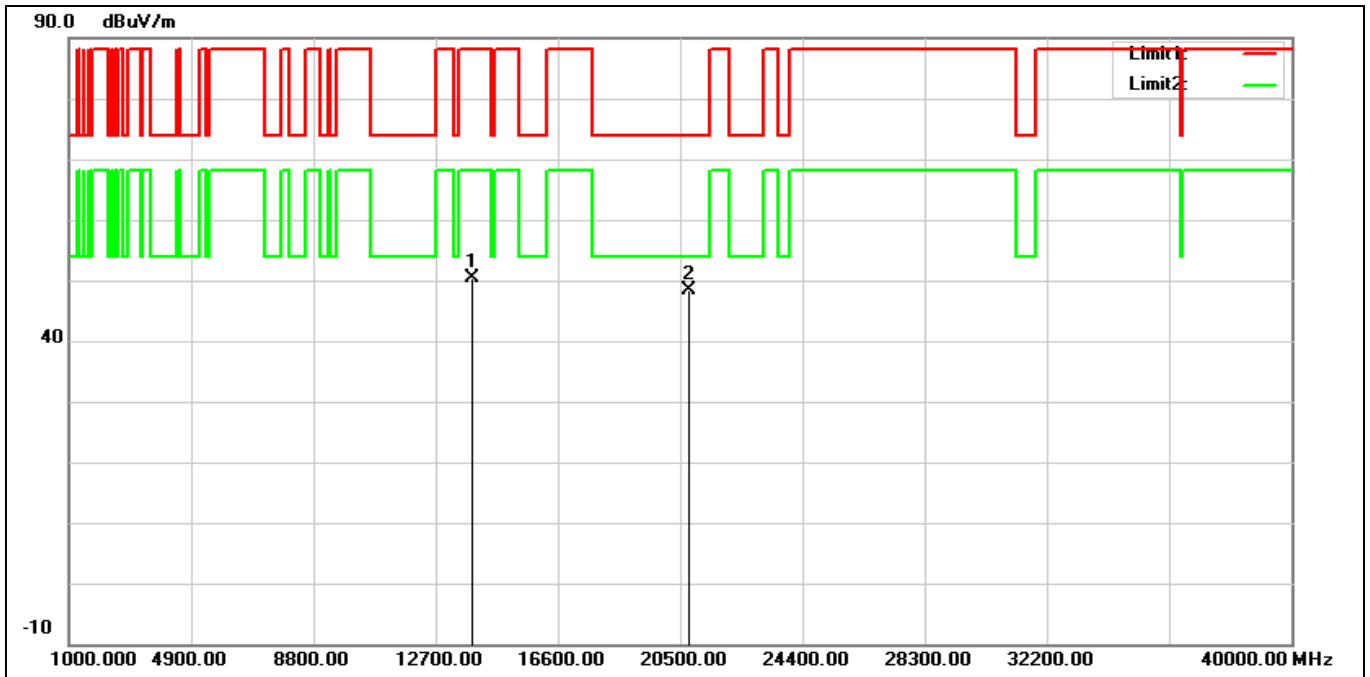

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13850.000	32.96	17.38	50.34	88.20	-37.86	peak
2*	20775.000	28.57	19.69	48.26	74.00	-25.74	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 6925 MHz		
Remark:			

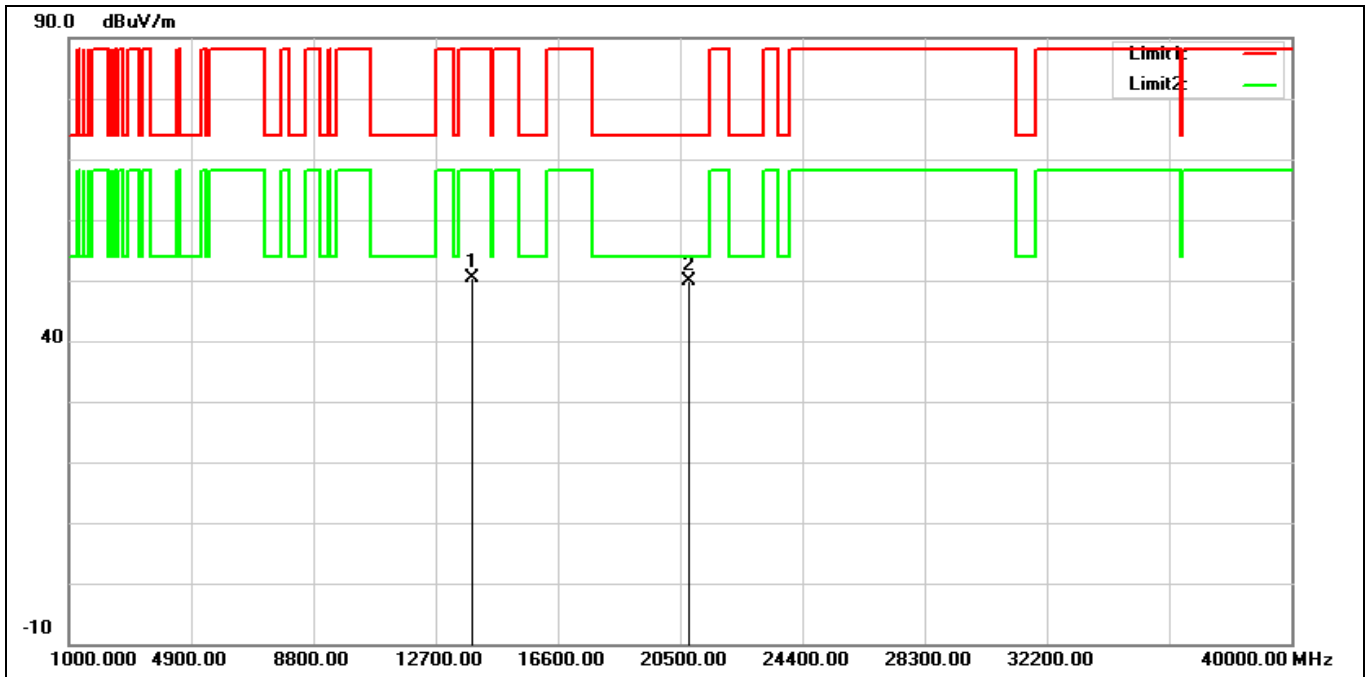

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13850.000	33.06	17.38	50.44	88.20	-37.76	peak
2*	20775.000	30.26	19.69	49.95	74.00	-24.05	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 7005 MHz		
Remark:			

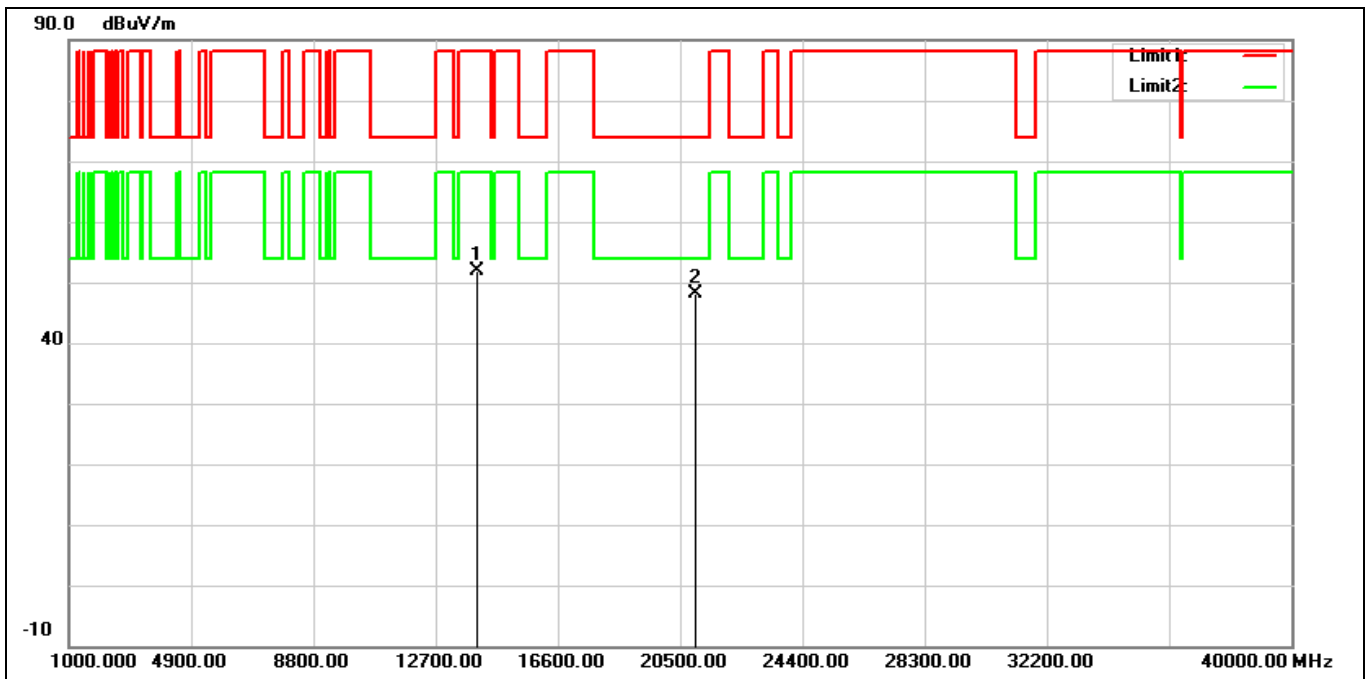


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14010.000	34.06	17.91	51.97	88.20	-36.23	peak
2*	21015.000	28.37	19.79	48.16	74.00	-25.84	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 7005 MHz		
Remark:			

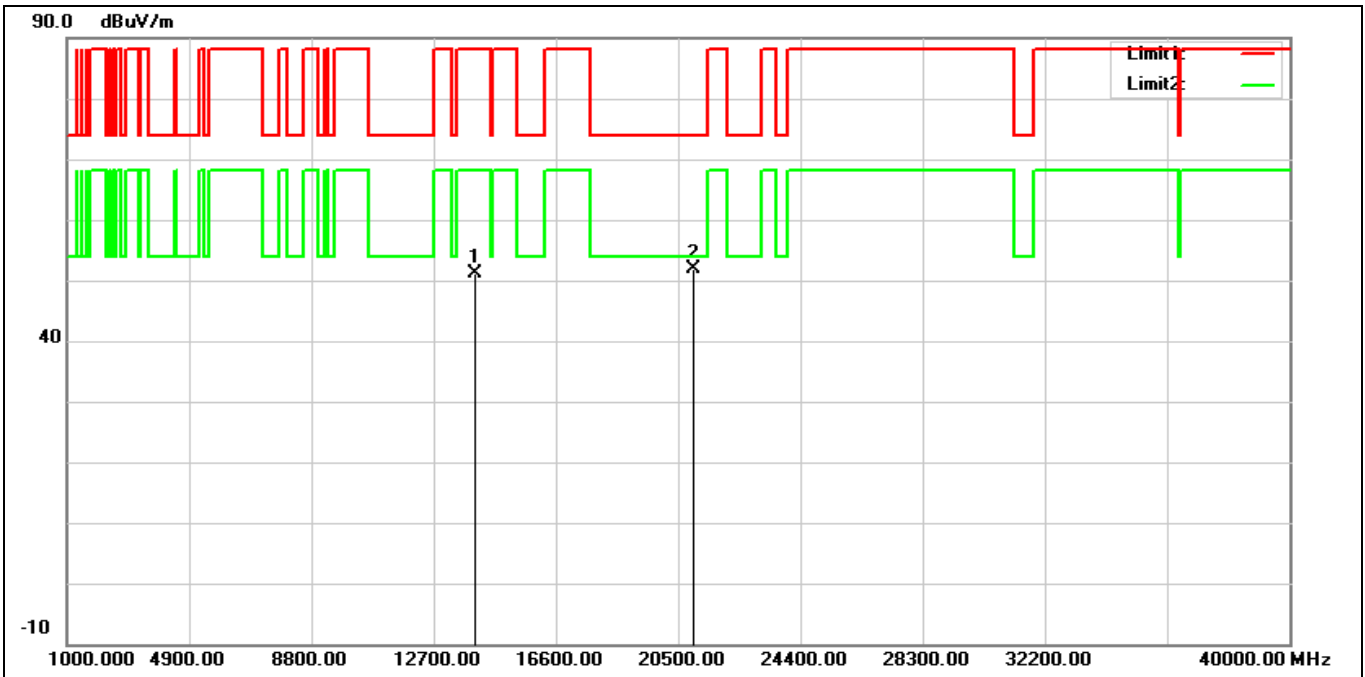


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14010.000	33.31	17.91	51.22	88.20	-36.98	peak
2*	21015.000	32.18	19.79	51.97	74.00	-22.03	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 7085 MHz		
Remark:			

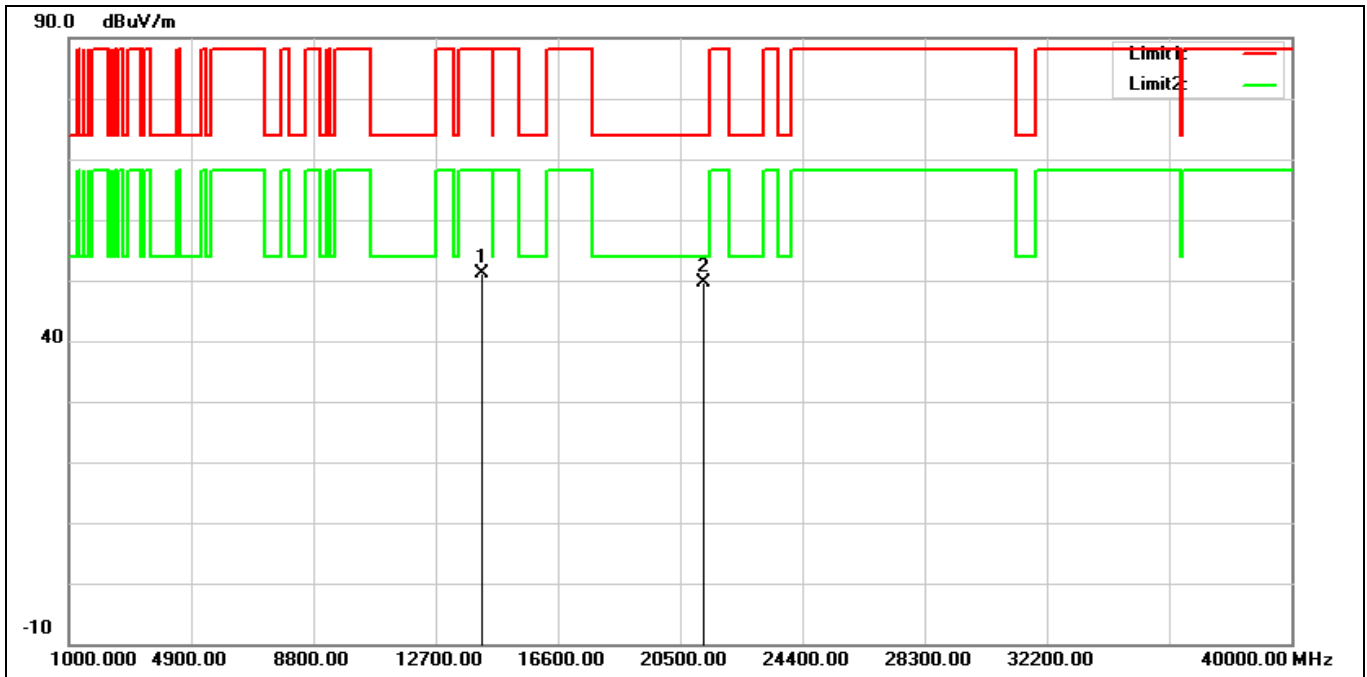


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14170.000	32.70	18.44	51.14	88.20	-37.06	peak
2*	21255.000	30.17	19.47	49.64	74.00	-24.36	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 7085 MHz		
Remark:			

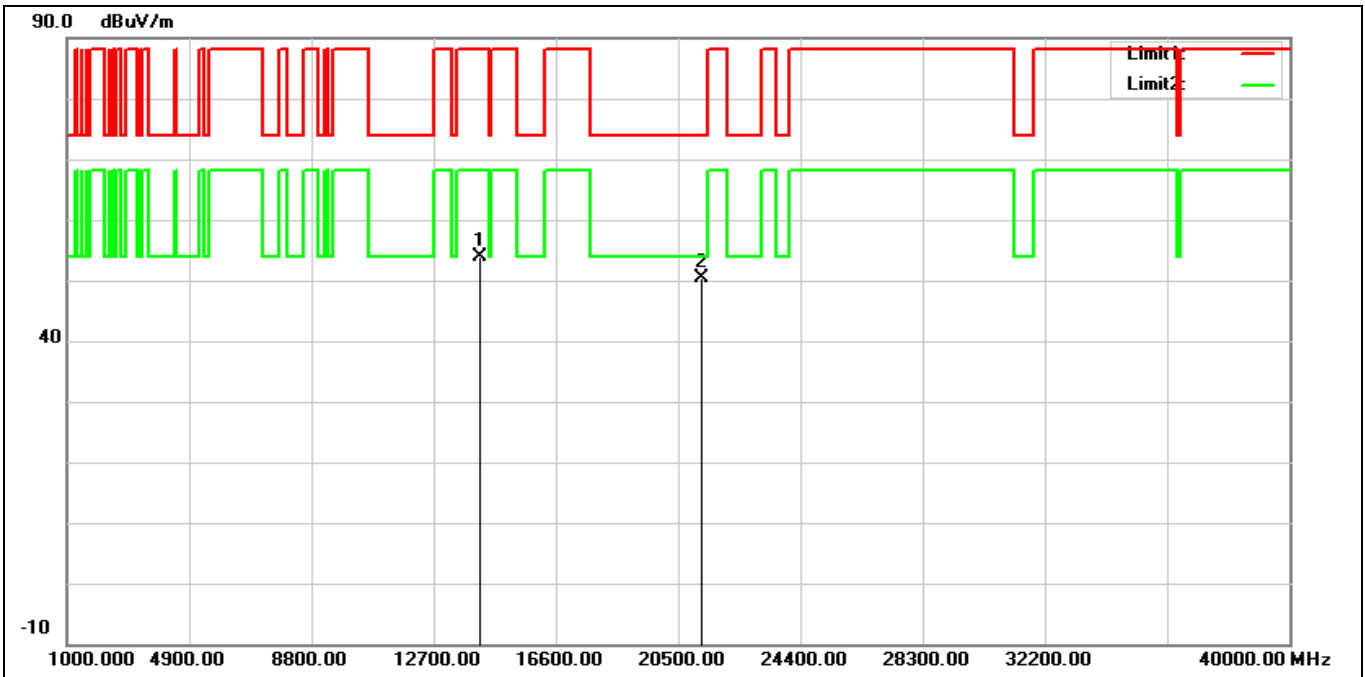


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14170.000	35.53	18.44	53.97	88.20	-34.23	peak
2*	21255.000	31.03	19.47	50.50	74.00	-23.50	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5985 MHz		
Remark:			

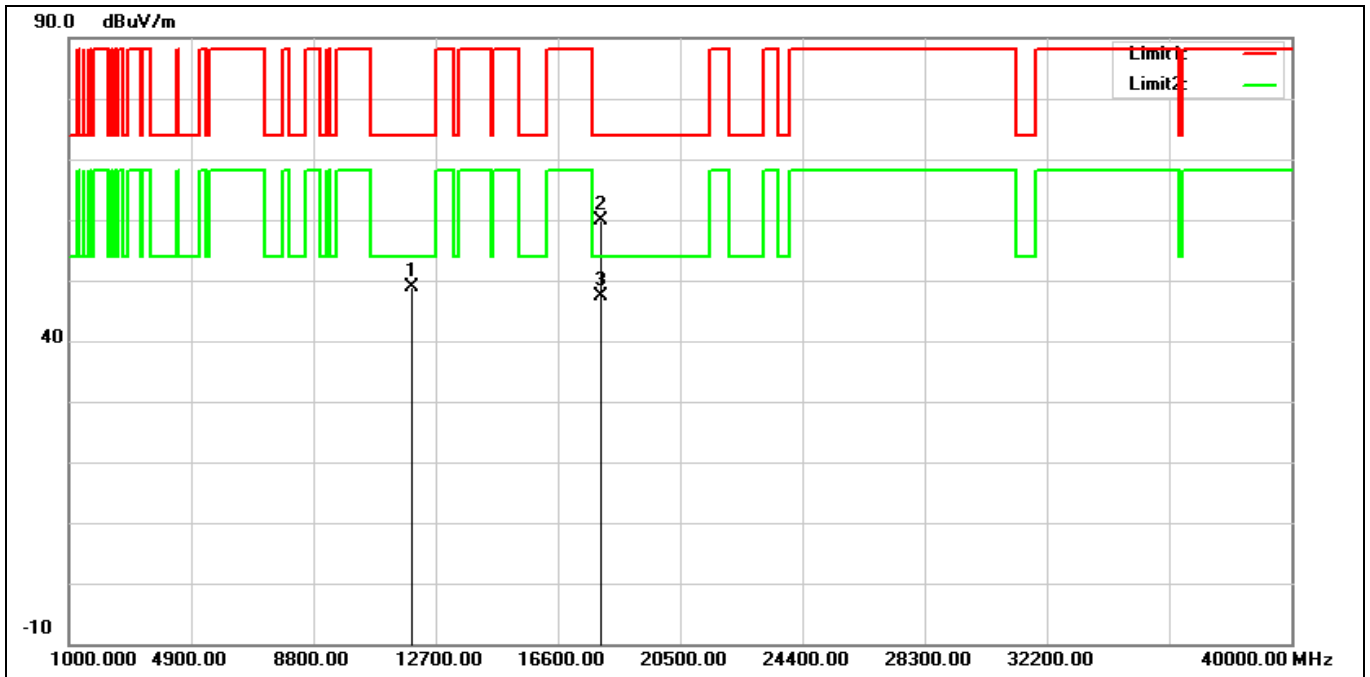


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11970.000	34.00	14.83	48.83	74.00	-25.17	peak
2	17955.000	31.69	28.19	59.88	74.00	-14.12	peak
3*	17955.000	19.15	28.19	47.34	54.00	-6.66	AVG

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5985 MHz		
Remark:			

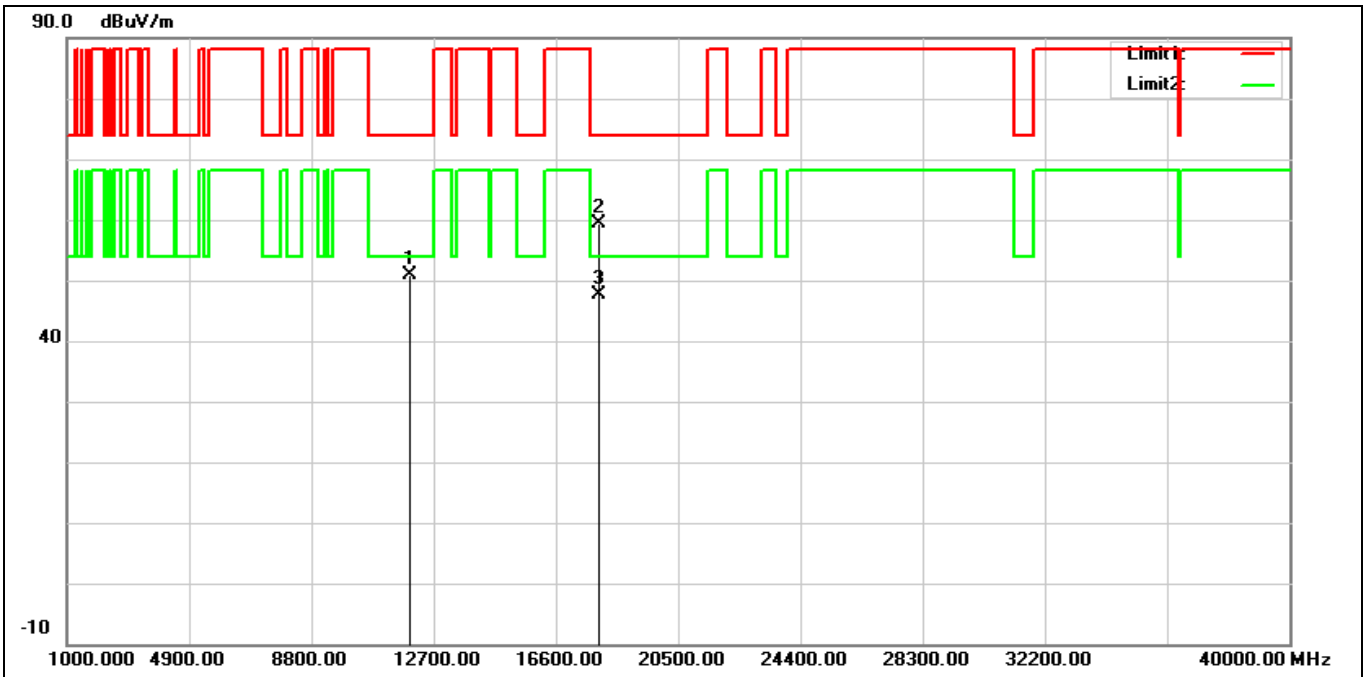


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11970.000	36.08	14.83	50.91	74.00	-23.09	peak
2	17955.000	31.08	28.19	59.27	74.00	-14.73	peak
3*	17955.000	19.42	28.19	47.61	54.00	-6.39	AVG

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6145 MHz		
Remark:			

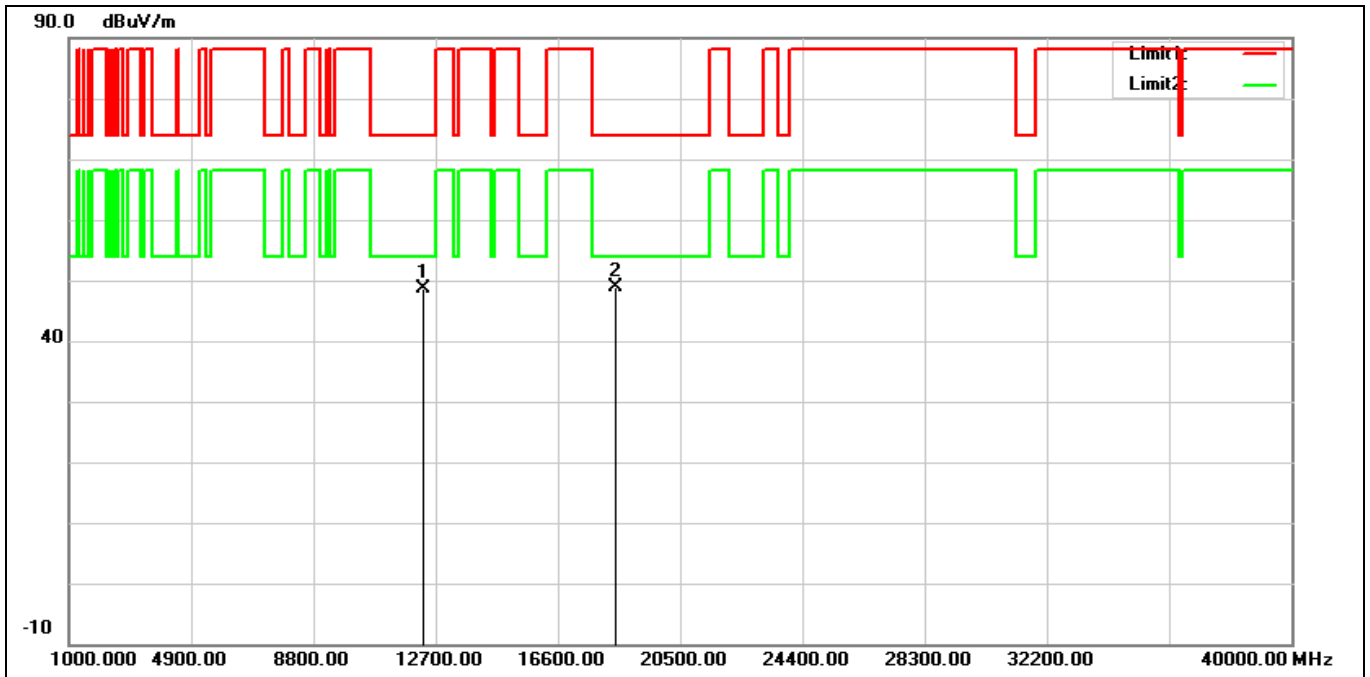

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12290.000	33.55	15.18	48.73	74.00	-25.27	peak
2*	18435.000	31.10	17.82	48.92	74.00	-25.08	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6145 MHz		
Remark:			

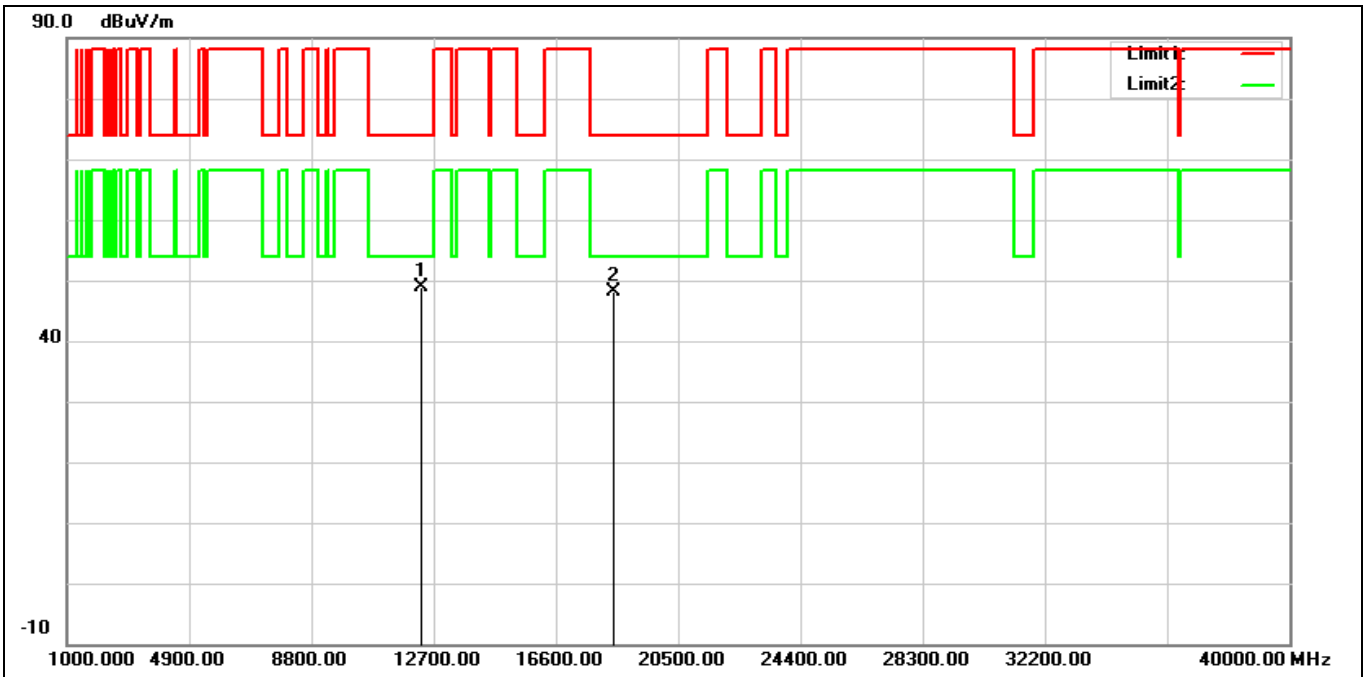

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12290.000	33.67	15.18	48.85	74.00	-25.15	peak
2	18435.000	30.41	17.82	48.23	74.00	-25.77	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6385 MHz		
Remark:			

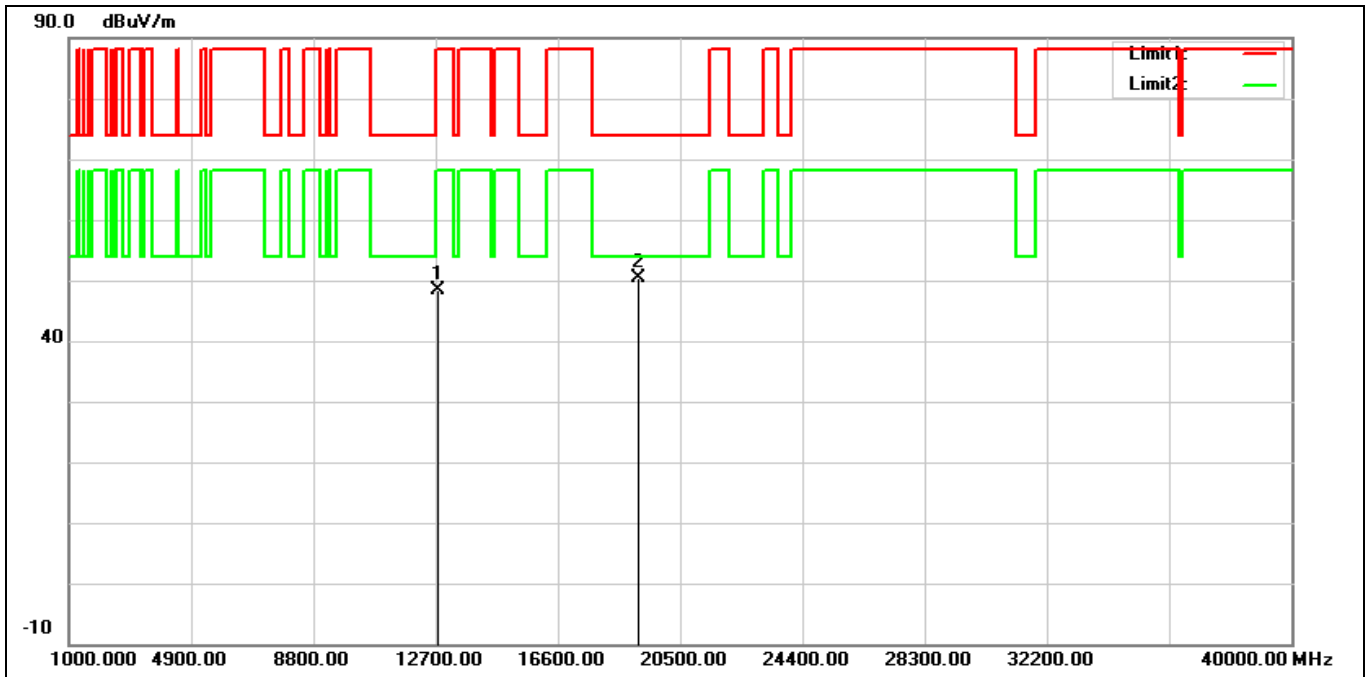


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12770.000	32.69	15.59	48.28	88.20	-39.92	peak
2*	19155.000	31.99	18.48	50.47	74.00	-23.53	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6385 MHz		
Remark:			

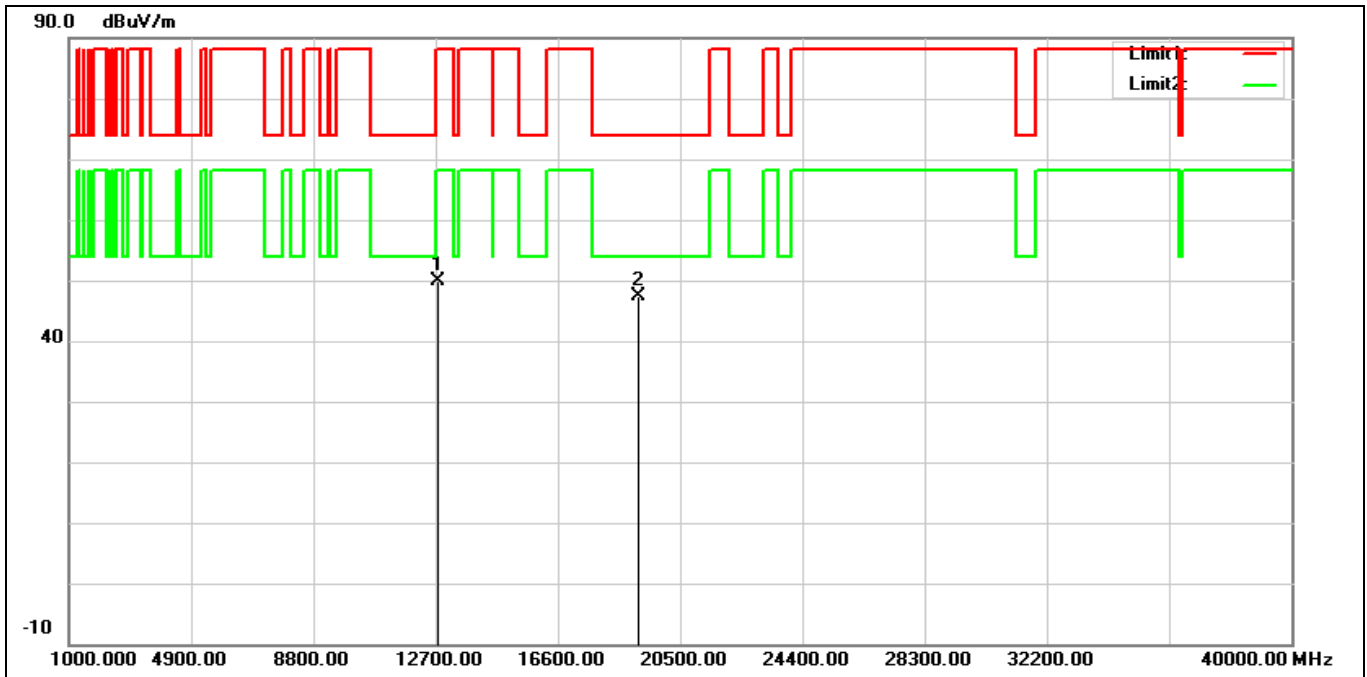


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12770.000	34.35	15.59	49.94	88.20	-38.26	peak
2*	19155.000	28.96	18.48	47.44	74.00	-26.56	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6415 MHz		
Remark:			

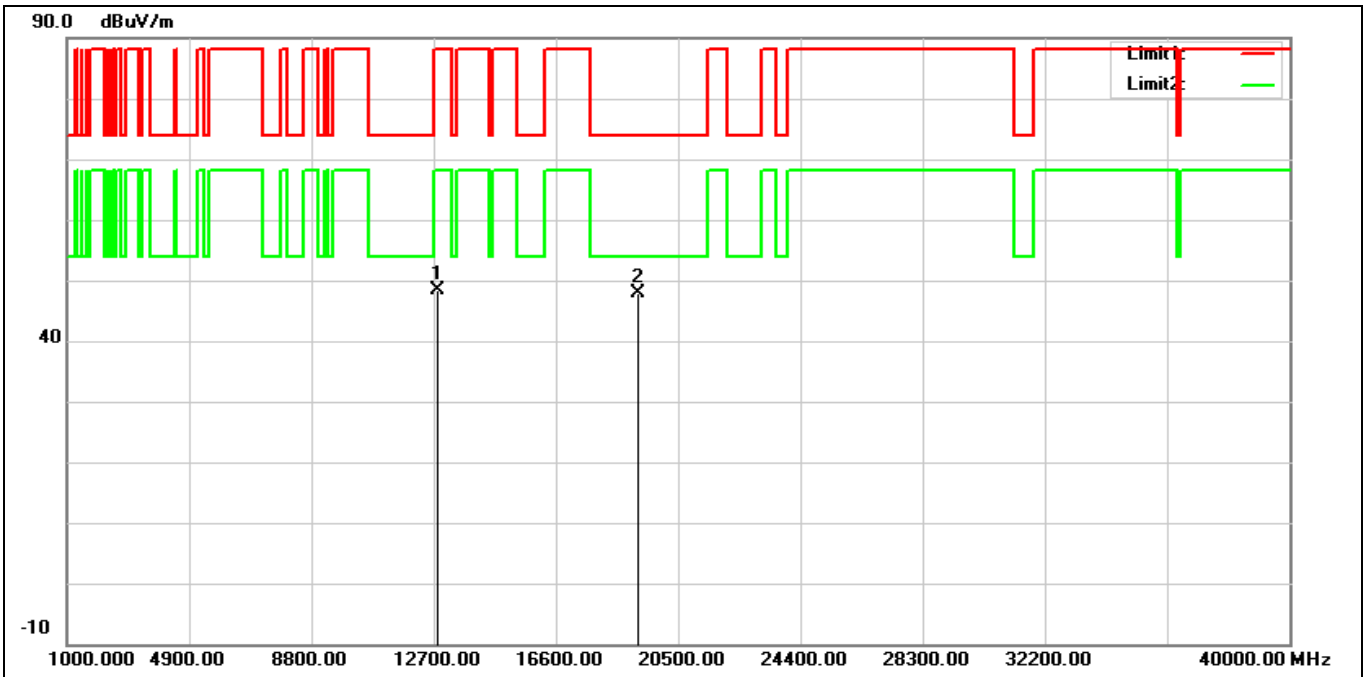


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12830.000	32.72	15.71	48.43	88.20	-39.77	peak
2*	19245.000	29.25	18.58	47.83	74.00	-26.17	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6415 MHz		
Remark:			

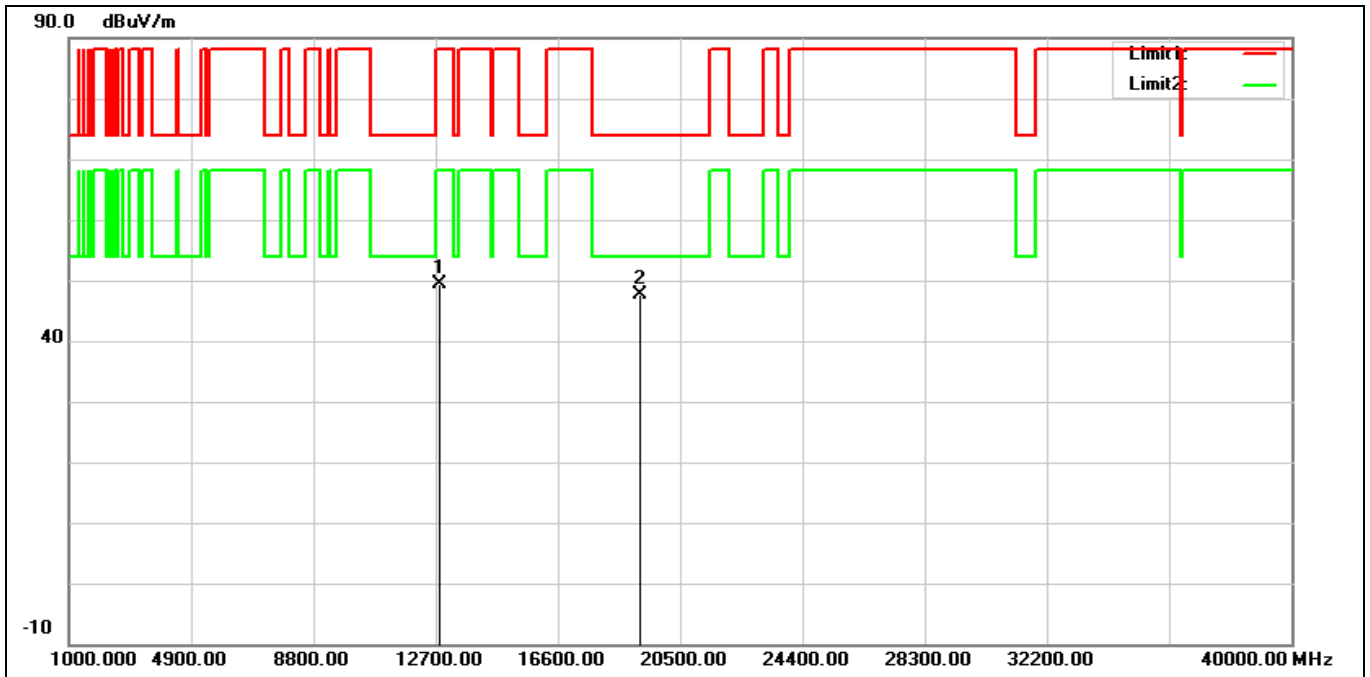


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12830.000	33.64	15.71	49.35	88.20	-38.85	peak
2*	19245.000	29.02	18.58	47.60	74.00	-26.40	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6465 MHz		
Remark:			

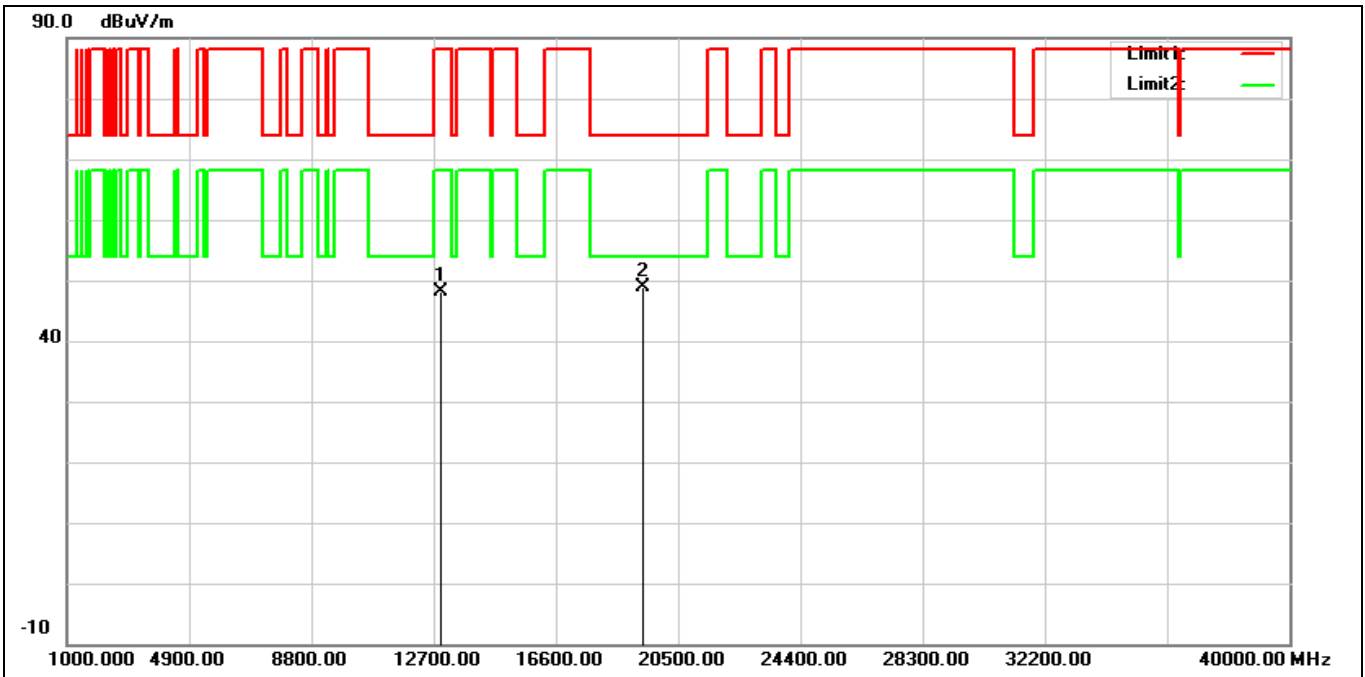


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12930.000	32.37	15.82	48.19	88.20	-40.01	peak
2*	19395.000	30.08	18.76	48.84	74.00	-25.16	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6465 MHz		
Remark:			

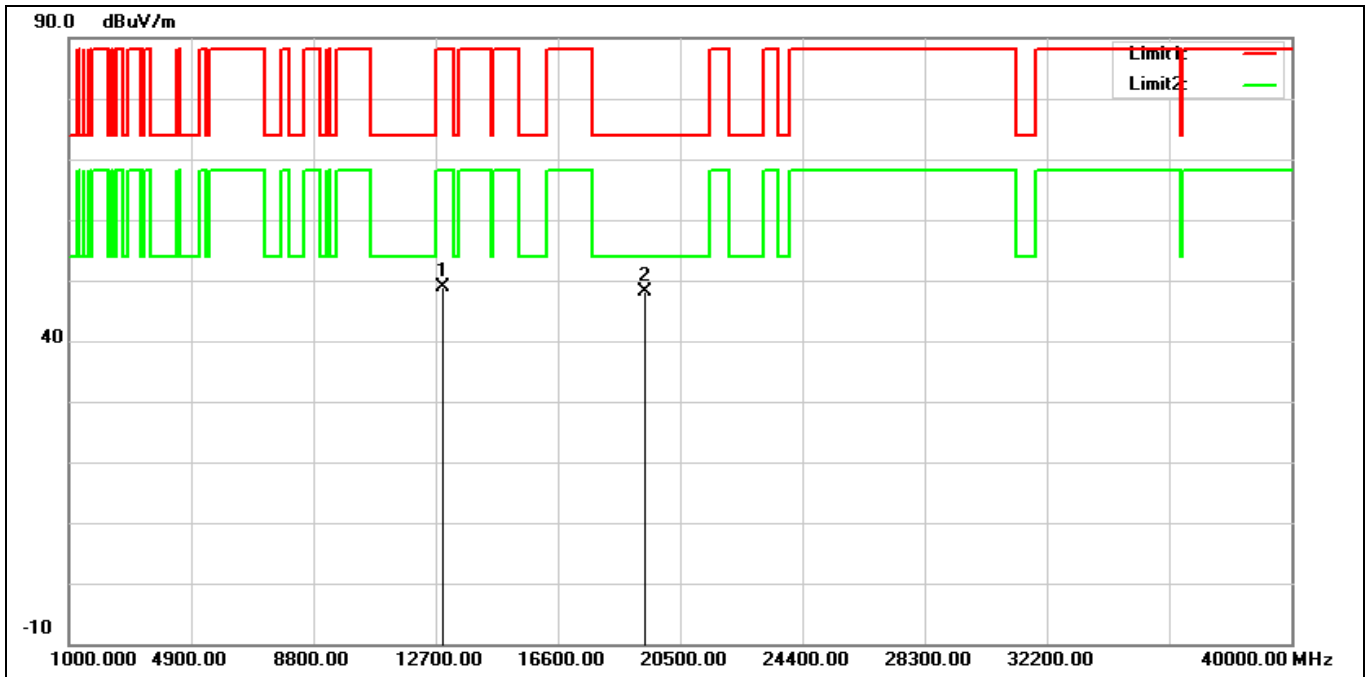


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12930.000	33.14	15.82	48.96	88.20	-39.24	peak
2*	19395.000	29.37	18.76	48.13	74.00	-25.87	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6545 MHz		
Remark:			

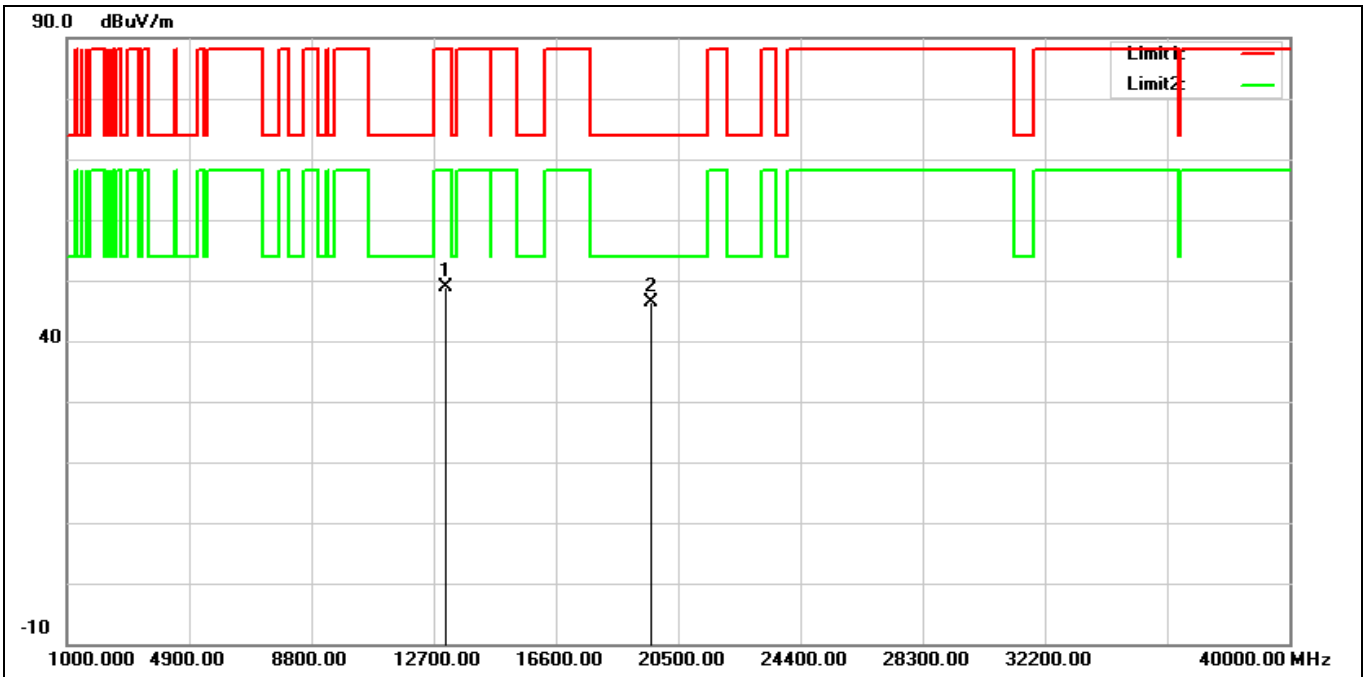

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13090.000	33.18	15.66	48.84	88.20	-39.36	peak
2*	19635.000	27.38	18.89	46.27	74.00	-27.73	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6545 MHz		
Remark:			

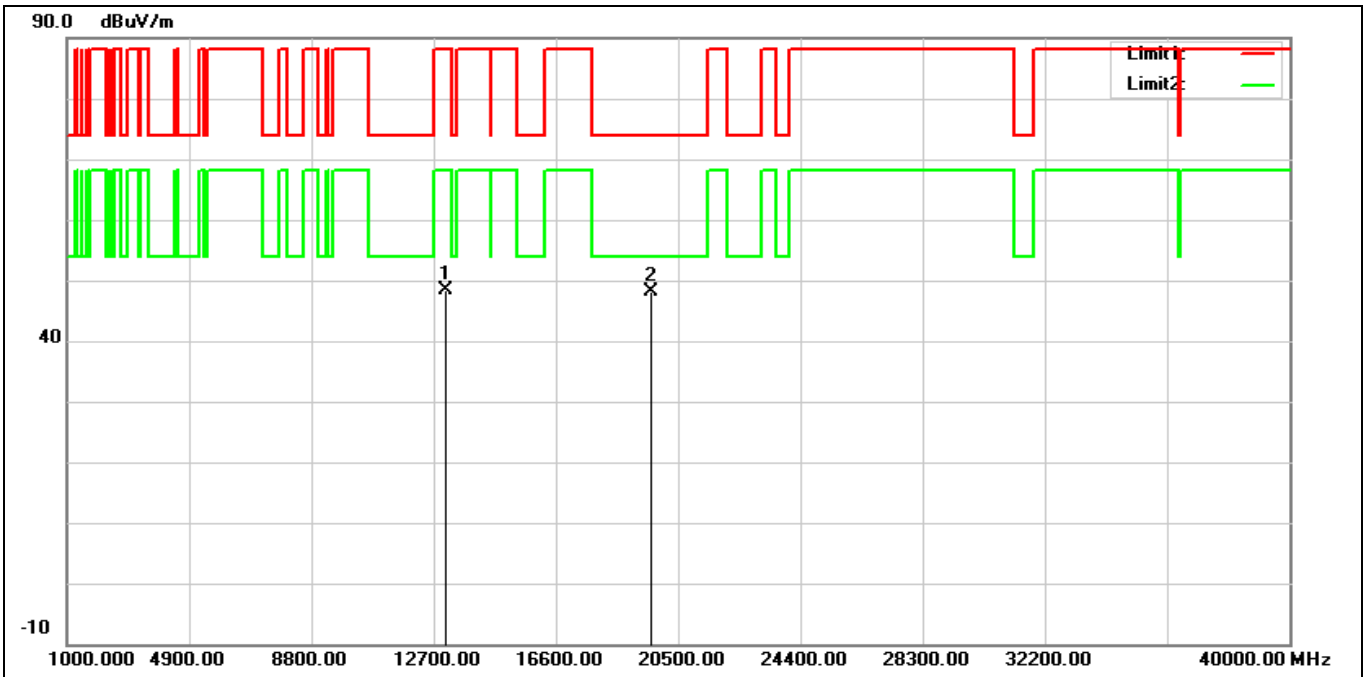

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13090.000	32.75	15.66	48.41	88.20	-39.79	peak
2*	19635.000	29.18	18.89	48.07	74.00	-25.93	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6625 MHz		
Remark:			

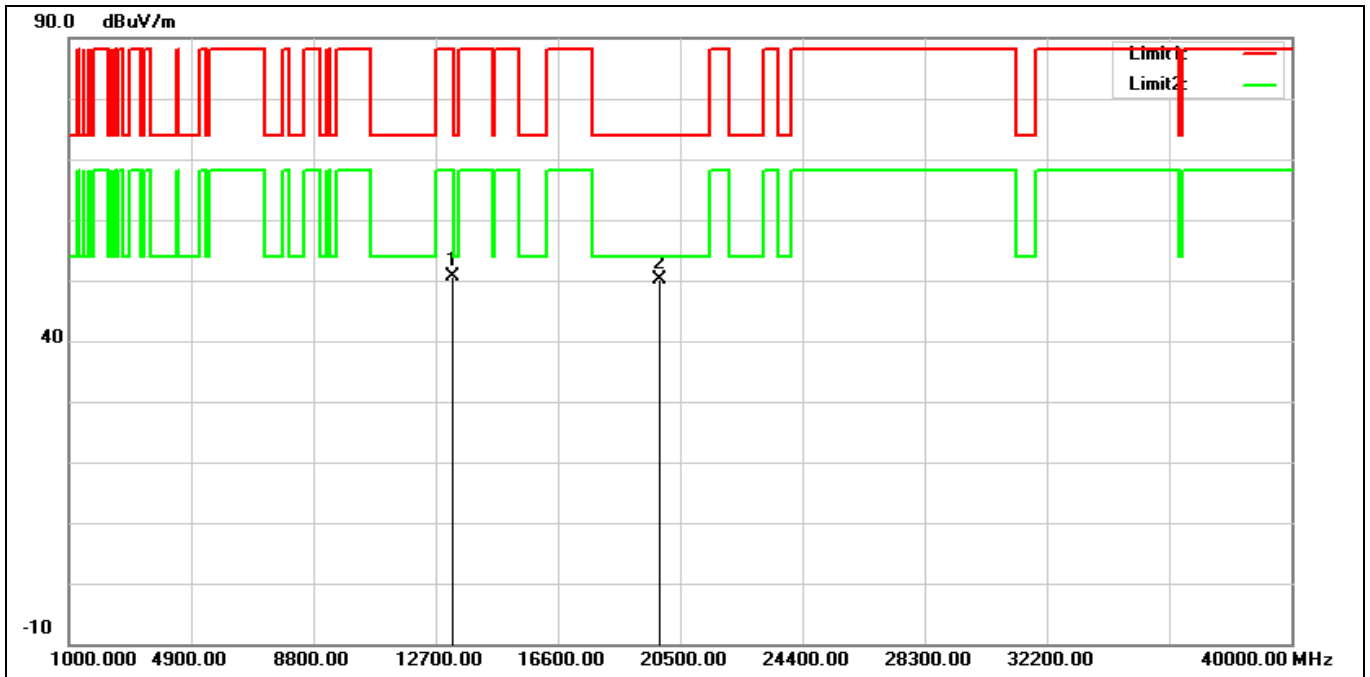


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	13250.000	34.75	15.97	50.72	74.00	-23.28	peak
2	19875.000	31.29	18.90	50.19	74.00	-23.81	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6625 MHz		
Remark:			

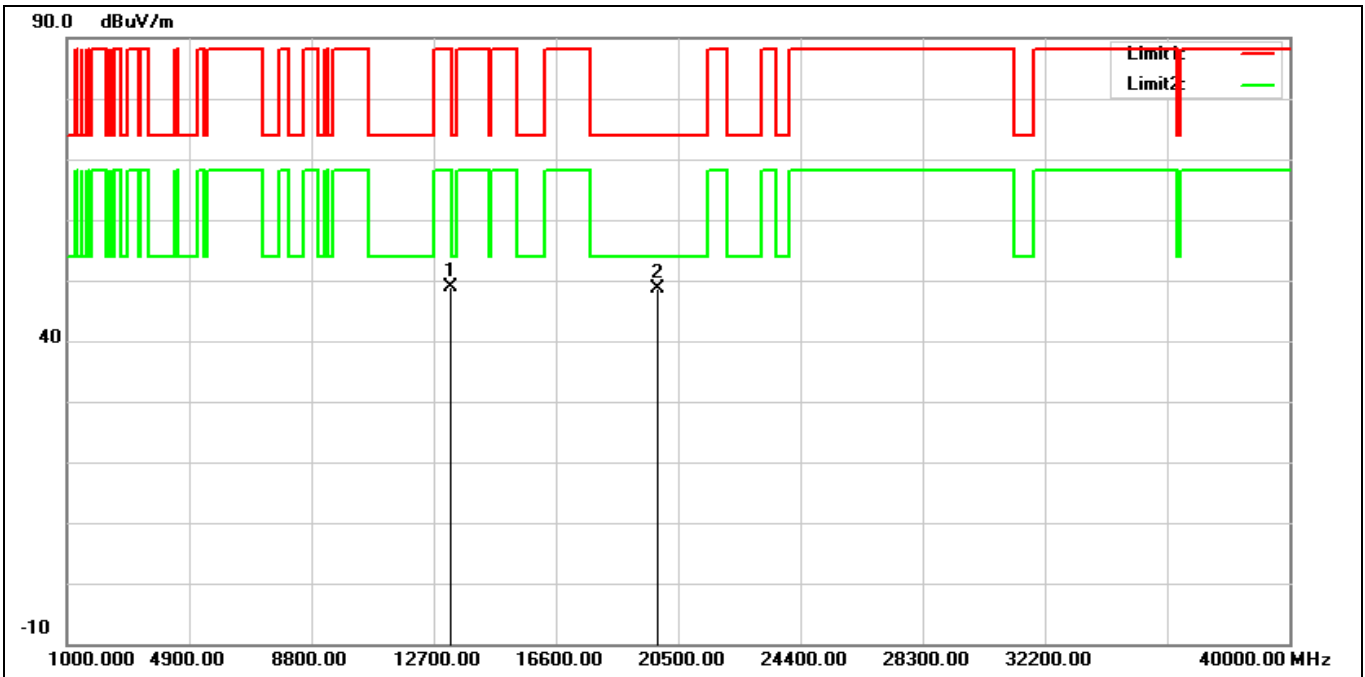


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	13250.000	32.82	15.97	48.79	74.00	-25.21	peak
2	19875.000	29.64	18.90	48.54	74.00	-25.46	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6705 MHz		
Remark:			

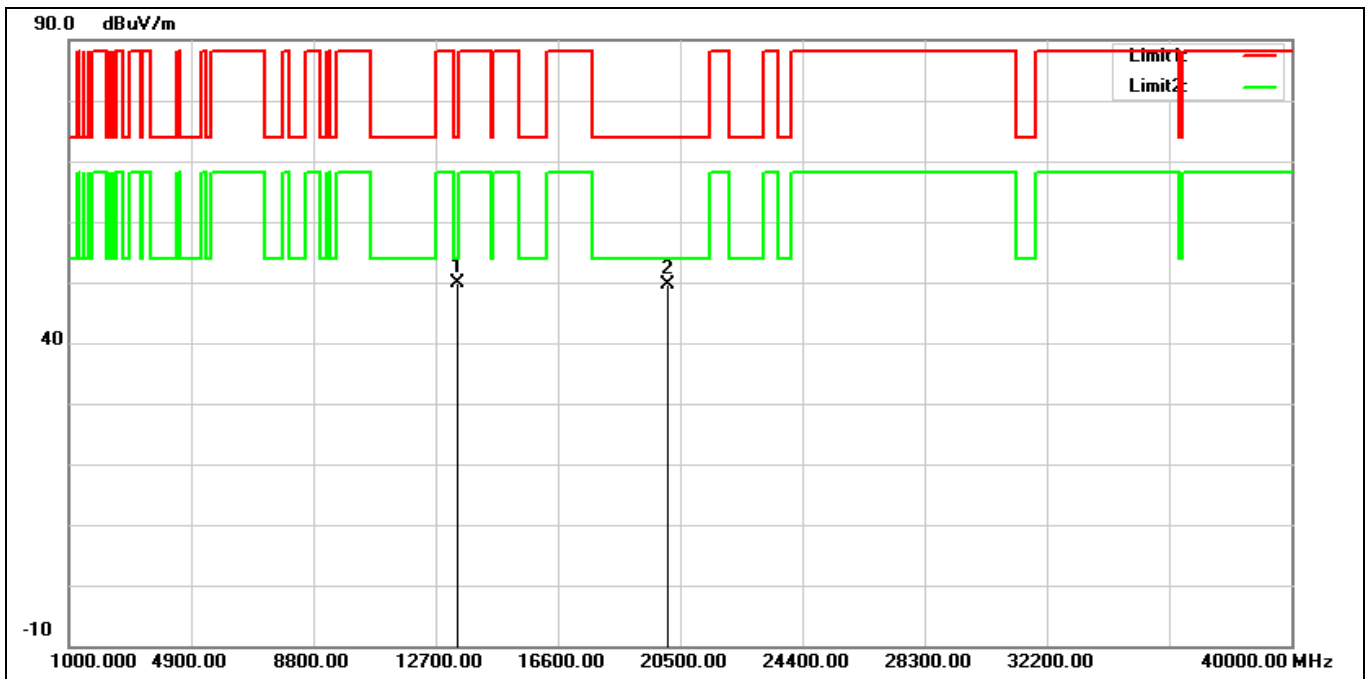


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13410.000	33.18	16.63	49.81	88.20	-38.39	peak
2*	20115.000	30.60	19.05	49.65	74.00	-24.35	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6705 MHz		
Remark:			

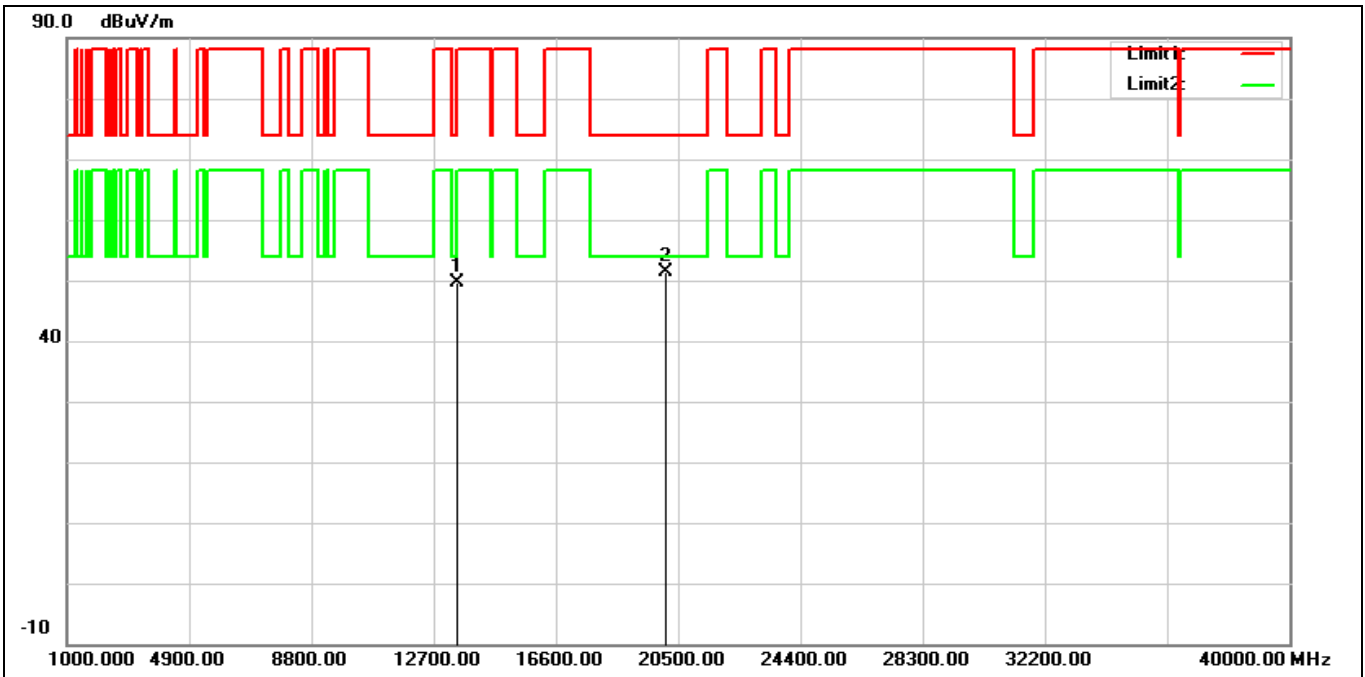


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13410.000	33.11	16.63	49.74	88.20	-38.46	peak
2*	20115.000	32.22	19.05	51.27	74.00	-22.73	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6785 MHz		
Remark:			

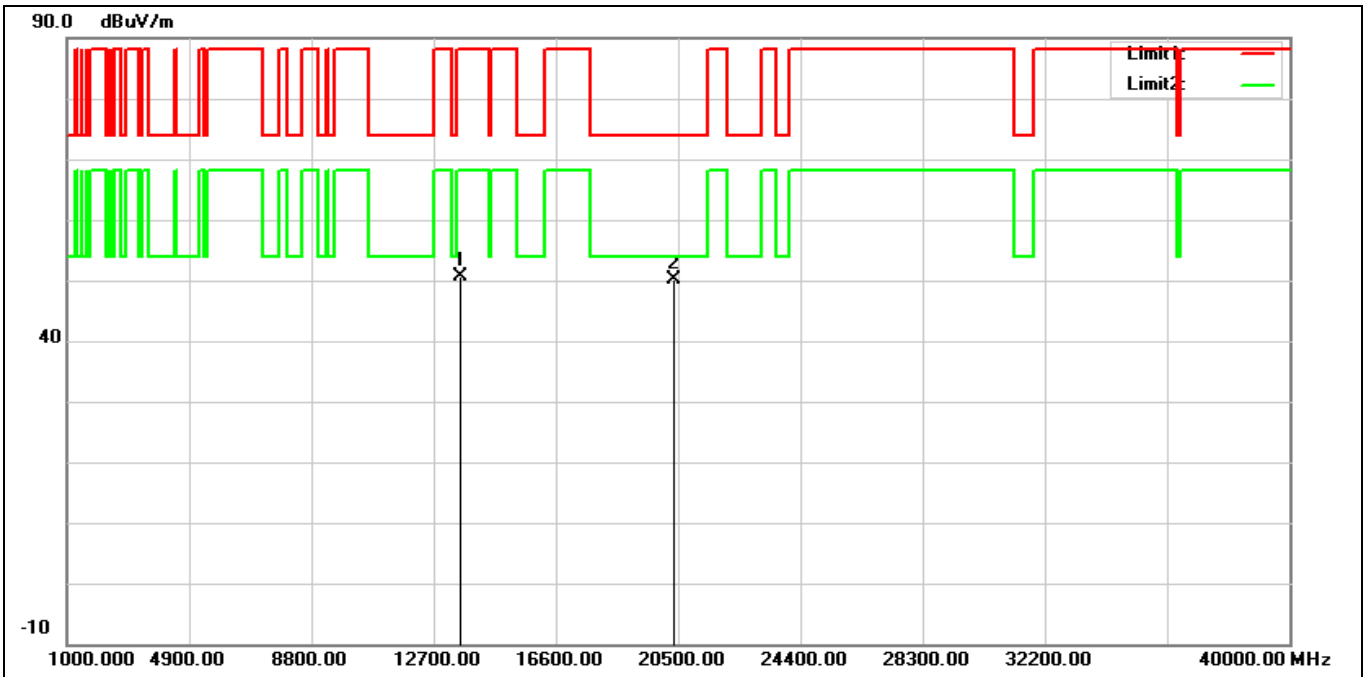


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13570.000	33.39	17.16	50.55	88.20	-37.65	peak
2*	20355.000	30.88	19.36	50.24	74.00	-23.76	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6785 MHz		
Remark:			

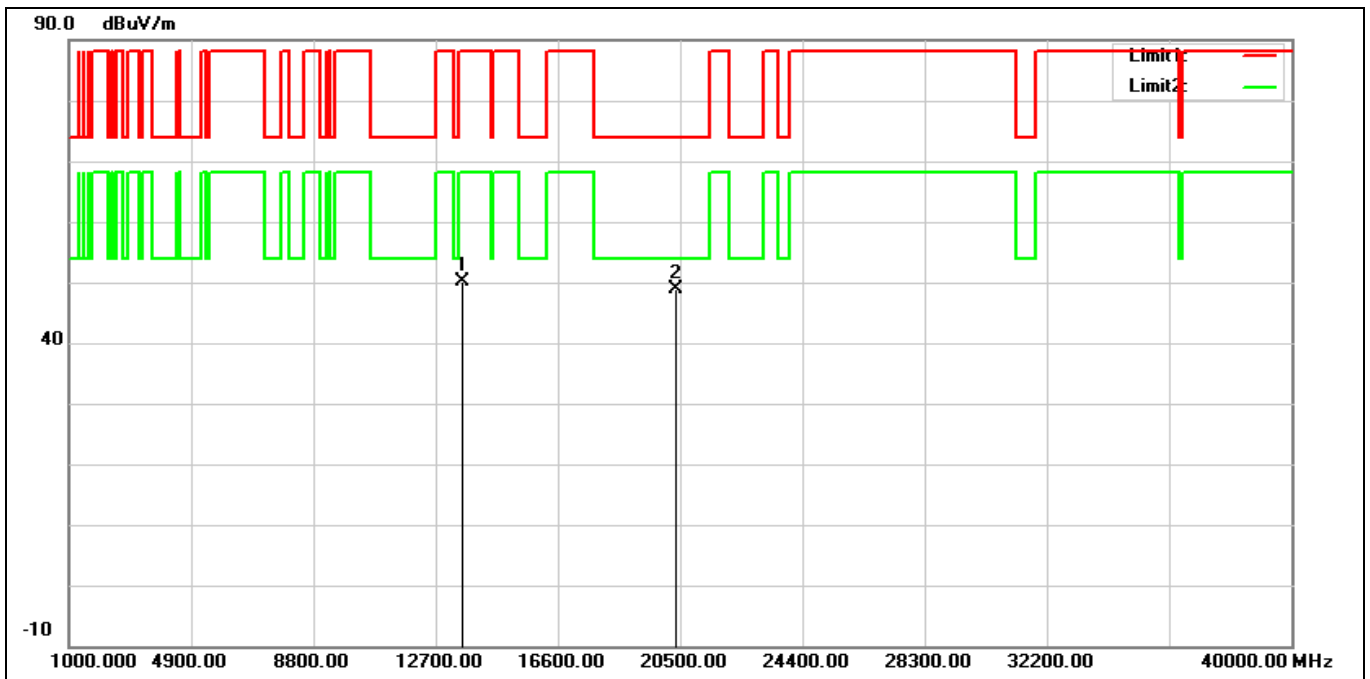


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13570.000	33.06	17.16	50.22	88.20	-37.98	peak
2*	20355.000	29.47	19.36	48.83	74.00	-25.17	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6865 MHz		
Remark:			

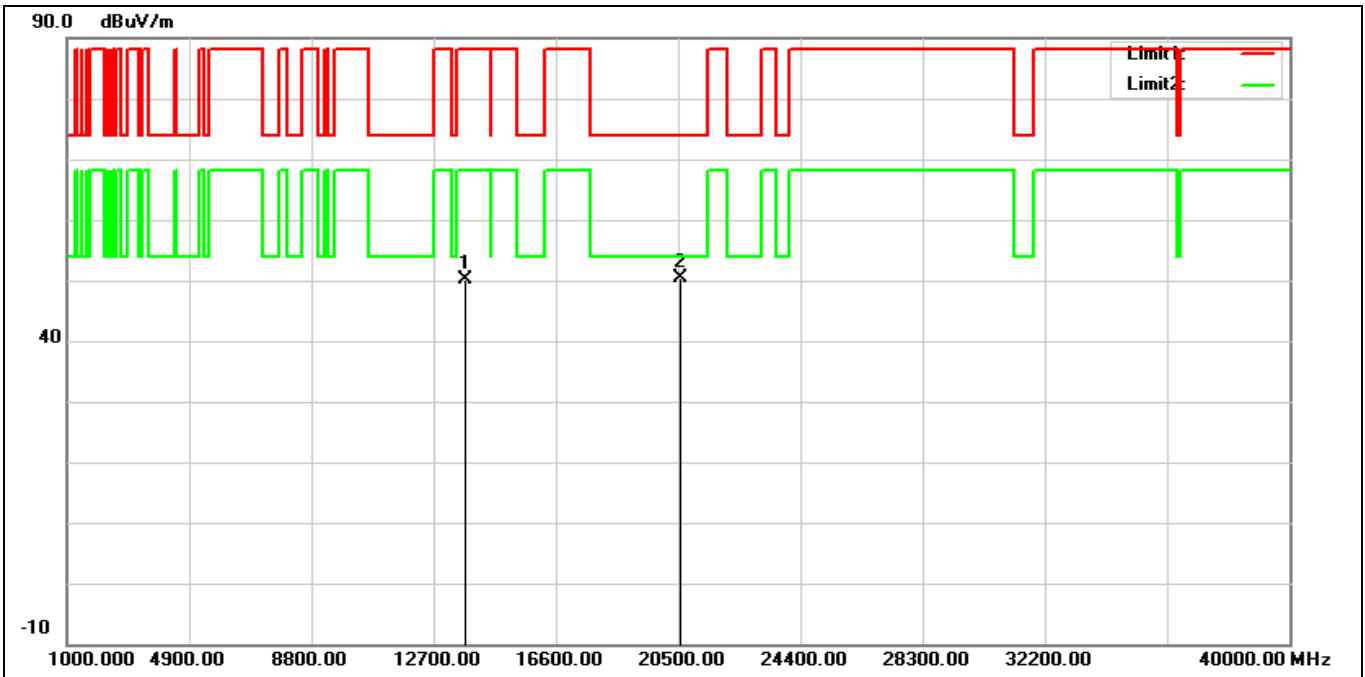

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13730.000	32.97	17.22	50.19	88.20	-38.01	peak
2*	20595.000	30.90	19.59	50.49	74.00	-23.51	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6865 MHz		
Remark:			

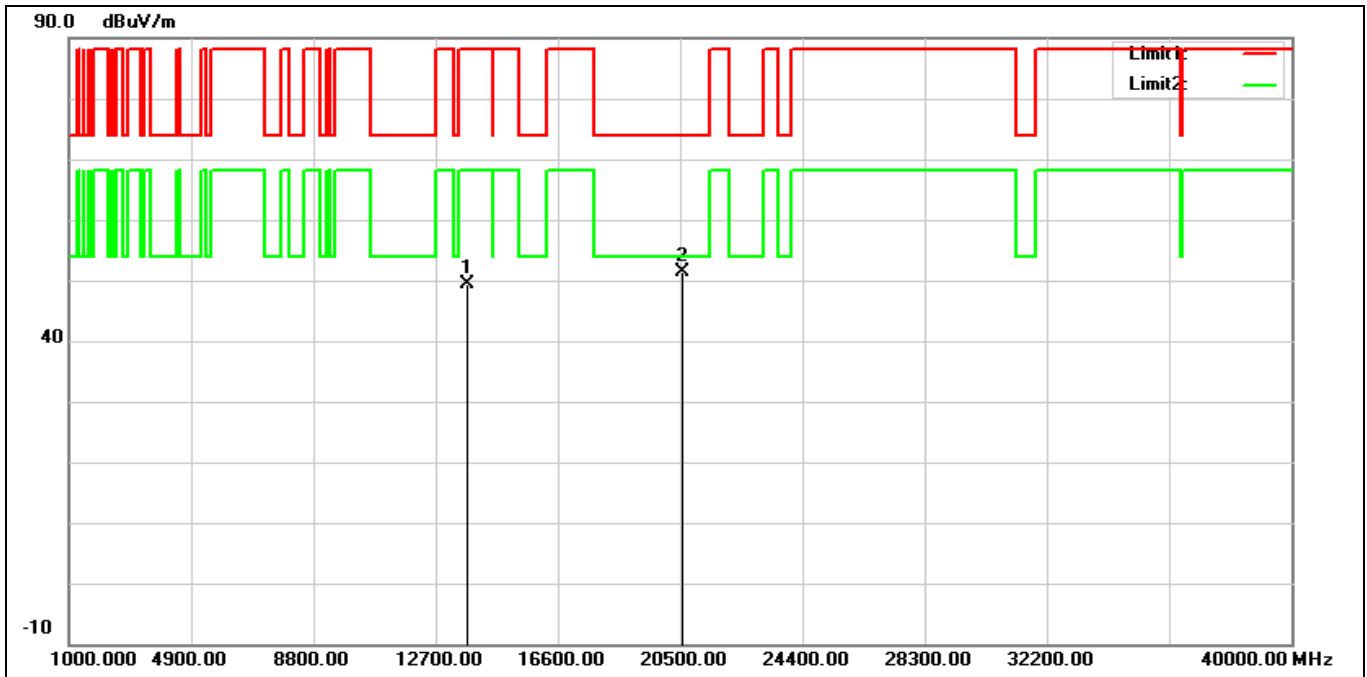

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13730.000	32.11	17.22	49.33	88.20	-38.87	peak
2*	20595.000	31.72	19.59	51.31	74.00	-22.69	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 6945 MHz		
Remark:			

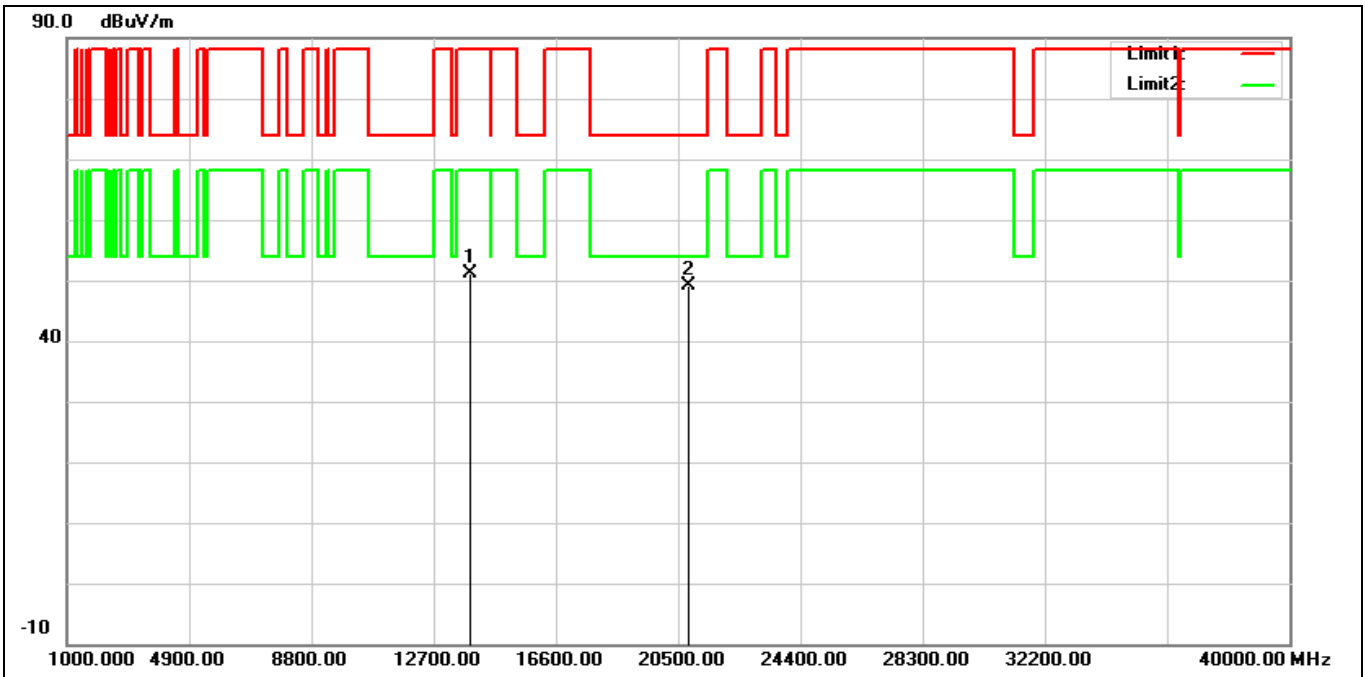


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13890.000	33.50	17.61	51.11	88.20	-37.09	peak
2*	20835.000	29.52	19.71	49.23	74.00	-24.77	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 6945 MHz		
Remark:			

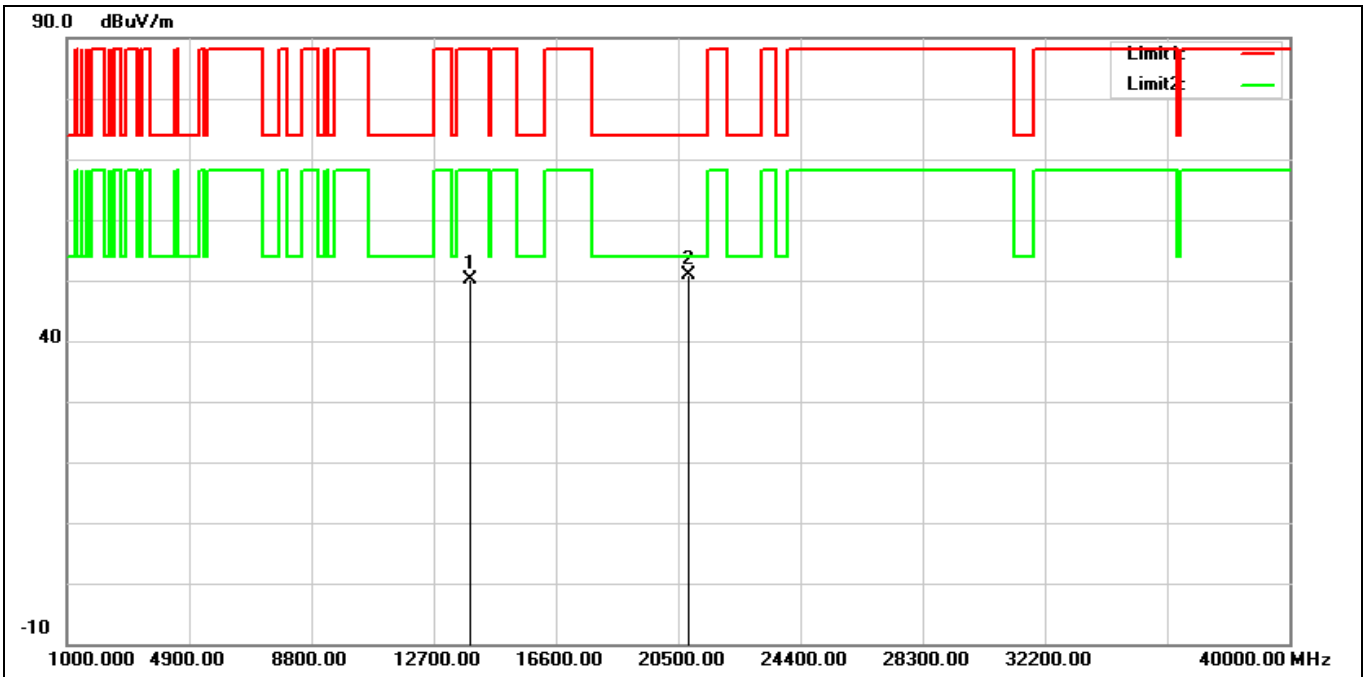


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13890.000	32.44	17.61	50.05	88.20	-38.15	peak
2*	20835.000	31.26	19.71	50.97	74.00	-23.03	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 7025 MHz		
Remark:			

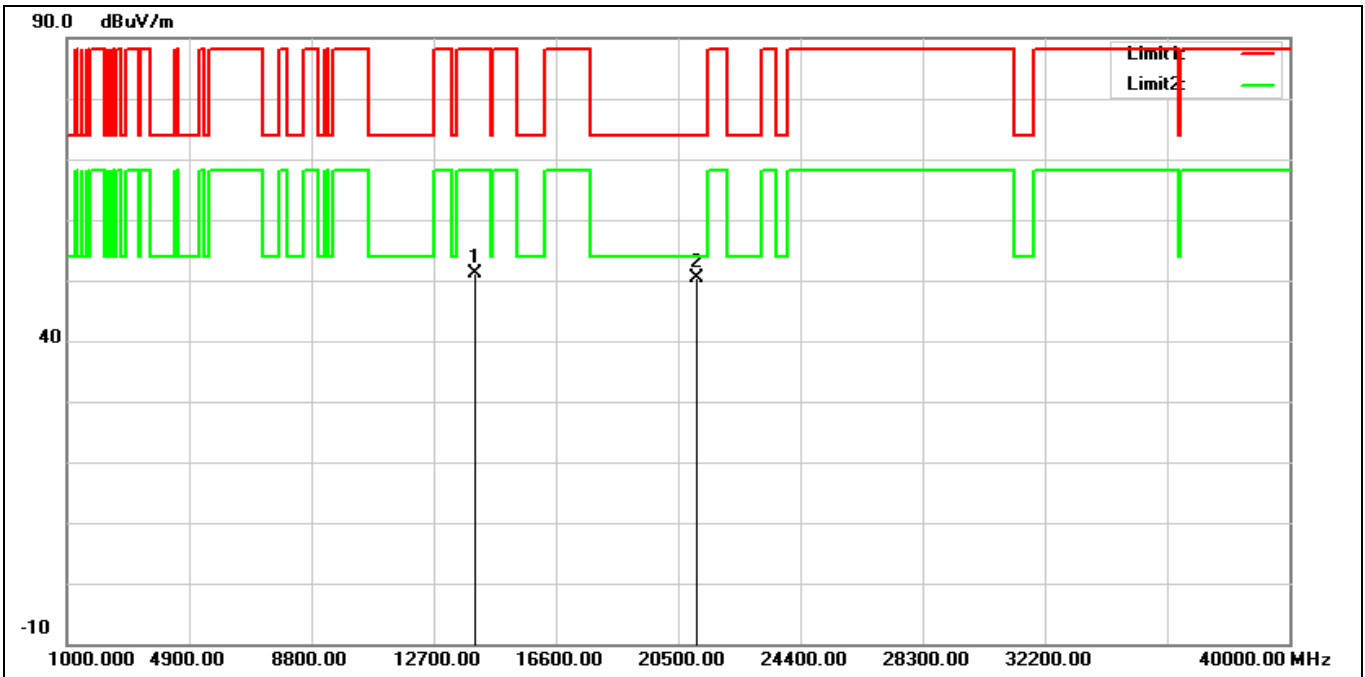


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14050.000	32.97	18.08	51.05	88.20	-37.15	peak
2*	21075.000	30.57	19.69	50.26	74.00	-23.74	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 7025 MHz		
Remark:			

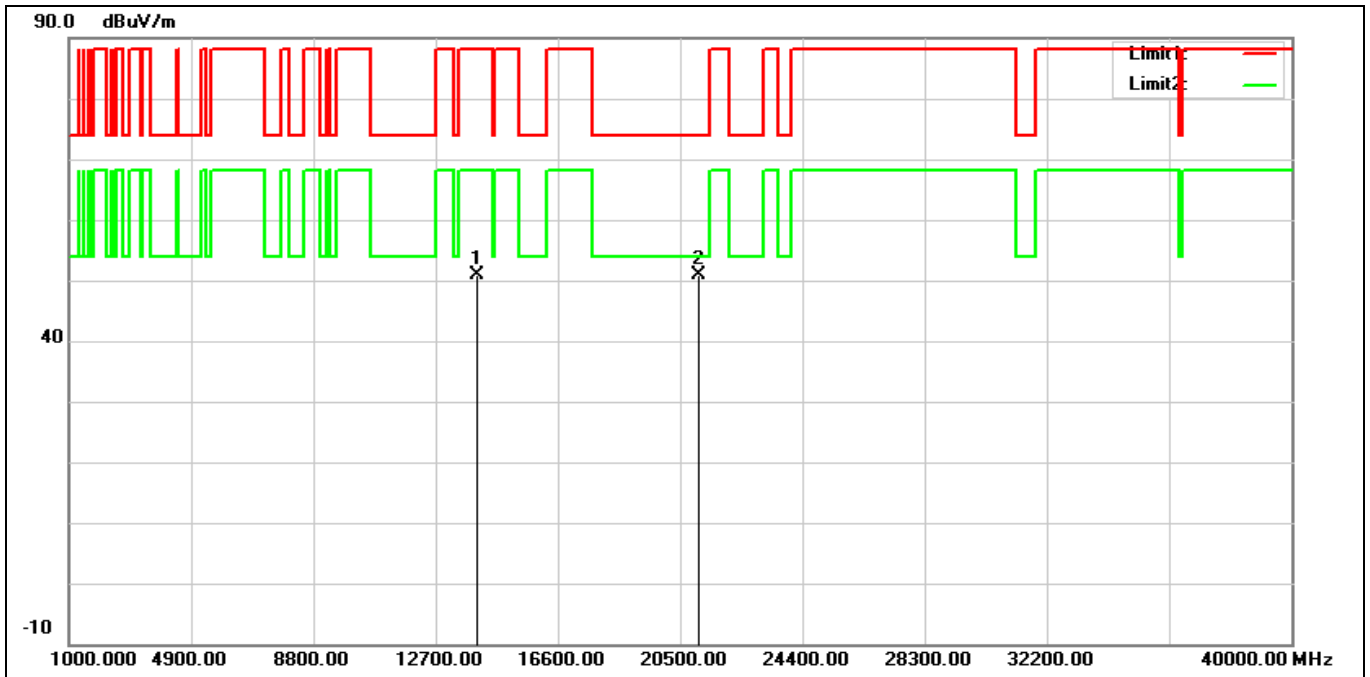


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14050.000	32.88	18.08	50.96	88.20	-37.24	peak
2*	21075.000	31.11	19.69	50.80	74.00	-23.20	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 6025 MHz		
Remark:			

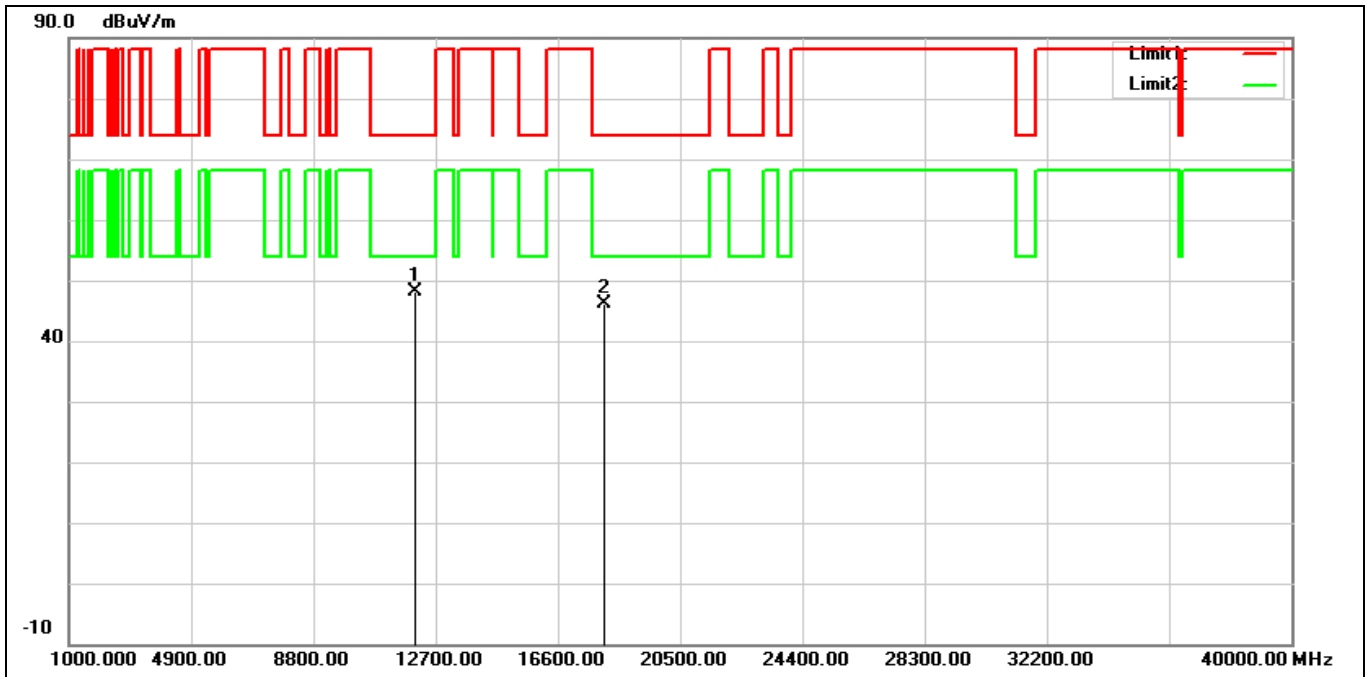


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12050.000	33.25	14.95	48.20	74.00	-25.80	peak
2	18075.000	29.12	17.06	46.18	74.00	-27.82	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 6025 MHz		
Remark:			

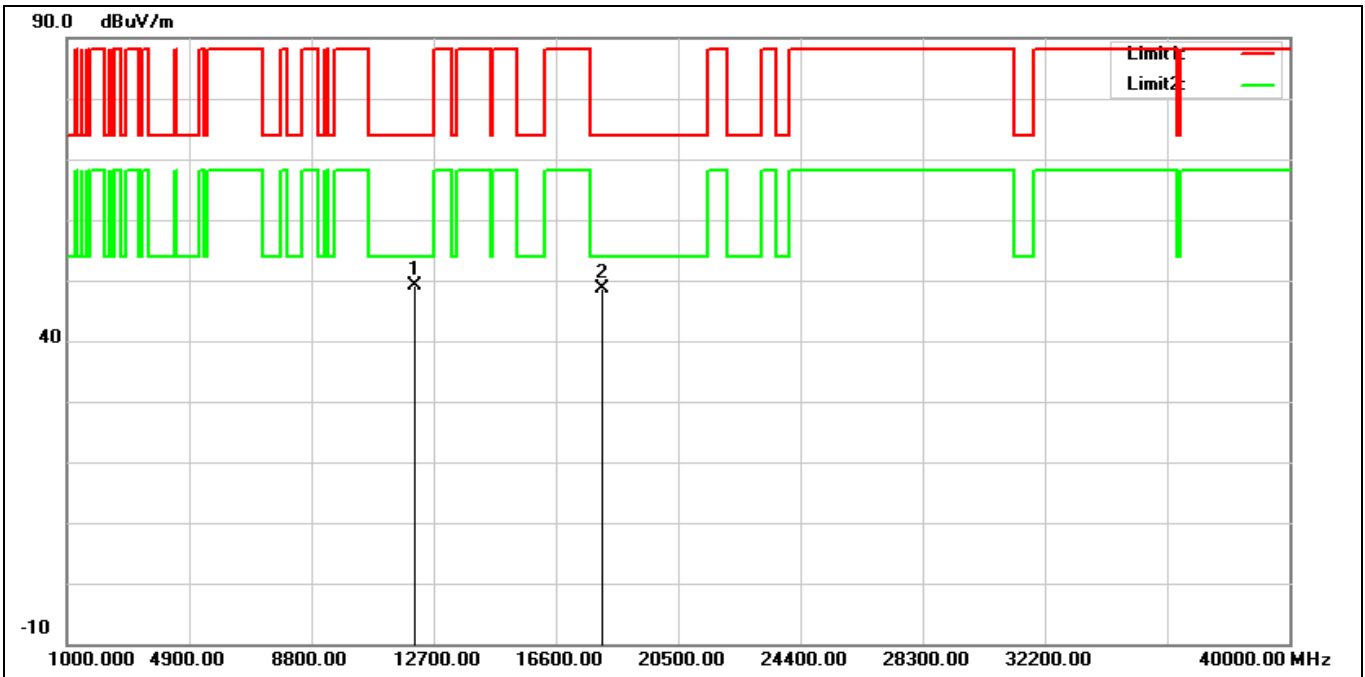


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12050.000	34.14	14.95	49.09	74.00	-24.91	peak
2	18075.000	31.67	17.06	48.73	74.00	-25.27	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 6185 MHz		
Remark:			

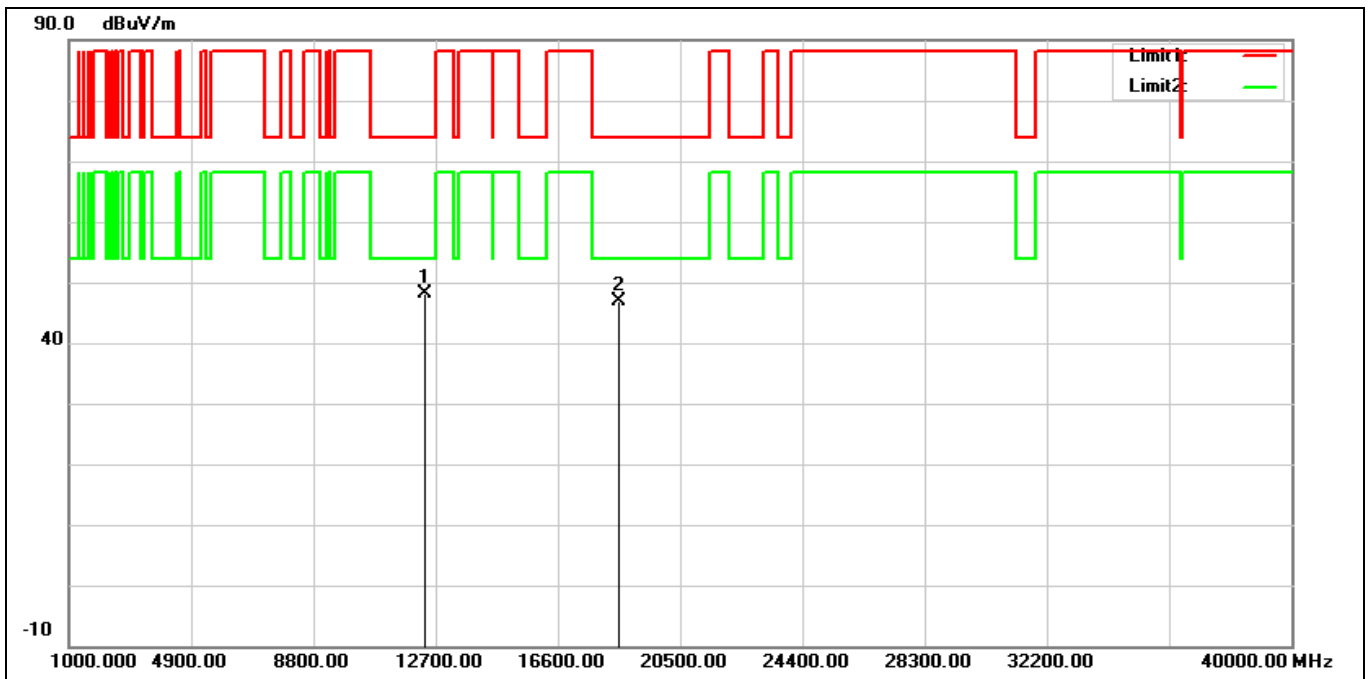

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12370.000	33.21	14.96	48.17	74.00	-25.83	peak
2	18555.000	28.77	18.01	46.78	74.00	-27.22	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 6185 MHz		
Remark:			

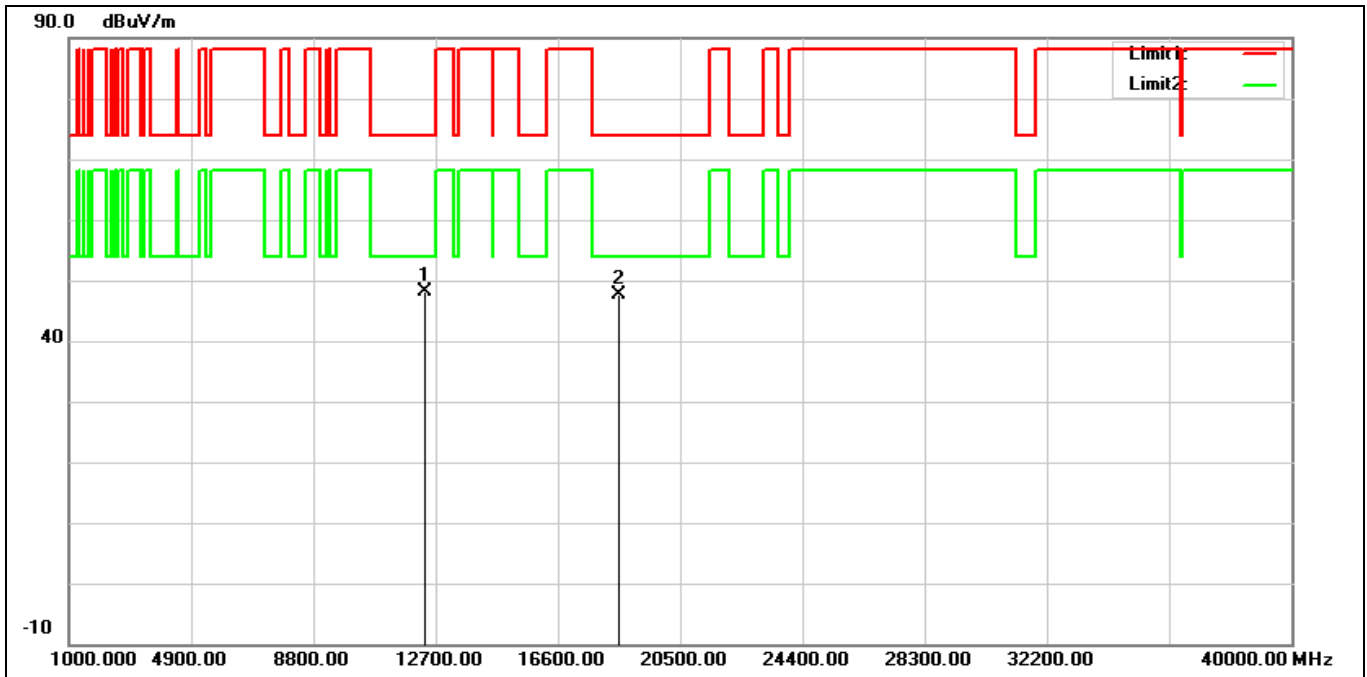

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12370.000	33.16	14.96	48.12	74.00	-25.88	peak
2	18555.000	29.73	18.01	47.74	74.00	-26.26	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 6345 MHz		
Remark:			

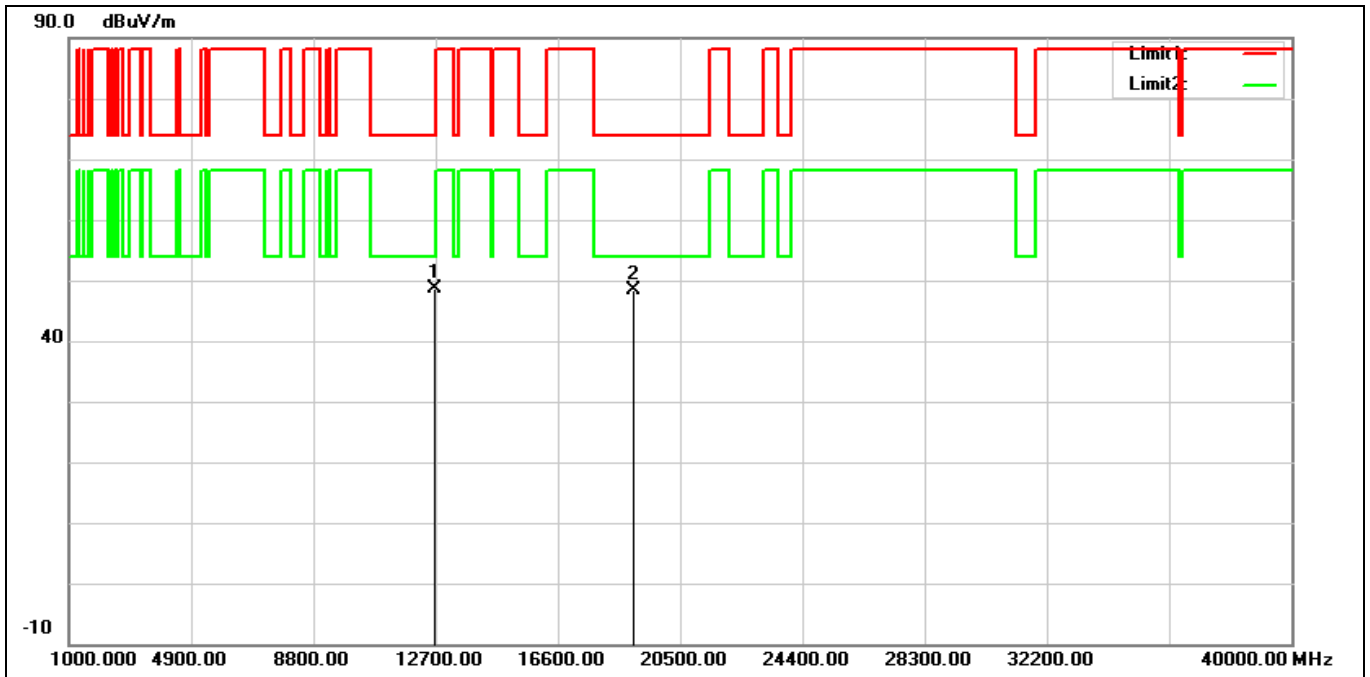


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	12690.000	33.25	15.42	48.67	74.00	-25.33	peak
2	19035.000	29.97	18.34	48.31	74.00	-25.69	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 6345 MHz		
Remark:			

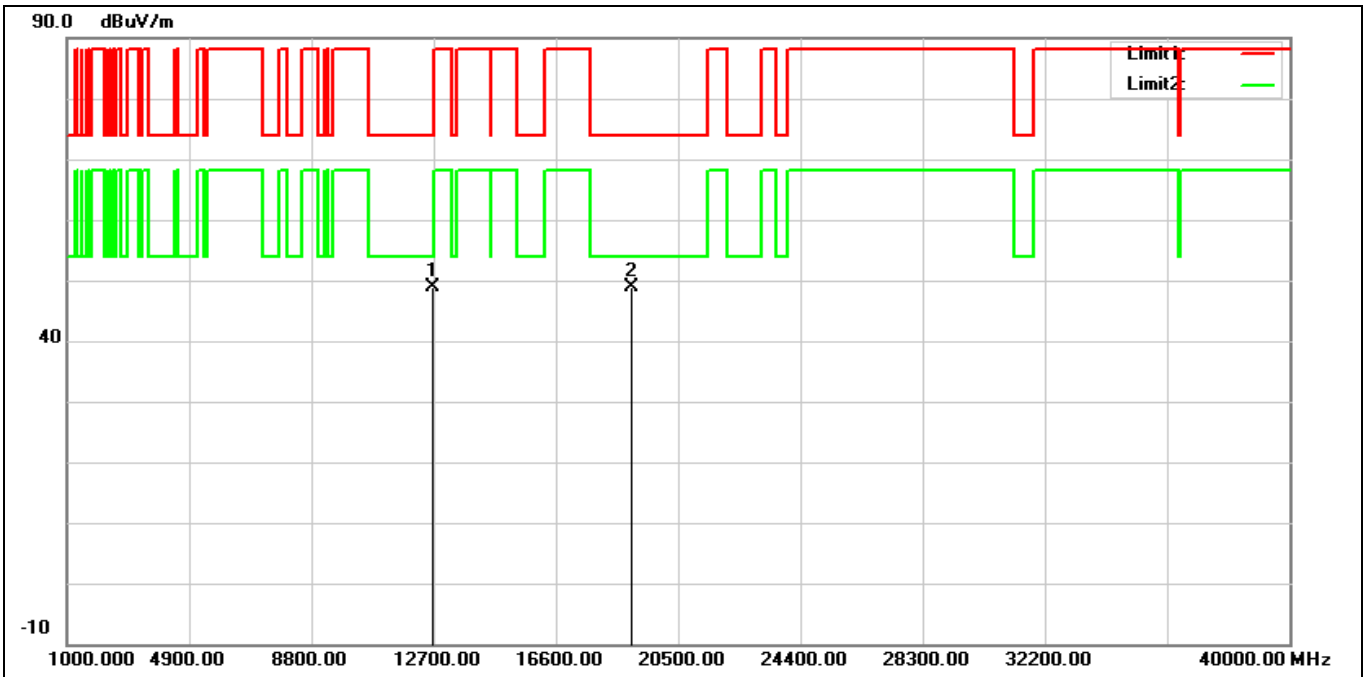


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12690.000	33.48	15.42	48.90	74.00	-25.10	peak
2*	19035.000	30.59	18.34	48.93	74.00	-25.07	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 6505 MHz		
Remark:			

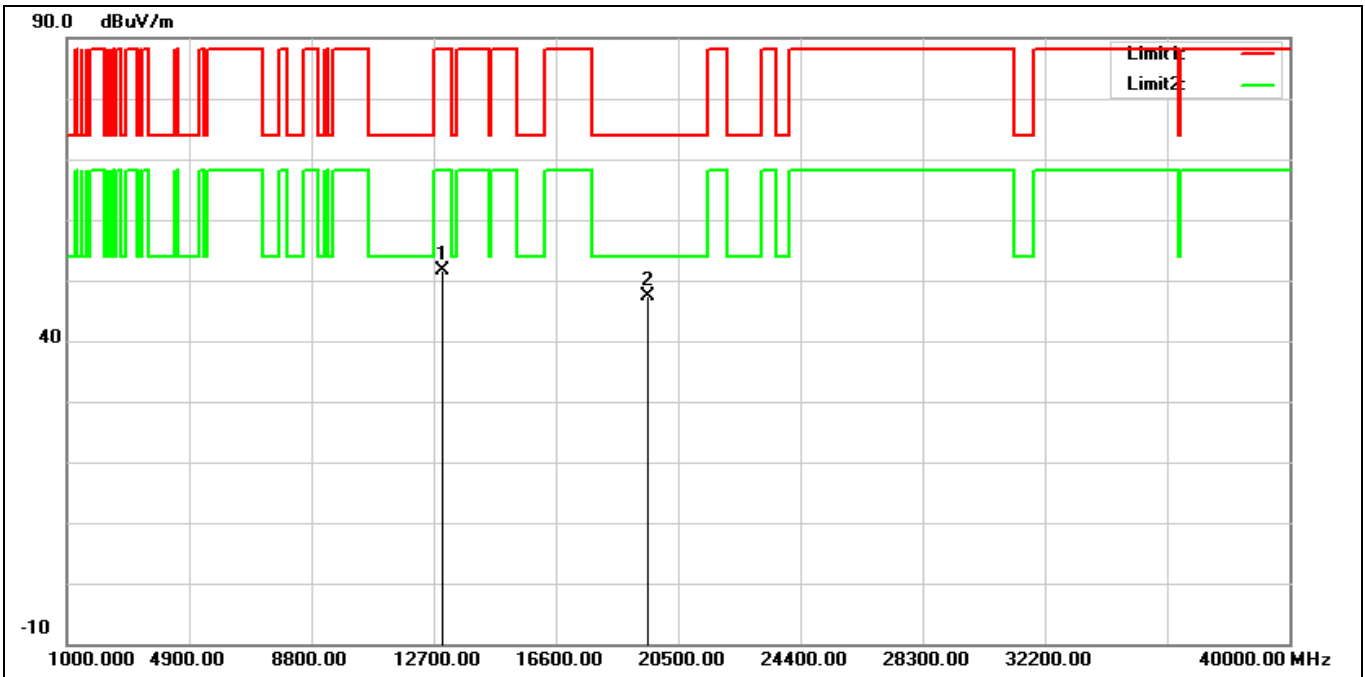


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13010.000	35.85	15.73	51.58	88.20	-36.62	peak
2*	19515.000	28.59	18.87	47.46	74.00	-26.54	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 6505 MHz		
Remark:			

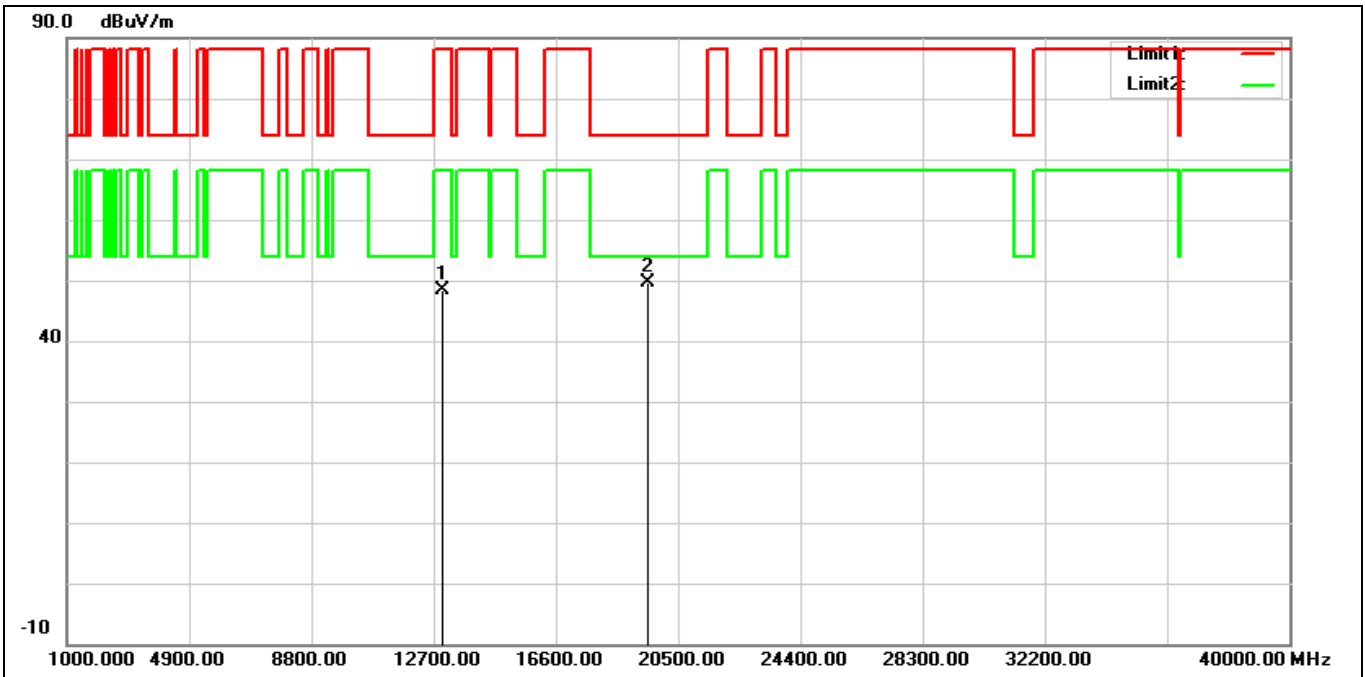


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13010.000	32.59	15.73	48.32	88.20	-39.88	peak
2*	19515.000	30.65	18.87	49.52	74.00	-24.48	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 6665 MHz		
Remark:			

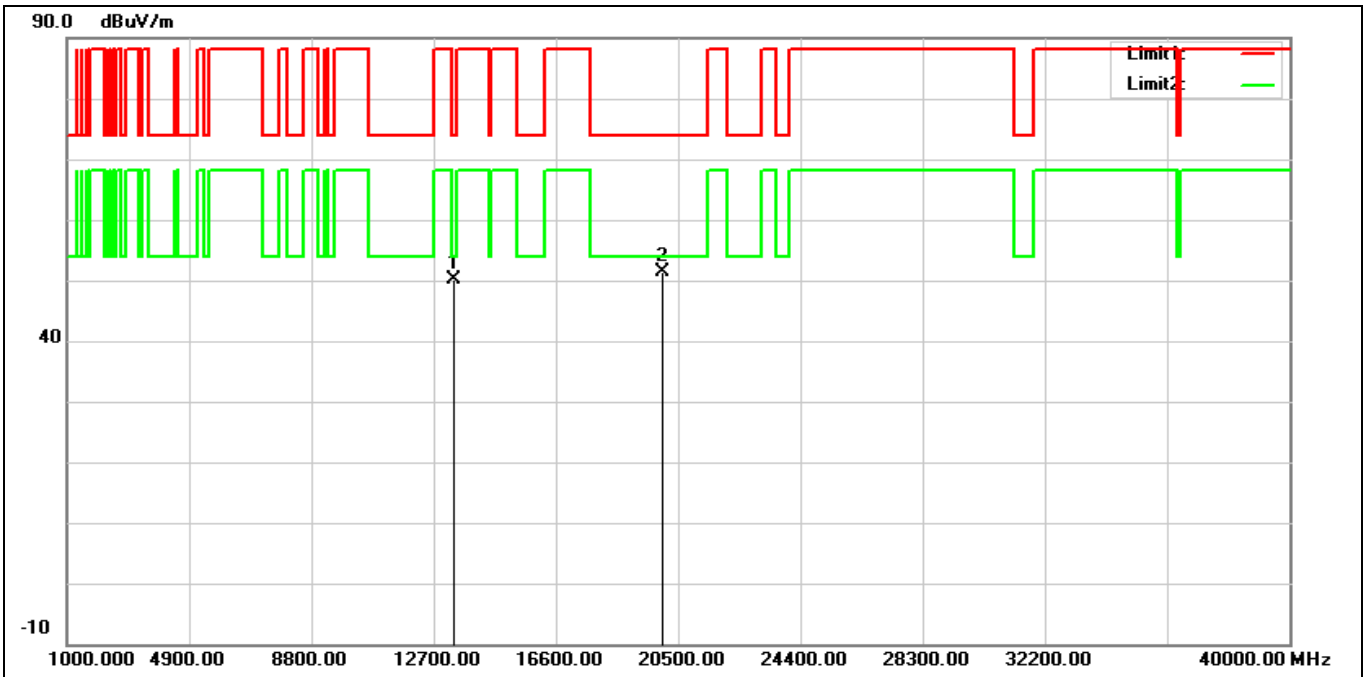


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13330.000	33.82	16.22	50.04	74.00	-23.96	peak
2*	19995.000	32.53	18.90	51.43	74.00	-22.57	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 6665 MHz		
Remark:			

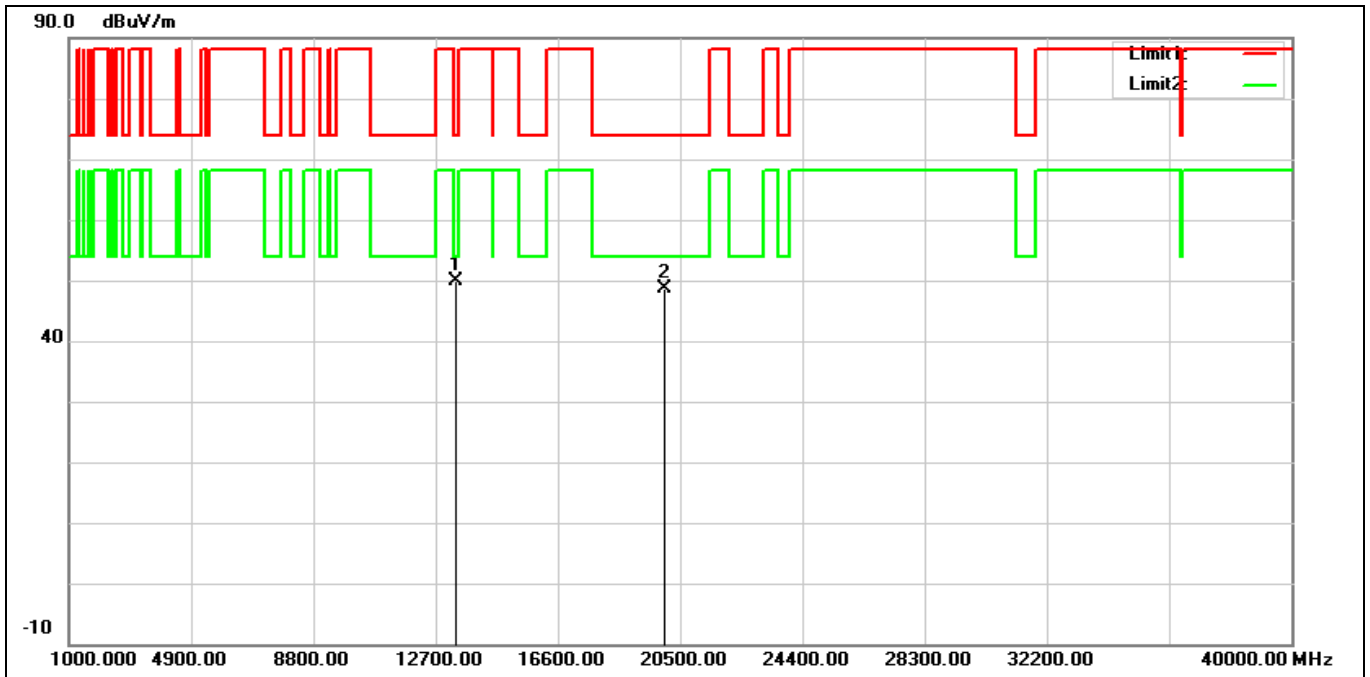


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	13330.000	33.61	16.22	49.83	74.00	-24.17	peak
2	19995.000	29.65	18.90	48.55	74.00	-25.45	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 6825 MHz		
Remark:			

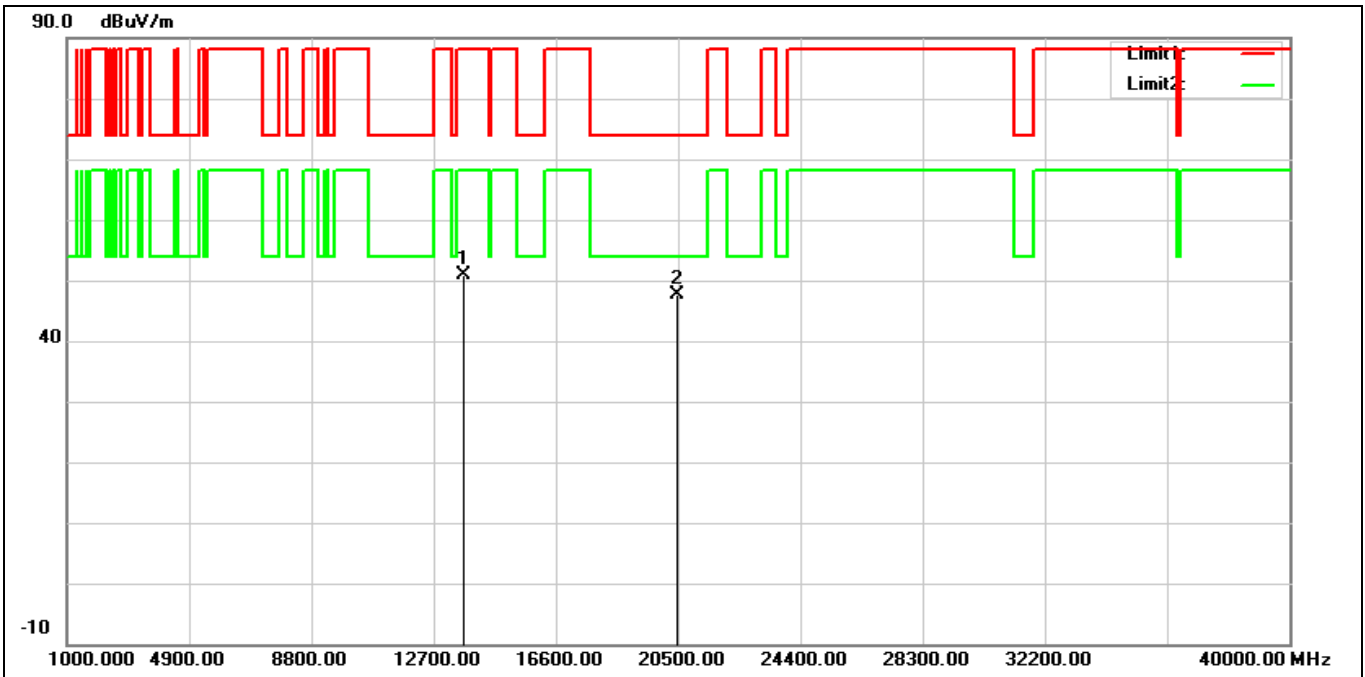

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13650.000	33.58	17.23	50.81	88.20	-37.39	peak
2*	20475.000	28.09	19.51	47.60	74.00	-26.40	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 6825 MHz		
Remark:			

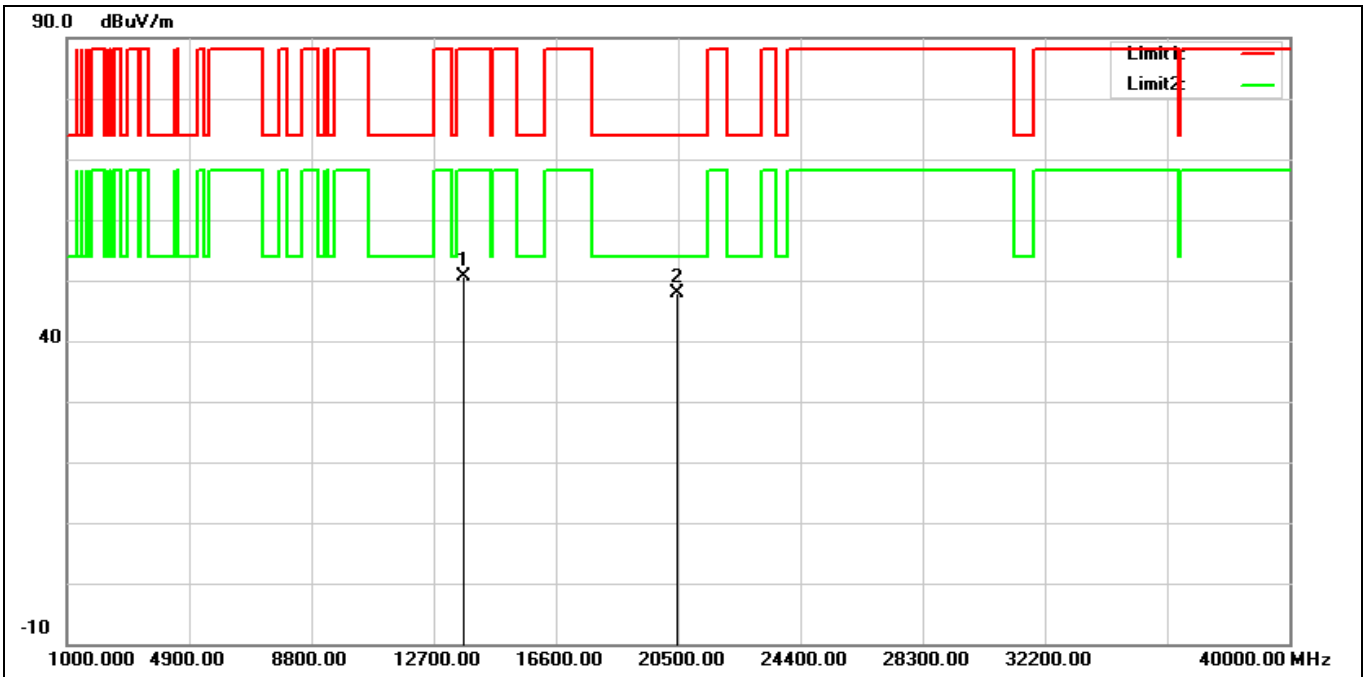

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13650.000	33.47	17.23	50.70	88.20	-37.50	peak
2*	20475.000	28.32	19.51	47.83	74.00	-26.17	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 6985 MHz		
Remark:			

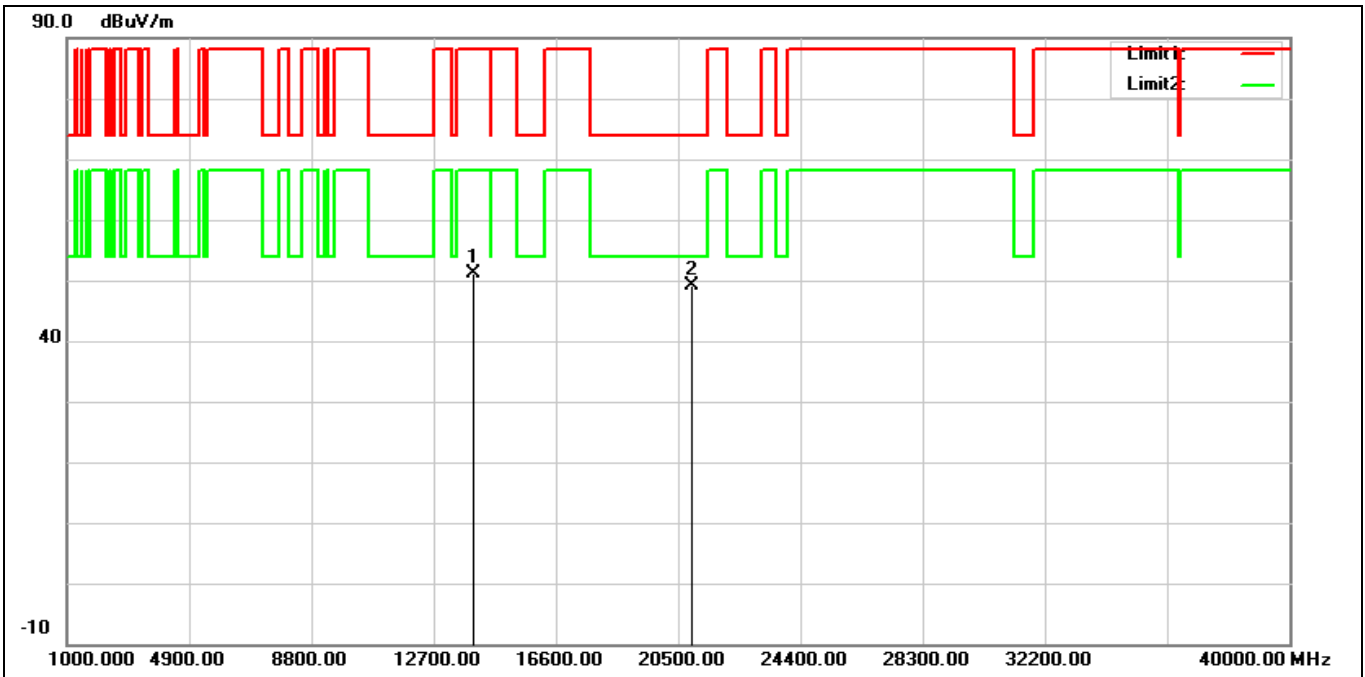


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13970.000	33.21	17.81	51.02	88.20	-37.18	peak
2*	20955.000	29.31	19.77	49.08	74.00	-24.92	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 6985 MHz		
Remark:			

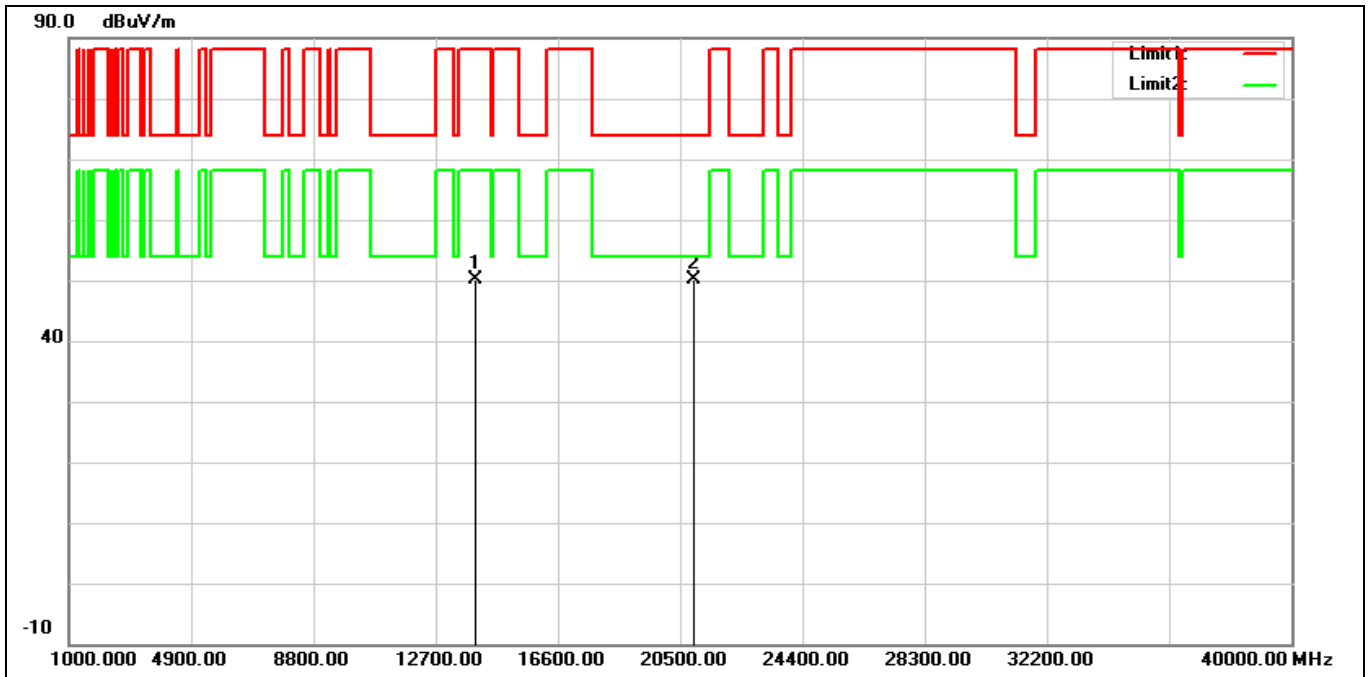


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13970.000	32.23	17.81	50.04	88.20	-38.16	peak
2*	20955.000	30.43	19.77	50.20	74.00	-23.80	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	WCDMA(B5)+BT+wifi 6E		
Remark:			

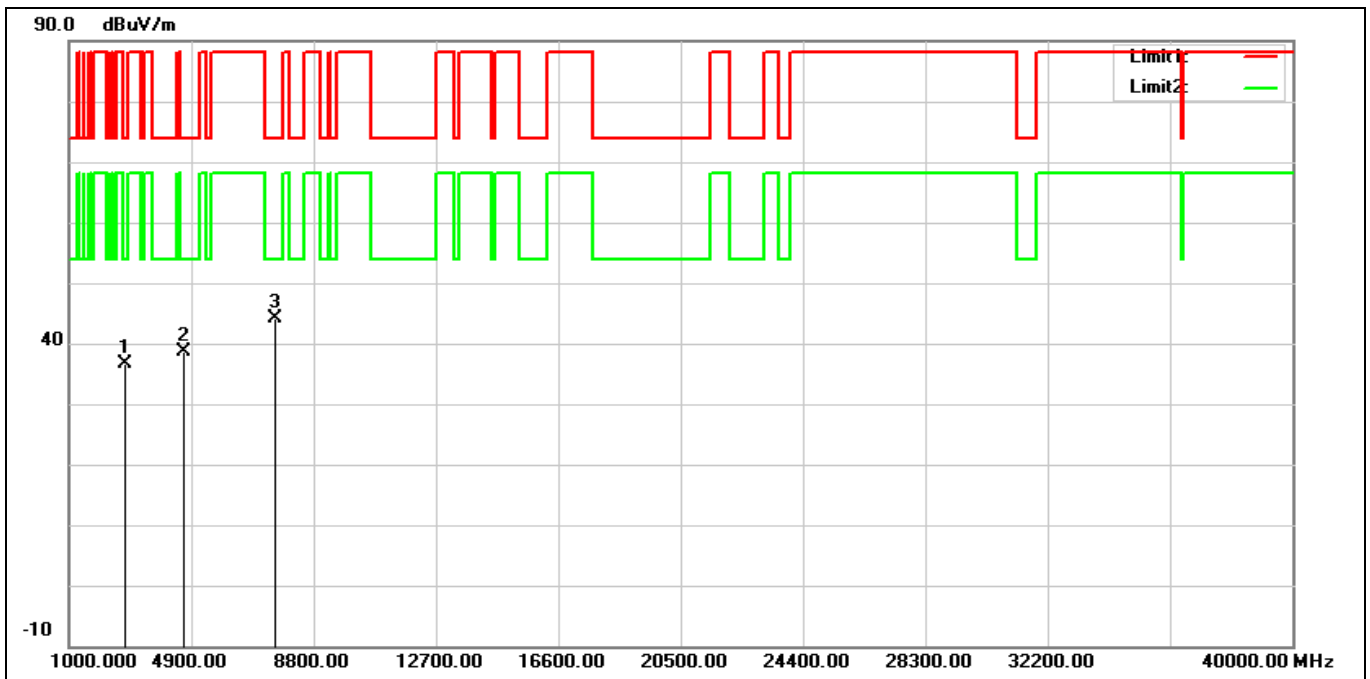


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2802.000	41.85	-5.27	36.58	74.00	-37.42	peak
2	4689.000	38.87	-0.21	38.66	74.00	-35.34	peak
3*	7579.000	35.66	8.42	44.08	74.00	-29.92	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	LTE (B5)+BT+wifi 6E		
Remark:			

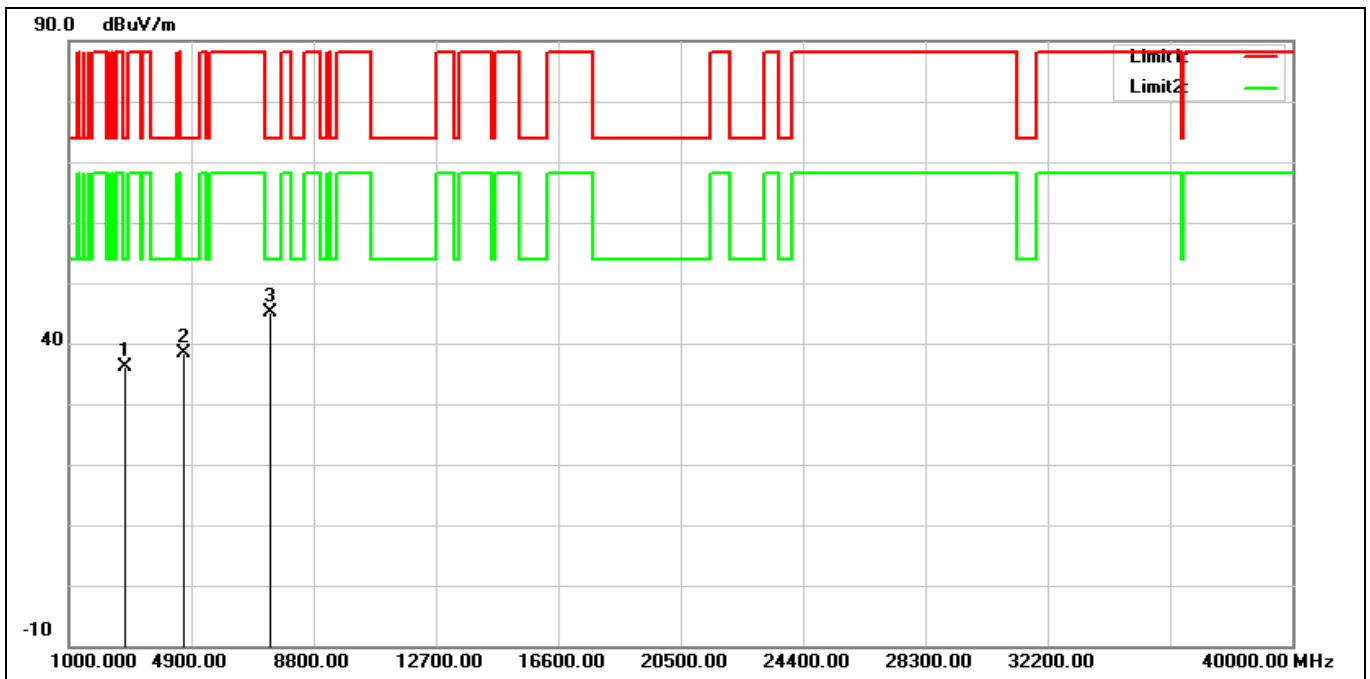


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2802.000	41.40	-5.27	36.13	74.00	-37.87	peak
2	4689.000	38.64	-0.21	38.43	74.00	-35.57	peak
3*	7426.000	36.96	8.27	45.23	74.00	-28.77	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	LTE (B41_CA 20+20)+BT+wifi 6E		
Remark:			

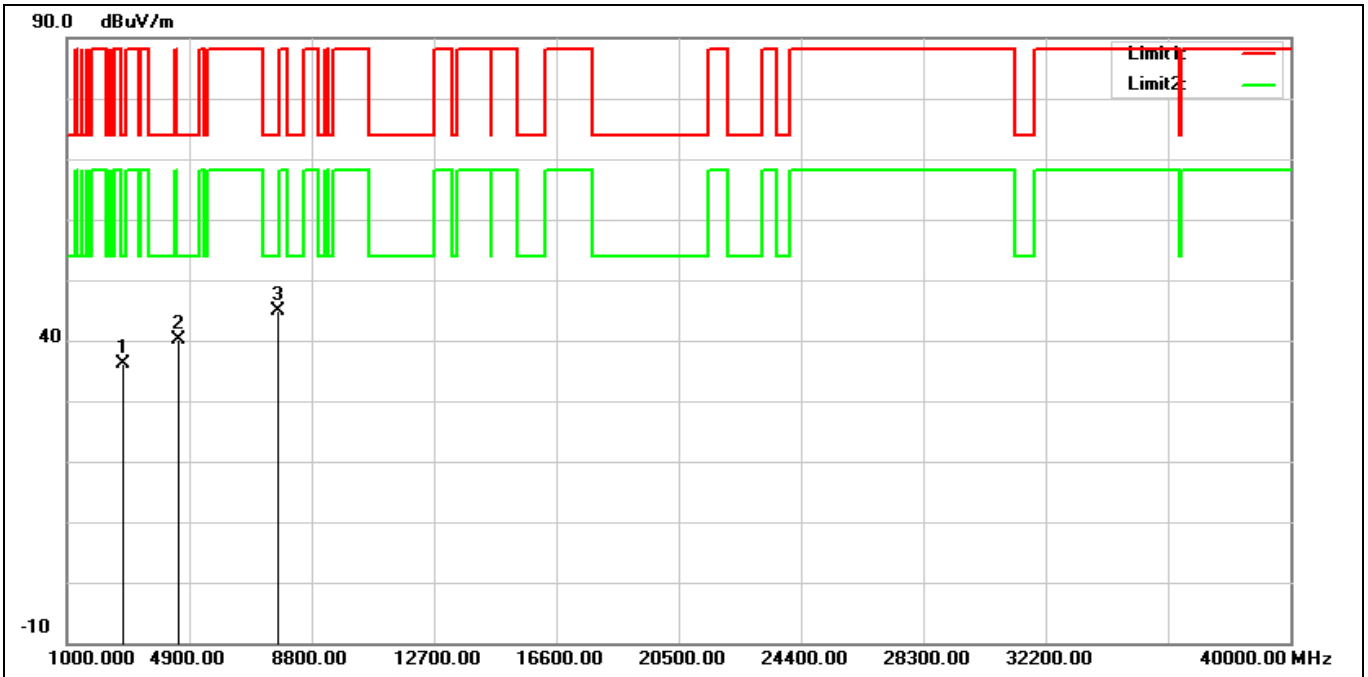

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2802.000	41.34	-5.27	36.07	74.00	-37.93	peak
2	4570.000	40.91	-0.68	40.23	74.00	-33.77	peak
3*	7715.000	36.77	8.07	44.84	74.00	-29.16	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	LTE(B41_CA 20+20)+BT+wifi 6E		
Remark:			

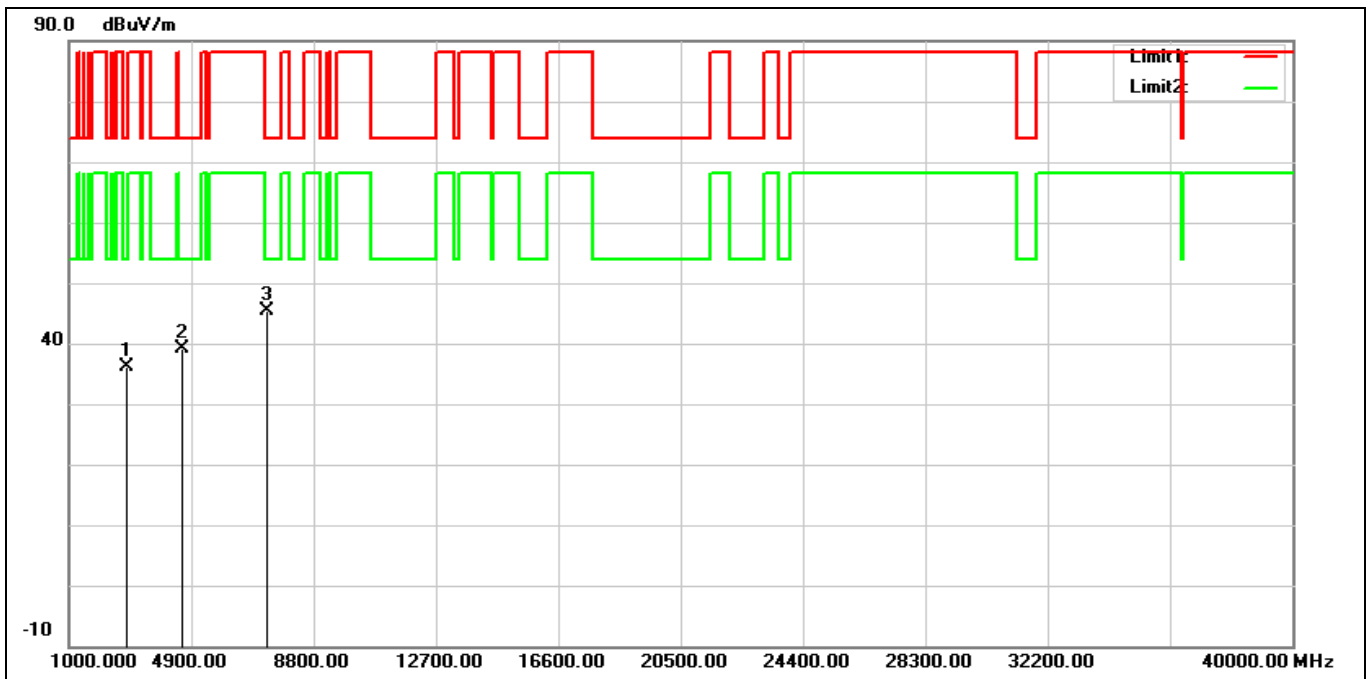

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2853.000	41.28	-5.23	36.05	74.00	-37.95	peak
2	4621.000	39.57	-0.52	39.05	74.00	-34.95	peak
3*	7307.000	37.48	7.97	45.45	74.00	-28.55	peak


Band Edge

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax 20 5955MHz		
Remark:	Z 軸		

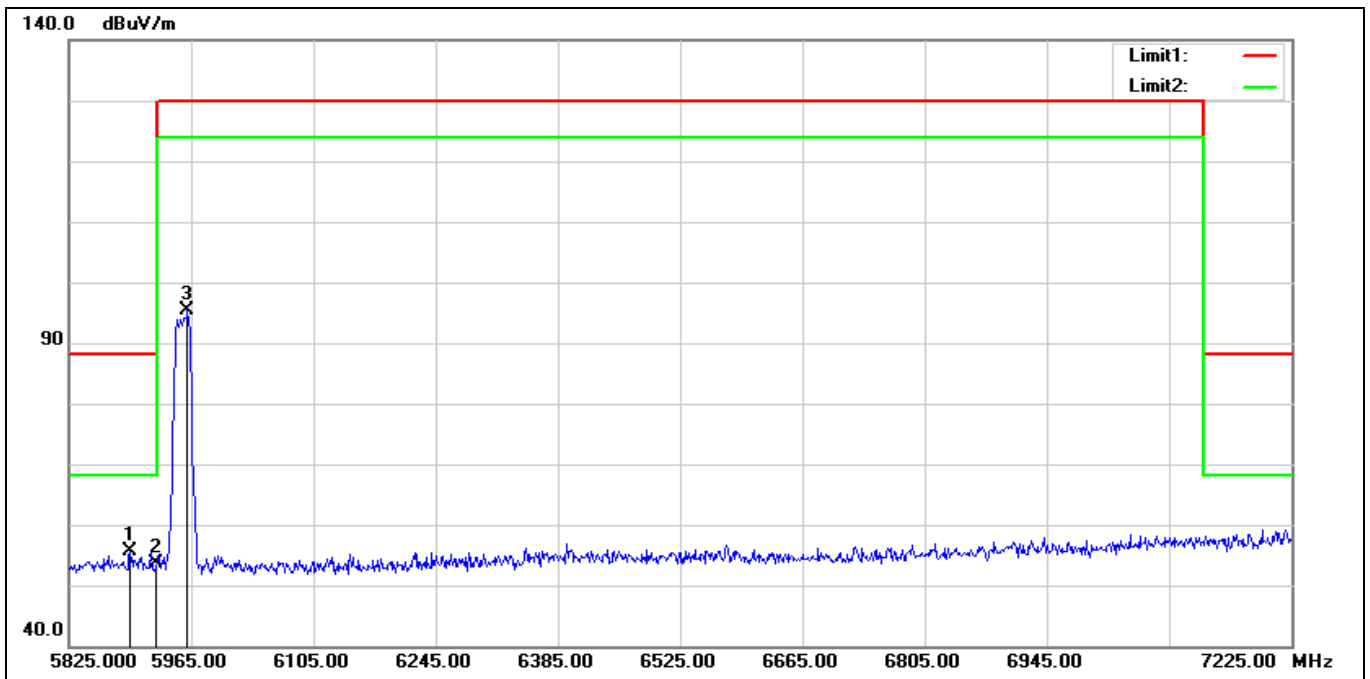

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5895.000	52.45	3.13	55.58	88.20	-32.62	peak
2	5925.000	50.61	3.10	53.71	88.20	-34.49	peak
3	5960.800	92.25	3.08	95.33	130.00	-34.67	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax 20 5955MHz		
Remark:	Z 軸		

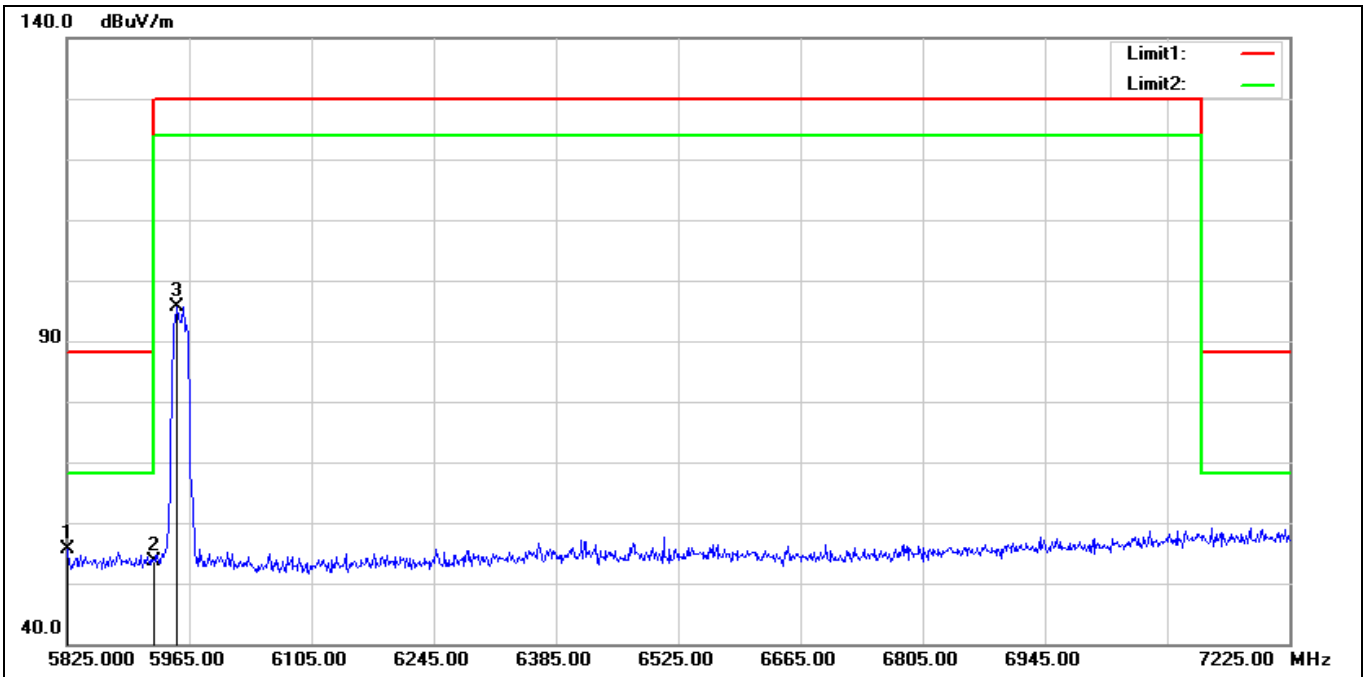

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5825.000	52.62	2.89	55.51	88.20	-32.69	peak
2	5925.000	50.62	3.10	53.72	88.20	-34.48	peak
3	5951.000	92.68	3.02	95.70	130.00	-34.30	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax 20 7115MHz		
Remark:	Z 軸		

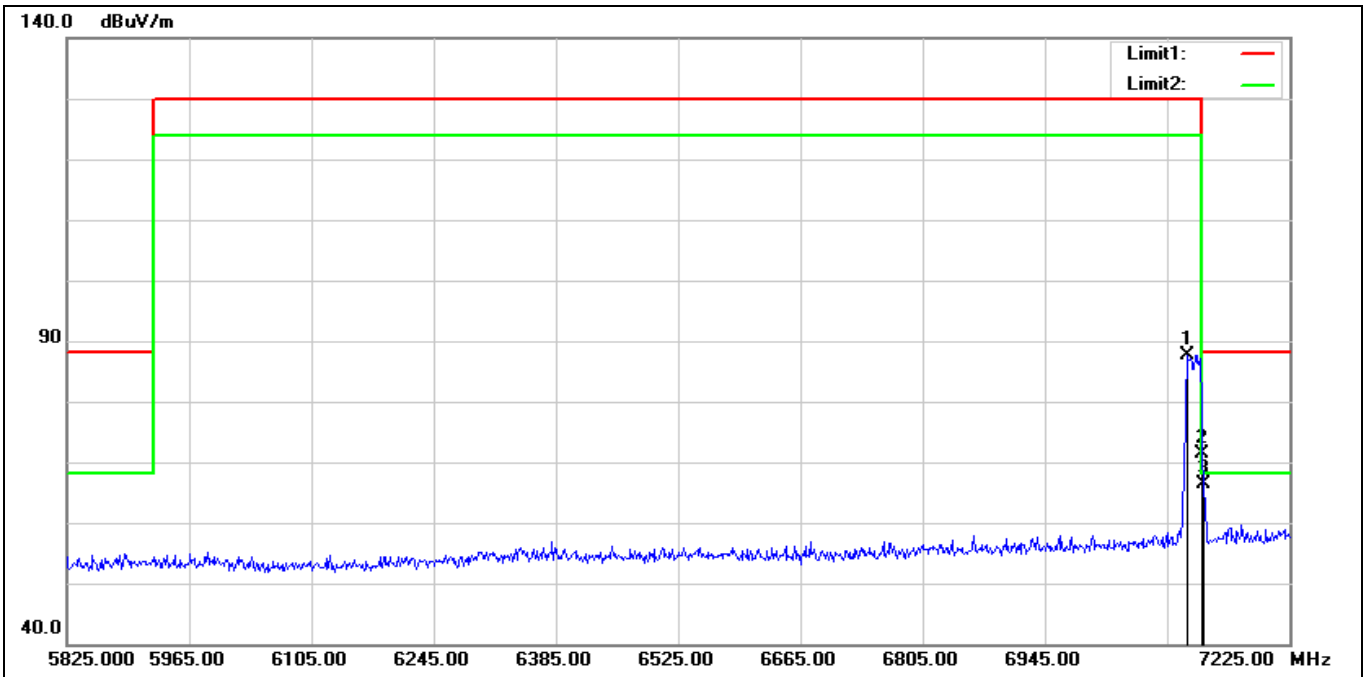


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7107.400	80.32	7.43	87.75	130.00	-42.25	peak
2*	7125.000	63.90	7.49	71.39	88.20	-16.81	peak
3	7127.000	58.89	7.49	66.38	88.20	-21.82	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax 20 7115MHz		
Remark:	Z 軸		

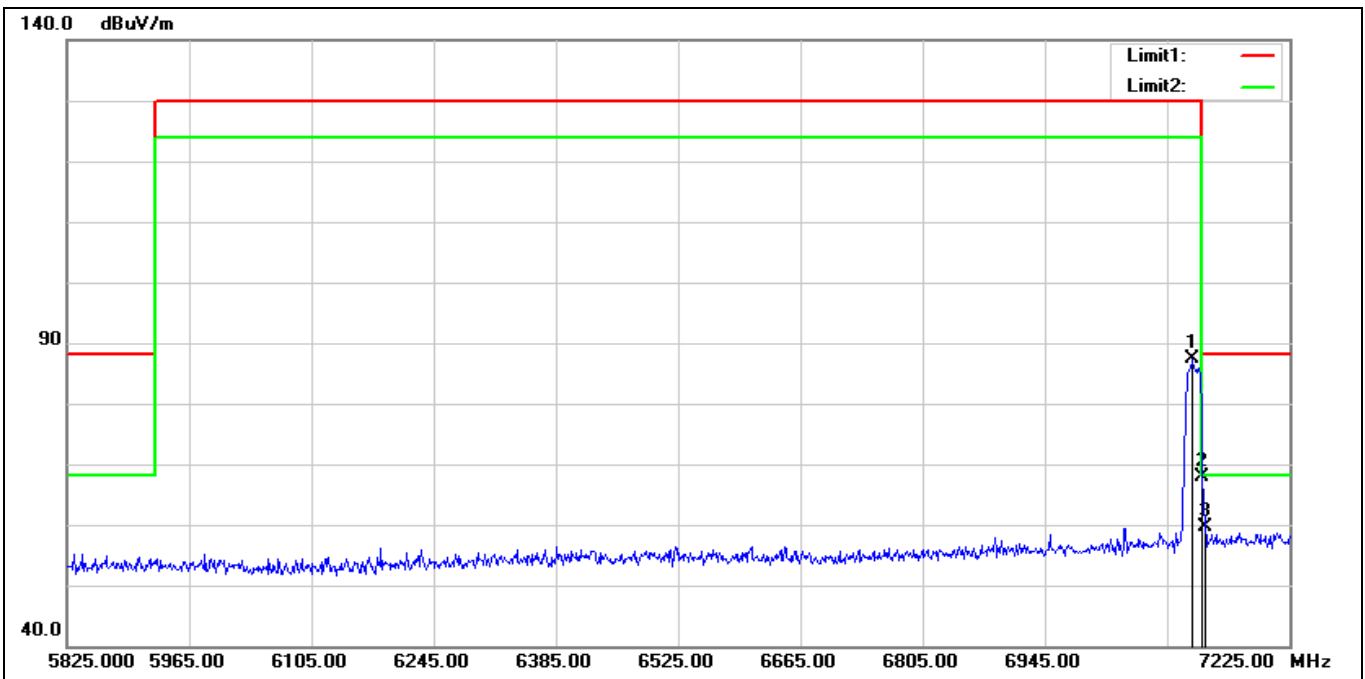


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7114.400	79.92	7.45	87.37	130.00	-42.63	peak
2*	7125.000	60.29	7.49	67.78	88.20	-20.42	peak
3	7128.400	52.03	7.50	59.53	88.20	-28.67	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax 40 5965MHz		
Remark:	Z 軸		

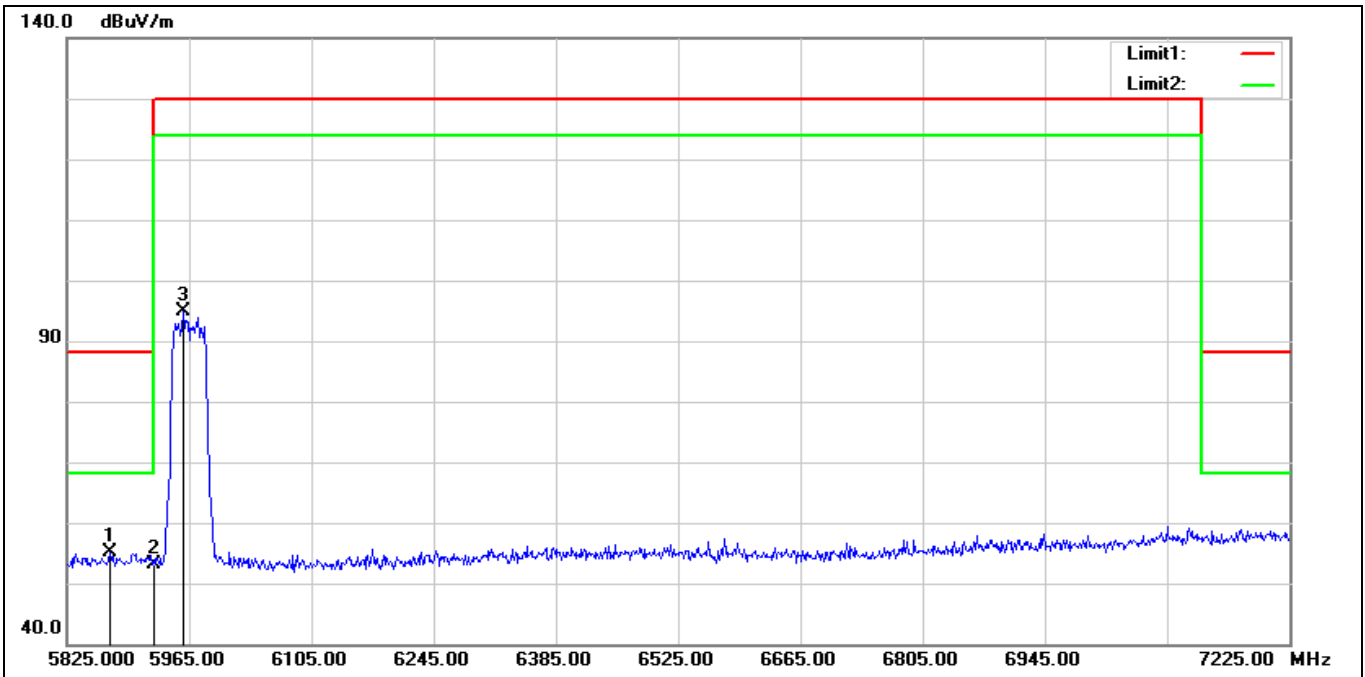


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5874.000	52.07	3.07	55.14	88.20	-33.06	peak
2	5925.000	50.12	3.10	53.22	88.20	-34.98	peak
3	5958.000	91.89	3.07	94.96	130.00	-35.04	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax 40 5965MHz		
Remark:	Z 軸		

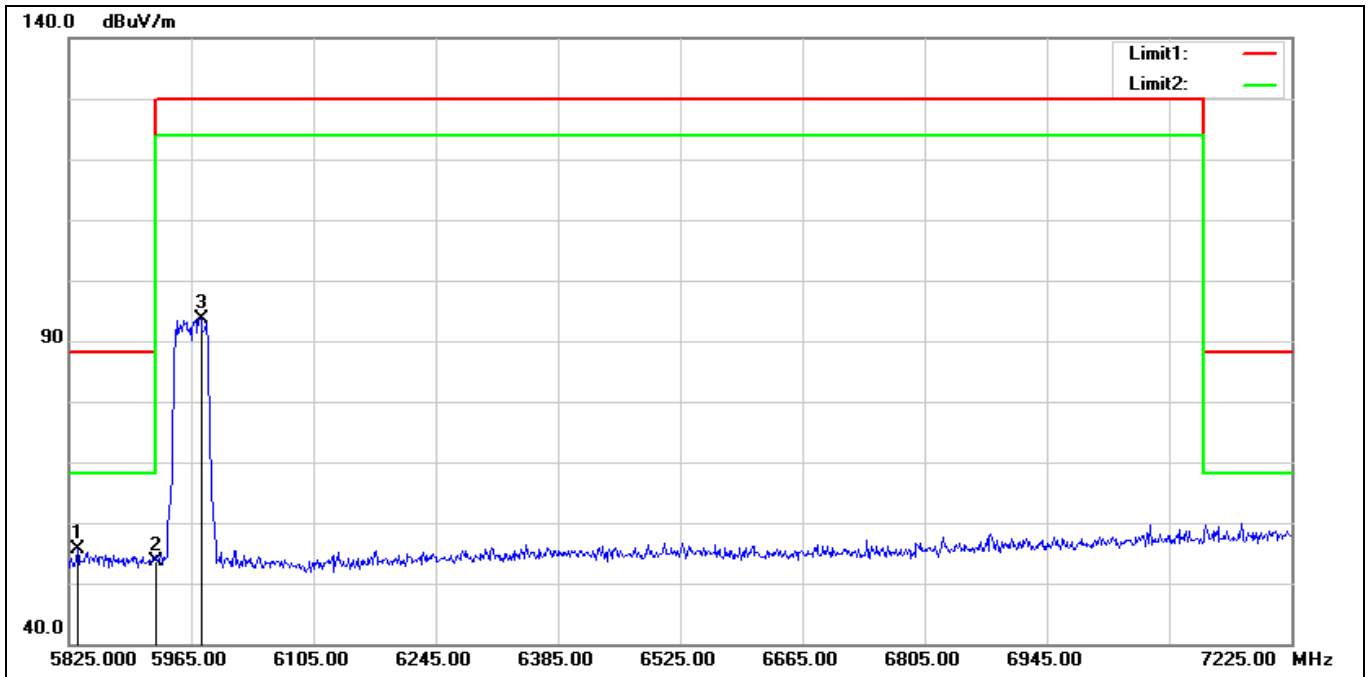


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5834.800	52.70	2.93	55.63	88.20	-32.57	peak
2	5925.000	50.49	3.10	53.59	88.20	-34.61	peak
3	5976.200	90.52	3.16	93.68	130.00	-36.32	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax 40 7085MHz		
Remark:	Z 軸		

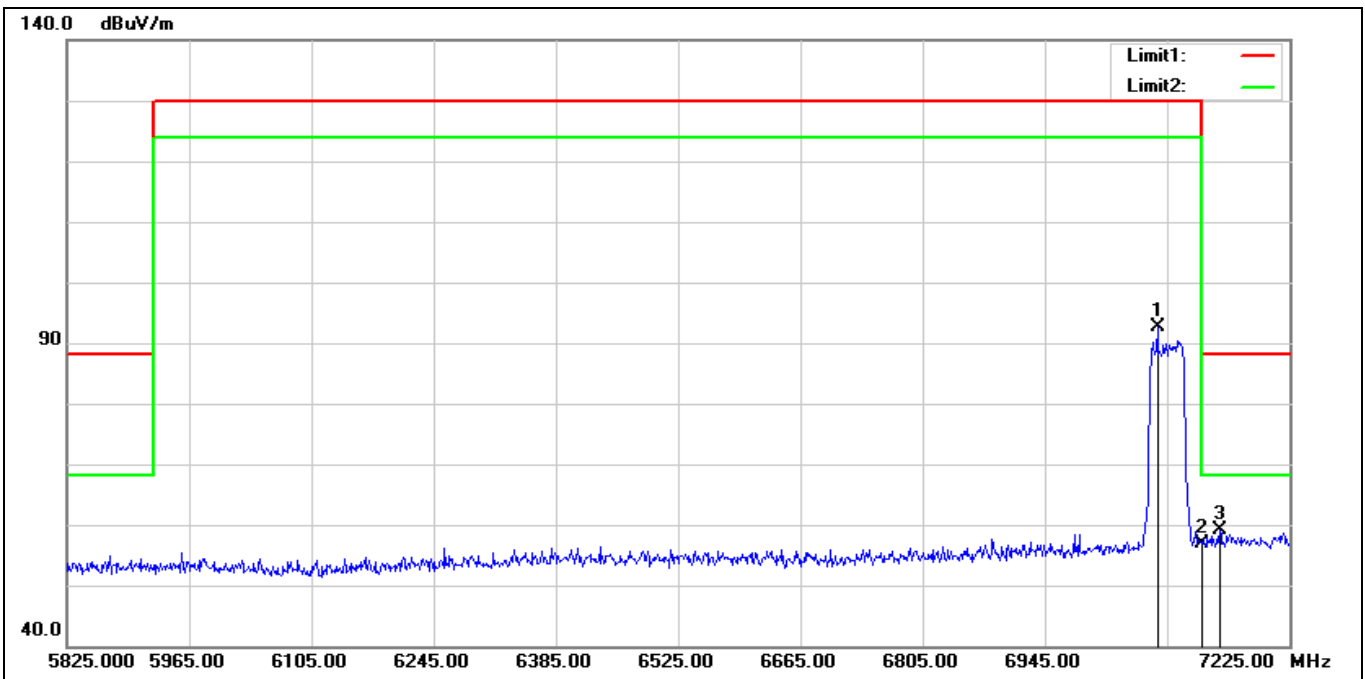


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7073.800	85.39	7.19	92.58	130.00	-37.42	peak
2	7125.000	49.40	7.49	56.89	88.20	-31.31	peak
3*	7145.200	51.53	7.54	59.07	88.20	-29.13	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax 40 7085MHz		
Remark:	Z 軸		

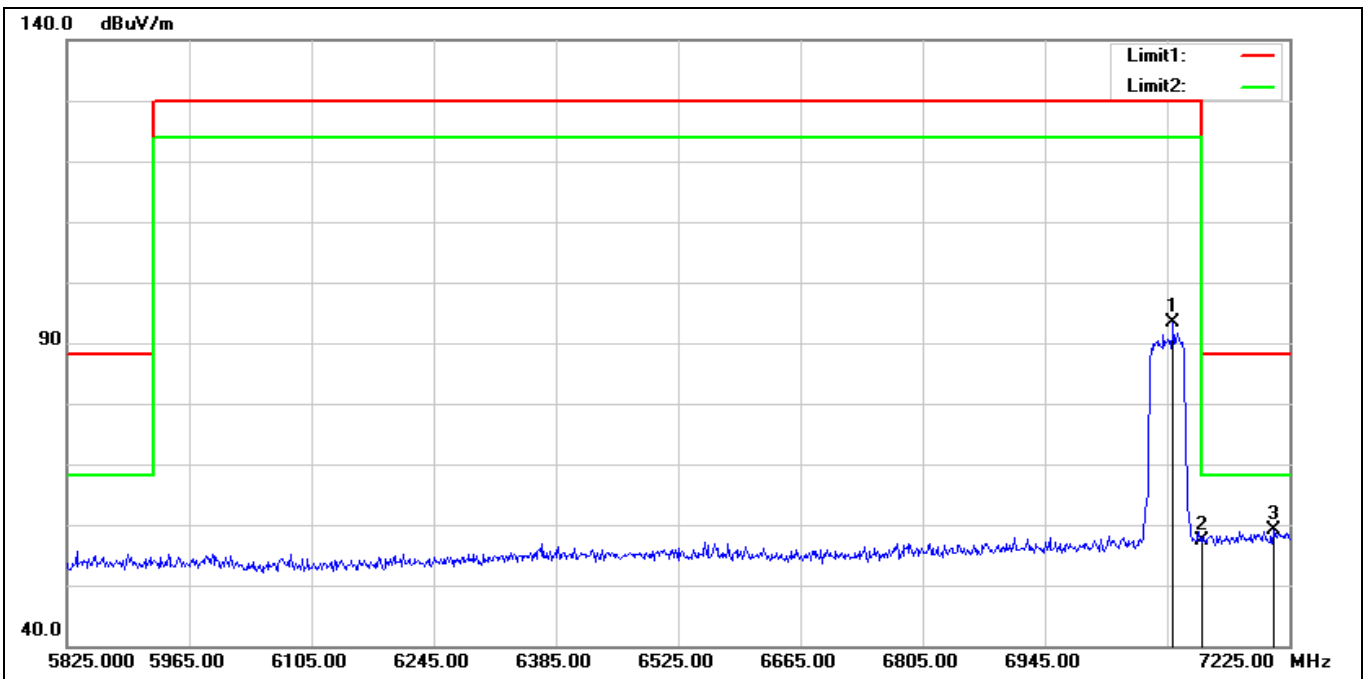


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7092.000	86.03	7.35	93.38	130.00	-36.62	peak
2	7125.000	49.91	7.49	57.40	88.20	-30.80	peak
3*	7206.800	51.18	7.83	59.01	88.20	-29.19	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax 80 5985MHz		
Remark:	Z 軸		

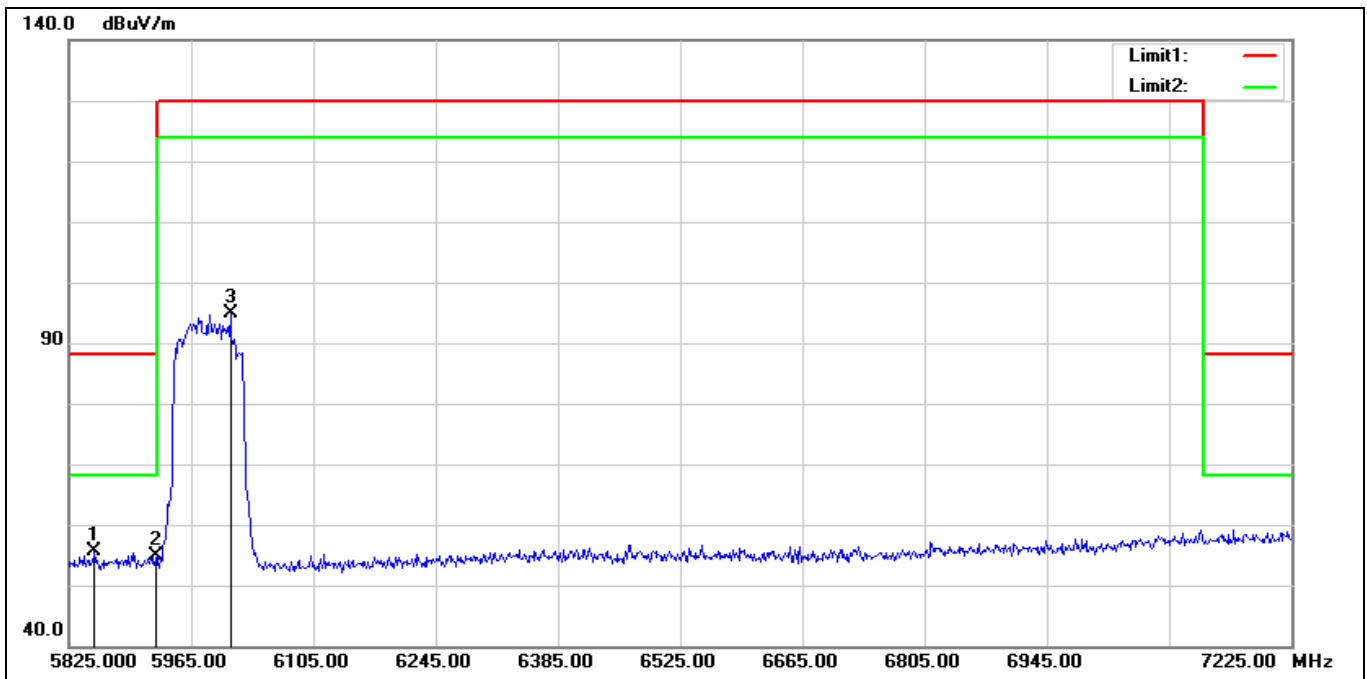

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5854.400	52.68	3.01	55.69	88.20	-32.51	peak
2	5925.000	51.67	3.10	54.77	88.20	-33.43	peak
3	6009.800	91.65	3.29	94.94	130.00	-35.06	peak


Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax 80 5985MHz		
Remark:	Z 軸		

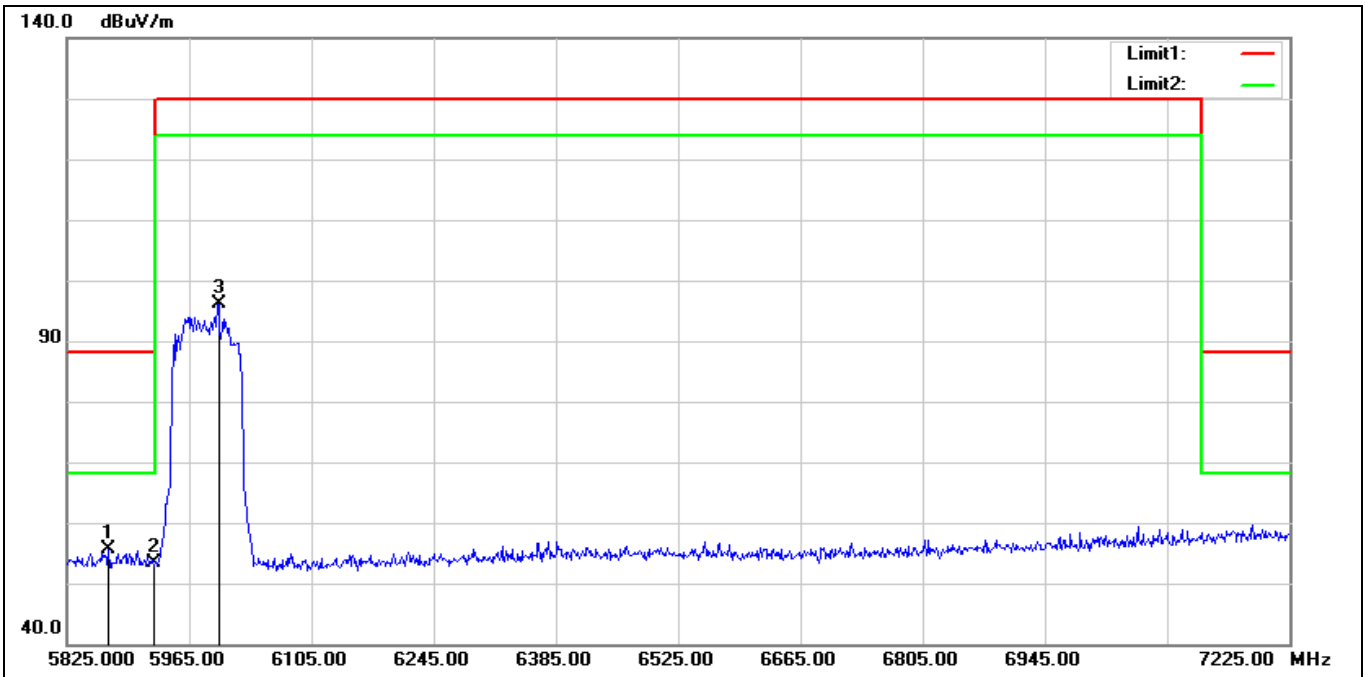

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5872.600	52.66	3.07	55.73	88.20	-32.47	peak
2	5925.000	50.38	3.10	53.48	88.20	-34.72	peak
3	5998.600	92.91	3.29	96.20	130.00	-33.80	peak




Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax 80 7025MHz		
Remark:	Z 軸		

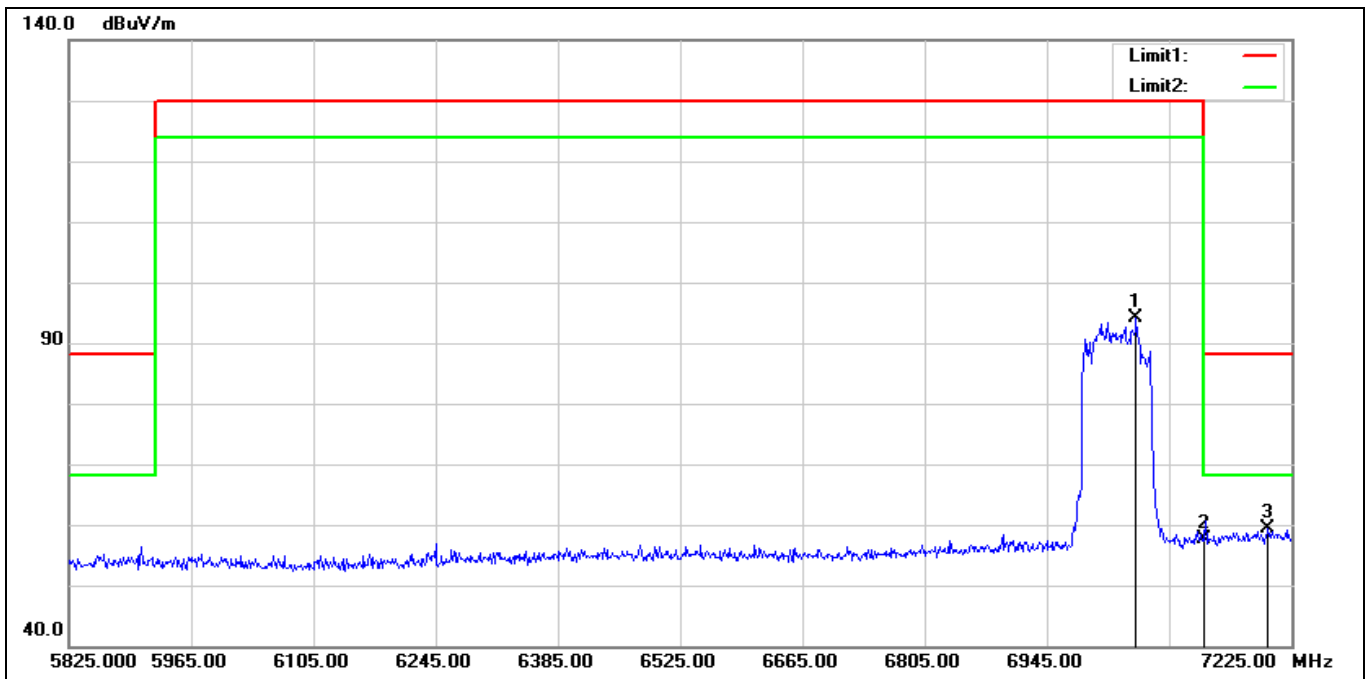


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7047.200	87.20	6.96	94.16	130.00	-35.84	peak
2	7125.000	50.13	7.49	57.62	88.20	-30.58	peak
3*	7198.400	51.61	7.78	59.39	88.20	-28.81	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax 80 7025MHz		
Remark:	Z 軸		

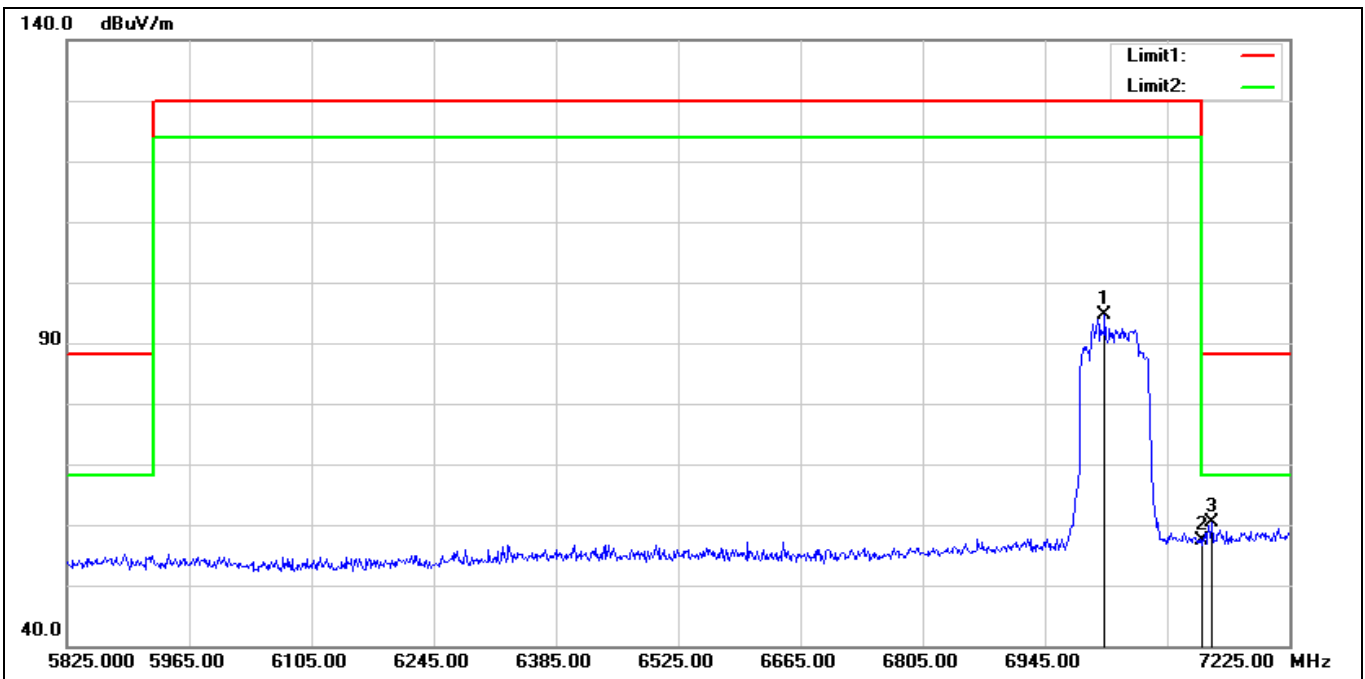


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7013.600	87.86	6.66	94.52	130.00	-35.48	peak
2	7125.000	49.77	7.49	57.26	88.20	-30.94	peak
3*	7136.800	52.94	7.52	60.46	88.20	-27.74	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax 160 6025MHz		
Remark:	Z 軸		

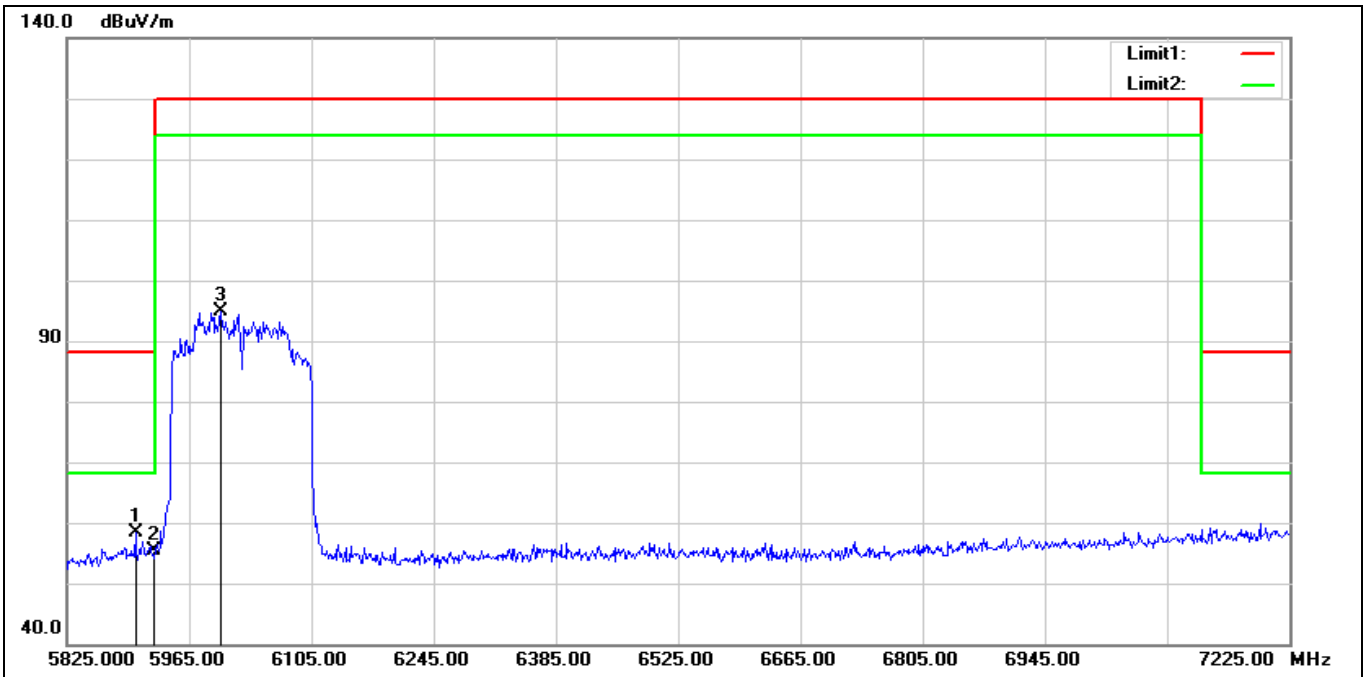


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5903.400	55.15	3.15	58.30	88.20	-29.90	peak
2	5925.000	52.27	3.10	55.37	88.20	-32.83	peak
3	6001.400	91.64	3.30	94.94	130.00	-35.06	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax 160 6025MHz		
Remark:	Z 軸		

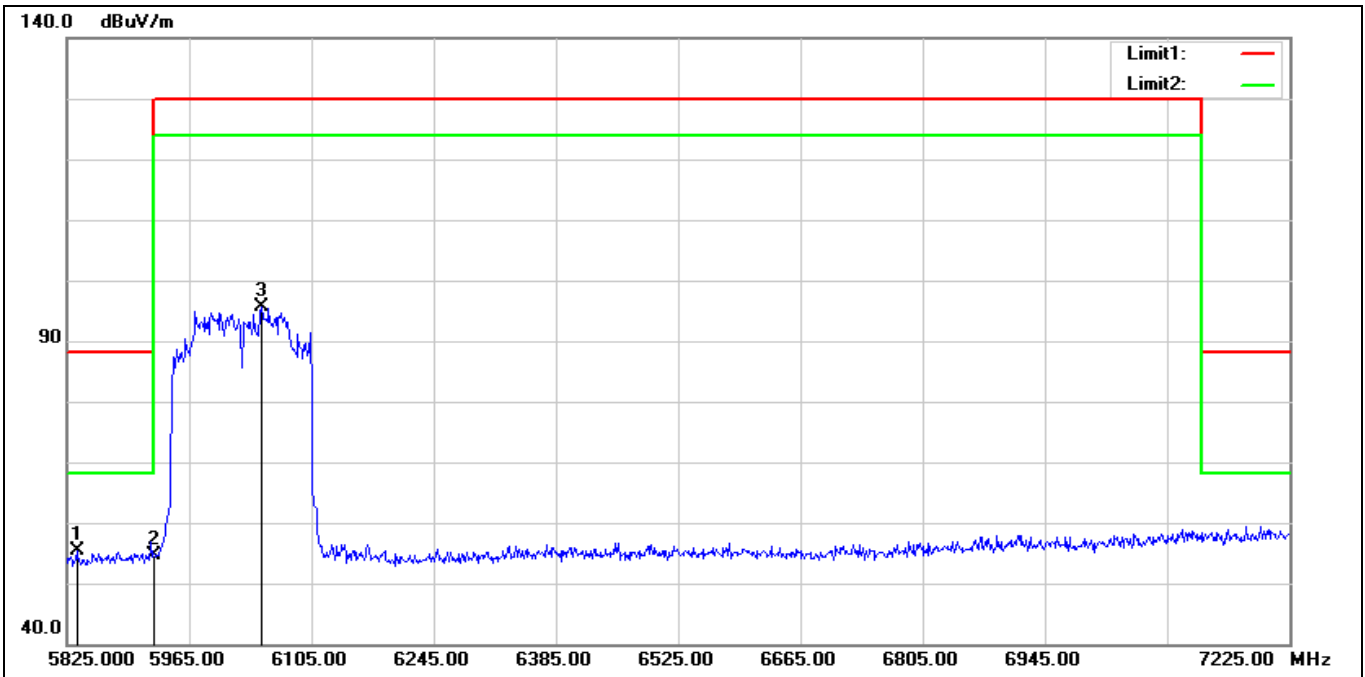


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5836.200	52.57	2.93	55.50	88.20	-32.70	peak
2	5925.000	51.50	3.10	54.60	88.20	-33.60	peak
3	6047.600	92.32	3.24	95.56	130.00	-34.44	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax 160 6985MHz		
Remark:	Z 軸		

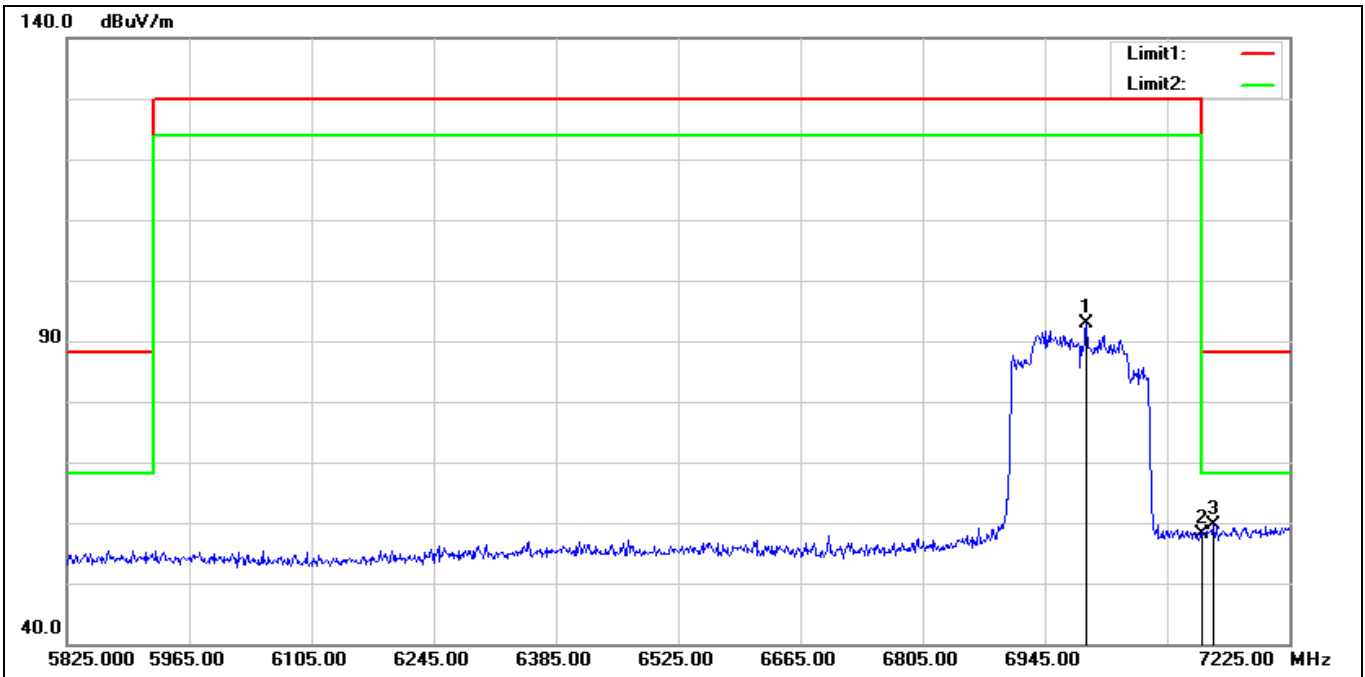

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6992.600	86.27	6.54	92.81	130.00	-37.19	peak
2	7125.000	50.53	7.49	58.02	88.20	-30.18	peak
3*	7138.200	51.98	7.53	59.51	88.20	-28.69	peak

Standard:	Part 15E_WIFI 6E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax 160 6985MHz		
Remark:	Z 軸		

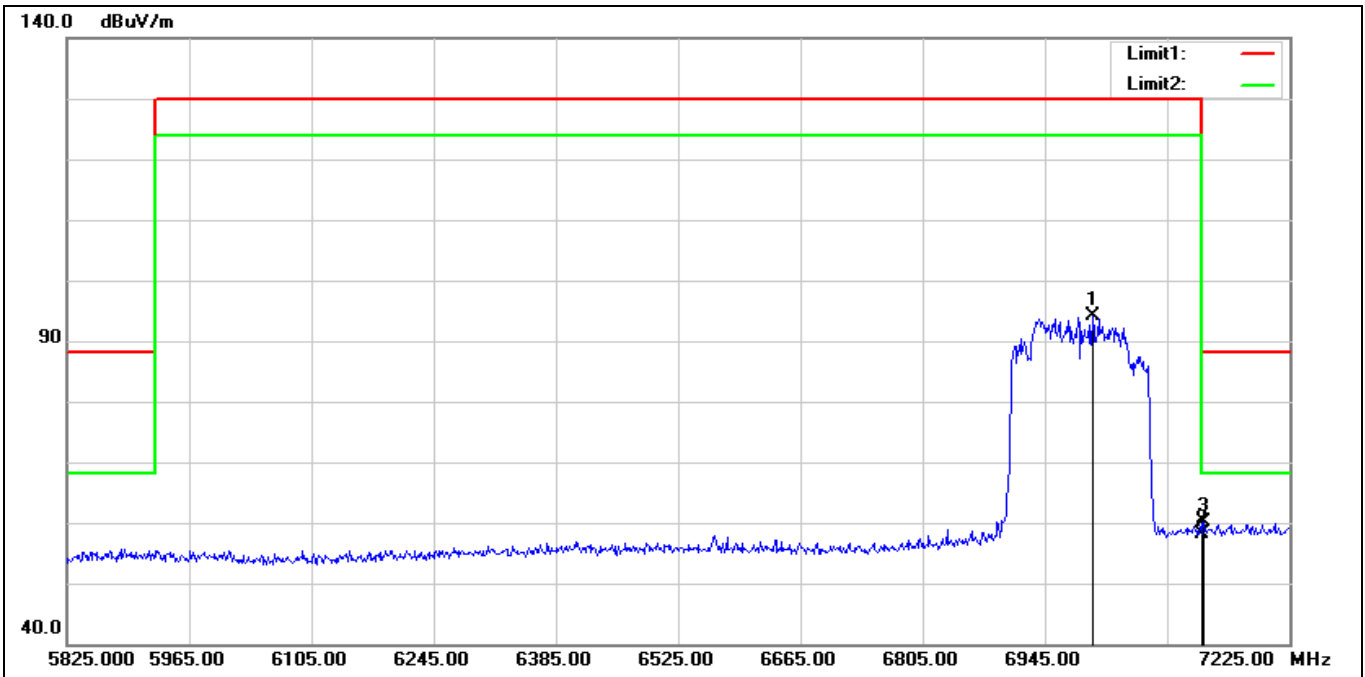

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6999.600	87.68	6.54	94.22	130.00	-35.78	peak
2	7125.000	50.58	7.49	58.07	88.20	-30.13	peak
3*	7127.000	52.62	7.49	60.11	88.20	-28.09	peak

## 5.2. Conducted Test Results

### 5.2.1. Maximum Output Power Measurement

SISO												
Maximum_EIRP 802.11ax HE20												
CH	Frequency (MHz)		Average POWER +Factor (dBm)		Antenna Gain (dBi)		EIRP (dBm)		REQUIRED EIRP LIMIT (dBm)		RESULT	
			ANT-0	ANT-1	ANT-0	ANT-1	ANT-0	ANT-1	ANT-0	ANT-1	ANT-0	ANT-1
1	5955	full	4.53	4.60	-0.13	1.86	4.400	6.460	24	24	PASS	PASS
45	6175	full	4.02	4.46	-0.13	1.86	3.890	6.320	24	24	PASS	PASS
93	6415	full	4.04	4.31	-0.13	1.86	3.910	6.170	24	24	PASS	PASS
97	6435	full	4.58	4.63	0.37	0.76	4.950	5.390	24	24	PASS	PASS
105	6475	full	4.52	4.62	0.37	0.76	4.890	5.380	24	24	PASS	PASS
113	6515	full	4.63	4.66	0.37	0.76	5.000	5.420	24	24	PASS	PASS
117	6535	full	4.04	4.34	0.51	1.11	4.550	5.450	24	24	PASS	PASS
149	6695	full	4.18	4.22	0.51	1.11	4.690	5.330	24	24	PASS	PASS
181	6855	full	4.08	4.56	0.51	1.11	4.590	5.670	24	24	PASS	PASS
185	6875	full	4.40	4.60	1.22	1.56	5.620	6.160	24	24	PASS	PASS
209	6995	full	4.42	4.78	1.22	1.56	5.640	6.340	24	24	PASS	PASS
229	7095	full	4.11	4.78	1.22	1.56	5.330	6.337	24	24	PASS	PASS
233	7115	full	0.25	0.62	1.22	1.56	1.470	2.180	24	24	PASS	PASS

Maximum_EIRP 802.11ax HE40												
CH	Frequency (MHz)		Average POWER +Factor (dBm)		Antenna Gain (dBi)		EIRP (dBm)		REQUIRED EIRP LIMIT (dBm)		RESULT	
			ANT-0	ANT-1	ANT-0	ANT-1	ANT-0	ANT-1	ANT-0	ANT-1	ANT-0	ANT-1
3	5965	full	7.22	7.44	-0.13	1.86	7.090	9.300	24	24	PASS	PASS
43	6165	full	7.26	7.52	-0.13	1.86	7.130	9.380	24	24	PASS	PASS
91	6405	full	7.18	7.35	-0.13	1.86	7.050	9.210	24	24	PASS	PASS
99	6445	full	7.59	7.85	0.37	0.76	7.960	8.610	24	24	PASS	PASS
107	6485	full	7.49	7.89	0.37	0.76	7.860	8.650	24	24	PASS	PASS
115	6525	full	7.45	7.85	0.51	1.11	7.960	8.960	24	24	PASS	PASS
147	6685	full	7.42	7.62	0.51	1.11	7.930	8.730	24	24	PASS	PASS
179	6845	full	7.25	7.41	0.51	1.11	7.760	8.520	24	24	PASS	PASS
187	6885	full	7.35	7.49	1.22	1.56	8.570	9.050	24	24	PASS	PASS
227	7085	full	7.45	7.88	1.22	1.56	8.670	9.440	24	24	PASS	PASS

Maximum_EIRP 802.11ax HE80												
CH	Frequency (MHz)		Average POWER +Factor (dBm)		Antenna Gain (dBi)		EIRP (dBm)		REQUIRED EIRP LIMIT (dBm)		RESULT	
			ANT-0	ANT-1	ANT-0	ANT-1	ANT-0	ANT-1	ANT-0	ANT-1	ANT-0	ANT-1
7	5985	full	10.05	10.19	-0.13	1.86	9.920	12.050	24	24	PASS	PASS
39	6145	full	10.10	10.15	-0.13	1.86	9.970	12.010	24	24	PASS	PASS
87	6385	full	9.90	9.95	-0.13	1.86	9.770	11.810	24	24	PASS	PASS
103	6465	full	10.24	10.31	0.37	0.76	10.610	11.070	24	24	PASS	PASS
119	6545	full	10.25	10.28	0.51	1.11	10.760	11.390	24	24	PASS	PASS
135	6625	full	9.77	9.81	0.51	1.11	10.280	10.920	24	24	PASS	PASS
167	6785	full	9.49	9.77	0.51	1.11	10.000	10.880	24	24	PASS	PASS
183	6865	full	9.75	9.79	1.22	1.56	10.970	11.350	24	24	PASS	PASS
199	6945	full	10.26	10.35	1.22	1.56	11.480	11.910	24	24	PASS	PASS
215	7025	full	9.84	10.21	1.22	1.56	11.060	11.770	24	24	PASS	PASS



Maximum_EIRP 802.11ax HE160												
CH	Frequency (MHz)		Average POWER +Factor (dBm)		Antenna Gain (dBi)		EIRP (dBm)		REQUIRED EIRP LIMIT (dBm)		RESULT	
			ANT-0	ANT-1	ANT-0	ANT-1	ANT-0	ANT-1	ANT-0	ANT-1	ANT-0	ANT-1
15	6025	full	12.61	12.77	-0.13	1.86	12.480	14.630	24	24	PASS	PASS
47	6185	full	12.56	12.67	-0.13	1.86	12.430	14.530	24	24	PASS	PASS
79	6345	full	12.27	12.37	-0.13	1.86	12.140	14.230	24	24	PASS	PASS
111	6505	full	12.71	12.98	0.51	1.11	13.220	14.090	24	24	PASS	PASS
143	6665	full	12.25	12.39	0.51	1.11	12.760	13.500	24	24	PASS	PASS
175	6825	full	12.20	12.50	1.22	1.56	13.420	14.060	24	24	PASS	PASS
207	6985	full	12.73	12.79	1.22	1.56	13.950	14.350	24	24	PASS	PASS

MIMO

Maximum_EIRP 802.11ax HE20									
CH	Frequency (MHz)	RU config.	AVERAGE POWER (dBm)		TOTAL POWER +Factor (dBm)	Antenna Gain (dBi)	EIRP (dBm)	REQUIRED EIRP LIMIT (dBm)	RESULT
			ANT-0	ANT-1					
1	5955	full	0.83	1.02	3.94	1.86	5.796	24	PASS
45	6175	full	1.08	1.16	4.13	1.86	5.990	24	PASS
93	6415	full	0.65	0.95	3.81	1.86	5.673	24	PASS
97	6435	full	1.61	1.7	4.67	0.76	5.426	24	PASS
105	6475	full	1.61	1.67	4.65	0.76	5.410	24	PASS
113	6515	full	1.78	2.01	4.91	0.76	5.667	24	PASS
117	6535	full	0.88	1.07	3.99	1.11	5.096	24	PASS
149	6695	full	0.85	0.89	3.88	1.11	4.990	24	PASS
181	6855	full	0.8	0.84	3.83	1.11	4.940	24	PASS
185	6875	full	0.89	1.33	4.13	1.56	5.686	24	PASS
209	6995	full	1.03	1.19	4.12	1.56	5.681	24	PASS
229	7097	full	0.51	0.73	3.63	1.56	5.192	24	PASS
233	7115	full	-2.31	-2.25	0.73	1.56	2.290	24	PASS

Maximum_EIRP 802.11ax HE40									
CH	Frequency (MHz)	RU config.	AVERAGE POWER (dBm)		TOTAL POWER +Factor (dBm)	Antenna Gain (dBi)	EIRP (dBm)	REQUIRED EIRP LIMIT (dBm)	RESULT
			ANT-0	ANT-1					
3	5965	full	3.79	3.990	6.90	1.86	8.761	24	PASS
43	6165	full	3.81	3.860	6.85	1.86	8.705	24	PASS
91	6405	full	4.07	4.220	7.16	1.86	9.016	24	PASS
99	6445	full	4.51	4.570	7.55	0.76	8.310	24	PASS
107	6485	full	4.68	4.730	7.72	0.76	8.475	24	PASS
115	6525	full	4.51	4.730	7.63	1.11	8.742	24	PASS
147	6685	full	3.46	3.660	6.57	1.11	7.681	24	PASS
179	6845	full	3.71	3.760	6.75	1.11	7.855	24	PASS
187	6885	full	4.58	4.030	7.32	1.56	8.884	24	PASS
227	7085	full	4.49	4.790	7.65	1.56	9.213	24	PASS

Maximum_EIRP 802.11ax HE80									
CH	Frequency (MHz)	RU config.	AVERAGE POWER (dBm)		TOTAL POWER +Factor (dBm)	Antenna Gain (dBi)	EIRP (dBm)	REQUIRED EIRP LIMIT (dBm)	RESULT
			ANT-0	ANT-1					
7	5985	full	6.48	6.58	9.54	1.86	11.401	24	PASS
39	6145	full	6.5	6.56	9.54	1.86	11.400	24	PASS
87	6385	full	6.47	6.62	9.56	1.86	11.416	24	PASS
103	6465	full	6.79	6.99	9.90	0.76	10.661	24	PASS
119	6545	full	6.7	6.89	9.81	1.11	10.916	24	PASS
135	6625	full	6.63	6.67	9.66	1.11	10.770	24	PASS
167	6785	full	6.52	6.57	9.56	1.11	10.665	24	PASS
183	6865	full	6.52	6.58	9.56	1.56	11.120	24	PASS
199	6945	full	7.06	7.11	10.10	1.56	11.655	24	PASS
215	7025	full	7.01	7.35	10.19	1.56	11.754	24	PASS

Maximum_EIRP 802.11ax HE160									
CH	Frequency (MHz)	RU config.	AVERAGE POWER (dBm)		TOTAL POWER +Factor (dBm)	Antenna Gain (dBi)	EIRP (dBm)	REQUIRED EIRP LIMIT (dBm)	RESULT
			ANT-0	ANT-1					
15	6025	full	9.37	9.41	12.40	1.86	14.260	24	PASS
47	6185	full	9.32	9.45	12.40	1.86	14.256	24	PASS
79	6345	full	9.28	9.53	12.42	1.86	14.277	24	PASS
111	6505	full	9.69	9.87	12.79	1.11	13.901	24	PASS
143	6665	full	9.52	9.67	12.61	1.11	13.716	24	PASS
175	6825	full	9.43	9.57	12.51	1.56	14.071	24	PASS
207	6985	full	9.47	9.61	12.55	1.56	14.111	24	PASS

**5.2.2. Contention Based Protocol Measurement**

Contention Based Protocol							
Band	Bandwidth (MHz)	AWGN Freq. (MHz)	Number of Times	Number of Detection	AWGN Detection Probability (%)	Limit Probability (%)	Result
U-NII-5	20	6135	10	10	100	90	PASS
	160	6110	10	10	100	90	PASS
		6185	10	9	90	90	PASS
		6260	10	10	100	90	PASS
U-NII-6	20	6455	10	10	100	90	PASS
	160	6430	10	9	90	90	PASS
		6505	10	9	90	90	PASS
		6580	10	10	100	90	PASS
U-NII-7	20	6695	10	10	100	90	PASS
	160	6590	10	9	90	90	PASS
		6665	10	10	100	90	PASS
		6740	10	10	100	90	PASS
U-NII-8	20	7015	10	10	100	90	PASS
	160	6910	10	10	100	90	PASS
		6985	10	9	90	90	PASS
		7060	10	10	100	90	PASS

Note: Detection Level of AWGN Interference :-62+min Gain

Contention Based Protocol Threshold Level Verify									
Band	Bandwidth (MHz)	Channel	Frequency (MHz)	Injected signal (AWGN)		Antenna Gain (dBi)	Adjusted Power (dBm)	Detection Level	EUT Tx Status
				Freq. (MHz)	Power (dBm)				
U-NII-5	20	37	6135	6135	-62.13	-0.13	-62.00	-62.00	OFF
					-69.13	-0.13	-69.00	-62.00	Minimal
					-73.13	-0.13	-73.00	-62.00	ON
	160	47	6185	6110	-62.13	-0.13	-62.00	-62.00	OFF
					-71.13	-0.13	-71.00	-62.00	Minimal
					-72.13	-0.13	-72.00	-62.00	ON
				6185	-62.13	-0.13	-62.00	-62.00	OFF
					-66.13	-0.13	-66.00	-62.00	Minimal
					-67.13	-0.13	-67.00	-62.00	ON
				6260	-62.13	-0.13	-62.00	-62.00	OFF
					-65.13	-0.13	-65.00	-62.00	Minimal
					-66.13	-0.13	-66.00	-62.00	ON
U-NII-6	20	101	6455	6455	-61.63	0.37	-62.00	-62.00	OFF
					-68.63	0.37	-69.00	-62.00	Minimal
					-72.63	0.37	-73.00	-62.00	ON
	160	111	6505	6430	-61.63	0.37	-62.00	-62.00	OFF
					-74.63	0.37	-75.00	-62.00	Minimal
					-75.63	0.37	-76.00	-62.00	ON
				6505	-61.63	0.37	-62.00	-62.00	OFF
					-67.63	0.37	-68.00	-62.00	Minimal
					-68.63	0.37	-69.00	-62.00	ON
				6580	-61.63	0.37	-62.00	-62.00	OFF
					-67.63	0.37	-68.00	-62.00	Minimal
					-68.63	0.37	-69.00	-62.00	ON

Note 1 : Adjusted power = Injected (AWGN) power (dBm) – Antenna Gain (dBi).

Note 2 : Injected (AWGN) power Include Path Loss.

Note 3 : Antenna gain is the lowest gain.

Contention Based Protocol Threshold Level Verify									
Band	Bandwidth (MHz)	Channel	Frequency (MHz)	Injected signal (AWGN)		Antenna Gain (dBi)	Adjusted Power (dBm)	Detection Level	EUT Tx Status
				Freq. (MHz)	Power (dBm)				
U-NII-7	20	149	6695	6695	-61.49	0.51	-62.00	-62.00	OFF
					-67.49	0.51	-68.00	-62.00	Minimal
					-72.49	0.51	-73.00	-62.00	ON
	160	143	6665	6590	-61.49	0.51	-62.00	-62.00	OFF
					-67.49	0.51	-68.00	-62.00	Minimal
					-68.49	0.51	-69.00	-62.00	ON
				6665	-61.49	0.51	-62.00	-62.00	OFF
					-70.49	0.51	-71.00	-62.00	Minimal
					-71.49	0.51	-72.00	-62.00	ON
				6740	-61.49	0.51	-62.00	-62.00	OFF
					-72.49	0.51	-73.00	-62.00	Minimal
					-73.49	0.51	-74.00	-62.00	ON
U-NII-8	20	213	7015	7015	-60.78	1.22	-62.00	-62.00	OFF
					-65.78	1.22	-67.00	-62.00	Minimal
					-70.78	1.22	-72.00	-62.00	ON
	160	207	6985	6910	-60.78	1.22	-62.00	-62.00	OFF
					-66.78	1.22	-68.00	-62.00	Minimal
					-67.78	1.22	-69.00	-62.00	ON
				6985	-60.78	1.22	-62.00	-62.00	OFF
					-67.78	1.22	-69.00	-62.00	Minimal
					-68.78	1.22	-70.00	-62.00	ON
				7060	-60.78	1.22	-62.00	-62.00	OFF
					-68.78	1.22	-70.00	-62.00	Minimal
					-69.78	1.22	-71.00	-62.00	ON

Note 1 : Adjusted power = Injected (AWGN) power (dBm) – Antenna Gain (dBi).

Note 2 : Injected (AWGN) power Include Path Loss.

Note 3 : Antenna gain is the lowest gain.

■ Test Graphs

Threshold level of AWGN interference Plot

802.11ax HE20	
6135 MHz	
6455 MHz	
6695 MHz	






<p>802.11ax HE160</p> <p>6110 MHz</p>	
<p>6185 MHz</p>	
<p>6260 MHz</p>	

<p>802.11ax HE160</p> <p>6430 MHz</p>	
<p>6505 MHz</p>	
<p>6580 MHz</p>	




802.11ax HE160	
6590 MHz	
6665 MHz	
6740 MHz	

802.11ax HE160	
6910 MHz	
6985 MHz	
7060 MHz	

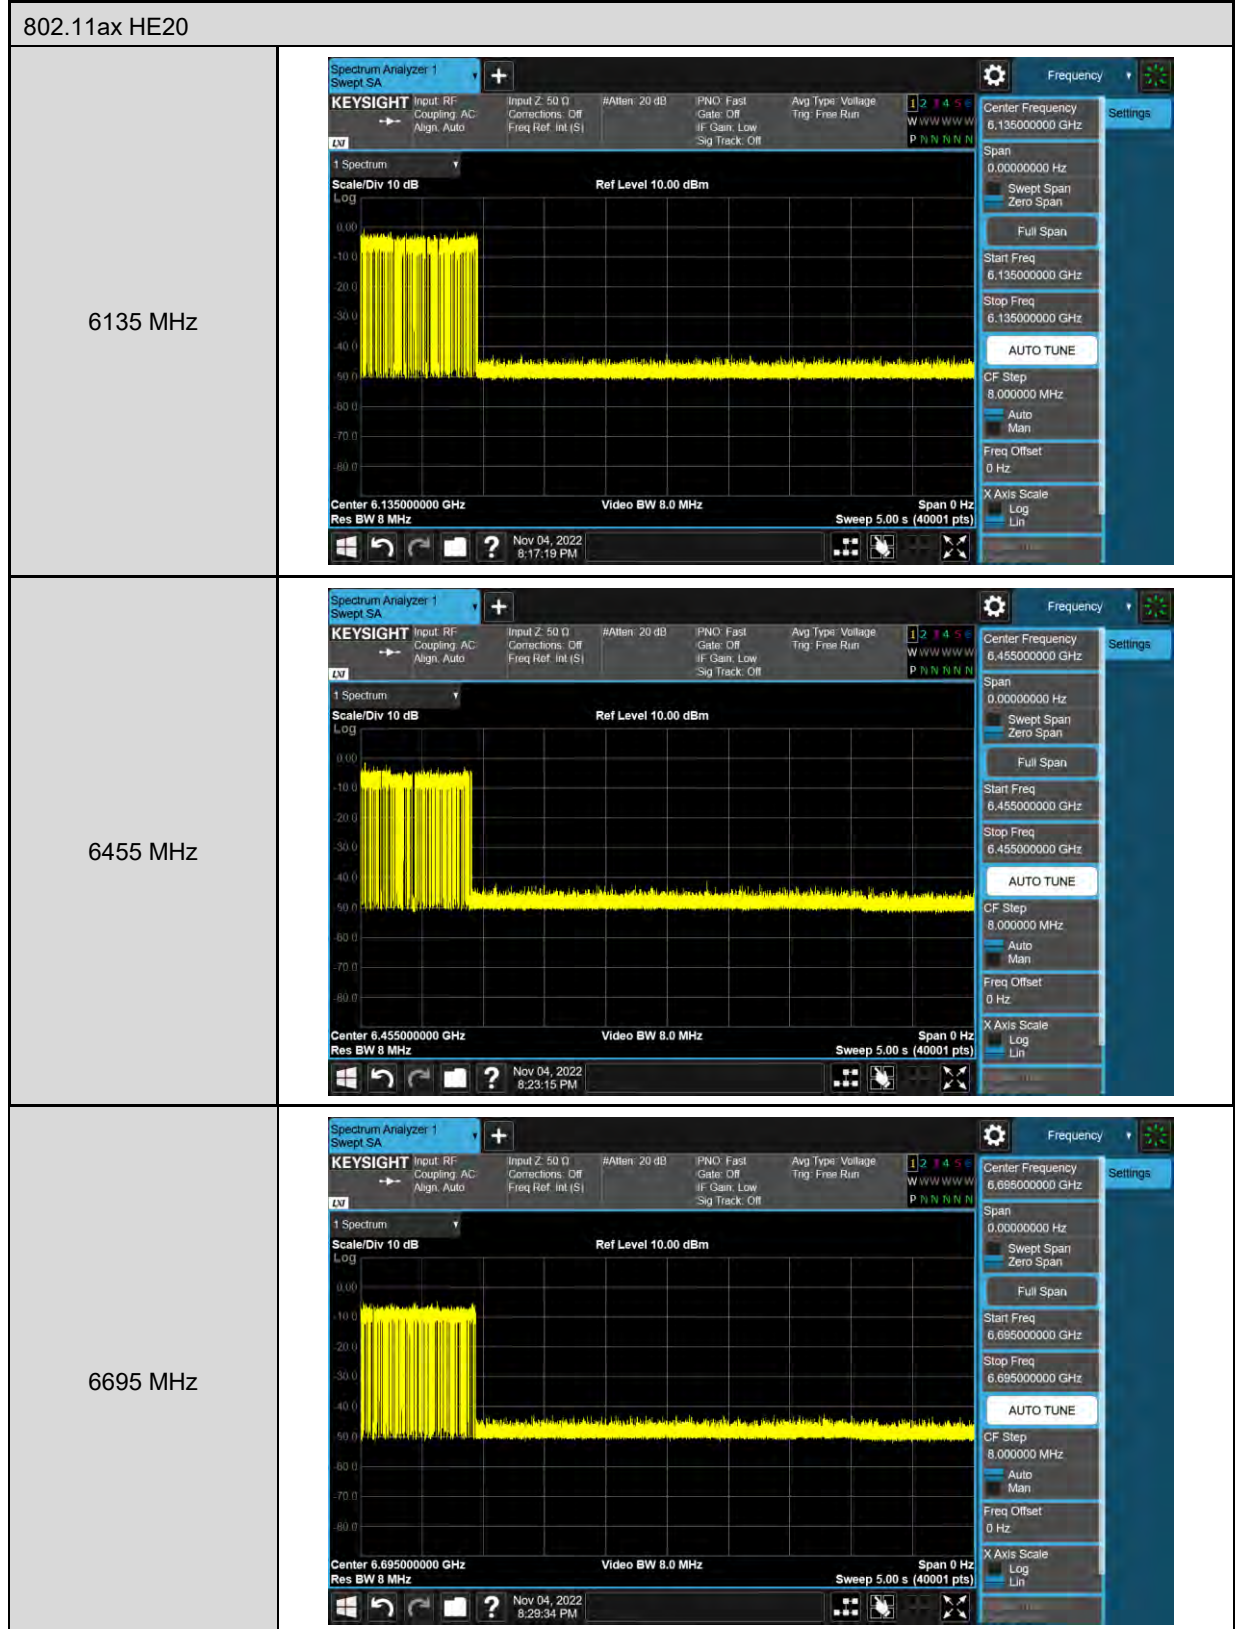Contention Based Protocol Plot





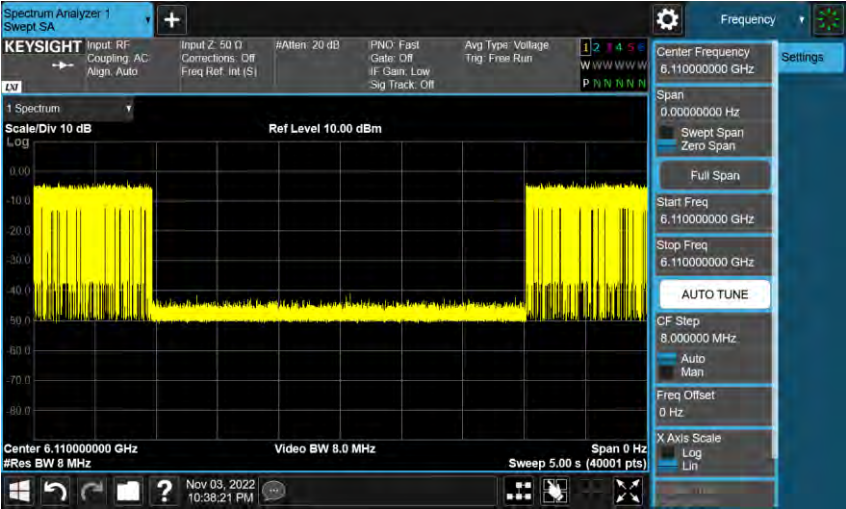


<p>802.11ax HE160</p> <p>6110 MHz</p>	
<p>6185 MHz</p>	
<p>6260 MHz</p>	

<p>802.11ax HE160</p> <p>6430 MHz</p>	
<p>6505 MHz</p>	
<p>6580 MHz</p>	

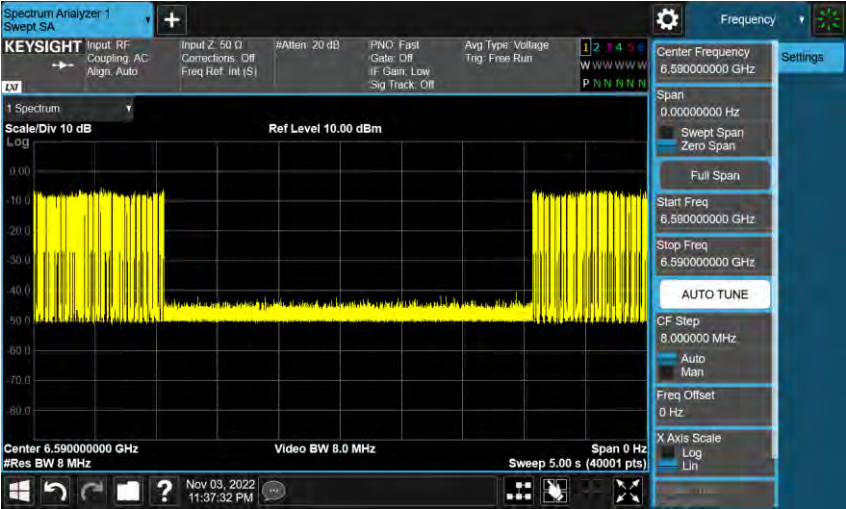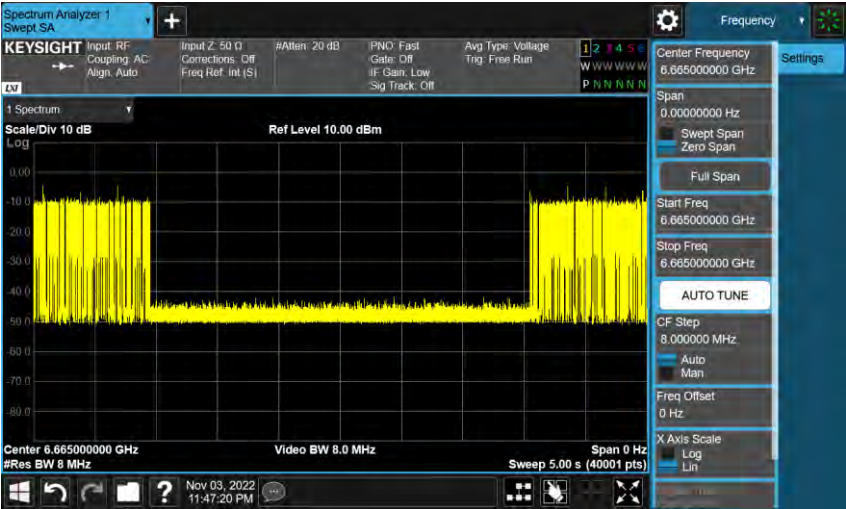


<p>802.11ax HE160</p> <p>6590 MHz</p>	
<p>6665 MHz</p>	
<p>6740 MHz</p>	


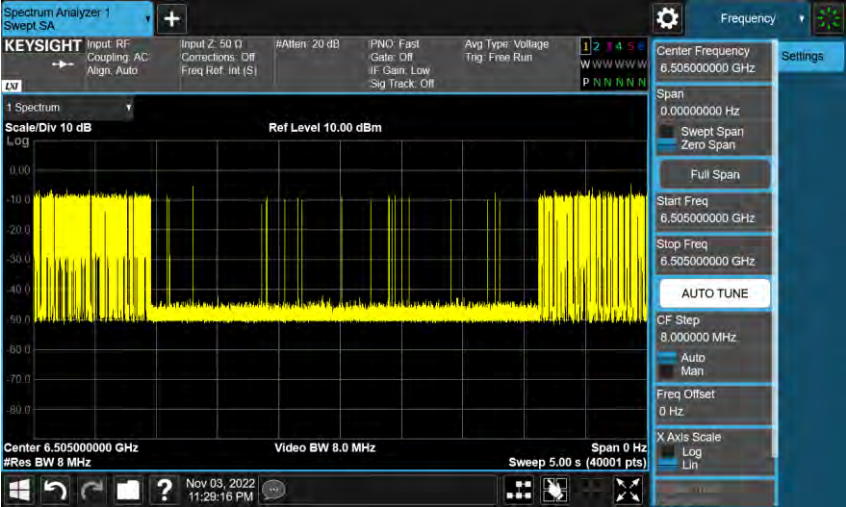
<p>802.11ax HE160</p> <p>6910 MHz</p>	
<p>6985 MHz</p>	
<p>7060 MHz</p>	

Contention Based Protocol Threshold Level Verify

802.11ax HE20	
6135 MHz	
6455 MHz	
6695 MHz	

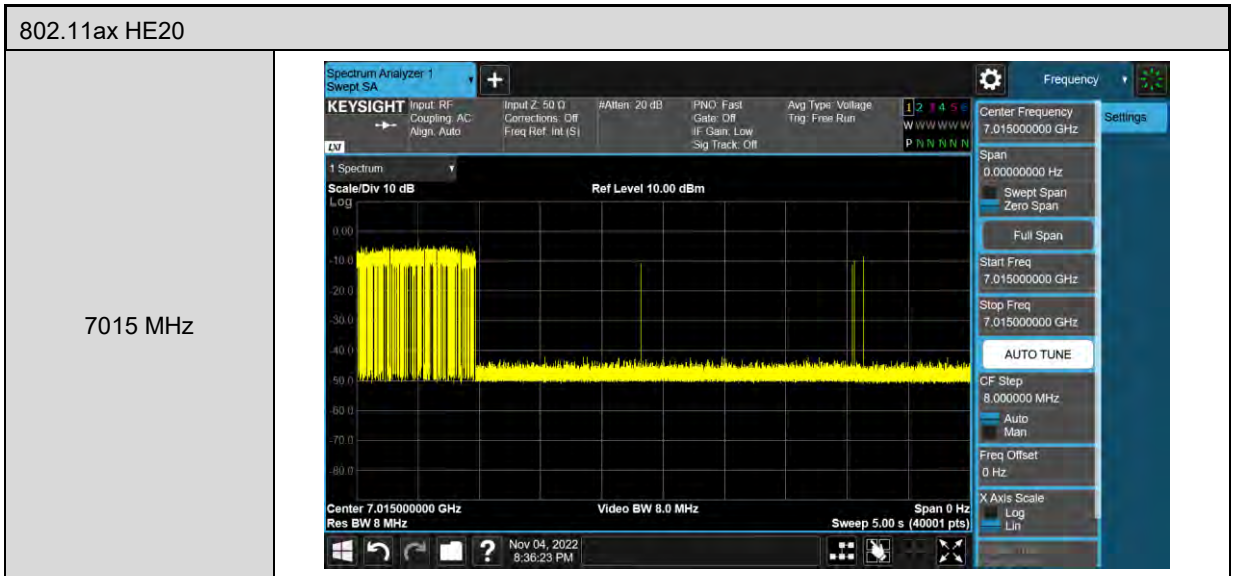

<p>802.11ax HE160</p> <p>6110 MHz</p>	
<p>6185 MHz</p>	
<p>6260 MHz</p>	

<p>802.11ax HE160</p> <p>6430 MHz</p>	
<p>6505 MHz</p>	
<p>6580 MHz</p>	

<p>802.11ax HE160</p> <p>6590 MHz</p>	
<p>6665 MHz</p>	
<p>6740 MHz</p>	

<p>802.11ax HE160</p> <p>6910 MHz</p>	
<p>6985 MHz</p>	
<p>7060 MHz</p>	

--- END---