

## RF Test Report

Applicant : Getac Technology Corporation

Product Name : Wireless Module

Trade Name : Getac

Model Number : AX211NGW

Applicable Standard : FCC 47 CFR PART 15 SUBPART E  
ANSI C63.10:2013

Received Date : Oct. 13, 2022

Test Period : Oct. 28 ~ Nov. 05, 2022

Issued Date : Jan. 04, 2023

### Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 334025, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330  
Frequency Range : 9 kHz to 40 GHz  
Test Firm MRA designation number: TW0010

#### Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

### Revision History

Version	Issued Date	Revisions	Revised By
00	Dec. 23, 2022	Initial Issue	Emma Chao
01	Jan. 04, 2023	Update chapter 4.8 (P.29)	Emma Chao

## Verification of Compliance

Applicant : Getac Technology Corporation  
 Product Name : Wireless Module  
 Trade Name : Getac  
 Model Number : AX211NGW  
 FCC ID : QYLAX211NG  
 Applicable Standard : FCC 47 CFR PART 15 SUBPART E  
 ANSI C63.10:2013  
 Test Result : Complied  
 Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.  
 No. 140-1, Changan Street, Bade District,  
 Taoyuan City 334025, Taiwan (R.O.C.)  
 Tel : +886-3-2710188 / Fax : +886-3-2710190  
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : \_\_\_\_\_

## TABLE OF CONTENTS

<b>1</b>	<b>General Information .....</b>	<b>5</b>
	1.1. Summary of Test Result .....	5
	1.2. Testing Location .....	6
	1.3. Measurement Uncertainty .....	6
<b>2</b>	<b>EUT Description .....</b>	<b>7</b>
<b>3</b>	<b>Test Methodology.....</b>	<b>11</b>
	3.1. Mode of Operation .....	11
	3.2. EUT Test Step .....	14
	3.3. Configuration of Test System Details .....	14
	3.4. Test Instruments .....	15
	3.5. Test Site Environment .....	16
<b>4</b>	<b>Measurement Procedure.....</b>	<b>17</b>
	4.1. AC Power Conducted Emission Measurement .....	17
	4.2. Transmitter Radiated Emissions Measurement .....	19
	4.3. Maximum Conducted Output Power and Transmit power control Measurement .....	24
	4.4. 26 dB RF Bandwidth Measurement .....	25
	4.5. 6 dB RF Bandwidth Measurement .....	26
	4.6. Maximum Power Spectral Density Measurement .....	27
	4.7. Automatically discontinue transmission .....	28
	4.8. Antenna Requirement .....	28
<b>5</b>	<b>Test Results.....</b>	<b>30</b>
	5.1. Conducted Test Results .....	30
	5.2. Radiated Emission Measurement .....	42

### Appendix A. Test Setup Photographs

# 1 General Information

## 1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(b)(9) 15.207	AC Power Conducted Emission	N/A	Note 1
15.407(b) 15.205 / 15.209	Transmitter Radiated Emissions	PASS	---
15.407(a)	Maximum Conducted Output Power	PASS	---
15.407(a)	26 dB RF Bandwidth	N/A	Note 1
15.407(e)	6 dB RF Bandwidth	N/A	Note 1
15.407(a)	Maximum Power Spectral Density	N/A	Note 1
15.407(c)	Automatically discontinue transmission	N/A	Note 1
15.407(a) 15.203	Antenna Requirement	PASS	---

Note 1: Class II permissive change. No need for verification.

### Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

## 1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address:  No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Site Address:  No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

## 1.3. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB
Radiated Emission	9 kHz ~ 30 MHz	2.2 dB
	30 MHz ~ 1000 MHz	5.1 dB
	1000 MHz ~ 18000 MHz	5.2 dB
	18000 MHz ~ 26500 MHz	4.6 dB
	26500 MHz ~ 40000 MHz	4.6 dB
Conducted Output Power		1.1 dB
RF Bandwidth		4.7 %
Power Spectral Density		1.1 dB
Frequency Stability		$1.3 \times 10^{-7}$
Duty Cycle		1.1 %
Time Occupancy		1.5 %

## 2 EUT Description

Applicant	Getac Technology Corporation 5F.,Building A,No.209,Sec.1 Nangang.,Rd., Taipei City, 11568, Taiwan			
Product Name	Wireless Module			
Trade Name	Getac			
Model Number	AX211NGW			
FCC ID	QYLAX211NG			
Host Information	Product Name: Tablet Trade Name: Getac Model Name: UX10, UX10G3, UX10-301, UX10-321, UX10-Ex, UX10Y(Y= 10 characters, Y can be 0 to 9, A to Z, a to z, "/", "\", "-", "_ " or blank for marketing purpose) (Different model numbers are for market purpose.)			
Operate Frequency	Frequency Band		Frequency Range (MHz)	Number of Channels
	802.11a	U-NII Band 1	5180 – 5240	4
		U-NII Band 2-A	5260 – 5320	4
		U-NII Band 2-C	5500 – 5700	11
		U-NII Band 3	5745 – 5825	5
	802.11n HT20/ 802.11ax HE20	U-NII Band 1	5180 – 5240	4
		U-NII Band 2-A	5260 – 5320	4
		U-NII Band 2-C	5500 – 5700	11
		Straddle band	5720	1
		U-NII Band 3	5745 – 5825	5
	802.11n HT40/ 802.11ax HE40	U-NII Band 1	5190 – 5230	2
		U-NII Band 2-A	5270 – 5310	2
		U-NII Band 2-C	5510 – 5670	5
		Straddle band	5710	1
		U-NII Band 3	5755 – 5795	2

	Frequency Band	Frequency Range (MHz)	Number of Channels	Frequency Band
	802.11ac VHT80/ 802.11ax HE80	U-NII Band 1		5210
U-NII Band 2-A			5290	1
U-NII Band 2-C			5530 – 5610	2
Straddle band			5690	1
U-NII Band 3			5775	1
802.11ac VHT160/ 802.11ax HE160	U-NII Band 1		5250	1
	U-NII Band 2-A			
	U-NII Band 2-C		5570	1
Modulation Type	OFDM/OFDMA			
Equipment Type	Client devices			
Antenna information	Antenna	Model	Type	Max. Gain (dBi)
	ANT-0 (AUX)	UX10G3 AUXWIFI ANT	PIFA Antenna	U-NII Band 1
U-NII Band 2-A				1.55
U-NII Band 2-C				-0.44
U-NII Band 3				0.45
ANT-1 (MAIN)	UX10G3 WIFI MAIN ANT	PIFA Antenna	U-NII Band 1	2.42
			U-NII Band 2-A	3.16
			U-NII Band 2-C	3.06
			U-NII Band 3	2.89
Antenna Delivery	Reference section 3.1			
Operate Temp. Range	-10 ~ +55 °C			
EUT Power Rating	DC 3.3 V			

EUT Modify Description :

<p>Modify Description: Added Host Model: UX10, UX10G3, UX10-301, UX10-321, UX10-Ex, UX10Y(Y= 10 characters, Y can be 0 to 9, A to Z, a to z, “/”, “\”, “-”, “_” or blank for marketing purpose)</p> <p>After our evaluation, the retest of Transmitter Radiated Emissions and Conducted Output Power is required. The other test data refer to the original report.</p>
---



**SISO**

Frequency Band		RF Output Power (W)
802.11a	U-NII Band 1	0.087
	U-NII Band 2-A	0.085
	U-NII Band 2-C	0.085
	U-NII Band 3	0.100
802.11n HT20	U-NII Band 1	0.086
	U-NII Band 2-A	0.085
	U-NII Band 2-C	0.101
	U-NII Band 3	0.098
802.11n HT40	U-NII Band 1	0.086
	U-NII Band 2-A	0.084
	U-NII Band 2-C	0.089
	U-NII Band 3	0.097
802.11ac VHT80	U-NII Band 1	0.077
	U-NII Band 2-A	0.060
	U-NII Band 2-C	0.086
	U-NII Band 3	0.099
802.11ac VHT160	U-NII Band 1	0.044
	U-NII Band 2-A	
	U-NII Band 2-C	0.039
802.11ax HE20	U-NII Band 1	0.086
	U-NII Band 2-A	0.086
	U-NII Band 2-C	0.087
	U-NII Band 3	0.097
802.11ax HE40	U-NII Band 1	0.087
	U-NII Band 2-A	0.087
	U-NII Band 2-C	0.088
	U-NII Band 3	0.096
802.11ax HE80	U-NII Band 1	0.086
	U-NII Band 2-A	0.060
	U-NII Band 2-C	0.087
	U-NII Band 3	0.092
802.11ax HE160	U-NII Band 1	0.041
	U-NII Band 2-A	
	U-NII Band 2-C	0.032

**MIMO**

Frequency Band		RF Output Power (W)
802.11n HT20	U-NII Band 1	0.088
	U-NII Band 2-A	0.089
	U-NII Band 2-C	0.109
	U-NII Band 3	0.125
802.11n HT40	U-NII Band 1	0.104
	U-NII Band 2-A	0.108
	U-NII Band 2-C	0.121
	U-NII Band 3	0.122
802.11ac VHT80	U-NII Band 1	0.072
	U-NII Band 2-A	0.072
	U-NII Band 2-C	0.116
	U-NII Band 3	0.095
802.11ac VHT160	U-NII Band 1	0.036
	U-NII Band 2-A	
	U-NII Band 2-C	0.048
802.11ax HE20	U-NII Band 1	0.102
	U-NII Band 2-A	0.102
	U-NII Band 2-C	0.110
	U-NII Band 3	0.126
802.11ax HE40	U-NII Band 1	0.111
	U-NII Band 2-A	0.110
	U-NII Band 2-C	0.121
	U-NII Band 3	0.125
802.11ax HE80	U-NII Band 1	0.064
	U-NII Band 2-A	0.064
	U-NII Band 2-C	0.120
	U-NII Band 3	0.092
802.11ax HE160	U-NII Band 1	0.038
	U-NII Band 2-A	
	U-NII Band 2-C	0.061

Equipment Type		
Outdoor access point	point-to-point	---
	point-to-multipoint	---
Indoor access point		---
Fixed point-to-point access points		---
Client devices		V

### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Transmit Mode
802.11a
802.11n HT20
802.11n HT40
802.11ac VHT80
802.11ac VHT160
802.11ax HE20
802.11ax HE40
802.11ax HE80
802.11ax HE160

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Y axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

**SISO**

Test Mode	ANT-0	ANT-1
802.11a	V	V
802.11n HT20	V	V
802.11n HT40	V	V
802.11ac VHT80	V	V
802.11ac VHT160	V	V
802.11ax HE20	V	V
802.11ax HE40	V	V
802.11ax HE80	V	V
802.11ax HE160	V	V

Test Mode	Antenna Delivery	Data Rate (Mbps)	Band	Test Channel
802.11a	1TX (Diveristy)	6	U-NII Band 1	36, 40, 48
			U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 120, 140
			U-NII Band 3	149, 157, 165
802.11n HT20	1TX (Diveristy)	6.5	U-NII Band 1	36, 40, 48
			U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 120, 140, 144
			U-NII Band 3	144, 149, 157, 165
802.11n HT40	1TX (Diveristy)	13.5	U-NII Band 1	38, 46
			U-NII Band 2-A	54, 62
			U-NII Band 2-C	102, 118, 134, 142
			U-NII Band 3	142, 151, 159
802.11ac VHT80	1TX (Diveristy)	29.3	U-NII Band 1	42
			U-NII Band 2-A	58
			U-NII Band 2-C	106, 122, 138
			U-NII Band 3	138, 155
802.11ac VHT160	1TX (Diveristy)	58.5	U-NII Band 1 & U-NII Band 2-A	50
			U-NII Band 2-C	114
802.11ax HE20	1TX (Diveristy)	MCS 0	U-NII Band 1	36, 40, 48
			U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 120, 140, 144
			U-NII Band 3	144, 149, 157, 165
802.11ax HE40	1TX (Diveristy)	MCS 0	U-NII Band 1	38, 46
			U-NII Band 2-A	54, 62
			U-NII Band 2-C	102, 118, 134, 142
			U-NII Band 3	142, 151, 159
802.11ax HE80	1TX (Diveristy)	MCS 0	U-NII Band 1	42
			U-NII Band 2-A	58
			U-NII Band 2-C	106, 122, 138
			U-NII Band 3	138, 155
802.11ax HE160	1TX (Diveristy)	MCS 0	U-NII Band 1 & U-NII Band 2-A	50
			U-NII Band 2-C	114

**MIMO**

Test Mode	ANT-0	ANT-1	ANT-0+1
802.11n HT20	V	V	V
802.11n HT40	V	V	V
802.11ac VHT80	V	V	V
802.11ac VHT160	V	V	V
802.11ax HE20	V	V	V
802.11ax HE40	V	V	V
802.11ax HE80	V	V	V
802.11ax HE160	V	V	V


Test Mode	Antenna Delivery	Data Rate (Mbps)	Band	Test Channel
802.11n HT20	2TX (MIMO)	6.5	U-NII Band 1	36, 40, 48
			U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 120, 140, 144
			U-NII Band 3	144, 149, 157, 165
802.11n HT40	2TX (MIMO)	13.5	U-NII Band 1	38, 46
			U-NII Band 2-A	54, 62
			U-NII Band 2-C	102, 118, 134, 142
			U-NII Band 3	142, 151, 159
802.11ac VHT80	2TX (MIMO)	29.3	U-NII Band 1	42
			U-NII Band 2-A	58
			U-NII Band 2-C	106, 122, 138
			U-NII Band 3	138, 155
802.11ac VHT160	2TX (MIMO)	58.5	U-NII Band 1 & U-NII Band 2-A	50
			U-NII Band 2-C	114
802.11ax HE20	2TX (MIMO)	MCS 0	U-NII Band 1	36, 40, 48
			U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 120, 140, 144
			U-NII Band 3	144, 149, 157, 165
802.11ax HE40	2TX (MIMO)	MCS 0	U-NII Band 1	38, 46
			U-NII Band 2-A	54, 62
			U-NII Band 2-C	102, 118, 134, 142
			U-NII Band 3	142, 151, 159
802.11ax HE80	2TX (MIMO)	MCS 0	U-NII Band 1	42
			U-NII Band 2-A	58
			U-NII Band 2-C	106, 122, 138
			U-NII Band 3	138, 155
802.11ax HE160	2TX (MIMO)	MCS 0	U-NII Band 1 & U-NII Band 2-A	50
			U-NII Band 2-C	114

### 3.2. EUT Test Step

The EUT is operated in the engineering mode to fix the TX frequency for the purposes of measurement. According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

1.	Setup the EUT shown on "Configuration of Test System Details".
2.	Turn on the power of all equipment.
3.	Turn on TX function.
4.	EUT run test program.

### 3.3. Configuration of Test System Details

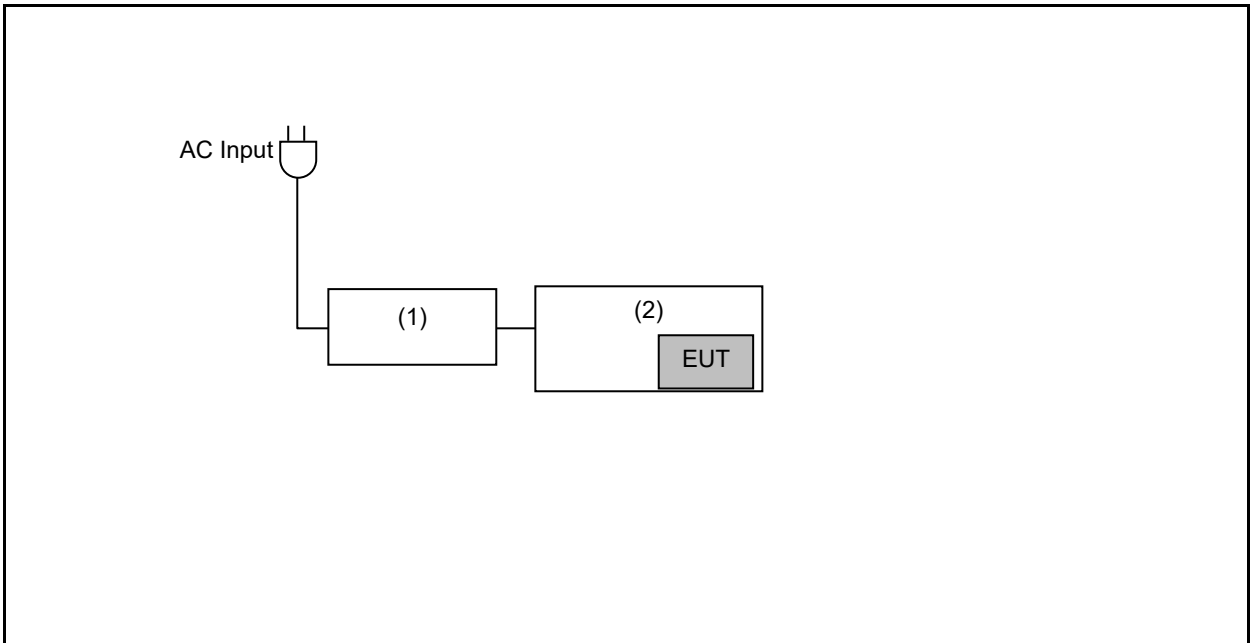

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Power Cord
(1)	Adapter	FSP	FSP065-RBBN3	---	---
(2)	Tablet	Getac	UX10G3	---	---

### 3.4. Test Instruments

For Conducted

Test Period: Oct. 28 ~ Nov. 01, 2022

Testing Engineer: Peter Shui

Test Site		RF01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input type="checkbox"/>	Power Sensor	Anritsu	MA2411B	1126022	Sep. 04, 2022	1 year
<input type="checkbox"/>	Power Meter	Anritsu	ML2495A	1135009	Sep. 04, 2022	1 year
<input checked="" type="checkbox"/>	Power Sensor	Agilent	N1921A	MY45241957	Dec. 06, 2021	1 year
<input checked="" type="checkbox"/>	Power Meter	Agilent	N1911A	MY45101619	Dec. 06, 2021	1 year
<input type="checkbox"/>	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY59071418	Mar. 16, 2022	1 year
<input type="checkbox"/>	Spectrum Analyzer (9 kHz~26.5 GHz)	Agilent	N9010A	MY48030518	Jul. 21, 2022	1 year
<input checked="" type="checkbox"/>	Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	Sep. 01, 2022	1 year
<input type="checkbox"/>	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Jan. 05, 2022	1 year
<input type="checkbox"/>	Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	Mar. 28, 2022	1 year
<input type="checkbox"/>	Signal Generator	Keysight	N5182B	MY53052569	Apr. 16, 2022	1 year
<input type="checkbox"/>	Signal Generator	Keysight	N5182BX07	MY59360221	Apr. 16, 2022	1 year
<input type="checkbox"/>	Bluetooth Tester	R&S	CBT	100350	Mar. 17, 2021	2 years
<input type="checkbox"/>	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 01, 2022	1 year
<input type="checkbox"/>	Power Supply	KEITHLEY	2303	4045290	Jan. 19, 2022	1 year

Note: N.C.R. = No Calibration Request.

For Radiated Emissions

Test Period: Nov. 02 ~ Nov. 05, 2022

Testing Engineer: Hung Chou, Kerry Xu, Andy Lu, Marc Yeh

Test Site		96603-BD				
Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input checked="" type="checkbox"/>	Spectrum Analyzer (2 Hz~50 GHz)	Keysight	N9030B	MY57143537	Apr. 14, 2022	1 year
<input type="checkbox"/>	Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9020B	MY60112363	Feb. 27, 2022	1 year
<input checked="" type="checkbox"/>	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	Jan. 14, 2022	1 year
<input checked="" type="checkbox"/>	Broadband Amplifier (1 GHz~26.5 GHz)	Titan	T0912E01263025 A1F	002	Jul. 21, 2022	1 year
<input checked="" type="checkbox"/>	Preamplifier (26.5 GHz~40 GHz)	EMCI	EMC2654045	980028	Sep. 02, 2022	1 year
<input checked="" type="checkbox"/>	Loop Antenna (9 kHz~30 MHz)	COM-POWER CORPORATION	AL-130	121014	Mar. 28, 2022	1 year
<input checked="" type="checkbox"/>	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	416	Nov. 17, 2021	1 year
<input checked="" type="checkbox"/>	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	02207	Jul. 13, 2022	1 year
<input checked="" type="checkbox"/>	Broadband Horn Antenna (18 GHz~40 GHz)	Schwarzbeck Mess-Elektronik	9170	9170-320	Aug. 25, 2022	1 year
<input checked="" type="checkbox"/>	Coaxial Cable	Titan	T0710AT327A10A 100	J11005	Aug. 04, 2022	1 year
<input checked="" type="checkbox"/>	Coaxial Cable	Titan	T0710AT327A10A 900	J11004	Aug. 04, 2022	1 year
<input checked="" type="checkbox"/>	Coaxial Cable	Titan	CFD400NL-LW	001	Aug. 04, 2022	1 year
<input checked="" type="checkbox"/>	Software	EZ EMC	1.1.4.4	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request.

### 3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75




## 4 Measurement Procedure

### 4.1. AC Power Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

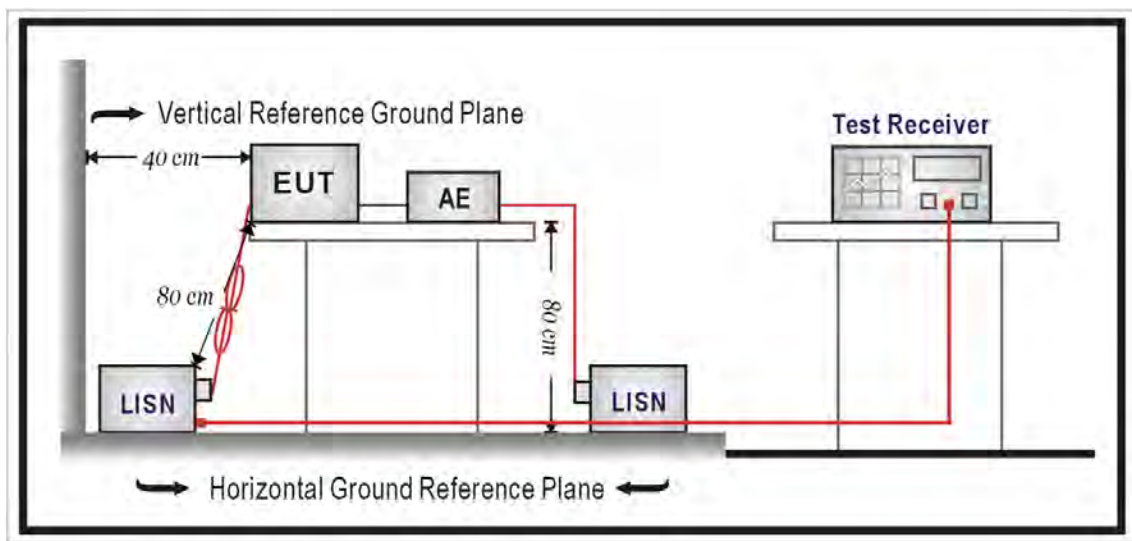

#### ■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a  $50 \Omega // 50 \mu\text{H}$  coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a  $50 \Omega // 50 \mu\text{H}$  coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All  $50 \Omega$  ports of the LISN shall be resistively terminated into  $50 \Omega$  loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored

## 4.2. Transmitter Radiated Emissions Measurement

### ■ Limit

(1)Undesirable emission limits. Except as shown in paragraph (b)(9) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(a)For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(b)For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(c)For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(d)For transmitters operating in the 5.725-5.85 GHz band:

(i)All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

EIRP (dBm)	Field Strength at 3 m(dBuV/m)
-27	68.3

(2)Limits of Radiated Emission Measurement

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequency Range (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	10	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


Note: 1. The lower limit shall apply at the transition frequencies.

2. Emission level (dBuV/m) = 20 log Emission level (uV/m).


3. As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

■ Setup


9 kHz ~ 30 MHz

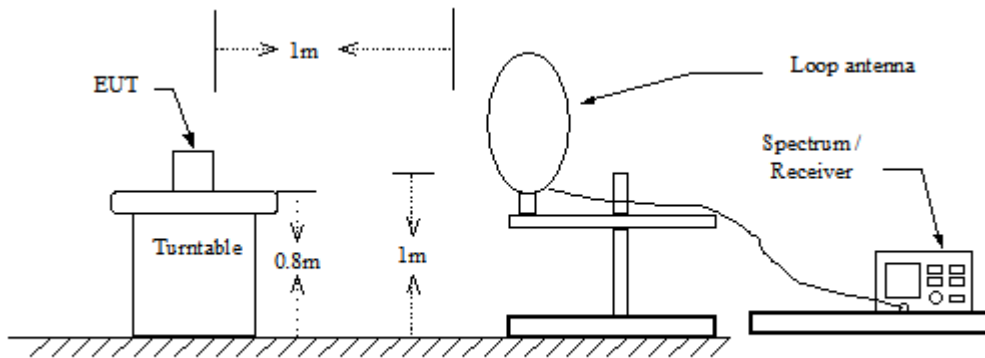

30 MHz ~ 1 GHz

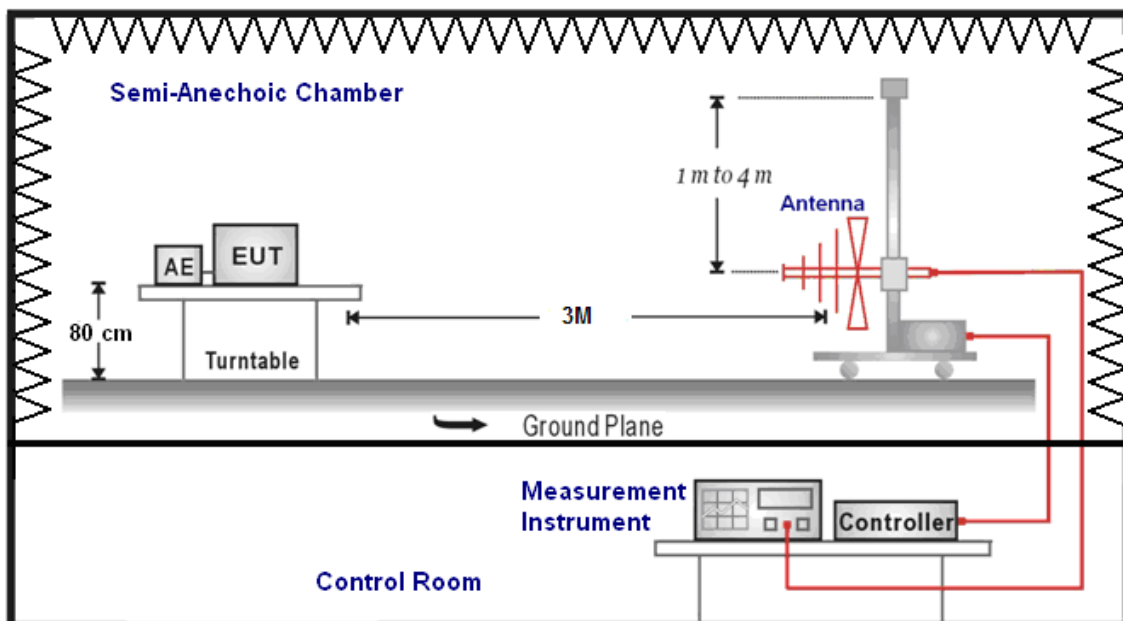

Above 1 GHz

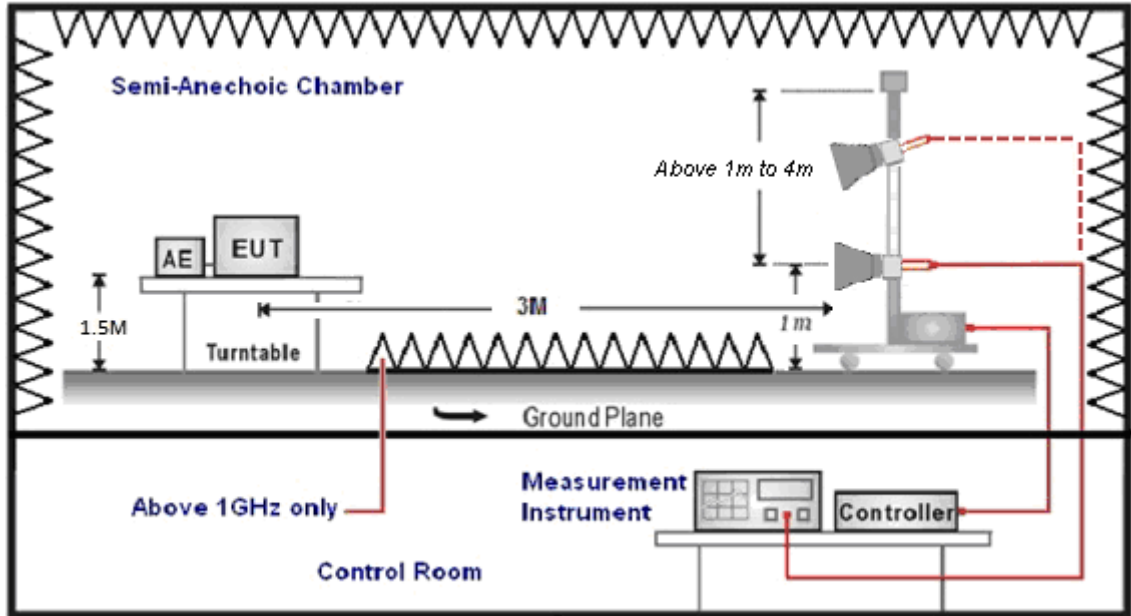

## ■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1 GHz use 0.8 m turntable / above 1 GHz use 1.5 m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 40 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For restricted measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle > 0.98 / 1/T for average measurements when Duty cycle < 0.98.

For out of band measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Trilog-Broadband Antenna at 3 Meter and the ETS-Lindgren Double-Ridged Waveguide Horn antenna Schwarzbeck Mess-Elektronik Broadband Horn Antenna was used in frequencies 1 – 40 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

### Measuring Instruments and setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW/VBW(Emission in restricted band)	1 MHz / 3 MHz for Peak 1 MHz / (1/T) for Average
RBW/VBW(Emission in non-restricted band)	1 MHz / 3 MHz for Peak


### 4.3. Maximum Conducted Output Power and Transmit power control Measurement

■ Limit

Frequency Range (MHz)	FCC Maximum Conducted Output Power Limit
	Client
5.150 ~ 5.250 GHz	The lesser of 250 mW (24 dBm)
5.250 ~ 5.350 GHz	The lesser of 250 mW (24 dBm) or 11 dBm + 10 log (B)
5.470 ~ 5.725 GHz	The lesser of 250 mW (24 dBm) or 11 dBm + 10 log (B)
5.725 ~ 5.850 GHz	The lesser of 1 W (30 dBm)

According FCC KDB 662911 D01 v02r01 – for power measurements on IEEE802.11 devices,

■ Test Setup

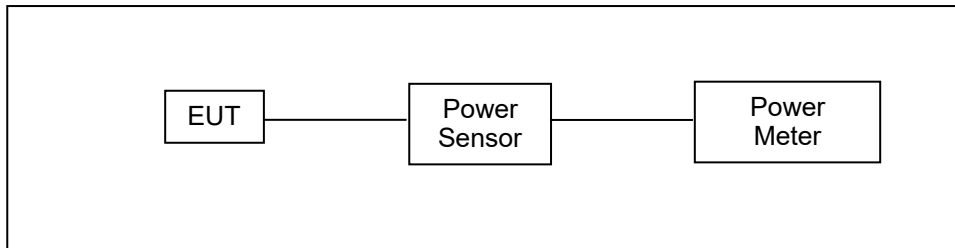

■ Test Procedure

The test is performed in accordance with ANSI C63.10:2013 section 12.3.3.2, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices

Section (E) Maximum Conducted Output Power

3. Measurement using a Power Meter (PM)

b) Method PM-G (Measurement using a gated RF average power meter)




#### 4.4. 26 dB RF Bandwidth Measurement

■ **Limit**

N/A

■ **Test Setup**

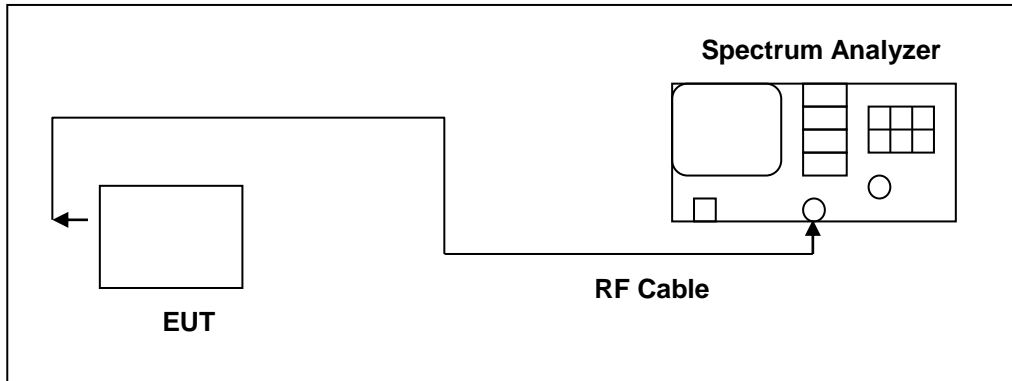

■ **Test Procedure**

The test is performed in accordance with ANSI C63.10:2013 section 12.4.1, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	>26 dB Bandwidth
RBW	Approximately 1 % of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


#### 4.5. 6 dB RF Bandwidth Measurement

■ **Limit**

**6 dB RF Bandwidth**

Systems using digital modulation techniques may operate in the 5725~5825 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

■ **Test Setup**

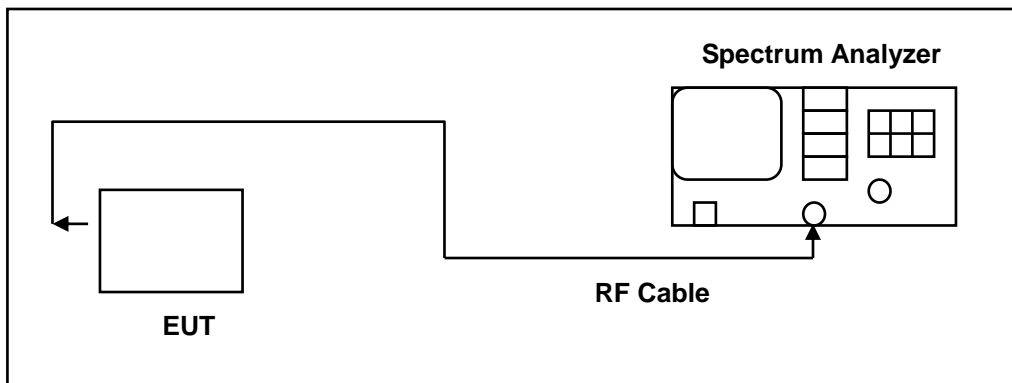

■ **Test Procedure**

**6 dB RF Bandwidth**

The EUT tested to UNII test procedure of ANSI C63.10:2013 section 6.9.2 for compliance to FCC 47CFR 15.407 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels.


#### 4.6. Maximum Power Spectral Density Measurement

■ Limit

Frequency Range (MHz)	FCC Limit
	Client
5.150 ~ 5.250 GHz	11 dBm/MHz
5.250 ~ 5.350 GHz	11 dBm/MHz
5.470 ~ 5.725 GHz	11 dBm/MHz
5.725 ~ 5.850 GHz	30 dBm/500 kHz

According FCC KDB 662911 D01 v02r01 – for power spectral density measurements on IEEE802.11 devices,

■ Test Setup

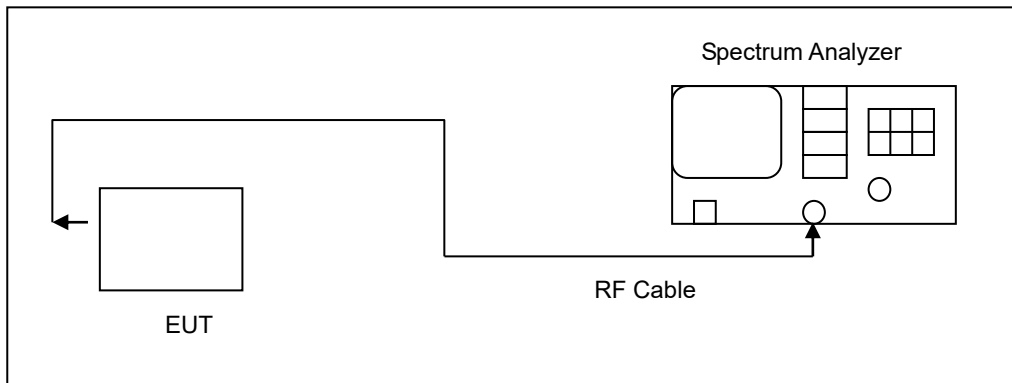

■ Test Procedure

The test is performed in accordance with ANSI C63.10:2013 section 12.5, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz (5725 ~ 5850 MHz use 100 kHz)
VBW	3 MHz (5725 ~ 5850 MHz use 300 kHz)
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10 \log(500 \text{ kHz}/100 \text{ kHz})$  to the measured result.

#### 4.7. Automatically discontinue transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

- **Declare**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

#### 4.8. Antenna Requirement

- **Requirement**

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.407 (a), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

- **Antenna Connector Construction**

See section 2 – antenna information.

**Directional Gain Calculated**
**For Maximum Conducted Output Power**

(Completely uncorrelated)

$$\text{Directional Gain} = 10 \cdot \log\left\{\frac{10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_n/10}}{N \cdot \text{ANT}}\right\}$$

\*G is the gain of the antenna having the highest gain.

Operate Freq. Band		Directional Gain (dBi)
802.11a	U-NII Band 1	2.42
	U-NII Band 2-A	3.16
	U-NII Band 2-C	3.06
	U-NII Band 3	2.89
802.11n HT20	U-NII Band 1	2.42
	U-NII Band 2-A	3.16
	U-NII Band 2-C	3.06
	U-NII Band 3	2.89
802.11n HT40	U-NII Band 1	2.42
	U-NII Band 2-A	3.16
	U-NII Band 2-C	3.06
	U-NII Band 3	2.89
802.11ac VHT80	U-NII Band 1	2.42
	U-NII Band 2-A	3.16
	U-NII Band 2-C	3.06
	U-NII Band 3	2.89
802.11ac VHT160	U-NII Band 1 & U-NII Band 2-A	3.16
	U-NII Band 2-C	3.06
802.11ax HE20	U-NII Band 1	2.42
	U-NII Band 2-A	3.16
	U-NII Band 2-C	3.06
	U-NII Band 3	2.89
802.11ax HE40	U-NII Band 1	2.42
	U-NII Band 2-A	3.16
	U-NII Band 2-C	3.06
	U-NII Band 3	2.89
802.11ax HE80	U-NII Band 1	2.42
	U-NII Band 2-A	3.16
	U-NII Band 2-C	3.06
	U-NII Band 3	2.89
802.11ax HE160	U-NII Band 1 & U-NII Band 2-A	3.16
	U-NII Band 2-C	3.06

## 5 Test Results

### 5.1. Conducted Test Results

#### Maximum Conducted Output Power and Transmit power control Measurement

SISO

Mode	Frequency (MHz)	RF Power setting in Test Software		Test SW Version
		ANT-0	ANT-1	
802.11a	5180	19.5	15	DRTU 02593.22.170.0
	5200	19.5	15.25	
	5220	19.5	15.25	
	5240	19.5	15.25	
	5260	19.5	15.25	
	5280	19.5	15.25	
	5300	19.5	15.25	
	5320	19.5	15	
	5500	19.5	16	
	5580	19.5	16	
	5600	19.5	16	
	5620	19.5	16	
	5640	21	21	
	5660	19.5	16	
	5700	19.75	16	
	5745	20.5	15.5	
	5785	20	15.25	
	5825	20	15.25	
802.11n HT20	5180	19.25	15	DRTU 02593.22.170.0
	5200	19.5	15.25	
	5220	19.5	15.25	
	5240	19.5	15.25	
	5260	19.5	15.25	
	5280	19.5	15.25	
	5300	19.5	15.25	
	5320	19.5	15	
	5500	19.5	16.25	
	5580	19.5	16.25	
	5600	19.5	16.25	
	5620	19.5	16.25	
	5640	21	21	
	5660	19.5	16.25	
	5700	19.5	16	
	5720	20.25	16	
	5720	20.25	16	
	5745	20.5	15.5	
5785	20.5	15.5		
5825	20.5	15.5		

Mode	Frequency (MHz)	RF Power setting in Test Software		Test SW Version
		ANT-0	ANT-1	
802.11n HT40	5190	18.75	14.5	DRTU 02593.22.170.0
	5230	19	14.5	
	5270	19.25	14.75	
	5310	17.75	14.75	
	5510	19.25	15.75	
	5550	19.25	15.75	
	5590	19.25	15.75	
	5630	19.25	15.75	
	5670	19.25	15.75	
	5710	19.25	15.75	
	5710	19.25	15.75	
	5755	20	15	
	5795	19.75	15	
802.11ac VHT80	5210	18.75	14.75	DRTU 02593.22.170.0
	5290	17.75	14.75	
	5530	19.25	16	
	5610	19.25	15.75	
	5690	19.25	15.75	
	5690	19.25	15.75	
	5775	20	15	
802.11ac VHT160	5250	16.5	14.25	DRTU 02593.22.170.0
	5570	15.75	15.75	

Mode	Frequency (MHz)	RF Power setting in Test Software		Test SW Version
		ANT-0	ANT-1	
802.11ax HE20	5180	19.5	15	DRTU 02593.22.170.0
	5200	19.5	15	
	5220	19.5	15	
	5240	19.5	15	
	5260	19.5	15.25	
	5280	19.5	15.25	
	5300	19.5	15.25	
	5320	19.25	15	
	5500	19.5	16	
	5520	13.25	13.25	
	5540	16	16	
	5560	19	16	
	5580	19.5	16	
	5600	19.5	16	
	5620	19.5	16	
	5640	19.5	16	
	5660	13.5	13.5	
	5680	16.5	16	
	5700	19.5	16	
	5720	20	16.5	
	5720	20	16.5	
	5745	19.25	15.25	
	5765	19.25	15.25	
5785	19.25	15.25		
5805	19.25	15.25		
5825	19.25	15.25		
802.11ax HE40	5190	19.5	15	DRTU 02593.22.170.0
	5230	19.5	14.75	
	5270	19.5	14.75	
	5310	17.5	15	
	5510	19.25	16	
	5550	19.25	16	
	5590	19.5	16	
	5630	19.5	16	
	5670	19.25	16.25	
	5710	19.25	16	
	5710	19.25	16	
	5755	19	15.5	
	5795	19	15	



Mode	Frequency (MHz)	RF Power setting in Test Software		Test SW Version
		ANT-0	ANT-1	
802.11ax HE80	5210	19.5	14.75	DRTU 02593.22.170.0
	5290	18	15	
	5530	19.25	16	
	5610	19.5	16	
	5690	19.25	16	
	5690	19.25	16	
	5775	19.75	15	
802.11ax HE160	5250	16.25	14.25	DRTU 02593.22.170.0

**MIMO**

Mode	Frequency (MHz)	RF Power setting in Test Software		Test SW Version
		ANT-0	ANT-1	
802.11ax HE20	5180	18.5	15	DRTU 02593.22.170.0
	5200	18.75	15	
	5220	18.75	15.25	
	5240	18.75	15.25	
	5260	18.75	15	
	5280	18.75	15	
	5300	18.75	15	
	5320	15.375	15	
	5500	18.75	16.25	
	5520	10.75	10.75	
	5540	12.25	12.75	
	5560	15.25	16	
	5580	18.75	15.75	
	5600	18.75	15.75	
	5620	18.75	15.75	
	5640	18.75	15.75	
	5660	9.5	10	
	5680	12.25	13	
	5700	16	15.5	
	5720	17.75	15.5	
5720	17.75	15.5		
5745	19.75	15.25		
5765	18	14.75		
5785	19.75	14.75		
5825	20	15		
802.11ax HE40	5190	15.75	15	DRTU 02593.22.170.0
	5230	19.25	14.75	
	5270	19.25	15	
	5310	15.75	15	
	5510	17.25	16	
	5550	16.75	16	
	5590	19.25	15.75	
	5630	19.25	15.75	
	5670	18.5	15.5	
	5710	17.25	15.75	
	5710	17.25	15.75	
	5755	19.5	15	
5795	20	15		
802.11ax HE80	5210	15.5	15	DRTU 02593.22.170.0
	5290	15.25	15.25	
	5530	17.5	16	
	5610	19.5	15.75	
	5690	18	16	
	5690	18	16	
802.11ax HE160	5775	18.5	14.75	DRTU 02593.22.170.0
	5250	12.25	13	
	5570	15.25	15	

## SISO

Band	Date Rate or Sub-test	Frequency (MHz)	Average power		Limit
			ANT-0	ANT-1	
			dBm	dBm	dBm
802.11a	6M	5180	19.38	14.88	24.00
		5200	19.33	14.94	24.00
		5220	19.18	14.88	24.00
		5240	19.31	14.92	24.00
		5260	19.27	14.83	24.00
		5280	19.25	14.90	24.00
		5300	19.19	14.85	24.00
		5320	19.24	14.77	24.00
		5500	19.23	15.83	24.00
		5580	19.12	15.71	24.00
		5600	19.25	15.77	24.00
		5620	19.23	15.73	24.00
		5660	19.18	15.75	24.00
		5700	19.27	15.83	24.00
		5745	19.98	14.81	30.00
		5785	19.70	14.77	30.00
5825	19.75	14.80	30.00		
802.11n HT20	6.5M	5180	19.11	14.82	24.00
		5200	19.35	14.85	24.00
		5220	19.24	14.79	24.00
		5240	19.29	14.88	24.00
		5260	19.17	14.89	24.00
		5280	19.11	14.91	24.00
		5300	19.14	14.88	24.00
		5320	19.30	14.81	24.00
		5500	19.26	15.79	24.00
		5580	19.18	15.89	24.00
		5600	19.23	15.93	24.00
		5620	19.19	15.91	24.00
		5660	19.08	15.88	24.00
		5700	19.24	15.79	24.00
		5720	20.04	15.94	24.00
		5720	12.64	8.05	24.00
5745	19.93	14.89	30.00		
5785	19.87	14.92	30.00		
5825	19.86	14.97	30.00		

Note: The relevant measured result has the offset with cable loss already.

Band	Data Rate or Sub-test	Frequency (MHz)	Average power		Limit
			ANT-0	ANT-1	
			dBm	dBm	dBm
802.11n HT40	13.5M	5190	18.96	14.93	24.00
		5230	19.35	14.84	24.00
		5270	19.23	14.87	24.00
		5310	17.78	14.92	24.00
		5510	19.36	15.83	24.00
		5550	19.24	15.79	24.00
		5590	19.27	15.83	24.00
		5630	19.25	15.80	24.00
		5670	19.23	15.88	24.00
		5710	19.50	15.95	24.00
		5710	7.03	3.23	30.00
		5755	19.89	14.92	30.00
		5795	19.83	14.98	30.00
802.11ac VHT80	29.3M	5210	18.88	14.92	24.00
		5290	17.76	14.89	24.00
		5530	19.27	15.93	24.00
		5610	19.33	15.82	24.00
		5690	19.35	15.99	24.00
		5690	3.38	-0.47	24.00
		5775	19.94	14.86	30.00
802.11ac VHT160	58.5M	5250	16.47	14.76	24.00
		5570	15.91	15.72	24.00

Note: The relevant measured result has the offset with cable loss already.

Band	Data Rate or Sub-test	Frequency (MHz)	Average power		Limit
			ANT-0	ANT-1	
			dBm	dBm	dBm
802.11ax HE20	MCS 0	5180	19.37	14.84	24.00
		5200	19.35	14.98	24.00
		5220	19.13	14.92	24.00
		5240	19.30	14.94	24.00
		5260	19.34	14.76	24.00
		5280	19.35	14.82	24.00
		5300	19.28	14.79	24.00
		5320	19.09	14.89	24.00
		5500	19.42	15.86	24.00
		5520	13.13	13.05	24.00
		5540	15.76	15.56	24.00
		5560	18.86	15.82	24.00
		5580	19.24	15.62	24.00
		5600	19.32	15.74	24.00
		5620	19.23	15.63	24.00
		5640	19.25	15.74	24.00
		5660	13.38	13.27	24.00
		5680	16.12	15.72	24.00
		5700	19.22	15.70	24.00
		5720	19.36	15.77	24.00
		5720	12.39	8.75	30.00
		5745	19.62	14.83	30.00
5765	19.60	14.80	30.00		
5785	19.89	14.79	30.00		
5825	19.88	14.83	30.00		
802.11ax HE40	MCS0	5190	19.40	14.98	24.00
		5230	19.42	14.78	24.00
		5270	19.38	14.79	24.00
		5310	17.27	14.85	24.00
		5510	19.17	15.93	24.00
		5550	19.01	15.87	24.00
		5590	19.46	15.86	24.00
		5630	19.04	15.89	24.00
		5670	19.02	15.84	24.00
		5710	19.31	15.96	24.00
		5710	7.59	4.29	30.00
		5755	19.54	14.89	30.00
5795	19.83	14.82	30.00		

Note: The relevant measured result has the offset with cable loss already.

Band	Data Rate or Sub-test	Frequency (MHz)	Average power		Limit
			ANT-0	ANT-1	
			dBm	dBm	dBm
802.11ax HE80	MCS 0	5210	19.33	14.89	24.00
		5290	17.81	14.89	24.00
		5530	19.05	15.94	24.00
		5610	19.34	15.83	24.00
		5690	19.42	15.95	24.00
		5690	3.91	0.26	24.00
		5775	19.62	14.61	30.00
802.11ax HE160	MCS 0	5250	16.09	14.68	24.00
		5570	15.01	15.06	24.00

Note: The relevant measured result has the offset with cable loss already.

**MIMO**

Band	Data Rate or Sub-test	Frequency (MHz)	Average power			Limit
			ANT-0	ANT-1	Total	
			dBm	dBm	dBm	dBm
802.11n HT20	13M	5180	12.33	12.25	15.30	24.00
		5200	12.39	12.31	15.36	24.00
		5220	12.32	12.26	15.30	24.00
		5240	12.06	11.95	15.02	24.00
		5260	17.63	14.56	19.37	24.00
		5280	17.72	14.55	19.43	24.00
		5300	17.59	14.49	19.32	24.00
		5320	17.69	14.78	19.48	24.00
		5500	18.33	15.65	20.20	24.00
		5580	18.41	15.72	20.28	24.00
		5600	18.47	15.86	20.37	24.00
		5620	18.42	15.81	20.32	24.00
		5660	18.39	15.80	20.30	24.00
		5700	18.34	15.72	20.23	24.00
		5720	16.82	15.66	19.29	24.00
		5720	9.42	7.98	11.77	24.00
		5745	19.66	14.56	20.83	30.00
		5785	19.72	14.55	20.87	30.00
5825	19.83	14.61	20.97	30.00		
802.11n HT40	27M	5190	13.77	13.66	16.73	24.00
		5230	12.74	12.39	15.58	24.00
		5270	18.96	14.61	20.32	24.00
		5310	15.92	14.56	18.30	24.00
		5510	17.55	15.01	19.47	24.00
		5550	19.15	15.38	20.67	24.00
		5590	19.27	15.42	20.77	24.00
		5630	19.17	15.40	20.69	24.00
		5670	19.18	15.81	20.82	24.00
		5710	17.53	15.51	19.65	24.00
		5710	4.96	2.90	7.06	30.00
		5755	19.52	14.71	20.76	30.00
5795	19.71	14.57	20.87	30.00		
802.11ac VHT80	58.6M	5210	14.07	13.92	17.01	24.00
		5290	16.32	14.72	18.60	24.00
		5530	17.72	15.63	19.81	24.00
		5610	19.11	15.42	20.66	24.00
		5690	17.61	15.60	19.73	24.00
		5690	1.07	-0.97	3.18	24.00
		5775	18.20	14.65	19.79	30.00

Note: The relevant measured result has the offset with cable loss already.

Band	Date Rate or Sub-test	Frequency (MHz)	Average power			Limit
			ANT-0	ANT-1	Total	
			dBm	dBm	dBm	
802.11ac VHT160	117M	5250	12.55	12.51	15.54	24.00
		5570	13.82	13.79	16.82	24.00
802.11ax HE20	MCS 0	5180	12.56	12.51	15.55	24.00
		5200	12.56	12.42	15.50	24.00
		5220	12.48	12.37	15.44	24.00
		5240	12.61	12.24	15.44	24.00
		5260	18.56	14.58	20.02	24.00
		5280	18.60	14.66	20.07	24.00
		5300	18.53	14.50	19.98	24.00
		5320	15.91	14.63	18.33	24.00
		5500	18.54	15.81	20.40	24.00
		5520	10.41	10.33	13.38	24.00
		5540	13.16	13.01	16.10	24.00
		5560	15.67	15.54	18.62	24.00
		5580	18.56	15.53	20.31	24.00
		5600	18.62	15.63	20.39	24.00
		5620	18.60	15.59	20.36	24.00
		5640	18.51	15.48	20.26	24.00
		5660	10.33	10.03	13.19	24.00
		5680	13.27	13.01	16.15	24.00
		5700	16.37	15.45	18.94	24.00
		5720	16.81	15.65	19.28	24.00
5720	9.50	8.34	11.97	30.00		
5745	19.41	14.68	20.67	30.00		
5765	17.71	14.52	19.41	30.00		
5785	19.77	14.60	20.92	30.00		
5825	19.86	14.66	21.01	30.00		
802.11ax HE40	MCS0	5190	14.66	14.35	17.52	24.00
		5230	12.39	14.37	16.50	24.00
		5270	19.02	14.76	20.40	24.00
		5310	15.66	14.58	18.16	24.00
		5510	17.16	15.59	19.46	24.00
		5550	17.01	15.55	19.35	24.00
		5590	19.31	15.51	20.82	24.00
		5630	19.01	15.61	20.64	24.00
		5670	18.51	15.37	20.23	24.00
		5710	17.52	15.52	19.64	24.00
		5710	5.36	3.27	7.45	30.00
		5755	19.52	14.73	20.76	30.00
		5795	19.79	14.71	20.96	30.00

Note: The relevant measured result has the offset with cable loss already.



Band	Data Rate or Sub-test	Frequency (MHz)	Average power			Limit
			ANT-0	ANT-1	Total	
			dBm	dBm	dBm	dBm
802.11ax HE80	MCS 0	5210	13.84	13.67	16.77	24.00
		5290	15.27	14.79	18.05	24.00
		5530	17.24	15.64	19.52	24.00
		5610	19.27	15.54	20.80	24.00
		5690	17.62	15.60	19.74	24.00
		5690	1.67	-0.39	3.77	24.00
		5775	18.18	14.27	19.66	30.00
802.11ax HE160	MCS 0	5250	12.81	12.86	15.85	24.00
		5570	15.00	14.64	17.83	24.00


Note: The relevant measured result has the offset with cable loss already.

### 5.2. Radiated Emission Measurement

SISO


Below 1 GHz

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	Transmit mode		
Remark:			

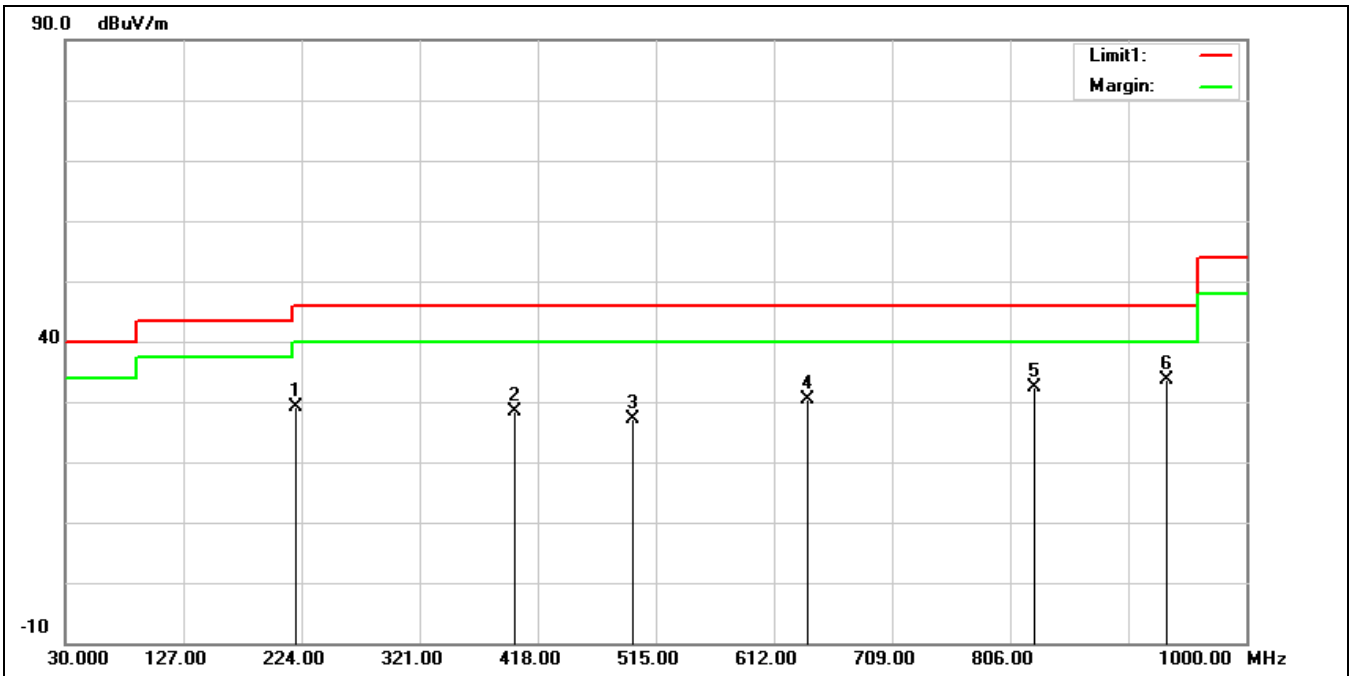

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	219.1500	39.06	-10.03	29.03	46.00	-16.97	QP
2	399.5700	32.76	-4.33	28.43	46.00	-17.57	QP
3	496.5700	29.35	-2.19	27.16	46.00	-18.84	QP
4	640.1300	29.72	0.58	30.30	46.00	-15.70	QP
5	826.3700	28.18	4.27	32.45	46.00	-13.55	QP
6*	935.0100	27.52	5.99	33.51	46.00	-12.49	QP

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	Transmit mode		
Remark:			

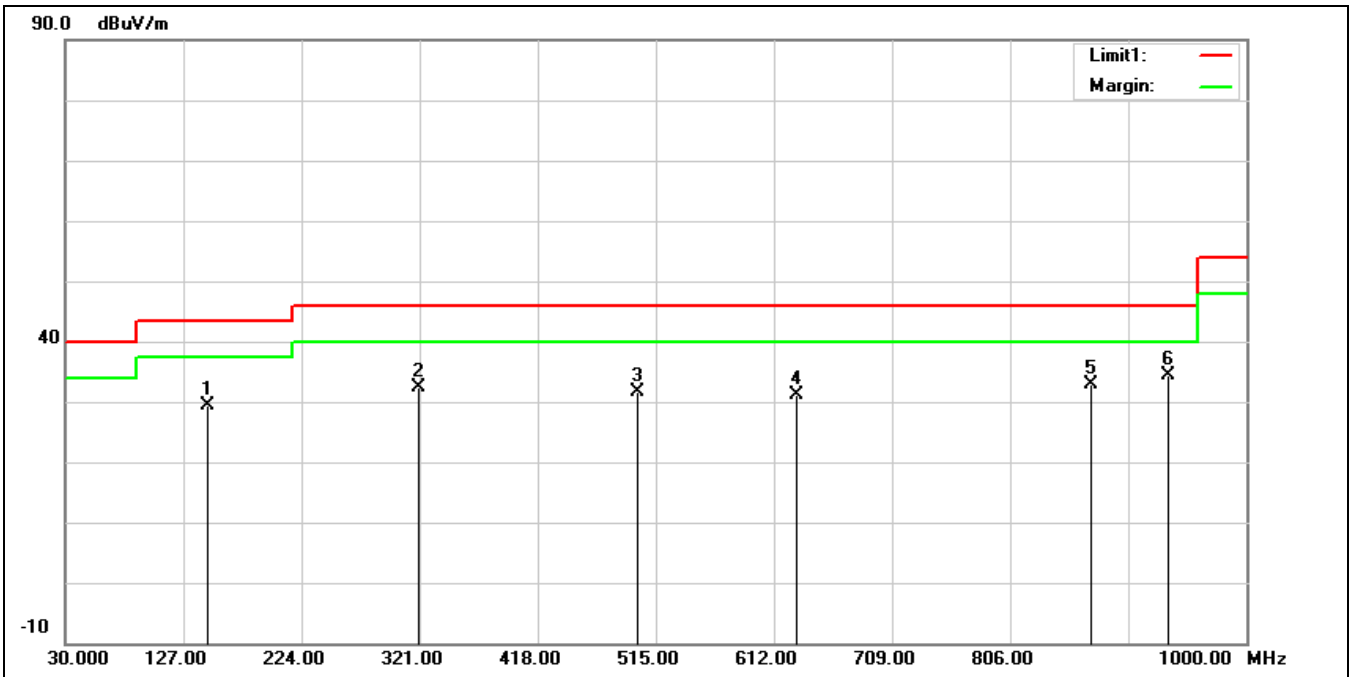


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	147.3700	36.81	-7.40	29.41	43.50	-14.09	QP
2	320.0300	38.73	-6.37	32.36	46.00	-13.64	QP
3	499.4800	33.70	-2.13	31.57	46.00	-14.43	QP
4	630.4300	30.68	0.48	31.16	46.00	-14.84	QP
5	871.9600	27.79	5.00	32.79	46.00	-13.21	QP
6*	935.9800	28.33	6.00	34.33	46.00	-11.67	QP

**Harmonic**


Above 1 GHz

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5180 MHz		
Remark:			

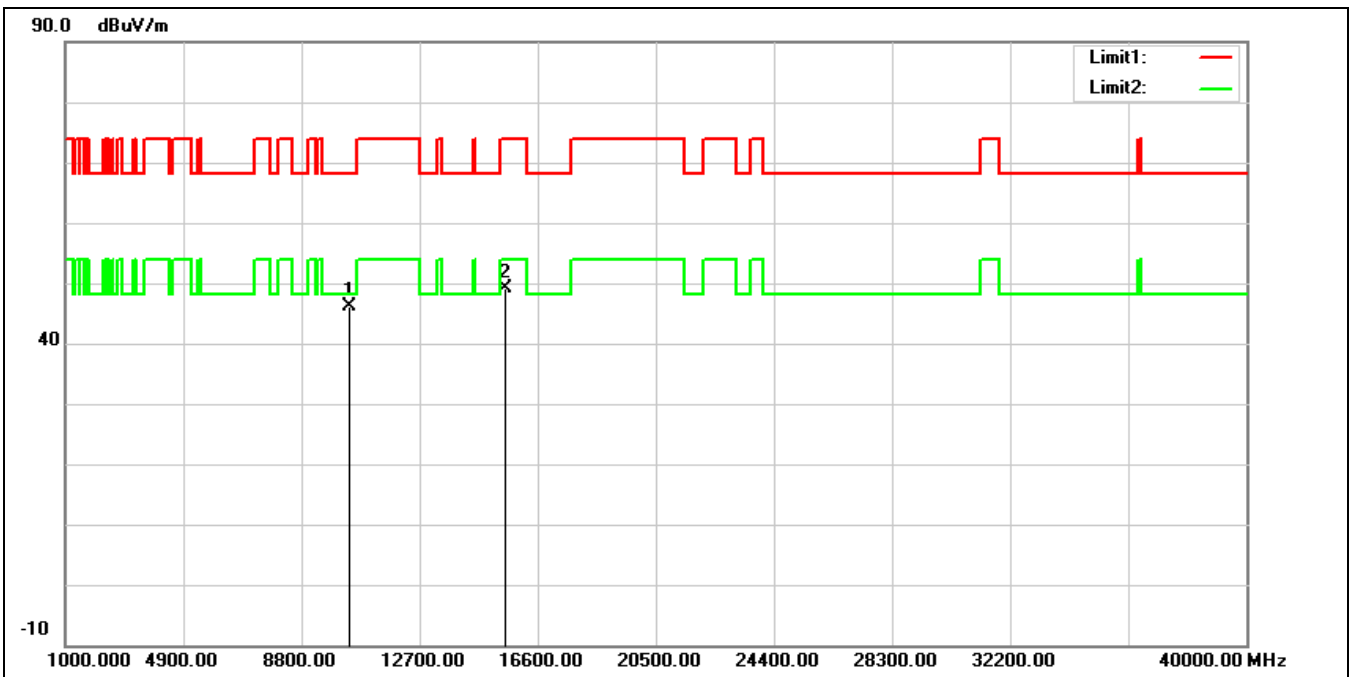


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	32.06	13.99	46.05	68.20	-22.15	peak
2	15540.000	31.82	17.31	49.13	74.00	-24.87	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5180 MHz		
Remark:			

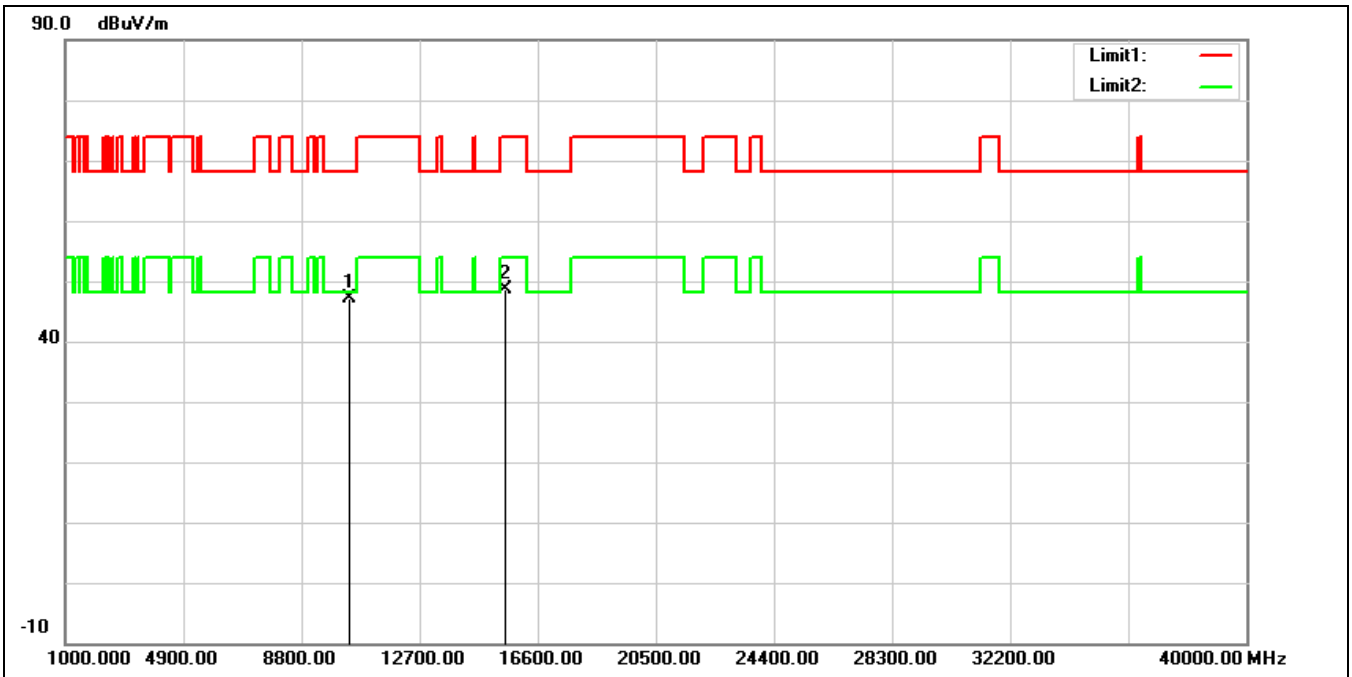


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	33.16	13.99	47.15	68.20	-21.05	peak
2	15540.000	31.42	17.31	48.73	74.00	-25.27	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5200 MHz		
Remark:			

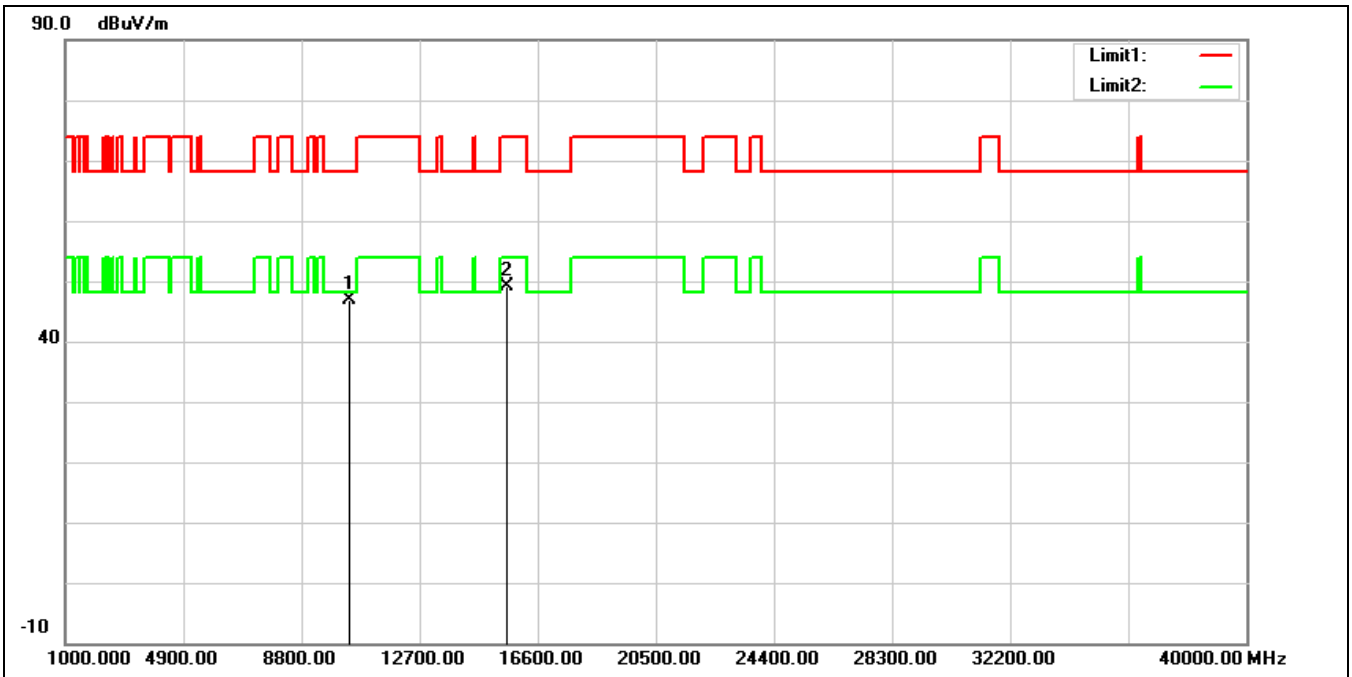


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	32.71	14.10	46.81	68.20	-21.39	peak
2	15600.000	32.04	17.01	49.05	74.00	-24.95	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5200 MHz		
Remark:			

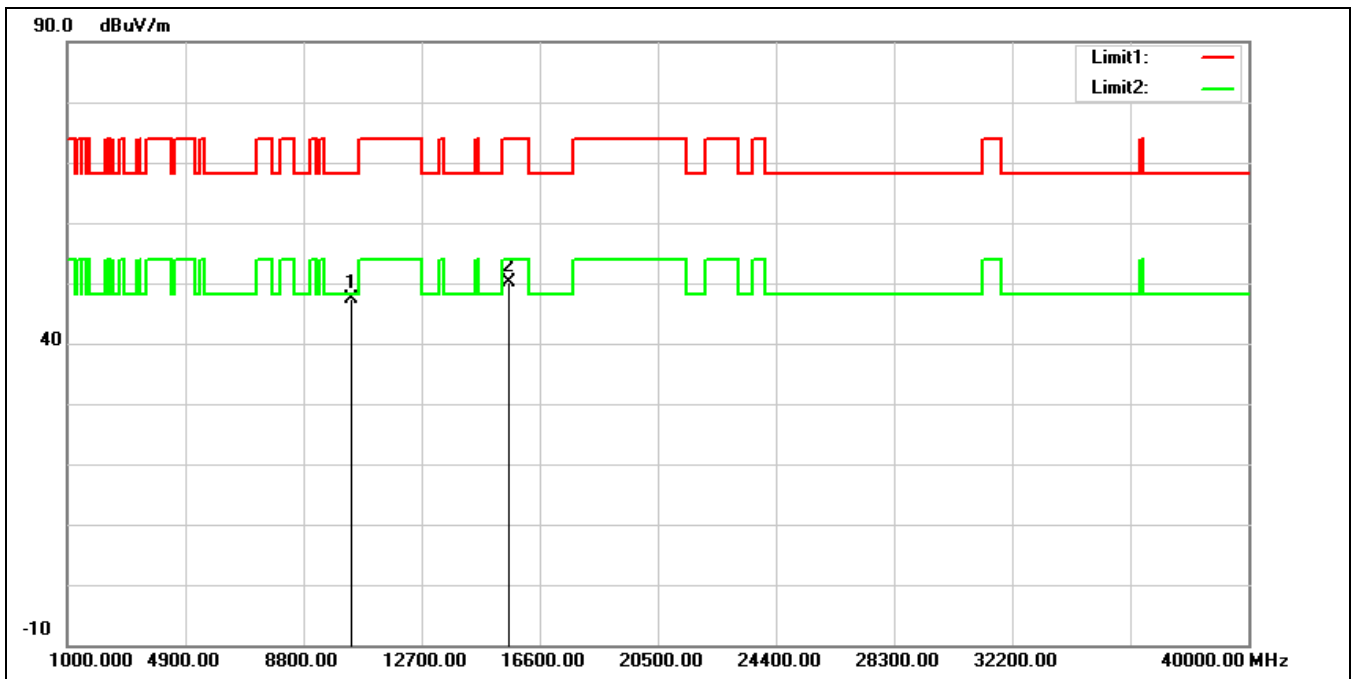

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	33.16	14.10	47.26	68.20	-20.94	peak
2	15600.000	33.09	17.01	50.10	74.00	-23.90	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5240 MHz		
Remark:			

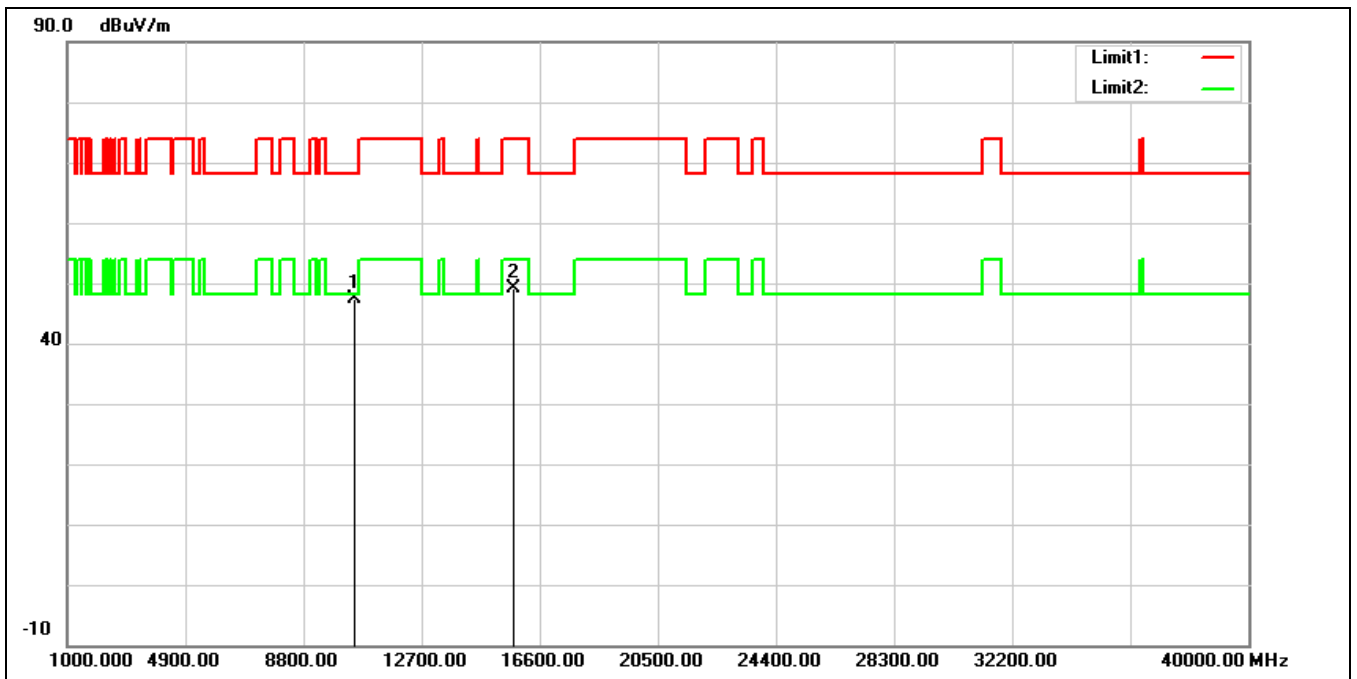

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	32.77	14.54	47.31	68.20	-20.89	peak
2	15720.000	31.86	17.34	49.20	74.00	-24.80	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5240 MHz		
Remark:			

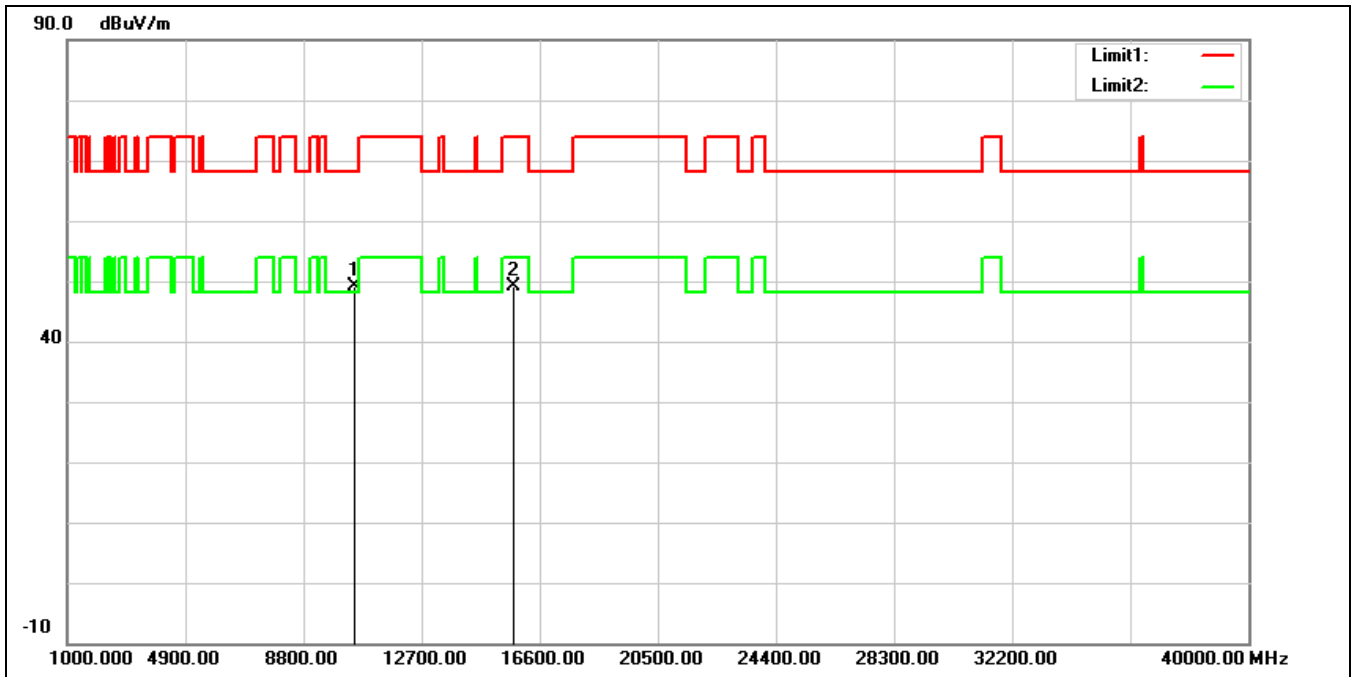


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	34.58	14.54	49.12	68.20	-19.08	peak
2	15720.000	31.71	17.34	49.05	74.00	-24.95	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5260 MHz		
Remark:			

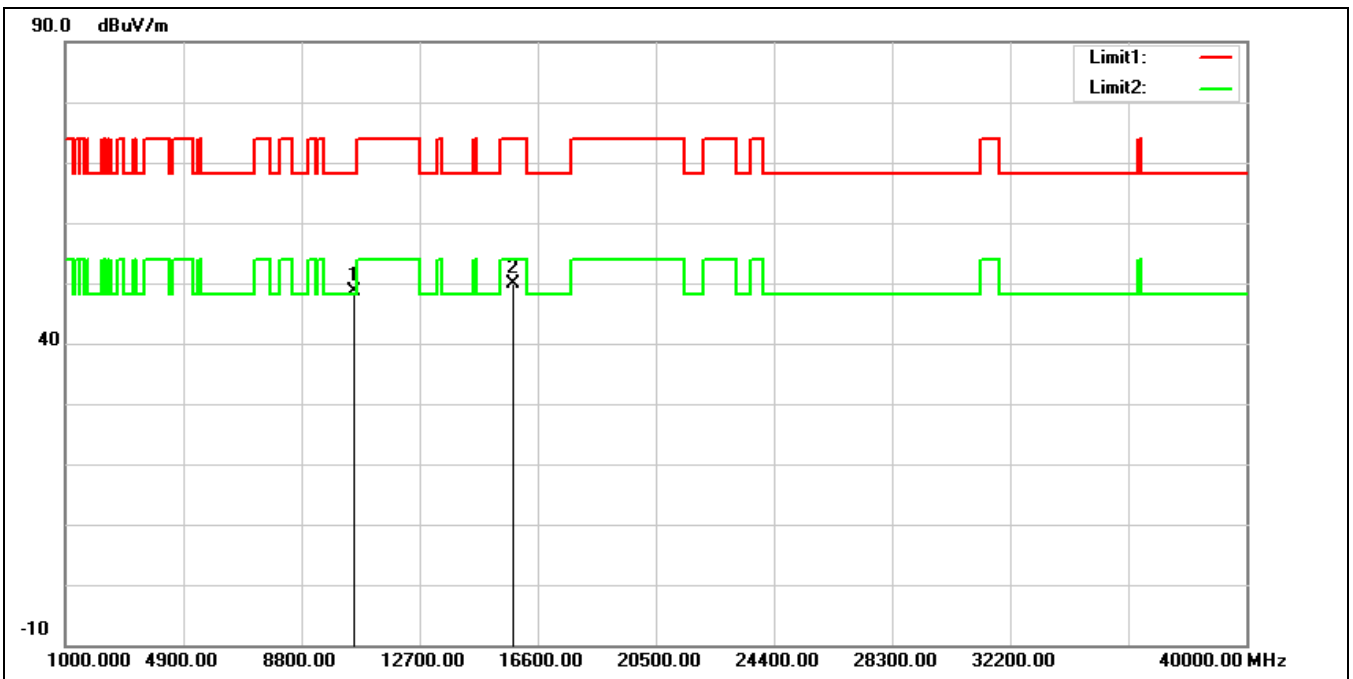


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	33.95	14.60	48.55	68.20	-19.65	peak
2	15780.000	32.76	17.10	49.86	74.00	-24.14	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5260 MHz		
Remark:			

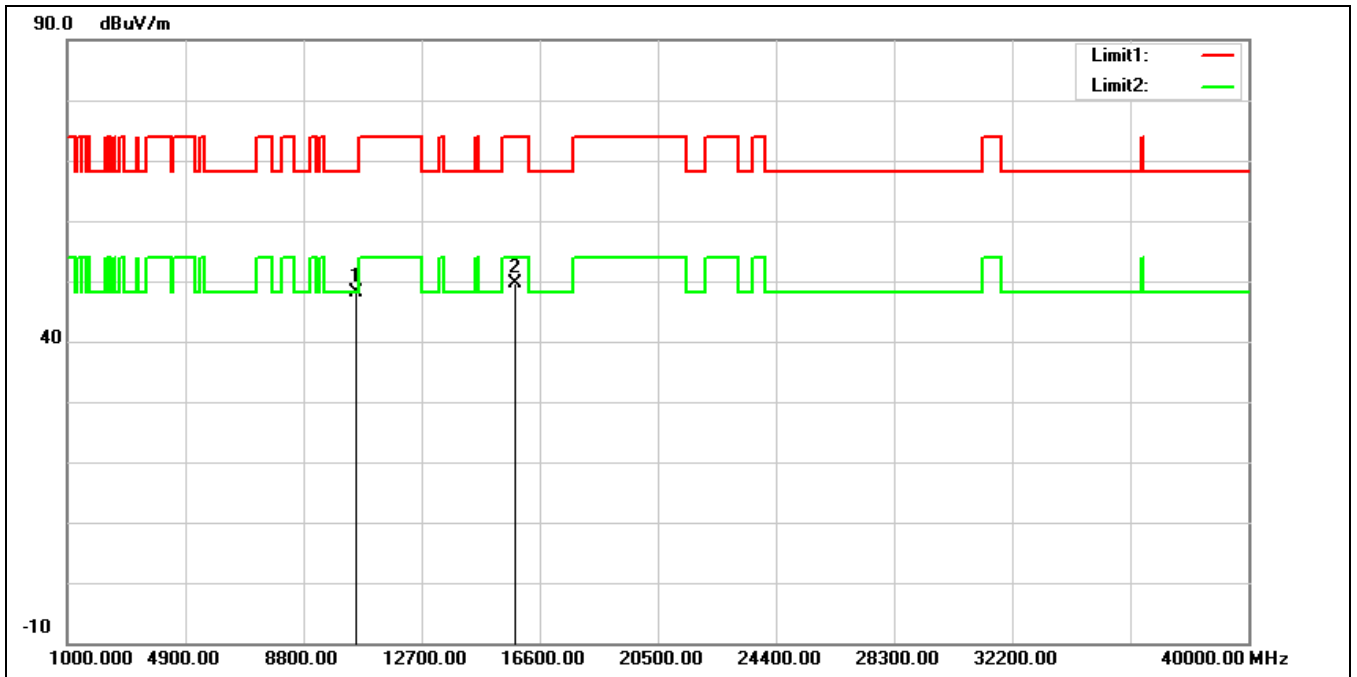


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	33.45	14.60	48.05	68.20	-20.15	peak
2	15780.000	32.42	17.10	49.52	74.00	-24.48	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5280 MHz		
Remark:			

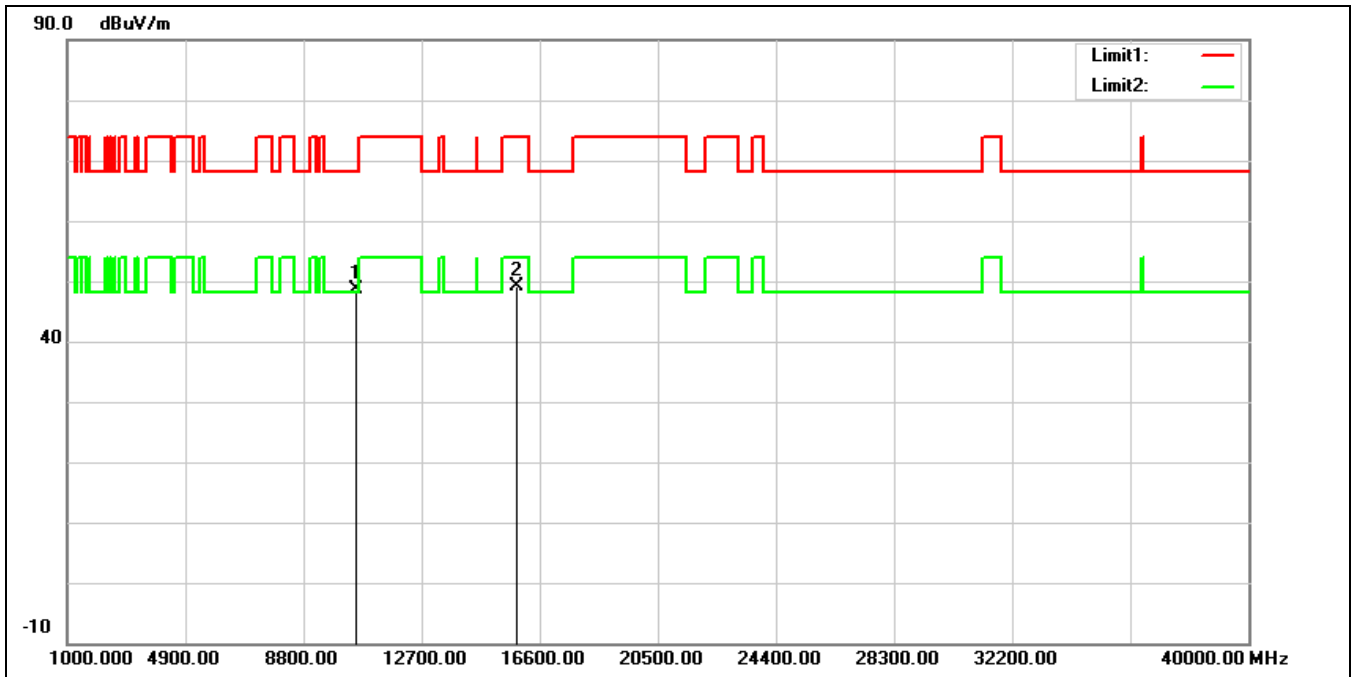


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	34.17	14.48	48.65	68.20	-19.55	peak
2	15840.000	32.21	16.90	49.11	74.00	-24.89	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5280 MHz		
Remark:			

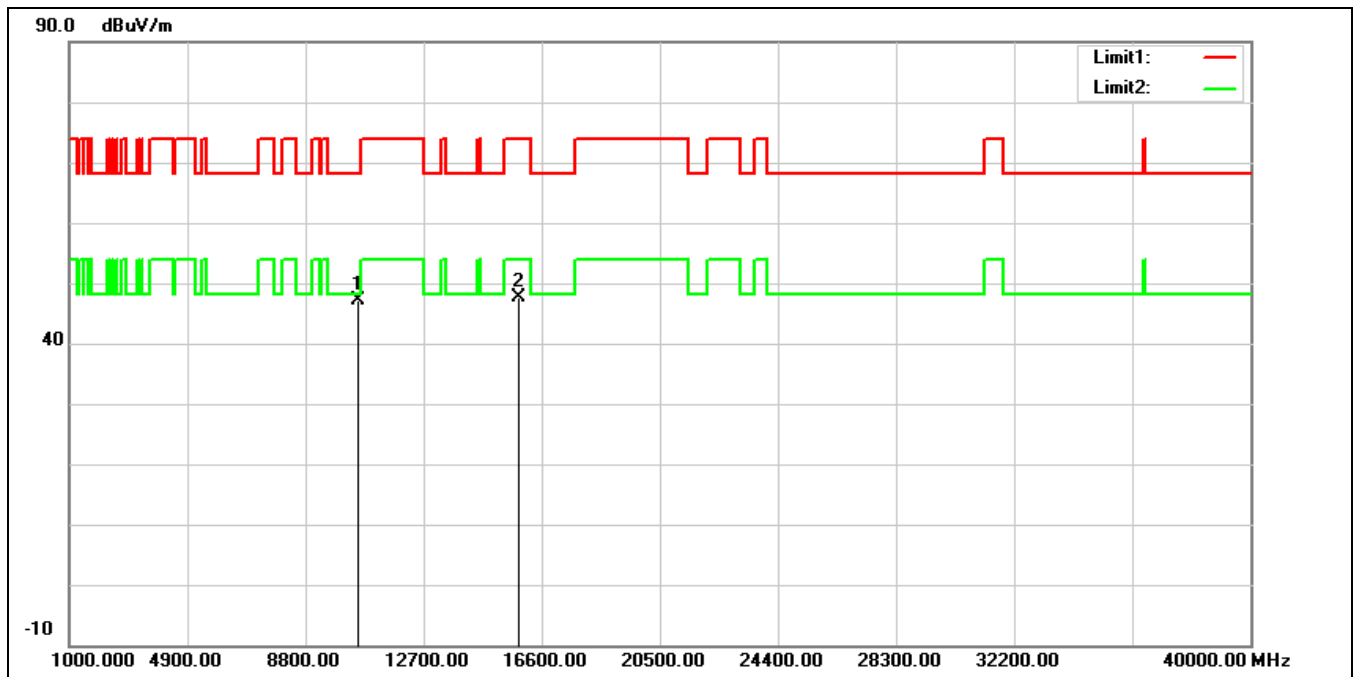


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	32.55	14.48	47.03	68.20	-21.17	peak
2	15840.000	30.68	16.90	47.58	74.00	-26.42	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5320 MHz		
Remark:			

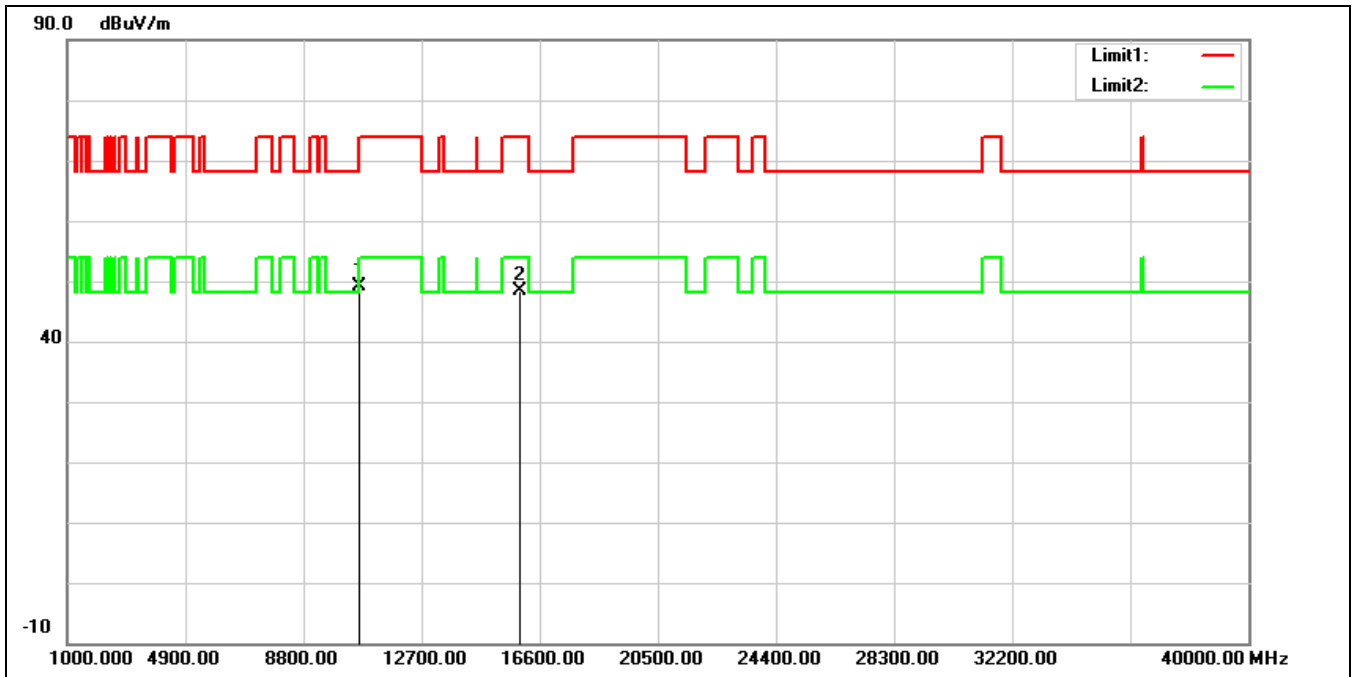


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10640.000	34.73	14.41	49.14	74.00	-24.86	peak
2	15960.000	31.73	16.55	48.28	74.00	-25.72	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5320 MHz		
Remark:			

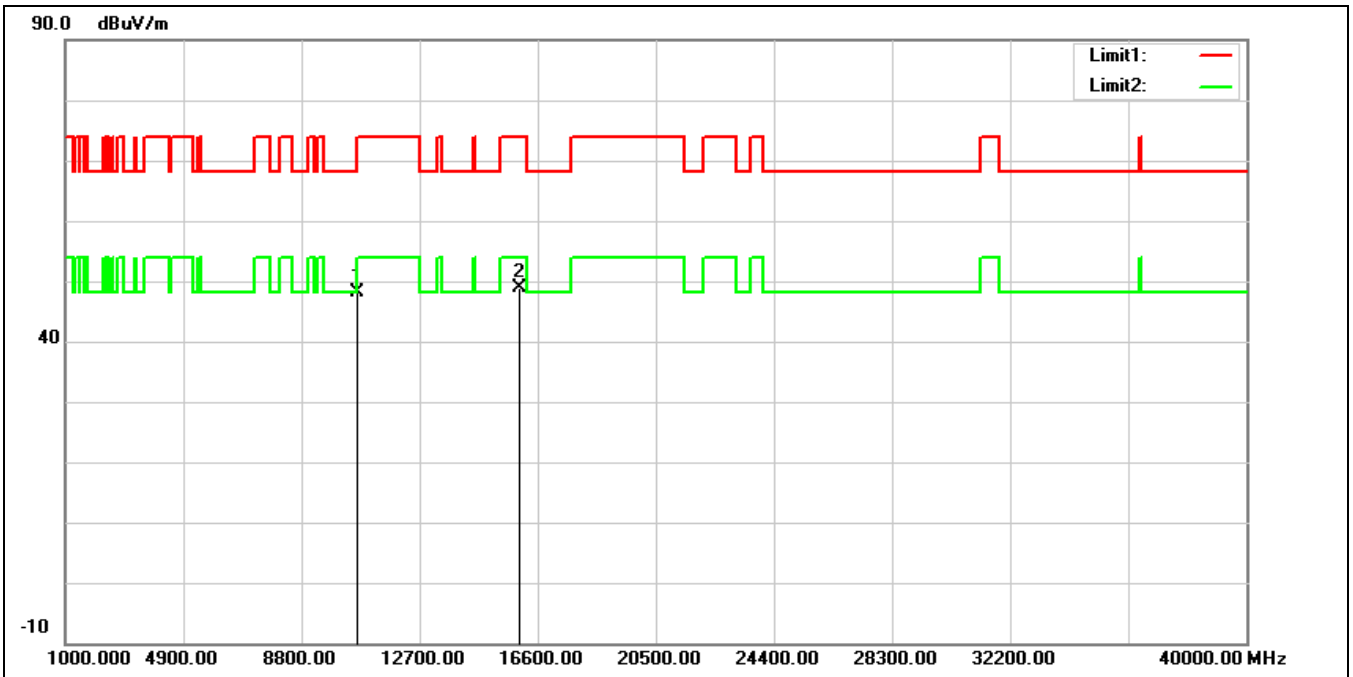

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	33.60	14.41	48.01	74.00	-25.99	peak
2*	15960.000	32.25	16.55	48.80	74.00	-25.20	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

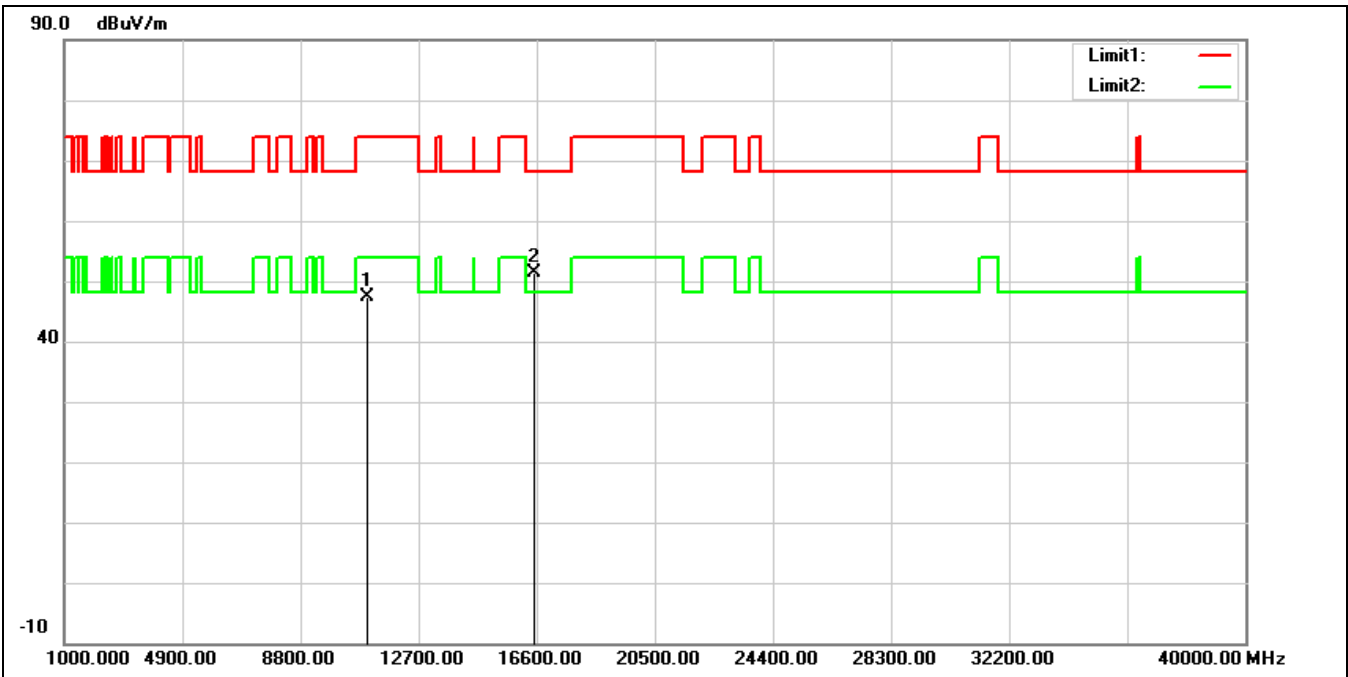

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.63	14.73	47.36	74.00	-26.64	peak
2*	16500.000	33.63	17.77	51.40	68.20	-16.80	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5500 MHz		
Remark:			

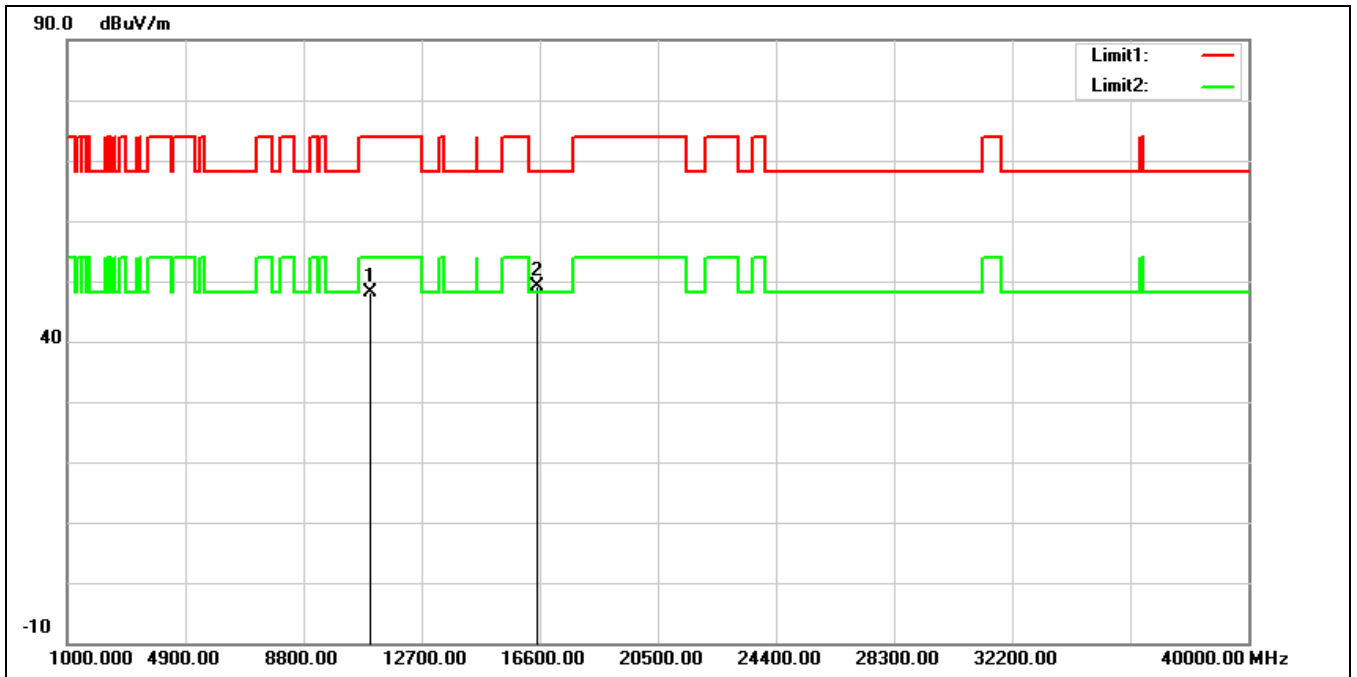


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	33.49	14.73	48.22	74.00	-25.78	peak
2*	16500.000	31.40	17.77	49.17	68.20	-19.03	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5600 MHz		
Remark:			

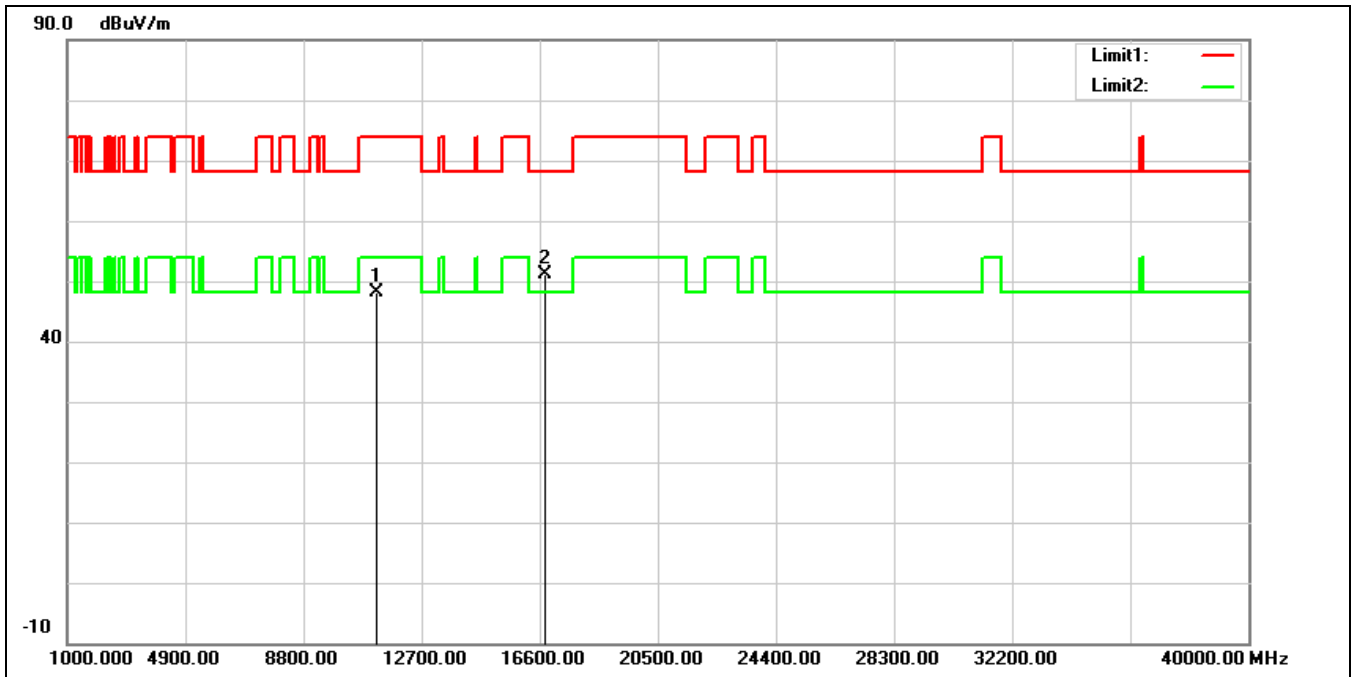


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11200.000	33.33	14.70	48.03	74.00	-25.97	peak
2*	16800.000	32.00	19.20	51.20	68.20	-17.00	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5600 MHz		
Remark:			

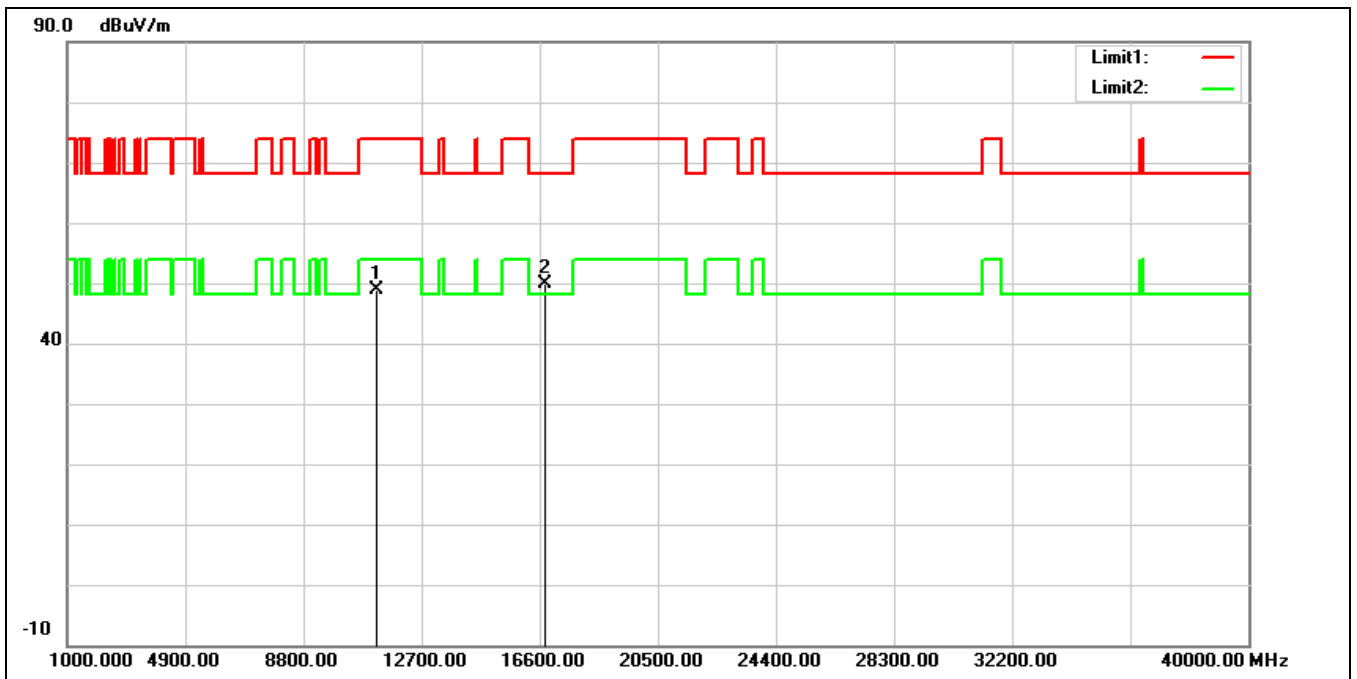


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11200.000	34.13	14.70	48.83	74.00	-25.17	peak
2*	16800.000	30.62	19.20	49.82	68.20	-18.38	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5700 MHz		
Remark:			

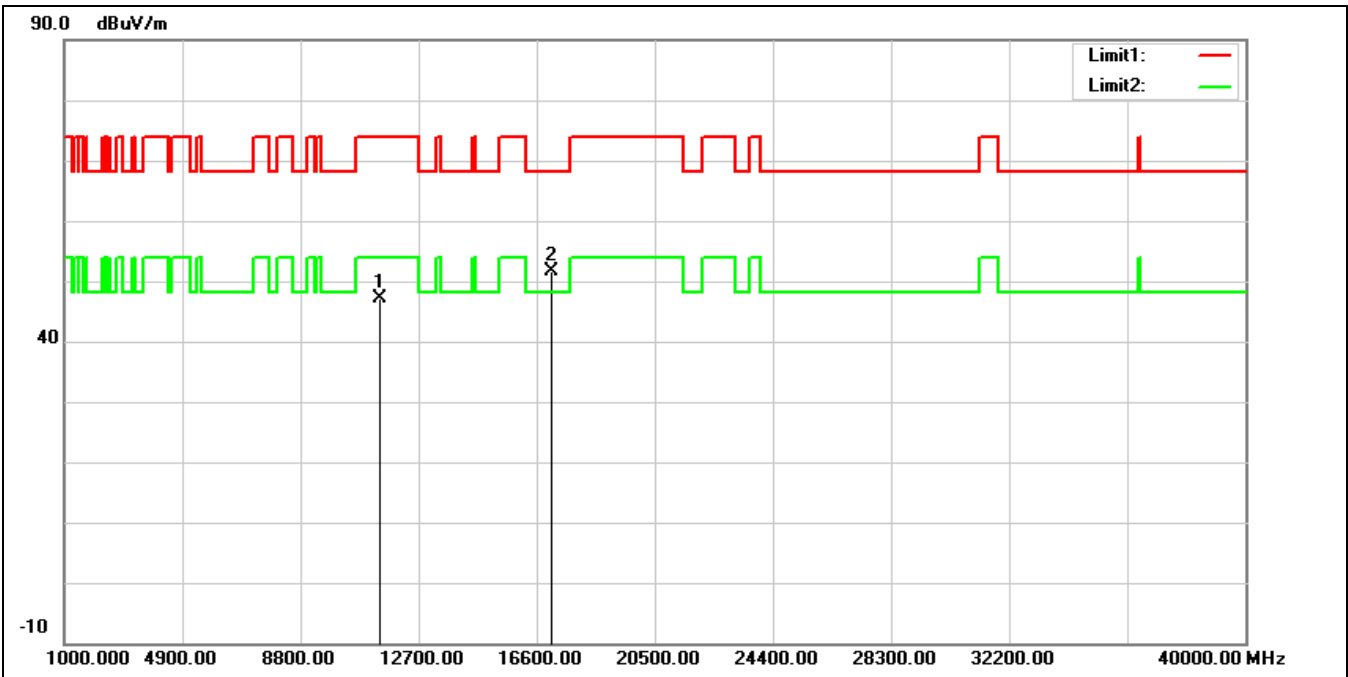


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	31.95	15.07	47.02	74.00	-26.98	peak
2*	17100.000	30.90	20.64	51.54	68.20	-16.66	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5700 MHz		
Remark:			

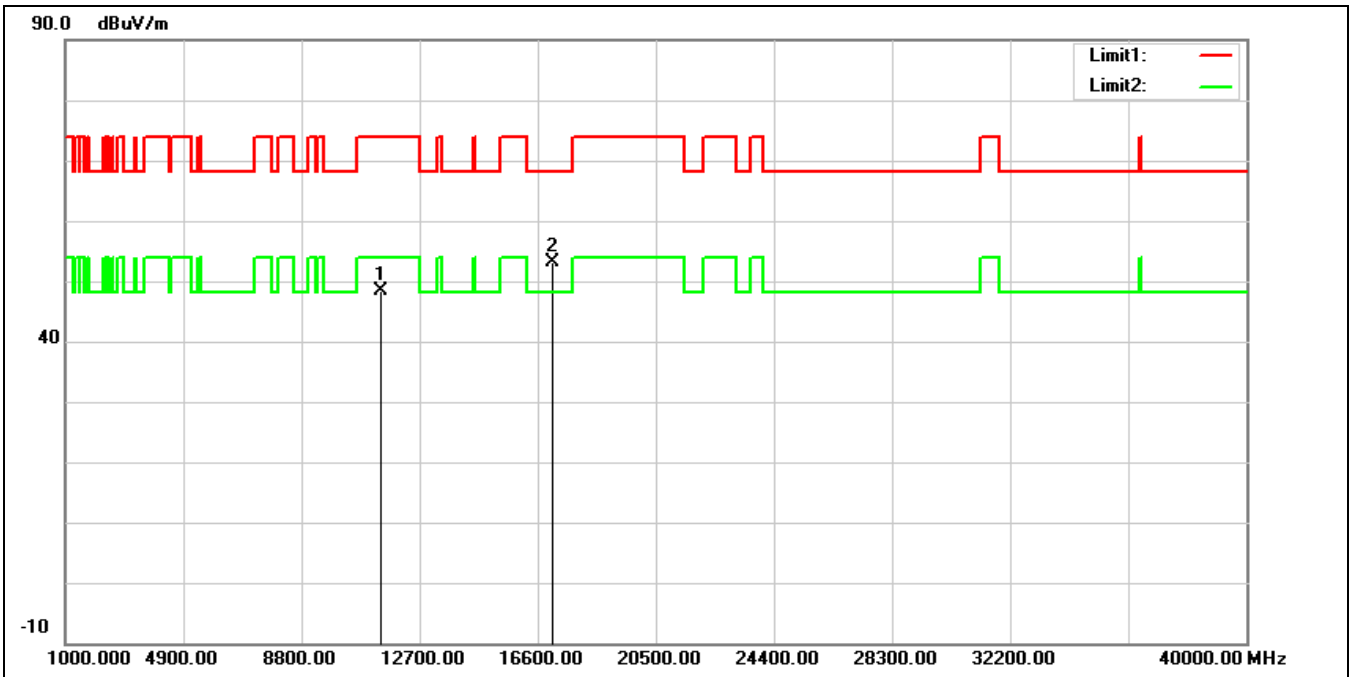


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	33.35	15.07	48.42	74.00	-25.58	peak
2*	17100.000	32.48	20.64	53.12	68.20	-15.08	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5745 MHz		
Remark:			

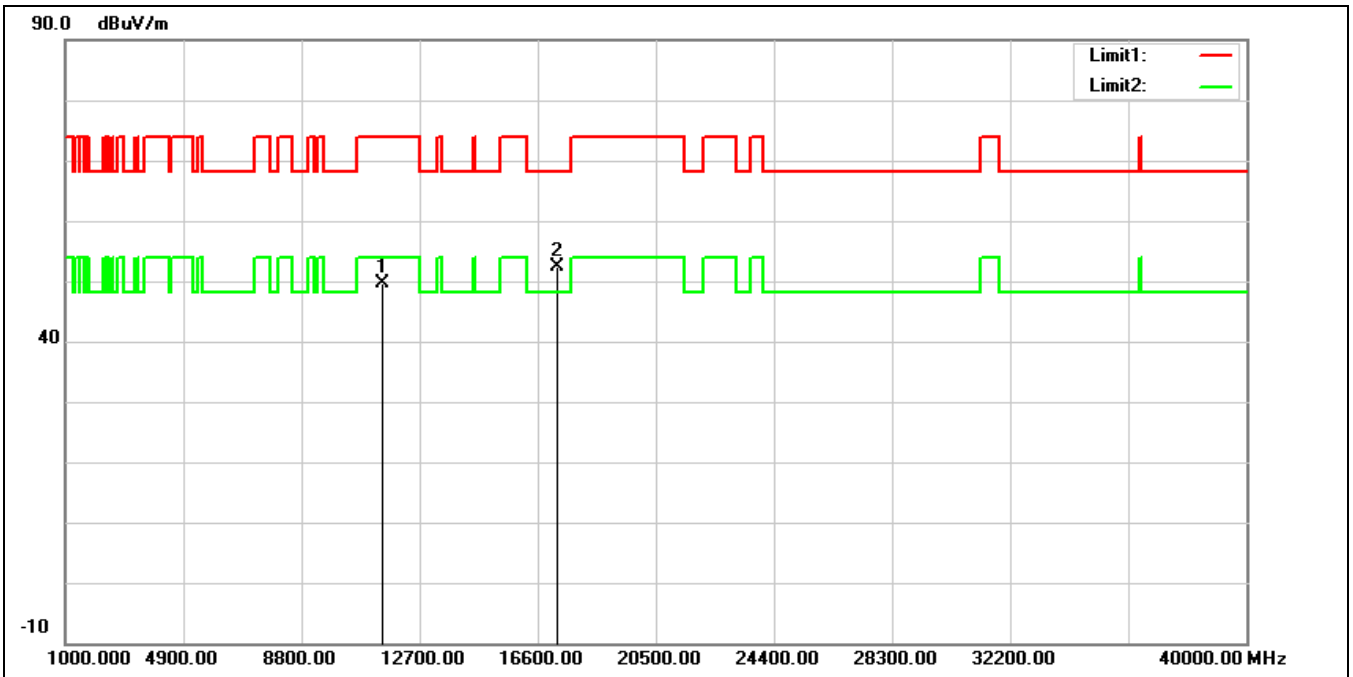


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.13	15.42	49.55	74.00	-24.45	peak
2*	17235.000	30.30	22.01	52.31	68.20	-15.89	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5745 MHz		
Remark:			

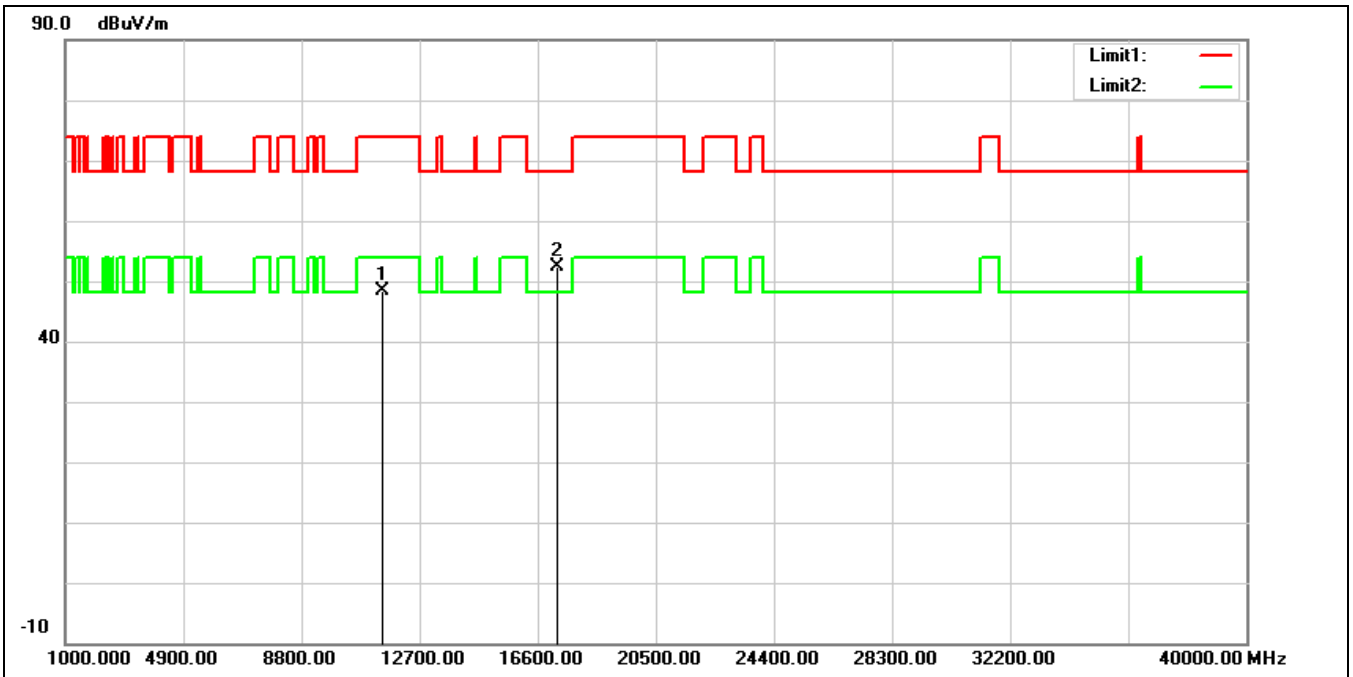

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	33.06	15.42	48.48	74.00	-25.52	peak
2*	17235.000	30.42	22.01	52.43	68.20	-15.77	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5785 MHz		
Remark:			

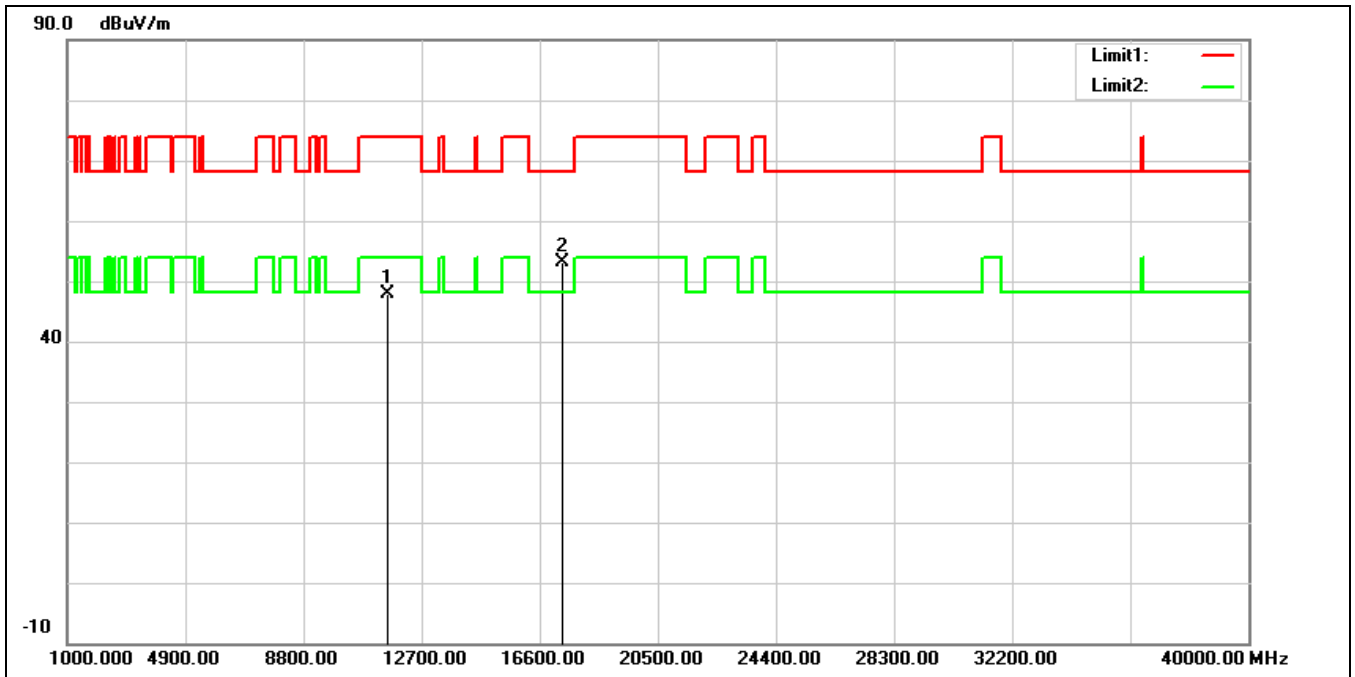

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	32.63	15.21	47.84	74.00	-26.16	peak
2*	17355.000	30.27	22.96	53.23	68.20	-14.97	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5785 MHz		
Remark:			

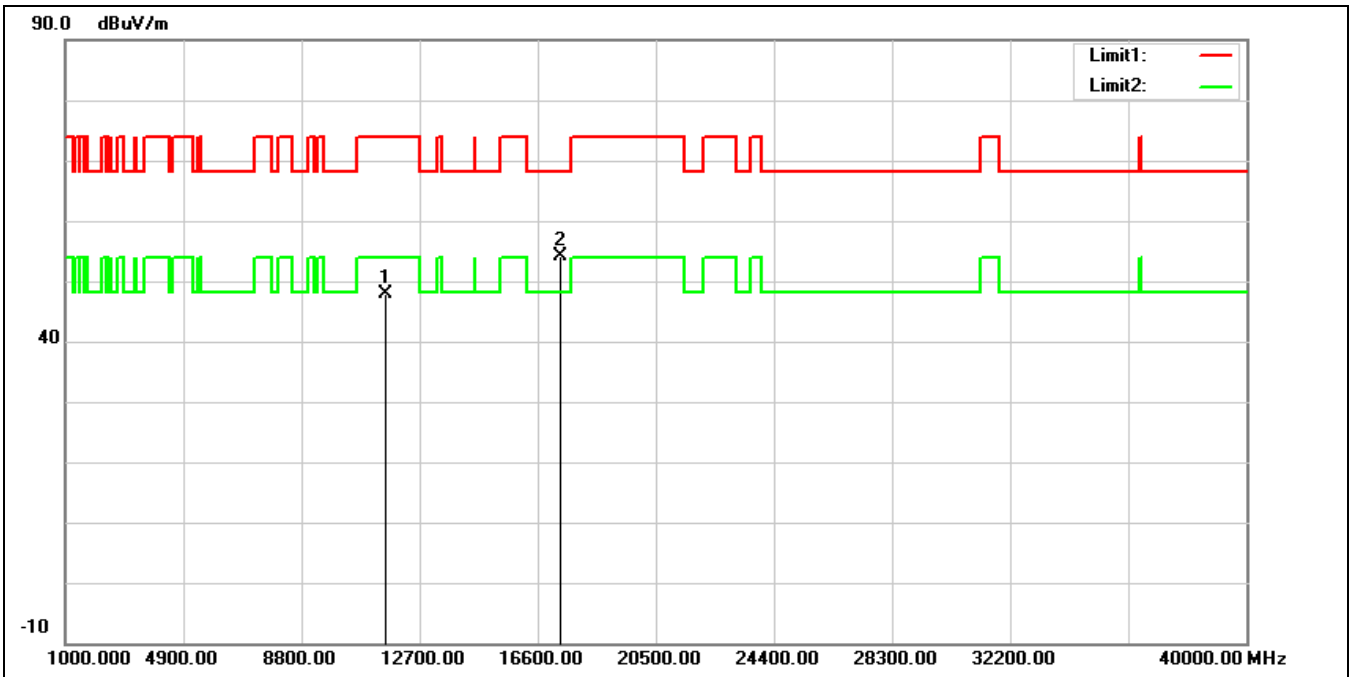


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	32.73	15.21	47.94	74.00	-26.06	peak
2*	17355.000	31.29	22.96	54.25	68.20	-13.95	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5825 MHz		
Remark:			

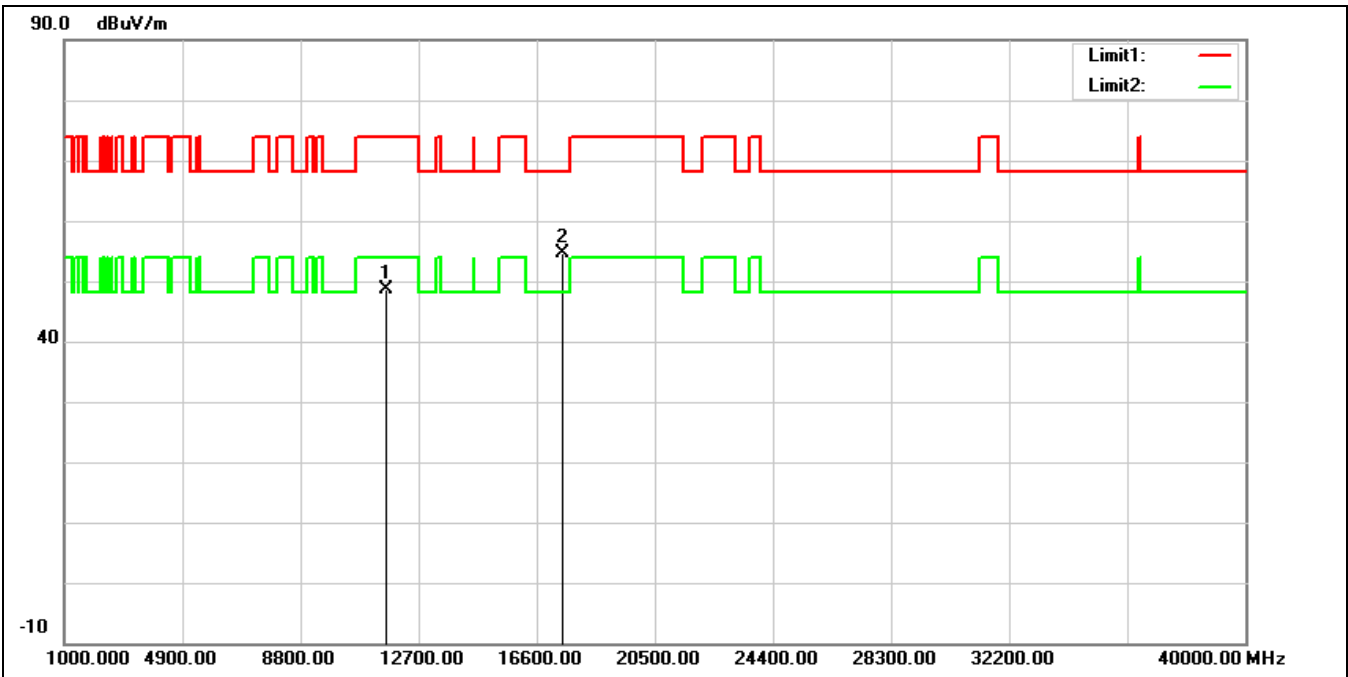


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	33.56	15.04	48.60	74.00	-25.40	peak
2*	17475.000	30.75	23.95	54.70	68.20	-13.50	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5825 MHz		
Remark:			

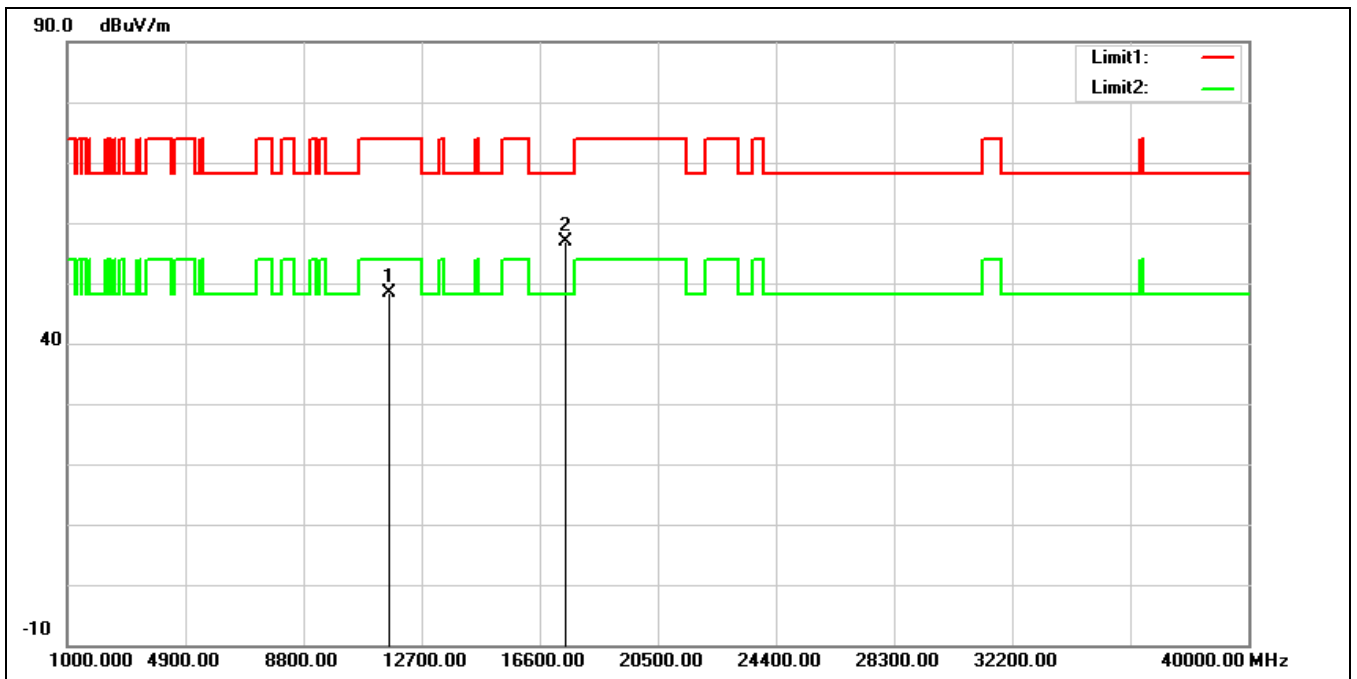


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	33.42	15.04	48.46	74.00	-25.54	peak
2*	17475.000	32.92	23.95	56.87	68.20	-11.33	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

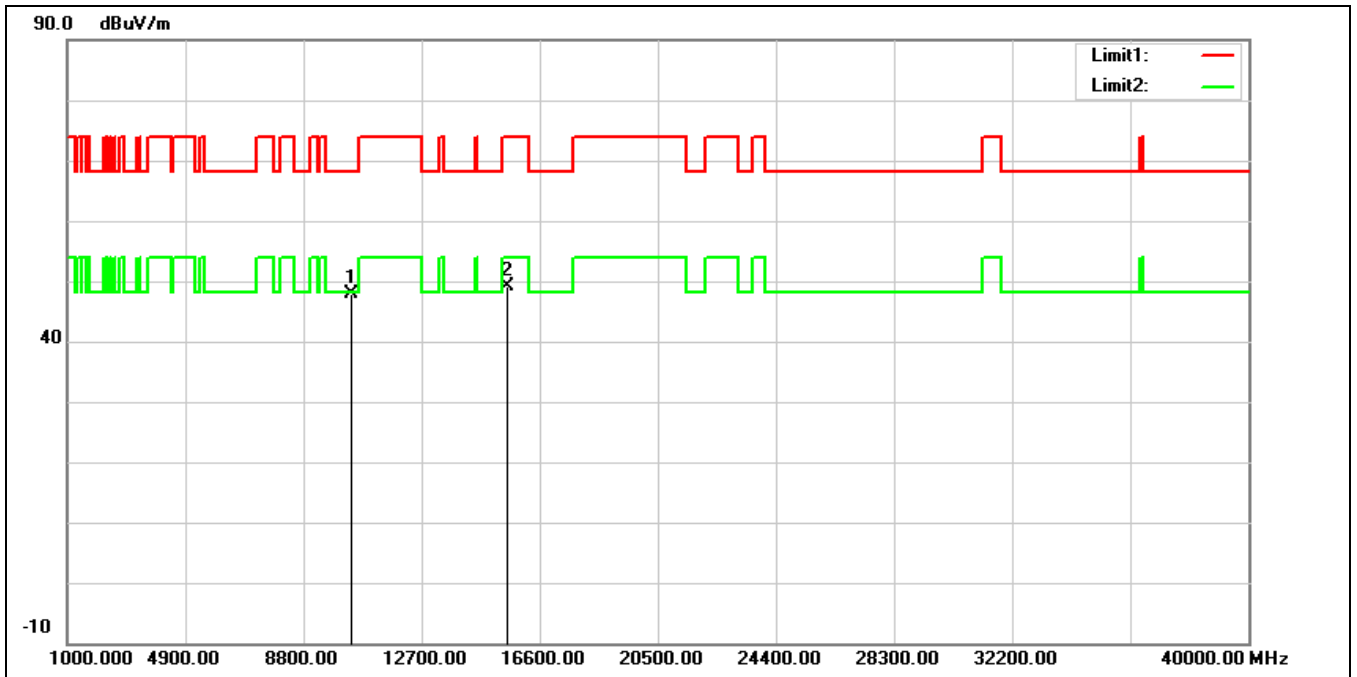


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	33.89	13.99	47.88	68.20	-20.32	peak
2	15540.000	31.77	17.31	49.08	74.00	-24.92	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

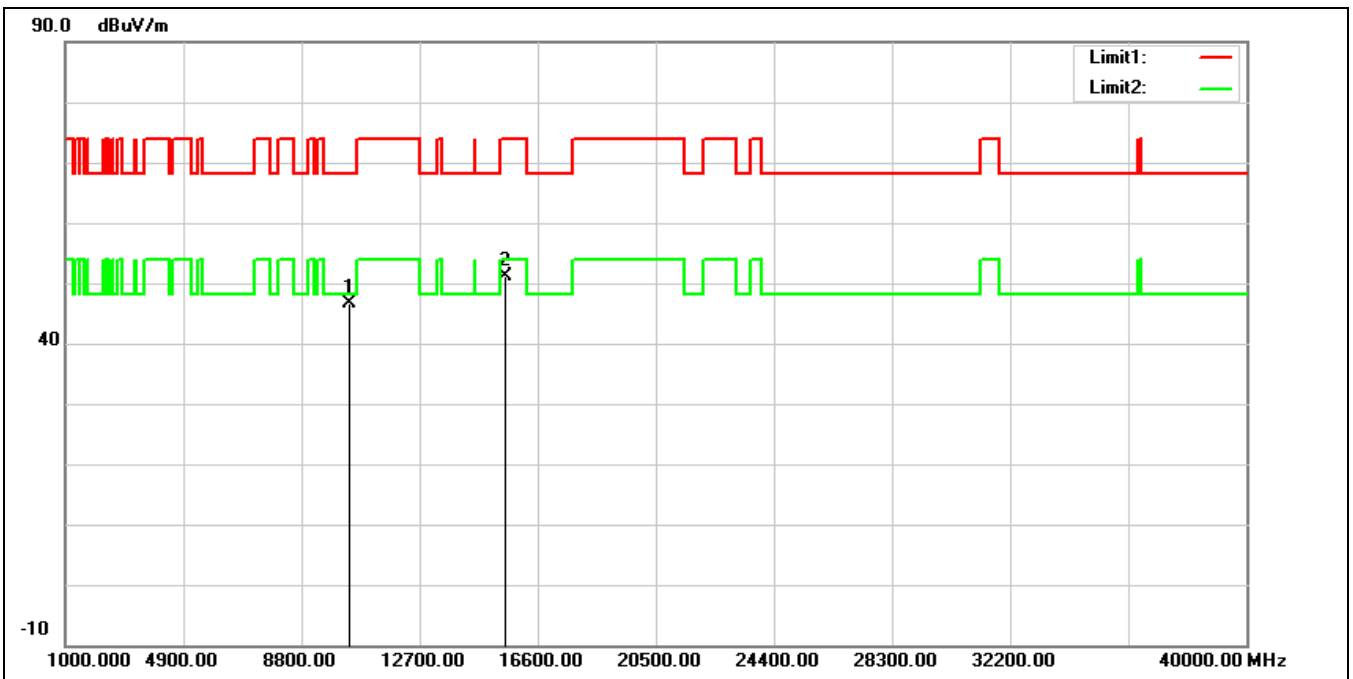


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	32.72	13.99	46.71	68.20	-21.49	peak
2	15540.000	33.71	17.31	51.02	74.00	-22.98	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5200 MHz		
Remark:			

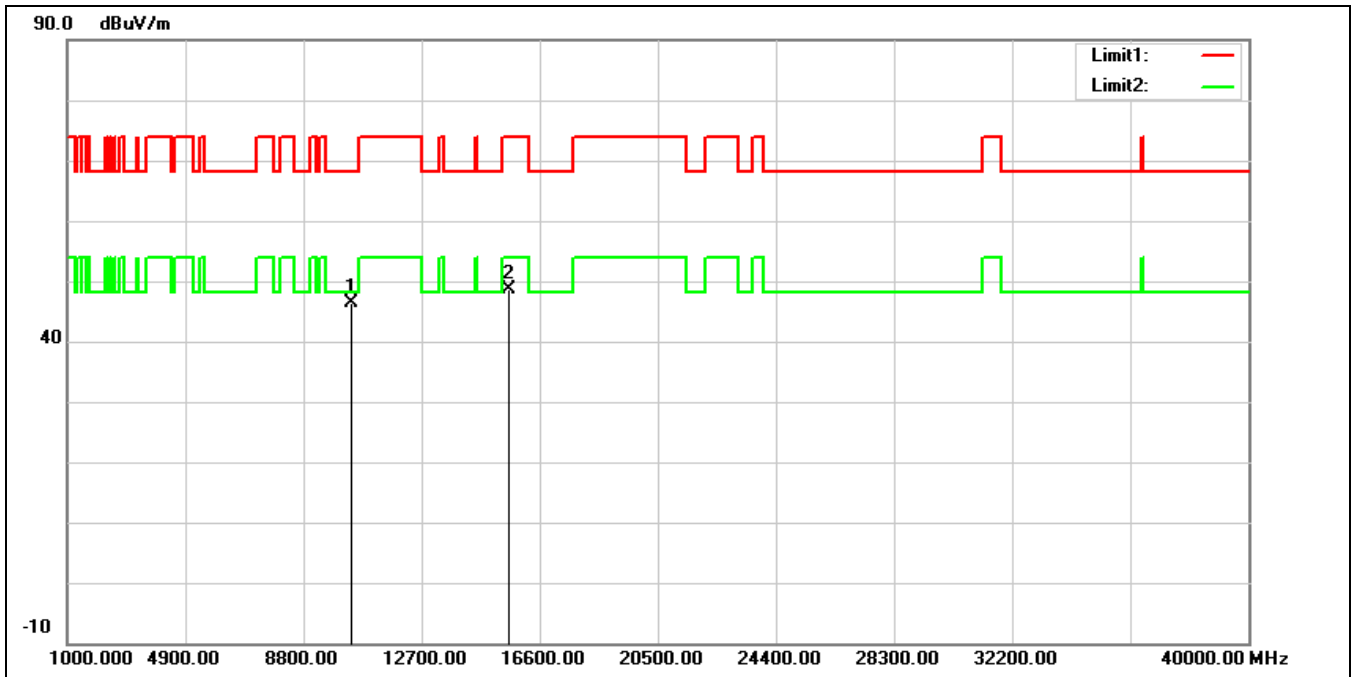


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	32.33	14.10	46.43	68.20	-21.77	peak
2	15600.000	31.66	17.01	48.67	74.00	-25.33	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5200 MHz		
Remark:			

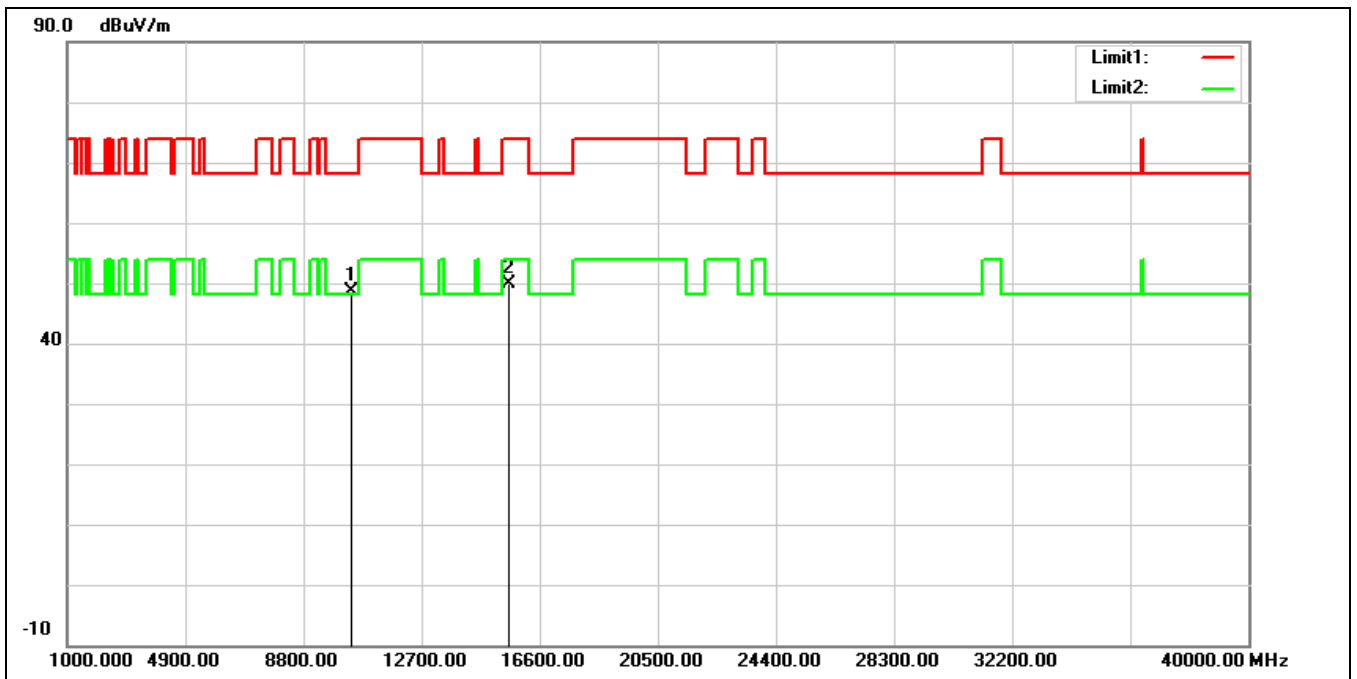

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	34.59	14.10	48.69	68.20	-19.51	peak
2	15600.000	32.75	17.01	49.76	74.00	-24.24	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5240 MHz		
Remark:			

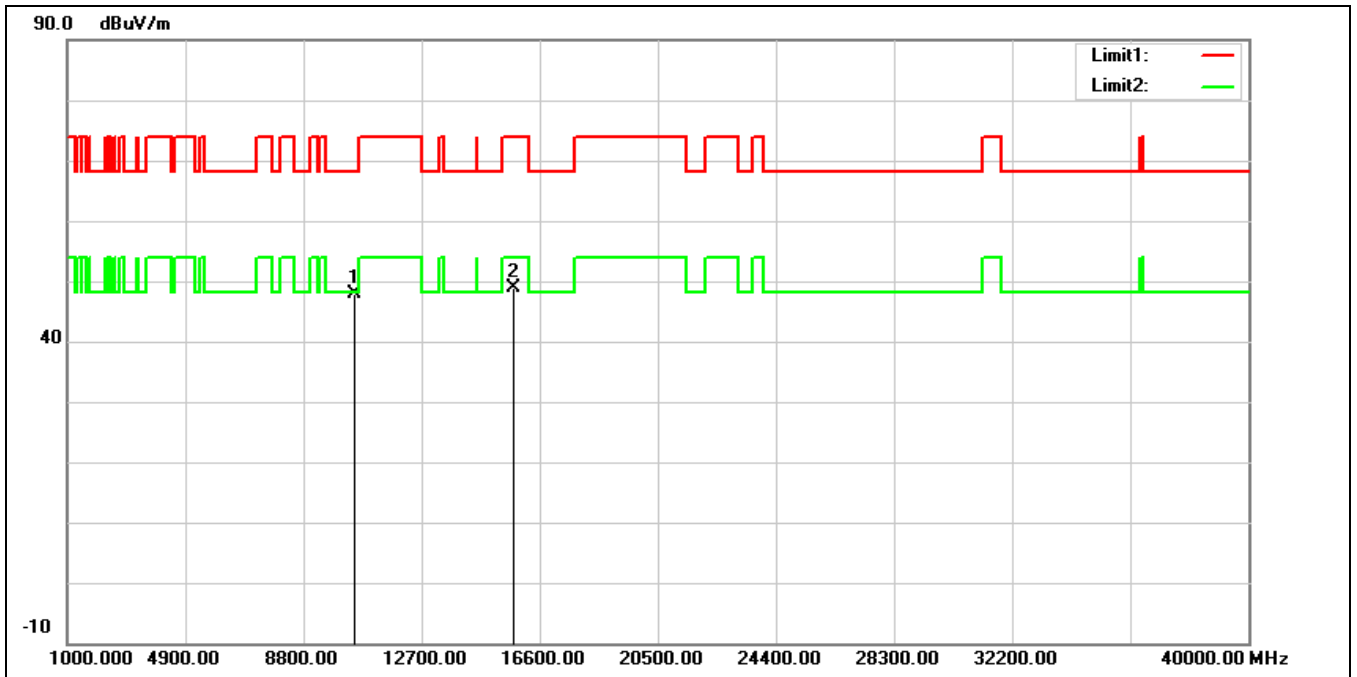

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	33.43	14.54	47.97	68.20	-20.23	peak
2	15720.000	31.51	17.34	48.85	74.00	-25.15	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5240 MHz		
Remark:			

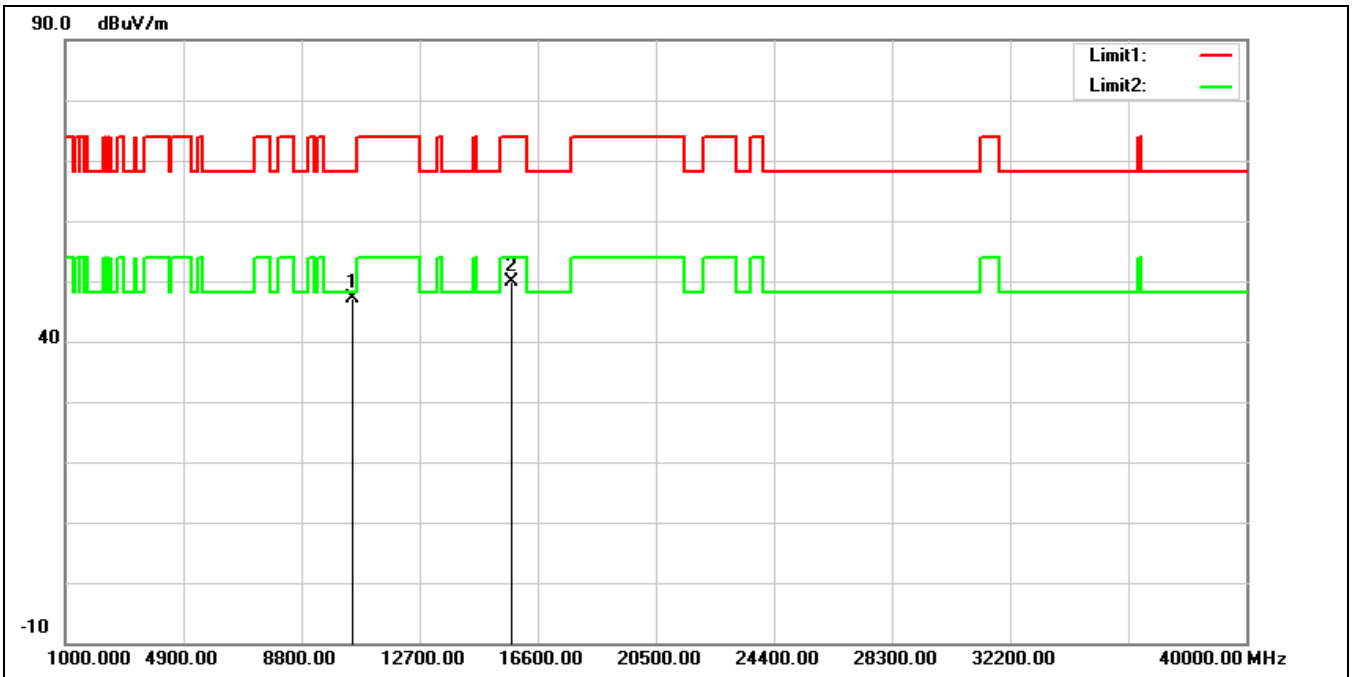


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	32.65	14.54	47.19	68.20	-21.01	peak
2	15720.000	32.60	17.34	49.94	74.00	-24.06	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5260 MHz		
Remark:			

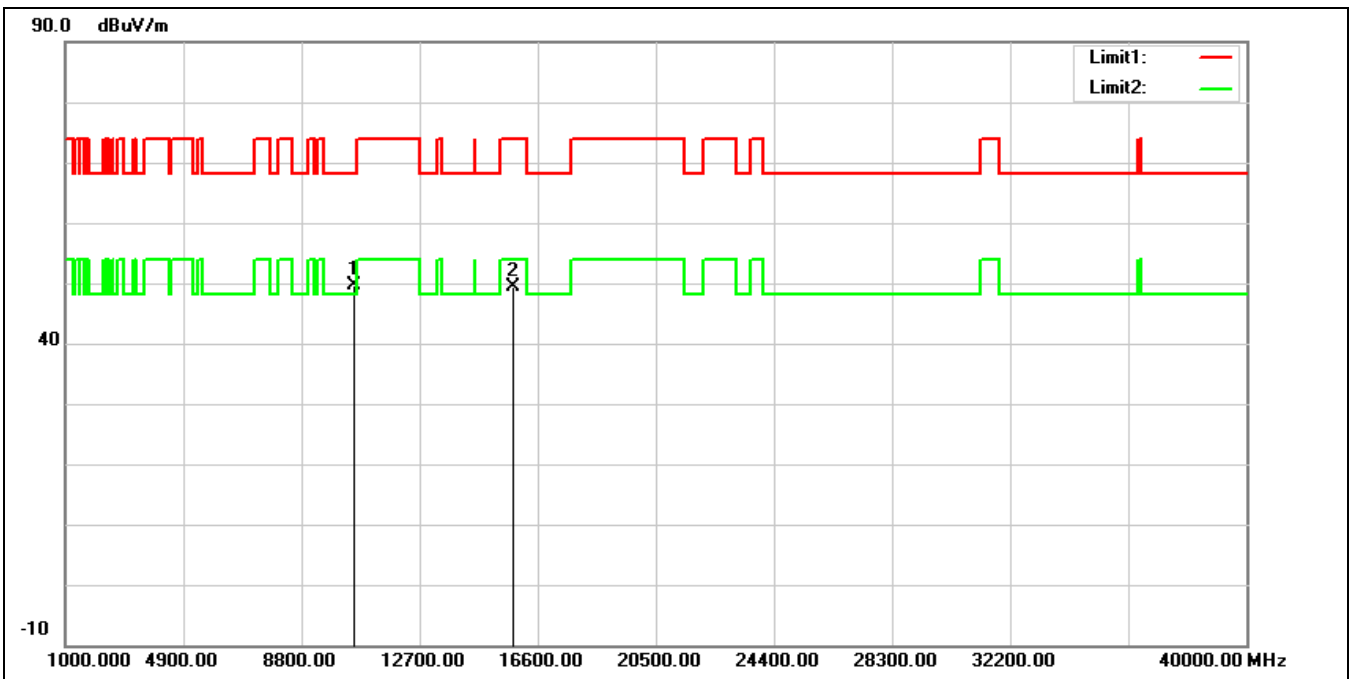


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	35.02	14.60	49.62	68.20	-18.58	peak
2	15780.000	32.38	17.10	49.48	74.00	-24.52	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5260 MHz		
Remark:			

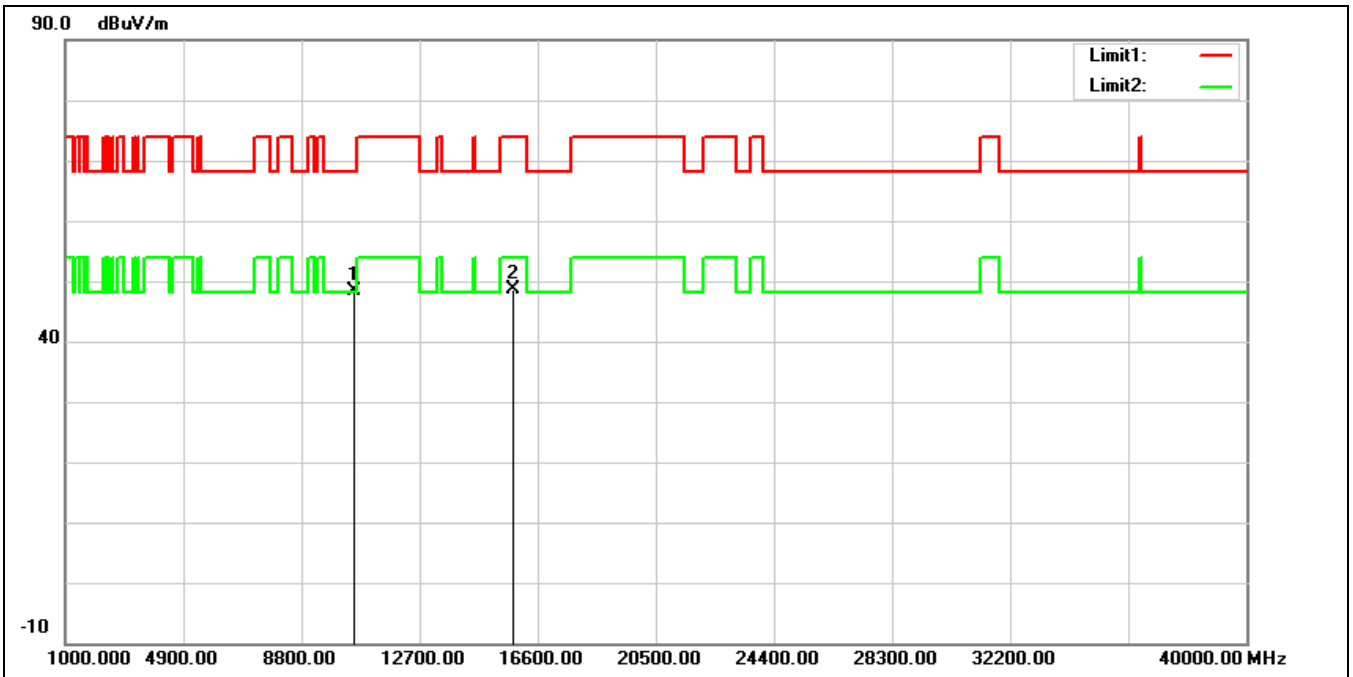


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	33.67	14.60	48.27	68.20	-19.93	peak
2	15780.000	31.47	17.10	48.57	74.00	-25.43	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5280 MHz		
Remark:			

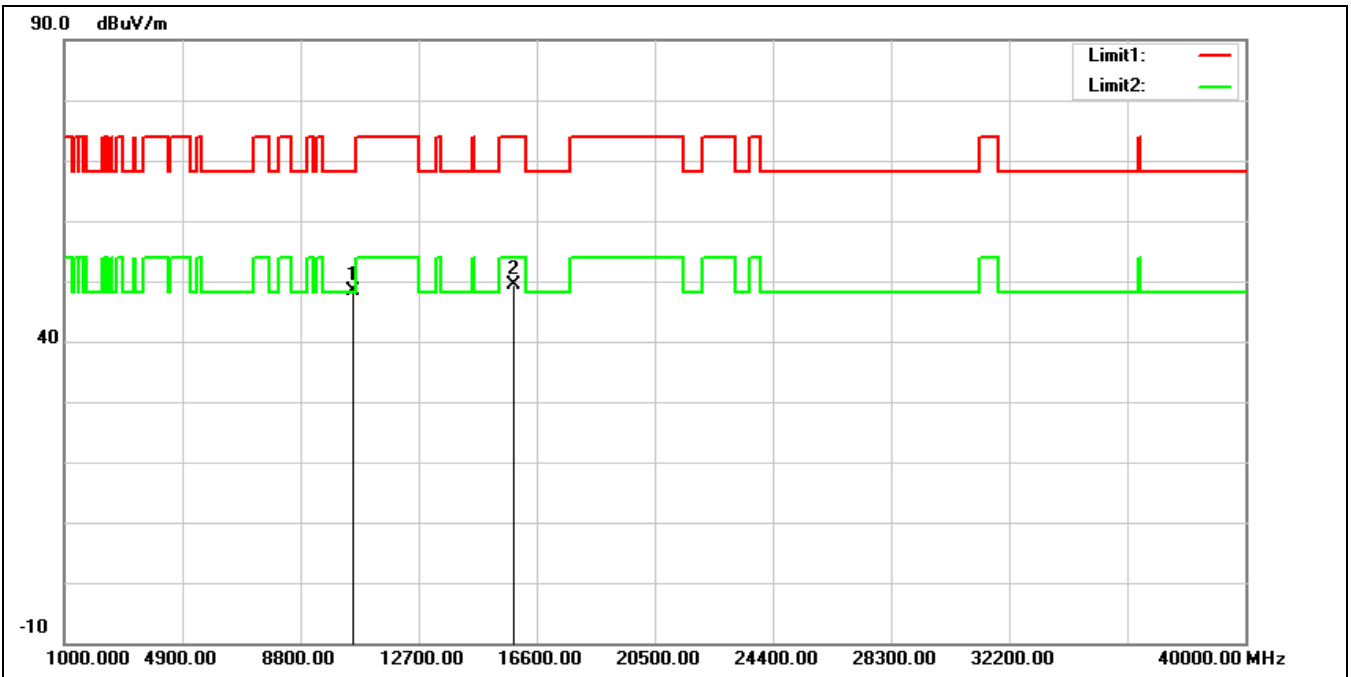


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	33.90	14.48	48.38	68.20	-19.82	peak
2	15840.000	32.36	16.90	49.26	74.00	-24.74	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5280 MHz		
Remark:			

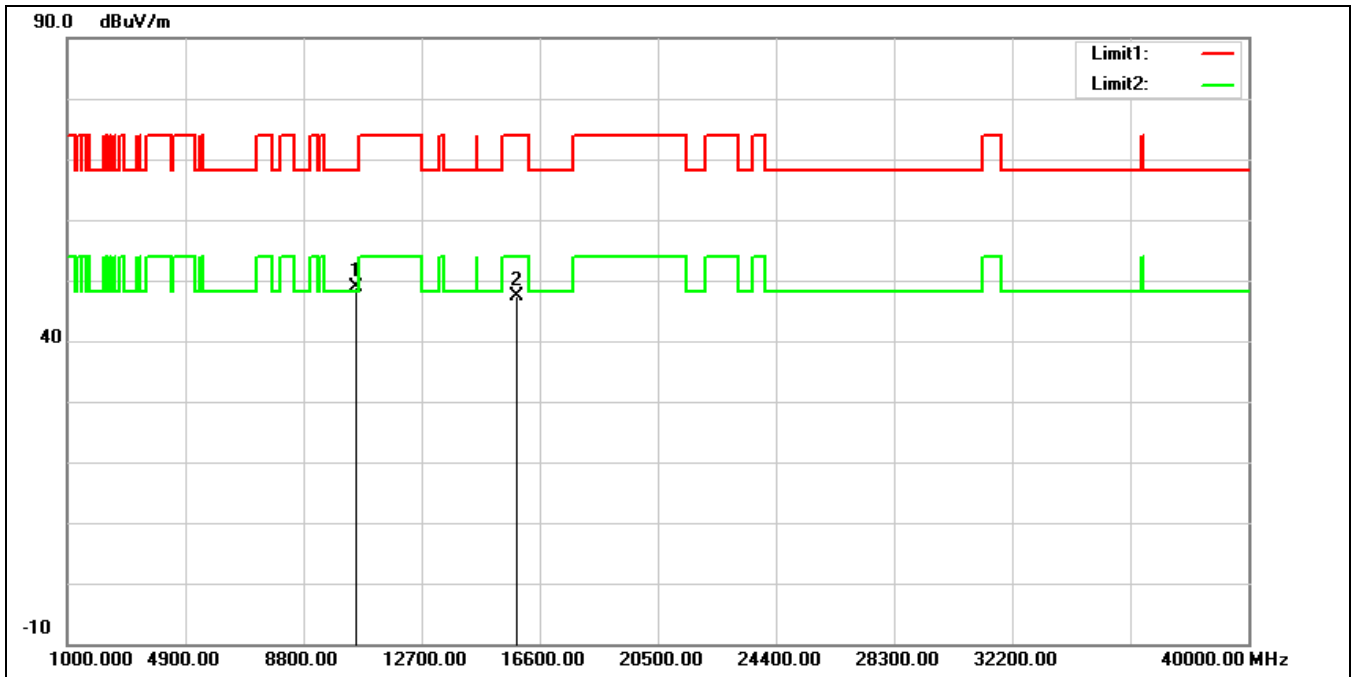


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	34.32	14.48	48.80	68.20	-19.40	peak
2	15840.000	30.49	16.90	47.39	74.00	-26.61	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

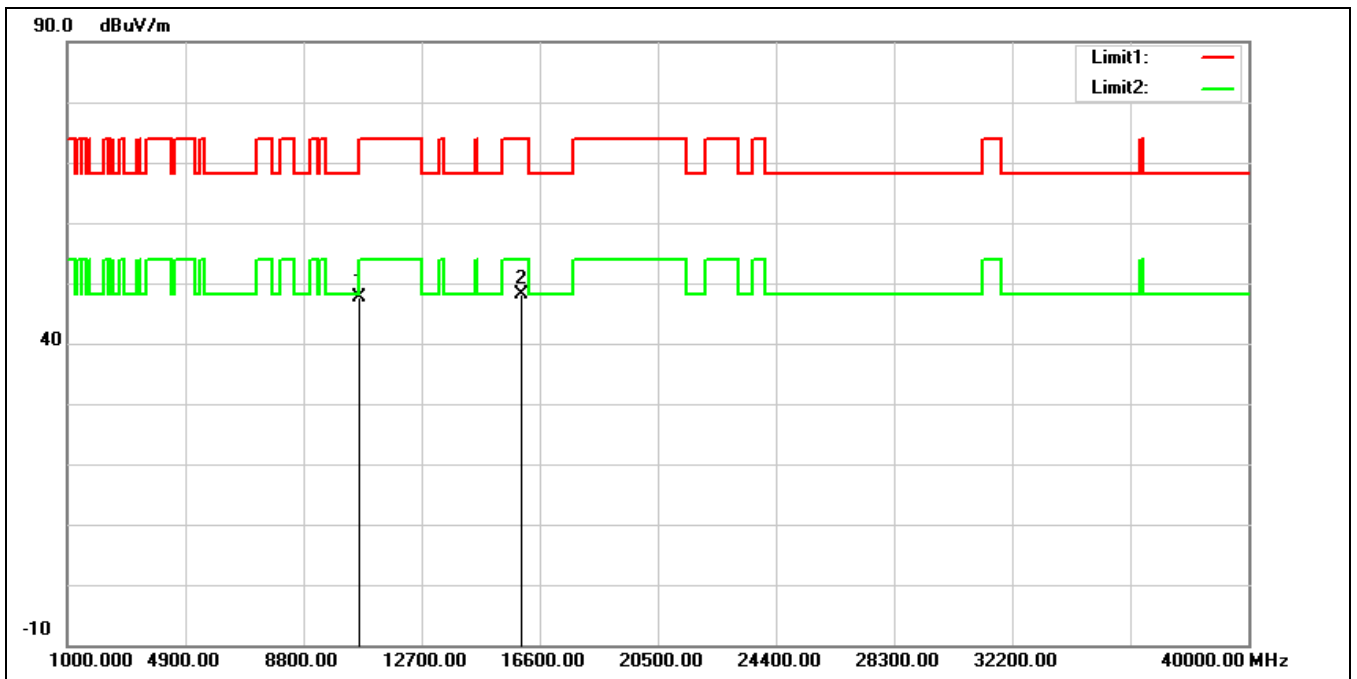


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	33.10	14.41	47.51	74.00	-26.49	peak
2*	15960.000	31.69	16.55	48.24	74.00	-25.76	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

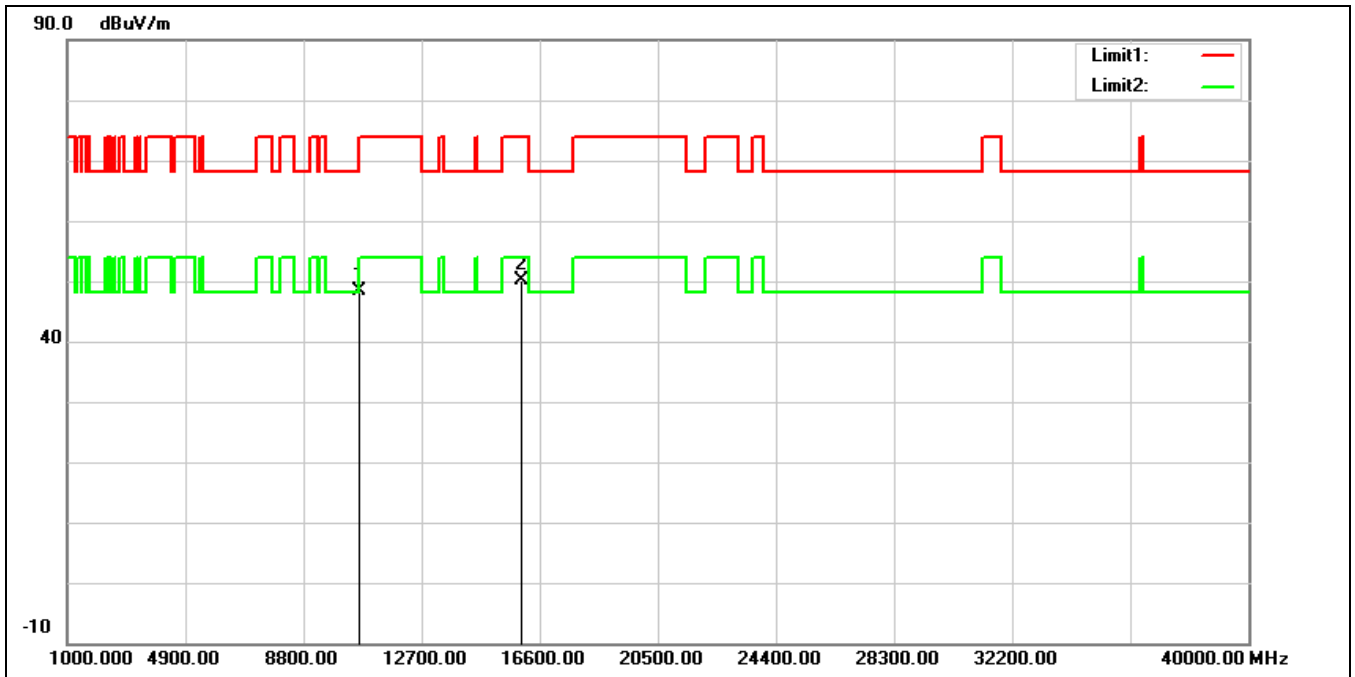

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	33.90	14.41	48.31	74.00	-25.69	peak
2*	15960.000	33.50	16.55	50.05	74.00	-23.95	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

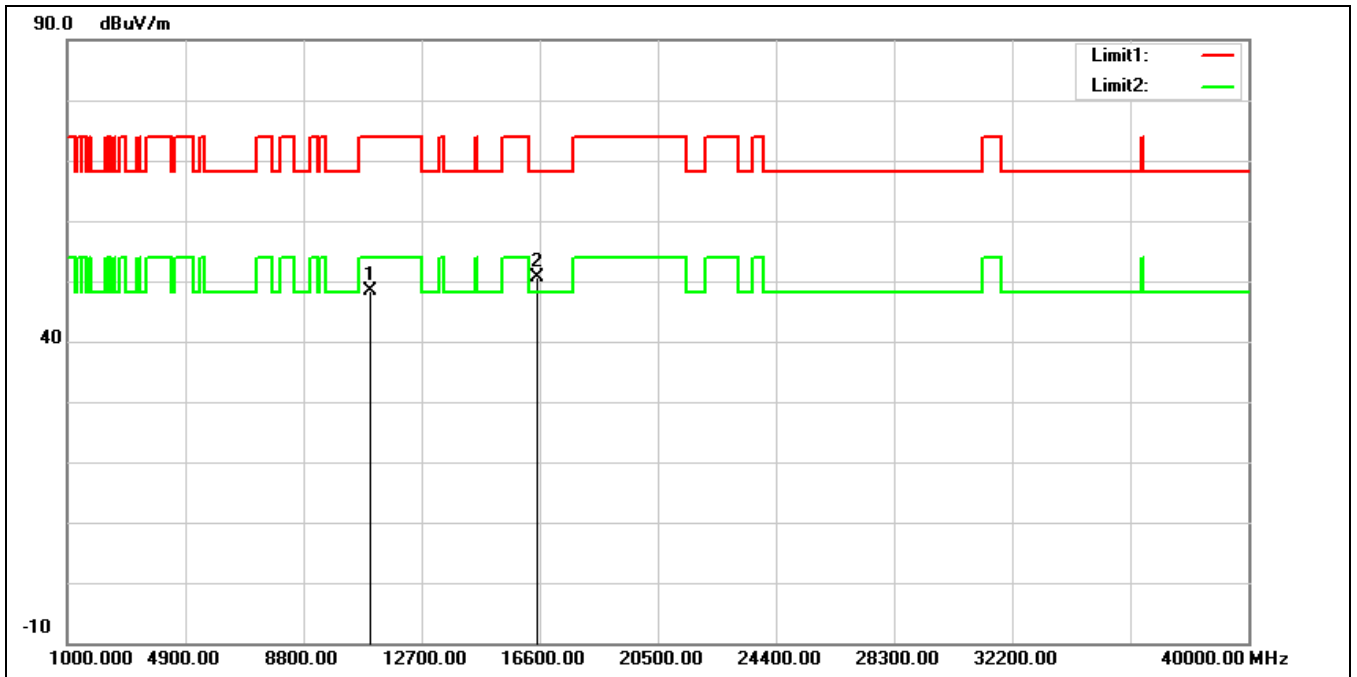

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	33.74	14.73	48.47	74.00	-25.53	peak
2*	16500.000	32.97	17.77	50.74	68.20	-17.46	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

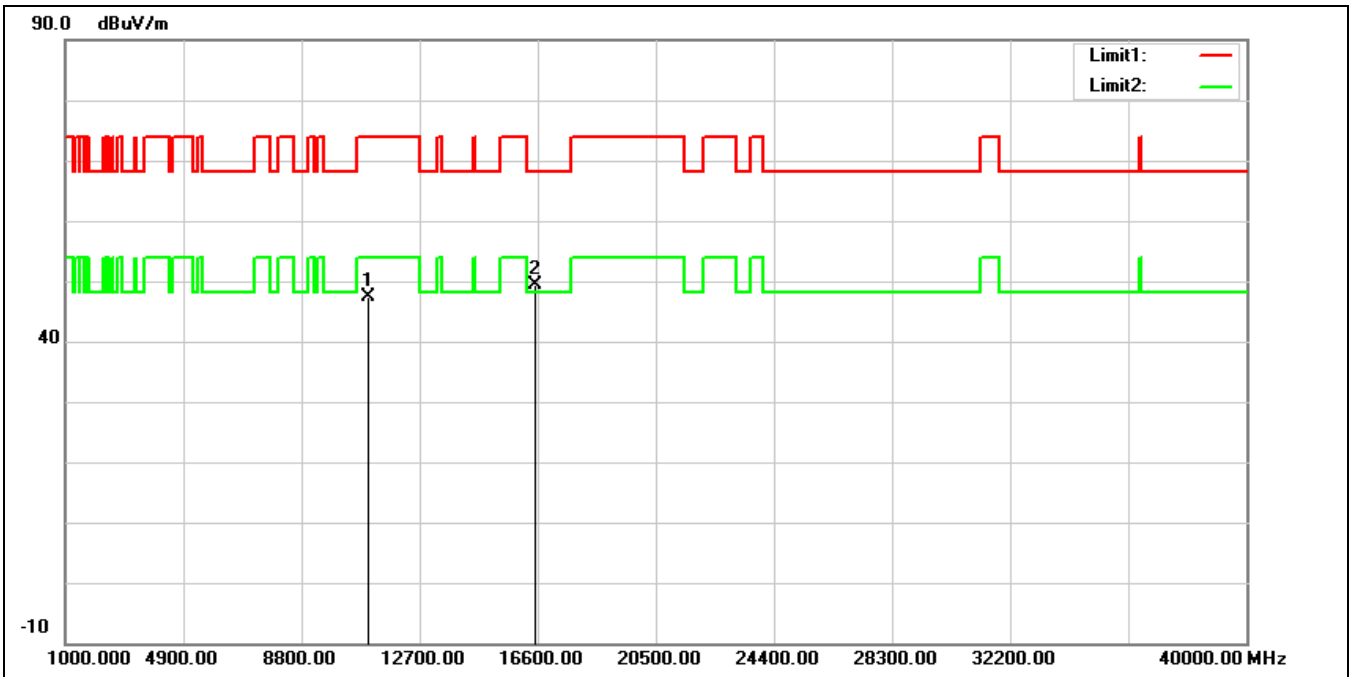


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.57	14.73	47.30	74.00	-26.70	peak
2*	16500.000	31.71	17.77	49.48	68.20	-18.72	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5600 MHz		
Remark:			

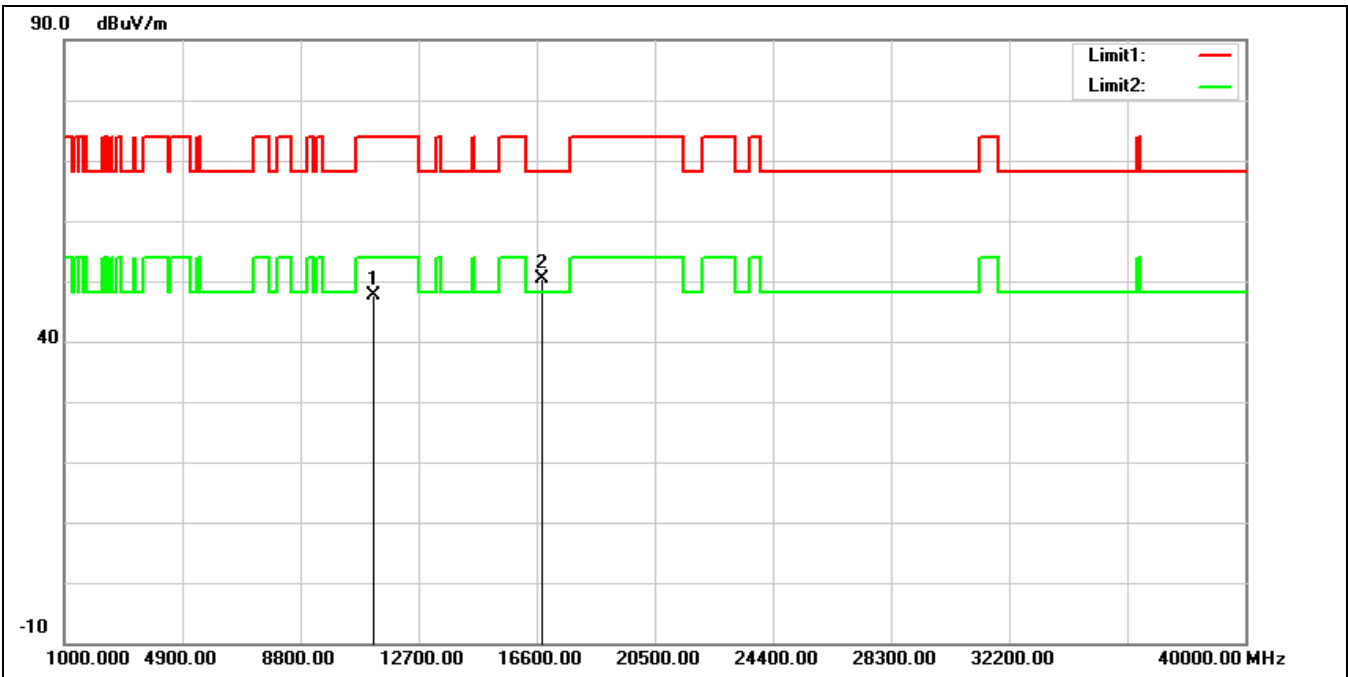


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11200.000	32.83	14.70	47.53	74.00	-26.47	peak
2*	16800.000	31.24	19.20	50.44	68.20	-17.76	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5600 MHz		
Remark:			

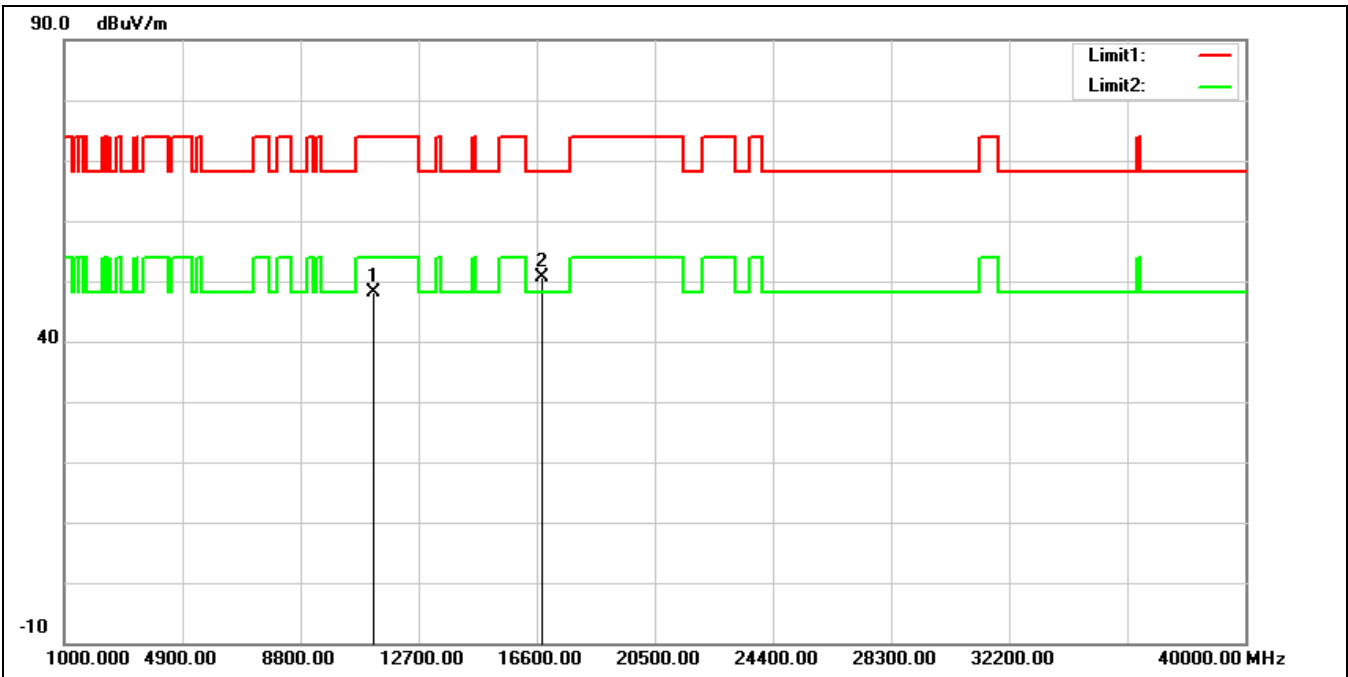


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11200.000	33.50	14.70	48.20	74.00	-25.80	peak
2*	16800.000	31.36	19.20	50.56	68.20	-17.64	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

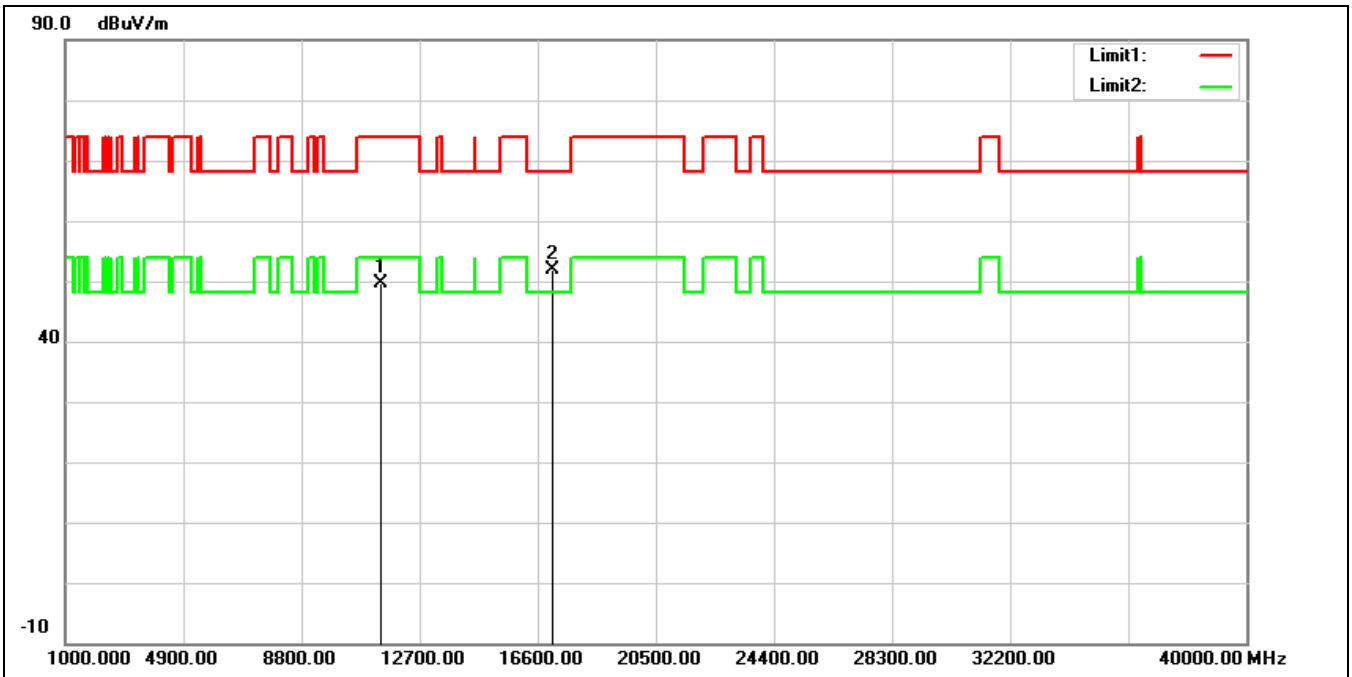


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.68	15.07	49.75	74.00	-24.25	peak
2*	17100.000	31.13	20.64	51.77	68.20	-16.43	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

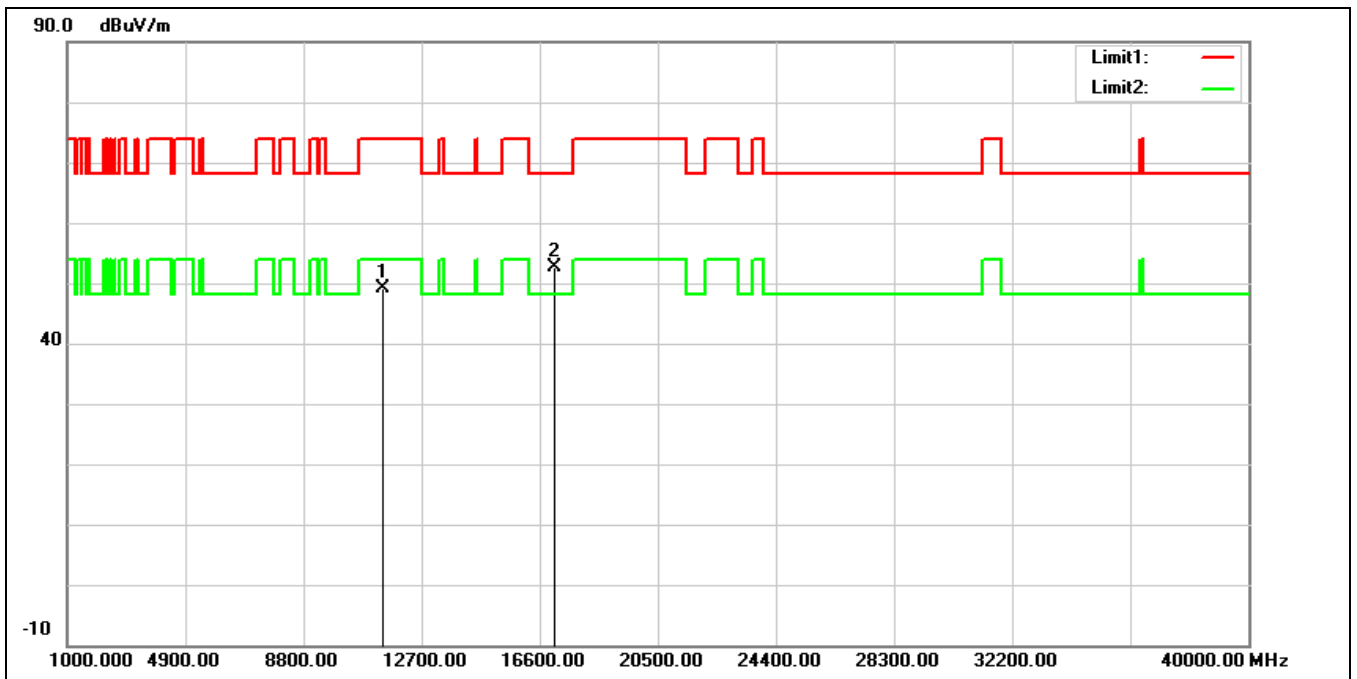


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.04	15.07	49.11	74.00	-24.89	peak
2*	17100.000	31.94	20.64	52.58	68.20	-15.62	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

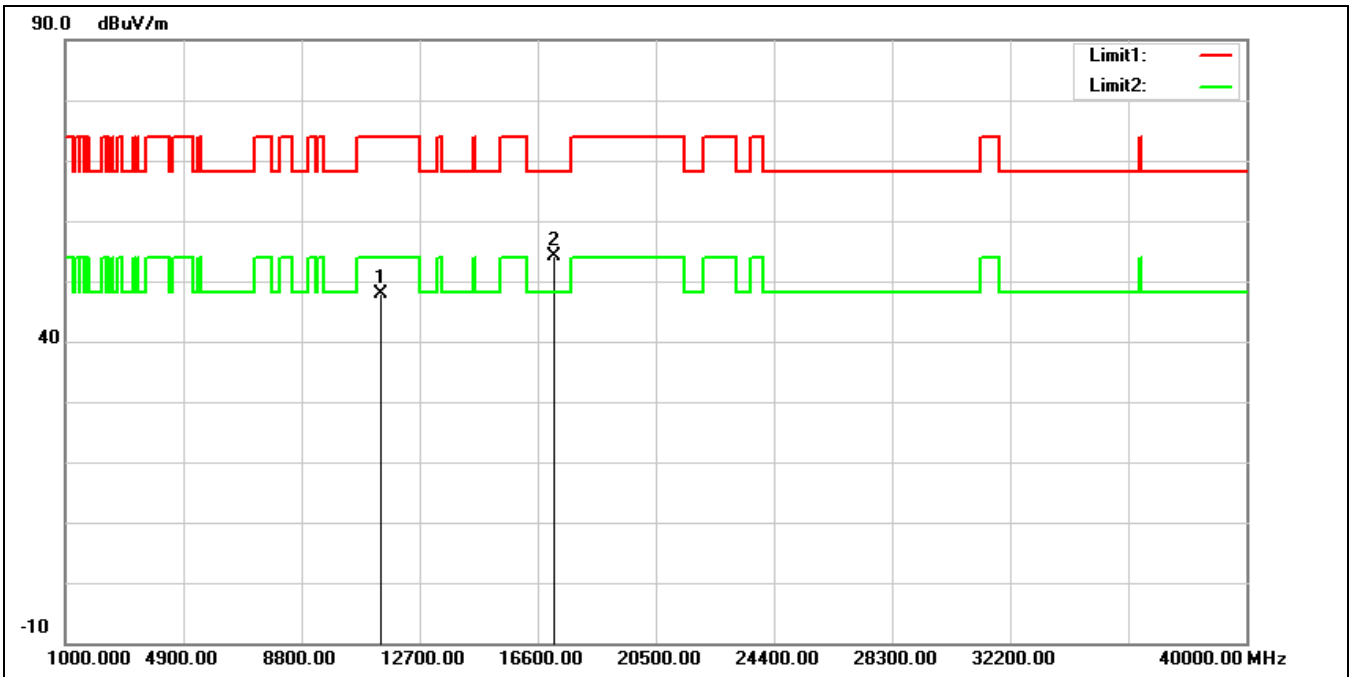


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	32.70	15.23	47.93	74.00	-26.07	peak
2*	17160.000	32.93	21.25	54.18	68.20	-14.02	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

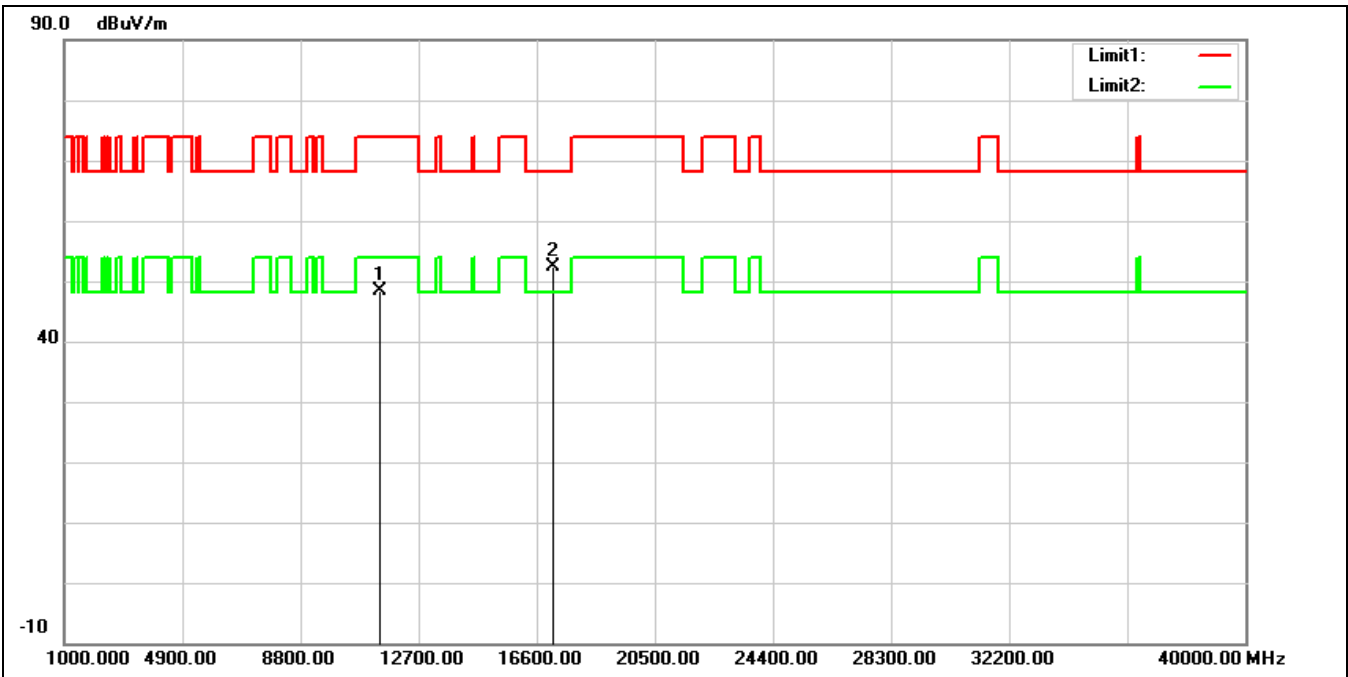

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	33.21	15.23	48.44	74.00	-25.56	peak
2*	17160.000	31.01	21.25	52.26	68.20	-15.94	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

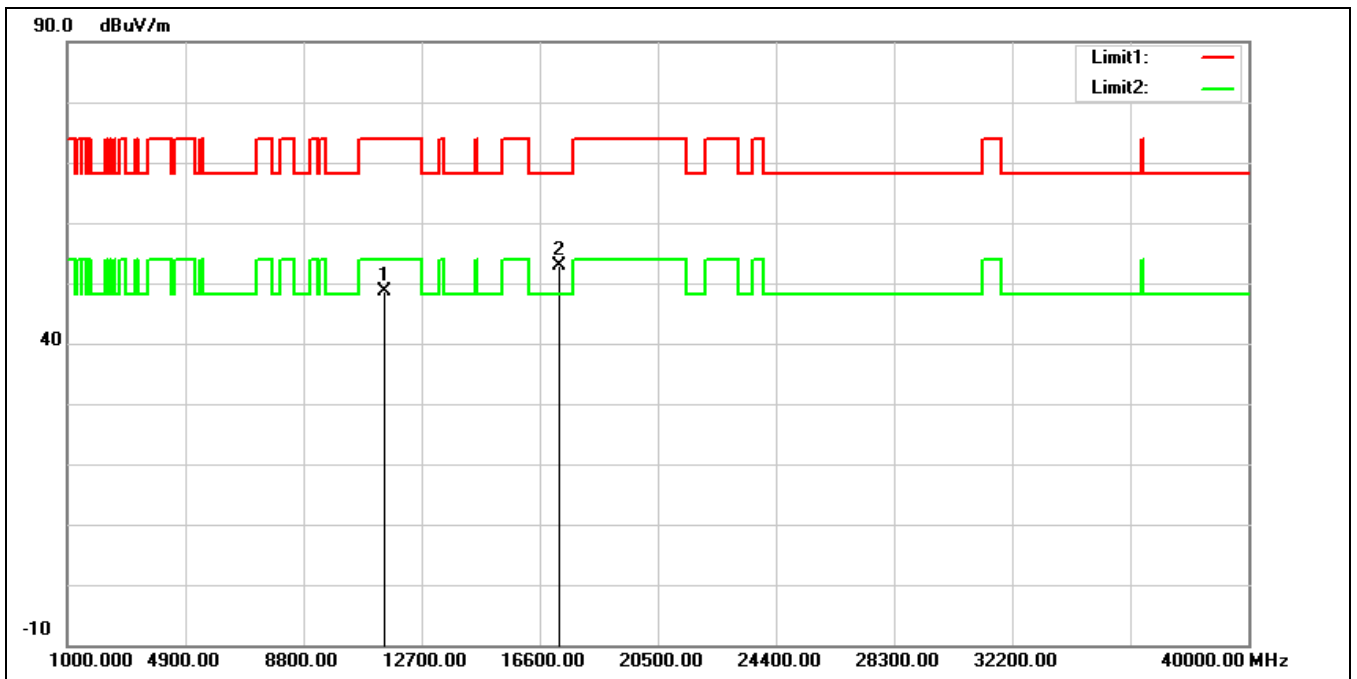

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	33.28	15.42	48.70	74.00	-25.30	peak
2*	17235.000	30.89	22.01	52.90	68.20	-15.30	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

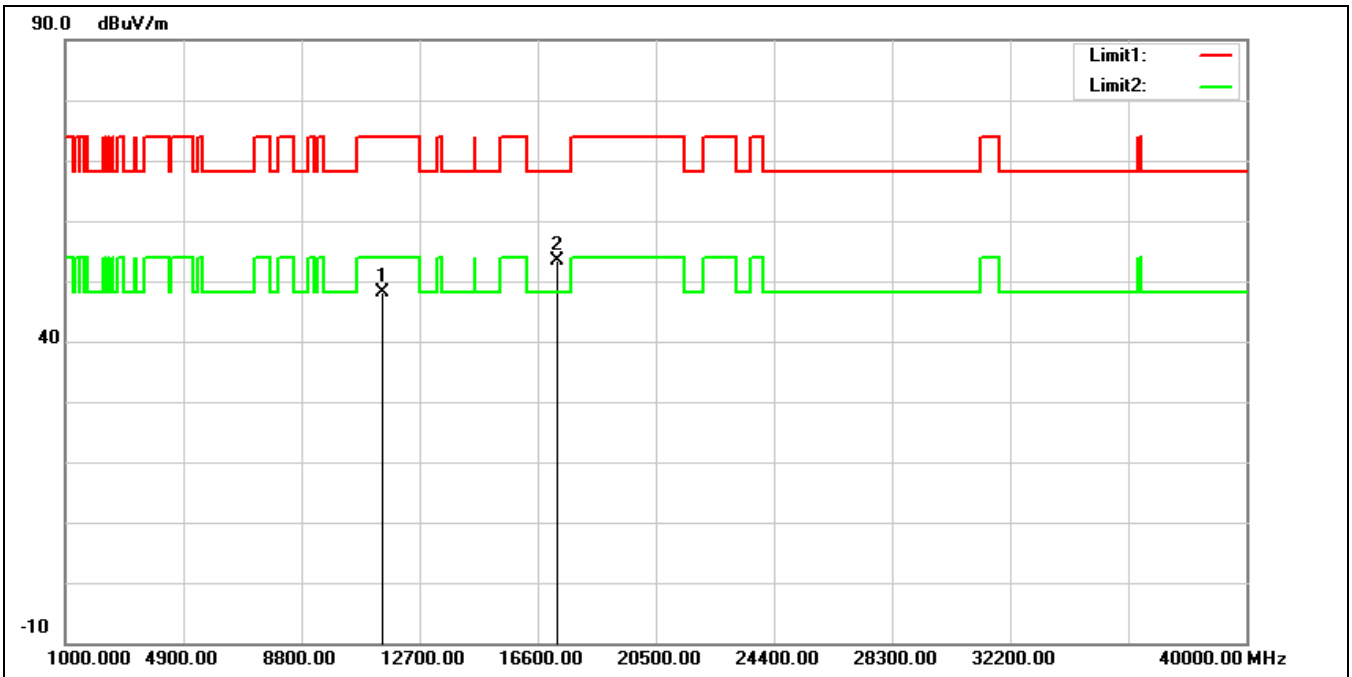


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	32.72	15.42	48.14	74.00	-25.86	peak
2*	17235.000	31.46	22.01	53.47	68.20	-14.73	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5785 MHz		
Remark:			

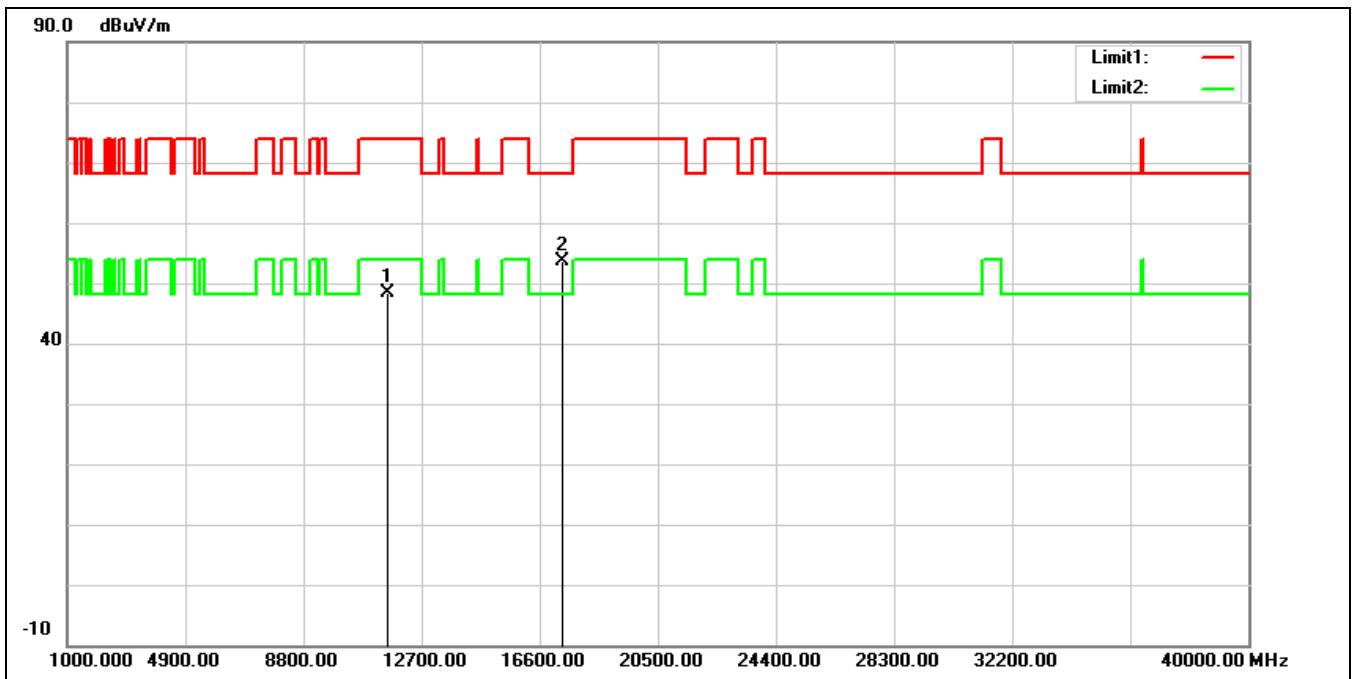


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.27	15.21	48.48	74.00	-25.52	peak
2*	17355.000	30.68	22.96	53.64	68.20	-14.56	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5785 MHz		
Remark:			

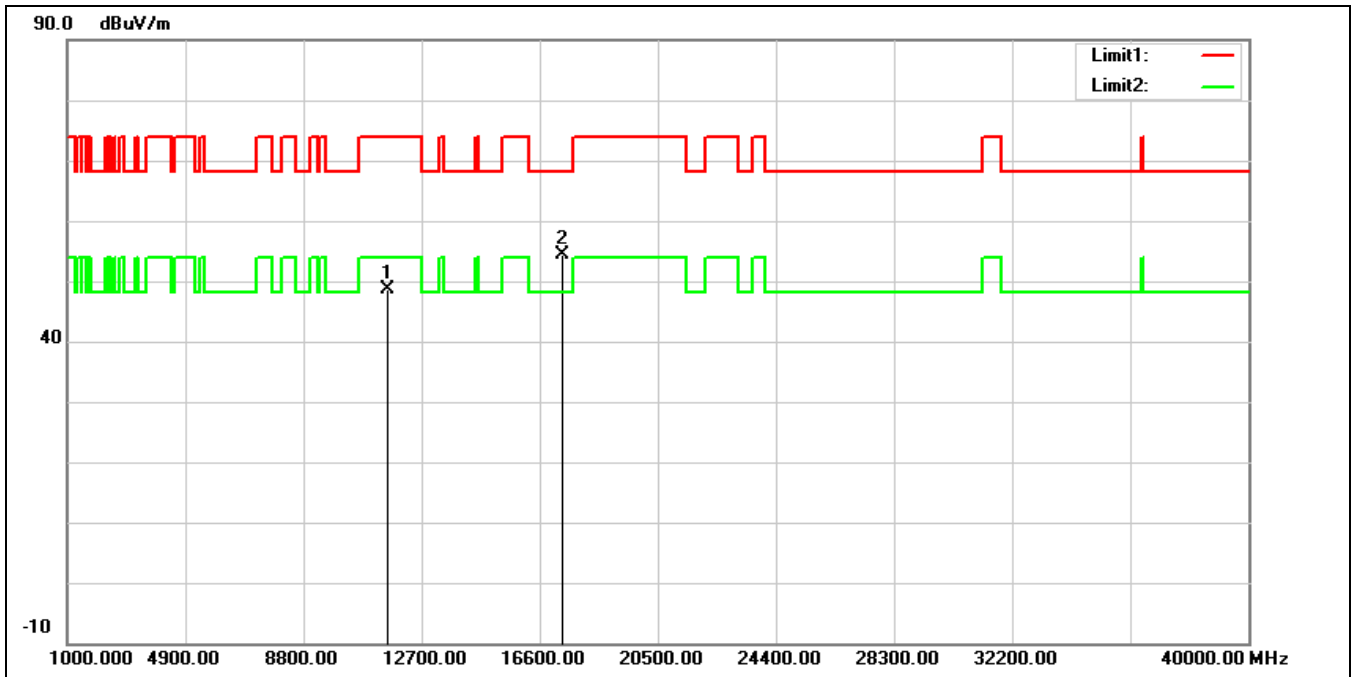


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.47	15.21	48.68	74.00	-25.32	peak
2*	17355.000	31.33	22.96	54.29	68.20	-13.91	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

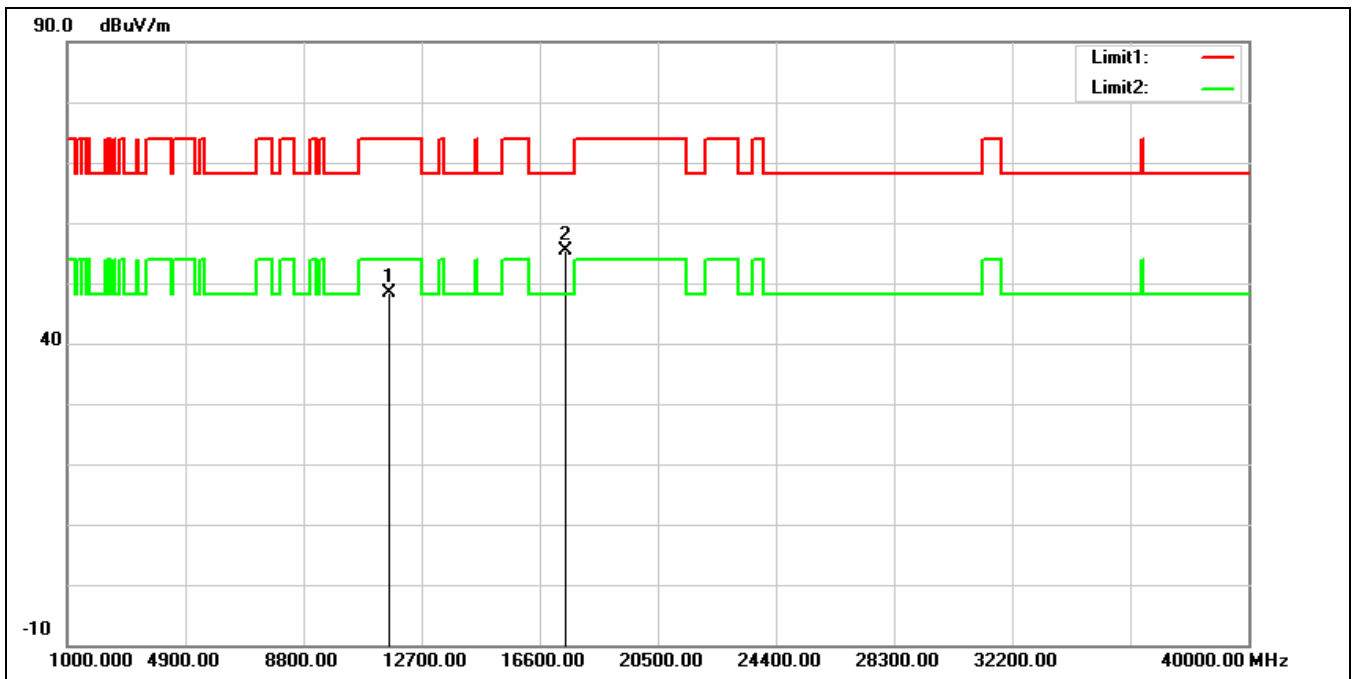


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	33.34	15.04	48.38	74.00	-25.62	peak
2*	17475.000	31.50	23.95	55.45	68.20	-12.75	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

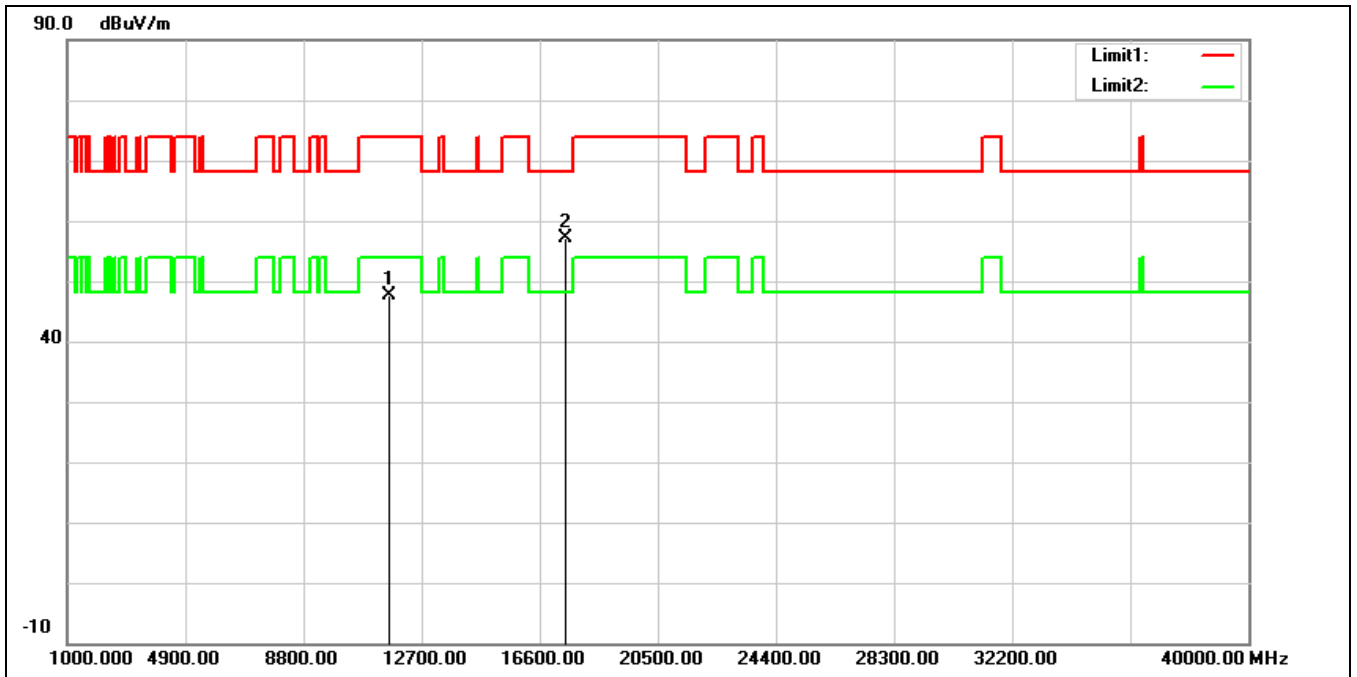


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	32.65	15.04	47.69	74.00	-26.31	peak
2*	17475.000	33.30	23.95	57.25	68.20	-10.95	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

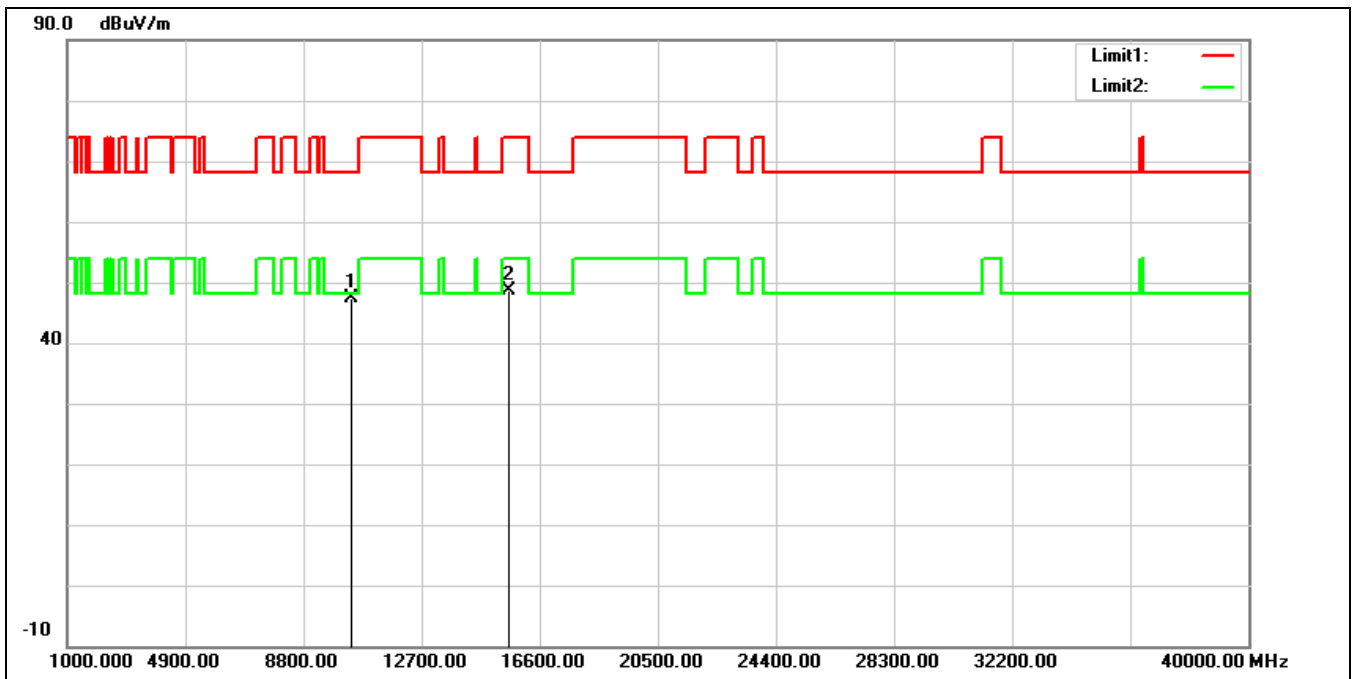


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	33.39	14.04	47.43	68.20	-20.77	peak
2	15570.000	31.50	17.16	48.66	74.00	-25.34	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

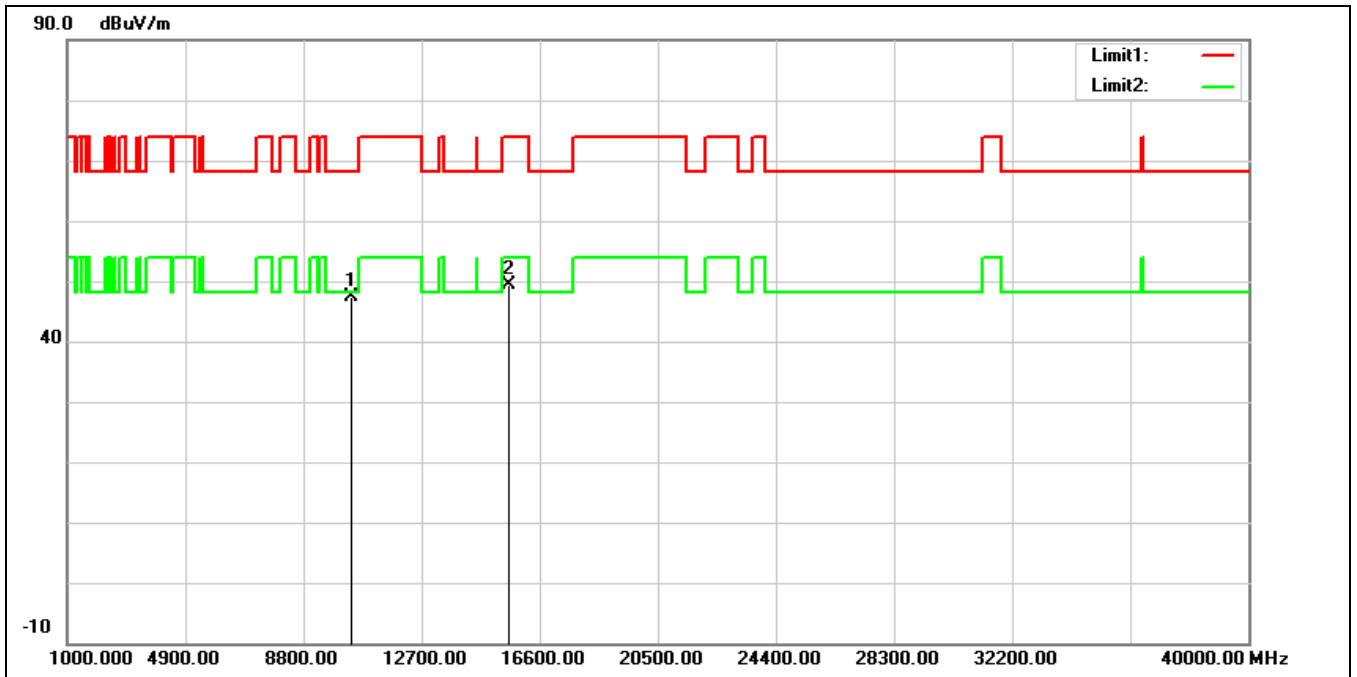

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	33.23	14.04	47.27	68.20	-20.93	peak
2	15570.000	32.27	17.16	49.43	74.00	-24.57	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5230 MHz		
Remark:			

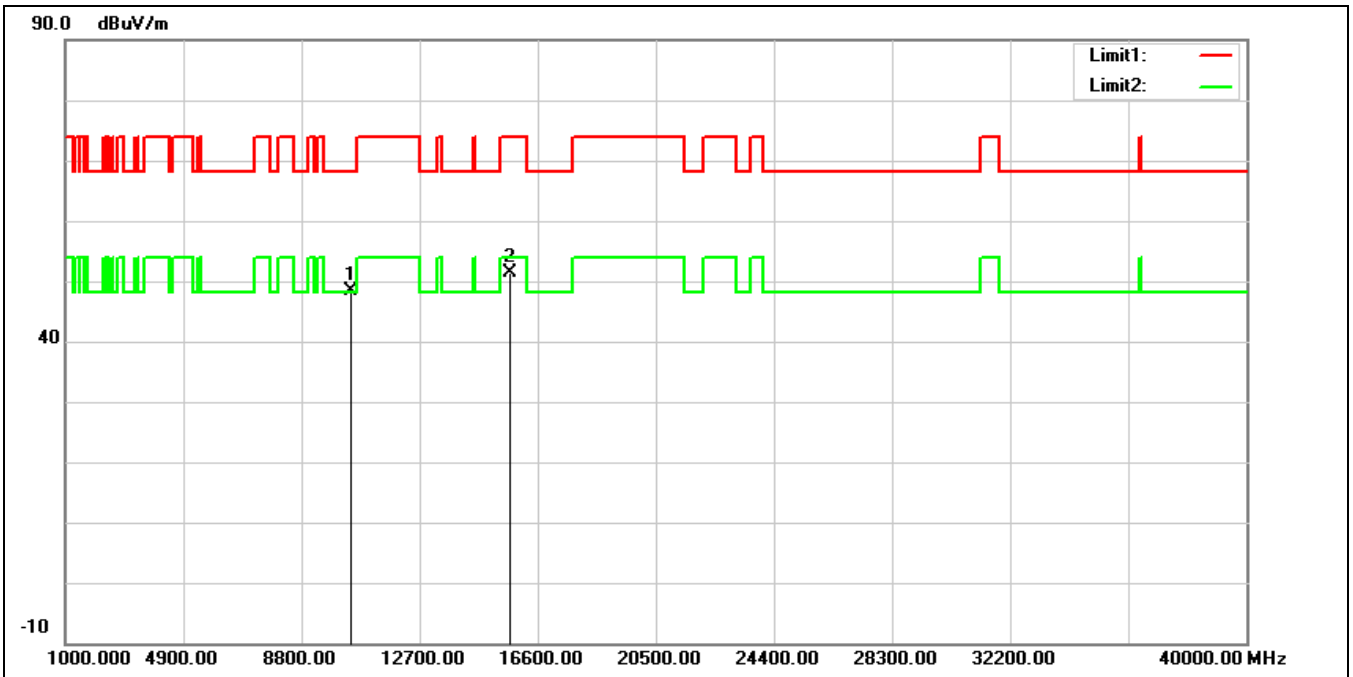

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	33.98	14.43	48.41	68.20	-19.79	peak
2	15690.000	33.90	17.37	51.27	74.00	-22.73	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5230 MHz		
Remark:			

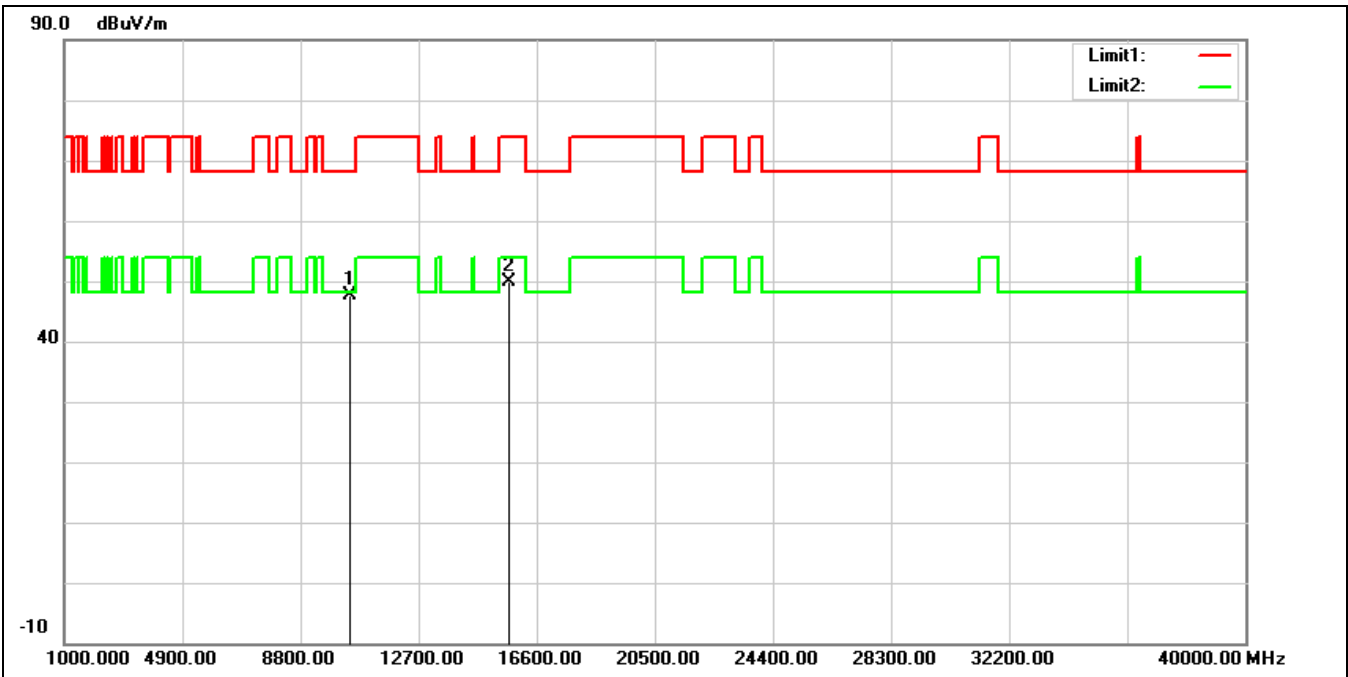


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	33.17	14.43	47.60	68.20	-20.60	peak
2	15690.000	32.53	17.37	49.90	74.00	-24.10	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5270 MHz		
Remark:			

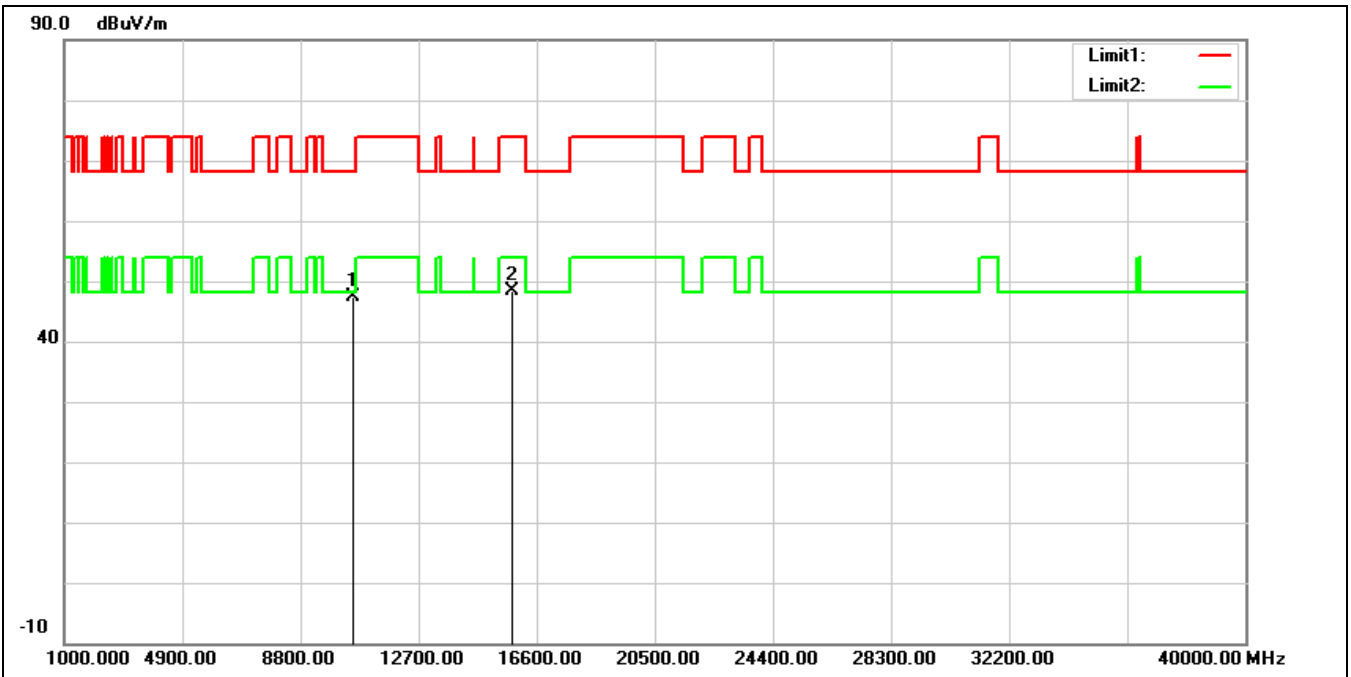


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	32.85	14.55	47.40	68.20	-20.80	peak
2	15810.000	31.49	17.00	48.49	74.00	-25.51	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5270 MHz		
Remark:			

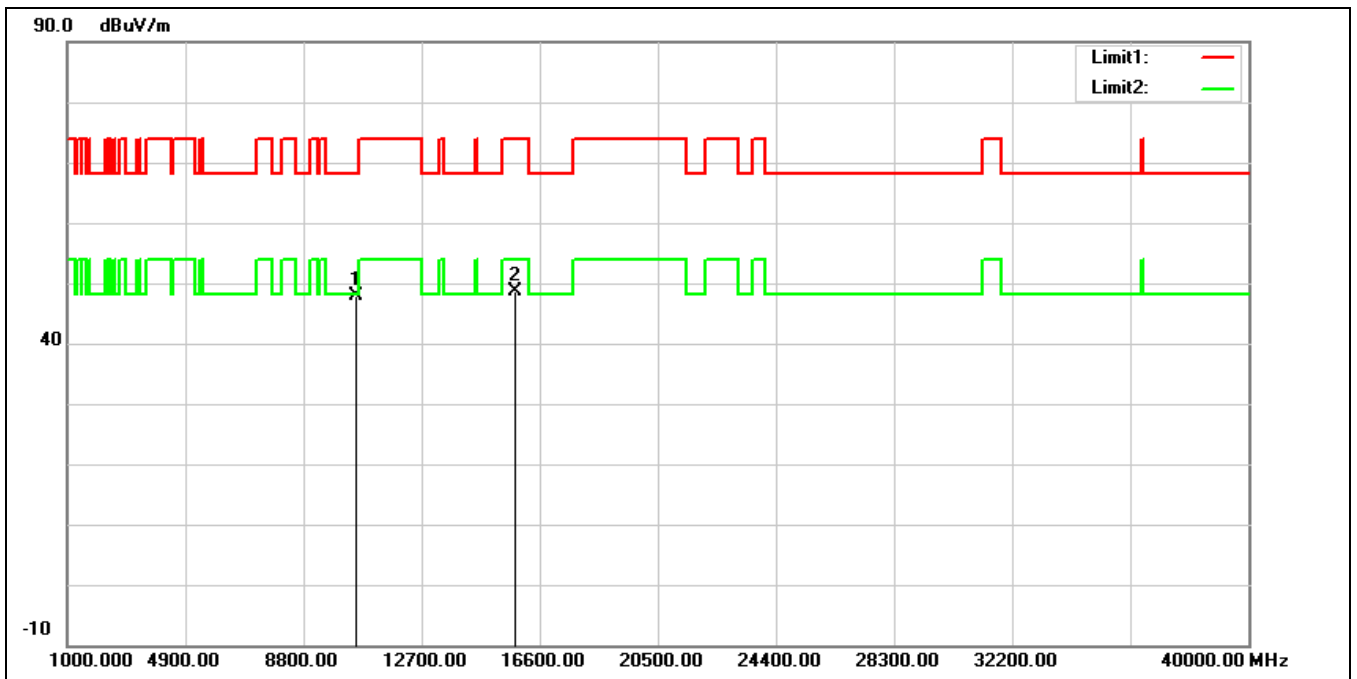


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	33.22	14.55	47.77	68.20	-20.43	peak
2	15810.000	31.67	17.00	48.67	74.00	-25.33	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

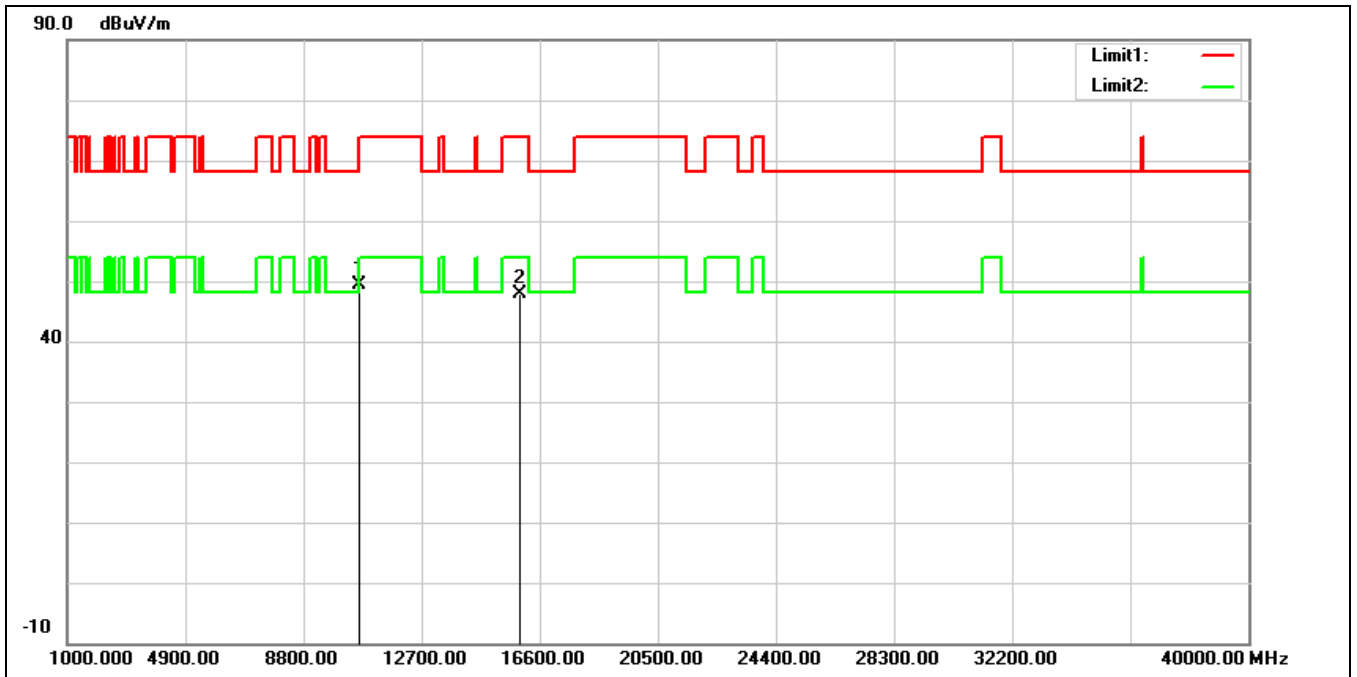


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10620.000	35.10	14.40	49.50	74.00	-24.50	peak
2	15930.000	31.16	16.64	47.80	74.00	-26.20	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

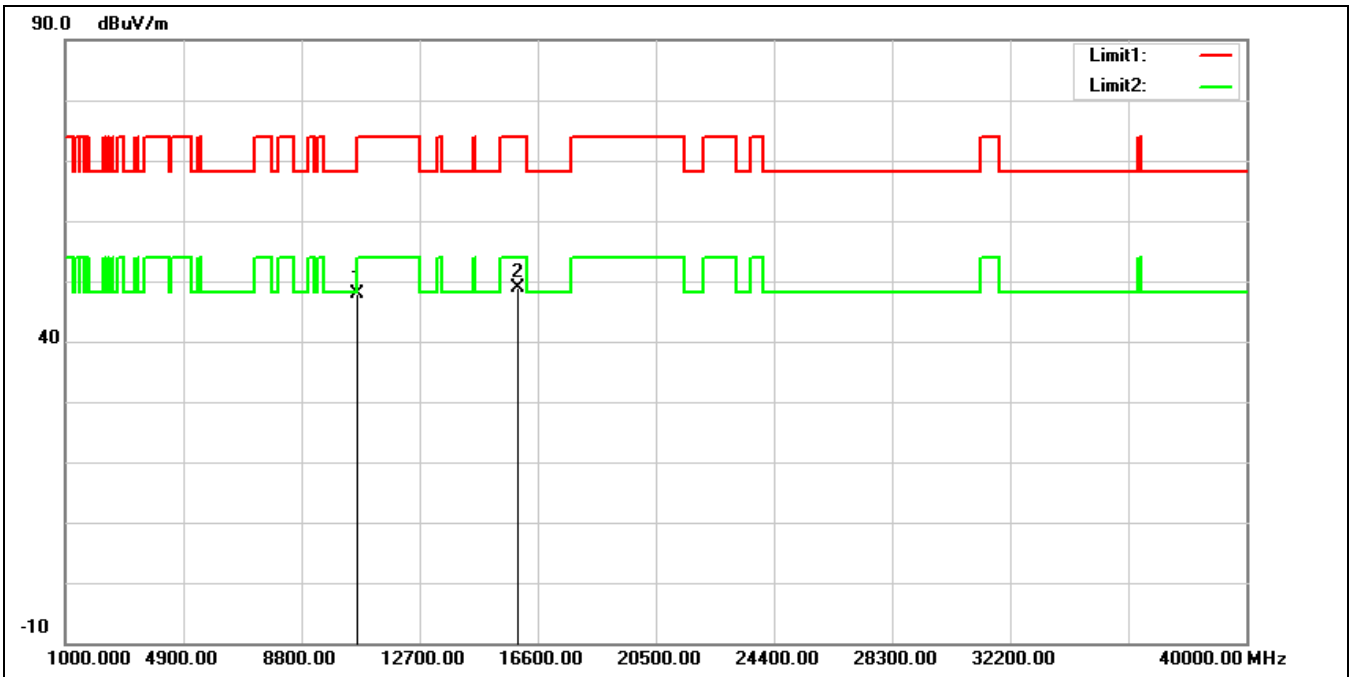


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	33.58	14.40	47.98	74.00	-26.02	peak
2*	15930.000	32.17	16.64	48.81	74.00	-25.19	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

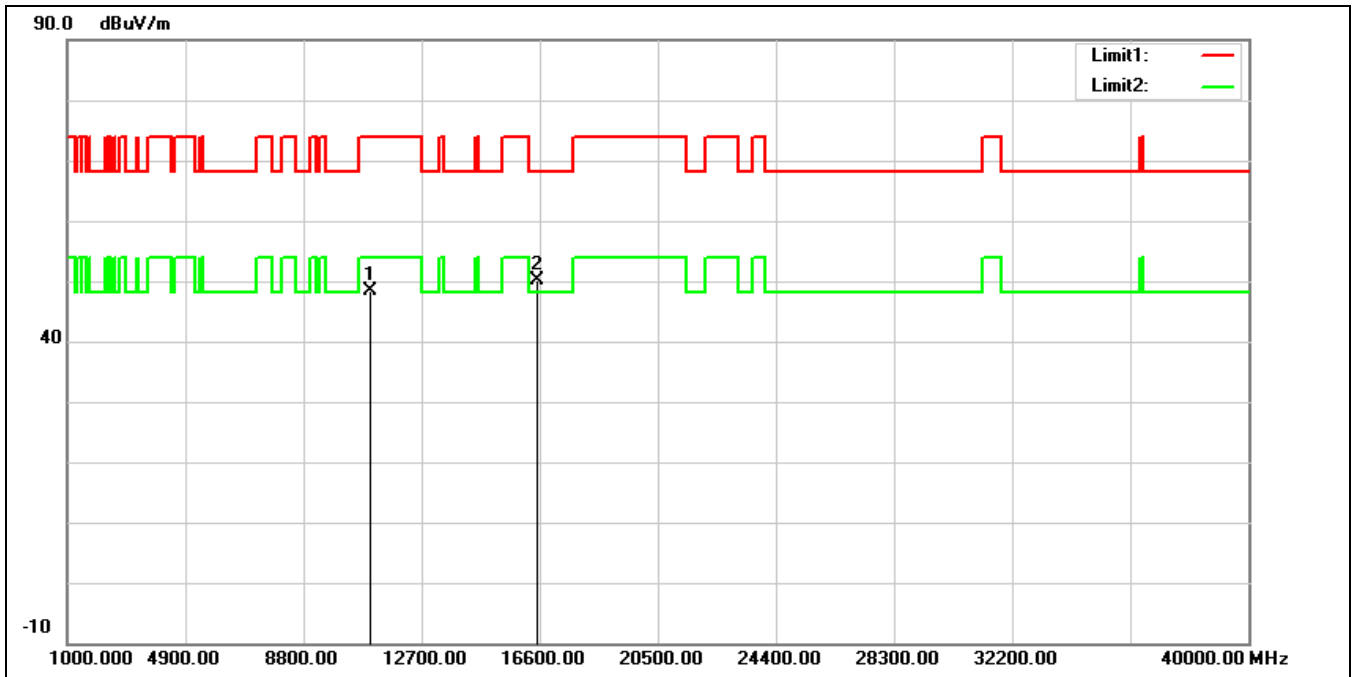


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.72	14.75	48.47	74.00	-25.53	peak
2*	16530.000	32.16	17.92	50.08	68.20	-18.12	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

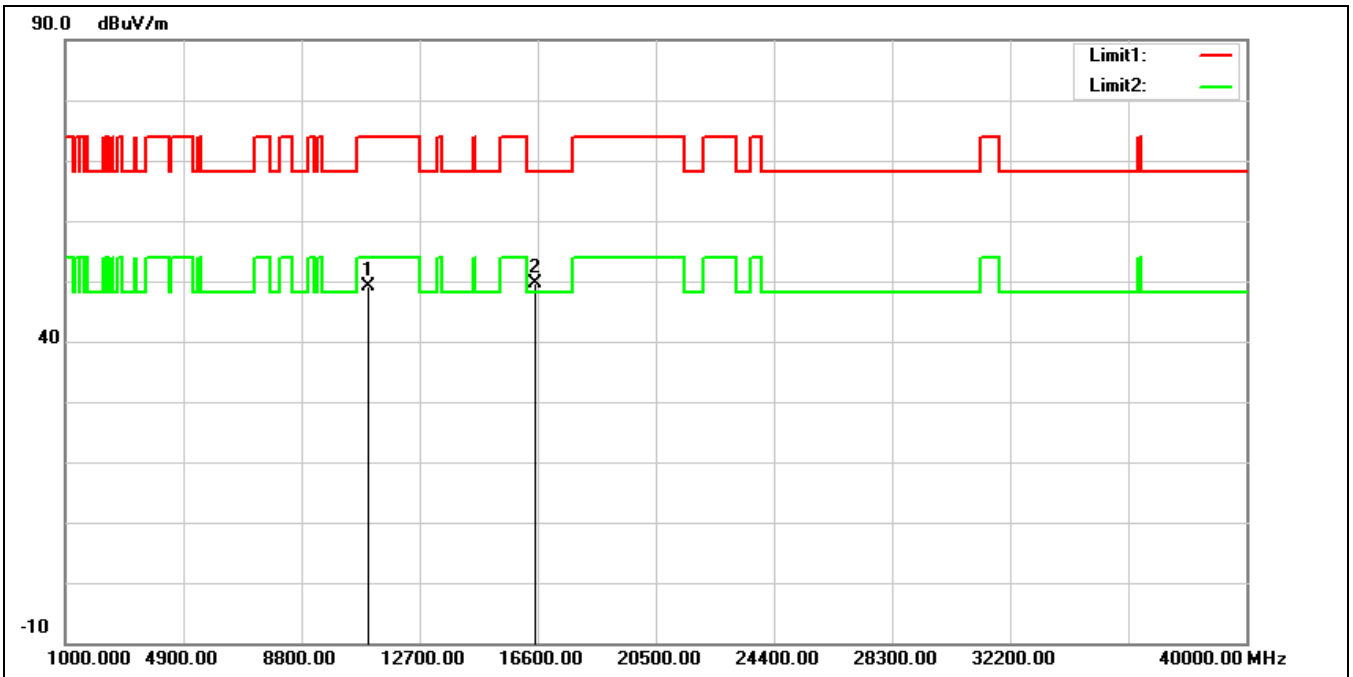

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	34.38	14.75	49.13	74.00	-24.87	peak
2*	16530.000	31.63	17.92	49.55	68.20	-18.65	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5590 MHz		
Remark:			

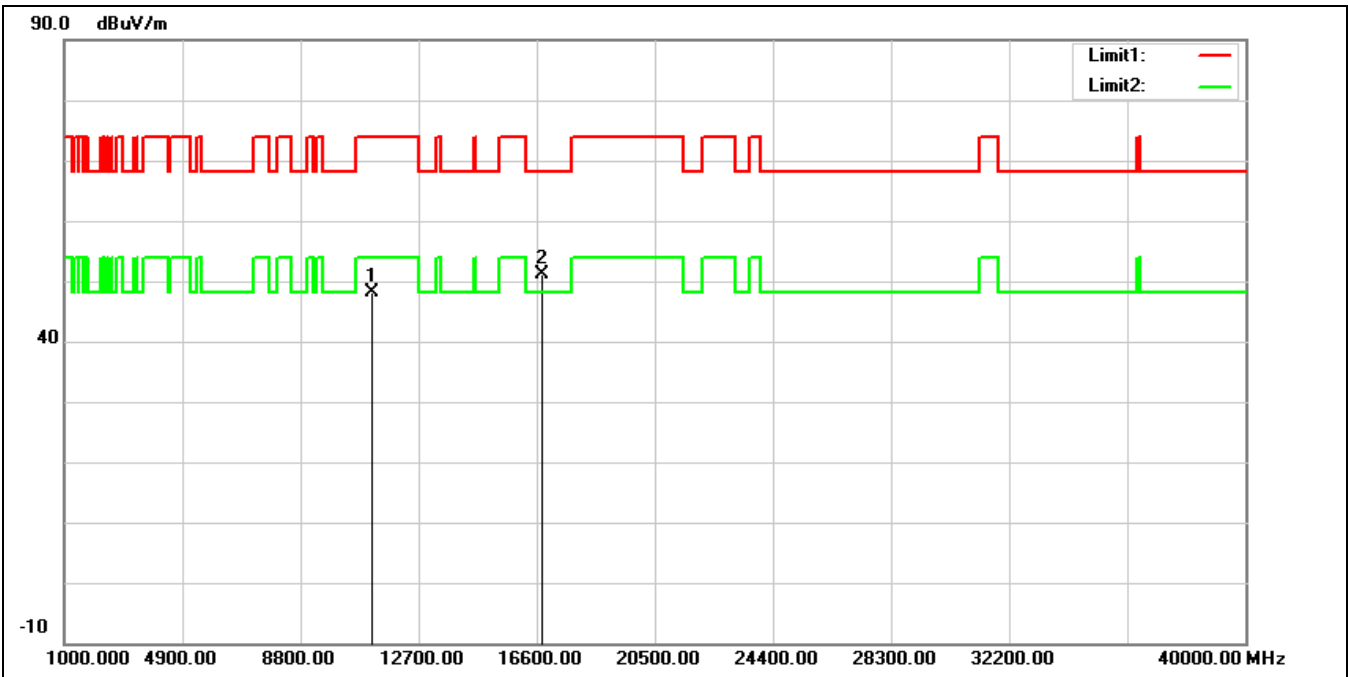

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11180.000	33.39	14.72	48.11	74.00	-25.89	peak
2*	16770.000	32.18	19.05	51.23	68.20	-16.97	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5590 MHz		
Remark:			

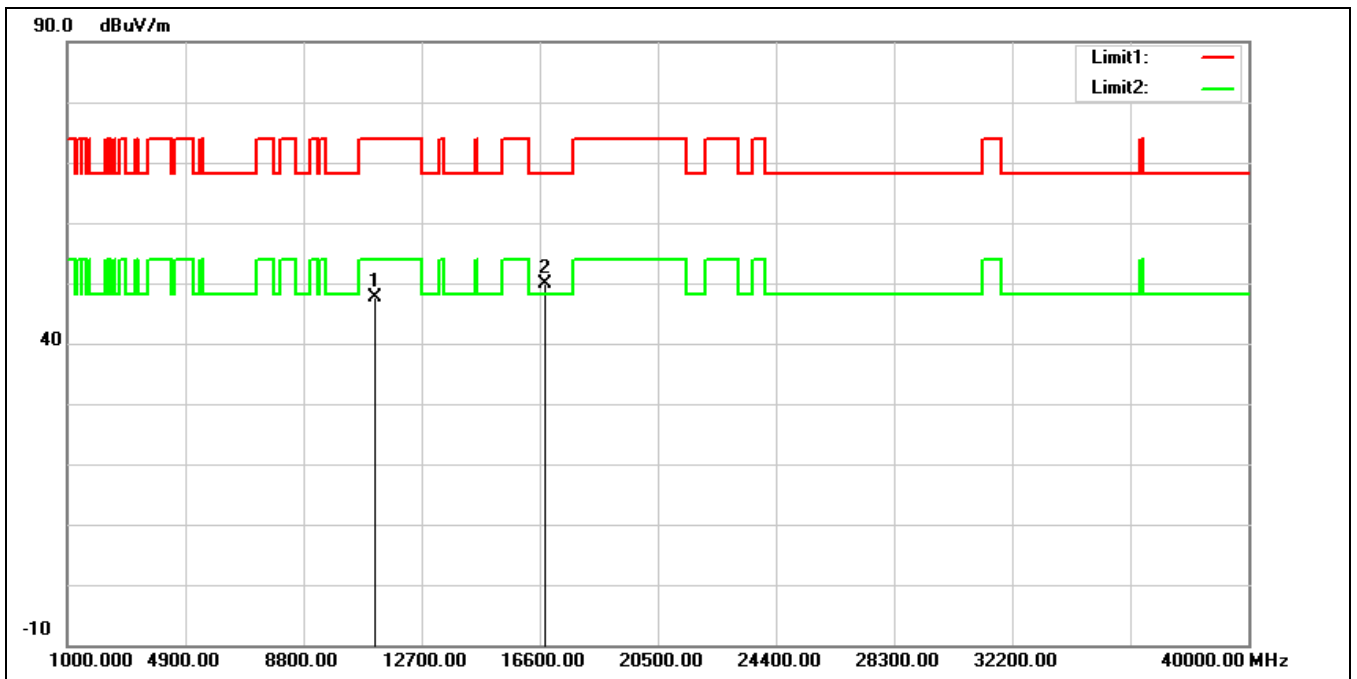


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11180.000	32.93	14.72	47.65	74.00	-26.35	peak
2*	16770.000	30.78	19.05	49.83	68.20	-18.37	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

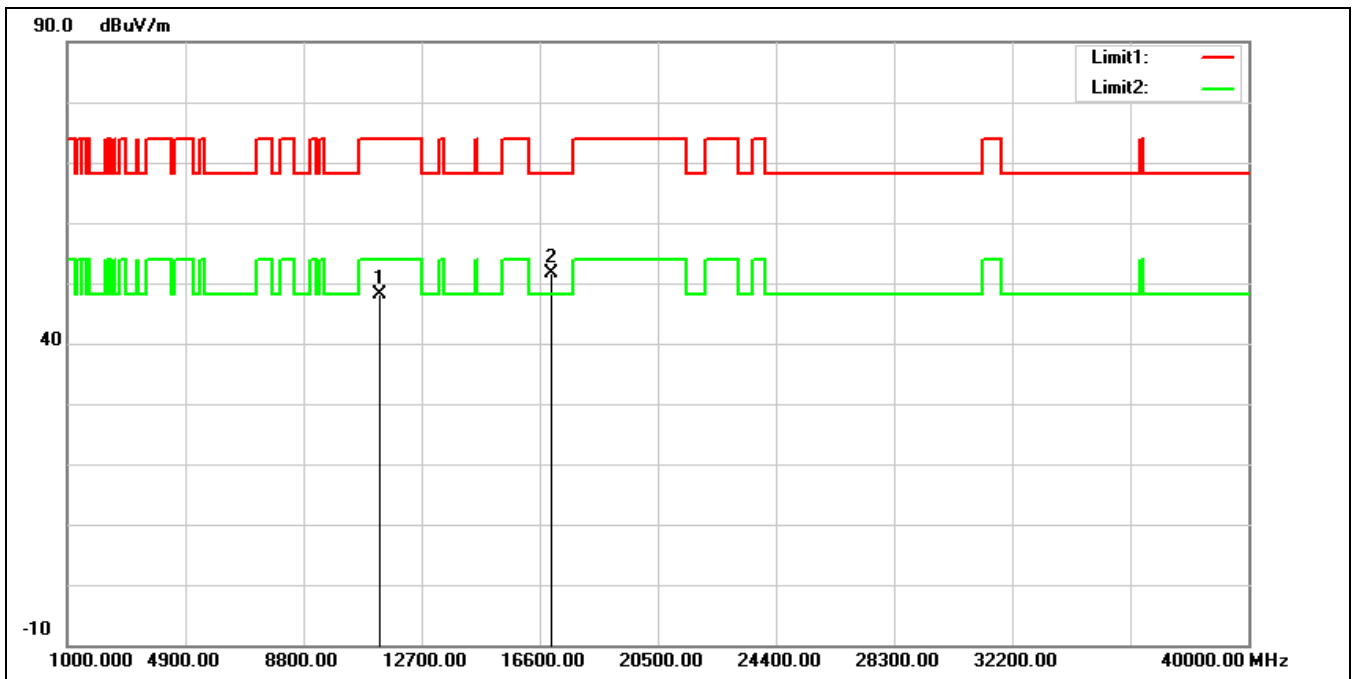


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	33.36	14.84	48.20	74.00	-25.80	peak
2*	17010.000	31.64	20.09	51.73	68.20	-16.47	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

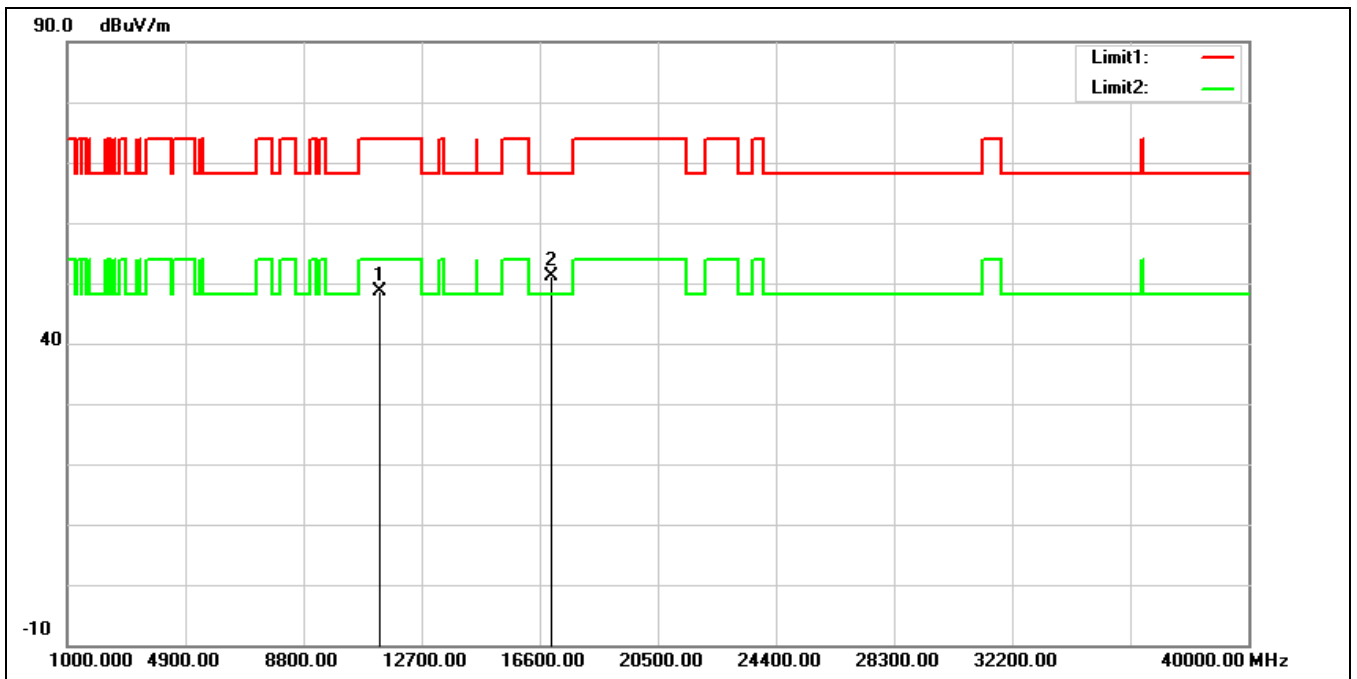


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	33.77	14.84	48.61	74.00	-25.39	peak
2*	17010.000	31.11	20.09	51.20	68.20	-17.00	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

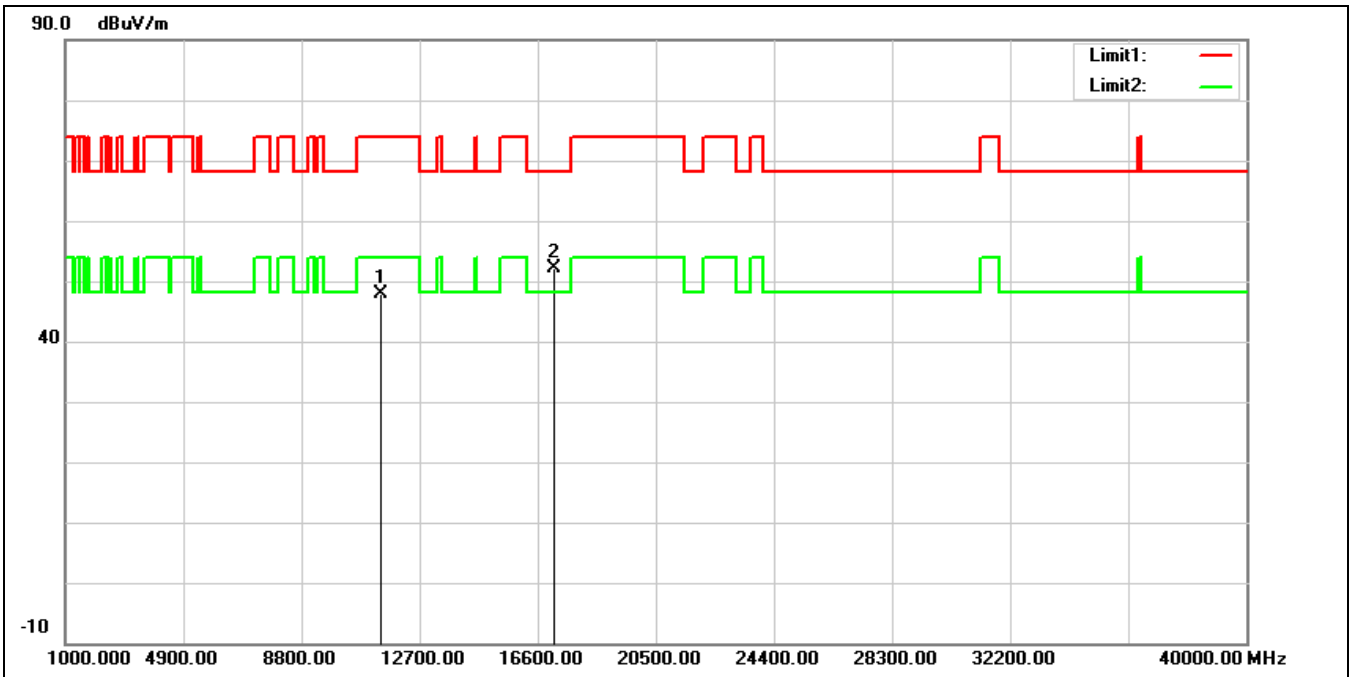


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	32.74	15.15	47.89	74.00	-26.11	peak
2*	17130.000	31.30	20.95	52.25	68.20	-15.95	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

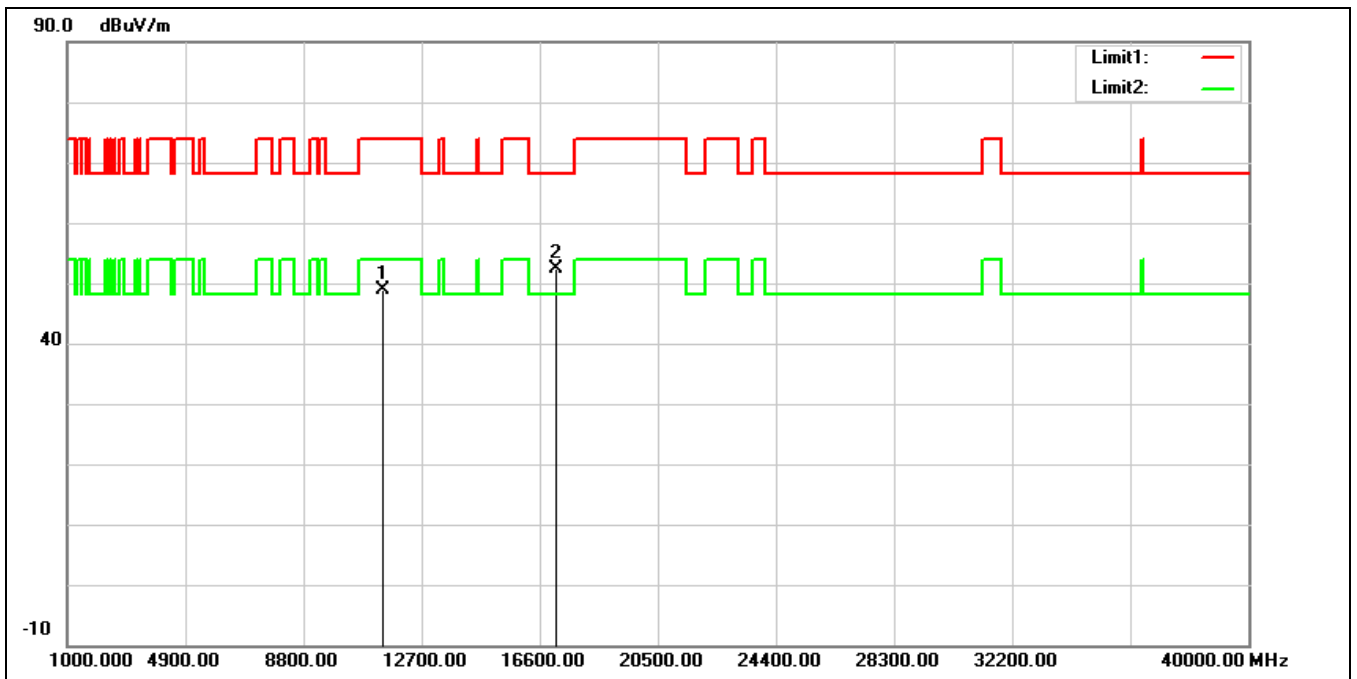


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	33.81	15.15	48.96	74.00	-25.04	peak
2*	17130.000	31.48	20.95	52.43	68.20	-15.77	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

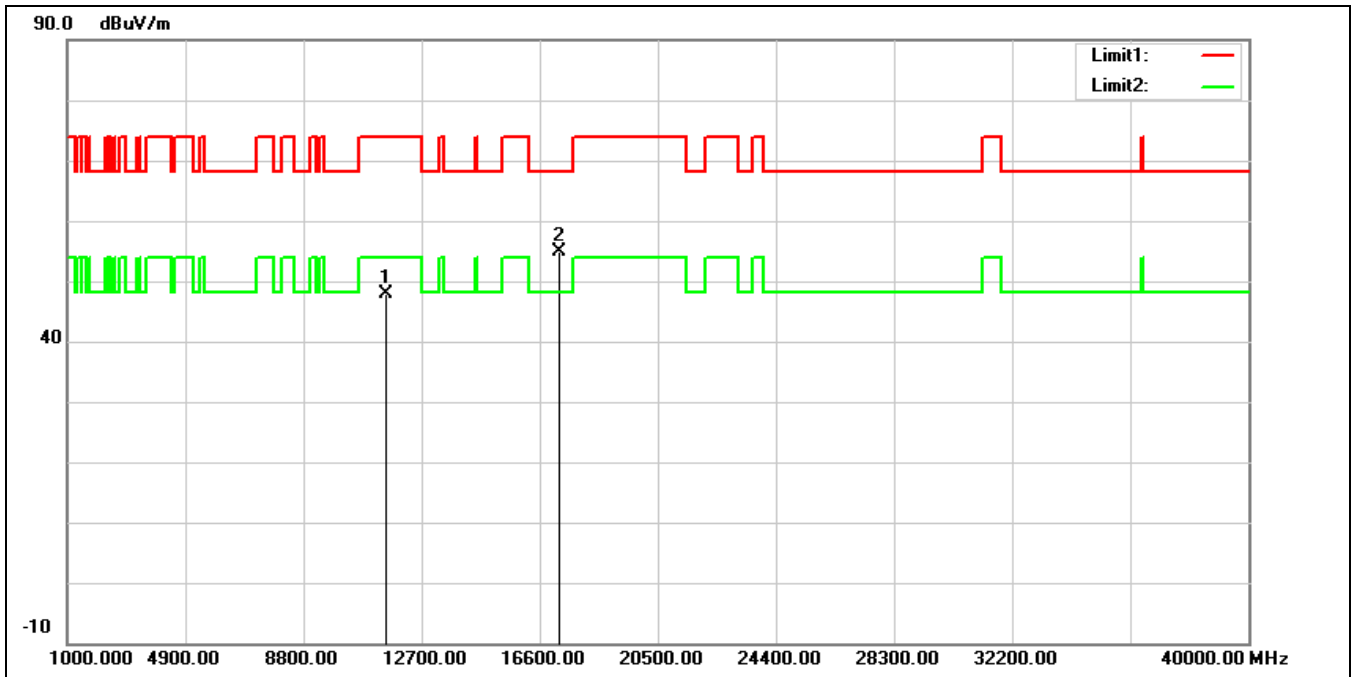


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	32.48	15.42	47.90	74.00	-26.10	peak
2*	17265.000	32.51	22.32	54.83	68.20	-13.37	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

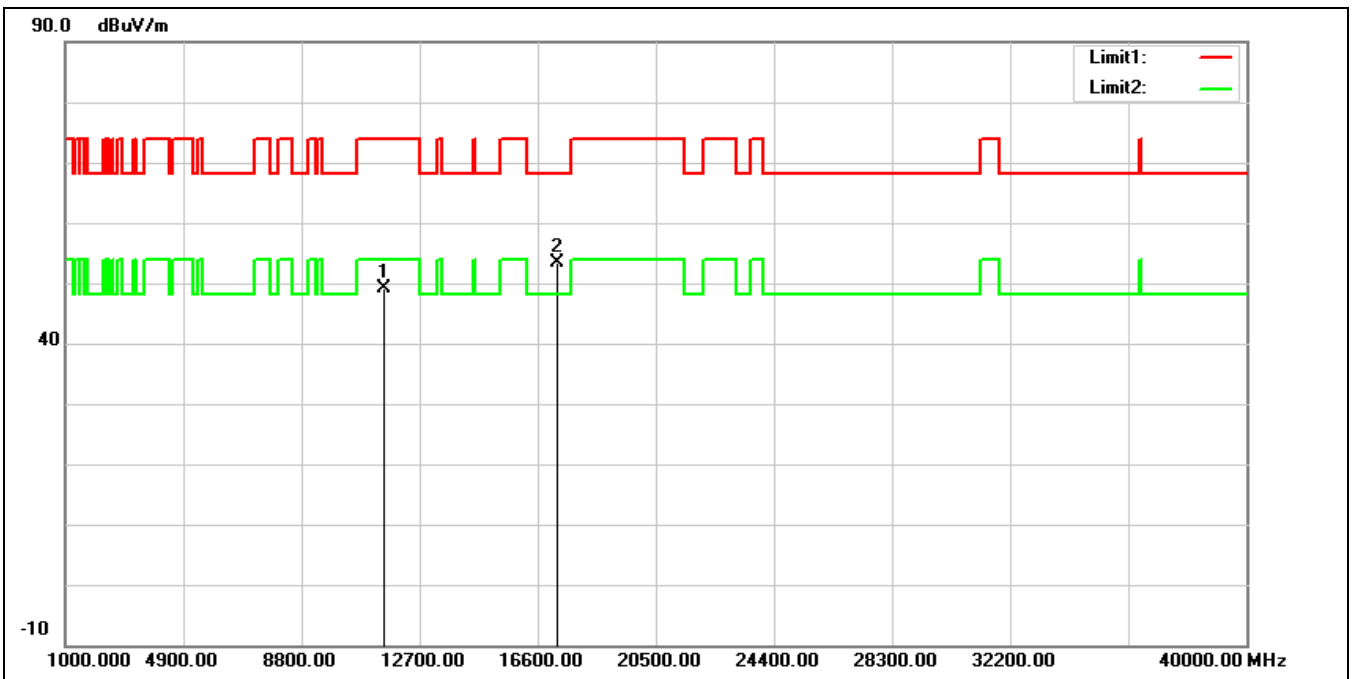

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	33.60	15.42	49.02	74.00	-24.98	peak
2*	17265.000	31.01	22.32	53.33	68.20	-14.87	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

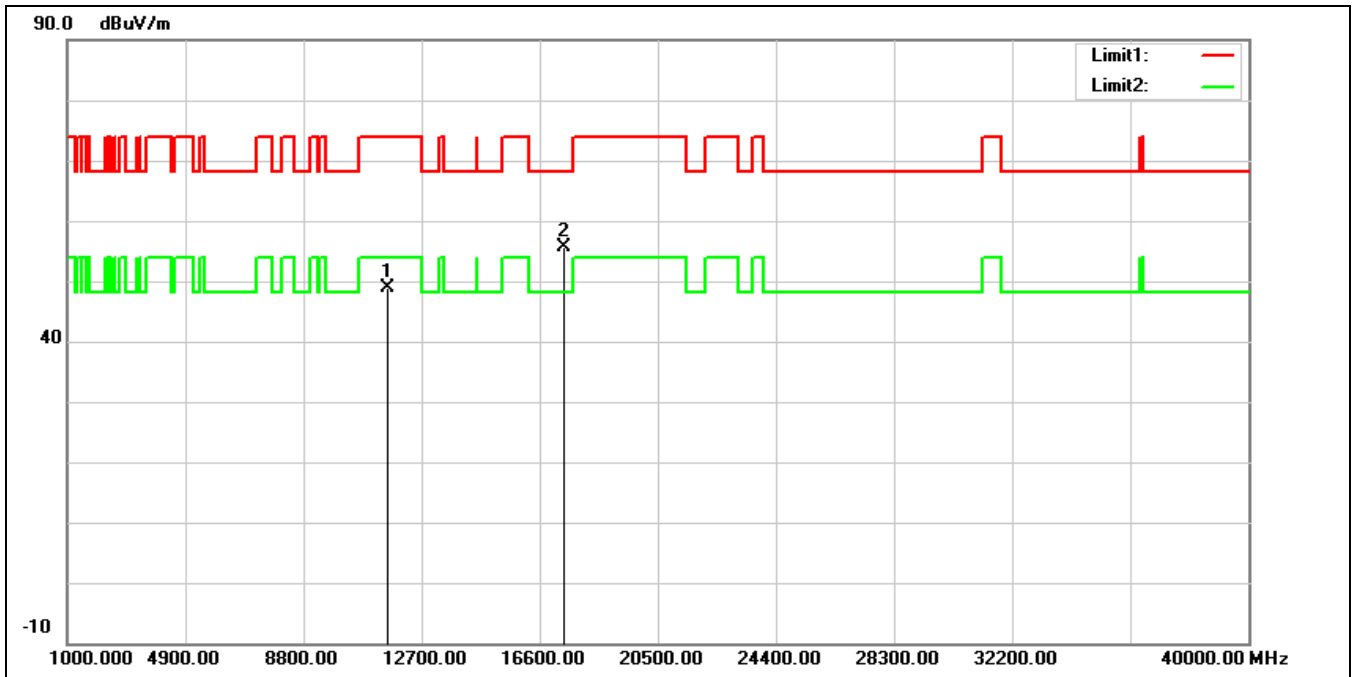

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	33.66	15.14	48.80	74.00	-25.20	peak
2*	17385.000	32.59	23.11	55.70	68.20	-12.50	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

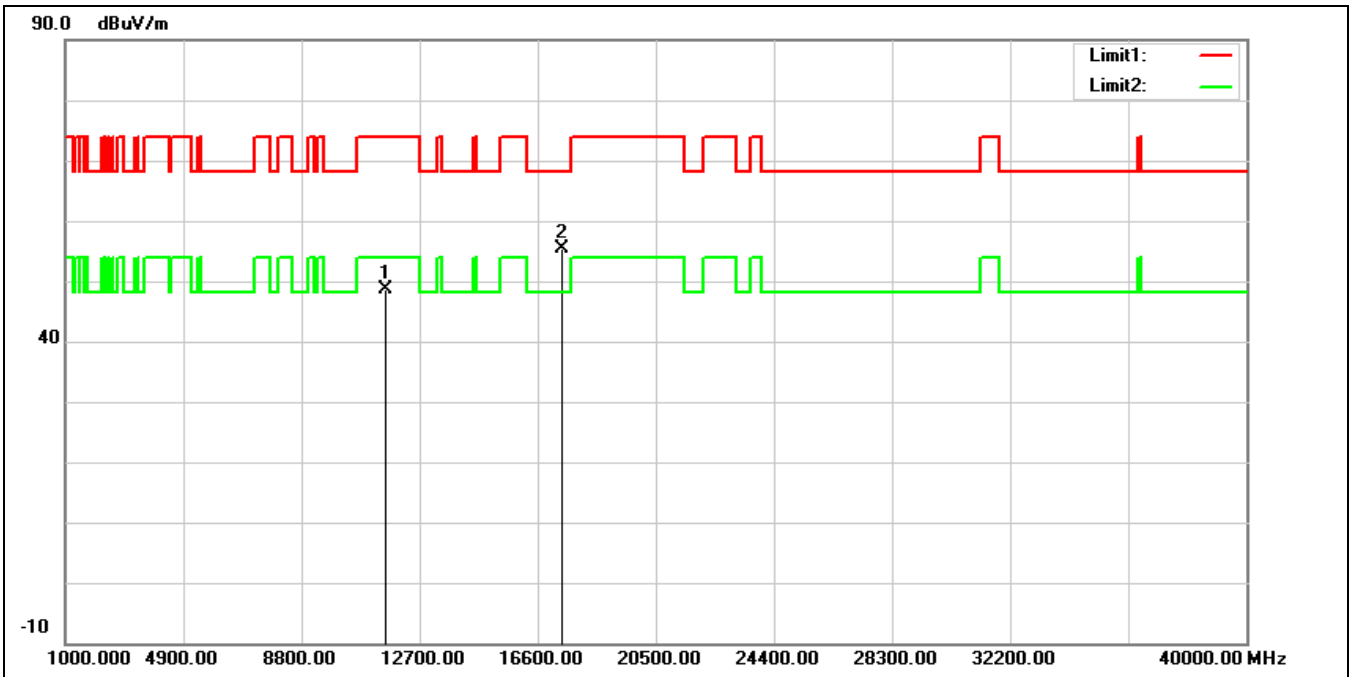


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	33.56	15.14	48.70	74.00	-25.30	peak
2*	17385.000	32.37	23.11	55.48	68.20	-12.72	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

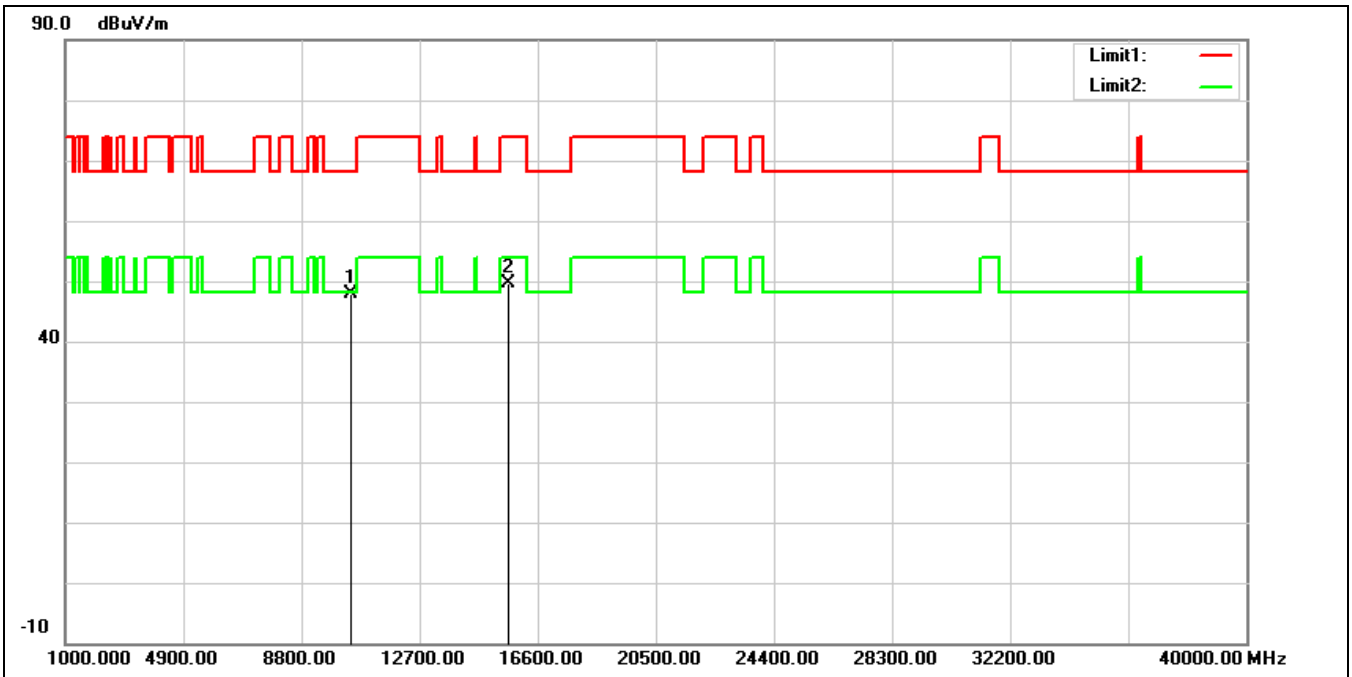


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	33.75	14.20	47.95	68.20	-20.25	peak
2	15630.000	32.39	17.14	49.53	74.00	-24.47	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

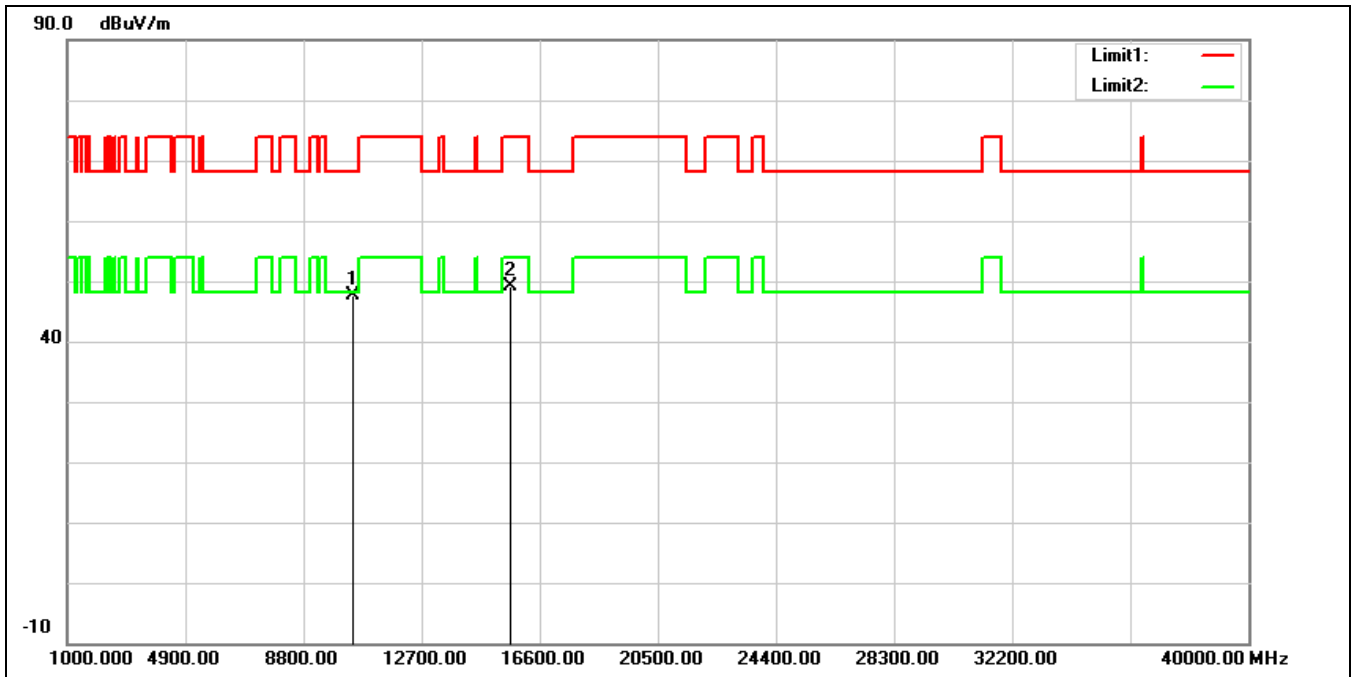


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	33.41	14.20	47.61	68.20	-20.59	peak
2	15630.000	31.95	17.14	49.09	74.00	-24.91	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

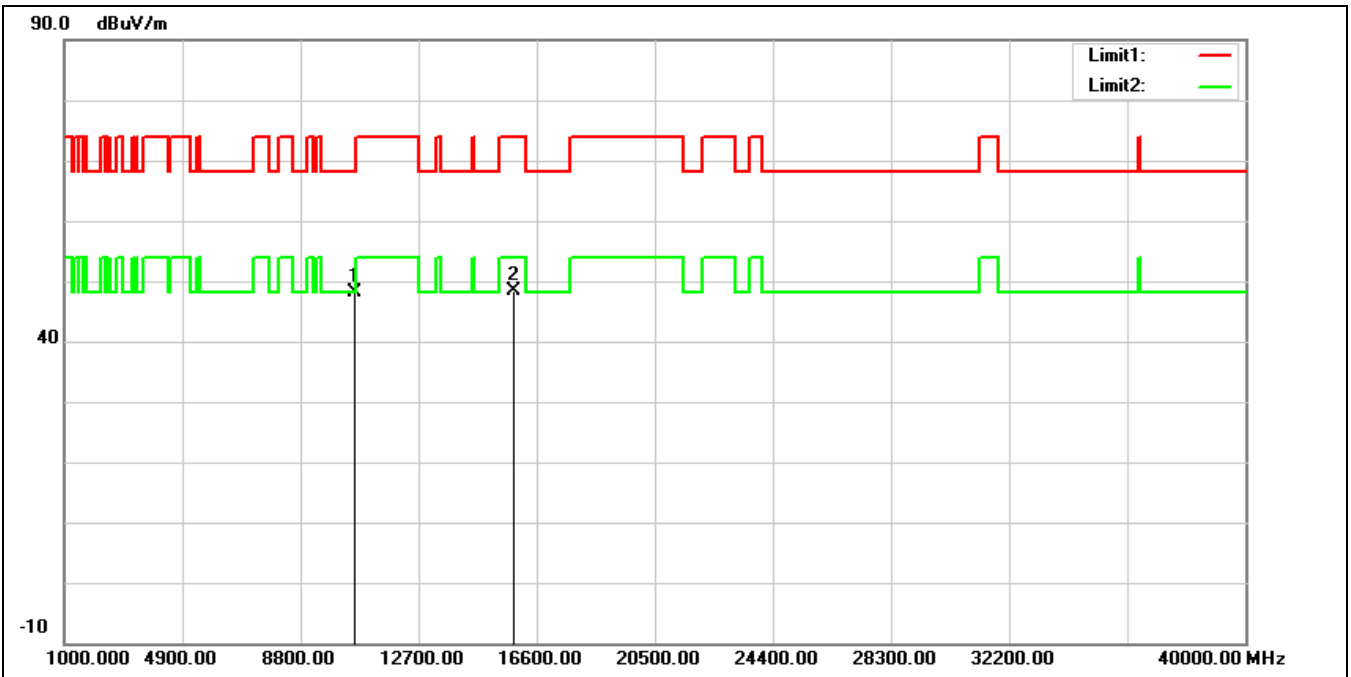


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	33.71	14.43	48.14	68.20	-20.06	peak
2	15870.000	31.68	16.81	48.49	74.00	-25.51	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

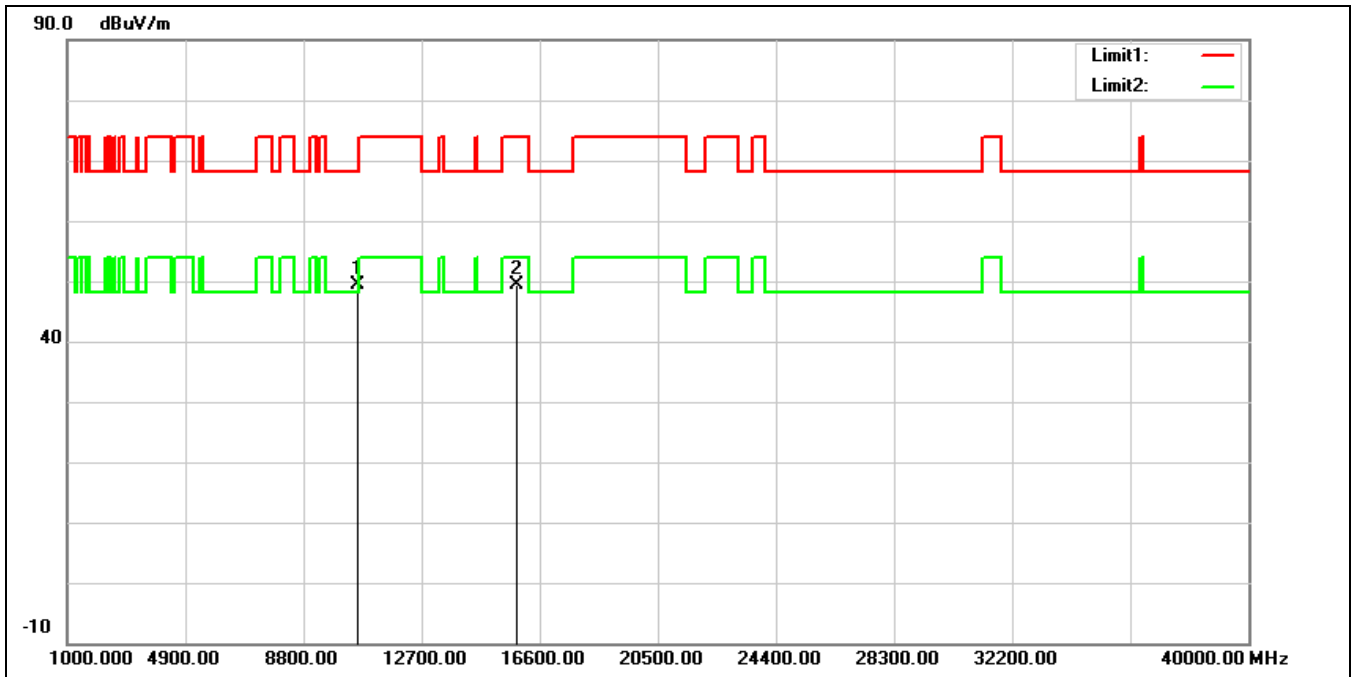


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	35.06	14.43	49.49	68.20	-18.71	peak
2	15870.000	32.51	16.81	49.32	74.00	-24.68	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

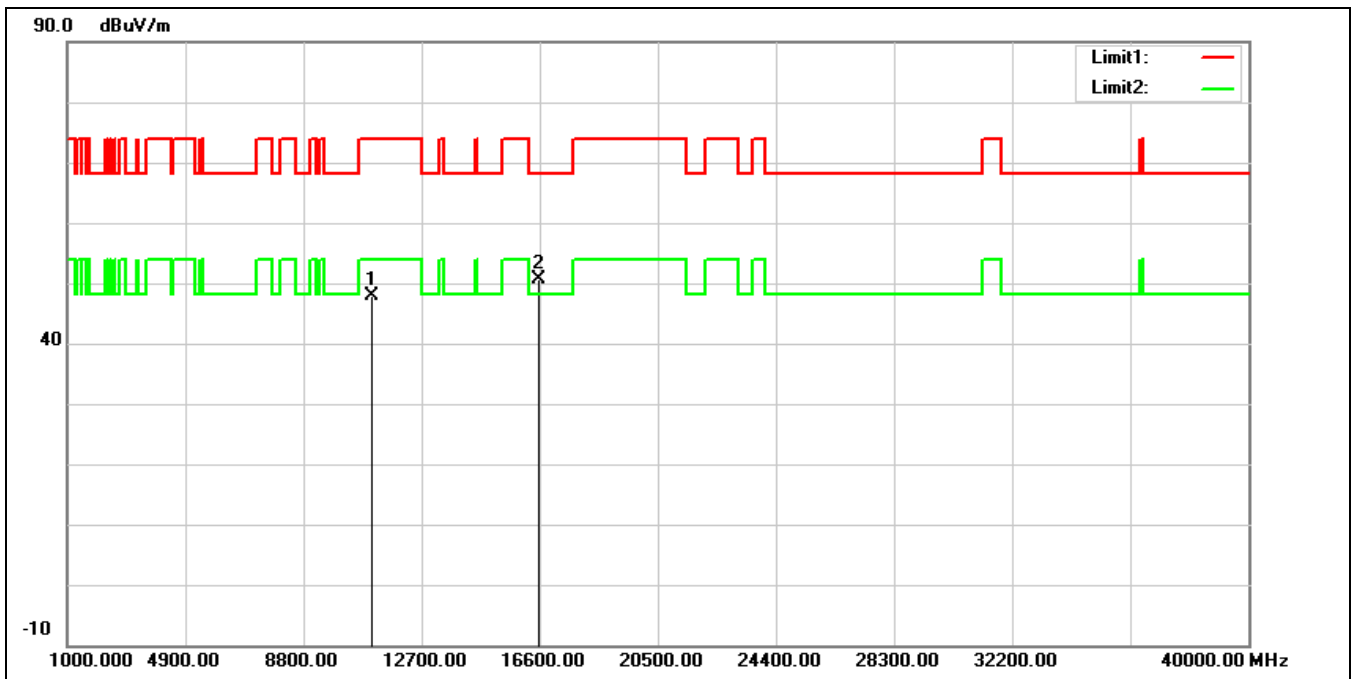


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	33.08	14.78	47.86	74.00	-26.14	peak
2*	16590.000	32.33	18.23	50.56	68.20	-17.64	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

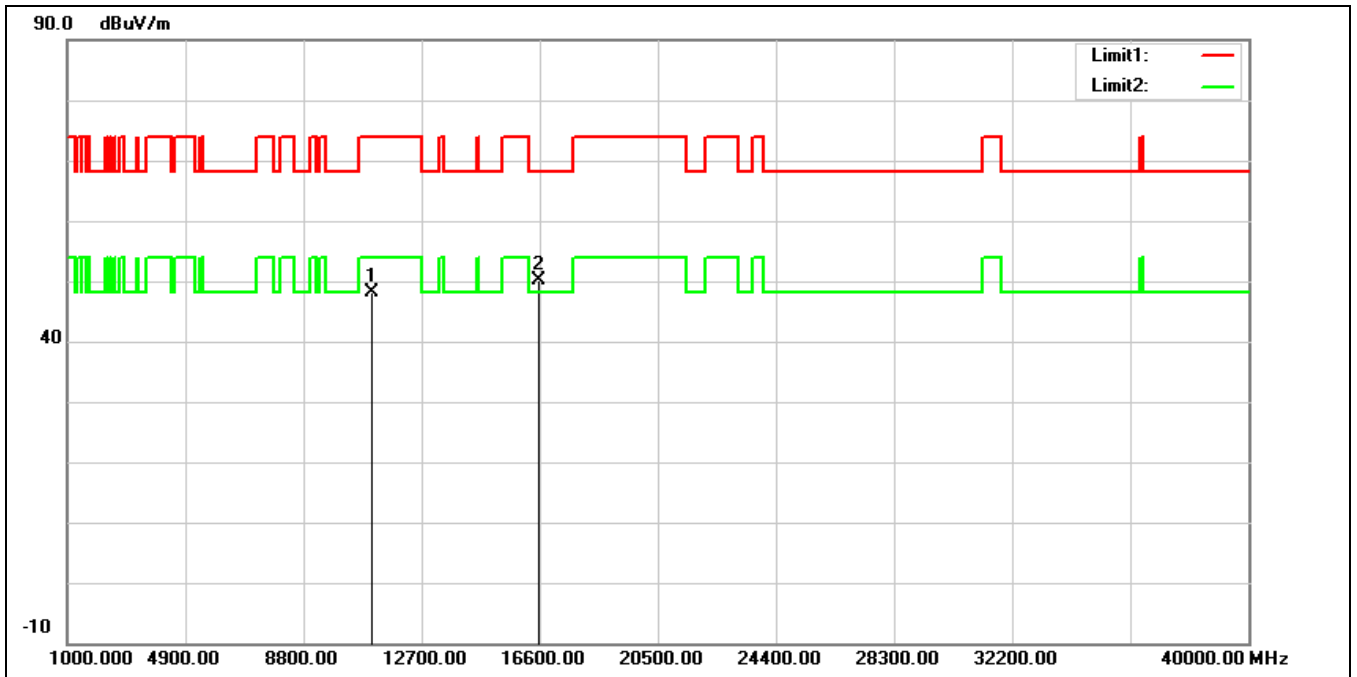

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	33.26	14.78	48.04	74.00	-25.96	peak
2*	16590.000	31.92	18.23	50.15	68.20	-18.05	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

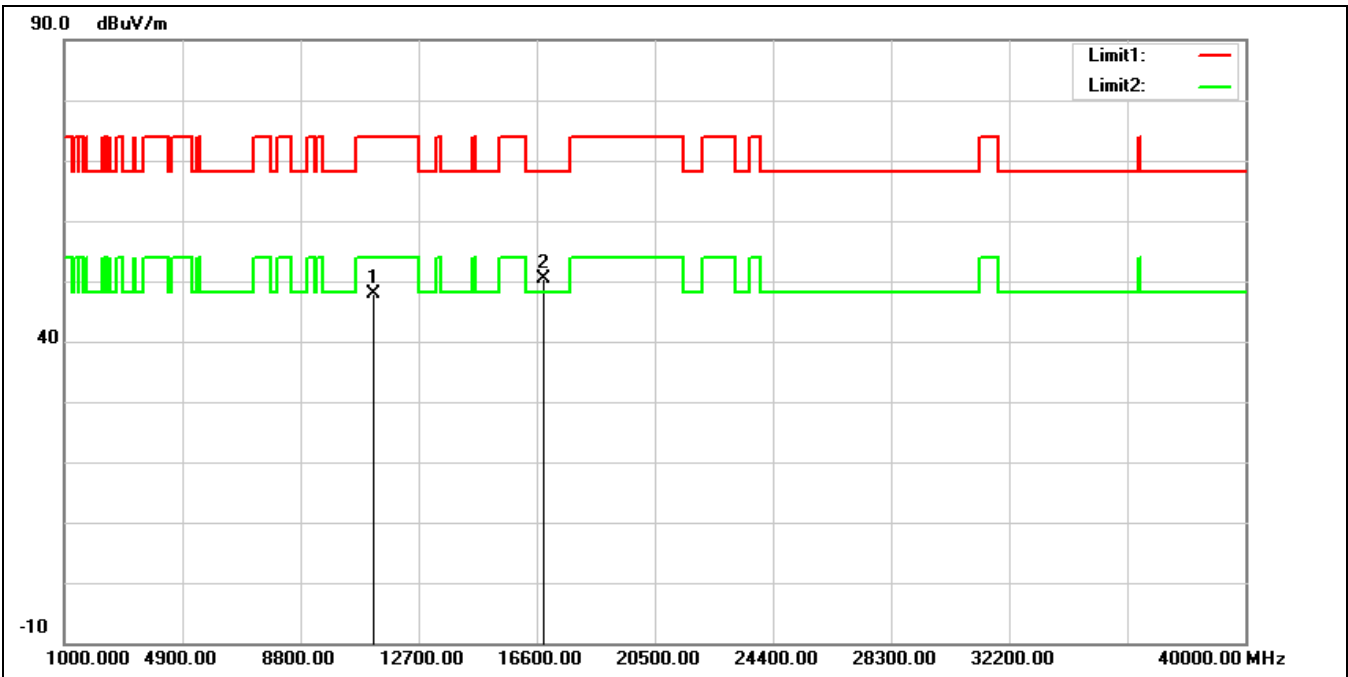

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	33.26	14.70	47.96	74.00	-26.04	peak
2*	16830.000	31.10	19.36	50.46	68.20	-17.74	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

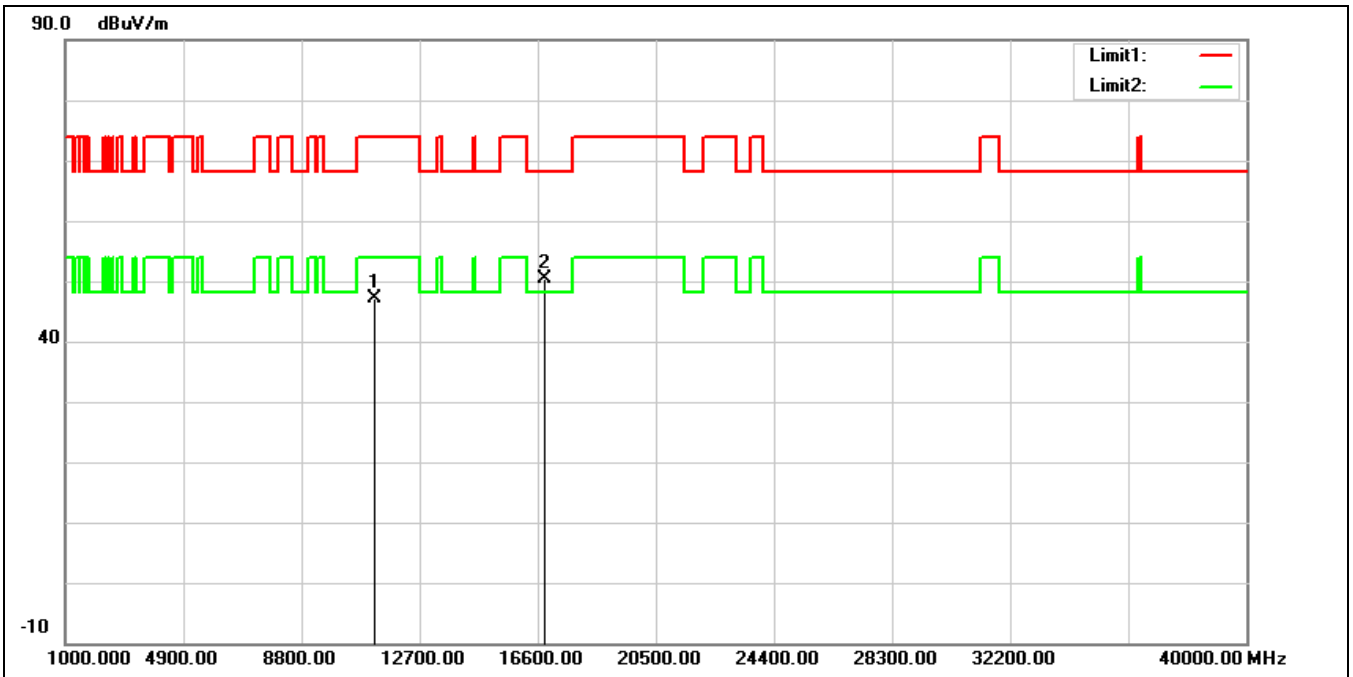


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	32.42	14.70	47.12	74.00	-26.88	peak
2*	16830.000	30.96	19.36	50.32	68.20	-17.88	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

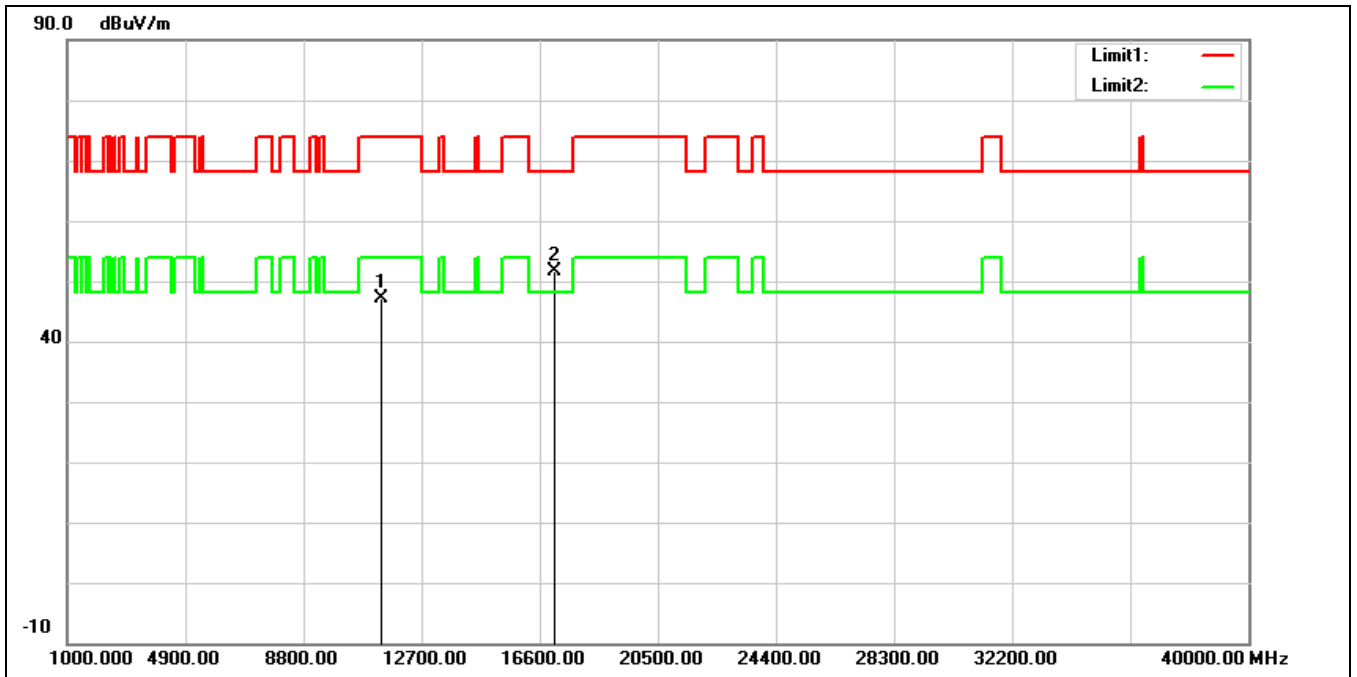


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	32.24	15.00	47.24	74.00	-26.76	peak
2*	17070.000	31.15	20.46	51.61	68.20	-16.59	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

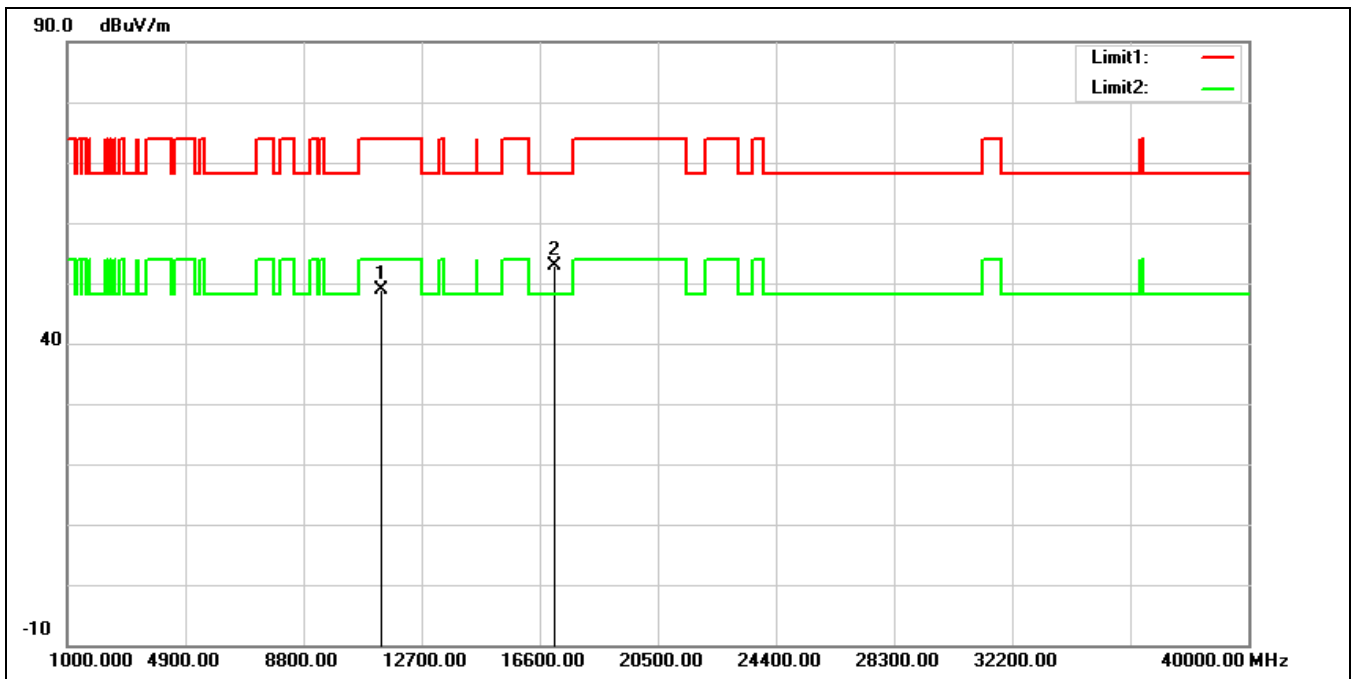


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	33.91	15.00	48.91	74.00	-25.09	peak
2*	17070.000	32.35	20.46	52.81	68.20	-15.39	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

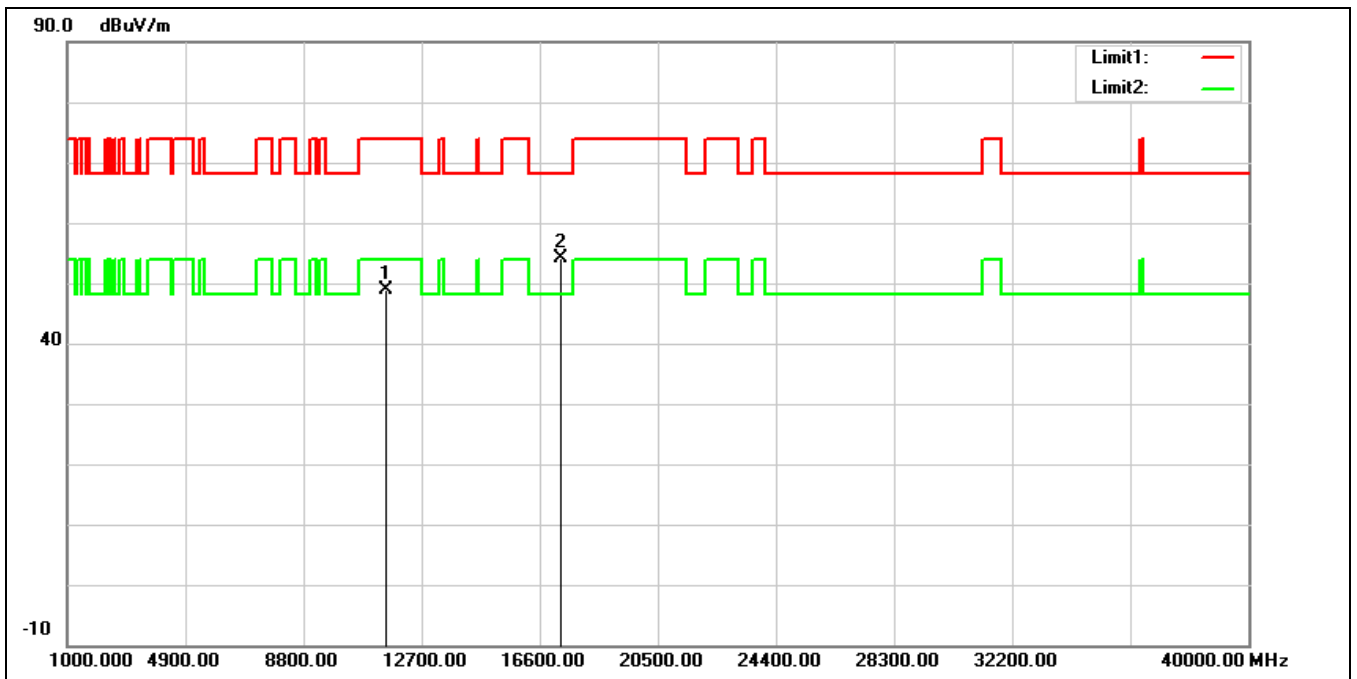


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	33.60	15.28	48.88	74.00	-25.12	peak
2*	17325.000	31.41	22.79	54.20	68.20	-14.00	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

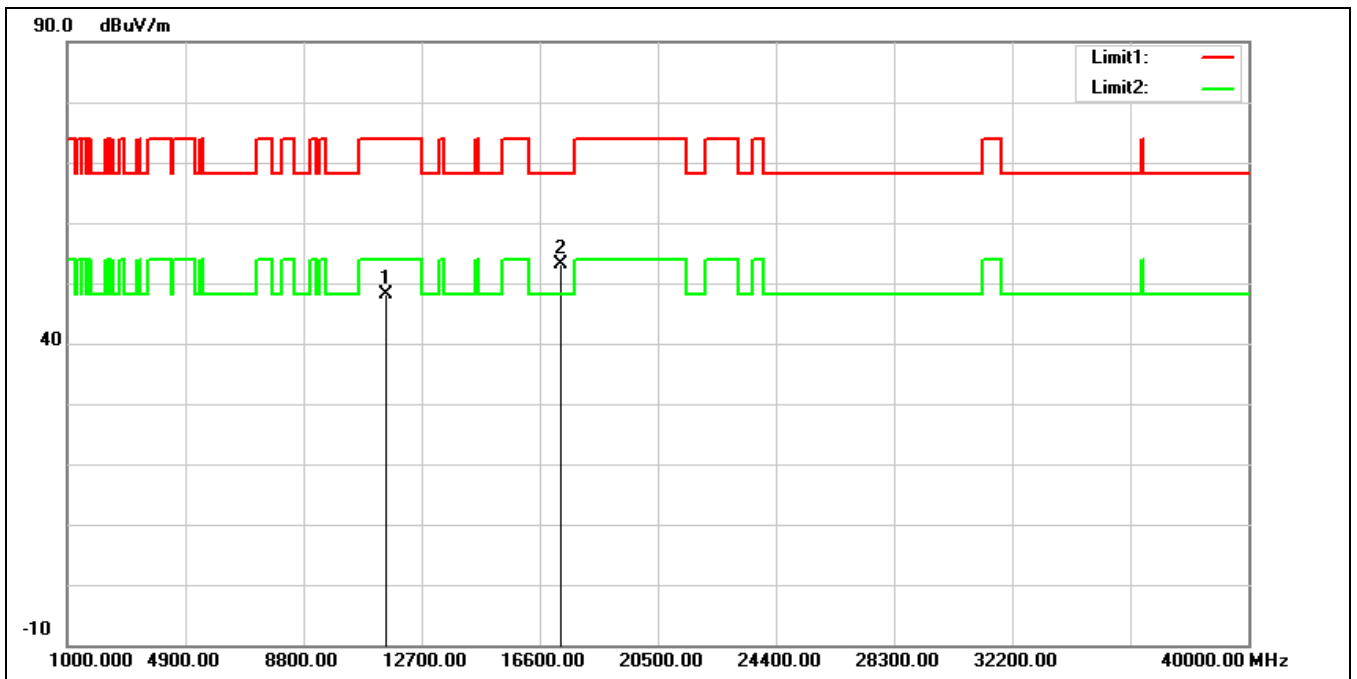


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	32.95	15.28	48.23	74.00	-25.77	peak
2*	17325.000	30.44	22.79	53.23	68.20	-14.97	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

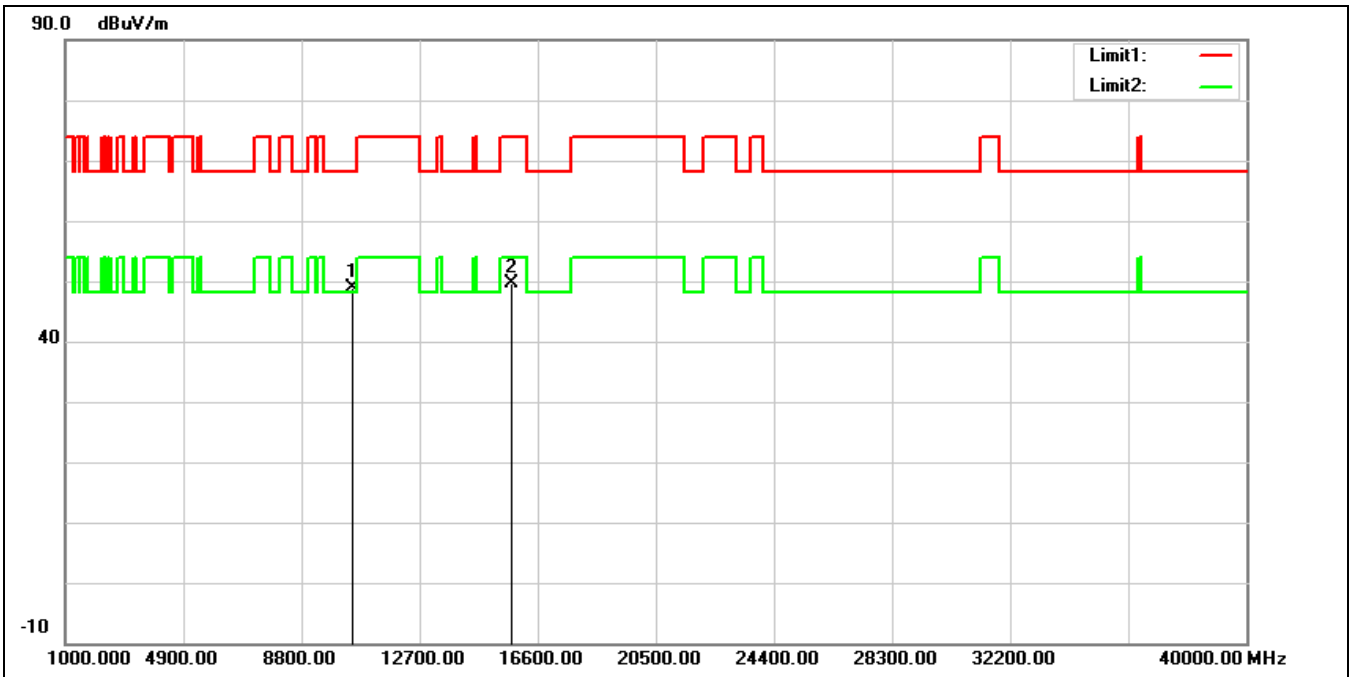


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	34.19	14.66	48.85	68.20	-19.35	peak
2	15750.000	32.29	17.22	49.51	74.00	-24.49	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

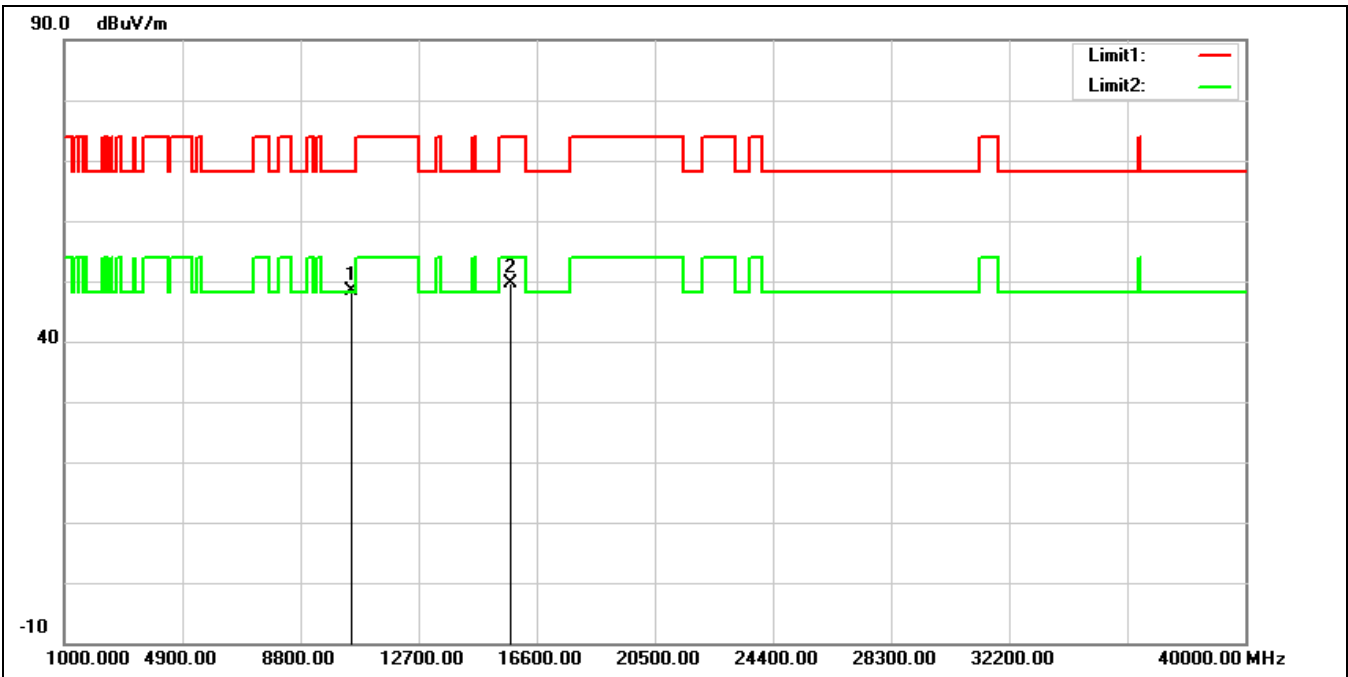

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	33.78	14.66	48.44	68.20	-19.76	peak
2	15750.000	32.47	17.22	49.69	74.00	-24.31	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

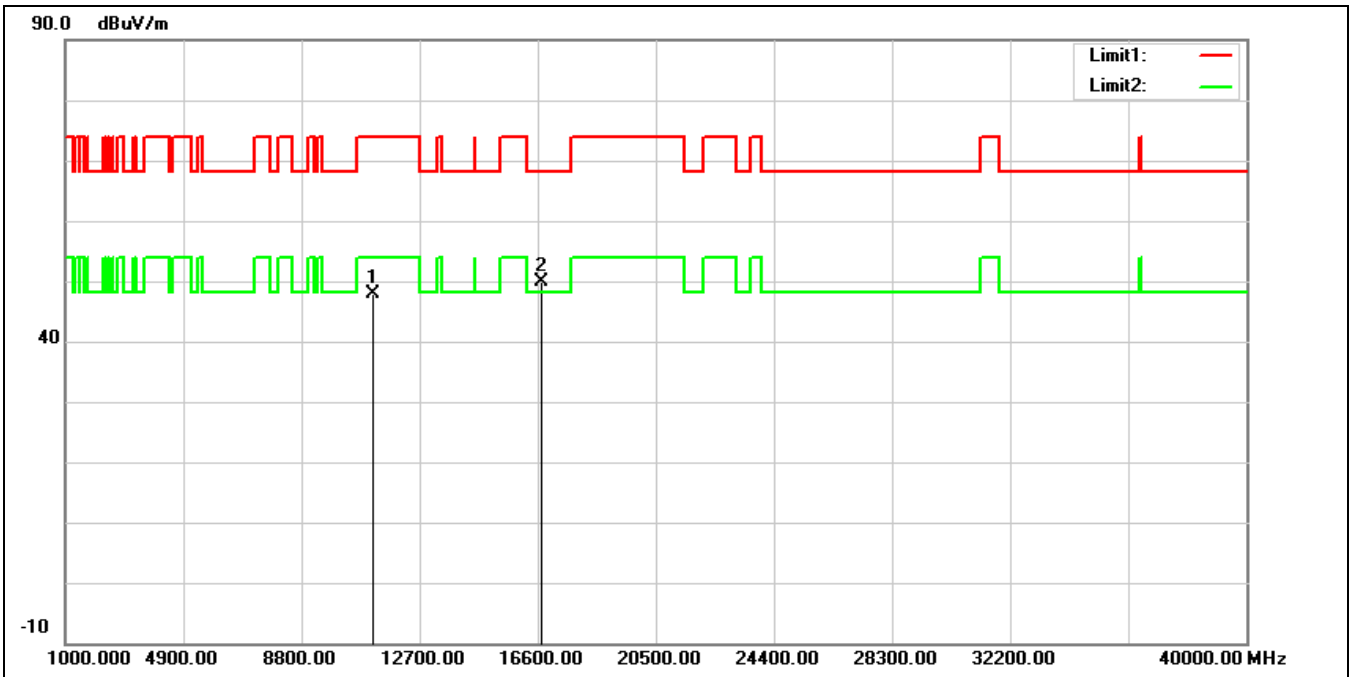

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	33.16	14.77	47.93	74.00	-26.07	peak
2*	16710.000	31.24	18.74	49.98	68.20	-18.22	peak



Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

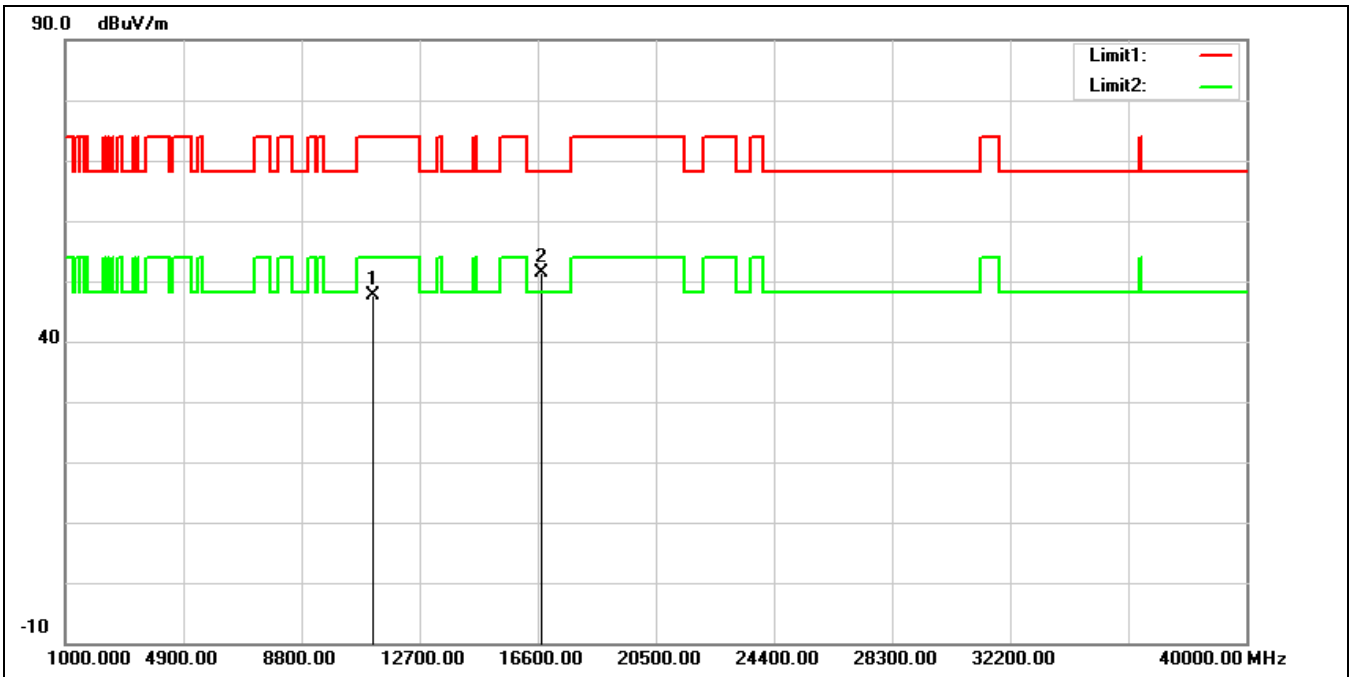


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	32.89	14.77	47.66	74.00	-26.34	peak
2*	16710.000	32.69	18.74	51.43	68.20	-16.77	peak

Band Edge


SISO\_Peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5180 MHz		
Remark:			

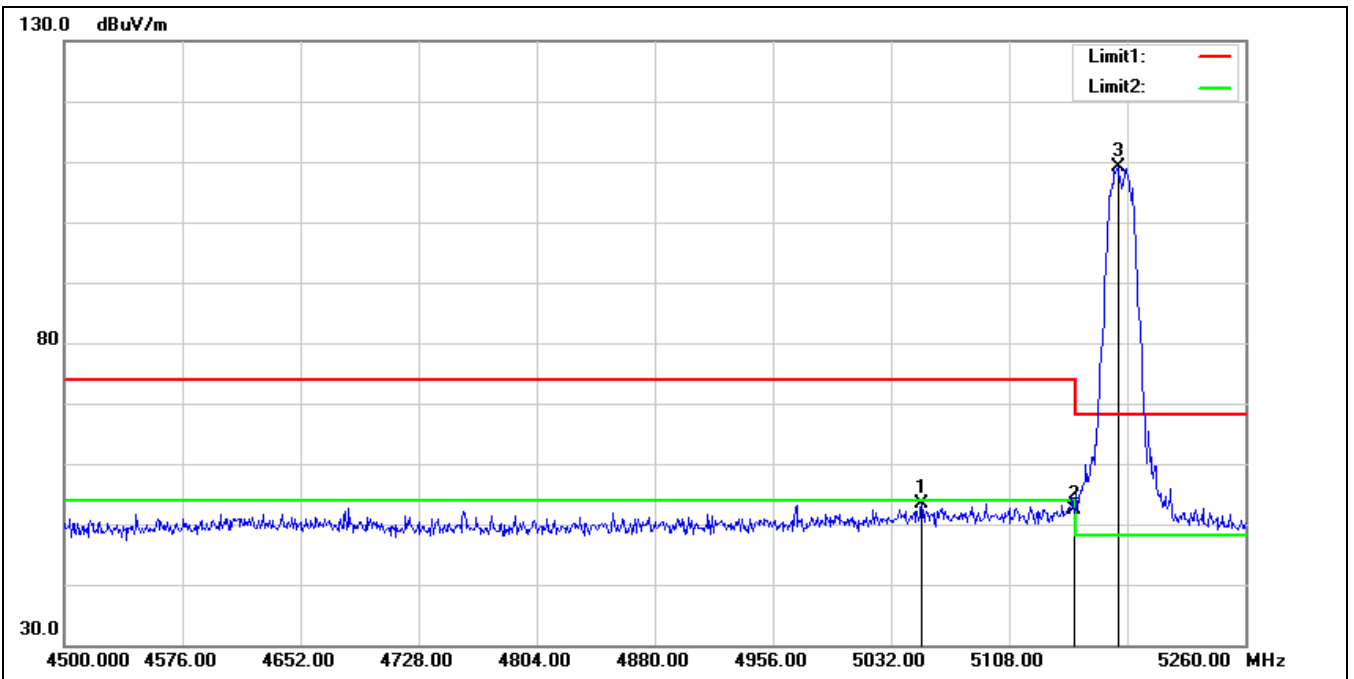


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5051.760	52.40	1.10	53.50	74.00	-20.50	peak
2	5150.000	50.92	1.42	52.34	74.00	-21.66	peak
3*	5177.920	107.72	1.35	109.07	68.20	40.87	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5180 MHz		
Remark:			

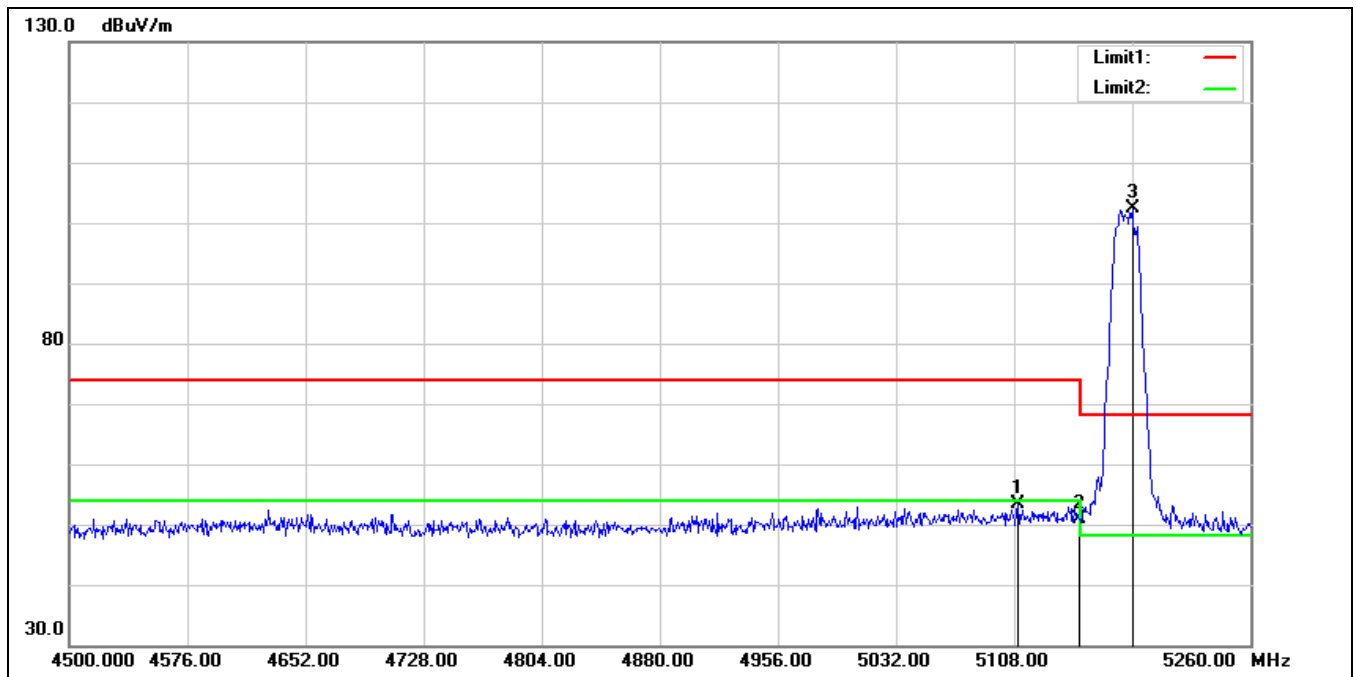


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5110.280	52.05	1.37	53.42	74.00	-20.58	peak
2	5150.000	49.40	1.42	50.82	74.00	-23.18	peak
3*	5184.000	100.99	1.32	102.31	68.20	34.11	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5320 MHz		
Remark:			

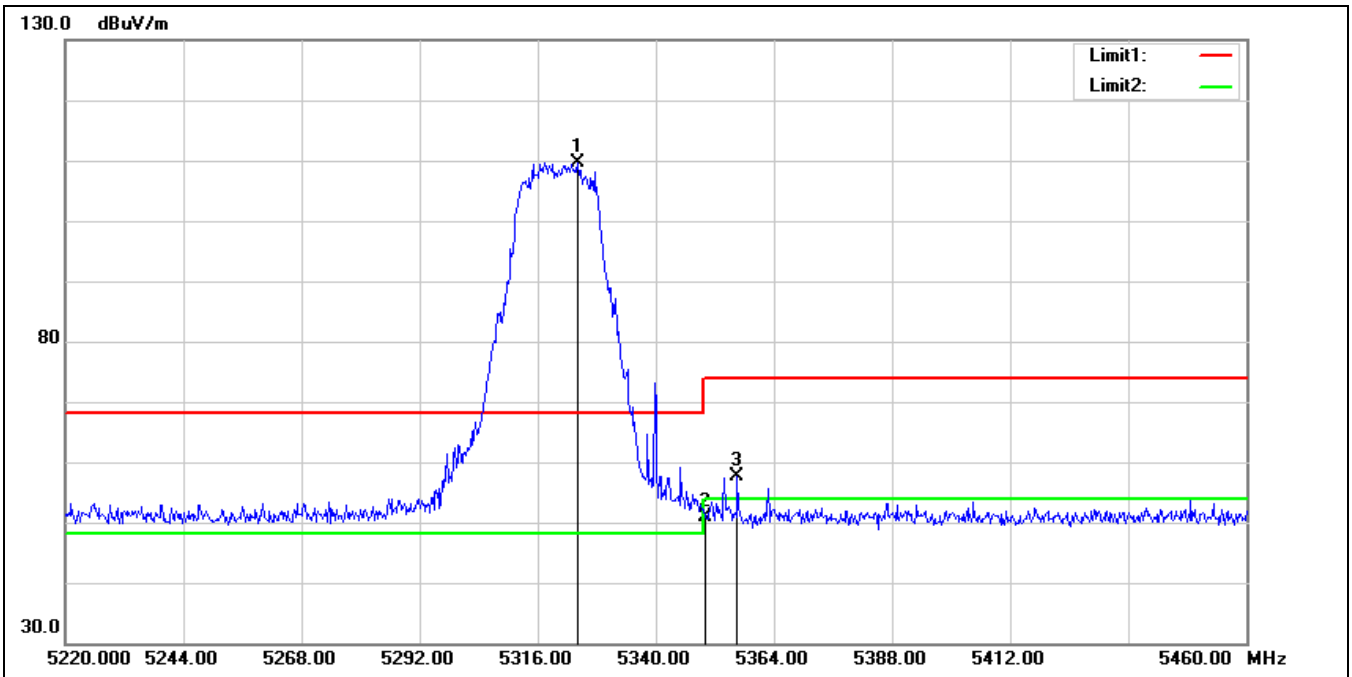


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5324.160	108.74	0.99	109.73	68.20	41.53	peak
2	5350.000	49.85	1.08	50.93	74.00	-23.07	peak
3	5356.560	56.39	1.14	57.53	74.00	-16.47	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5320 MHz		
Remark:			

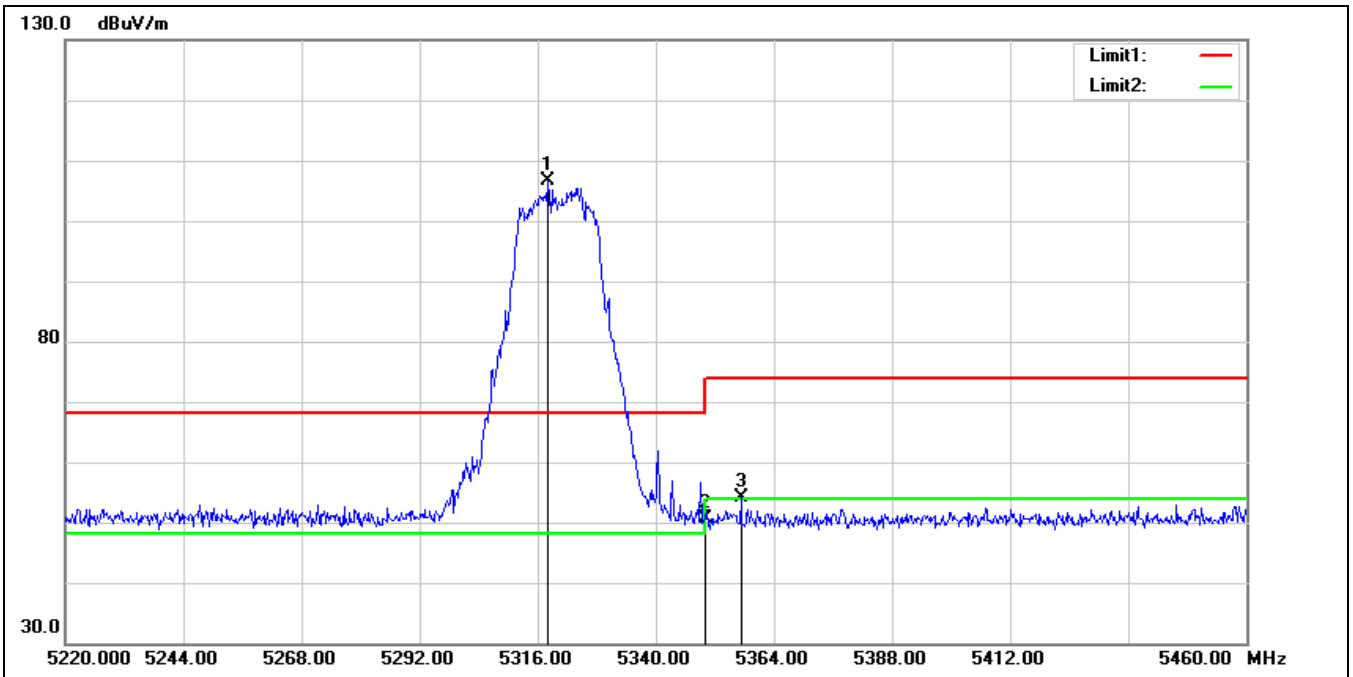


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5318.160	105.69	0.98	106.67	68.20	38.47	peak
2	5350.000	49.57	1.08	50.65	74.00	-23.35	peak
3	5357.280	52.99	1.15	54.14	74.00	-19.86	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

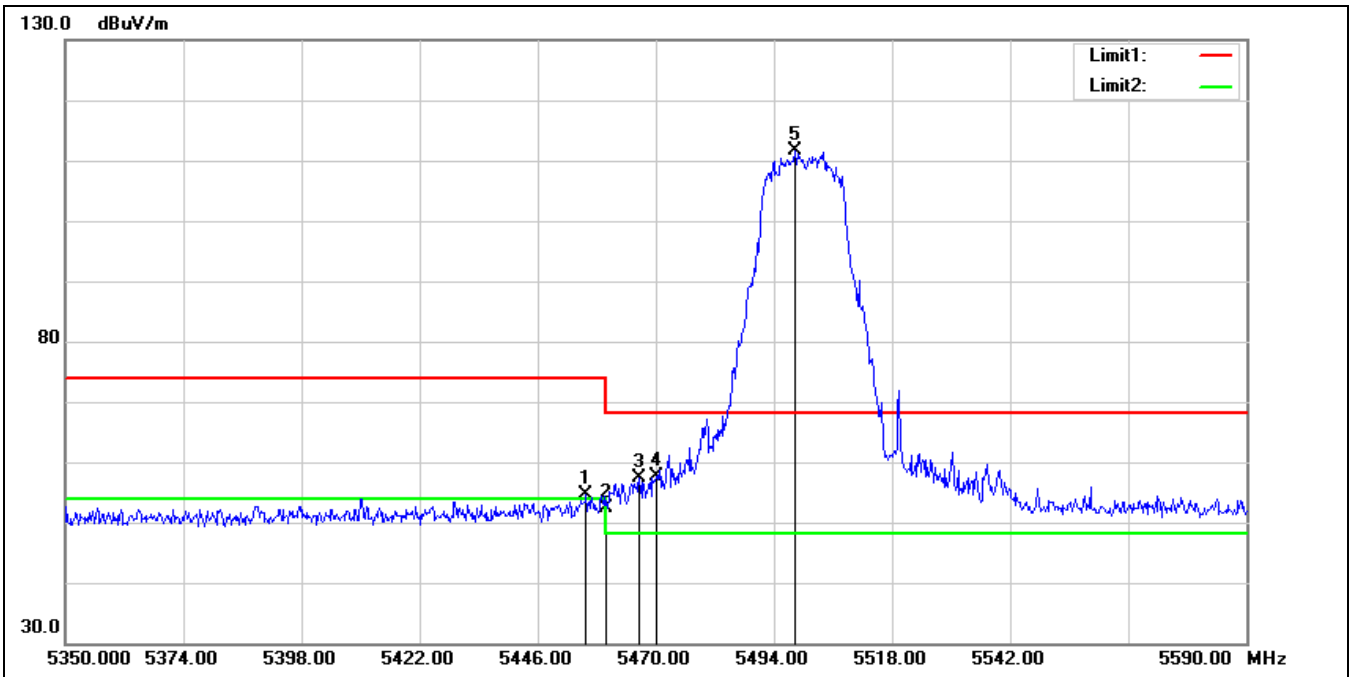


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.840	52.83	1.72	54.55	74.00	-19.45	peak
2	5460.000	50.67	1.73	52.40	74.00	-21.60	peak
3	5466.640	55.66	1.74	57.40	68.20	-10.80	peak
4	5470.000	55.83	1.74	57.57	68.20	-10.63	peak
5*	5498.320	109.85	1.78	111.63	68.20	43.43	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5500 MHz		
Remark:			

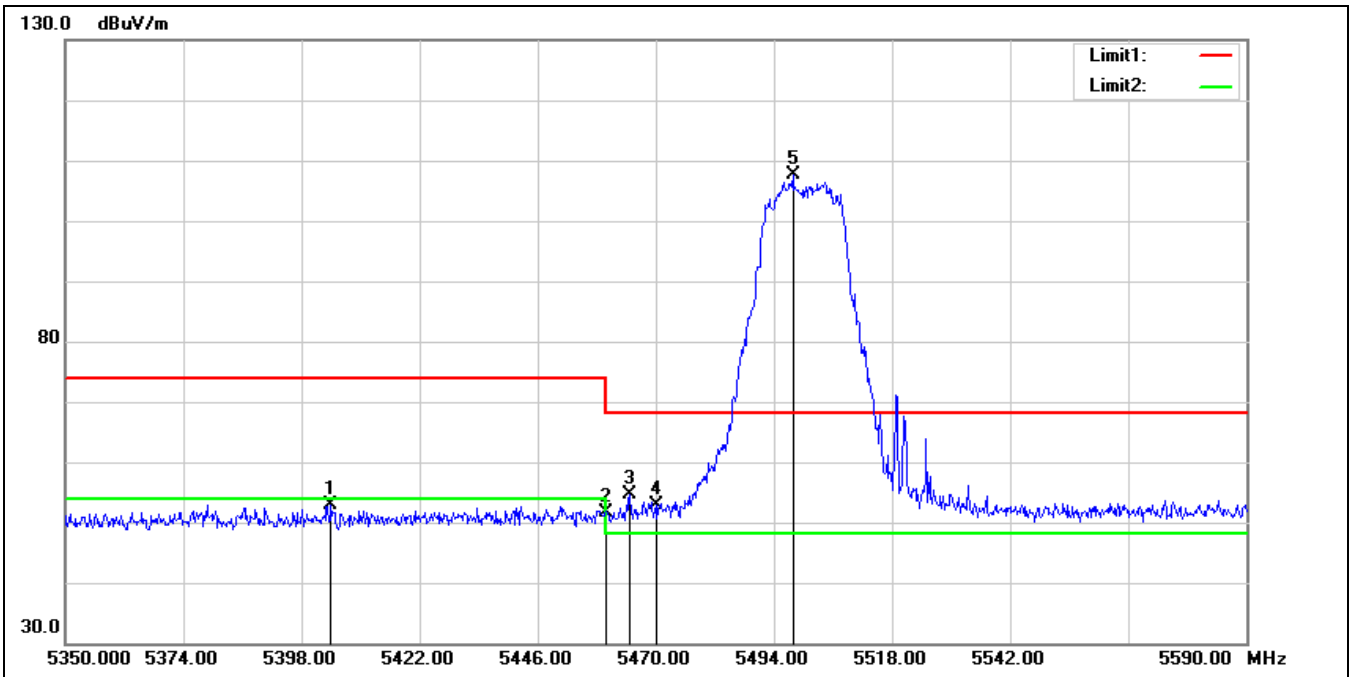

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5404.000	51.32	1.56	52.88	74.00	-21.12	peak
2	5460.000	49.98	1.73	51.71	74.00	-22.29	peak
3	5464.720	52.84	1.73	54.57	68.20	-13.63	peak
4	5470.000	51.21	1.74	52.95	68.20	-15.25	peak
5*	5497.840	105.88	1.78	107.66	68.20	39.46	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5700 MHz		
Remark:			

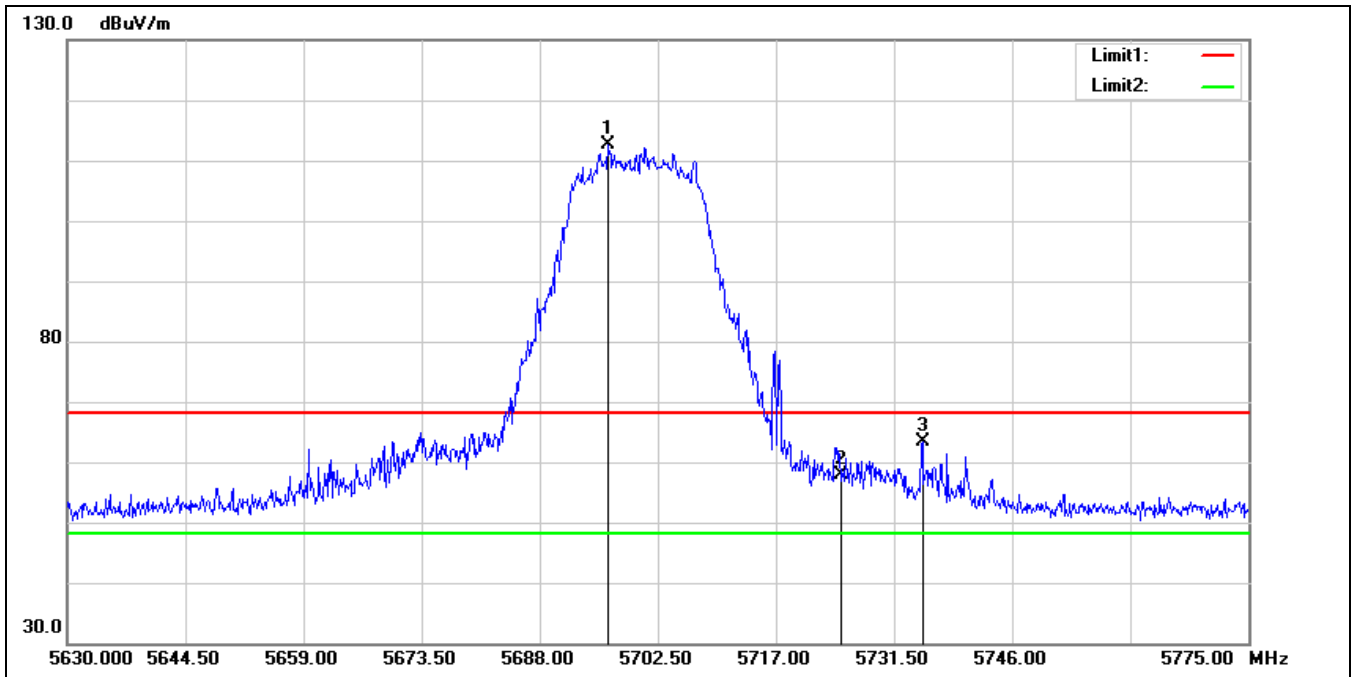

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5696.410	110.64	2.05	112.69	68.20	44.49	peak
2	5725.000	55.70	2.30	58.00	68.20	-10.20	peak
3	5734.980	60.91	2.40	63.31	68.20	-4.89	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5700 MHz		
Remark:			

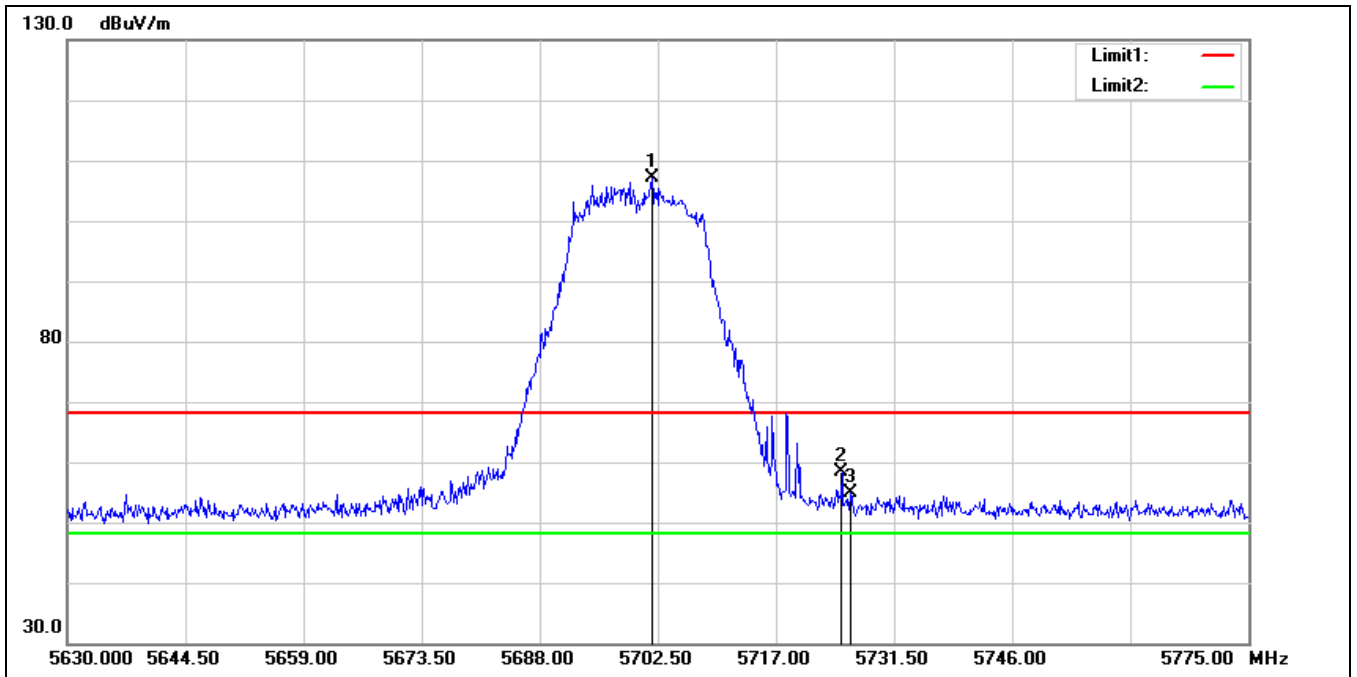


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5701.775	104.93	2.09	107.02	68.20	38.82	peak
2	5725.000	56.04	2.30	58.34	68.20	-9.86	peak
3	5726.135	52.59	2.31	54.90	68.20	-13.30	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5745 MHz		
Remark:			

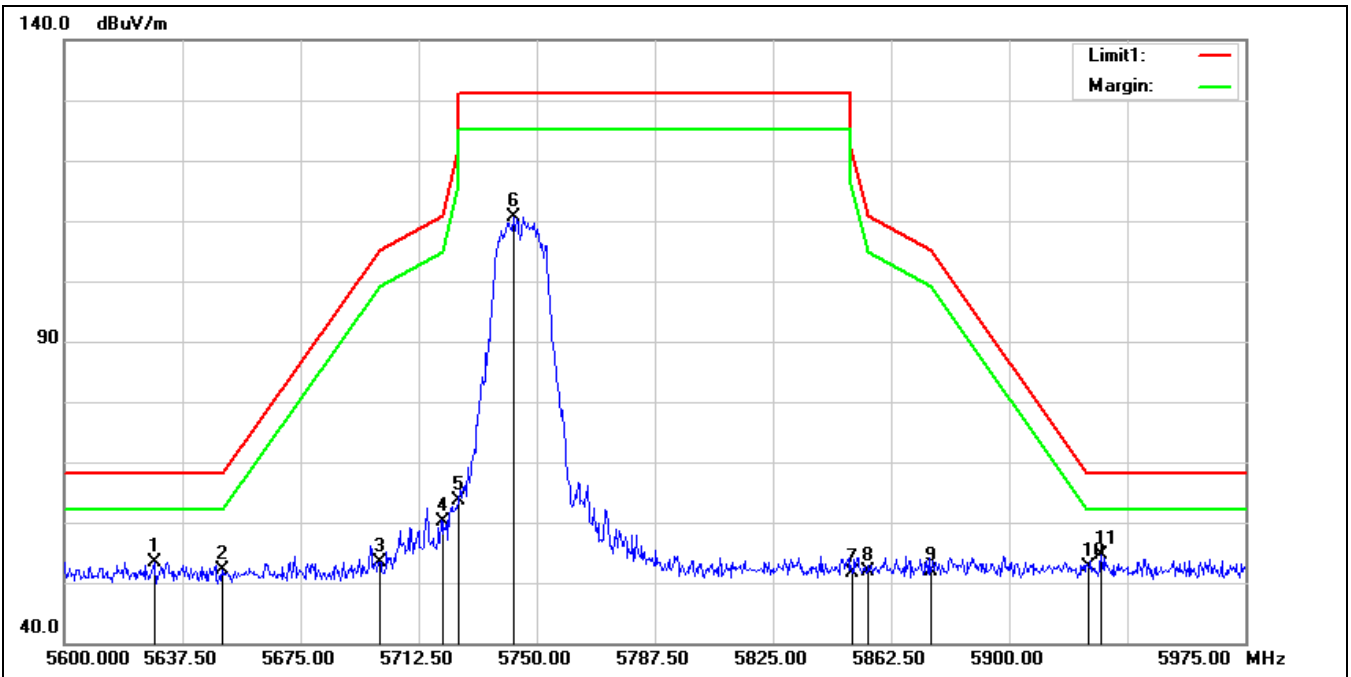


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5628.500	51.51	1.95	53.46	68.20	-14.74	peak
2	5650.000	50.27	1.90	52.17	68.20	-16.03	peak
3	5700.000	51.24	2.06	53.30	105.20	-51.90	peak
4	5720.000	57.79	2.26	60.05	110.80	-50.75	peak
5	5725.000	61.39	2.30	63.69	122.20	-58.51	peak
6	5742.500	108.25	2.46	110.71	131.20	-20.49	peak
7	5850.000	48.74	2.98	51.72	122.20	-70.48	peak
8	5855.000	48.94	3.01	51.95	110.80	-58.85	peak
9	5875.000	48.88	3.07	51.95	105.20	-53.25	peak
10	5925.000	49.43	3.10	52.53	68.20	-15.67	peak
11*	5929.250	51.62	3.08	54.70	68.20	-13.50	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5745 MHz		
Remark:			

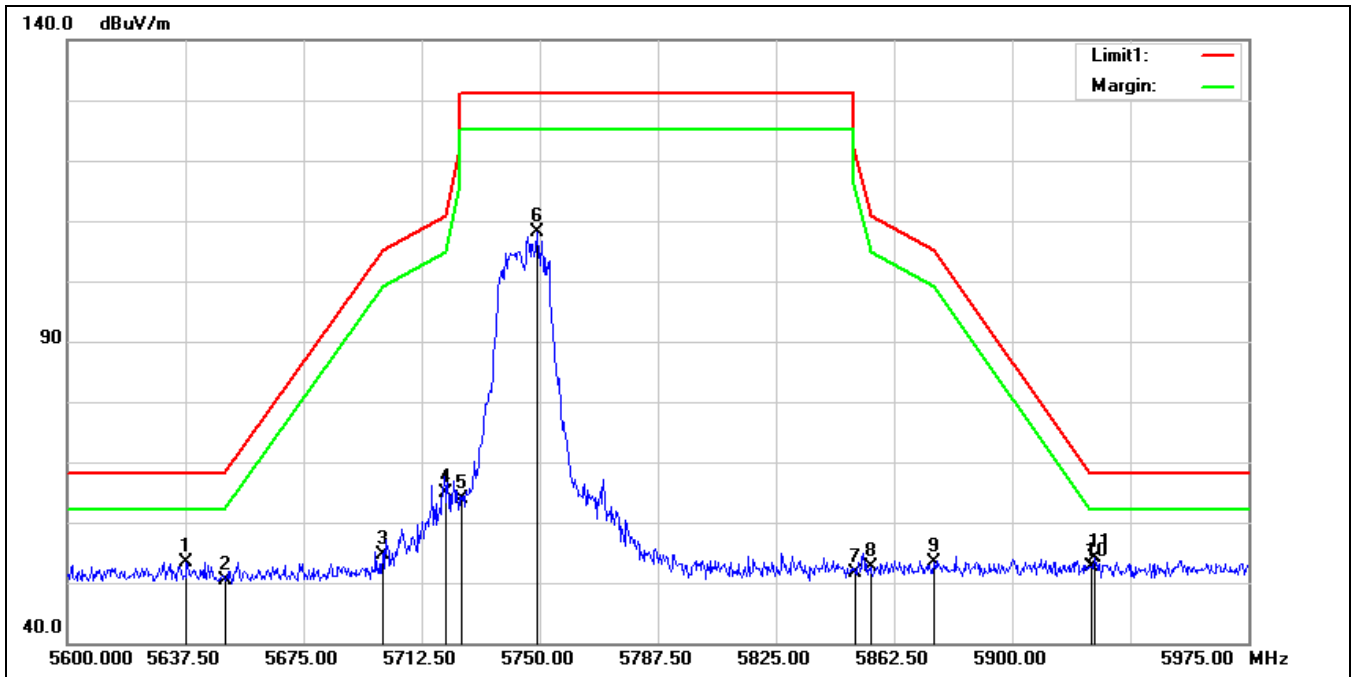


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5637.875	51.49	1.93	53.42	68.20	-14.78	peak
2	5650.000	48.52	1.90	50.42	68.20	-17.78	peak
3	5700.000	52.45	2.06	54.51	105.20	-50.69	peak
4	5720.000	62.66	2.26	64.92	110.80	-45.88	peak
5	5725.000	61.59	2.30	63.89	122.20	-58.31	peak
6	5749.250	105.57	2.53	108.10	131.20	-23.10	peak
7	5850.000	48.56	2.98	51.54	122.20	-70.66	peak
8	5855.000	49.65	3.01	52.66	110.80	-58.14	peak
9	5875.000	50.34	3.07	53.41	105.20	-51.79	peak
10	5925.000	49.46	3.10	52.56	68.20	-15.64	peak
11*	5926.250	51.12	3.10	54.22	68.20	-13.98	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5825 MHz		
Remark:			

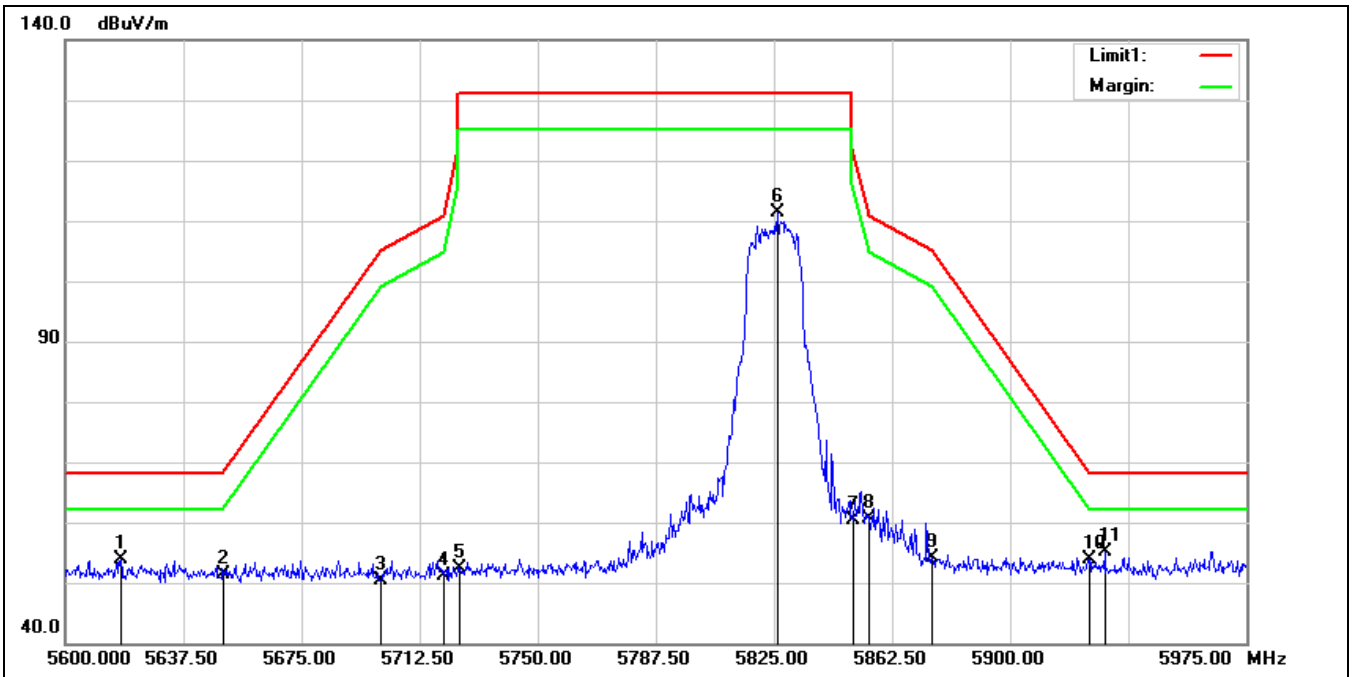


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5617.625	51.97	1.97	53.94	68.20	-14.26	peak
2	5650.000	49.41	1.90	51.31	68.20	-16.89	peak
3	5700.000	48.42	2.06	50.48	105.20	-54.72	peak
4	5720.000	48.92	2.26	51.18	110.80	-59.62	peak
5	5725.000	49.98	2.30	52.28	122.20	-69.92	peak
6	5826.125	108.52	2.89	111.41	131.20	-19.79	peak
7	5850.000	57.46	2.98	60.44	122.20	-61.76	peak
8	5855.000	57.52	3.01	60.53	110.80	-50.27	peak
9	5875.000	50.94	3.07	54.01	105.20	-51.19	peak
10	5925.000	50.69	3.10	53.79	68.20	-14.41	peak
11*	5930.000	52.11	3.08	55.19	68.20	-13.01	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5825 MHz		
Remark:			

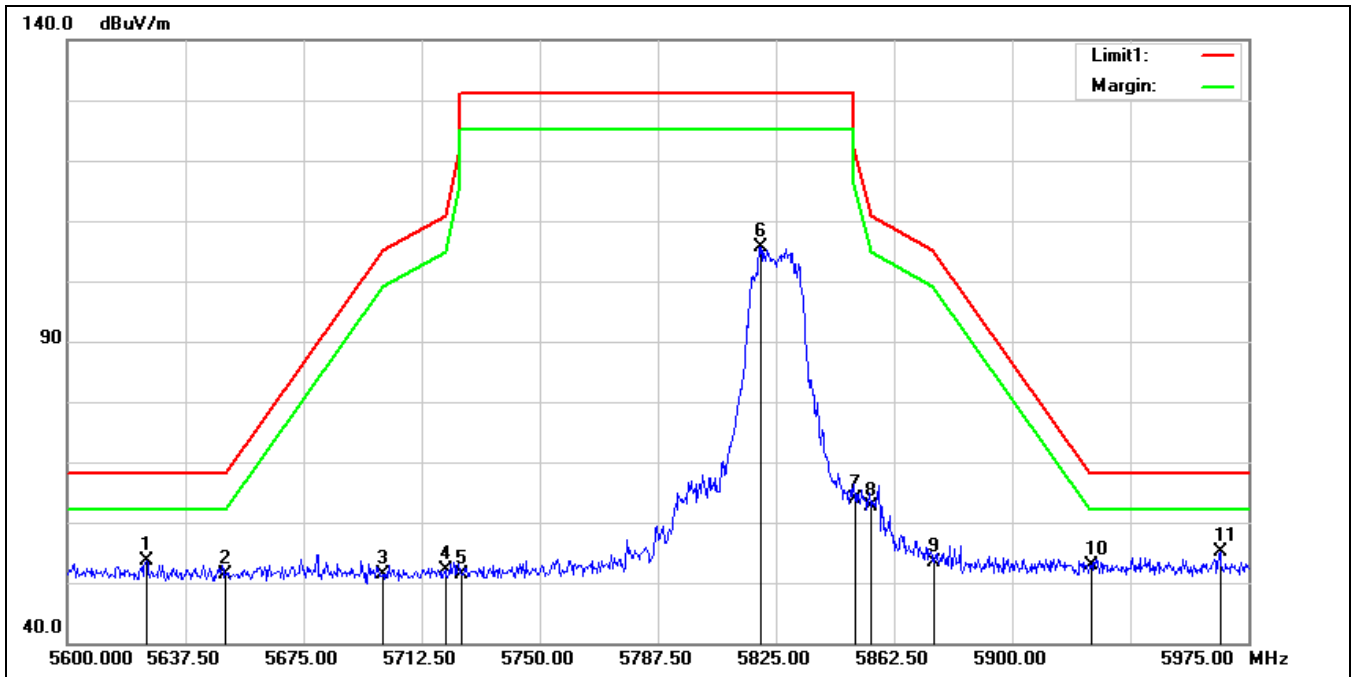


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5625.125	51.55	1.96	53.51	68.20	-14.69	peak
2	5650.000	49.48	1.90	51.38	68.20	-16.82	peak
3	5700.000	49.34	2.06	51.40	105.20	-53.80	peak
4	5720.000	49.83	2.26	52.09	110.80	-58.71	peak
5	5725.000	49.18	2.30	51.48	122.20	-70.72	peak
6	5820.125	102.83	2.88	105.71	131.20	-25.49	peak
7	5850.000	60.95	2.98	63.93	122.20	-58.27	peak
8	5855.000	59.71	3.01	62.72	110.80	-48.08	peak
9	5875.000	50.21	3.07	53.28	105.20	-51.92	peak
10	5925.000	49.70	3.10	52.80	68.20	-15.40	peak
11*	5966.000	51.96	3.12	55.08	68.20	-13.12	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

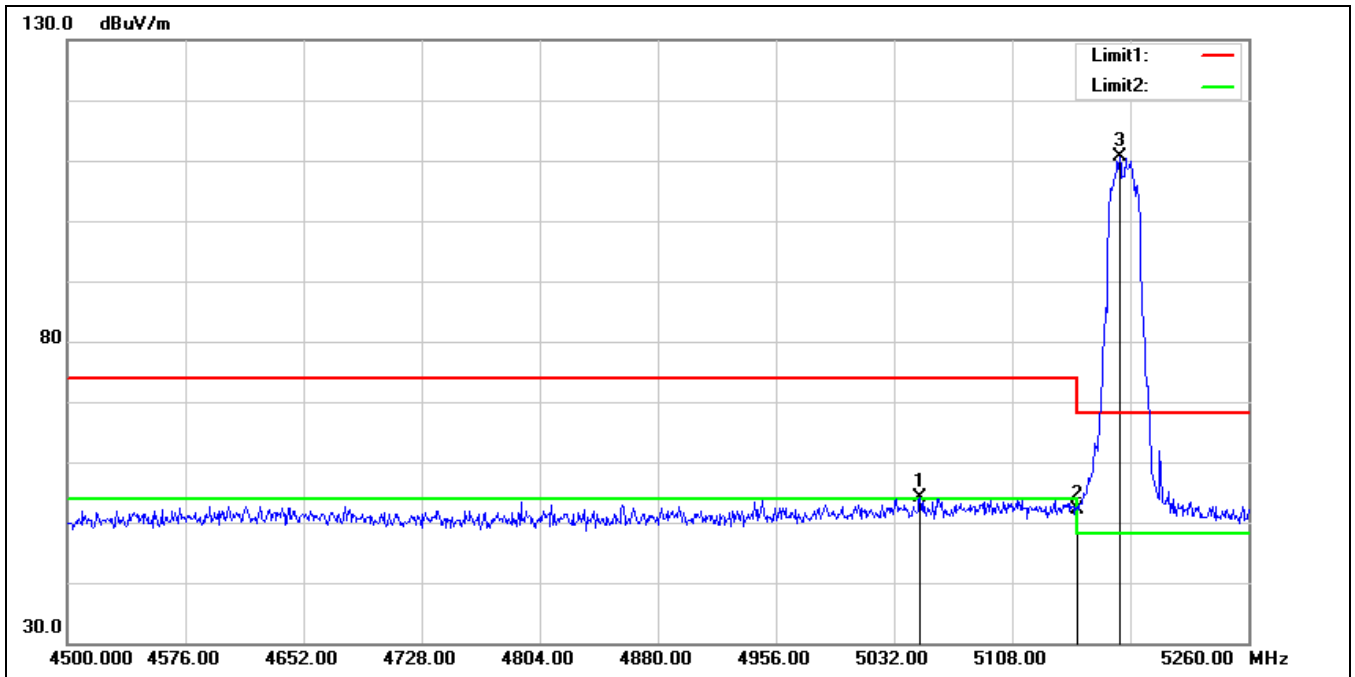


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5048.720	53.10	1.08	54.18	74.00	-19.82	peak
2	5150.000	50.60	1.42	52.02	74.00	-21.98	peak
3*	5177.160	109.39	1.35	110.74	68.20	42.54	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

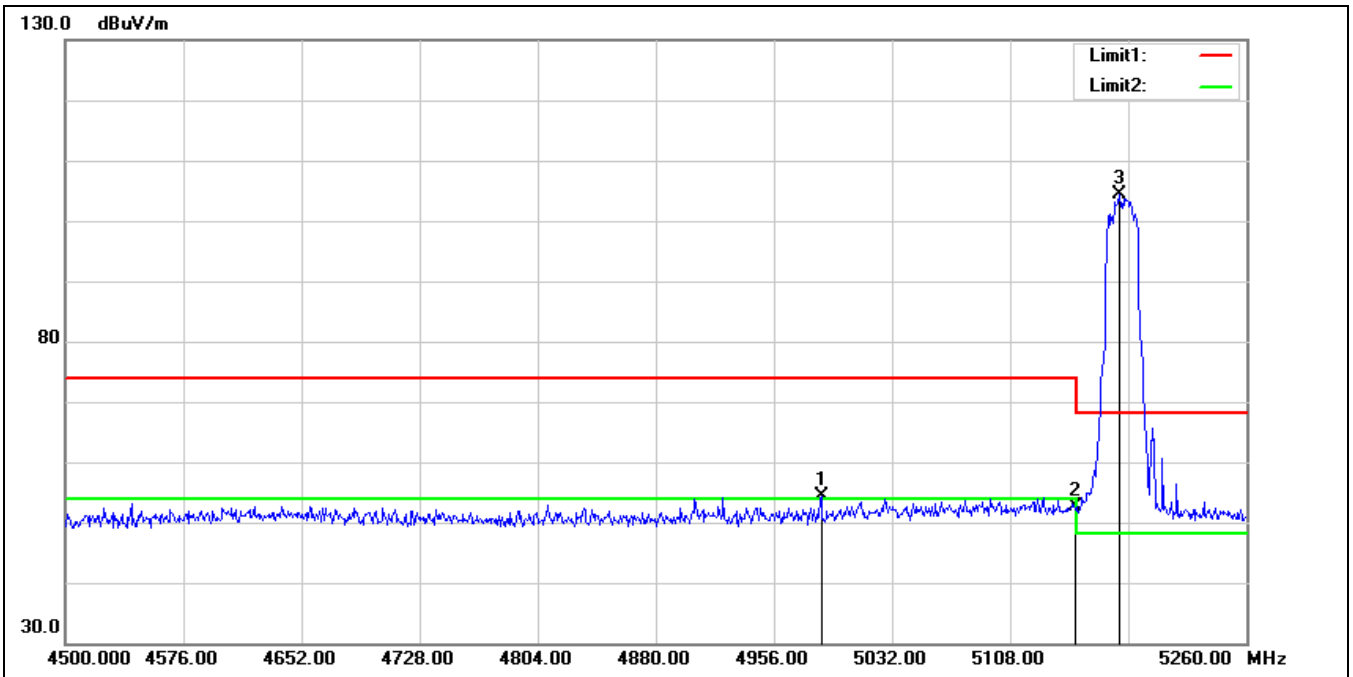

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4986.400	53.73	0.66	54.39	74.00	-19.61	peak
2	5150.000	51.10	1.42	52.52	74.00	-21.48	peak
3*	5178.680	103.14	1.35	104.49	68.20	36.29	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

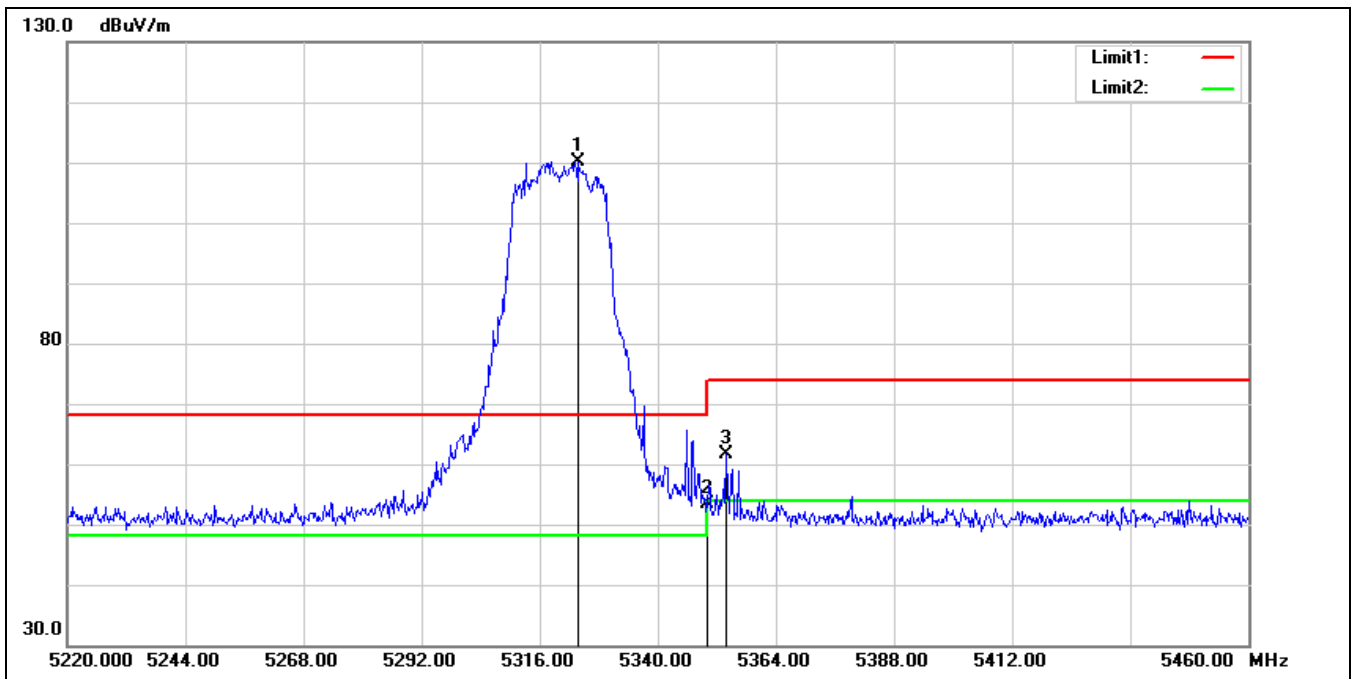

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5323.920	109.13	0.99	110.12	68.20	41.92	peak
2	5350.000	52.40	1.08	53.48	74.00	-20.52	peak
3	5353.920	60.47	1.11	61.58	74.00	-12.42	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

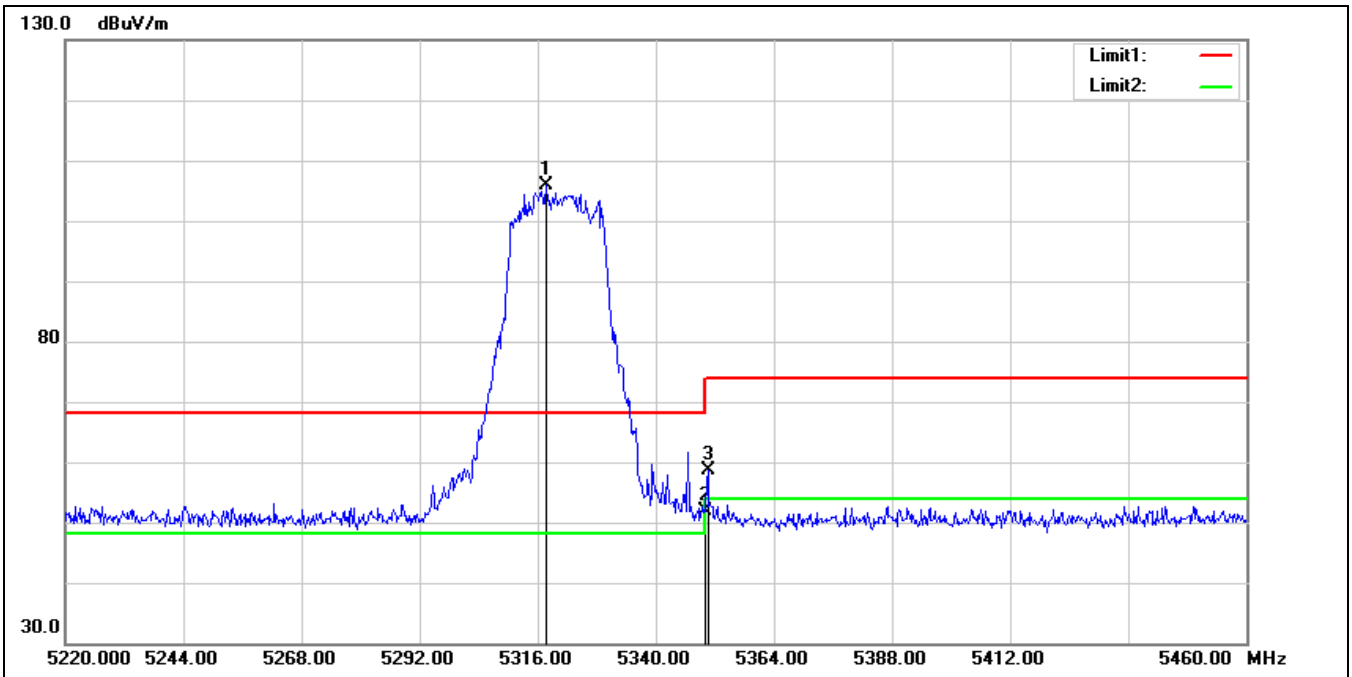


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5317.680	104.96	0.98	105.94	68.20	37.74	peak
2	5350.000	50.85	1.08	51.93	74.00	-22.07	peak
3	5350.560	57.54	1.08	58.62	74.00	-15.38	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

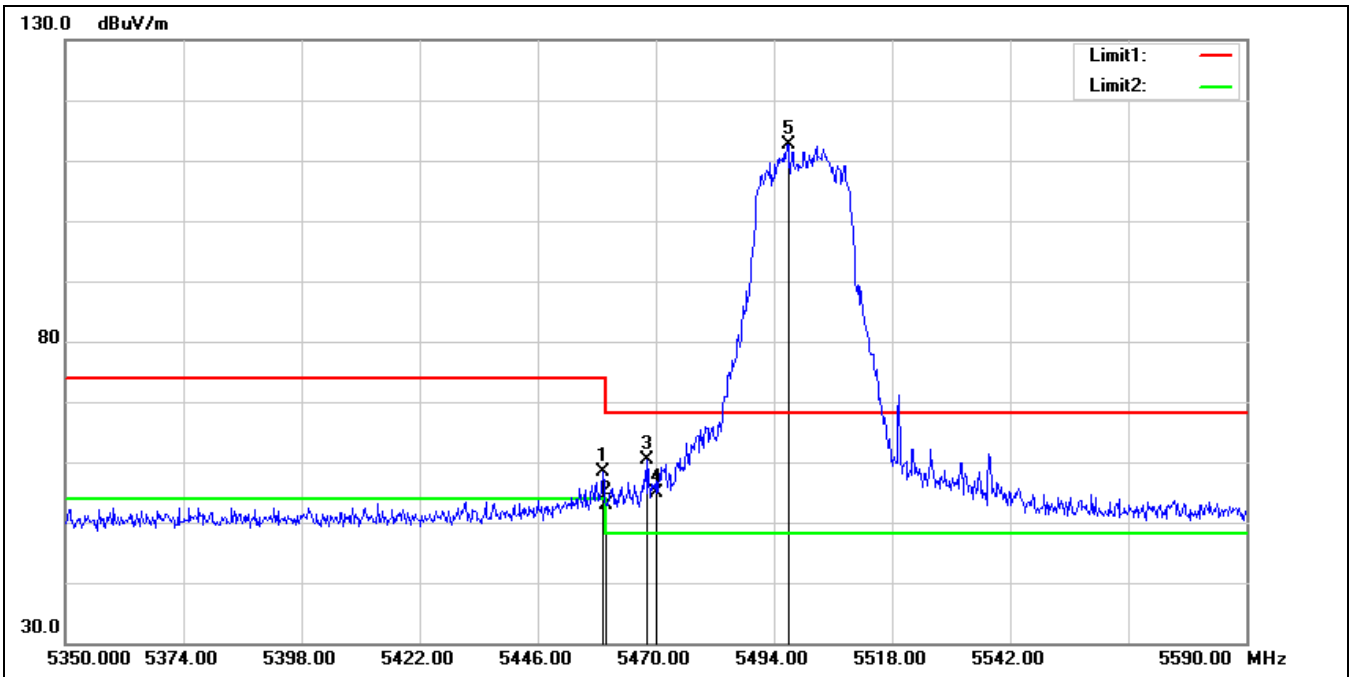


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.200	56.72	1.73	58.45	74.00	-15.55	peak
2	5460.000	51.05	1.73	52.78	74.00	-21.22	peak
3	5468.320	58.60	1.74	60.34	68.20	-7.86	peak
4	5470.000	53.16	1.74	54.90	68.20	-13.30	peak
5*	5496.880	110.84	1.78	112.62	68.20	44.42	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

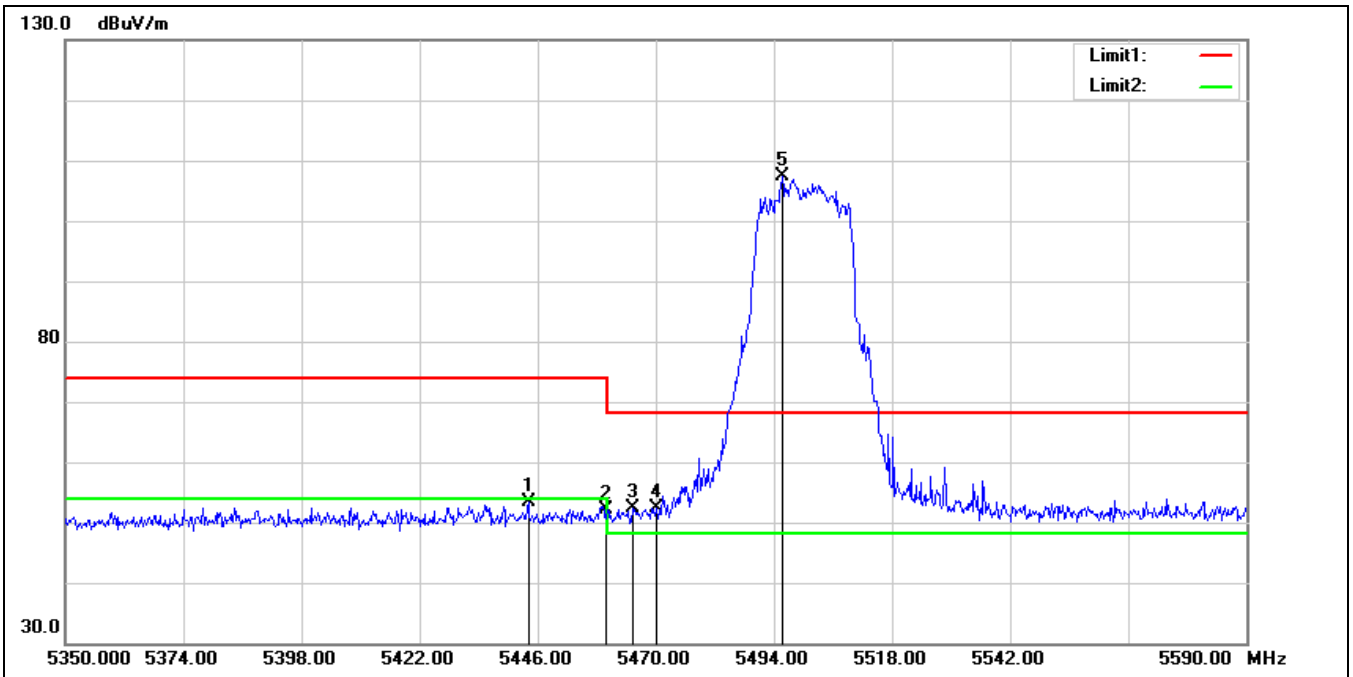


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5444.080	51.60	1.70	53.30	74.00	-20.70	peak
2	5460.000	50.51	1.73	52.24	74.00	-21.76	peak
3	5465.200	50.62	1.73	52.35	68.20	-15.85	peak
4	5470.000	50.52	1.74	52.26	68.20	-15.94	peak
5*	5495.680	105.66	1.78	107.44	68.20	39.24	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

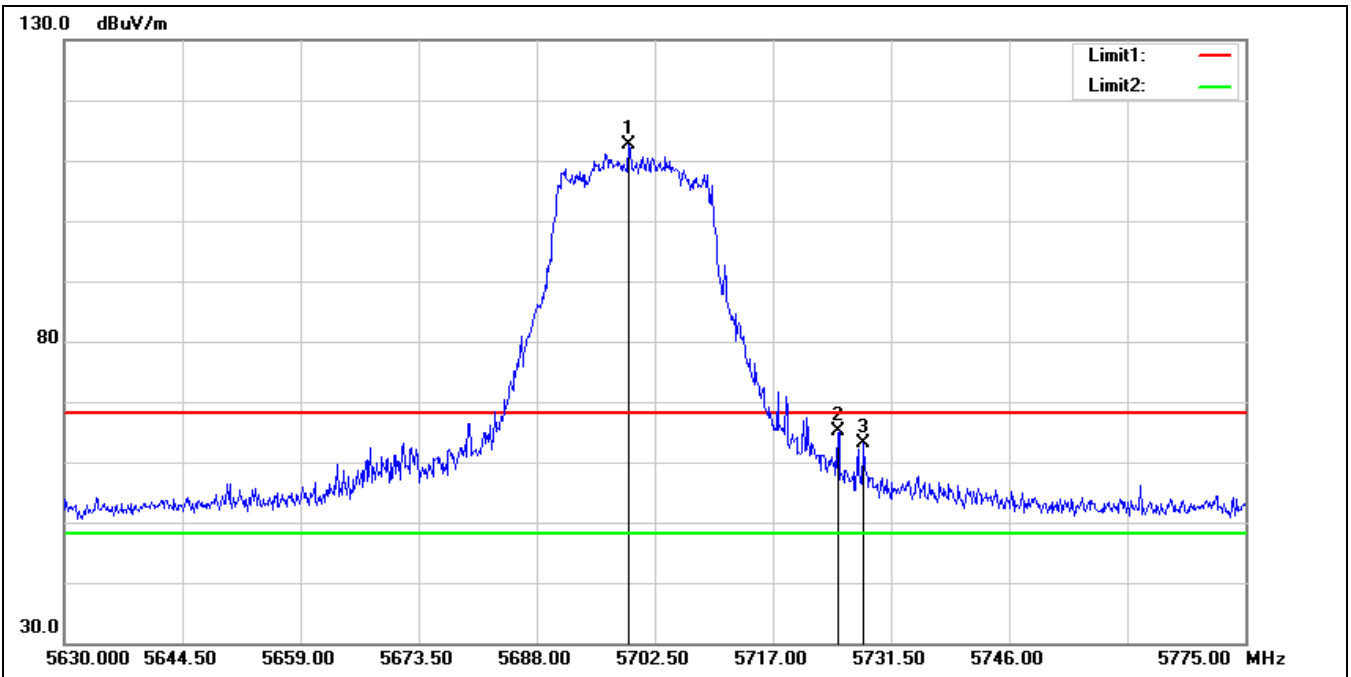


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5699.310	110.67	2.06	112.73	68.20	44.53	peak
2	5725.000	62.75	2.30	65.05	68.20	-3.15	peak
3	5728.165	60.70	2.33	63.03	68.20	-5.17	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

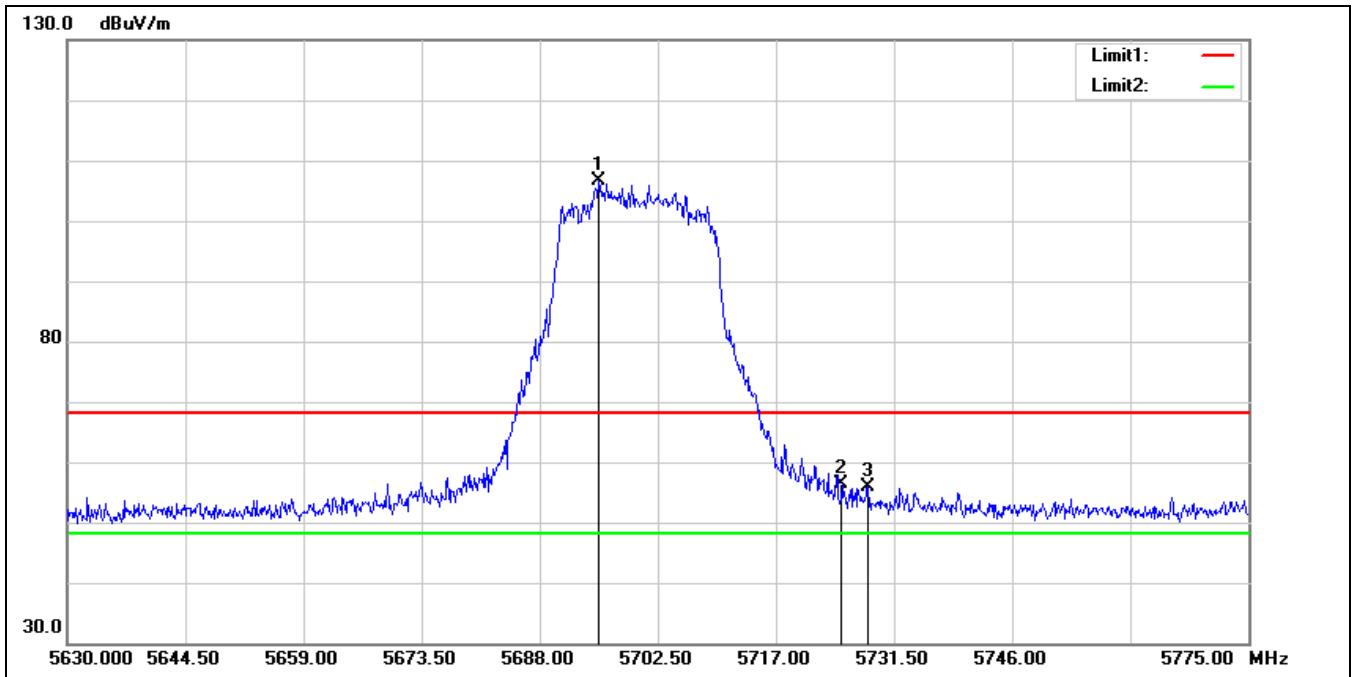


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5695.250	104.66	2.05	106.71	68.20	38.51	peak
2	5725.000	53.98	2.30	56.28	68.20	-11.92	peak
3	5728.310	53.60	2.33	55.93	68.20	-12.27	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

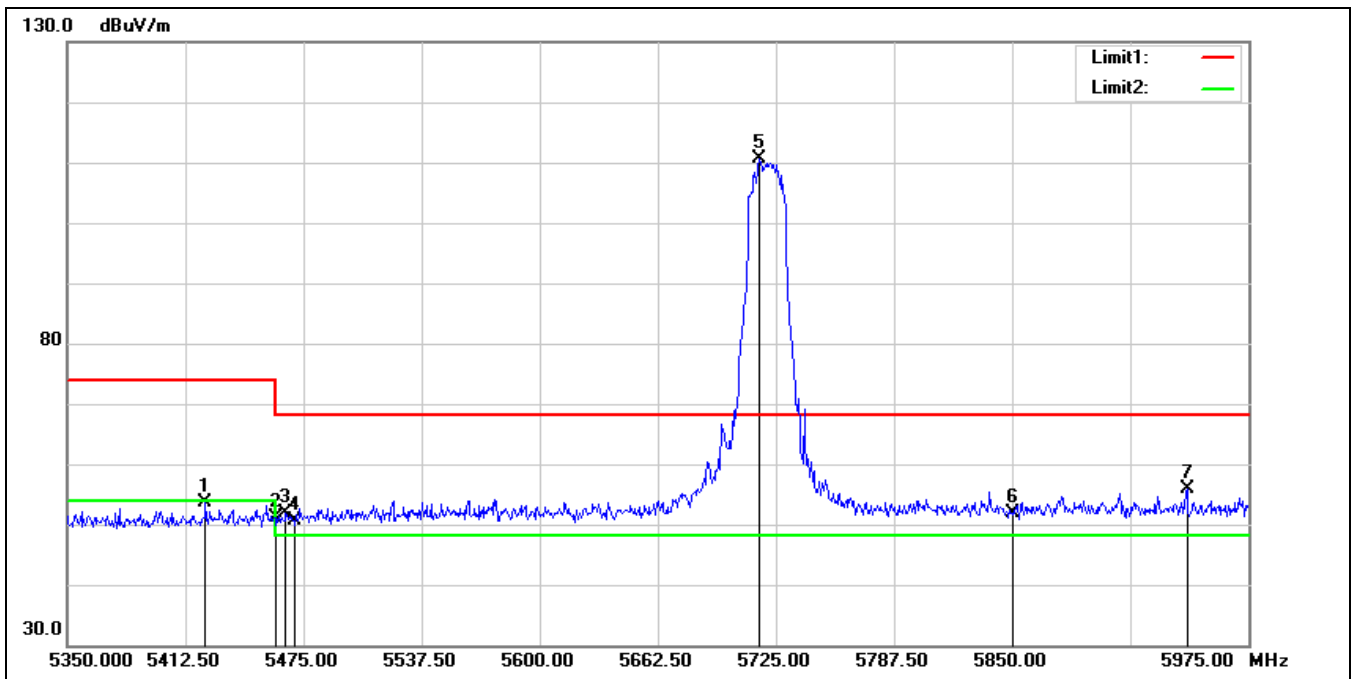


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5423.125	52.11	1.62	53.73	74.00	-20.27	peak
2	5460.000	49.42	1.73	51.15	74.00	-22.85	peak
3	5465.625	50.02	1.74	51.76	68.20	-16.44	peak
4	5470.000	48.88	1.74	50.62	68.20	-17.58	peak
5*	5716.250	108.29	2.23	110.52	68.20	42.32	peak
6	5850.000	48.78	2.98	51.76	68.20	-16.44	peak
7	5942.500	52.78	3.05	55.83	68.20	-12.37	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

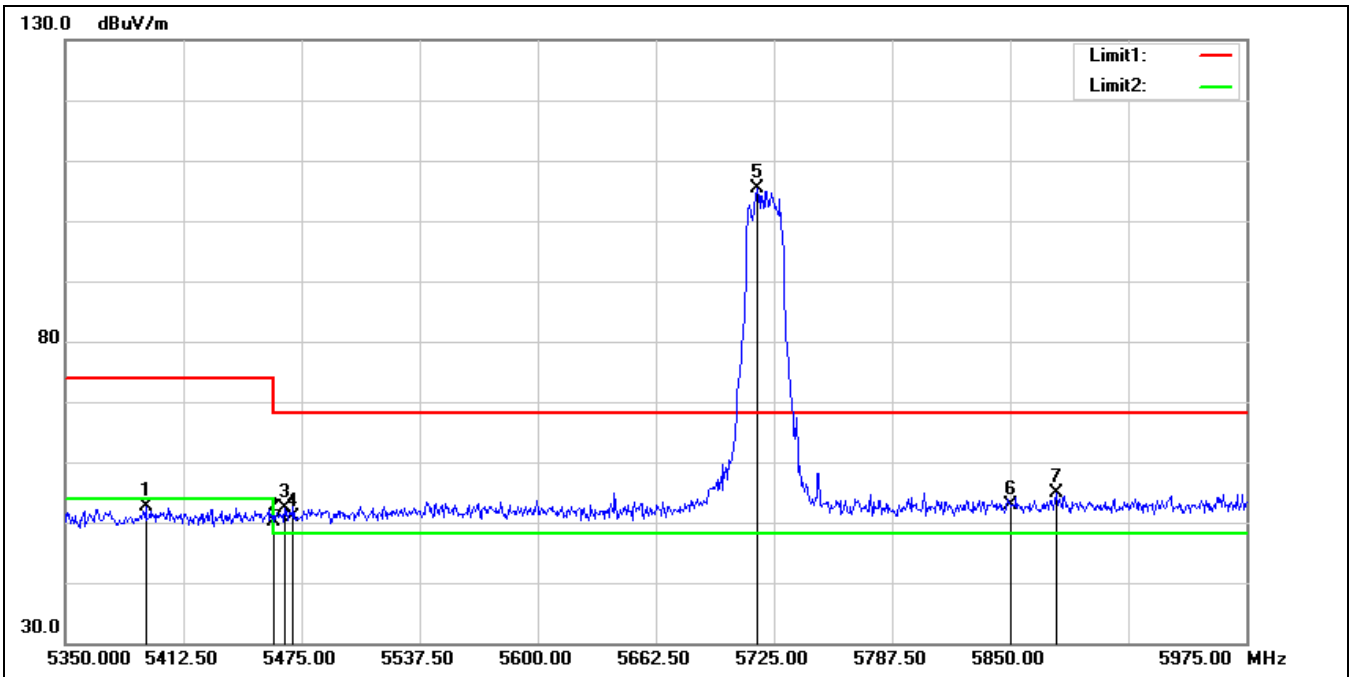

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5392.500	51.15	1.48	52.63	74.00	-21.37	peak
2	5460.000	48.49	1.73	50.22	74.00	-23.78	peak
3	5466.250	50.71	1.74	52.45	68.20	-15.75	peak
4	5470.000	49.17	1.74	50.91	68.20	-17.29	peak
5*	5716.250	103.26	2.23	105.49	68.20	37.29	peak
6	5850.000	49.83	2.98	52.81	68.20	-15.39	peak
7	5874.375	51.80	3.07	54.87	68.20	-13.33	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

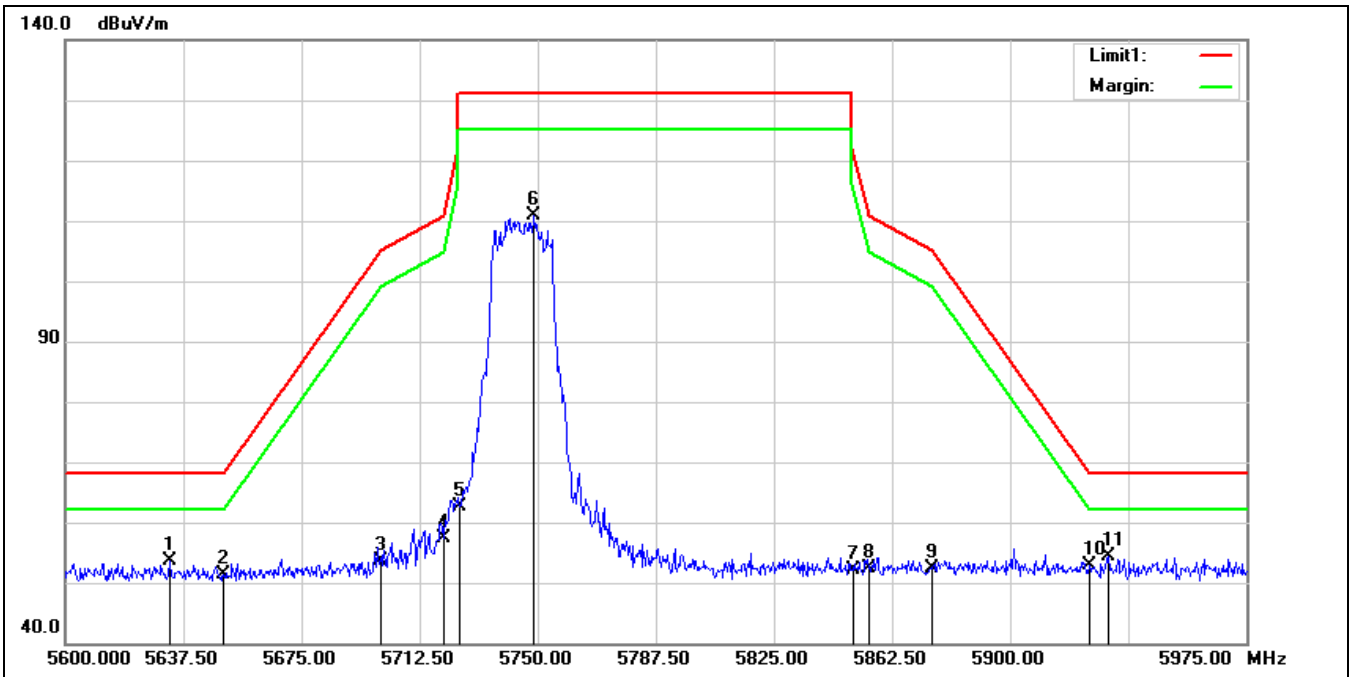

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5633.375	51.74	1.95	53.69	68.20	-14.51	peak
2	5650.000	49.45	1.90	51.35	68.20	-16.85	peak
3	5700.000	51.50	2.06	53.56	105.20	-51.64	peak
4	5720.000	55.24	2.26	57.50	110.80	-53.30	peak
5	5725.000	60.22	2.30	62.52	122.20	-59.68	peak
6	5748.875	108.23	2.53	110.76	131.20	-20.44	peak
7	5850.000	49.06	2.98	52.04	122.20	-70.16	peak
8	5855.000	49.40	3.01	52.41	110.80	-58.39	peak
9	5875.000	49.36	3.07	52.43	105.20	-52.77	peak
10	5925.000	49.71	3.10	52.81	68.20	-15.39	peak
11*	5931.125	51.26	3.08	54.34	68.20	-13.86	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

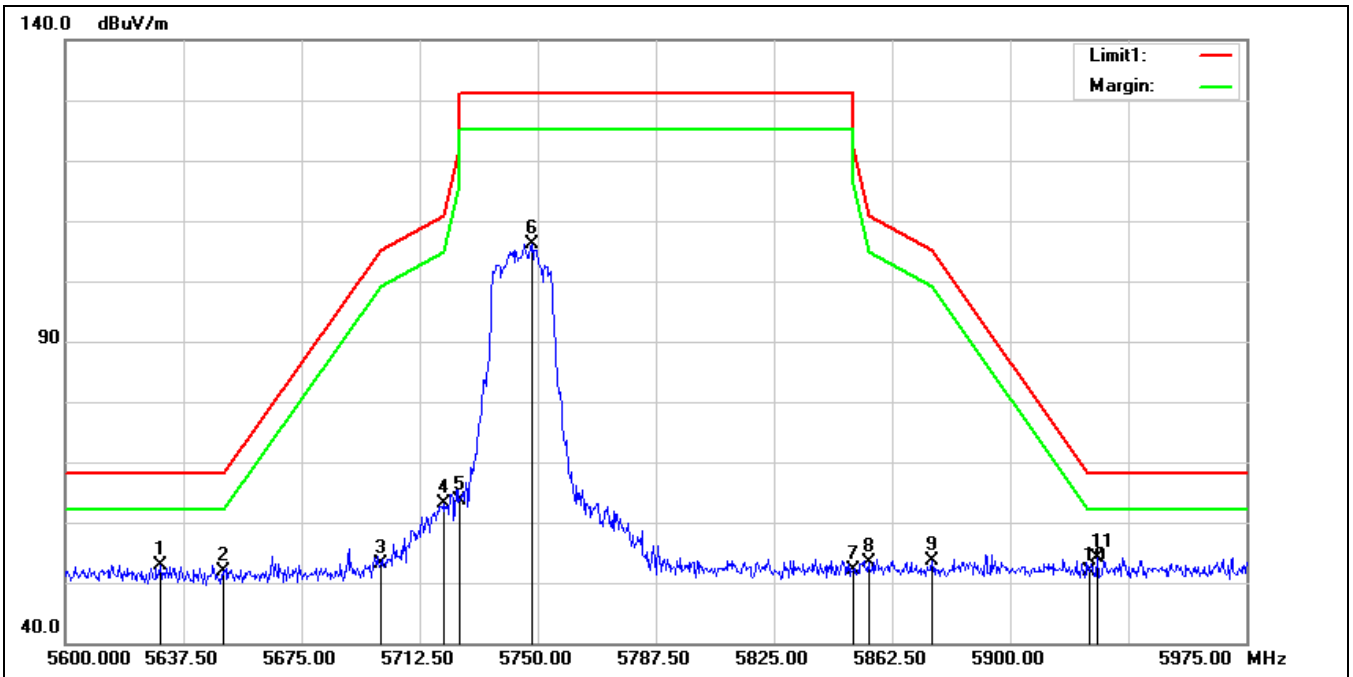


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5630.000	51.06	1.94	53.00	68.20	-15.20	peak
2	5650.000	49.89	1.90	51.79	68.20	-16.41	peak
3	5700.000	50.97	2.06	53.03	105.20	-52.17	peak
4	5720.000	60.75	2.26	63.01	110.80	-47.79	peak
5	5725.000	61.37	2.30	63.67	122.20	-58.53	peak
6	5748.125	103.61	2.52	106.13	131.20	-25.07	peak
7	5850.000	49.05	2.98	52.03	122.20	-70.17	peak
8	5855.000	50.49	3.01	53.50	110.80	-57.30	peak
9	5875.000	50.44	3.07	53.51	105.20	-51.69	peak
10	5925.000	48.74	3.10	51.84	68.20	-16.36	peak
11*	5927.750	51.14	3.09	54.23	68.20	-13.97	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

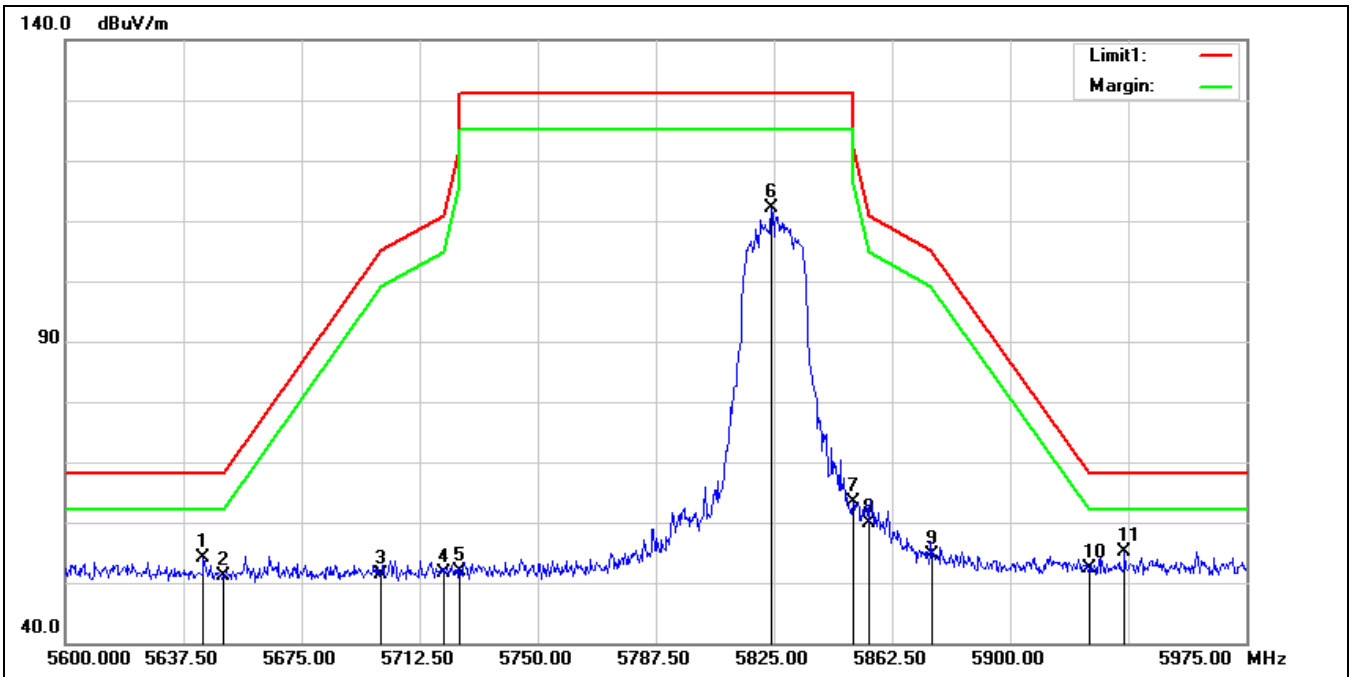


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5643.875	52.14	1.90	54.04	68.20	-14.16	peak
2	5650.000	49.18	1.90	51.08	68.20	-17.12	peak
3	5700.000	49.24	2.06	51.30	105.20	-53.90	peak
4	5720.000	49.29	2.26	51.55	110.80	-59.25	peak
5	5725.000	49.68	2.30	51.98	122.20	-70.22	peak
6	5824.250	109.17	2.89	112.06	131.20	-19.14	peak
7	5850.000	60.30	2.98	63.28	122.20	-58.92	peak
8	5855.000	56.91	3.01	59.92	110.80	-50.88	peak
9	5875.000	51.59	3.07	54.66	105.20	-50.54	peak
10	5925.000	49.35	3.10	52.45	68.20	-15.75	peak
11*	5936.375	52.17	3.05	55.22	68.20	-12.98	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

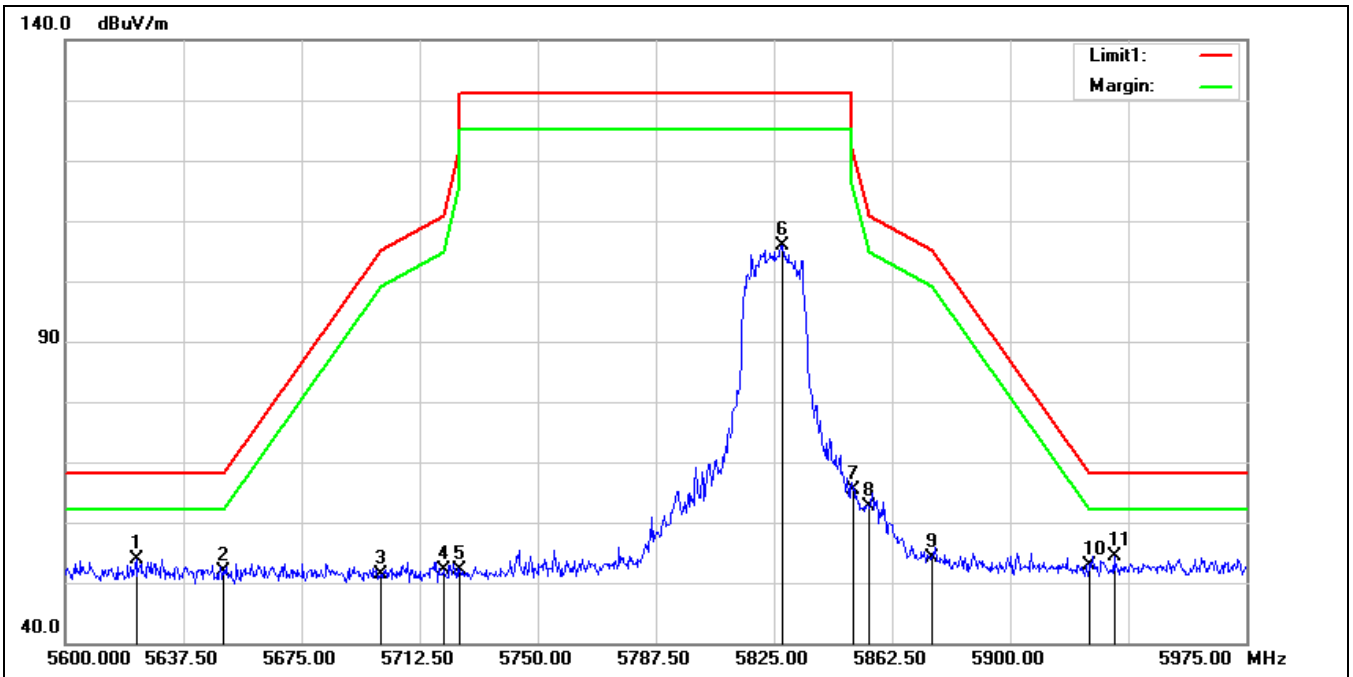


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5622.500	51.97	1.97	53.94	68.20	-14.26	peak
2	5650.000	50.07	1.90	51.97	68.20	-16.23	peak
3	5700.000	49.43	2.06	51.49	105.20	-53.71	peak
4	5720.000	49.75	2.26	52.01	110.80	-58.79	peak
5	5725.000	49.92	2.30	52.22	122.20	-69.98	peak
6	5827.625	103.00	2.92	105.92	131.20	-25.28	peak
7	5850.000	62.29	2.98	65.27	122.20	-56.93	peak
8	5855.000	59.58	3.01	62.59	110.80	-48.21	peak
9	5875.000	50.96	3.07	54.03	105.20	-51.17	peak
10	5925.000	49.73	3.10	52.83	68.20	-15.37	peak
11*	5933.000	51.24	3.07	54.31	68.20	-13.89	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

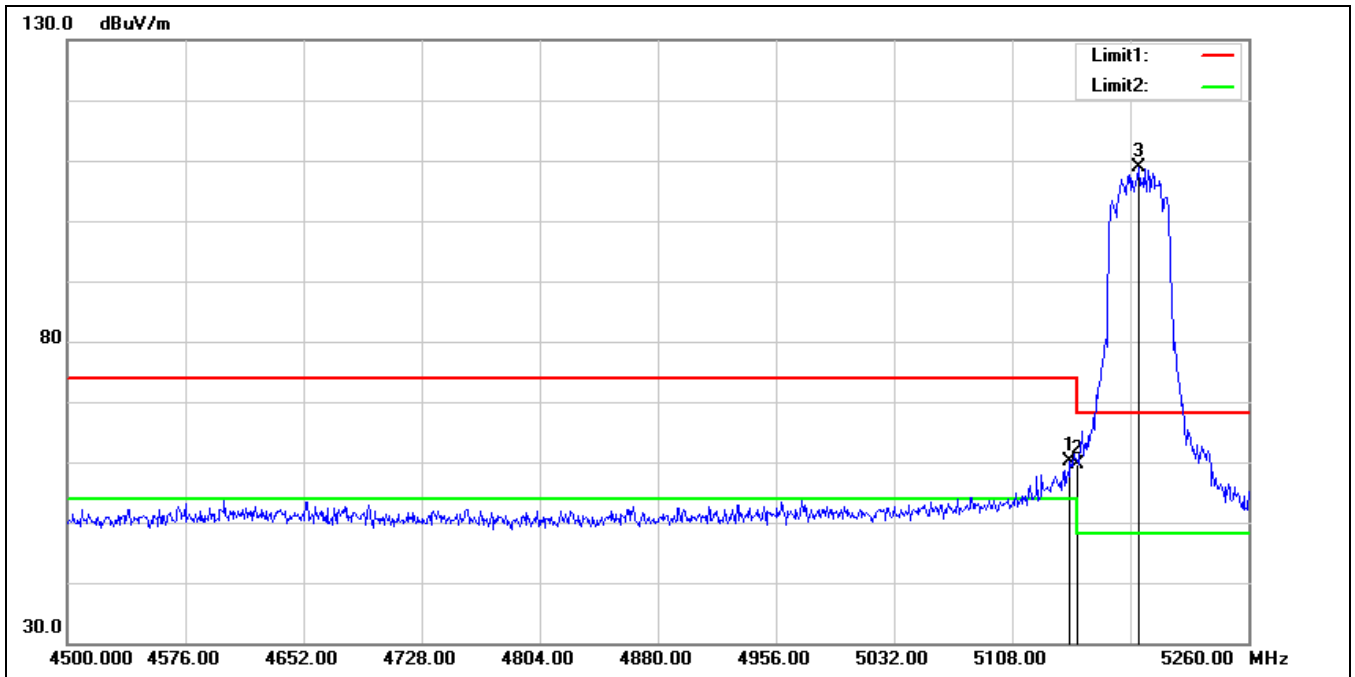


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.240	58.60	1.41	60.01	74.00	-13.99	peak
2	5150.000	58.20	1.42	59.62	74.00	-14.38	peak
3*	5189.320	107.57	1.31	108.88	68.20	40.68	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

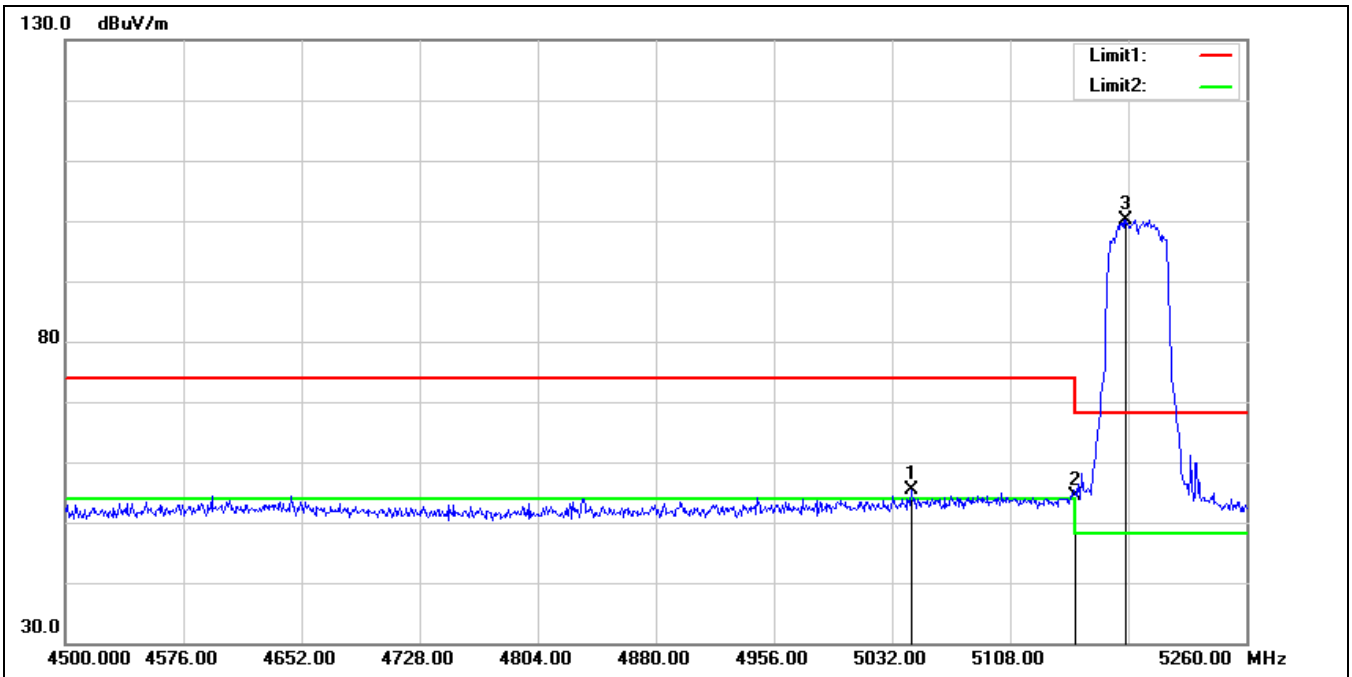


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5044.160	54.38	1.04	55.42	74.00	-18.58	peak
2	5150.000	52.86	1.42	54.28	74.00	-19.72	peak
3*	5182.480	98.88	1.33	100.21	68.20	32.01	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

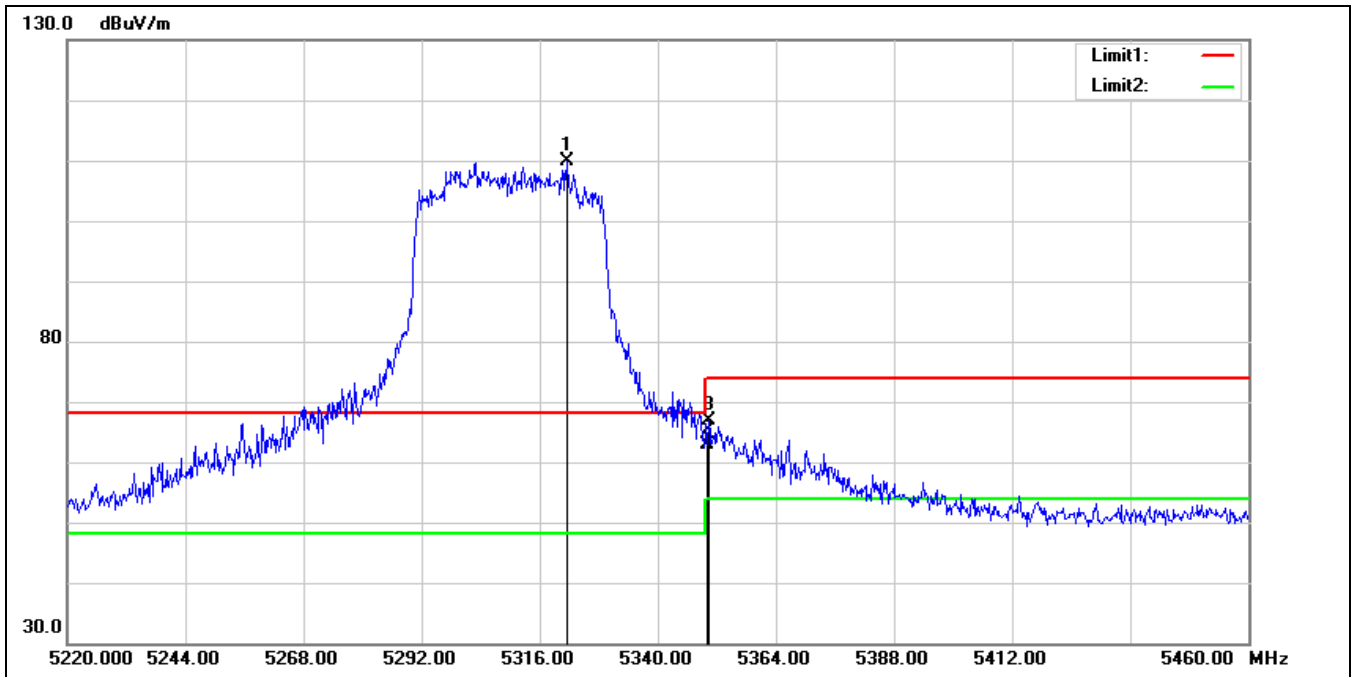


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5321.520	108.96	0.98	109.94	68.20	41.74	peak
2	5350.000	61.90	1.08	62.98	74.00	-11.02	peak
3	5350.320	65.83	1.08	66.91	74.00	-7.09	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

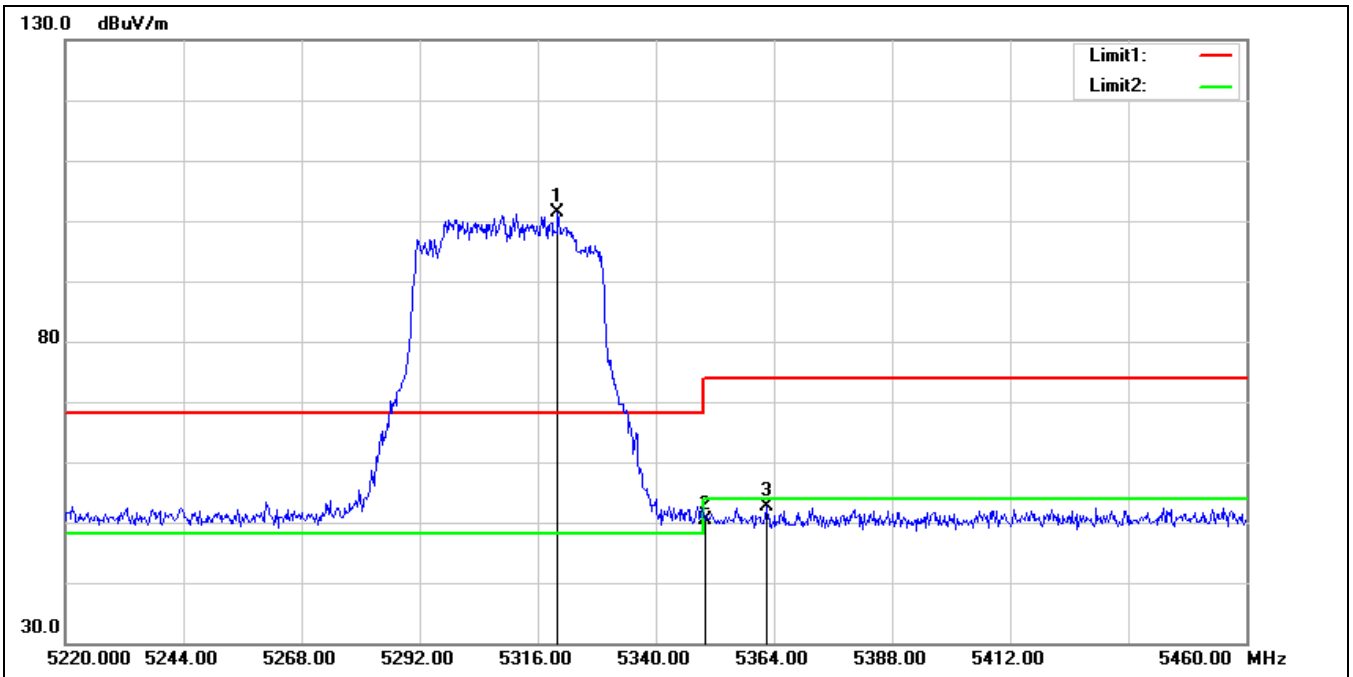

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5320.080	100.33	0.98	101.31	68.20	33.11	peak
2	5350.000	49.34	1.08	50.42	74.00	-23.58	peak
3	5362.560	51.34	1.20	52.54	74.00	-21.46	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

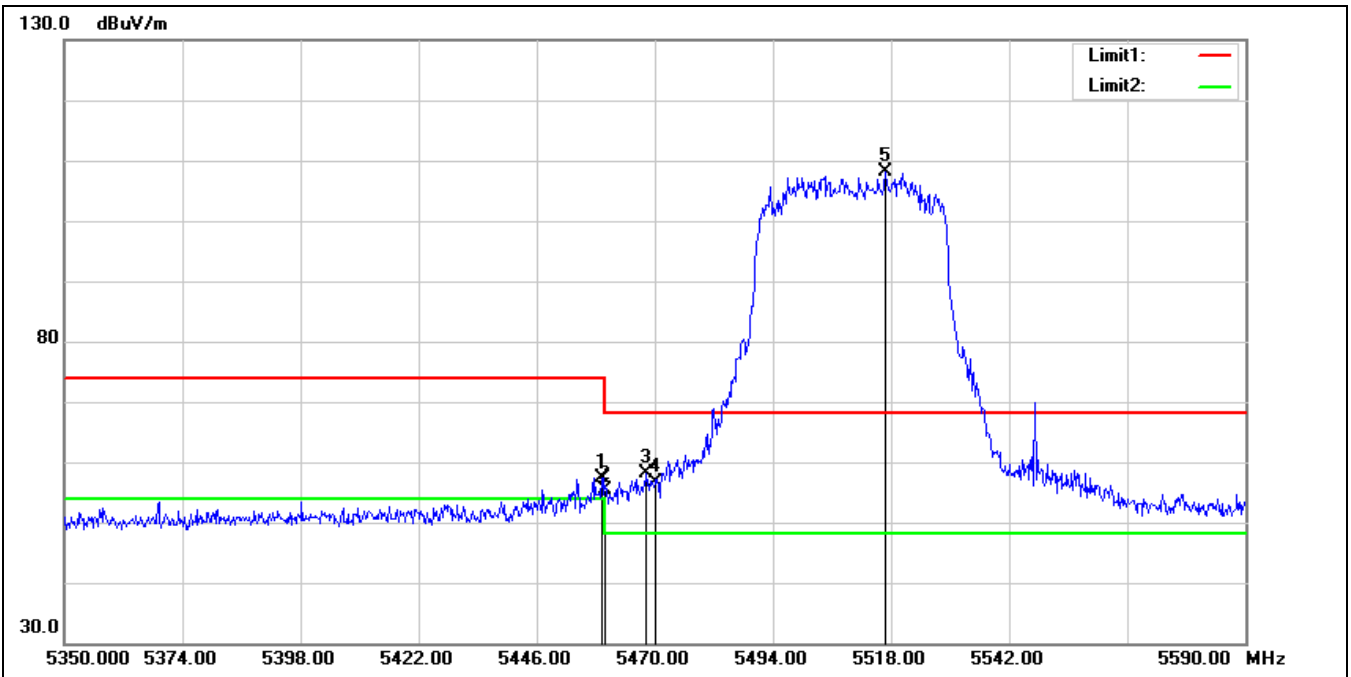

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.200	55.74	1.73	57.47	74.00	-16.53	peak
2	5460.000	53.57	1.73	55.30	74.00	-18.70	peak
3	5468.320	56.38	1.74	58.12	68.20	-10.08	peak
4	5470.000	54.77	1.74	56.51	68.20	-11.69	peak
5*	5516.800	106.24	1.87	108.11	68.20	39.91	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

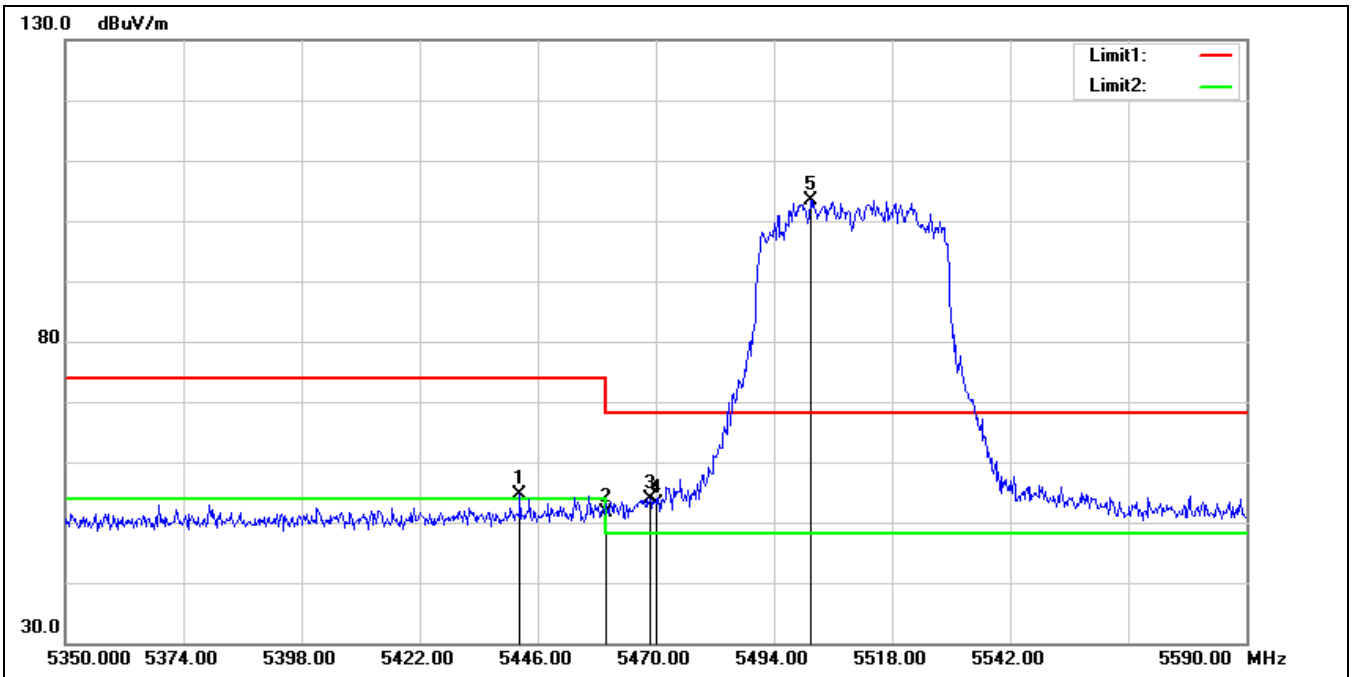


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5442.400	52.82	1.69	54.51	74.00	-19.49	peak
2	5460.000	49.82	1.73	51.55	74.00	-22.45	peak
3	5468.800	52.12	1.74	53.86	68.20	-14.34	peak
4	5470.000	51.37	1.74	53.11	68.20	-15.09	peak
5*	5501.440	101.64	1.79	103.43	68.20	35.23	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

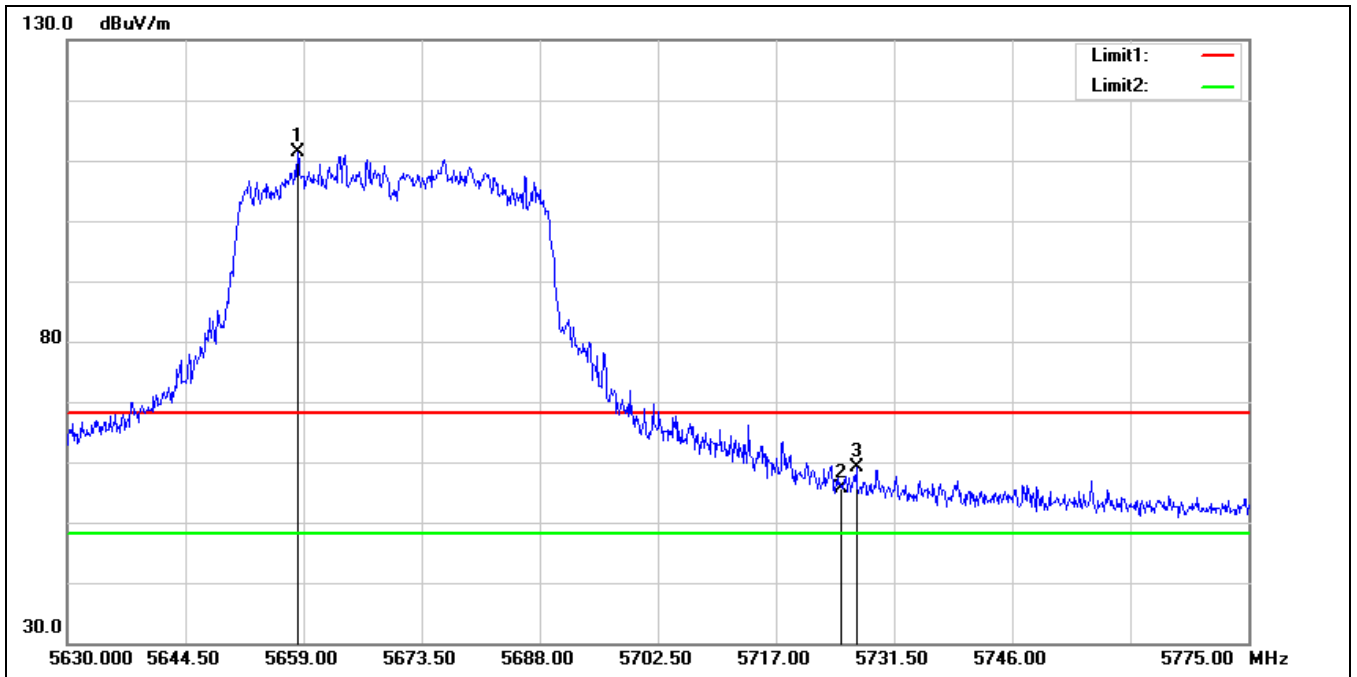


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5658.275	109.42	1.92	111.34	68.20	43.14	peak
2	5725.000	53.23	2.30	55.53	68.20	-12.67	peak
3	5726.860	56.94	2.31	59.25	68.20	-8.95	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

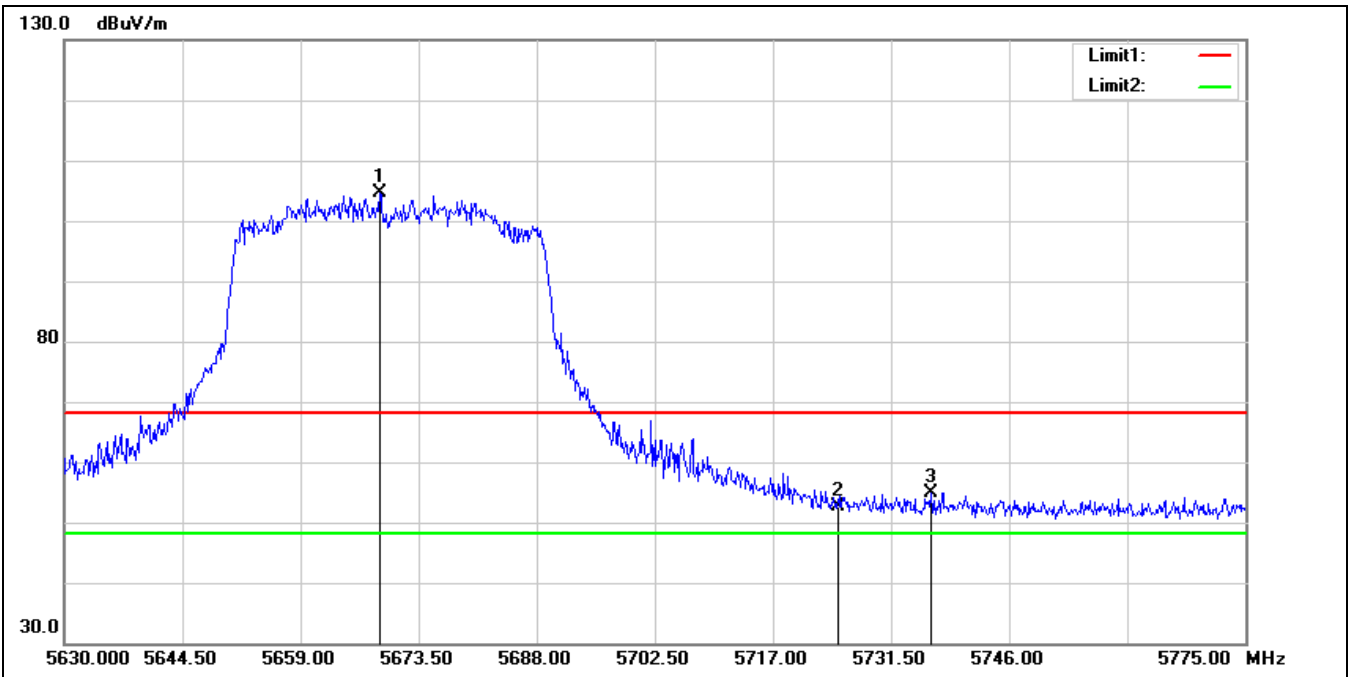


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5668.715	102.76	1.96	104.72	68.20	36.52	peak
2	5725.000	50.41	2.30	52.71	68.20	-15.49	peak
3	5736.430	52.49	2.41	54.90	68.20	-13.30	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

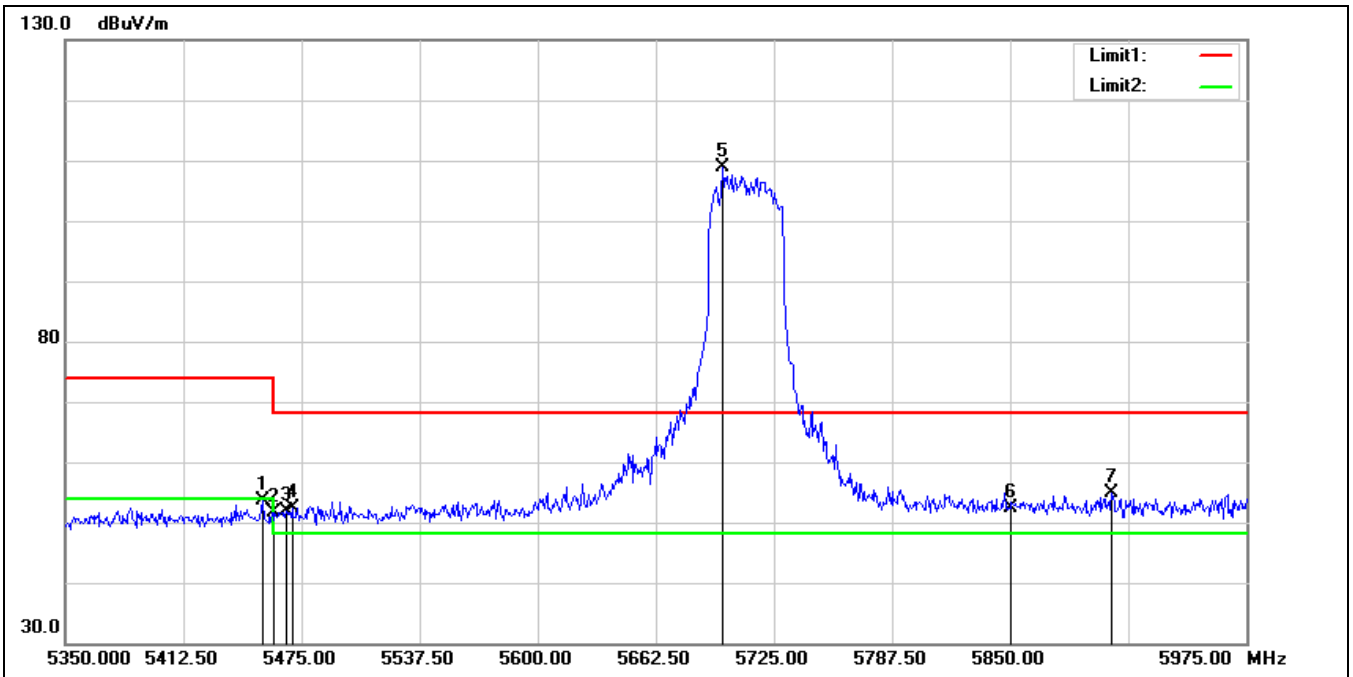


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.375	51.94	1.72	53.66	74.00	-20.34	peak
2	5460.000	50.00	1.73	51.73	74.00	-22.27	peak
3	5466.875	50.25	1.74	51.99	68.20	-16.21	peak
4	5470.000	50.70	1.74	52.44	68.20	-15.76	peak
5*	5698.125	106.80	2.06	108.86	68.20	40.66	peak
6	5850.000	49.47	2.98	52.45	68.20	-15.75	peak
7	5903.750	51.62	3.14	54.76	68.20	-13.44	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

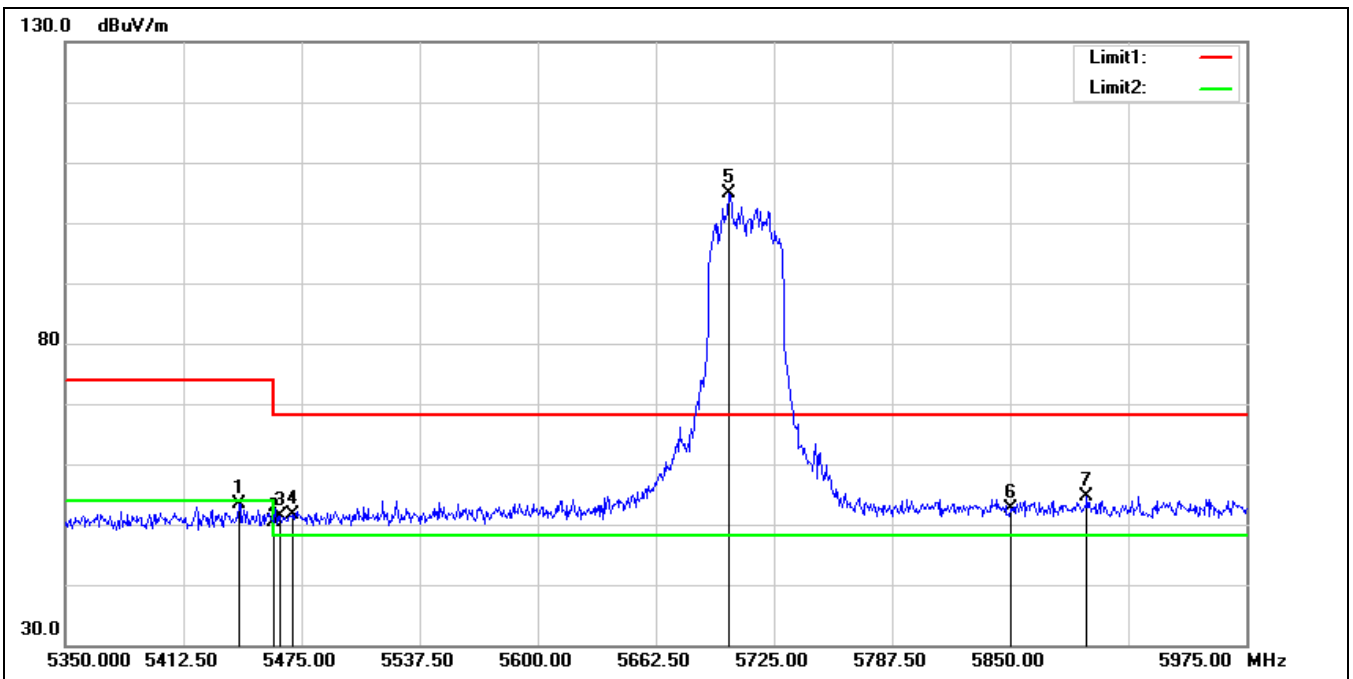


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5441.875	51.77	1.69	53.46	74.00	-20.54	peak
2	5460.000	48.62	1.73	50.35	74.00	-23.65	peak
3	5463.750	49.64	1.73	51.37	68.20	-16.83	peak
4	5470.000	49.96	1.74	51.70	68.20	-16.50	peak
5*	5701.250	102.70	2.07	104.77	68.20	36.57	peak
6	5850.000	49.61	2.98	52.59	68.20	-15.61	peak
7	5890.625	51.49	3.12	54.61	68.20	-13.59	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

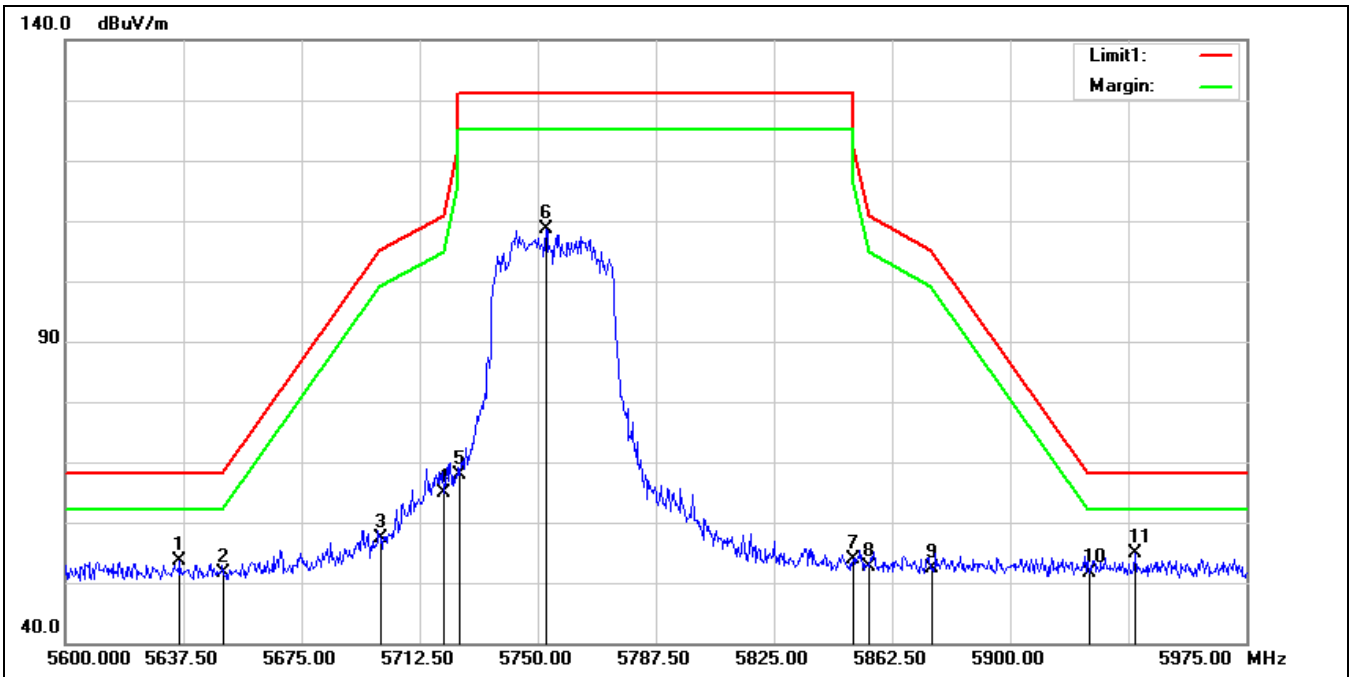


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5636.375	51.66	1.93	53.59	68.20	-14.61	peak
2	5650.000	49.62	1.90	51.52	68.20	-16.68	peak
3	5700.000	55.30	2.06	57.36	105.20	-47.84	peak
4	5720.000	62.67	2.26	64.93	110.80	-45.87	peak
5	5725.000	65.64	2.30	67.94	122.20	-54.26	peak
6	5752.625	106.07	2.55	108.62	131.20	-22.58	peak
7	5850.000	50.96	2.98	53.94	122.20	-68.26	peak
8	5855.000	49.65	3.01	52.66	110.80	-58.14	peak
9	5875.000	49.24	3.07	52.31	105.20	-52.89	peak
10	5925.000	48.54	3.10	51.64	68.20	-16.56	peak
11*	5939.750	51.76	3.06	54.82	68.20	-13.38	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

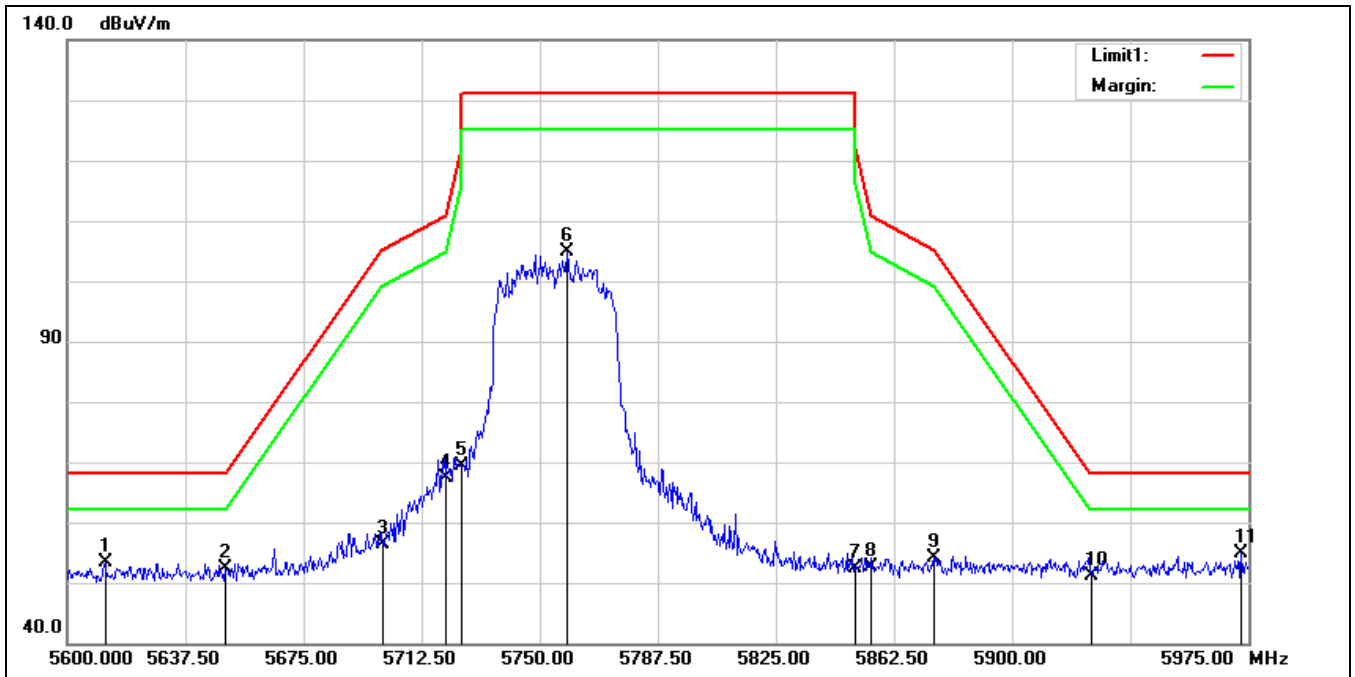

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5612.000	51.46	1.99	53.45	68.20	-14.75	peak
2	5650.000	50.40	1.90	52.30	68.20	-15.90	peak
3	5700.000	54.38	2.06	56.44	105.20	-48.76	peak
4	5720.000	65.19	2.26	67.45	110.80	-43.35	peak
5	5725.000	67.10	2.30	69.40	122.20	-52.80	peak
6	5758.625	102.28	2.59	104.87	131.20	-26.33	peak
7	5850.000	49.49	2.98	52.47	122.20	-69.73	peak
8	5855.000	49.58	3.01	52.59	110.80	-58.21	peak
9	5875.000	51.01	3.07	54.08	105.20	-51.12	peak
10	5925.000	48.11	3.10	51.21	68.20	-16.99	peak
11*	5972.750	51.80	3.15	54.95	68.20	-13.25	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

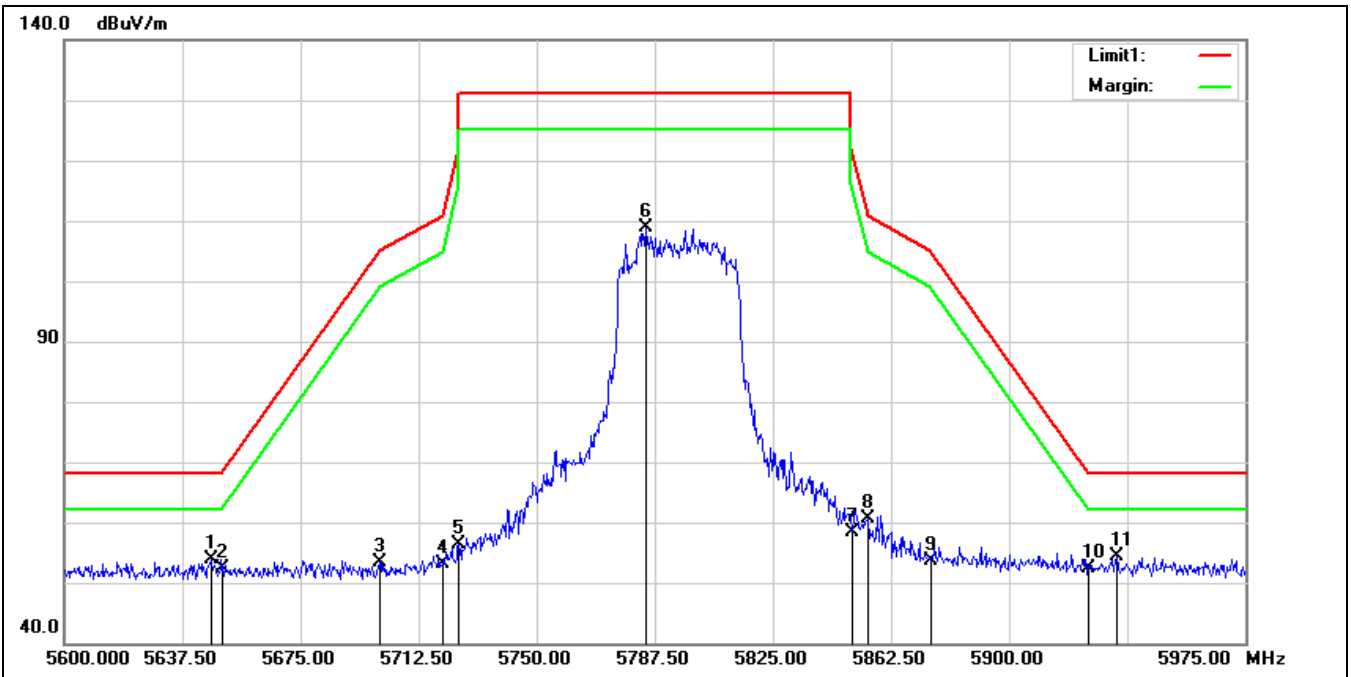

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5646.500	52.06	1.91	53.97	68.20	-14.23	peak
2	5650.000	50.46	1.90	52.36	68.20	-15.84	peak
3	5700.000	51.33	2.06	53.39	105.20	-51.81	peak
4	5720.000	50.75	2.26	53.01	110.80	-57.79	peak
5	5725.000	54.17	2.30	56.47	122.20	-65.73	peak
6	5784.500	106.20	2.72	108.92	131.20	-22.28	peak
7	5850.000	55.28	2.98	58.26	122.20	-63.94	peak
8	5855.000	57.59	3.01	60.60	110.80	-50.20	peak
9	5875.000	50.62	3.07	53.69	105.20	-51.51	peak
10	5925.000	49.39	3.10	52.49	68.20	-15.71	peak
11*	5934.125	51.41	3.06	54.47	68.20	-13.73	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

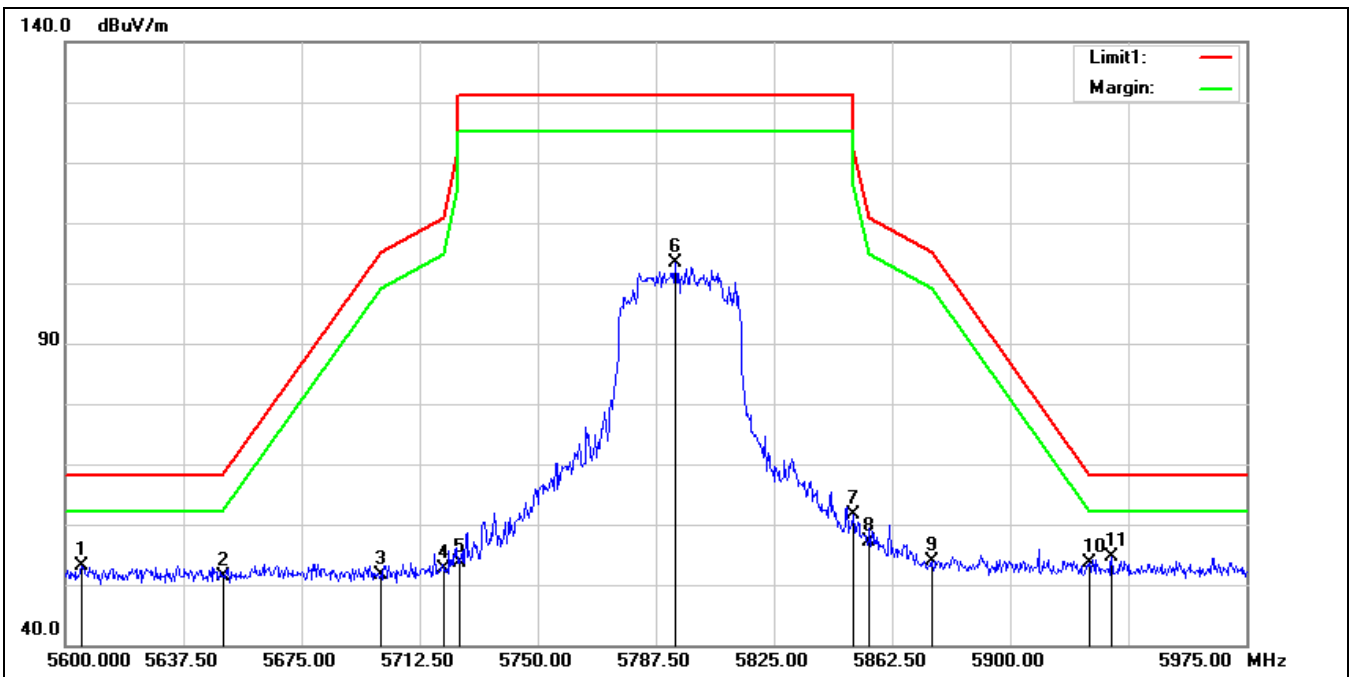


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5605.250	51.22	2.02	53.24	68.20	-14.96	peak
2	5650.000	49.49	1.90	51.39	68.20	-16.81	peak
3	5700.000	49.46	2.06	51.52	105.20	-53.68	peak
4	5720.000	50.31	2.26	52.57	110.80	-58.23	peak
5	5725.000	51.44	2.30	53.74	122.20	-68.46	peak
6	5793.875	100.48	2.78	103.26	131.20	-27.94	peak
7	5850.000	58.70	2.98	61.68	122.20	-60.52	peak
8	5855.000	54.05	3.01	57.06	110.80	-53.74	peak
9	5875.000	50.73	3.07	53.80	105.20	-51.40	peak
10	5925.000	50.53	3.10	53.63	68.20	-14.57	peak
11*	5932.250	51.67	3.07	54.74	68.20	-13.46	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

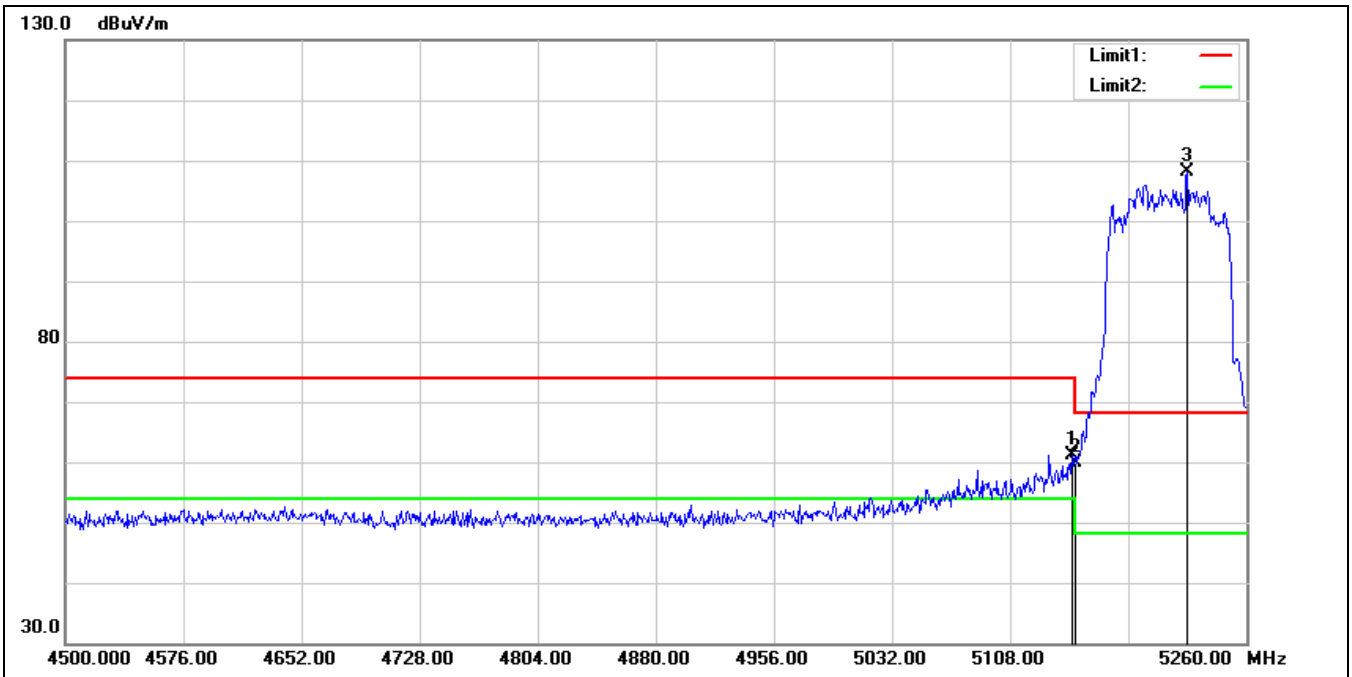


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.520	59.74	1.42	61.16	74.00	-12.84	peak
2	5150.000	58.34	1.42	59.76	74.00	-14.24	peak
3*	5222.000	106.93	1.18	108.11	68.20	39.91	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

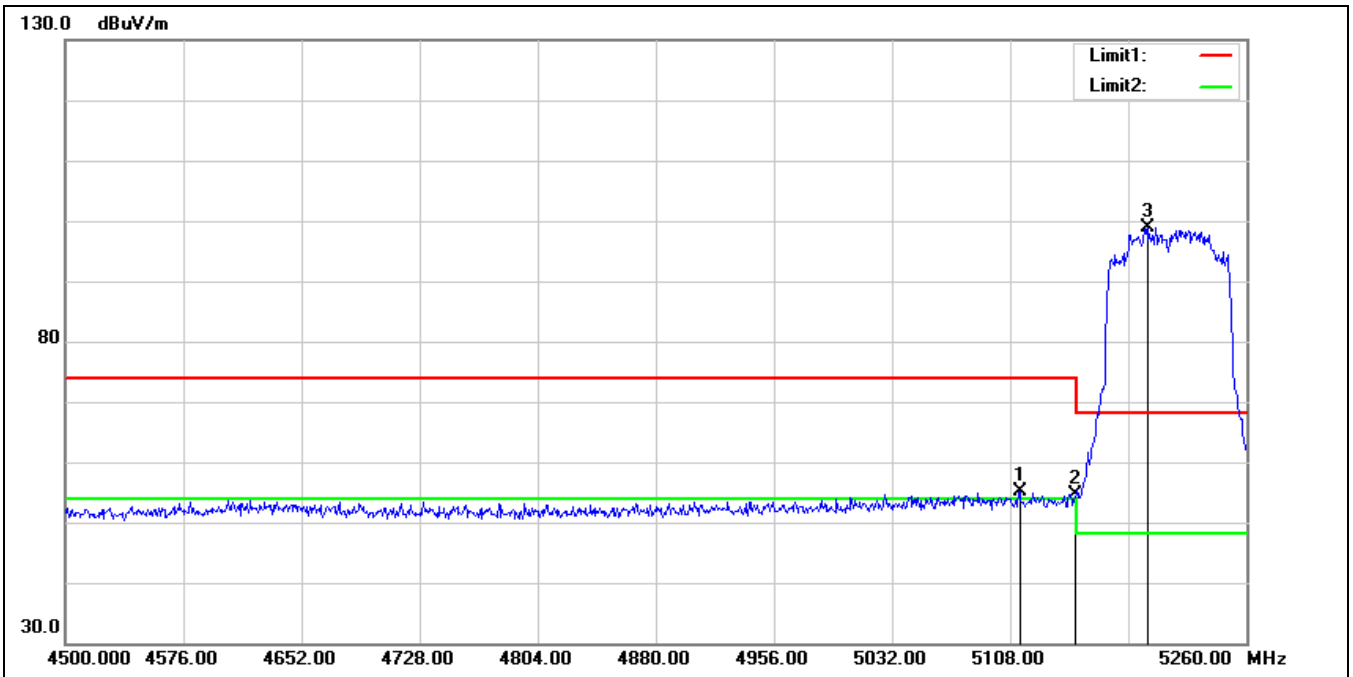


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5114.080	53.66	1.37	55.03	74.00	-18.97	peak
2	5150.000	53.30	1.42	54.72	74.00	-19.28	peak
3*	5196.920	97.49	1.29	98.78	68.20	30.58	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

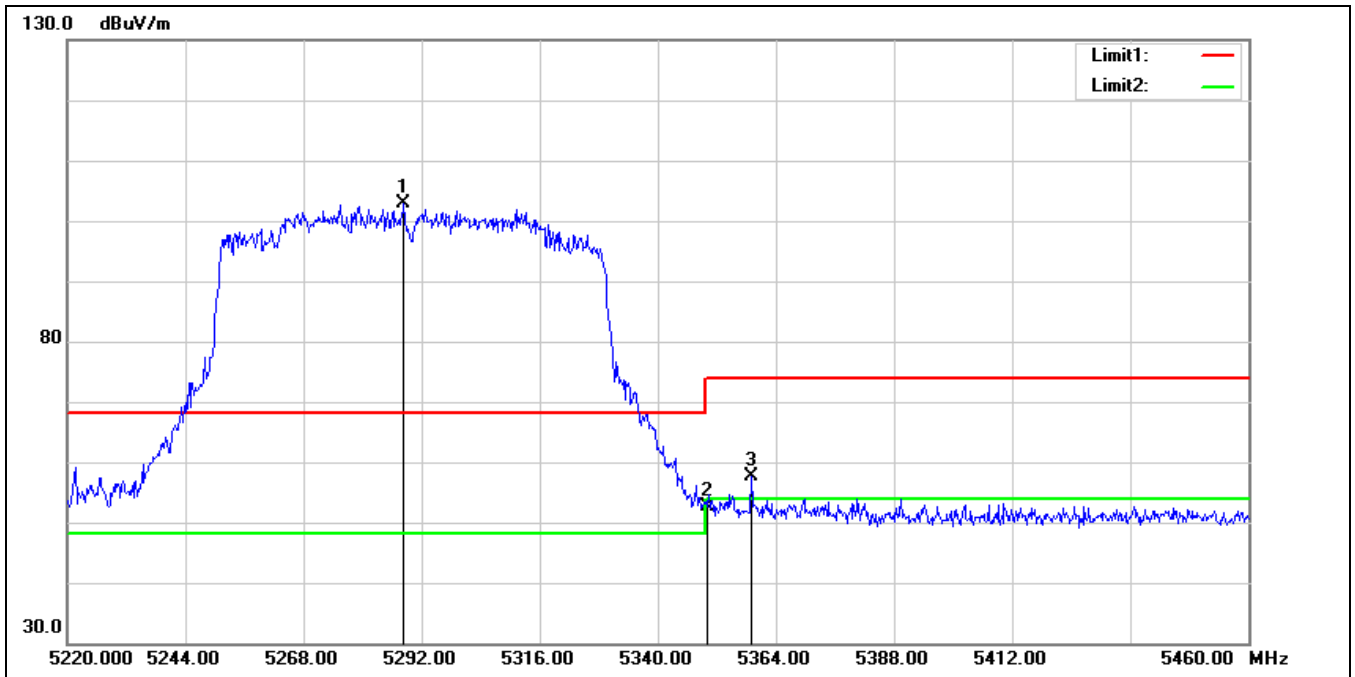


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5288.400	101.91	0.95	102.86	68.20	34.66	peak
2	5350.000	51.49	1.08	52.57	74.00	-21.43	peak
3	5358.960	56.35	1.17	57.52	74.00	-16.48	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

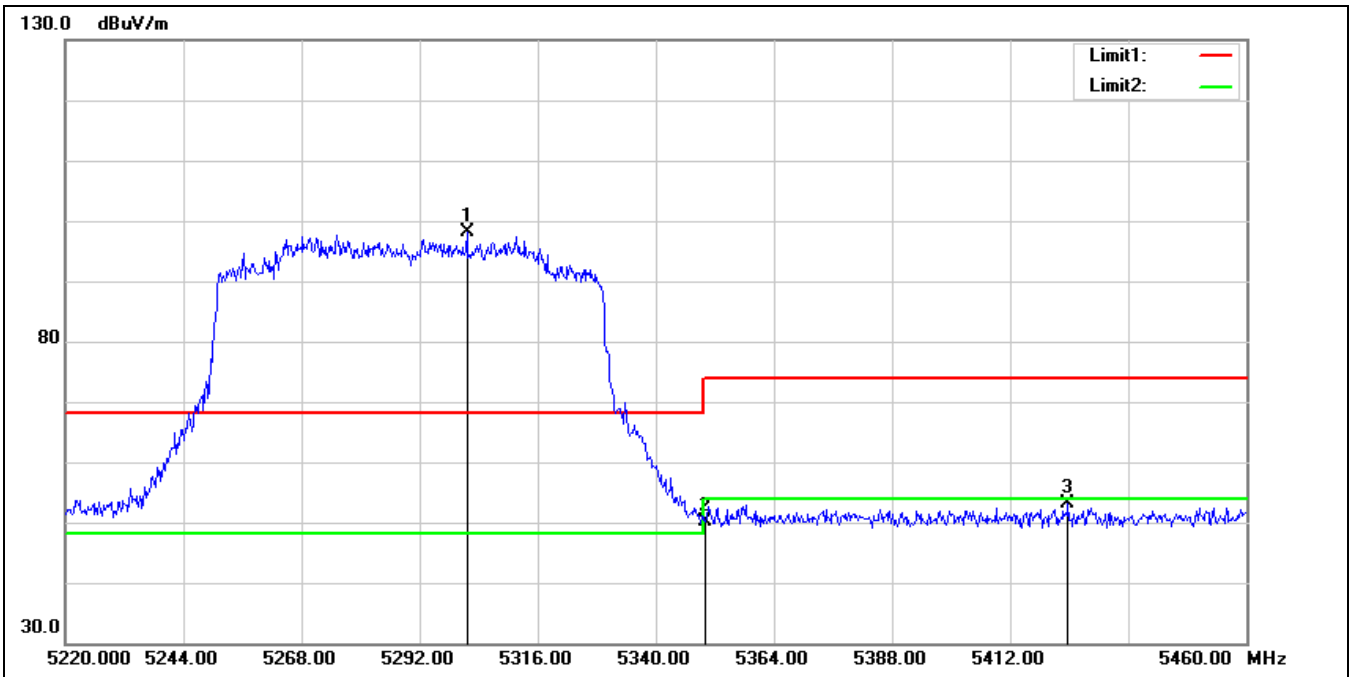


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5301.600	97.25	0.92	98.17	68.20	29.97	peak
2	5350.000	49.15	1.08	50.23	74.00	-23.77	peak
3	5423.760	51.60	1.63	53.23	74.00	-20.77	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

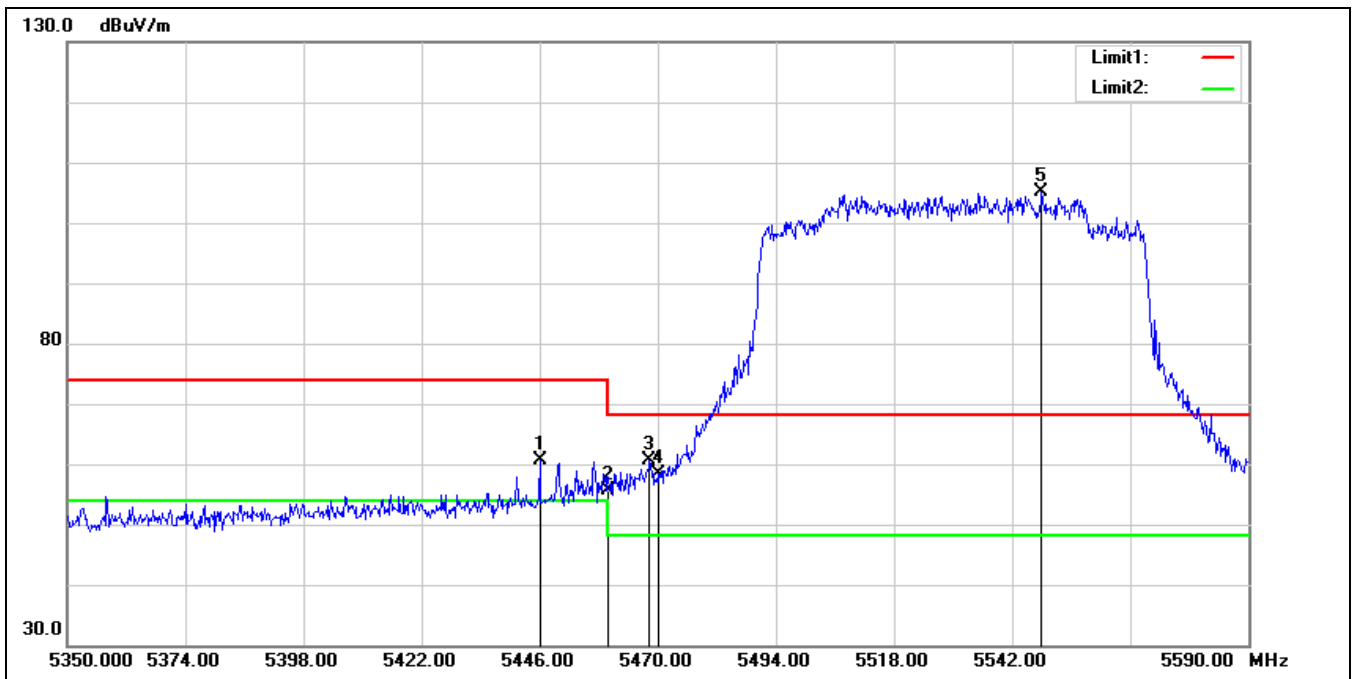


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5446.000	58.81	1.70	60.51	74.00	-13.49	peak
2	5460.000	53.93	1.73	55.66	74.00	-18.34	peak
3	5468.320	58.91	1.74	60.65	68.20	-7.55	peak
4	5470.000	56.73	1.74	58.47	68.20	-9.73	peak
5*	5548.000	103.20	2.03	105.23	68.20	37.03	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

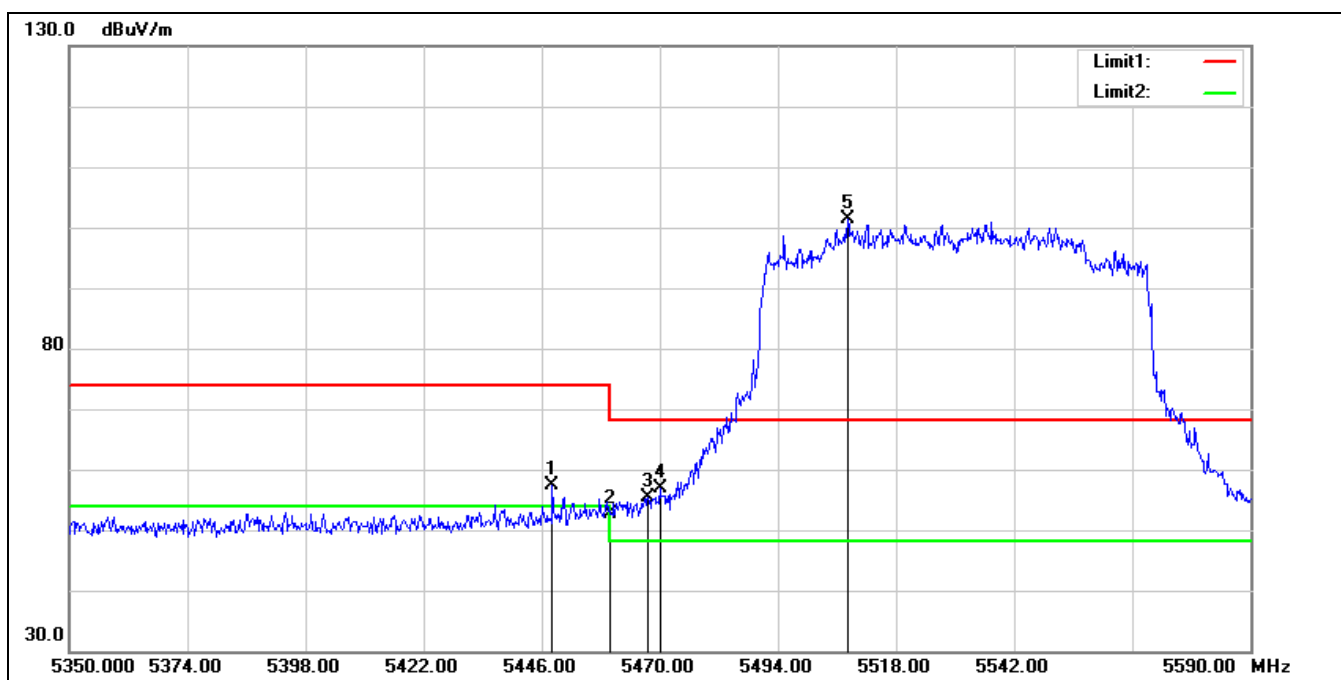

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5448.160	55.75	1.71	57.46	74.00	-16.54	peak
2	5460.000	50.92	1.73	52.65	74.00	-21.35	peak
3	5467.600	53.64	1.74	55.38	68.20	-12.82	peak
4	5470.000	55.21	1.74	56.95	68.20	-11.25	peak
5*	5508.160	99.43	1.83	101.26	68.20	33.06	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

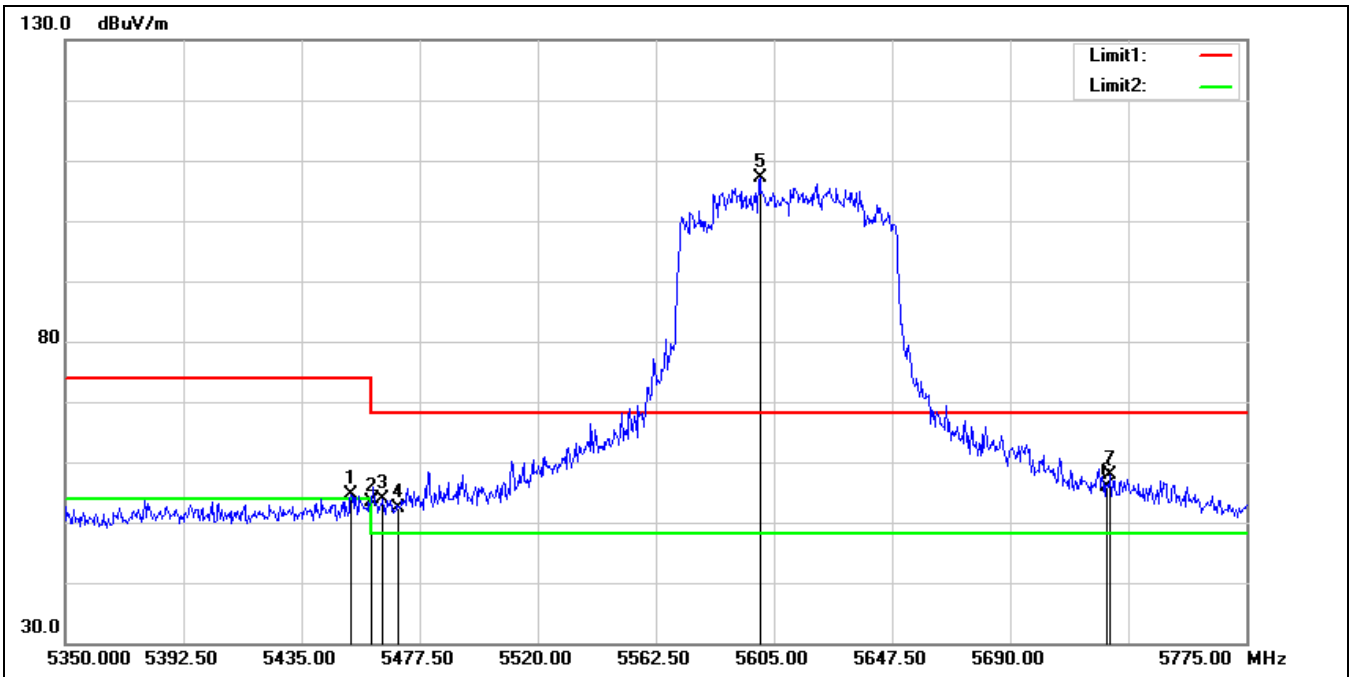

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.850	52.79	1.72	54.51	74.00	-19.49	peak
2	5460.000	51.58	1.73	53.31	74.00	-20.69	peak
3	5464.325	52.05	1.73	53.78	68.20	-14.42	peak
4	5470.000	50.66	1.74	52.40	68.20	-15.80	peak
5*	5599.900	105.05	2.02	107.07	68.20	38.87	peak
6	5725.000	53.60	2.30	55.90	68.20	-12.30	peak
7	5726.125	55.47	2.31	57.78	68.20	-10.42	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

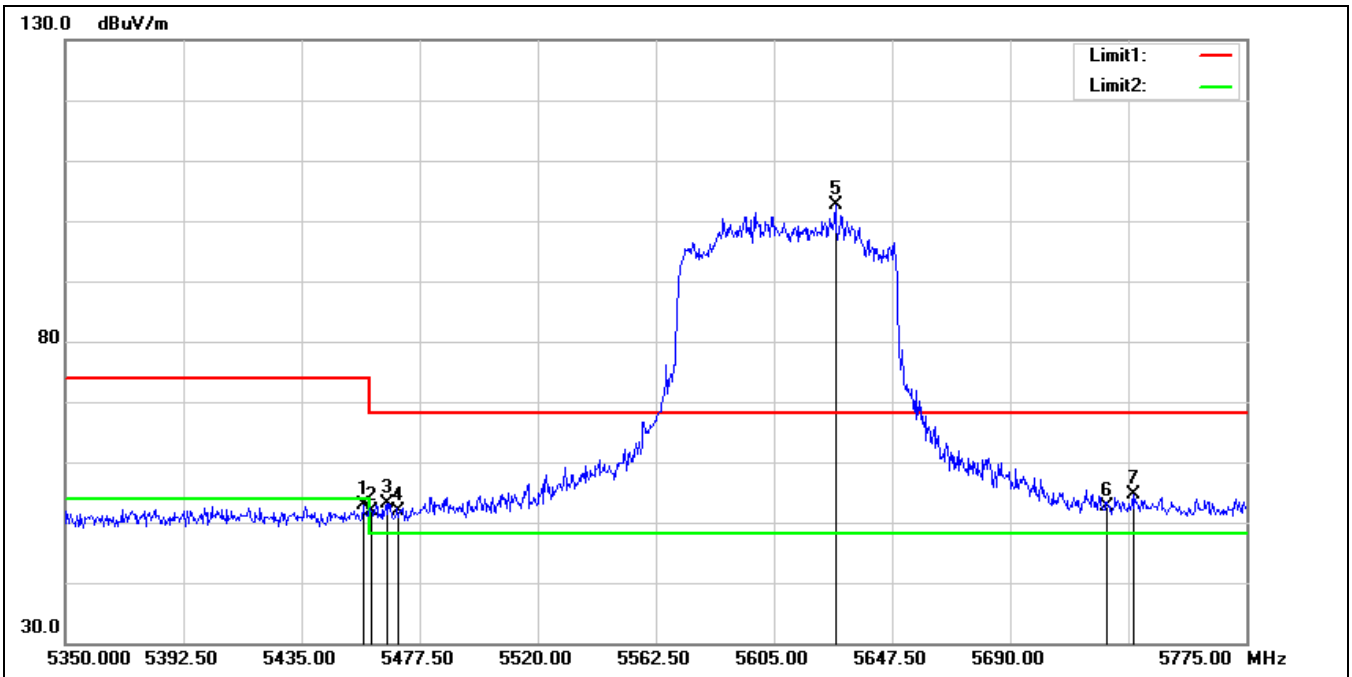


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.100	51.15	1.72	52.87	74.00	-21.13	peak
2	5460.000	50.14	1.73	51.87	74.00	-22.13	peak
3	5465.600	51.45	1.74	53.19	68.20	-15.01	peak
4	5470.000	50.16	1.74	51.90	68.20	-16.30	peak
5*	5627.100	100.74	1.95	102.69	68.20	34.49	peak
6	5725.000	50.31	2.30	52.61	68.20	-15.59	peak
7	5734.200	52.24	2.39	54.63	68.20	-13.57	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

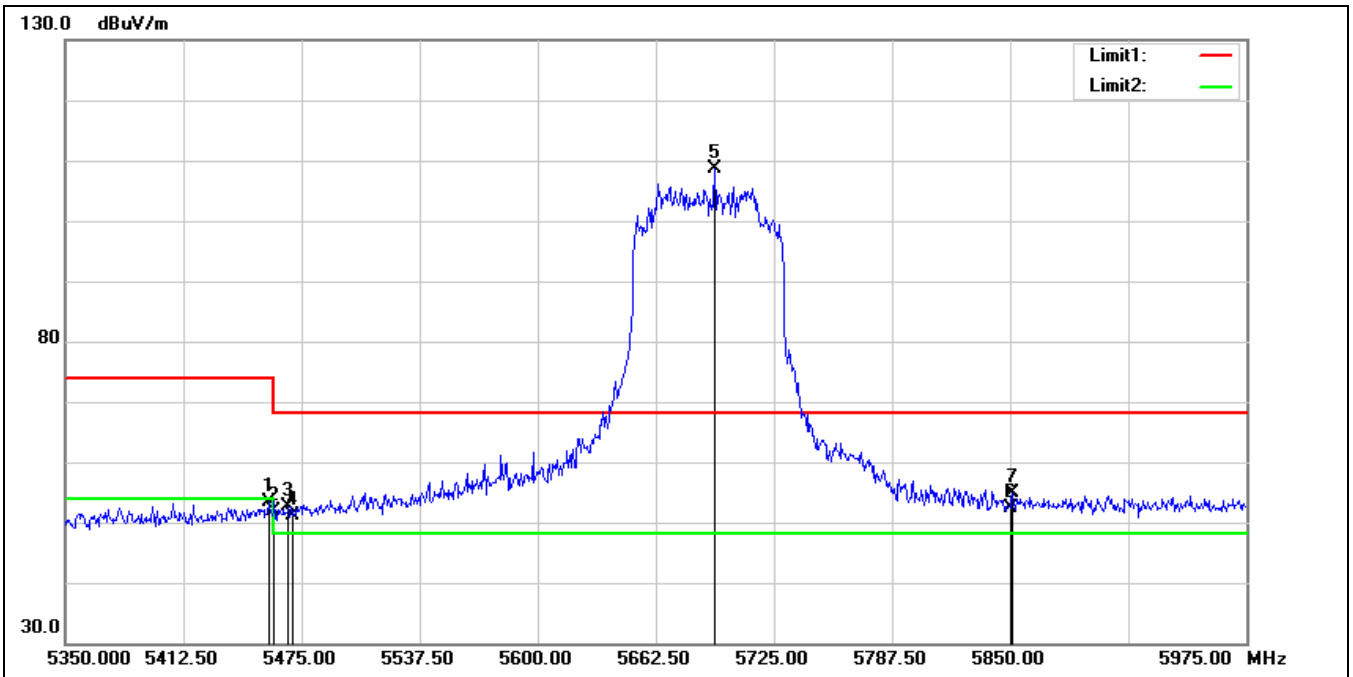


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.500	51.58	1.72	53.30	74.00	-20.70	peak
2	5460.000	50.15	1.73	51.88	74.00	-22.12	peak
3	5468.125	50.92	1.74	52.66	68.20	-15.54	peak
4	5470.000	49.51	1.74	51.25	68.20	-16.95	peak
5*	5693.750	106.68	2.05	108.73	68.20	40.53	peak
6	5850.000	49.49	2.98	52.47	68.20	-15.73	peak
7	5851.250	51.85	2.98	54.83	68.20	-13.37	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

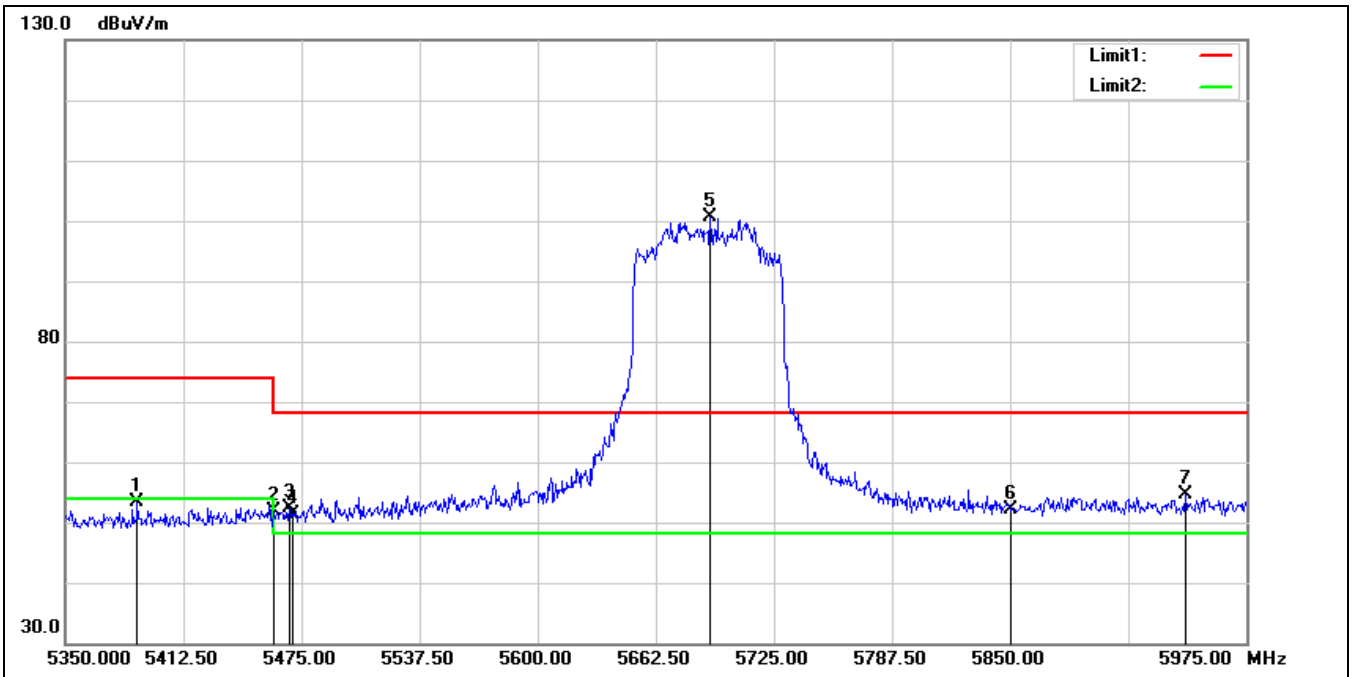


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5388.125	51.83	1.44	53.27	74.00	-20.73	peak
2	5460.000	50.14	1.73	51.87	74.00	-22.13	peak
3	5468.750	50.66	1.74	52.40	68.20	-15.80	peak
4	5470.000	49.58	1.74	51.32	68.20	-16.88	peak
5*	5691.250	98.51	2.04	100.55	68.20	32.35	peak
6	5850.000	49.20	2.98	52.18	68.20	-16.02	peak
7	5943.125	51.63	3.05	54.68	68.20	-13.52	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

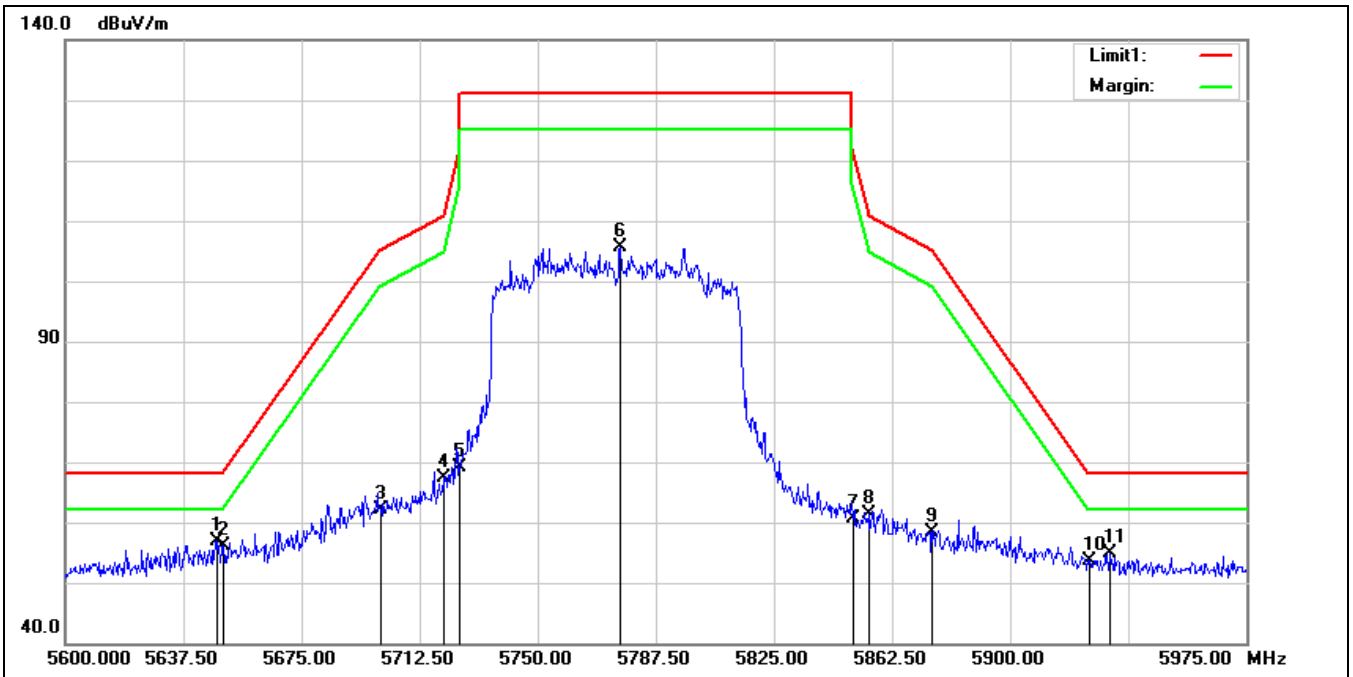


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5648.000	55.04	1.91	56.95	68.20	-11.25	peak
2	5650.000	54.16	1.90	56.06	68.20	-12.14	peak
3	5700.000	60.00	2.06	62.06	105.20	-43.14	peak
4	5720.000	65.10	2.26	67.36	110.80	-43.44	peak
5	5725.000	66.92	2.30	69.22	122.20	-52.98	peak
6	5776.250	103.00	2.69	105.69	131.20	-25.51	peak
7	5850.000	57.53	2.98	60.51	122.20	-61.69	peak
8	5855.000	58.33	3.01	61.34	110.80	-49.46	peak
9	5875.000	55.41	3.07	58.48	105.20	-46.72	peak
10	5925.000	50.46	3.10	53.56	68.20	-14.64	peak
11	5931.500	51.76	3.07	54.83	68.20	-13.37	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

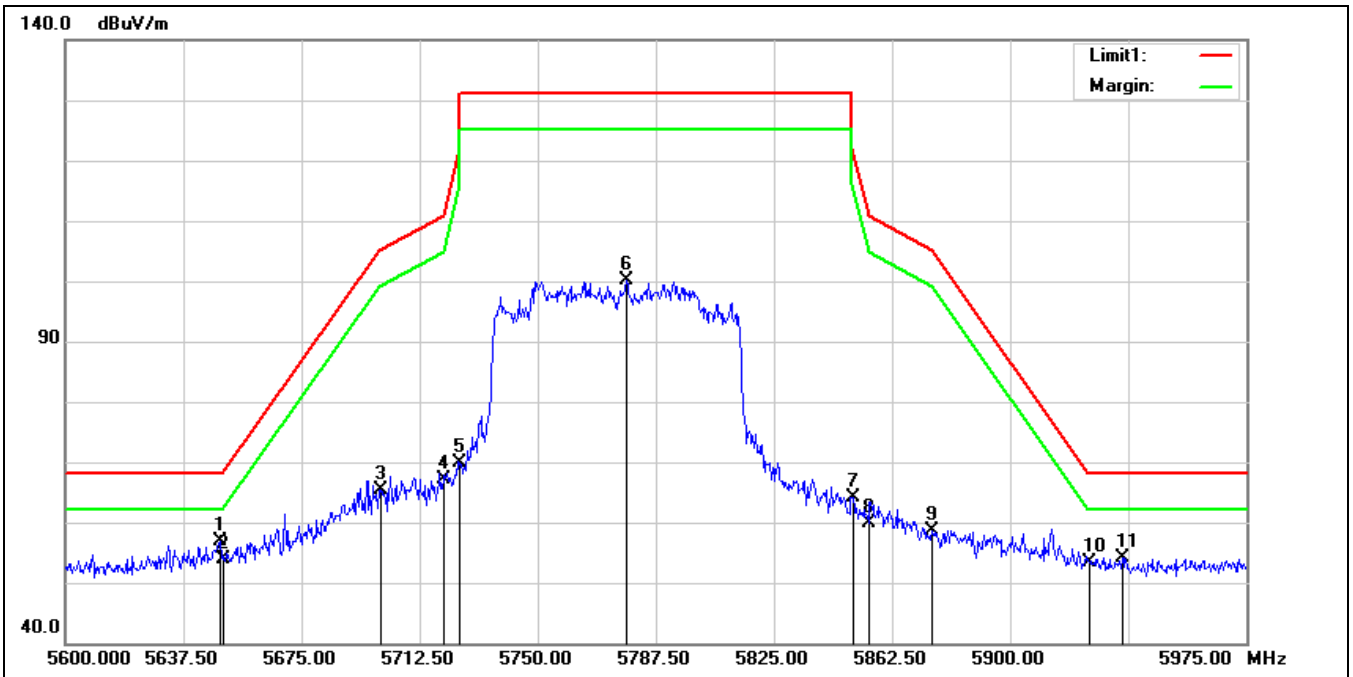


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5649.125	54.97	1.90	56.87	68.20	-11.33	peak
2	5650.000	52.03	1.90	53.93	68.20	-14.27	peak
3	5700.000	63.32	2.06	65.38	105.20	-39.82	peak
4	5720.000	64.93	2.26	67.19	110.80	-43.61	peak
5	5725.000	67.46	2.30	69.76	122.20	-52.44	peak
6	5778.125	97.47	2.69	100.16	131.20	-31.04	peak
7	5850.000	61.05	2.98	64.03	122.20	-58.17	peak
8	5855.000	56.92	3.01	59.93	110.80	-50.87	peak
9	5875.000	55.62	3.07	58.69	105.20	-46.51	peak
10	5925.000	50.29	3.10	53.39	68.20	-14.81	peak
11	5935.625	51.15	3.06	54.21	68.20	-13.99	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

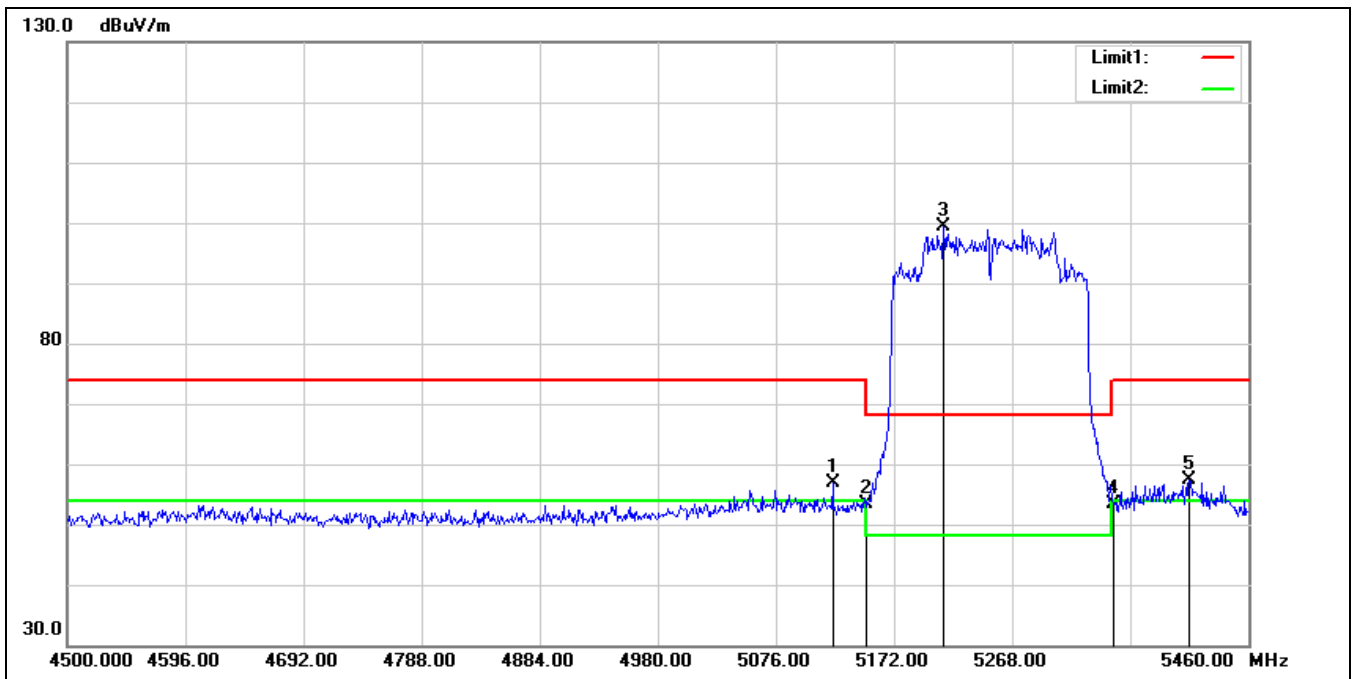


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5122.080	55.49	1.38	56.87	74.00	-17.13	peak
2	5150.000	51.99	1.42	53.41	74.00	-20.59	peak
3*	5212.320	98.18	1.23	99.41	68.20	31.21	peak
4	5350.000	52.27	1.08	53.35	74.00	-20.65	peak
5	5412.000	55.82	1.59	57.41	74.00	-16.59	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

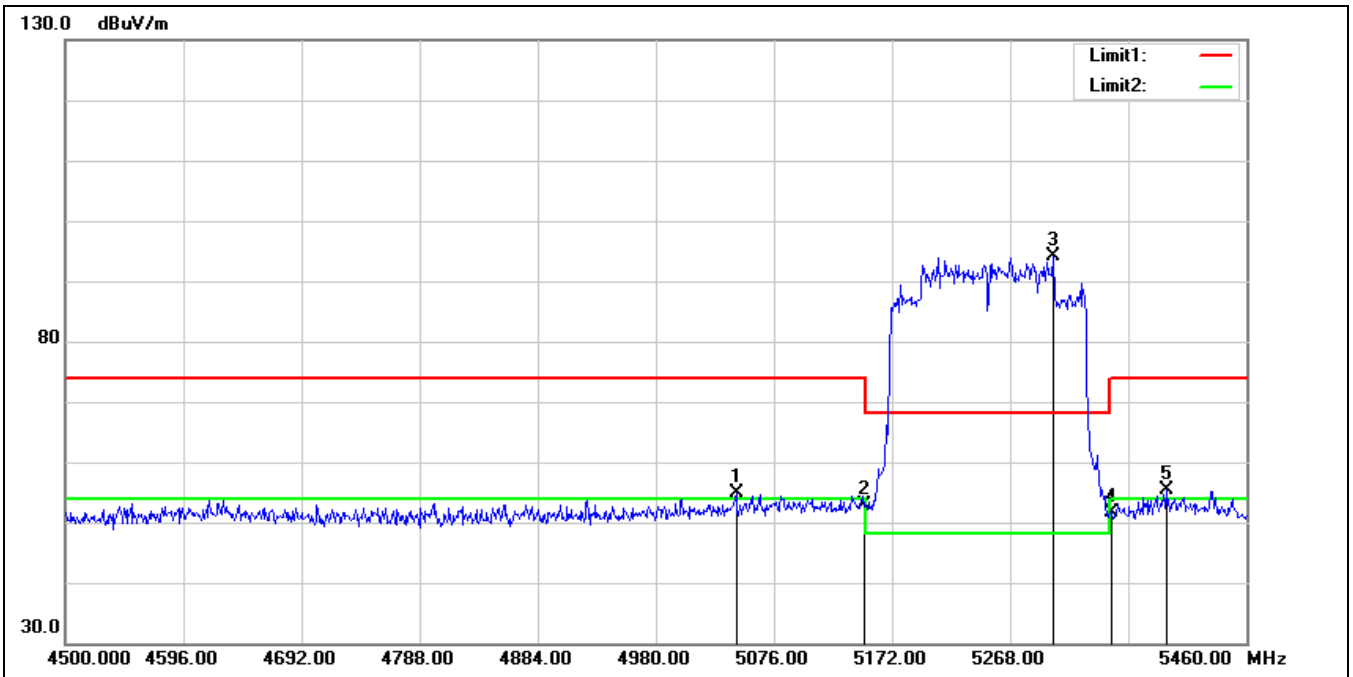

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5045.280	53.82	1.05	54.87	74.00	-19.13	peak
2	5150.000	51.45	1.42	52.87	74.00	-21.13	peak
3*	5302.560	93.17	0.93	94.10	68.20	25.90	peak
4	5350.000	50.44	1.08	51.52	74.00	-22.48	peak
5	5394.720	53.82	1.50	55.32	74.00	-18.68	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

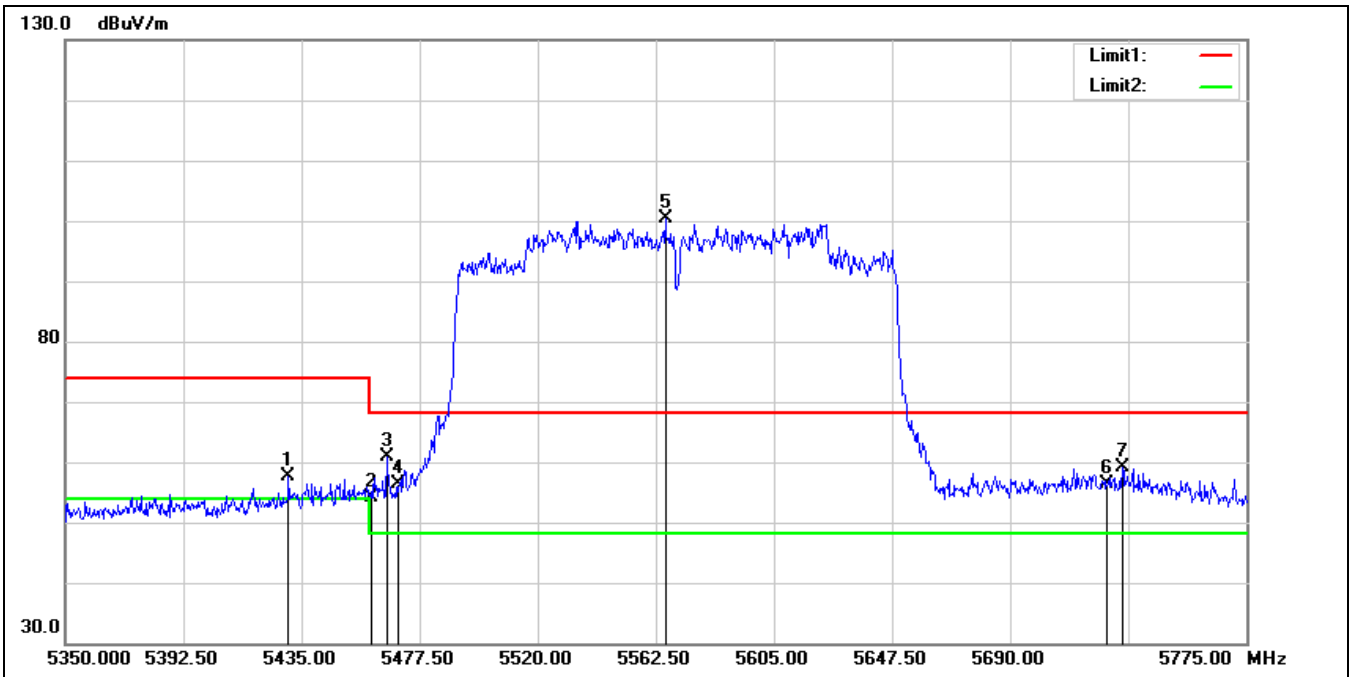

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5430.325	56.07	1.65	57.72	74.00	-16.28	peak
2	5460.000	52.47	1.73	54.20	74.00	-19.80	peak
3	5465.600	59.16	1.74	60.90	68.20	-7.30	peak
4	5470.000	54.60	1.74	56.34	68.20	-11.86	peak
5*	5565.900	98.43	2.05	100.48	68.20	32.28	peak
6	5725.000	54.13	2.30	56.43	68.20	-11.77	peak
7	5730.375	56.87	2.36	59.23	68.20	-8.97	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

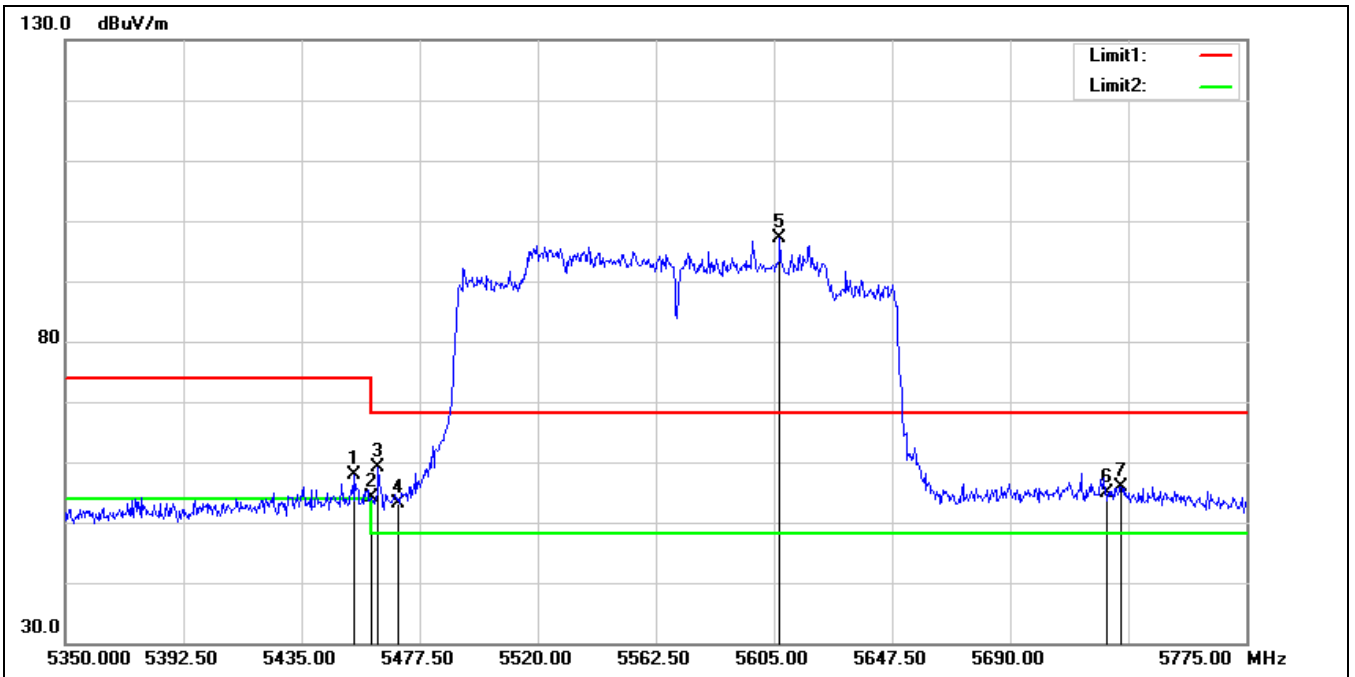

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.125	56.21	1.72	57.93	74.00	-16.07	peak
2	5460.000	52.33	1.73	54.06	74.00	-19.94	peak
3	5462.625	57.49	1.73	59.22	68.20	-8.98	peak
4	5470.000	51.45	1.74	53.19	68.20	-15.01	peak
5*	5607.125	95.19	2.01	97.20	68.20	29.00	peak
6	5725.000	52.69	2.30	54.99	68.20	-13.21	peak
7	5729.950	53.63	2.36	55.99	68.20	-12.21	peak


SISO\_Average

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5180 MHz		
Remark:			

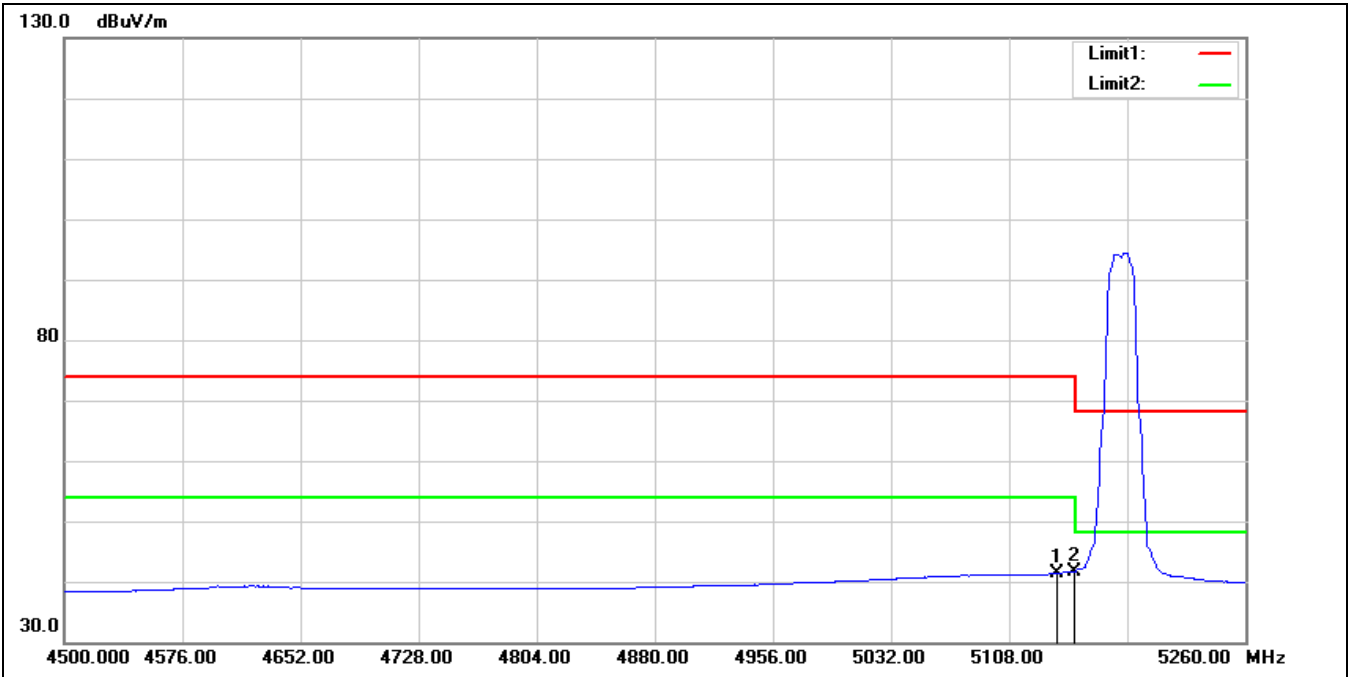


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5139.160	40.01	1.40	41.41	54.00	-12.59	AVG
2*	5150.000	40.33	1.42	41.75	54.00	-12.25	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5180 MHz		
Remark:			

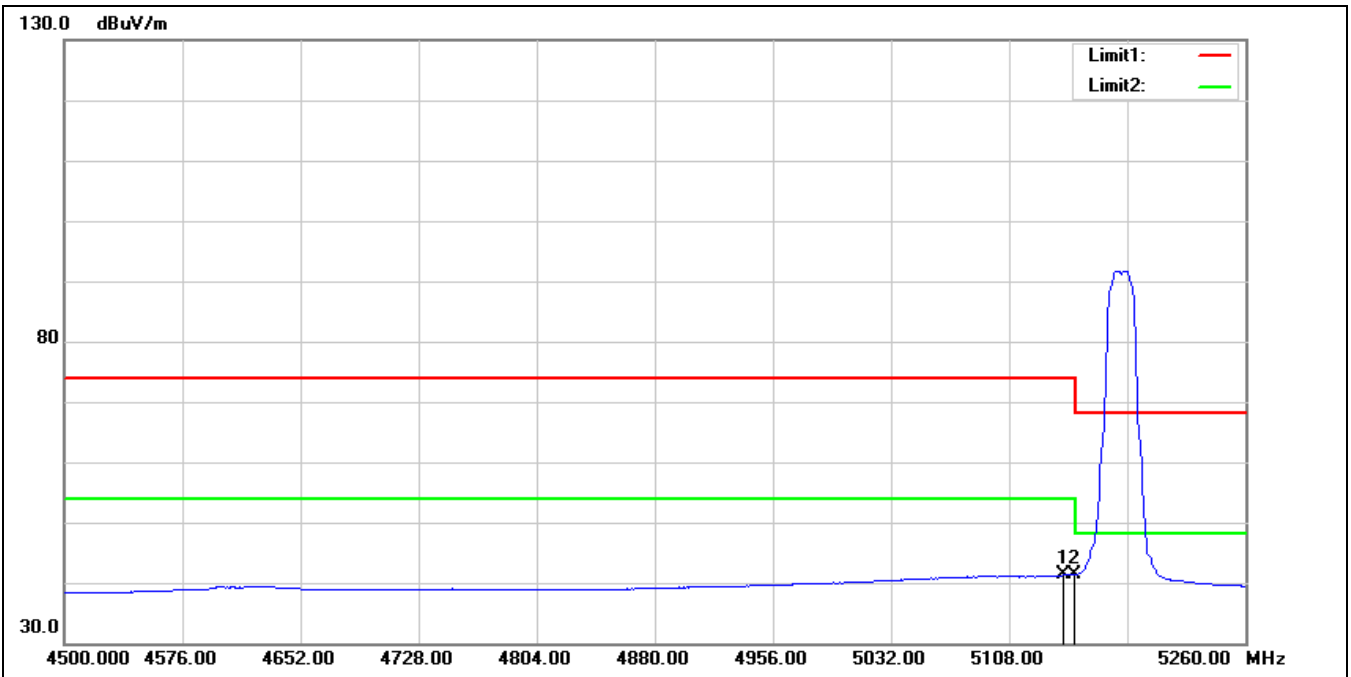


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.960	39.85	1.41	41.26	54.00	-12.74	AVG
2*	5150.000	40.04	1.42	41.46	54.00	-12.54	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5320 MHz		
Remark:			

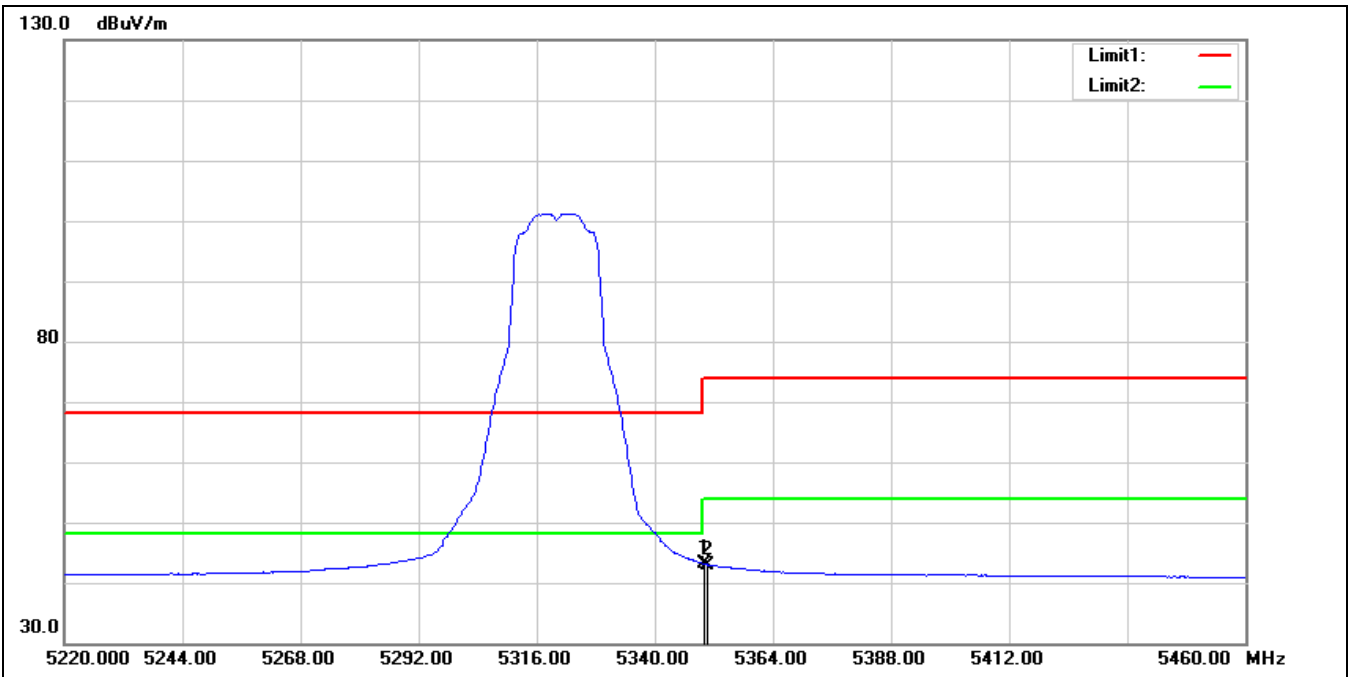


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	42.05	1.08	43.13	54.00	-10.87	AVG
2	5350.800	41.90	1.09	42.99	54.00	-11.01	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5320 MHz		
Remark:			

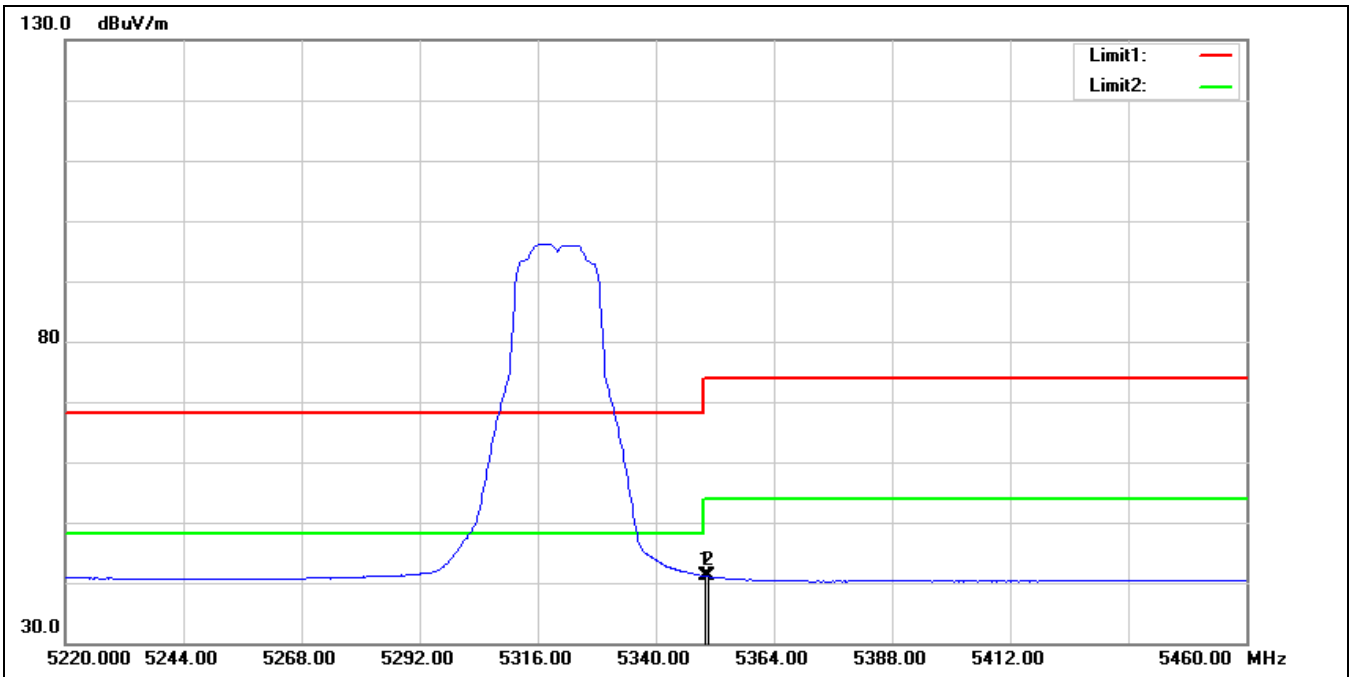


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	39.99	1.08	41.07	54.00	-12.93	AVG
2*	5350.560	40.00	1.08	41.08	54.00	-12.92	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

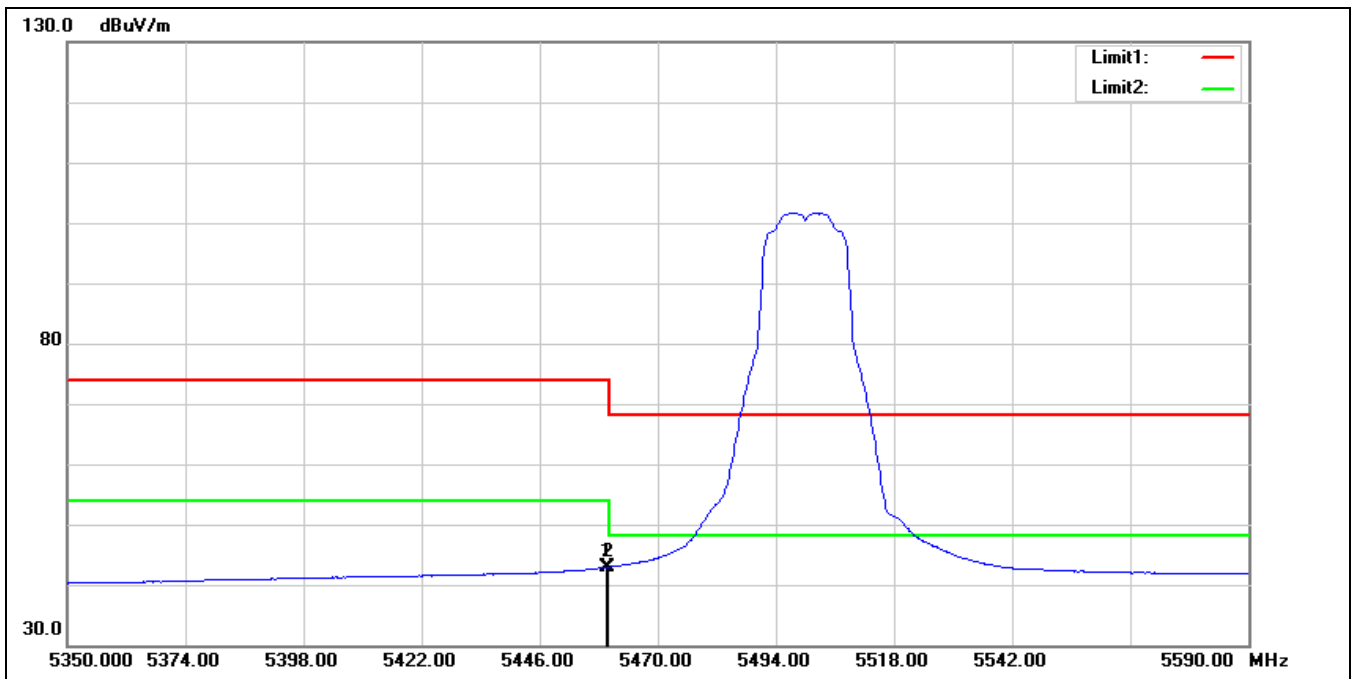


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.440	41.20	1.73	42.93	54.00	-11.07	AVG
2*	5460.000	41.23	1.73	42.96	54.00	-11.04	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5500 MHz		
Remark:			

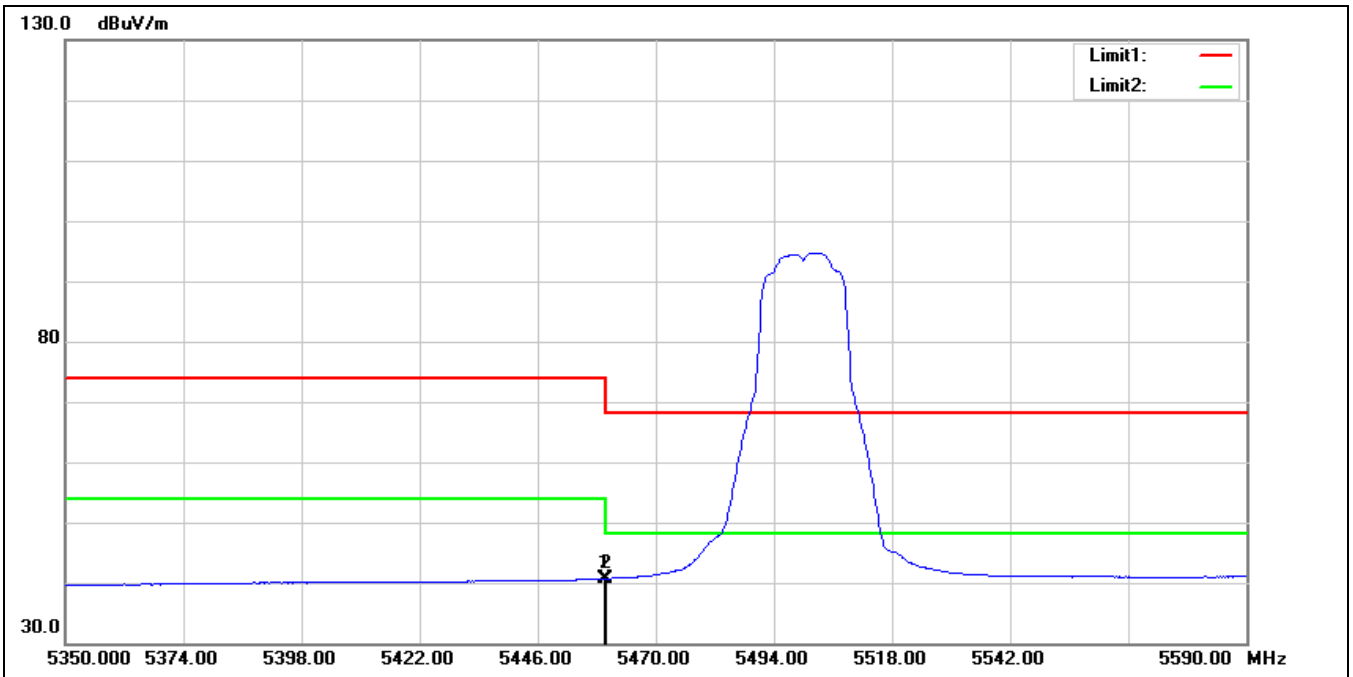

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.440	38.97	1.73	40.70	54.00	-13.30	AVG
2*	5460.000	38.98	1.73	40.71	54.00	-13.29	AVG


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

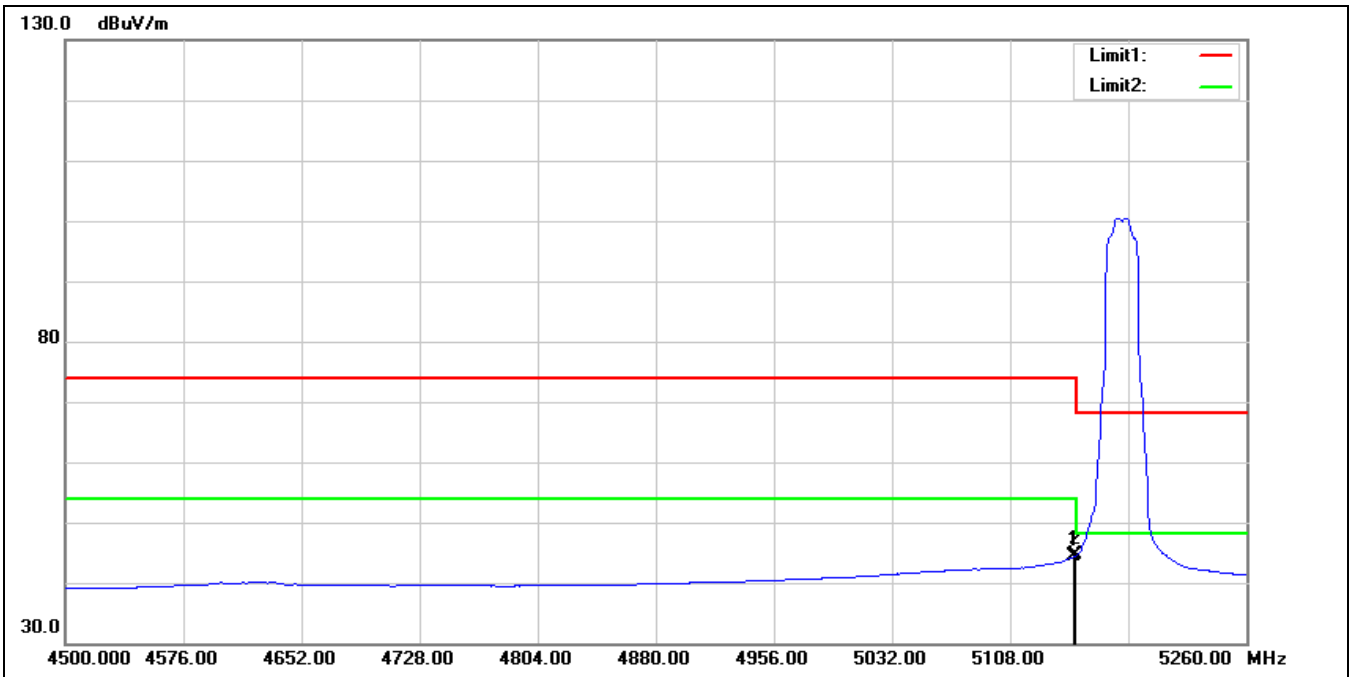

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.040	42.90	1.42	44.32	54.00	-9.68	AVG
2*	5150.000	43.12	1.42	44.54	54.00	-9.46	AVG




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

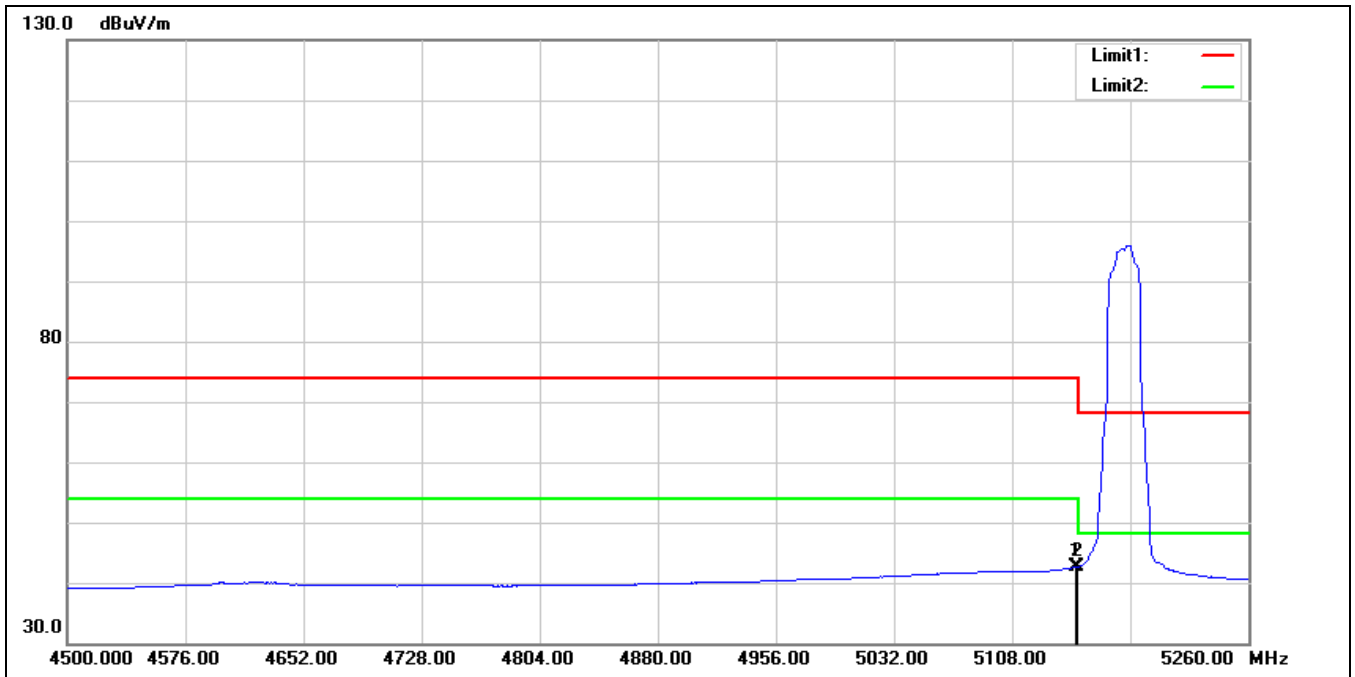


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.040	41.21	1.42	42.63	54.00	-11.37	AVG
2*	5150.000	41.26	1.42	42.68	54.00	-11.32	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

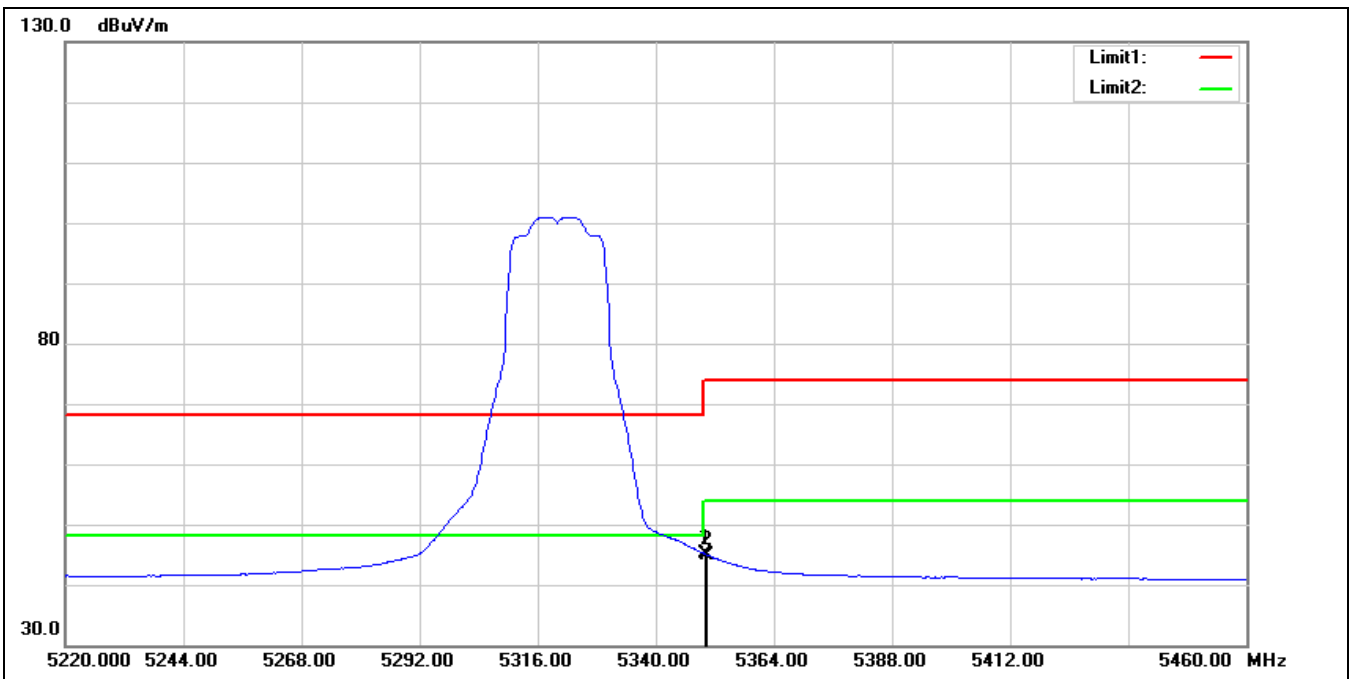


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	44.04	1.08	45.12	54.00	-8.88	AVG
2	5350.320	43.91	1.08	44.99	54.00	-9.01	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

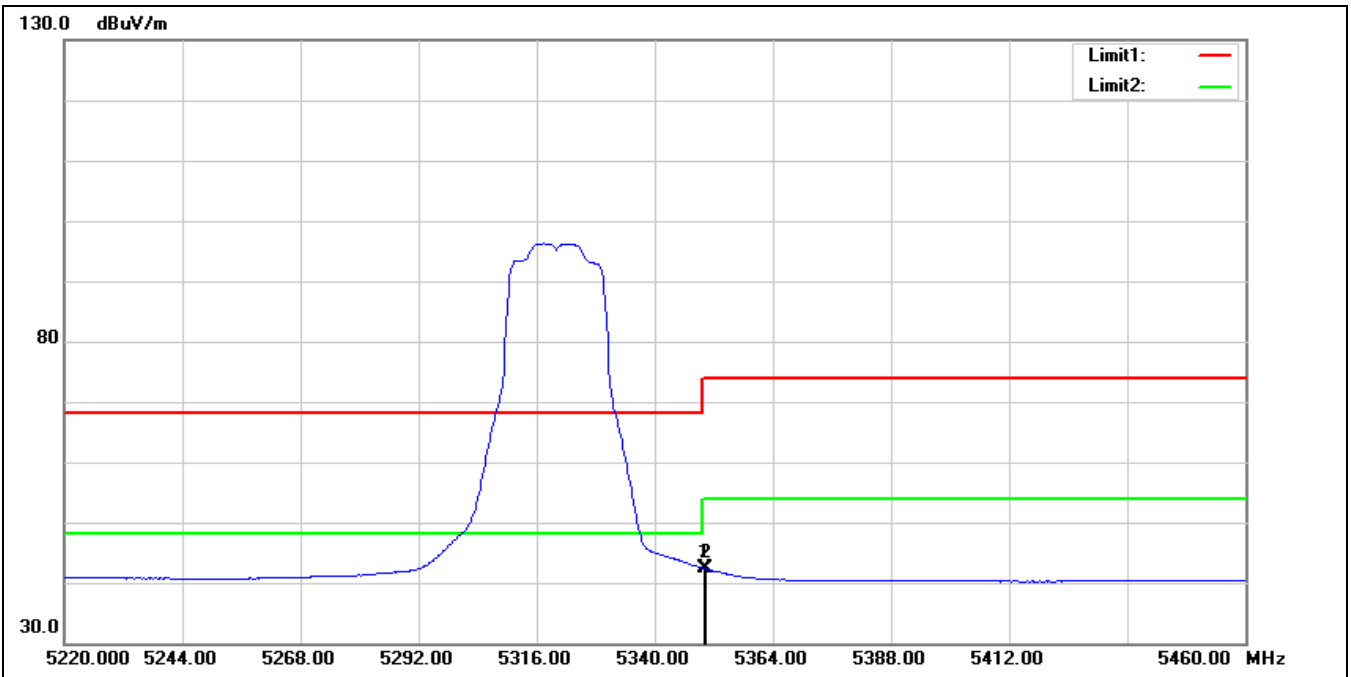


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	41.26	1.08	42.34	54.00	-11.66	AVG
2	5350.320	41.20	1.08	42.28	54.00	-11.72	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

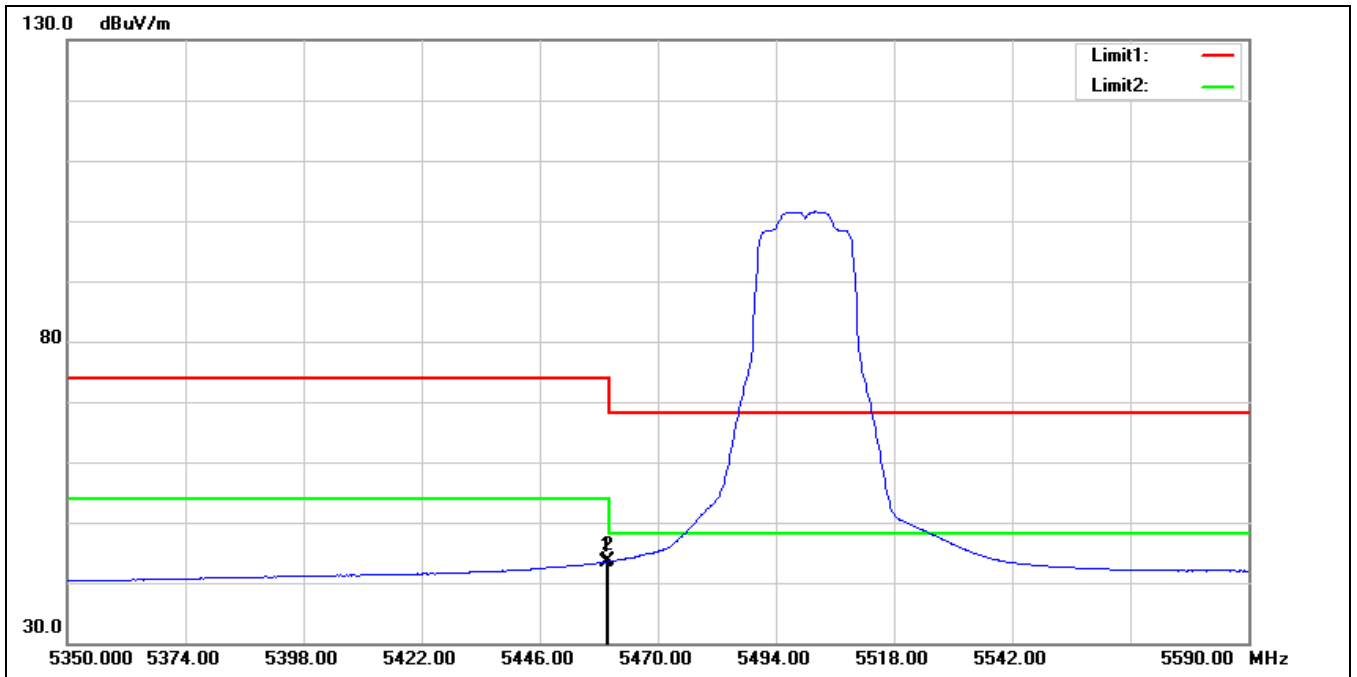


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.680	41.77	1.73	43.50	54.00	-10.50	AVG
2*	5460.000	41.84	1.73	43.57	54.00	-10.43	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

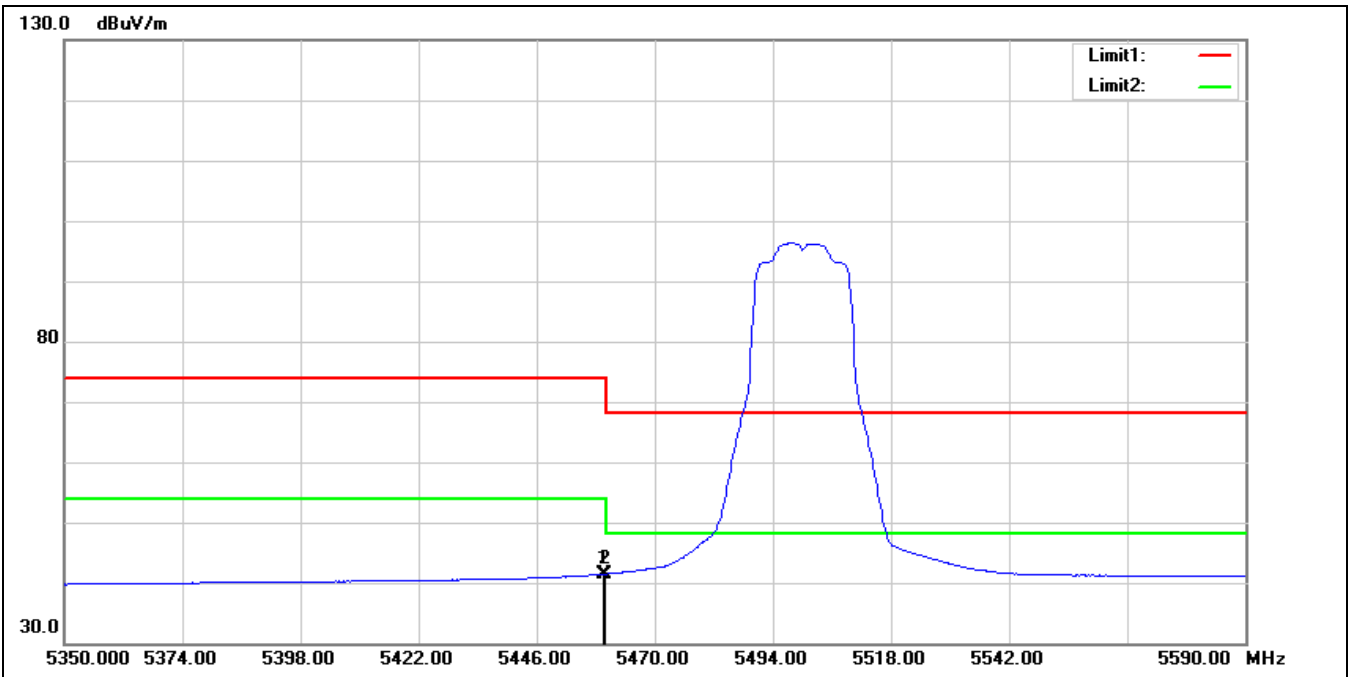


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.680	39.75	1.73	41.48	54.00	-12.52	AVG
2*	5460.000	39.77	1.73	41.50	54.00	-12.50	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

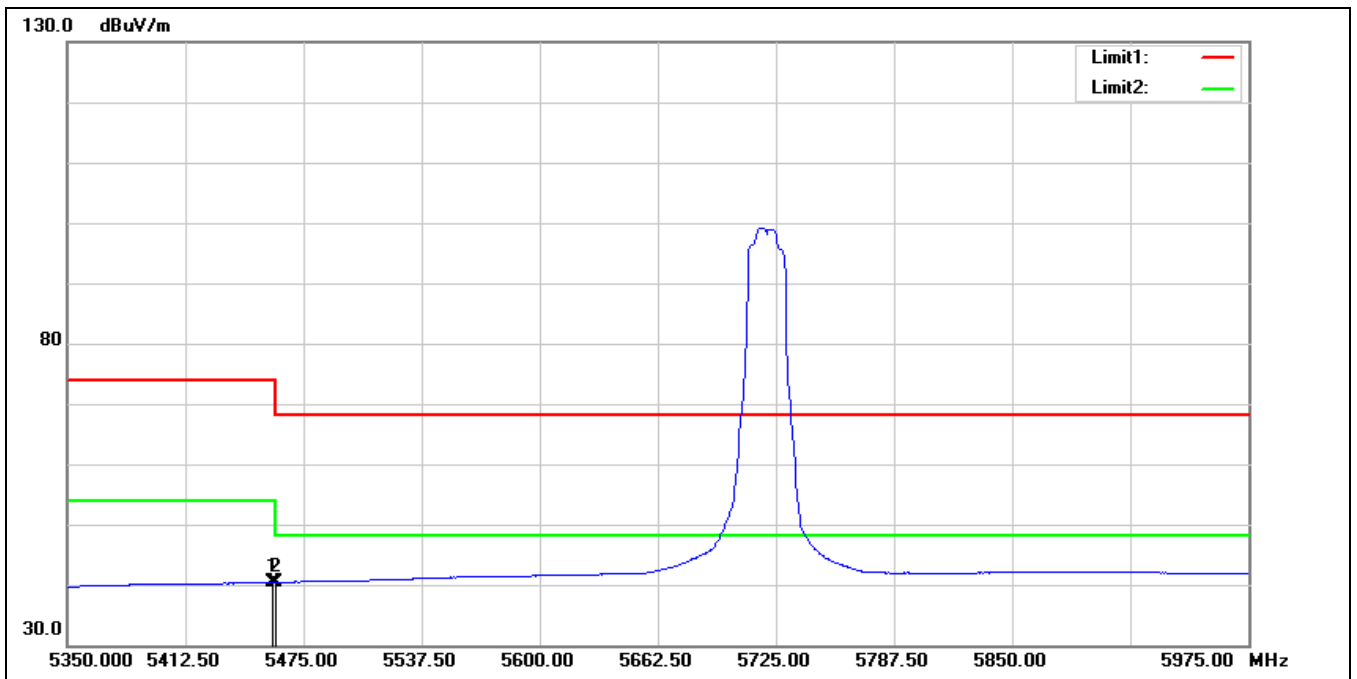


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.750	38.66	1.73	40.39	54.00	-13.61	AVG
2*	5460.000	38.68	1.73	40.41	54.00	-13.59	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

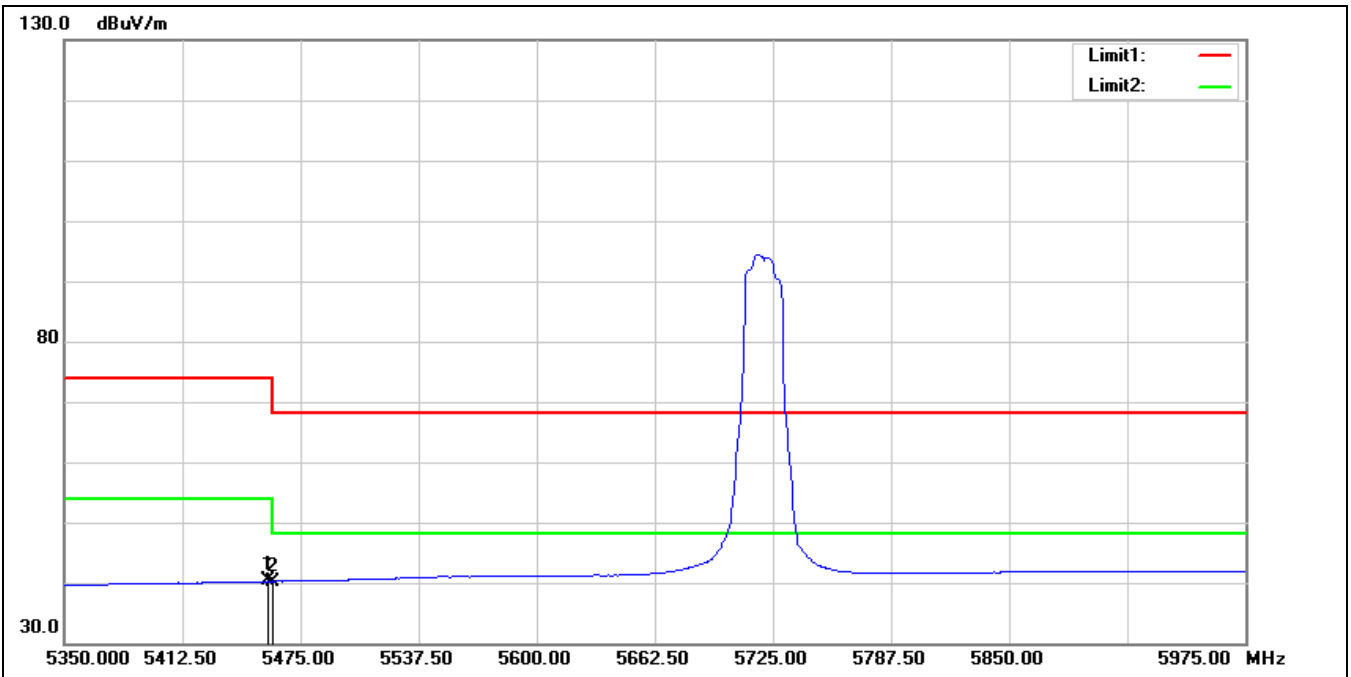

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.125	38.55	1.72	40.27	54.00	-13.73	AVG
2	5460.000	38.50	1.73	40.23	54.00	-13.77	AVG


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

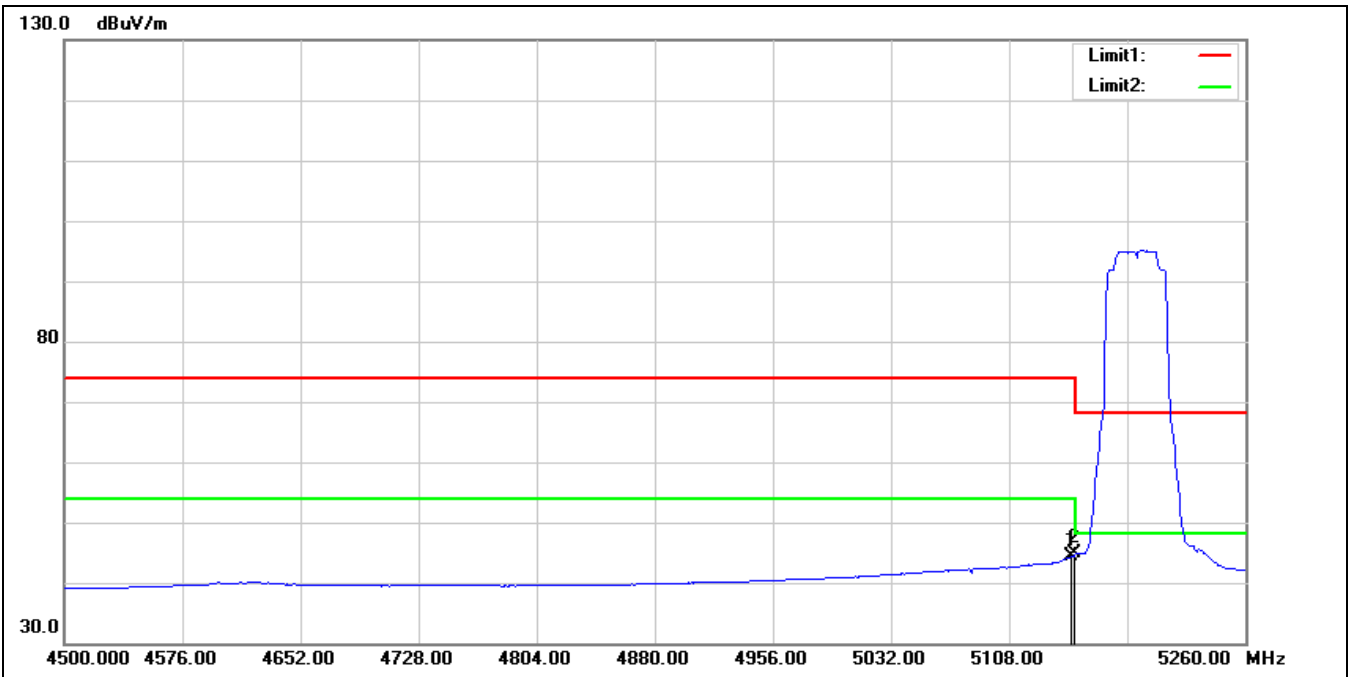

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.520	42.95	1.42	44.37	54.00	-9.63	AVG
2*	5150.000	43.38	1.42	44.80	54.00	-9.20	AVG




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

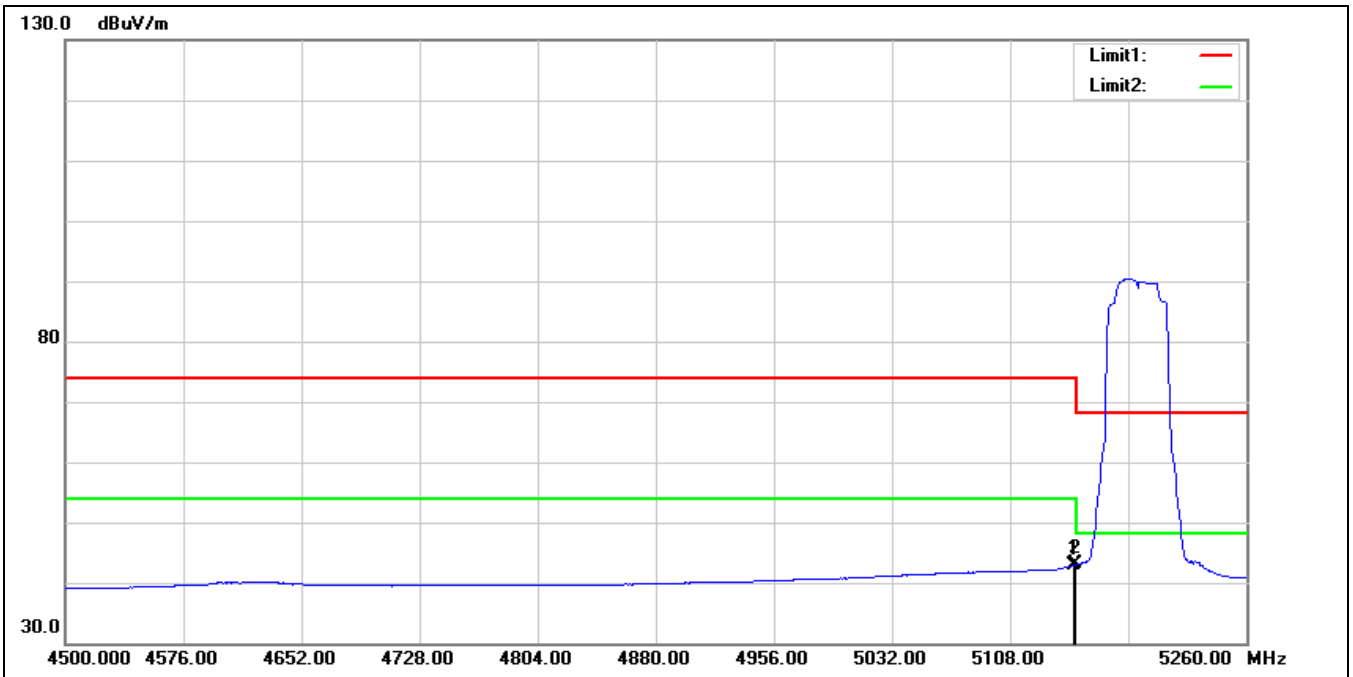


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.040	41.50	1.42	42.92	54.00	-11.08	AVG
2*	5150.000	41.62	1.42	43.04	54.00	-10.96	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

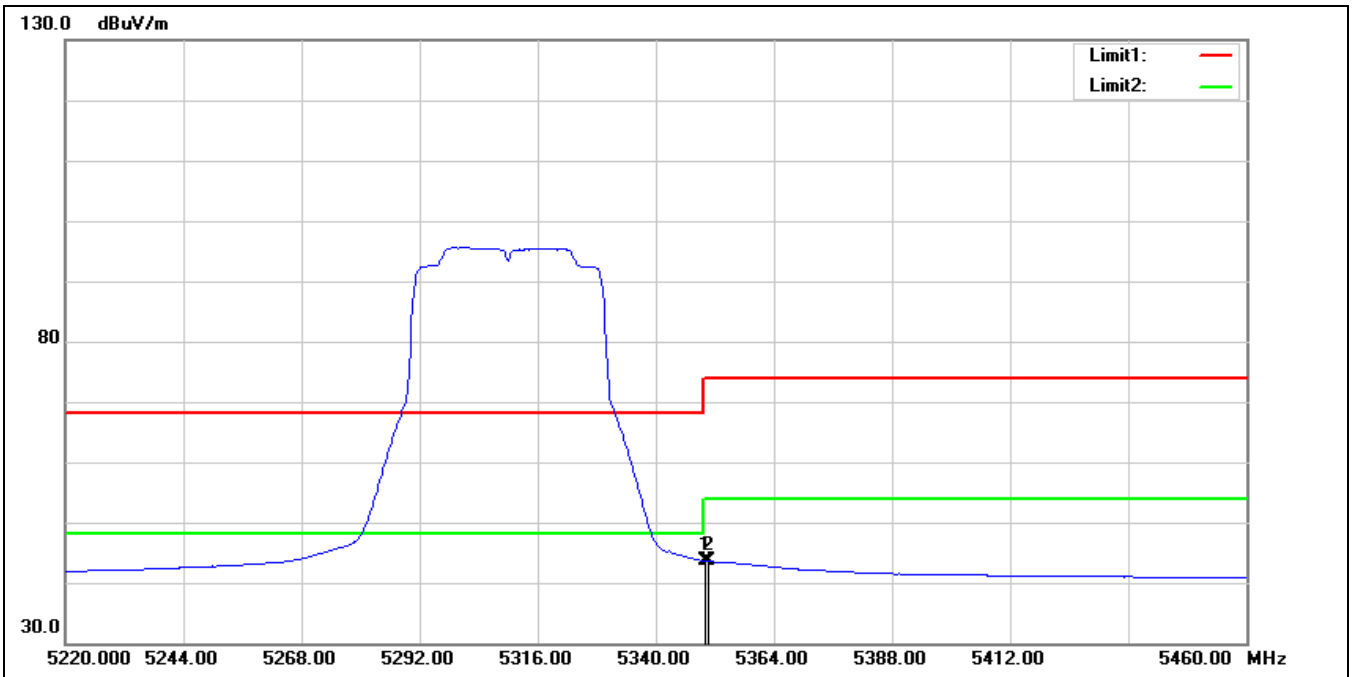


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	42.55	1.08	43.63	54.00	-10.37	AVG
2	5350.560	42.53	1.08	43.61	54.00	-10.39	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

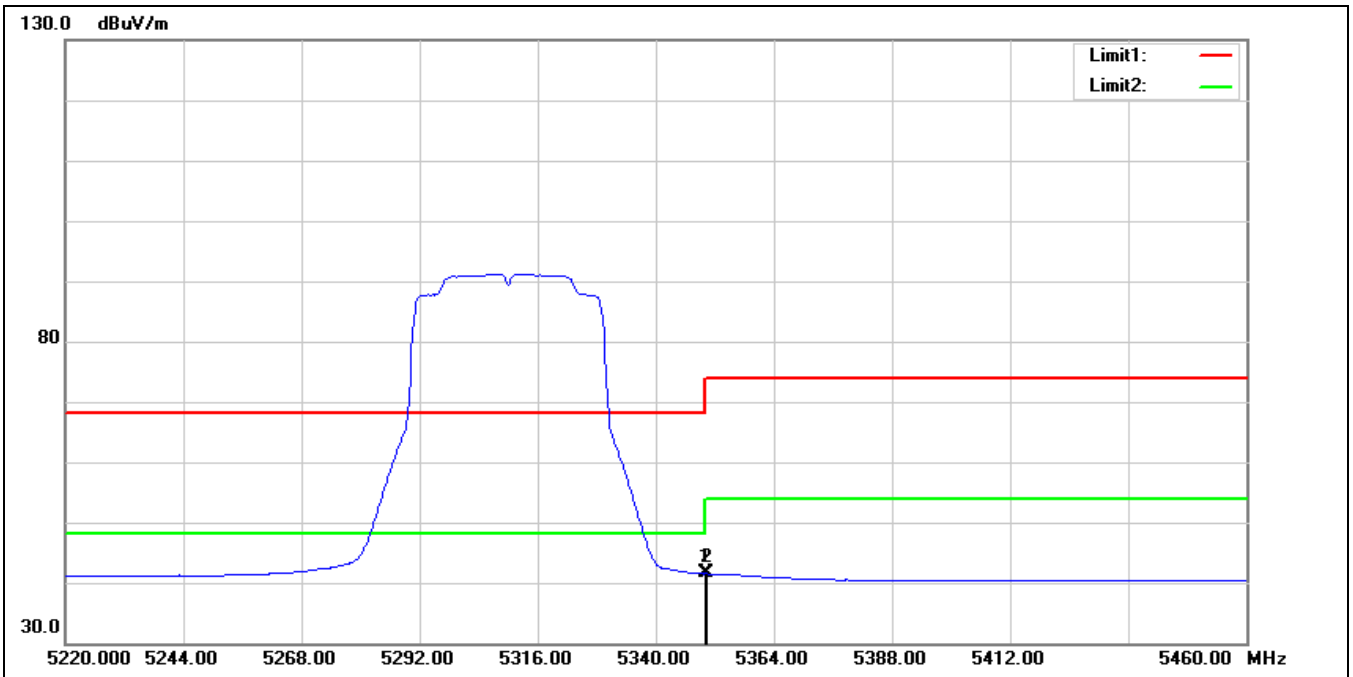


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	40.43	1.08	41.51	54.00	-12.49	AVG
2	5350.320	40.43	1.08	41.51	54.00	-12.49	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

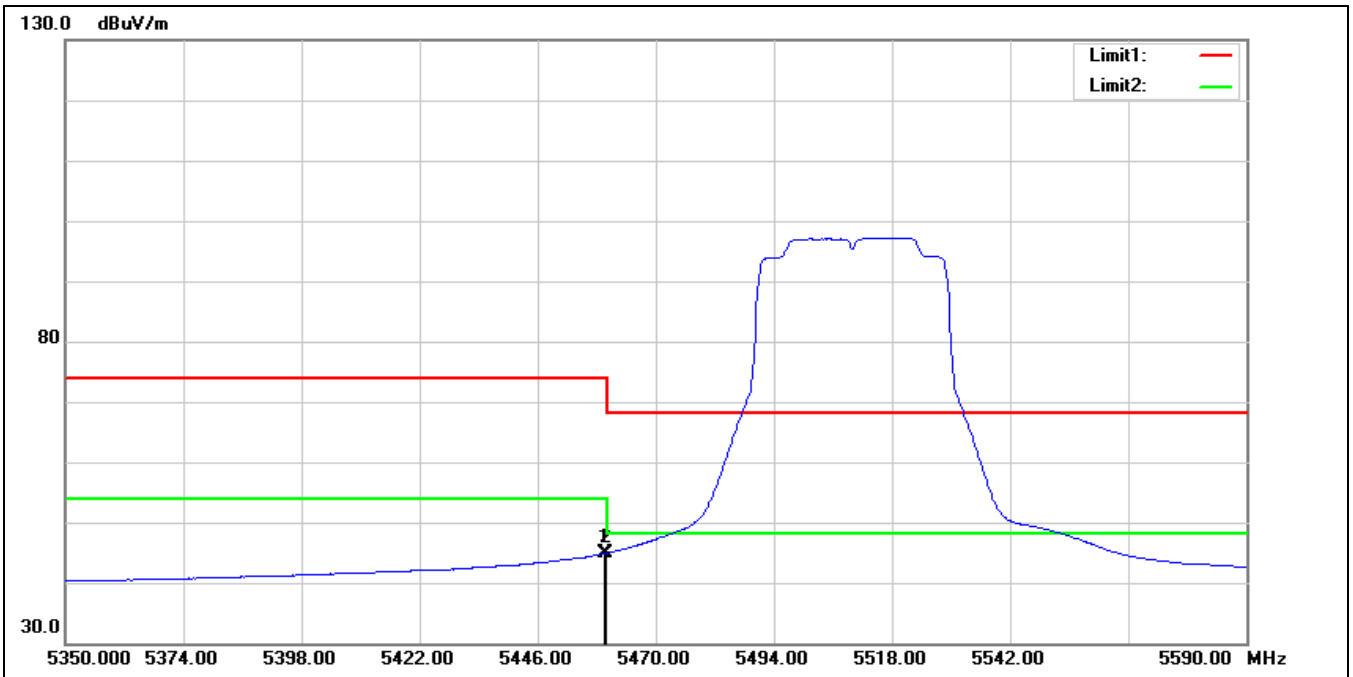


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.680	43.15	1.73	44.88	54.00	-9.12	AVG
2*	5460.000	43.24	1.73	44.97	54.00	-9.03	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

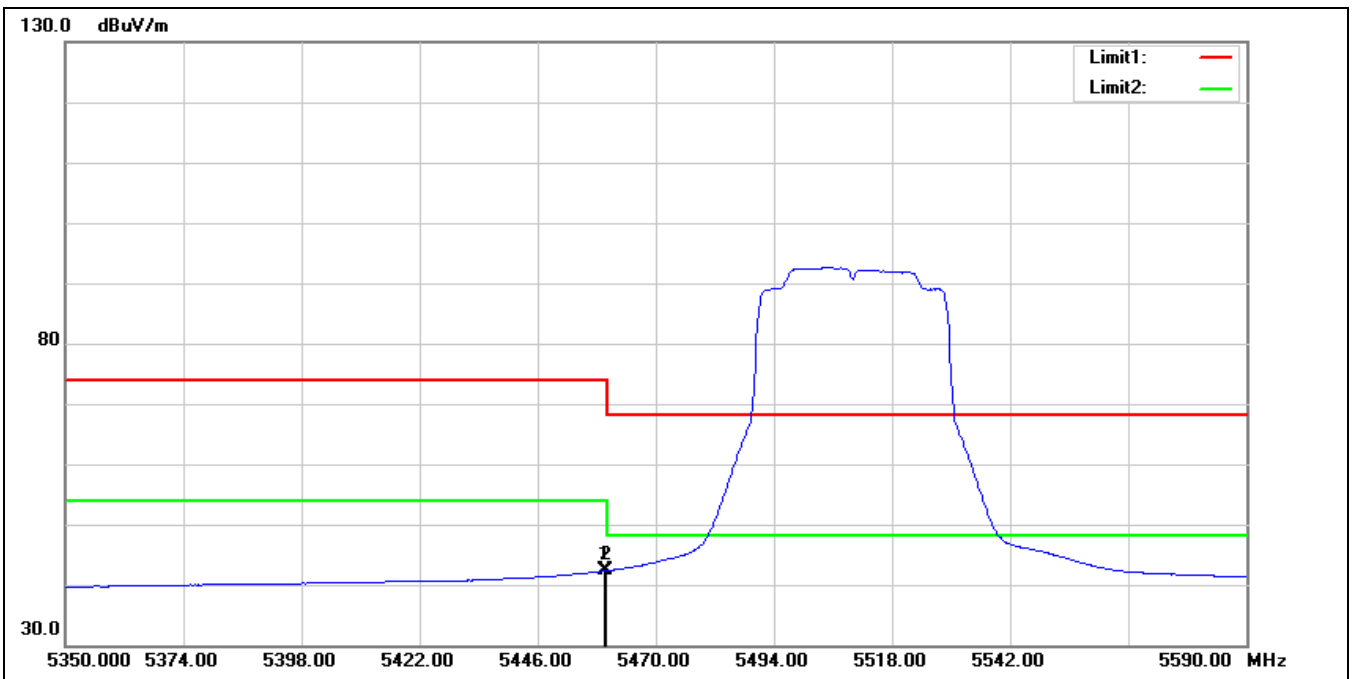


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.680	40.63	1.73	42.36	54.00	-11.64	AVG
2*	5460.000	40.64	1.73	42.37	54.00	-11.63	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

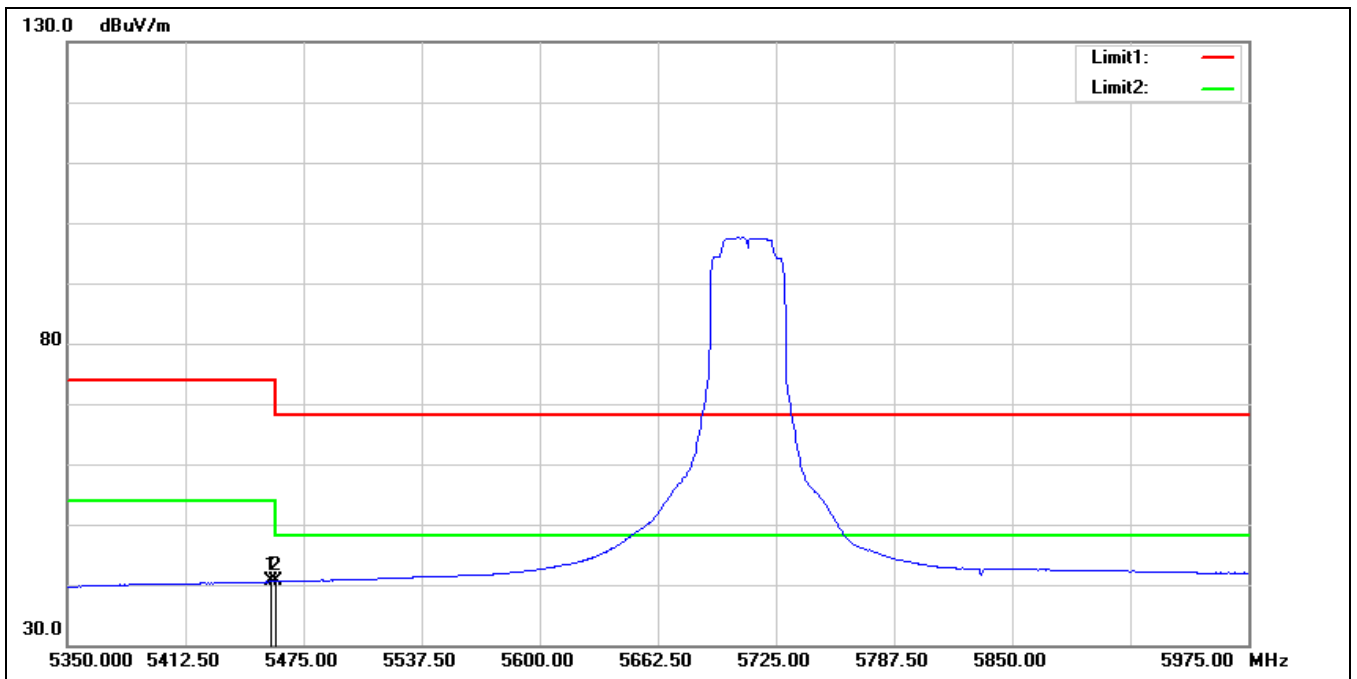


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.125	38.84	1.72	40.56	54.00	-13.44	AVG
2	5460.000	38.81	1.73	40.54	54.00	-13.46	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

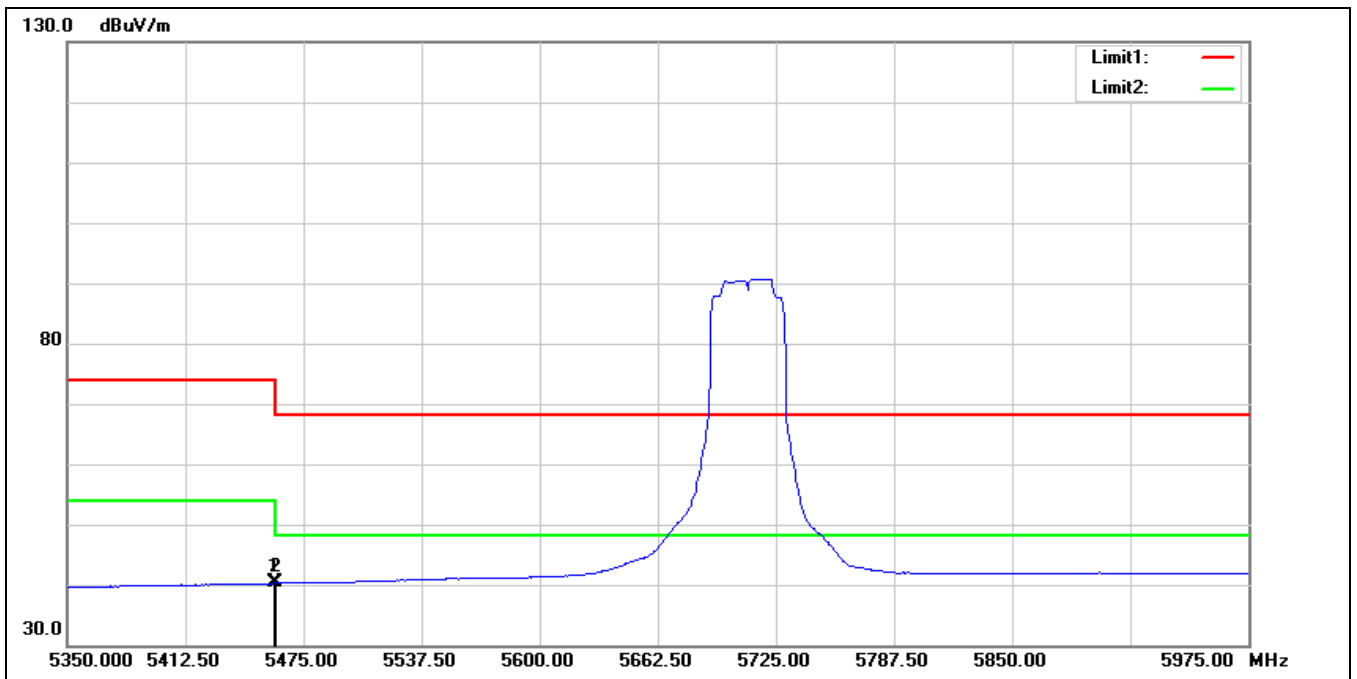

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5459.375	38.54	1.73	40.27	54.00	-13.73	AVG
2	5460.000	38.54	1.73	40.27	54.00	-13.73	AVG


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

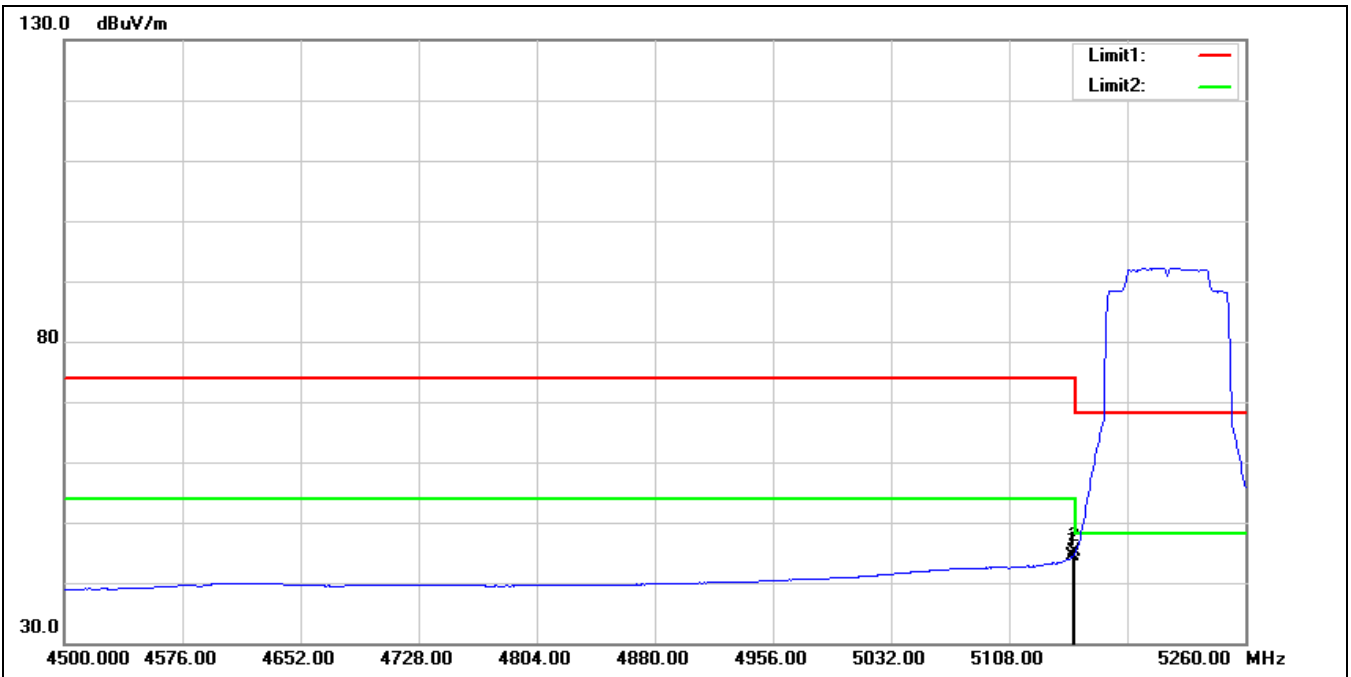

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.040	43.08	1.42	44.50	54.00	-9.50	AVG
2*	5150.000	43.59	1.42	45.01	54.00	-8.99	AVG




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

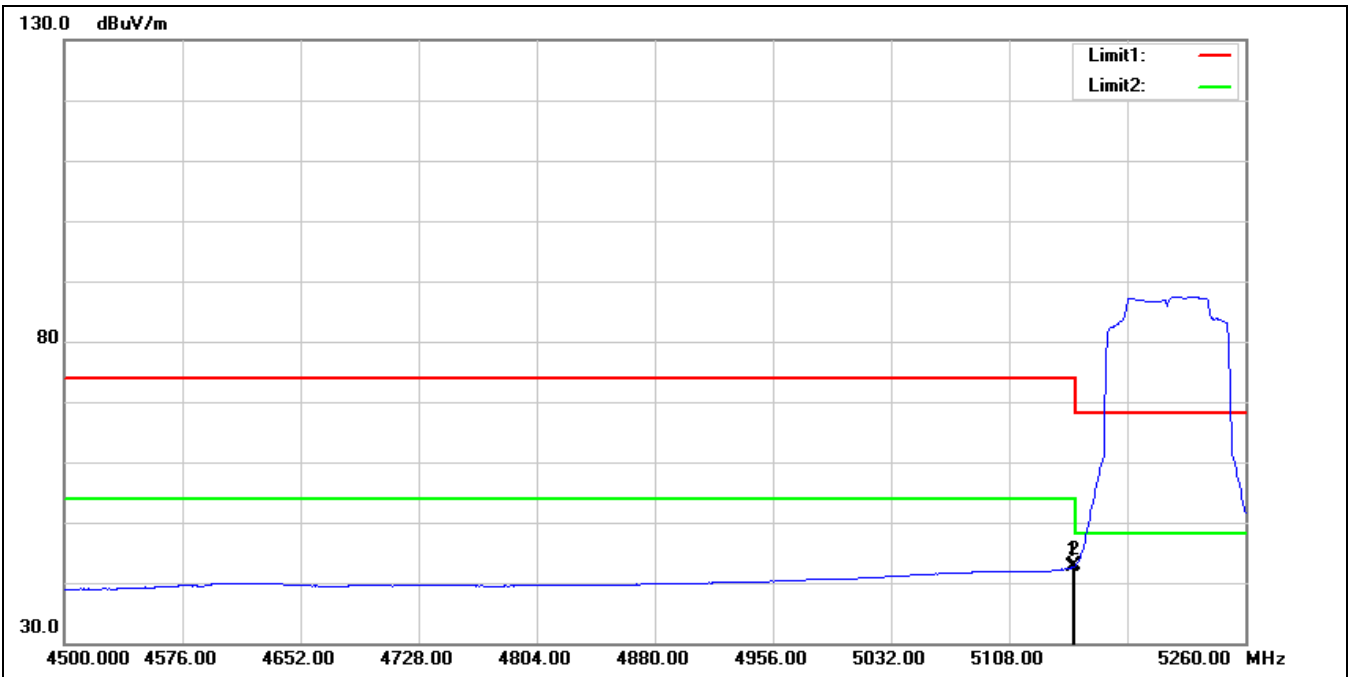


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.040	41.22	1.42	42.64	54.00	-11.36	AVG
2*	5150.000	41.46	1.42	42.88	54.00	-11.12	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

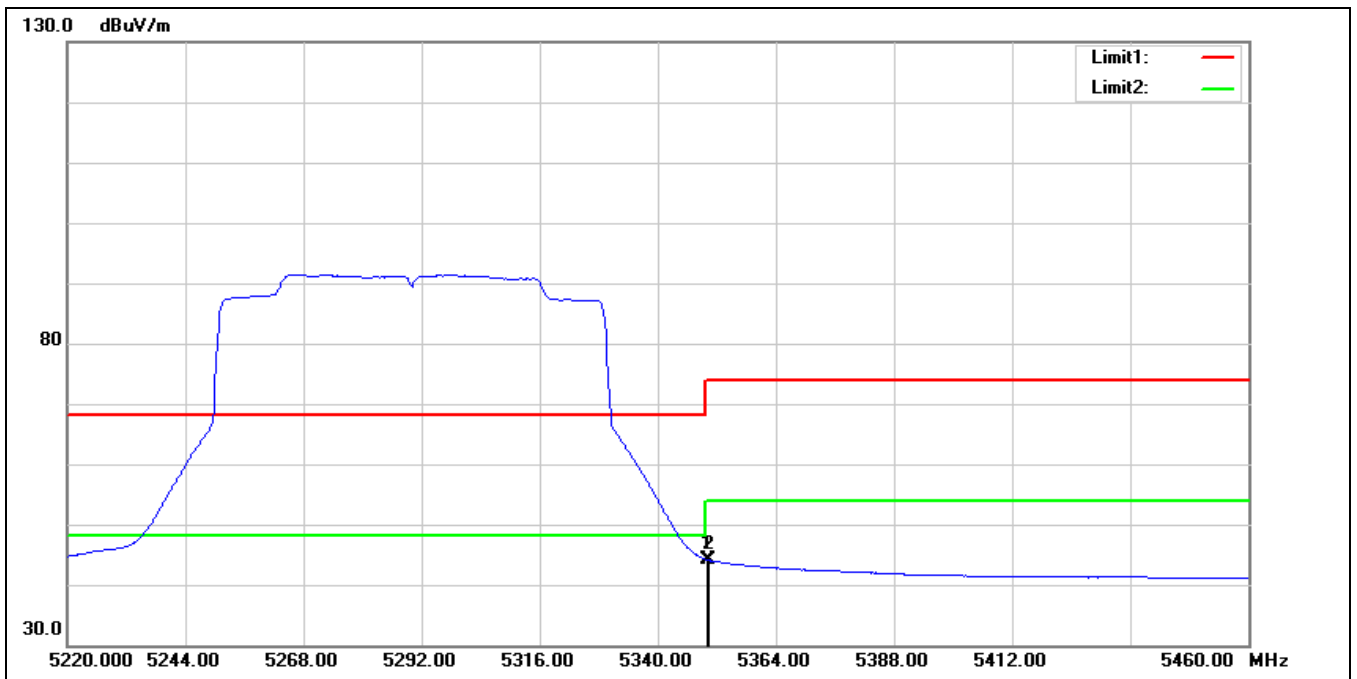


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	43.04	1.08	44.12	54.00	-9.88	AVG
2	5350.320	42.97	1.08	44.05	54.00	-9.95	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

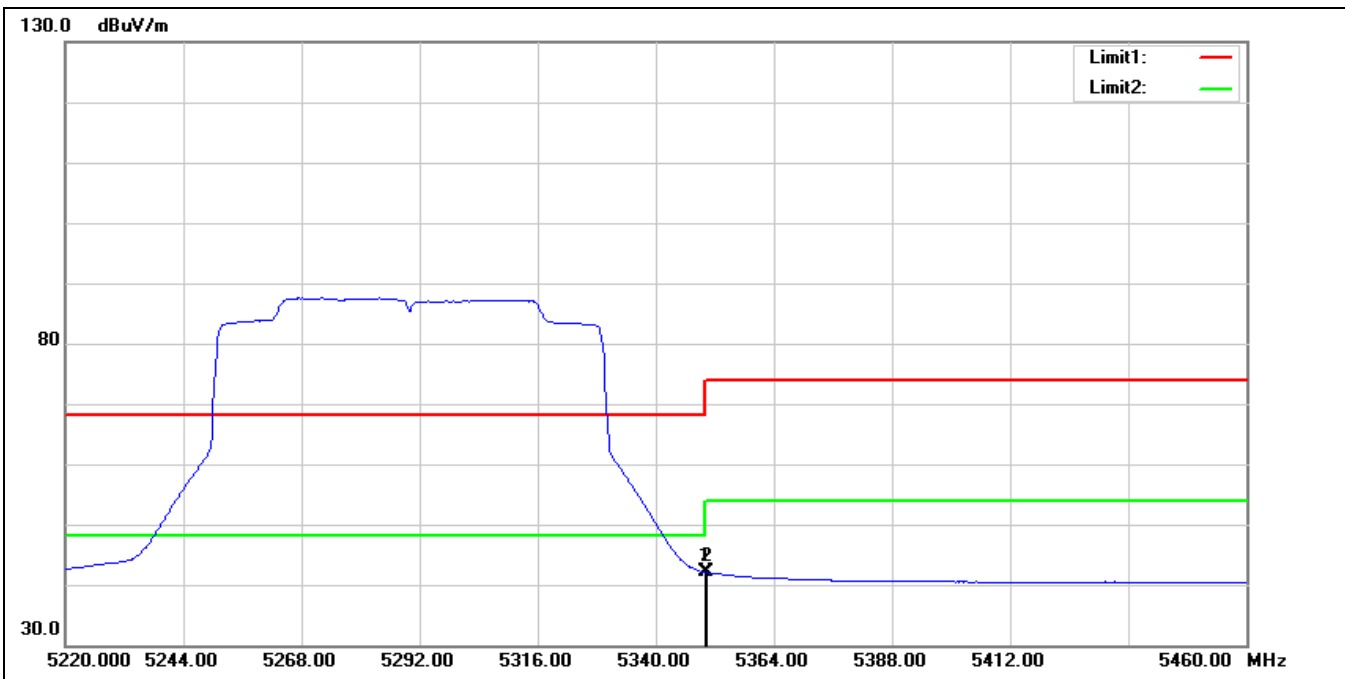


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	40.97	1.08	42.05	54.00	-11.95	AVG
2	5350.320	40.93	1.08	42.01	54.00	-11.99	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

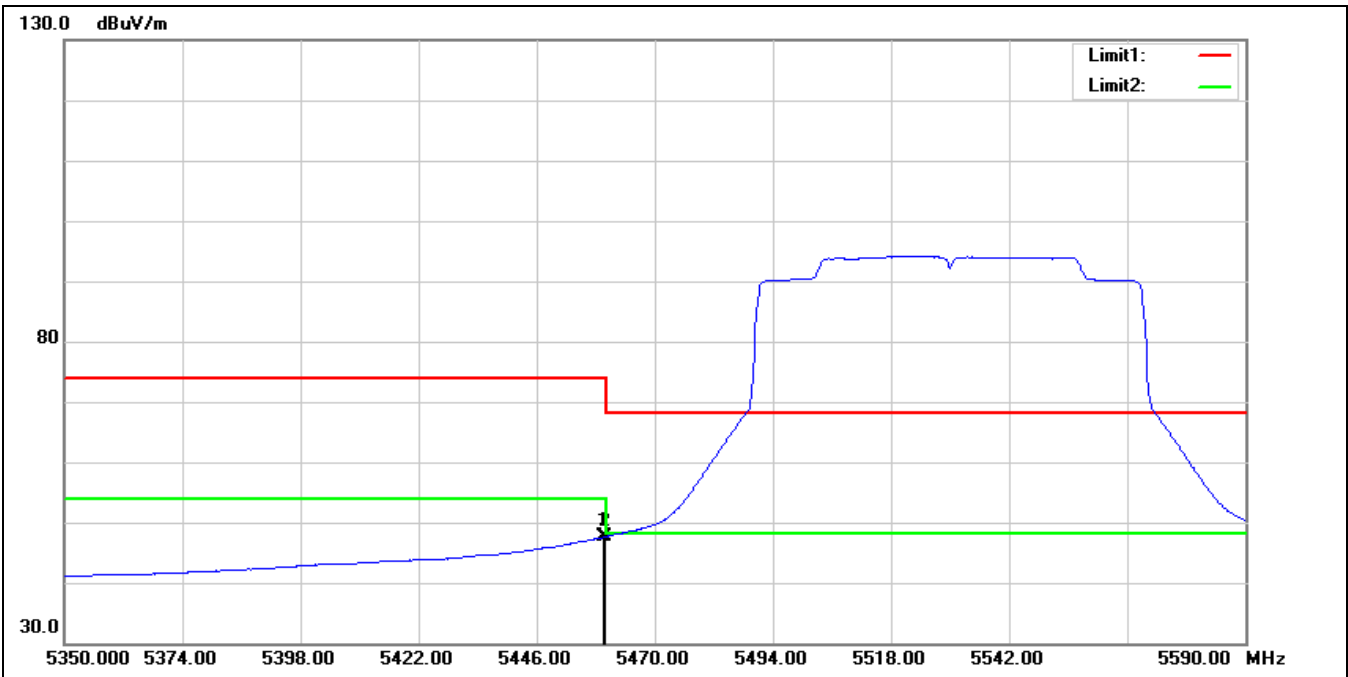


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.680	45.86	1.73	47.59	54.00	-6.41	AVG
2*	5460.000	45.93	1.73	47.66	54.00	-6.34	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

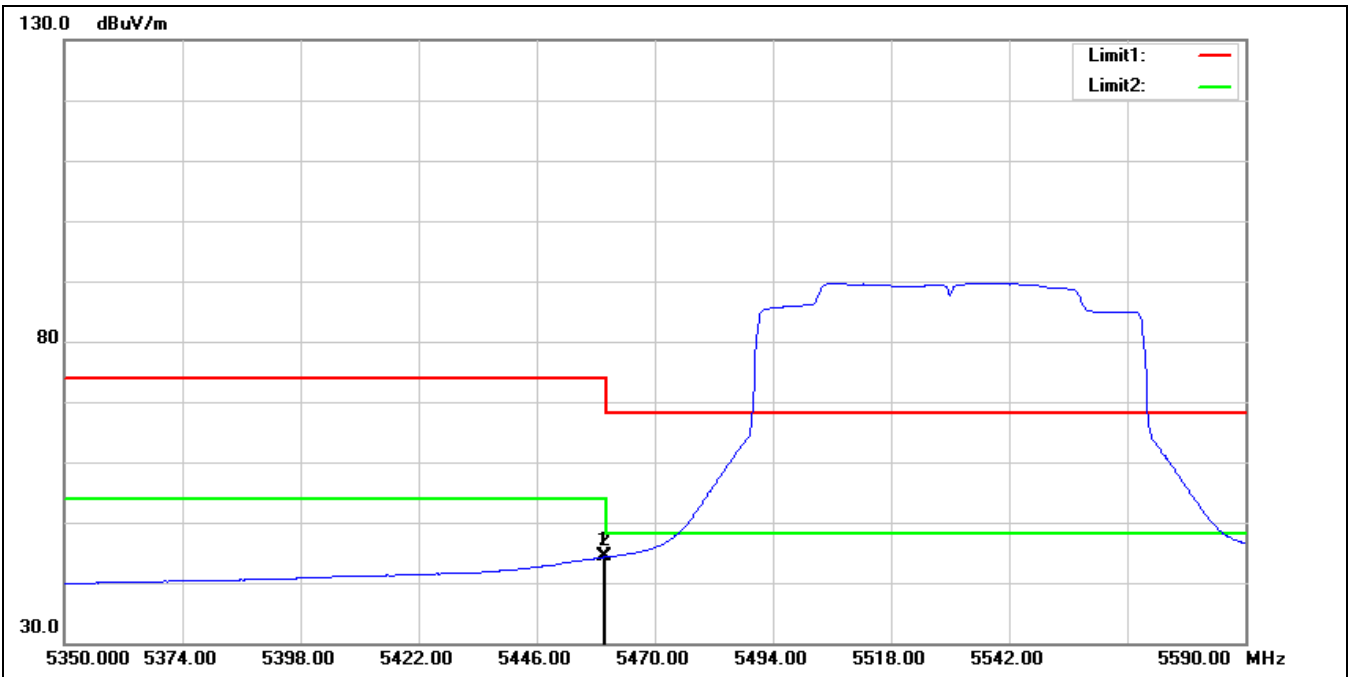


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.680	42.53	1.73	44.26	54.00	-9.74	AVG
2*	5460.000	42.58	1.73	44.31	54.00	-9.69	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

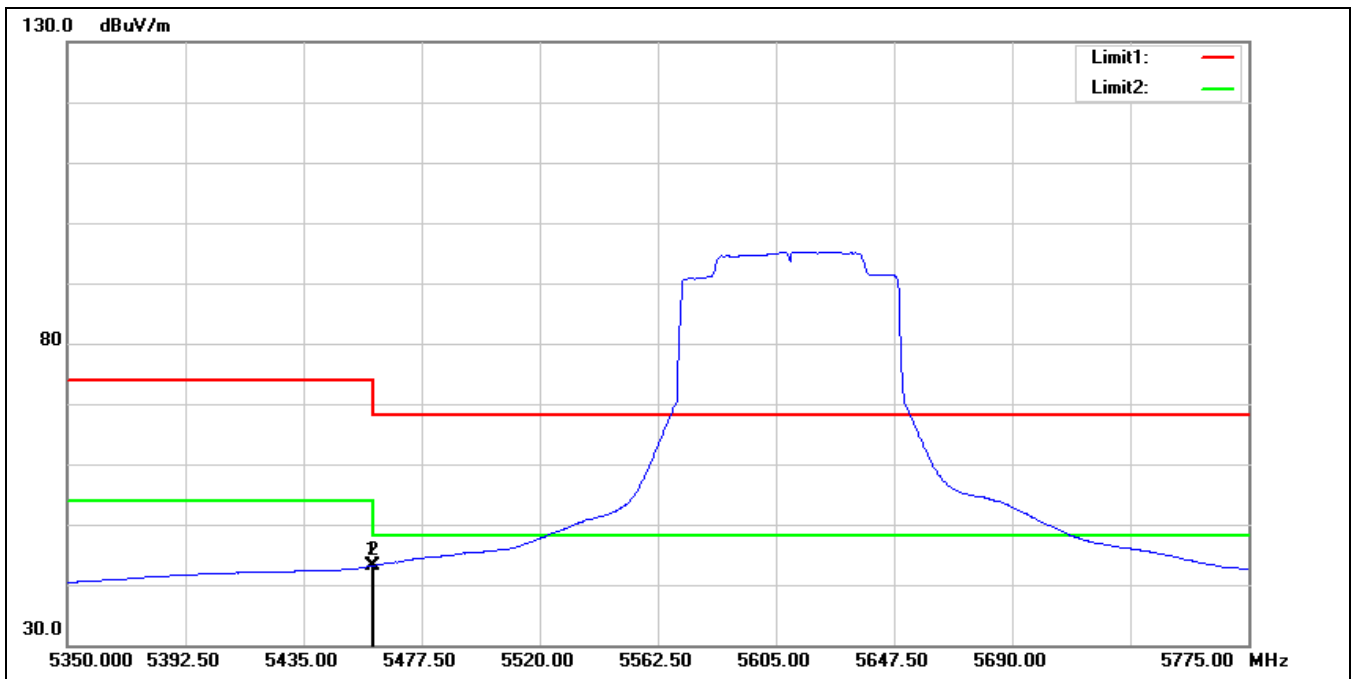


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.650	41.42	1.73	43.15	54.00	-10.85	AVG
2*	5460.000	41.47	1.73	43.20	54.00	-10.80	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

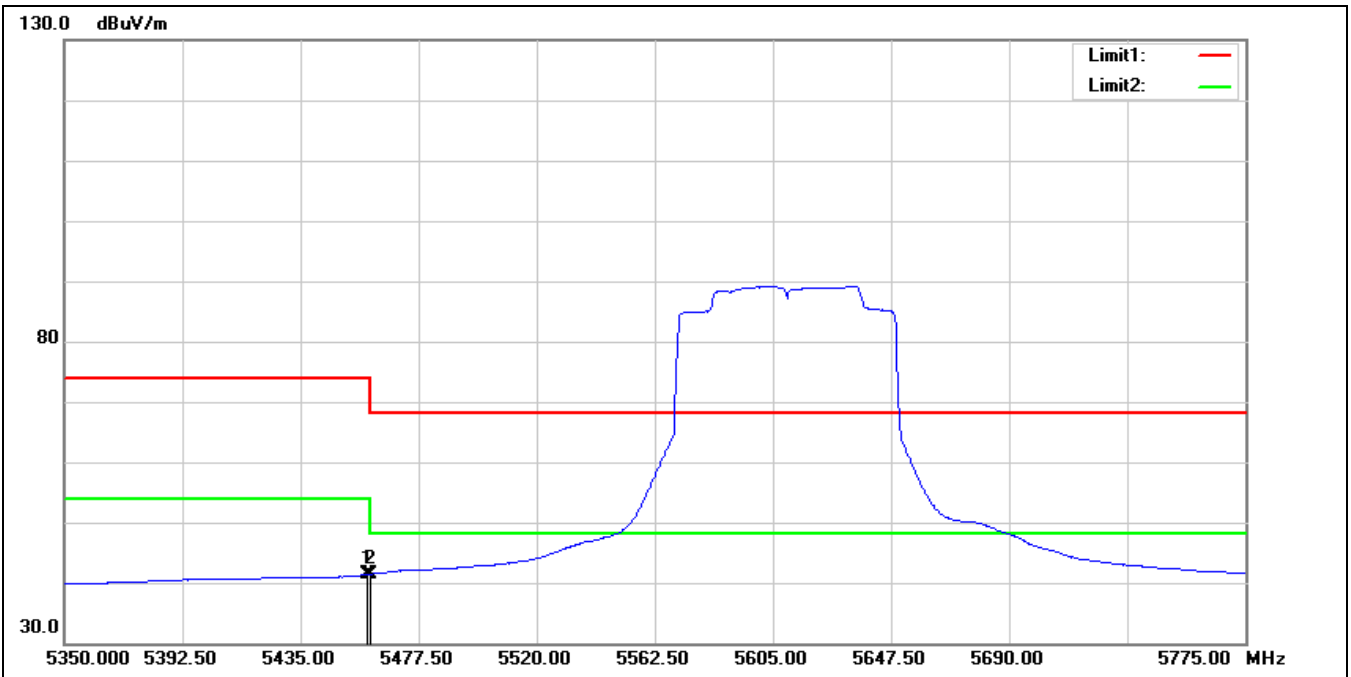

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.225	39.67	1.73	41.40	54.00	-12.60	AVG
2*	5460.000	39.69	1.73	41.42	54.00	-12.58	AVG


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

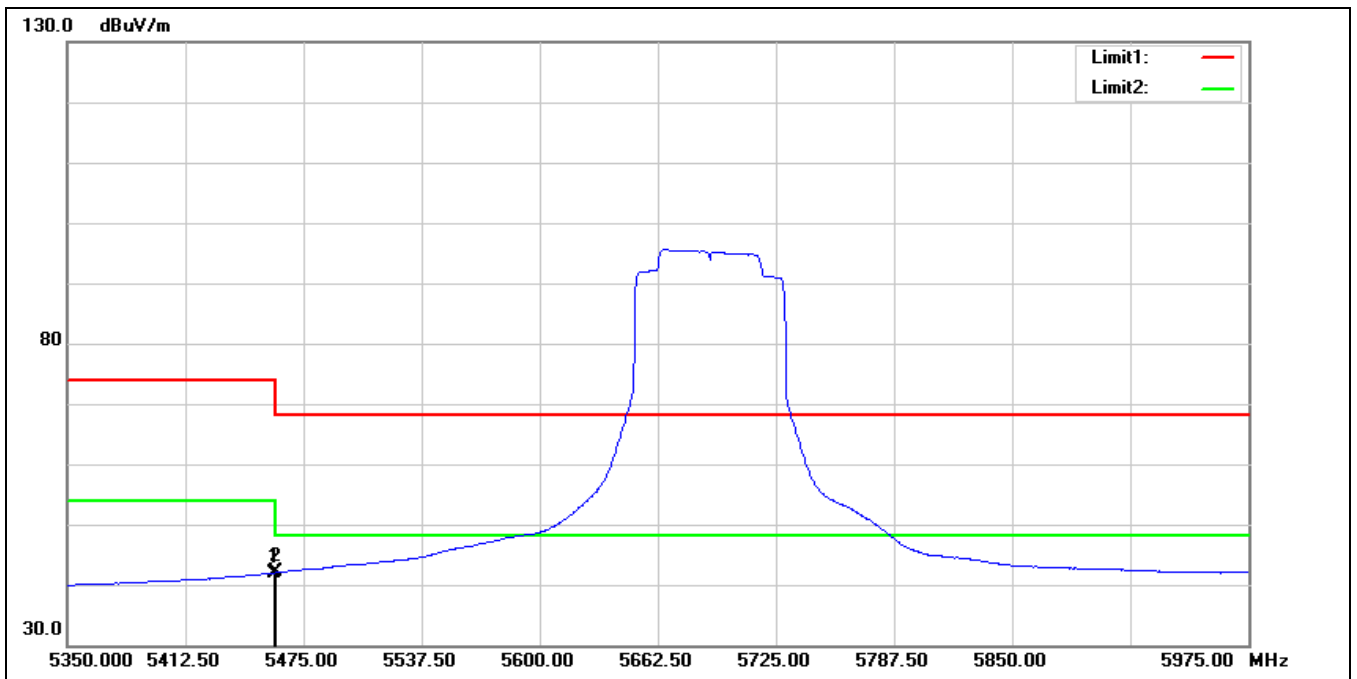

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.375	40.27	1.73	42.00	54.00	-12.00	AVG
2*	5460.000	40.30	1.73	42.03	54.00	-11.97	AVG




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

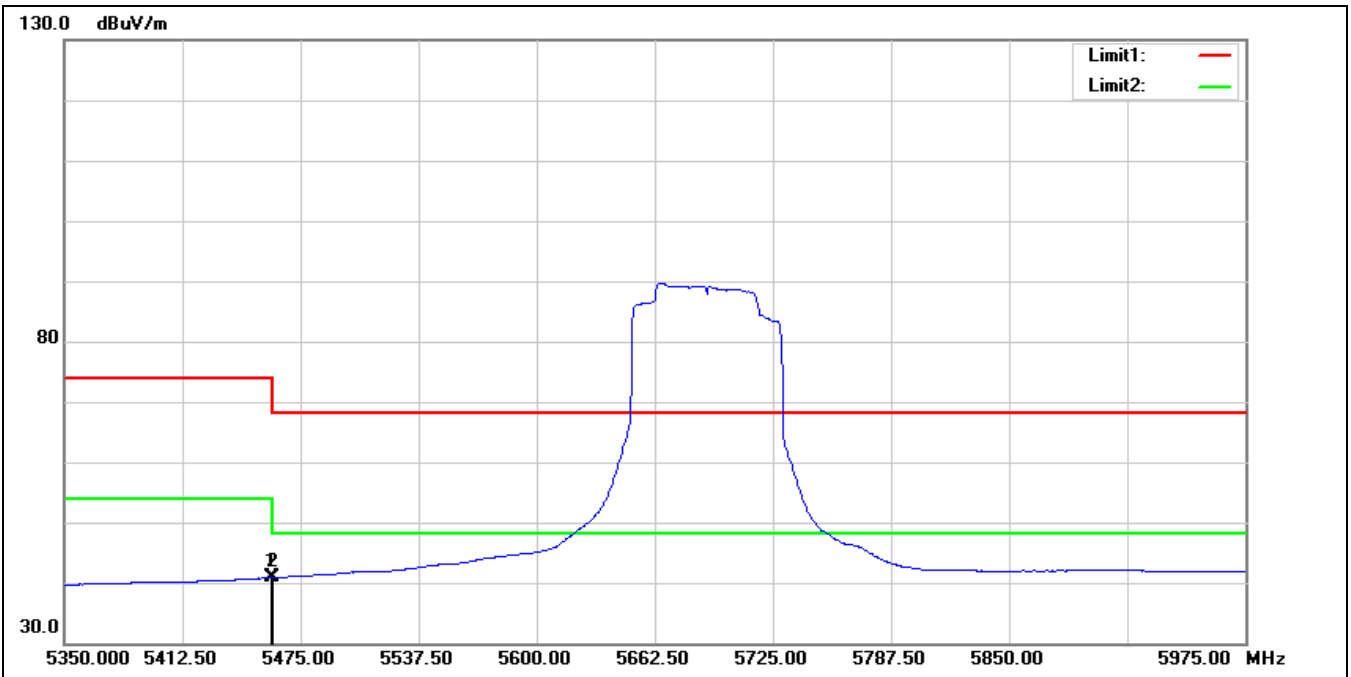


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.375	39.14	1.73	40.87	54.00	-13.13	AVG
2*	5460.000	39.15	1.73	40.88	54.00	-13.12	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

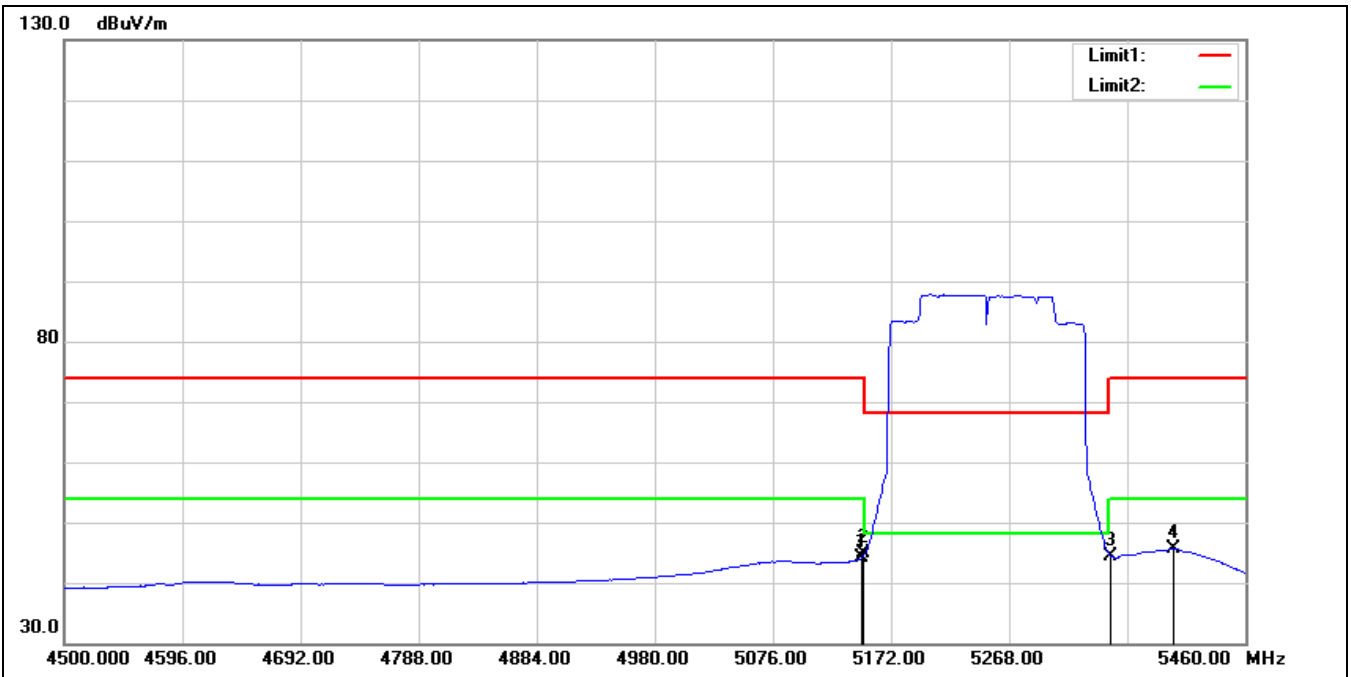


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.000	42.67	1.42	44.09	54.00	-9.91	AVG
2	5150.000	43.38	1.42	44.80	54.00	-9.20	AVG
3	5350.000	43.34	1.08	44.42	54.00	-9.58	AVG
4*	5401.440	44.08	1.55	45.63	54.00	-8.37	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

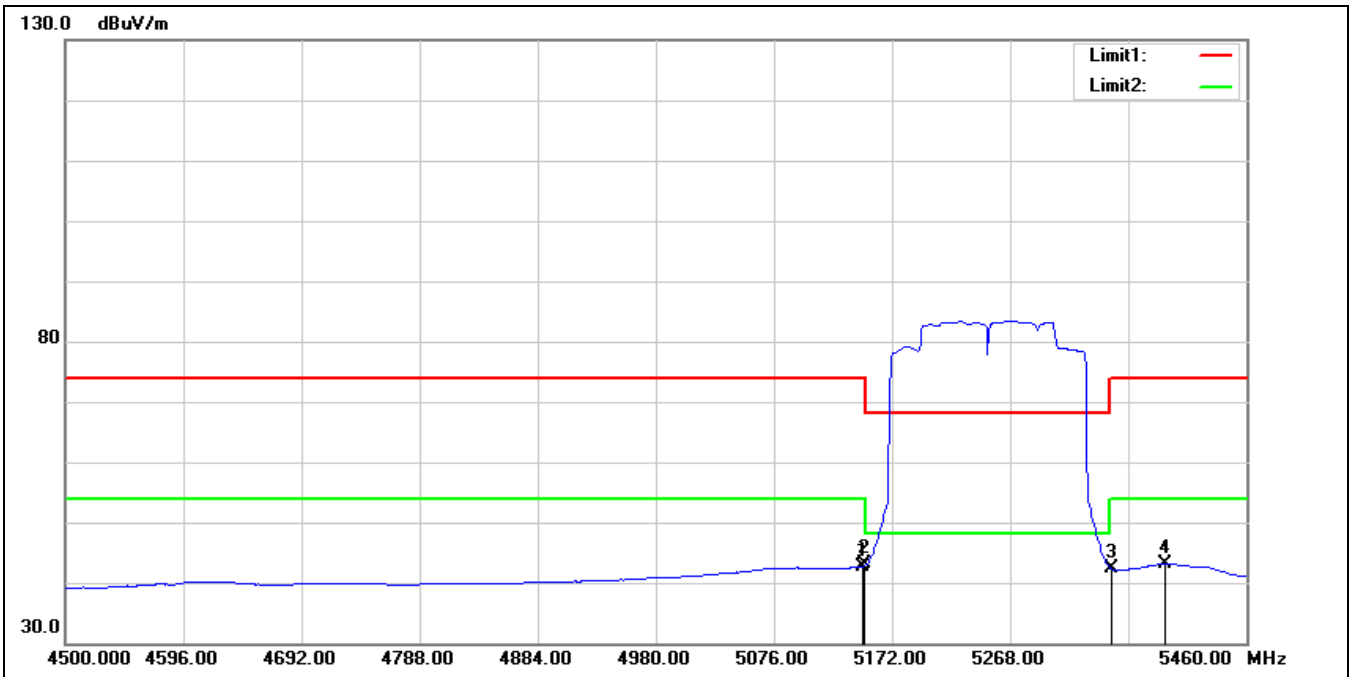


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.000	41.28	1.42	42.70	54.00	-11.30	AVG
2	5150.000	41.60	1.42	43.02	54.00	-10.98	AVG
3	5350.000	41.18	1.08	42.26	54.00	-11.74	AVG
4*	5393.760	41.71	1.49	43.20	54.00	-10.80	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

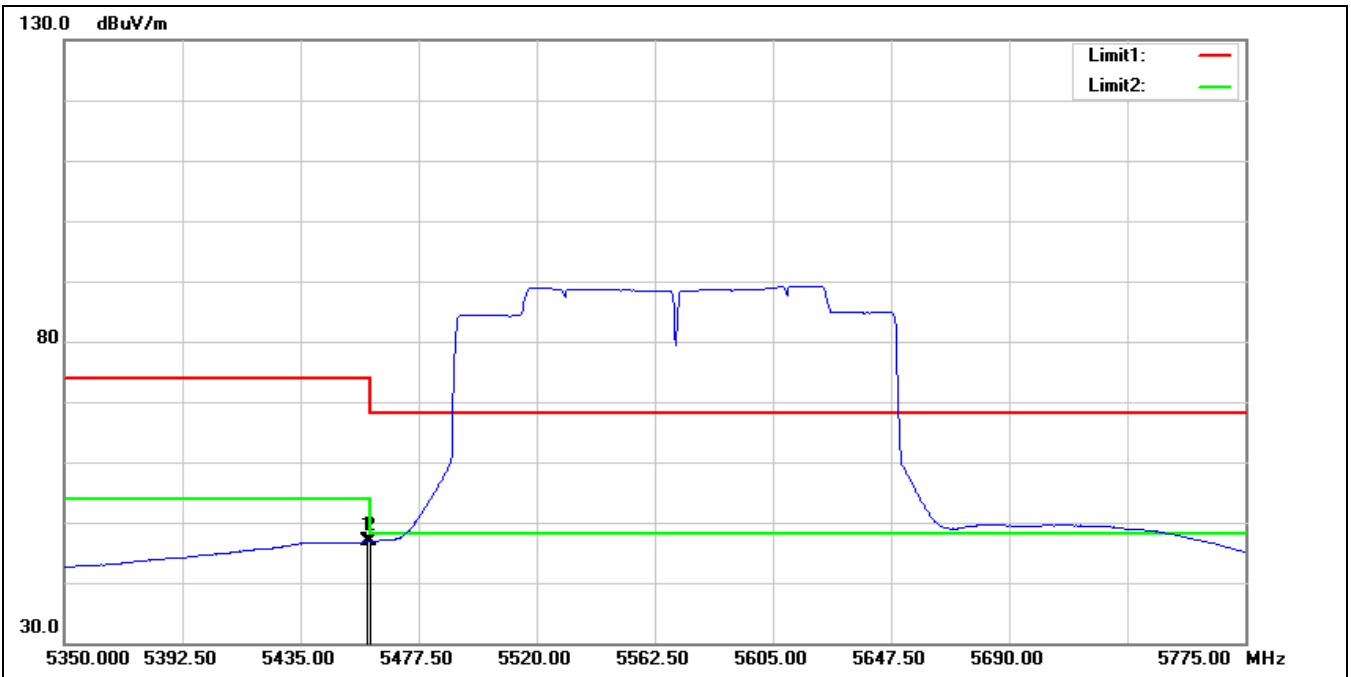

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.800	45.10	1.73	46.83	54.00	-7.17	AVG
2*	5460.000	45.12	1.73	46.85	54.00	-7.15	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

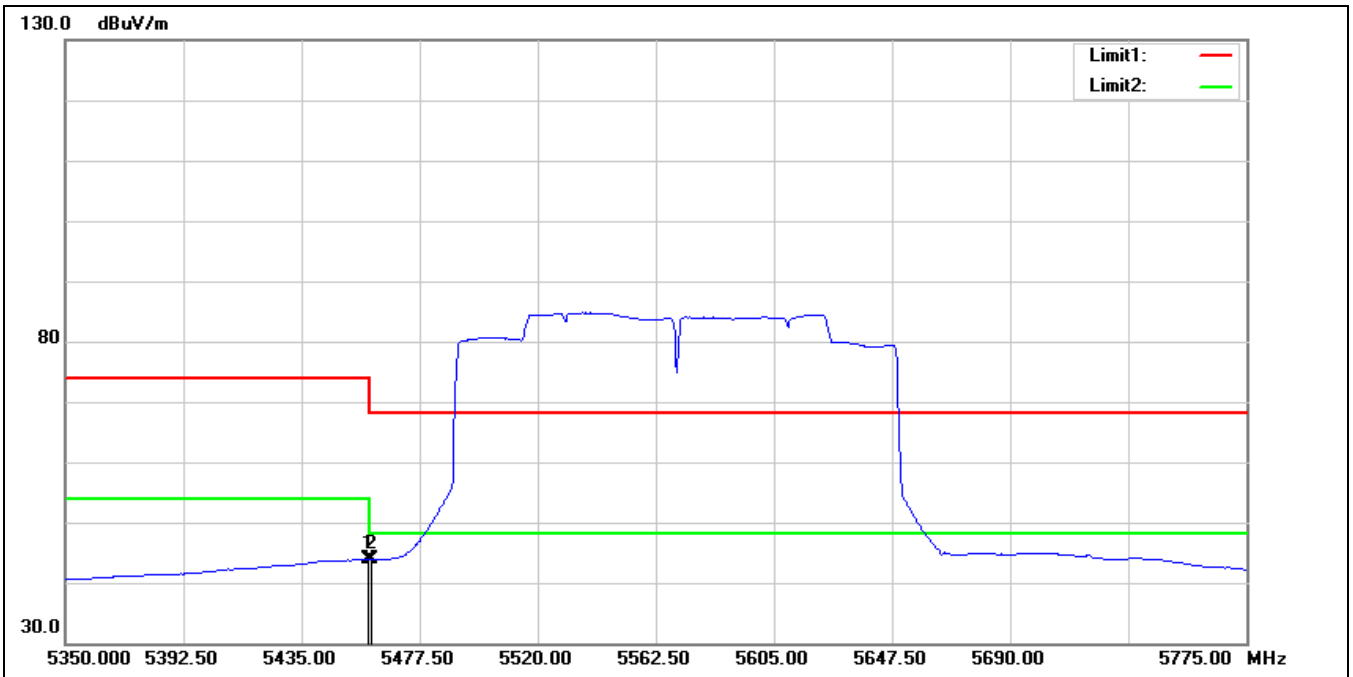

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.800	42.22	1.73	43.95	54.00	-10.05	AVG
2	5460.000	42.15	1.73	43.88	54.00	-10.12	AVG