


MIMO


Below 1 GHz

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	Transmit mode		
Remark:			

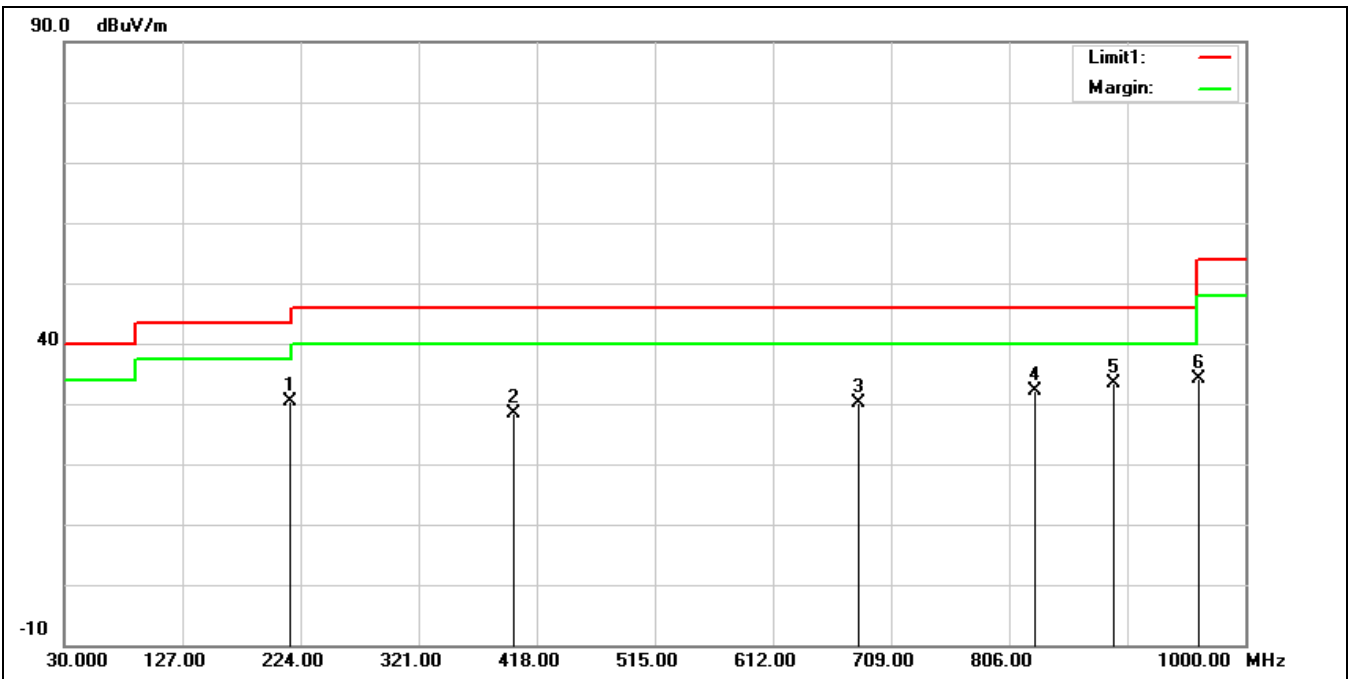

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	215.2700	40.55	-10.09	30.46	43.50	-13.04	QP
2	399.5700	32.76	-4.33	28.43	46.00	-17.57	QP
3	681.8400	28.95	1.30	30.25	46.00	-15.75	QP
4	827.3400	27.76	4.28	32.04	46.00	-13.96	QP
5*	892.3300	28.15	5.33	33.48	46.00	-12.52	QP
6	961.2000	27.83	6.25	34.08	54.00	-19.92	QP

Standard:	FCC Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	Transmit mode		
Remark:			

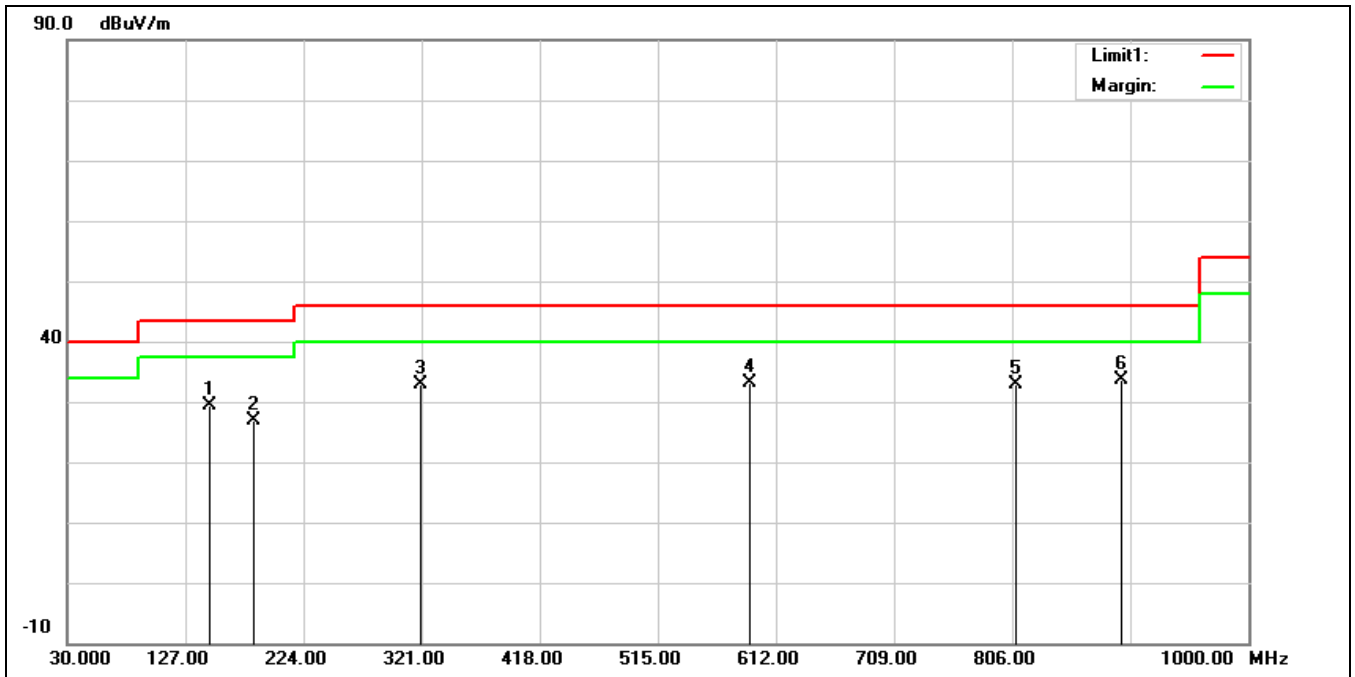


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	147.3700	36.74	-7.40	29.34	43.50	-14.16	QP
2	183.2600	35.79	-8.91	26.88	43.50	-16.62	QP
3	320.0300	39.17	-6.37	32.80	46.00	-13.20	QP
4	590.6600	33.26	-0.16	33.10	46.00	-12.90	QP
5	808.9100	28.77	3.99	32.76	46.00	-13.24	QP
6*	896.2100	28.15	5.39	33.54	46.00	-12.46	QP

**Harmonic**


Above 1 GHz

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

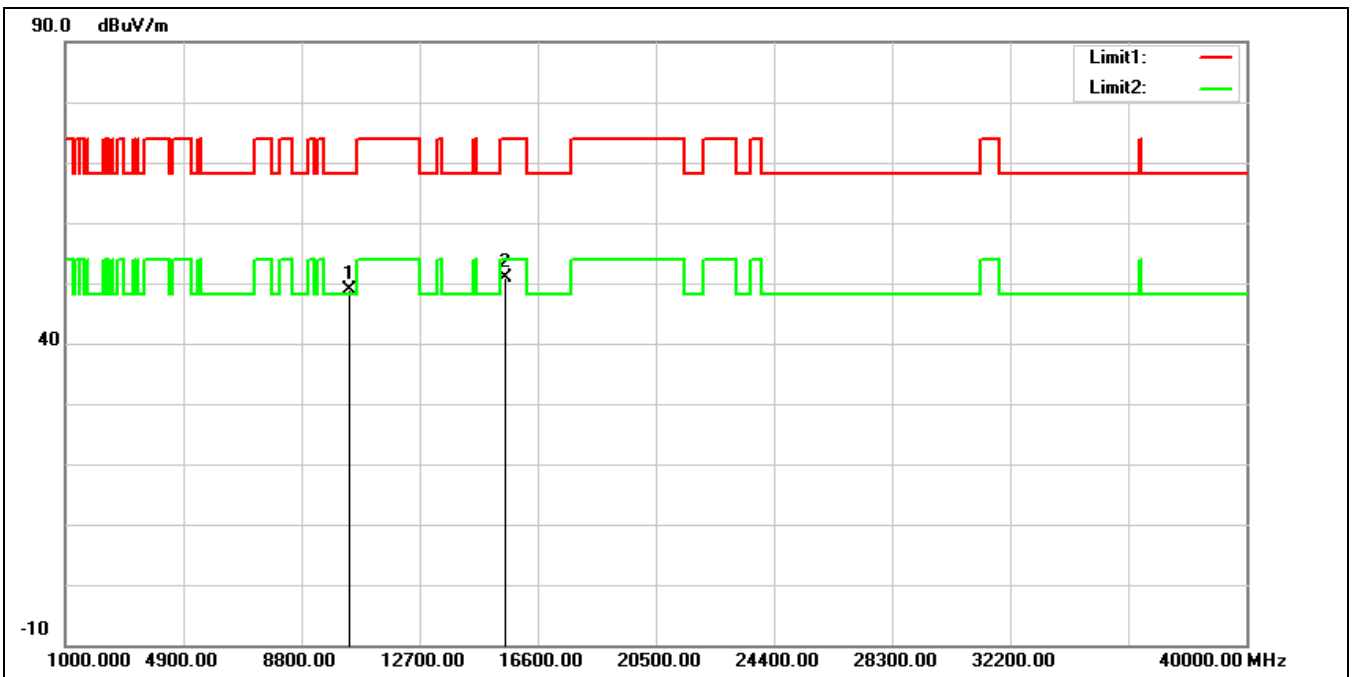


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	34.77	13.99	48.76	68.20	-19.44	peak
2	15540.000	33.67	17.31	50.98	74.00	-23.02	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

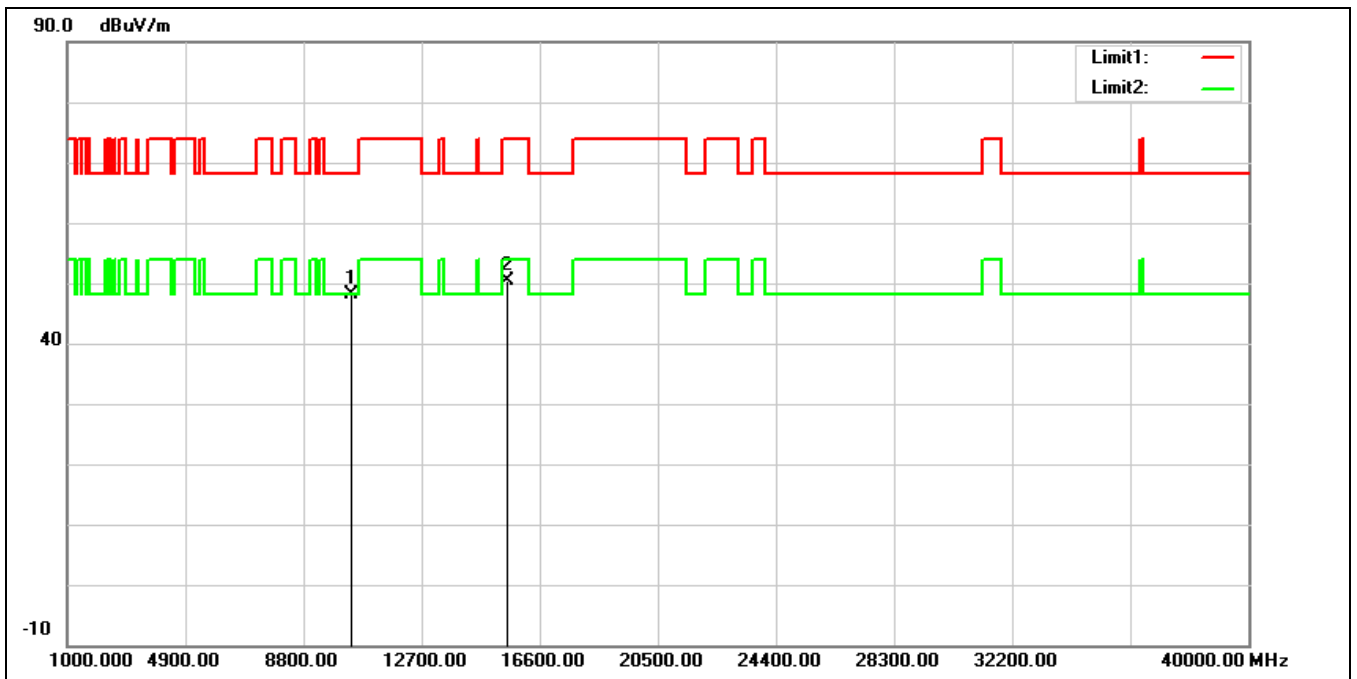


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	34.13	13.99	48.12	68.20	-20.08	peak
2	15540.000	33.07	17.31	50.38	74.00	-23.62	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5200 MHz		
Remark:			

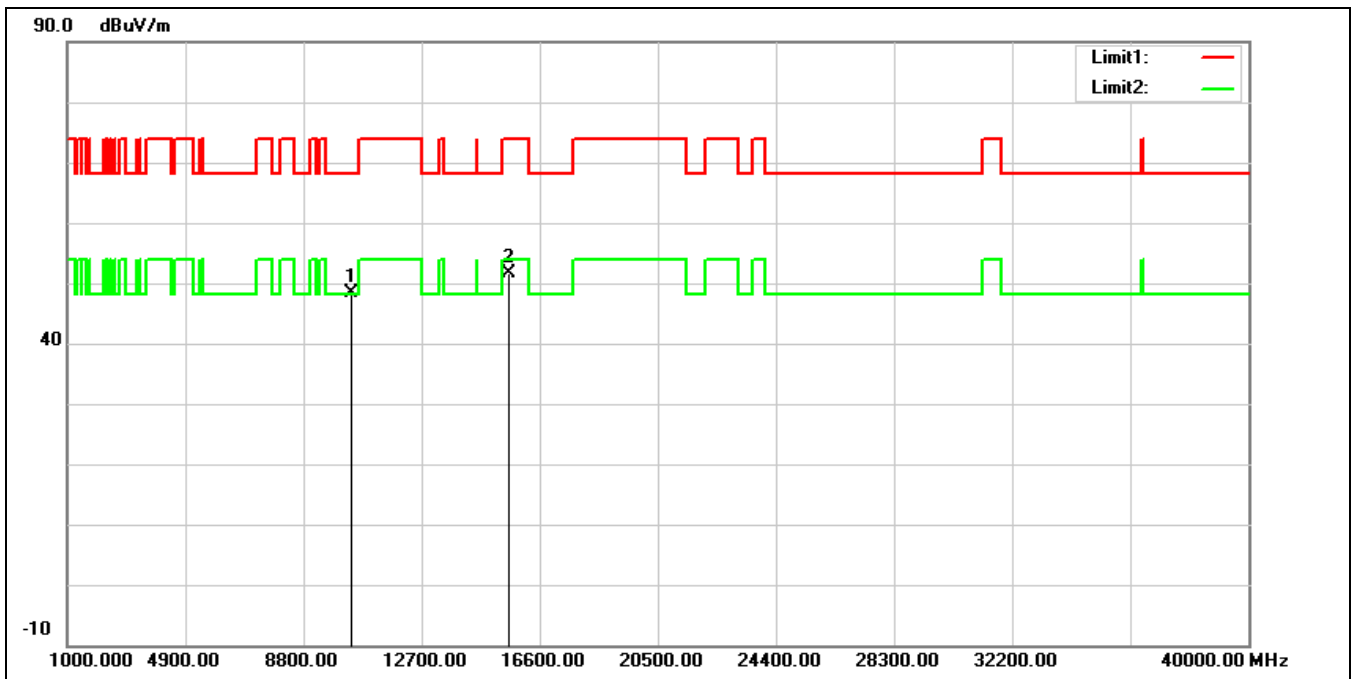


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	34.29	14.10	48.39	68.20	-19.81	peak
2	15600.000	34.54	17.01	51.55	74.00	-22.45	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5200 MHz		
Remark:			

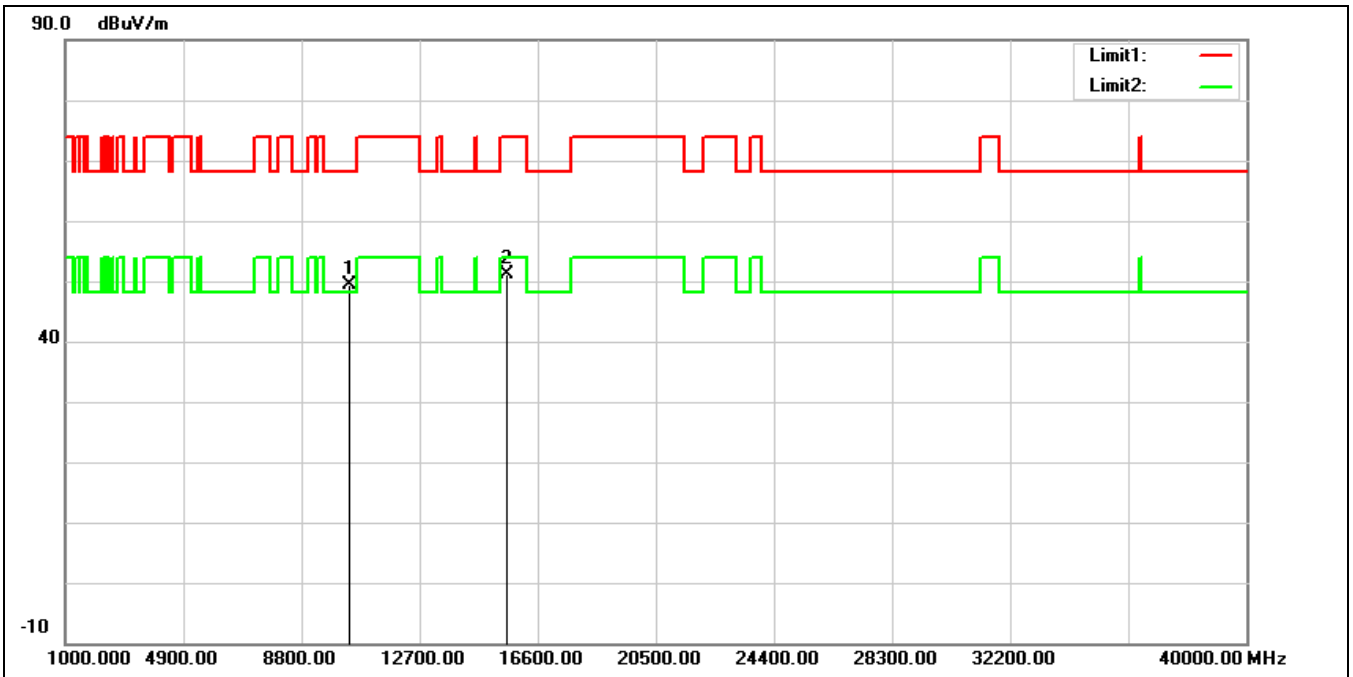


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	35.29	14.10	49.39	68.20	-18.81	peak
2	15600.000	34.16	17.01	51.17	74.00	-22.83	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5240 MHz		
Remark:			

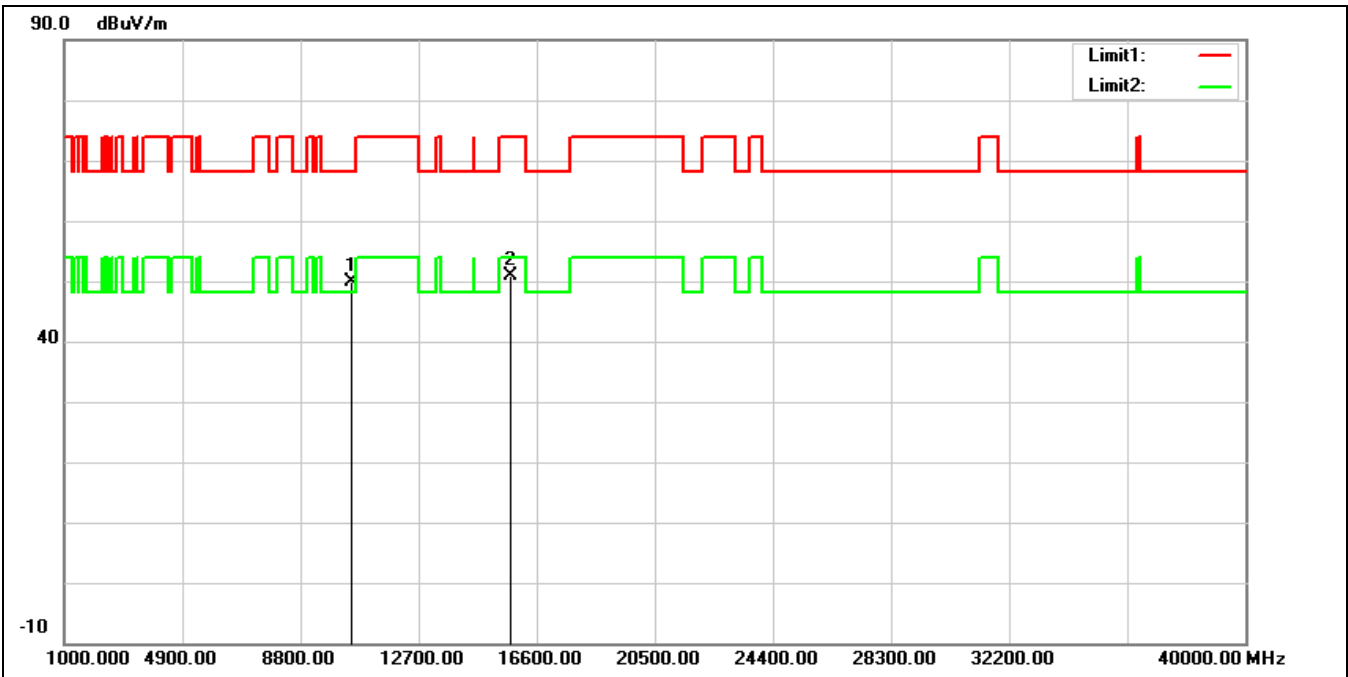

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	35.33	14.54	49.87	68.20	-18.33	peak
2	15720.000	33.56	17.34	50.90	74.00	-23.10	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5240 MHz		
Remark:			

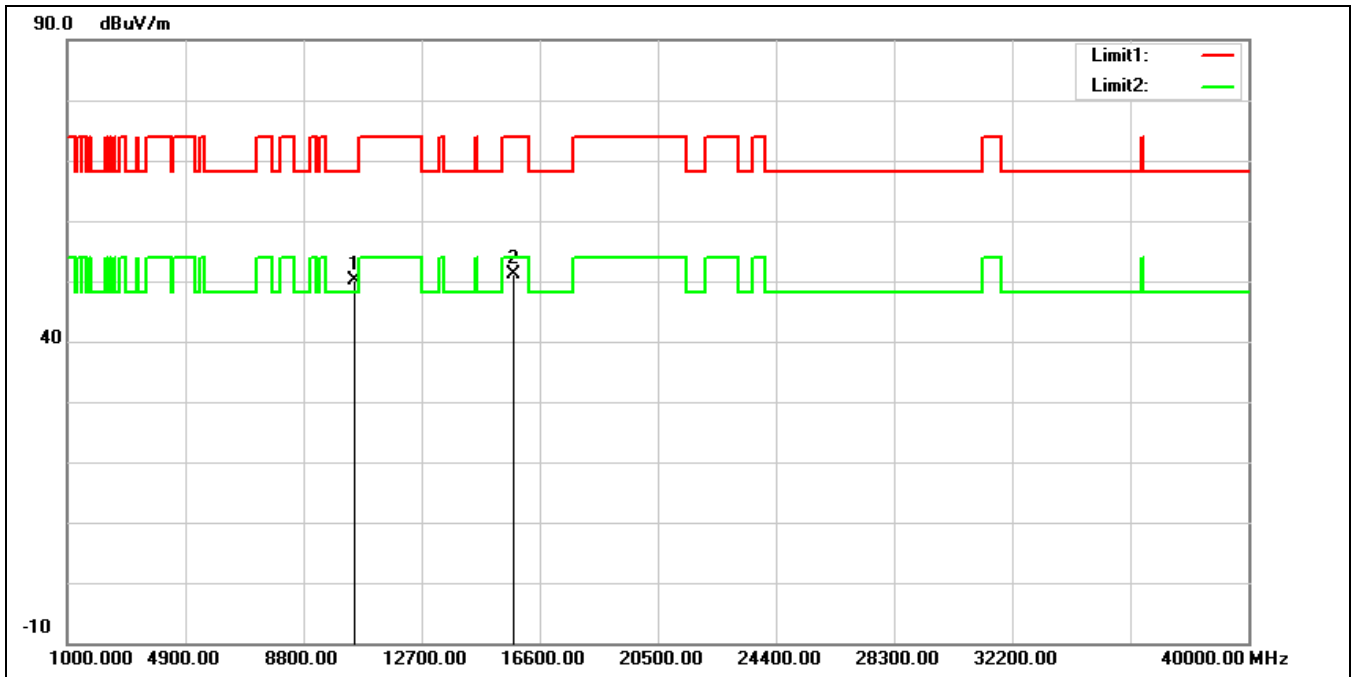

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	35.59	14.54	50.13	68.20	-18.07	peak
2	15720.000	33.83	17.34	51.17	74.00	-22.83	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5260 MHz		
Remark:			

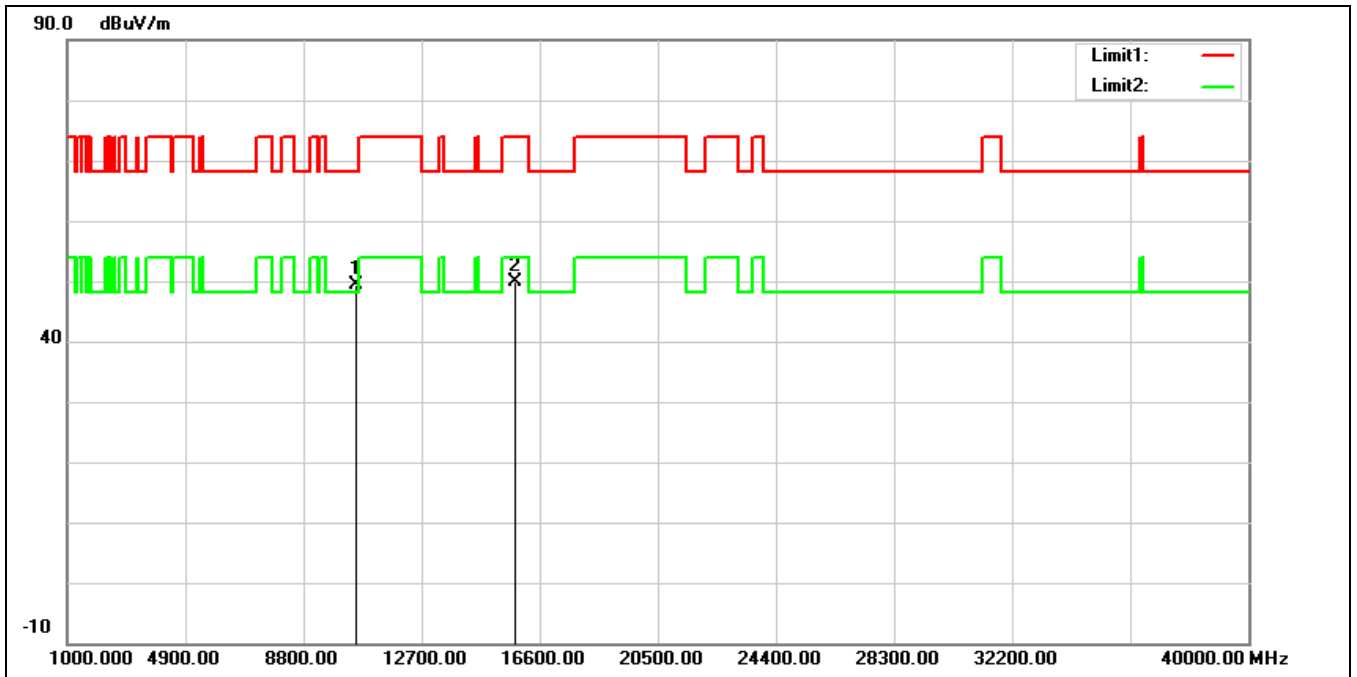


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	34.84	14.60	49.44	68.20	-18.76	peak
2	15780.000	32.86	17.10	49.96	74.00	-24.04	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5260 MHz		
Remark:			

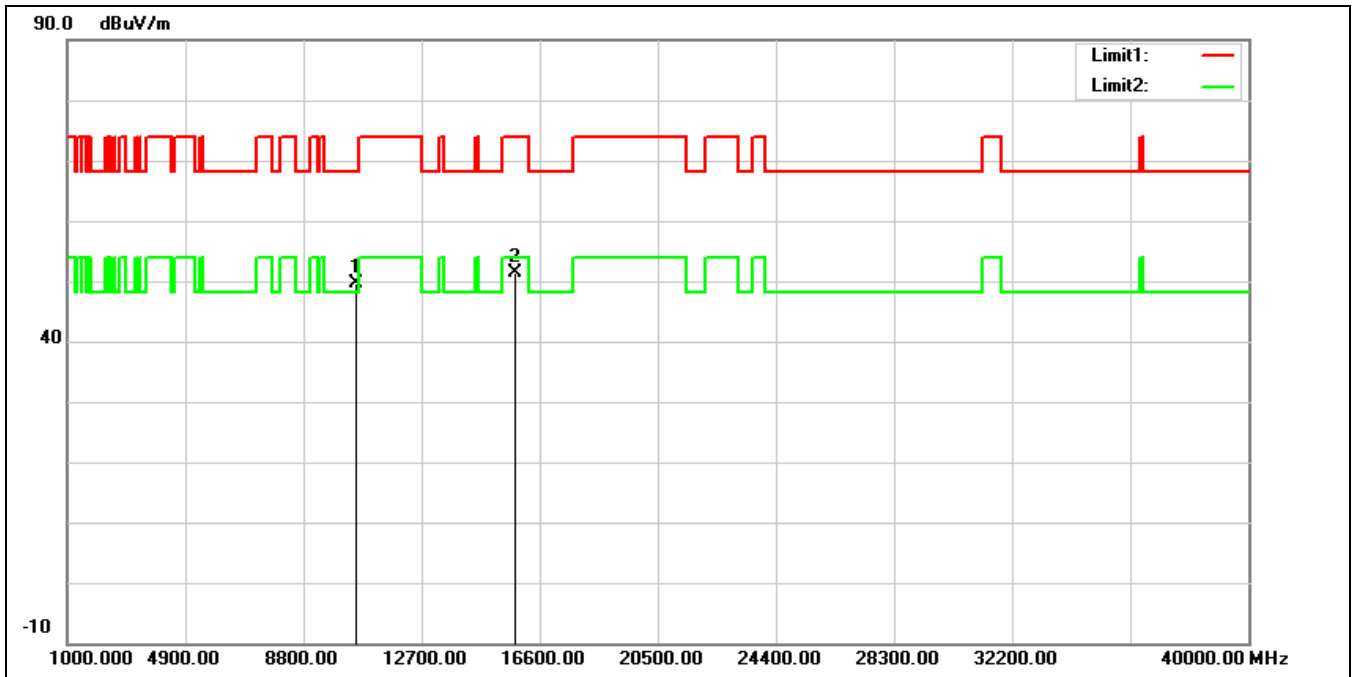


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	34.98	14.60	49.58	68.20	-18.62	peak
2	15780.000	34.17	17.10	51.27	74.00	-22.73	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5280 MHz		
Remark:			

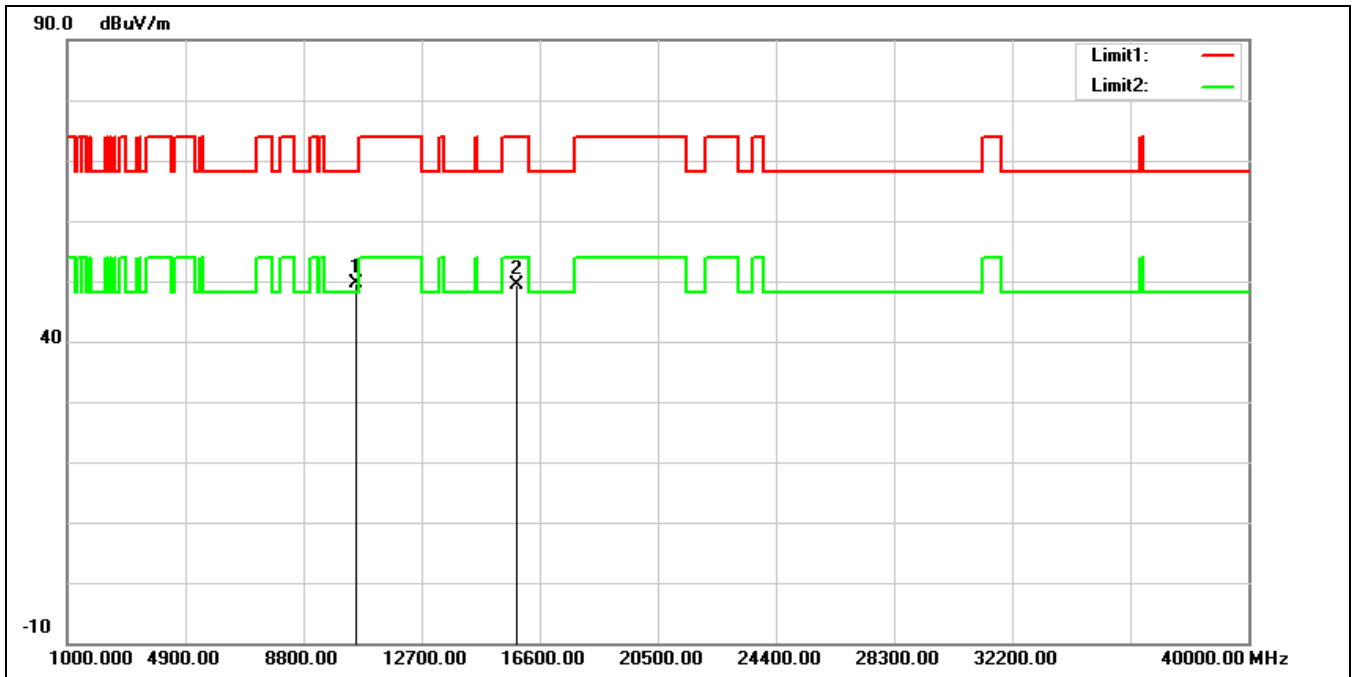


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	35.08	14.48	49.56	68.20	-18.64	peak
2	15840.000	32.49	16.90	49.39	74.00	-24.61	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5280 MHz		
Remark:			

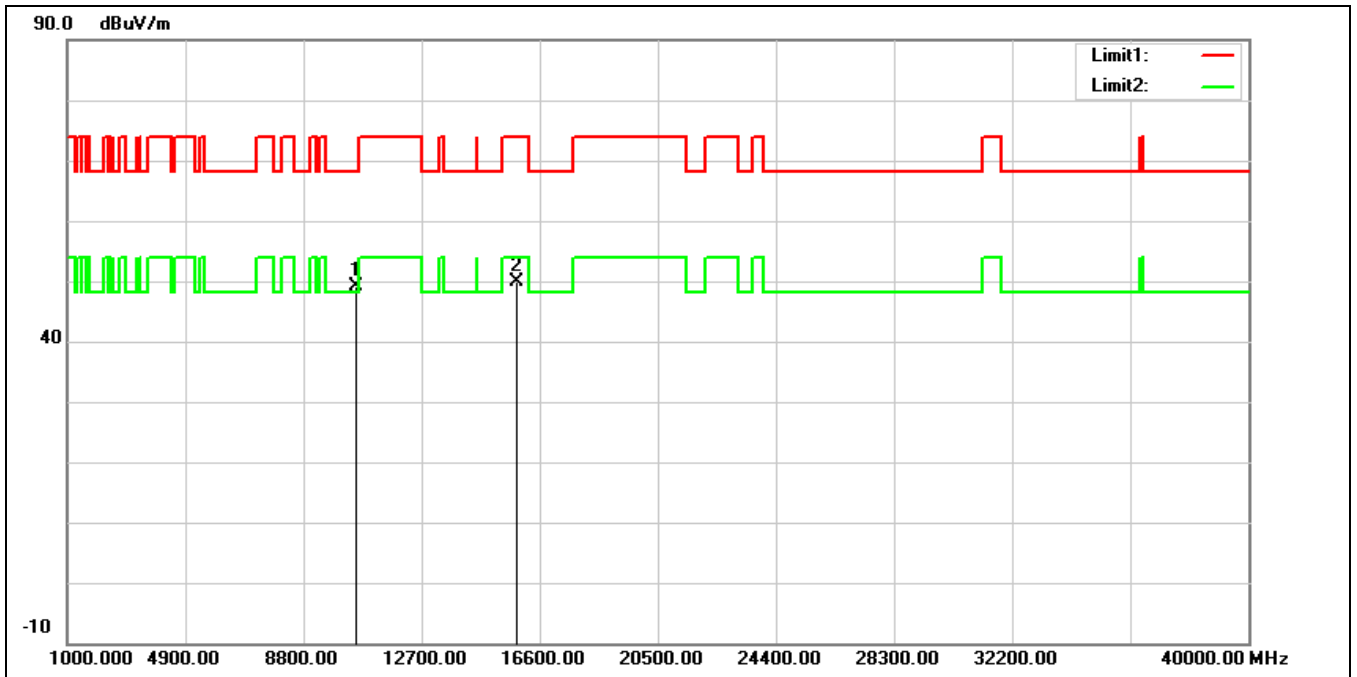


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	34.71	14.48	49.19	68.20	-19.01	peak
2	15840.000	33.09	16.90	49.99	74.00	-24.01	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

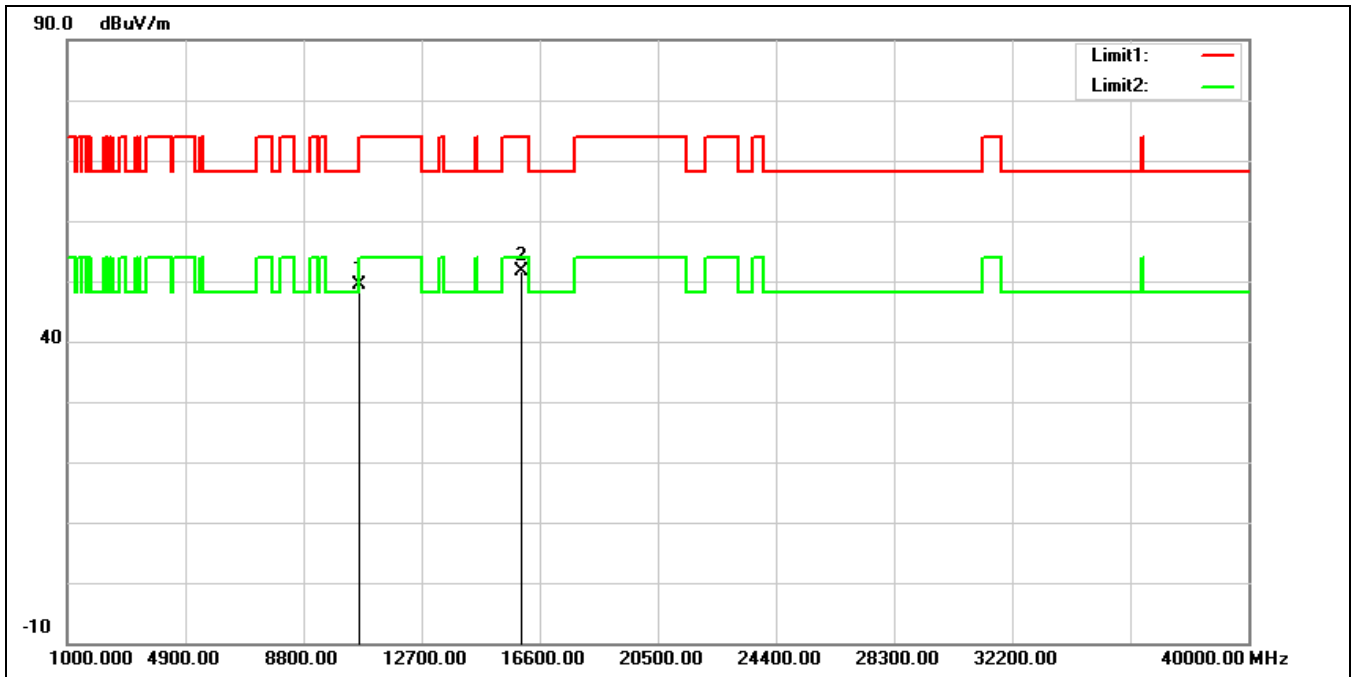


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.96	14.41	49.37	74.00	-24.63	peak
2*	15960.000	35.17	16.55	51.72	74.00	-22.28	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

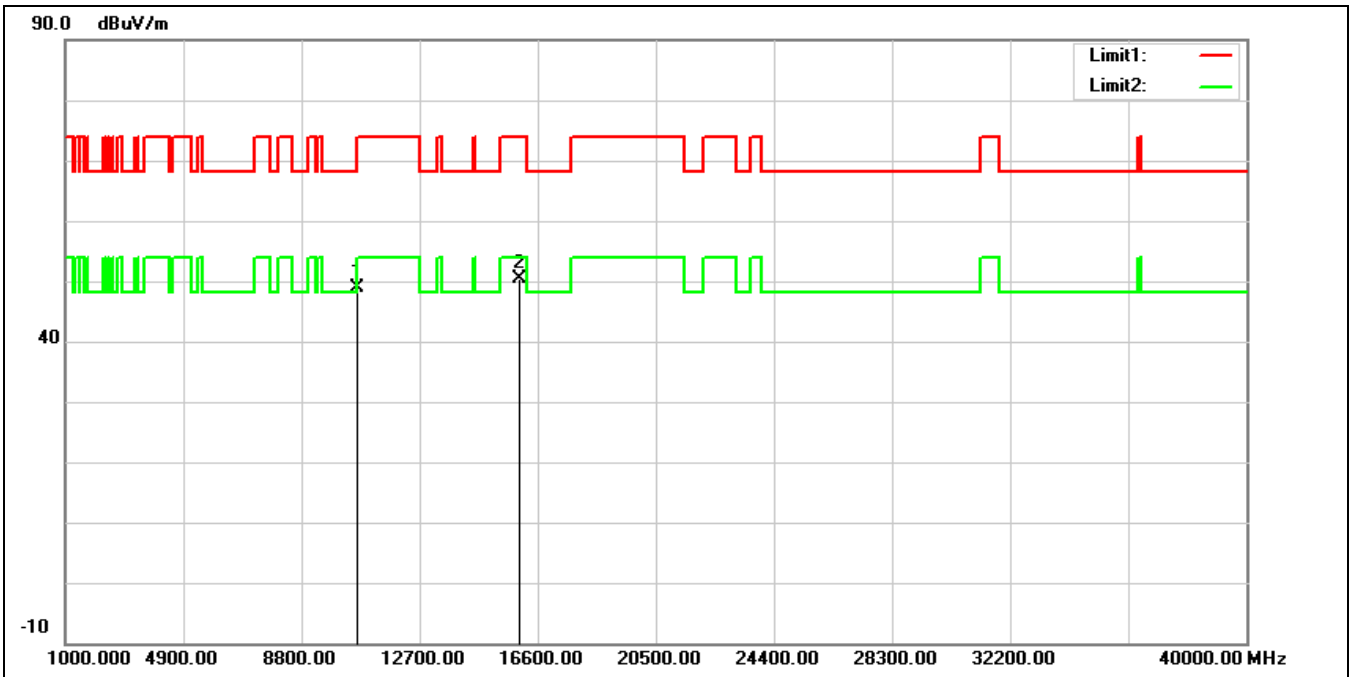


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.44	14.41	48.85	74.00	-25.15	peak
2*	15960.000	33.88	16.55	50.43	74.00	-23.57	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

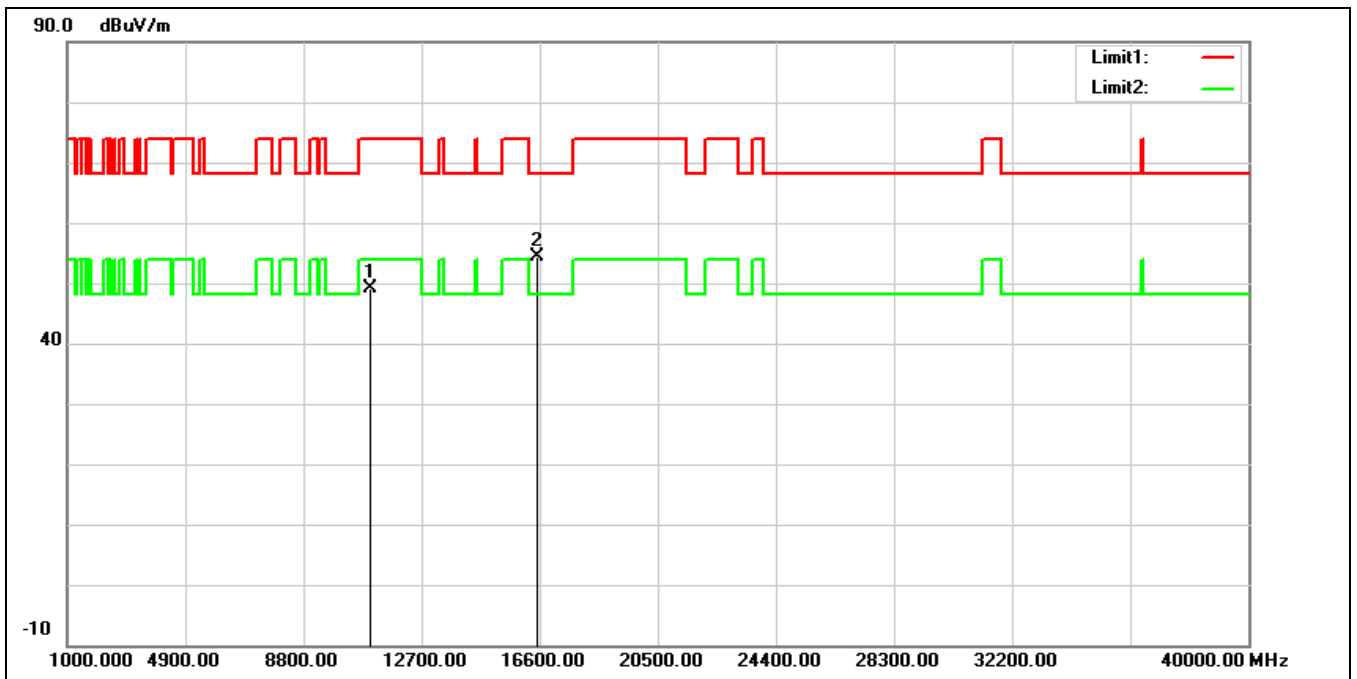

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.30	14.73	49.03	74.00	-24.97	peak
2*	16500.000	36.67	17.77	54.44	68.20	-13.76	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

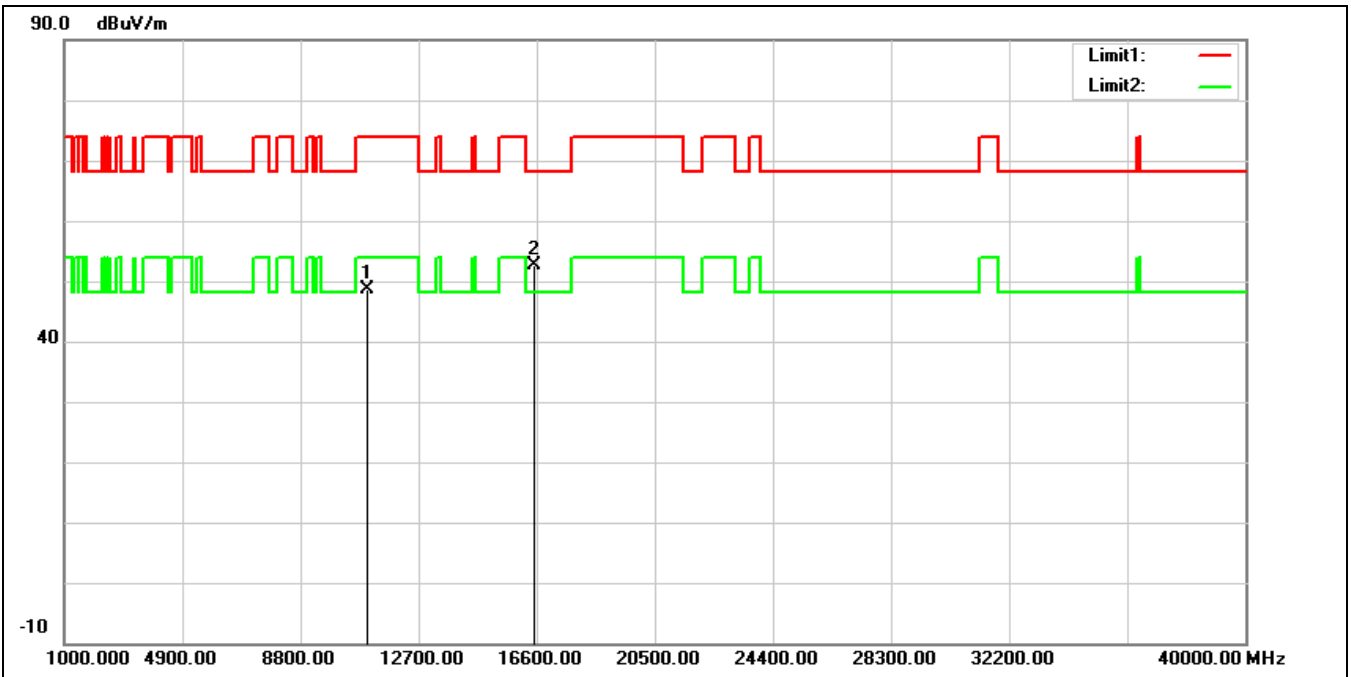

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	33.94	14.73	48.67	74.00	-25.33	peak
2*	16500.000	34.88	17.77	52.65	68.20	-15.55	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5600 MHz		
Remark:			

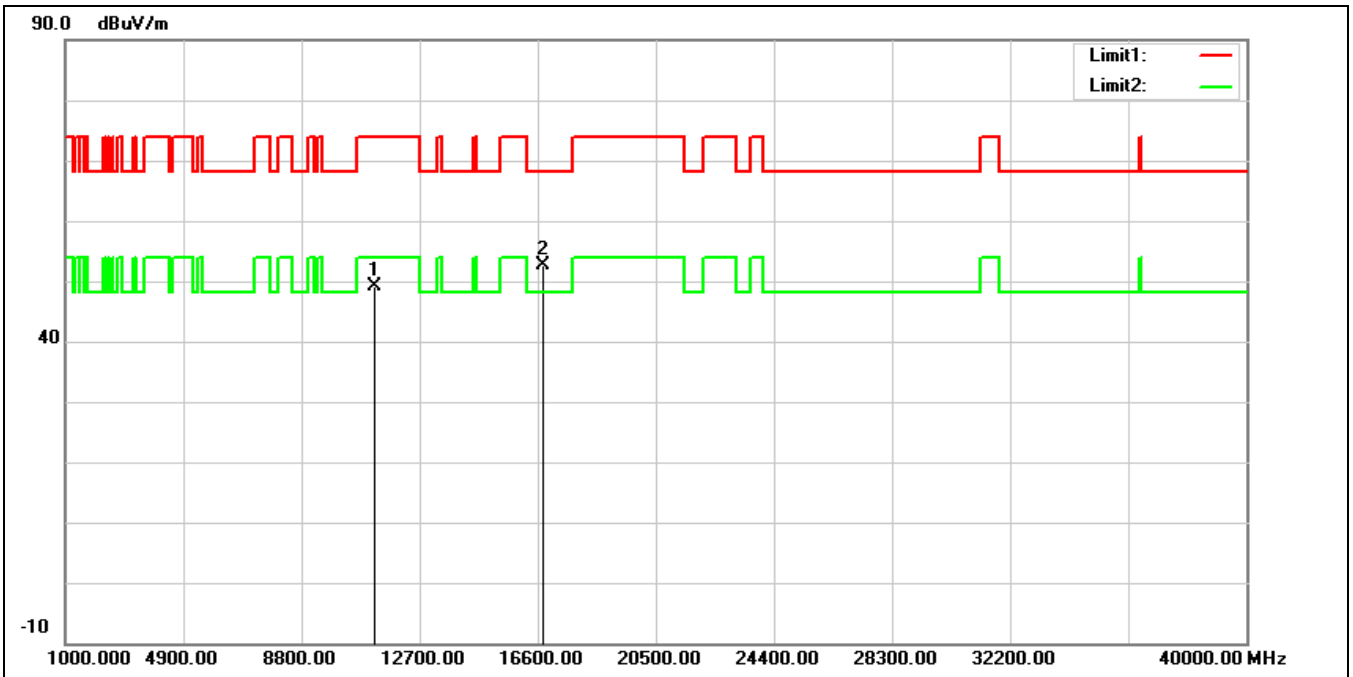


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11200.000	34.54	14.70	49.24	74.00	-24.76	peak
2*	16800.000	33.41	19.20	52.61	68.20	-15.59	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5600 MHz		
Remark:			

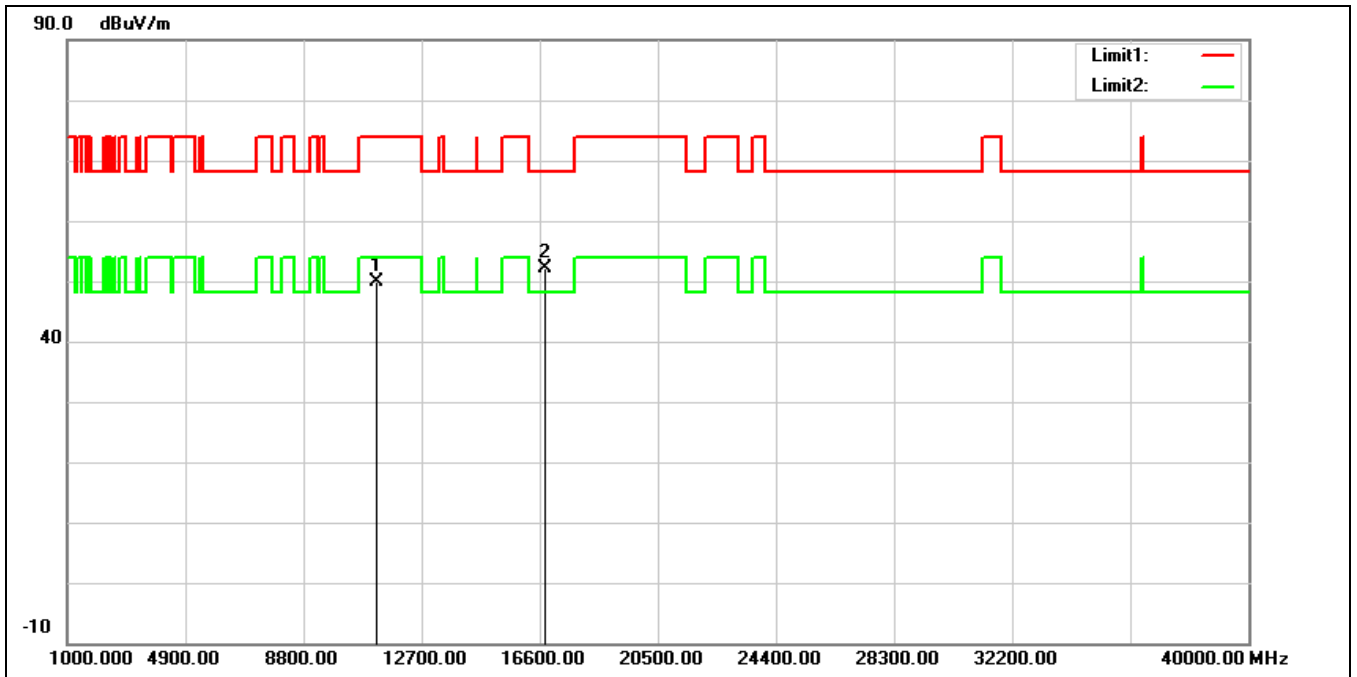


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11200.000	35.21	14.70	49.91	74.00	-24.09	peak
2*	16800.000	32.95	19.20	52.15	68.20	-16.05	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

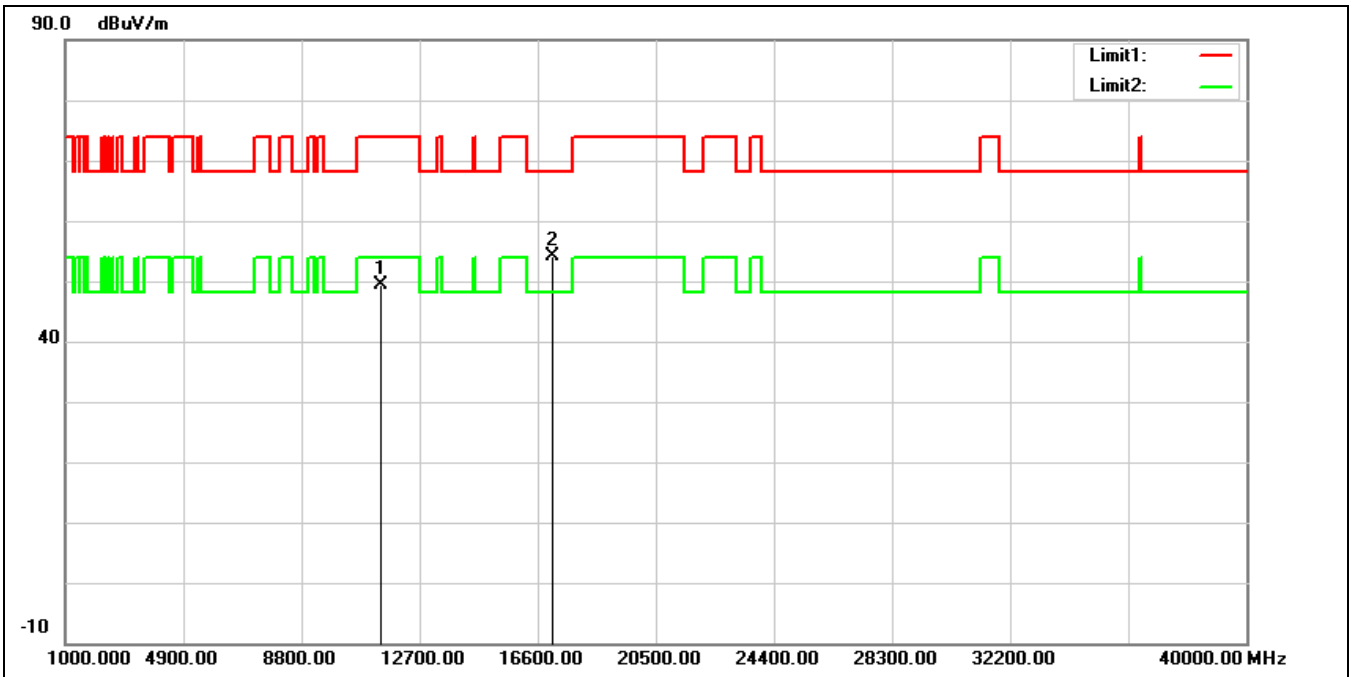


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.39	15.07	49.46	74.00	-24.54	peak
2*	17100.000	33.42	20.64	54.06	68.20	-14.14	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

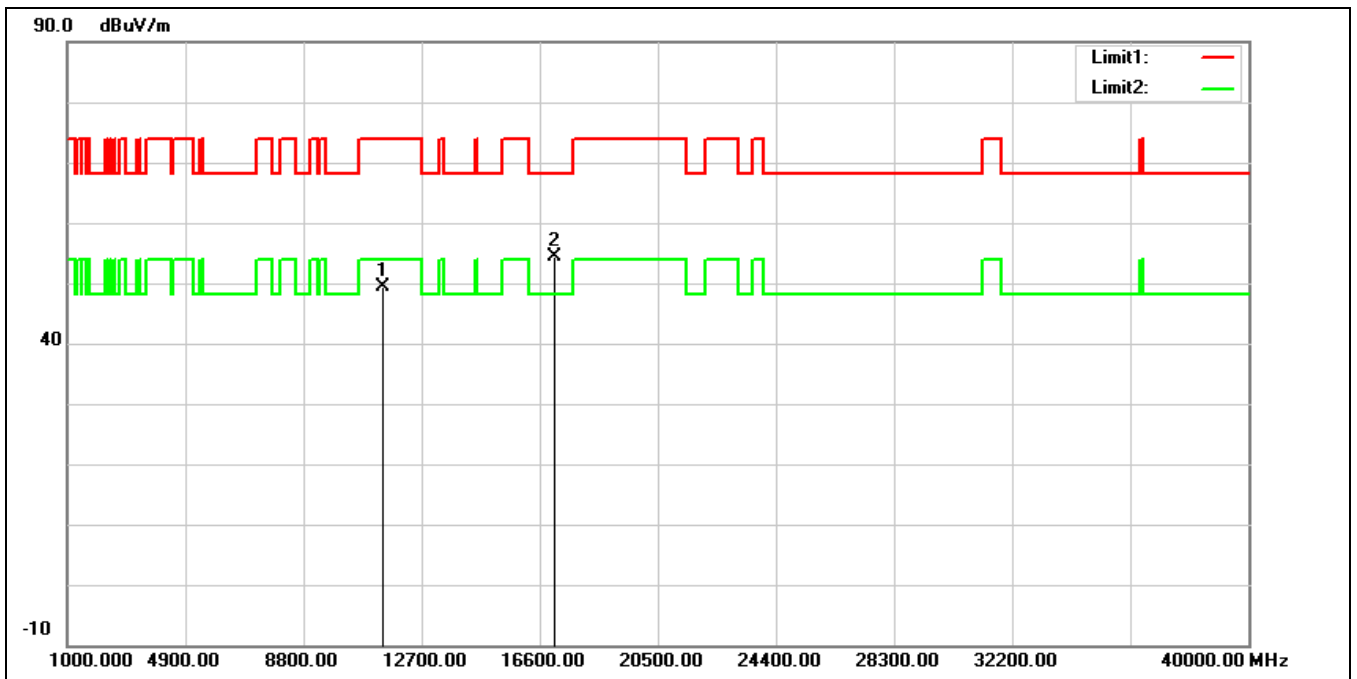


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.36	15.07	49.43	74.00	-24.57	peak
2*	17100.000	33.73	20.64	54.37	68.20	-13.83	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

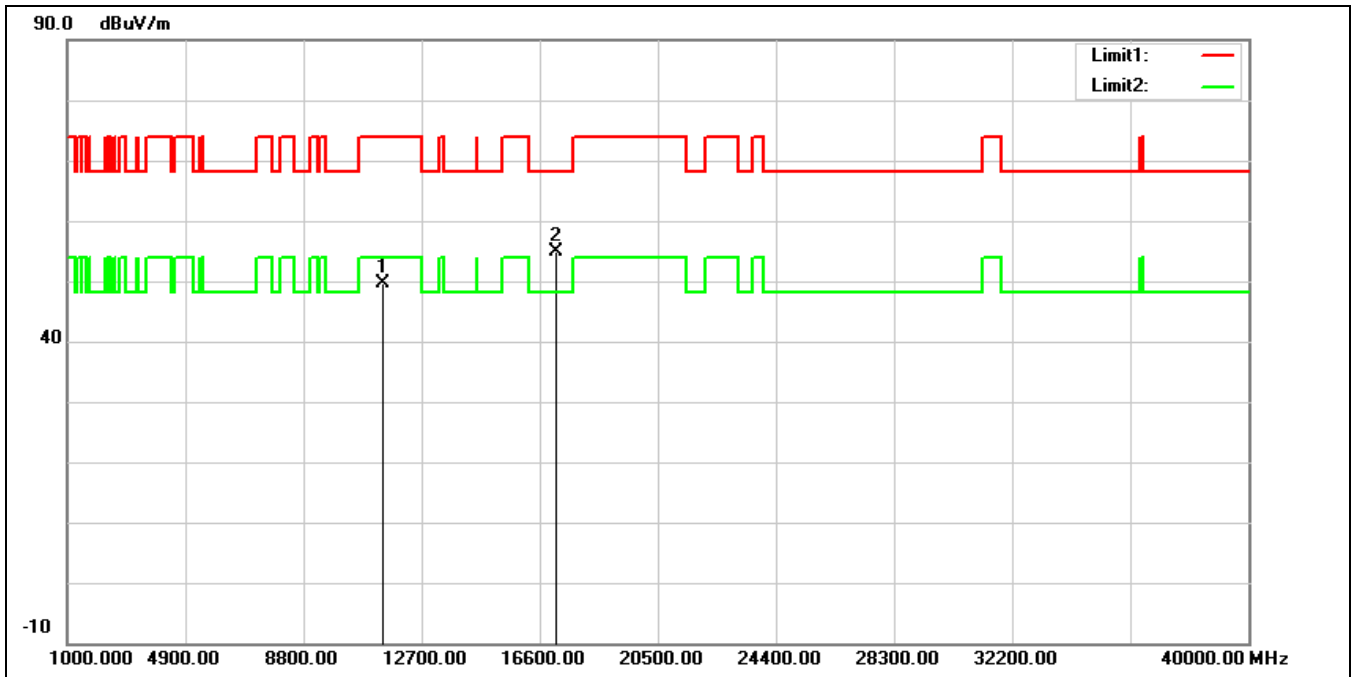


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	34.51	15.23	49.74	74.00	-24.26	peak
2*	17160.000	33.62	21.25	54.87	68.20	-13.33	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

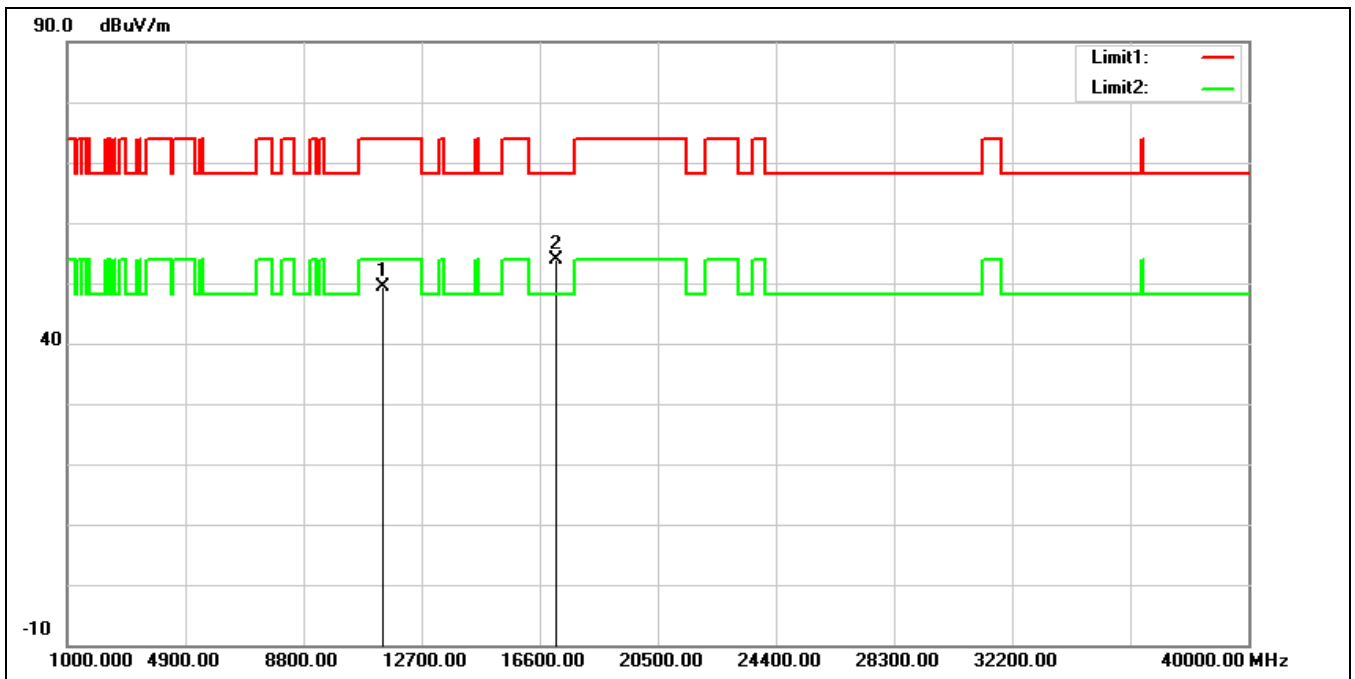


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	34.15	15.23	49.38	74.00	-24.62	peak
2*	17160.000	32.69	21.25	53.94	68.20	-14.26	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

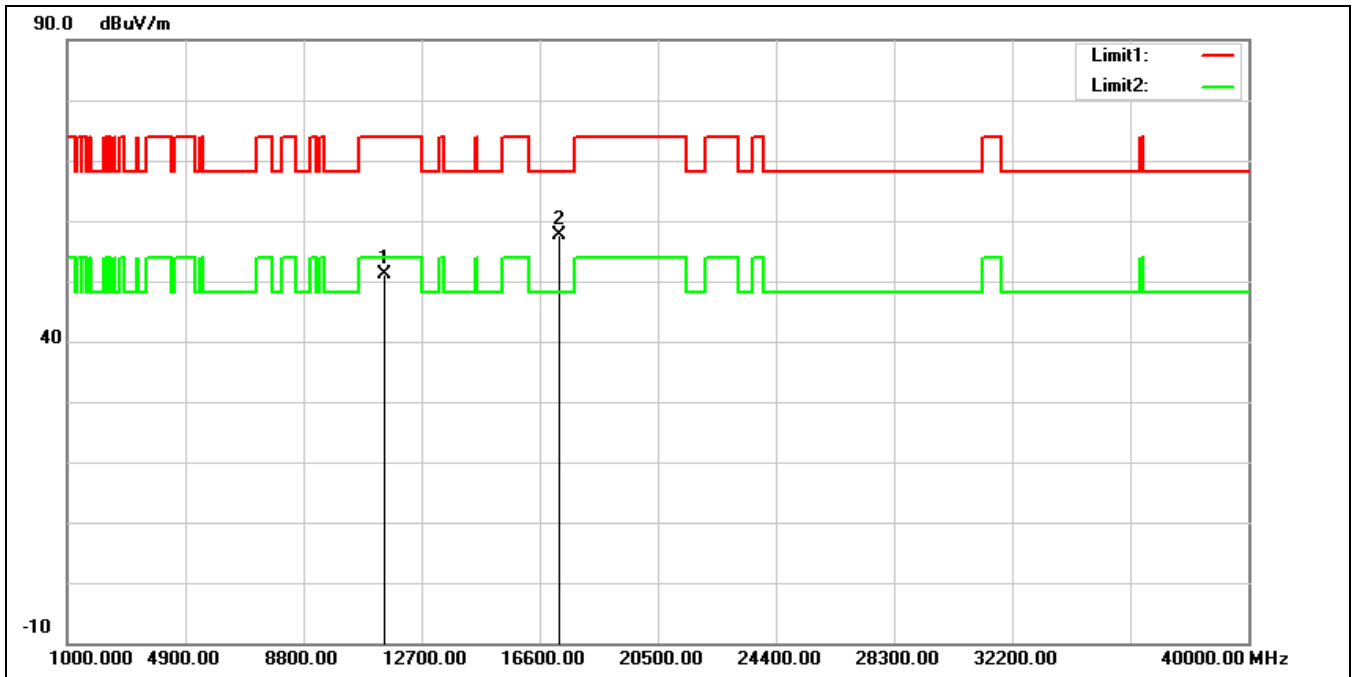

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.71	15.42	51.13	74.00	-22.87	peak
2*	17235.000	35.62	22.01	57.63	68.20	-10.57	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

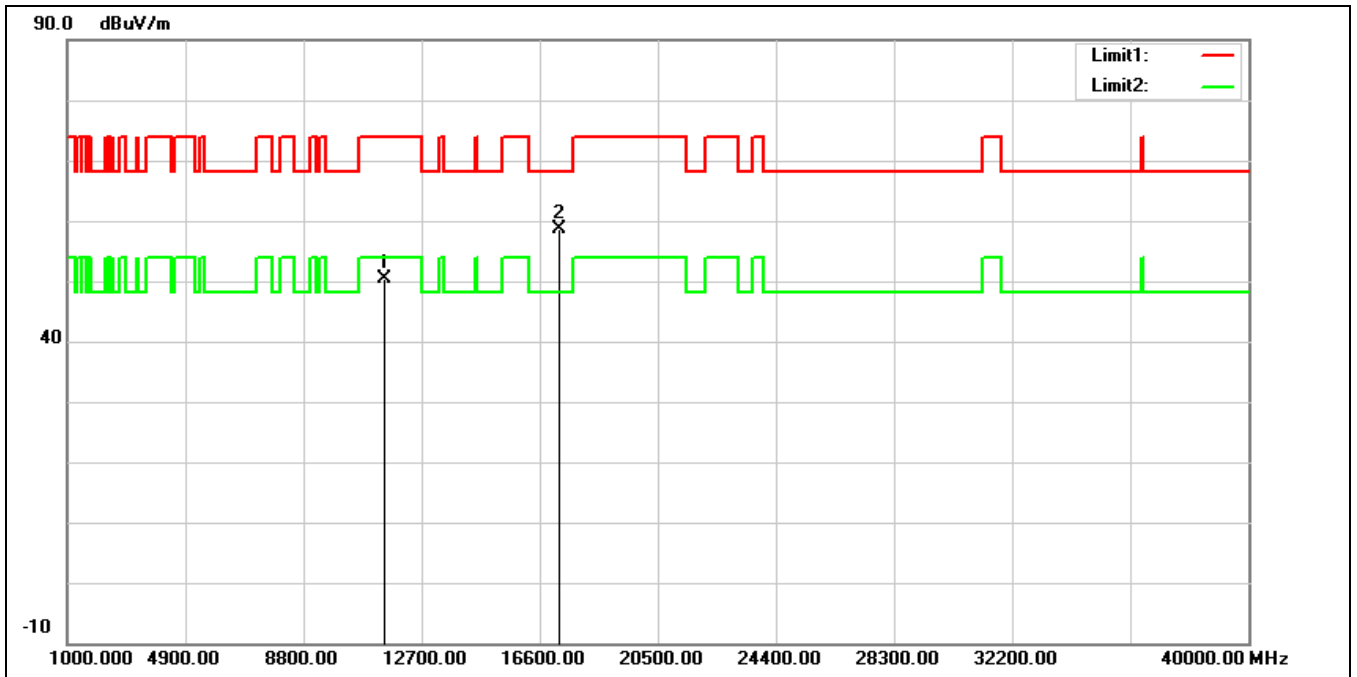

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.87	15.42	50.29	74.00	-23.71	peak
2*	17235.000	36.57	22.01	58.58	68.20	-9.62	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5785 MHz		
Remark:			

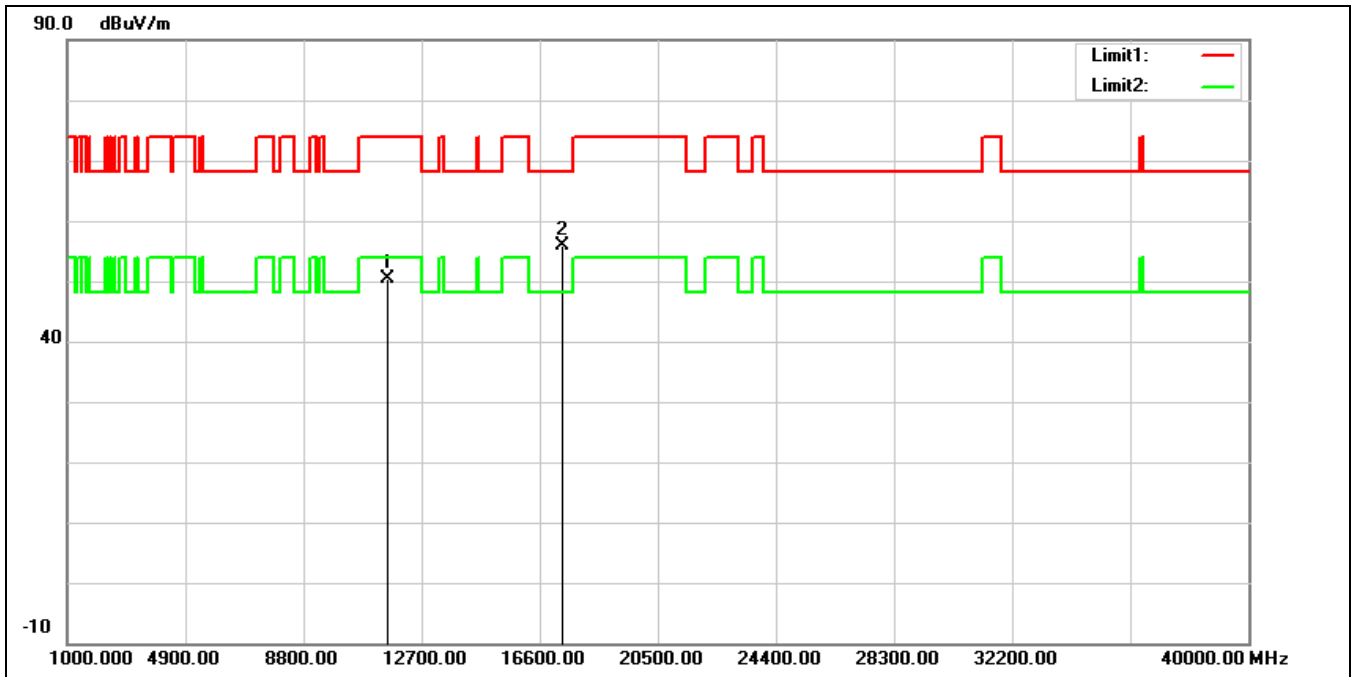


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.20	15.21	50.41	74.00	-23.59	peak
2*	17355.000	32.96	22.96	55.92	68.20	-12.28	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5785 MHz		
Remark:			

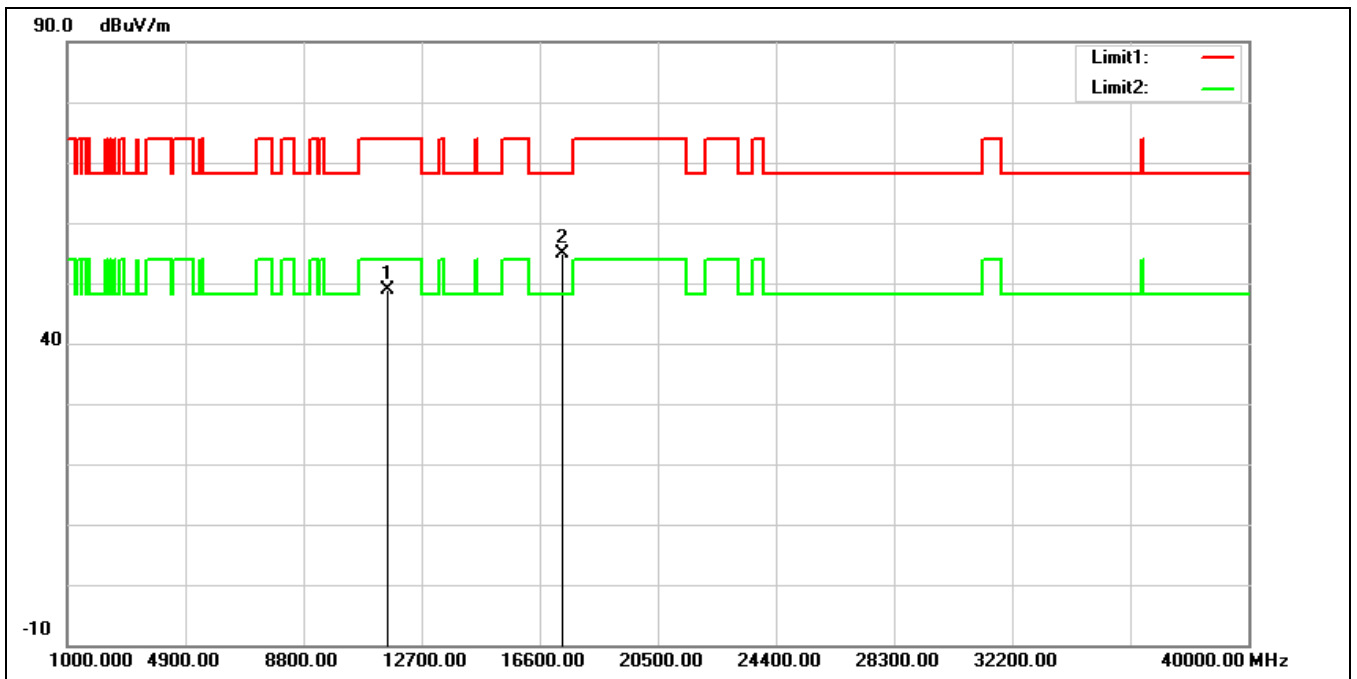


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.58	15.21	48.79	74.00	-25.21	peak
2*	17355.000	31.95	22.96	54.91	68.20	-13.29	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

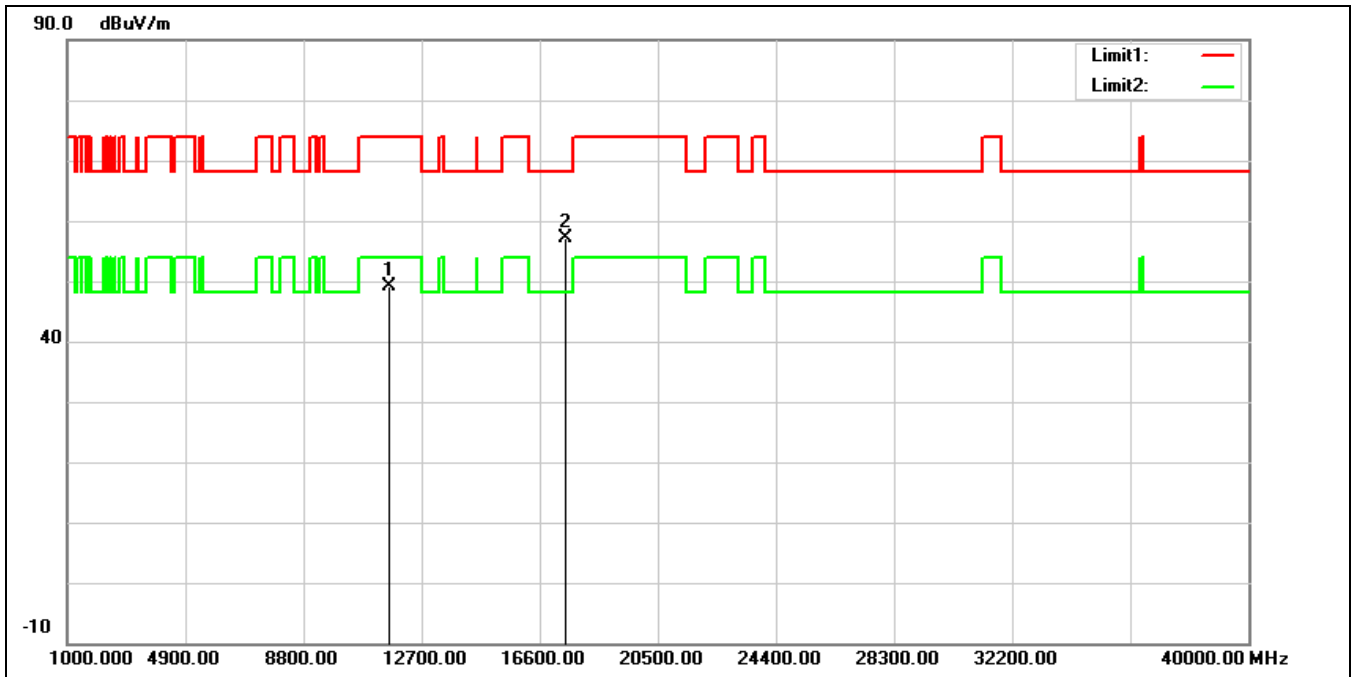


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.19	15.04	49.23	74.00	-24.77	peak
2*	17475.000	33.14	23.95	57.09	68.20	-11.11	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

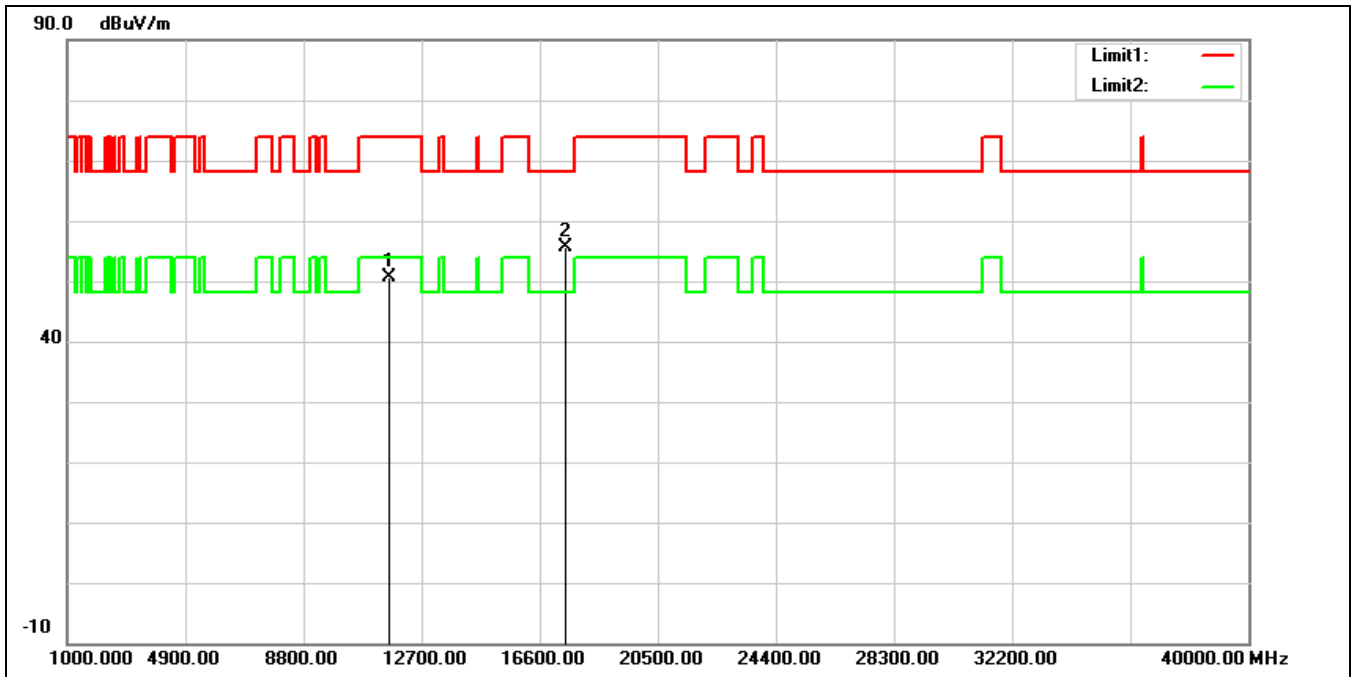


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.65	15.04	50.69	74.00	-23.31	peak
2*	17475.000	31.74	23.95	55.69	68.20	-12.51	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

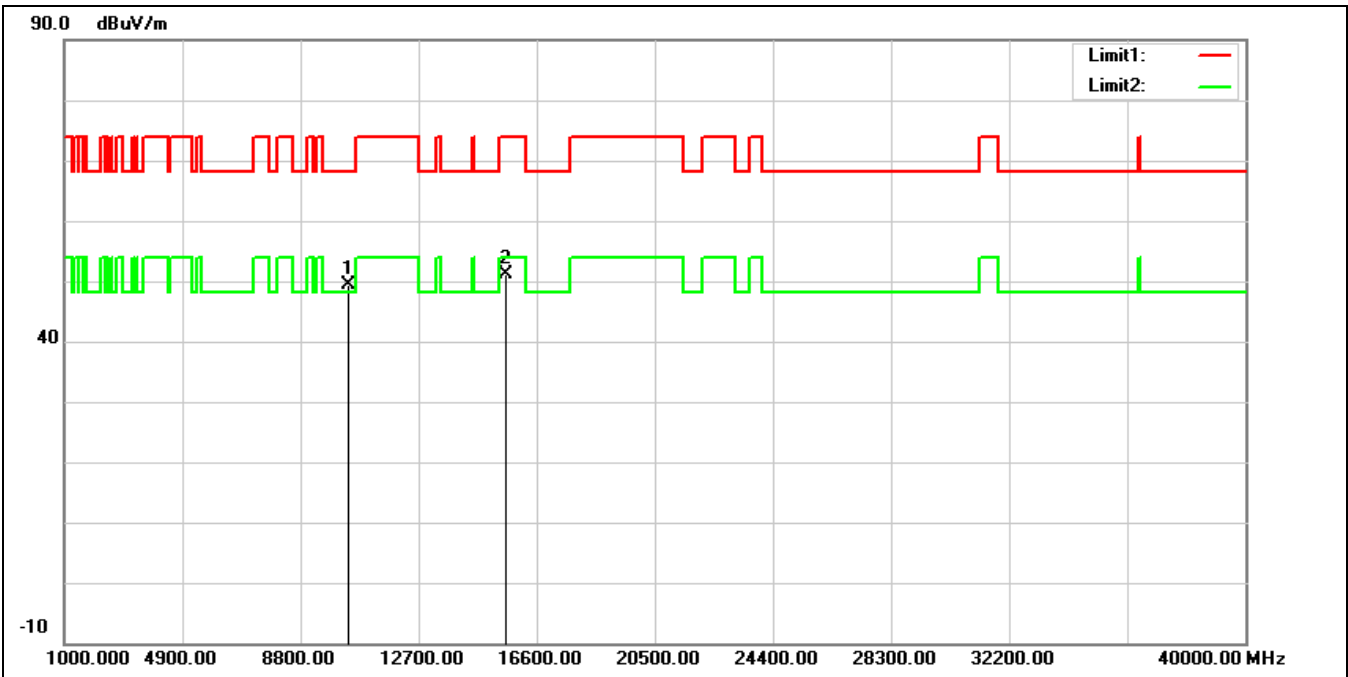


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	35.22	14.04	49.26	68.20	-18.94	peak
2	15570.000	33.88	17.16	51.04	74.00	-22.96	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

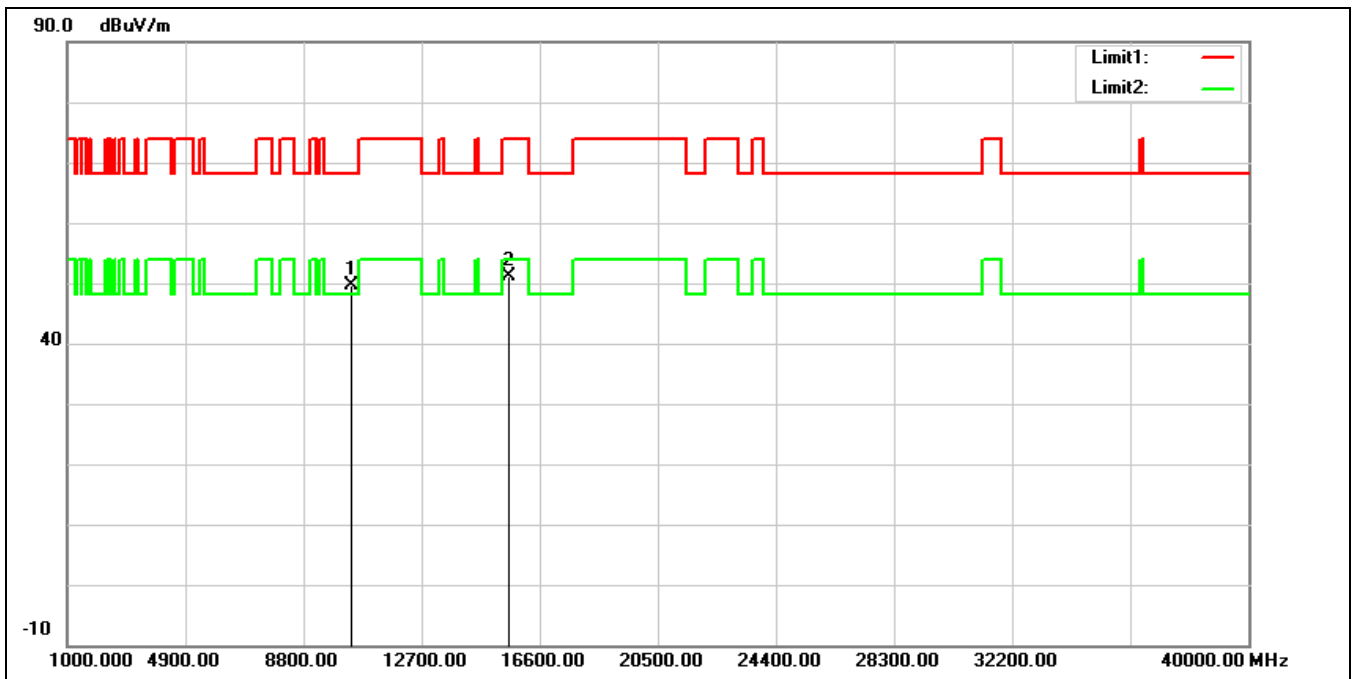


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	35.71	14.04	49.75	68.20	-18.45	peak
2	15570.000	33.98	17.16	51.14	74.00	-22.86	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5230 MHz		
Remark:			

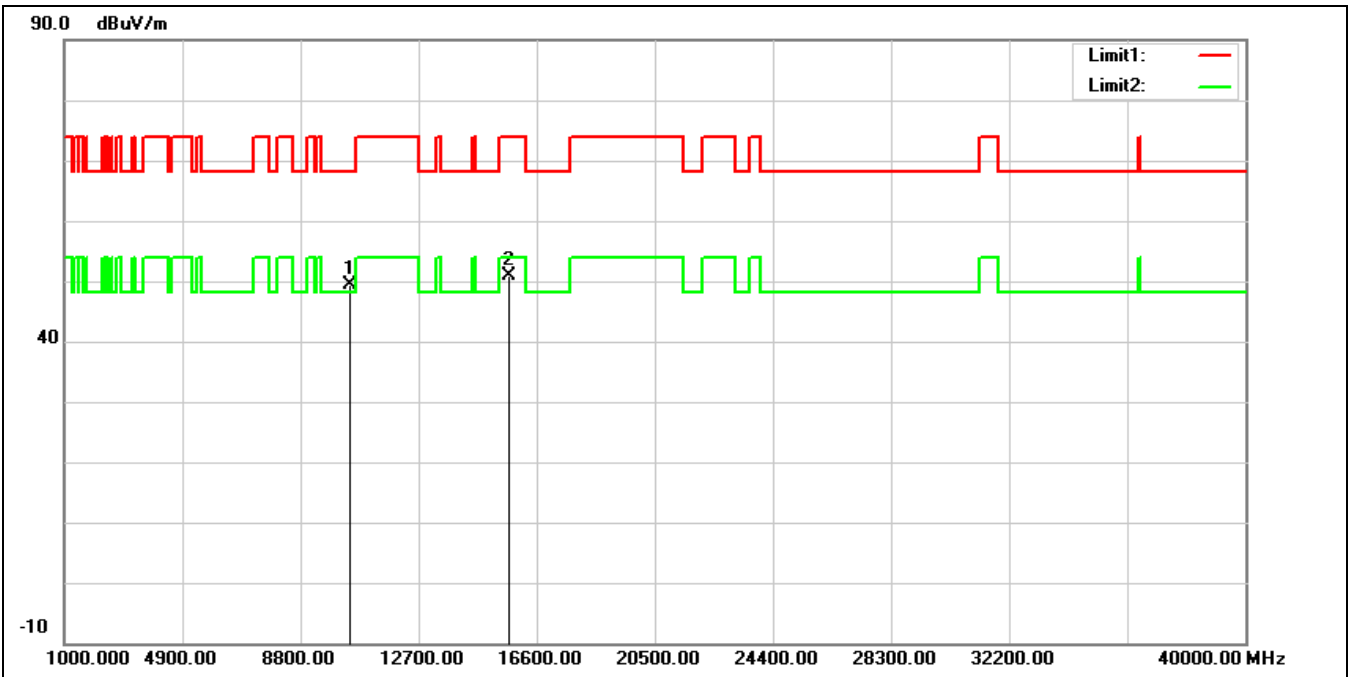

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	34.97	14.43	49.40	68.20	-18.80	peak
2	15690.000	33.62	17.37	50.99	74.00	-23.01	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5230 MHz		
Remark:			

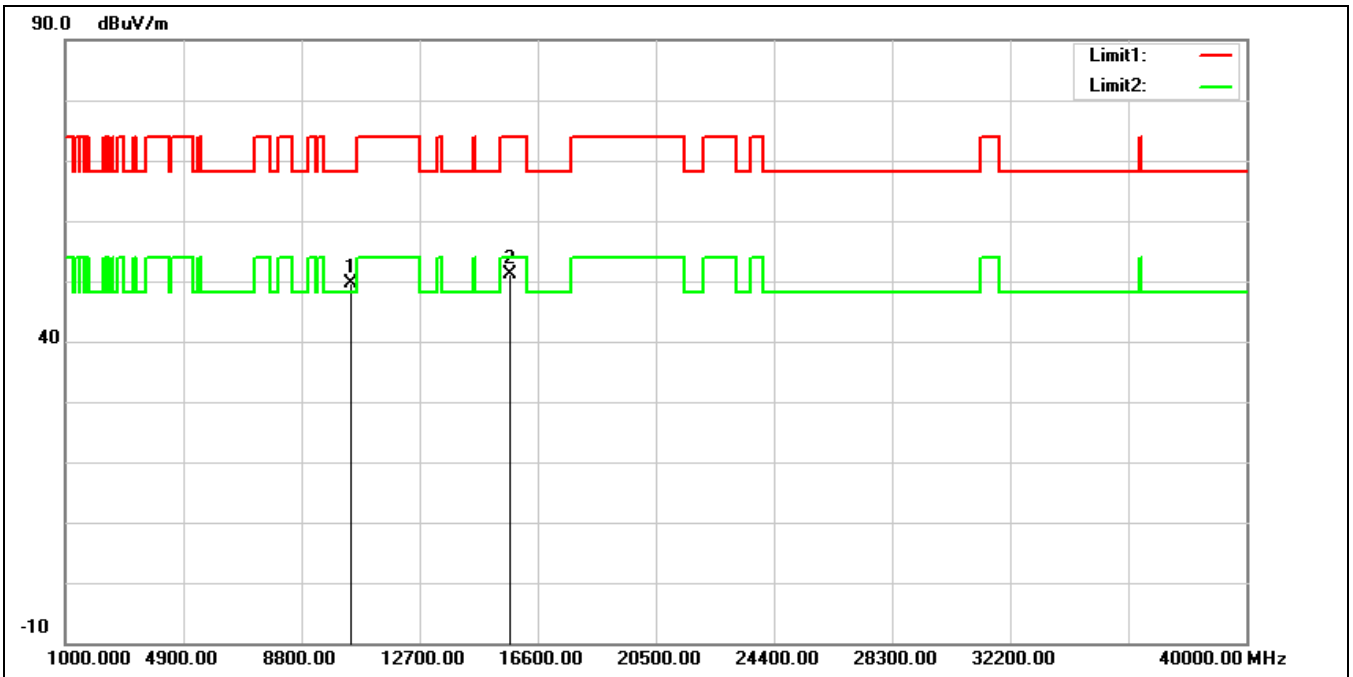

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	35.12	14.43	49.55	68.20	-18.65	peak
2	15690.000	33.67	17.37	51.04	74.00	-22.96	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5270 MHz		
Remark:			

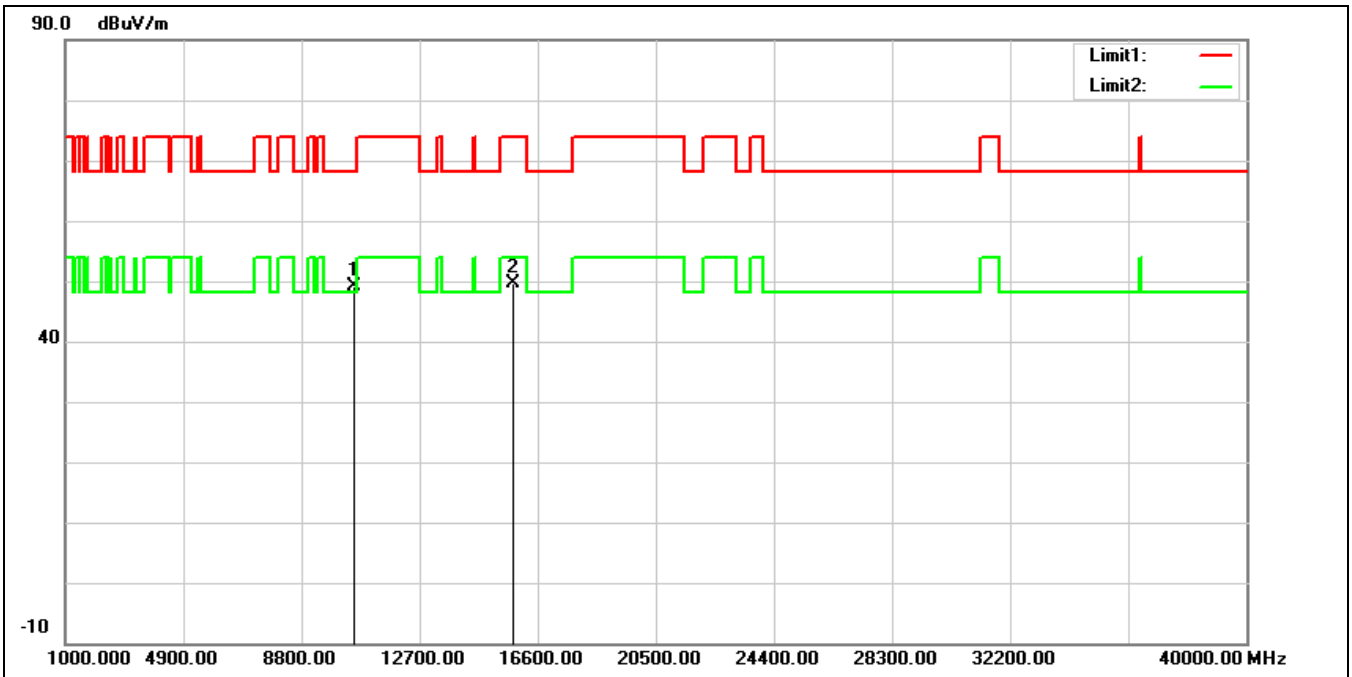


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	34.61	14.55	49.16	68.20	-19.04	peak
2	15810.000	32.58	17.00	49.58	74.00	-24.42	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5270 MHz		
Remark:			

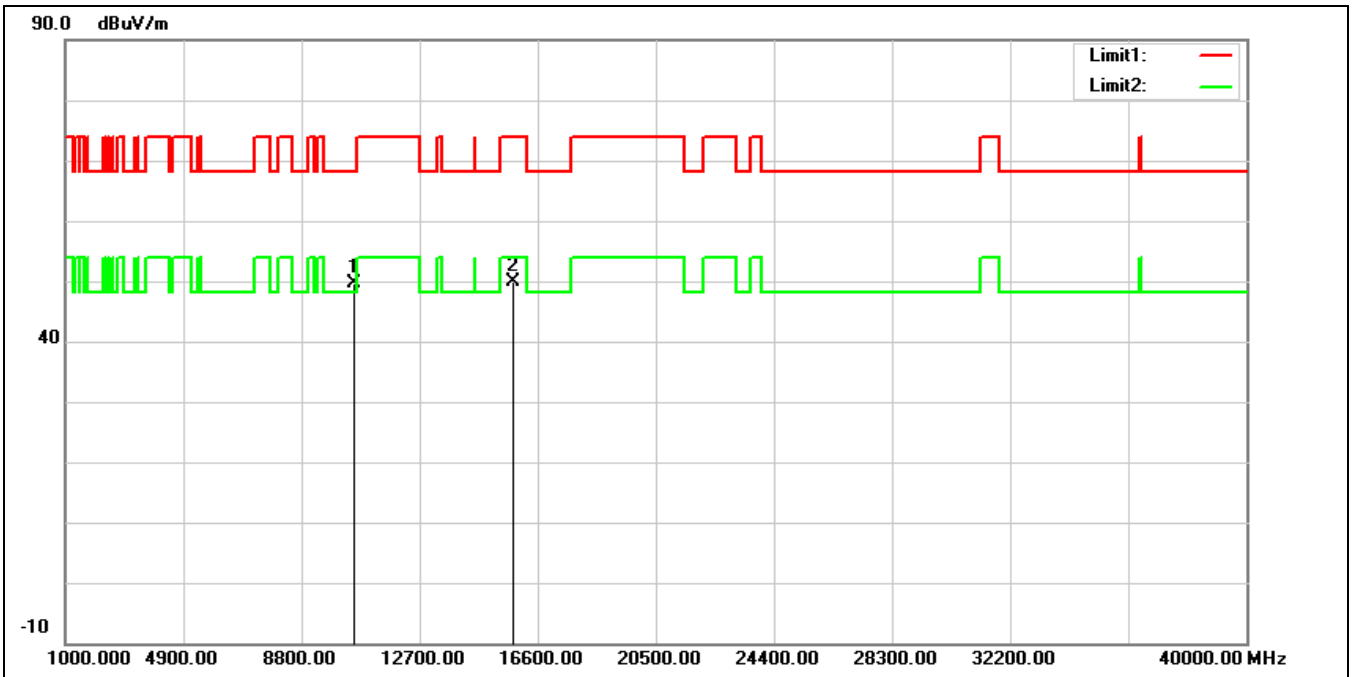


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	35.00	14.55	49.55	68.20	-18.65	peak
2	15810.000	32.78	17.00	49.78	74.00	-24.22	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

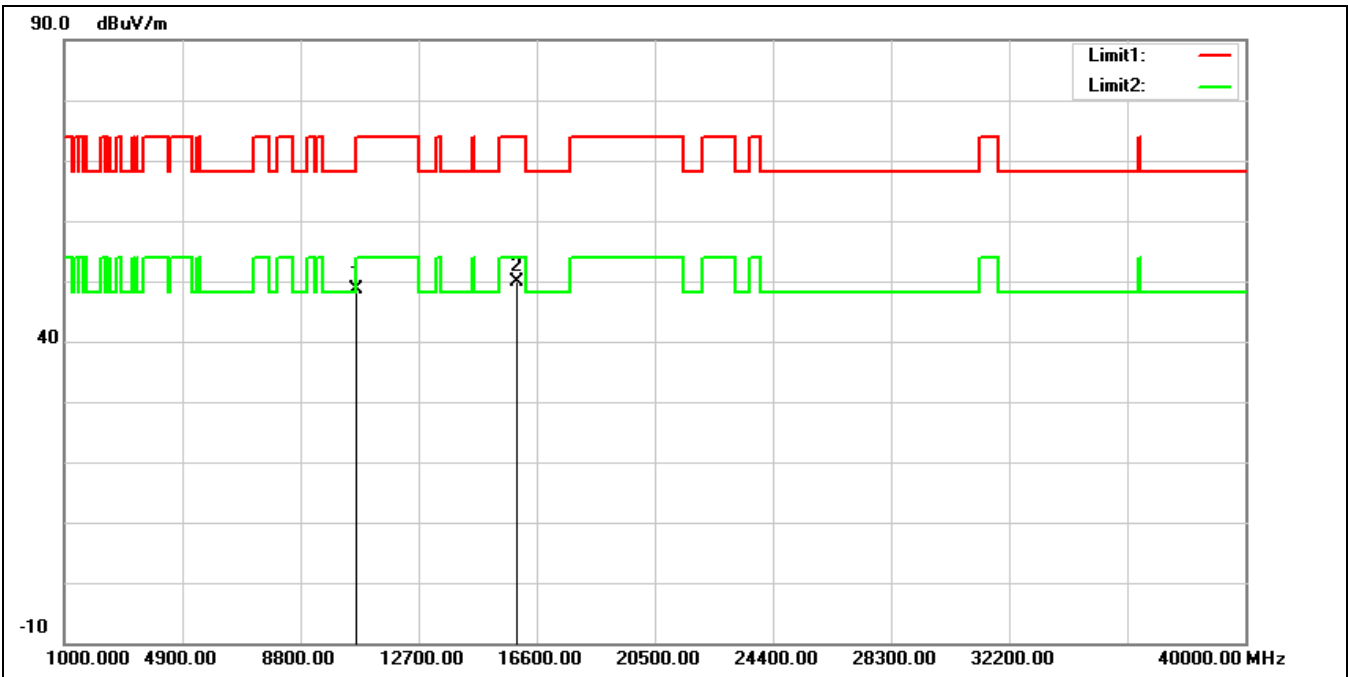


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	34.29	14.40	48.69	74.00	-25.31	peak
2*	15930.000	33.20	16.64	49.84	74.00	-24.16	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

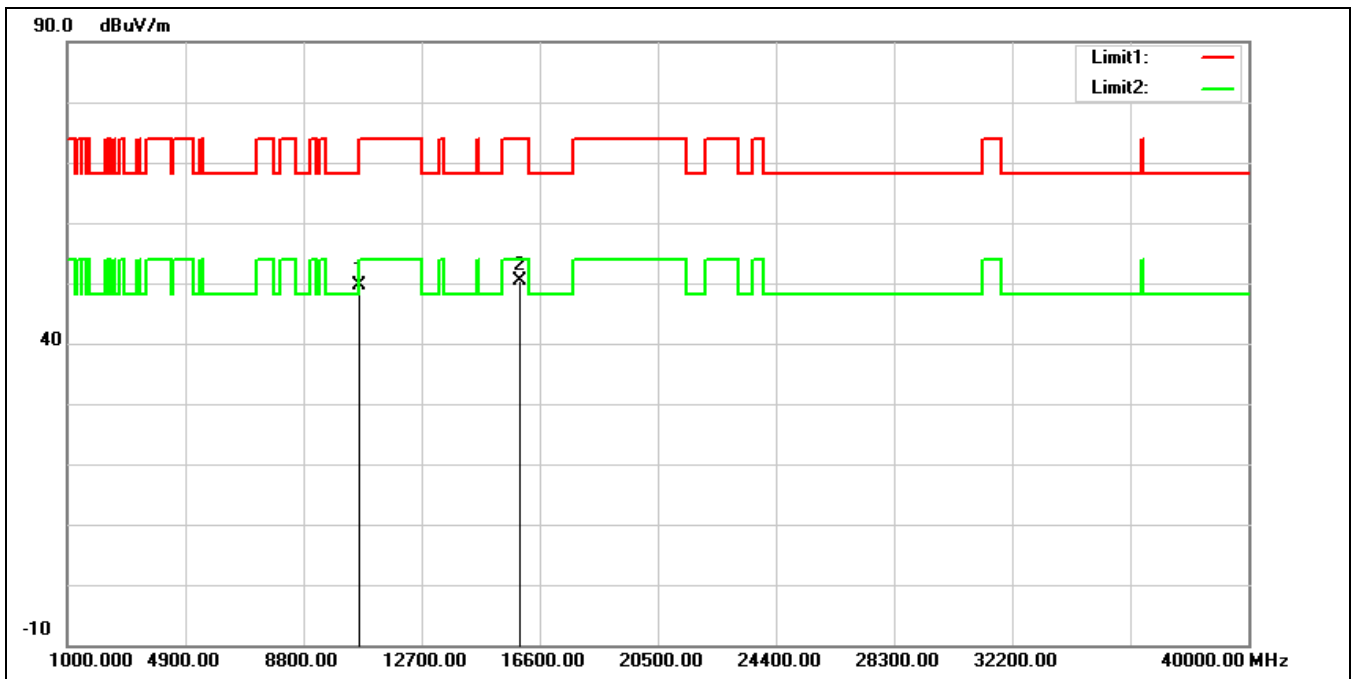


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	35.12	14.40	49.52	74.00	-24.48	peak
2*	15930.000	33.63	16.64	50.27	74.00	-23.73	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

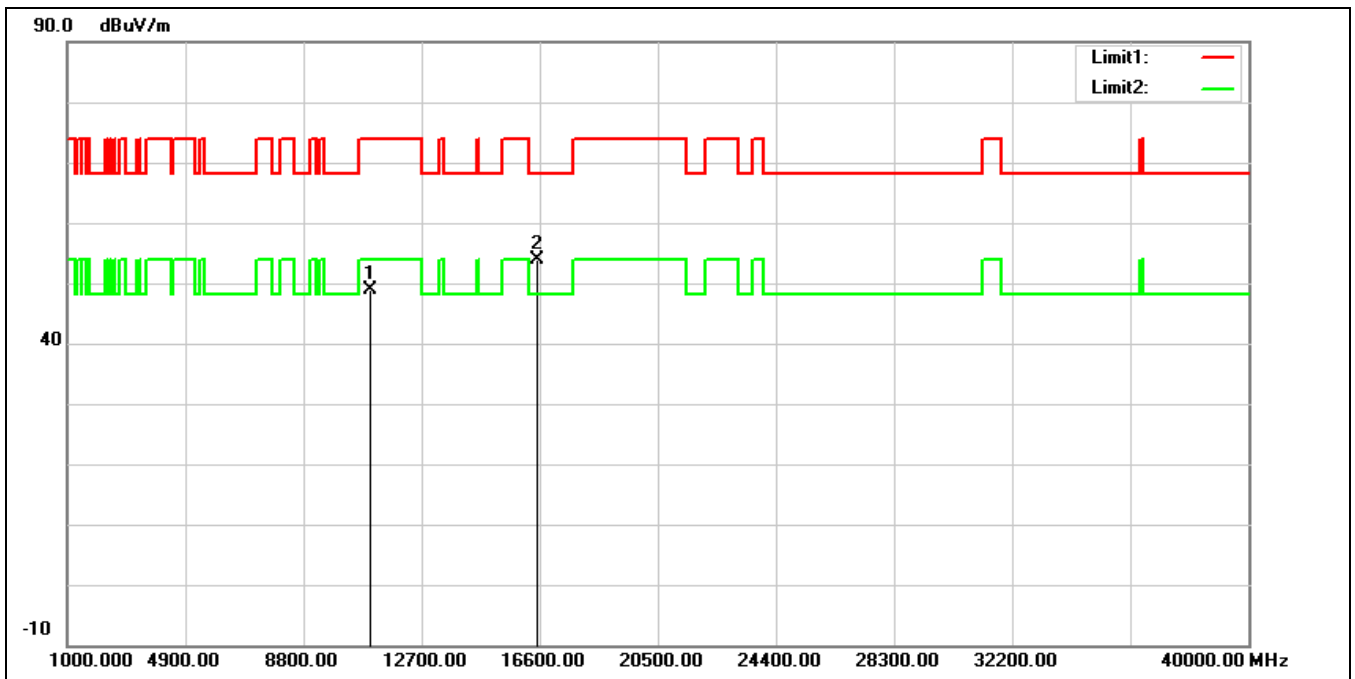


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	34.13	14.75	48.88	74.00	-25.12	peak
2*	16530.000	35.88	17.92	53.80	68.20	-14.40	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

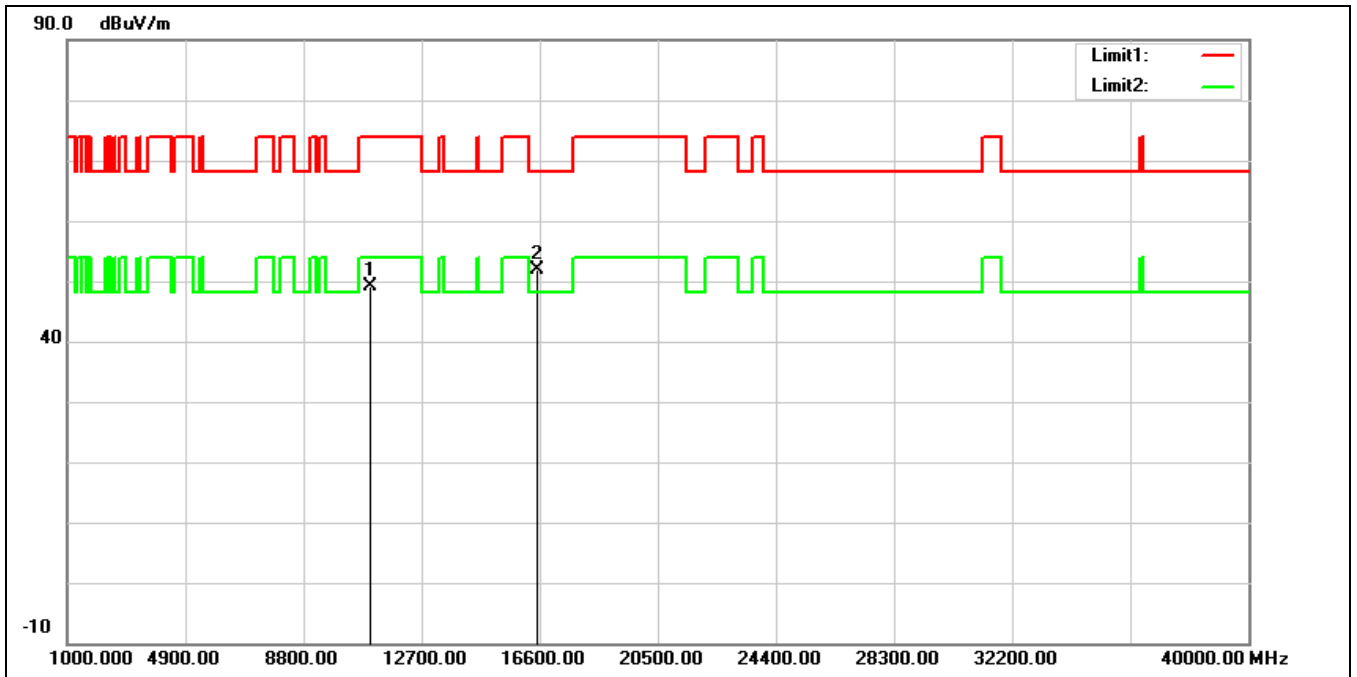


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	34.37	14.75	49.12	74.00	-24.88	peak
2*	16530.000	33.88	17.92	51.80	68.20	-16.40	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5590 MHz		
Remark:			

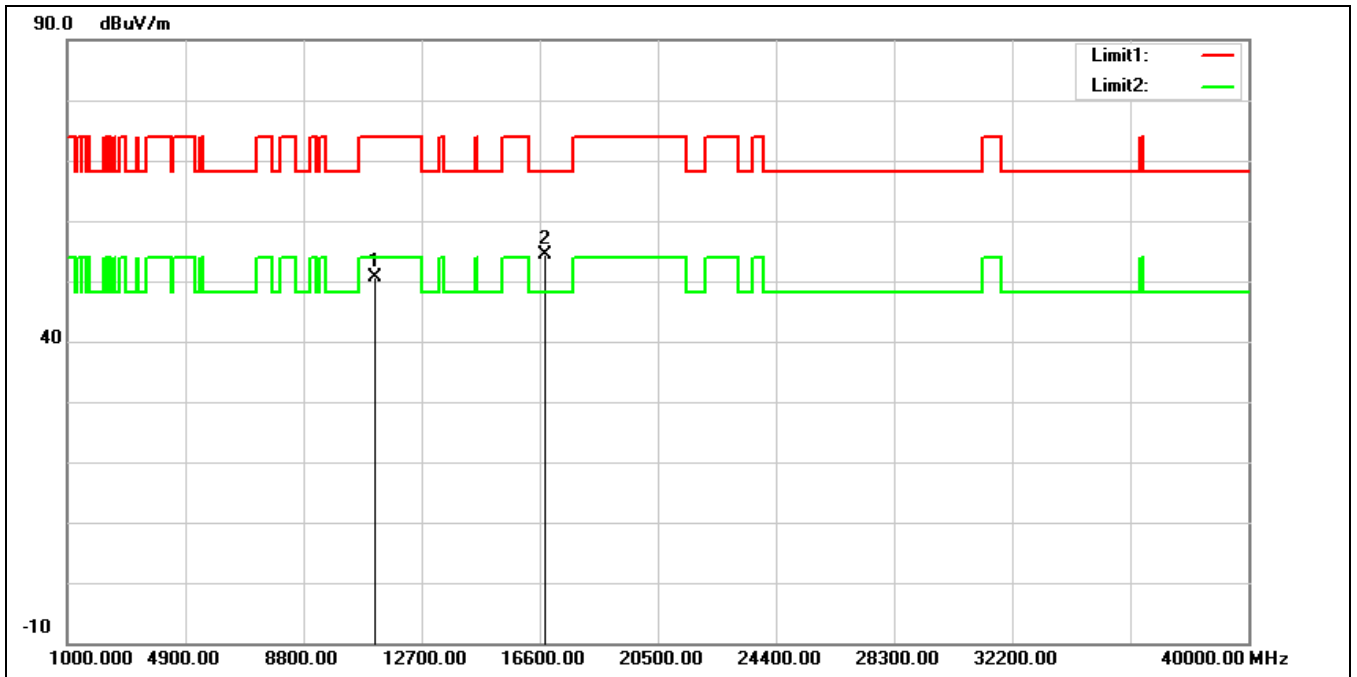

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11180.000	35.92	14.72	50.64	74.00	-23.36	peak
2*	16770.000	35.25	19.05	54.30	68.20	-13.90	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5590 MHz		
Remark:			

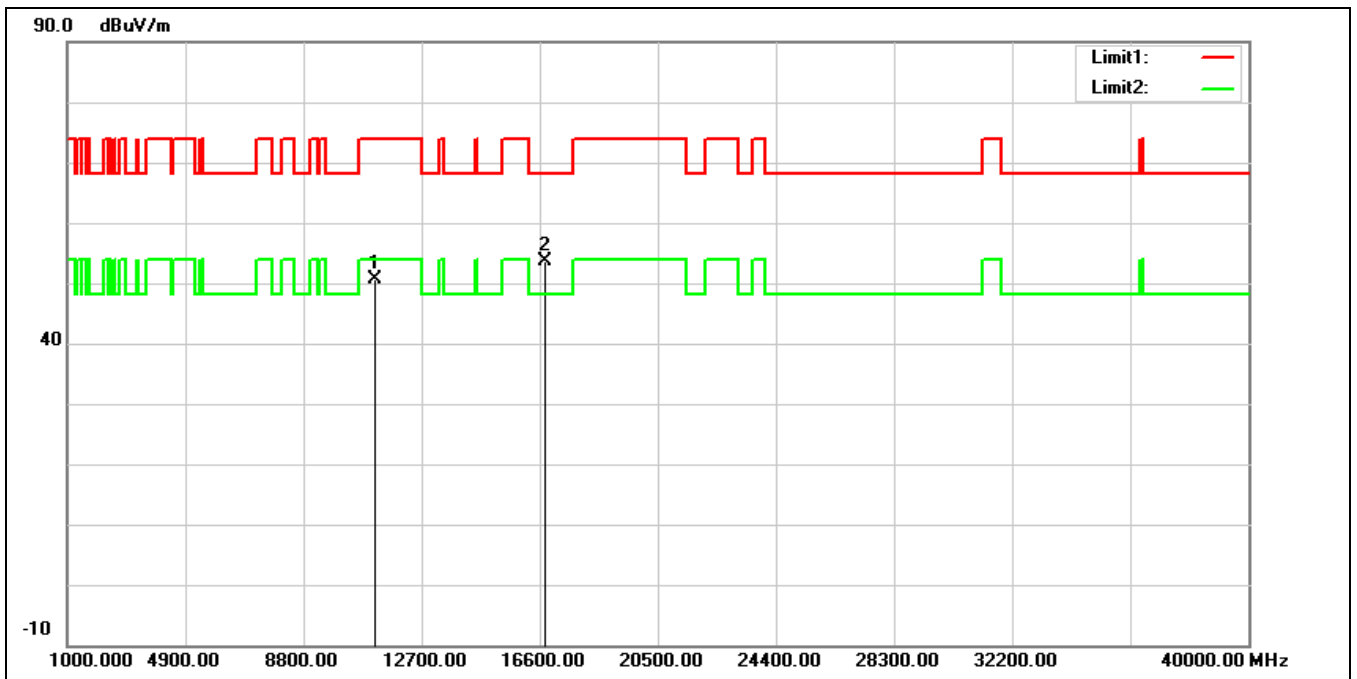

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11180.000	35.88	14.72	50.60	74.00	-23.40	peak
2*	16770.000	34.63	19.05	53.68	68.20	-14.52	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

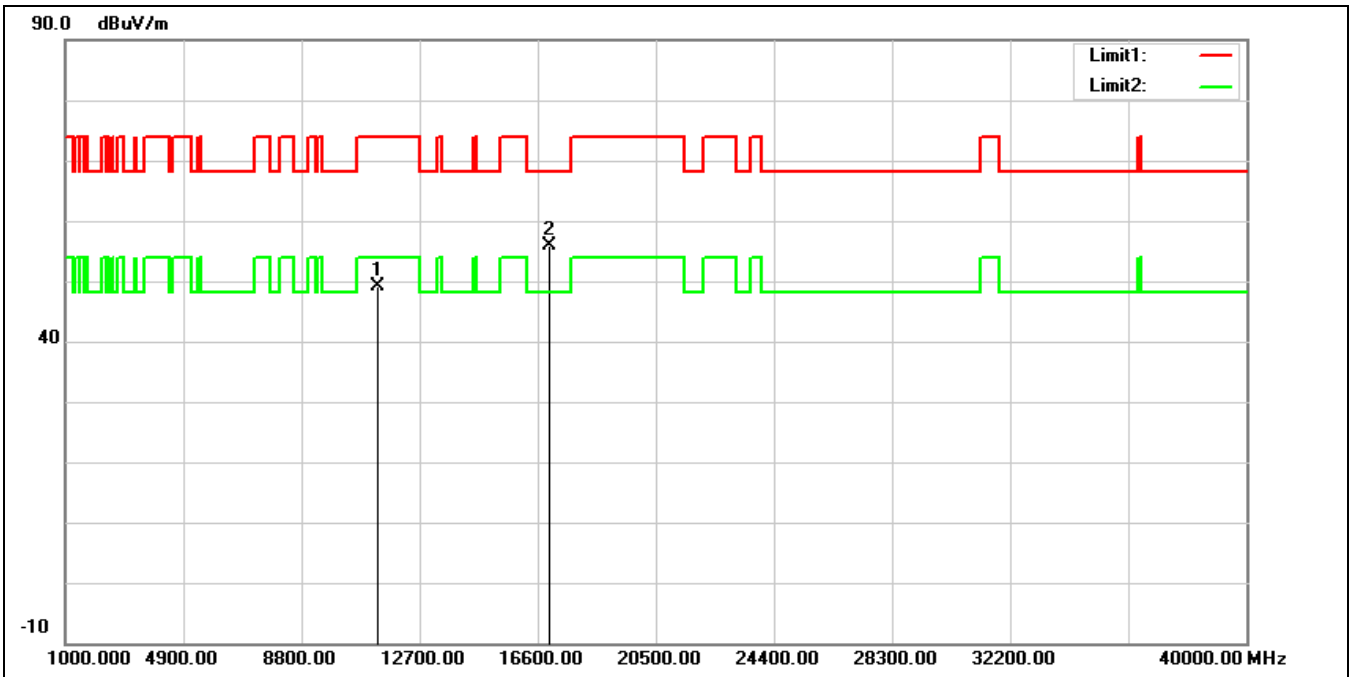


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.21	14.84	49.05	74.00	-24.95	peak
2*	17010.000	35.78	20.09	55.87	68.20	-12.33	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

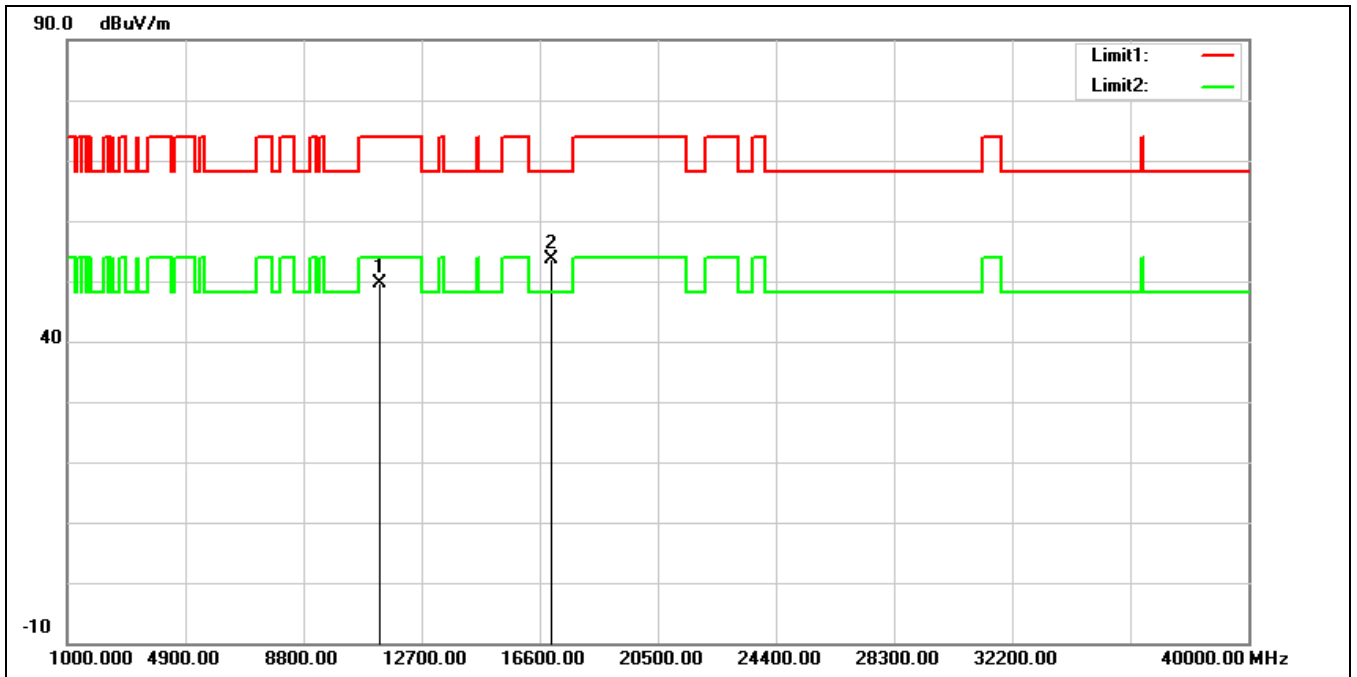


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.91	14.84	49.75	74.00	-24.25	peak
2*	17010.000	33.47	20.09	53.56	68.20	-14.64	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

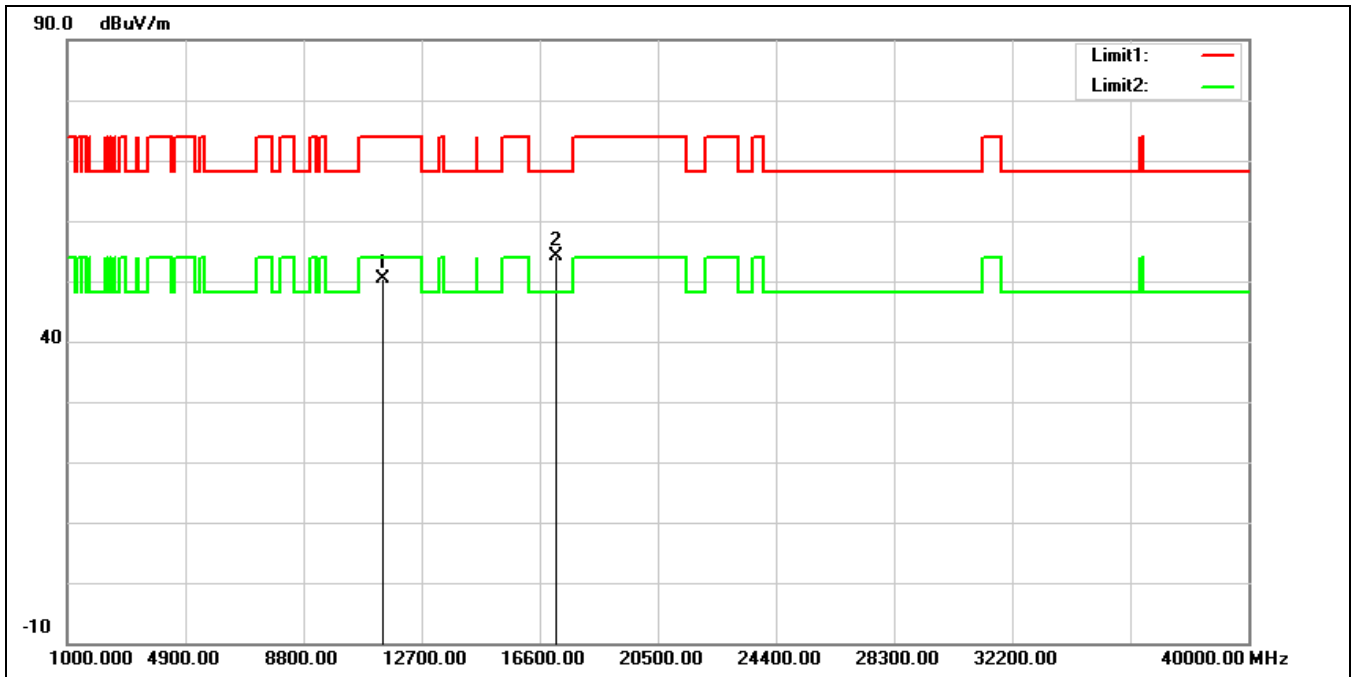


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	35.24	15.15	50.39	74.00	-23.61	peak
2*	17130.000	33.18	20.95	54.13	68.20	-14.07	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

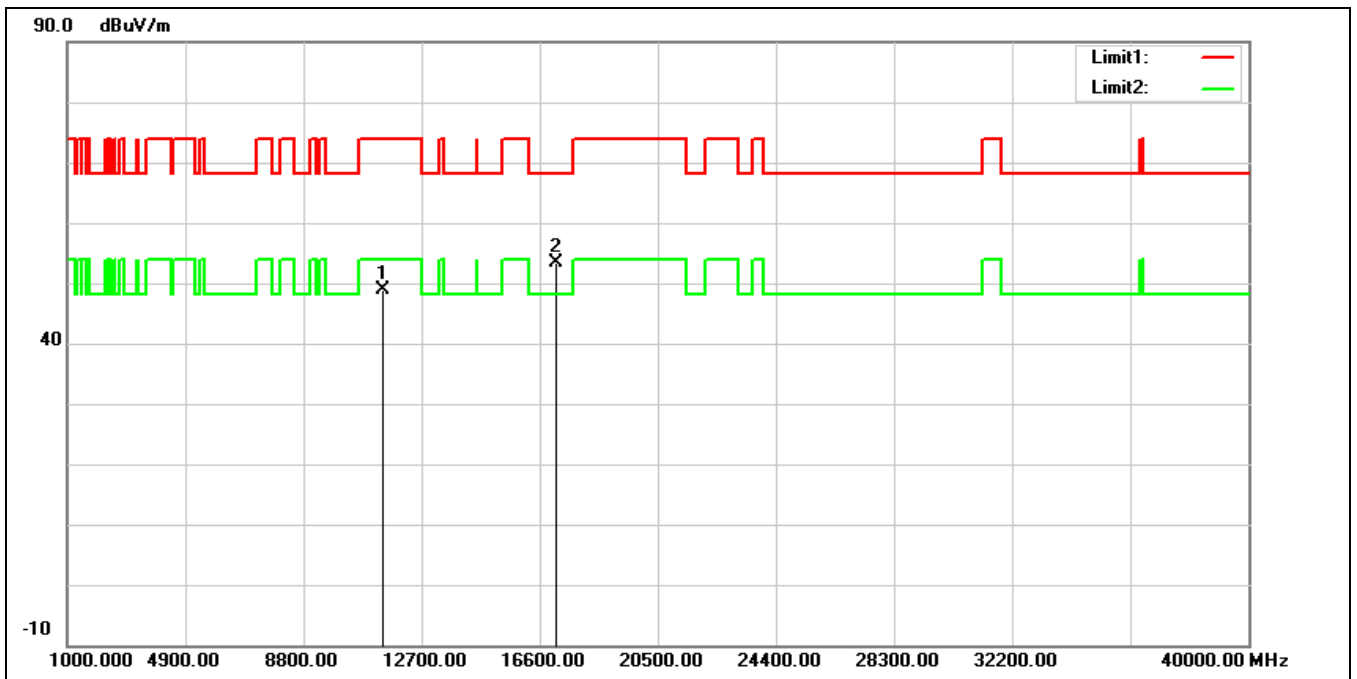


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	33.69	15.15	48.84	74.00	-25.16	peak
2*	17130.000	32.49	20.95	53.44	68.20	-14.76	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

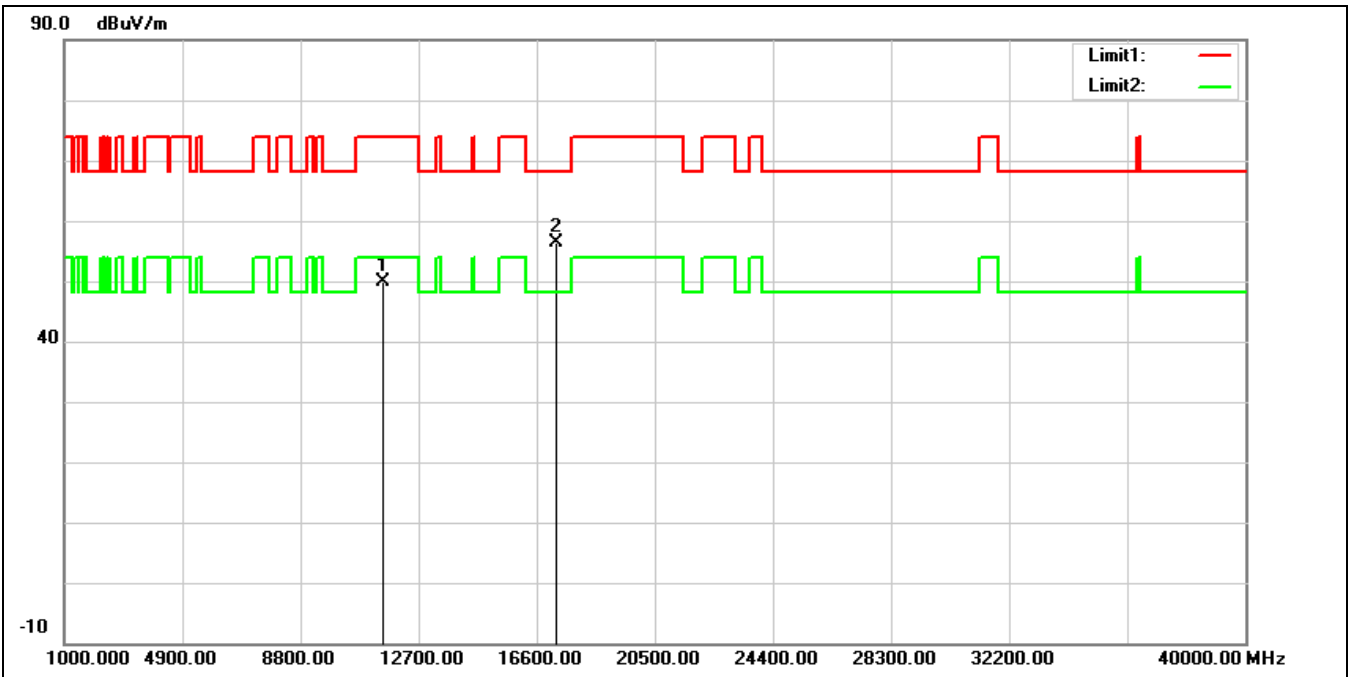


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.36	15.42	49.78	74.00	-24.22	peak
2*	17265.000	33.98	22.32	56.30	68.20	-11.90	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

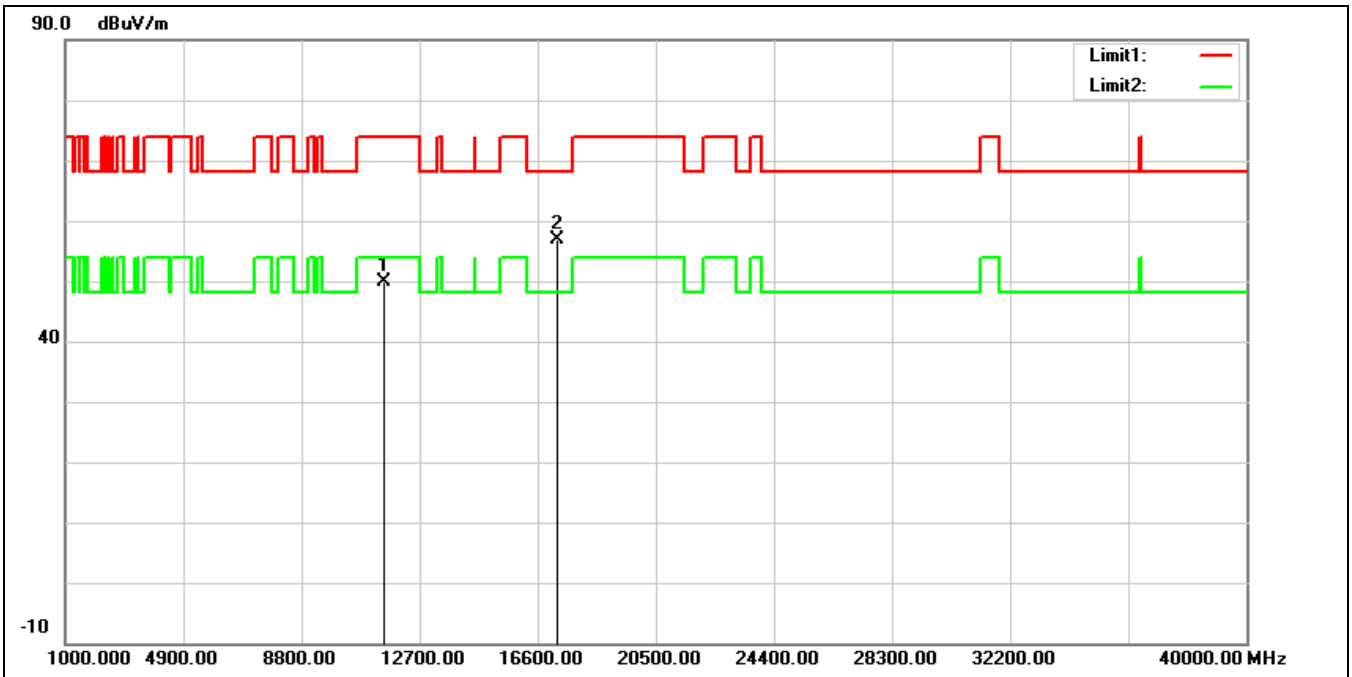


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.55	15.42	49.97	74.00	-24.03	peak
2*	17265.000	34.64	22.32	56.96	68.20	-11.24	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

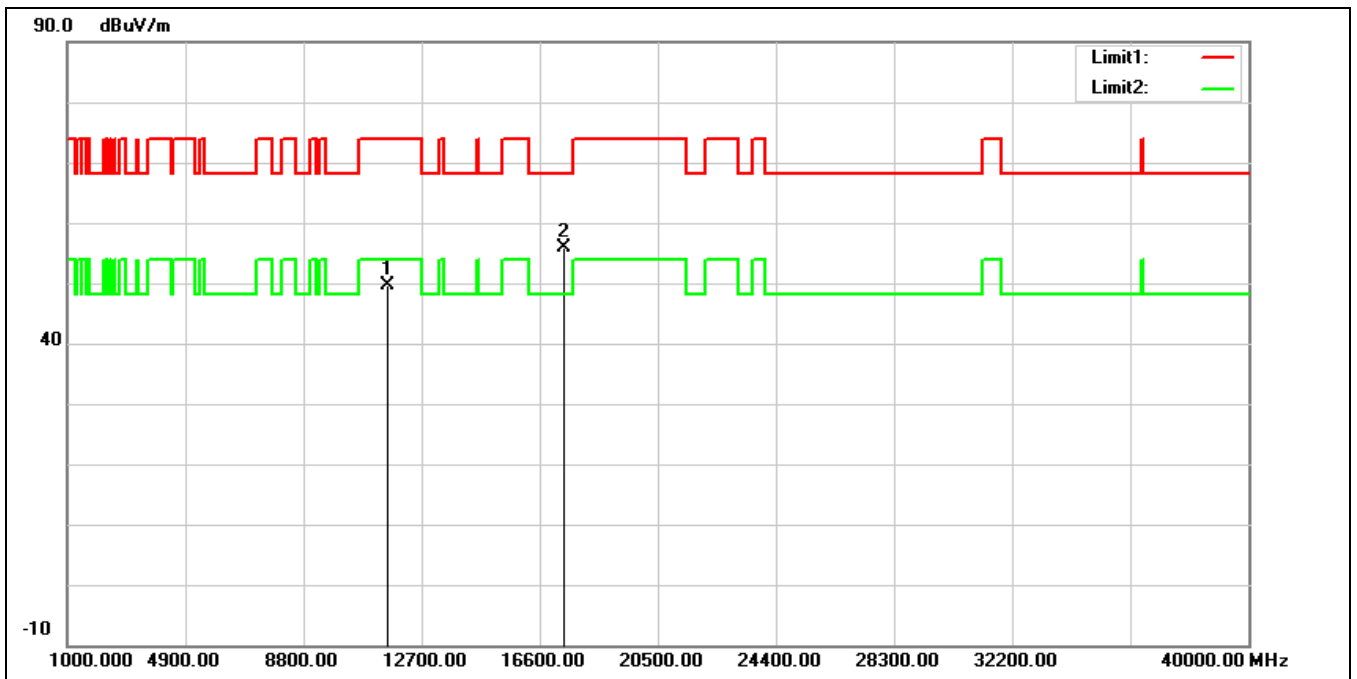

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	34.45	15.14	49.59	74.00	-24.41	peak
2*	17385.000	32.81	23.11	55.92	68.20	-12.28	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

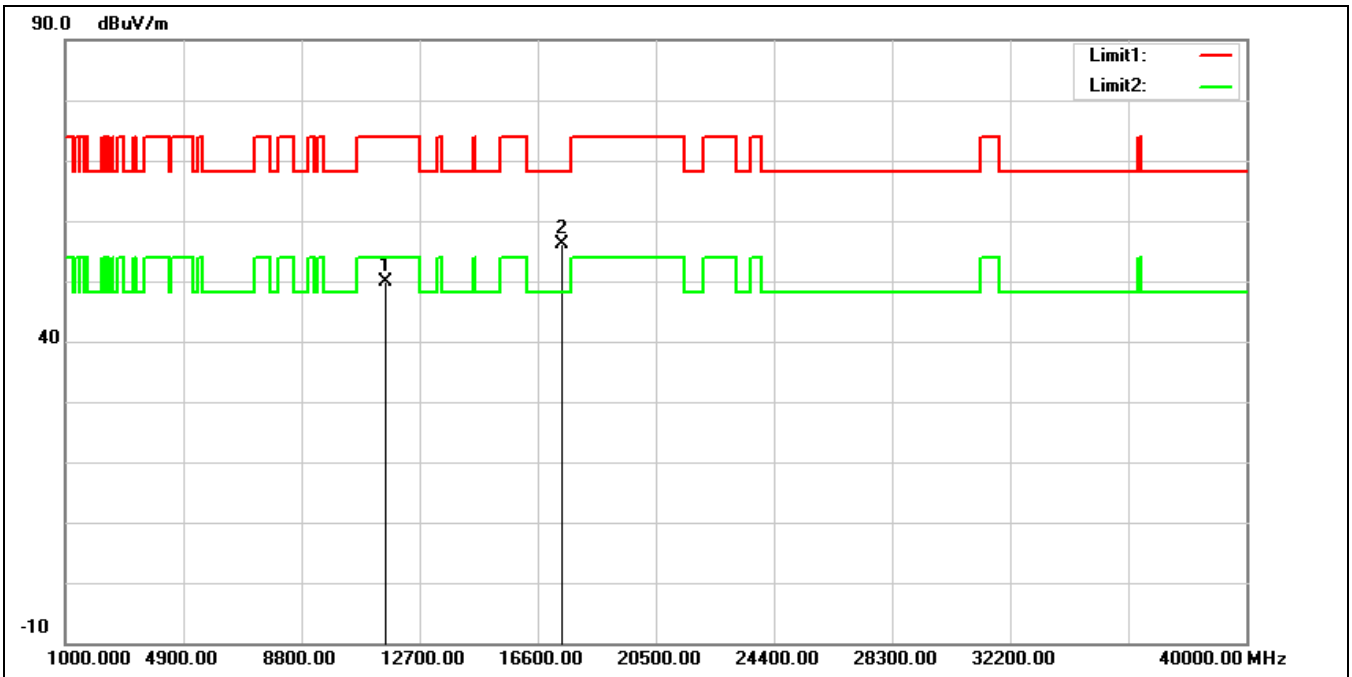

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	34.76	15.14	49.90	74.00	-24.10	peak
2*	17385.000	33.08	23.11	56.19	68.20	-12.01	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

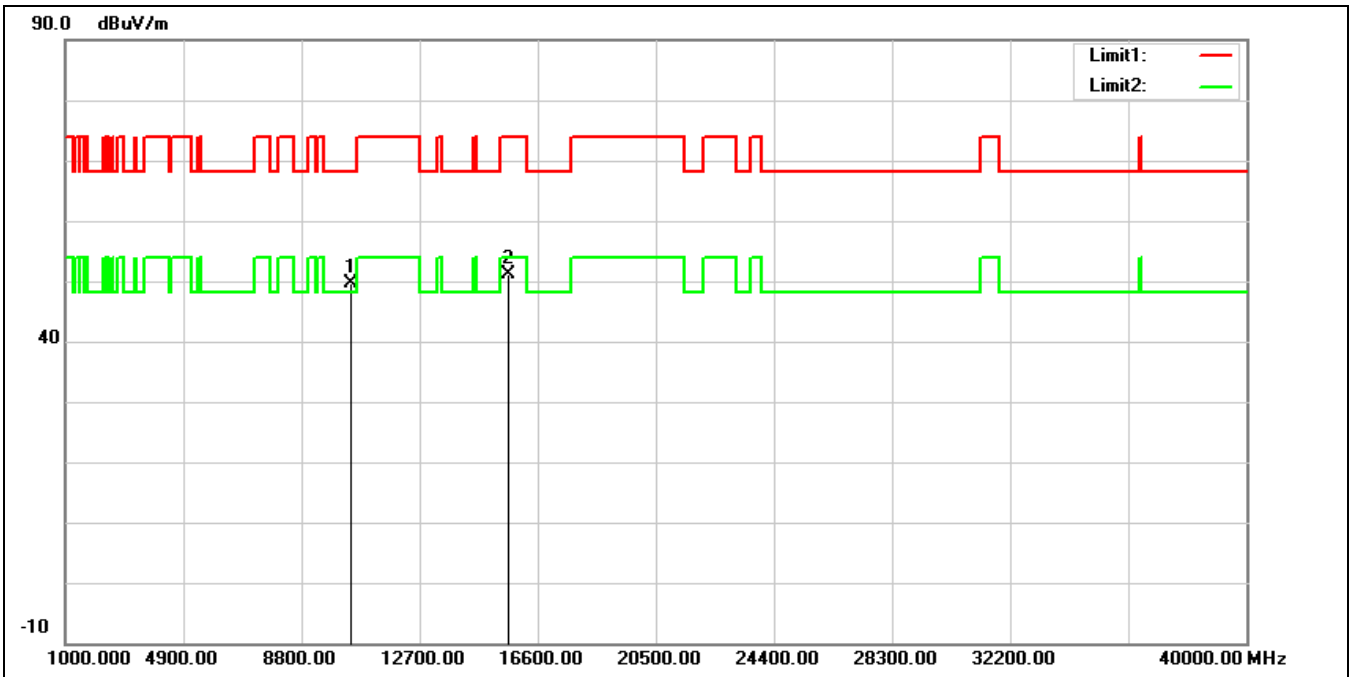


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	35.43	14.20	49.63	68.20	-18.57	peak
2	15630.000	34.01	17.14	51.15	74.00	-22.85	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

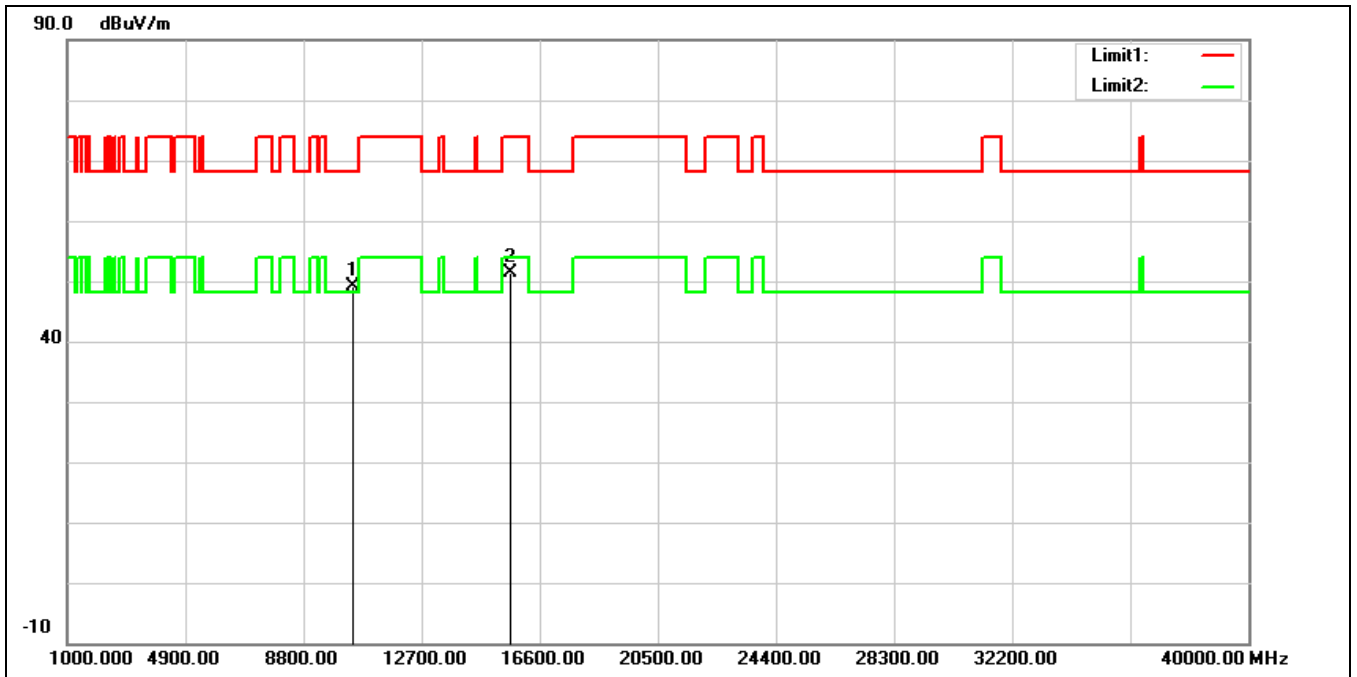


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	34.92	14.20	49.12	68.20	-19.08	peak
2	15630.000	34.35	17.14	51.49	74.00	-22.51	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

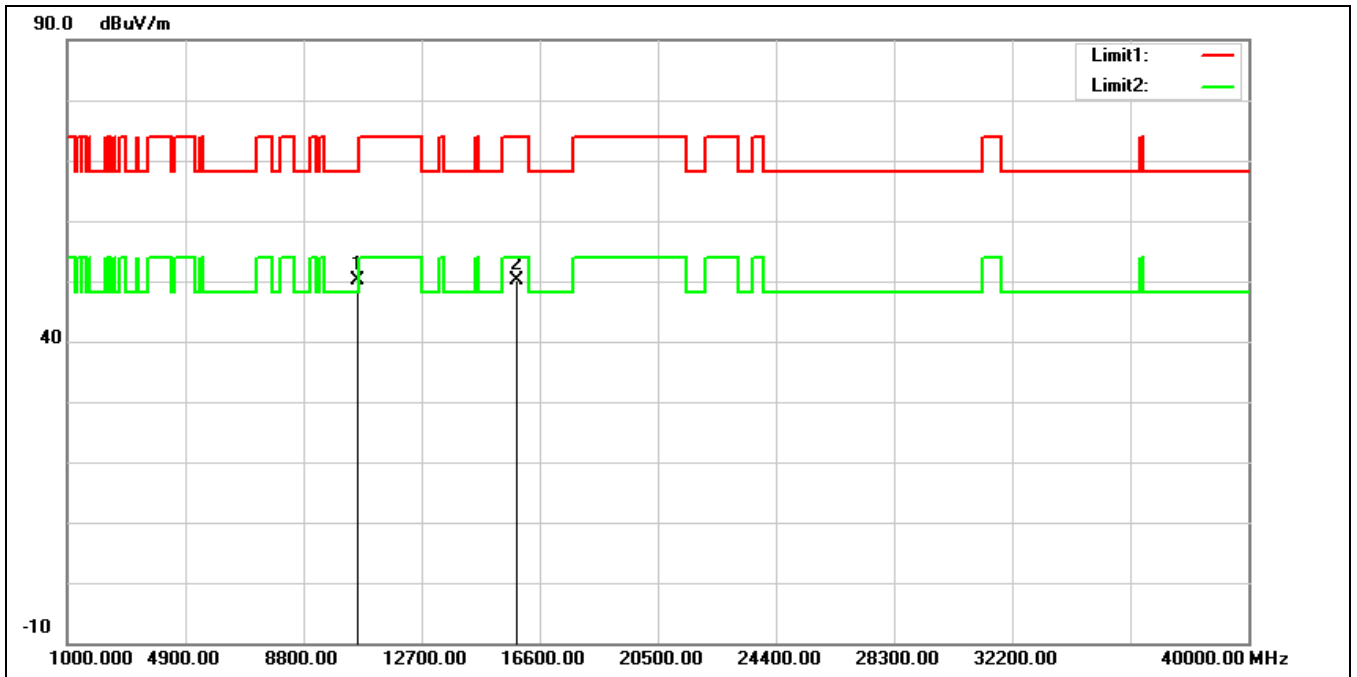


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	35.79	14.43	50.22	68.20	-17.98	peak
2	15870.000	33.21	16.81	50.02	74.00	-23.98	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

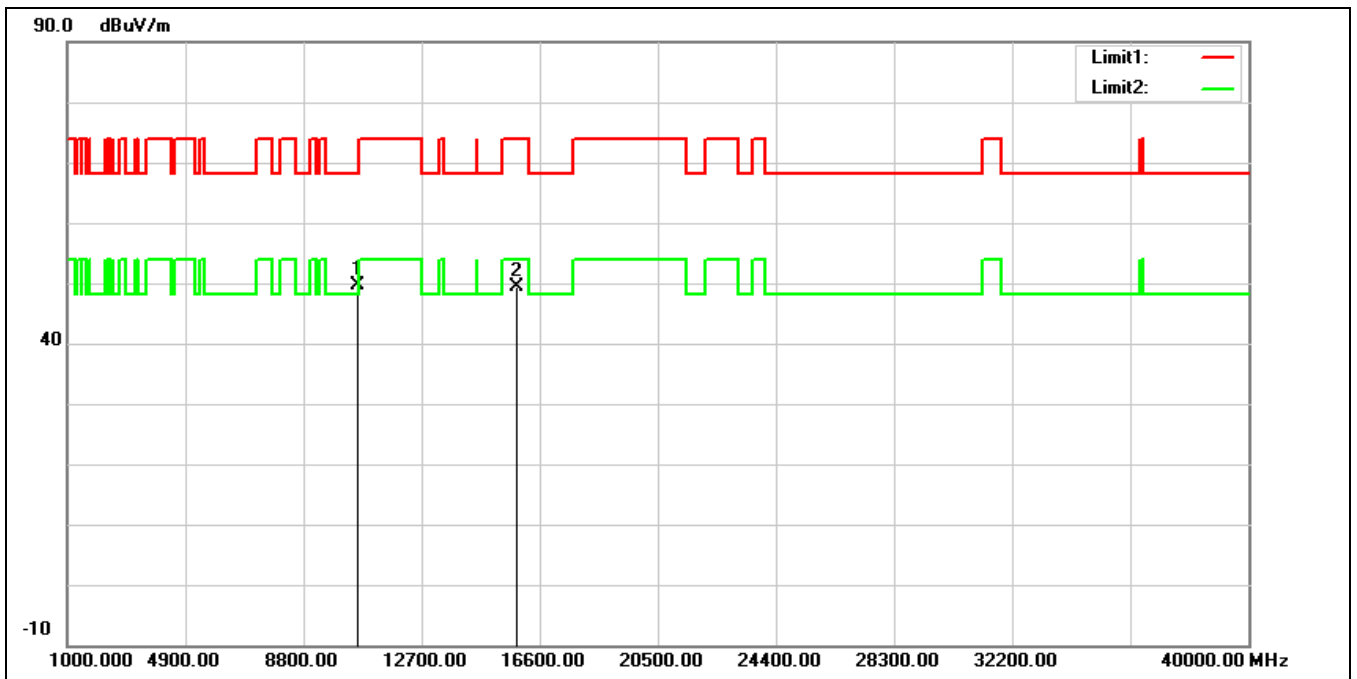


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	35.13	14.43	49.56	68.20	-18.64	peak
2	15870.000	32.66	16.81	49.47	74.00	-24.53	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

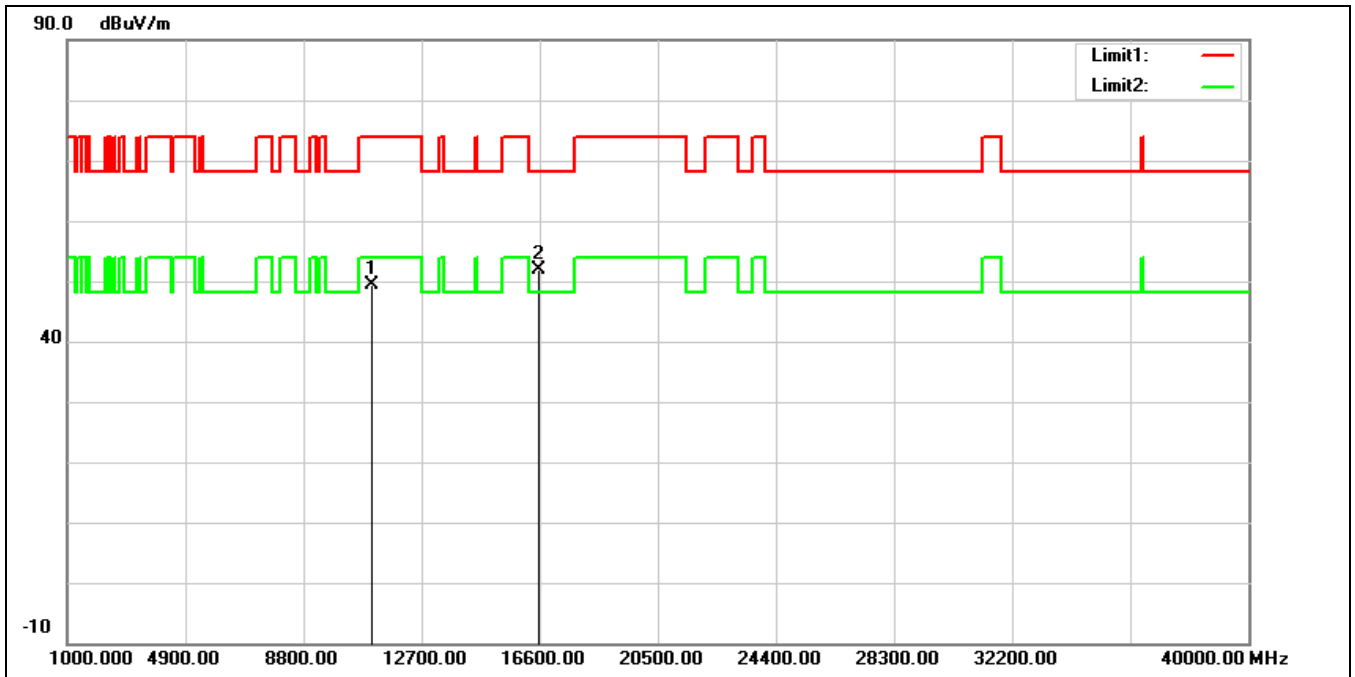


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	34.61	14.78	49.39	74.00	-24.61	peak
2*	16590.000	33.77	18.23	52.00	68.20	-16.20	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

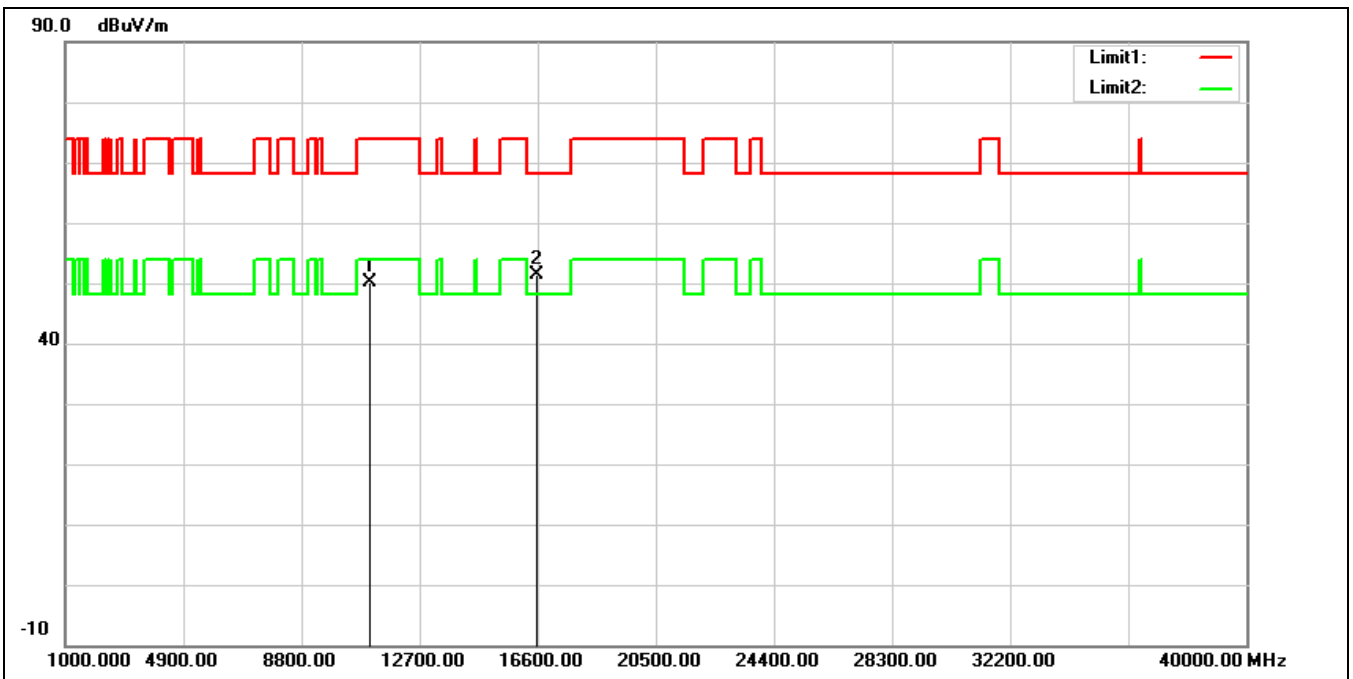


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	35.45	14.78	50.23	74.00	-23.77	peak
2*	16590.000	33.18	18.23	51.41	68.20	-16.79	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

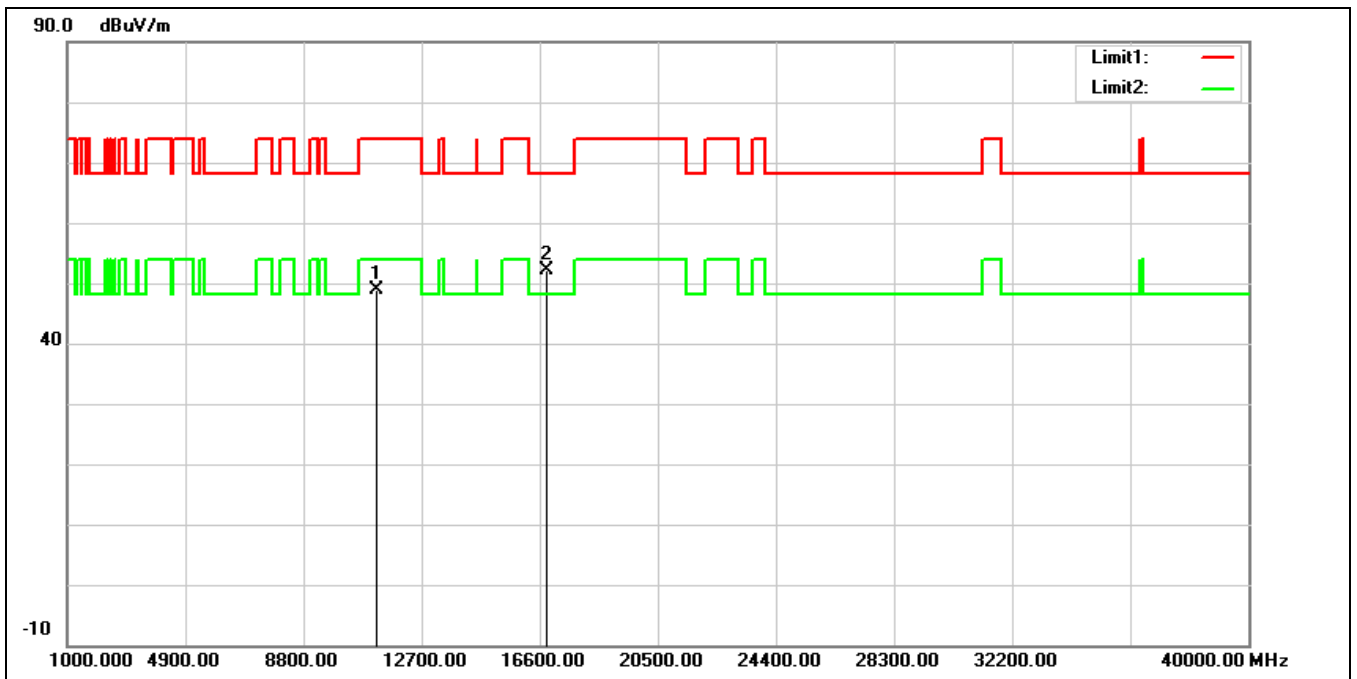

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	34.14	14.70	48.84	74.00	-25.16	peak
2*	16830.000	32.86	19.36	52.22	68.20	-15.98	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

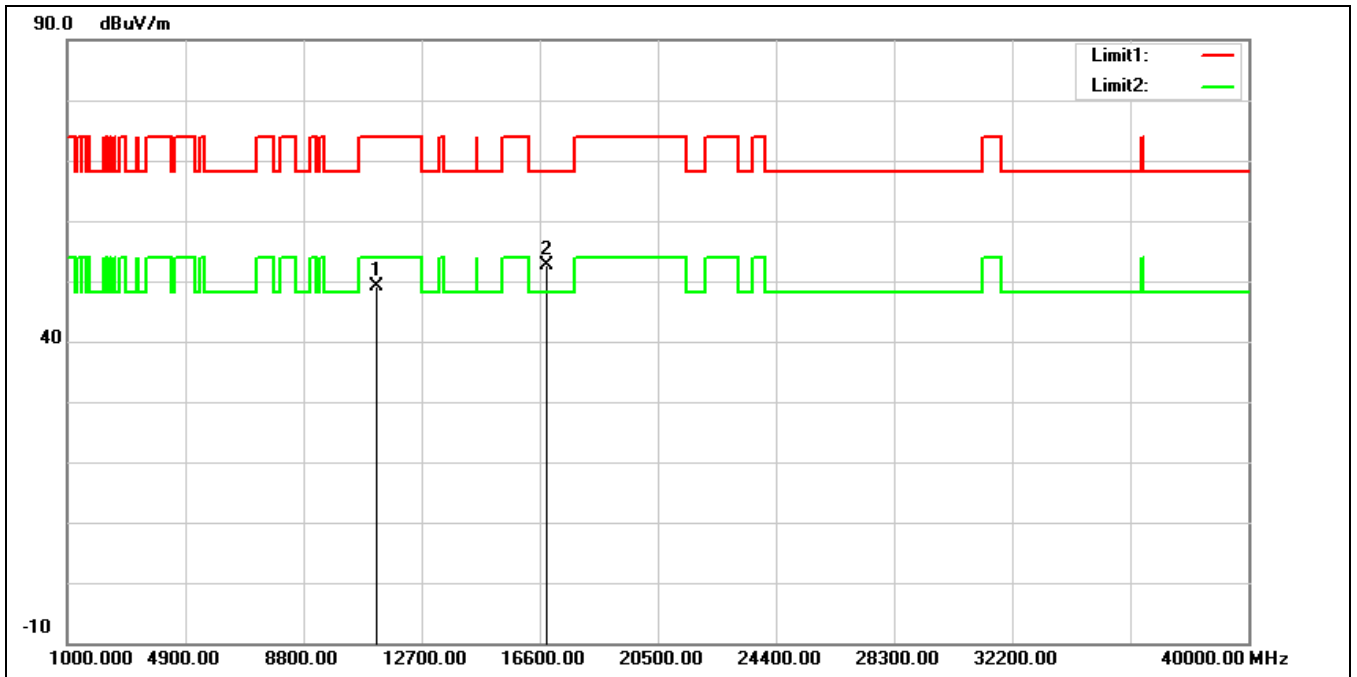

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	34.38	14.70	49.08	74.00	-24.92	peak
2*	16830.000	33.16	19.36	52.52	68.20	-15.68	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

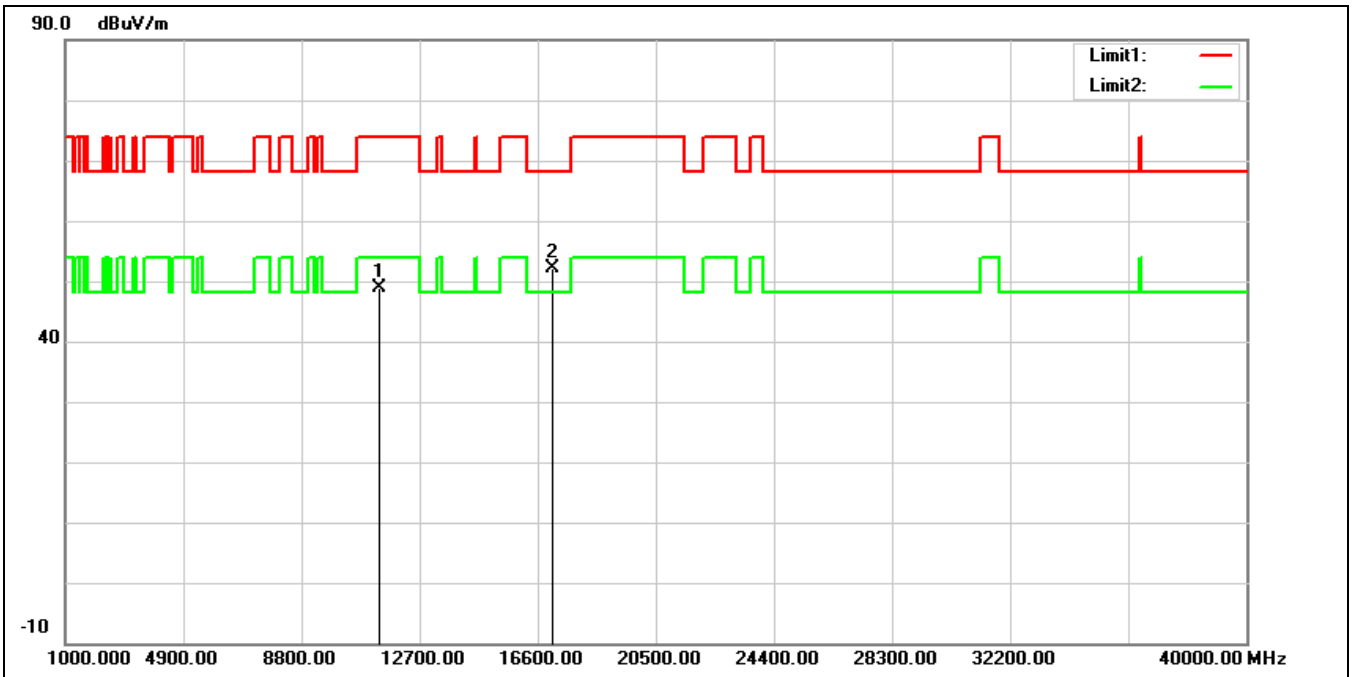


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	33.98	15.00	48.98	74.00	-25.02	peak
2*	17070.000	31.60	20.46	52.06	68.20	-16.14	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

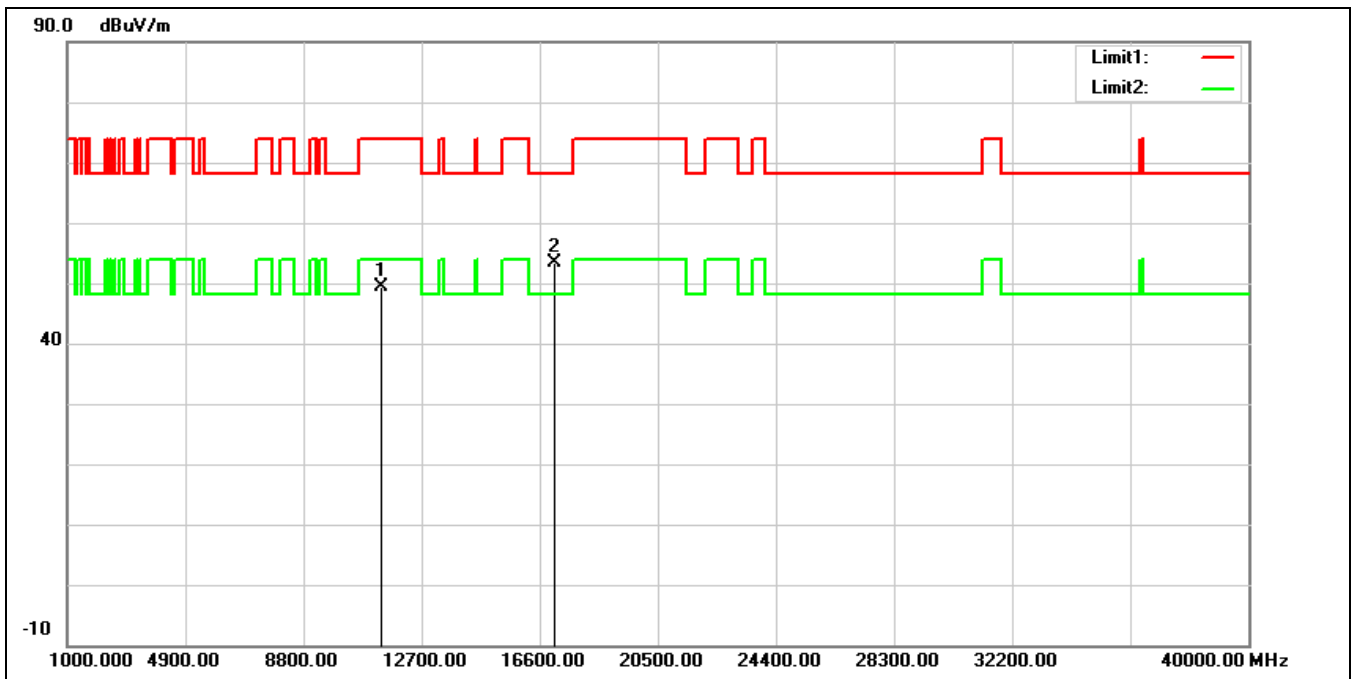


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	34.30	15.00	49.30	74.00	-24.70	peak
2*	17070.000	33.03	20.46	53.49	68.20	-14.71	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

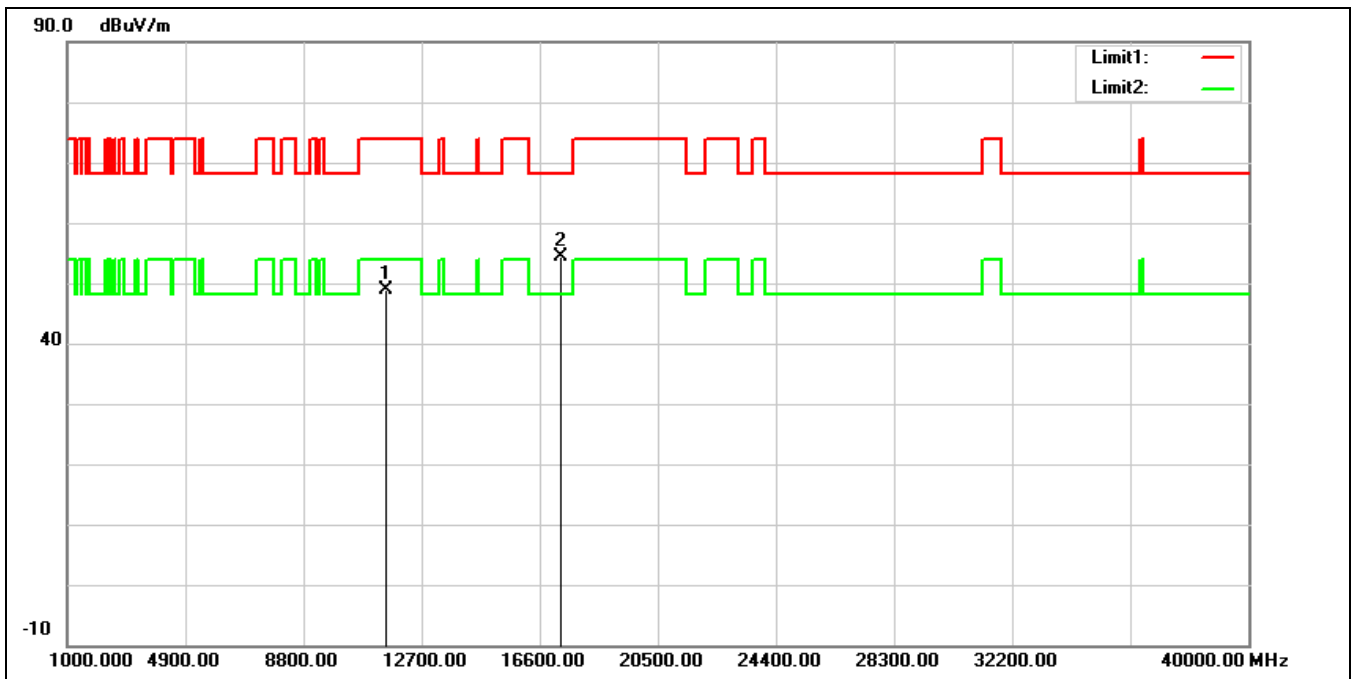


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	33.69	15.28	48.97	74.00	-25.03	peak
2*	17325.000	31.51	22.79	54.30	68.20	-13.90	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

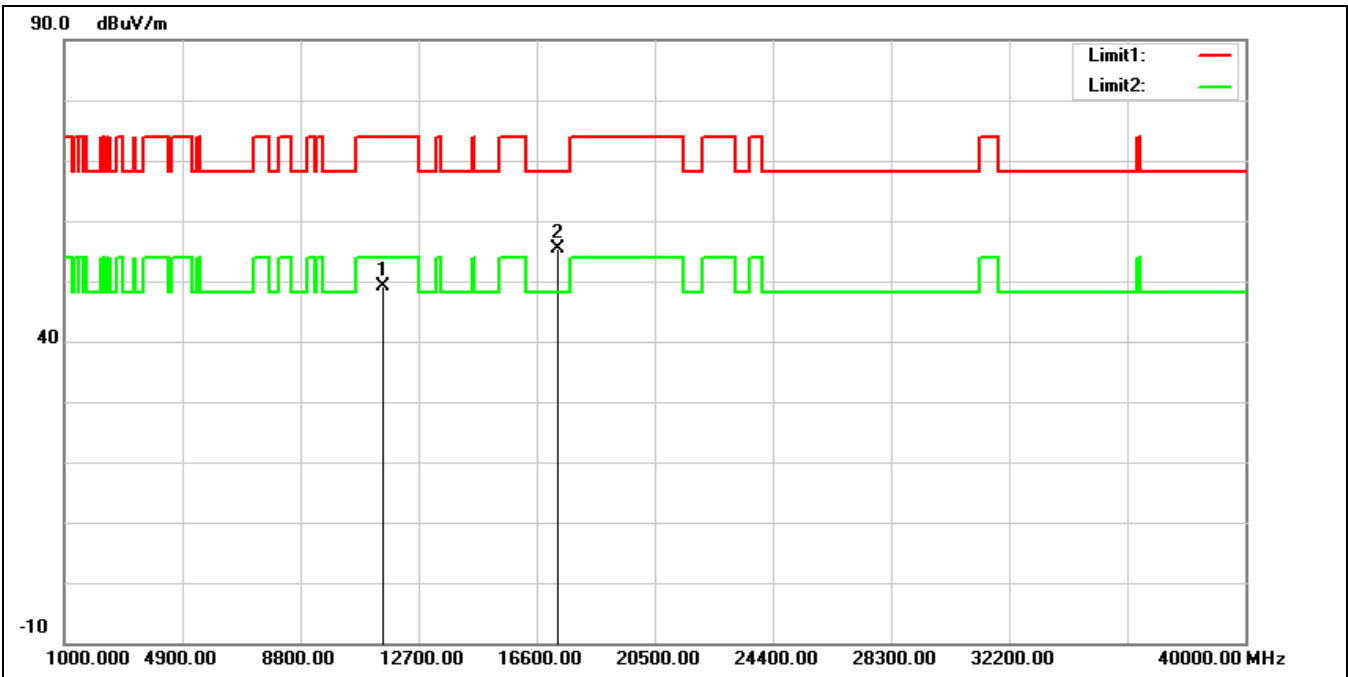


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	33.85	15.28	49.13	74.00	-24.87	peak
2*	17325.000	32.61	22.79	55.40	68.20	-12.80	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

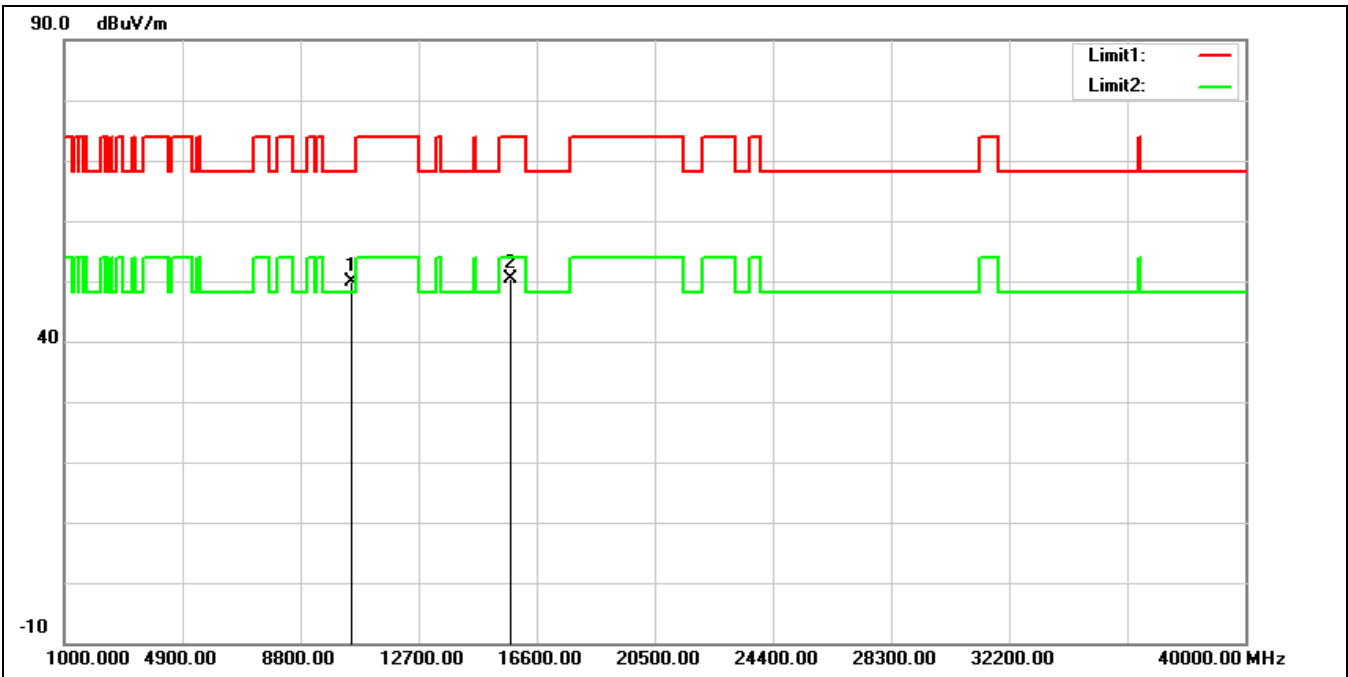


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	35.30	14.66	49.96	68.20	-18.24	peak
2	15750.000	33.14	17.22	50.36	74.00	-23.64	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

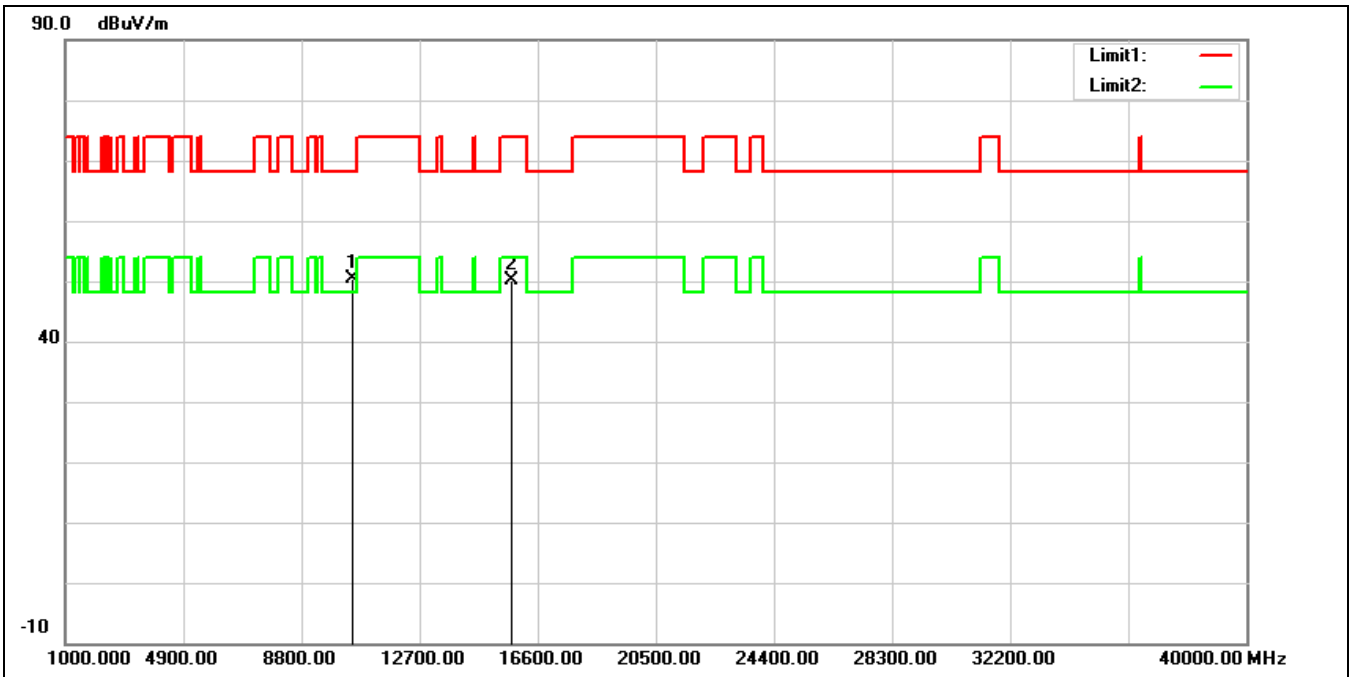


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	35.64	14.66	50.30	68.20	-17.90	peak
2	15750.000	32.98	17.22	50.20	74.00	-23.80	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

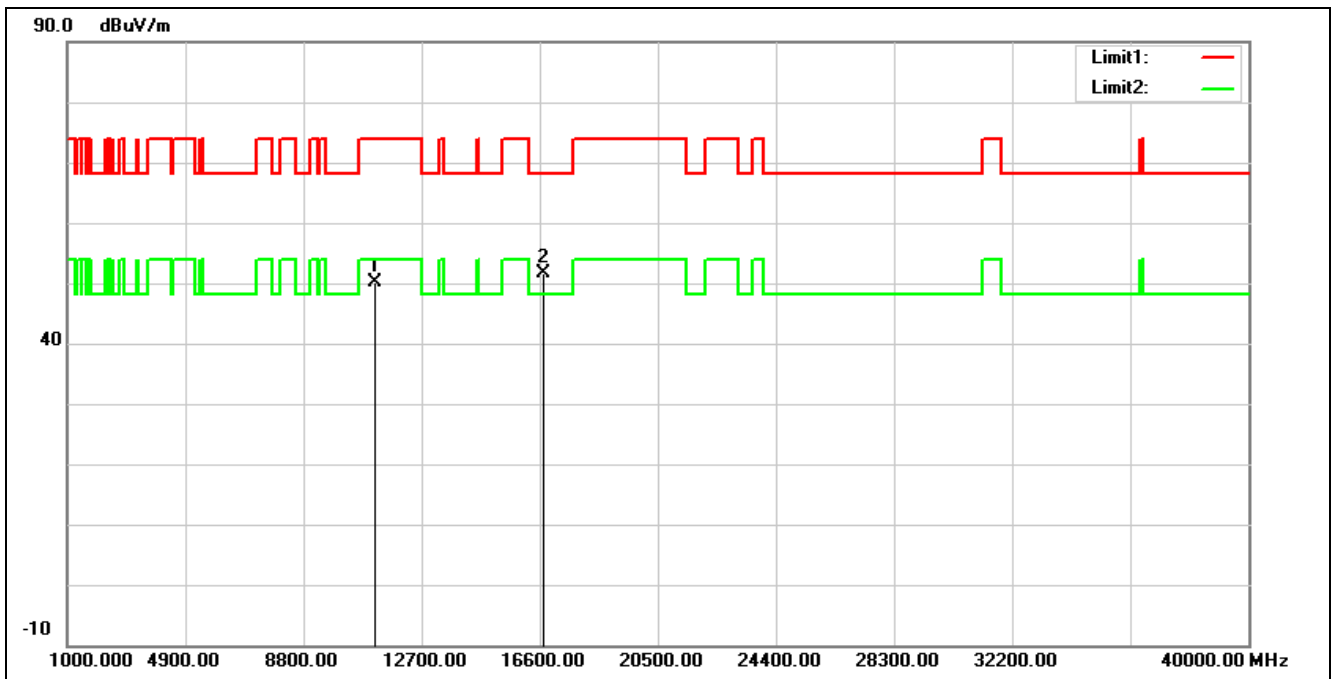

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	35.47	14.77	50.24	74.00	-23.76	peak
2*	16710.000	32.77	18.74	51.51	68.20	-16.69	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

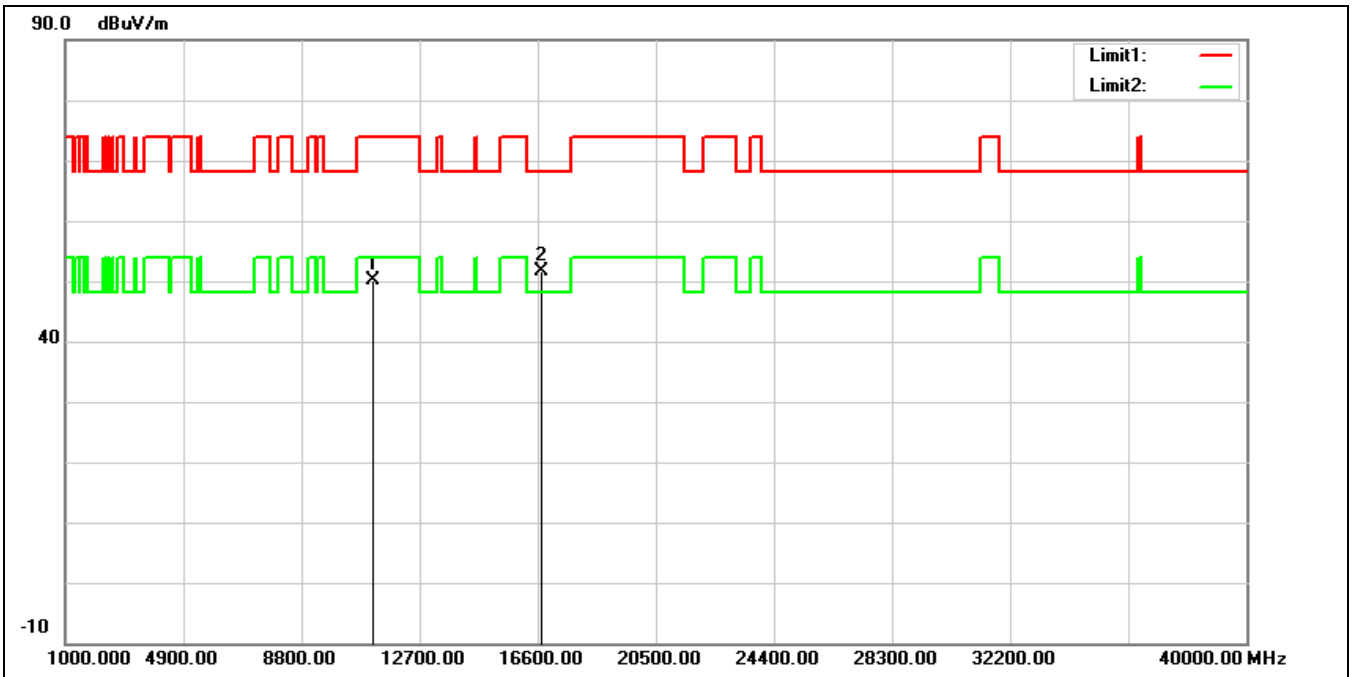

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	35.46	14.77	50.23	74.00	-23.77	peak
2*	16710.000	32.99	18.74	51.73	68.20	-16.47	peak




Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	Simultaneous Transmitting 3G(B5)+BT+wifi 5G		
Remark:			

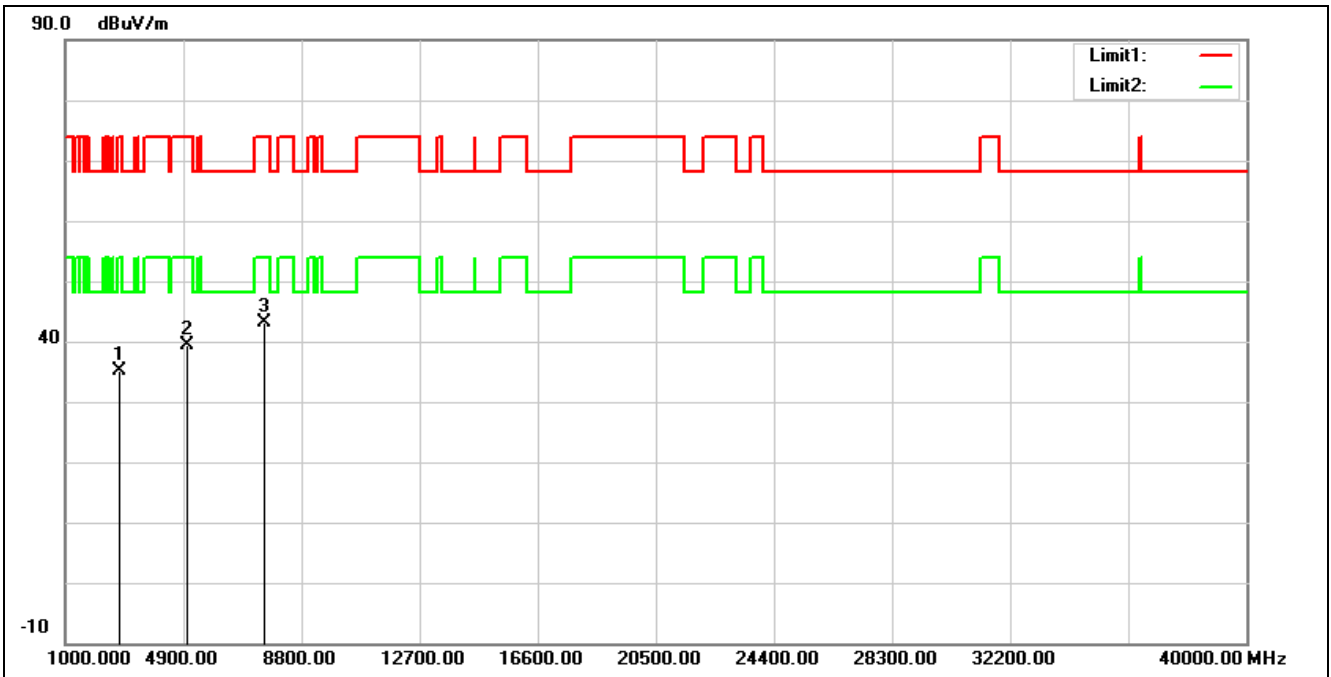


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2785.000	40.51	-5.38	35.13	74.00	-38.87	peak
2	5029.000	38.36	0.93	39.29	74.00	-34.71	peak
3*	7562.000	34.71	8.45	43.16	74.00	-30.84	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	Simultaneous Transmitting 3G(B5)+BT+wifi 5G		
Remark:			

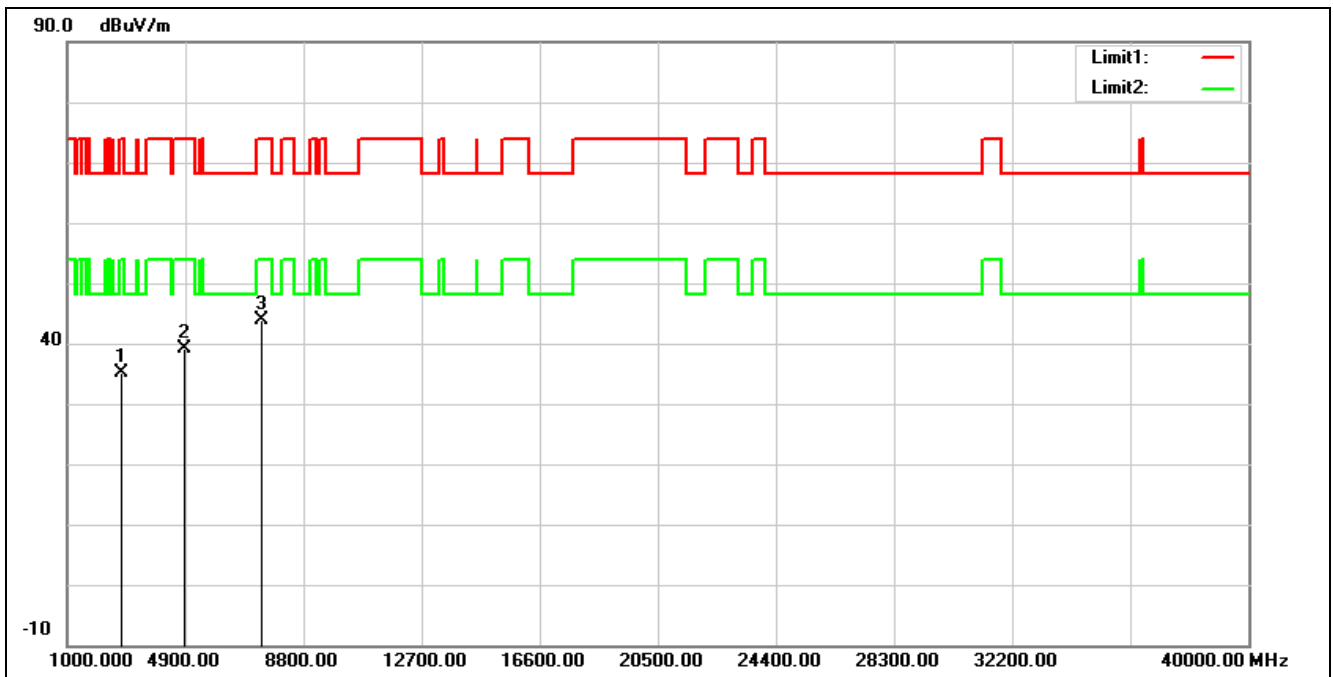


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2802.000	40.32	-5.27	35.05	74.00	-38.95	peak
2	4859.000	38.85	0.31	39.16	74.00	-34.84	peak
3*	7426.000	35.53	8.27	43.80	74.00	-30.20	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	Simultaneous Transmitting 4G(B41_CA 20+20)+BT+wifi 5G		
Remark:			

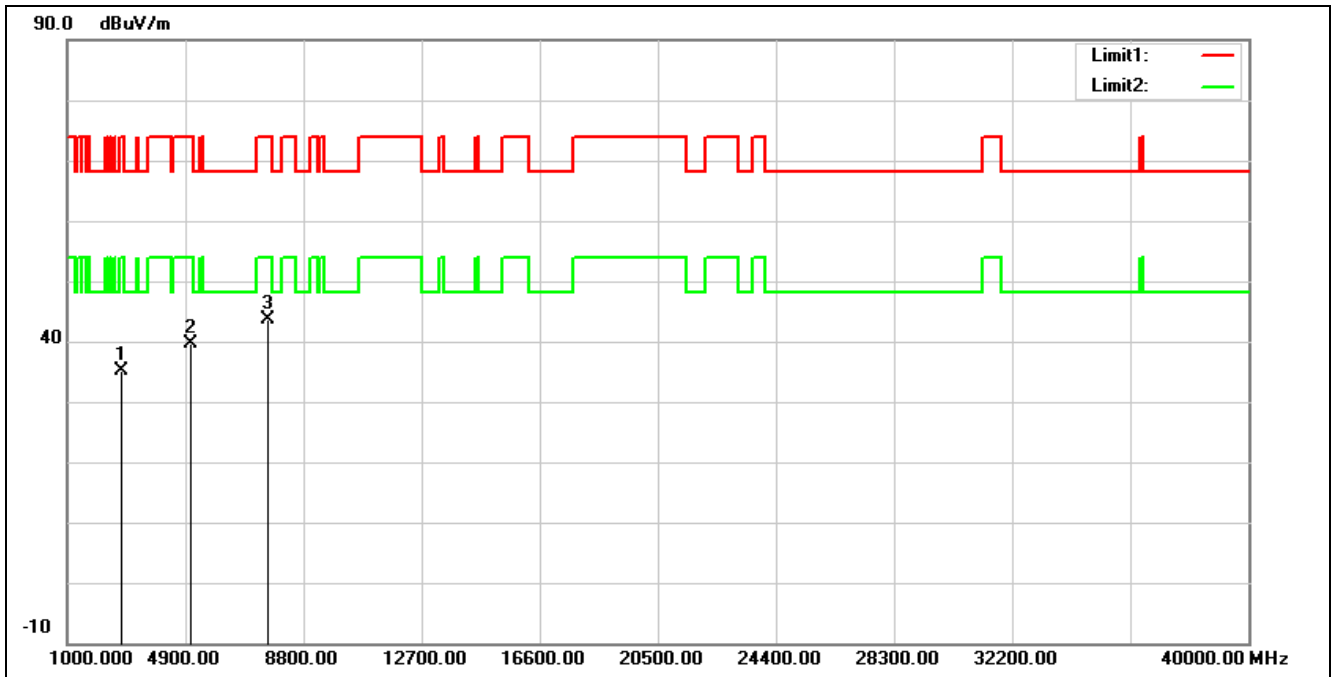

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2802.000	40.52	-5.27	35.25	74.00	-38.75	peak
2	5029.000	38.69	0.93	39.62	74.00	-34.38	peak
3*	7647.000	35.47	8.24	43.71	74.00	-30.29	peak

Standard:	Part 15.247	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	Simultaneous Transmitting 4G(B41_CA 20+20)+BT+wifi 5G		
Remark:			

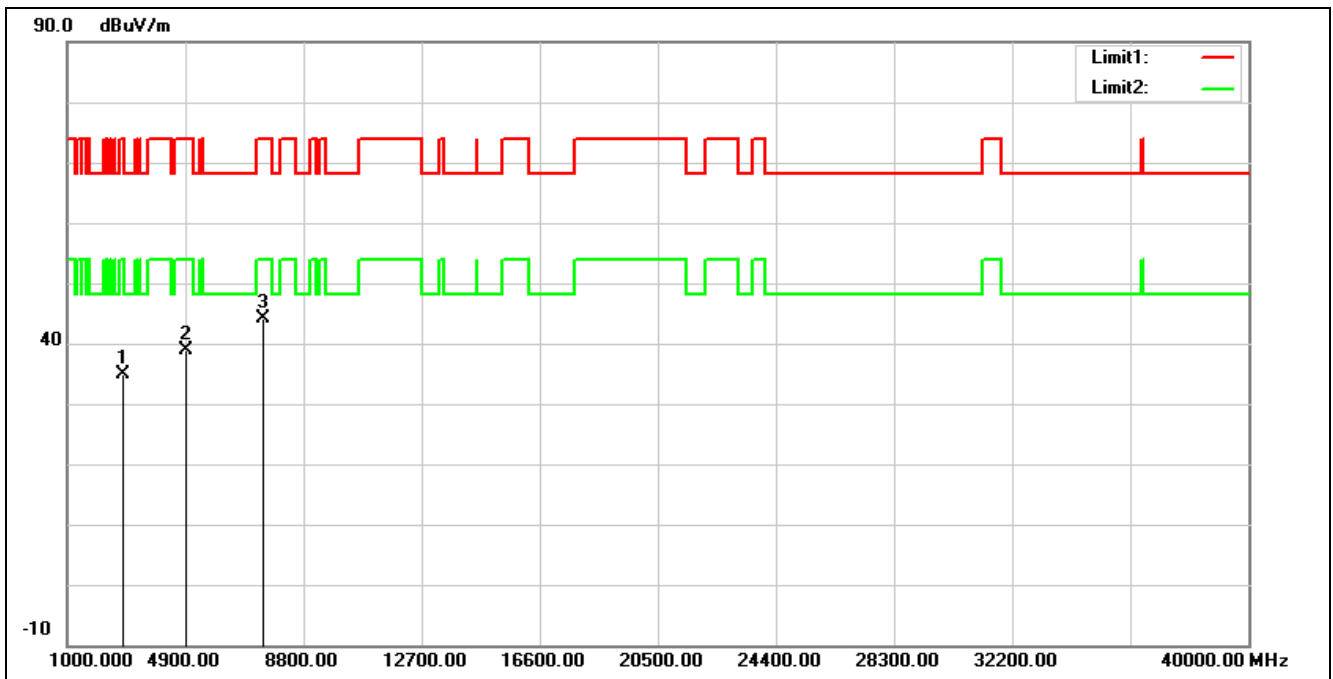


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2853.000	40.19	-5.23	34.96	74.00	-39.04	peak
2	4910.000	38.49	0.47	38.96	74.00	-35.04	peak
3*	7477.000	35.61	8.41	44.02	74.00	-29.98	peak

Band Edge


MIMO\_Peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

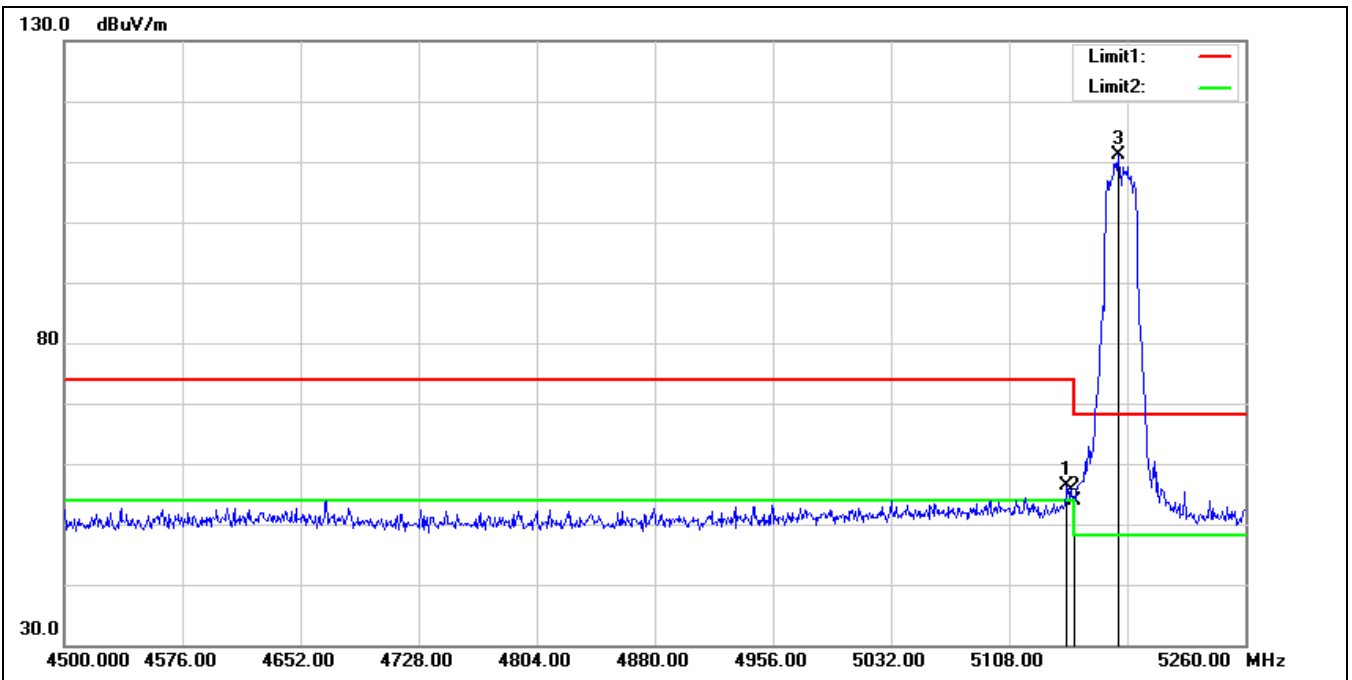


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.240	54.89	1.41	56.30	74.00	-17.70	peak
2	5150.000	52.49	1.42	53.91	74.00	-20.09	peak
3*	5177.920	109.76	1.35	111.11	68.20	42.91	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

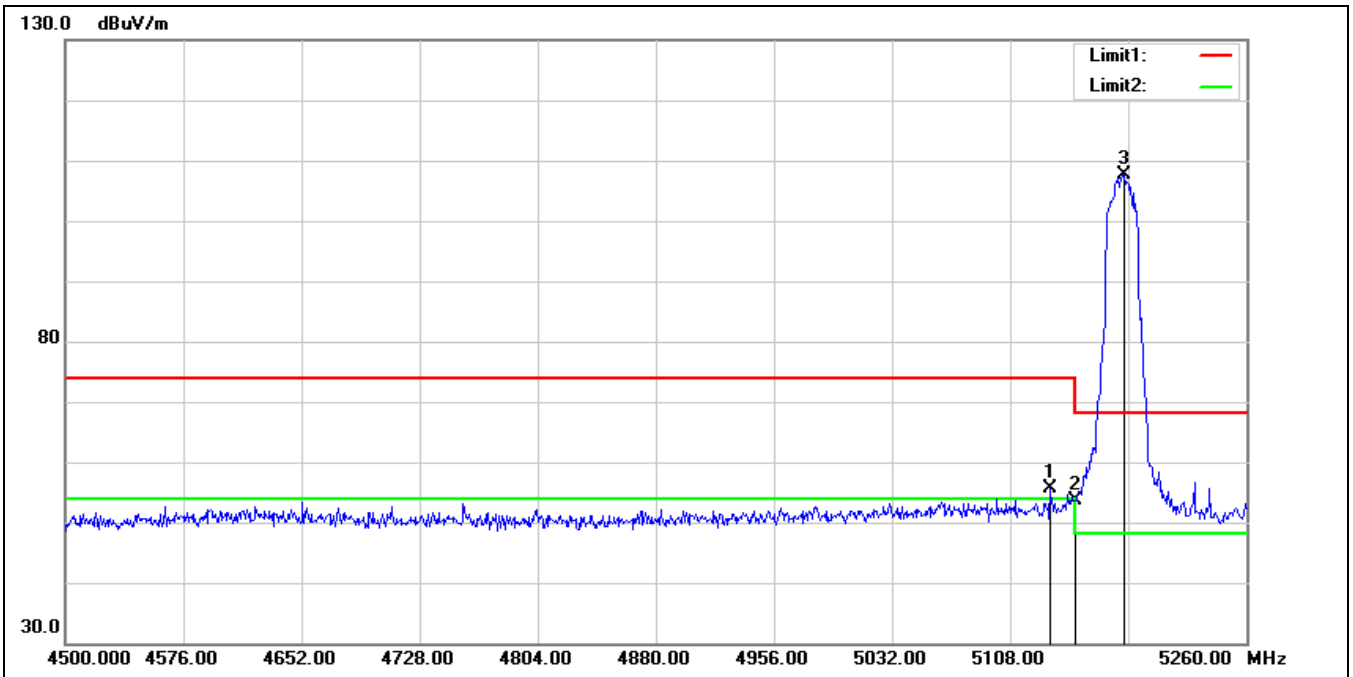


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5133.840	54.22	1.40	55.62	74.00	-18.38	peak
2	5150.000	52.10	1.42	53.52	74.00	-20.48	peak
3*	5181.720	106.30	1.33	107.63	68.20	39.43	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

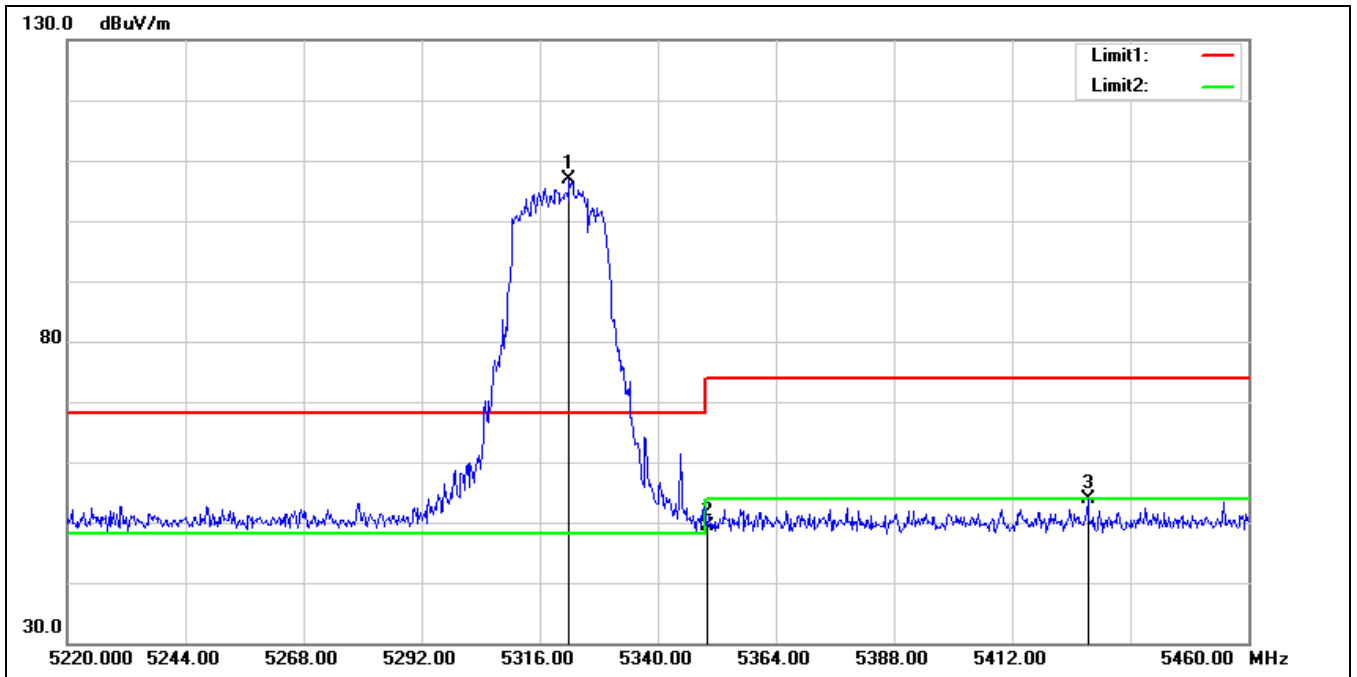

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5322.000	105.79	0.98	106.77	68.20	38.57	peak
2	5350.000	48.23	1.08	49.31	74.00	-24.69	peak
3	5427.360	52.26	1.64	53.90	74.00	-20.10	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

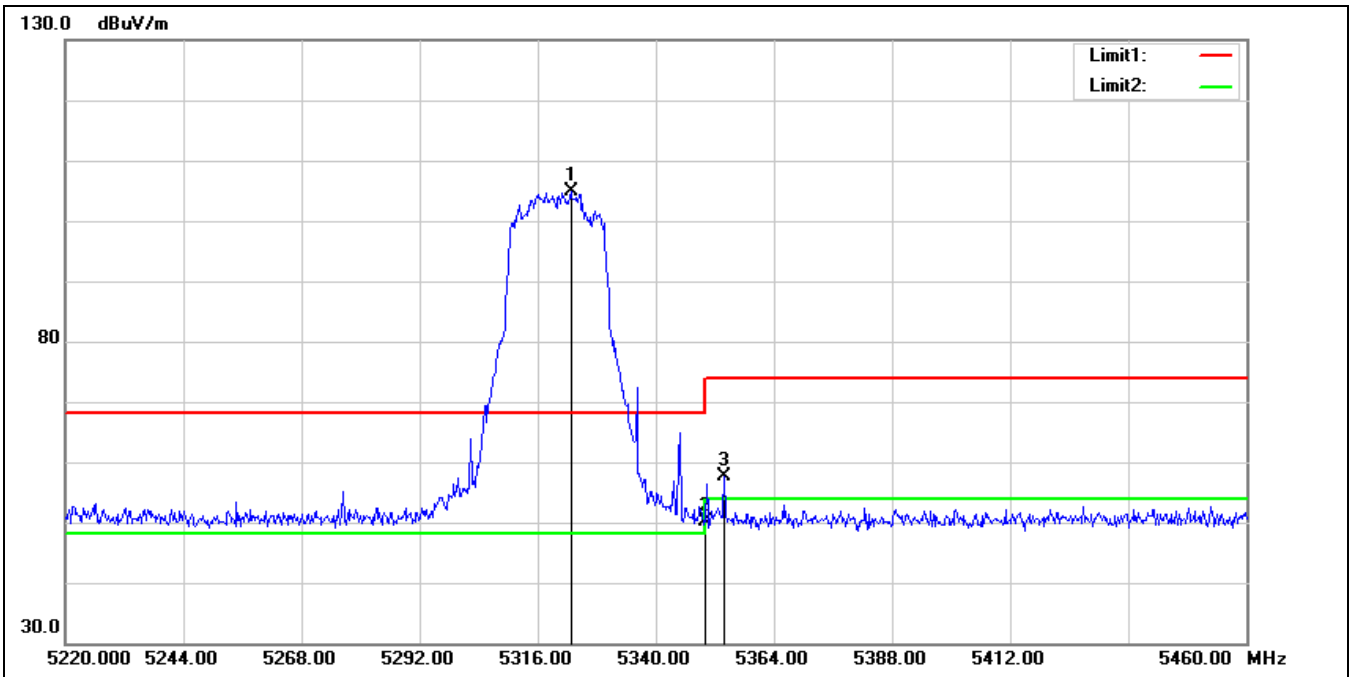

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5322.720	103.90	0.99	104.89	68.20	36.69	peak
2	5350.000	49.04	1.08	50.12	74.00	-23.88	peak
3	5353.920	56.51	1.11	57.62	74.00	-16.38	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

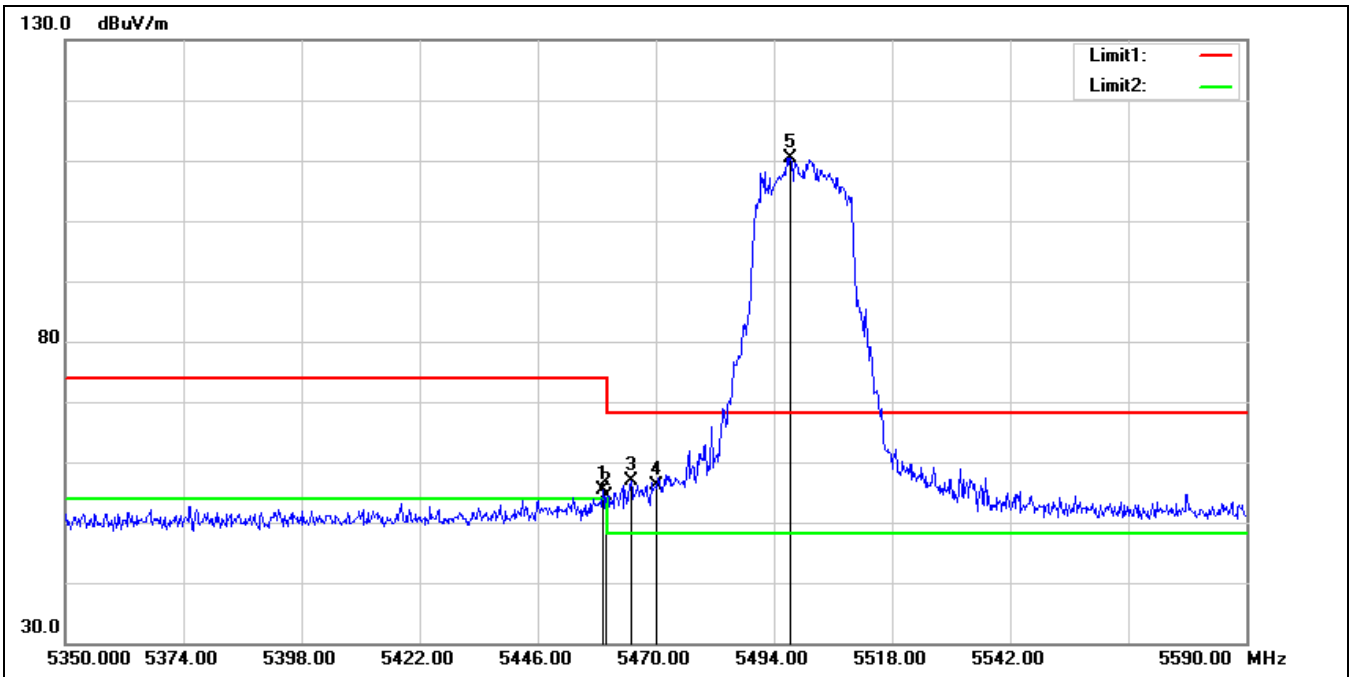


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.200	53.75	1.73	55.48	74.00	-18.52	peak
2	5460.000	52.66	1.73	54.39	74.00	-19.61	peak
3	5464.960	55.15	1.73	56.88	68.20	-11.32	peak
4	5470.000	54.48	1.74	56.22	68.20	-11.98	peak
5*	5497.360	108.72	1.78	110.50	68.20	42.30	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

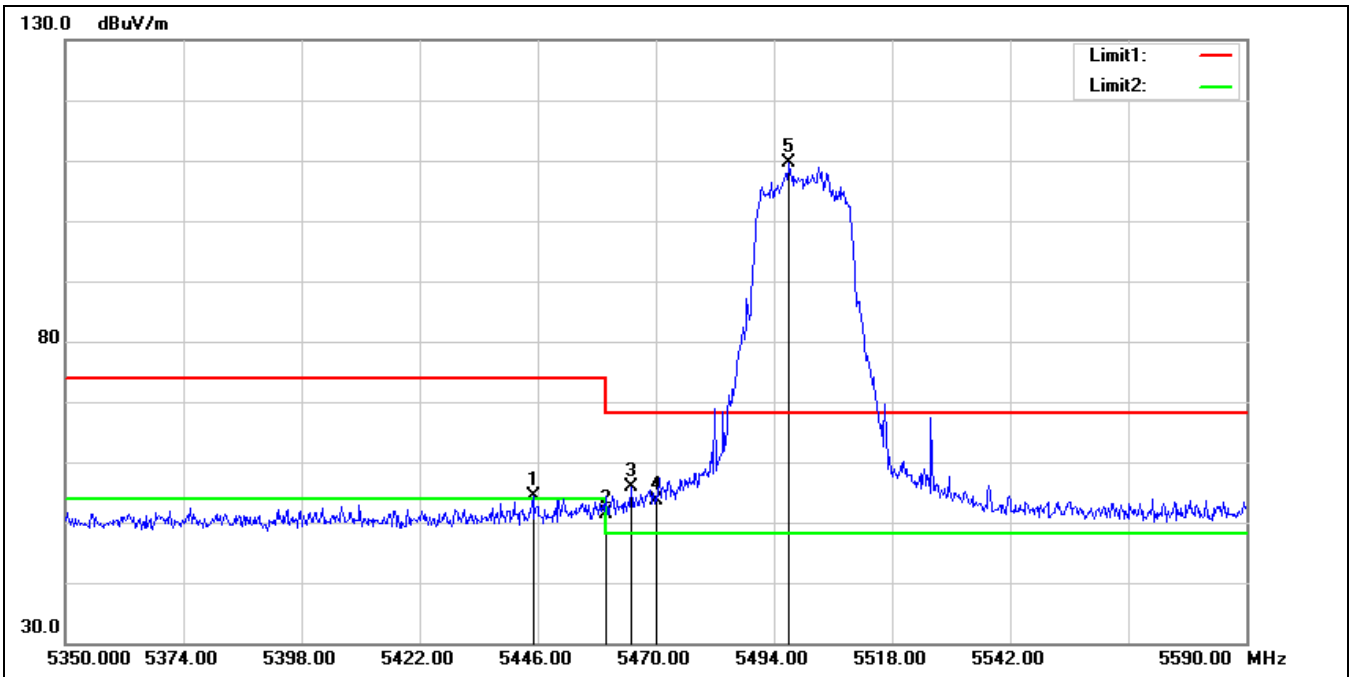


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.040	52.72	1.70	54.42	74.00	-19.58	peak
2	5460.000	49.74	1.73	51.47	74.00	-22.53	peak
3	5464.960	54.05	1.73	55.78	68.20	-12.42	peak
4	5470.000	51.86	1.74	53.60	68.20	-14.60	peak
5*	5497.120	107.87	1.78	109.65	68.20	41.45	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

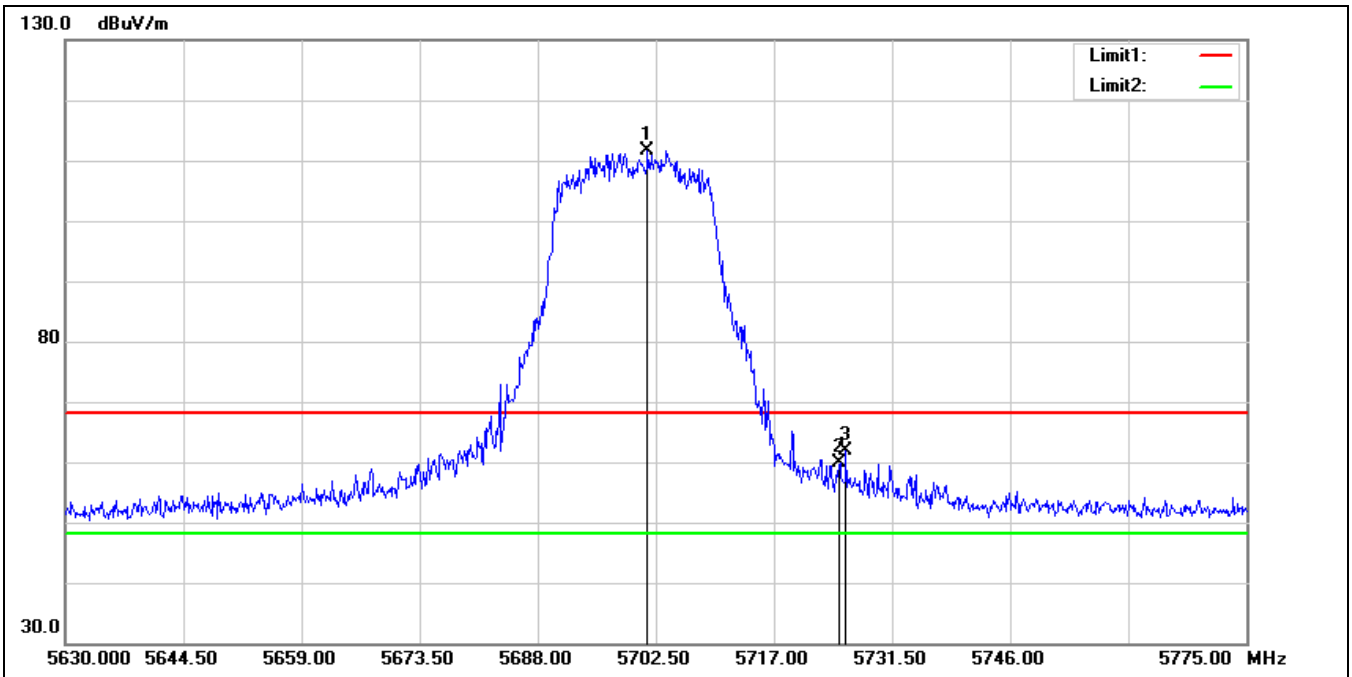


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5701.485	109.54	2.09	111.63	68.20	43.43	peak
2	5725.000	57.54	2.30	59.84	68.20	-8.36	peak
3	5725.845	59.51	2.31	61.82	68.20	-6.38	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5700 MHz		
Remark:			

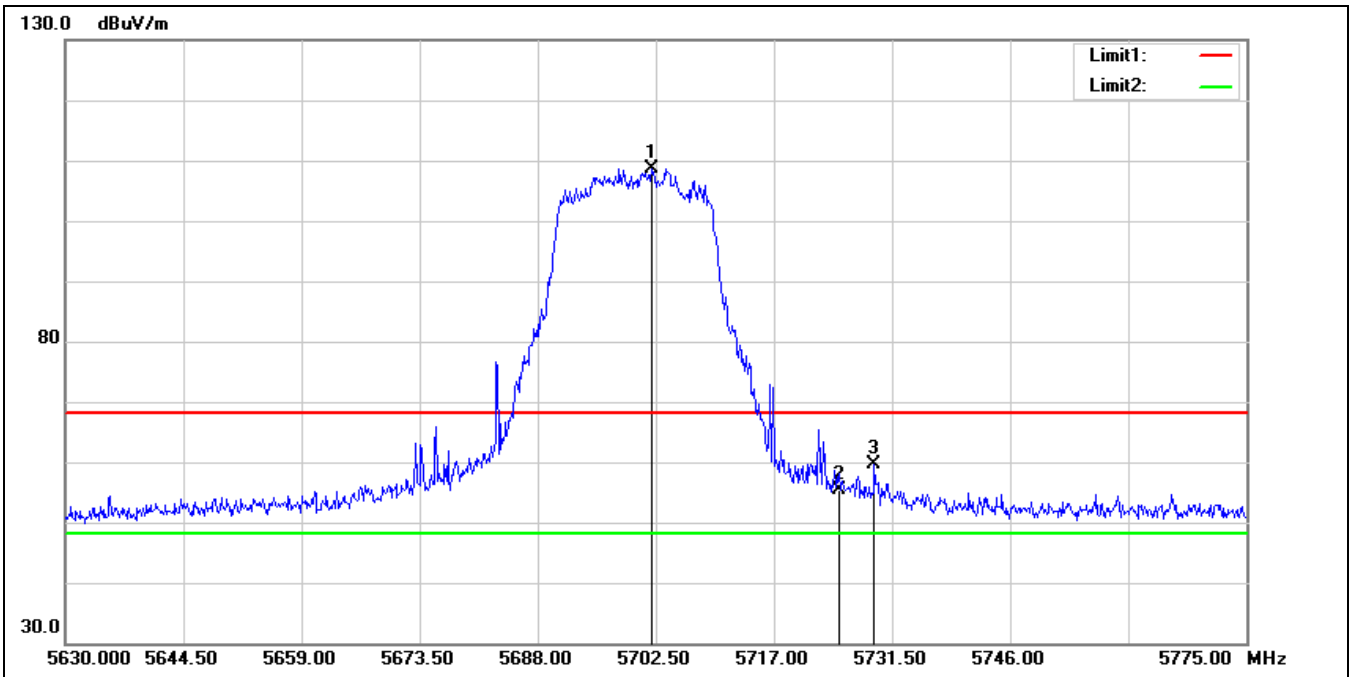


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5701.920	106.65	2.10	108.75	68.20	40.55	peak
2	5725.000	53.16	2.30	55.46	68.20	-12.74	peak
3	5729.325	57.17	2.35	59.52	68.20	-8.68	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

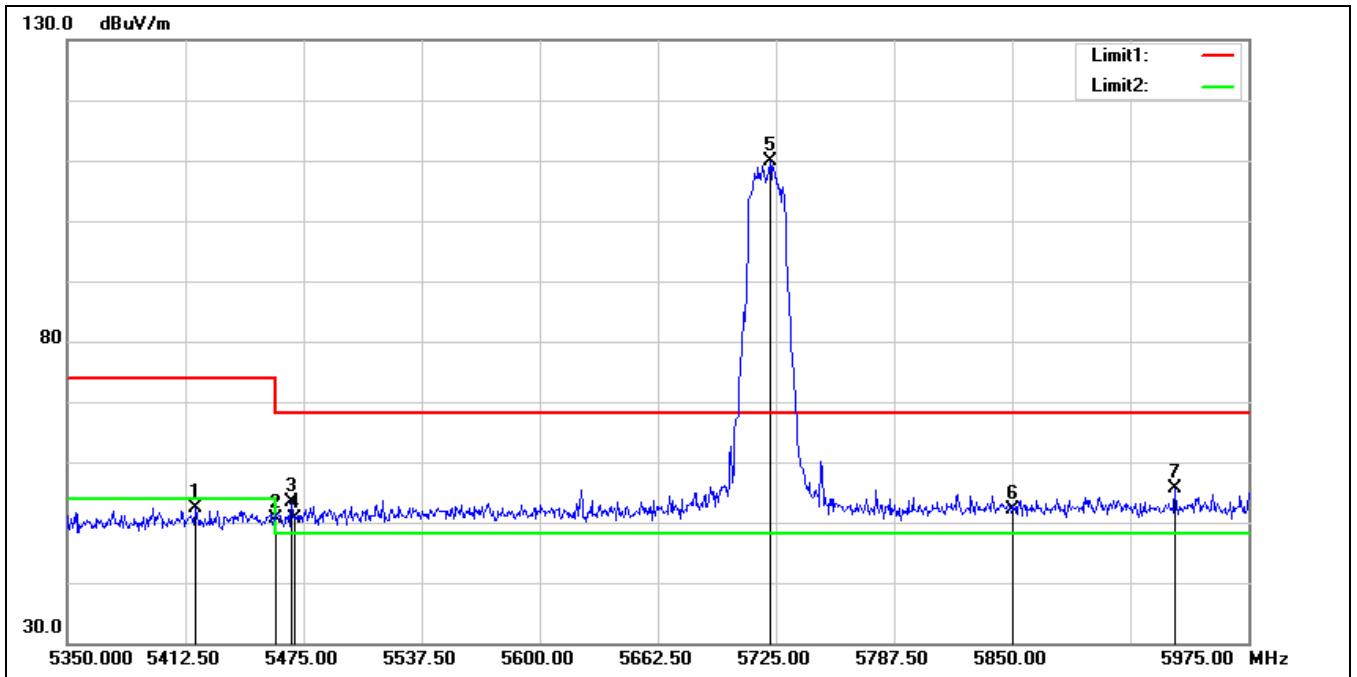


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5417.500	50.88	1.61	52.49	74.00	-21.51	peak
2	5460.000	48.78	1.73	50.51	74.00	-23.49	peak
3	5468.750	51.76	1.74	53.50	68.20	-14.70	peak
4	5470.000	48.98	1.74	50.72	68.20	-17.48	peak
5*	5721.875	107.71	2.27	109.98	68.20	41.78	peak
6	5850.000	49.15	2.98	52.13	68.20	-16.07	peak
7	5936.250	52.52	3.06	55.58	68.20	-12.62	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

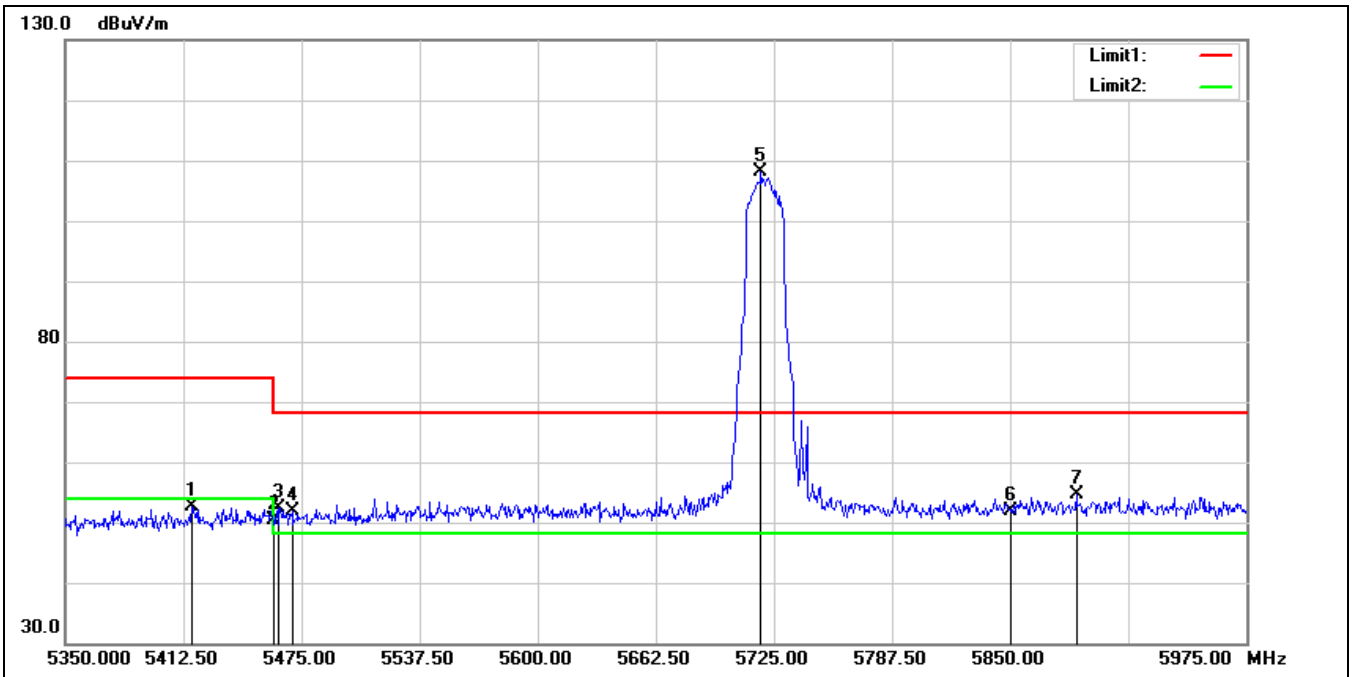


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5416.875	50.92	1.60	52.52	74.00	-21.48	peak
2	5460.000	48.64	1.73	50.37	74.00	-23.63	peak
3	5463.125	50.72	1.73	52.45	68.20	-15.75	peak
4	5470.000	50.11	1.74	51.85	68.20	-16.35	peak
5*	5718.125	106.01	2.24	108.25	68.20	40.05	peak
6	5850.000	48.92	2.98	51.90	68.20	-16.30	peak
7	5885.000	51.47	3.11	54.58	68.20	-13.62	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

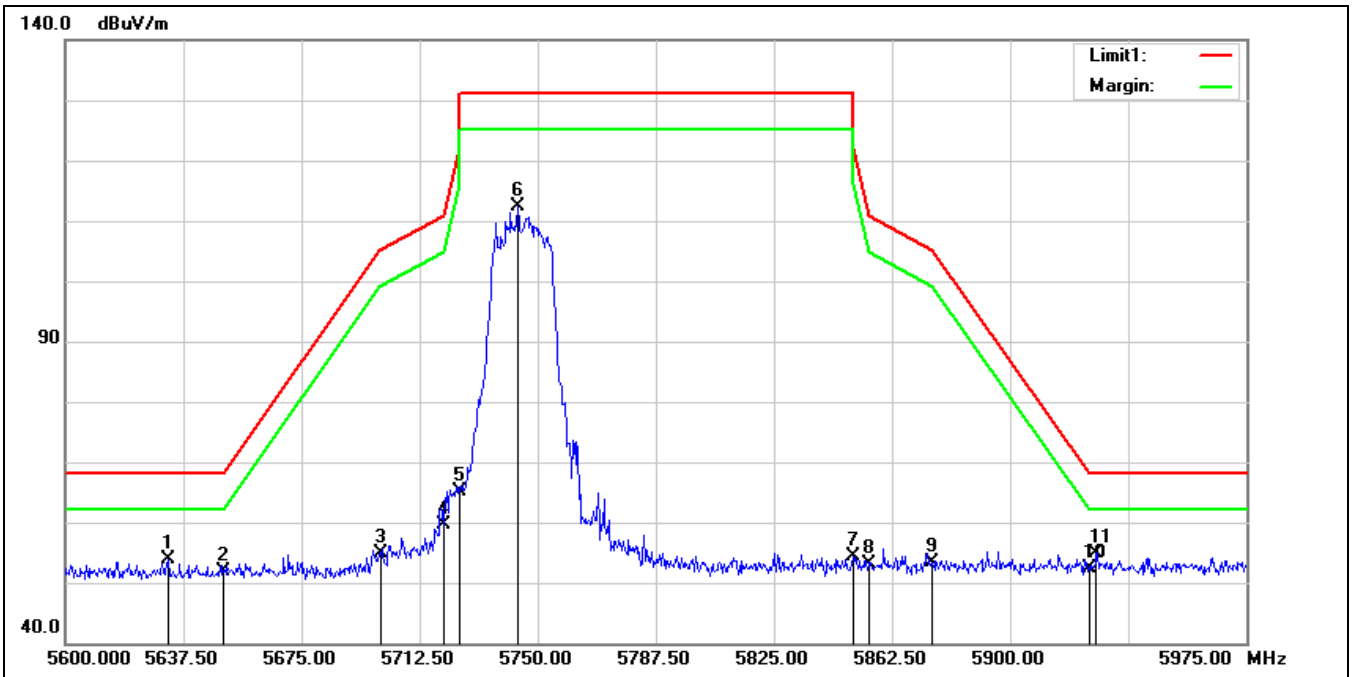

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5632.625	51.93	1.95	53.88	68.20	-14.32	peak
2	5650.000	50.10	1.90	52.00	68.20	-16.20	peak
3	5700.000	52.74	2.06	54.80	105.20	-50.40	peak
4	5720.000	57.37	2.26	59.63	110.80	-51.17	peak
5	5725.000	62.89	2.30	65.19	122.20	-57.01	peak
6	5743.625	109.78	2.49	112.27	131.20	-18.93	peak
7	5850.000	51.40	2.98	54.38	122.20	-67.82	peak
8	5855.000	50.05	3.01	53.06	110.80	-57.74	peak
9	5875.000	50.41	3.07	53.48	105.20	-51.72	peak
10	5925.000	49.36	3.10	52.46	68.20	-15.74	peak
11*	5927.375	51.82	3.09	54.91	68.20	-13.29	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5745 MHz		
Remark:			

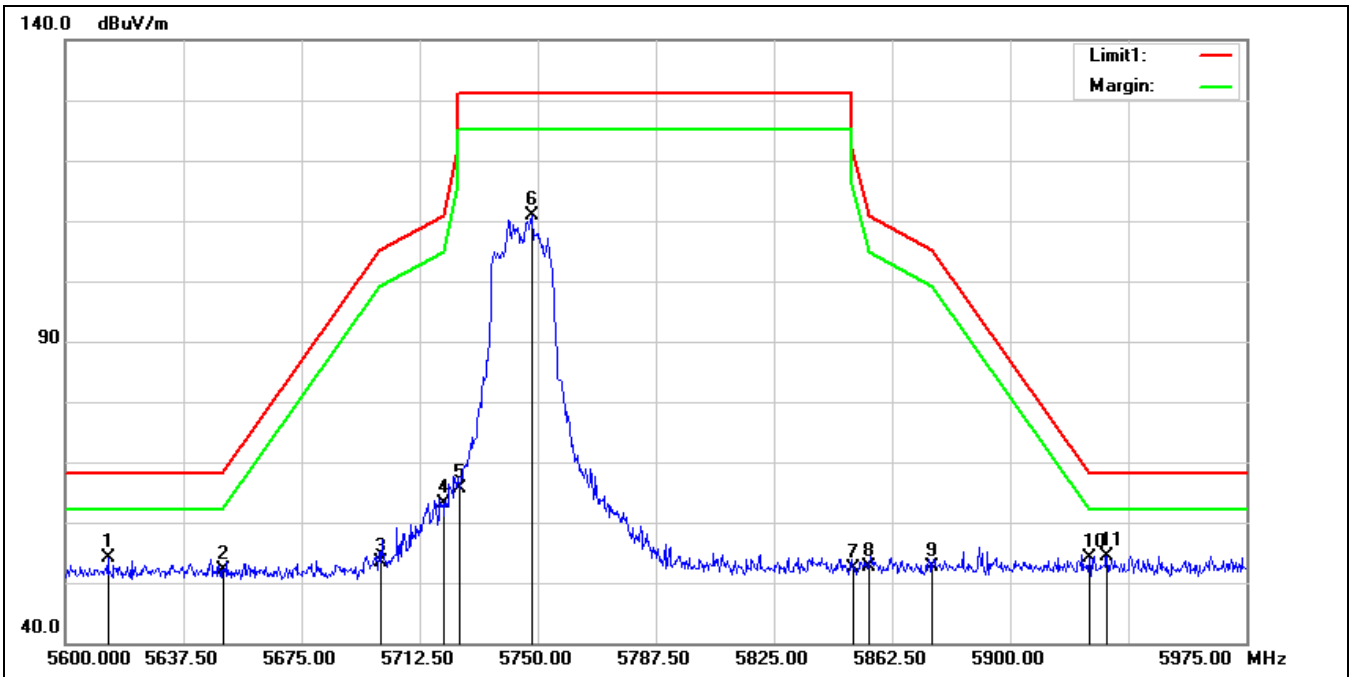

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5613.500	52.20	1.99	54.19	68.20	-14.01	peak
2	5650.000	50.11	1.90	52.01	68.20	-16.19	peak
3	5700.000	51.39	2.06	53.45	105.20	-51.75	peak
4	5720.000	60.96	2.26	63.22	110.80	-47.58	peak
5	5725.000	63.29	2.30	65.59	122.20	-56.61	peak
6	5748.125	108.46	2.52	110.98	131.20	-20.22	peak
7	5850.000	49.40	2.98	52.38	122.20	-69.82	peak
8	5855.000	49.54	3.01	52.55	110.80	-58.25	peak
9	5875.000	49.49	3.07	52.56	105.20	-52.64	peak
10	5925.000	51.04	3.10	54.14	68.20	-14.06	peak
11*	5930.750	51.39	3.08	54.47	68.20	-13.73	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

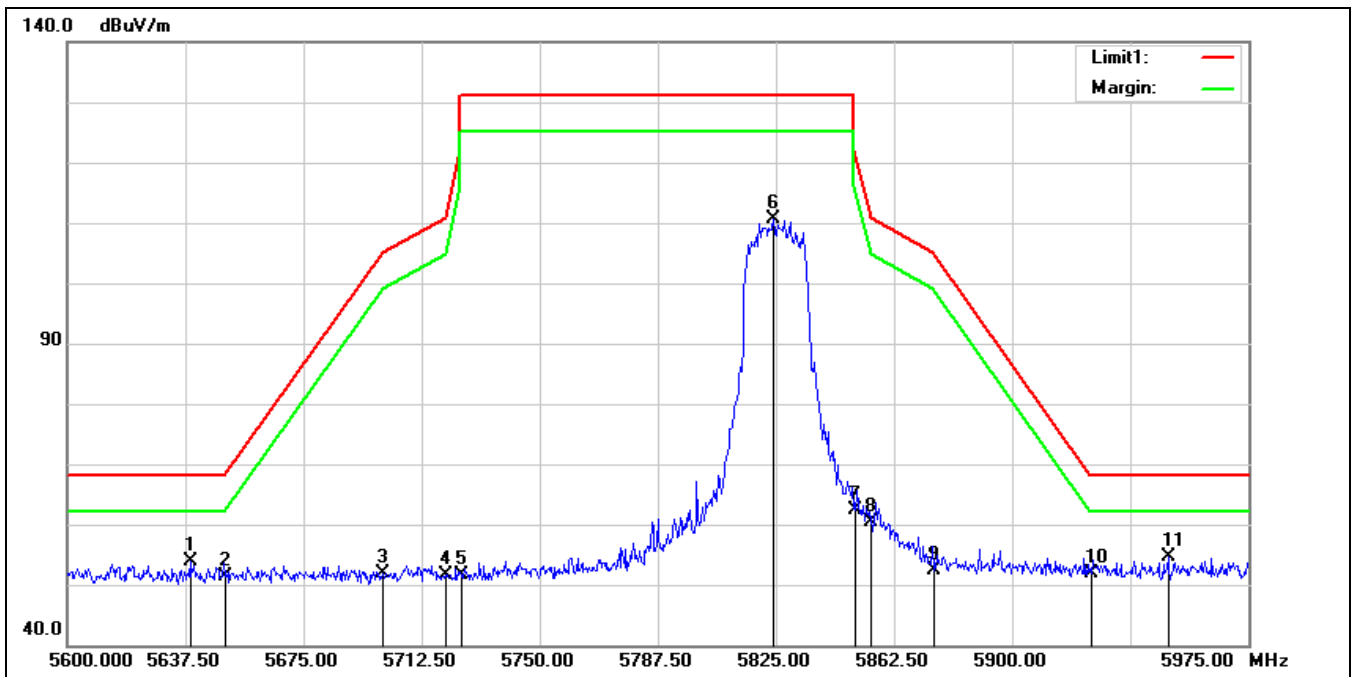


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5639.000	52.04	1.92	53.96	68.20	-14.24	peak
2	5650.000	49.50	1.90	51.40	68.20	-16.80	peak
3	5700.000	49.86	2.06	51.92	105.20	-53.28	peak
4	5720.000	49.27	2.26	51.53	110.80	-59.27	peak
5	5725.000	49.23	2.30	51.53	122.20	-70.67	peak
6	5824.250	107.77	2.89	110.66	131.20	-20.54	peak
7	5850.000	59.51	2.98	62.49	122.20	-59.71	peak
8	5855.000	57.28	3.01	60.29	110.80	-50.51	peak
9	5875.000	49.40	3.07	52.47	105.20	-52.73	peak
10	5925.000	48.84	3.10	51.94	68.20	-16.26	peak
11*	5949.500	51.56	3.02	54.58	68.20	-13.62	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5825 MHz		
Remark:			

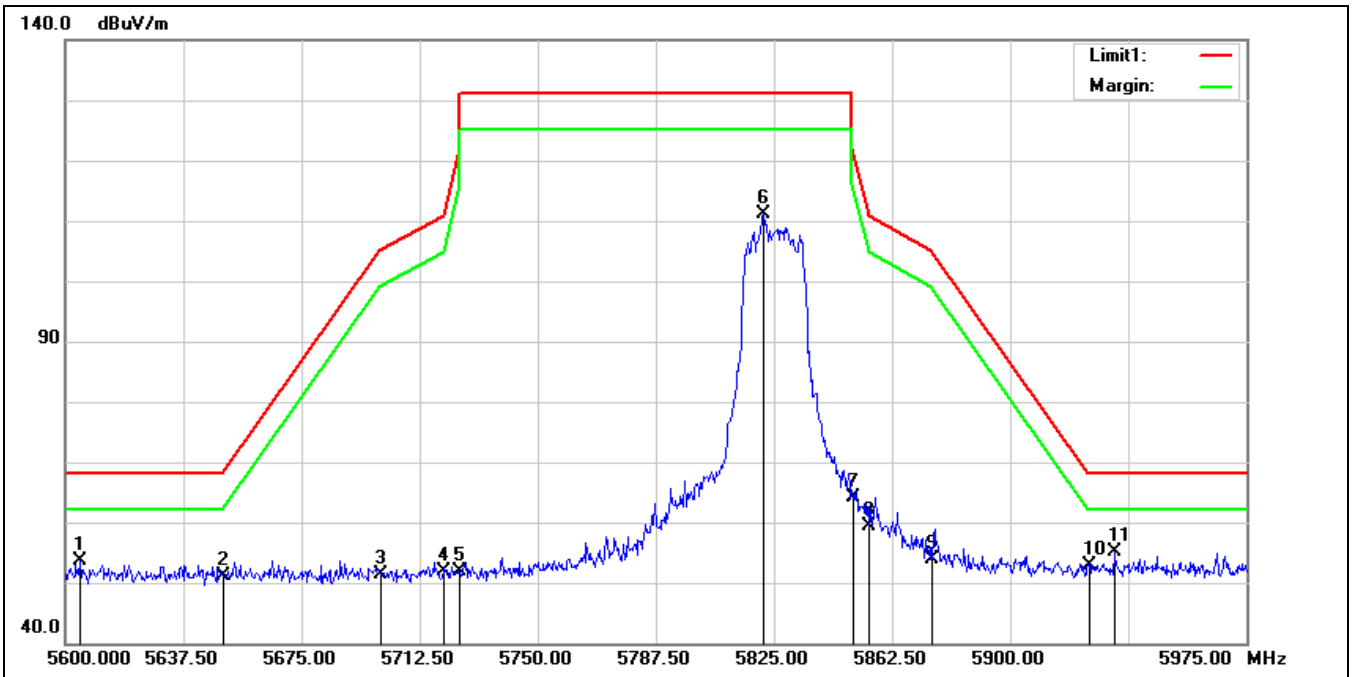


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5604.875	51.50	2.02	53.52	68.20	-14.68	peak
2	5650.000	49.19	1.90	51.09	68.20	-17.11	peak
3	5700.000	49.33	2.06	51.39	105.20	-53.81	peak
4	5720.000	49.50	2.26	51.76	110.80	-59.04	peak
5	5725.000	49.67	2.30	51.97	122.20	-70.23	peak
6	5821.625	108.37	2.88	111.25	131.20	-19.95	peak
7	5850.000	61.19	2.98	64.17	122.20	-58.03	peak
8	5855.000	56.33	3.01	59.34	110.80	-51.46	peak
9	5875.000	50.83	3.07	53.90	105.20	-51.30	peak
10	5925.000	49.71	3.10	52.81	68.20	-15.39	peak
11*	5933.000	51.96	3.07	55.03	68.20	-13.17	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

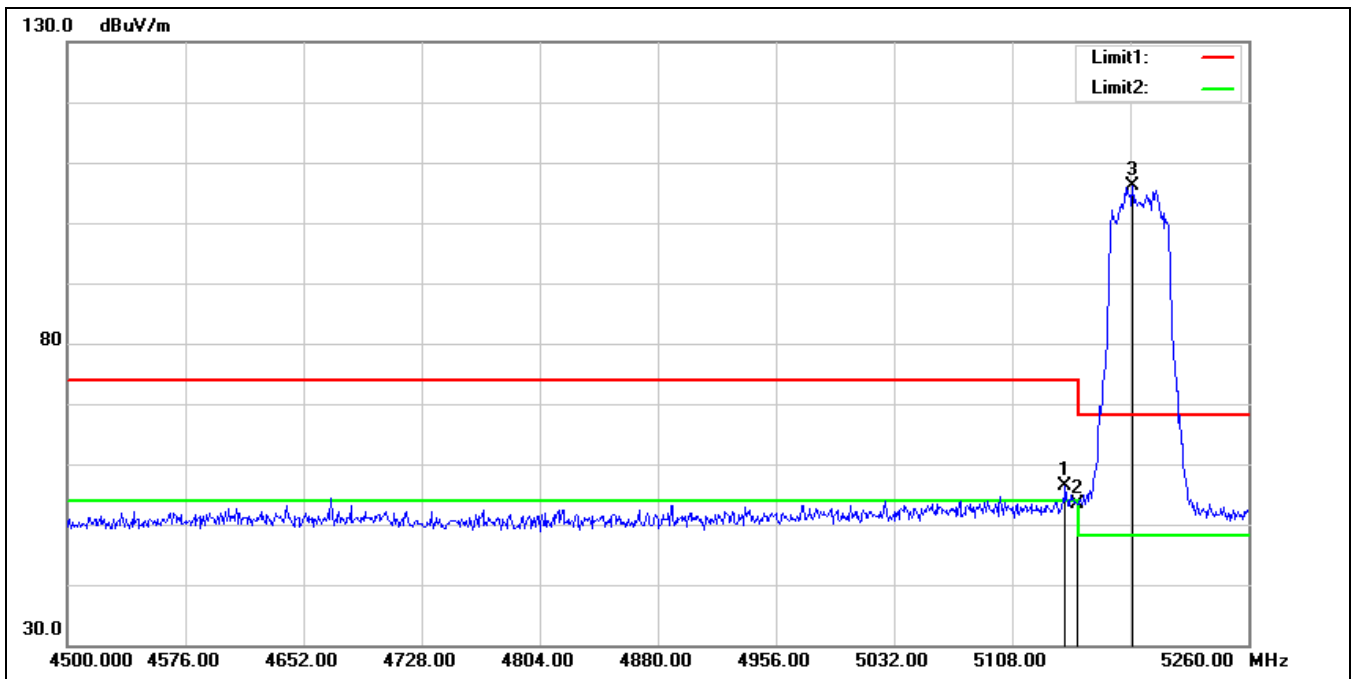


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.200	55.07	1.41	56.48	74.00	-17.52	peak
2	5150.000	51.93	1.42	53.35	74.00	-20.65	peak
3*	5185.520	104.79	1.32	106.11	68.20	37.91	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

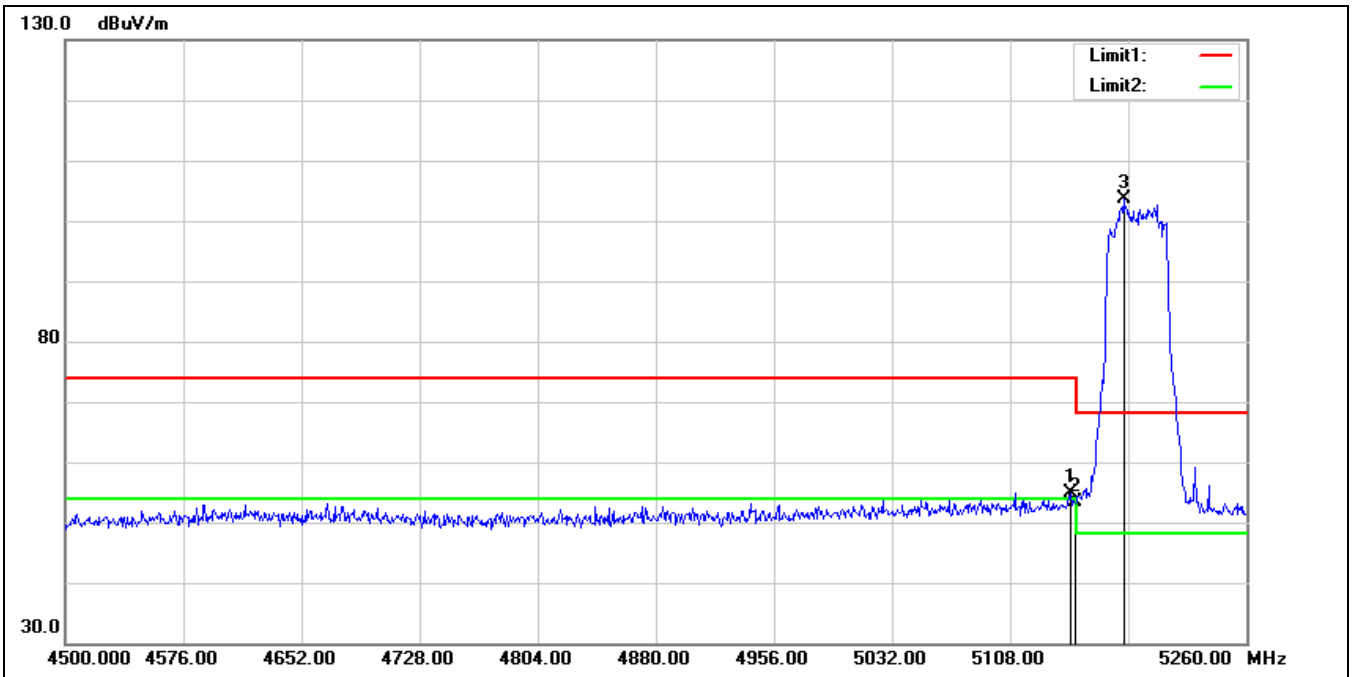


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	53.57	1.42	54.99	74.00	-19.01	peak
2	5150.000	52.08	1.42	53.50	74.00	-20.50	peak
3*	5180.960	102.29	1.34	103.63	68.20	35.43	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

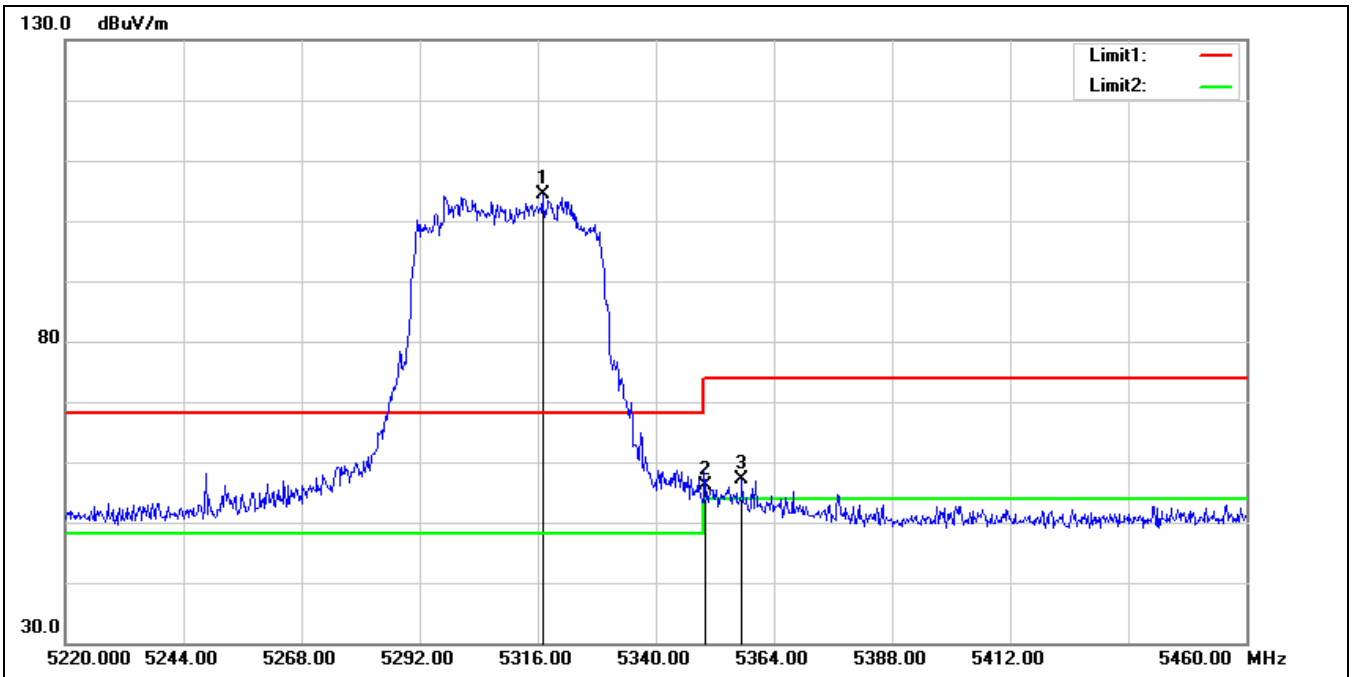


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5316.960	103.32	0.97	104.29	68.20	36.09	peak
2	5350.000	54.99	1.08	56.07	74.00	-17.93	peak
3	5357.520	55.97	1.15	57.12	74.00	-16.88	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

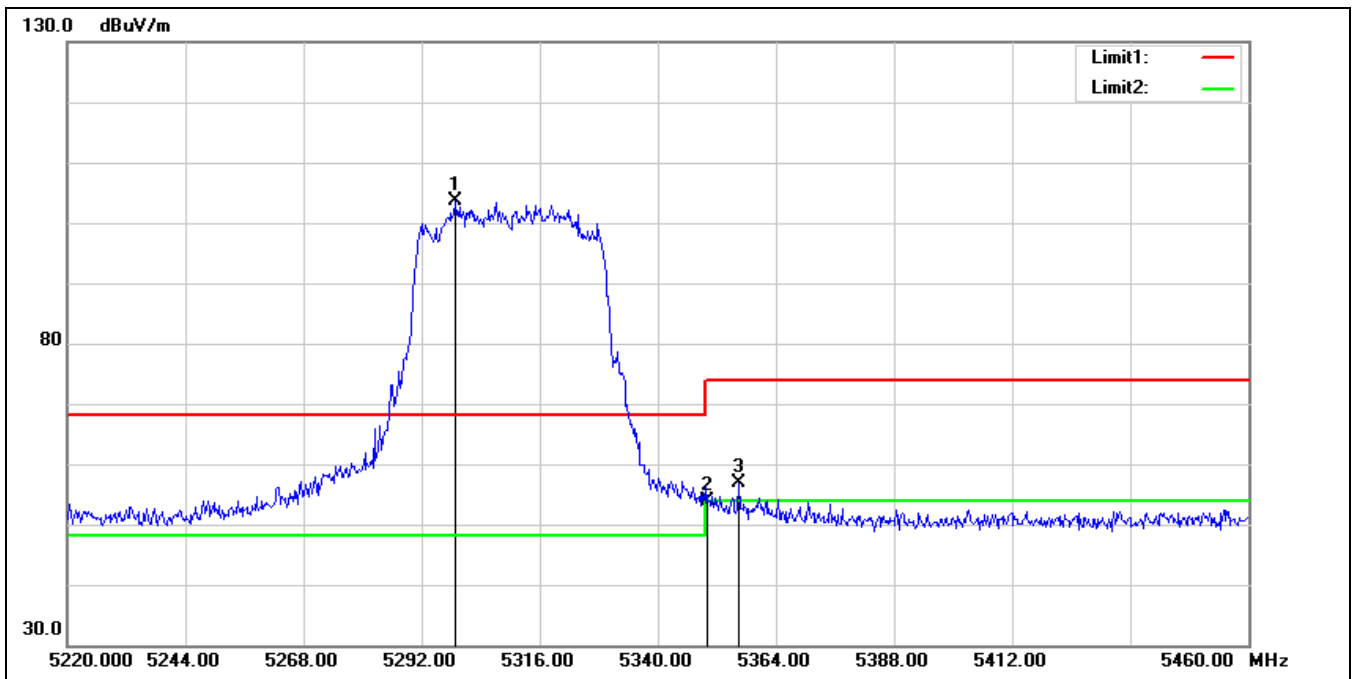


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5298.720	102.69	0.93	103.62	68.20	35.42	peak
2	5350.000	52.92	1.08	54.00	74.00	-20.00	peak
3	5356.560	55.67	1.14	56.81	74.00	-17.19	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

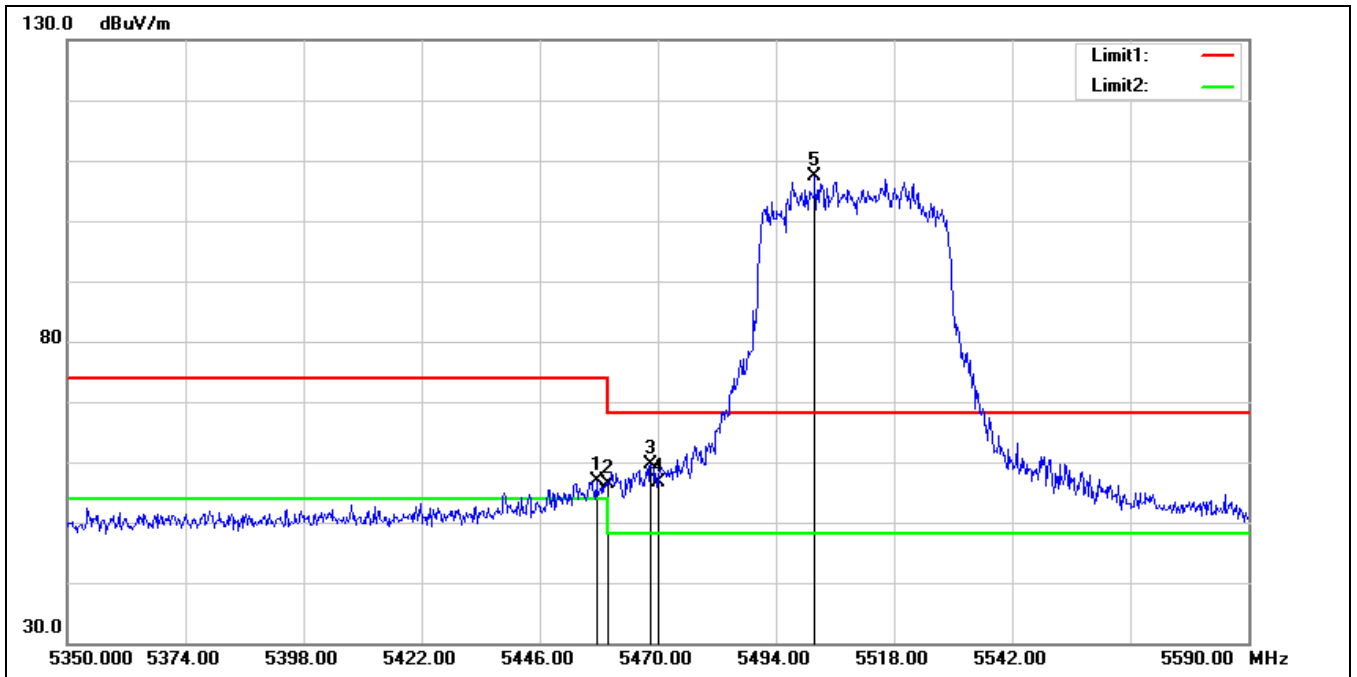

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.520	55.17	1.72	56.89	74.00	-17.11	peak
2	5460.000	54.68	1.73	56.41	74.00	-17.59	peak
3	5468.560	57.83	1.74	59.57	68.20	-8.63	peak
4	5470.000	54.89	1.74	56.63	68.20	-11.57	peak
5*	5501.920	105.55	1.79	107.34	68.20	39.14	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

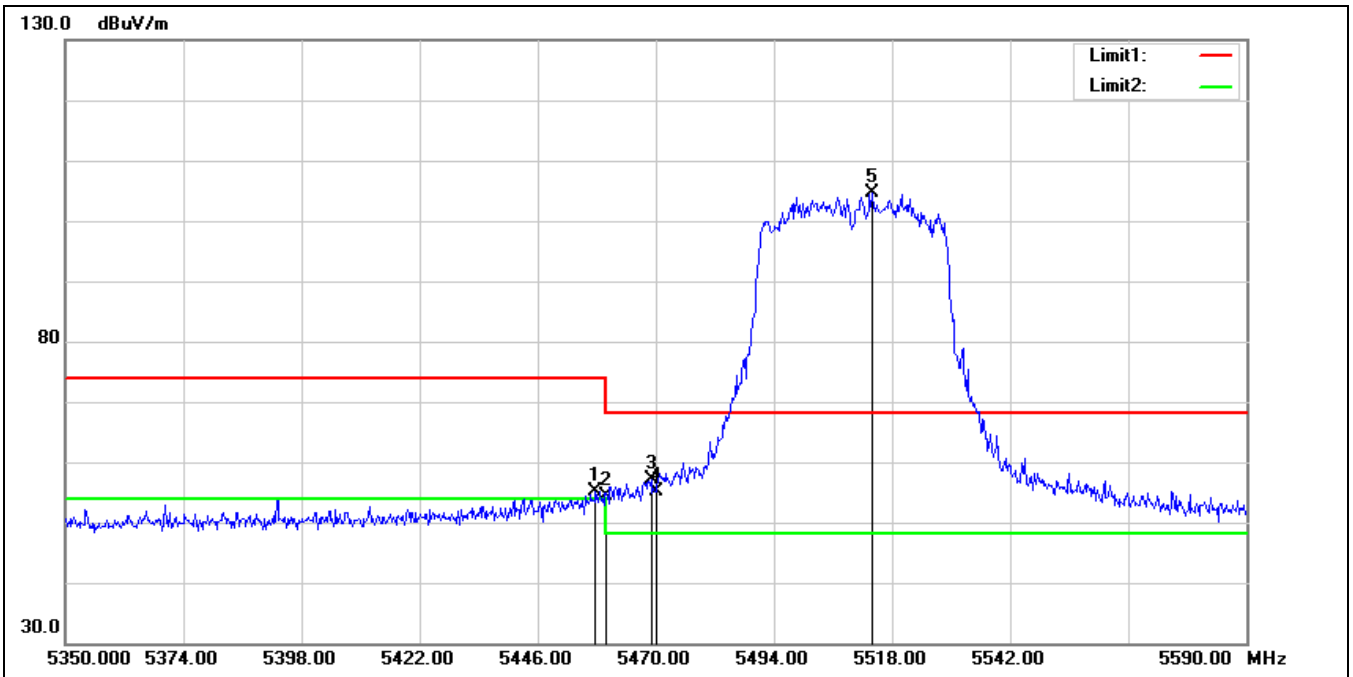

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.760	53.53	1.72	55.25	74.00	-18.75	peak
2	5460.000	52.65	1.73	54.38	74.00	-19.62	peak
3	5469.040	55.51	1.74	57.25	68.20	-10.95	peak
4	5470.000	53.35	1.74	55.09	68.20	-13.11	peak
5*	5513.920	102.65	1.86	104.51	68.20	36.31	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

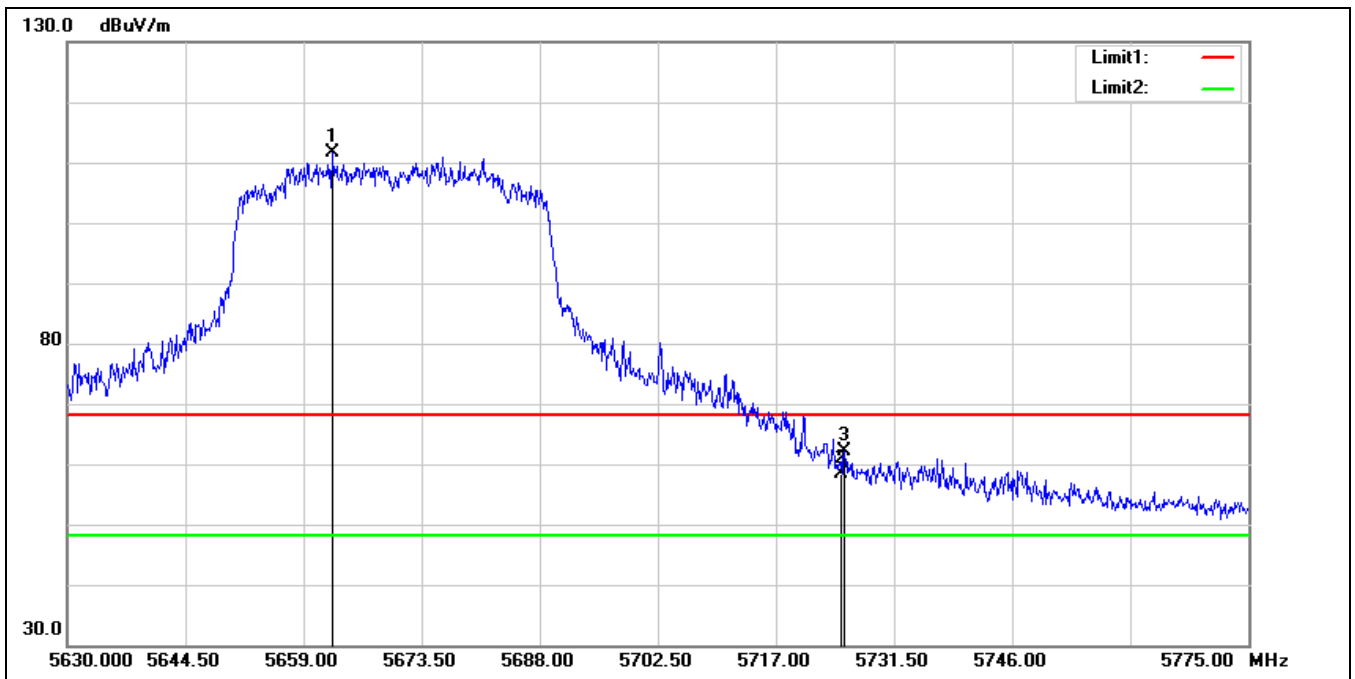


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5662.480	109.60	1.94	111.54	68.20	43.34	peak
2	5725.000	56.14	2.30	58.44	68.20	-9.76	peak
3	5725.410	59.85	2.30	62.15	68.20	-6.05	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5670 MHz		
Remark:			

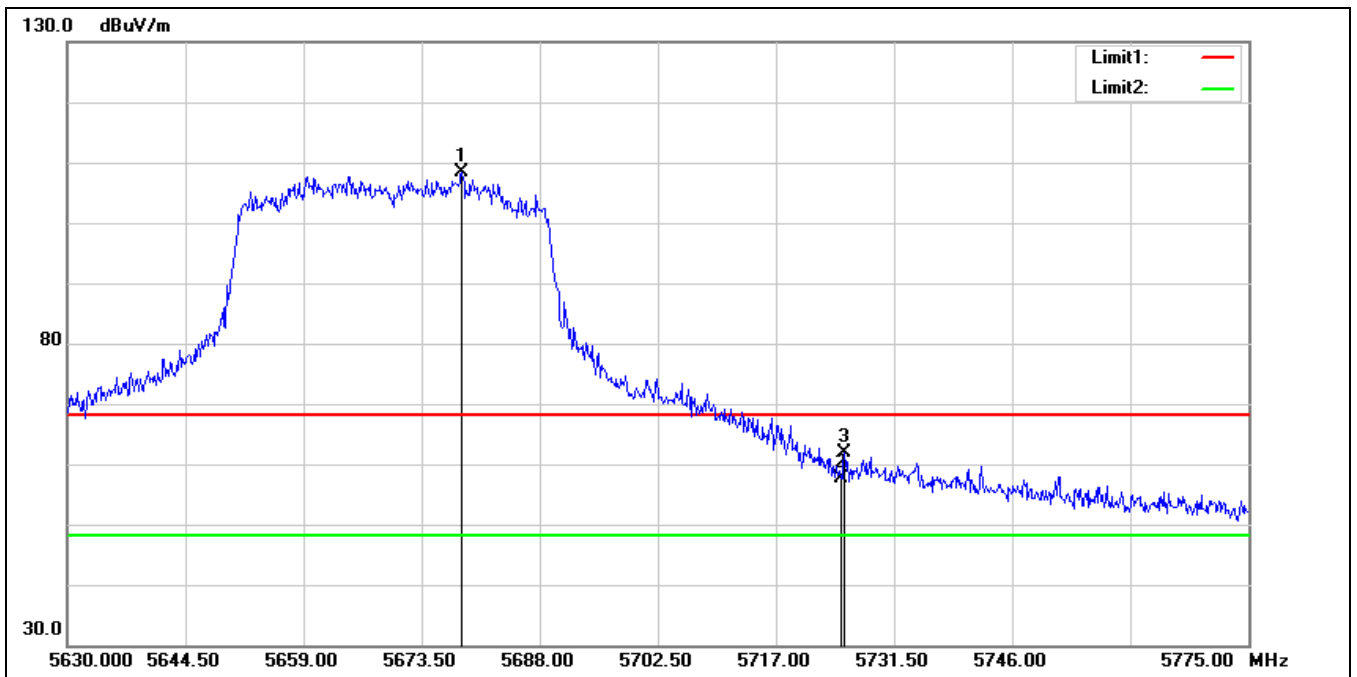


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5678.430	106.44	2.00	108.44	68.20	40.24	peak
2	5725.000	55.43	2.30	57.73	68.20	-10.47	peak
3	5725.410	59.64	2.30	61.94	68.20	-6.26	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

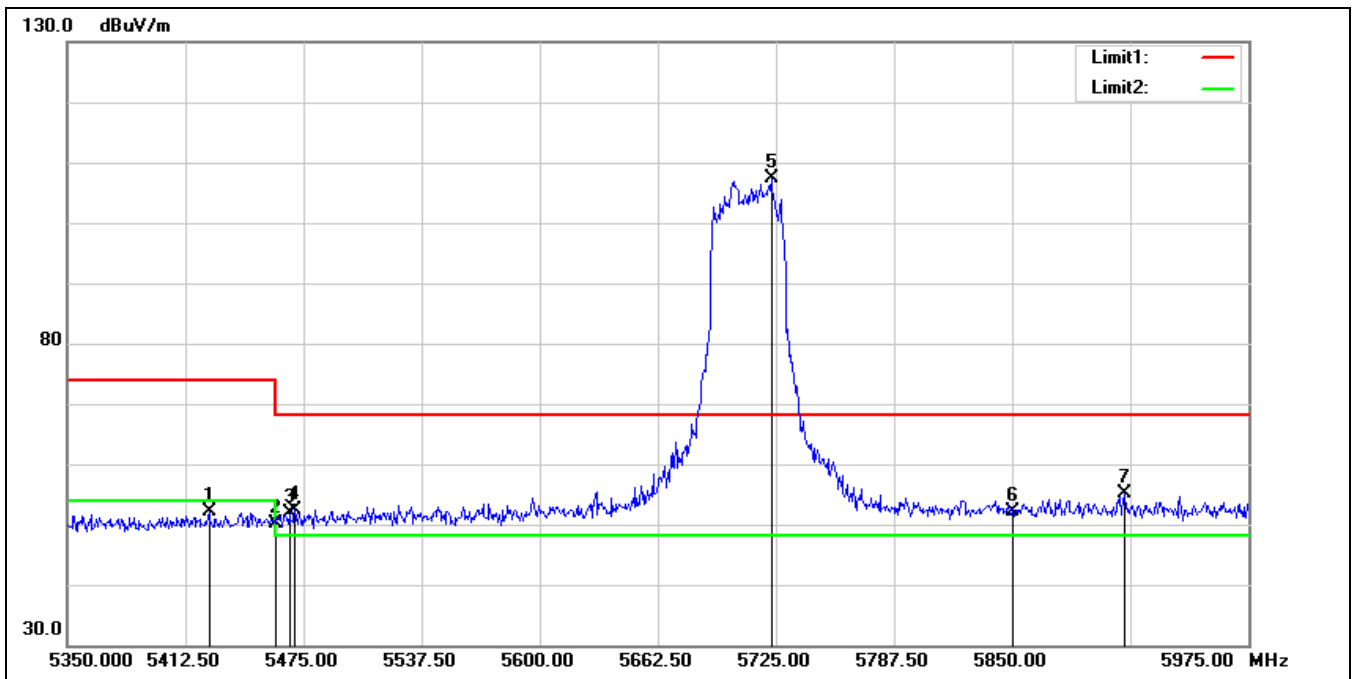


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5425.000	50.39	1.64	52.03	74.00	-21.97	peak
2	5460.000	48.32	1.73	50.05	74.00	-23.95	peak
3	5467.500	50.17	1.74	51.91	68.20	-16.29	peak
4	5470.000	50.74	1.74	52.48	68.20	-15.72	peak
5*	5722.500	105.05	2.28	107.33	68.20	39.13	peak
6	5850.000	49.13	2.98	52.11	68.20	-16.09	peak
7	5909.375	51.96	3.12	55.08	68.20	-13.12	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

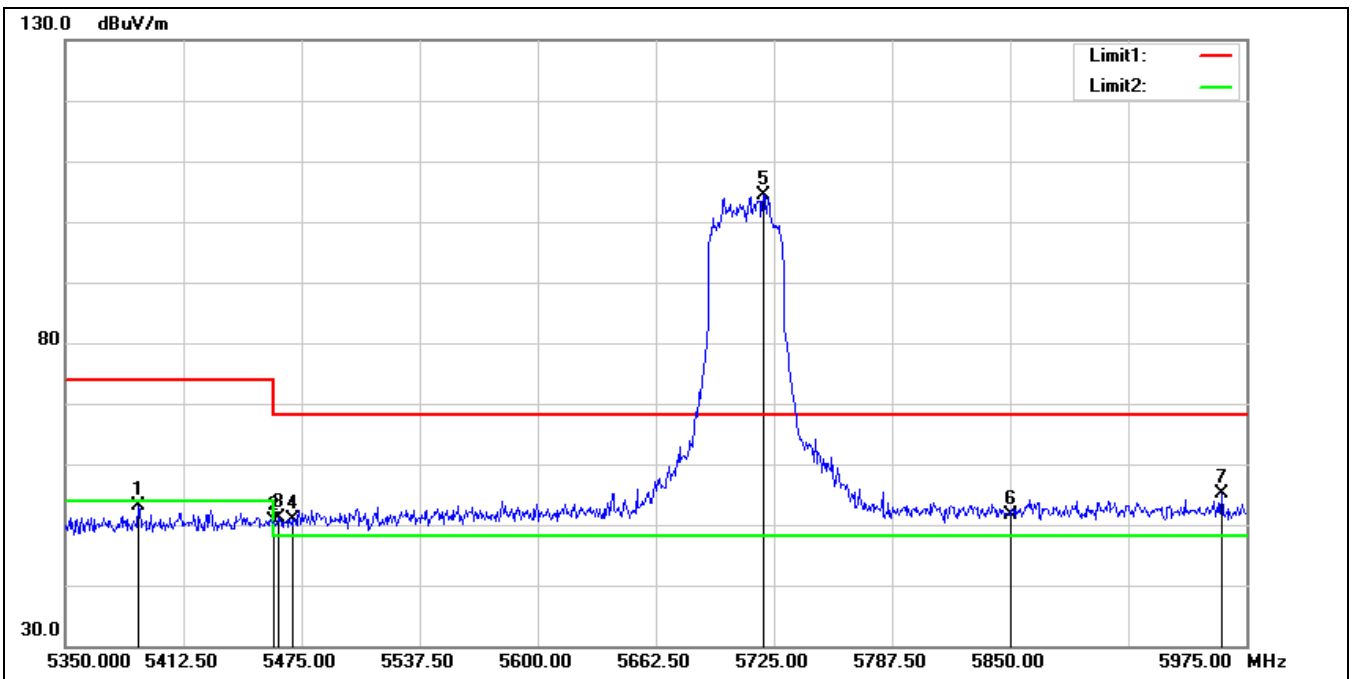


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5388.750	51.67	1.44	53.11	74.00	-20.89	peak
2	5460.000	49.02	1.73	50.75	74.00	-23.25	peak
3	5463.125	49.30	1.73	51.03	68.20	-17.17	peak
4	5470.000	49.05	1.74	50.79	68.20	-17.41	peak
5*	5719.375	102.16	2.26	104.42	68.20	36.22	peak
6	5850.000	48.76	2.98	51.74	68.20	-16.46	peak
7	5961.875	51.98	3.09	55.07	68.20	-13.13	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

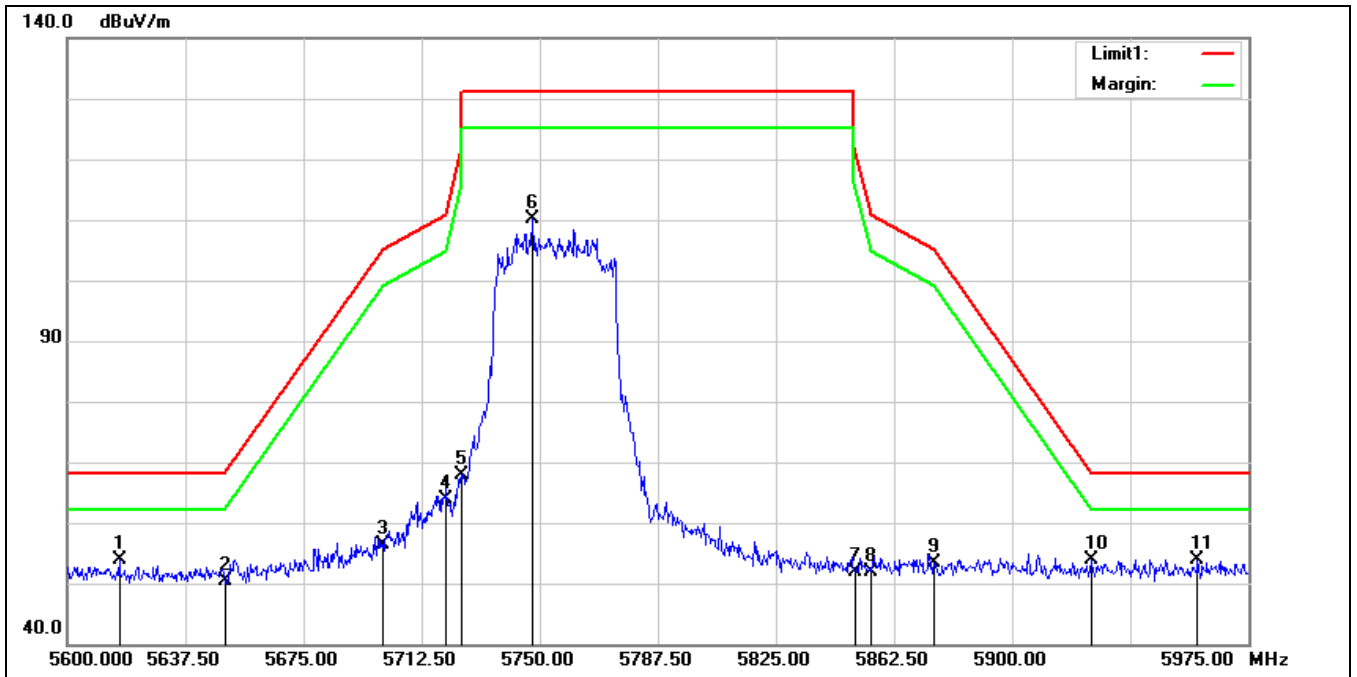


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5616.500	51.80	1.97	53.77	68.20	-14.43	peak
2	5650.000	48.54	1.90	50.44	68.20	-17.76	peak
3	5700.000	54.38	2.06	56.44	105.20	-48.76	peak
4	5720.000	61.60	2.26	63.86	110.80	-46.94	peak
5	5725.000	65.63	2.30	67.93	122.20	-54.27	peak
6	5747.750	107.73	2.52	110.25	131.20	-20.95	peak
7	5850.000	48.97	2.98	51.95	122.20	-70.25	peak
8	5855.000	48.98	3.01	51.99	110.80	-58.81	peak
9	5875.000	50.41	3.07	53.48	105.20	-51.72	peak
10	5925.000	50.77	3.10	53.87	68.20	-14.33	peak
11*	5958.875	50.89	3.08	53.97	68.20	-14.23	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5755 MHz		
Remark:			

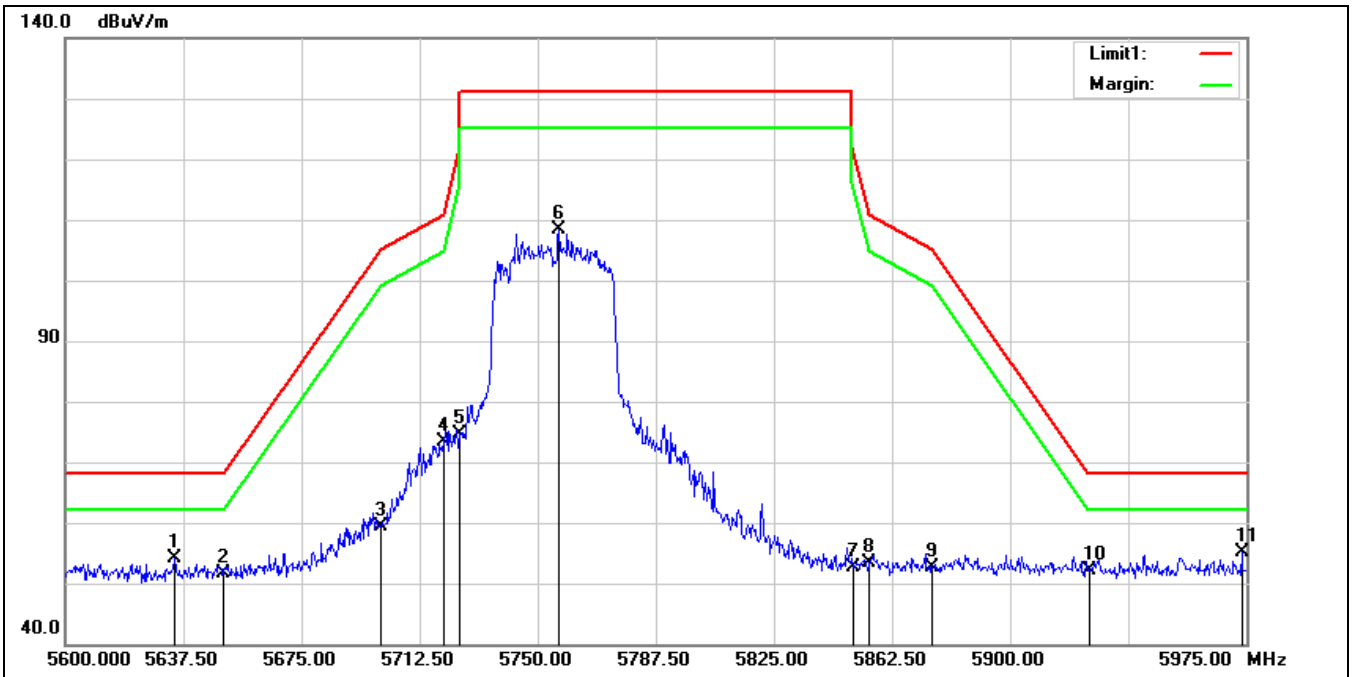


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5634.500	52.16	1.94	54.10	68.20	-14.10	peak
2	5650.000	49.81	1.90	51.71	68.20	-16.49	peak
3	5700.000	57.39	2.06	59.45	105.20	-45.75	peak
4	5720.000	71.14	2.26	73.40	110.80	-37.40	peak
5	5725.000	72.24	2.30	74.54	122.20	-47.66	peak
6	5756.750	105.71	2.57	108.28	131.20	-22.92	peak
7	5850.000	49.53	2.98	52.51	122.20	-69.69	peak
8	5855.000	50.49	3.01	53.50	110.80	-57.30	peak
9	5875.000	49.63	3.07	52.70	105.20	-52.50	peak
10	5925.000	49.03	3.10	52.13	68.20	-16.07	peak
11*	5973.500	51.89	3.15	55.04	68.20	-13.16	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

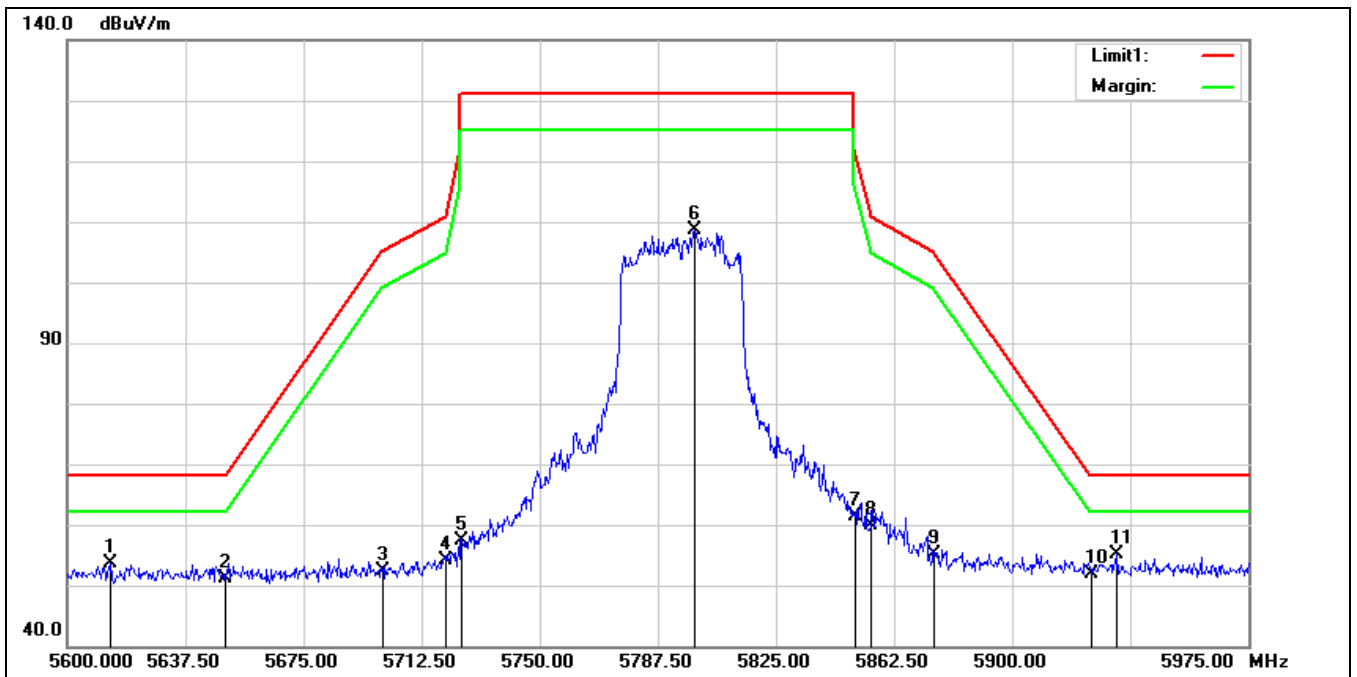

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5613.875	51.61	1.98	53.59	68.20	-14.61	peak
2	5650.000	49.26	1.90	51.16	68.20	-17.04	peak
3	5700.000	50.36	2.06	52.42	105.20	-52.78	peak
4	5720.000	51.93	2.26	54.19	110.80	-56.61	peak
5	5725.000	55.19	2.30	57.49	122.20	-64.71	peak
6	5799.125	105.85	2.82	108.67	131.20	-22.53	peak
7	5850.000	58.46	2.98	61.44	122.20	-60.76	peak
8	5855.000	56.87	3.01	59.88	110.80	-50.92	peak
9	5875.000	52.10	3.07	55.17	105.20	-50.03	peak
10	5925.000	48.86	3.10	51.96	68.20	-16.24	peak
11*	5933.375	52.16	3.07	55.23	68.20	-12.97	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5795 MHz		
Remark:			

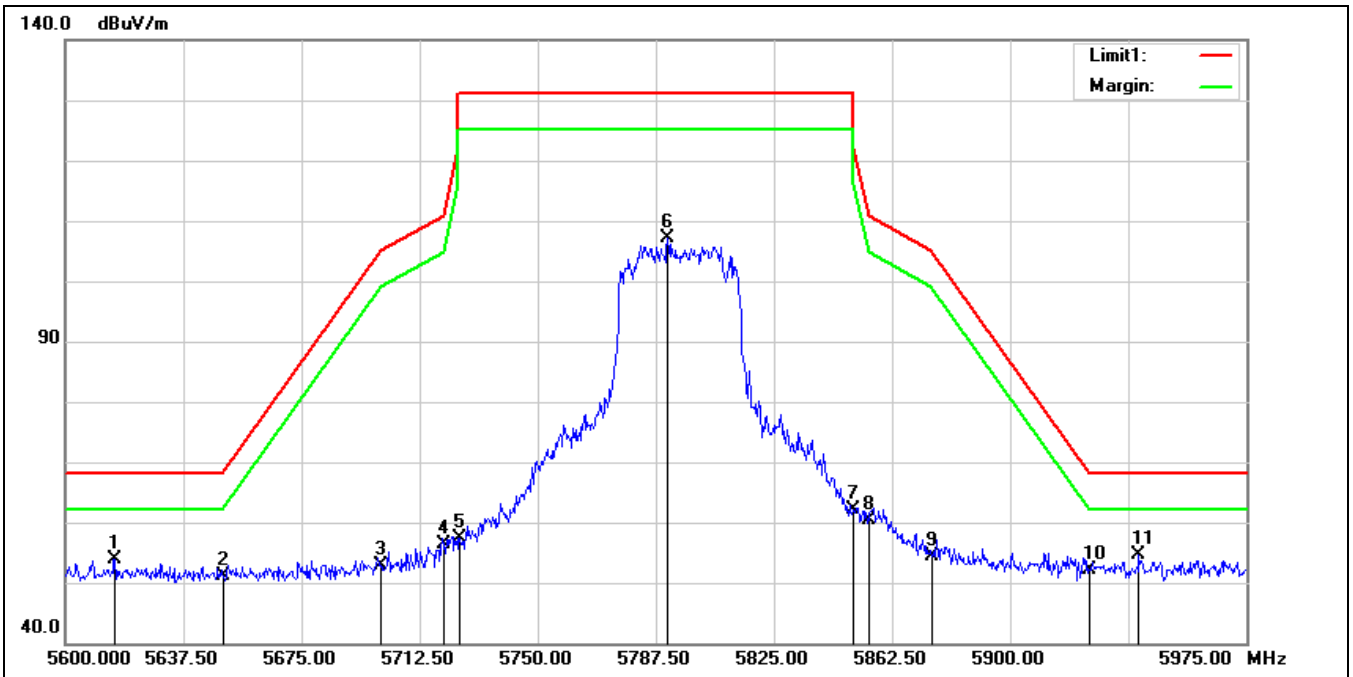

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5615.750	51.86	1.98	53.84	68.20	-14.36	peak
2	5650.000	49.26	1.90	51.16	68.20	-17.04	peak
3	5700.000	50.94	2.06	53.00	105.20	-52.20	peak
4	5720.000	54.05	2.26	56.31	110.80	-54.49	peak
5	5725.000	54.96	2.30	57.26	122.20	-64.94	peak
6	5791.250	104.28	2.76	107.04	131.20	-24.16	peak
7	5850.000	59.19	2.98	62.17	122.20	-60.03	peak
8	5855.000	57.44	3.01	60.45	110.80	-50.35	peak
9	5875.000	51.31	3.07	54.38	105.20	-50.82	peak
10	5925.000	49.14	3.10	52.24	68.20	-15.96	peak
11*	5940.875	51.66	3.06	54.72	68.20	-13.48	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

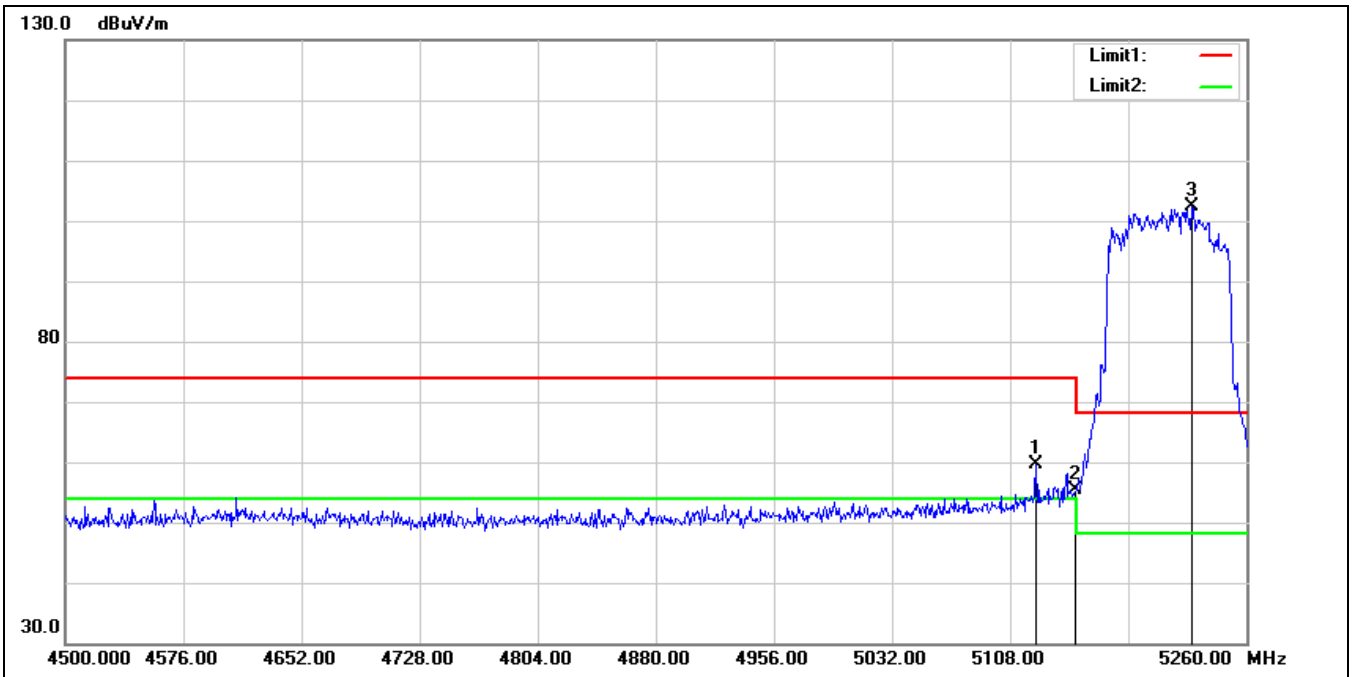


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5124.720	58.22	1.38	59.60	74.00	-14.40	peak
2	5150.000	53.95	1.42	55.37	74.00	-18.63	peak
3*	5225.040	101.31	1.17	102.48	68.20	34.28	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

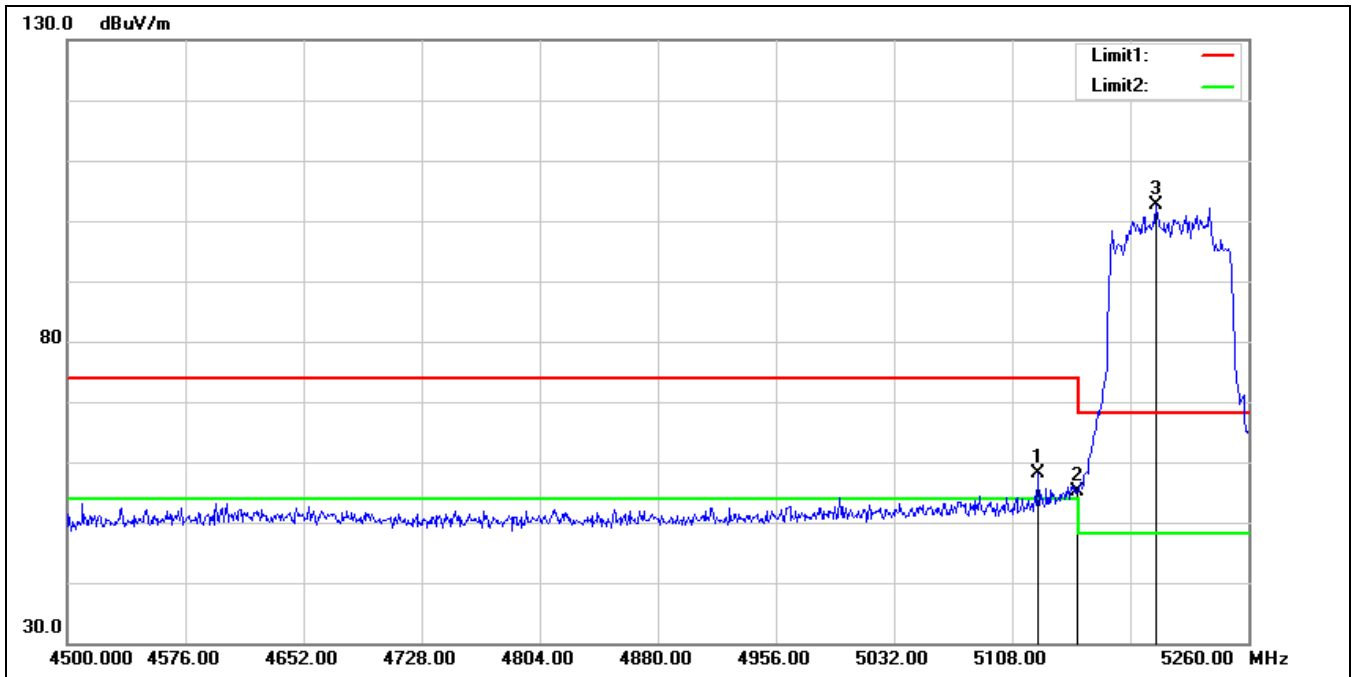


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5124.720	56.73	1.38	58.11	74.00	-15.89	peak
2	5150.000	53.67	1.42	55.09	74.00	-18.91	peak
3*	5200.720	101.27	1.28	102.55	68.20	34.35	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

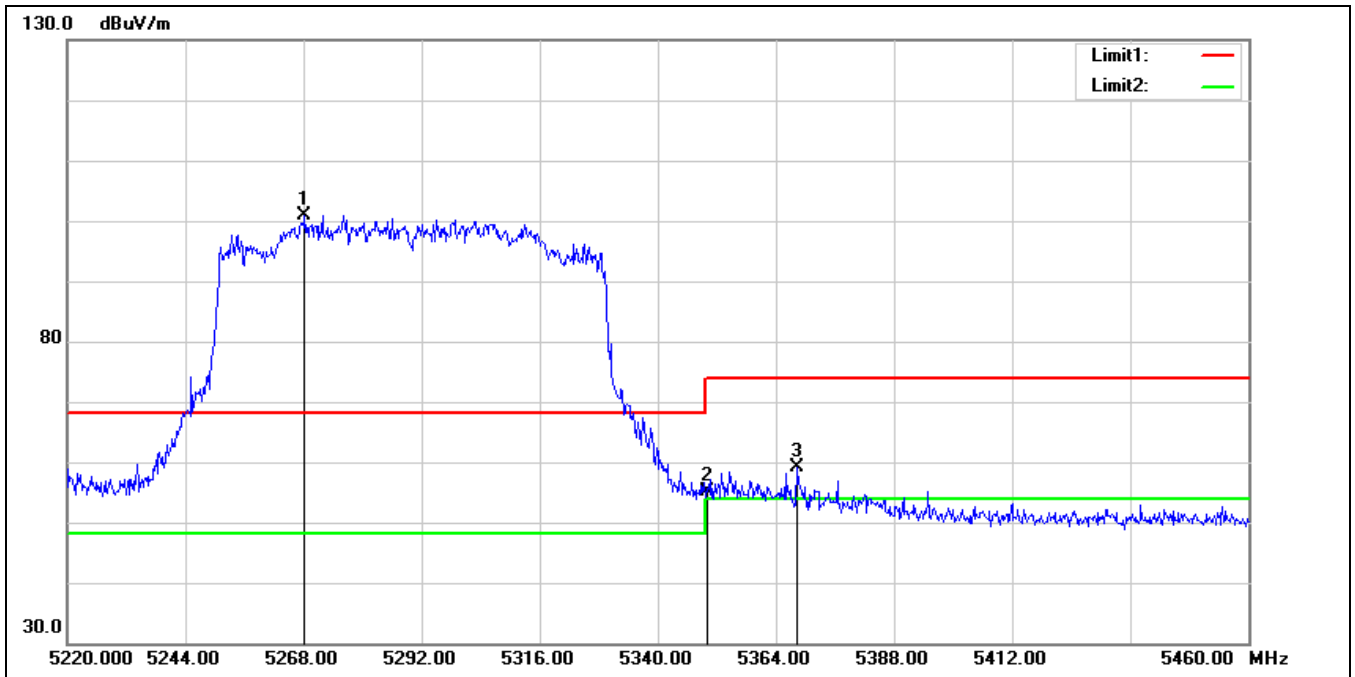


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5268.240	99.97	1.00	100.97	68.20	32.77	peak
2	5350.000	54.02	1.08	55.10	74.00	-18.90	peak
3	5368.320	57.82	1.26	59.08	74.00	-14.92	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

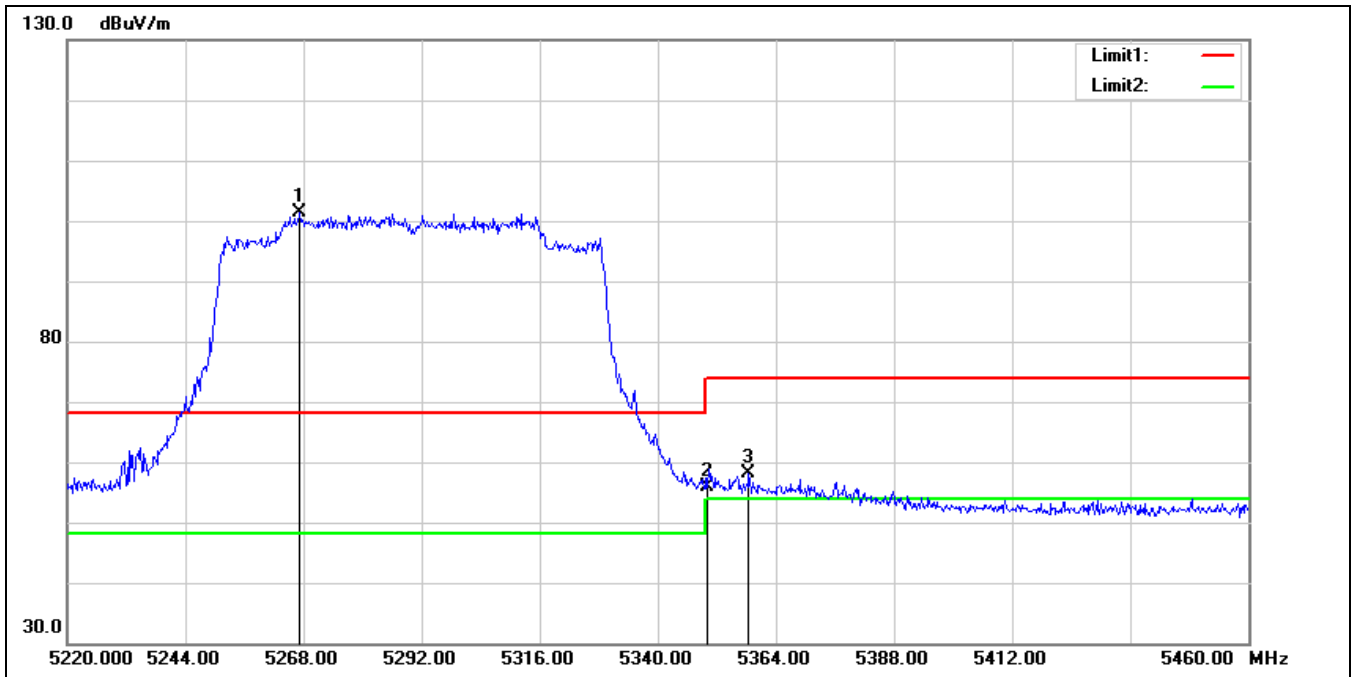


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5267.280	100.37	1.00	101.37	68.20	33.17	peak
2	5350.000	54.91	1.08	55.99	74.00	-18.01	peak
3	5358.480	57.02	1.17	58.19	74.00	-15.81	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

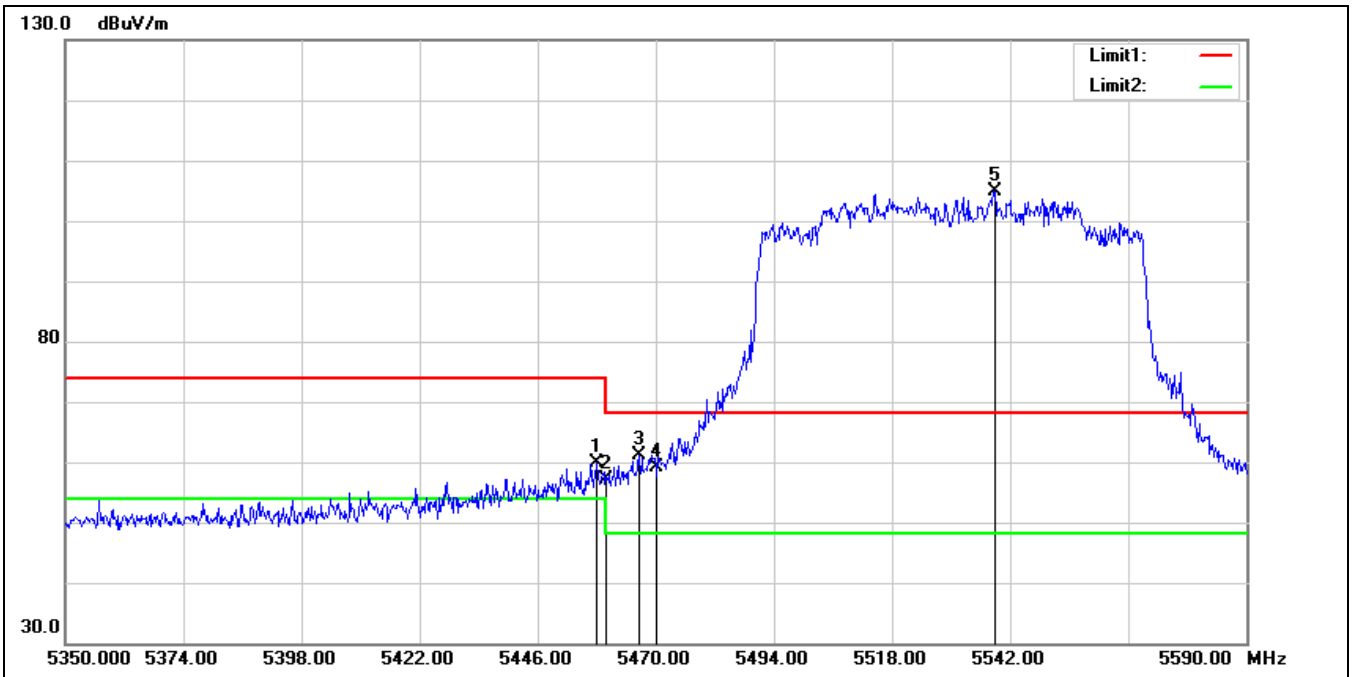


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.000	58.10	1.72	59.82	74.00	-14.18	peak
2	5460.000	55.36	1.73	57.09	74.00	-16.91	peak
3	5466.640	59.40	1.74	61.14	68.20	-7.06	peak
4	5470.000	57.38	1.74	59.12	68.20	-9.08	peak
5*	5538.880	102.99	2.00	104.99	68.20	36.79	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

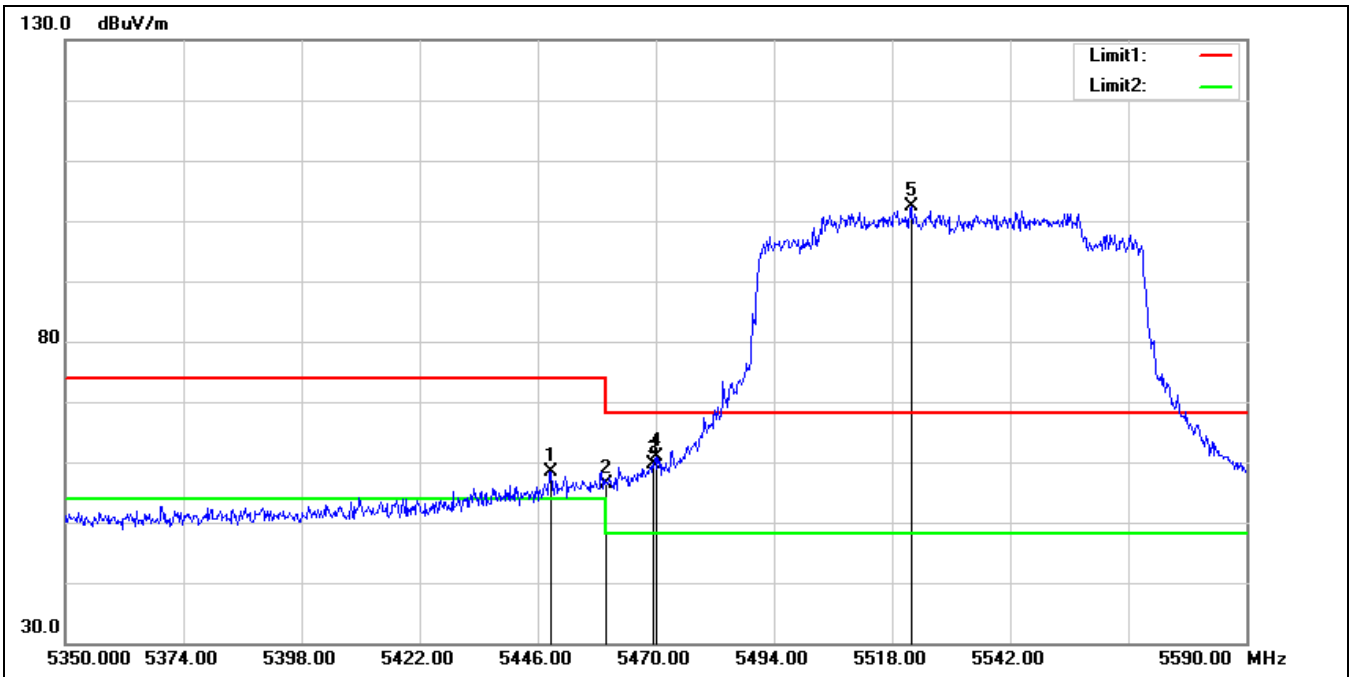


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5448.640	56.71	1.71	58.42	74.00	-15.58	peak
2	5460.000	54.62	1.73	56.35	74.00	-17.65	peak
3	5469.520	57.80	1.74	59.54	68.20	-8.66	peak
4	5470.000	59.24	1.74	60.98	68.20	-7.22	peak
5*	5521.840	100.42	1.91	102.33	68.20	34.13	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

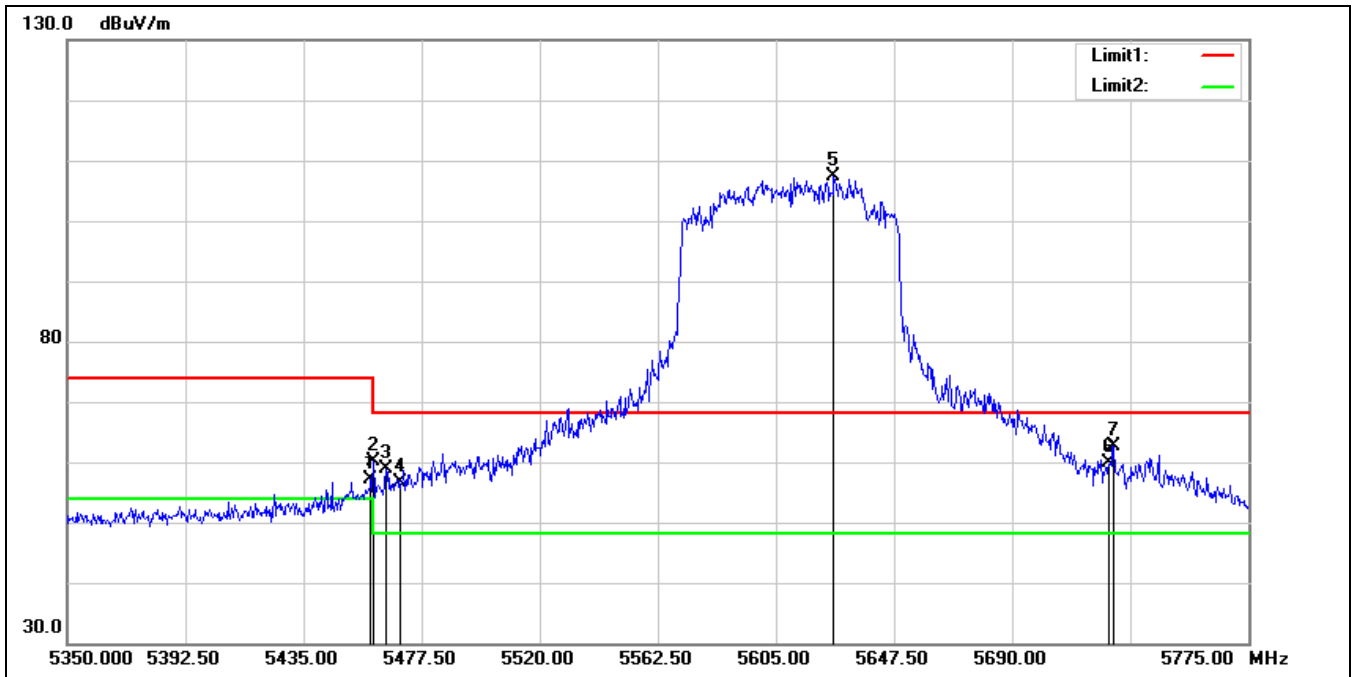

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.225	55.36	1.73	57.09	74.00	-16.91	peak
2	5460.000	58.34	1.73	60.07	74.00	-13.93	peak
3	5464.750	57.22	1.73	58.95	68.20	-9.25	peak
4	5470.000	54.84	1.74	56.58	68.20	-11.62	peak
5*	5625.825	105.54	1.96	107.50	68.20	39.30	peak
6	5725.000	57.58	2.30	59.88	68.20	-8.32	peak
7	5726.550	60.34	2.31	62.65	68.20	-5.55	peak


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

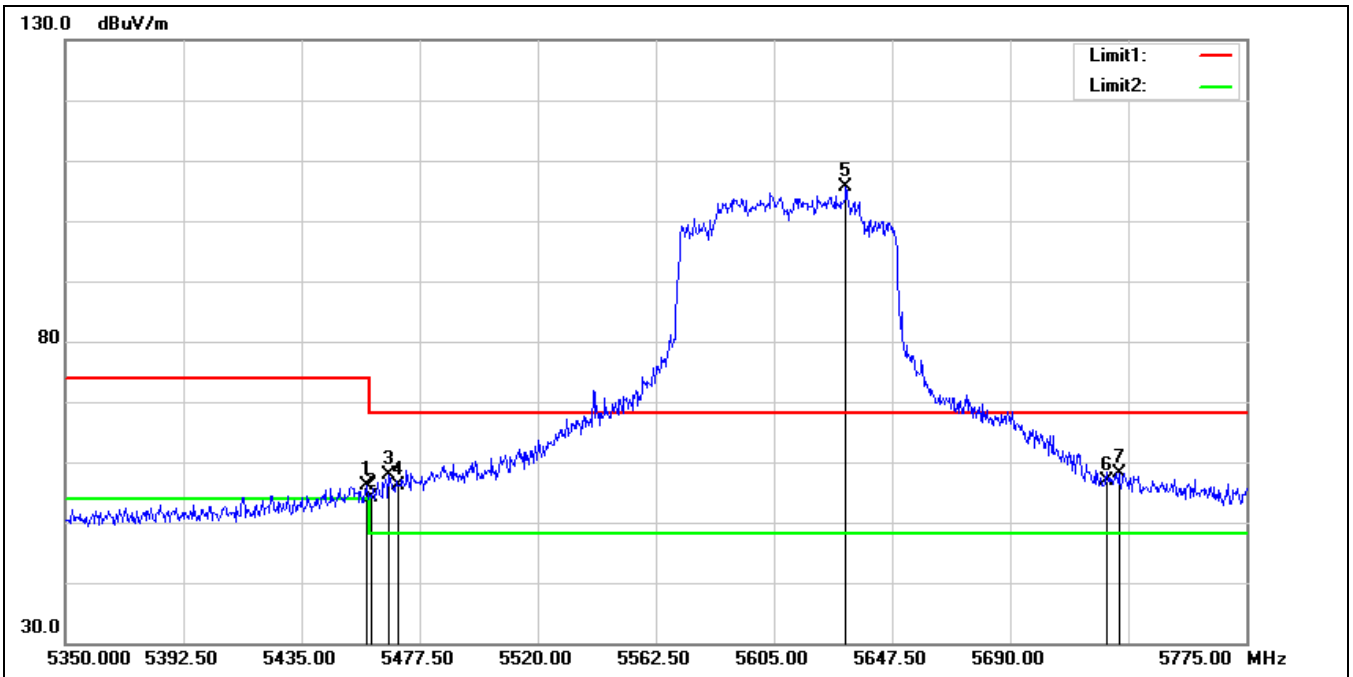

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.375	54.39	1.73	56.12	74.00	-17.88	peak
2	5460.000	52.29	1.73	54.02	74.00	-19.98	peak
3	5466.450	56.16	1.74	57.90	68.20	-10.30	peak
4	5470.000	54.42	1.74	56.16	68.20	-12.04	peak
5*	5630.925	103.68	1.94	105.62	68.20	37.42	peak
6	5725.000	54.58	2.30	56.88	68.20	-11.32	peak
7	5729.100	55.90	2.33	58.23	68.20	-9.97	peak




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

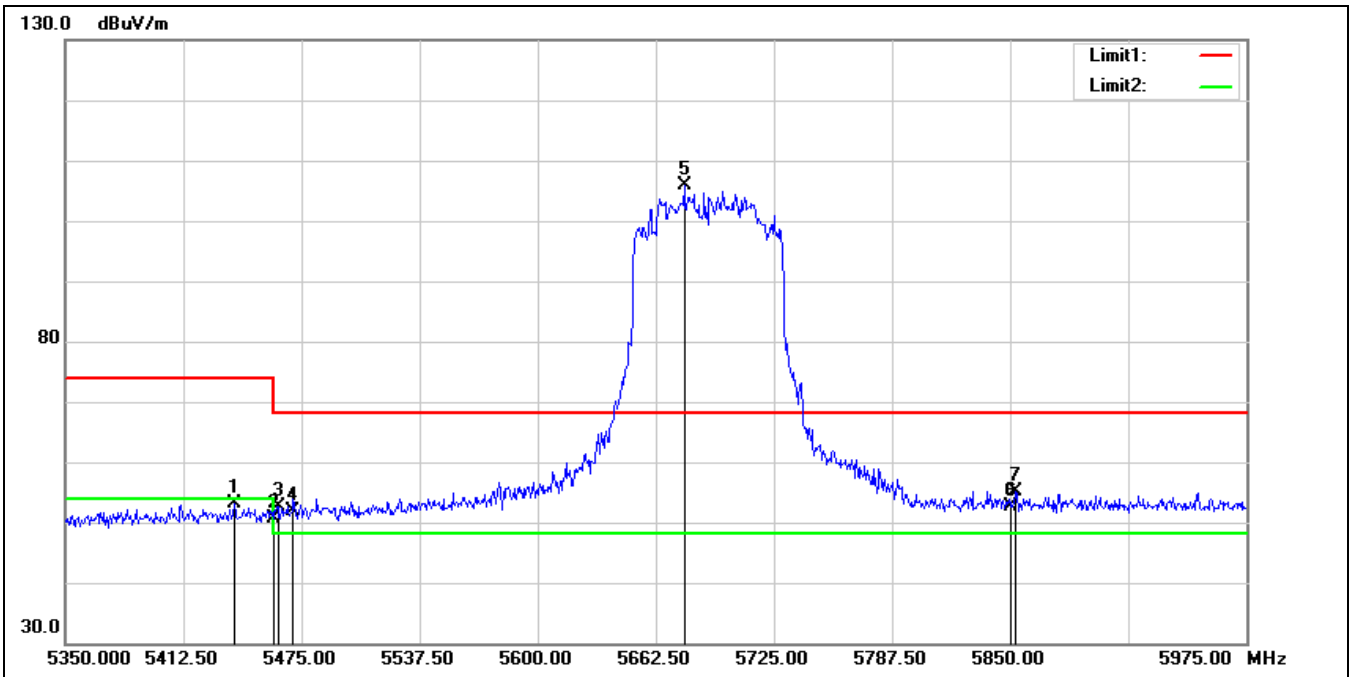


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5439.375	51.41	1.68	53.09	74.00	-20.91	peak
2	5460.000	48.95	1.73	50.68	74.00	-23.32	peak
3	5462.500	50.90	1.73	52.63	68.20	-15.57	peak
4	5470.000	50.23	1.74	51.97	68.20	-16.23	peak
5*	5677.500	103.95	1.99	105.94	68.20	37.74	peak
6	5850.000	49.68	2.98	52.66	68.20	-15.54	peak
7	5853.125	52.23	2.99	55.22	68.20	-12.98	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

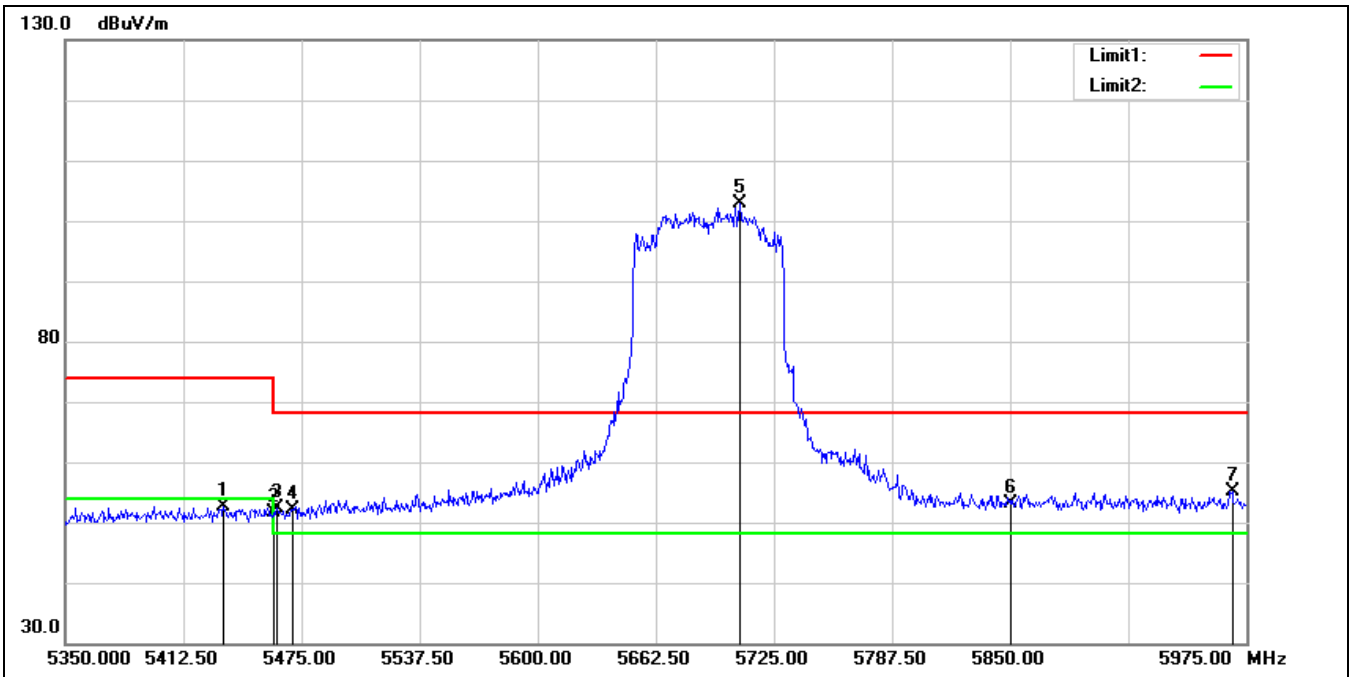


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5433.750	51.00	1.66	52.66	74.00	-21.34	peak
2	5460.000	49.90	1.73	51.63	74.00	-22.37	peak
3	5461.875	50.57	1.73	52.30	68.20	-15.90	peak
4	5470.000	50.35	1.74	52.09	68.20	-16.11	peak
5*	5706.875	100.71	2.14	102.85	68.20	34.65	peak
6	5850.000	50.14	2.98	53.12	68.20	-15.08	peak
7	5967.500	51.94	3.13	55.07	68.20	-13.13	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

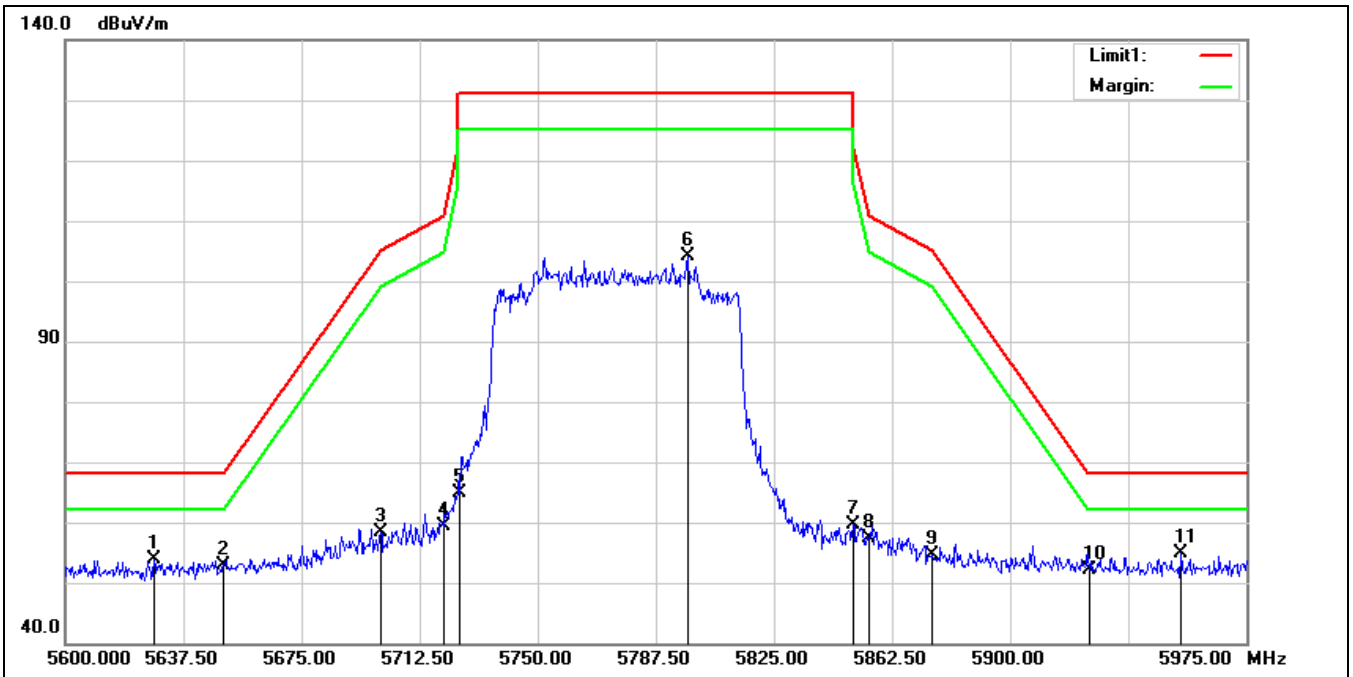


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5628.125	51.92	1.95	53.87	68.20	-14.33	peak
2	5650.000	50.90	1.90	52.80	68.20	-15.40	peak
3	5700.000	56.24	2.06	58.30	105.20	-46.90	peak
4	5720.000	57.01	2.26	59.27	110.80	-51.53	peak
5	5725.000	62.53	2.30	64.83	122.20	-57.37	peak
6	5797.625	101.38	2.79	104.17	131.20	-27.03	peak
7	5850.000	56.67	2.98	59.65	122.20	-62.55	peak
8	5855.000	54.37	3.01	57.38	110.80	-53.42	peak
9	5875.000	51.65	3.07	54.72	105.20	-50.48	peak
10	5925.000	49.12	3.10	52.22	68.20	-15.98	peak
11*	5954.375	51.77	3.06	54.83	68.20	-13.37	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5775 MHz		
Remark:			

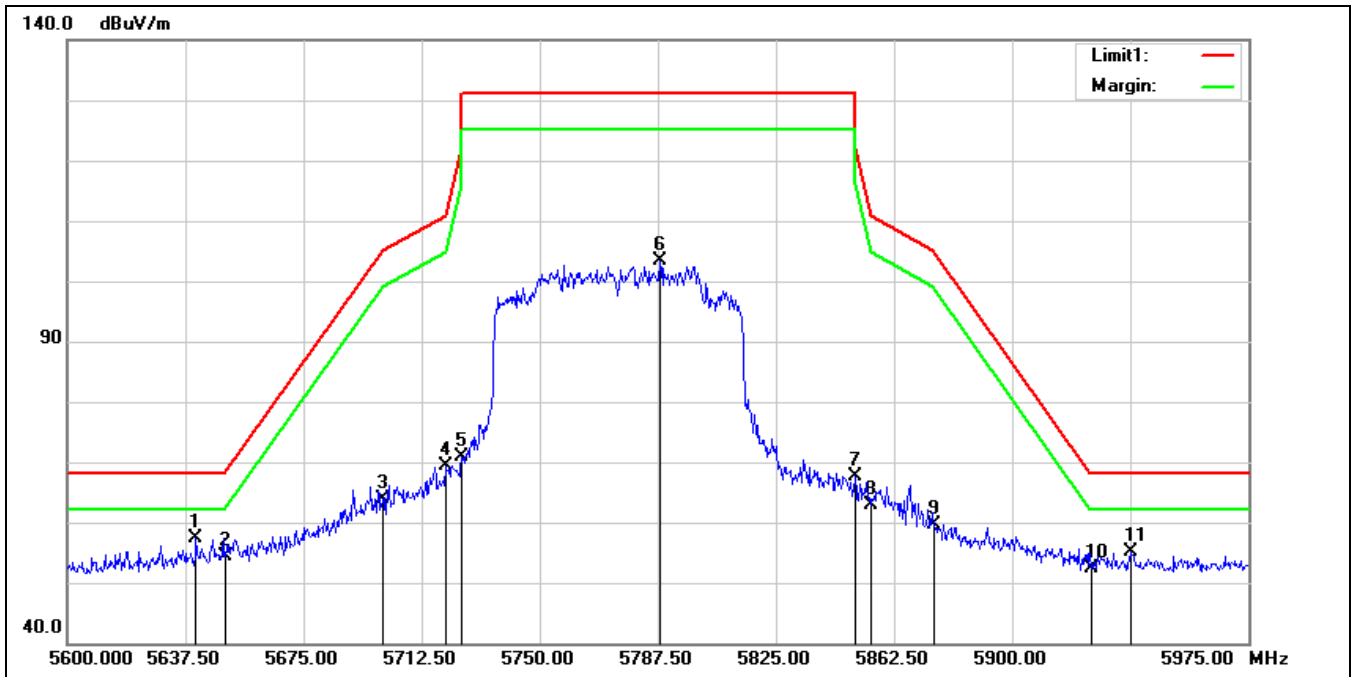


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5640.875	55.45	1.92	57.37	68.20	-10.83	peak
2	5650.000	52.40	1.90	54.30	68.20	-13.90	peak
3	5700.000	61.71	2.06	63.77	105.20	-41.43	peak
4	5720.000	67.13	2.26	69.39	110.80	-41.41	peak
5	5725.000	68.50	2.30	70.80	122.20	-51.40	peak
6	5788.250	100.60	2.75	103.35	131.20	-27.85	peak
7	5850.000	64.77	2.98	67.75	122.20	-54.45	peak
8	5855.000	59.87	3.01	62.88	110.80	-47.92	peak
9	5875.000	56.61	3.07	59.68	105.20	-45.52	peak
10	5925.000	49.30	3.10	52.40	68.20	-15.80	peak
11	5937.875	52.01	3.07	55.08	68.20	-13.12	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

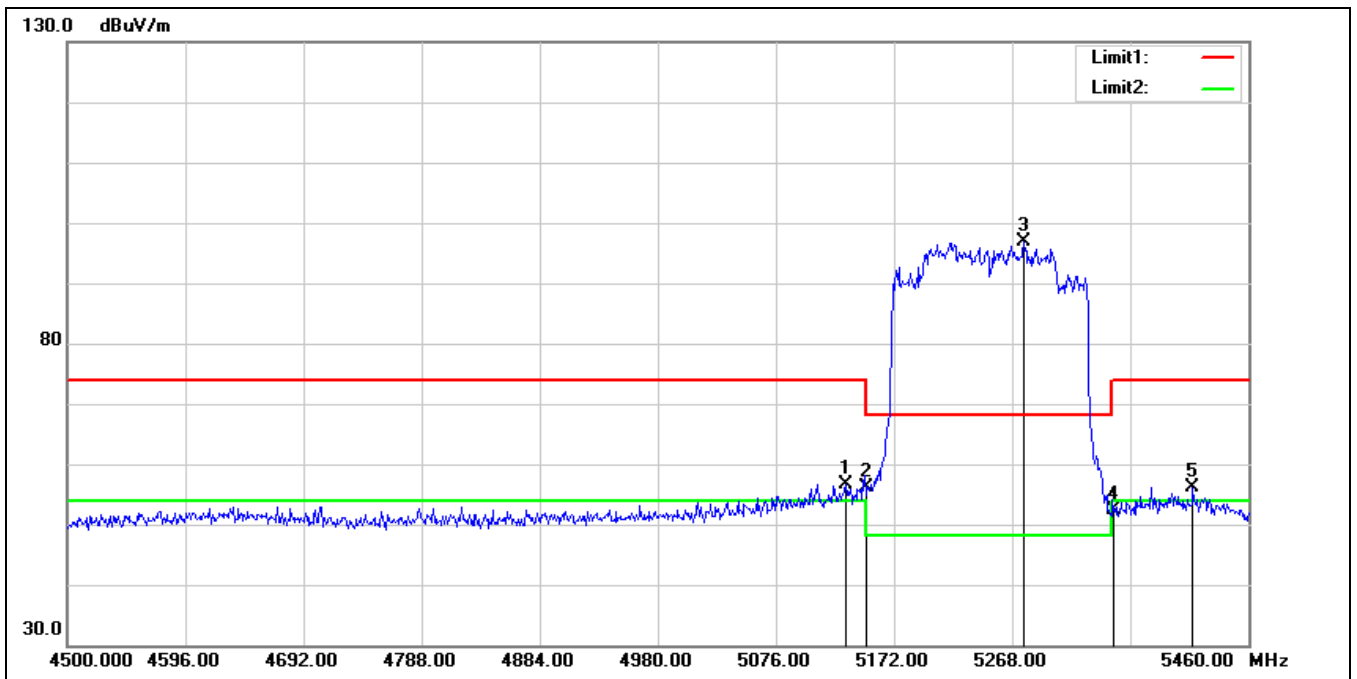


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5132.640	55.33	1.40	56.73	74.00	-17.27	peak
2	5150.000	54.62	1.42	56.04	74.00	-17.96	peak
3*	5277.600	95.82	0.98	96.80	68.20	28.60	peak
4	5350.000	51.22	1.08	52.30	74.00	-21.70	peak
5	5414.880	54.64	1.60	56.24	74.00	-17.76	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

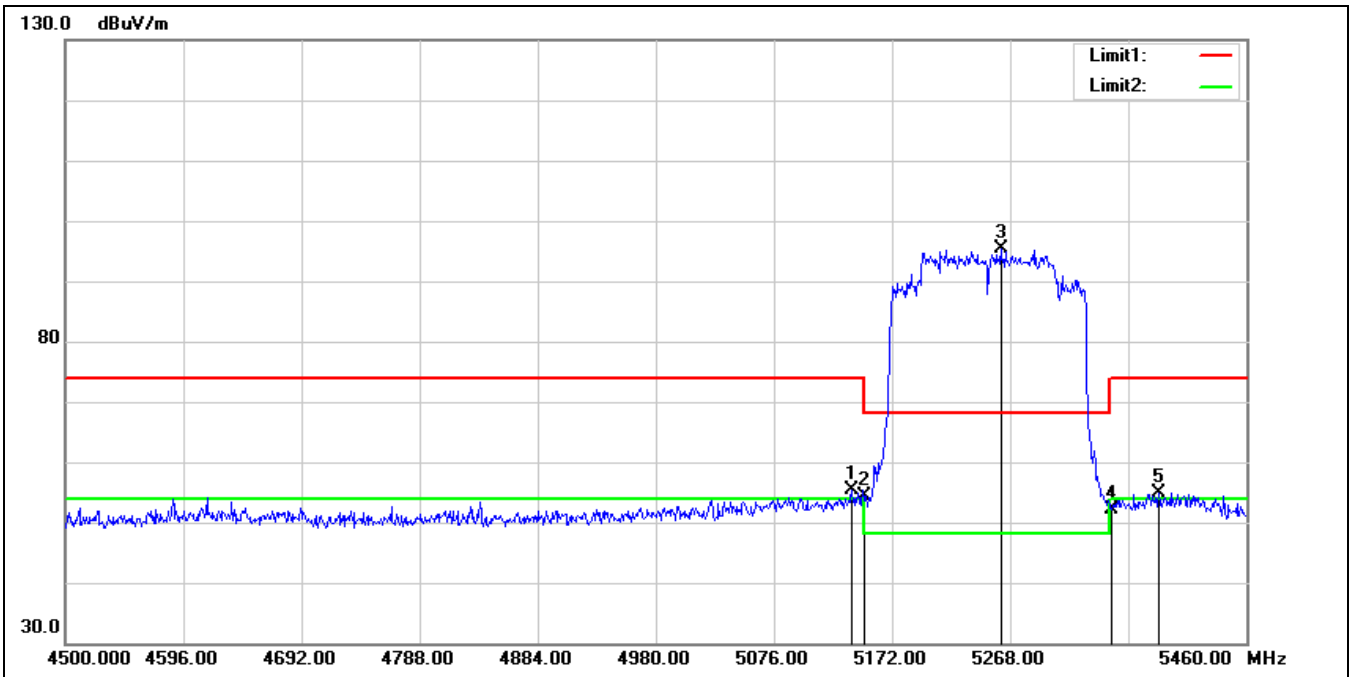


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5139.360	54.07	1.40	55.47	74.00	-18.53	peak
2	5150.000	52.97	1.42	54.39	74.00	-19.61	peak
3*	5260.320	94.42	1.03	95.45	68.20	27.25	peak
4	5350.000	51.10	1.08	52.18	74.00	-21.82	peak
5	5388.960	53.51	1.44	54.95	74.00	-19.05	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

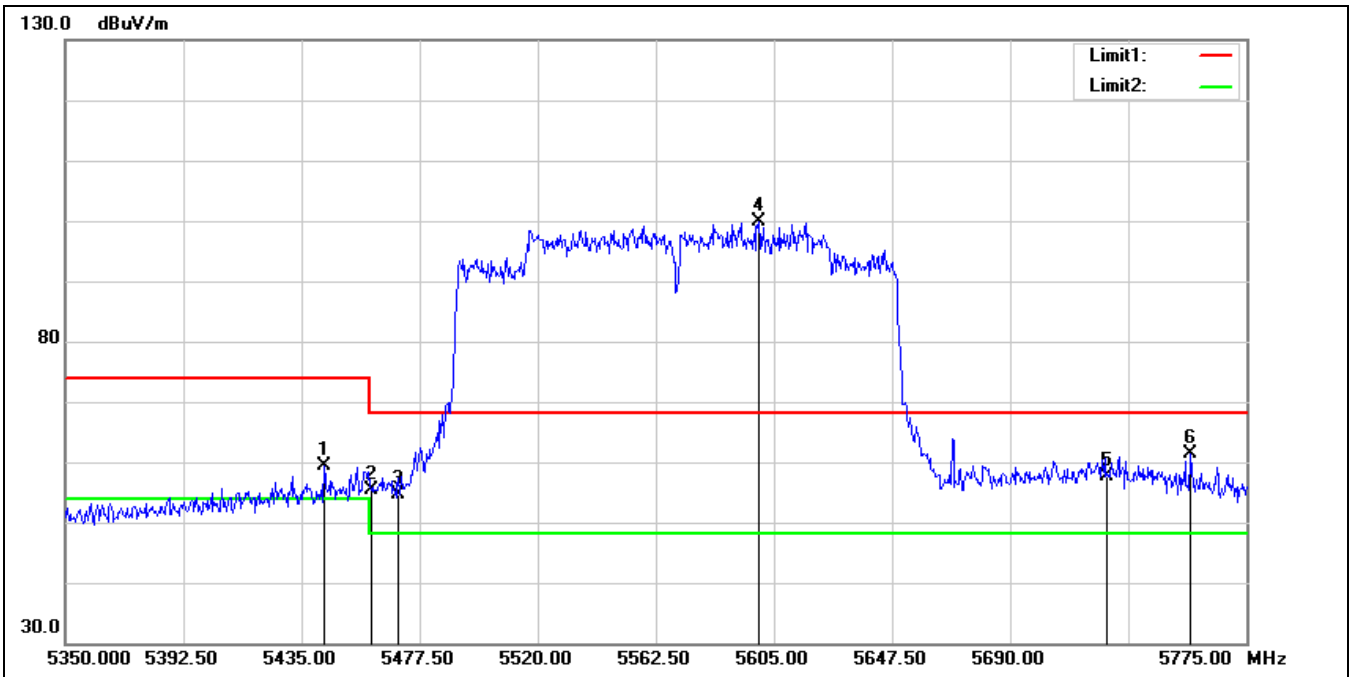

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5443.075	57.61	1.70	59.31	74.00	-14.69	peak
2	5460.000	53.69	1.73	55.42	74.00	-18.58	peak
3	5470.000	52.85	1.74	54.59	68.20	-13.61	peak
4*	5599.475	97.79	2.02	99.81	68.20	31.61	peak
5	5725.000	55.31	2.30	57.61	68.20	-10.59	peak
6	5755.025	58.74	2.56	61.30	68.20	-6.90	peak

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

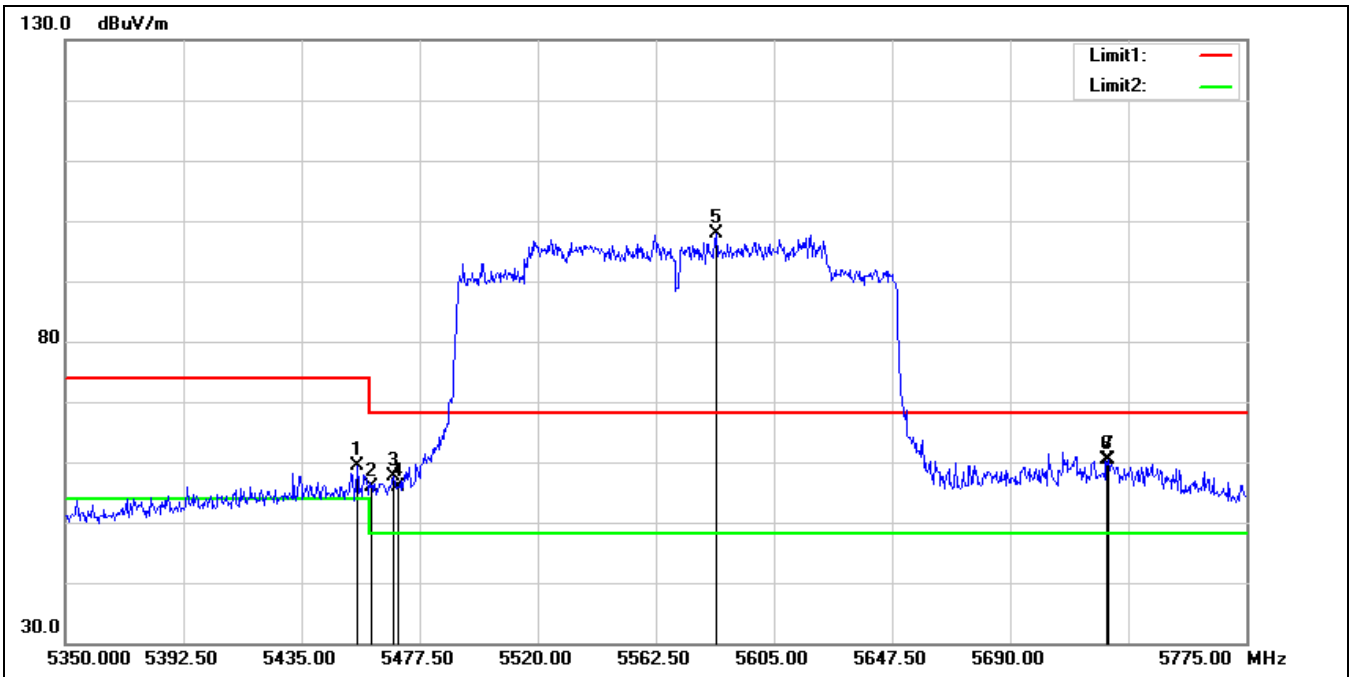


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.975	57.74	1.72	59.46	74.00	-14.54	peak
2	5460.000	54.16	1.73	55.89	74.00	-18.11	peak
3	5468.150	55.85	1.74	57.59	68.20	-10.61	peak
4	5470.000	54.12	1.74	55.86	68.20	-12.34	peak
5*	5584.175	95.77	2.03	97.80	68.20	29.60	peak
6	5725.000	58.10	2.30	60.40	68.20	-7.80	peak
7	5725.275	58.10	2.30	60.40	68.20	-7.80	peak




MIMO\_Average

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

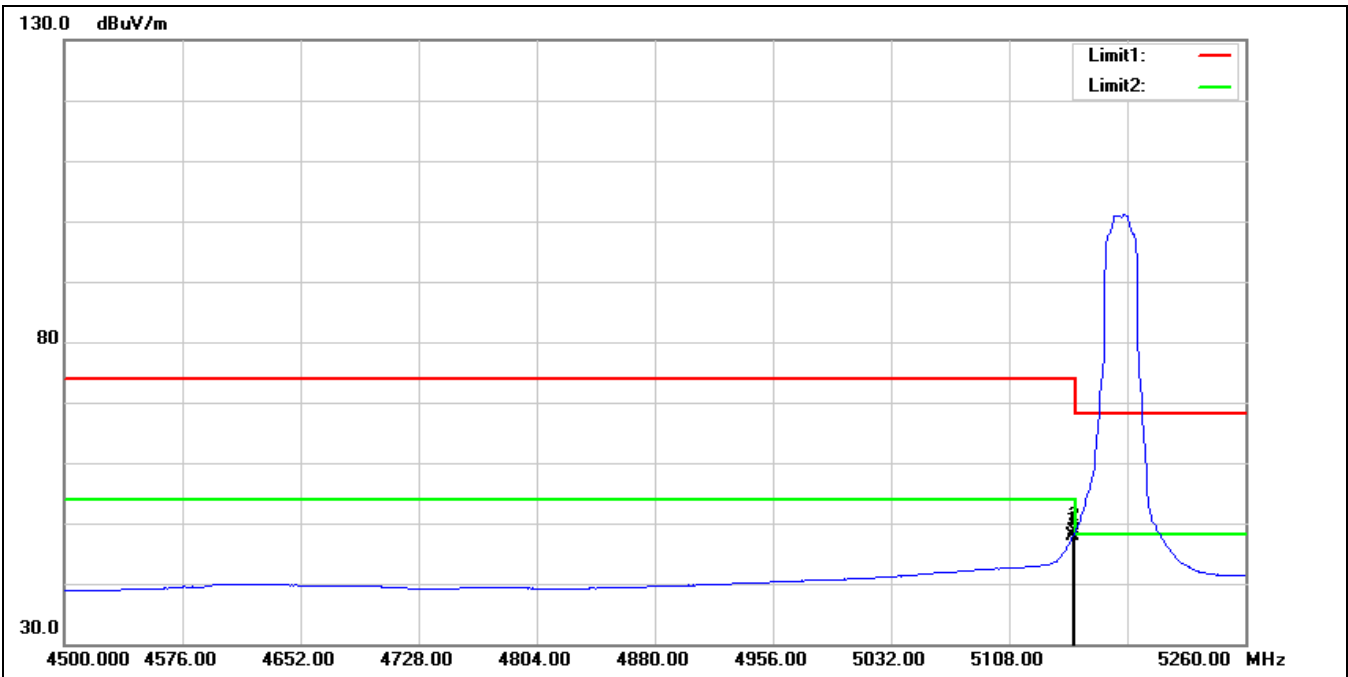


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.040	46.39	1.42	47.81	54.00	-6.19	AVG
2*	5150.000	47.09	1.42	48.51	54.00	-5.49	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5180 MHz		
Remark:			

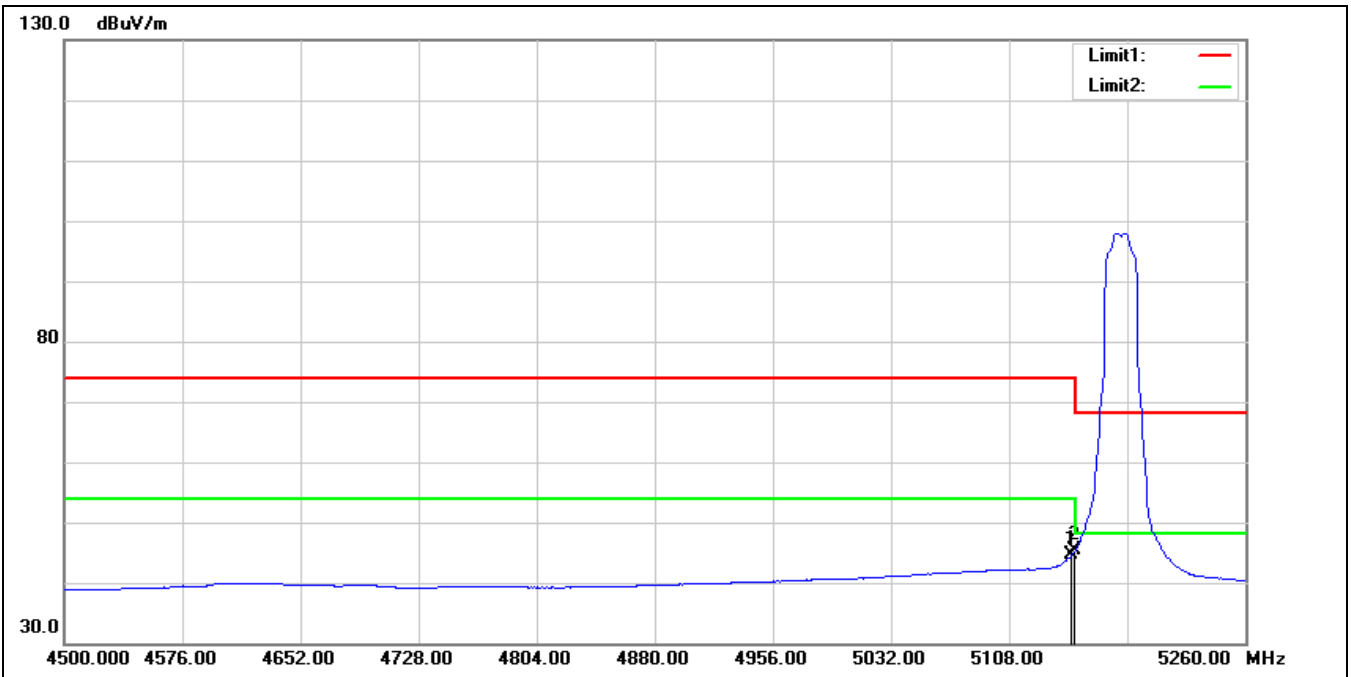


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.280	43.25	1.42	44.67	54.00	-9.33	AVG
2*	5150.000	43.96	1.42	45.38	54.00	-8.62	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

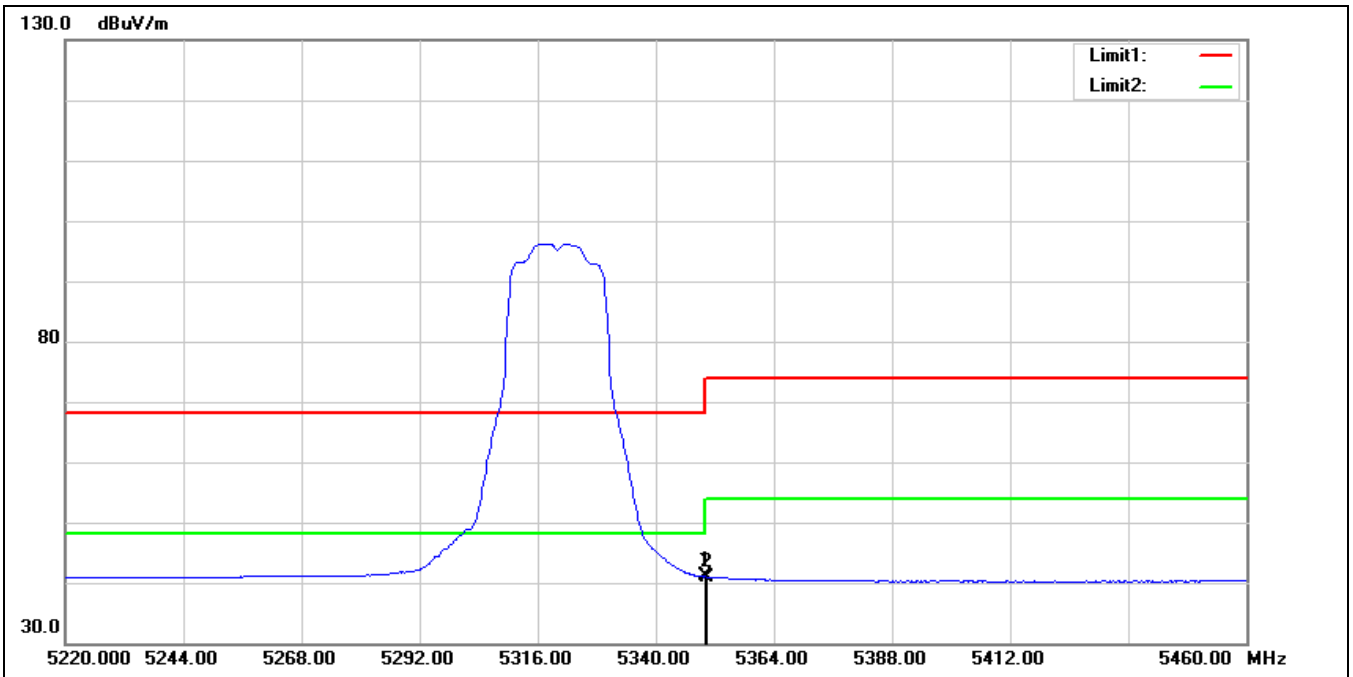


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	39.94	1.08	41.02	54.00	-12.98	AVG
2	5350.320	39.91	1.08	40.99	54.00	-13.01	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5320 MHz		
Remark:			

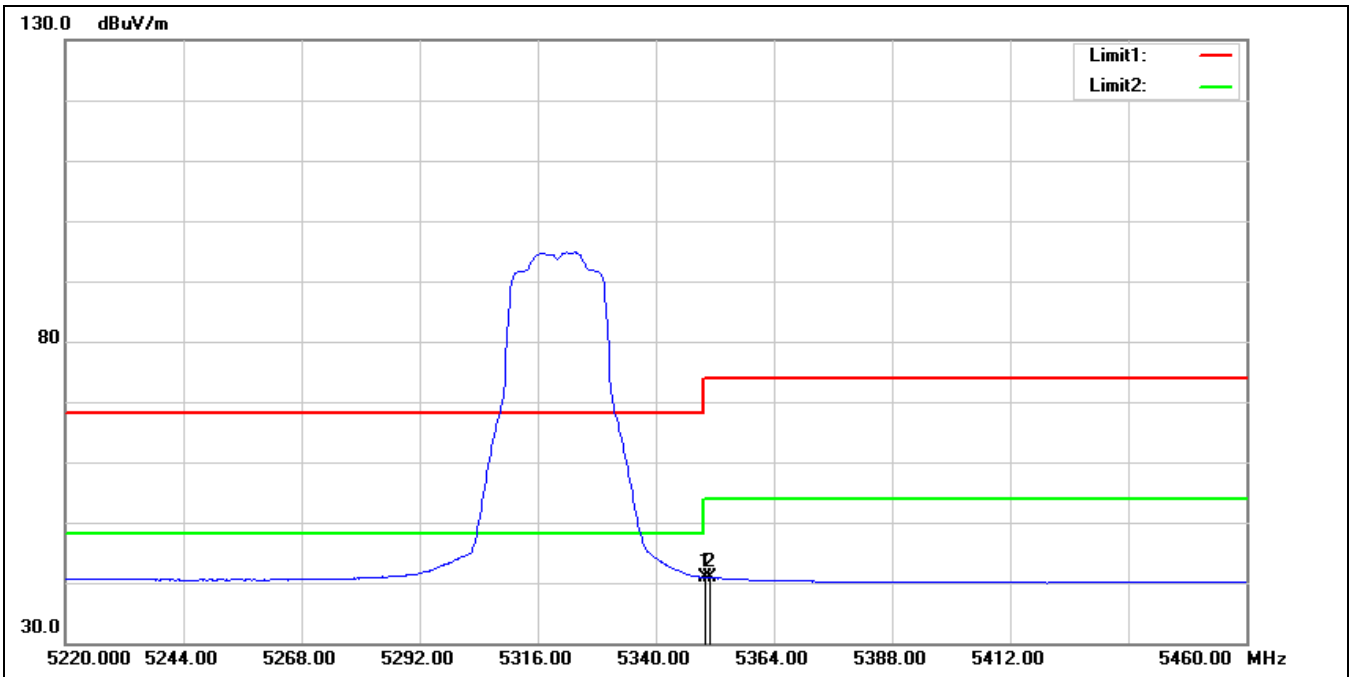


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	39.80	1.08	40.88	54.00	-13.12	AVG
2	5351.040	39.77	1.09	40.86	54.00	-13.14	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

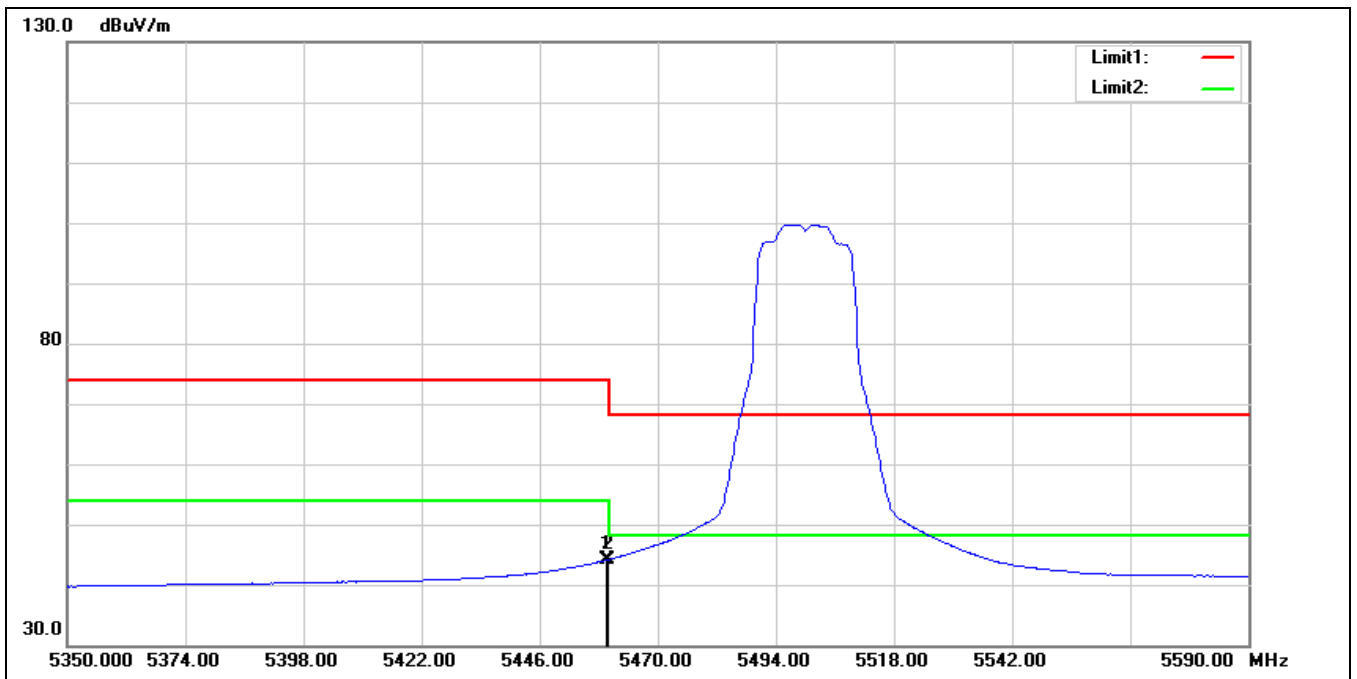


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.680	42.39	1.73	44.12	54.00	-9.88	AVG
2*	5460.000	42.49	1.73	44.22	54.00	-9.78	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5500 MHz		
Remark:			

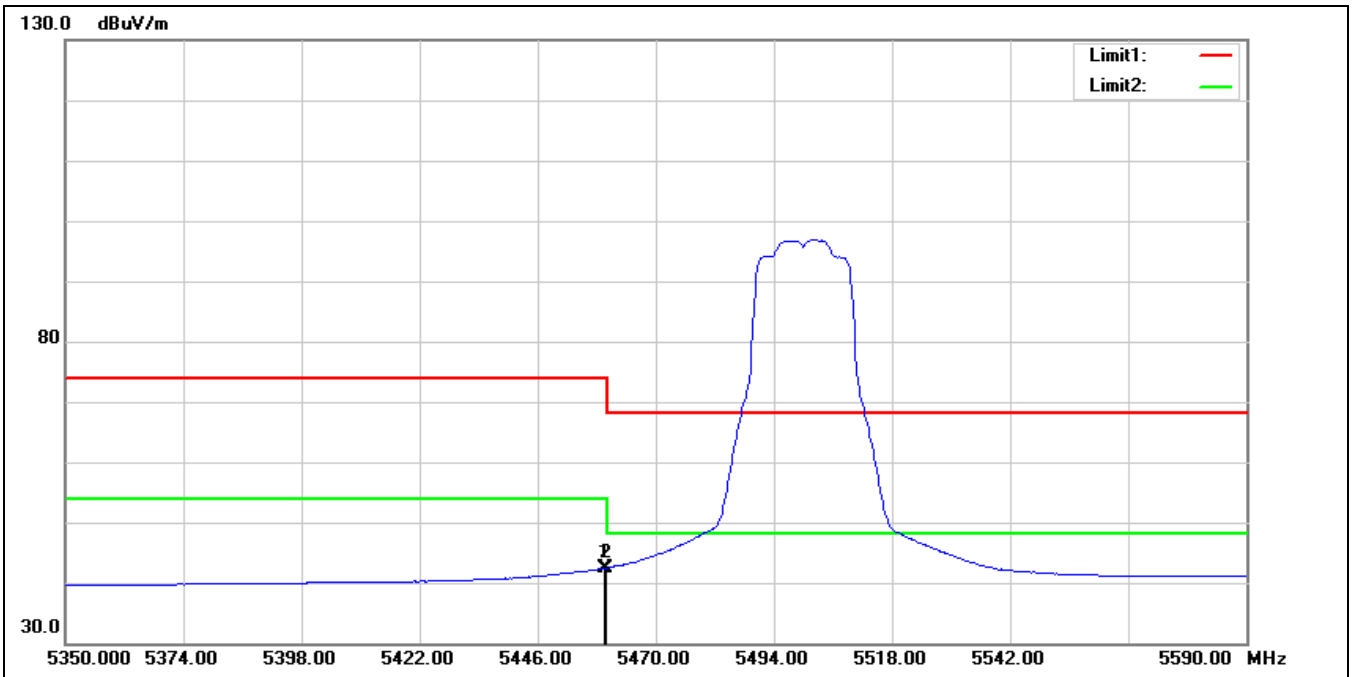


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.680	40.73	1.73	42.46	54.00	-11.54	AVG
2*	5460.000	40.77	1.73	42.50	54.00	-11.50	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

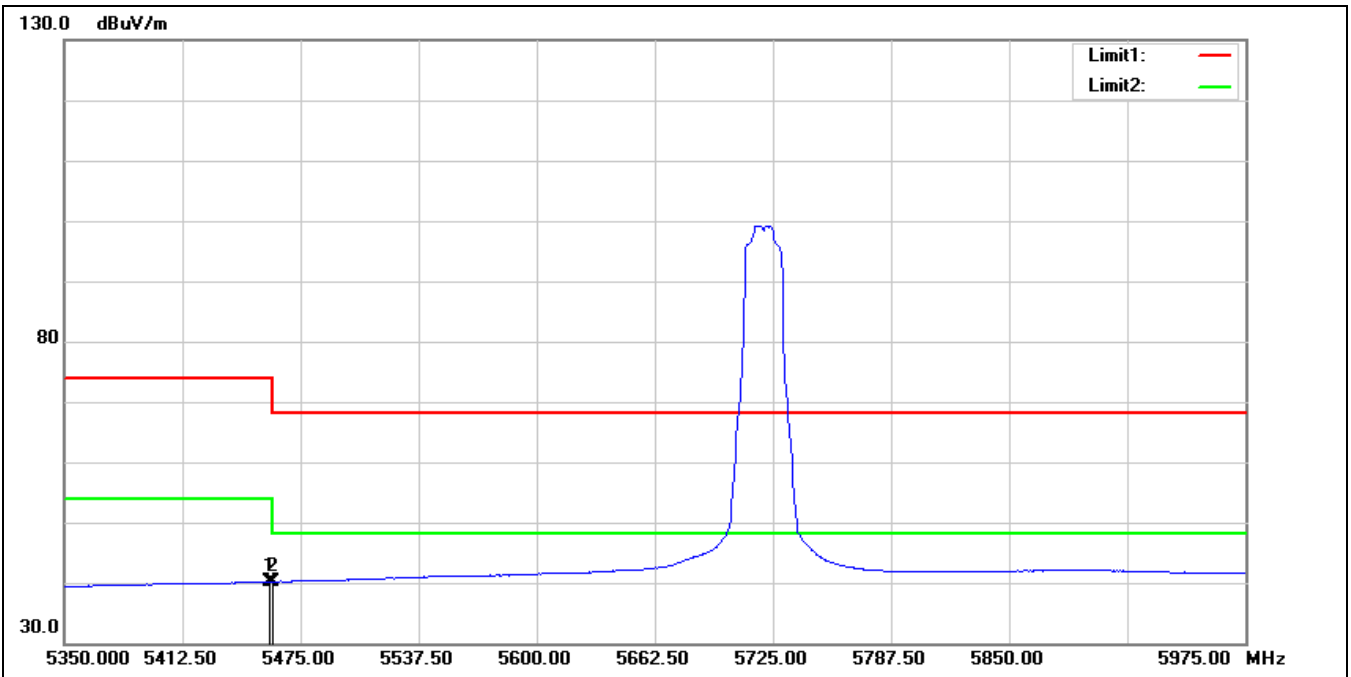

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.750	38.45	1.73	40.18	54.00	-13.82	AVG
2	5460.000	38.45	1.73	40.18	54.00	-13.82	AVG


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE20 5720 MHz		
Remark:			

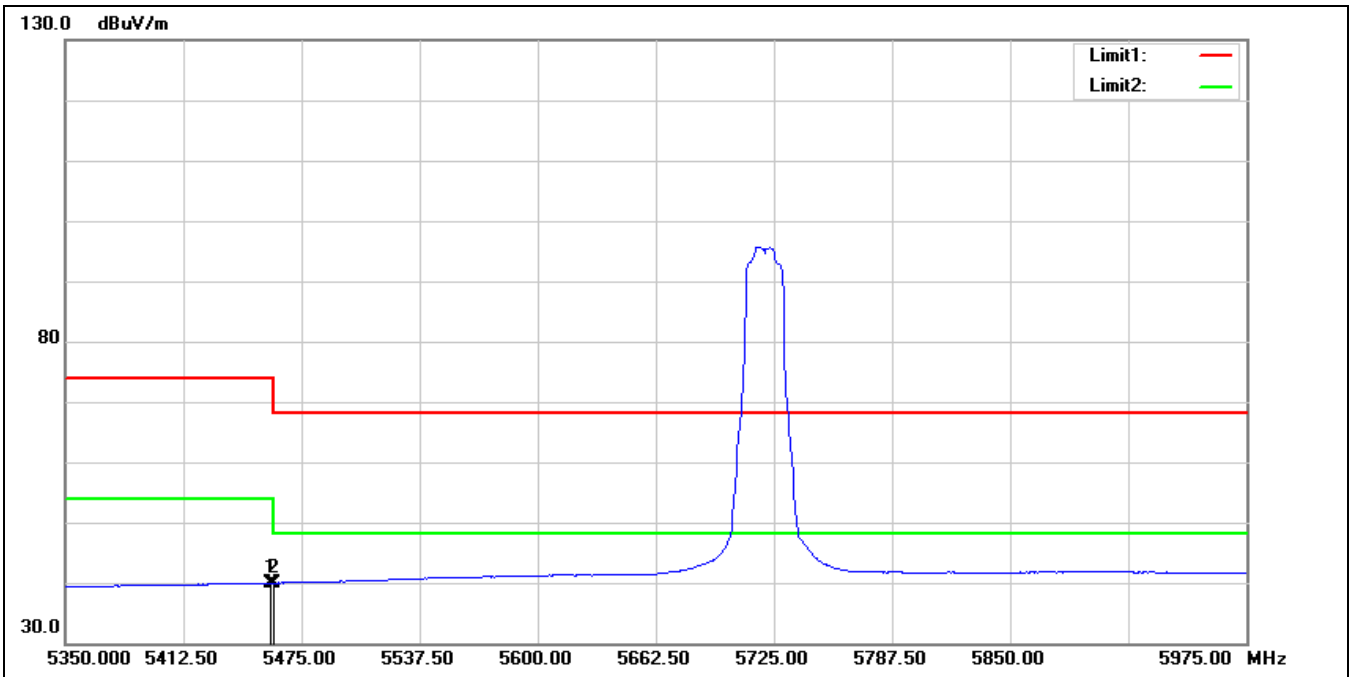

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.750	38.26	1.73	39.99	54.00	-14.01	AVG
2	5460.000	38.26	1.73	39.99	54.00	-14.01	AVG




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

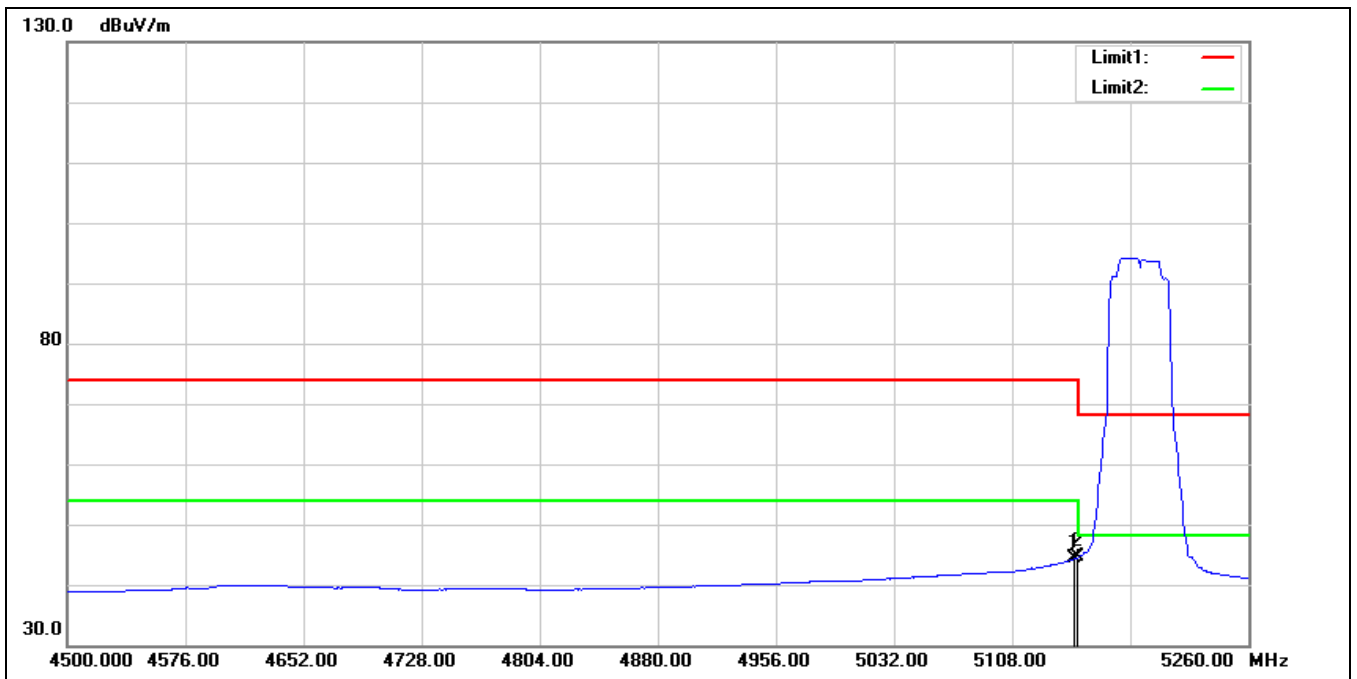


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.280	42.94	1.42	44.36	54.00	-9.64	AVG
2*	5150.000	43.16	1.42	44.58	54.00	-9.42	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5190 MHz		
Remark:			

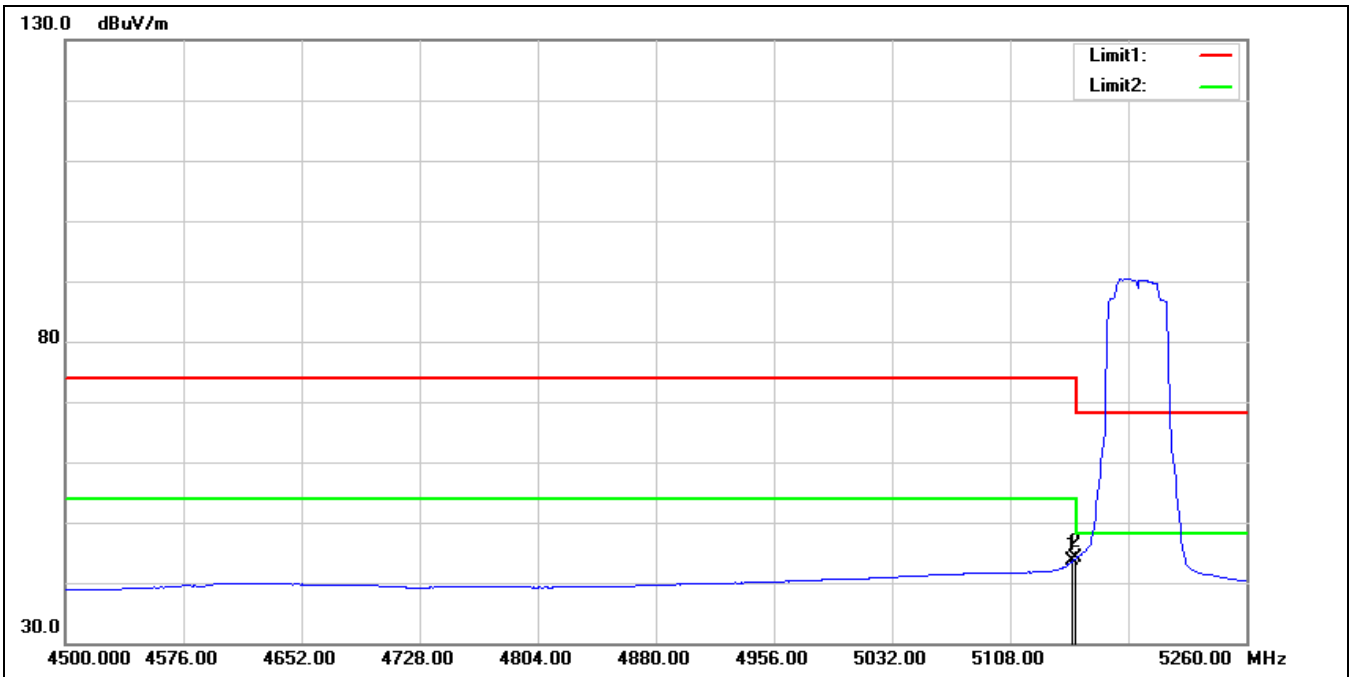


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.280	42.21	1.42	43.63	54.00	-10.37	AVG
2*	5150.000	42.73	1.42	44.15	54.00	-9.85	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

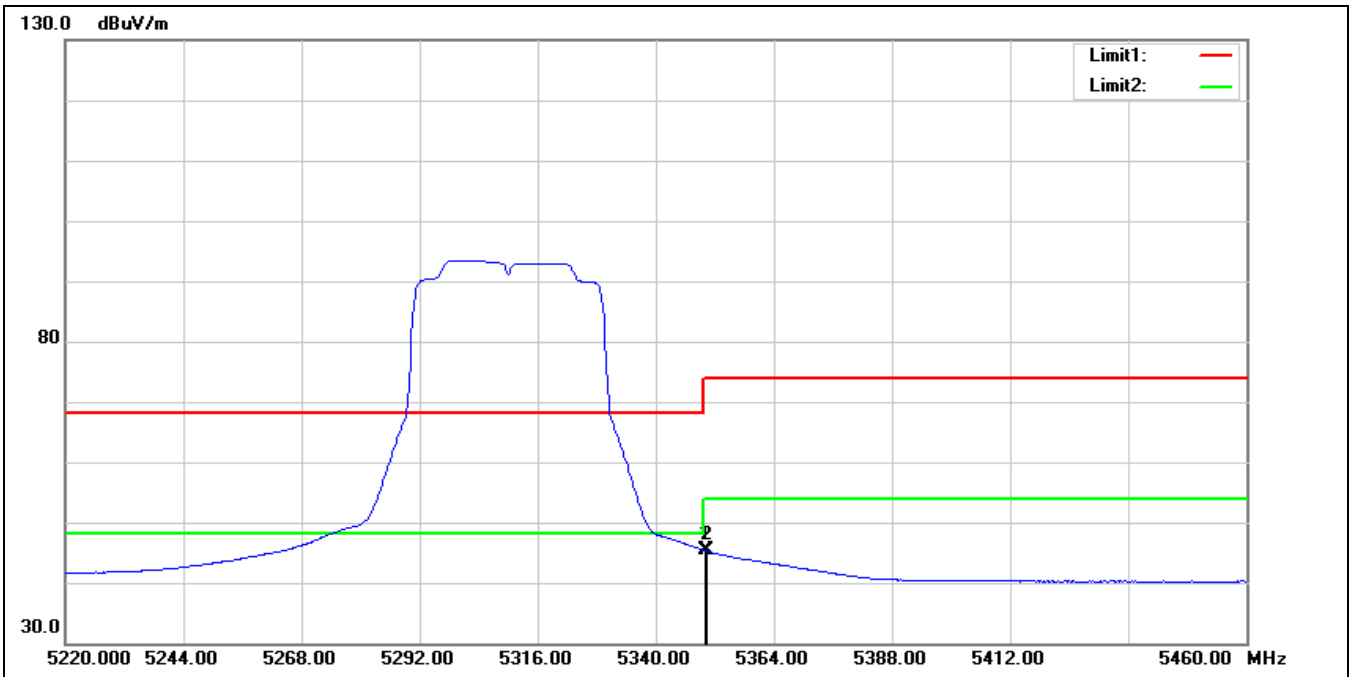


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	44.22	1.08	45.30	54.00	-8.70	AVG
2	5350.320	44.19	1.08	45.27	54.00	-8.73	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5310 MHz		
Remark:			

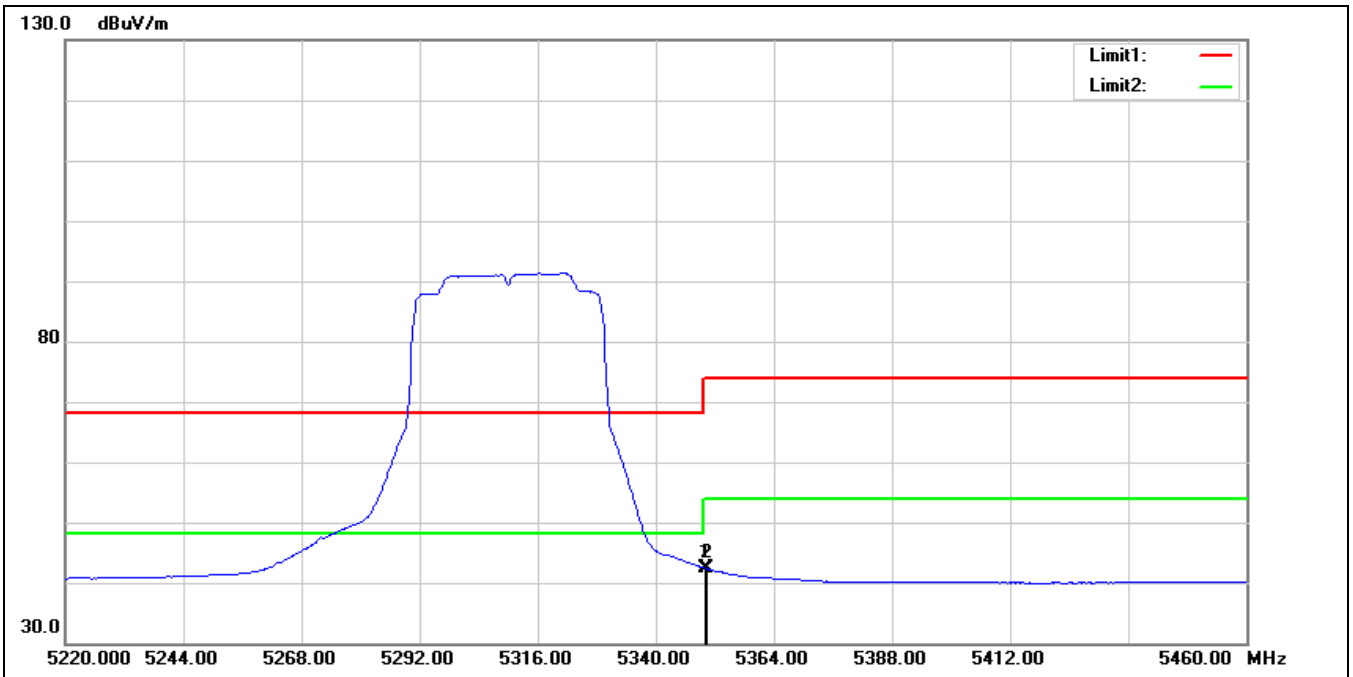


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	41.35	1.08	42.43	54.00	-11.57	AVG
2	5350.320	41.29	1.08	42.37	54.00	-11.63	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

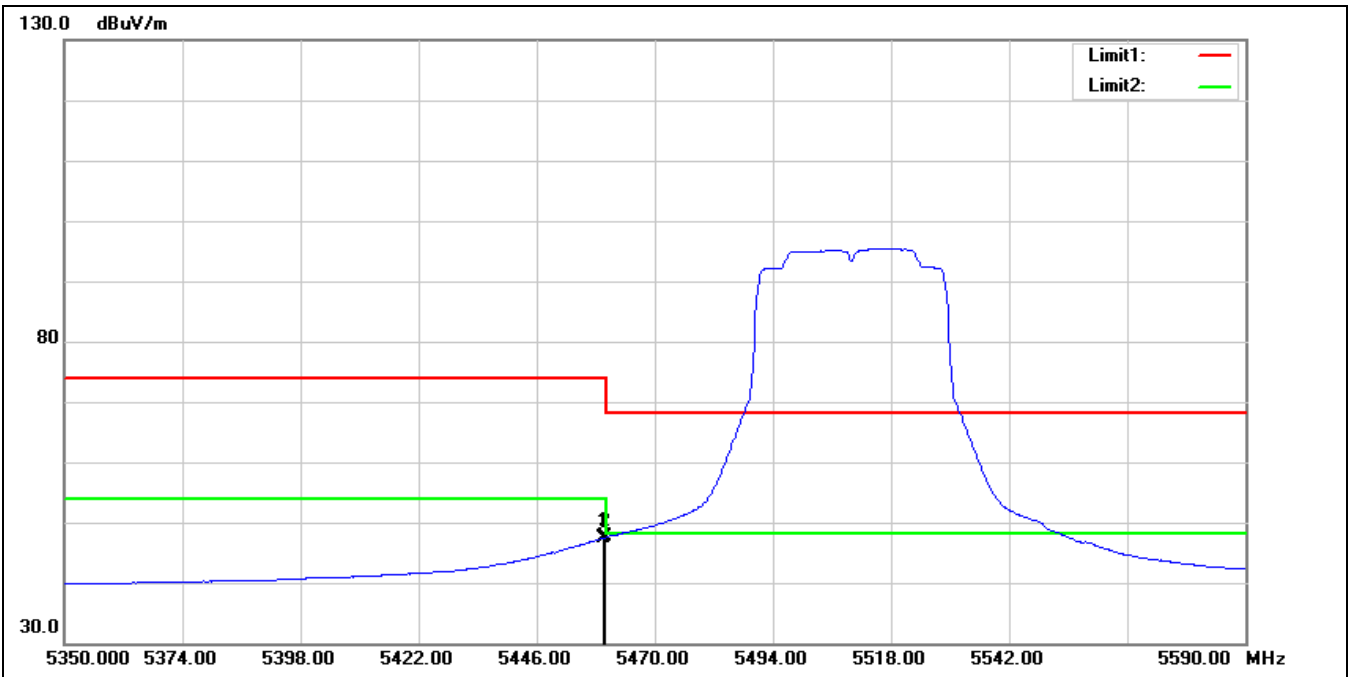


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.680	45.71	1.73	47.44	54.00	-6.56	AVG
2*	5460.000	45.79	1.73	47.52	54.00	-6.48	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5510 MHz		
Remark:			

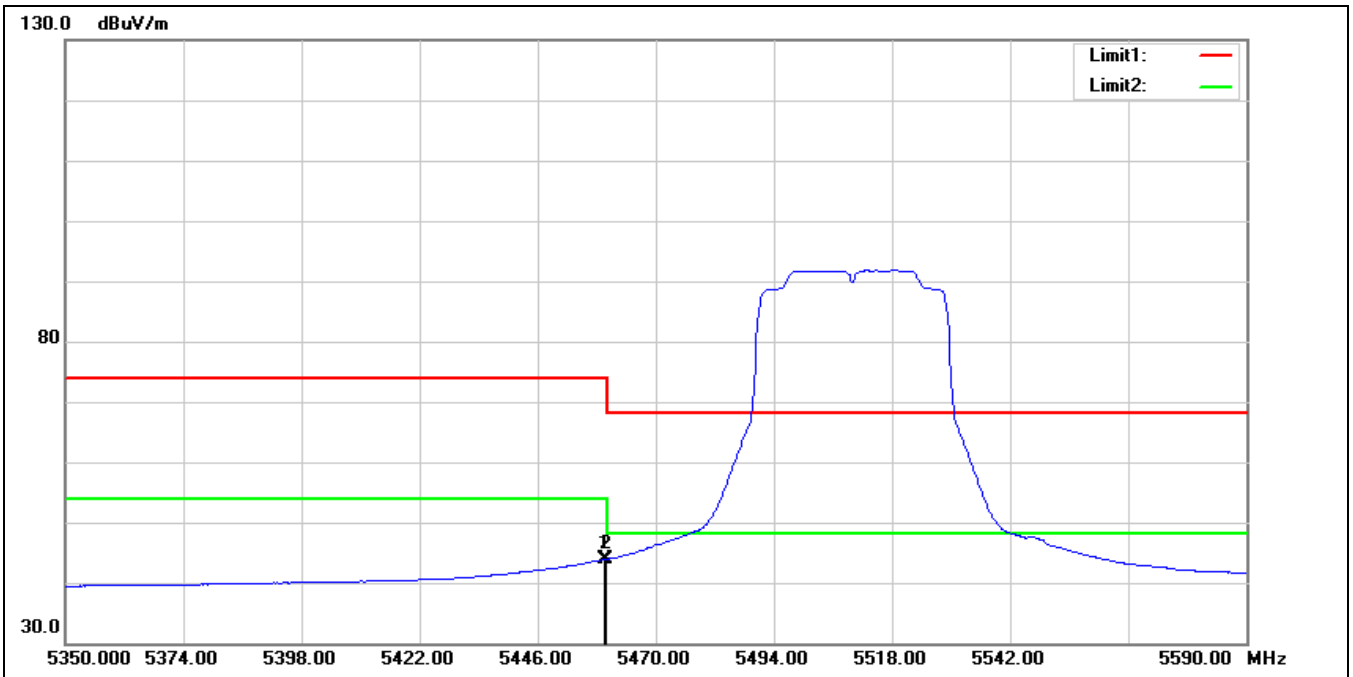


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.680	42.08	1.73	43.81	54.00	-10.19	AVG
2*	5460.000	42.18	1.73	43.91	54.00	-10.09	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

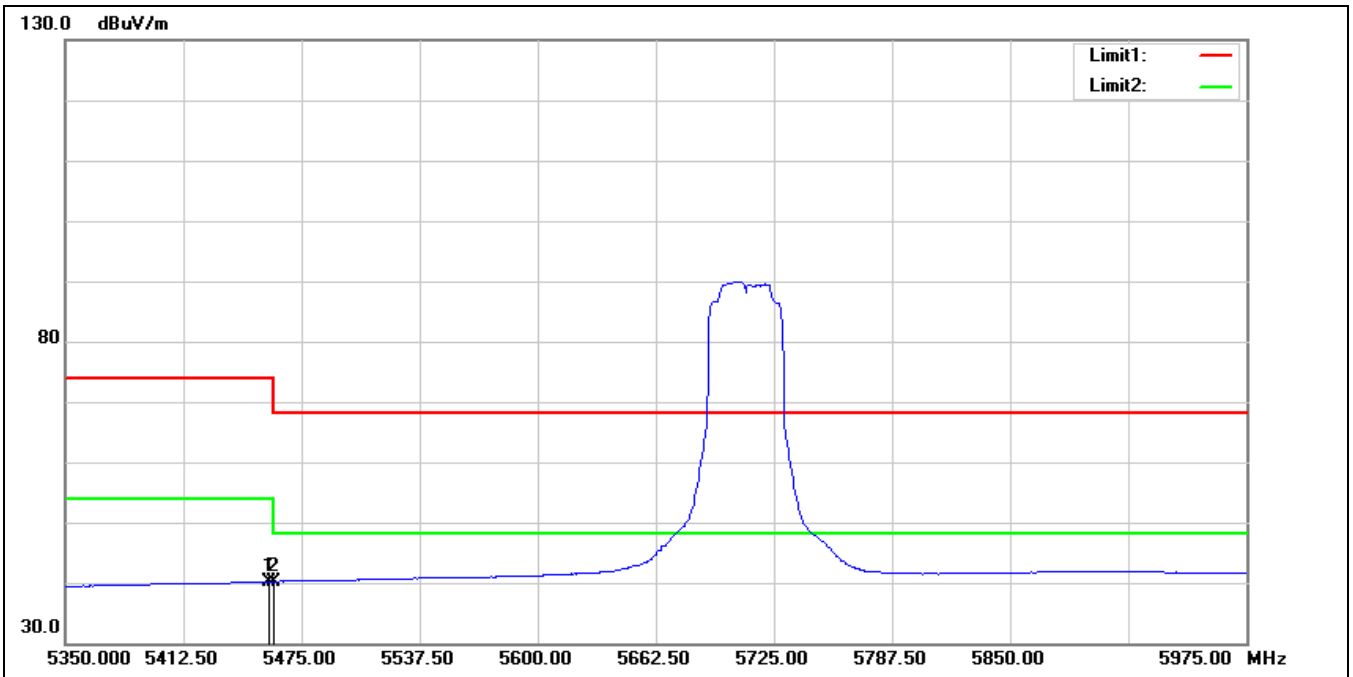

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.125	38.48	1.72	40.20	54.00	-13.80	AVG
2	5460.000	38.47	1.73	40.20	54.00	-13.80	AVG


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE40 5710 MHz		
Remark:			

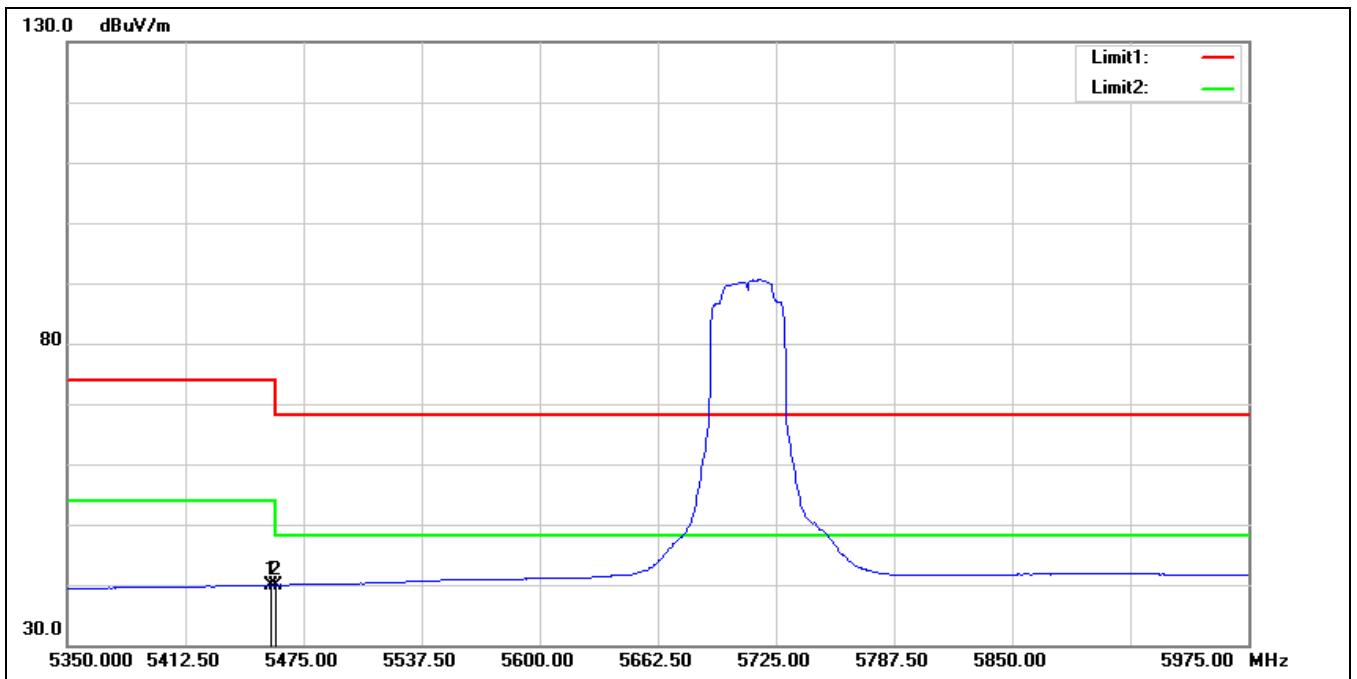

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.500	38.25	1.72	39.97	54.00	-14.03	AVG
2*	5460.000	38.25	1.73	39.98	54.00	-14.02	AVG




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

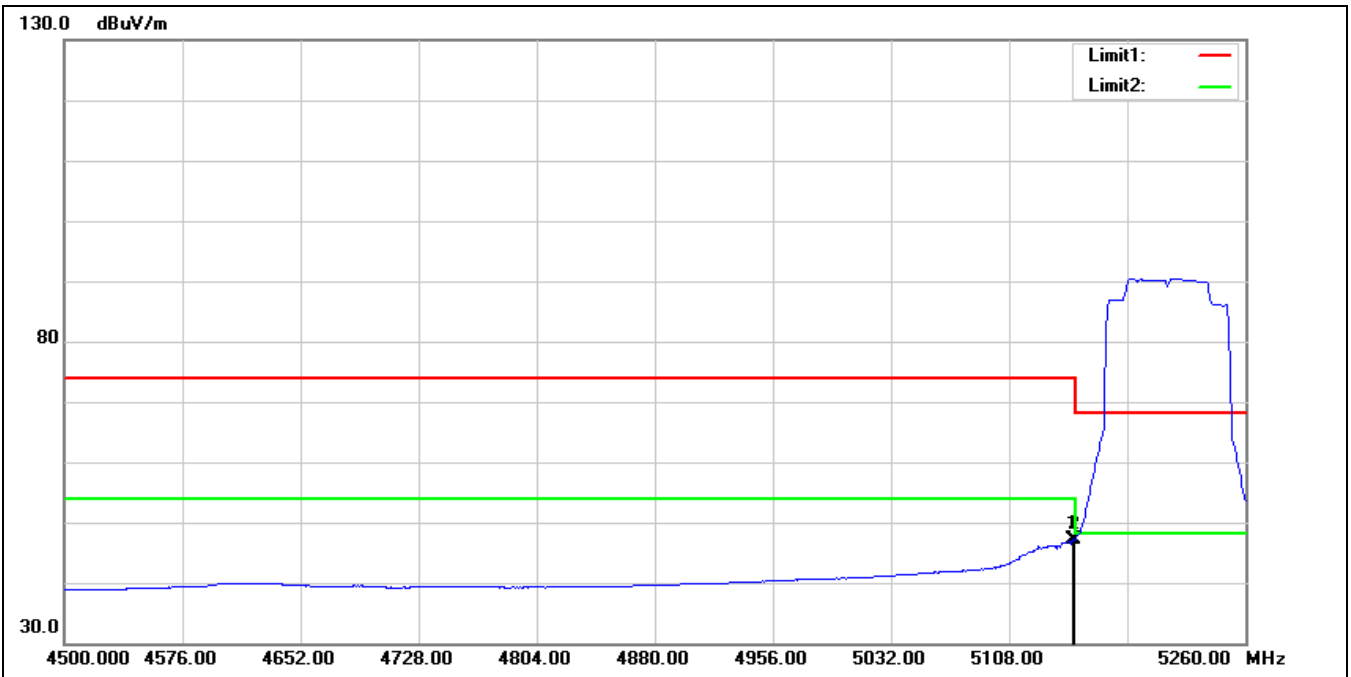


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.040	45.70	1.42	47.12	54.00	-6.88	AVG
2*	5150.000	45.80	1.42	47.22	54.00	-6.78	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5210 MHz		
Remark:			

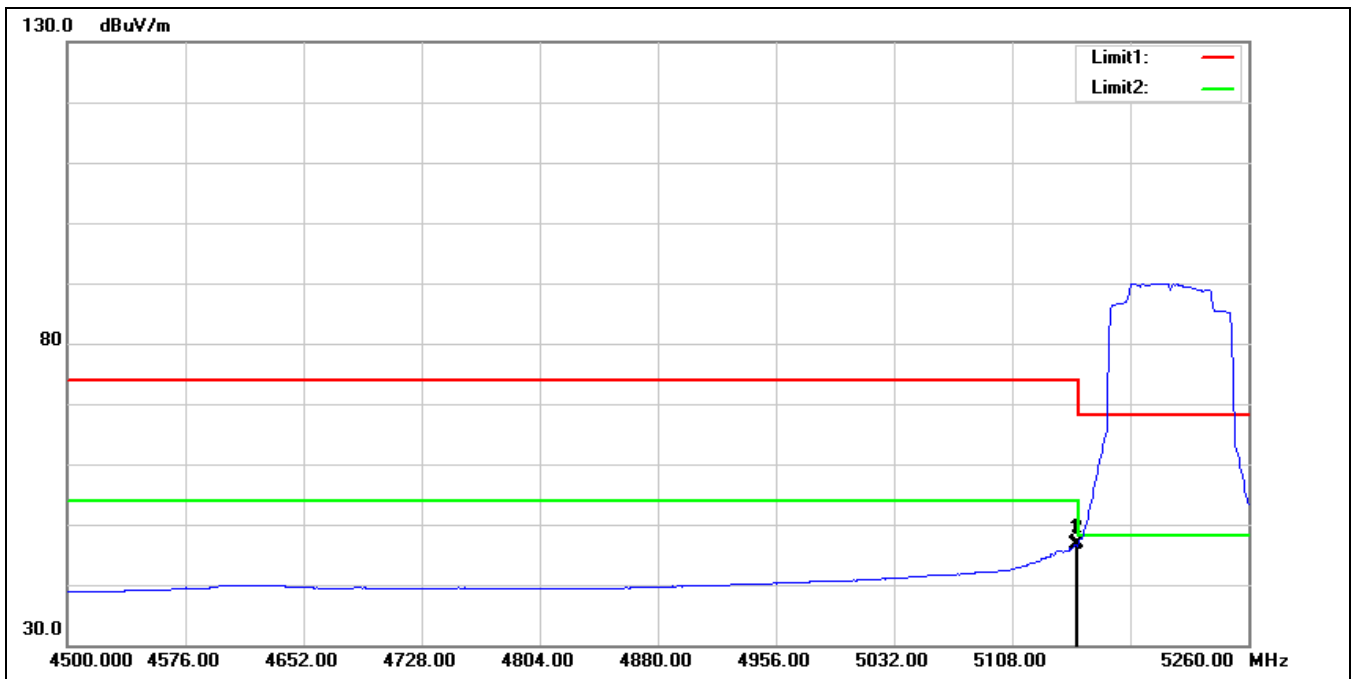


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.040	45.18	1.42	46.60	54.00	-7.40	AVG
2*	5150.000	45.39	1.42	46.81	54.00	-7.19	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

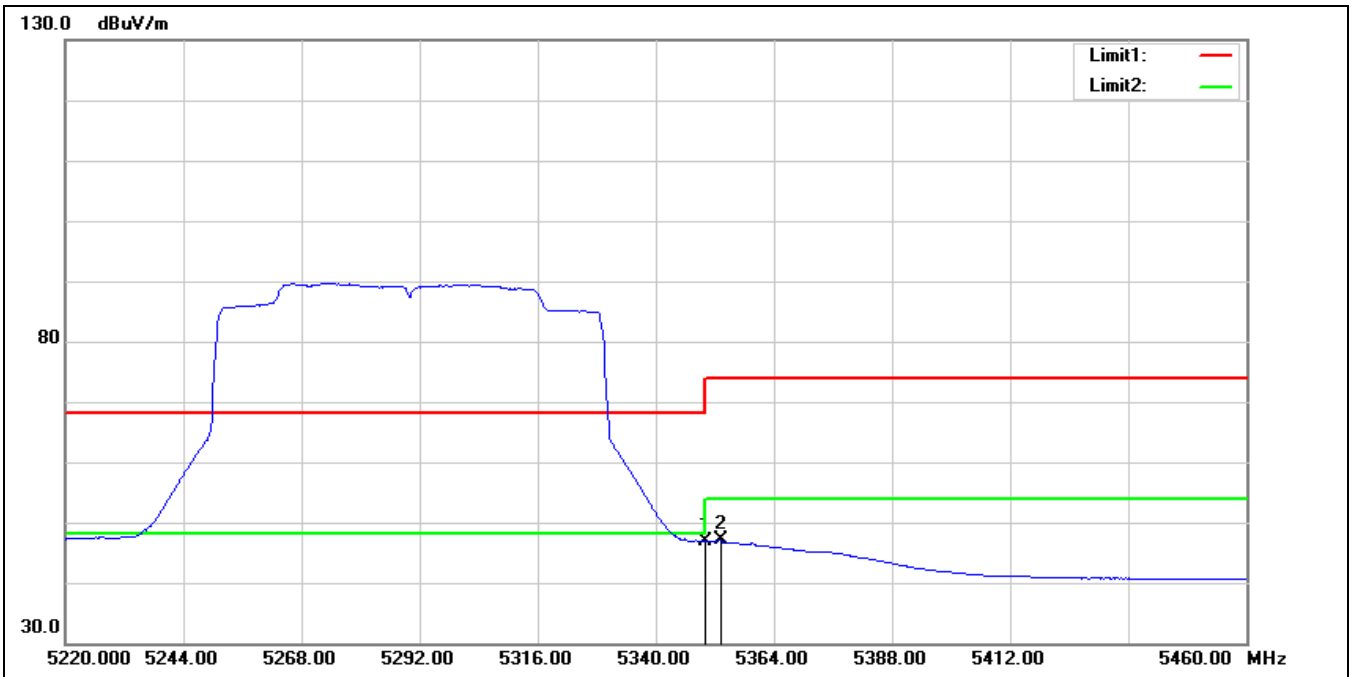


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	45.76	1.08	46.84	54.00	-7.16	AVG
2*	5353.200	45.97	1.11	47.08	54.00	-6.92	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5290 MHz		
Remark:			

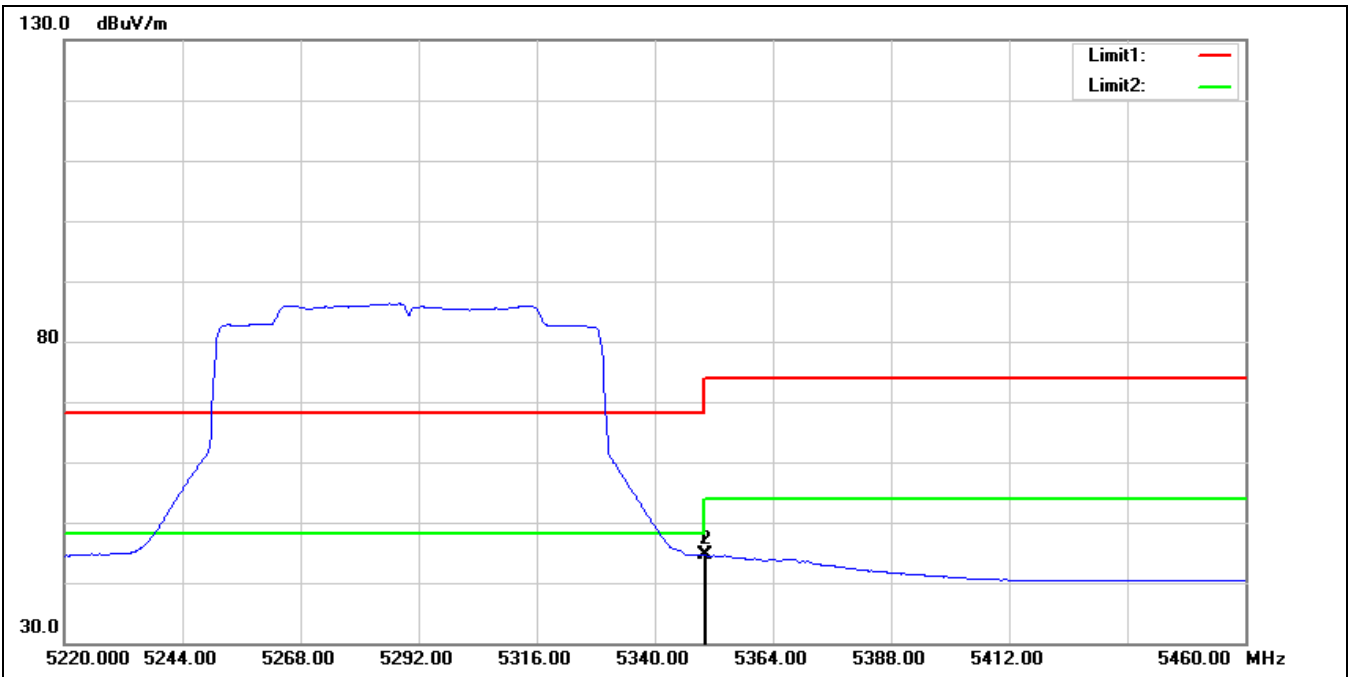


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	43.45	1.08	44.53	54.00	-9.47	AVG
2*	5350.320	43.49	1.08	44.57	54.00	-9.43	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

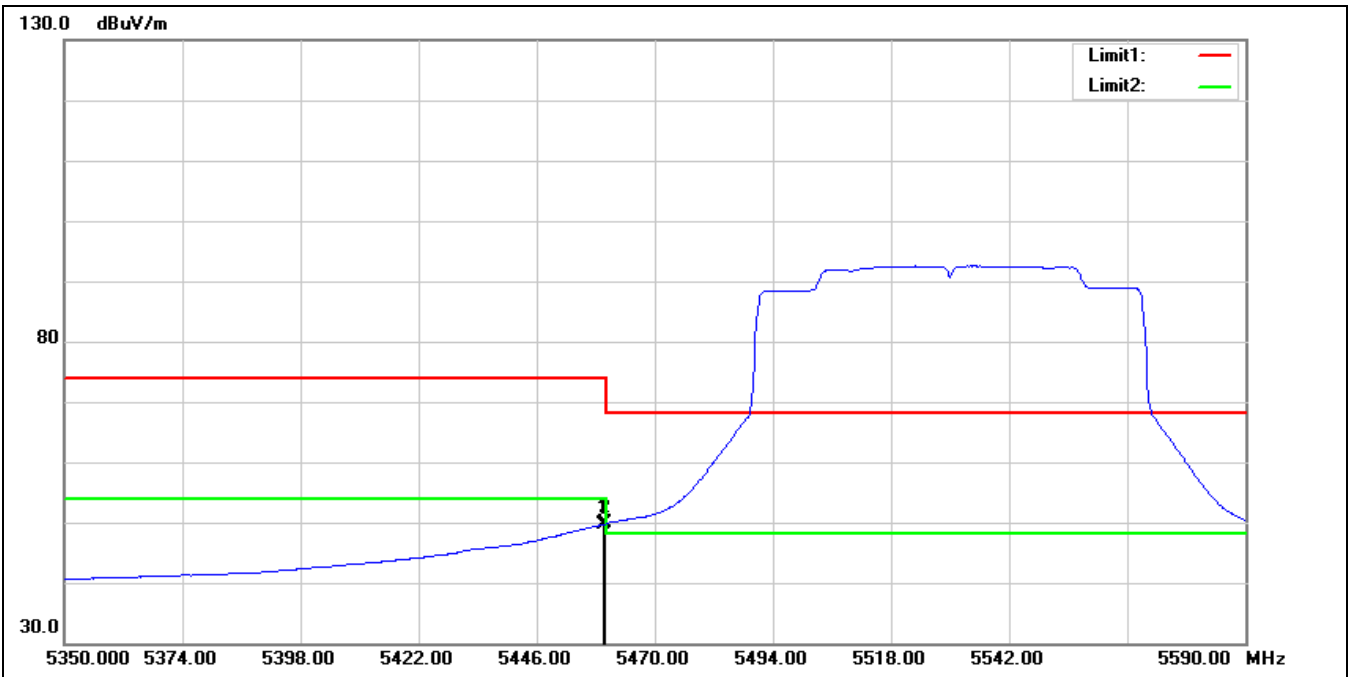


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.680	47.98	1.73	49.71	54.00	-4.29	AVG
2*	5460.000	48.10	1.73	49.83	54.00	-4.17	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5530 MHz		
Remark:			

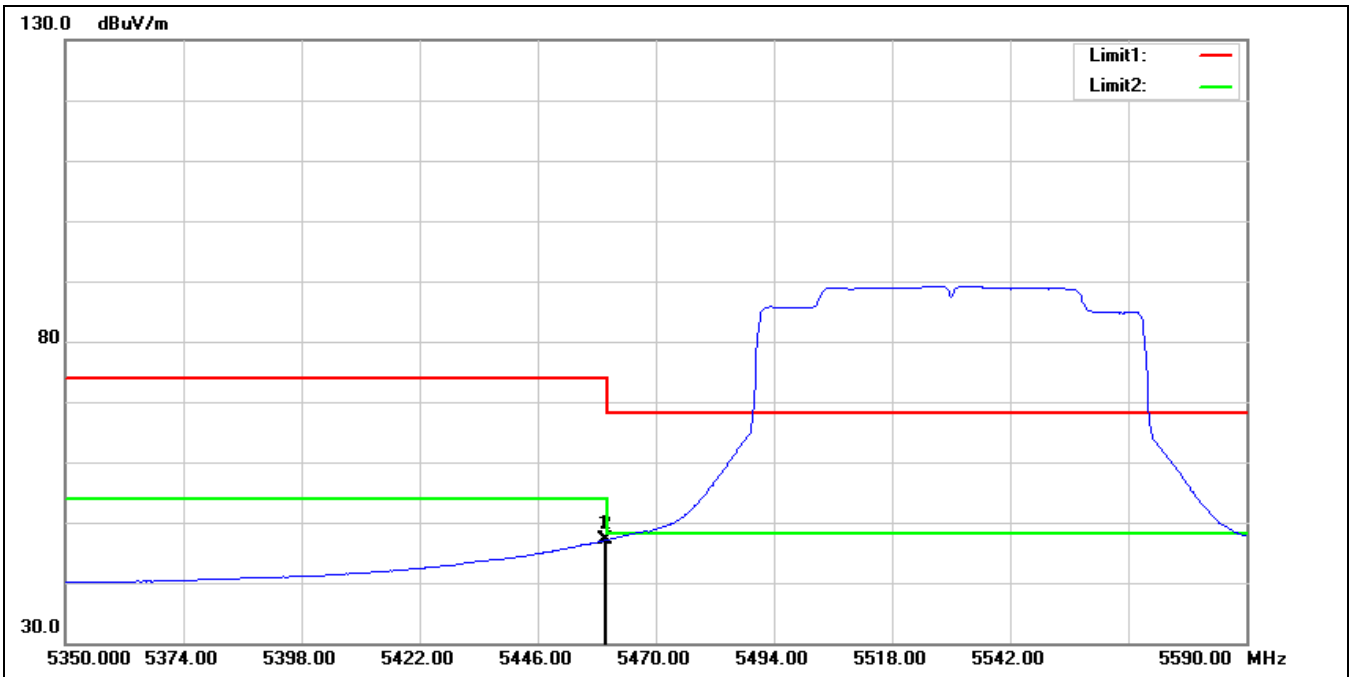


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.680	45.35	1.73	47.08	54.00	-6.92	AVG
2*	5460.000	45.39	1.73	47.12	54.00	-6.88	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

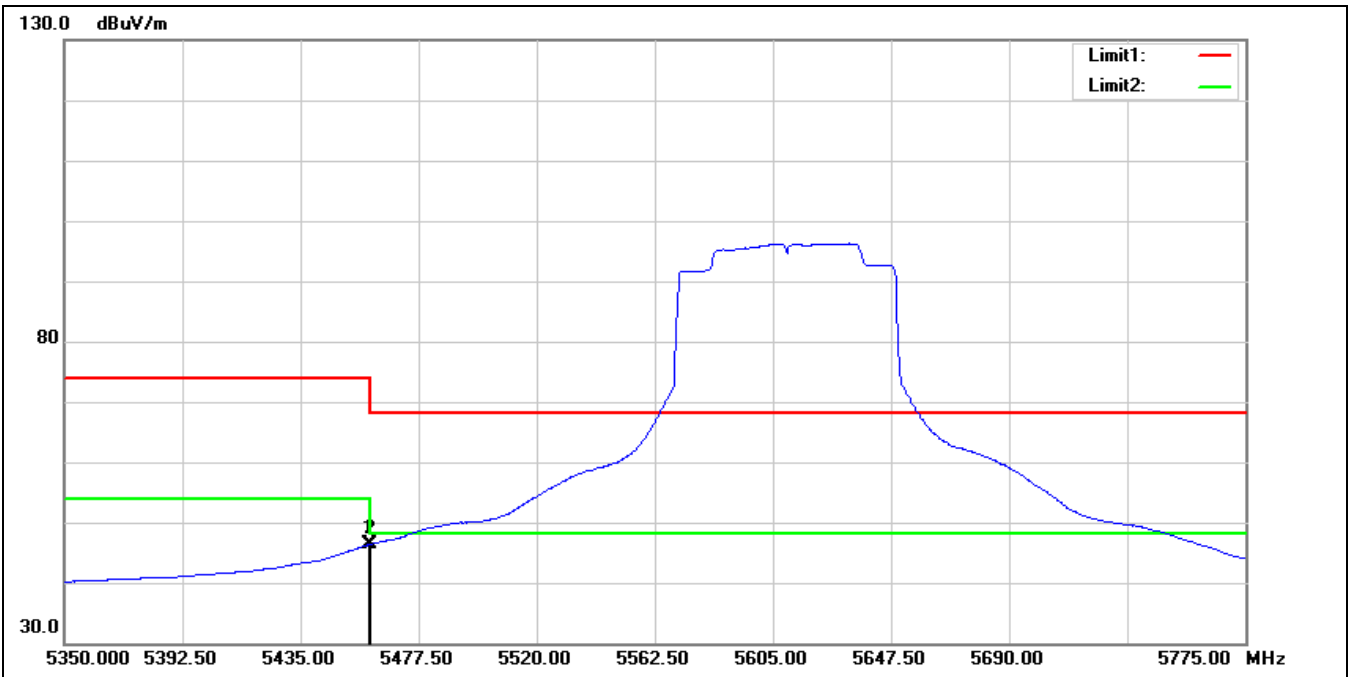

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.650	44.58	1.73	46.31	54.00	-7.69	AVG
2*	5460.000	44.68	1.73	46.41	54.00	-7.59	AVG


Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5610 MHz		
Remark:			

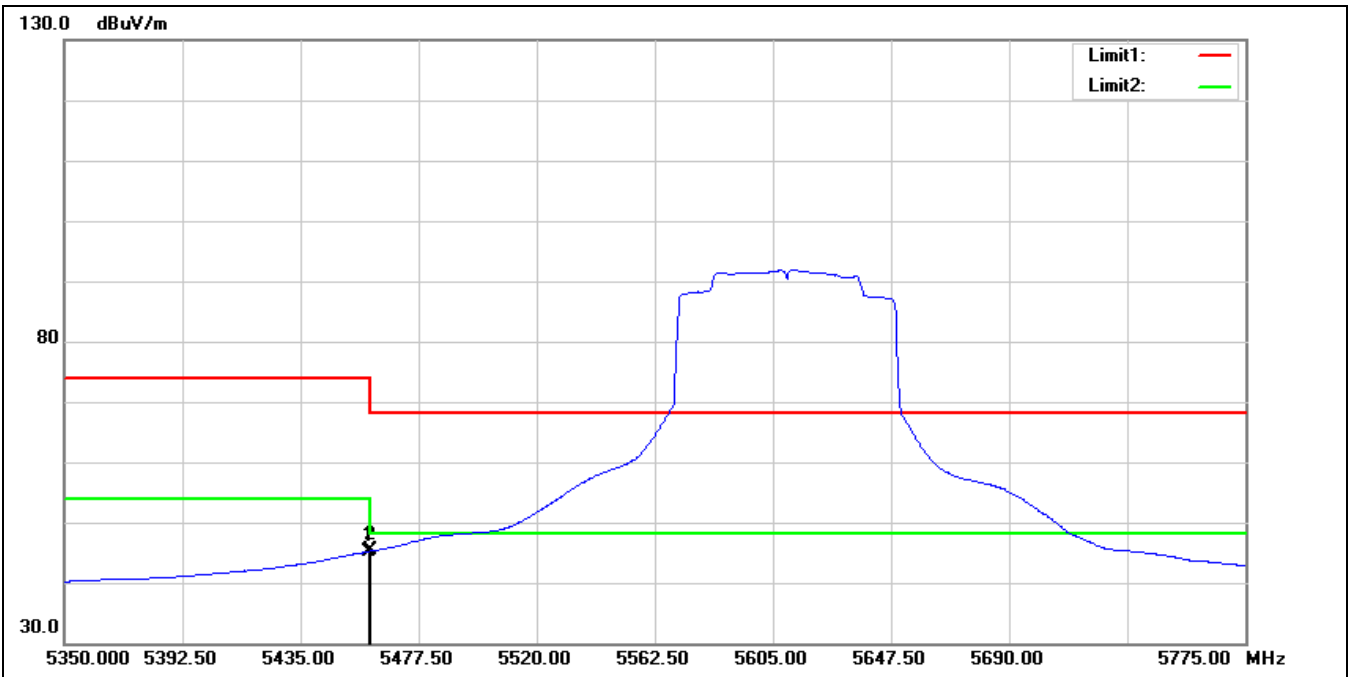

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.650	43.50	1.73	45.23	54.00	-8.77	AVG
2*	5460.000	43.53	1.73	45.26	54.00	-8.74	AVG




Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

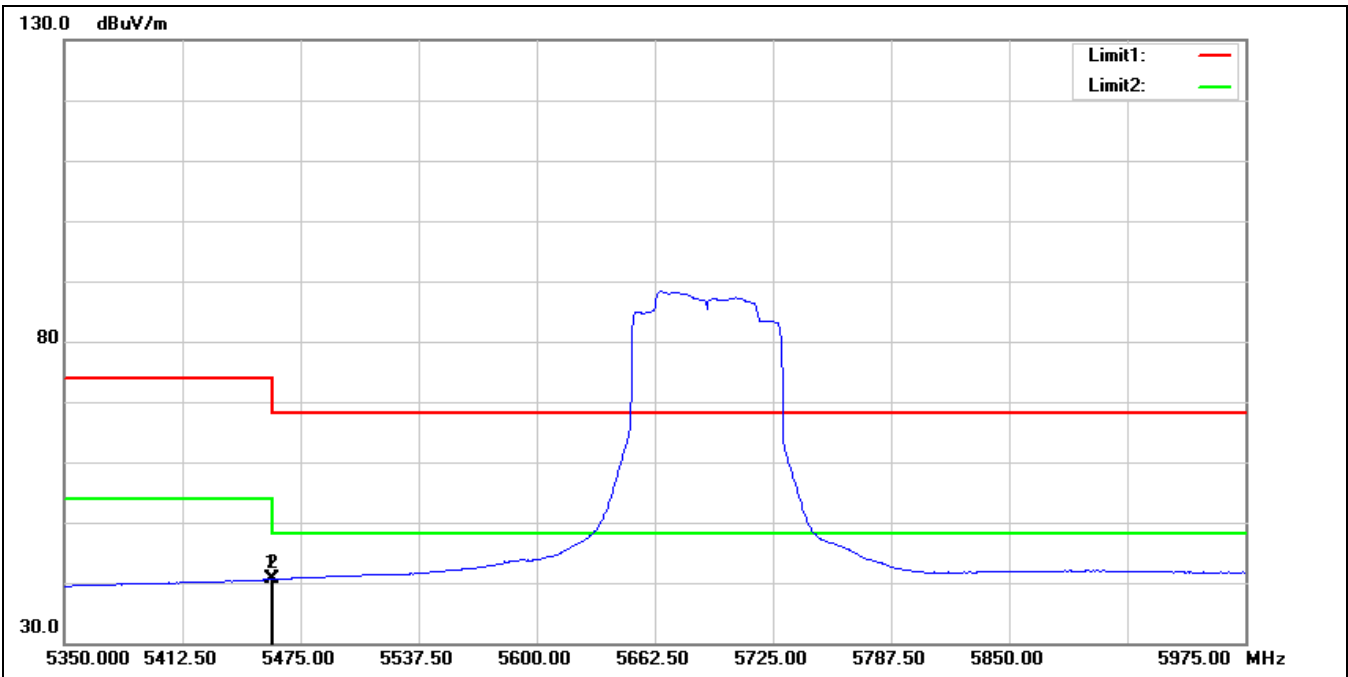


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.375	38.85	1.73	40.58	54.00	-13.42	AVG
2*	5460.000	38.89	1.73	40.62	54.00	-13.38	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE80 5690 MHz		
Remark:			

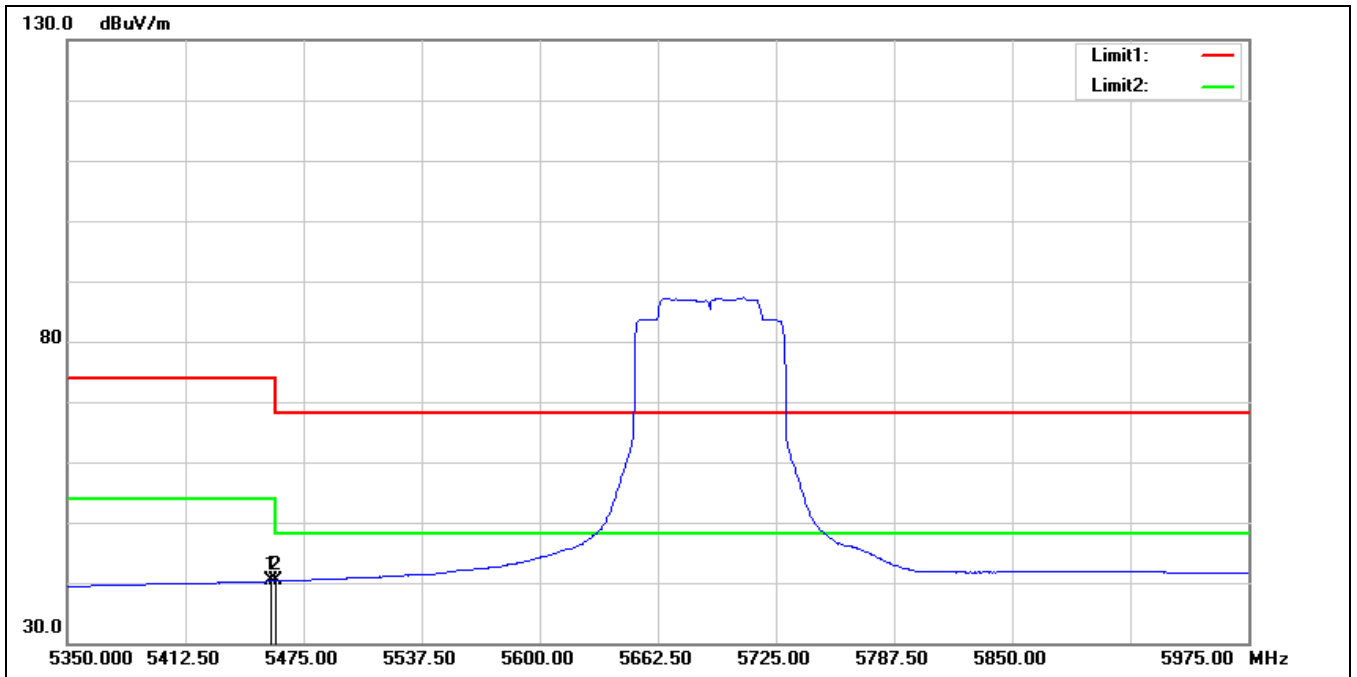


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.125	38.58	1.72	40.30	54.00	-13.70	AVG
2	5460.000	38.57	1.73	40.30	54.00	-13.70	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

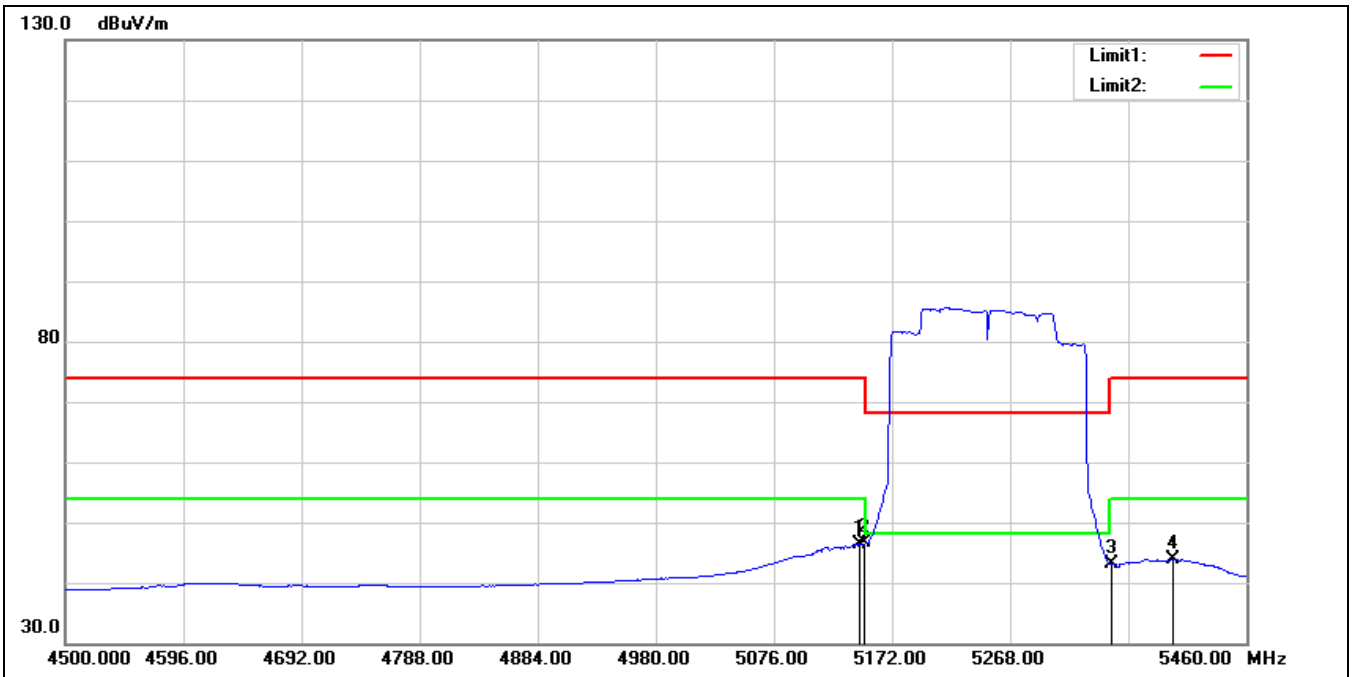


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.120	45.09	1.41	46.50	54.00	-7.50	AVG
2*	5150.000	45.16	1.42	46.58	54.00	-7.42	AVG
3	5350.000	42.00	1.08	43.08	54.00	-10.92	AVG
4	5400.480	42.38	1.55	43.93	54.00	-10.07	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5250 MHz		
Remark:			

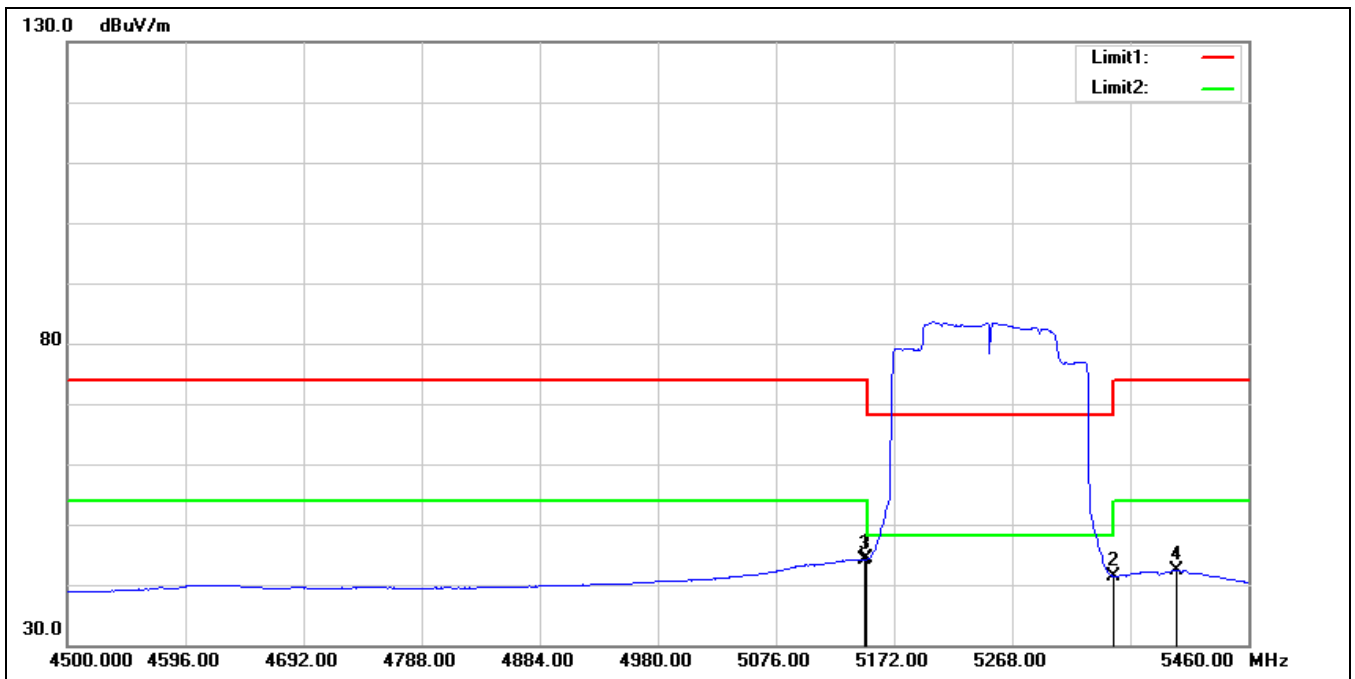


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5150.000	42.86	1.42	44.28	54.00	-9.72	AVG
2	5350.000	40.34	1.08	41.42	54.00	-12.58	AVG
3	5148.000	42.82	1.42	44.24	54.00	-9.76	AVG
4	5401.440	40.85	1.55	42.40	54.00	-11.60	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

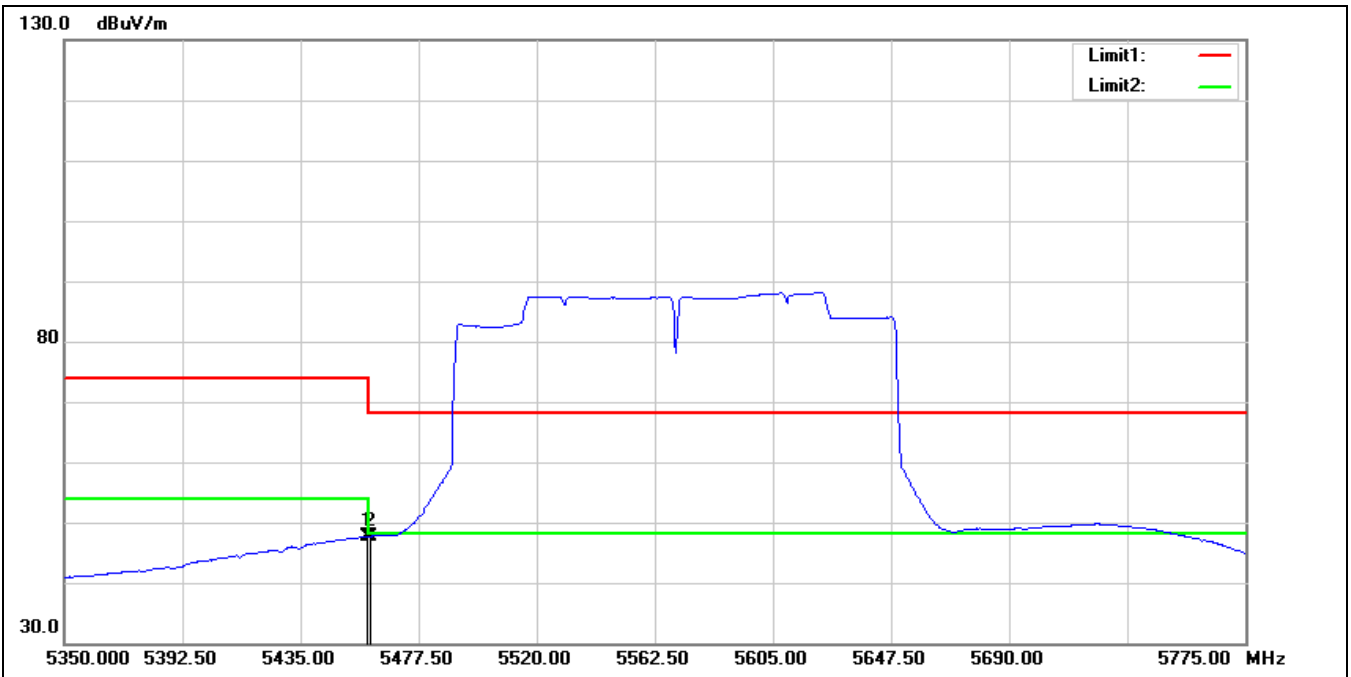

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5459.225	45.96	1.73	47.69	54.00	-6.31	AVG
2	5460.000	45.95	1.73	47.68	54.00	-6.32	AVG

Standard:	Part 15.407	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ax HE160 5570 MHz		
Remark:			

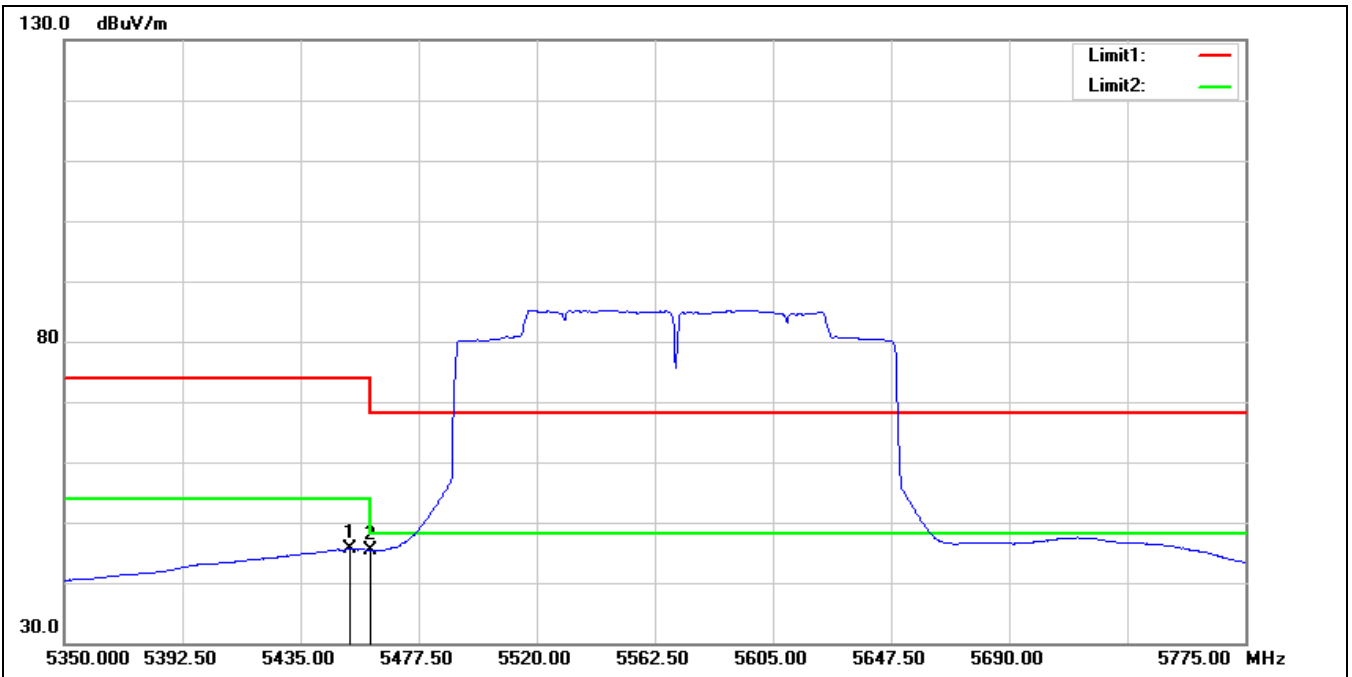

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5452.850	43.88	1.72	45.60	54.00	-8.40	AVG
2	5460.000	43.73	1.73	45.46	54.00	-8.54	AVG

---END---