



FCC TEST REPORT (15.247)

REPORT NO.: RF120412C30A

MODEL NO.: E110

FCC ID: QYLE110

RECEIVED: Apr. 16, 2012

TESTED: May 17 ~ Jun. 07, 2012

ISSUED: Jun. 18, 2012

APPLICANT: Getac Technology Corporation.

ADDRESS: 5F., Building A, No. 209, Sec. 1, Nangang Rd.,
Nangang Dist, Taipei City 11568, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan (R.O.C.)

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1. CERTIFICATION	6
2. SUMMARY OF TEST RESULTS	7
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 DESCRIPTION OF SUPPORT UNITS	15
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST	15
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	16
4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)	17
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	17
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	17
4.1.2 TEST INSTRUMENTS	18
4.1.3 TEST PROCEDURES	19
4.1.4 DEVIATION FROM TEST STANDARD	19
4.1.5 TEST SETUP	20
4.1.6 EUT OPERATING CONDITIONS	20
4.1.7 TEST RESULTS	21
4.2 CONDUCTED EMISSION MEASUREMENT	41
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	41
4.2.2 TEST INSTRUMENTS	41
4.2.3 TEST PROCEDURES	42
4.2.4 DEVIATION FROM TEST STANDARD	42
4.2.5 TEST SETUP	42
4.2.6 EUT OPERATING CONDITIONS	42
4.2.7 TEST RESULTS	43
4.3 6dB BANDWIDTH MEASUREMENT	47
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	47
4.3.2 TEST SETUP	47
4.3.3 TEST INSTRUMENTS	47
4.3.4 TEST PROCEDURE	47
4.3.5 DEVIATION FROM TEST STANDARD	47
4.3.6 EUT OPERATING CONDITIONS	47
4.3.7 TEST RESULTS	48
4.4 CONDUCTED OUTPUT POWER	50
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	50
4.4.2 TEST SETUP	50
4.4.3 TEST INSTRUMENTS	50
4.4.4 TEST PROCEDURES	50
4.4.5 DEVIATION FROM TEST STANDARD	50
4.4.6 EUT OPERATING CONDITIONS	50
4.4.7 TEST RESULTS	51
4.5 POWER SPECTRAL DENSITY MEASUREMENT	53
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	53



4.5.2	TEST SETUP	53
4.5.3	TEST INSTRUMENTS.....	53
4.5.4	TEST PROCEDURE.....	53
4.5.5	DEVIATION FROM TEST STANDARD.....	53
4.5.6	EUT OPERATING CONDITION.....	53
4.5.7	TEST RESULTS	54
4.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT.....	56
4.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	56
4.6.2	TEST SETUP.....	56
4.6.3	TEST INSTRUMENTS.....	56
4.6.4	TEST PROCEDURE.....	56
4.6.5	DEVIATION FROM TEST STANDARD.....	57
4.6.6	EUT OPERATING CONDITION.....	57
4.6.7	TEST RESULTS	57
4.6.8	TEST RESULTS	58
5.	TEST TYPES AND RESULTS (FOR 5.0GHz BAND).....	64
5.1	RADIATED EMISSION MEASUREMENT	64
5.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	64
5.1.2	TEST INSTRUMENTS.....	65
5.1.3	TEST PROCEDURES	65
5.1.4	DEVIATION FROM TEST STANDARD.....	65
5.1.5	TEST SETUP.....	65
5.1.6	EUT OPERATING CONDITIONS	65
5.1.7	TEST RESULTS	66
5.2	CONDUCTED EMISSION MEASUREMENT	81
5.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	81
5.2.2	TEST INSTRUMENTS.....	81
5.2.3	TEST PROCEDURES	81
5.2.4	DEVIATION FROM TEST STANDARD.....	81
5.2.5	TEST SETUP.....	81
5.2.6	EUT OPERATING CONDITIONS	81
5.2.7	TEST RESULTS	82
5.3	6dB BANDWIDTH MEASUREMENT.....	86
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	86
5.3.2	TEST SETUP.....	86
5.3.3	TEST INSTRUMENTS.....	86
5.3.4	TEST PROCEDURE.....	86
5.3.5	DEVIATION FROM TEST STANDARD.....	86
5.3.6	EUT OPERATING CONDITIONS	86
5.3.7	TEST RESULTS	87
5.4	CONDUCTED OUTPUT POWER.....	89
5.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	89
5.4.2	TEST SETUP.....	89
5.4.3	INSTRUMENTS.....	89
5.4.4	TEST PROCEDURES	89
5.4.5	DEVIATION FROM TEST STANDARD.....	89
5.4.6	EUT OPERATING CONDITIONS	89
5.4.7	TEST RESULTS	90
5.5	POWER SPECTRAL DENSITY MEASUREMENT.....	91
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	91
5.5.2	TEST SETUP.....	91



A D T

5.5.3	TEST INSTRUMENTS.....	91
5.5.4	TEST PROCEDURE.....	91
5.5.5	DEVIATION FROM TEST STANDARD.....	91
5.5.6	EUT OPERATING CONDITION.....	91
5.5.7	TEST RESULTS	92
5.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT	93
5.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	93
5.6.2	TEST SETUP.....	93
5.6.3	TEST INSTRUMENTS.....	93
5.6.4	TEST PROCEDURE.....	93
5.6.5	DEVIATION FROM TEST STANDARD.....	93
5.6.6	EUT OPERATING CONDITION.....	93
5.6.7	TEST RESULTS	93
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	99
7.	INFORMATION ON THE TESTING LABORATORIES	100
8.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	101



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120412C30A	Original release	Jun. 18, 2012



1. CERTIFICATION

PRODUCT: Tablet PC
MODEL NO.: E110
BRAND: Getac
APPLICANT: Getac Technology Corporation.
TESTED: May 17 ~ Jun. 07, 2012
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (model: E110) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , DATE : Jun. 18, 2012
Andrea Hsia / Specialist

APPROVED BY : Gary Chang , DATE : Jun. 18, 2012
Gary Chang / Technical Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.59dB at 1.46094MHz.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.1dB at 2390.00, 2483.50MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is I-PEX

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Tablet PC
MODEL NO.	E110
POWER SUPPLY	19Vdc (Adapter) 7.2Vdc (Battery)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps
OPERATING FREQUENCY	2.4GHz: 2412 ~ 2462MHz 5.0GHz: 5745 ~ 5825MHz
NUMBER OF CHANNEL	2.4GHz: 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) 5.0GHz: 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
OUTPUT POWER	236.2mW for 2412 ~ 2462MHz 228.8mW for 5745 ~ 5825MHz
ANTENNA TYPE	Refer to note as below
ANTENNA CONNECTOR	I-PEX
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Adapter, Battery

NOTE:

1. The antenna used in this EUT is listed as below table:

ITEM	TYPE	GAIN (dBi)						
		2400 MHz	2402 MHz	2442 MHz	2450 MHz	5725 MHz	5785 MHz	5850 MHz
Main Antenna	PIFA	-1.86009	-1.76394	-0.87054	-0.7299	-0.47239	-0.7516	-1.17693
Aux. Antenna	PIFA	2.3807	2.37434	2.38666	2.32688	-0.37657	-0.455	0.443475

2. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

MODULATION MODE	TX FUNCTION
802.11b	1TX
802.11g	1TX
802.11a	1TX
802.11n (20MHz)	1TX / 2TX
802.11n (40MHz)	1TX / 2TX



A D T

3. The EUT consumes power from the following adapter & battery.

ADAPTER	
BRAND:	DELTA ELECTRONICS, INC.
MODEL:	ADP-65WH BB
INPUT:	100-240Vac, 1.5A
OUTPUT:	19Vdc, 3.42A
POWER LINE:	DC 1.7m non-shielded cable with one core

BATTERY	
BRAND	Getac
MODEL	BP2S2P2050
RATING	7.2Vdc, 4100mAh

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

FOR 2.4GHz:

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

FOR 5.0GHz (5745 ~ 5825MHz):

5 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

FOR 2.4GHz:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on Z-plane.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX Function
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	1TX
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	1TX
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2	1TX
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	15.0	1TX
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	14.4	2TX
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	30.0	2TX

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX Function
802.11g	1 to 11	6	OFDM	BPSK	6.0	1TX
802.11n (40MHz)	3 to 9	6	OFDM	BPSK	30.0	2TX

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX Function
802.11g	1 to 11	6	OFDM	BPSK	6.0	1TX
802.11n (40MHz)	3 to 9	6	OFDM	BPSK	30.0	2TX

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX Function
802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0	1TX
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0	1TX
802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	7.2	1TX
802.11n (40MHz)	3 to 9	3, 9	OFDM	BPSK	15.0	1TX
802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	14.4	2TX
802.11n (40MHz)	3 to 9	3, 9	OFDM	BPSK	30.0	2TX

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX Function
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	1TX
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	1TX
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2	1TX
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	15.0	1TX
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	14.4	2TX
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	30.0	2TX

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	24deg. C, 65%RH	120Vac, 60Hz	Brad Wu Alan Wu
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Haru Yang
PLC	21deg. C, 66%RH	120Vac, 60Hz	Ben Huang
APCM	25deg. C, 65%RH	120Vac, 60Hz	Haru Yang



FOR 5.0GHz (5745 ~ 5825MHz):

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX Function
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0	1TX
802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	7.2	1TX
802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0	1TX
802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	14.4	2TX
802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	30.0	2TX

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX Function
802.11a	149 to 165	149	OFDM	BPSK	6.0	1TX
802.11n (40MHz)	151 to 159	151	OFDM	BPSK	30.0	2TX

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX Function
802.11a	149 to 165	149	OFDM	BPSK	6.0	1TX
802.11n (40MHz)	151 to 159	151	OFDM	BPSK	30.0	2TX



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX Function
802.11a	149 to 165	149, 165	OFDM	BPSK	6.0	1TX
802.11n (20MHz)	149 to 165	149, 165	OFDM	BPSK	7.2	1TX
802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0	1TX
802.11n (20MHz)	149 to 165	149, 165	OFDM	BPSK	14.4	2TX
802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	30.0	2TX

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX Function
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0	1TX
802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	7.2	1TX
802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0	1TX
802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	14.4	2TX
802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	30.0	2TX

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	24deg. C, 65%RH	120Vac, 60Hz	Haru Yang
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Haru Yang
PLC	21deg. C, 66%RH	120Vac, 60Hz	Ben Huang
APCM	25deg. C, 65%RH	120Vac, 60Hz	Haru Yang

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	EARPHONE	PHILIPS	SBC HL150	NA	NA
2	Dongle	Transcend	V85	538455 4489	NA
3	Dongle	Transcend	V85	569992-8208	NA
4	PC	DELL	D531	CN-0XM006-48643-81U-2973	QDS-BRCM1020

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.5m non-shielded cable
2	NA
3	NA
4	10m RJ45 UTP cable

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 4 acted as communication partner to transfer data.

3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

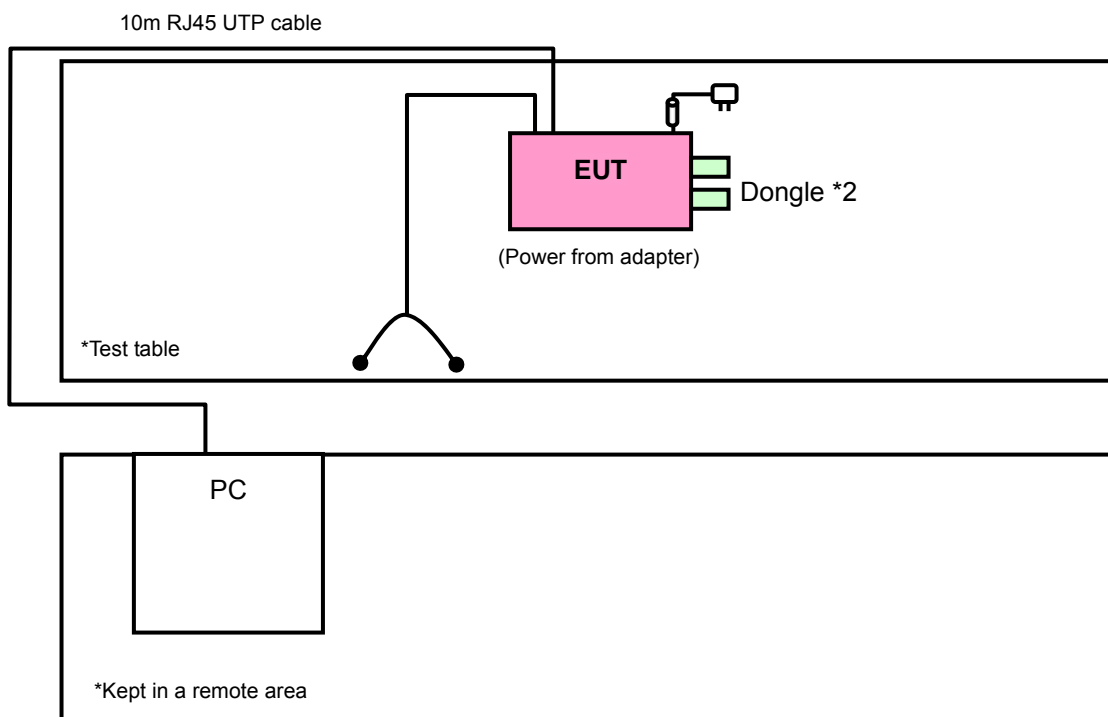

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2009

KDB 558074 D01 DTS Meas Guidance v01

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100744	Apr. 19, 2012	Apr. 18, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Aug. 04, 2011	Aug. 03, 2012
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Apr. 03, 2012	Apr. 02, 2013
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Sep. 06, 2011	Sep. 05, 2012
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 20, 2011	Jul. 19, 2012
Preamplifier Agilent	8449B	3008A01911	Oct. 29, 2011	Oct. 28, 2012
Preamplifier Agilent	8447D	2944A10638	Oct. 29, 2011	Oct. 28, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295013/4 283403/4	Aug. 19, 2011	Aug. 18, 2012
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 13, 2011	Aug. 12, 2012
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA
Turn Table ADT.	TT100.	TT93021704	NA	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA	NA
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 29, 2011	Oct. 28, 2012
High Speed Peak Power Meter	ML2495A	0824011	Aug. 04, 2011	Aug. 03, 2012
Power Sensor	MA2411B	0738171	Aug. 04, 2011	Aug. 03, 2012

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in HwaYa Chamber 4.
4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
5. The FCC Site Registration No. is 460141.
6. The IC Site Registration No. is IC7450F-4.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 100kHz and video bandwidth is 300kHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

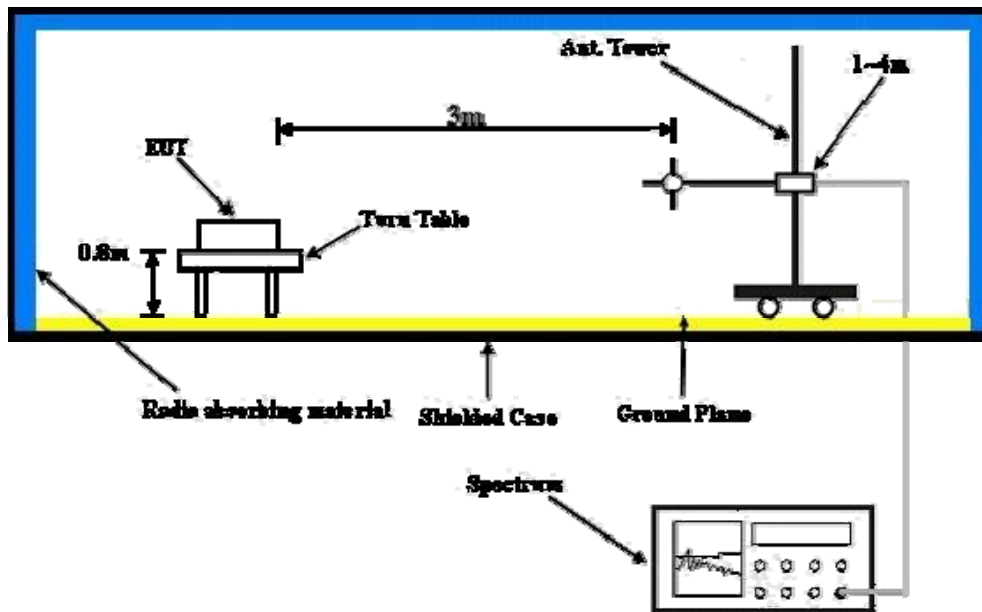

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on the testing table.
- Prepared PC to act as communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".

4.1.7 TEST RESULTS

ABOVE 1GHz DATA:

802.11b: 1TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	55.5 PK	74.0	-18.5	1.32 H	60	26.30	29.20
2	1600.00	33.9 AV	54.0	-20.1	1.32 H	60	4.70	29.20
3	2386.00	60.2 PK	74.0	-13.8	1.03 H	226	28.30	31.90
4	2386.00	50.9 AV	54.0	-3.1	1.03 H	226	19.00	31.90
5	*2412.00	103.2 PK			1.02 H	224	71.20	32.00
6	*2412.00	99.4 AV			1.02 H	224	67.40	32.00
7	4824.00	49.8 PK	74.0	-24.2	1.15 H	175	11.40	38.40
8	4824.00	46.5 AV	54.0	-7.5	1.15 H	175	8.10	38.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	58.6 PK	74.0	-15.4	1.00 V	121	29.40	29.20
2	1600.00	36.1 AV	54.0	-17.9	1.00 V	121	6.90	29.20
3	2386.00	56.4 PK	74.0	-17.6	1.34 V	106	24.50	31.90
4	2386.00	46.2 AV	54.0	-7.8	1.34 V	106	14.30	31.90
5	*2412.00	97.6 PK			1.34 V	106	65.60	32.00
6	*2412.00	94.0 AV			1.34 V	106	62.00	32.00
7	4824.00	49.2 PK	74.0	-24.8	1.11 V	182	10.80	38.40
8	4824.00	45.9 AV	54.0	-8.1	1.11 V	182	7.50	38.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	55.8 PK	74.0	-18.2	1.24 H	58	26.60	29.20
2	1600.00	34.1 AV	54.0	-19.9	1.24 H	58	4.90	29.20
3	*2437.00	102.9 PK			1.03 H	201	70.80	32.10
4	*2437.00	99.3 AV			1.03 H	201	67.20	32.10
5	4874.00	54.2 PK	74.0	-19.8	1.04 H	148	15.80	38.40
6	4874.00	50.9 AV	54.0	-3.1	1.04 H	148	12.50	38.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	58.8 PK	74.0	-15.2	1.02 V	126	29.60	29.20
2	1600.00	36.4 AV	54.0	-17.6	1.02 V	126	7.20	29.20
3	*2437.00	97.4 PK			1.33 V	138	65.30	32.10
4	*2437.00	93.8 AV			1.33 V	138	61.70	32.10
5	4874.00	54.0 PK	74.0	-20.0	1.00 V	128	15.60	38.40
6	4874.00	50.5 AV	54.0	-3.5	1.00 V	128	12.10	38.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	56.0 PK	74.0	-18.0	1.25 H	61	26.80	29.20
2	1600.00	34.2 AV	54.0	-19.8	1.25 H	61	5.00	29.20
3	*2462.00	101.7 PK			1.00 H	241	69.50	32.20
4	*2462.00	98.1 AV			1.00 H	241	65.90	32.20
5	2488.00	61.9 PK	74.0	-12.1	1.00 H	228	29.60	32.30
6	2488.00	52.5 AV	54.0	-1.5	1.00 H	228	20.20	32.30
7	4924.00	53.2 PK	74.0	-20.8	1.04 H	146	14.80	38.40
8	4924.00	49.6 AV	54.0	-4.4	1.04 H	146	11.20	38.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	59.1 PK	74.0	-14.9	1.04 V	124	29.90	29.20
2	1600.00	36.6 AV	54.0	-17.4	1.04 V	124	7.40	29.20
3	*2462.00	96.2 PK			1.31 V	135	64.00	32.20
4	*2462.00	92.6 AV			1.31 V	135	60.40	32.20
5	2488.00	57.6 PK	74.0	-16.4	1.31 V	135	25.30	32.30
6	2488.00	46.9 AV	54.0	-7.1	1.31 V	135	14.60	32.30
7	4924.00	52.4 PK	74.0	-21.6	1.02 V	131	14.00	38.40
8	4924.00	48.8 AV	54.0	-5.2	1.02 V	131	10.40	38.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

802.11g: 1TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	55.2 PK	74.0	-18.8	1.30 H	58	26.00	29.20
2	1600.00	33.6 AV	54.0	-20.4	1.30 H	58	4.40	29.20
3	2390.00	70.2 PK	74.0	-3.8	1.26 H	252	38.20	32.00
4	2390.00	52.2 AV	54.0	-1.8	1.26 H	252	20.20	32.00
5	*2412.00	105.8 PK			1.56 H	249	73.80	32.00
6	*2412.00	95.6 AV			1.56 H	249	63.60	32.00
7	4824.00	46.5 PK	74.0	-27.5	1.23 H	16	8.10	38.40
8	4824.00	33.8 AV	54.0	-20.2	1.23 H	16	-4.60	38.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	58.2 PK	74.0	-15.8	1.02 V	118	29.00	29.20
2	1600.00	35.8 AV	54.0	-18.2	1.02 V	118	6.60	29.20
3	2390.00	62.6 PK	74.0	-11.4	1.10 V	96	30.60	32.00
4	2390.00	47.1 AV	54.0	-6.9	1.10 V	96	15.10	32.00
5	*2412.00	99.5 PK			1.10 V	96	67.50	32.00
6	*2412.00	89.4 AV			1.10 V	96	57.40	32.00
7	4824.00	45.9 PK	74.0	-28.1	1.04 V	241	7.50	38.40
8	4824.00	33.2 AV	54.0	-20.8	1.04 V	241	-5.20	38.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	55.4 PK	74.0	-18.6	1.29 H	61	26.20	29.20
2	1600.00	33.9 AV	54.0	-20.1	1.29 H	61	4.70	29.20
3	*2437.00	107.1 PK			1.52 H	246	75.00	32.10
4	*2437.00	96.7 AV			1.52 H	246	64.60	32.10
5	4874.00	46.8 PK	74.0	-27.2	1.20 H	12	8.40	38.40
6	4874.00	34.0 AV	54.0	-20.0	1.20 H	12	-4.40	38.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	58.4 PK	74.0	-15.6	1.06 V	120	29.20	29.20
2	1600.00	36.0 AV	54.0	-18.0	1.06 V	120	6.80	29.20
3	*2437.00	100.8 PK			1.08 V	95	68.70	32.10
4	*2437.00	90.6 AV			1.08 V	95	58.50	32.10
5	4874.00	46.1 PK	74.0	-27.9	1.05 V	231	7.70	38.40
6	4874.00	33.5 AV	54.0	-20.5	1.05 V	231	-4.90	38.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	55.0 PK	74.0	-19.0	1.05 H	114	25.80	29.20
2	1600.00	33.2 AV	54.0	-20.8	1.05 H	114	4.00	29.20
3	*2462.00	101.5 PK			1.50 H	249	69.30	32.20
4	*2462.00	91.4 AV			1.50 H	249	59.20	32.20
5	2483.50	68.8 PK	74.0	-5.2	1.49 H	248	36.50	32.30
6	2483.50	52.5 AV	54.0	-1.5	1.49 H	248	20.20	32.30
7	4924.00	46.3 PK	74.0	-27.7	1.09 H	24	7.90	38.40
8	4924.00	33.5 AV	54.0	-20.5	1.09 H	24	-4.90	38.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	58.0 PK	74.0	-16.0	1.05 V	121	28.80	29.20
2	1600.00	35.4 AV	54.0	-18.6	1.05 V	121	6.20	29.20
3	*2462.00	95.3 PK			1.10 V	98	63.10	32.20
4	*2462.00	85.1 AV			1.10 V	98	52.90	32.20
5	2483.50	62.8 PK	74.0	-11.2	1.10 V	98	30.50	32.30
6	2483.50	47.4 AV	54.0	-6.6	1.10 V	98	15.10	32.30
7	4924.00	45.6 PK	74.0	-28.4	1.03 V	88	7.20	38.40
8	4924.00	33.0 AV	54.0	-21.0	1.03 V	88	-5.40	38.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

802.11n (20MHz): 1TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	55.6 PK	74.0	-18.4	1.29 H	64	26.40	29.20
2	1600.00	34.0 AV	54.0	-20.0	1.29 H	64	4.80	29.20
3	2390.00	71.2 PK	74.0	-2.8	1.24 H	255	39.20	32.00
4	2390.00	52.4 AV	54.0	-1.6	1.24 H	255	20.40	32.00
5	*2412.00	103.9 PK			1.25 H	252	71.90	32.00
6	*2412.00	93.6 AV			1.25 H	252	61.60	32.00
7	4824.00	46.6 PK	74.0	-27.4	1.05 H	112	8.20	38.40
8	4824.00	33.9 AV	54.0	-20.1	1.05 H	112	-4.50	38.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	58.8 PK	74.0	-15.2	1.02 V	124	29.60	29.20
2	1600.00	36.3 AV	54.0	-17.7	1.02 V	124	7.10	29.20
3	2390.00	62.8 PK	74.0	-11.2	1.09 V	101	30.80	32.00
4	2390.00	47.2 AV	54.0	-6.8	1.09 V	101	15.20	32.00
5	*2412.00	97.6 PK			1.09 V	101	65.60	32.00
6	*2412.00	87.5 AV			1.09 V	101	55.50	32.00
7	4824.00	46.1 PK	74.0	-27.9	1.04 V	245	7.70	38.40
8	4824.00	33.4 AV	54.0	-20.6	1.04 V	245	-5.00	38.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	55.6 PK	74.0	-18.4	1.31 H	54	26.40	29.20
2	1600.00	34.1 AV	54.0	-19.9	1.31 H	54	4.90	29.20
3	*2437.00	106.9 PK			1.52 H	247	74.80	32.10
4	*2437.00	96.4 AV			1.52 H	247	64.30	32.10
5	4874.00	47.1 PK	74.0	-26.9	1.05 H	14	8.70	38.40
6	4874.00	34.2 AV	54.0	-19.8	1.05 H	14	-4.20	38.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	58.6 PK	74.0	-15.4	1.05 V	118	29.40	29.20
2	1600.00	36.3 AV	54.0	-17.7	1.05 V	118	7.10	29.20
3	*2437.00	100.5 PK			1.10 V	96	68.40	32.10
4	*2437.00	90.3 AV			1.10 V	96	58.20	32.10
5	4874.00	46.4 PK	74.0	-27.6	1.08 V	234	8.00	38.40
6	4874.00	33.8 AV	54.0	-20.2	1.08 V	234	-4.60	38.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	55.2 PK	74.0	-18.8	1.04 H	121	26.00	29.20
2	1600.00	33.4 AV	54.0	-20.6	1.04 H	121	4.20	29.20
3	*2462.00	100.5 PK			1.50 H	246	68.30	32.20
4	*2462.00	90.2 AV			1.50 H	246	58.00	32.20
5	2483.50	70.1 PK	74.0	-3.9	1.50 H	244	37.80	32.30
6	2483.50	52.5 AV	54.0	-1.5	1.50 H	244	20.20	32.30
7	4924.00	46.5 PK	74.0	-27.5	1.04 H	27	8.10	38.40
8	4924.00	33.6 AV	54.0	-20.4	1.04 H	27	-4.80	38.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	58.2 PK	74.0	-15.8	1.02 V	118	29.00	29.20
2	1600.00	35.6 AV	54.0	-18.4	1.02 V	118	6.40	29.20
3	*2462.00	94.4 PK			1.09 V	100	62.20	32.20
4	*2462.00	84.1 AV			1.09 V	100	51.90	32.20
5	2483.50	63.1 PK	74.0	-10.9	1.09 V	100	30.80	32.30
6	2483.50	47.6 AV	54.0	-6.4	1.09 V	100	15.30	32.30
7	4924.00	45.8 PK	74.0	-28.2	1.05 V	94	7.40	38.40
8	4924.00	33.1 AV	54.0	-20.9	1.05 V	94	-5.30	38.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



802.11n (40MHz): 1TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 3	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	55.2 PK	74.0	-18.8	1.05 H	90	26.00	29.20
2	1600.00	33.6 AV	54.0	-20.4	1.05 H	90	4.40	29.20
3	2390.00	68.8 PK	74.0	-5.2	1.27 H	248	36.80	32.00
4	2390.00	52.3 AV	54.0	-1.7	1.27 H	248	20.30	32.00
5	*2422.00	98.4 PK			1.54 H	248	66.30	32.10
6	*2422.00	87.3 AV			1.54 H	248	55.20	32.10
7	4844.00	46.1 PK	74.0	-27.9	1.04 H	120	7.70	38.40
8	4844.00	33.5 AV	54.0	-20.5	1.04 H	120	-4.90	38.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	58.4 PK	74.0	-15.6	1.04 V	126	29.20	29.20
2	1600.00	35.8 AV	54.0	-18.2	1.04 V	126	6.60	29.20
3	2390.00	63.6 PK	74.0	-10.4	1.10 V	105	31.60	32.00
4	2390.00	47.8 AV	54.0	-6.2	1.10 V	105	15.80	32.00
5	*2422.00	92.8 PK			1.10 V	105	60.70	32.10
6	*2422.00	82.6 AV			1.10 V	105	50.50	32.10
7	4844.00	45.8 PK	74.0	-28.2	1.03 V	240	7.40	38.40
8	4844.00	33.0 AV	54.0	-21.0	1.03 V	240	-5.40	38.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	55.0 PK	74.0	-19.0	1.06 H	88	25.80	29.20
2	1600.00	33.3 AV	54.0	-20.7	1.06 H	88	4.10	29.20
3	*2437.00	102.1 PK			1.52 H	247	70.00	32.10
4	*2437.00	90.9 AV			1.52 H	247	58.80	32.10
5	2483.50	68.8 PK	74.0	-5.2	1.48 H	245	36.50	32.30
6	2483.50	52.5 AV	54.0	-1.5	1.48 H	245	20.20	32.30
7	4874.00	46.6 PK	74.0	-27.4	1.06 H	118	8.20	38.40
8	4874.00	33.9 AV	54.0	-20.1	1.06 H	118	-4.50	38.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	58.2 PK	74.0	-15.8	1.01 V	130	29.00	29.20
2	1600.00	35.5 AV	54.0	-18.5	1.01 V	130	6.30	29.20
3	*2437.00	96.6 PK			1.08 V	101	64.50	32.10
4	*2437.00	86.4 AV			1.08 V	101	54.30	32.10
5	2483.50	62.8 PK	74.0	-11.2	1.08 V	101	30.50	32.30
6	2483.50	46.9 AV	54.0	-7.1	1.08 V	101	14.60	32.30
7	4874.00	46.1 PK	74.0	-27.9	1.09 V	234	7.70	38.40
8	4874.00	33.2 AV	54.0	-20.8	1.09 V	234	-5.20	38.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 9	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	54.8 PK	74.0	-19.2	1.04 H	91	25.60	29.20
2	1600.00	33.1 AV	54.0	-20.9	1.04 H	91	3.90	29.20
3	*2452.00	97.0 PK			1.50 H	246	64.80	32.20
4	*2452.00	86.2 AV			1.50 H	246	54.00	32.20
5	2483.50	65.9 PK	74.0	-8.1	1.49 H	245	33.60	32.30
6	2483.50	52.7 AV	54.0	-1.3	1.49 H	245	20.40	32.30
7	4904.00	46.2 PK	74.0	-27.8	1.01 H	124	7.70	38.50
8	4904.00	33.5 AV	54.0	-20.5	1.01 H	124	-5.00	38.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	58.0 PK	74.0	-16.0	1.00 V	126	28.80	29.20
2	1600.00	35.2 AV	54.0	-18.8	1.00 V	126	6.00	29.20
3	*2452.00	91.8 PK			1.10 V	106	59.60	32.20
4	*2452.00	81.5 AV			1.10 V	106	49.30	32.20
5	2483.50	64.2 PK	74.0	-9.8	1.10 V	106	31.90	32.30
6	2483.50	48.0 AV	54.0	-6.0	1.10 V	106	15.70	32.30
7	4904.00	46.5 PK	74.0	-27.5	1.10 V	228	8.00	38.50
8	4904.00	33.4 AV	54.0	-20.6	1.10 V	228	-5.10	38.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

802.11n (20MHz): 2TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	55.8 PK	74.0	-18.2	1.30 H	85	26.60	29.20
2	1600.00	34.2 AV	54.0	-19.8	1.30 H	85	5.00	29.20
3	2390.00	69.8 PK	74.0	-4.2	1.27 H	249	37.80	32.00
4	2390.00	52.4 AV	54.0	-1.6	1.27 H	249	20.40	32.00
5	*2412.00	106.0 PK			1.55 H	247	74.00	32.00
6	*2412.00	93.7 AV			1.55 H	247	61.70	32.00
7	4824.00	47.1 PK	74.0	-26.9	1.06 H	124	8.70	38.40
8	4824.00	34.2 AV	54.0	-19.8	1.06 H	124	-4.20	38.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	59.0 PK	74.0	-15.0	1.05 V	131	29.80	29.20
2	1600.00	36.5 AV	54.0	-17.5	1.05 V	131	7.30	29.20
3	2390.00	61.4 PK	74.0	-12.6	1.16 V	186	29.40	32.00
4	2390.00	47.6 AV	54.0	-6.4	1.16 V	186	15.60	32.00
5	*2412.00	100.0 PK			1.16 V	186	68.00	32.00
6	*2412.00	86.6 AV			1.16 V	186	54.60	32.00
7	4824.00	46.3 PK	74.0	-27.7	1.05 V	236	7.90	38.40
8	4824.00	33.5 AV	54.0	-20.5	1.05 V	236	-4.90	38.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	56.1 PK	74.0	-17.9	1.28 H	91	26.90	29.20
2	1600.00	34.5 AV	54.0	-19.5	1.28 H	91	5.30	29.20
3	*2437.00	106.5 PK			1.52 H	245	74.40	32.10
4	*2437.00	94.0 AV			1.52 H	245	61.90	32.10
5	4874.00	47.4 PK	74.0	-26.6	1.05 H	122	9.00	38.40
6	4874.00	34.5 AV	54.0	-19.5	1.05 H	122	-3.90	38.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	59.2 PK	74.0	-14.8	1.06 V	125	30.00	29.20
2	1600.00	36.8 AV	54.0	-17.2	1.06 V	125	7.60	29.20
3	*2437.00	100.3 PK			1.15 V	188	68.20	32.10
4	*2437.00	86.9 AV			1.15 V	188	54.80	32.10
5	4874.00	46.5 PK	74.0	-27.5	1.06 V	241	8.10	38.40
6	4874.00	33.6 AV	54.0	-20.4	1.06 V	241	-4.80	38.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	56.3 PK	74.0	-17.7	1.26 H	92	27.10	29.20
2	1600.00	34.6 AV	54.0	-19.4	1.26 H	92	5.40	29.20
3	*2462.00	102.1 PK			1.51 H	245	69.90	32.20
4	*2462.00	89.6 AV			1.51 H	245	57.40	32.20
5	2483.50	69.1 PK	74.0	-4.9	1.49 H	246	36.80	32.30
6	2483.50	52.4 AV	54.0	-1.6	1.49 H	246	20.10	32.30
7	4924.00	47.6 PK	74.0	-26.4	1.06 H	128	9.20	38.40
8	4924.00	34.7 AV	54.0	-19.3	1.06 H	128	-3.70	38.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1600.00	59.2 PK	74.0	-14.8	1.06 V	140	30.00	29.20
2	1600.00	36.8 AV	54.0	-17.2	1.06 V	140	7.60	29.20
3	*2462.00	96.0 PK			1.16 V	190	63.80	32.20
4	*2462.00	82.6 AV			1.16 V	190	50.40	32.20
5	2483.50	61.9 PK	74.0	-12.1	1.16 V	190	29.60	32.30
6	2483.50	47.8 AV	54.0	-6.2	1.16 V	190	15.50	32.30
7	4924.00	46.5 PK	74.0	-27.5	1.09 V	22	8.10	38.40
8	4924.00	33.9 AV	54.0	-20.1	1.09 V	22	-4.50	38.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.

802.11n (40MHz): 2TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 3	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.6 PK	74.0	-7.4	1.54 H	209	34.60	32.00
2	2390.00	52.9 AV	54.0	-1.1	1.54 H	209	20.90	32.00
3	*2422.00	98.6 PK			1.00 H	211	66.50	32.10
4	*2422.00	88.1 AV			1.00 H	211	56.00	32.10
5	4844.00	46.8 PK	74.0	-27.2	1.00 H	7	8.40	38.40
6	4844.00	33.8 AV	54.0	-20.2	1.00 H	7	-4.60	38.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.6 PK	74.0	-12.4	1.23 V	341	29.60	32.00
2	2390.00	48.4 AV	54.0	-5.6	1.23 V	341	16.40	32.00
3	*2422.00	94.7 PK			1.19 V	341	62.60	32.10
4	*2422.00	84.1 AV			1.19 V	341	52.00	32.10
5	4844.00	45.4 PK	74.0	-28.6	1.00 V	70	7.00	38.40
6	4844.00	32.1 AV	54.0	-21.9	1.00 V	70	-6.30	38.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.1 PK	74.0	-11.9	1.55 H	210	30.10	32.00
2	2390.00	49.6 AV	54.0	-4.4	1.55 H	210	17.60	32.00
3	*2437.00	104.0 PK			1.50 H	210	71.90	32.10
4	*2437.00	93.4 AV			1.50 H	210	61.30	32.10
5	2483.50	65.6 PK	74.0	-8.4	1.24 H	213	33.30	32.30
6	2483.50	52.1 AV	54.0	-1.9	1.24 H	213	19.80	32.30
7	4874.00	50.1 PK	74.0	-23.9	1.06 H	183	11.70	38.40
8	4874.00	35.1 AV	54.0	-18.9	1.06 H	183	-3.30	38.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.2 PK	74.0	-15.8	1.37 V	116	26.20	32.00
2	2390.00	47.0 AV	54.0	-7.0	1.37 V	116	15.00	32.00
3	*2437.00	99.6 PK			1.35 V	121	67.50	32.10
4	*2437.00	88.7 AV			1.35 V	121	56.60	32.10
5	2483.50	58.9 PK	74.0	-15.1	1.36 V	115	26.60	32.30
6	2483.50	47.6 AV	54.0	-6.4	1.36 V	115	15.30	32.30
7	4874.00	49.1 PK	74.0	-24.9	1.10 V	138	10.70	38.40
8	4874.00	34.6 AV	54.0	-19.4	1.10 V	138	-3.80	38.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 9	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	99.3 PK			1.48 H	208	67.10	32.20
2	*2452.00	89.1 AV			1.48 H	208	56.90	32.20
3	2483.50	67.4 PK	74.0	-6.6	1.45 H	231	35.10	32.30
4	2483.50	52.9 AV	54.0	-1.1	1.45 H	231	20.60	32.30
5	4904.00	46.9 PK	74.0	-27.1	1.00 H	10	8.40	38.50
6	4904.00	33.4 AV	54.0	-20.6	1.00 H	10	-5.10	38.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	95.4 PK			1.34 V	119	63.20	32.20
2	*2452.00	84.7 AV			1.34 V	119	52.50	32.20
3	2483.50	63.0 PK	74.0	-11.0	1.31 V	118	30.70	32.30
4	2483.50	49.1 AV	54.0	-4.9	1.31 V	118	16.80	32.30
5	4904.00	45.5 PK	74.0	-28.5	1.00 V	2	7.00	38.50
6	4904.00	32.7 AV	54.0	-21.3	1.00 V	2	-5.80	38.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

BELOW 1GHz WORST-CASE DATA :

802.11g: 1TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	103.78	27.5 QP	43.5	-16.0	1.50 H	102	17.60	9.90
2	177.67	31.9 QP	43.5	-11.6	1.50 H	260	19.00	12.90
3	222.38	33.4 QP	46.0	-12.6	1.00 H	168	21.50	11.90
4	479.03	30.3 QP	46.0	-15.7	1.50 H	305	10.90	19.40
5	689.01	42.3 QP	46.0	-3.7	1.00 H	107	19.40	22.90
6	729.84	40.3 QP	46.0	-5.7	1.00 H	124	16.50	23.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.62	35.1 QP	40.0	-4.9	1.00 V	4	21.50	13.60
2	70.73	30.3 QP	40.0	-9.7	1.00 V	120	18.20	12.10
3	160.17	30.0 QP	43.5	-13.5	1.00 V	186	15.90	14.10
4	665.68	43.6 QP	46.0	-2.4	1.50 V	151	20.90	22.70
5	689.01	42.3 QP	46.0	-3.7	1.00 V	146	19.40	22.90
6	829.00	34.2 QP	46.0	-11.8	1.00 V	159	8.20	26.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

802.11n (40MHz): 2TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	103.78	28.6 QP	43.5	-14.9	1.50 H	15	18.70	9.90
2	175.72	32.1 QP	43.5	-11.4	1.50 H	245	19.00	13.10
3	222.38	34.0 QP	46.0	-12.0	1.00 H	173	22.10	11.90
4	665.68	41.3 QP	46.0	-4.7	1.50 H	102	18.60	22.70
5	733.73	44.0 QP	46.0	-2.0	1.00 H	133	20.10	23.90
6	797.89	36.9 QP	46.0	-9.1	1.00 H	189	11.30	25.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.62	35.8 QP	40.0	-4.2	1.00 V	352	22.20	13.60
2	162.11	30.1 QP	43.5	-13.4	1.00 V	168	16.10	14.00
3	222.38	28.5 QP	46.0	-17.5	1.00 V	24	16.60	11.90
4	665.68	43.2 QP	46.0	-2.8	1.00 V	280	20.50	22.70
5	690.96	41.7 QP	46.0	-4.3	1.00 V	274	18.80	22.90
6	797.89	35.2 QP	46.0	-10.8	1.00 V	168	9.60	25.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 19, 2011	Nov. 18, 2012
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 22, 2011	Dec. 21, 2012
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Dec. 30, 2011	Dec. 29, 2012
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Jul. 07, 2011	Jul. 06, 2012
Software ADT	ADT_Cond_ V7.3.7	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

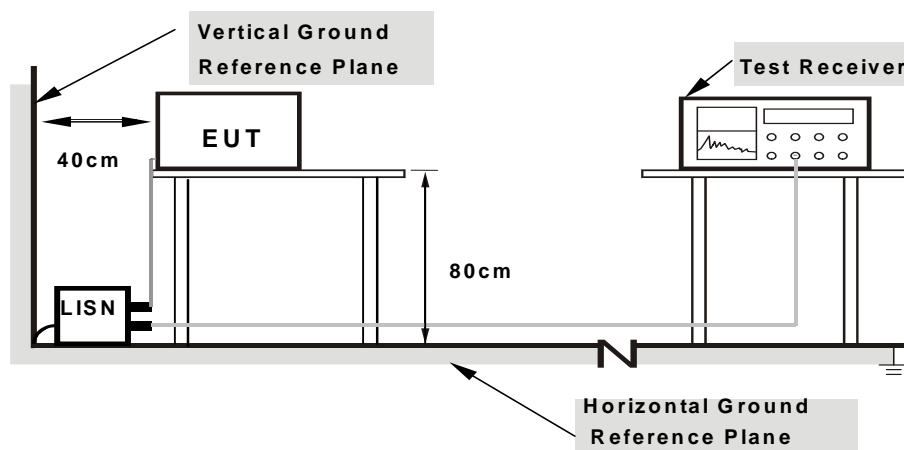

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.



4.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA :

802.11g: 1TX

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18906	0.15	48.72	35.07	48.87	35.22	64.08	54.08	-15.21	-18.86
2	0.97031	0.19	39.89	27.67	40.08	27.86	56.00	46.00	-15.92	-18.14
3	1.30469	0.21	41.17	28.59	41.38	28.80	56.00	46.00	-14.62	-17.20
4	1.79297	0.25	40.21	28.94	40.46	29.19	56.00	46.00	-15.54	-16.81
5	15.01953	0.53	33.88	27.40	34.41	27.93	60.00	50.00	-25.59	-22.07
6	24.63672	0.58	35.97	26.56	36.55	27.14	60.00	50.00	-23.45	-22.86

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

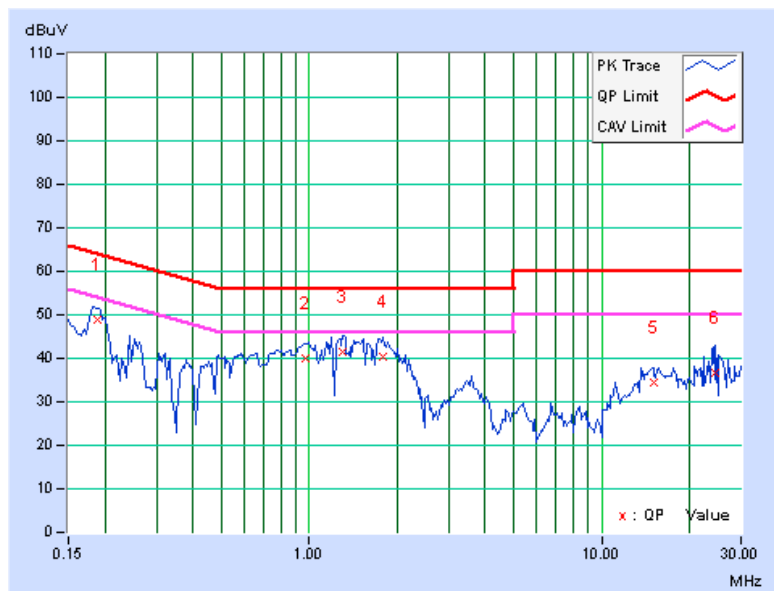




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18125	0.14	48.16	30.50	48.30	30.64	64.43	54.43	-16.13	-23.79
2	0.99766	0.19	40.61	27.01	40.80	27.20	56.00	46.00	-15.20	-18.80
3	1.32422	0.21	41.28	29.19	41.49	29.40	56.00	46.00	-14.51	-16.60
4	1.72266	0.24	40.99	29.95	41.23	30.19	56.00	46.00	-14.77	-15.81
5	14.45313	0.59	34.47	27.86	35.06	28.45	60.00	50.00	-24.94	-21.55
6	24.22266	0.65	38.28	30.11	38.93	30.76	60.00	50.00	-21.07	-19.24

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

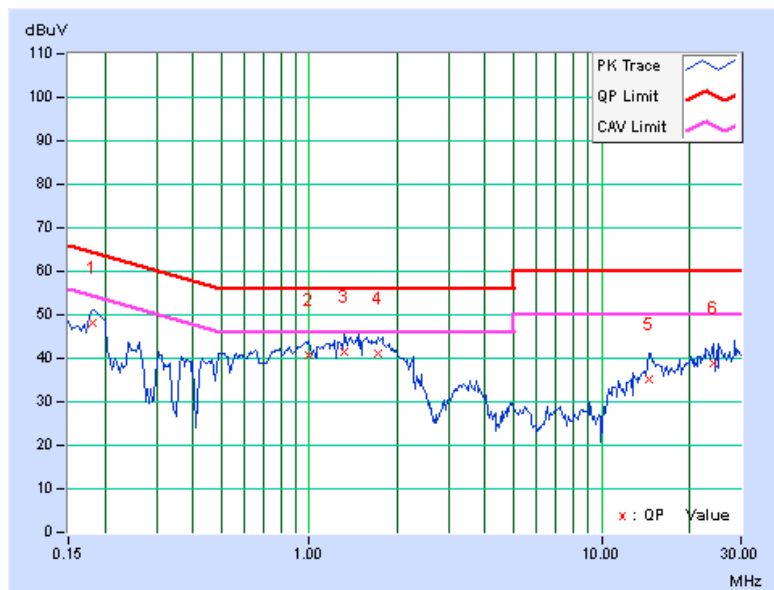




A D T

802.11n (40MHz): 2TX

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18516	0.15	47.81	33.94	47.96	34.09	64.25	54.25	-16.29	-20.16
2	0.97813	0.19	40.17	28.17	40.36	28.36	56.00	46.00	-15.64	-17.64
3	1.28125	0.21	41.30	28.99	41.51	29.20	56.00	46.00	-14.49	-16.80
4	1.64063	0.23	41.46	30.94	41.69	31.17	56.00	46.00	-14.31	-14.83
5	15.33594	0.54	33.33	26.64	33.87	27.18	60.00	50.00	-26.13	-22.82
6	23.24609	0.60	38.85	33.70	39.45	34.30	60.00	50.00	-20.55	-15.70

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

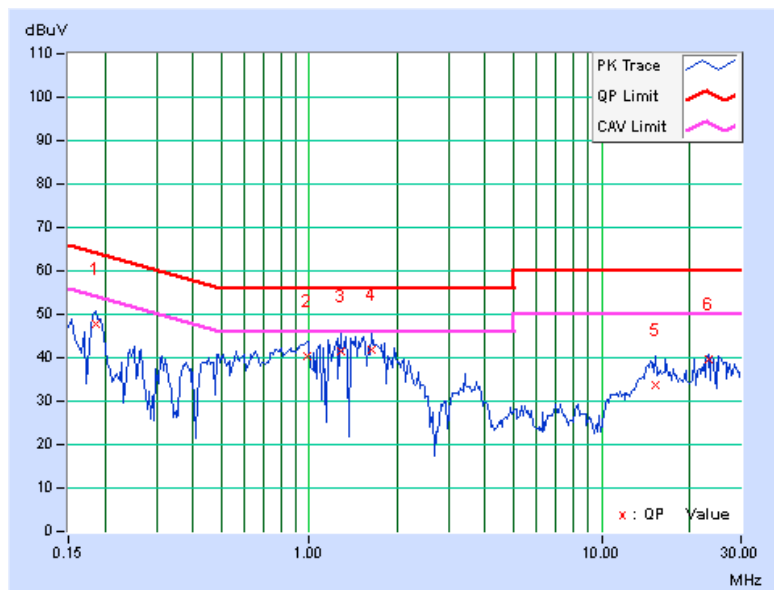




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18906	0.14	47.38	34.63	47.52	34.77	64.08	54.08	-16.56	-19.31
2	0.50000	0.17	38.14	24.17	38.31	24.34	56.00	46.00	-17.69	-21.66
3	0.95469	0.19	39.89	24.55	40.08	24.74	56.00	46.00	-15.92	-21.26
4	1.33594	0.21	41.60	30.45	41.81	30.66	56.00	46.00	-14.19	-15.34
5	1.65234	0.24	41.44	31.04	41.68	31.28	56.00	46.00	-14.32	-14.72
6	24.69141	0.64	36.97	28.76	37.61	29.40	60.00	50.00	-22.39	-20.60

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

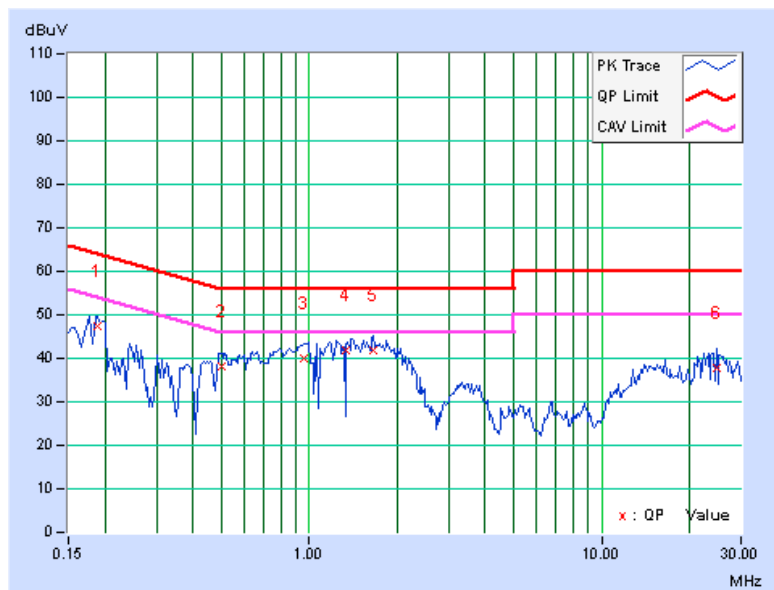


4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST SETUP



4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.3.4 TEST PROCEDURE

- a. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	10.40	0.5	PASS
6	2437	10.40	0.5	PASS
11	2462	10.39	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	15.90	0.5	PASS
6	2437	15.91	0.5	PASS
11	2462	15.86	0.5	PASS

802.11n (20MHz): 1TX

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.39	0.5	PASS
6	2437	17.30	0.5	PASS
11	2462	17.05	0.5	PASS

802.11n (40MHz): 1TX

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	35.97	0.5	PASS
6	2437	36.04	0.5	PASS
9	2452	35.95	0.5	PASS



A D T

802.11n (20MHz): 2TX

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.61	16.43	0.5	PASS
6	2437	17.11	16.55	0.5	PASS
11	2462	16.77	16.52	0.5	PASS

802.11n (40MHz): 2TX


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	35.93	35.65	0.5	PASS
6	2437	36.12	35.72	0.5	PASS
9	2452	36.02	35.93	0.5	PASS

4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 TEST SETUP

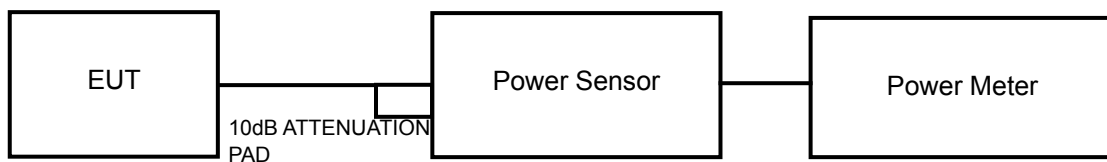

4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



4.4.7 TEST RESULTS

802.11b: 1TX

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	76.033	18.81	30	PASS
6	2437	75.509	18.78	30	PASS
11	2462	74.302	18.71	30	PASS

802.11g: 1TX

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	128.233	21.08	30	PASS
6	2437	173.380	22.39	30	PASS
11	2462	170.216	22.31	30	PASS

802.11n (20MHz): 1TX

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	109.144	20.38	30	PASS
6	2437	163.305	22.13	30	PASS
11	2462	148.594	21.72	30	PASS

802.11n (40MHz): 1TX

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
3	2422	63.533	18.03	30	PASS
6	2437	148.594	21.72	30	PASS
9	2452	85.901	19.34	30	PASS



A D T

802.11n (20MHz): 2TX

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	20.16	20.06	205.1	23.1	30	PASS
6	2437	20.19	20.04	205.4	23.1	30	PASS
11	2462	20.22	20.01	205.4	23.1	30	PASS

802.11n (40MHz): 2TX


CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	18.02	17.89	124.9	21.0	30	PASS
6	2437	20.98	20.45	236.2	23.7	30	PASS
9	2452	18.02	19.32	148.9	21.7	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- a. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- b. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- c. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- d. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100\text{kHz})$

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.5.7 TEST RESULTS

802.11b: 1TX

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	5.70	-9.53	8	PASS
6	2437	5.47	-9.76	8	PASS
11	2462	5.60	-9.63	8	PASS

802.11g: 1TX

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	4.41	-10.82	8	PASS
6	2437	5.54	-9.69	8	PASS
11	2462	5.68	-9.55	8	PASS

802.11n (20MHz): 1TX

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	3.41	-11.82	8	PASS
6	2437	5.31	-9.92	8	PASS
11	2462	4.61	-10.62	8	PASS

802.11n (40MHz): 1TX

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
3	2422	-3.27	-18.50	8	PASS
6	2437	0.59	-14.64	8	PASS
9	2452	-2.02	-17.25	8	PASS



A D T

802.11n (20MHz): 2TX

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	4.59	-10.64	3.01	-7.63	8	PASS
	6	2437	4.51	-10.72	3.01	-7.71	8	PASS
	11	2462	4.56	-10.67	3.01	-7.66	8	PASS
1	1	2412	4.76	-10.47	3.01	-7.46	8	PASS
	6	2437	4.86	-10.37	3.01	-7.36	8	PASS
	11	2462	4.94	-10.29	3.01	-7.28	8	PASS

802.11n (40MHz): 2TX


TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-2.73	-17.96	3.01	-14.95	8	PASS
	6	2437	0.21	-15.02	3.01	-12.01	8	PASS
	9	2452	-2.68	-17.91	3.01	-14.90	8	PASS
1	3	2422	-4.52	-19.75	3.01	-16.74	8	PASS
	6	2437	-1.78	-17.01	3.01	-14.00	8	PASS
	9	2452	-3.00	-18.23	3.01	-15.22	8	PASS

4.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP



4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS


The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit. Only worst data of each operating mode is presented.

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.


4.6.8 TEST RESULTS

802.11b: 1TX


CH 1

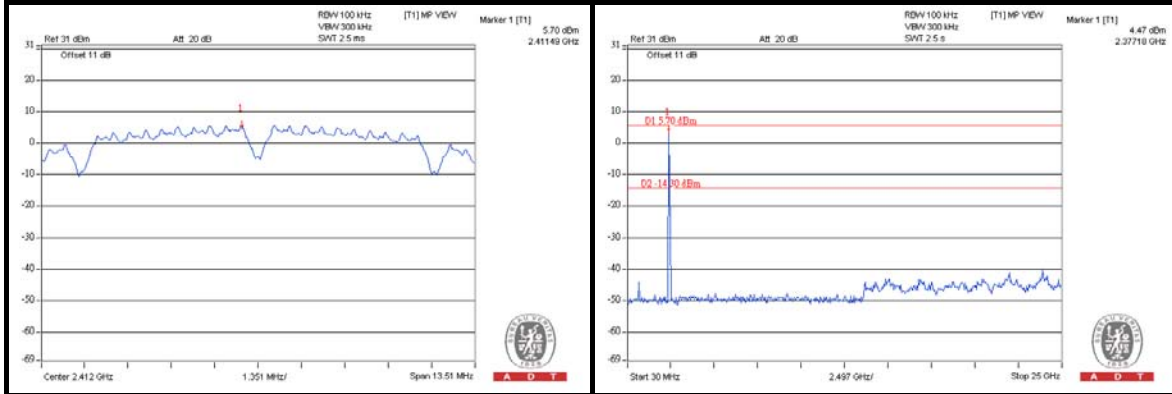

CH 6

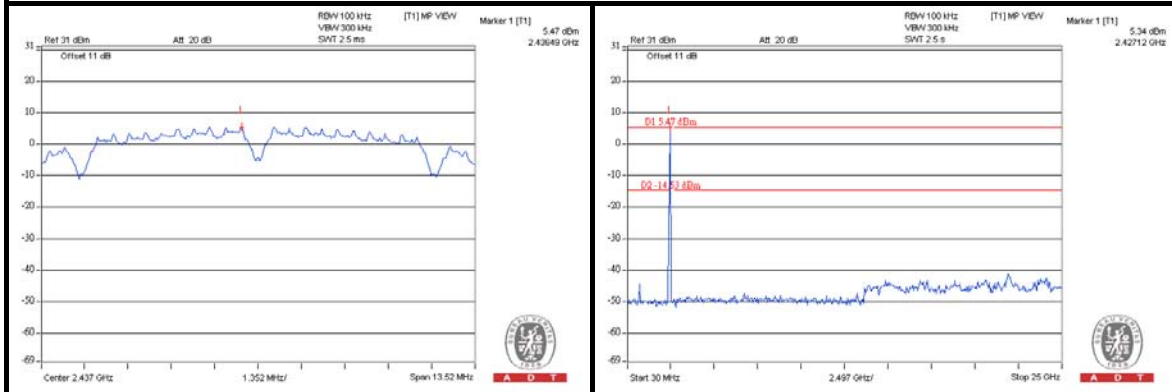

CH 11

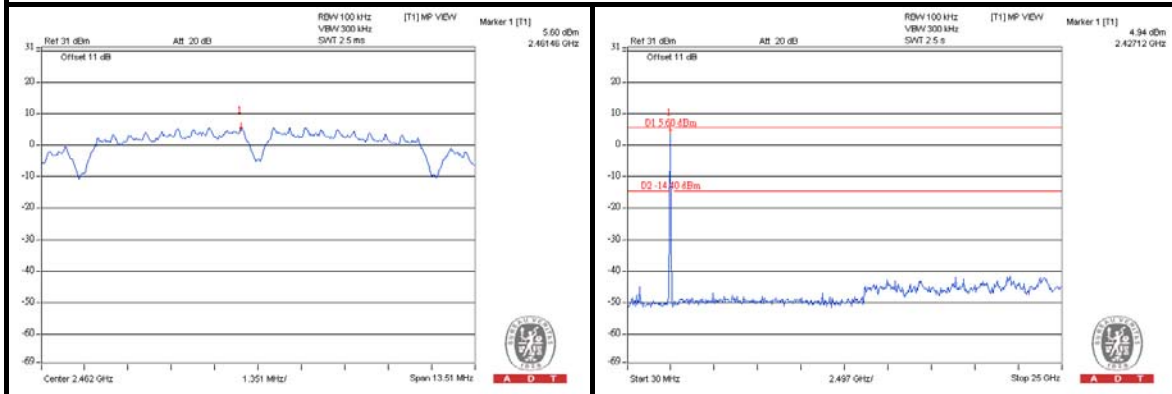





A D T

802.11g: 1TX


CH 1

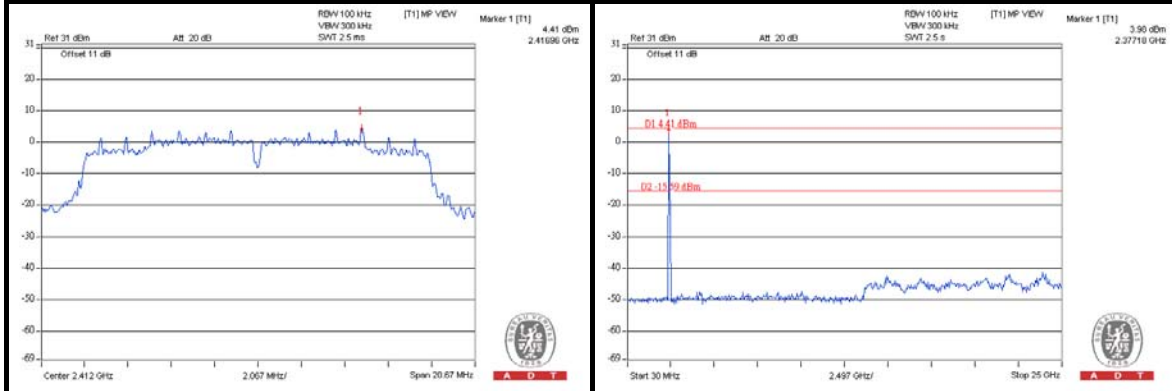

CH 6

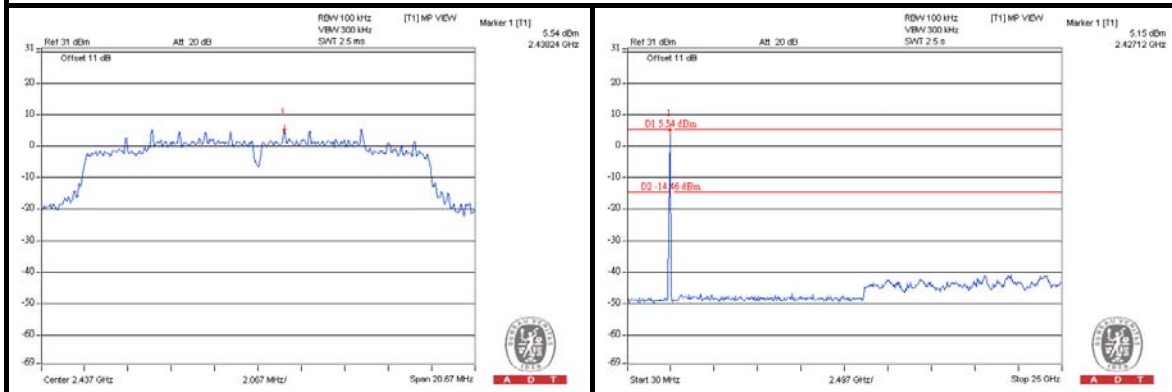

CH 11

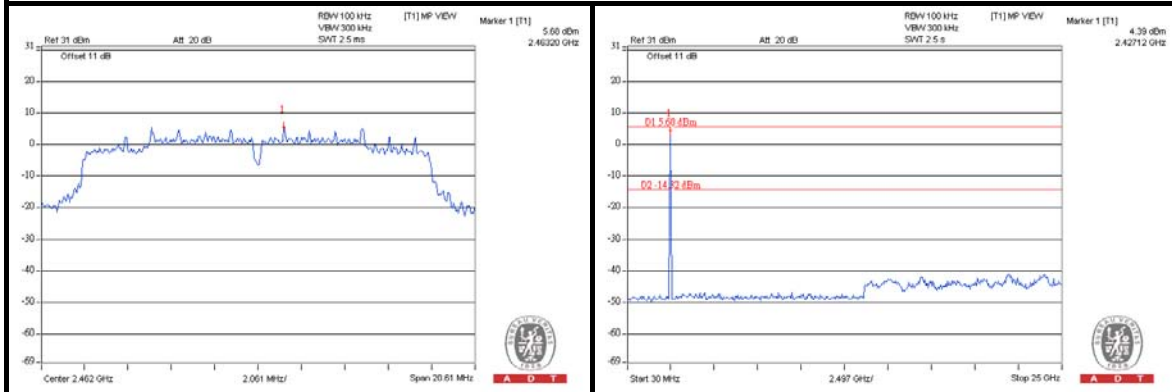





A D T

802.11n (20MHz): 1TX


CH 1



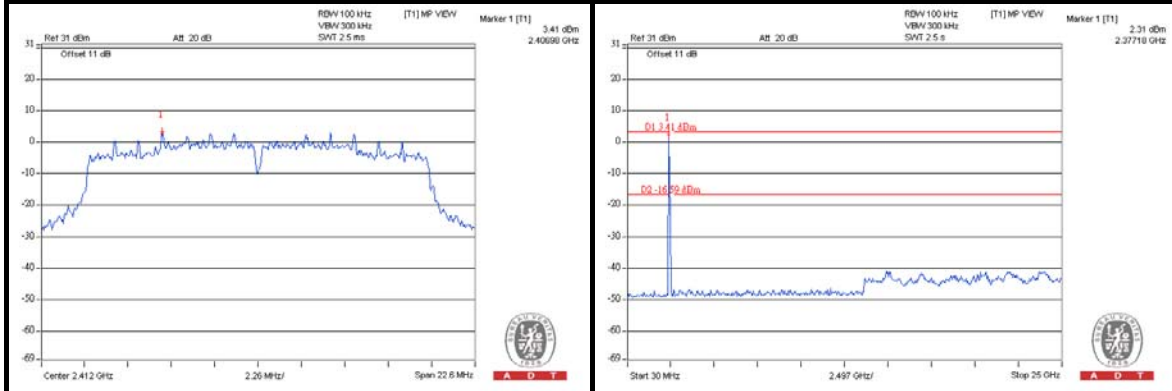


CH 6

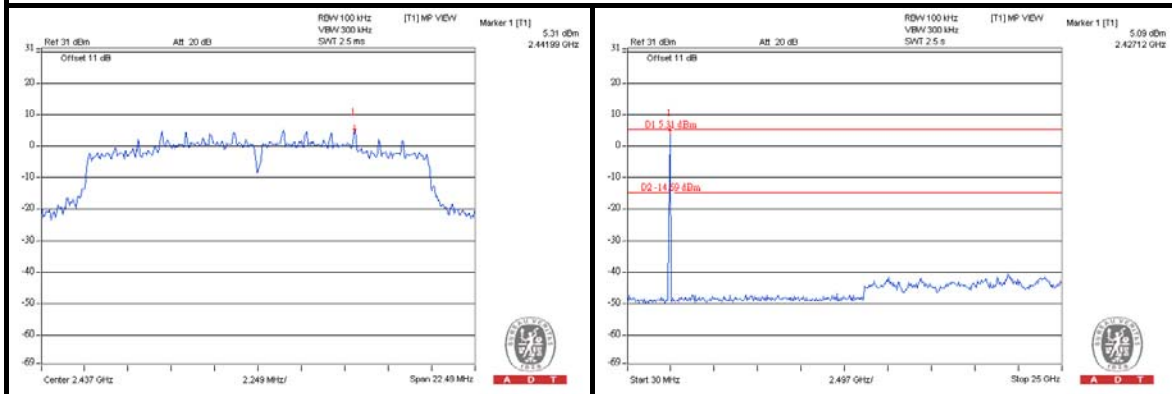

CH 11

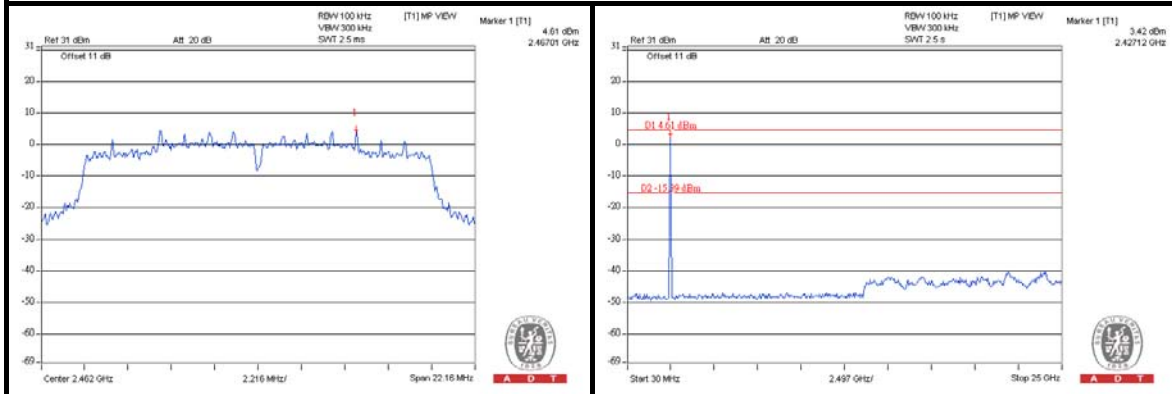

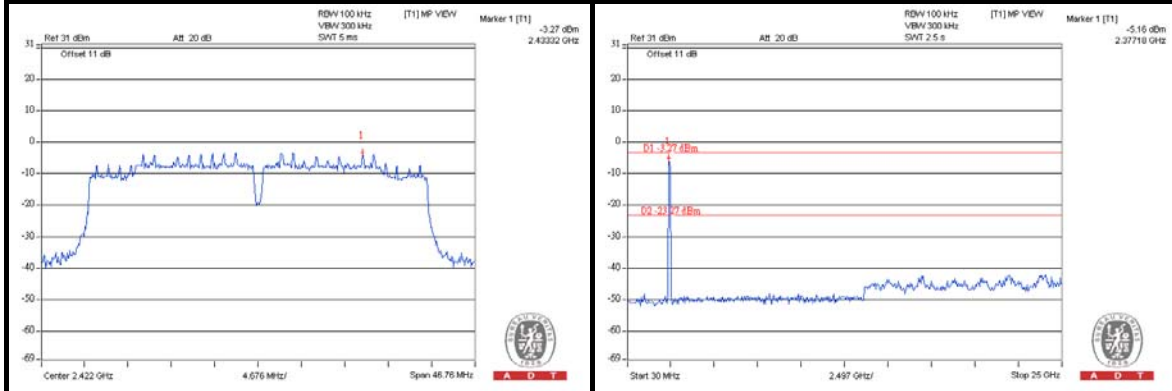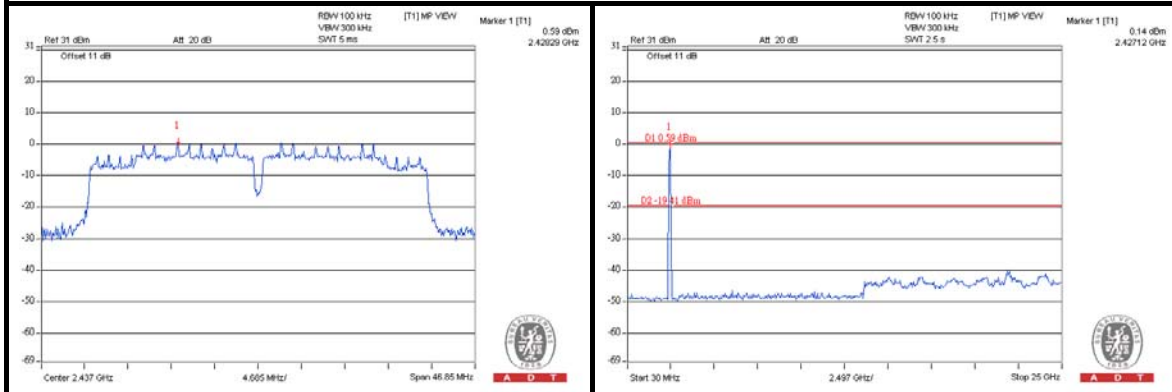
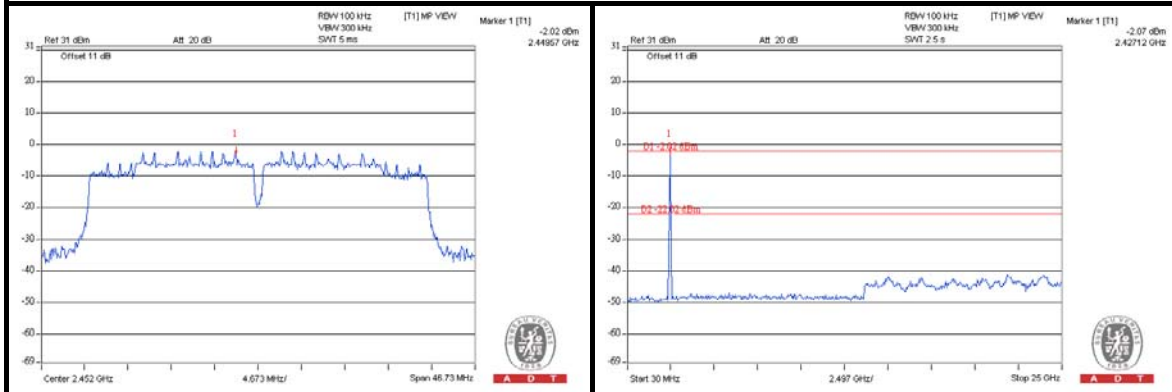
802.11n (40MHz): 1TX**CH 3****CH 6****CH 9**





A D T

802.11n (20MHz): 2TX



CH 1

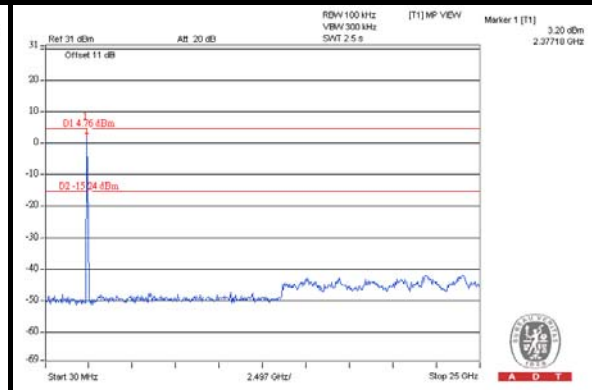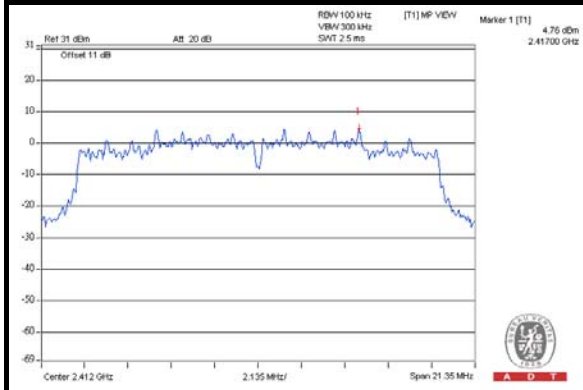

CH 6

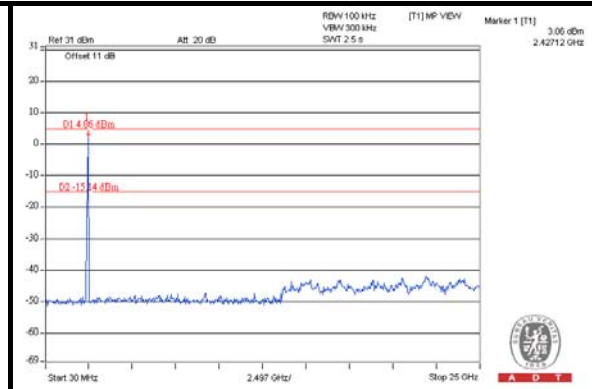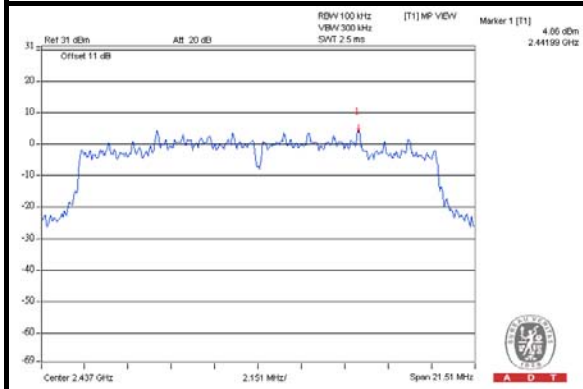

CH 11

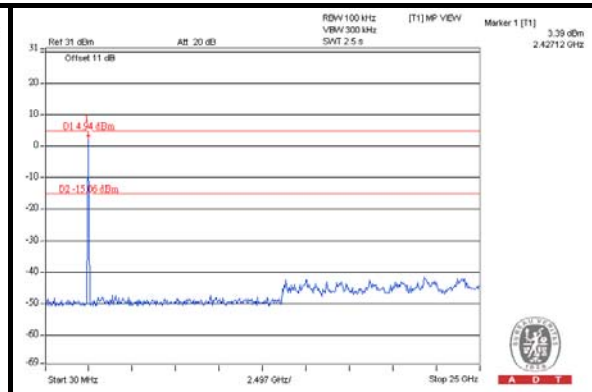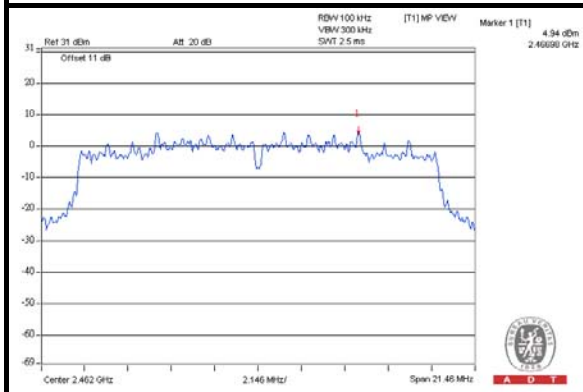





A D T

802.11n (40MHz): 2TX


CH 3

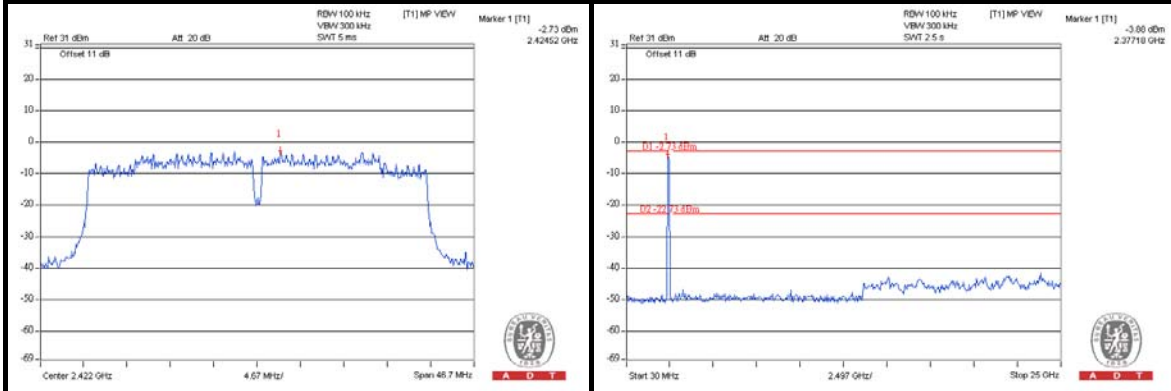

CH 6

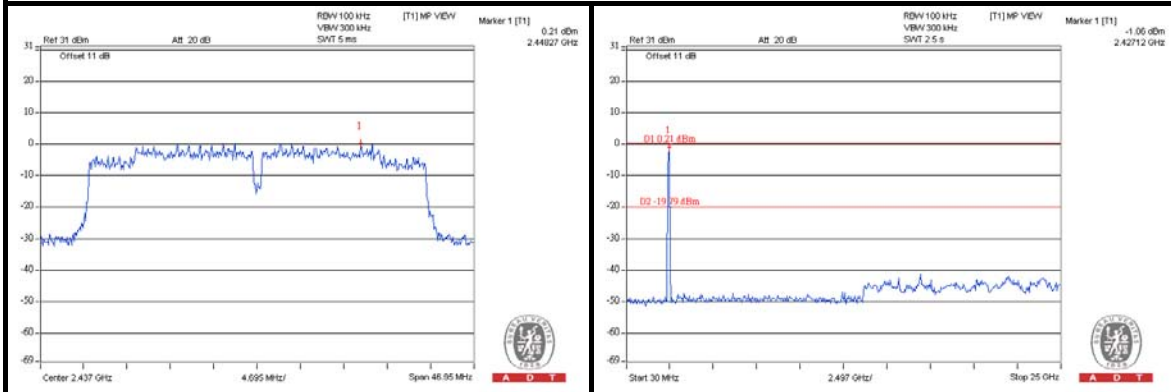

CH 9

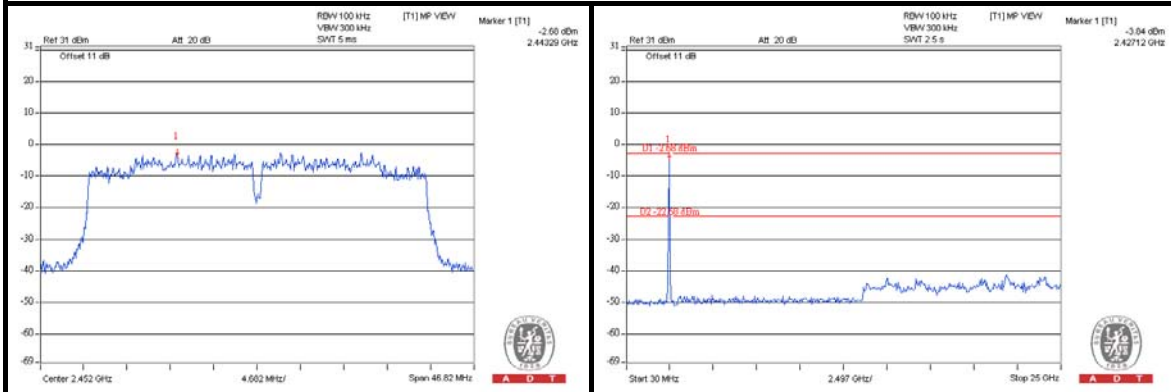

5. TEST TYPES AND RESULTS (FOR 5.0GHz BAND)

5.1 RADIATED EMISSION MEASUREMENT

5.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

5.1.2 TEST INSTRUMENTS

Same as item 4.1.2.

5.1.3 TEST PROCEDURES

Same as item 4.1.3.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation.

5.1.5 TEST SETUP

Same as item 4.1.5.

5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

5.1.7 TEST RESULTS

ABOVE 1GHz DATA:

802.11a: 1TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	71.1 PK	85.4	-14.3	1.55 H	323	31.60	39.50
2	#5725.00	60.2 AV	74.5	-14.3	1.55 H	323	20.70	39.50
3	*5745.00	105.4 PK			1.55 H	323	65.80	39.60
4	*5745.00	94.5 AV			1.55 H	323	54.90	39.60
5	11490.00	58.9 PK	74.0	-15.1	1.00 H	133	7.20	51.70
6	11490.00	45.7 AV	54.0	-8.3	1.00 H	133	-6.00	51.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	73.1 PK	86.6	-13.5	1.00 V	27	33.60	39.50
2	#5725.00	62.1 AV	75.6	-13.5	1.00 V	27	22.60	39.50
3	*5745.00	106.6 PK			1.00 V	27	67.00	39.60
4	*5745.00	95.6 AV			1.00 V	27	56.00	39.60
5	11490.00	59.7 PK	74.0	-14.3	1.00 V	244	8.00	51.70
6	11490.00	46.8 AV	54.0	-7.2	1.00 V	244	-4.90	51.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	58.2 PK	84.2	-26.0	1.53 H	310	18.70	39.50
2	#5725.00	47.0 AV	73.0	-26.0	1.53 H	310	7.50	39.50
3	*5785.00	104.2 PK			1.53 H	310	64.50	39.70
4	*5785.00	93.0 AV			1.53 H	310	53.30	39.70
5	11570.00	58.6 PK	74.0	-15.4	1.00 H	127	7.00	51.60
6	11570.00	45.4 AV	54.0	-8.6	1.00 H	127	-6.20	51.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	57.6 PK	84.8	-27.2	1.00 V	26	18.10	39.50
2	#5725.00	47.3 AV	74.5	-27.2	1.00 V	26	7.80	39.50
3	*5785.00	104.8 PK			1.00 V	26	65.10	39.70
4	*5785.00	94.5 AV			1.00 V	26	54.80	39.70
5	11570.00	60.2 PK	74.0	-13.8	1.00 V	253	8.60	51.60
6	11570.00	47.1 AV	54.0	-6.9	1.00 V	253	-4.50	51.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	101.5 PK			1.54 H	328	61.80	39.70
2	*5825.00	91.6 AV			1.54 H	328	51.90	39.70
3	#5850.00	64.1 PK	81.5	-17.4	1.54 H	328	24.30	39.80
4	#5850.00	54.2 AV	71.6	-17.4	1.54 H	328	14.40	39.80
5	11650.00	58.6 PK	74.0	-15.4	1.00 H	138	7.00	51.60
6	11650.00	45.5 AV	54.0	-8.5	1.00 H	138	-6.10	51.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	102.5 PK			1.00 V	20	62.80	39.70
2	*5825.00	92.9 AV			1.00 V	20	53.20	39.70
3	#5850.00	63.6 PK	82.5	-18.9	1.00 V	20	23.80	39.80
4	#5850.00	54.0 AV	72.9	-18.9	1.00 V	20	14.20	39.80
5	11650.00	59.6 PK	74.0	-14.4	1.00 V	261	8.00	51.60
6	11650.00	46.5 AV	54.0	-7.5	1.00 V	261	-5.10	51.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

802.11n (20MHz): 1TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	73.4 PK	85.5	-12.1	1.54 H	325	33.90	39.50
2	#5725.00	62.1 AV	74.2	-12.1	1.54 H	325	22.60	39.50
3	*5745.00	105.5 PK			1.54 H	325	65.90	39.60
4	*5745.00	94.2 AV			1.54 H	325	54.60	39.60
5	11490.00	59.1 PK	74.0	-14.9	1.00 H	142	7.40	51.70
6	11490.00	45.8 AV	54.0	-8.2	1.00 H	142	-5.90	51.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	73.4 PK	86.4	-13.0	1.00 V	27	33.90	39.50
2	#5725.00	62.5 AV	75.5	-13.0	1.00 V	27	23.00	39.50
3	*5745.00	106.4 PK			1.00 V	27	66.80	39.60
4	*5745.00	95.5 AV			1.00 V	27	55.90	39.60
5	11490.00	59.8 PK	74.0	-14.2	1.00 V	237	8.10	51.70
6	11490.00	46.7 AV	54.0	-7.3	1.00 V	237	-5.00	51.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	57.3 PK	83.6	-26.3	1.55 H	327	17.80	39.50
2	#5725.00	47.0 AV	73.3	-26.3	1.55 H	327	7.50	39.50
3	*5785.00	103.6 PK			1.55 H	327	63.90	39.70
4	*5785.00	93.3 AV			1.55 H	327	53.60	39.70
5	11570.00	58.8 PK	74.0	-15.2	1.00 H	136	7.20	51.60
6	11570.00	45.5 AV	54.0	-8.5	1.00 H	136	-6.10	51.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	55.5 PK	84.2	-28.7	1.00 V	26	16.00	39.50
2	#5725.00	45.6 AV	74.3	-28.7	1.00 V	26	6.10	39.50
3	*5785.00	104.2 PK			1.00 V	26	64.50	39.70
4	*5785.00	94.3 AV			1.00 V	26	54.60	39.70
5	11570.00	60.3 PK	74.0	-13.7	1.00 V	249	8.70	51.60
6	11570.00	46.9 AV	54.0	-7.1	1.00 V	249	-4.70	51.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	102.1 PK			1.52 H	332	62.40	39.70
2	*5825.00	92.0 AV			1.52 H	332	52.30	39.70
3	#5850.00	65.4 PK	82.1	-16.7	1.52 H	332	25.60	39.80
4	#5850.00	55.3 AV	72.0	-16.7	1.52 H	332	15.50	39.80
5	11650.00	58.9 PK	74.0	-15.1	1.00 H	142	7.30	51.60
6	11650.00	45.4 AV	54.0	-8.6	1.00 H	142	-6.20	51.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	102.8 PK			1.00 V	18	63.10	39.70
2	*5825.00	93.2 AV			1.00 V	18	53.50	39.70
3	#5850.00	65.3 PK	82.8	-17.5	1.00 V	18	25.50	39.80
4	#5850.00	55.7 AV	73.2	-17.5	1.00 V	18	15.90	39.80
5	11650.00	59.8 PK	74.0	-14.2	1.00 V	258	8.20	51.60
6	11650.00	46.6 AV	54.0	-7.4	1.00 V	258	-5.00	51.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

802.11n (40MHz): 1TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	71.7 PK	81.9	-10.2	1.55 H	332	32.20	39.50
2	#5725.00	62.0 AV	72.2	-10.2	1.55 H	332	22.50	39.50
3	*5755.00	101.9 PK			1.55 H	332	62.30	39.60
4	*5755.00	92.2 AV			1.55 H	332	52.60	39.60
5	11510.00	59.2 PK	74.0	-14.8	1.00 H	117	7.50	51.70
6	11510.00	45.9 AV	54.0	-8.1	1.00 H	117	-5.80	51.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	78.0 PK	83.9	-5.9	1.00 V	25	38.50	39.50
2	#5725.00	67.7 AV	73.6	-5.9	1.00 V	25	28.20	39.50
3	*5755.00	103.9 PK			1.00 V	25	64.30	39.60
4	*5755.00	93.6 AV			1.00 V	25	54.00	39.60
5	11510.00	59.9 PK	74.0	-14.1	1.00 V	255	8.20	51.70
6	11510.00	47.0 AV	54.0	-7.0	1.00 V	255	-4.70	51.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 159	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	62.2 PK	80.6	-18.4	1.54 H	327	22.70	39.50
2	#5725.00	51.9 AV	71.0	-19.1	1.54 H	327	12.40	39.50
3	*5795.00	100.6 PK			1.54 H	327	60.90	39.70
4	*5795.00	91.0 AV			1.54 H	327	51.30	39.70
5	11590.00	58.4 PK	74.0	-15.6	1.00 H	142	6.90	51.50
6	11590.00	45.3 AV	54.0	-8.7	1.00 H	142	-6.20	51.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	61.1 PK	82.4	-21.3	1.00 V	28	21.60	39.50
2	#5725.00	50.8 AV	72.1	-21.3	1.00 V	28	11.30	39.50
3	*5795.00	102.4 PK			1.00 V	28	62.70	39.70
4	*5795.00	92.1 AV			1.00 V	28	52.40	39.70
5	11590.00	60.1 PK	74.0	-13.9	1.00 V	244	8.60	51.50
6	11590.00	46.9 AV	54.0	-7.1	1.00 V	244	-4.60	51.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

802.11n (20MHz): 2TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	68.4 PK	83.9	-15.5	1.06 H	26	28.90	39.50
2	#5725.00	56.6 AV	72.1	-15.5	1.06 H	26	17.10	39.50
3	*5745.00	103.9 PK			1.06 H	26	64.30	39.60
4	*5745.00	92.1 AV			1.06 H	26	52.50	39.60
5	11490.00	59.3 PK	74.0	-14.7	1.00 H	133	7.60	51.70
6	11490.00	46.2 AV	54.0	-7.8	1.00 H	133	-5.50	51.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	71.1 PK	85.5	-14.4	1.11 V	15	31.60	39.50
2	#5725.00	58.5 AV	72.9	-14.4	1.11 V	15	19.00	39.50
3	*5745.00	105.5 PK			1.11 V	15	65.90	39.60
4	*5745.00	92.9 AV			1.11 V	15	53.30	39.60
5	11490.00	60.2 PK	74.0	-13.8	1.00 V	244	8.50	51.70
6	11490.00	46.6 AV	54.0	-7.4	1.00 V	244	-5.10	51.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#": The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	57.2 PK	83.3	-26.1	1.05 H	34	17.70	39.50
2	#5725.00	44.8 AV	70.9	-26.1	1.05 H	34	5.30	39.50
3	*5785.00	103.3 PK			1.05 H	34	63.60	39.70
4	*5785.00	90.9 AV			1.05 H	34	51.20	39.70
5	11570.00	58.9 PK	74.0	-15.1	1.00 H	132	7.30	51.60
6	11570.00	45.8 AV	54.0	-8.2	1.00 H	132	-5.80	51.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	60.1 PK	84.9	-24.8	1.00 V	15	20.60	39.50
2	#5725.00	47.3 AV	72.1	-24.8	1.00 V	15	7.80	39.50
3	*5785.00	104.9 PK			1.00 V	15	65.20	39.70
4	*5785.00	92.1 AV			1.00 V	15	52.40	39.70
5	11570.00	60.5 PK	74.0	-13.5	1.00 V	251	8.90	51.60
6	11570.00	47.2 AV	54.0	-6.8	1.00 V	251	-4.40	51.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	102.4 PK			1.04 H	28	62.70	39.70
2	*5825.00	90.1 AV			1.04 H	28	50.40	39.70
3	#5850.00	60.2 PK	82.4	-22.2	1.04 H	28	20.40	39.80
4	#5850.00	47.9 AV	70.1	-22.2	1.04 H	28	8.10	39.80
5	11650.00	59.1 PK	74.0	-14.9	1.00 H	129	7.50	51.60
6	11650.00	45.9 AV	54.0	-8.1	1.00 H	129	-5.70	51.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	103.1 PK			1.00 V	15	63.40	39.70
2	*5825.00	90.9 AV			1.00 V	15	51.20	39.70
3	#5850.00	60.4 PK	83.1	-22.7	1.00 V	15	20.60	39.80
4	#5850.00	48.2 AV	70.9	-22.7	1.00 V	15	8.40	39.80
5	11650.00	59.9 PK	74.0	-14.1	1.00 V	263	8.30	51.60
6	11650.00	46.2 AV	54.0	-7.8	1.00 V	263	-5.40	51.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

802.11n (40MHz): 2TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	72.1 PK	80.2	-8.1	1.05 H	29	32.60	39.50
2	#5725.00	62.7 AV	70.8	-8.1	1.05 H	29	23.20	39.50
3	*5755.00	100.2 PK			1.05 H	29	60.60	39.60
4	*5755.00	90.8 AV			1.05 H	29	51.20	39.60
5	11510.00	59.3 PK	74.0	-14.7	1.00 H	120	7.60	51.70
6	11510.00	45.7 AV	54.0	-8.3	1.00 H	120	-6.00	51.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	75.0 PK	82.3	-7.3	1.00 V	15	35.50	39.50
2	#5725.00	65.3 AV	72.6	-7.3	1.00 V	15	25.80	39.50
3	*5755.00	102.3 PK			1.00 V	15	62.70	39.60
4	*5755.00	92.6 AV			1.00 V	15	53.00	39.60
5	11510.00	61.0 PK	74.0	-13.0	1.00 V	262	9.30	51.70
6	11510.00	46.9 AV	54.0	-7.1	1.00 V	262	-4.80	51.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 159	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	99.5 PK			1.04 H	31	59.80	39.70
2	*5795.00	90.0 AV			1.04 H	31	50.30	39.70
3	#5850.00	58.9 PK	79.5	-20.6	1.04 H	31	19.10	39.80
4	#5850.00	49.4 AV	70.0	-20.6	1.04 H	31	9.60	39.80
5	11590.00	58.7 PK	74.0	-15.3	1.00 H	137	7.20	51.50
6	11590.00	45.6 AV	54.0	-8.4	1.00 H	137	-5.90	51.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	101.1 PK			1.00 V	17	61.40	39.70
2	*5795.00	91.6 AV			1.00 V	17	51.90	39.70
3	#5850.00	55.3 PK	81.1	-25.8	1.00 V	17	15.50	39.80
4	#5850.00	45.8 AV	71.6	-25.8	1.00 V	17	6.00	39.80
5	11590.00	60.4 PK	74.0	-13.6	1.00 V	258	8.90	51.50
6	11590.00	47.2 AV	54.0	-6.8	1.00 V	258	-4.30	51.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.

BELOW 1GHz WORST-CASE DATA :

802.11a: 1TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	222.38	33.3 QP	46.0	-12.7	1.00 H	170	21.40	11.90
2	611.24	31.6 QP	46.0	-14.4	1.50 H	297	9.40	22.20
3	665.68	41.6 QP	46.0	-4.4	1.00 H	249	18.90	22.70
4	690.96	39.4 QP	46.0	-6.6	1.00 H	213	16.50	22.90
5	729.84	41.6 QP	46.0	-4.4	1.00 H	133	17.80	23.80
6	795.95	36.1 QP	46.0	-9.9	1.00 H	322	10.60	25.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.62	34.8 QP	40.0	-5.2	1.00 V	325	21.20	13.60
2	162.11	28.9 QP	43.5	-14.6	1.00 V	160	14.90	14.00
3	224.33	29.1 QP	46.0	-16.9	1.00 V	182	17.10	12.00
4	665.68	44.2 QP	46.0	-1.8	1.49 V	160	21.50	22.70
5	690.96	40.5 QP	46.0	-5.5	1.49 V	17	17.60	22.90
6	731.79	35.3 QP	46.0	-10.7	1.49 V	17	11.50	23.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

802.11n (40MHz): 2TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	105.73	26.6 QP	43.5	-16.9	1.50 H	67	16.50	10.10
2	169.89	29.8 QP	43.5	-13.7	1.50 H	49	16.30	13.50
3	224.33	33.3 QP	46.0	-12.7	1.50 H	7	21.30	12.00
4	663.74	42.2 QP	46.0	-3.8	1.50 H	111	19.50	22.70
5	690.96	41.6 QP	46.0	-4.4	1.00 H	273	18.70	22.90
6	733.73	42.3 QP	46.0	-3.7	1.00 H	112	18.40	23.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.62	32.9 QP	40.0	-7.1	1.50 V	222	19.30	13.60
2	103.78	28.0 QP	43.5	-15.5	1.50 V	133	18.10	9.90
3	296.27	26.8 QP	46.0	-19.2	1.00 V	14	12.00	14.80
4	663.74	40.5 QP	46.0	-5.5	1.00 V	284	17.80	22.70
5	690.96	44.8 QP	46.0	-1.2	1.50 V	151	21.90	22.90
6	729.84	35.6 QP	46.0	-10.4	1.50 V	45	11.80	23.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

5.2 CONDUCTED EMISSION MEASUREMENT

5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.2.2 TEST INSTRUMENTS

Same as item 4.2.2.

5.2.3 TEST PROCEDURES

Same as item 4.2.3.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation.

5.2.5 TEST SETUP

Same as item 4.2.5.

5.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



A D T

5.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA :

802.11a: 1TX

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18516	0.15	47.35	33.80	47.50	33.95	64.25	54.25	-16.75	-20.30
2	0.92344	0.19	39.37	28.16	39.56	28.35	56.00	46.00	-16.44	-17.65
3	1.39063	0.22	41.89	30.96	42.11	31.18	56.00	46.00	-13.89	-14.82
4	1.68359	0.24	40.89	27.95	41.13	28.19	56.00	46.00	-14.87	-17.81
5	13.45313	0.50	32.31	25.20	32.81	25.70	60.00	50.00	-27.19	-24.30
6	22.27734	0.61	37.25	29.90	37.86	30.51	60.00	50.00	-22.14	-19.49

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

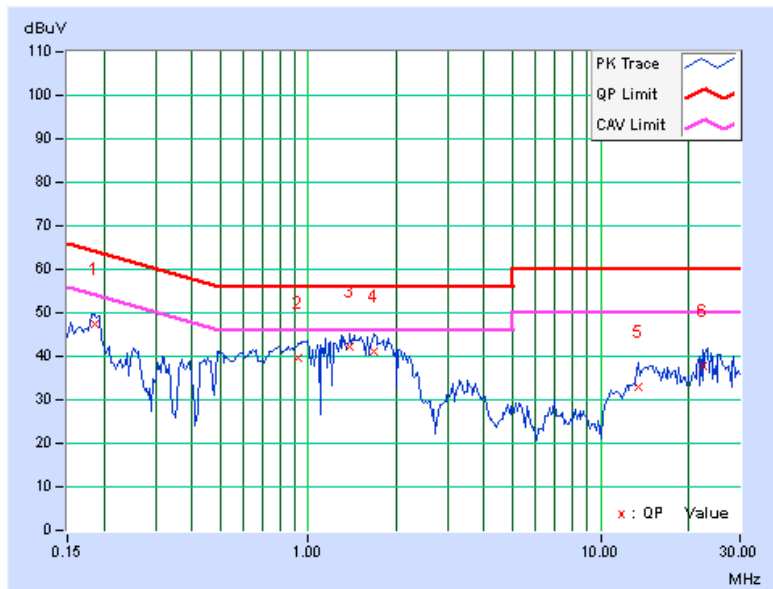




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18516	0.14	47.32	33.64	47.46	33.78	64.25	54.25	-16.79	-20.47
2	0.98203	0.19	40.11	28.13	40.30	28.32	56.00	46.00	-15.70	-17.68
3	1.46094	0.22	42.19	31.78	42.41	32.00	56.00	46.00	-13.59	-14.00
4	1.69922	0.24	41.07	30.17	41.31	30.41	56.00	46.00	-14.69	-15.59
5	14.52344	0.59	34.61	27.76	35.20	28.35	60.00	50.00	-24.80	-21.65
6	25.67578	0.62	38.75	33.56	39.37	34.18	60.00	50.00	-20.63	-15.82

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

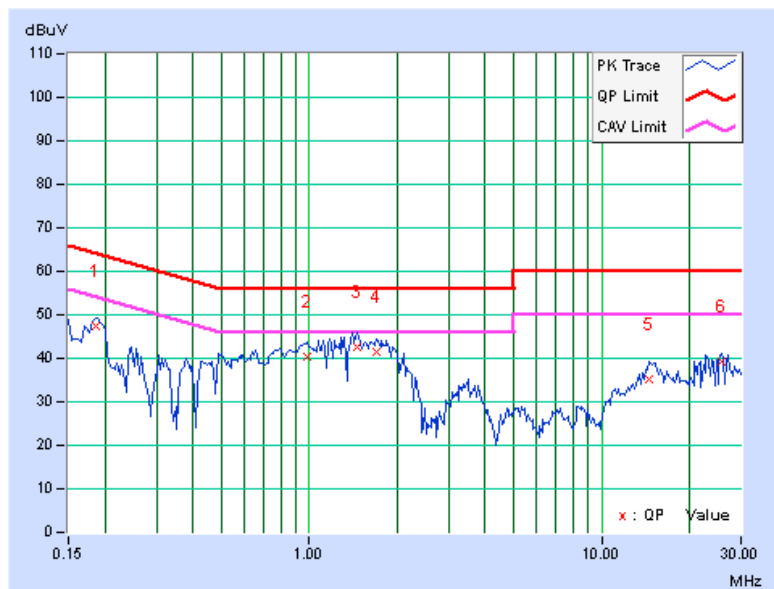




802.11n (40MHz): 2TX

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18906	0.15	46.45	34.10	46.60	34.25	64.08	54.08	-17.48	-19.83
2	1.12500	0.20	40.93	28.71	41.13	28.91	56.00	46.00	-14.87	-17.09
3	1.32422	0.21	41.74	29.48	41.95	29.69	56.00	46.00	-14.05	-16.31
4	1.80859	0.25	39.99	27.69	40.24	27.94	56.00	46.00	-15.76	-18.06
5	14.69531	0.52	34.26	27.97	34.78	28.49	60.00	50.00	-25.22	-21.51
6	24.22656	0.59	40.07	33.87	40.66	34.46	60.00	50.00	-19.34	-15.54

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

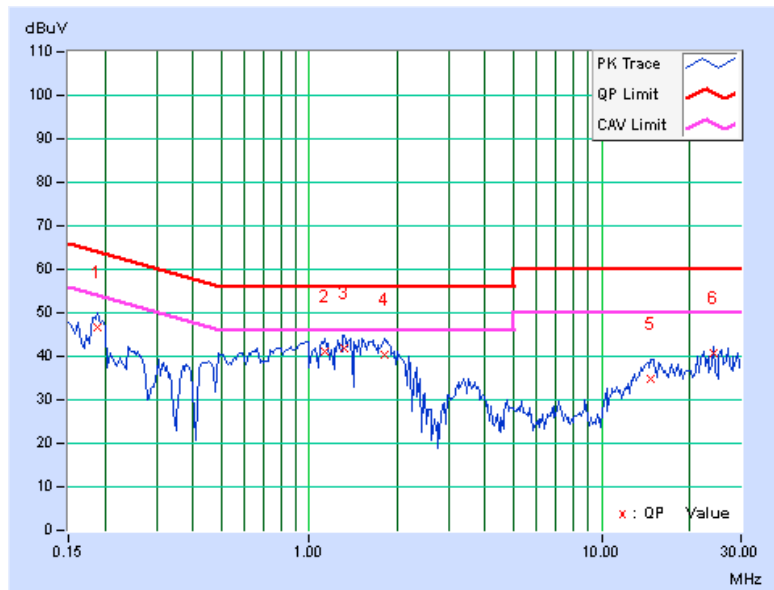




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.18516	0.14	46.88	33.38	47.02	33.52	64.25	54.25	-17.23	-20.73
2	0.93125	0.19	39.68	27.51	39.87	27.70	56.00	46.00	-16.13	-18.30
3	1.36328	0.22	41.52	28.86	41.74	29.08	56.00	46.00	-14.26	-16.92
4	1.86328	0.25	40.59	28.84	40.84	29.09	56.00	46.00	-15.16	-16.91
5	15.25781	0.61	34.11	27.29	34.72	27.90	60.00	50.00	-25.28	-22.10
6	25.14453	0.63	37.59	31.30	38.22	31.93	60.00	50.00	-21.78	-18.07

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

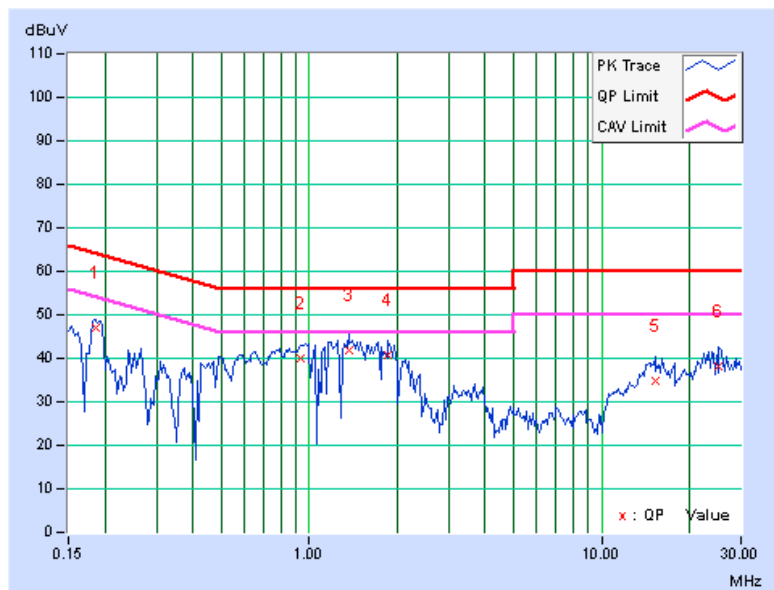

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

5.3.2 TEST SETUP

Same as item 4.3.2.

5.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.3.4 TEST PROCEDURE

Same as item 4.3.4.

5.3.5 DEVIATION FROM TEST STANDARD

No deviation.

5.3.6 EUT OPERATING CONDITIONS

Same as item 4.3.6.



5.3.7 TEST RESULTS

802.11a: 1TX

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
149	5745	16.55	0.5	PASS
157	5785	16.52	0.5	PASS
165	5825	16.54	0.5	PASS

802.11n (20MHz): 1TX

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
149	5745	17.75	0.5	PASS
157	5785	17.73	0.5	PASS
165	5825	17.73	0.5	PASS

802.11n (40MHz): 1TX

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
151	5755	36.15	0.5	PASS
159	5795	36.11	0.5	PASS



802.11n (20MHz): 2TX

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	17.69	17.78	0.5	PASS
157	5785	17.74	17.80	0.5	PASS
165	5825	17.77	17.75	0.5	PASS

802.11n (20MHz): 2TX

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
151	5755	35.91	35.97	0.5	PASS
159	5795	36.07	36.03	0.5	PASS

5.4 CONDUCTED OUTPUT POWER

5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 5725 –5850 MHz bands: 1 Watt (30dBm)

5.4.2 TEST SETUP

Same as Item 4.4.2.

5.4.3 INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.4.4 TEST PROCEDURES

Same as Item 4.4.4.

5.4.5 DEVIATION FROM TEST STANDARD

No deviation.

5.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



5.4.7 TEST RESULTS

802.11a: 1TX

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
149	5745	179.887	22.55	30	PASS
157	5785	178.238	22.51	30	PASS
165	5825	175.388	22.44	30	PASS

802.11n (20MHz): 1TX

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
149	5745	170.216	22.31	30	PASS
157	5785	177.011	22.48	30	PASS
165	5825	172.584	22.37	30	PASS

802.11n (40MHz): 1TX

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
151	5755	176.604	22.47	30	PASS
159	5795	177.419	22.49	30	PASS

802.11n (20MHz): 2TX

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	20.33	20.58	222.2	23.5	30	PASS
157	5785	20.13	20.51	215.5	23.3	30	PASS
165	5825	20.07	20.41	211.5	23.3	30	PASS

802.11n (40MHz): 2TX

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
151	5755	20.62	20.55	228.8	23.6	30	PASS
159	5795	20.37	20.54	222.1	23.5	30	PASS

5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST SETUP

Same as item 4.5.2.

5.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.5.4 TEST PROCEDURE.

Same as item 4.5.4.

5.5.5 DEVIATION FROM TEST STANDARD

No deviation.

5.5.6 EUT OPERATING CONDITION

Same as item 4.3.6.

5.5.7 TEST RESULTS

802.11a: 1TX

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
149	5745	5.75	-9.48	8	PASS
157	5785	5.57	-9.66	8	PASS
165	5825	5.42	-9.81	8	PASS

802.11n (20MHz): 1TX

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
149	5745	5.87	-9.36	8	PASS
157	5785	5.89	-9.34	8	PASS
165	5825	5.78	-9.45	8	PASS

802.11n (40MHz): 1TX

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
151	5755	3.19	-12.04	8	PASS
159	5795	3.22	-12.01	8	PASS

802.11n (20MHz): 2TX

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	3.08	-12.15	3.01	-9.14	8	PASS
	157	5785	3.09	-12.14	3.01	-9.13	8	PASS
	165	5825	2.67	-12.56	3.01	-9.55	8	PASS
1	149	5745	2.55	-12.68	3.01	-9.67	8	PASS
	157	5785	2.57	-12.66	3.01	-9.65	8	PASS
	165	5825	2.29	-12.94	3.01	-9.93	8	PASS

802.11n (40MHz): 2TX

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	151	5755	-0.17	-15.40	3.01	-12.39	8	PASS
	159	5795	-0.31	-15.54	3.01	-12.53	8	PASS
1	151	5755	-0.07	-15.30	3.01	-12.29	8	PASS
	159	5795	-0.10	-15.33	3.01	-12.32	8	PASS

5.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

5.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST SETUP

Same as Item 4.6.2

5.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.6.4 TEST PROCEDURE

Same as Item 4.6.4

5.6.5 DEVIATION FROM TEST STANDARD

No deviation.

5.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

5.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit. Only worst data of each operating mode is presented.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11a: 1TX


CH 149



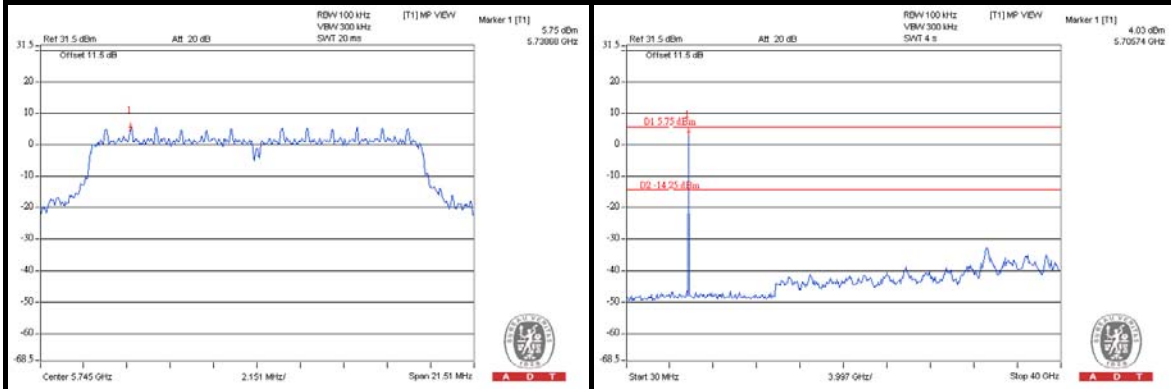


CH 157

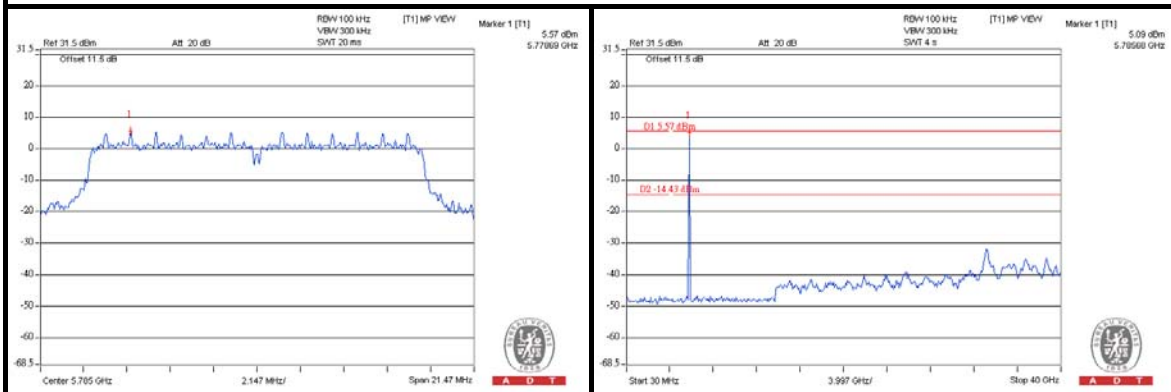

CH 165

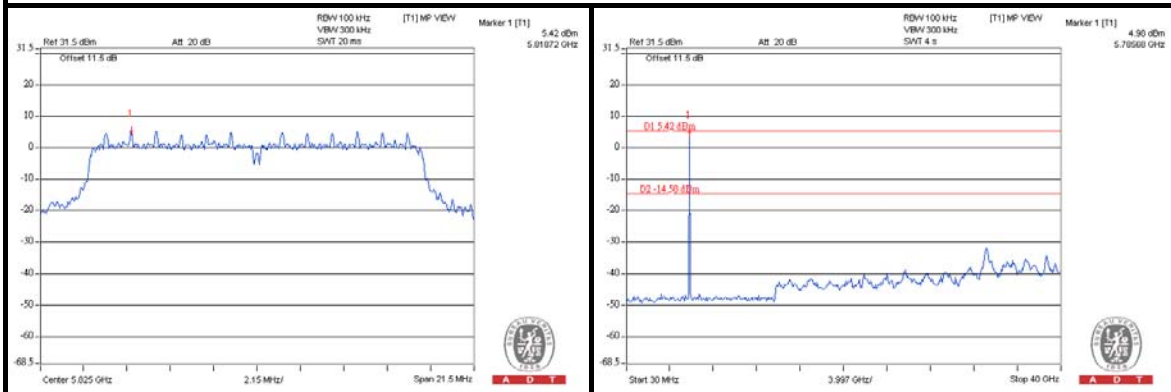

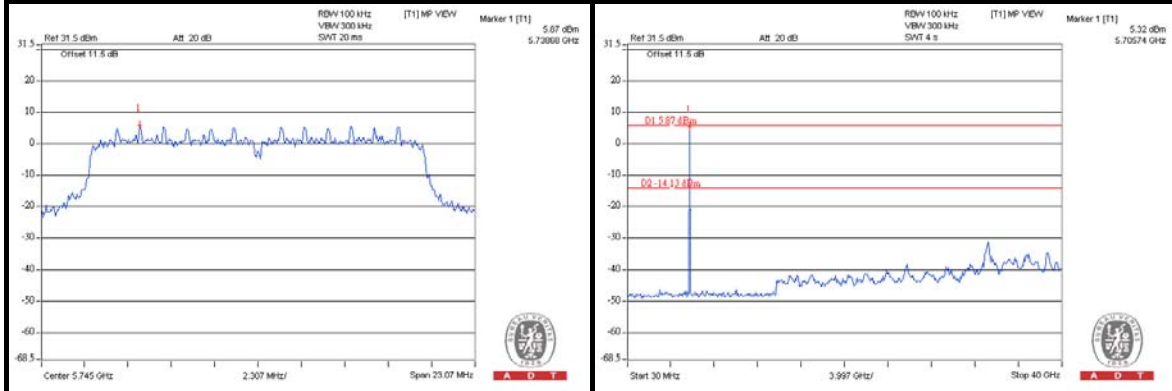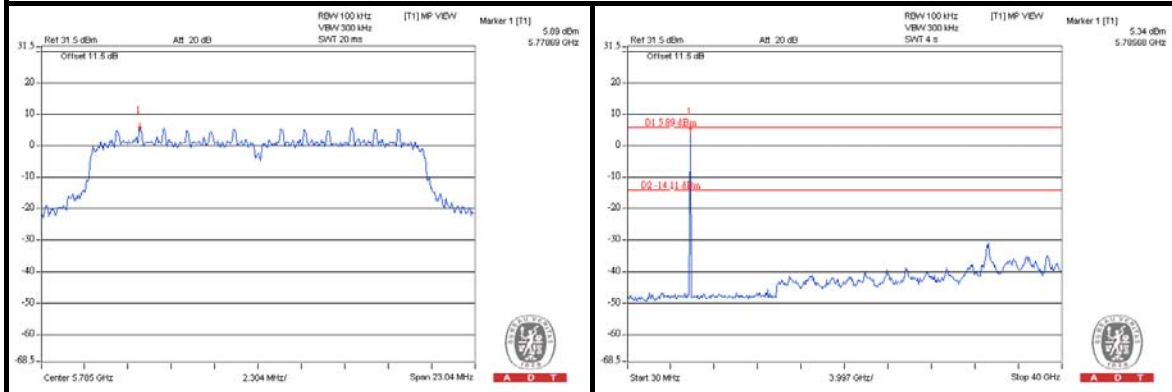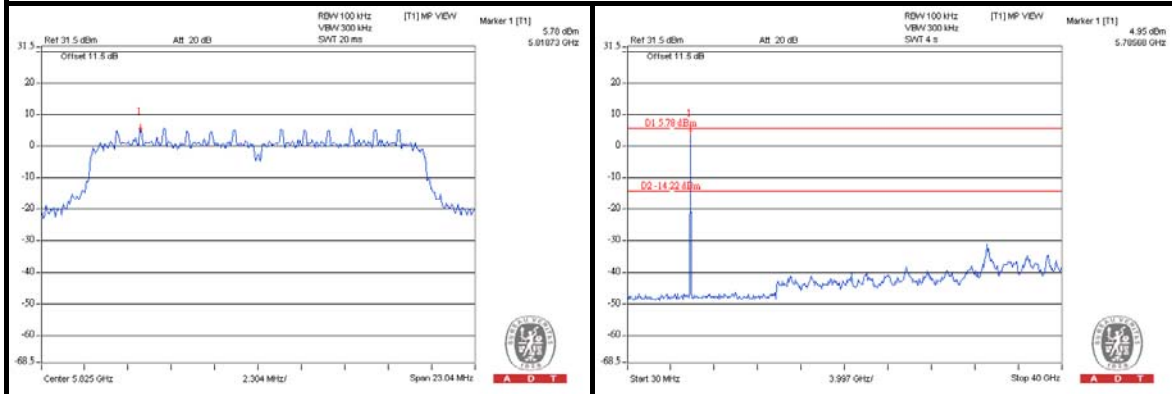
802.11n (20MHz): 1TX**CH 149****CH 157****CH 165**




A D T

802.11n (40MHz): 1TX

CH 151

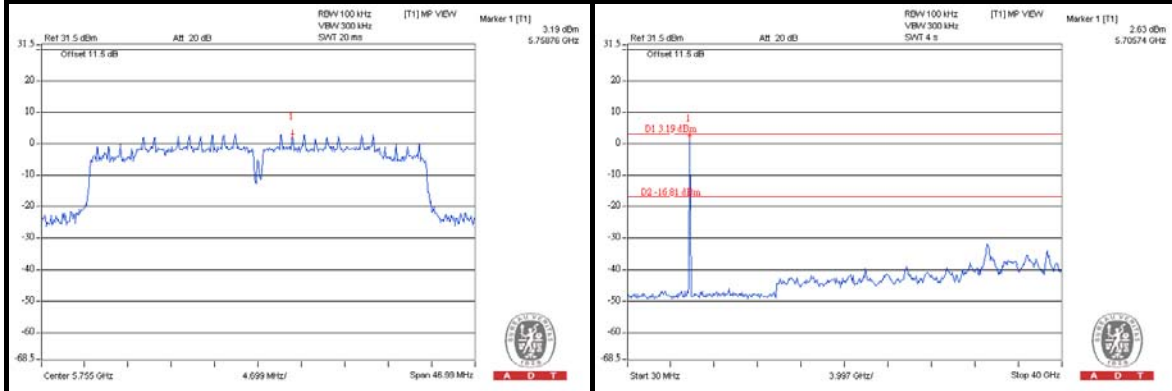

CH 159

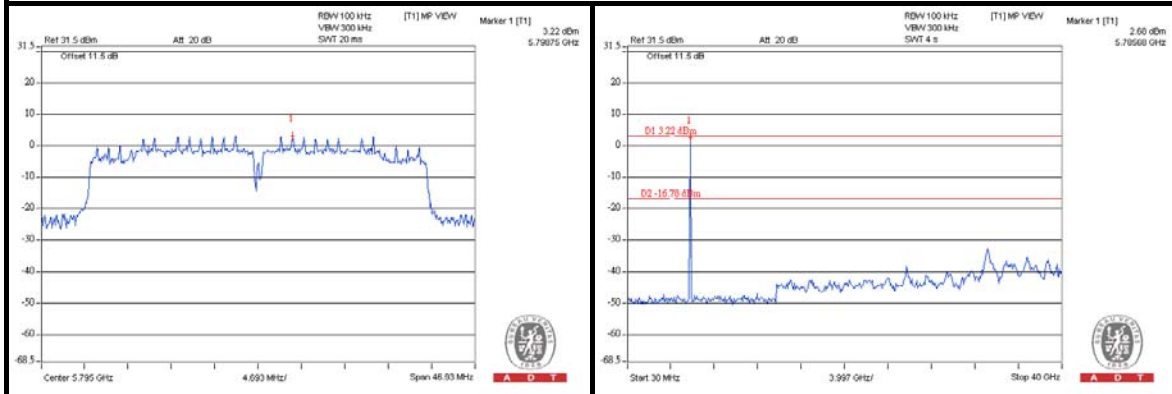





A D T

802.11n (20MHz): 2TX


CH 149

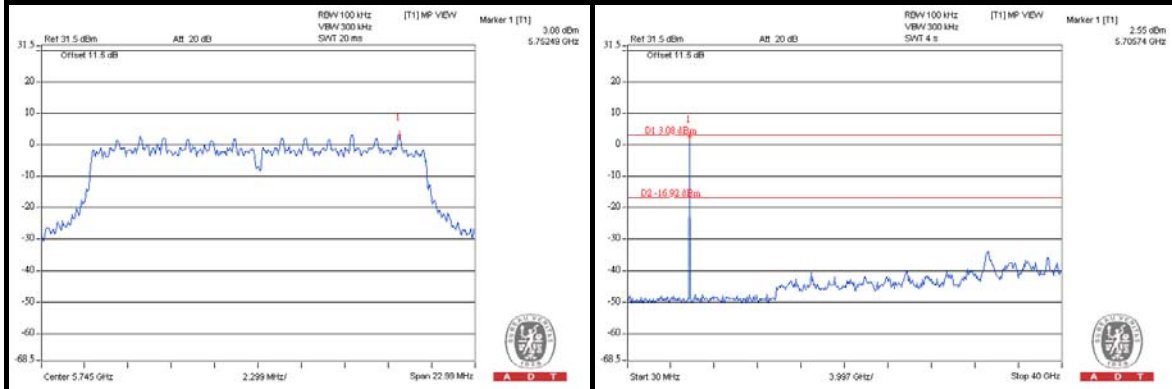

CH 157

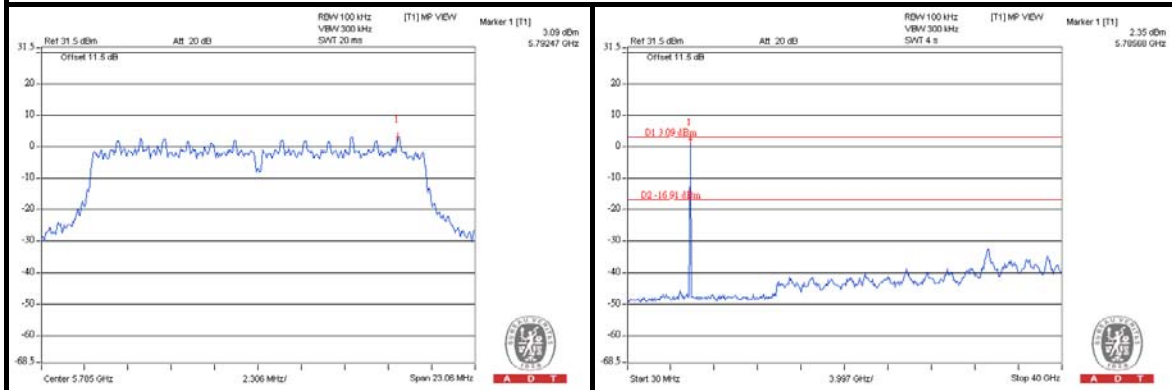

CH 165

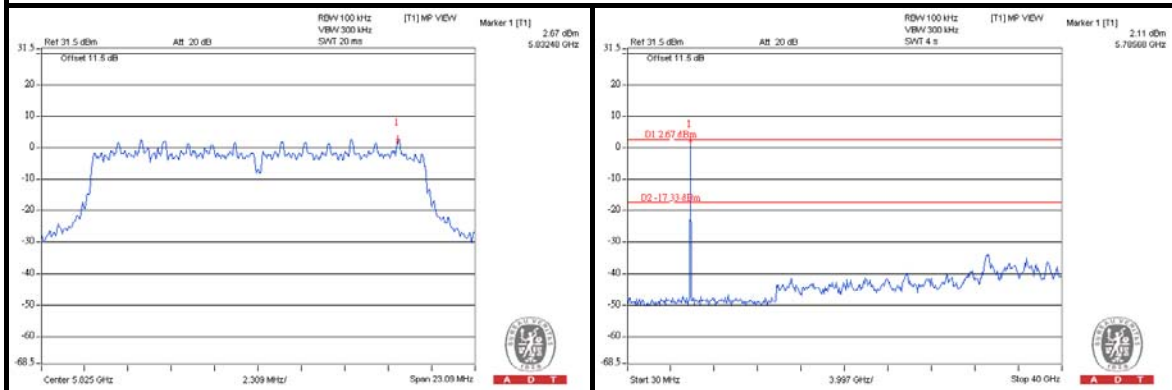





A D T

802.11n (40MHz): 2TX

CH 151

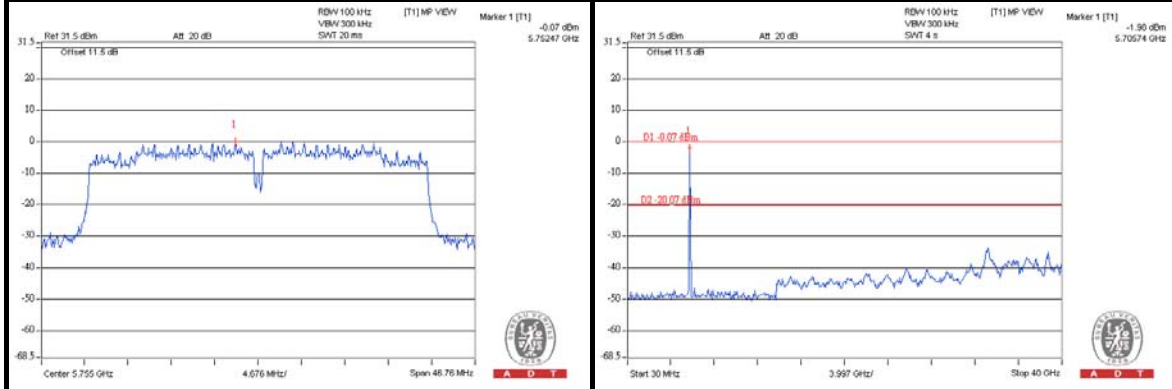

CH 159

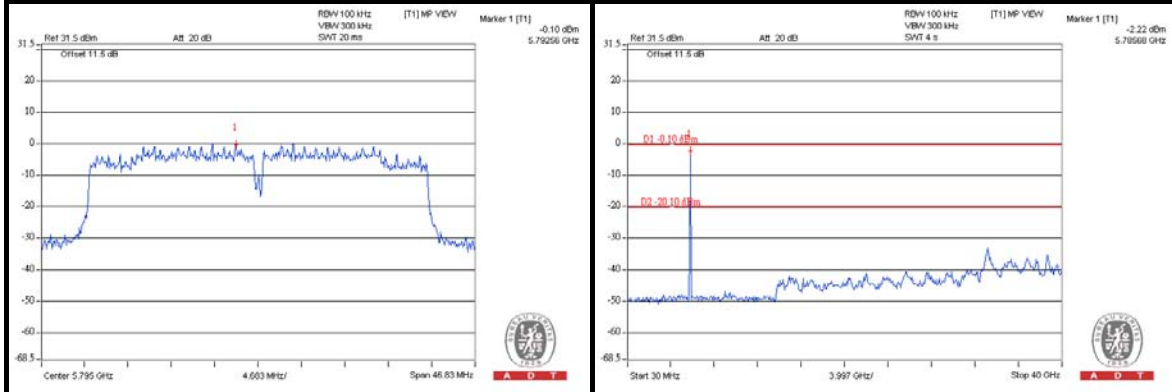



A D T

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025:

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

8. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---