


A B C D E F

1

2

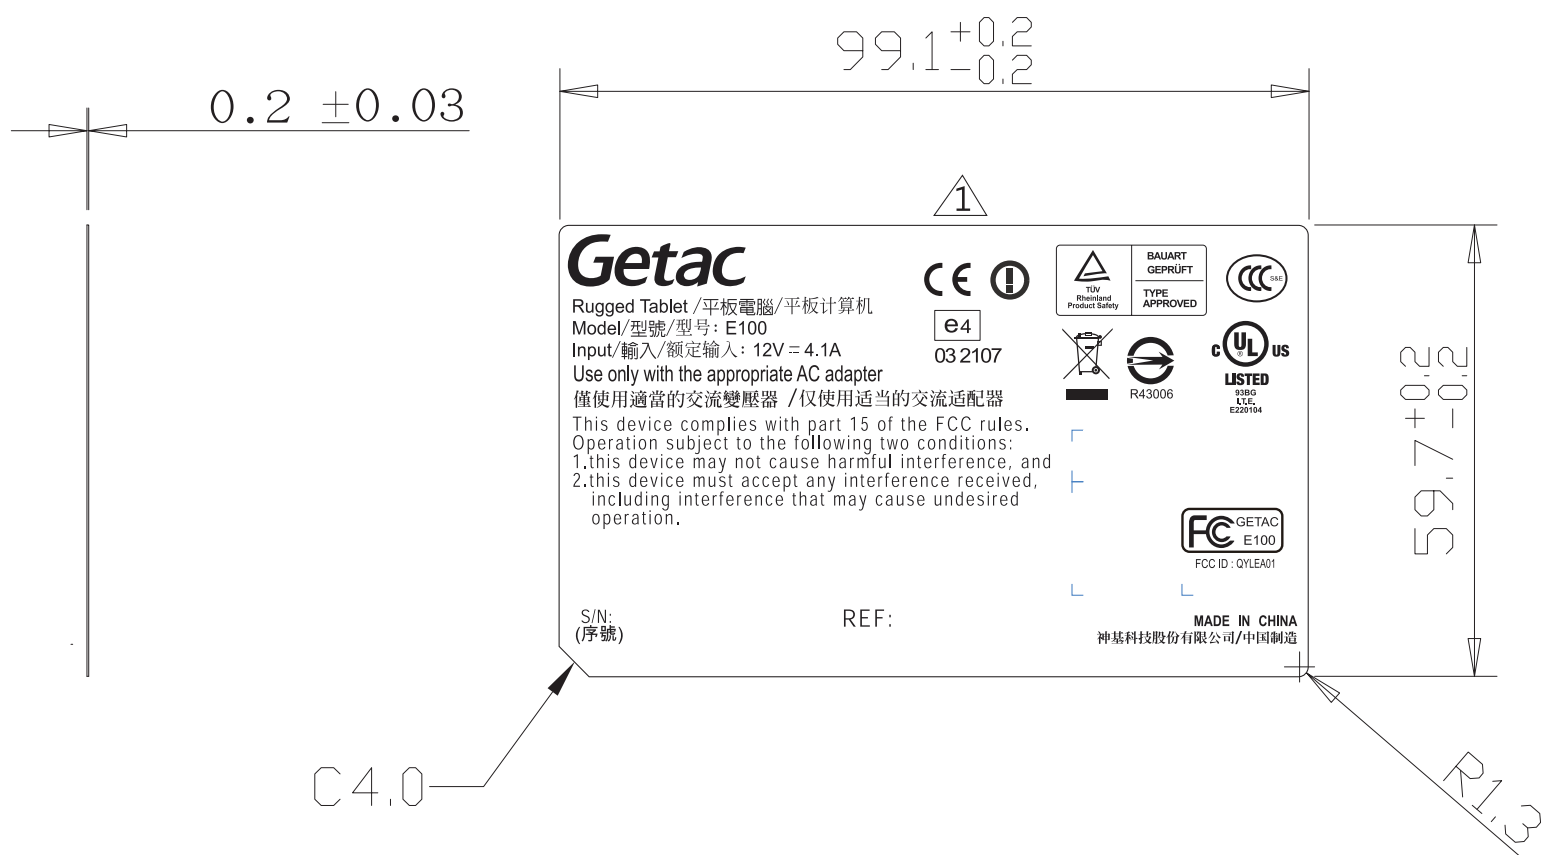

**Note:**

1. MATERIAL:PC KLX 1860 T = 0.125mm  
it must be approved by UL & CSA STANDARD
2. LABEL SHOULD HAVE PRESSURE SENSITIVE ADHESIVE WITH PROTECTIVE RELEASE LINER ON THE BACK SIDE.
3. COLORS:TEXT FOREGROUND:GRAY 7 ; BACKGROUND:TAC-11A19
4. LABEL MANUFACTURER MUST USE A PROCESS & MATERIALS THOSE WHICH HAVE BEEN APPROVED BY UL & CSA
5. ADHESIVE: 3M467
6. 黏性：黏著力為2.3以上
7. 表面：粗糙面
8. 貼附位置：後蓋
9. 環測項目及條件,(判定標準follow “QAP-4-75-A 系統表面處理的測試規範)
10. Flflow RD approval sample as standar
11. Sample must approve GP standard

|                    |  |  |  |         |     |     |       |         |     |     |     |     |      |           |          |           |                               |                             |            |     |      |       |   |    |
|--------------------|--|--|--|---------|-----|-----|-------|---------|-----|-----|-----|-----|------|-----------|----------|-----------|-------------------------------|-----------------------------|------------|-----|------|-------|---|----|
|                    |  |  |  | TOL ±   |     | ○   |       |         |     |     |     |     | DATE | 4-22-2010 | MATERIAL | SEE NOTES | TREATMENT                     |                             | PROJECTION |     |      |       |   |    |
|                    |  |  |  | RANGE   |     | M1  | M2    | S1      | S2  | P1  | P2  | C   | B    | UNIT      | MM       | SCALE     | DRAWING NAME                  | TF1-LABEL ; RATING , E100-A |            |     |      |       |   |    |
|                    |  |  |  | 0~6     |     | .05 | 0.1   | .15     | 0.2 | .05 | 0.1 | 0.5 | .15  | DRAWN     | DESIGNED | CHECKED   | APPROVED                      | MATERIAL NO.                | MF         | 242 | 8303 | 00005 | R | 01 |
|                    |  |  |  | 6~30    |     | 0.1 | 0.2   | .15     | .25 | 0.1 | .15 | 1   | .15  |           |          |           |                               |                             |            |     |      |       |   |    |
|                    |  |  |  | 30~80   |     | .15 | .25   | 0.2     | 0.3 | 0.2 | 0.4 | 2   | .25  |           |          |           |                               |                             |            |     |      |       |   |    |
|                    |  |  |  | 80~180  |     | .15 | 0.3   | .25     | .45 | 0.4 | 0.8 | 3   | .25  |           |          |           |                               |                             |            |     |      |       |   |    |
|                    |  |  |  | 180~315 |     | 0.2 | 0.5   | 0.4     | 0.6 | 0.6 | 1.2 | 3   | 0.3  |           |          |           |                               |                             |            |     |      |       |   |    |
| CONTENTS OF CHANGE |  |  |  | RVS     | CHK | APV | M/D/Y | 315~800 | 0.3 | 0.8 | 0.7 | 1.1 | 0.8  | 1.5       | 4        | 0.5       | <b>Getac Technology Corp.</b> |                             |            |     |      |       |   |    |

A B C D E F