


A B C D E F

1

2

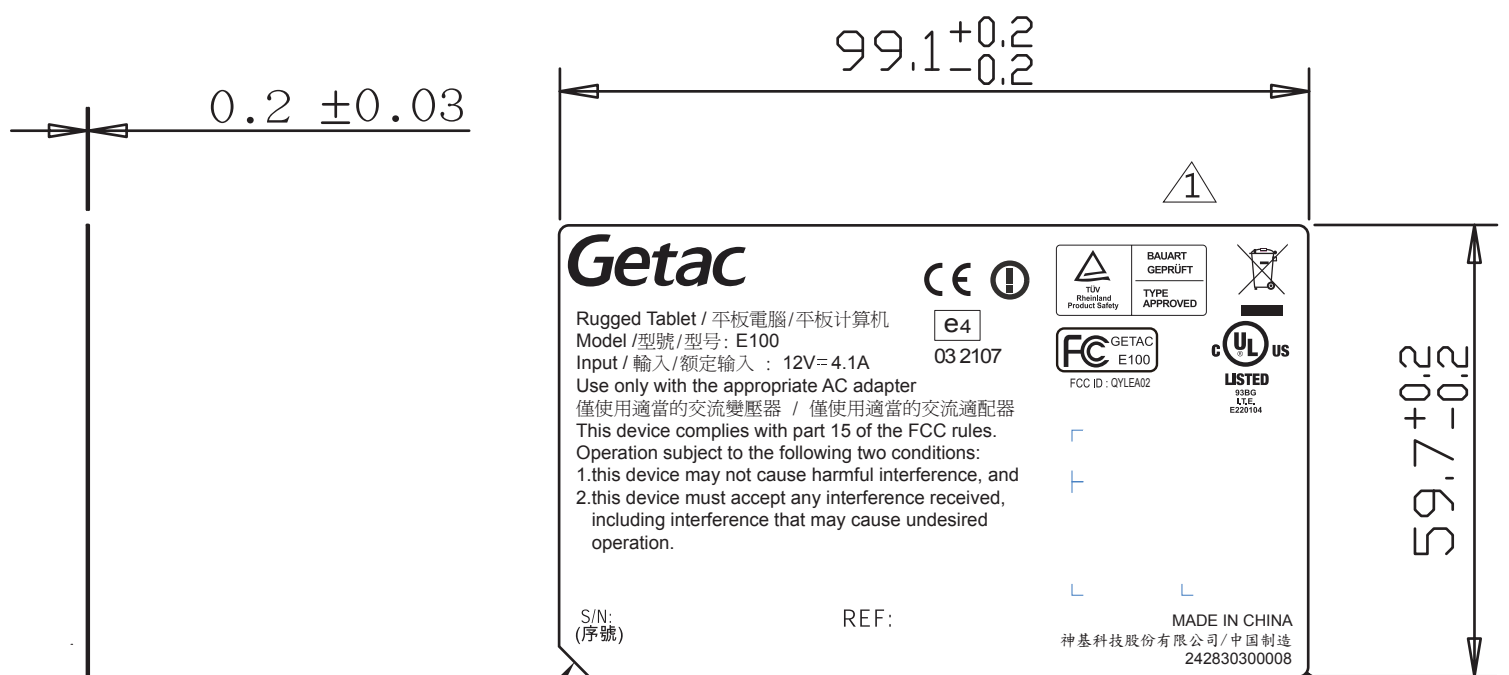

C4.0

R1.3

Note:

1. MATERIAL:PC KLX 1860 T = 0.125mm
it must be approved by UL & CSA STANDARD
2. LABEL SHOULD HAVE PRESSURE SENSITIVE ADHESIVE WITH PROTECTIVE RELEASE LINER ON THE BACK SIDE.
3. COLORS:TEXT FOREGROUND:GRAY 7 ; BACKGROUND:TAC-11A19
4. LABEL MANUFACTURER MUST USE A PROCESS & MATERIALS THOSE WHICH HAVE BEEN APPROVED BY UL & CSA
5. ADHESIVE: 3M467
6. 黏性：黏著力為2.3以上
7. 表面：粗糙面
8. 貼附位置：後蓋
9. 環測項目及條件,(判定標準follow “QAP-4-75-A 系統表面處理的測試規範)
10. Fllow RD approval sample as standar
11. Sample must approve GP standard

				TOL ±		O				DATE	05-17-2010	MATERIAL	SEE NOTES	TREATMENT	PROJECTION		
				RANGE		M1	M2	S1	S2	P1	P2	C	B				
				0~6		.05	0.1	.15	0.2	.05	0.1	0.5	.15	UNIT MM SCALE / DRAWING NAME TF1-LABEL;RATING, SEC, E100-A			
				6~30		0.1	0.2	.15	.25	0.1	.15	1	.15	DRAWN DESIGNED CHECKED APPROVED MATERIAL NO. MF 242830300008 R 01			
				30~80		.15	.25	0.2	0.3	0.2	0.4	2	.25				
				80~180		.15	0.3	.25	.45	0.4	0.8	3	.25				
ECR#G53410AM2K				180~315		0.2	0.5	0.4	0.6	0.6	1.2	3	0.3	廖梅華 李惠民 Getac Technology Corp.			
CONTENTS OF CHANGE				RVS	CHK	APV	M/D/Y	315~800		0.3	0.8	0.7	1.1	0.8	1.5	4	0.5

A B C D E F