



FCC SAR Test Report

Report No. : SA140313C20
Applicant : Getac Technology Corporation
Address : 5F., Building A, No. 209, Sec.1, Nangang Rd., Nangang Dist., Taipei
City 11568, Taiwan, R.O.C.
Product : Tablet PC
FCC ID : QYLEM7355T
Brand : Getac
Model No. : T800
Standards : FCC 47 CFR Part 2 (2.1093) / IEEE C95.1:1992 / IEEE 1528:2003
IEEE 1528a-2005 / KDB 865664 D01 v01r03 / KDB 447498 D01 v05r02
KDB 616217 D04 v01r01 / KDB 941225 D01 v02
KDB 941225 D02 v02r02 / KDB 941225 D03 v01
Sample Received Date : Mar. 13, 2014
Date of Testing : May 13, 2014 ~ Jun. 06, 2014

CERTIFICATION: The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch – Lin Kou Laboratories**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample’s SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies.

Prepared By : Evonne Liu
Evonne Liu / Specialist

Approved By : Roy Wu
Roy Wu / Manager



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



Table of Contents

Release Control Record 3

1. Summary of Maximum SAR Value 4

2. Description of Equipment Under Test 5

3. SAR Measurement System 6

3.1 Definition of Specific Absorption Rate (SAR) 6

3.2 SPEAG DASY System 6

3.2.1 Robot 7

3.2.2 Probes 8

3.2.3 Data Acquisition Electronics (DAE) 8

3.2.4 Phantoms 9

3.2.5 Device Holder 10

3.2.6 System Validation Dipoles 10

3.2.7 Tissue Simulating Liquids 11

3.3 SAR System Verification 14

3.4 SAR Measurement Procedure 15

3.4.1 Area & Zoom Scan Procedure 15

3.4.2 Volume Scan Procedure 15

3.4.3 Power Drift Monitoring 16

3.4.4 Spatial Peak SAR Evaluation 16

3.4.5 SAR Averaged Methods 16

4. SAR Measurement Evaluation 17

4.1 EUT Configuration and Setting 17

4.2 EUT Testing Position 19

4.3 Tissue Verification 21

4.4 System Validation 21

4.5 System Verification 22

4.6 Maximum Output Power 22

4.6.1 Maximum Conducted Power 22

4.6.2 Measured Conducted Power Result 23

4.7 SAR Testing Results 33

4.7.1 SAR Results for Body 33

4.7.2 SAR Measurement Variability 37

5. Calibration of Test Equipment 38

6. Measurement Uncertainty 39

7. Information on the Testing Laboratories 40

Appendix A. SAR Plots of System Verification

Appendix B. SAR Plots of SAR Measurement

Appendix C. Calibration Certificate for Probe and Dipole

Appendix D. Photographs of EUT and Setup



Release Control Record

| Report No. | Reason for Change | Date Issued |
|-------------|-------------------|---------------|
| SA140313C20 | Initial release | Jun. 06, 2014 |
| | | |
| | | |
| | | |

1. Summary of Maximum SAR Value

| Equipment Class | Mode | Highest Reported Body SAR _{1g} (W/kg) |
|-----------------|-----------|--|
| PCB | GSM850 | 0.57 |
| | GSM1900 | 0.52 |
| | WCDMA II | 0.53 |
| | WCDMA IV | 0.97 |
| | WCDMA V | 0.33 |
| | CDMA BC0 | 0.70 |
| | CDMA BC1 | 0.98 |
| | CDMA BC10 | 0.69 |
| | LTE 2 | 0.58 |
| | LTE 4 | 0.99 |
| | LTE 5 | 0.39 |
| | LTE 13 | 0.70 |
| | LTE 17 | 0.83 |
| LTE 25 | 0.60 | |
| DXX | NFC | N/A |

Note:

- The SAR limit (**Head & Body: SAR_{1g} 1.6 W/kg**) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992.

FCC SAR Test Report
2. Description of Equipment Under Test

| | |
|--|---|
| EUT Type | Tablet PC |
| FCC ID | QYLEM7355T |
| Brand Name | Getac |
| Model Name | T800 |
| HW Version | R0D |
| SW Version | R0.51.070520U |
| Tx Frequency Bands (Unit: MHz) | GSM850 : 824.2 ~ 848.8 GSM1900 : 1850.2 ~ 1909.8 WCDMA Band II : 1852.4 ~ 1907.6 WCDMA Band IV : 1712.4 ~ 1752.6 WCDMA Band V : 826.4 ~ 846.6 CDMA BC0 : 824.7 ~ 848.31 CDMA BC1 : 1851.25 ~ 1908.75 CDMA BC10 : 817.9 ~ 823.1 LTE Band 2 : 1850.7 ~ 1909.3 (1.4M), 1851.5 ~ 1908.5 (3M), 1852.5 ~ 1907.5 (5M), 1855 ~ 1905 (10M), 1857.5 ~ 1902.5 (15M), 1860 ~ 1900 (20M) LTE Band 4 : 1710.7 ~ 1754.3 (1.4M), 1711.5 ~ 1753.5 (3M), 1712.5 ~ 1752.5 (5M), 1715 ~ 1750 (10M), 1717.5 ~ 1747.5 (15M), 1720 ~ 1745 (20M) LTE Band 5 : 824.7 ~ 848.3 (1.4M), 825.5 ~ 847.5 (3M), 826.5 ~ 846.5 (5M), 829 ~ 844 (10M) LTE Band 13 : 779.5 ~ 784.5 (5M), 782 (10M) LTE Band 17 : 706.5 ~ 713.5 (5M), 709 ~ 711 (10M) LTE Band 25 : 1850.7 ~ 1914.3 (1.4M), 1851.5 ~ 1913.5 (3M), 1852.5 ~ 1912.5 (5M), 1855 ~ 1910 (10M), 1857.5 ~ 1907.5 (15M), 1860 ~ 1905 (20M) NFC : 13.56 |
| Uplink Modulations | GPRS : GMSK EDGE : 8PSK WCDMA : QPSK CDMA : QPSK LTE : QPSK, 16QAM NFC : ASK |
| Maximum Tune-up Conducted Power (Unit: dBm) | GSM850 : 32.0 GSM1900 : 29.5 WCDMA Band II : 23.5 WCDMA Band IV : 23.0 WCDMA Band V : 23.0 CDMA BC0 : 24.0 CDMA BC1 : 24.0 CDMA BC10 : 24.0 LTE Band 2 : 22.7 LTE Band 4 : 22.8 LTE Band 5 : 22.3 LTE Band 13 : 22.5 LTE Band 17 : 22.7 LTE Band 25 : 22.6 |
| Antenna Type | Fixed Internal Antenna |
| EUT Stage | Identical Prototype |

Note:

- The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

List of Accessory:

| | | |
|--------------------|---------------------|-----------------------|
| Battery | Brand Name | Getac |
| | Model Name | BP2S2P2100S |
| | Power Rating | 7.4Vdc, 4200mAh, 32Wh |
| | Type | Li-ion |
| WWAN Module | Brand Name | Getac |
| | Model Name | EM7355 |

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SPEAG DASY System

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY4/5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.



Fig-3.1 DASY System Setup

3.2.1 Robot

The DASY system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig-3.2 DASY4





Fig-3.3 DASY5

FCC SAR Test Report


3.2.2 Probes

The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

| | | |
|----------------------|--|---|
| Model | EX3DV4 |  |
| Construction | Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE). | |
| Frequency | 10 MHz to 6 GHz Linearity: ± 0.2 dB | |
| Directivity | ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis) | |
| Dynamic Range | 10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g) | |
| Dimensions | Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm | |


| | | |
|----------------------|---|--|
| Model | ES3DV3 |  |
| Construction | Symmetrical design with triangular core. Interleaved sensors. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE). | |
| Frequency | 10 MHz to 4 GHz Linearity: ± 0.2 dB | |
| Directivity | ± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis) | |
| Dynamic Range | 5 μ W/g to 100 mW/g Linearity: ± 0.2 dB | |
| Dimensions | Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm | |


3.2.3 Data Acquisition Electronics (DAE)

| | | |
|-----------------------------|---|---|
| Model | DAE3, DAE4 |  |
| Construction | Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop. | |
| Measurement Range | -100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV) | |
| Input Offset Voltage | < 5 μ V (with auto zero) | |
| Input Bias Current | < 50 fA | |
| Dimensions | 60 x 60 x 68 mm | |

FCC SAR Test Report

3.2.4 Phantoms

| | | |
|------------------------|---|---|
| Model | Twin SAM |  |
| Construction | The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot. | |
| Material | Vinylester, glass fiber reinforced (VE-GF) | |
| Shell Thickness | 2 ± 0.2 mm (6 ± 0.2 mm at ear point) | |
| Dimensions | Length: 1000 mm Width: 500 mm Height: adjustable feet | |
| Filling Volume | approx. 25 liters | |

| | | |
|------------------------|---|--|
| Model | ELI |  |
| Construction | Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. | |
| Material | Vinylester, glass fiber reinforced (VE-GF) | |
| Shell Thickness | 2.0 ± 0.2 mm (bottom plate) | |
| Dimensions | Major axis: 600 mm Minor axis: 400 mm | |
| Filling Volume | approx. 30 liters | |

FCC SAR Test Report

3.2.5 Device Holder

| | | |
|---------------------|---|---|
| Model | Mounting Device |  |
| Construction | In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). | |
| Material | POM | |

| | | |
|---------------------|---|---|
| Model | Laptop Extensions Kit |  |
| Construction | Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. | |
| Material | POM, Acrylic glass, Foam | |

3.2.6 System Validation Dipoles

| | | |
|-------------------------|--|---|
| Model | D-Serial |  |
| Construction | Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions. | |
| Frequency | 750 MHz to 5800 MHz | |
| Return Loss | > 20 dB | |
| Power Capability | > 100 W (f < 1GHz), > 40 W (f > 1GHz) | |

FCC SAR Test Report

3.2.7 Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in Table-3.1.



The dielectric properties of the head tissue simulating liquids are defined in IEEE 1528, and KDB 865664 D01 Appendix A. For the body tissue simulating liquids, the dielectric properties are defined in KDB 865664 D01 Appendix A. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.



FCC SAR Test Report

Table-3.1 Targets of Tissue Simulating Liquid

| Frequency (MHz) | Target Permittivity | Range of $\pm 5\%$ | Target Conductivity | Range of $\pm 5\%$ |
|-----------------|---------------------|--------------------|---------------------|--------------------|
| For Head | | | | |
| 750 | 41.9 | 39.8 ~ 44.0 | 0.89 | 0.85 ~ 0.93 |
| 835 | 41.5 | 39.4 ~ 43.6 | 0.90 | 0.86 ~ 0.95 |
| 900 | 41.5 | 39.4 ~ 43.6 | 0.97 | 0.92 ~ 1.02 |
| 1450 | 40.5 | 38.5 ~ 42.5 | 1.20 | 1.14 ~ 1.26 |
| 1640 | 40.3 | 38.3 ~ 42.3 | 1.29 | 1.23 ~ 1.35 |
| 1750 | 40.1 | 38.1 ~ 42.1 | 1.37 | 1.30 ~ 1.44 |
| 1800 | 40.0 | 38.0 ~ 42.0 | 1.40 | 1.33 ~ 1.47 |
| 1900 | 40.0 | 38.0 ~ 42.0 | 1.40 | 1.33 ~ 1.47 |
| 2000 | 40.0 | 38.0 ~ 42.0 | 1.40 | 1.33 ~ 1.47 |
| 2300 | 39.5 | 37.5 ~ 41.5 | 1.67 | 1.59 ~ 1.75 |
| 2450 | 39.2 | 37.2 ~ 41.2 | 1.80 | 1.71 ~ 1.89 |
| 2600 | 39.0 | 37.1 ~ 41.0 | 1.96 | 1.86 ~ 2.06 |
| 3500 | 37.9 | 36.0 ~ 39.8 | 2.91 | 2.76 ~ 3.06 |
| 5200 | 36.0 | 34.2 ~ 37.8 | 4.66 | 4.43 ~ 4.89 |
| 5300 | 35.9 | 34.1 ~ 37.7 | 4.76 | 4.52 ~ 5.00 |
| 5500 | 35.6 | 33.8 ~ 37.4 | 4.96 | 4.71 ~ 5.21 |
| 5600 | 35.5 | 33.7 ~ 37.3 | 5.07 | 4.82 ~ 5.32 |
| 5800 | 35.3 | 33.5 ~ 37.1 | 5.27 | 5.01 ~ 5.53 |
| For Body | | | | |
| 750 | 55.5 | 52.7 ~ 58.3 | 0.96 | 0.91 ~ 1.01 |
| 835 | 55.2 | 52.4 ~ 58.0 | 0.97 | 0.92 ~ 1.02 |
| 900 | 55.0 | 52.3 ~ 57.8 | 1.05 | 1.00 ~ 1.10 |
| 1450 | 54.0 | 51.3 ~ 56.7 | 1.30 | 1.24 ~ 1.37 |
| 1640 | 53.8 | 51.1 ~ 56.5 | 1.40 | 1.33 ~ 1.47 |
| 1750 | 53.4 | 50.7 ~ 56.1 | 1.49 | 1.42 ~ 1.56 |
| 1800 | 53.3 | 50.6 ~ 56.0 | 1.52 | 1.44 ~ 1.60 |
| 1900 | 53.3 | 50.6 ~ 56.0 | 1.52 | 1.44 ~ 1.60 |
| 2000 | 53.3 | 50.6 ~ 56.0 | 1.52 | 1.44 ~ 1.60 |
| 2300 | 52.9 | 50.3 ~ 55.5 | 1.81 | 1.72 ~ 1.90 |
| 2450 | 52.7 | 50.1 ~ 55.3 | 1.95 | 1.85 ~ 2.05 |
| 2600 | 52.5 | 49.9 ~ 55.1 | 2.16 | 2.05 ~ 2.27 |
| 3500 | 51.3 | 48.7 ~ 53.9 | 3.31 | 3.14 ~ 3.48 |
| 5200 | 49.0 | 46.6 ~ 51.5 | 5.30 | 5.04 ~ 5.57 |
| 5300 | 48.9 | 46.5 ~ 51.3 | 5.42 | 5.15 ~ 5.69 |
| 5500 | 48.6 | 46.2 ~ 51.0 | 5.65 | 5.37 ~ 5.93 |
| 5600 | 48.5 | 46.1 ~ 50.9 | 5.77 | 5.48 ~ 6.06 |
| 5800 | 48.2 | 45.8 ~ 50.6 | 6.00 | 5.70 ~ 6.30 |

FCC SAR Test Report

The following table gives the recipes for tissue simulating liquids.

Table-3.2 Recipes of Tissue Simulating Liquid

| Tissue Type | Bactericide | DGBE | HEC | NaCl | Sucrose | Triton X-100 | Water | Diethylene Glycol Mono-hexylether |
|-------------|-------------|------|-----|------|---------|--------------|-------|-----------------------------------|
| H750 | 0.2 | - | 0.2 | 1.5 | 56.0 | - | 42.1 | - |
| H835 | 0.2 | - | 0.2 | 1.5 | 57.0 | - | 41.1 | - |
| H900 | 0.2 | - | 0.2 | 1.4 | 58.0 | - | 40.2 | - |
| H1450 | - | 43.3 | - | 0.6 | - | - | 56.1 | - |
| H1640 | - | 45.8 | - | 0.5 | - | - | 53.7 | - |
| H1750 | - | 47.0 | - | 0.4 | - | - | 52.6 | - |
| H1800 | - | 44.5 | - | 0.3 | - | - | 55.2 | - |
| H1900 | - | 44.5 | - | 0.2 | - | - | 55.3 | - |
| H2000 | - | 44.5 | - | 0.1 | - | - | 55.4 | - |
| H2300 | - | 44.9 | - | 0.1 | - | - | 55.0 | - |
| H2450 | - | 45.0 | - | 0.1 | - | - | 54.9 | - |
| H2600 | - | 45.1 | - | 0.1 | - | - | 54.8 | - |
| H3500 | - | 8.0 | - | 0.2 | - | 20.0 | 71.8 | - |
| H5G | - | - | - | - | - | 17.2 | 65.5 | 17.3 |
| B750 | 0.2 | - | 0.2 | 0.8 | 48.8 | - | 50.0 | - |
| B835 | 0.2 | - | 0.2 | 0.9 | 48.5 | - | 50.2 | - |
| B900 | 0.2 | - | 0.2 | 0.9 | 48.2 | - | 50.5 | - |
| B1450 | - | 34.0 | - | 0.3 | - | - | 65.7 | - |
| B1640 | - | 32.5 | - | 0.3 | - | - | 67.2 | - |
| B1750 | - | 31.0 | - | 0.2 | - | - | 68.8 | - |
| B1800 | - | 29.5 | - | 0.4 | - | - | 70.1 | - |
| B1900 | - | 29.5 | - | 0.3 | - | - | 70.2 | - |
| B2000 | - | 30.0 | - | 0.2 | - | - | 69.8 | - |
| B2300 | - | 31.0 | - | 0.1 | - | - | 68.9 | - |
| B2450 | - | 31.4 | - | 0.1 | - | - | 68.5 | - |
| B2600 | - | 31.8 | - | 0.1 | - | - | 68.1 | - |
| B3500 | - | 28.8 | - | 0.1 | - | - | 71.1 | - |
| B5G | - | - | - | - | - | 10.7 | 78.6 | 10.7 |

3.3 SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

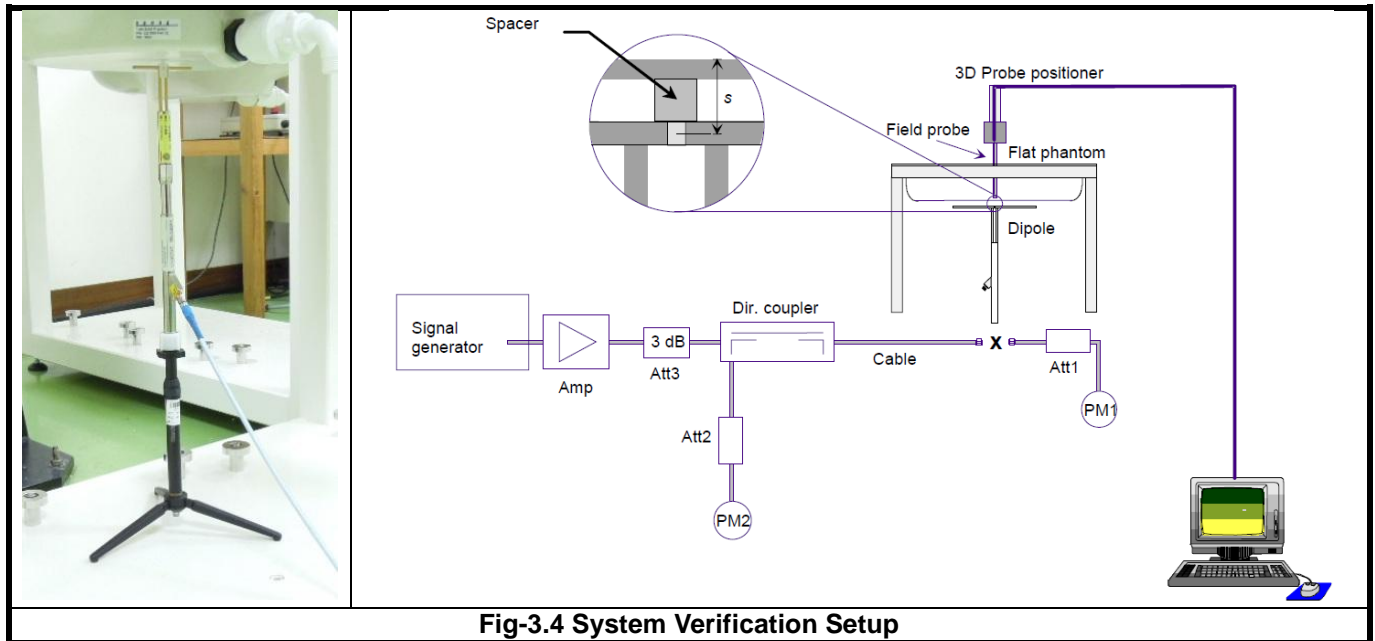


Fig-3.4 System Verification Setup

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The power meter PM1 measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

3.4 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Perform SAR testing steps on the DASY system
- (e) Record the SAR value

3.4.1 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. According to KDB 865664 D01, the resolution for Area and Zoom scan is specified in the table below.

| Items | <= 2 GHz | 2-3 GHz | 3-4 GHz | 4-5 GHz | 5-6 GHz |
|---------------------------------------|----------|----------|----------|----------|----------|
| Area Scan ($\Delta x, \Delta y$) | <= 15 mm | <= 12 mm | <= 12 mm | <= 10 mm | <= 10 mm |
| Zoom Scan ($\Delta x, \Delta y$) | <= 8 mm | <= 5 mm | <= 5 mm | <= 4 mm | <= 4 mm |
| Zoom Scan (Δz) | <= 5 mm | <= 5 mm | <= 4 mm | <= 3 mm | <= 2 mm |
| Zoom Scan Volume | >= 30 mm | >= 30 mm | >= 28 mm | >= 25 mm | >= 22 mm |

Note:

When zoom scan is required and report SAR is <= 1.4 W/kg, the zoom scan resolution of $\Delta x / \Delta y$ (2-3GHz: <= 8 mm, 3-4GHz: <= 7 mm, 4-6GHz: <= 5 mm) may be applied.

3.4.2 Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

FCC SAR Test Report

3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

3.4.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

4. SAR Measurement Evaluation

4.1 EUT Configuration and Setting

This device supports WWAN capabilities. Because of the SAR issue, this device has designed with a proximity sensor which can trigger/not trigger power reduction for WCDMA II/CDMA BC1/LTE B4 on EUT Rear Face and Top Side orientations for SAR compliance. Others RF capabilities (GSM/WCDMA IV&V/CDMA BC0&BC10/ LTE B2&B5&B13&B17&B25) have no power reduction. The power levels for all wireless technologies and the power reduction please refer to section 4.6.1 of this report.

According to the procedures noticed in KDB 616217 D04, the proximity sensor triggering distance is 7 mm for EUT Rear Face, and 6 mm for Top Side. The separation distance of 6 mm determined by the smallest triggering distance on Top Side is used to assess the tilt angle influence and the sensor does not release during ± 45 degree. Therefore, the smallest separation distance for tilt angle influence is 6 mm. The details can be found in technical document. The conservative triggering distances based on the separation distance for the sensor triggered / not triggered as EUT with power reduction at 0 mm, and EUT without power reduction at 6 mm for EUT Rear Face, and 5 mm for Top Side is used to test SAR.

The power reduction is depends on the proximity sensor input. For a steady SAR test, the power reduction was enabled/disabled manually by engineering software during SAR testing.

The EUT is a data transmitter device that contains one WWAN transmitter, and one WWAN antenna. Confirming the LTE transmitter follows 3GPP standards, is category 3, FDD-LTE band 2/4/25 (BW 1.4/3/5/10/15/20 MHz), FDD-LTE band 5 (BW 1.4/3/5/10 MHz), FDD-LTE band 13/17 (BW 5/10 MHz), supports QPSK / 16QAM modulations, and supports data transmission only. Tested per 3GPP 36.521 maximum transmit procedures for both QPSK / 16QAM.

LTE Maximum Power Reduction in accordance with 3GPP 36.101: Power Reduction in accordance to 3GPP is active all times during LTE operation.

| Modulation | Channel Bandwidth / RB Configurations | | | | | | LTE MPR Setting (dB) |
|------------|---------------------------------------|----------|----------|-----------|-----------|-----------|----------------------|
| | BW 1.4 MHz | BW 3 MHz | BW 5 MHz | BW 10 MHz | BW 15 MHz | BW 20 MHz | |
| QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | 1 |
| 16QAM | <= 5 | <= 4 | <= 8 | <= 12 | <= 16 | <= 18 | 1 |
| 16QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | 2 |

Note: MPR is according to the standard and implemented in the circuit (mandatory).

In addition, the device is compliant with A-MPR requirements defined in 36.101 section 6.2.4 that may be required to meet 3GPP Adjacent Channel Leakage Ratio ("ACLR") requirements. A-MPR was disabled for all FCC compliance testing.

FCC SAR Test Report

For WWAN SAR testing, the EUT was linked and controlled by base station emulator (Agilent E5515C is used for GSM/WCDMA/CDMA, and Anritsu MT8820C is used for LTE). Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.

For GSM850, the power control level is set to 5. For GPRS850 (GMSK, CS1), the power control level is set to 5. For EDGE850 (8PSK:MCS9), the power control level is set to 8. For GSM1900, the power control level is set to 0. For GPRS1900 (GMSK, CS1), the power control level is set to 0. For EDGE1900 (8PSK:MCS9), the power control level is set to 2.

For WCDMA, body SAR is tested under 12.2k RMC mode with power control set all up bits. SAR for AMR is not required since its power is less than 1/4 dB higher than RMC. SAR for HSDPA/HSUPA is not required since its power is less than 1/4 dB higher than RMC without HSDPA/HSUPA and SAR for 12.2 kbps RMC is less than 75% of the SAR limit (1.2 W/kg).

For CDMA, SAR is tested under EVDO Rev.0 mode using Reverse Data Channel rate of 153.6 kbps in subtype 0/1 Physical Layer Configurations, and the power control set "All Up Bits". SAR for EVDO Rev.A is not required since its power is less than EVDO Rev.0. SAR for 1xRTT is not required since its power is less than 1/4 dB higher than EVDO Rev.0. The steps for system simulator (Agilent E5515C) setup are as below.

1. Set the Sector ID
2. Set the Protocol Release
3. Set the Cell Band and connecting Channel
4. Set the RTAP Rate
5. Set the power control
6. Press "Start Data Connection" button

For LTE, set the related parameters of operating band, channel bandwidth, uplink channel number, modulation type, and RB in base station simulator. When the EUT has registered and communicated to base station simulator, set the simulator to make EUT transmitting the maximum radiated power. The steps for system simulator (Anritsu MT8820C) setup are as below.

1. Press the "Std" button to select "LTE 22.20S" function
2. Choose the "Screen Select" item to "Fundamental Measurement"
3. Enter the "Common" item
4. Set the Operating Band
5. Set the Channel Bandwidth
6. Set the UL Channel & Frequency
7. Set the Modulation
8. Set the RB number and RB shift
9. Press "Start Call" button when EUT register to the system simulator
10. Set the TX-1 Max. Power to make the EUT transmit maximum output power

4.2 EUT Testing Position

According to KDB 616217 D04, SAR evaluation is required for back surface and edges of the devices. The back surface and edges of the tablet are tested with the tablet touching the phantom. Exposures from antennas through the front surface of the display section of a tablet are generally limited to the user's hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary. When voice mode is supported on a tablet and it is limited to speaker mode or headset operations only, additional SAR testing for this type of voice use is not required.

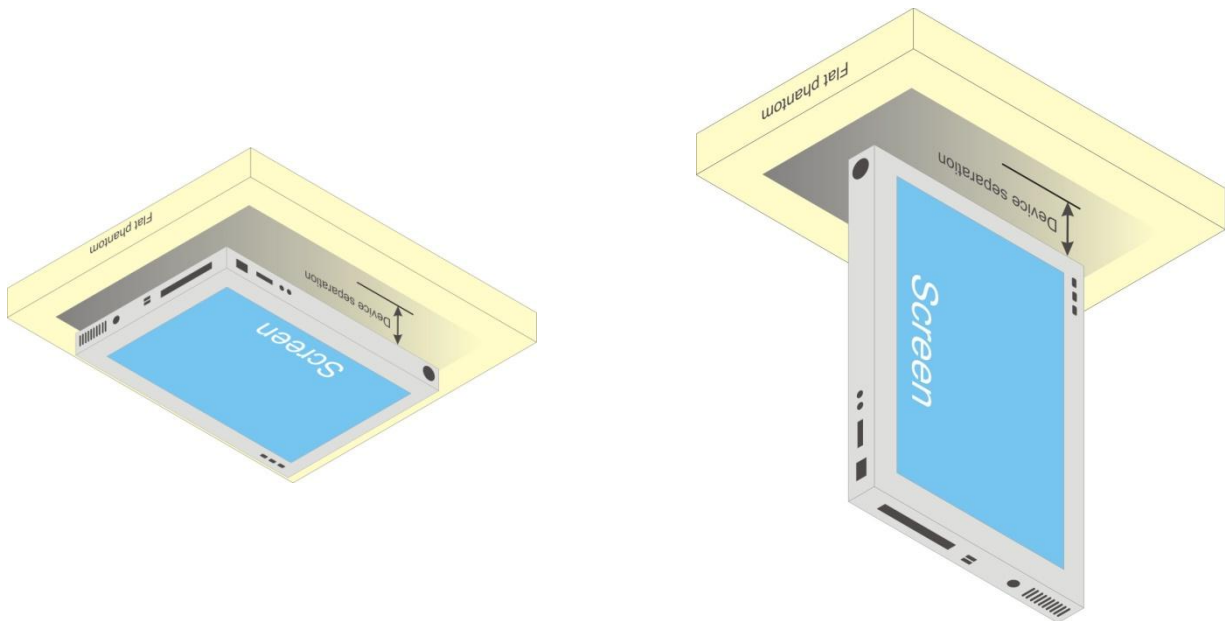


Fig-4.1 Illustration for Tablet Setup

FCC SAR Test Report

According to KDB 447498 D01, the SAR test exclusion condition is based on source-based time-averaged maximum conducted output power, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions. The SAR exclusion threshold is determined by the following formula.

1. For the test separation distance ≤ 50 mm

$$\frac{\text{Max. Tune up Power}_{(mW)}}{\text{Min. Test Separation Distance}_{(mm)}} \times \sqrt{f_{(GHz)}} \leq 3.0$$

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

2. For the test separation distance > 50 mm, and the frequency at 100 MHz to 1500 MHz

$$\left[(\text{Threshold at 50 mm in Step 1}) + (\text{Test Separation Distance} - 50 \text{ mm}) \times \left(\frac{f_{(MHz)}}{150} \right) \right]_{(mW)}$$

3. For the test separation distance > 50 mm, and the frequency at > 1500 MHz to 6 GHz

$$[(\text{Threshold at 50 mm in Step 1}) + (\text{Test Separation Distance} - 50 \text{ mm}) \times 10]_{(mW)}$$

| Mode | Max. Tune-up Power (dBm) | Max. Tune-up Power (mW) | Rear Face | | | Top Side | | | Bottom Side | | | Left Side | | | Right Side | | |
|-----------|--------------------------|-------------------------|----------------------|-------------------|----------------------|----------------------|-------------------|----------------------|----------------------|-------------------|----------------------|----------------------|-------------------|----------------------|----------------------|-------------------|----------------------|
| | | | Ant. to Surface (mm) | Calculated Result | Require SAR Testing? | Ant. to Surface (mm) | Calculated Result | Require SAR Testing? | Ant. to Surface (mm) | Calculated Result | Require SAR Testing? | Ant. to Surface (mm) | Calculated Result | Require SAR Testing? | Ant. to Surface (mm) | Calculated Result | Require SAR Testing? |
| GSM 850 | 26.0 | 398 | 5 | 73.3 | Yes | 5 | 73.3 | Yes | 137 | 655 mW | No | 140 | 672 mW | No | 20 | 18.3 | Yes |
| GSM 1900 | 23.0 | 200 | 5 | 55.3 | Yes | 5 | 55.3 | Yes | 137 | 979 mW | No | 140 | 1009 mW | No | 20 | 13.8 | Yes |
| WCDMA II | 23.5 | 224 | 5 | 61.9 | Yes | 5 | 61.9 | Yes | 137 | 979 mW | No | 140 | 1009 mW | No | 20 | 15.5 | Yes |
| WCDMA IV | 23.0 | 200 | 5 | 53.0 | Yes | 5 | 53 | Yes | 137 | 983 mW | No | 140 | 1013 mW | No | 20 | 13.2 | Yes |
| WCDMA V | 23.0 | 200 | 5 | 36.8 | Yes | 5 | 36.8 | Yes | 137 | 654 mW | No | 140 | 671 mW | No | 20 | 9.2 | Yes |
| CDMA BC0 | 24.0 | 251 | 5 | 46.2 | Yes | 5 | 46.2 | Yes | 137 | 655 mW | No | 140 | 672 mW | No | 20 | 11.6 | Yes |
| CDMA BC1 | 24.0 | 251 | 5 | 69.4 | Yes | 5 | 69.4 | Yes | 137 | 979 mW | No | 140 | 1009 mW | No | 20 | 17.3 | Yes |
| CDMA BC10 | 24.0 | 251 | 5 | 45.5 | Yes | 5 | 45.5 | Yes | 137 | 643 mW | No | 140 | 659 mW | No | 20 | 11.4 | Yes |
| LTE 2 | 22.7 | 186 | 5 | 51.4 | Yes | 5 | 51.4 | Yes | 137 | 979 mW | No | 140 | 1009 mW | No | 20 | 12.8 | Yes |
| LTE 4 | 22.8 | 191 | 5 | 50.6 | Yes | 5 | 50.6 | Yes | 137 | 983 mW | No | 140 | 1013 mW | No | 20 | 12.6 | Yes |
| LTE 5 | 22.3 | 170 | 5 | 31.3 | Yes | 5 | 31.3 | Yes | 137 | 654 mW | No | 140 | 671 mW | No | 20 | 7.8 | Yes |
| LTE 13 | 22.5 | 178 | 5 | 31.5 | Yes | 5 | 31.5 | Yes | 137 | 625 mW | No | 140 | 640 mW | No | 20 | 7.9 | Yes |
| LTE 17 | 22.7 | 186 | 5 | 31.4 | Yes | 5 | 31.4 | Yes | 137 | 592 mW | No | 140 | 606 mW | No | 20 | 7.9 | Yes |
| LTE 25 | 22.6 | 182 | 5 | 50.3 | Yes | 5 | 50.3 | Yes | 137 | 978 mW | No | 140 | 1008 mW | No | 20 | 12.6 | Yes |

FCC SAR Test Report

4.3 Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

| Test Date | Tissue Type | Frequency (MHz) | Liquid Temp. (°C) | Measured Conductivity (σ) | Measured Permittivity (ε _r) | Target Conductivity (σ) | Target Permittivity (ε _r) | Conductivity Deviation (%) | Permittivity Deviation (%) |
|---------------|-------------|-----------------|-------------------|---------------------------|---|-------------------------|---------------------------------------|----------------------------|----------------------------|
| May 13, 2014 | Body | 750 | 21.5 | 0.969 | 55.526 | 0.96 | 55.5 | 0.94 | 0.05 |
| May 13, 2014 | Body | 835 | 21.5 | 0.972 | 55.205 | 0.97 | 55.2 | 0.21 | 0.01 |
| May 22, 2014 | Body | 835 | 21.5 | 0.975 | 55.506 | 0.97 | 55.2 | 0.52 | 0.55 |
| May 13, 2014 | Body | 1750 | 20.6 | 1.486 | 52.091 | 1.49 | 53.4 | -0.27 | -2.45 |
| May 14, 2014 | Body | 1750 | 21.5 | 1.498 | 52.238 | 1.49 | 53.4 | 0.54 | -2.18 |
| Jun. 06, 2014 | Body | 1750 | 20.7 | 1.499 | 52.347 | 1.49 | 53.4 | 0.60 | -1.97 |
| May 13, 2014 | Body | 1900 | 20.6 | 1.561 | 54.526 | 1.52 | 53.3 | 2.70 | 2.30 |
| May 14, 2014 | Body | 1900 | 21.4 | 1.578 | 54.721 | 1.52 | 53.3 | 3.82 | 2.67 |
| Jun. 06, 2014 | Body | 1900 | 20.7 | 1.565 | 54.581 | 1.52 | 53.3 | 2.96 | 2.40 |

Note:

The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within ±5% of the target values. Liquid temperature during the SAR testing must be within ±2 °C.

4.4 System Validation

The SAR measurement system was validated according to procedures in KDB 865664 D01 v01r01. The validation status in tabulated summary is as below.

| Test Date | Probe S/N | Calibration Point | | Measured Conductivity (σ) | Measured Permittivity (ε _r) | Validation for CW | | | Validation for Modulation | | |
|---------------|-----------|-------------------|------|---------------------------|---|-------------------|-----------------|----------------|---------------------------|-------------|-----|
| | | | | | | Sensitivity Range | Probe Linearity | Probe Isotropy | Modulation Type | Duty Factor | PAR |
| May 13, 2014 | 3971 | Body | 750 | 0.969 | 55.526 | Pass | Pass | Pass | N/A | N/A | N/A |
| May 13, 2014 | 3971 | Body | 835 | 0.972 | 55.205 | Pass | Pass | Pass | GMSK | Pass | N/A |
| May 22, 2014 | 3971 | Body | 835 | 0.975 | 55.506 | Pass | Pass | Pass | N/A | N/A | N/A |
| May 13, 2014 | 3971 | Body | 1750 | 1.486 | 52.091 | Pass | Pass | Pass | N/A | N/A | N/A |
| May 14, 2014 | 3971 | Body | 1750 | 1.498 | 52.238 | Pass | Pass | Pass | N/A | N/A | N/A |
| Jun. 06, 2014 | 3971 | Body | 1750 | 1.499 | 52.347 | Pass | Pass | Pass | N/A | N/A | N/A |
| May 13, 2014 | 3590 | Body | 1900 | 1.561 | 54.526 | Pass | Pass | Pass | GMSK | Pass | N/A |
| May 14, 2014 | 3971 | Body | 1900 | 1.578 | 54.721 | Pass | Pass | Pass | N/A | N/A | N/A |
| Jun. 06, 2014 | 3971 | Body | 1900 | 1.565 | 54.581 | Pass | Pass | Pass | N/A | N/A | N/A |

FCC SAR Test Report

4.5 System Verification

The measuring result for system verification is tabulated as below.

| Test Date | Mode | Frequency (MHz) | 1W Target SAR-1g (W/kg) | Measured SAR-1g (W/kg) | Normalized to 1W SAR-1g (W/kg) | Deviation (%) | Dipole S/N | Probe S/N | DAE S/N |
|---------------|------|-----------------|-------------------------|------------------------|--------------------------------|---------------|------------|-----------|---------|
| May 13, 2014 | Body | 750 | 8.81 | 2.36 | 9.44 | 7.15 | 1013 | 3971 | 1431 |
| May 13, 2014 | Body | 835 | 9.69 | 2.41 | 9.64 | -0.52 | 4d121 | 3971 | 1431 |
| May 22, 2014 | Body | 835 | 9.69 | 2.42 | 9.68 | -0.10 | 4d121 | 3971 | 1431 |
| May 13, 2014 | Body | 1750 | 36.90 | 9.68 | 38.72 | 4.93 | 1055 | 3971 | 1431 |
| May 14, 2014 | Body | 1750 | 36.90 | 9.26 | 37.04 | 0.38 | 1055 | 3971 | 1431 |
| Jun. 06, 2014 | Body | 1750 | 36.90 | 9.24 | 36.96 | 0.16 | 1055 | 3971 | 1431 |
| May 13, 2014 | Body | 1900 | 40.40 | 9.76 | 39.04 | -3.37 | 5d022 | 3590 | 861 |
| May 14, 2014 | Body | 1900 | 40.40 | 9.42 | 37.68 | -6.73 | 5d022 | 3971 | 1431 |
| Jun. 06, 2014 | Body | 1900 | 40.40 | 9.92 | 39.68 | -1.78 | 5d022 | 3971 | 1431 |

Note:

Comparing to the reference SAR value provided by SPEAG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.

4.6 Maximum Output Power

4.6.1 Maximum Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

| Mode | GSM850 | GSM1900 |
|--------------------------|--------|---------|
| GPRS 8 (GMSK, 1 Uplink) | 32.0 | 29.5 |
| GPRS 10 (GMSK, 2 Uplink) | 32.0 | 29.0 |
| EDGE 8 (8PSK, 1 Uplink) | 27.0 | 25.0 |
| EDGE 10 (8PSK, 2 Uplink) | 27.0 | 25.0 |
| EDGE 11 (8PSK, 3 Uplink) | 27.0 | 25.0 |
| EDGE 12 (8PSK, 4 Uplink) | 26.5 | 25.0 |

| Mode | WCDMA Band II (without Power Reduction) | WCDMA Band II (with Power Reduction) | Power Reduction (dBm) |
|-----------|---|--------------------------------------|-----------------------|
| RMC 12.2K | 23.5 | 21.5 | 2.0 |

| Mode | WCDMA Band IV | WCDMA Band V |
|-----------|---------------|--------------|
| RMC 12.2K | 23.0 | 23.0 |

| Mode | CDMA BC0 | CDMA BC10 |
|--------------|----------|-----------|
| 1xRTT / EVDO | 24.0 | 24.0 |

FCC SAR Test Report

| Mode | CDMA BC1 (without Power Reduction) | CDMA BC1 (with Power Reduction) | Power Reduction (dBm) |
|--------------|---------------------------------------|------------------------------------|--------------------------|
| 1xRTT / EVDO | 24.0 | 22.5 | 1.5 |

| Mode | LTE 2 | LTE 5 |
|--------------|-------|-------|
| QPSK / 16QAM | 22.7 | 22.3 |

| Mode | LTE 4 (without Power Reduction) | LTE 4 (with Power Reduction) | Power Reduction (dBm) |
|--------------|------------------------------------|---------------------------------|--------------------------|
| QPSK / 16QAM | 22.8 | 22.5 | 0.3 |

| Mode | LTE 13 | LTE 17 | LTE 25 |
|--------------|--------|--------|--------|
| QPSK / 16QAM | 22.5 | 22.7 | 22.6 |

4.6.2 Measured Conducted Power Result

The measuring conducted average power (Unit: dBm) is shown as below.

| Band Channel | GSM850 | | | GSM1900 | | |
|--|--------------|-------|-------|---------|--------------|--------|
| | 128 | 189 | 251 | 512 | 661 | 810 |
| Frequency (MHz) | 824.2 | 836.4 | 848.8 | 1850.2 | 1880.0 | 1909.8 |
| Maximum Burst-Averaged Output Power | | | | | | |
| GPRS 8 (GMSK, 1 Uplink) | 31.97 | 31.82 | 31.77 | 28.84 | 29.04 | 28.97 |
| GPRS 10 (GMSK, 2 Uplink) | 31.91 | 31.77 | 31.90 | 28.72 | 28.98 | 28.85 |
| EDGE 8 (8PSK, 1 Uplink) | 26.80 | 26.68 | 26.80 | 24.75 | 24.95 | 24.88 |
| EDGE 10 (8PSK, 2 Uplink) | 26.69 | 26.57 | 26.69 | 24.63 | 24.83 | 24.76 |
| EDGE 11 (8PSK, 3 Uplink) | 26.54 | 26.42 | 26.54 | 24.52 | 24.72 | 24.65 |
| EDGE 12 (8PSK, 4 Uplink) | 26.36 | 26.24 | 26.36 | 24.46 | 24.66 | 24.59 |
| Maximum Frame-Averaged Output Power | | | | | | |
| GPRS 8 (GMSK, 1 Uplink) | 22.97 | 22.82 | 22.77 | 19.84 | 20.04 | 19.97 |
| GPRS 10 (GMSK, 2 Uplink) | 25.91 | 25.77 | 25.90 | 22.72 | 22.98 | 22.85 |
| EDGE 8 (8PSK, 1 Uplink) | 17.80 | 17.68 | 17.80 | 15.75 | 15.95 | 15.88 |
| EDGE 10 (8PSK, 2 Uplink) | 20.69 | 20.57 | 20.69 | 18.63 | 18.83 | 18.76 |
| EDGE 11 (8PSK, 3 Uplink) | 22.28 | 22.16 | 22.28 | 20.26 | 20.46 | 20.39 |
| EDGE 12 (8PSK, 4 Uplink) | 23.36 | 23.24 | 23.36 | 21.46 | 21.66 | 21.59 |

Note:

- SAR testing was performed on the maximum frame-averaged power mode.
- The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

$$\text{Frame-averaged power} = 10 \times \log (\text{Burst-averaged power mW} \times \text{Slot used} / 8)$$



FCC SAR Test Report

| Band Channel | WCDMA Band II | | | 3GPP MPR (dB) |
|---|---------------|--------|--------|---------------------|
| | 9262 | 9400 | 9538 | |
| Frequency (MHz) | 1852.4 | 1880.0 | 1907.6 | |
| EUT without Power Reduction (P-Sensor NOT Triggered) | | | | |
| RMC 12.2K | 23.06 | 22.84 | 22.83 | - |
| HSDPA Subtest-1 | 22.57 | 22.35 | 22.34 | 0 |
| HSDPA Subtest-2 | 22.55 | 22.33 | 22.32 | 0 |
| HSDPA Subtest-3 | 22.07 | 21.85 | 21.84 | 0.5 |
| HSDPA Subtest-4 | 22.05 | 21.83 | 21.82 | 0.5 |
| HSUPA Subtest-1 | 22.70 | 22.48 | 22.47 | 0 |
| HSUPA Subtest-2 | 21.02 | 20.80 | 20.79 | 2 |
| HSUPA Subtest-3 | 21.14 | 20.92 | 20.91 | 1 |
| HSUPA Subtest-4 | 21.17 | 20.95 | 20.94 | 2 |
| HSUPA Subtest-5 | 22.67 | 22.45 | 22.44 | 0 |
| EUT with Power Reduction (P-Sensor Triggered) | | | | |
| RMC 12.2K | 21.40 | 21.18 | 21.17 | - |
| HSDPA Subtest-1 | 20.91 | 20.69 | 20.68 | - |
| HSDPA Subtest-2 | 20.89 | 20.67 | 20.66 | - |
| HSDPA Subtest-3 | 20.41 | 20.19 | 20.18 | - |
| HSDPA Subtest-4 | 20.39 | 20.17 | 20.16 | - |
| HSUPA Subtest-1 | 21.04 | 20.82 | 20.81 | - |
| HSUPA Subtest-2 | 19.36 | 19.14 | 19.13 | - |
| HSUPA Subtest-3 | 19.48 | 19.26 | 19.25 | - |
| HSUPA Subtest-4 | 19.51 | 19.29 | 19.28 | - |
| HSUPA Subtest-5 | 21.01 | 20.79 | 20.78 | - |

| Band Channel | WCDMA Band IV | | | WCDMA Band V | | | 3GPP MPR (dB) |
|-----------------|---------------|--------------|--------|--------------|--------------|-------|---------------------|
| | 1312 | 1413 | 1513 | 4132 | 4182 | 4233 | |
| Frequency (MHz) | 1712.4 | 1732.6 | 1752.6 | 826.4 | 836.4 | 846.6 | |
| RMC 12.2K | 22.57 | 22.83 | 22.79 | 22.75 | 22.81 | 22.66 | - |
| HSDPA Subtest-1 | 22.12 | 22.38 | 22.34 | 22.31 | 22.37 | 22.22 | 0 |
| HSDPA Subtest-2 | 22.01 | 22.27 | 22.23 | 22.29 | 22.35 | 22.20 | 0 |
| HSDPA Subtest-3 | 21.58 | 21.84 | 21.80 | 21.81 | 21.87 | 21.72 | 0.5 |
| HSDPA Subtest-4 | 21.56 | 21.82 | 21.78 | 21.80 | 21.86 | 21.71 | 0.5 |
| HSUPA Subtest-1 | 21.63 | 21.89 | 21.85 | 21.89 | 21.95 | 21.80 | 0 |
| HSUPA Subtest-2 | 20.60 | 20.86 | 20.82 | 20.75 | 20.81 | 20.66 | 2 |
| HSUPA Subtest-3 | 20.94 | 21.20 | 21.16 | 21.26 | 21.32 | 21.17 | 1 |
| HSUPA Subtest-4 | 20.37 | 20.63 | 20.59 | 20.31 | 20.37 | 20.22 | 2 |
| HSUPA Subtest-5 | 22.10 | 22.36 | 22.32 | 22.26 | 22.32 | 22.17 | 0 |

| Band Channel | CDMA BC0 | | | CDMA BC10 | | |
|----------------------------|----------|--------|--------|-----------|-------|-------|
| | 1013 | 384 | 777 | 476 | 580 | 684 |
| Frequency (MHz) | 824.70 | 836.52 | 848.31 | 817.9 | 820.5 | 823.1 |
| 1xRTT RC3+SO32 | 23.58 | 23.52 | 23.24 | 23.60 | 23.45 | 23.52 |
| 1xEVDO Rev.0 RTAP 153.6 | 23.57 | 23.51 | 23.23 | 23.58 | 23.43 | 23.50 |
| 1xEVDO Rev.A RETAP 4096 | 23.59 | 23.53 | 23.25 | 23.56 | 23.41 | 23.48 |

FCC SAR Test Report

| Band | CDMA2000 BC1 | | |
|---|--------------|---------|---------|
| Channel | 25 | 600 | 1175 |
| Frequency (MHz) | 1851.25 | 1880.00 | 1908.75 |
| EUT without Power Reduction (P-Sensor NOT Triggered) | | | |
| 1xRTT RC3+SO32 | 23.99 | 23.93 | 23.82 |
| 1xEVDO Rev.0 RTAP 153.6 | 23.97 | 23.89 | 23.78 |
| 1xEVDO Rev.A RETAP 4096 | 23.90 | 23.82 | 23.71 |
| EUT with Power Reduction (P-Sensor Triggered) | | | |
| 1xRTT RC3+SO32 | 22.40 | 22.36 | 22.25 |
| 1xEVDO Rev.0 RTAP 153.6 | 22.40 | 22.32 | 22.21 |
| 1xEVDO Rev.A RETAP 4096 | 22.33 | 22.25 | 22.14 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 18607 | Mid CH 18900 | High CH 19193 | | Low CH 18607 | Mid CH 18900 | High CH 19193 | |
| | | | 1850.7 MHz | 1880.0 MHz | 1909.3 MHz | | 1850.7 MHz | 1880.0 MHz | 1909.3 MHz | |
| 2 / 1.4M | 1 | 0 | 22.10 | 22.05 | 21.84 | 0 | 21.10 | 21.05 | 20.84 | 1 |
| | 1 | 2 | 22.16 | 22.07 | 21.96 | 0 | 21.16 | 21.07 | 20.96 | 1 |
| | 1 | 5 | 22.06 | 21.86 | 21.72 | 0 | 21.06 | 20.86 | 20.72 | 1 |
| | 3 | 0 | 21.90 | 21.79 | 21.72 | 0 | 20.90 | 20.79 | 20.72 | 1 |
| | 3 | 1 | 21.90 | 21.84 | 21.79 | 0 | 20.90 | 20.84 | 20.79 | 1 |
| | 3 | 3 | 21.89 | 21.75 | 21.74 | 0 | 20.89 | 20.75 | 20.74 | 1 |
| | 6 | 0 | 20.93 | 20.84 | 20.77 | 1 | 19.93 | 19.84 | 19.77 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 18615 | Mid CH 18900 | High CH 19185 | | Low CH 18615 | Mid CH 18900 | High CH 19185 | |
| | | | 1851.5 MHz | 1880.0 MHz | 1908.5 MHz | | 1851.5 MHz | 1880.0 MHz | 1908.5 MHz | |
| 2 / 3M | 1 | 0 | 22.19 | 22.14 | 21.93 | 0 | 21.19 | 21.14 | 20.93 | 1 |
| | 1 | 7 | 22.25 | 22.16 | 22.05 | 0 | 21.25 | 21.16 | 21.05 | 1 |
| | 1 | 14 | 22.15 | 21.95 | 21.81 | 0 | 21.15 | 20.95 | 20.81 | 1 |
| | 8 | 0 | 20.99 | 20.88 | 20.81 | 1 | 19.99 | 19.88 | 19.81 | 2 |
| | 8 | 3 | 20.99 | 20.93 | 20.78 | 1 | 19.99 | 19.93 | 19.78 | 2 |
| | 8 | 7 | 20.98 | 20.84 | 20.83 | 1 | 19.98 | 19.84 | 19.83 | 2 |
| | 15 | 0 | 21.02 | 20.93 | 20.86 | 1 | 20.02 | 19.93 | 19.86 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 18625 | Mid CH 18900 | High CH 19175 | | Low CH 18625 | Mid CH 18900 | High CH 19175 | |
| | | | 1852.5 MHz | 1880.0 MHz | 1907.5 MHz | | 1852.5 MHz | 1880.0 MHz | 1907.5 MHz | |
| 2 / 5M | 1 | 0 | 22.29 | 22.24 | 22.03 | 0 | 21.29 | 21.24 | 21.03 | 1 |
| | 1 | 12 | 22.35 | 22.26 | 22.15 | 0 | 21.35 | 21.26 | 21.15 | 1 |
| | 1 | 24 | 22.25 | 22.05 | 21.91 | 0 | 21.25 | 21.05 | 20.91 | 1 |
| | 12 | 0 | 21.09 | 20.98 | 20.91 | 1 | 20.09 | 19.98 | 19.91 | 2 |
| | 12 | 6 | 21.09 | 21.03 | 20.88 | 1 | 20.09 | 20.03 | 19.88 | 2 |
| | 12 | 13 | 21.08 | 20.94 | 20.93 | 1 | 20.08 | 19.94 | 19.93 | 2 |
| | 25 | 0 | 21.12 | 21.03 | 20.96 | 1 | 20.12 | 20.03 | 19.96 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 18650 | Mid CH 18900 | High CH 19150 | | Low CH 18650 | Mid CH 18900 | High CH 19150 | |
| | | | 1855.0 MHz | 1880.0 MHz | 1905.0 MHz | | 1855.0 MHz | 1880.0 MHz | 1905.0 MHz | |
| 2 / 10M | 1 | 0 | 22.40 | 22.35 | 22.14 | 0 | 21.40 | 21.35 | 21.14 | 1 |
| | 1 | 24 | 22.46 | 22.37 | 22.26 | 0 | 21.46 | 21.37 | 21.26 | 1 |
| | 1 | 49 | 22.36 | 22.16 | 22.02 | 0 | 21.36 | 21.16 | 21.02 | 1 |
| | 25 | 0 | 21.20 | 21.09 | 21.02 | 1 | 20.20 | 20.09 | 20.02 | 2 |
| | 25 | 12 | 21.20 | 21.14 | 20.99 | 1 | 20.20 | 20.14 | 19.99 | 2 |
| | 25 | 25 | 21.19 | 21.05 | 21.04 | 1 | 20.19 | 20.05 | 20.04 | 2 |
| | 50 | 0 | 21.23 | 21.14 | 21.07 | 1 | 20.23 | 20.14 | 20.07 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 18675 | Mid CH 18900 | High CH 19125 | | Low CH 18675 | Mid CH 18900 | High CH 19125 | |
| | | | 1857.5 MHz | 1880.0 MHz | 1902.5 MHz | | 1857.5 MHz | 1880.0 MHz | 1902.5 MHz | |
| 2 / 15M | 1 | 0 | 22.51 | 22.46 | 22.25 | 0 | 21.51 | 21.46 | 21.25 | 1 |
| | 1 | 37 | 22.57 | 22.48 | 22.37 | 0 | 21.57 | 21.48 | 21.37 | 1 |
| | 1 | 74 | 22.47 | 22.27 | 22.13 | 0 | 21.47 | 21.27 | 21.13 | 1 |
| | 36 | 0 | 21.31 | 21.20 | 21.13 | 1 | 20.31 | 20.20 | 20.13 | 2 |
| | 36 | 19 | 21.31 | 21.25 | 21.10 | 1 | 20.31 | 20.25 | 20.10 | 2 |
| | 36 | 39 | 21.30 | 21.16 | 21.15 | 1 | 20.30 | 20.16 | 20.15 | 2 |
| | 75 | 0 | 21.34 | 21.25 | 21.18 | 1 | 20.34 | 20.25 | 20.18 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 18700 | Mid CH 18900 | High CH 19100 | | Low CH 18700 | Mid CH 18900 | High CH 19100 | |
| | | | 1860.0 MHz | 1880.0 MHz | 1900.0 MHz | | 1860.0 MHz | 1880.0 MHz | 1900.0 MHz | |
| 2 / 20M | 1 | 0 | 22.63 | 22.58 | 22.37 | 0 | 21.63 | 21.58 | 21.37 | 1 |
| | 1 | 50 | 22.69 | 22.60 | 22.49 | 0 | 21.69 | 21.60 | 21.49 | 1 |
| | 1 | 99 | 22.59 | 22.39 | 22.25 | 0 | 21.59 | 21.39 | 21.25 | 1 |
| | 50 | 0 | 21.43 | 21.32 | 21.25 | 1 | 20.43 | 20.32 | 20.25 | 2 |
| | 50 | 25 | 21.42 | 21.37 | 21.22 | 1 | 20.43 | 20.37 | 20.22 | 2 |
| | 50 | 50 | 21.41 | 21.28 | 21.27 | 1 | 20.42 | 20.28 | 20.27 | 2 |
| | 100 | 0 | 21.46 | 21.37 | 21.30 | 1 | 20.46 | 20.37 | 20.30 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|---|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 19957 | Mid CH 20175 | High CH 20393 | | Low CH 19957 | Mid CH 20175 | High CH 20393 | |
| | | | 1710.7 MHz | 1732.5 MHz | 1754.3 MHz | | 1710.7 MHz | 1732.5 MHz | 1754.3 MHz | |
| EUT without Power Reduction (P-Sensor NOT Triggered) | | | | | | | | | | |
| 4 / 1.4M | 1 | 0 | 21.81 | 21.85 | 22.05 | 0 | 20.86 | 20.88 | 21.00 | 1 |
| | 1 | 2 | 21.87 | 21.96 | 22.04 | 0 | 20.84 | 20.91 | 20.99 | 1 |
| | 1 | 5 | 21.82 | 21.91 | 21.84 | 0 | 20.83 | 20.86 | 20.89 | 1 |
| | 3 | 0 | 21.82 | 21.82 | 21.89 | 0 | 20.86 | 20.82 | 20.84 | 1 |
| | 3 | 1 | 21.86 | 21.84 | 21.87 | 0 | 20.87 | 20.82 | 20.81 | 1 |
| | 3 | 3 | 21.86 | 21.82 | 21.81 | 0 | 20.83 | 20.86 | 20.84 | 1 |
| | 6 | 0 | 20.82 | 20.85 | 20.85 | 1 | 20.79 | 20.77 | 20.76 | 2 |
| EUT with Power Reduction (P-Sensor Triggered) | | | | | | | | | | |
| 4 / 1.4M | 1 | 0 | 21.69 | 21.79 | 21.91 | 0 | 20.69 | 20.79 | 20.91 | 1 |
| | 1 | 2 | 21.68 | 21.78 | 21.89 | 0 | 20.68 | 20.78 | 20.89 | 1 |
| | 1 | 5 | 21.61 | 21.71 | 21.80 | 0 | 20.61 | 20.71 | 20.80 | 1 |
| | 3 | 0 | 21.55 | 21.59 | 21.71 | 0 | 20.55 | 20.59 | 20.71 | 1 |
| | 3 | 1 | 21.52 | 21.58 | 21.69 | 0 | 20.51 | 20.58 | 20.69 | 1 |
| | 3 | 3 | 21.53 | 21.51 | 21.60 | 0 | 20.53 | 20.51 | 20.60 | 1 |
| | 6 | 0 | 20.65 | 20.72 | 20.81 | 1 | 19.65 | 19.72 | 19.81 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|---|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 19965 | Mid CH 20175 | High CH 20385 | | Low CH 19965 | Mid CH 20175 | High CH 20385 | |
| | | | 1711.5 MHz | 1732.5 MHz | 1753.5 MHz | | 1711.5 MHz | 1732.5 MHz | 1753.5 MHz | |
| EUT without Power Reduction (P-Sensor NOT Triggered) | | | | | | | | | | |
| 4 / 3M | 1 | 0 | 21.82 | 21.93 | 22.13 | 0 | 20.83 | 20.89 | 21.09 | 1 |
| | 1 | 7 | 21.85 | 22.04 | 22.12 | 0 | 20.81 | 21.00 | 21.08 | 1 |
| | 1 | 14 | 21.88 | 21.99 | 21.92 | 0 | 20.84 | 20.95 | 20.88 | 1 |
| | 8 | 0 | 20.83 | 20.85 | 20.97 | 1 | 19.81 | 19.82 | 19.93 | 2 |
| | 8 | 3 | 20.82 | 20.81 | 20.85 | 1 | 19.81 | 19.83 | 19.81 | 2 |
| | 8 | 7 | 20.83 | 20.82 | 20.86 | 1 | 19.85 | 19.83 | 19.82 | 2 |
| | 15 | 0 | 20.85 | 20.88 | 20.84 | 1 | 19.84 | 19.83 | 19.81 | 2 |
| EUT with Power Reduction (P-Sensor Triggered) | | | | | | | | | | |
| 4 / 3M | 1 | 0 | 21.79 | 21.89 | 22.01 | 0 | 20.79 | 20.89 | 21.01 | 1 |
| | 1 | 7 | 21.78 | 21.88 | 21.99 | 0 | 20.78 | 20.88 | 20.99 | 1 |
| | 1 | 14 | 21.71 | 21.81 | 21.90 | 0 | 20.71 | 20.81 | 20.90 | 1 |
| | 8 | 0 | 20.65 | 20.69 | 20.81 | 1 | 19.65 | 19.69 | 19.81 | 2 |
| | 8 | 3 | 20.58 | 20.68 | 20.79 | 1 | 19.58 | 19.68 | 19.79 | 2 |
| | 8 | 7 | 20.51 | 20.61 | 20.70 | 1 | 19.51 | 19.61 | 19.70 | 2 |
| | 15 | 0 | 20.75 | 20.82 | 20.91 | 1 | 19.75 | 19.82 | 19.91 | 2 |



FCC SAR Test Report

A D T

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|---|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 19975 | Mid CH 20175 | High CH 20375 | | Low CH 19975 | Mid CH 20175 | High CH 20375 | |
| | | | 1712.5 MHz | 1732.5 MHz | 1752.5 MHz | | 1712.5 MHz | 1732.5 MHz | 1752.5 MHz | |
| EUT without Power Reduction (P-Sensor NOT Triggered) | | | | | | | | | | |
| 4 / 5M | 1 | 0 | 21.92 | 22.07 | 22.27 | 0 | 20.85 | 20.90 | 21.10 | 1 |
| | 1 | 12 | 21.99 | 22.18 | 22.26 | 0 | 20.82 | 21.01 | 21.09 | 1 |
| | 1 | 24 | 22.02 | 22.13 | 22.06 | 0 | 20.85 | 20.96 | 20.89 | 1 |
| | 12 | 0 | 20.82 | 20.87 | 21.11 | 1 | 19.81 | 19.82 | 19.94 | 2 |
| | 12 | 6 | 20.86 | 20.95 | 20.99 | 1 | 19.82 | 19.83 | 19.82 | 2 |
| | 12 | 13 | 20.87 | 20.87 | 20.90 | 1 | 19.85 | 19.87 | 19.86 | 2 |
| | 25 | 0 | 20.82 | 21.02 | 20.98 | 1 | 19.84 | 19.85 | 19.81 | 2 |
| EUT with Power Reduction (P-Sensor Triggered) | | | | | | | | | | |
| 4 / 5M | 1 | 0 | 21.89 | 21.99 | 22.11 | 0 | 20.89 | 20.99 | 21.11 | 1 |
| | 1 | 12 | 21.88 | 21.98 | 22.09 | 0 | 20.88 | 20.98 | 21.09 | 1 |
| | 1 | 24 | 21.81 | 21.91 | 22.00 | 0 | 20.81 | 20.91 | 21.00 | 1 |
| | 12 | 0 | 20.75 | 20.79 | 20.91 | 1 | 19.75 | 19.79 | 19.91 | 2 |
| | 12 | 6 | 20.68 | 20.78 | 20.89 | 1 | 19.68 | 19.78 | 19.89 | 2 |
| | 12 | 13 | 20.61 | 20.71 | 20.80 | 1 | 19.61 | 19.71 | 19.80 | 2 |
| | 25 | 0 | 20.85 | 20.92 | 21.01 | 1 | 19.85 | 19.92 | 20.01 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|---|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 20000 | Mid CH 20175 | High CH 20350 | | Low CH 20000 | Mid CH 20175 | High CH 20350 | |
| | | | 1715.0 MHz | 1732.5 MHz | 1750.0 MHz | | 1715.0 MHz | 1732.5 MHz | 1750.0 MHz | |
| EUT without Power Reduction (P-Sensor NOT Triggered) | | | | | | | | | | |
| 4 / 10M | 1 | 0 | 22.05 | 22.20 | 22.40 | 0 | 20.89 | 21.04 | 21.24 | 1 |
| | 1 | 24 | 22.12 | 22.31 | 22.39 | 0 | 20.96 | 21.15 | 21.23 | 1 |
| | 1 | 49 | 22.15 | 22.26 | 22.19 | 0 | 20.99 | 21.10 | 21.03 | 1 |
| | 25 | 0 | 20.85 | 21.00 | 21.24 | 1 | 19.82 | 19.84 | 20.08 | 2 |
| | 25 | 12 | 20.89 | 21.08 | 21.12 | 1 | 19.83 | 19.92 | 19.96 | 2 |
| | 25 | 25 | 20.90 | 21.00 | 21.03 | 1 | 19.84 | 19.84 | 19.87 | 2 |
| | 50 | 0 | 20.95 | 21.15 | 21.11 | 1 | 19.89 | 19.99 | 19.95 | 2 |
| EUT with Power Reduction (P-Sensor Triggered) | | | | | | | | | | |
| 4 / 10M | 1 | 0 | 21.99 | 22.09 | 22.21 | 0 | 20.99 | 21.09 | 21.21 | 1 |
| | 1 | 24 | 21.98 | 22.08 | 22.19 | 0 | 20.98 | 21.08 | 21.19 | 1 |
| | 1 | 49 | 21.91 | 22.01 | 22.10 | 0 | 20.91 | 21.01 | 21.10 | 1 |
| | 25 | 0 | 20.85 | 20.89 | 21.01 | 1 | 19.85 | 19.89 | 20.01 | 2 |
| | 25 | 12 | 20.78 | 20.88 | 20.99 | 1 | 19.78 | 19.88 | 19.99 | 2 |
| | 25 | 25 | 20.71 | 20.81 | 20.90 | 1 | 19.71 | 19.81 | 19.90 | 2 |
| | 50 | 0 | 20.95 | 21.02 | 21.11 | 1 | 19.95 | 20.02 | 20.11 | 2 |



FCC SAR Test Report

A D T

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|---|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 20025 | Mid CH 20175 | High CH 20325 | | Low CH 20025 | Mid CH 20175 | High CH 20325 | |
| | | | 1717.5 MHz | 1732.5 MHz | 1747.5 MHz | | 1717.5 MHz | 1732.5 MHz | 1747.5 MHz | |
| EUT without Power Reduction (P-Sensor NOT Triggered) | | | | | | | | | | |
| 4 / 15M | 1 | 0 | 22.23 | 22.38 | 22.58 | 0 | 21.10 | 21.25 | 21.45 | 1 |
| | 1 | 37 | 22.30 | 22.49 | 22.57 | 0 | 21.17 | 21.36 | 21.44 | 1 |
| | 1 | 74 | 22.33 | 22.44 | 22.37 | 0 | 21.20 | 21.31 | 21.24 | 1 |
| | 36 | 0 | 21.03 | 21.18 | 21.42 | 1 | 19.90 | 20.05 | 20.29 | 2 |
| | 36 | 19 | 21.07 | 21.26 | 21.30 | 1 | 19.94 | 20.13 | 20.17 | 2 |
| | 36 | 39 | 21.08 | 21.18 | 21.21 | 1 | 19.95 | 20.05 | 20.08 | 2 |
| | 75 | 0 | 21.13 | 21.33 | 21.29 | 1 | 20.00 | 20.20 | 20.16 | 2 |
| EUT with Power Reduction (P-Sensor Triggered) | | | | | | | | | | |
| 4 / 15M | 1 | 0 | 22.09 | 22.19 | 22.31 | 0 | 21.09 | 21.19 | 21.31 | 1 |
| | 1 | 37 | 22.08 | 22.18 | 22.29 | 0 | 21.08 | 21.18 | 21.29 | 1 |
| | 1 | 74 | 22.01 | 22.11 | 22.20 | 0 | 21.01 | 21.11 | 21.20 | 1 |
| | 36 | 0 | 20.95 | 20.99 | 21.11 | 1 | 19.95 | 19.99 | 20.11 | 2 |
| | 36 | 19 | 20.88 | 20.98 | 21.09 | 1 | 19.88 | 19.98 | 20.09 | 2 |
| | 36 | 39 | 20.81 | 20.91 | 21.00 | 1 | 19.81 | 19.91 | 20.00 | 2 |
| | 75 | 0 | 21.05 | 21.12 | 21.21 | 1 | 20.05 | 20.12 | 20.21 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|---|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 20050 | Mid CH 20175 | High CH 20300 | | Low CH 20050 | Mid CH 20175 | High CH 20300 | |
| | | | 1720.0 MHz | 1732.5 MHz | 1745.0 MHz | | 1720.0 MHz | 1732.5 MHz | 1745.0 MHz | |
| EUT without Power Reduction (P-Sensor NOT Triggered) | | | | | | | | | | |
| 4 / 20M | 1 | 0 | 22.38 | 22.53 | 22.73 | 0 | 21.34 | 21.49 | 21.69 | 1 |
| | 1 | 50 | 22.45 | 22.64 | 22.72 | 0 | 21.41 | 21.60 | 21.68 | 1 |
| | 1 | 99 | 22.48 | 22.59 | 22.52 | 0 | 21.44 | 21.55 | 21.48 | 1 |
| | 50 | 0 | 21.18 | 21.33 | 21.57 | 1 | 20.14 | 20.29 | 20.53 | 2 |
| | 50 | 25 | 21.22 | 21.41 | 21.45 | 1 | 20.18 | 20.37 | 20.41 | 2 |
| | 50 | 50 | 21.23 | 21.33 | 21.36 | 1 | 20.19 | 20.29 | 20.32 | 2 |
| | 100 | 0 | 21.28 | 21.48 | 21.44 | 1 | 20.24 | 20.44 | 20.40 | 2 |
| EUT with Power Reduction (P-Sensor Triggered) | | | | | | | | | | |
| 4 / 20M | 1 | 0 | 22.19 | 22.29 | 22.41 | 0 | 21.19 | 21.29 | 21.41 | 1 |
| | 1 | 50 | 22.18 | 22.28 | 22.39 | 0 | 21.18 | 21.28 | 21.39 | 1 |
| | 1 | 99 | 22.11 | 22.21 | 22.30 | 0 | 21.11 | 21.21 | 21.30 | 1 |
| | 50 | 0 | 21.05 | 21.09 | 21.21 | 1 | 20.05 | 20.09 | 20.21 | 2 |
| | 50 | 25 | 20.98 | 21.08 | 21.19 | 1 | 19.98 | 20.08 | 20.19 | 2 |
| | 50 | 50 | 20.91 | 21.01 | 21.10 | 1 | 19.91 | 20.01 | 20.10 | 2 |
| | 100 | 0 | 21.15 | 21.22 | 21.31 | 1 | 20.15 | 20.22 | 20.31 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 20407 | Mid CH 20525 | High CH 20643 | | Low CH 20407 | Mid CH 20525 | High CH 20643 | |
| | | | 824.7 MHz | 836.5 MHz | 848.3 MHz | | 824.7 MHz | 836.5 MHz | 848.3 MHz | |
| 5 / 1.4M | 1 | 0 | 21.63 | 21.75 | 21.71 | 0 | 20.63 | 20.75 | 20.71 | 1 |
| | 1 | 2 | 21.88 | 21.92 | 21.89 | 0 | 20.88 | 20.92 | 20.89 | 1 |
| | 1 | 5 | 21.64 | 21.80 | 21.74 | 0 | 20.64 | 20.80 | 20.74 | 1 |
| | 3 | 0 | 21.68 | 21.85 | 21.82 | 0 | 20.68 | 20.85 | 20.82 | 1 |
| | 3 | 1 | 21.83 | 21.92 | 21.84 | 0 | 20.83 | 20.92 | 20.84 | 1 |
| | 3 | 3 | 21.74 | 21.89 | 21.80 | 0 | 20.74 | 20.89 | 20.80 | 1 |
| | 6 | 0 | 20.65 | 20.74 | 20.69 | 1 | 19.65 | 19.74 | 19.69 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 20415 | Mid CH 20525 | High CH 20635 | | Low CH 20415 | Mid CH 20525 | High CH 20635 | |
| | | | 825.5 MHz | 836.5 MHz | 847.5 MHz | | 825.5 MHz | 836.5 MHz | 847.5 MHz | |
| 5 / 3M | 1 | 0 | 21.75 | 21.87 | 21.83 | 0 | 20.75 | 20.87 | 20.83 | 1 |
| | 1 | 7 | 22.00 | 22.04 | 22.01 | 0 | 21.00 | 21.04 | 21.01 | 1 |
| | 1 | 14 | 21.76 | 21.92 | 21.86 | 0 | 20.76 | 20.92 | 20.86 | 1 |
| | 8 | 0 | 20.80 | 20.97 | 20.94 | 1 | 19.80 | 19.97 | 19.94 | 2 |
| | 8 | 3 | 20.95 | 21.04 | 20.96 | 1 | 19.95 | 20.04 | 19.96 | 2 |
| | 8 | 7 | 20.86 | 21.01 | 20.92 | 1 | 19.86 | 20.01 | 19.92 | 2 |
| | 15 | 0 | 20.77 | 20.86 | 20.81 | 1 | 19.77 | 19.86 | 19.81 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 20425 | Mid CH 20525 | High CH 20625 | | Low CH 20425 | Mid CH 20525 | High CH 20625 | |
| | | | 826.5 MHz | 836.5 MHz | 846.5 MHz | | 826.5 MHz | 836.5 MHz | 846.5 MHz | |
| 5 / 5M | 1 | 0 | 21.84 | 21.96 | 21.92 | 0 | 20.84 | 20.96 | 20.92 | 1 |
| | 1 | 12 | 22.09 | 22.13 | 22.10 | 0 | 21.09 | 21.13 | 21.10 | 1 |
| | 1 | 24 | 21.85 | 22.01 | 21.95 | 0 | 20.85 | 21.01 | 20.95 | 1 |
| | 12 | 0 | 20.89 | 21.06 | 21.03 | 1 | 19.89 | 20.06 | 20.03 | 2 |
| | 12 | 6 | 21.04 | 21.13 | 21.05 | 1 | 20.04 | 20.13 | 20.05 | 2 |
| | 12 | 13 | 20.95 | 21.10 | 21.01 | 1 | 19.95 | 20.10 | 20.01 | 2 |
| | 25 | 0 | 20.86 | 20.95 | 20.90 | 1 | 19.86 | 19.95 | 19.90 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 20450 | Mid CH 20525 | High CH 20600 | | Low CH 20450 | Mid CH 20525 | High CH 20600 | |
| | | | 829.0 MHz | 836.5 MHz | 844.0 MHz | | 829.0 MHz | 836.5 MHz | 844.0 MHz | |
| 5 / 10M | 1 | 0 | 21.96 | 22.08 | 22.04 | 0 | 20.96 | 21.08 | 21.04 | 1 |
| | 1 | 24 | 22.21 | 22.25 | 22.22 | 0 | 21.21 | 21.25 | 21.22 | 1 |
| | 1 | 49 | 21.97 | 22.13 | 22.07 | 0 | 20.97 | 21.13 | 21.07 | 1 |
| | 25 | 0 | 21.01 | 21.18 | 21.15 | 1 | 20.01 | 20.18 | 20.15 | 2 |
| | 25 | 12 | 21.16 | 21.25 | 21.17 | 1 | 20.16 | 20.25 | 20.17 | 2 |
| | 25 | 25 | 21.07 | 21.22 | 21.13 | 1 | 20.07 | 20.22 | 20.13 | 2 |
| | 50 | 0 | 20.98 | 21.07 | 21.02 | 1 | 19.98 | 20.07 | 20.02 | 2 |

FCC SAR Test Report

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 23205 | Mid CH 23230 | High CH 23255 | | Low CH 23205 | Mid CH 23230 | High CH 23255 | |
| | | | 779.5 MHz | 782.0 MHz | 784.5 MHz | | 779.5 MHz | 782.0 MHz | 784.5 MHz | |
| 13 / 5M | 1 | 0 | 22.08 | 22.21 | 22.37 | 0 | 21.03 | 21.16 | 21.32 | 1 |
| | 1 | 12 | 22.25 | 22.36 | 22.23 | 0 | 21.20 | 21.31 | 21.18 | 1 |
| | 1 | 24 | 22.35 | 22.25 | 22.02 | 0 | 21.30 | 21.20 | 20.97 | 1 |
| | 12 | 0 | 21.09 | 21.34 | 21.38 | 1 | 20.04 | 20.29 | 20.33 | 2 |
| | 12 | 6 | 21.22 | 21.37 | 21.13 | 1 | 20.17 | 20.38 | 20.08 | 2 |
| | 12 | 13 | 21.39 | 21.38 | 21.00 | 1 | 20.34 | 20.33 | 19.95 | 2 |
| | 25 | 0 | 21.05 | 21.36 | 21.15 | 1 | 20.00 | 20.31 | 20.10 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | 3GPP MPR (dB) | 16QAM | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--|---------------|--------------|--|---------------|
| | | | Mid CH 23230 | | | Mid CH 23230 | | |
| | | | 782.0 MHz | | | 782.0 MHz | | |
| 13 / 10M | 1 | 0 | 22.16 | | 0 | 21.09 | | 1 |
| | 1 | 24 | 22.41 | | 0 | 21.34 | | 1 |
| | 1 | 49 | 22.08 | | 0 | 21.01 | | 1 |
| | 25 | 0 | 21.41 | | 1 | 20.34 | | 2 |
| | 25 | 12 | 21.48 | | 1 | 20.49 | | 2 |
| | 25 | 25 | 21.41 | | 1 | 20.34 | | 2 |
| | 50 | 0 | 21.35 | | 1 | 20.28 | | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 23755 | Mid CH 23790 | High CH 23825 | | Low CH 23755 | Mid CH 23790 | High CH 23825 | |
| | | | 706.5 MHz | 710.0 MHz | 713.5 MHz | | 706.5 MHz | 710.0 MHz | 713.5 MHz | |
| 17 / 5M | 1 | 0 | 22.26 | 22.36 | 22.37 | 0 | 21.18 | 21.28 | 21.29 | 1 |
| | 1 | 12 | 22.47 | 22.53 | 22.38 | 0 | 21.39 | 21.45 | 21.30 | 1 |
| | 1 | 24 | 22.12 | 22.15 | 21.96 | 0 | 21.04 | 21.07 | 20.88 | 1 |
| | 12 | 0 | 21.47 | 21.33 | 21.33 | 1 | 20.39 | 20.25 | 20.25 | 2 |
| | 12 | 6 | 21.29 | 21.29 | 21.20 | 1 | 20.21 | 20.21 | 20.12 | 2 |
| | 12 | 13 | 21.22 | 21.26 | 21.15 | 1 | 20.14 | 20.18 | 20.07 | 2 |
| | 25 | 0 | 21.33 | 21.06 | 21.18 | 1 | 20.25 | 19.98 | 20.10 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 23780 | Mid CH 23790 | High CH 23800 | | Low CH 23780 | Mid CH 23790 | High CH 23800 | |
| | | | 709.0 MHz | 710.0 MHz | 711.0 MHz | | 709.0 MHz | 710.0 MHz | 711.0 MHz | |
| 17 / 10M | 1 | 0 | 22.42 | 22.52 | 22.53 | 0 | 21.39 | 21.49 | 21.50 | 1 |
| | 1 | 24 | 22.63 | 22.69 | 22.54 | 0 | 21.60 | 21.66 | 21.51 | 1 |
| | 1 | 49 | 22.28 | 22.31 | 22.12 | 0 | 21.25 | 21.28 | 21.09 | 1 |
| | 25 | 0 | 21.63 | 21.49 | 21.49 | 1 | 20.60 | 20.46 | 20.46 | 2 |
| | 25 | 12 | 21.45 | 21.45 | 21.36 | 1 | 20.42 | 20.42 | 20.33 | 2 |
| | 25 | 25 | 21.38 | 21.42 | 21.31 | 1 | 20.35 | 20.39 | 20.28 | 2 |
| | 50 | 0 | 21.49 | 21.22 | 21.34 | 1 | 20.46 | 20.19 | 20.31 | 2 |

FCC SAR Test Report

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 26047 | Mid CH 26365 | High CH 26683 | | Low CH 26047 | Mid CH 26365 | High CH 26683 | |
| | | | 1850.7 MHz | 1882.5 MHz | 1914.3 MHz | | 1850.7 MHz | 1882.5 MHz | 1914.3 MHz | |
| 25 / 1.4M | 1 | 0 | 21.93 | 21.86 | 21.62 | 0 | 20.80 | 20.73 | 20.61 | 1 |
| | 1 | 2 | 21.88 | 21.73 | 21.63 | 0 | 20.75 | 20.61 | 20.65 | 1 |
| | 1 | 5 | 21.76 | 21.65 | 21.85 | 0 | 20.63 | 20.62 | 20.72 | 1 |
| | 3 | 0 | 21.72 | 21.63 | 21.64 | 0 | 20.66 | 20.64 | 20.62 | 1 |
| | 3 | 1 | 21.63 | 21.65 | 21.66 | 0 | 20.65 | 20.61 | 20.68 | 1 |
| | 3 | 3 | 21.67 | 21.61 | 21.63 | 0 | 20.63 | 20.65 | 20.68 | 1 |
| | 6 | 0 | 20.68 | 20.63 | 20.66 | 1 | 19.65 | 19.61 | 19.63 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 26055 | Mid CH 26365 | High CH 26675 | | Low CH 26055 | Mid CH 26365 | High CH 26675 | |
| | | | 1851.5 MHz | 1882.5 MHz | 1913.5 MHz | | 1851.5 MHz | 1882.5 MHz | 1913.5 MHz | |
| 25 / 3M | 1 | 0 | 22.00 | 21.93 | 21.69 | 0 | 20.98 | 20.91 | 20.67 | 1 |
| | 1 | 7 | 21.95 | 21.80 | 21.70 | 0 | 20.93 | 20.78 | 20.68 | 1 |
| | 1 | 14 | 21.83 | 21.62 | 21.92 | 0 | 20.81 | 20.61 | 20.90 | 1 |
| | 8 | 0 | 20.79 | 20.62 | 20.67 | 1 | 19.77 | 19.62 | 19.65 | 2 |
| | 8 | 3 | 20.65 | 20.69 | 20.64 | 1 | 19.63 | 19.61 | 19.65 | 2 |
| | 8 | 7 | 20.66 | 20.68 | 20.61 | 1 | 19.64 | 19.66 | 19.69 | 2 |
| | 15 | 0 | 20.75 | 20.61 | 20.62 | 1 | 19.73 | 19.67 | 19.63 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 26065 | Mid CH 26365 | High CH 26665 | | Low CH 26065 | Mid CH 26365 | High CH 26665 | |
| | | | 1852.5 MHz | 1882.5 MHz | 1912.5 MHz | | 1852.5 MHz | 1882.5 MHz | 1912.5 MHz | |
| 25 / 5M | 1 | 0 | 22.18 | 22.11 | 21.87 | 0 | 21.11 | 21.04 | 20.80 | 1 |
| | 1 | 12 | 22.13 | 21.98 | 21.88 | 0 | 21.06 | 20.91 | 20.81 | 1 |
| | 1 | 24 | 22.01 | 21.80 | 22.10 | 0 | 20.94 | 20.73 | 21.03 | 1 |
| | 12 | 0 | 20.97 | 20.80 | 20.65 | 1 | 19.90 | 19.73 | 19.65 | 2 |
| | 12 | 6 | 20.83 | 20.77 | 20.61 | 1 | 19.76 | 19.70 | 19.66 | 2 |
| | 12 | 13 | 20.77 | 20.66 | 20.79 | 1 | 19.70 | 19.63 | 19.72 | 2 |
| | 25 | 0 | 20.93 | 20.79 | 20.80 | 1 | 19.86 | 19.72 | 19.73 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 26090 | Mid CH 26365 | High CH 26640 | | Low CH 26090 | Mid CH 26365 | High CH 26640 | |
| | | | 1855.0 MHz | 1882.5 MHz | 1910.0 MHz | | 1855.0 MHz | 1882.5 MHz | 1910.0 MHz | |
| 25 / 10M | 1 | 0 | 22.35 | 22.28 | 22.04 | 0 | 21.31 | 21.24 | 21.00 | 1 |
| | 1 | 24 | 22.30 | 22.15 | 22.05 | 0 | 21.26 | 21.11 | 21.01 | 1 |
| | 1 | 49 | 22.18 | 21.97 | 22.27 | 0 | 21.14 | 20.93 | 21.23 | 1 |
| | 25 | 0 | 21.14 | 20.97 | 20.82 | 1 | 20.10 | 19.93 | 19.78 | 2 |
| | 25 | 12 | 21.00 | 20.94 | 20.78 | 1 | 19.96 | 19.90 | 19.74 | 2 |
| | 25 | 25 | 20.94 | 20.83 | 20.96 | 1 | 19.90 | 19.79 | 19.92 | 2 |
| | 50 | 0 | 21.10 | 20.96 | 20.97 | 1 | 20.06 | 19.92 | 19.93 | 2 |

FCC SAR Test Report

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 26115 | Mid CH 26365 | High CH 26615 | | Low CH 26115 | Mid CH 26365 | High CH 26615 | |
| | | | 1857.5 MHz | 1882.5 MHz | 1907.5 MHz | | 1857.5 MHz | 1882.5 MHz | 1907.5 MHz | |
| 25 / 15M | 1 | 0 | 22.46 | 22.39 | 22.15 | 0 | 21.40 | 21.33 | 21.09 | 1 |
| | 1 | 37 | 22.41 | 22.26 | 22.16 | 0 | 21.35 | 21.20 | 21.10 | 1 |
| | 1 | 74 | 22.29 | 22.08 | 22.38 | 0 | 21.23 | 21.02 | 21.32 | 1 |
| | 36 | 0 | 21.25 | 21.08 | 20.93 | 1 | 20.19 | 20.02 | 19.87 | 2 |
| | 36 | 19 | 21.11 | 21.05 | 20.89 | 1 | 20.05 | 19.99 | 19.83 | 2 |
| | 36 | 39 | 21.05 | 20.94 | 21.07 | 1 | 19.99 | 19.88 | 20.01 | 2 |
| | 75 | 0 | 21.21 | 21.07 | 21.08 | 1 | 20.15 | 20.01 | 20.02 | 2 |

| Band / BW | RB Size | RB Offset | QPSK | | | 3GPP MPR (dB) | 16QAM | | | 3GPP MPR (dB) |
|-----------|---------|-----------|--------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|
| | | | Low CH 26140 | Mid CH 26365 | High CH 26590 | | Low CH 26140 | Mid CH 26365 | High CH 26590 | |
| | | | 1860.0 MHz | 1882.5 MHz | 1905.0 MHz | | 1860.0 MHz | 1882.5 MHz | 1905.0 MHz | |
| 25 / 20M | 1 | 0 | 22.53 | 22.46 | 22.22 | 0 | 21.51 | 21.44 | 21.20 | 1 |
| | 1 | 50 | 22.48 | 22.33 | 22.23 | 0 | 21.46 | 21.31 | 21.21 | 1 |
| | 1 | 99 | 22.36 | 22.15 | 22.45 | 0 | 21.34 | 21.13 | 21.43 | 1 |
| | 50 | 0 | 21.32 | 21.15 | 21.00 | 1 | 20.30 | 20.13 | 19.98 | 2 |
| | 50 | 25 | 21.18 | 21.12 | 20.96 | 1 | 20.16 | 20.10 | 19.94 | 2 |
| | 50 | 50 | 21.12 | 21.01 | 21.14 | 1 | 20.10 | 19.99 | 20.12 | 2 |
| | 100 | 0 | 21.28 | 21.14 | 21.15 | 1 | 20.26 | 20.12 | 20.13 | 2 |

4.7 SAR Testing Results

4.7.1 SAR Results for Body

| Plot No. | Band | Mode | Test Position | Separation Distance (mm) | Ch. | Power Reduction | Extended Accessory | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaled SAR-1g (W/kg) |
|----------|----------|------------|---------------|--------------------------|------|-----------------|--------------------|--------------------------|--------------------------------|----------------|------------------|------------------------|----------------------|
| 01 | GSM850 | GPRS10 | Rear Face | 0 | 128 | N/A | N/A | 32.0 | 31.91 | 1.02 | -0.11 | 0.563 | 0.57 |
| | GSM850 | GPRS10 | Left Side | 0 | 128 | N/A | N/A | 32.0 | 31.91 | 1.02 | 0.00 | 0.00 | 0.00 |
| | GSM850 | GPRS10 | Right Side | 0 | 128 | N/A | N/A | 32.0 | 31.91 | 1.02 | -0.10 | 0.218 | 0.22 |
| | GSM850 | GPRS10 | Top Side | 0 | 128 | N/A | N/A | 32.0 | 31.91 | 1.02 | 0.02 | 0.304 | 0.31 |
| | GSM850 | GPRS10 | Rear Face | 0 | 128 | N/A | Battery | 32.0 | 31.91 | 1.02 | -0.13 | 0.114 | 0.12 |
| | GSM850 | GPRS10 | Rear Face | 0 | 128 | N/A | RFID | 32.0 | 31.91 | 1.02 | -0.17 | 0.138 | 0.14 |
| GSM1900 | GPRS10 | Rear Face | 0 | 661 | N/A | N/A | 29.0 | 28.98 | 1.00 | 0.19 | 0.437 | 0.44 | |
| | GPRS10 | Left Side | 0 | 661 | N/A | N/A | 29.0 | 28.98 | 1.00 | 0.00 | 0.00 | 0.00 | |
| | GPRS10 | Right Side | 0 | 661 | N/A | N/A | 29.0 | 28.98 | 1.00 | 0.02 | 0.147 | 0.15 | |
| 02 | GSM1900 | GPRS10 | Top Side | 0 | 661 | N/A | N/A | 29.0 | 28.98 | 1.00 | 0.09 | 0.522 | 0.52 |
| | GSM1900 | GPRS10 | Top Side | 0 | 661 | N/A | Battery | 29.0 | 28.98 | 1.00 | 0.03 | 0.517 | 0.52 |
| | GSM1900 | GPRS10 | Top Side | 0 | 661 | N/A | RFID | 29.0 | 28.98 | 1.00 | 0.02 | 0.512 | 0.51 |
| WCDMA II | RMC12.2K | Rear Face | 0 | 9262 | w/ | N/A | 21.5 | 21.40 | 1.02 | 0.18 | 0.218 | 0.22 | |
| | RMC12.2K | Rear Face | 6 | 9262 | w/o | N/A | 23.5 | 23.06 | 1.11 | -0.08 | 0.31 | 0.34 | |
| | RMC12.2K | Left Side | 0 | 9262 | w/o | N/A | 23.5 | 23.06 | 1.11 | 0.00 | 0.00 | 0.00 | |
| | RMC12.2K | Right Side | 0 | 9262 | w/o | N/A | 23.5 | 23.06 | 1.11 | 0.07 | 0.215 | 0.24 | |
| | RMC12.2K | Top Side | 0 | 9262 | w/ | N/A | 21.5 | 21.40 | 1.02 | -0.10 | 0.239 | 0.25 | |
| 03 | WCDMA II | RMC12.2K | Top Side | 5 | 9262 | w/o | N/A | 23.5 | 23.06 | 1.11 | -0.02 | 0.48 | 0.53 |
| | WCDMA II | RMC12.2K | Top Side | 5 | 9262 | w/o | Battery | 23.5 | 23.06 | 1.11 | 0.03 | 0.469 | 0.52 |
| | WCDMA II | RMC12.2K | Top Side | 5 | 9262 | w/o | RFID | 23.5 | 23.06 | 1.11 | 0.01 | 0.466 | 0.52 |

Note:

- SAR is performed on the highest power channel. When the reported SAR value of highest power channel is \leq 0.8 W/kg, SAR testing for optional channel is not required.



FCC SAR Test Report

A D T

| Plot No. | Band | Mode | Test Position | Separation Distance (mm) | Ch. | Power Reduction | Extended Accessory | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaled SAR-1g (W/kg) |
|----------|-----------|------------|---------------|--------------------------|------|-----------------|--------------------|--------------------------|--------------------------------|----------------|------------------|------------------------|----------------------|
| | WCDMA IV | RMC12.2K | Rear Face | 0 | 1413 | N/A | N/A | 23.0 | 22.83 | 1.04 | 0.01 | 0.626 | 0.65 |
| | WCDMA IV | RMC12.2K | Left Side | 0 | 1413 | N/A | N/A | 23.0 | 22.83 | 1.04 | 0.00 | 0.00 | 0.00 |
| | WCDMA IV | RMC12.2K | Right Side | 0 | 1413 | N/A | N/A | 23.0 | 22.83 | 1.04 | 0.10 | 0.101 | 0.10 |
| | WCDMA IV | RMC12.2K | Top Side | 0 | 1413 | N/A | N/A | 23.0 | 22.83 | 1.04 | 0.08 | 0.882 | 0.92 |
| | WCDMA IV | RMC12.2K | Top Side | 0 | 1312 | N/A | N/A | 23.0 | 22.57 | 1.10 | 0.01 | 0.844 | 0.93 |
| 04 | WCDMA IV | RMC12.2K | Top Side | 0 | 1513 | N/A | N/A | 23.0 | 22.79 | 1.05 | 0.01 | 0.927 | 0.97 |
| | WCDMA IV | RMC12.2K | Top Side | 0 | 1513 | N/A | Battery | 23.0 | 22.79 | 1.05 | 0.03 | 0.919 | 0.96 |
| | WCDMA IV | RMC12.2K | Top Side | 0 | 1513 | N/A | RFID | 23.0 | 22.79 | 1.05 | 0.05 | 0.909 | 0.95 |
| | WCDMA IV | RMC12.2K | Top Side | 0 | 1513 | N/A | N/A | 23.0 | 22.79 | 1.05 | 0.12 | 0.917 | 0.96 |
| 05 | WCDMA V | RMC12.2K | Rear Face | 0 | 4182 | N/A | N/A | 23.0 | 22.81 | 1.04 | -0.14 | 0.317 | 0.33 |
| | WCDMA V | RMC12.2K | Left Side | 0 | 4182 | N/A | N/A | 23.0 | 22.81 | 1.04 | 0.00 | 0.00 | 0.00 |
| | WCDMA V | RMC12.2K | Right Side | 0 | 4182 | N/A | N/A | 23.0 | 22.81 | 1.04 | 0.07 | 0.118 | 0.12 |
| | WCDMA V | RMC12.2K | Top Side | 0 | 4182 | N/A | N/A | 23.0 | 22.81 | 1.04 | 0.13 | 0.183 | 0.19 |
| | WCDMA V | RMC12.2K | Rear Face | 0 | 4182 | N/A | Battery | 23.0 | 22.81 | 1.04 | -0.12 | 0.061 | 0.06 |
| | WCDMA V | RMC12.2K | Rear Face | 0 | 4182 | N/A | RFID | 23.0 | 22.81 | 1.04 | -0.15 | 0.082 | 0.09 |
| 06 | CDMA BC0 | RTAP153.6K | Rear Face | 0 | 1013 | N/A | N/A | 24.0 | 23.57 | 1.10 | -0.17 | 0.632 | 0.70 |
| | CDMA BC0 | RTAP153.6K | Left Side | 0 | 1013 | N/A | N/A | 24.0 | 23.57 | 1.10 | 0.00 | 0.00 | 0.00 |
| | CDMA BC0 | RTAP153.6K | Right Side | 0 | 1013 | N/A | N/A | 24.0 | 23.57 | 1.10 | 0.15 | 0.306 | 0.34 |
| | CDMA BC0 | RTAP153.6K | Top Side | 0 | 1013 | N/A | N/A | 24.0 | 23.57 | 1.10 | 0.04 | 0.313 | 0.35 |
| | CDMA BC0 | RTAP153.6K | Rear Face | 0 | 1013 | N/A | Battery | 24.0 | 23.57 | 1.10 | -0.06 | 0.136 | 0.15 |
| | CDMA BC0 | RTAP153.6K | Rear Face | 0 | 1013 | N/A | RFID | 24.0 | 23.57 | 1.10 | 0.11 | 0.158 | 0.17 |
| | CDMA BC1 | RTAP153.6K | Rear Face | 0 | 25 | w/ | N/A | 22.5 | 22.40 | 1.02 | 0.12 | 0.777 | 0.79 |
| | CDMA BC1 | RTAP153.6K | Rear Face | 6 | 25 | w/o | N/A | 24.0 | 23.97 | 1.01 | -0.07 | 0.323 | 0.33 |
| | CDMA BC1 | RTAP153.6K | Left Side | 0 | 25 | w/o | N/A | 24.0 | 23.97 | 1.01 | 0.00 | 0.00 | 0.00 |
| | CDMA BC1 | RTAP153.6K | Right Side | 0 | 25 | w/o | N/A | 24.0 | 23.97 | 1.01 | 0.03 | 0.257 | 0.26 |
| 07 | CDMA BC1 | RTAP153.6K | Top Side | 0 | 25 | w/ | N/A | 22.5 | 22.40 | 1.02 | 0.11 | 0.96 | 0.98 |
| | CDMA BC1 | RTAP153.6K | Top Side | 5 | 25 | w/o | N/A | 24.0 | 23.97 | 1.01 | 0.16 | 0.472 | 0.47 |
| | CDMA BC1 | RTAP153.6K | Top Side | 0 | 600 | w/ | N/A | 22.5 | 22.32 | 1.04 | -0.13 | 0.73 | 0.76 |
| | CDMA BC1 | RTAP153.6K | Top Side | 0 | 1175 | w/ | N/A | 22.5 | 22.21 | 1.07 | 0.11 | 0.859 | 0.92 |
| | CDMA BC1 | RTAP153.6K | Top Side | 0 | 25 | w/ | Battery | 22.5 | 22.40 | 1.02 | 0.08 | 0.925 | 0.95 |
| | CDMA BC1 | RTAP153.6K | Top Side | 0 | 25 | w/ | RFID | 22.5 | 22.40 | 1.02 | 0.05 | 0.909 | 0.93 |
| | CDMA BC1 | RTAP153.6K | Top Side | 0 | 600 | w/ | Battery | 22.5 | 22.32 | 1.04 | -0.18 | 0.685 | 0.71 |
| | CDMA BC1 | RTAP153.6K | Top Side | 0 | 1175 | w/ | Battery | 22.5 | 22.21 | 1.07 | 0.14 | 0.836 | 0.89 |
| | CDMA BC1 | RTAP153.6K | Top Side | 0 | 600 | w/ | RFID | 22.5 | 22.32 | 1.04 | 0.12 | 0.897 | 0.93 |
| | CDMA BC1 | RTAP153.6K | Top Side | 0 | 1175 | w/ | RFID | 22.5 | 22.21 | 1.07 | 0.11 | 0.884 | 0.95 |
| | CDMA BC1 | RTAP153.6K | Top Side | 0 | 25 | w/ | N/A | 22.5 | 22.40 | 1.02 | 0.11 | 0.931 | 0.95 |
| 08 | CDMA BC10 | RTAP153.6K | Rear Face | 0 | 476 | N/A | N/A | 24.0 | 23.58 | 1.10 | 0.08 | 0.627 | 0.69 |
| | CDMA BC10 | RTAP153.6K | Left Side | 0 | 476 | N/A | N/A | 24.0 | 23.58 | 1.10 | 0.00 | 0.00 | 0.00 |
| | CDMA BC10 | RTAP153.6K | Right Side | 0 | 476 | N/A | N/A | 24.0 | 23.58 | 1.10 | -0.02 | 0.175 | 0.19 |
| | CDMA BC10 | RTAP153.6K | Top Side | 0 | 476 | N/A | N/A | 24.0 | 23.58 | 1.10 | 0.09 | 0.122 | 0.13 |
| | CDMA BC10 | RTAP153.6K | Rear Face | 0 | 476 | N/A | Battery | 24.0 | 23.58 | 1.10 | N/A | N/A | N/A |
| | CDMA BC10 | RTAP153.6K | Rear Face | 0 | 476 | N/A | RFID | 24.0 | 23.58 | 1.10 | 0.01 | 0.000601 | 0.00 |

Note:

- SAR is performed on the highest power channel. When the reported SAR value of highest power channel is \leq 0.8 W/kg, SAR testing for optional channel is not required.



FCC SAR Test Report

A D T

| Plot No. | Band | Mode | Test Position | Separation Distance (mm) | Ch. | Power Reduction | Extended Accessory | RB# | RB Offset | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaled SAR-1g (W/kg) |
|----------|-------|---------|---------------|--------------------------|-------|-----------------|--------------------|-----|-----------|--------------------------|--------------------------------|----------------|------------------|------------------------|----------------------|
| | LTE 2 | QPSK20M | Rear Face | 0 | 18700 | N/A | N/A | 1 | 50 | 22.7 | 22.69 | 1.00 | 0.19 | 0.533 | 0.53 |
| | LTE 2 | QPSK20M | Left Side | 0 | 18700 | N/A | N/A | 1 | 50 | 22.7 | 22.69 | 1.00 | 0.00 | 0.00 | 0.00 |
| | LTE 2 | QPSK20M | Right Side | 0 | 18700 | N/A | N/A | 1 | 50 | 22.7 | 22.69 | 1.00 | 0.05 | 0.152 | 0.15 |
| | LTE 2 | QPSK20M | Top Side | 0 | 18700 | N/A | N/A | 1 | 50 | 22.7 | 22.69 | 1.00 | 0.00 | 0.547 | 0.55 |
| | LTE 2 | QPSK20M | Rear Face | 0 | 18700 | N/A | N/A | 50 | 0 | 21.7 | 21.43 | 1.06 | 0.11 | 0.407 | 0.43 |
| | LTE 2 | QPSK20M | Left Side | 0 | 18700 | N/A | N/A | 50 | 0 | 21.7 | 21.43 | 1.06 | 0.00 | 0.00 | 0.00 |
| | LTE 2 | QPSK20M | Right Side | 0 | 18700 | N/A | N/A | 50 | 0 | 21.7 | 21.43 | 1.06 | 0.06 | 0.115 | 0.12 |
| 09 | LTE 2 | QPSK20M | Top Side | 0 | 18700 | N/A | N/A | 50 | 0 | 21.7 | 21.43 | 1.06 | 0.08 | 0.548 | 0.58 |
| | LTE 2 | QPSK20M | Top Side | 0 | 18700 | N/A | Battery | 50 | 0 | 21.7 | 21.43 | 1.06 | 0.12 | 0.349 | 0.37 |
| | LTE 2 | QPSK20M | Top Side | 0 | 18700 | N/A | RFID | 50 | 0 | 21.7 | 21.43 | 1.06 | 0.01 | 0.346 | 0.37 |
| | LTE 4 | QPSK20M | Rear Face | 0 | 20300 | w/ | N/A | 1 | 0 | 22.5 | 22.41 | 1.02 | -0.15 | 0.718 | 0.73 |
| | LTE 4 | QPSK20M | Rear Face | 6 | 20300 | w/o | N/A | 1 | 0 | 22.8 | 22.73 | 1.02 | 0.05 | 0.231 | 0.24 |
| | LTE 4 | QPSK20M | Left Side | 0 | 20300 | w/o | N/A | 1 | 0 | 22.8 | 22.73 | 1.02 | 0.00 | 0.00 | 0.00 |
| | LTE 4 | QPSK20M | Right Side | 0 | 20300 | w/o | N/A | 1 | 0 | 22.8 | 22.73 | 1.02 | 0.15 | 0.143 | 0.15 |
| 10 | LTE 4 | QPSK20M | Top Side | 0 | 20300 | w/ | N/A | 1 | 0 | 22.5 | 22.41 | 1.02 | 0.17 | 0.97 | 0.99 |
| | LTE 4 | QPSK20M | Top Side | 5 | 20300 | w/o | N/A | 1 | 0 | 22.8 | 22.73 | 1.02 | 0.07 | 0.421 | 0.43 |
| | LTE 4 | QPSK20M | Rear Face | 0 | 20300 | w/ | N/A | 50 | 0 | 21.5 | 21.21 | 1.07 | 0.17 | 0.424 | 0.45 |
| | LTE 4 | QPSK20M | Rear Face | 6 | 20300 | w/o | N/A | 50 | 0 | 21.8 | 21.57 | 1.05 | 0.12 | 0.174 | 0.18 |
| | LTE 4 | QPSK20M | Left Side | 0 | 20300 | w/o | N/A | 50 | 0 | 21.8 | 21.57 | 1.05 | 0.00 | 0.00 | 0.00 |
| | LTE 4 | QPSK20M | Right Side | 0 | 20300 | w/o | N/A | 50 | 0 | 21.8 | 21.57 | 1.05 | 0.18 | 0.116 | 0.12 |
| | LTE 4 | QPSK20M | Top Side | 0 | 20300 | w/ | N/A | 50 | 0 | 21.5 | 21.21 | 1.07 | 0.05 | 0.727 | 0.78 |
| | LTE 4 | QPSK20M | Top Side | 5 | 20300 | w/o | N/A | 50 | 0 | 21.8 | 21.57 | 1.05 | -0.05 | 0.318 | 0.33 |
| | LTE 4 | QPSK20M | Top Side | 0 | 20050 | w/ | N/A | 1 | 0 | 22.5 | 22.19 | 1.07 | 0.06 | 0.848 | 0.91 |
| | LTE 4 | QPSK20M | Top Side | 0 | 20175 | w/ | N/A | 1 | 0 | 22.5 | 22.29 | 1.05 | 0.04 | 0.909 | 0.95 |
| | LTE 4 | QPSK20M | Top Side | 0 | 20300 | w/ | Battery | 1 | 0 | 22.5 | 22.41 | 1.02 | 0.13 | 0.95 | 0.97 |
| | LTE 4 | QPSK20M | Top Side | 0 | 20300 | w/ | RFID | 1 | 0 | 22.5 | 22.41 | 1.02 | 0.12 | 0.939 | 0.96 |
| | LTE 4 | QPSK20M | Top Side | 0 | 20050 | w/ | Battery | 1 | 0 | 22.5 | 22.19 | 1.07 | 0.04 | 0.788 | 0.85 |
| | LTE 4 | QPSK20M | Top Side | 0 | 20175 | w/ | Battery | 1 | 0 | 22.5 | 22.29 | 1.05 | -0.06 | 0.846 | 0.89 |
| | LTE 4 | QPSK20M | Top Side | 0 | 20050 | w/ | RFID | 1 | 0 | 22.5 | 22.19 | 1.07 | 0.12 | 0.871 | 0.94 |
| | LTE 4 | QPSK20M | Top Side | 0 | 20175 | w/ | RFID | 1 | 0 | 22.5 | 22.29 | 1.05 | 0.13 | 0.857 | 0.90 |
| | LTE 4 | QPSK20M | Top Side | 0 | 20300 | w/ | N/A | 1 | 0 | 22.5 | 22.41 | 1.02 | 0.14 | 0.952 | 0.97 |
| 11 | LTE 5 | QPSK10M | Rear Face | 0 | 20525 | N/A | N/A | 1 | 24 | 22.3 | 22.25 | 1.01 | -0.15 | 0.389 | 0.39 |
| | LTE 5 | QPSK10M | Left Side | 0 | 20525 | N/A | N/A | 1 | 24 | 22.3 | 22.25 | 1.01 | 0.00 | 0.00 | 0.00 |
| | LTE 5 | QPSK10M | Right Side | 0 | 20525 | N/A | N/A | 1 | 24 | 22.3 | 22.25 | 1.01 | 0.16 | 0.14 | 0.14 |
| | LTE 5 | QPSK10M | Top Side | 0 | 20525 | N/A | N/A | 1 | 24 | 22.3 | 22.25 | 1.01 | 0.10 | 0.172 | 0.17 |
| | LTE 5 | QPSK10M | Rear Face | 0 | 20525 | N/A | N/A | 25 | 12 | 21.3 | 21.25 | 1.01 | -0.01 | 0.276 | 0.28 |
| | LTE 5 | QPSK10M | Left Side | 0 | 20525 | N/A | N/A | 25 | 12 | 21.3 | 21.25 | 1.01 | 0.00 | 0.00 | 0.00 |
| | LTE 5 | QPSK10M | Right Side | 0 | 20525 | N/A | N/A | 25 | 12 | 21.3 | 21.25 | 1.01 | -0.11 | 0.123 | 0.12 |
| | LTE 5 | QPSK10M | Top Side | 0 | 20525 | N/A | N/A | 25 | 12 | 21.3 | 21.25 | 1.01 | -0.07 | 0.132 | 0.13 |
| | LTE 5 | QPSK10M | Rear Face | 0 | 20525 | N/A | Battery | 1 | 24 | 22.3 | 22.25 | 1.01 | -0.16 | 0.089 | 0.09 |
| | LTE 5 | QPSK10M | Rear Face | 0 | 20525 | N/A | RFID | 1 | 24 | 22.3 | 22.25 | 1.01 | 0.12 | 0.085 | 0.09 |

Note:

1. According to KDB 941225, LTE SAR testing for remaining RB offset configurations and required test channels is not required when the reported SAR of highest power 1RB configuration is less than 0.8 W/kg.
2. According to KDB 941225, LTE SAR testing for remaining RB offset configurations and required test channels is not required when the reported SAR of highest power 50% RB configuration is less than 0.8 W/kg.
3. According to KDB 941225, LTE SAR testing for 100% RB is not required when the maximum power of 100% RB is less than the maximum power of 1RB and 50% RB, and the highest reported SAR for 1RB and 50% RB is less than 0.8 W/kg.
4. According to KDB 941225, LTE SAR testing for 16QAM is not required when the maximum power of 16QAM is less 1/2 dB higher than QPSK, and the highest reported SAR of QPSK is less than 1.45 W/kg.
5. According to KDB 941225, LTE SAR testing for smaller channel bandwidth is not required when the maximum power of smaller channel bandwidth is less 1/2 dB higher than largest channel bandwidth, and the highest reported SAR of largest channel bandwidth is less than 1.45 W/kg.



FCC SAR Test Report

A D T

| Plot No. | Band | Mode | Test Position | Separation Distance (mm) | Ch. | Power Reduction | Extended Accessory | RB# | RB Offset | Max. Tune-up Power (dBm) | Measured Conducted Power (dBm) | Scaling Factor | Power Drift (dB) | Measured SAR-1g (W/kg) | Scaled SAR-1g (W/kg) |
|----------|--------|---------|---------------|--------------------------|-------|-----------------|--------------------|-----|-----------|--------------------------|--------------------------------|----------------|------------------|------------------------|----------------------|
| 12 | LTE 13 | QPSK10M | Rear Face | 0 | 23230 | N/A | N/A | 1 | 24 | 22.5 | 22.41 | 1.02 | -0.12 | 0.684 | 0.70 |
| | LTE 13 | QPSK10M | Left Side | 0 | 23230 | N/A | N/A | 1 | 24 | 22.5 | 22.41 | 1.02 | 0.00 | 0.00 | 0.00 |
| | LTE 13 | QPSK10M | Right Side | 0 | 23230 | N/A | N/A | 1 | 24 | 22.5 | 22.41 | 1.02 | -0.19 | 0.289 | 0.29 |
| | LTE 13 | QPSK10M | Top Side | 0 | 23230 | N/A | N/A | 1 | 24 | 22.5 | 22.41 | 1.02 | 0.13 | 0.352 | 0.36 |
| | LTE 13 | QPSK10M | Rear Face | 0 | 23230 | N/A | N/A | 25 | 12 | 21.5 | 21.48 | 1.00 | 0.05 | 0.503 | 0.51 |
| | LTE 13 | QPSK10M | Left Side | 0 | 23230 | N/A | N/A | 25 | 12 | 21.5 | 21.48 | 1.00 | 0.00 | 0.00 | 0.00 |
| | LTE 13 | QPSK10M | Right Side | 0 | 23230 | N/A | N/A | 25 | 12 | 21.5 | 21.48 | 1.00 | -0.15 | 0.262 | 0.26 |
| | LTE 13 | QPSK10M | Top Side | 0 | 23230 | N/A | N/A | 25 | 12 | 21.5 | 21.48 | 1.00 | 0.04 | 0.286 | 0.29 |
| | LTE 13 | QPSK10M | Rear Face | 0 | 23230 | N/A | Battery | 1 | 24 | 22.5 | 22.41 | 1.02 | 0.10 | 0.248 | 0.25 |
| | LTE 13 | QPSK10M | Rear Face | 0 | 23230 | N/A | RFID | 1 | 24 | 22.5 | 22.41 | 1.02 | 0.13 | 0.246 | 0.25 |
| | LTE 17 | QPSK10M | Rear Face | 0 | 23790 | N/A | N/A | 1 | 24 | 22.7 | 22.69 | 1.00 | 0.19 | 0.801 | 0.80 |
| | LTE 17 | QPSK10M | Left Side | 0 | 23790 | N/A | N/A | 1 | 24 | 22.7 | 22.69 | 1.00 | 0.00 | 0.00 | 0.00 |
| | LTE 17 | QPSK10M | Right Side | 0 | 23790 | N/A | N/A | 1 | 24 | 22.7 | 22.69 | 1.00 | 0.02 | 0.239 | 0.24 |
| | LTE 17 | QPSK10M | Top Side | 0 | 23790 | N/A | N/A | 1 | 24 | 22.7 | 22.69 | 1.00 | 0.10 | 0.231 | 0.23 |
| | LTE 17 | QPSK10M | Rear Face | 0 | 23780 | N/A | N/A | 25 | 0 | 21.7 | 21.63 | 1.02 | 0.09 | 0.62 | 0.63 |
| | LTE 17 | QPSK10M | Left Side | 0 | 23780 | N/A | N/A | 25 | 0 | 21.7 | 21.63 | 1.02 | 0.00 | 0.00 | 0.00 |
| | LTE 17 | QPSK10M | Right Side | 0 | 23780 | N/A | N/A | 25 | 0 | 21.7 | 21.63 | 1.02 | 0.06 | 0.17 | 0.17 |
| | LTE 17 | QPSK10M | Top Side | 0 | 23780 | N/A | N/A | 25 | 0 | 21.7 | 21.63 | 1.02 | -0.18 | 0.175 | 0.18 |
| 13 | LTE 17 | QPSK10M | Rear Face | 0 | 23780 | N/A | N/A | 1 | 24 | 22.7 | 22.63 | 1.02 | 0.14 | 0.821 | 0.83 |
| | LTE 17 | QPSK10M | Rear Face | 0 | 23800 | N/A | N/A | 1 | 24 | 22.7 | 22.54 | 1.04 | 0.12 | 0.801 | 0.83 |
| | LTE 17 | QPSK10M | Rear Face | 0 | 23780 | N/A | Battery | 1 | 24 | 22.7 | 22.63 | 1.02 | 0.10 | 0.192 | 0.20 |
| | LTE 17 | QPSK10M | Rear Face | 0 | 23780 | N/A | RFID | 1 | 24 | 22.7 | 22.63 | 1.02 | 0.01 | 0.19 | 0.19 |
| | LTE 17 | QPSK10M | Rear Face | 0 | 23780 | N/A | N/A | 1 | 24 | 22.7 | 22.63 | 1.02 | 0.10 | 0.809 | 0.82 |
| | LTE 25 | QPSK20M | Rear Face | 0 | 26140 | N/A | N/A | 1 | 0 | 22.6 | 22.53 | 1.02 | 0.18 | 0.527 | 0.54 |
| | LTE 25 | QPSK20M | Left Side | 0 | 26140 | N/A | N/A | 1 | 0 | 22.6 | 22.53 | 1.02 | 0.00 | 0.00 | 0.00 |
| | LTE 25 | QPSK20M | Right Side | 0 | 26140 | N/A | N/A | 1 | 0 | 22.6 | 22.53 | 1.02 | 0.13 | 0.165 | 0.17 |
| | LTE 25 | QPSK20M | Top Side | 0 | 26140 | N/A | N/A | 1 | 0 | 22.6 | 22.53 | 1.02 | -0.01 | 0.56 | 0.57 |
| | LTE 25 | QPSK20M | Rear Face | 0 | 26140 | N/A | N/A | 50 | 0 | 21.6 | 21.32 | 1.07 | 0.13 | 0.387 | 0.41 |
| | LTE 25 | QPSK20M | Left Side | 0 | 26140 | N/A | N/A | 50 | 0 | 21.6 | 21.32 | 1.07 | 0.00 | 0.00 | 0.00 |
| | LTE 25 | QPSK20M | Right Side | 0 | 26140 | N/A | N/A | 50 | 0 | 21.6 | 21.32 | 1.07 | 0.07 | 0.126 | 0.13 |
| 14 | LTE 25 | QPSK20M | Top Side | 0 | 26140 | N/A | N/A | 50 | 0 | 21.6 | 21.32 | 1.07 | 0.13 | 0.561 | 0.60 |
| | LTE 25 | QPSK20M | Top Side | 0 | 26140 | N/A | Battery | 50 | 0 | 21.6 | 21.32 | 1.07 | 0.05 | 0.475 | 0.51 |
| | LTE 25 | QPSK20M | Top Side | 0 | 26140 | N/A | RFID | 50 | 0 | 21.6 | 21.32 | 1.07 | 0.01 | 0.473 | 0.50 |

Note:

1. According to KDB 941225, LTE SAR testing for remaining RB offset configurations and required test channels is not required when the reported SAR of highest power 1RB configuration is less than 0.8 W/kg.
2. According to KDB 941225, LTE SAR testing for remaining RB offset configurations and required test channels is not required when the reported SAR of highest power 50% RB configuration is less than 0.8 W/kg.
3. According to KDB 941225, LTE SAR testing for 100% RB is not required when the maximum power of 100% RB is less than the maximum power of 1RB and 50% RB, and the highest reported SAR for 1RB and 50% RB is less than 0.8 W/kg.
4. According to KDB 941225, LTE SAR testing for 16QAM is not required when the maximum power of 16QAM is less 1/2 dB higher than QPSK, and the highest reported SAR of QPSK is less than 1.45 W/kg.
5. According to KDB 941225, LTE SAR testing for smaller channel bandwidth is not required when the maximum power of smaller channel bandwidth is less 1/2 dB higher than largest channel bandwidth, and the highest reported SAR of largest channel bandwidth is less than 1.45 W/kg.

FCC SAR Test Report

4.7.2 SAR Measurement Variability

According to KDB 865664 D01 v01r01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

| Band | Mode | Test Position | Ch. | Original Measured SAR-1g (W/kg) | 1st Repeated SAR-1g (W/kg) | L/S Ratio | 2nd Repeated SAR-1g (W/kg) | L/S Ratio | 3rd Repeated SAR-1g (W/kg) | L/S Ratio |
|----------|------------|---------------|-------|---------------------------------|----------------------------|-----------|----------------------------|-----------|----------------------------|-----------|
| WCDMA IV | RMC12.2K | Top Side | 1513 | 0.927 | 0.917 | 1.01 | N/A | N/A | N/A | N/A |
| CDMA BC1 | RTAP153.6K | Top Side | 25 | 0.96 | 0.931 | 1.03 | N/A | N/A | N/A | N/A |
| LTE 4 | QPSK20M | Top Side | 20300 | 0.97 | 0.952 | 1.02 | N/A | N/A | N/A | N/A |
| LTE 17 | QPSK10M | Rear Face | 23780 | 0.821 | 0.809 | 1.01 | N/A | N/A | N/A | N/A |

Test Engineer : Enzo Chang, and Mars Chang



5. Calibration of Test Equipment

| Equipment | Manufacturer | Model | SN | Cal. Date | Cal. Interval |
|---------------------------------|--------------|---------|------------|---------------|---------------|
| System Validation Dipole | SPEAG | D750V3 | 1013 | Apr. 25, 2013 | 2 Years |
| System Validation Dipole | SPEAG | D835V2 | 4d121 | Apr. 25, 2013 | 2 Years |
| System Validation Dipole | SPEAG | D1750V2 | 1055 | Aug. 27, 2013 | 2 Years |
| System Validation Dipole | SPEAG | D1900V2 | 5d022 | Jul. 29, 2013 | 2 Years |
| Dosimetric E-Field Probe | SPEAG | EX3DV4 | 3590 | Mar. 04, 2014 | 1 Year |
| Dosimetric E-Field Probe | SPEAG | EX3DV4 | 3971 | Mar. 31, 2014 | 1 Year |
| Data Acquisition Electronics | SPEAG | DAE4 | 861 | Apr. 23, 2014 | 1 Year |
| Data Acquisition Electronics | SPEAG | DAE4 | 1431 | Mar. 24, 2014 | 1 Year |
| Wireless Communication Test Set | Agilent | E5515C | MY50260642 | Nov. 25, 2013 | 2 Years |
| Radio Communication Analyzer | Anritsu | MT8820C | 6201300638 | Jul. 08, 2013 | 1 Year |
| ENA Series Network Analyzer | Agilent | E5071C | MY46214281 | Jun. 10, 2013 | 1 Year |
| EXA Spectrum Analyzer | Agilent | N9010A | MY52100136 | Jun. 26, 2013 | 1 Year |
| MXG Analog Signal Generator | Agilent | N5181A | MY50143868 | Jun. 06, 2013 | 1 Year |
| Power Meter | Anritsu | ML2495A | 1218009 | Jun. 11, 2013 | 1 Year |
| Power Sensor | Anritsu | MA2411B | 1207252 | Jun. 11, 2013 | 1 Year |

6. Measurement Uncertainty

| Error Description | Uncertainty Value (±%) | Probability Distribution | Divisor | Ci (1g) | Standard Uncertainty (1g) | Vi |
|--------------------------------------|------------------------|--------------------------|---------|---------|---------------------------|----|
| Measurement System | | | | | | |
| Probe Calibration | 6.0 | Normal | 1 | 1 | ± 6.0 % | ∞ |
| Axial Isotropy | 4.7 | Rectangular | √3 | 0.7 | ± 1.9 % | ∞ |
| Hemispherical Isotropy | 9.6 | Rectangular | √3 | 0.7 | ± 3.9 % | ∞ |
| Boundary Effects | 1.0 | Rectangular | √3 | 1 | ± 0.6 % | ∞ |
| Linearity | 4.7 | Rectangular | √3 | 1 | ± 2.7 % | ∞ |
| System Detection Limits | 1.0 | Rectangular | √3 | 1 | ± 0.6 % | ∞ |
| Readout Electronics | 0.6 | Normal | 1 | 1 | ± 0.6 % | ∞ |
| Response Time | 0.0 | Rectangular | √3 | 1 | ± 0.0 % | ∞ |
| Integration Time | 1.7 | Rectangular | √3 | 1 | ± 1.0 % | ∞ |
| RF Ambient Noise | 3.0 | Rectangular | √3 | 1 | ± 1.7 % | ∞ |
| RF Ambient Reflections | 3.0 | Rectangular | √3 | 1 | ± 1.7 % | ∞ |
| Probe Positioner | 0.5 | Rectangular | √3 | 1 | ± 0.3 % | ∞ |
| Probe Positioning | 2.9 | Rectangular | √3 | 1 | ± 1.7 % | ∞ |
| Max. SAR Eval. | 2.3 | Rectangular | √3 | 1 | ± 1.3 % | ∞ |
| Test Sample Related | | | | | | |
| Device Positioning | 3.9 | Normal | 1 | 1 | ± 3.9 % | 31 |
| Device Holder | 2.7 | Normal | 1 | 1 | ± 2.7 % | 19 |
| Power Drift | 5.0 | Rectangular | √3 | 1 | ± 2.9 % | ∞ |
| Phantom and Setup | | | | | | |
| Phantom Uncertainty | 4.0 | Rectangular | √3 | 1 | ± 2.3 % | ∞ |
| Liquid Conductivity (Target) | 5.0 | Rectangular | √3 | 0.64 | ± 1.8 % | ∞ |
| Liquid Conductivity (Meas.) | 5.0 | Normal | 1 | 0.64 | ± 3.2 % | 29 |
| Liquid Permittivity (Target) | 5.0 | Rectangular | √3 | 0.6 | ± 1.7 % | ∞ |
| Liquid Permittivity (Meas.) | 5.0 | Normal | 1 | 0.6 | ± 3.0 % | 29 |
| Combined Standard Uncertainty | | | | | ± 11.7 % | |
| Expanded Uncertainty (K=2) | | | | | ± 23.4 % | |

Uncertainty budget for frequency range 300 MHz to 3 GHz



7. Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Taiwan HwaYa EMC/RF/Safety/Telecom Lab:

Add: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil., Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-318-3232

Fax: 886-3-327-0892

Taiwan LinKo EMC/RF Lab:

Add: No. 47, 14th Ling, Chia Pau Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C.

Tel: 886-2-2605-2180

Fax: 886-2-2605-1924

Taiwan HsinChu EMC/RF Lab:

Add: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Vil., Chiung Lin Township, Hsinchu County 307, Taiwan, R.O.C.

Tel: 886-3-593-5343

Fax: 886-3-593-5342

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The road map of all our labs can be found in our web site also.

---END---



Appendix A. SAR Plots of System Verification

The plots for system verification with largest deviation for each SAR system combination are shown as follows.

System Check_B750_140513

DUT: Dipole 750 MHz; Type: D750V3; SN: 1013

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: B750_0513 Medium parameters used: $f = 750$ MHz; $\sigma = 0.969$ S/m; $\epsilon_r = 55.526$; $\rho = 1000$ kg/m³


Ambient Temperature : 21.7°C; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(9.91, 9.91, 9.91); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1039
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.95 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 56.212 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 3.45 W/kg
SAR(1 g) = 2.36 W/kg; SAR(10 g) = 1.58 W/kg
Maximum value of SAR (measured) = 2.95 W/kg

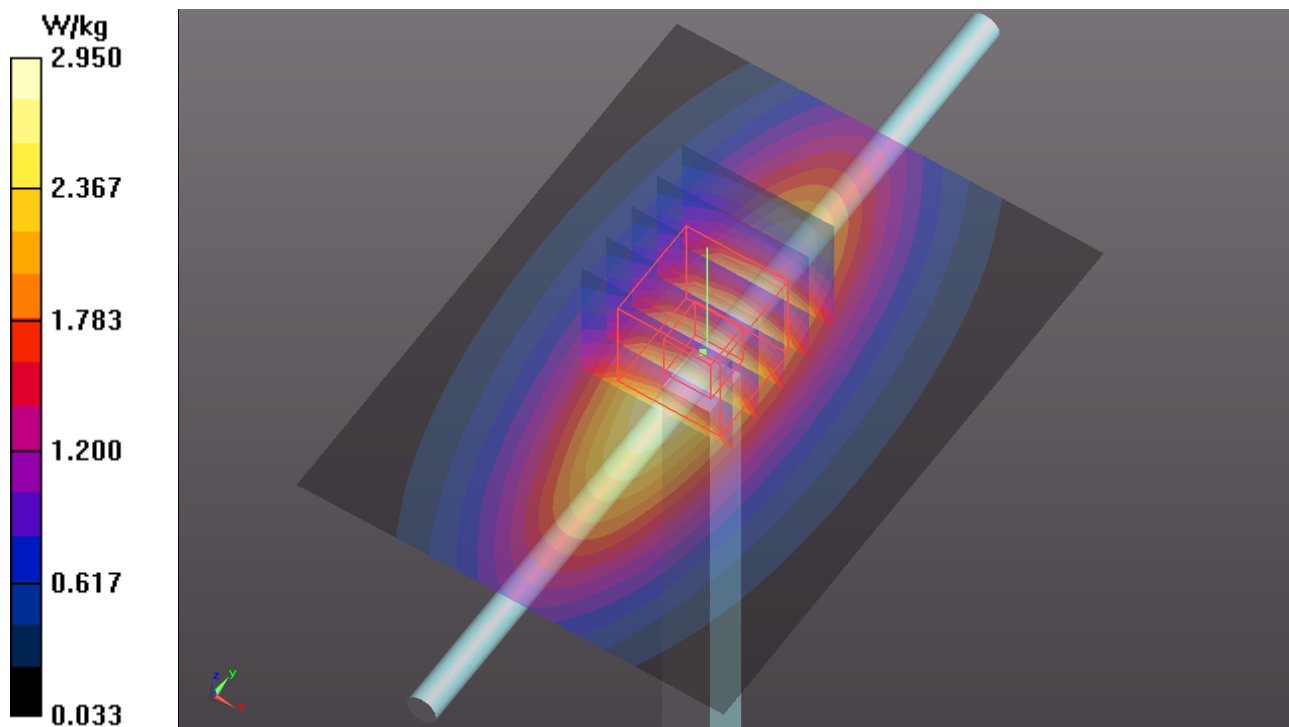

System Check_B835_140513

DUT: Dipole 835 MHz; Type: D835V2; SN: 4d121

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: B835_0513 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.972 \text{ S/m}$; $\epsilon_r = 55.205$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature : 21.8°C ; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(9.74, 9.74, 9.74); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1039
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 3.08 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 54.377 V/m ; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 3.53 W/kg
SAR(1 g) = 2.41 W/kg ; SAR(10 g) = 1.59 W/kg
Maximum value of SAR (measured) = 3.02 W/kg

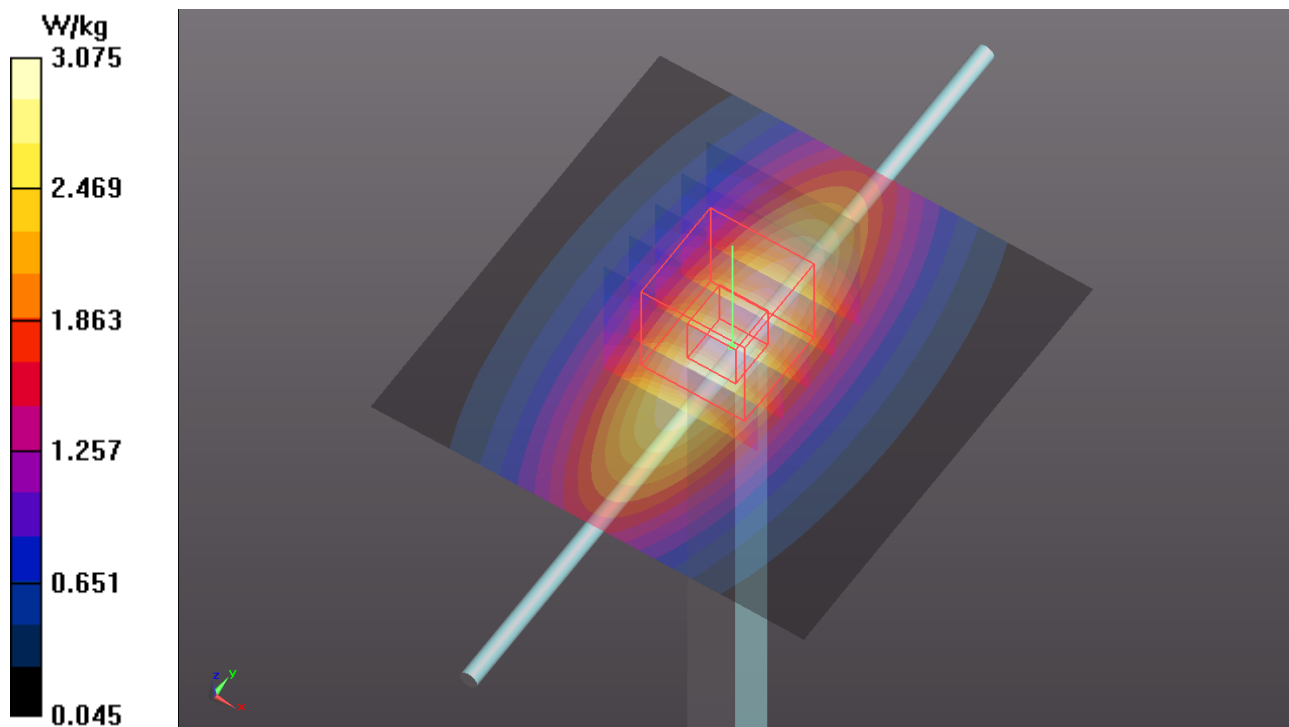

System Check_B1750_140513

DUT: Dipole 1750 MHz; Type: D1750V2; SN: 1055

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: B1750_0513 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.486$ S/m; $\epsilon_r = 52.091$; $\rho = 1000$ kg/m³


Ambient Temperature : 21.2°C; Liquid Temperature : 20.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(7.93, 7.93, 7.93); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1039
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 13.6 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 96.530 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 16.8 W/kg
SAR(1 g) = 9.68 W/kg; SAR(10 g) = 5.21 W/kg
Maximum value of SAR (measured) = 13.6 W/kg

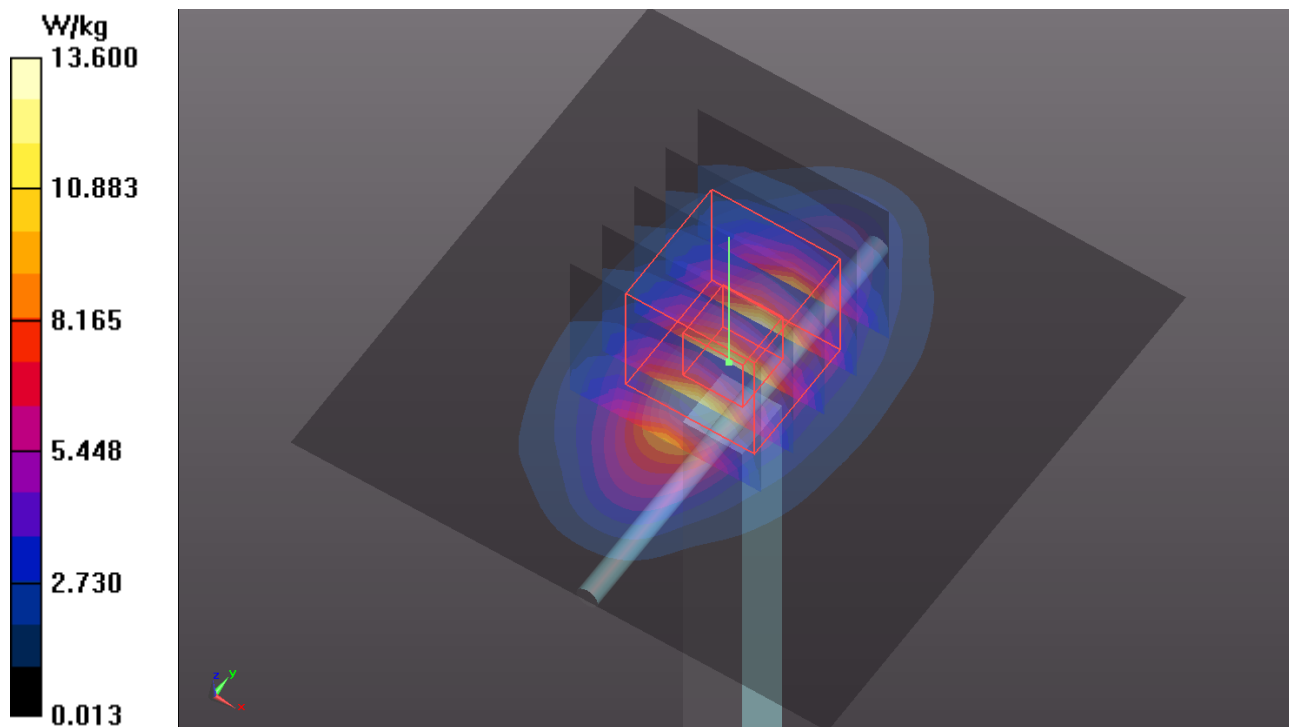

System Check_B1900_140514

DUT: Dipole 1900 MHz; Type: D1900V2; SN: 5d022

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: B1900_0514 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.578$ S/m; $\epsilon_r = 54.721$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.5°C; Liquid Temperature : 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(7.93, 7.93, 7.93); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1039
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 13.5 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 94.240 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 17.1 W/kg

SAR(1 g) = 9.42 W/kg; SAR(10 g) = 4.84 W/kg

Maximum value of SAR (measured) = 13.6 W/kg

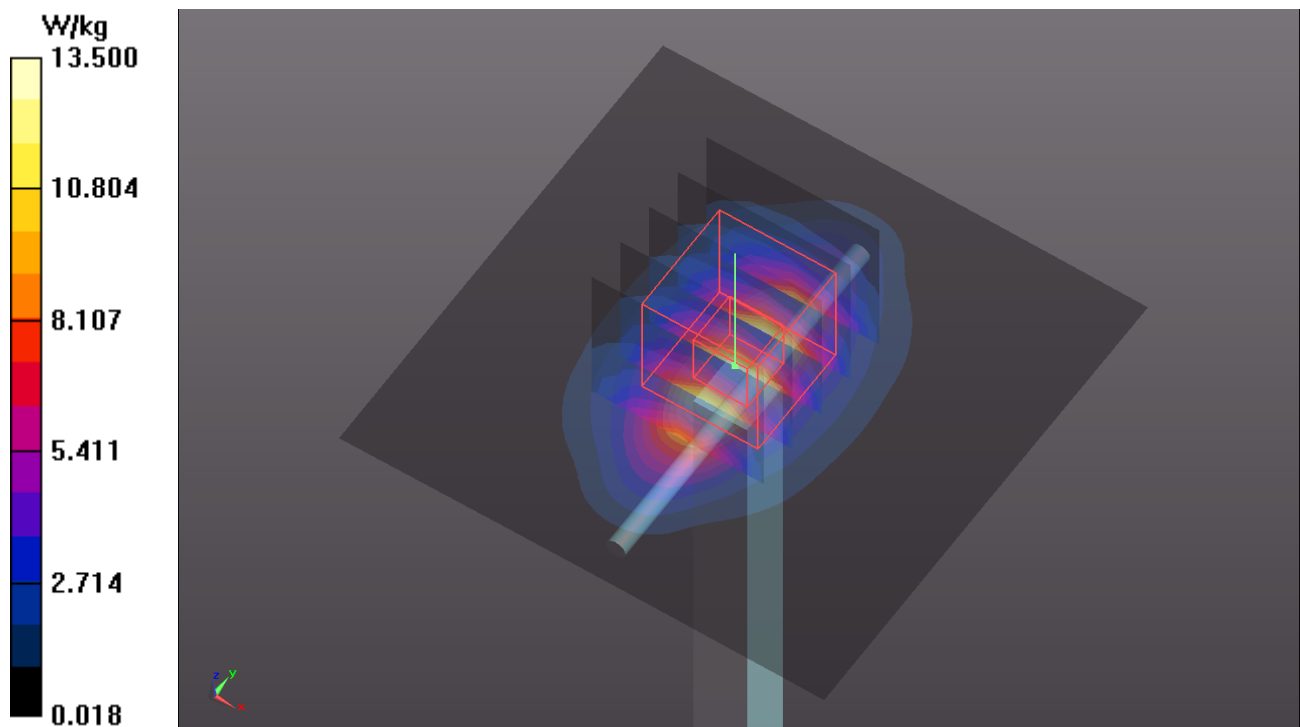



Appendix B. SAR Plots of SAR Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination, and measured SAR > 1.5 W/kg are shown as follows.

P01 GSM850_GPRS10_Rear Face_0mm_Ch128

DUT: 140313C20


Communication System: GPRS10; Frequency: 824.2 MHz; Duty Cycle: 1:4
Medium: B835_0513 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.963$ S/m; $\epsilon_r = 55.272$; $\rho = 1000$ kg/m³
Ambient Temperature : 21.8°C; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(9.74, 9.74, 9.74); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1039
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (121x171x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.668 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.781 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.842 W/kg
SAR(1 g) = 0.563 W/kg; SAR(10 g) = 0.370 W/kg
Maximum value of SAR (measured) = 0.695 W/kg

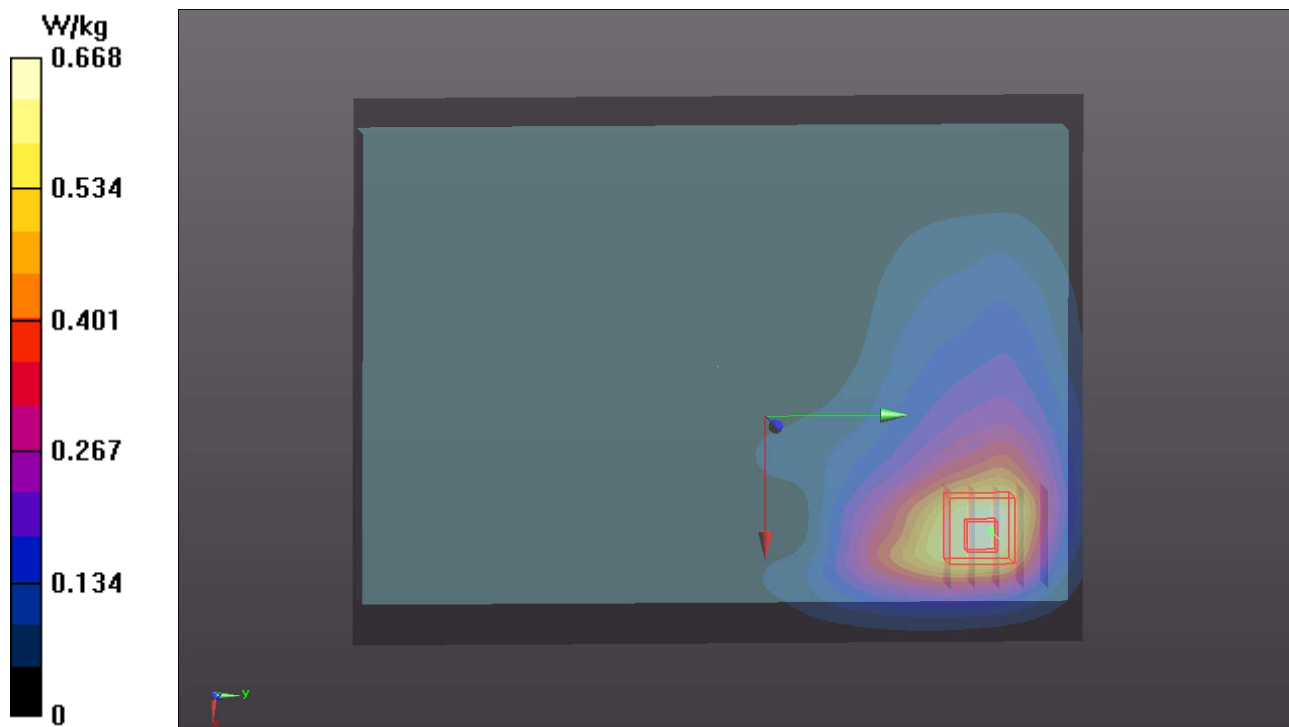

P02 GSM1900_GPRS10_Top Side_0mm_Ch661

DUT: 140313C20

Communication System: GPRS10; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: B1900_0513 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 54.572$; $\rho = 1000$ kg/m³


Ambient Temperature : 21.2°C; Liquid Temperature : 20.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.11, 8.11, 8.11); Calibrated: 2014/03/04;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2014/04/23
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1039
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (31x181x1)**: Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.573 W/kg

- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.604 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.923 W/kg
SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.275 W/kg
Maximum value of SAR (measured) = 0.586 W/kg

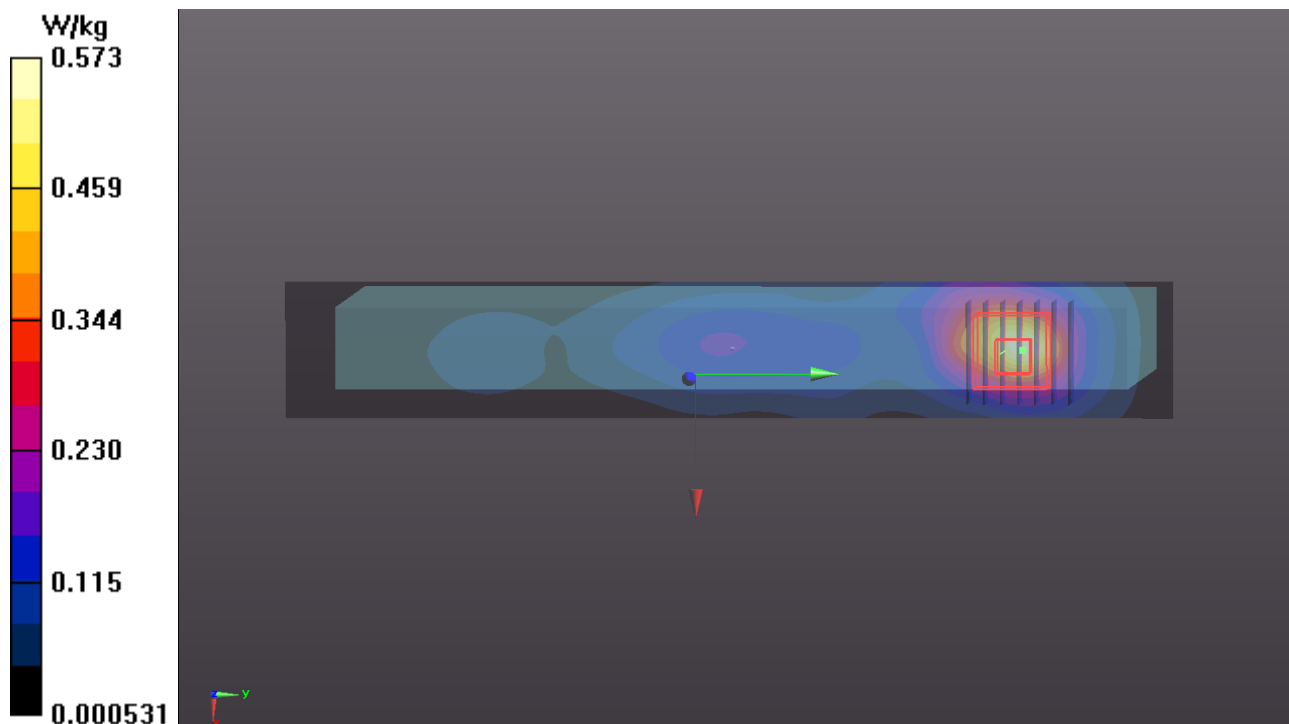

P03 WCDMA II_RMC12.2K_Top Side_5mm_Ch9262_w/o Pw Reduction

DUT: 140313C20

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: B1900_0513 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.517$ S/m; $\epsilon_r = 54.59$; $\rho =$

1000 kg/m³

Ambient Temperature : 21.2°C; Liquid Temperature : 20.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.11, 8.11, 8.11); Calibrated: 2014/03/04;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2014/04/23
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1039
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (31x181x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.543 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.183 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.797 W/kg

SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 0.561 W/kg

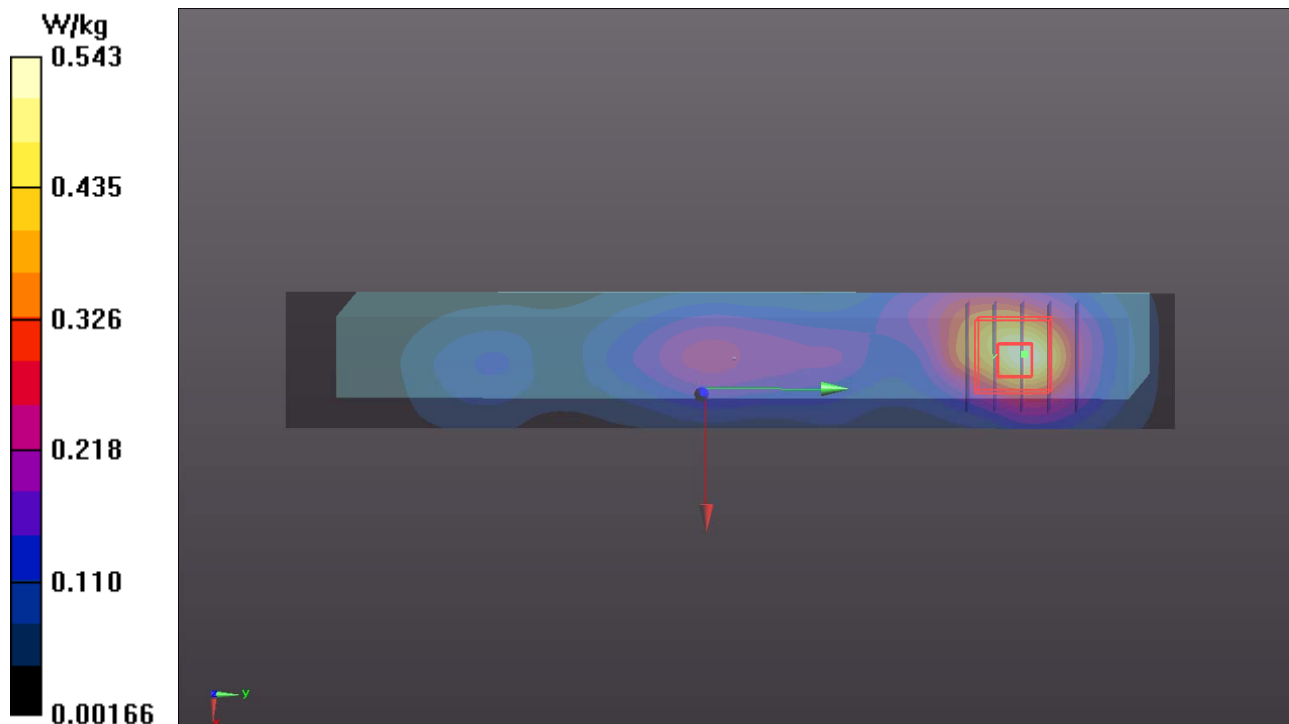

P04 WCDMA IV_RMC12.2K_Top Side_0mm_Ch1513

DUT: 140313C20

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: B1750_0513 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 52.078$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.2°C; Liquid Temperature : 20.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(7.93, 7.93, 7.93); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1039
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (31x161x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.23 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.541 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.927 W/kg; SAR(10 g) = 0.493 W/kg

Maximum value of SAR (measured) = 1.25 W/kg

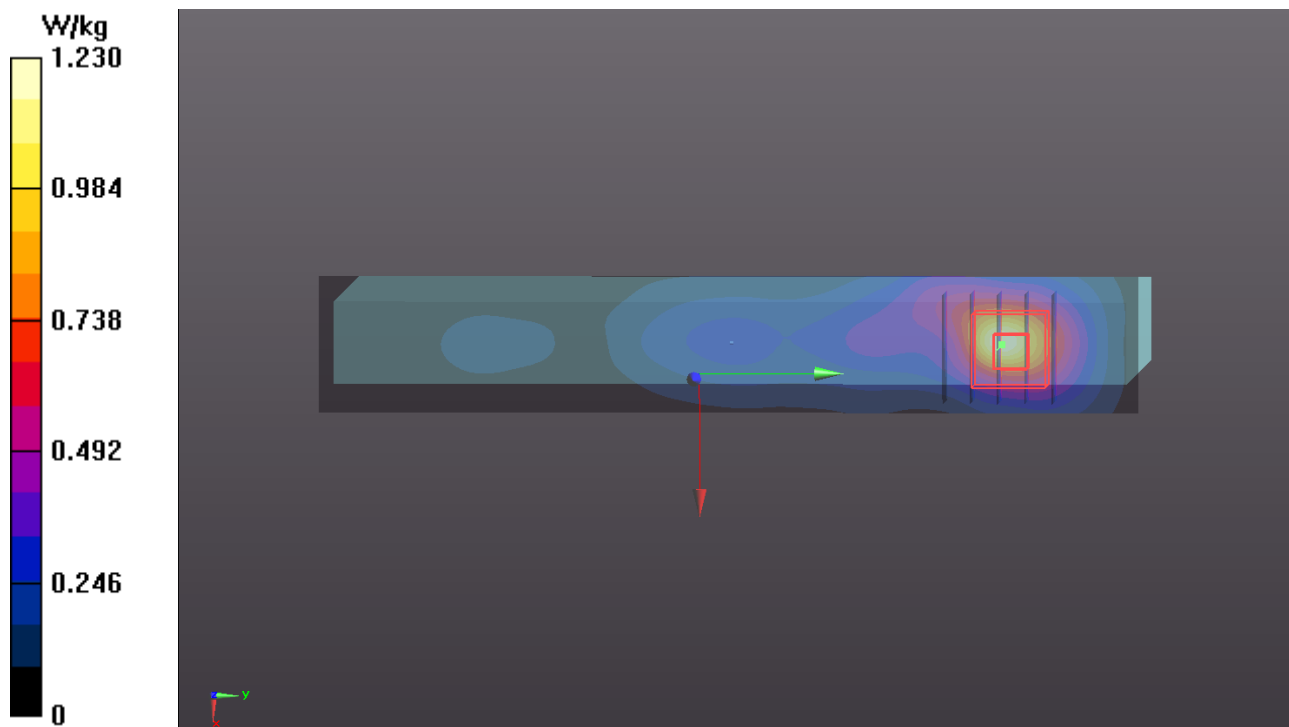

P05 WCDMA V_RMC12.2K_Rear Face_0mm_Ch4182

DUT: 140313C20

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: B835_0513 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.974$ S/m; $\epsilon_r = 55.199$; $\rho = 1000$ kg/m³


Ambient Temperature : 21.8°C; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(9.74, 9.74, 9.74); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1039
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (121x171x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.382 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.757 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 0.471 W/kg
SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.211 W/kg
Maximum value of SAR (measured) = 0.392 W/kg

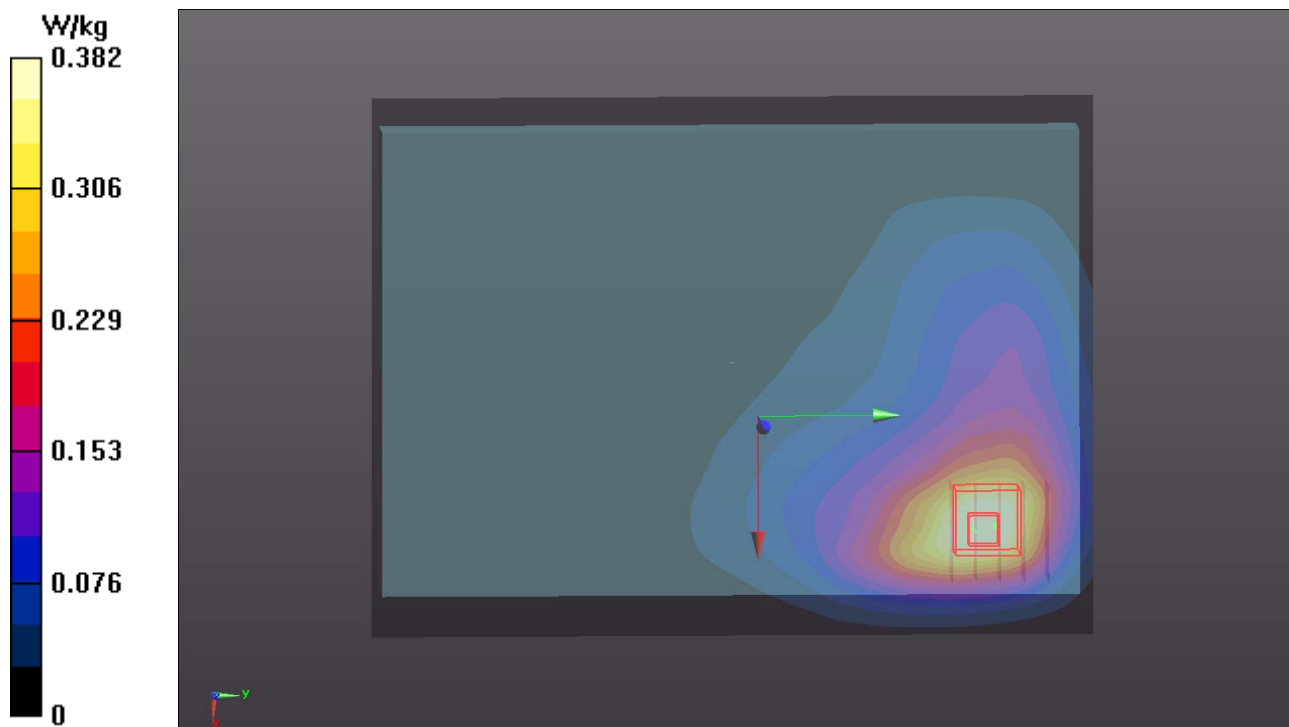

P06 CDMA BC0_RTAP153.6K_Rear Face_0mm_Ch1013

DUT: 140313C20

Communication System: CDMA2000; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: B835_0513 Medium parameters used: $f = 825$ MHz; $\sigma = 0.963$ S/m; $\epsilon_r = 55.266$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.7°C; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(9.74, 9.74, 9.74); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1039
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- Area Scan (91x121x1): Interpolated grid: dx=2.000 mm, dy=2.000 mm

Maximum value of SAR (interpolated) = 0.770 W/kg


- Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.047 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.984 W/kg

SAR(1 g) = 0.632 W/kg; SAR(10 g) = 0.411 W/kg

Maximum value of SAR (measured) = 0.790 W/kg

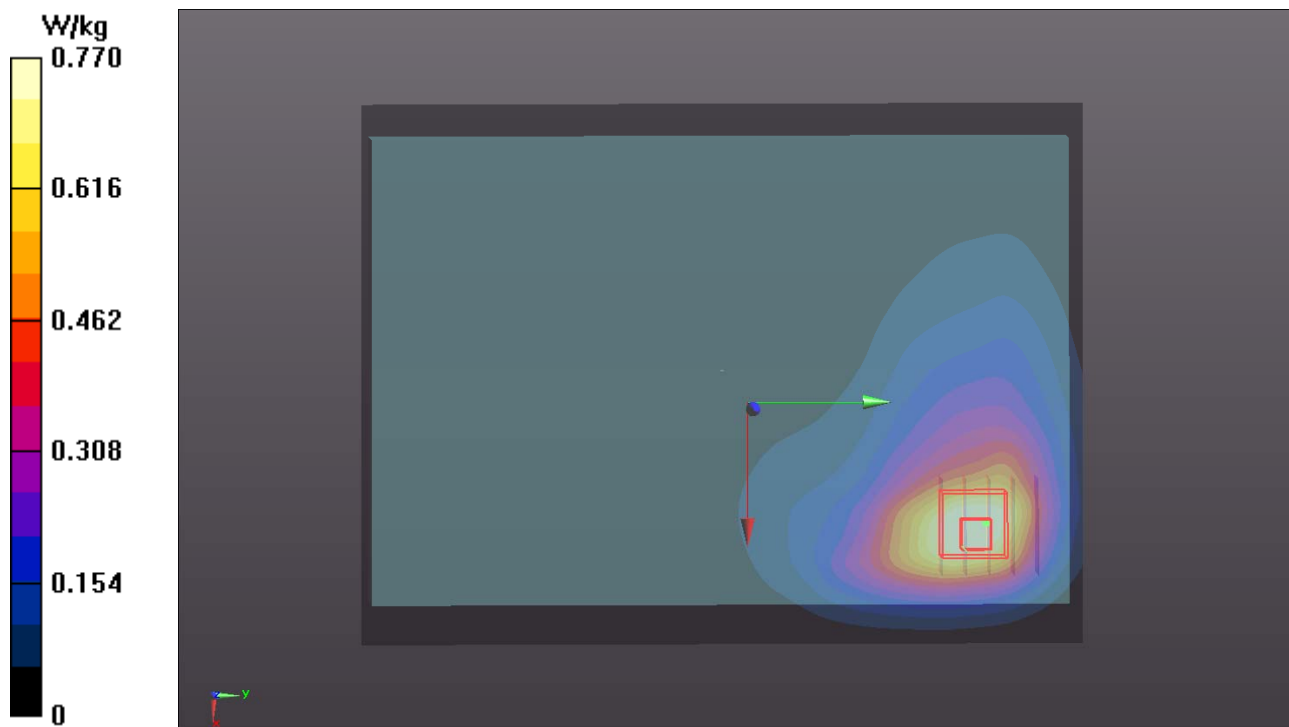

P07 CDMA BC1_RTAP153.6K_Top Side_0mm_Ch25_w/ Pw Reduction

DUT: 140313C20

Communication System: CDMA2000; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: B1900_0514 Medium parameters used: $f = 1851.25$ MHz; $\sigma = 1.533$ S/m; $\epsilon_r = 54.785$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.5°C; Liquid Temperature : 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(7.68, 7.68, 7.68); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1039
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (61x161x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.48 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.798 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.96 W/kg; SAR(10 g) = 0.547 W/kg

Maximum value of SAR (measured) = 1.46 W/kg

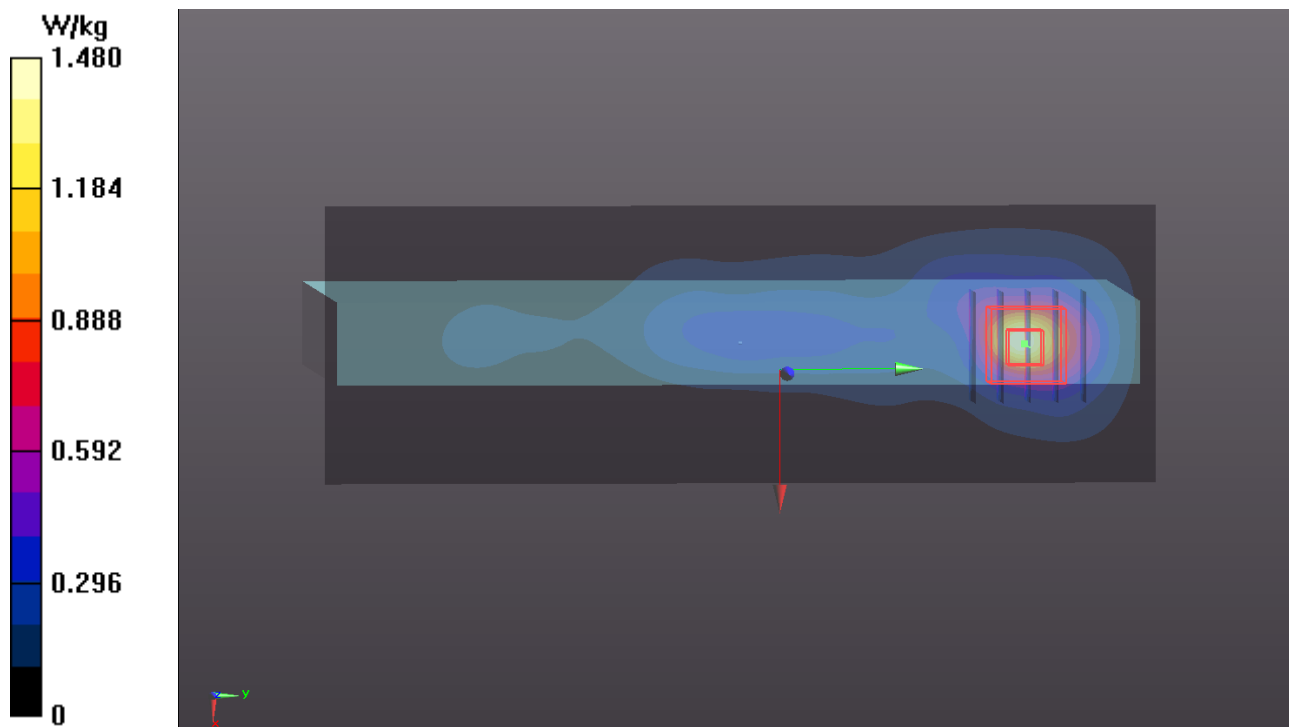

P08 CDMA BC10_RTAP153.6K_Rear Face_0mm_Ch476

DUT: 140313C20


Communication System: CDMA2000; Frequency: 817.9 MHz; Duty Cycle: 1:1
 Medium: B835_0522 Medium parameters used: $f = 818$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.62$; $\rho = 1000$ kg/m³
 Ambient Temperature : 22.1 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(9.74, 9.74, 9.74); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: ELI v5.0_Right; Type: QD OVA 002 AA; Serial: SN:1245
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (121x181x1)**: Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.823 W/kg

- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 4.161 V/m; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 0.953 W/kg
SAR(1 g) = 0.627 W/kg; SAR(10 g) = 0.398 W/kg
 Maximum value of SAR (measured) = 0.789 W/kg

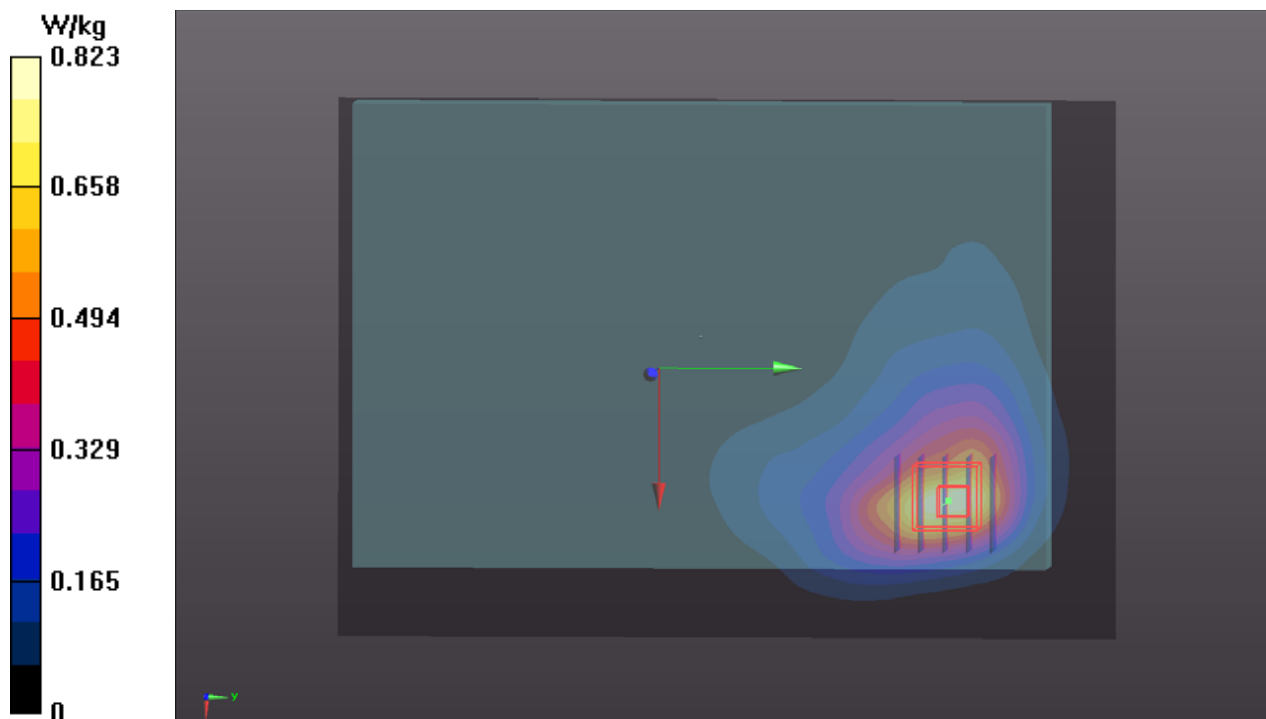

P09 LTE 2_QPSK_20M_Top Side_0mm_Ch18700_50RB_OS0

DUT: 140313C20

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: B1900_0513 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.522$ S/m; $\epsilon_r = 54.59$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.2°C; Liquid Temperature : 20.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.11, 8.11, 8.11); Calibrated: 2014/03/04;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2014/04/23
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1039
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (31x181x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.630 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.474 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.951 W/kg

SAR(1 g) = 0.548 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 0.676 W/kg

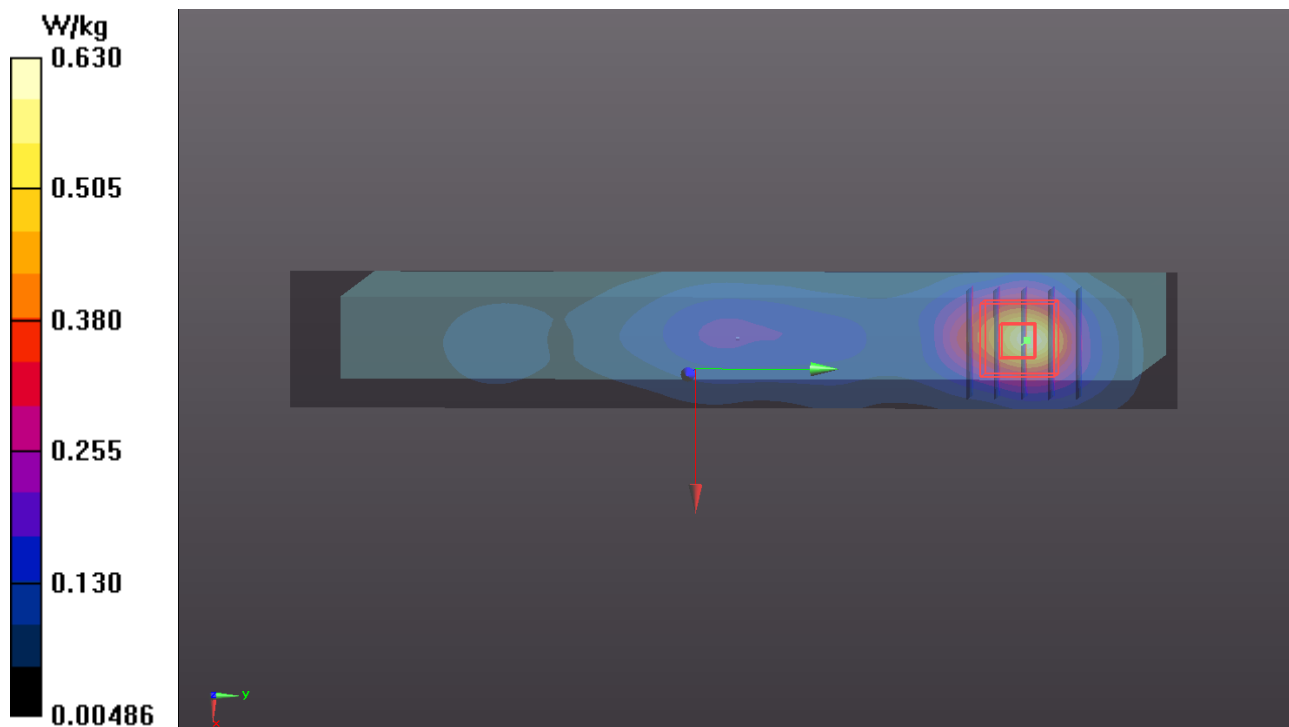

P10 LTE 4_QPSK_20M_Top Side_0mm_Ch20300_w/ Pw Reduction_1RB_OS0

DUT: 140313C20

Communication System: LTE; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: B1750_0514 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.491$ S/m; $\epsilon_r = 52.265$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.2°C; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(7.93, 7.93, 7.93); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1039
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (61x161x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.46 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.168 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.97 W/kg; SAR(10 g) = 0.544 W/kg

Maximum value of SAR (measured) = 1.36 W/kg

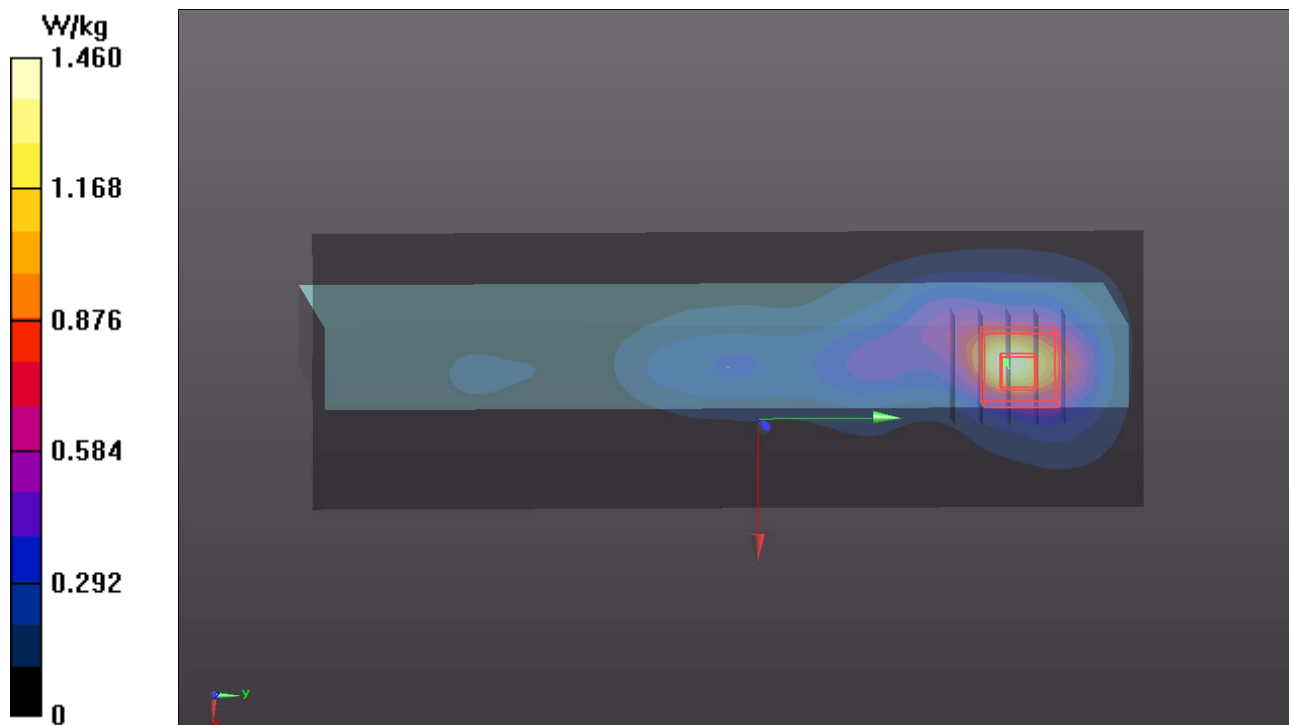

P11 LTE 5_QPSK_10M_Rear Face_0mm_Ch20525_1RB_OS24

DUT: 140313C20

Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: B835_0513 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.974$ S/m; $\epsilon_r = 55.198$; $\rho = 1000$ kg/m³


Ambient Temperature : 21.8°C; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(9.74, 9.74, 9.74); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1039
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (121x171x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.505 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.254 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.607 W/kg
SAR(1 g) = 0.389 W/kg; SAR(10 g) = 0.247 W/kg
Maximum value of SAR (measured) = 0.478 W/kg

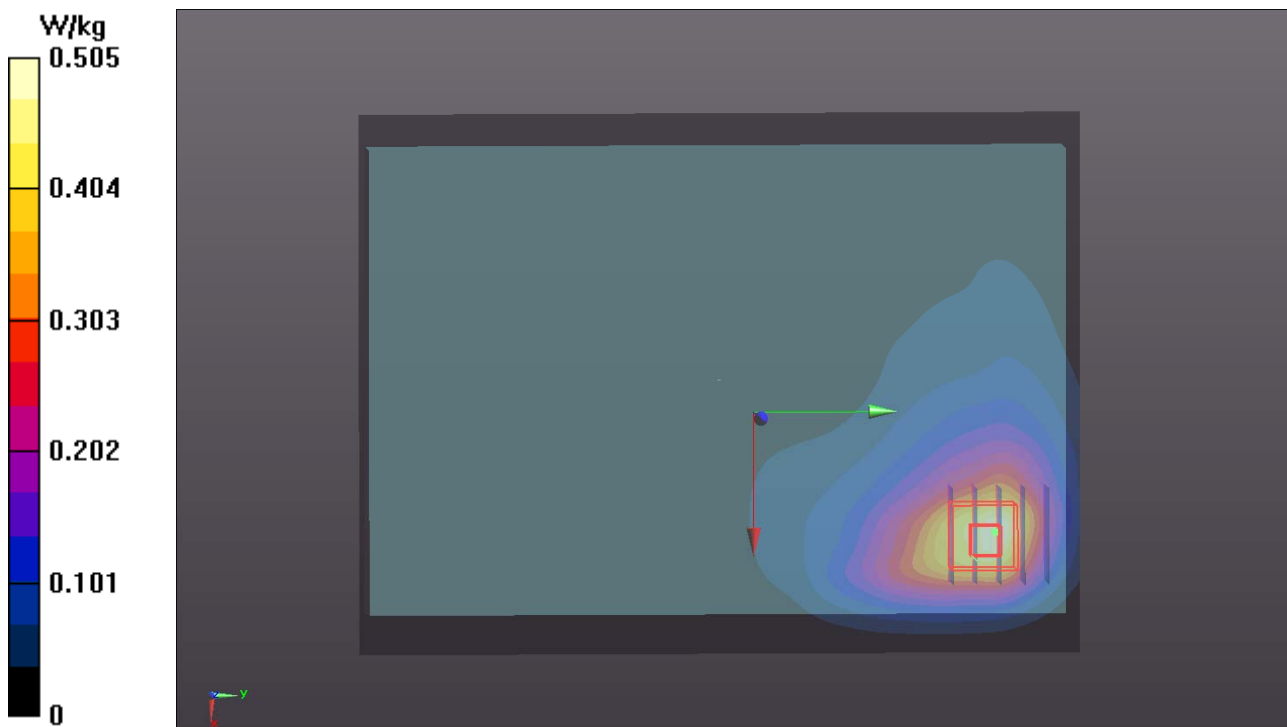

P12 LTE 13_QPSK_10M_Rear Face_0cm_Ch23230_1RB_OS24

DUT: 140313C20

Communication System: LTE; Frequency: 782.5 MHz; Duty Cycle: 1:1

Medium: B750_0513 Medium parameters used: $f = 782.5$ MHz; $\sigma = 0.994$ S/m; $\epsilon_r = 55.198$; $\rho = 1000$ kg/m³


Ambient Temperature : 21.7°C; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(9.91, 9.91, 9.91); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: ELI v4.0 Left; Type: QDOVA001BB; Serial: TP:1039
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (91x121x1):** Interpolated grid: dx=2.000 mm, dy=2.000 mm
Maximum value of SAR (interpolated) = 0.793 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.084 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 1.04 W/kg
SAR(1 g) = 0.684 W/kg; SAR(10 g) = 0.442 W/kg
Maximum value of SAR (measured) = 0.853 W/kg

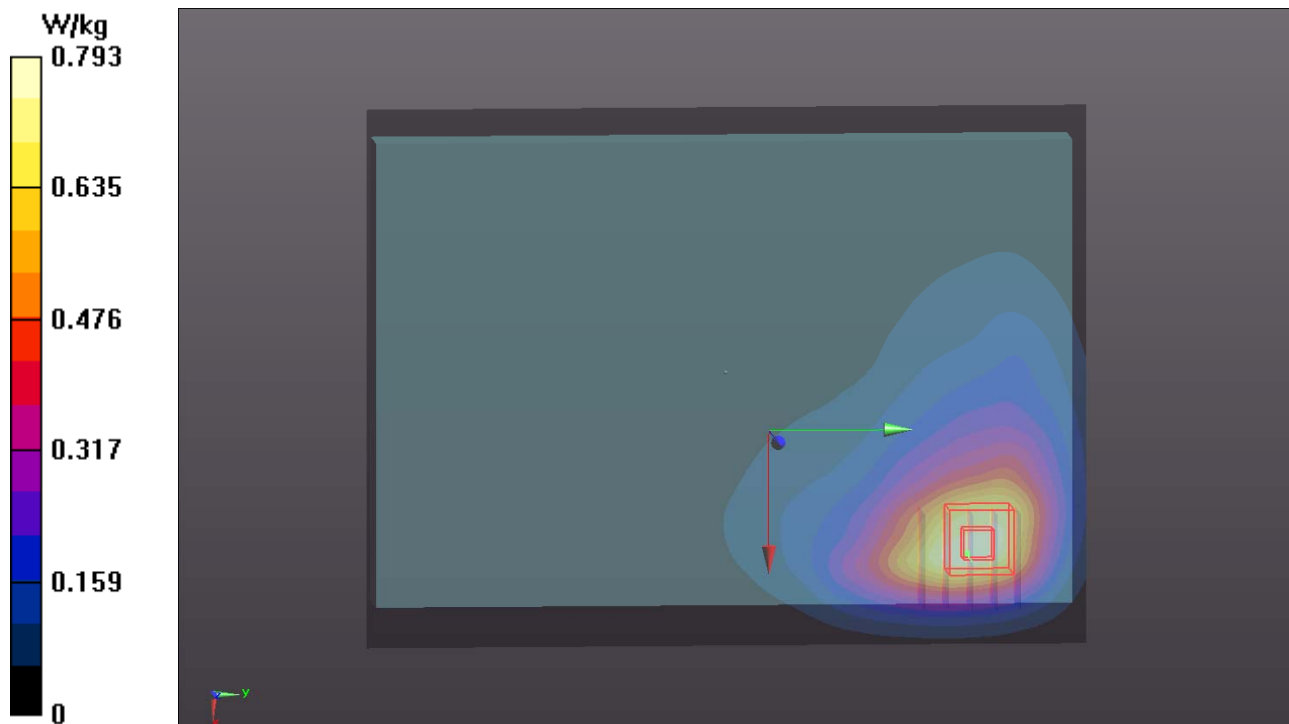

P13 LTE 17_QPSK_10M_Rear Face_0mm_Ch23780_1RB_OS24

DUT: 140313C20

Communication System: LTE; Frequency: 709 MHz; Duty Cycle: 1:1

Medium: B750_0513 Medium parameters used: $f = 709$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 55.855$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.7°C; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3971; ConvF(9.91, 9.91, 9.91); Calibrated: 2014/03/31;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1431; Calibrated: 2014/03/24
- Phantom: ELI v4.0 Left; Type: QDOVA001BB; Serial: TP:1039
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (121x181x1)**: Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.05 W/kg


- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.212 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.821 W/kg; SAR(10 g) = 0.571 W/kg

Maximum value of SAR (measured) = 0.918 W/kg

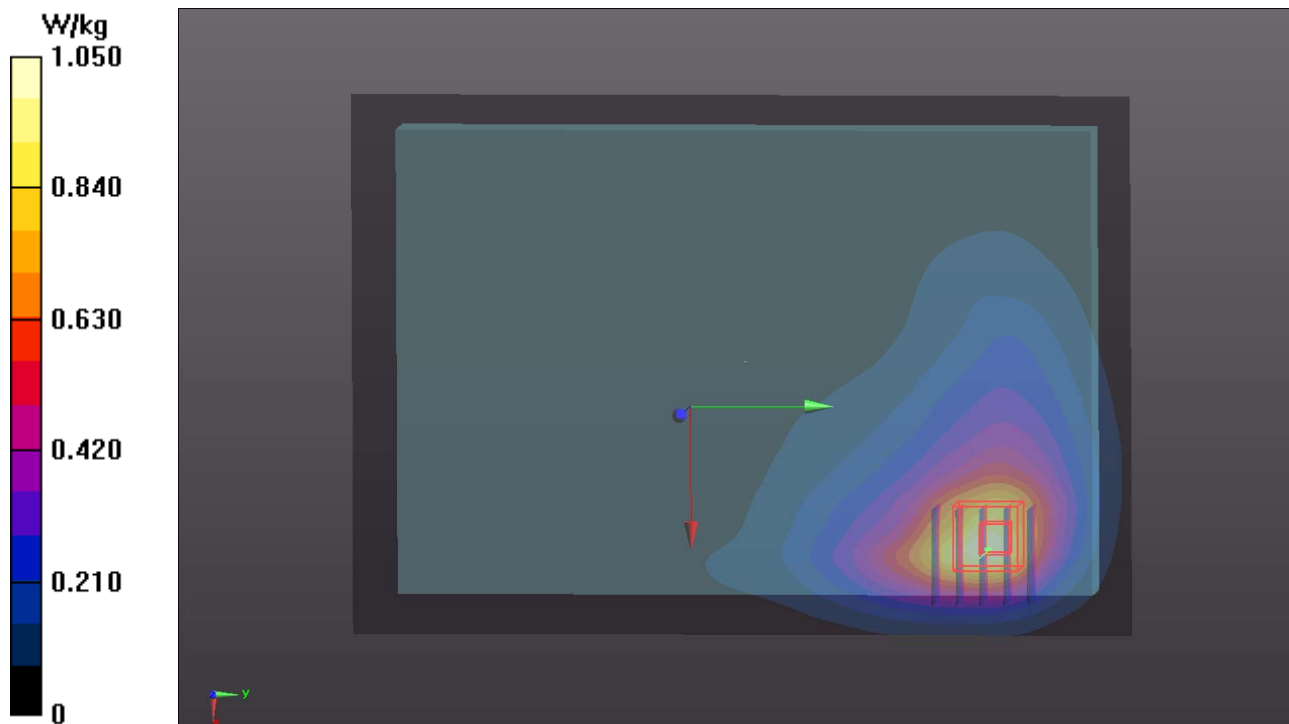

P14 LTE 25_QPSK_20M_Top Side_0cm_Ch26140_50RB_OS0

DUT: 140313C20

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: B1900_0513 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.522$ S/m; $\epsilon_r = 54.59$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.2°C; Liquid Temperature : 20.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.11, 8.11, 8.11); Calibrated: 2014/03/04;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2014/04/23
- Phantom: ELI v4.0_Left; Type: QDOVA001BB; Serial: TP:1039
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (31x181x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.649 W/kg


- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.369 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.978 W/kg

SAR(1 g) = 0.561 W/kg; SAR(10 g) = 0.297 W/kg

Maximum value of SAR (measured) = 0.676 W/kg

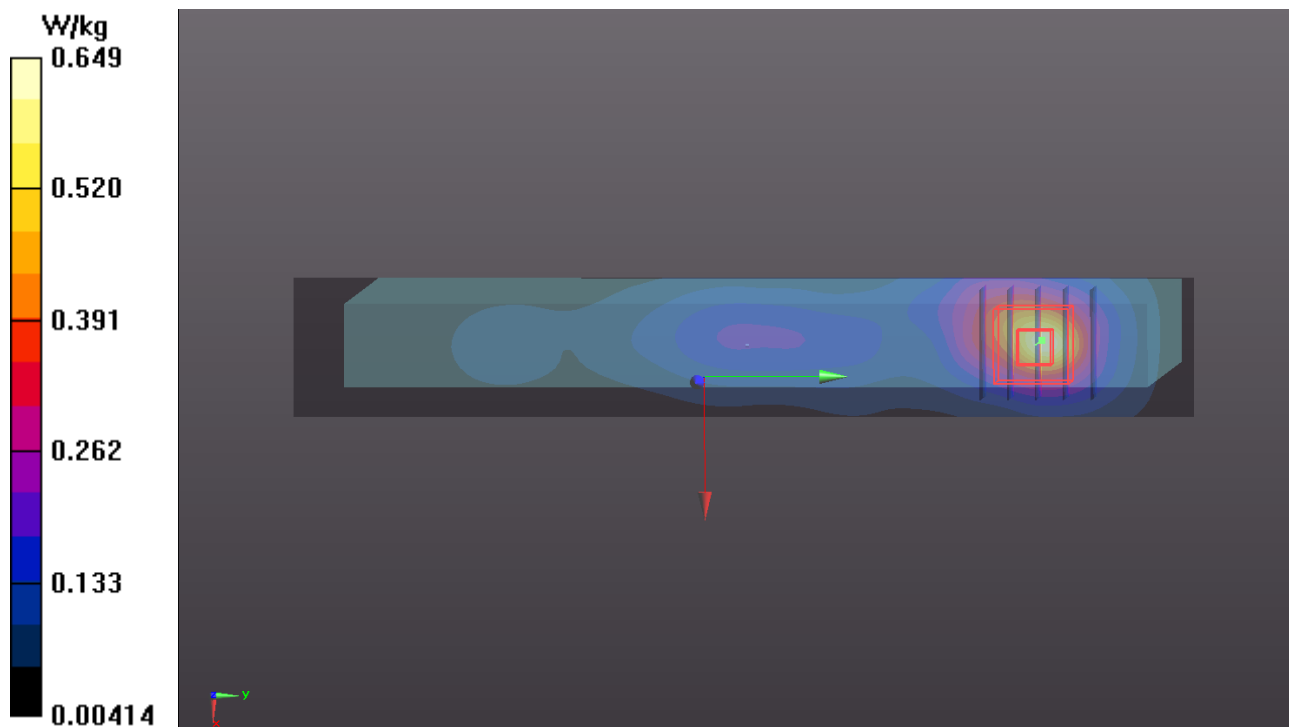



Appendix C. Calibration Certificate for Probe and Dipole

The SPEAG calibration certificates are shown as follows.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **D750V3-1013_Apr13**

CALIBRATION CERTIFICATE

Object **D750V3 - SN: 1013**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **April 25, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 01-Nov-12 (No. 217-01640) | Oct-13 |
| Power sensor HP 8481A | US37292783 | 01-Nov-12 (No. 217-01640) | Oct-13 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 04-Apr-13 (No. 217-01736) | Apr-14 |
| Type-N mismatch combination | SN: 5047.3 / 06327 | 04-Apr-13 (No. 217-01739) | Apr-14 |
| Reference Probe ES3DV3 | SN: 3205 | 28-Dec-12 (No. ES3-3205_Dec12) | Dec-13 |
| DAE4 | SN: 909 | 11-Sep-12 (No. DAE4-909_Sep12) | Sep-13 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-11) | In house check: Oct-13 |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-11) | In house check: Oct-13 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |

Calibrated by: **Claudio Leubler** Name: Claudio Leubler Function: Laboratory Technician

Approved by: **Katja Pokovic** Name: Katja Pokovic Function: Technical Manager

Signature

Issued: April 26, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|-------------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.6 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 15 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 750 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|---------------------|----------------|----------------------|
| Nominal Head TSL parameters | 22.0 °C | 41.9 | 0.89 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 41.0 \pm 6 % | 0.92 mho/m \pm 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm³ (1 g) of Head TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 2.23 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 8.66 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Head TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 1.45 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 5.66 W/kg \pm 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|---------------------|----------------|----------------------|
| Nominal Body TSL parameters | 22.0 °C | 55.5 | 0.96 mho/m |
| Measured Body TSL parameters | (22.0 \pm 0.2) °C | 54.1 \pm 6 % | 0.98 mho/m \pm 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm³ (1 g) of Body TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 2.25 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 8.81 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Body TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 1.48 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 5.82 W/kg \pm 16.5 % (k=2) |

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|-------------------------------|
| Impedance, transformed to feed point | 53.5 Ω - 0.7 $j\Omega$ |
| Return Loss | - 29.3 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|-------------------------------|
| Impedance, transformed to feed point | 48.8 Ω - 2.8 $j\Omega$ |
| Return Loss | - 30.3 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.036 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|----------------|
| Manufactured by | SPEAG |
| Manufactured on | March 22, 2010 |

DASY5 Validation Report for Head TSL

Date: 25.04.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1013

Communication System: UID 0 – CW, Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.28, 6.28, 6.28); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn909; Calibrated: 11.09.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x8x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.217 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.44 W/kg

SAR(1 g) = 2.23 W/kg; SAR(10 g) = 1.45 W/kg

Maximum value of SAR (measured) = 2.60 W/kg

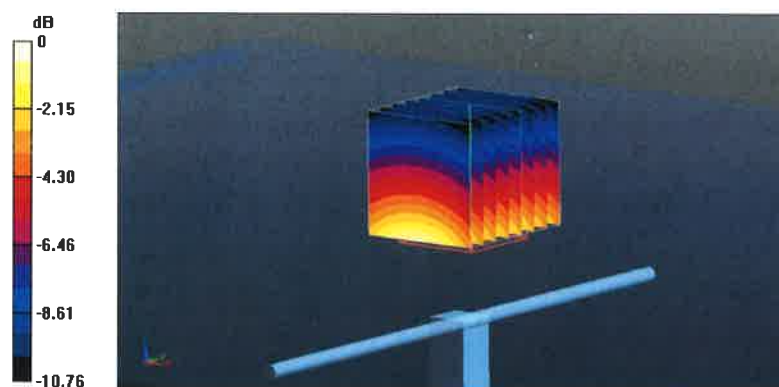


0 dB = 2.60 W/kg = 4.15 dBW/kg

Impedance Measurement Plot for Head TSL

25 Apr 2013 13:41:42


CH1 S11 1 U FS 1: 53.498 Ω -662.11 m Ω 320.50 pF 750.000 000 MHz

*
De1
Cor
Avg
0
H1d

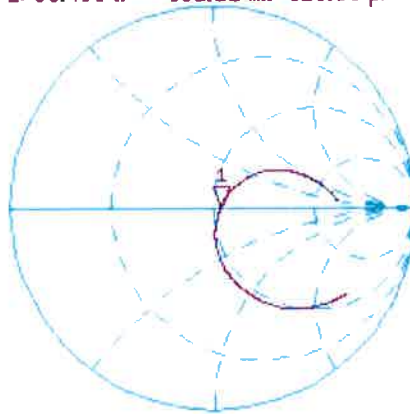

CH2 S11 LOG 5 dB/REF -20 dB 1:-29.272 dB 750.000 000 MHz

Cor
Avg
0
H1d

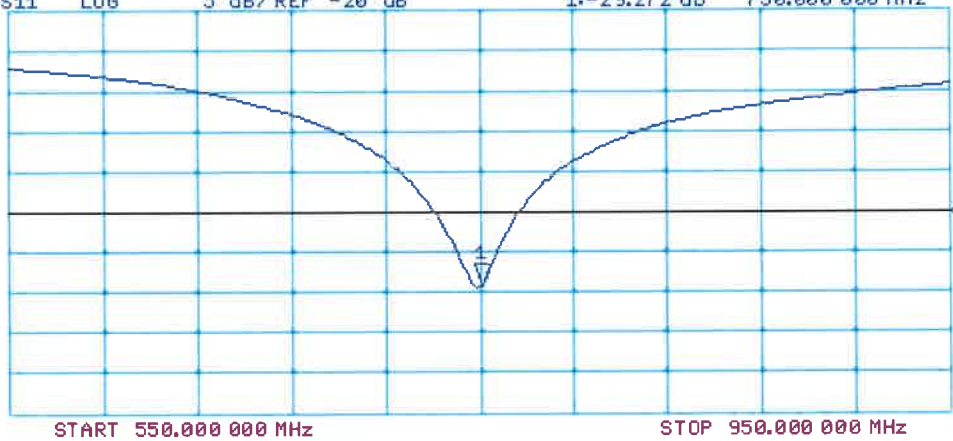

DASY5 Validation Report for Body TSL

Date: 25.04.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1013

Communication System: UID 0 - CW Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.11, 6.11, 6.11); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn909; Calibrated: 11.09.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.330 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.32 W/kg

SAR(1 g) = 2.25 W/kg; SAR(10 g) = 1.48 W/kg

Maximum value of SAR (measured) = 2.62 W/kg

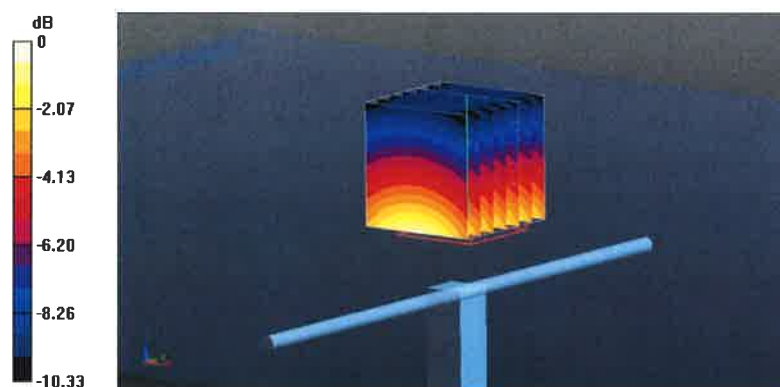


0 dB = 2.62 W/kg = 4.18 dBW/kg

Impedance Measurement Plot for Body TSL

25 Apr 2013 16:47:36

CH1 S11 1 U FS 1: 48.809 Ω -2.7578 Ω 76.947 pF 750.000 000 MHz

*
De1
Cor

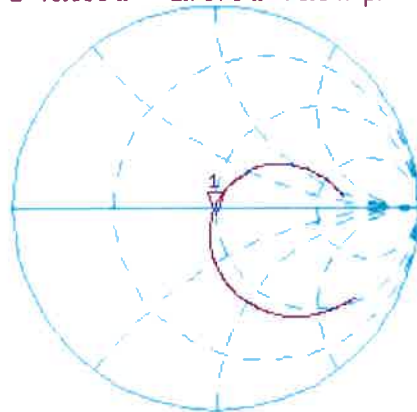

Avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-30.343 dB 750.000 000 MHz

Cor

Avg
16

H1d

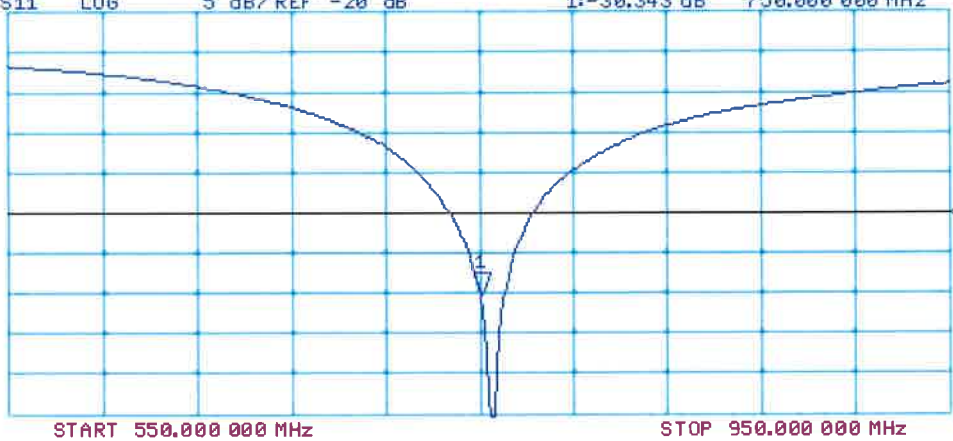



A D T



Annual Confirmation of SAR Reference Dipole

Model: D750V3



S/N : 1013

Measured Date : Apr. 24, 2014

| Frequency (MHz) | Type | Item | Previous Measurement | Annual Check | Deviation | Accepted Tolerance | Note |
|-----------------|----------|---------------------|----------------------|----------------|-----------|--------------------|-------------|
| 750 | Head TSL | Return Loss | -29.272 | -30.125 | 2.9 % | ±20 % | PASS |
| | | Real Impedance | 53.498 | 52.443 | -1.055 | ±5 Ω | PASS |
| | | Imaginary Impedance | -0.66211 | -1.9648 | -1.30269 | ±5 Ω | PASS |
| 750 | Body TSL | Return Loss | -30.343 | -29.365 | -3.2 % | ±20 % | PASS |
| | | Real Impedance | 48.809 | 48.898 | 0.089 | ±5 Ω | PASS |
| | | Imaginary Impedance | -2.7578 | -3.4515 | -0.6937 | ±5 Ω | PASS |

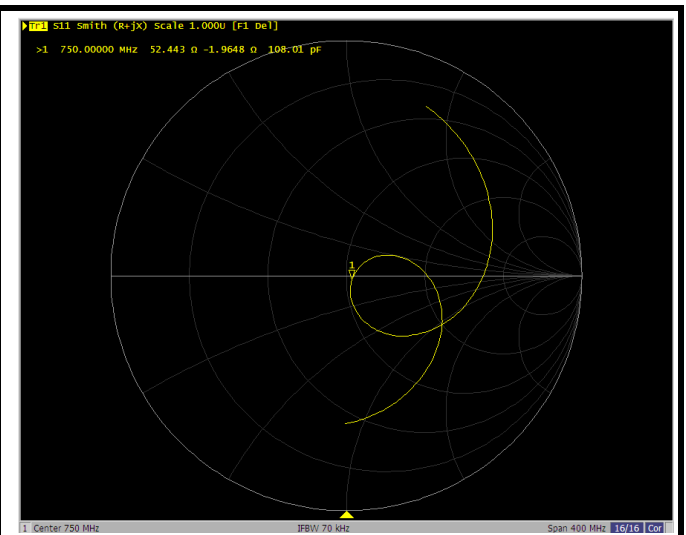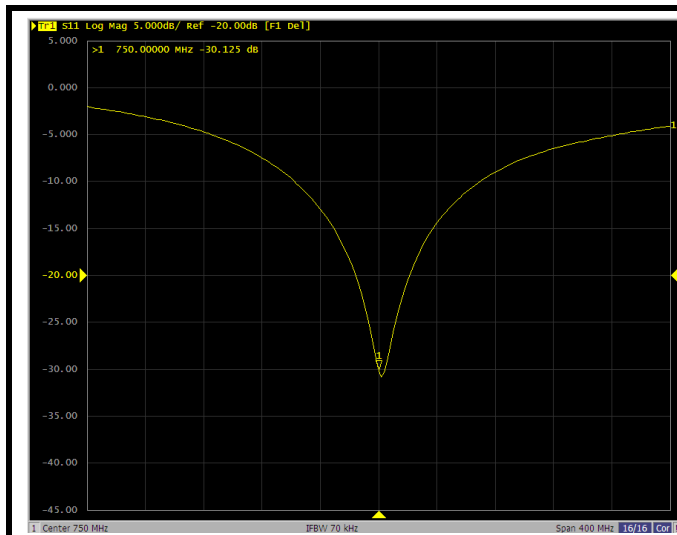

750 MHz, Head TSL

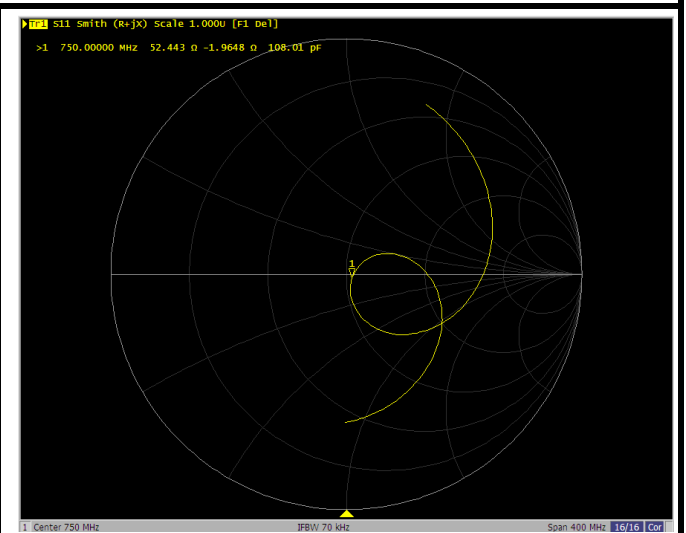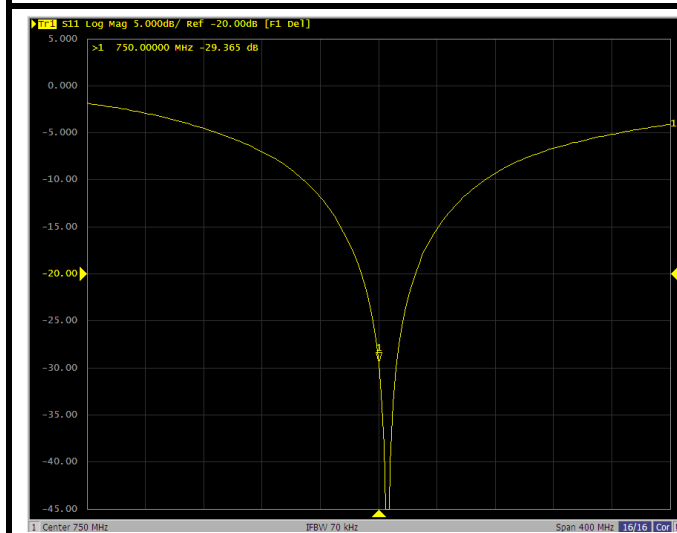

750 MHz, Body TSL



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **D835V2-4d121_Apr13**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d121**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **April 25, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 01-Nov-12 (No. 217-01640) | Oct-13 |
| Power sensor HP 8481A | US37292783 | 01-Nov-12 (No. 217-01640) | Oct-13 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 04-Apr-13 (No. 217-01736) | Apr-14 |
| Type-N mismatch combination | SN: 5047.3 / 06327 | 04-Apr-13 (No. 217-01739) | Apr-14 |
| Reference Probe ES3DV3 | SN: 3205 | 28-Dec-12 (No. ES3-3205_Dec12) | Dec-13 |
| DAE4 | SN: 909 | 11-Sep-12 (No. DAE4-909_Sep12) | Sep-13 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-11) | In house check: Oct-13 |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-11) | In house check: Oct-13 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |

Calibrated by: **Claudio Leubler** Name: Claudio Leubler Function: Laboratory Technician

Approved by: **Katja Pokovic** Name: Katja Pokovic Function: Technical Manager

Signature

Issued: April 26, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|-------------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.6 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 15 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 835 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|---------------------|---------------------|----------------------|
| Nominal Head TSL parameters | 22.0 °C | 41.5 | 0.90 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 40.8 \pm 6 % | 0.94 mho/m \pm 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm³ (1 g) of Head TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 2.51 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 9.68 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Head TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 1.62 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 6.30 W/kg \pm 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|---------------------|---------------------|----------------------|
| Nominal Body TSL parameters | 22.0 °C | 55.2 | 0.97 mho/m |
| Measured Body TSL parameters | (22.0 \pm 0.2) °C | 54.0 \pm 6 % | 1.01 mho/m \pm 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm³ (1 g) of Body TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 2.51 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 9.69 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Body TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 1.64 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 6.38 W/kg \pm 16.5 % (k=2) |

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 52.4 Ω - 2.1 j Ω |
| Return Loss | - 30.2 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.4 Ω - 3.8 j Ω |
| Return Loss | - 26.6 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.395 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|---------------|
| Manufactured by | SPEAG |
| Manufactured on | June 29, 2010 |

DASY5 Validation Report for Head TSL

Date: 25.04.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d121

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.05, 6.05, 6.05); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn909; Calibrated: 11.09.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.380 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.86 W/kg

SAR(1 g) = 2.51 W/kg; SAR(10 g) = 1.62 W/kg

Maximum value of SAR (measured) = 2.94 W/kg

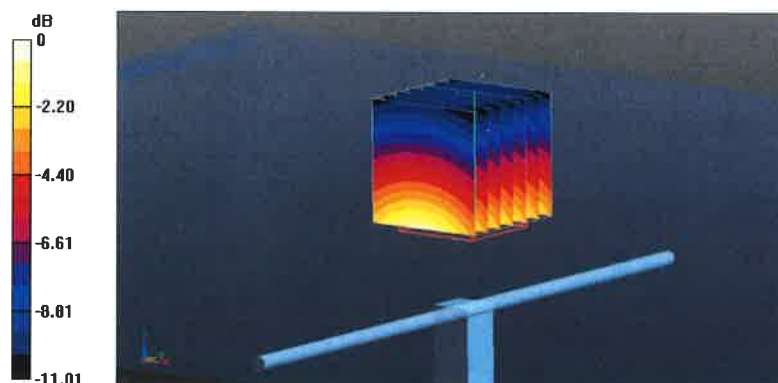

0 dB = 2.94 W/kg = 4.68 dBW/kg

Impedance Measurement Plot for Head TSL

25 Apr 2013 09:13:26

[CH1] S11 1 U FS

1: 52.387 Ω -2.0566 Ω 92.678 pF

835.000 000 MHz

*


De1

CA

Avg

16

H1d

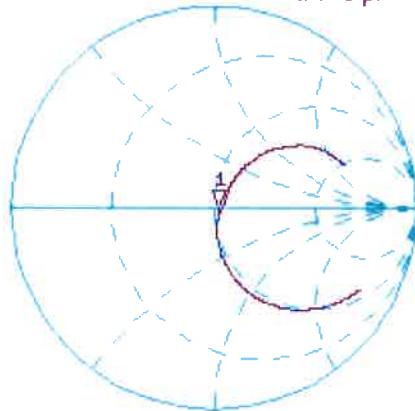


CH2 S11 LOG 5 dB/REF -20 dB 1:-30.231 dB 835.000 000 MHz

CA

Avg

16

H1d

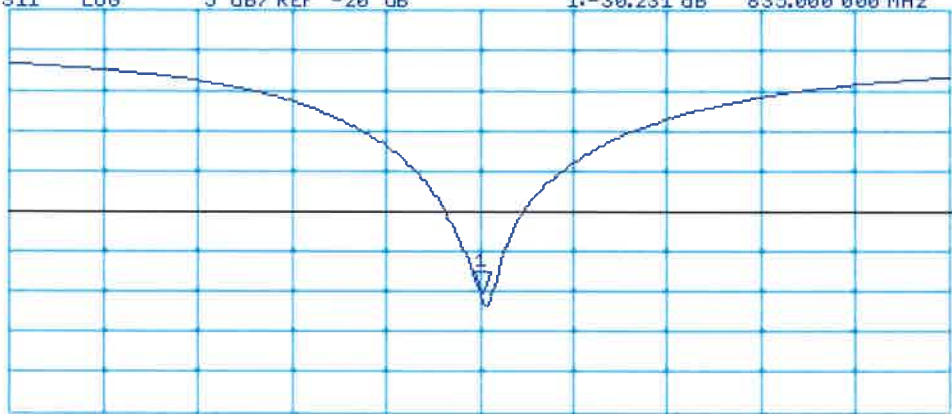

START 635.000 000 MHz

STOP 1 035.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 24.04.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d121

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 1.01$ S/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.04, 6.04, 6.04); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn909; Calibrated: 11.09.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.573 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.72 W/kg

SAR(1 g) = 2.51 W/kg; SAR(10 g) = 1.64 W/kg

Maximum value of SAR (measured) = 2.93 W/kg

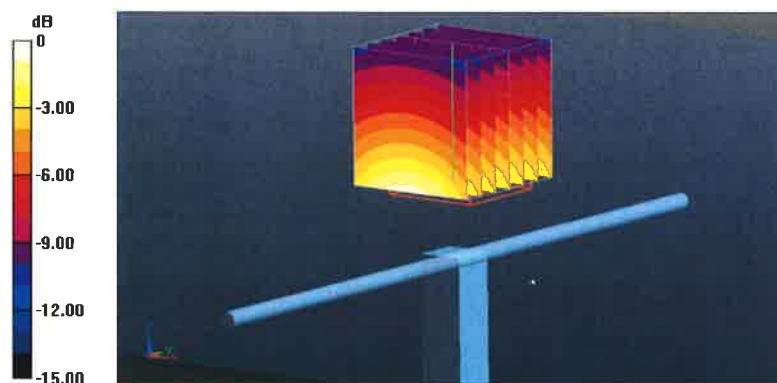

Impedance Measurement Plot for Body TSL

24 Apr 2013 11:36:25


CH1 S11 1 U FS 2: 47.438 Ω -3.7910 Ω 50.278 μF 835.000 000 MHz

*
De 1

CA

Avg
16

H1 d

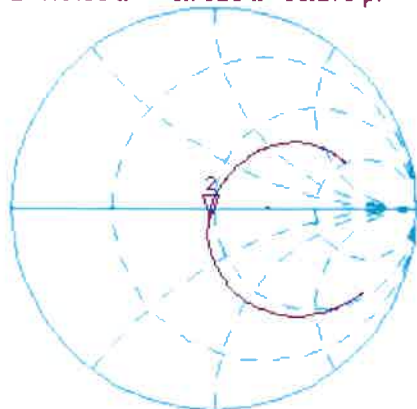


CH2 S11 LOG 5 dB/ REF -20 dB 2: -26.570 dB 835.000 000 MHz

CA

Avg
16

H1 d

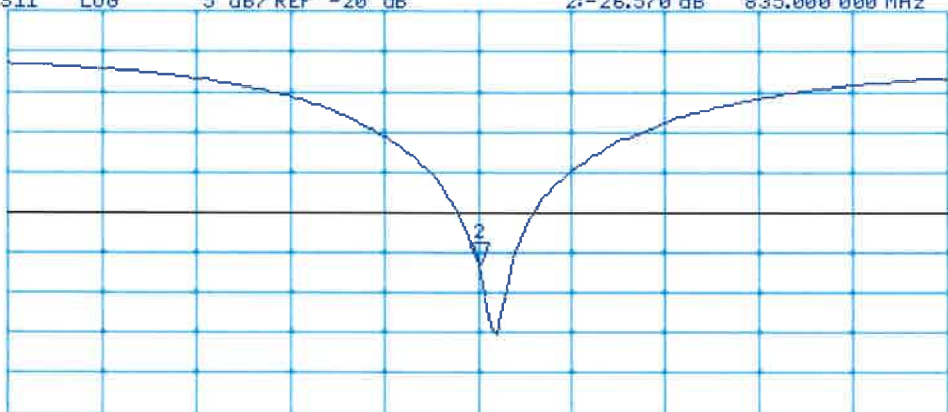

START 635.000 000 MHz

STOP 1 035.000 000 MHz



A D T



Annual Confirmation of SAR Reference Dipole

Model: D835V2



S/N : 4d121

Measured Date : Apr. 24, 2014

| Frequency (MHz) | Type | Item | Previous Measurement | Annual Check | Deviation | Accepted Tolerance | Note |
|-----------------|----------|---------------------|----------------------|----------------|-----------|--------------------|-------------|
| 835 | Head TSL | Return Loss | -30.231 | -29.447 | -2.6 % | ±20 % | PASS |
| | | Real Impedance | 52.387 | 49.407 | -2.98 | ±5 Ω | PASS |
| | | Imaginary Impedance | -2.0566 | -3.3194 | -1.2628 | ±5 Ω | PASS |
| 835 | Body TSL | Return Loss | -26.57 | -25.576 | -3.7 % | ±20 % | PASS |
| | | Real Impedance | 47.438 | 46.948 | -0.49 | ±5 Ω | PASS |
| | | Imaginary Impedance | -3.791 | -4.0984 | -0.3074 | ±5 Ω | PASS |

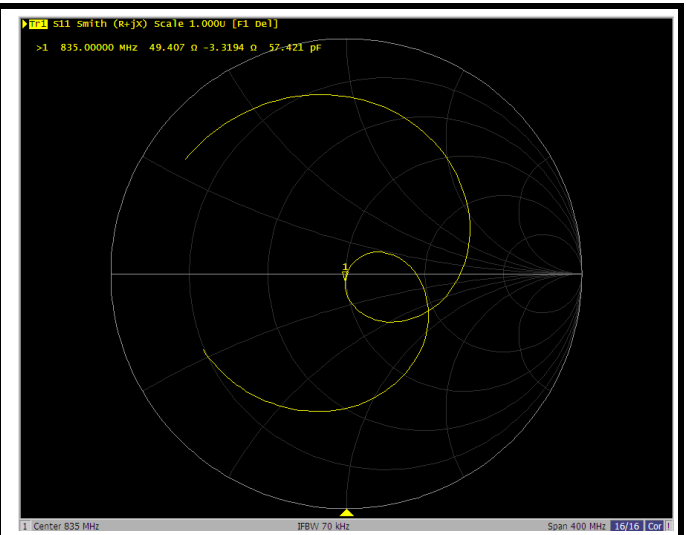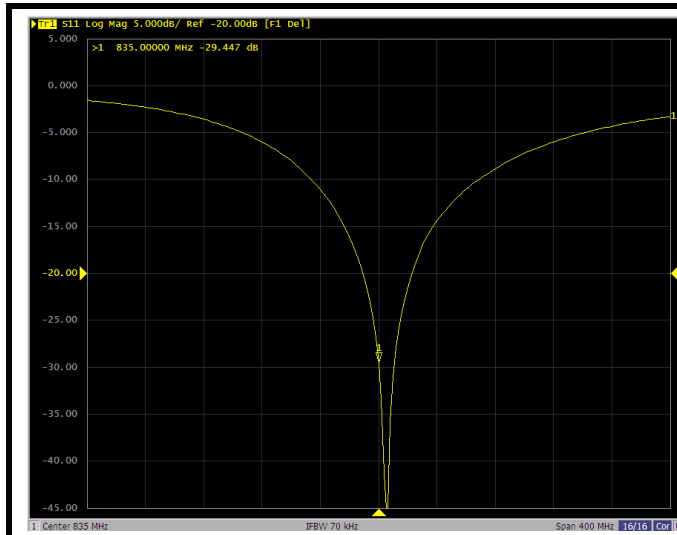

835 MHz, Head TSL

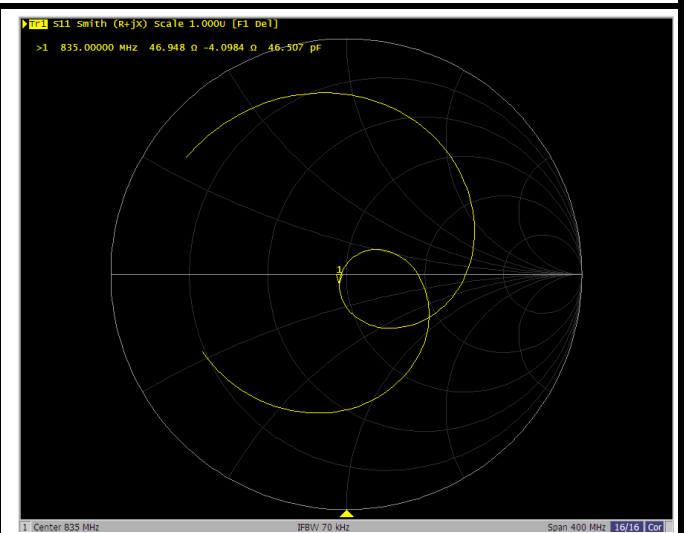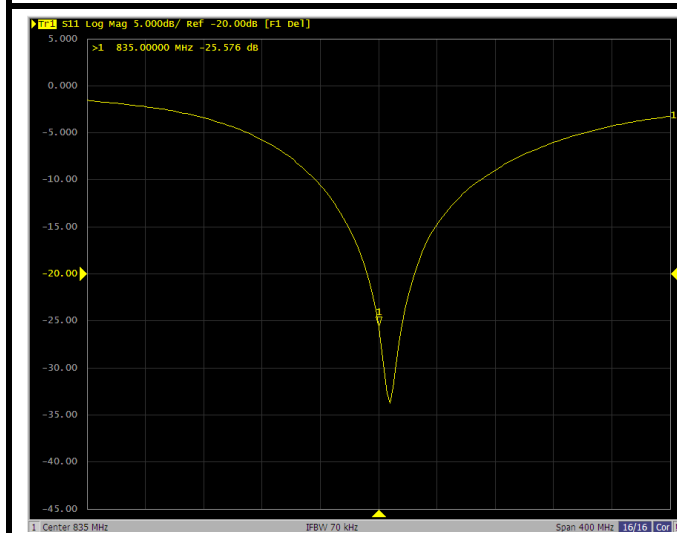

835 MHz, Body TSL



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **D1750V2-1055_Aug13**

CALIBRATION CERTIFICATE

Object **D1750V2 - SN: 1055**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **August 27, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 01-Nov-12 (No. 217-01640) | Oct-13 |
| Power sensor HP 8481A | US37292783 | 01-Nov-12 (No. 217-01640) | Oct-13 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 04-Apr-13 (No. 217-01736) | Apr-14 |
| Type-N mismatch combination | SN: 5047.3 / 06327 | 04-Apr-13 (No. 217-01739) | Apr-14 |
| Reference Probe ES3DV3 | SN: 3205 | 28-Dec-12 (No. ES3-3205_Dec12) | Dec-13 |
| DAE4 | SN: 601 | 25-Apr-13 (No. DAE4-601_Apr13) | Apr-14 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-11) | In house check: Oct-13 |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-11) | In house check: Oct-13 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |

| | | | |
|----------------|-------------------------------|--|---------------|
| Calibrated by: | Name Israe El-Naouq | Function Laboratory Technician | Signature |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: August 27, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|-------------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.7 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 1750 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|---------------------|----------------|----------------------|
| Nominal Head TSL parameters | 22.0 °C | 40.1 | 1.37 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 39.0 \pm 6 % | 1.32 mho/m \pm 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm³ (1 g) of Head TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 8.96 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 36.5 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Head TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 4.79 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 19.4 W/kg \pm 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|---------------------|----------------|----------------------|
| Nominal Body TSL parameters | 22.0 °C | 53.4 | 1.49 mho/m |
| Measured Body TSL parameters | (22.0 \pm 0.2) °C | 51.4 \pm 6 % | 1.49 mho/m \pm 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm³ (1 g) of Body TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 9.30 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 36.9 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Body TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 5.01 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 19.9 W/kg \pm 16.5 % (k=2) |

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $50.7 \Omega + 2.4 j\Omega$ |
| Return Loss | - 32.0 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $46.7 \Omega + 2.0 j\Omega$ |
| Return Loss | - 27.9 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.223 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|-------------------|
| Manufactured by | SPEAG |
| Manufactured on | February 19, 2010 |

DASY5 Validation Report for Head TSL

Date: 27.08.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1055

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.18, 5.18, 5.18); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.937 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 16.1 W/kg

SAR(1 g) = 8.96 W/kg; SAR(10 g) = 4.79 W/kg

Maximum value of SAR (measured) = 10.9 W/kg

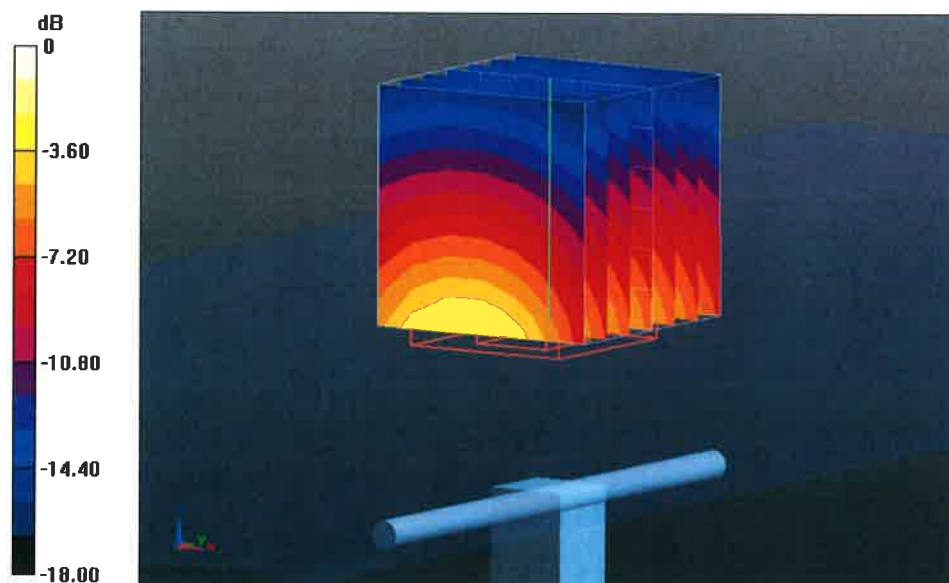

0 dB = 10.9 W/kg = 10.37 dBW/kg

Impedance Measurement Plot for Head TSL


27 Aug 2013 10:36:17
CH1 S11 1 U FS 1: 50.721 Ω 2.4297 Ω 220.97 pH 1 750.000 000 MHz

*
De1

Cor

Avg
16

H1 d

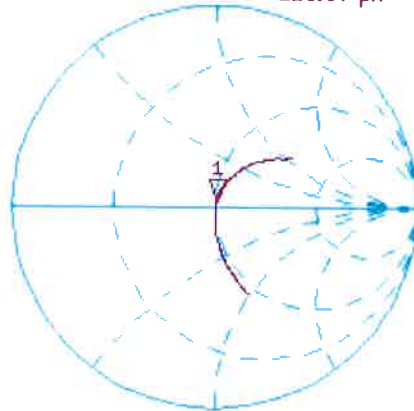


CH2 S11 LOG 5 dB/REF -20 dB 1:-31.982 dB 1 750.000 000 MHz

Cor

Avg
16

H1 d

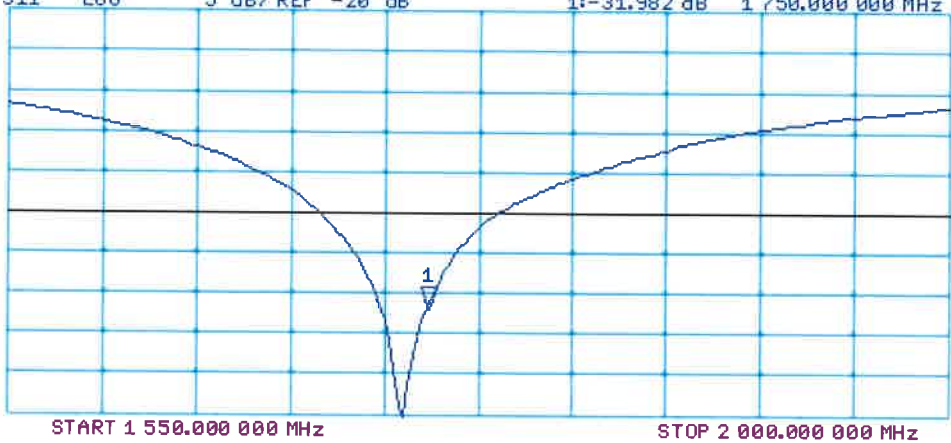

DASY5 Validation Report for Body TSL

Date: 27.08.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1055

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.83, 4.83, 4.83); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.937 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 15.9 W/kg

SAR(1 g) = 9.3 W/kg; SAR(10 g) = 5.01 W/kg

Maximum value of SAR (measured) = 11.6 W/kg



Impedance Measurement Plot for Body TSL

27 Aug 2013 10:23:03

CH1 S11 1 U FS


1: 46.664 Ω 2.0332 Ω 184.91 pF 1 750.000 000 MHz

*
De1

Cor

Avg
16

H1 d

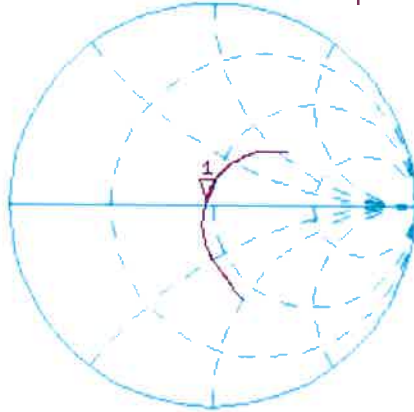


CH2 S11 LOG 5 dB/REF -20 dB 1:-27.868 dB 1 750.000 000 MHz

Cor

Avg
16

H1 d

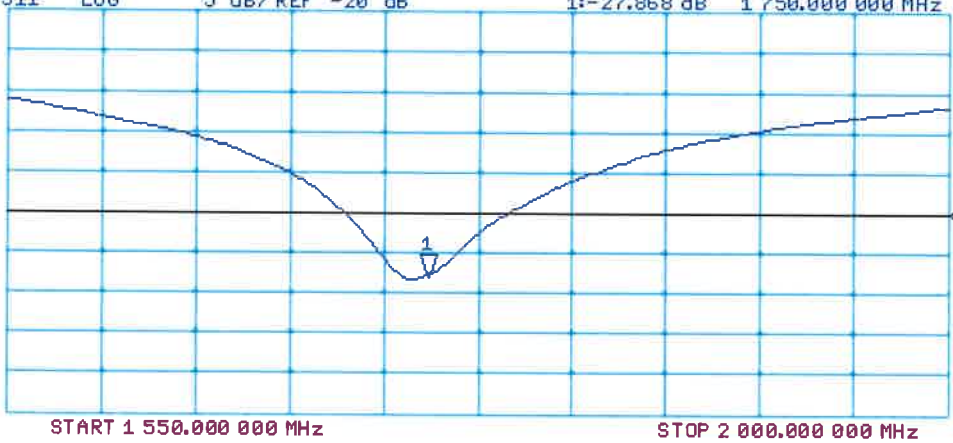



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **D1900V2-5d022_Jul13**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d022**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 29, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 01-Nov-12 (No. 217-01640) | Oct-13 |
| Power sensor HP 8481A | US37292783 | 01-Nov-12 (No. 217-01640) | Oct-13 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 04-Apr-13 (No. 217-01736) | Apr-14 |
| Type-N mismatch combination | SN: 5047.3 / 06327 | 04-Apr-13 (No. 217-01739) | Apr-14 |
| Reference Probe ES3DV3 | SN: 3205 | 28-Dec-12 (No. ES3-3205_Dec12) | Dec-13 |
| DAE4 | SN: 601 | 25-Apr-13 (No. DAE4-601_Apr13) | Apr-14 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-11) | In house check: Oct-13 |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-11) | In house check: Oct-13 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |

| | | | |
|----------------|----------------|-----------------------|-----------|
| | Name | Function | Signature |
| Calibrated by: | Israe El-Naouq | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: July 30, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|-------------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.7 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 1900 MHz ± 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 40.0 | 1.40 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 38.9 ± 6 % | 1.36 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm³ (1 g) of Head TSL | Condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 9.88 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 40.0 W/kg ± 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Head TSL | condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 5.18 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 20.9 W/kg ± 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|-----------------|--------------|------------------|
| Nominal Body TSL parameters | 22.0 °C | 53.3 | 1.52 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 53.4 ± 6 % | 1.49 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm³ (1 g) of Body TSL | Condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 9.97 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 40.4 W/kg ± 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Body TSL | condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 5.31 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 21.4 W/kg ± 16.5 % (k=2) |

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.7 Ω + 3.7 j Ω |
| Return Loss | - 28.5 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 46.5 Ω + 3.9 j Ω |
| Return Loss | - 25.3 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.193 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|-----------------|
| Manufactured by | SPEAG |
| Manufactured on | August 29, 2002 |

DASY5 Validation Report for Head TSL

Date: 29.07.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d022

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.98, 4.98, 4.98); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.326 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 17.9 W/kg

SAR(1 g) = 9.88 W/kg; SAR(10 g) = 5.18 W/kg

Maximum value of SAR (measured) = 12.3 W/kg




0 dB = 12.3 W/kg = 10.90 dBW/kg

Impedance Measurement Plot for Head TSL

29 Jul 2013 10:54:25

CH1 S11 1 U FS 1: 50.738 Ω 3.6992 Ω 309.87 pH 1 900.000 000 MHz

*
De1
Cor

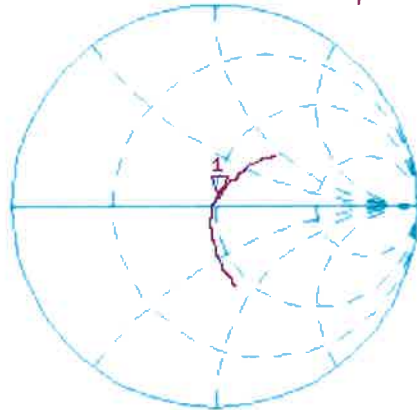

Avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-28.530 dB 1 900.000 000 MHz

Cor

Avg
16

H1d

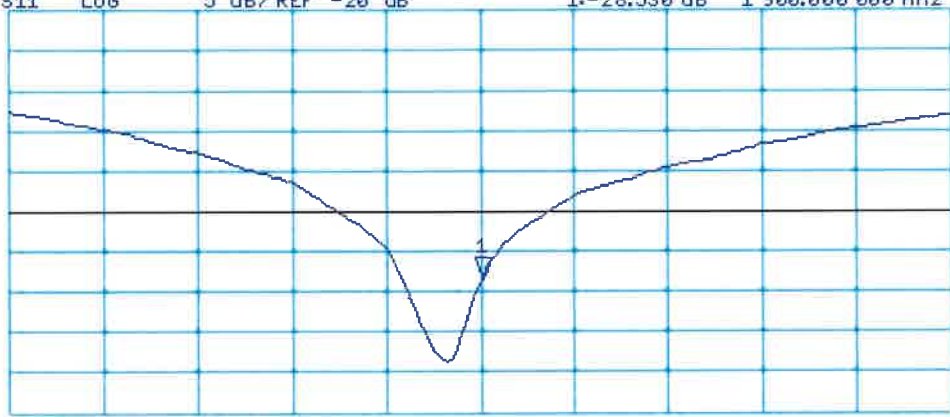

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 29.07.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d022

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.6, 4.6, 4.6); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.326 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 9.97 W/kg; SAR(10 g) = 5.31 W/kg


Maximum value of SAR (measured) = 12.6 W/kg



Impedance Measurement Plot for Body TSL

29 Jul 2013 10:54:01
[CH1] S11 1 U FS 1: 46.488 Ω 3.8906 Ω 325.90 pF 1 900.000 000 MHz

*
De1
Cor

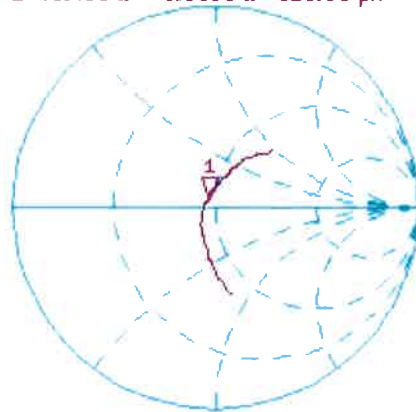

Avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-25.304 dB 1 900.000 000 MHz

Cor

Avg
16

H1d

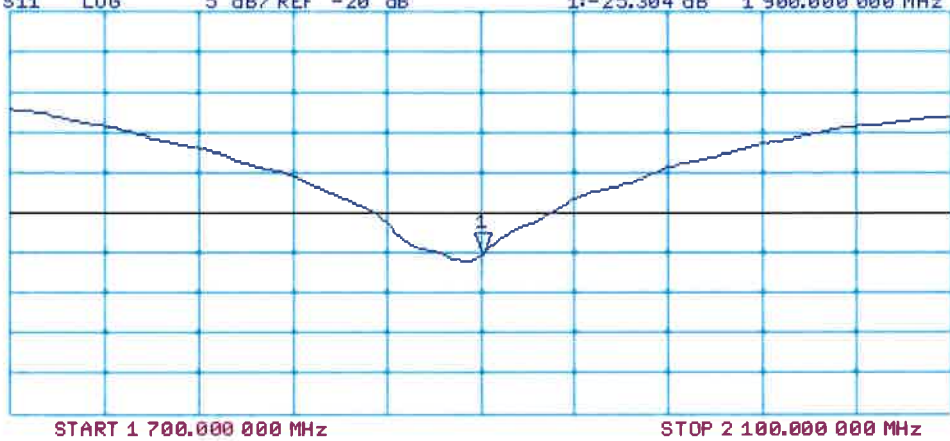



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **B.V.ADT (Auden)**

Certificate No: **EX3-3590_Mar14**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3590**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **March 4, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 04-Apr-13 (No. 217-01733) | Apr-14 |
| Power sensor E4412A | MY41498087 | 04-Apr-13 (No. 217-01733) | Apr-14 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 04-Apr-13 (No. 217-01737) | Apr-14 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-13 (No. 217-01735) | Apr-14 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 04-Apr-13 (No. 217-01738) | Apr-14 |
| Reference Probe ES3DV2 | SN: 3013 | 30-Dec-13 (No. ES3-3013_Dec13) | Dec-14 |
| DAE4 | SN: 660 | 13-Dec-13 (No. DAE4-660_Dec13) | Dec-14 |
| | | | |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Apr-13) | In house check: Apr-16 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

| | Name | Function | Signature |
|---|-----------------------|------------------------------|-----------------------|
| Calibrated by: | Jeton Kastrati | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |
| | | | Issued: March 4, 2014 |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. | | | |



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

| | |
|-----------------------|--|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., ϑ = 0 is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization ϑ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe EX3DV4

SN:3590

Manufactured: March 23, 2009
Calibrated: March 4, 2014

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3590

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|-----------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 0.50 | 0.47 | 0.50 | ± 10.1 % |
| DCP (mV) ^B | 94.6 | 96.4 | 95.9 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Unc ^E (k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 146.4 | ±3.5 % |
| | | Y | 0.0 | 0.0 | 1.0 | | 168.7 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 160.8 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3590

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 41.9 | 0.89 | 10.89 | 10.89 | 10.89 | 0.25 | 1.15 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 10.52 | 10.52 | 10.52 | 0.62 | 0.67 | ± 12.0 % |
| 900 | 41.5 | 0.97 | 10.53 | 10.53 | 10.53 | 0.61 | 0.63 | ± 12.0 % |
| 1450 | 40.5 | 1.20 | 9.12 | 9.12 | 9.12 | 0.80 | 0.50 | ± 12.0 % |
| 1640 | 40.3 | 1.29 | 8.96 | 8.96 | 8.96 | 0.76 | 0.55 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 8.92 | 8.92 | 8.92 | 0.80 | 0.56 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 8.70 | 8.70 | 8.70 | 0.43 | 0.74 | ± 12.0 % |
| 2000 | 40.0 | 1.40 | 8.61 | 8.61 | 8.61 | 0.39 | 0.79 | ± 12.0 % |
| 2300 | 39.5 | 1.67 | 8.30 | 8.30 | 8.30 | 0.35 | 0.82 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 7.95 | 7.95 | 7.95 | 0.53 | 0.68 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 7.76 | 7.76 | 7.76 | 0.49 | 0.73 | ± 12.0 % |
| 3500 | 37.9 | 2.91 | 7.88 | 7.88 | 7.88 | 0.88 | 0.57 | ± 13.1 % |
| 5200 | 36.0 | 4.66 | 5.57 | 5.57 | 5.57 | 0.35 | 1.80 | ± 13.1 % |
| 5300 | 35.9 | 4.76 | 5.33 | 5.33 | 5.33 | 0.35 | 1.80 | ± 13.1 % |
| 5500 | 35.6 | 4.96 | 5.06 | 5.06 | 5.06 | 0.40 | 1.80 | ± 13.1 % |
| 5600 | 35.5 | 5.07 | 4.94 | 4.94 | 4.94 | 0.35 | 1.80 | ± 13.1 % |
| 5800 | 35.3 | 5.27 | 4.89 | 4.89 | 4.89 | 0.40 | 1.80 | ± 13.1 % |

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3590

Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 55.5 | 0.96 | 10.39 | 10.39 | 10.39 | 0.43 | 0.81 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 10.31 | 10.31 | 10.31 | 0.77 | 0.60 | ± 12.0 % |
| 900 | 55.0 | 1.05 | 10.13 | 10.13 | 10.13 | 0.77 | 0.60 | ± 12.0 % |
| 1450 | 54.0 | 1.30 | 8.83 | 8.83 | 8.83 | 0.34 | 0.94 | ± 12.0 % |
| 1640 | 53.8 | 1.40 | 9.04 | 9.04 | 9.04 | 0.40 | 0.88 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 8.35 | 8.35 | 8.35 | 0.52 | 0.76 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 8.11 | 8.11 | 8.11 | 0.37 | 0.86 | ± 12.0 % |
| 2000 | 53.3 | 1.52 | 8.24 | 8.24 | 8.24 | 0.36 | 0.85 | ± 12.0 % |
| 2300 | 52.9 | 1.81 | 7.96 | 7.96 | 7.96 | 0.59 | 0.65 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 7.72 | 7.72 | 7.72 | 0.80 | 0.50 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 7.49 | 7.49 | 7.49 | 0.80 | 0.50 | ± 12.0 % |
| 3500 | 51.3 | 3.31 | 7.51 | 7.51 | 7.51 | 0.68 | 0.74 | ± 13.1 % |
| 5200 | 49.0 | 5.30 | 5.16 | 5.16 | 5.16 | 0.40 | 1.90 | ± 13.1 % |
| 5300 | 48.9 | 5.42 | 4.92 | 4.92 | 4.92 | 0.40 | 1.90 | ± 13.1 % |
| 5500 | 48.6 | 5.65 | 4.64 | 4.64 | 4.64 | 0.40 | 1.90 | ± 13.1 % |
| 5600 | 48.5 | 5.77 | 4.62 | 4.62 | 4.62 | 0.35 | 1.90 | ± 13.1 % |
| 5800 | 48.2 | 6.00 | 4.74 | 4.74 | 4.74 | 0.45 | 1.90 | ± 13.1 % |

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

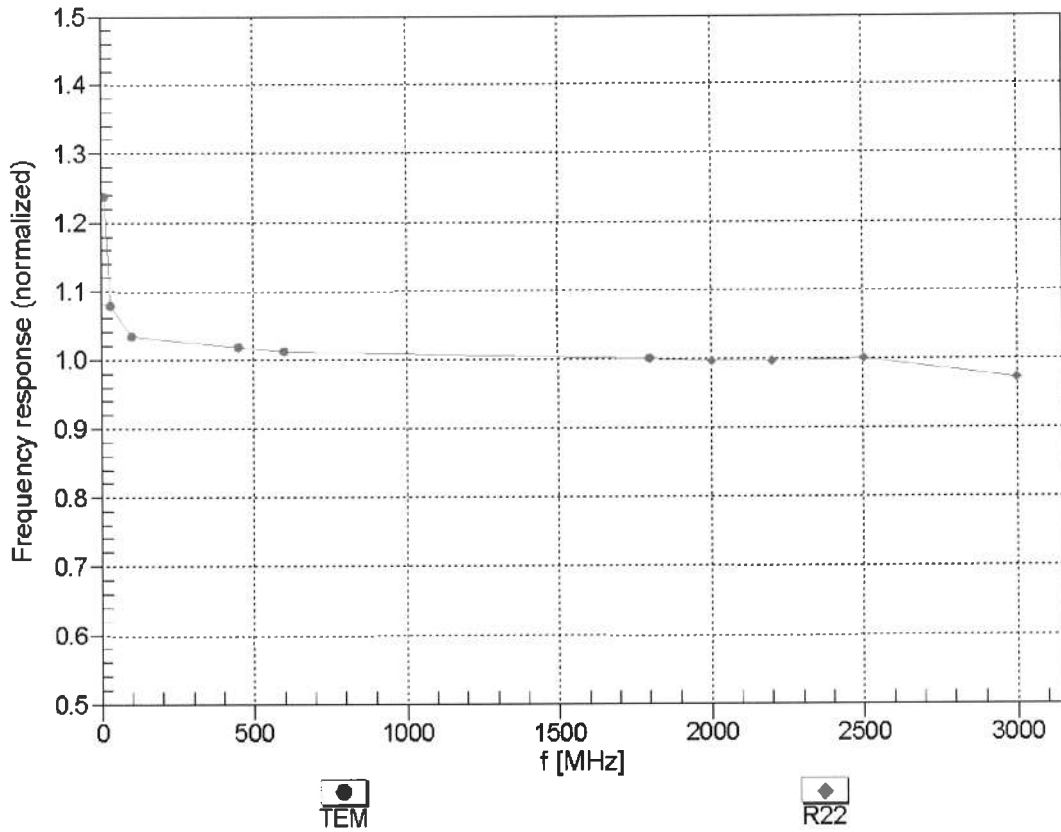



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM


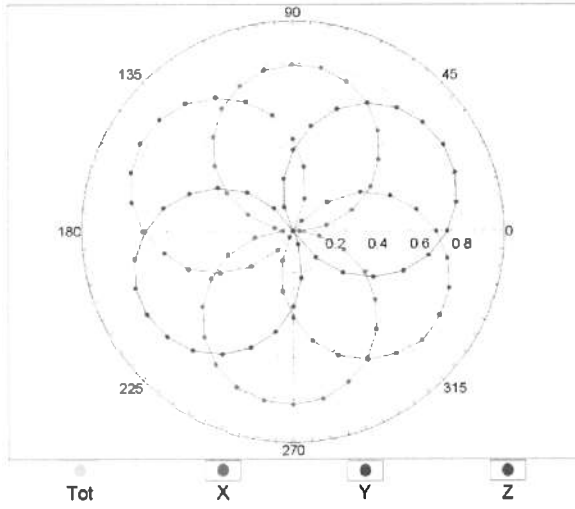


f=1800 MHz,R22

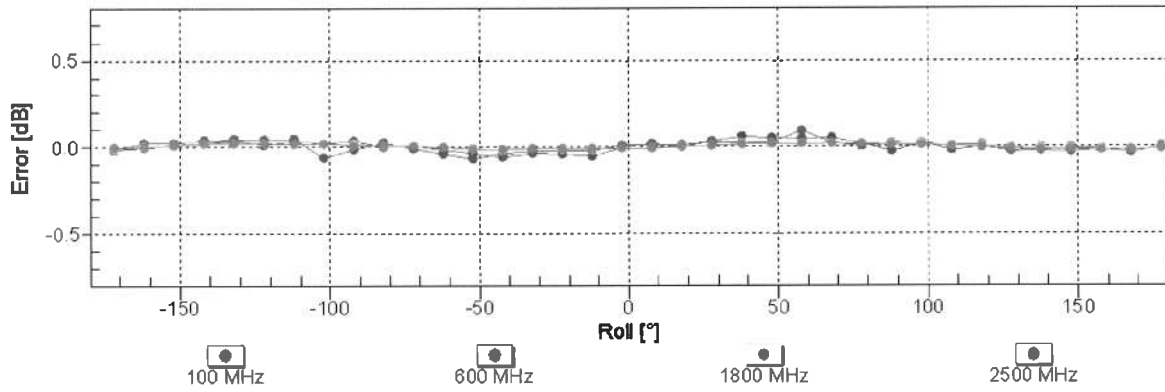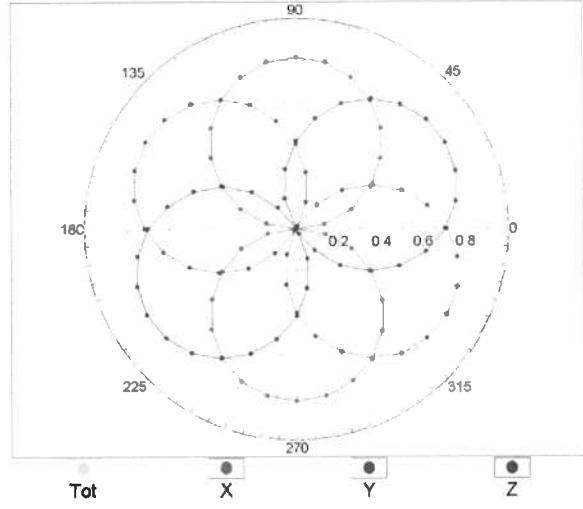


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range $f(SAR_{head})$ (TEM cell , $f_{eval}= 1900$ MHz)

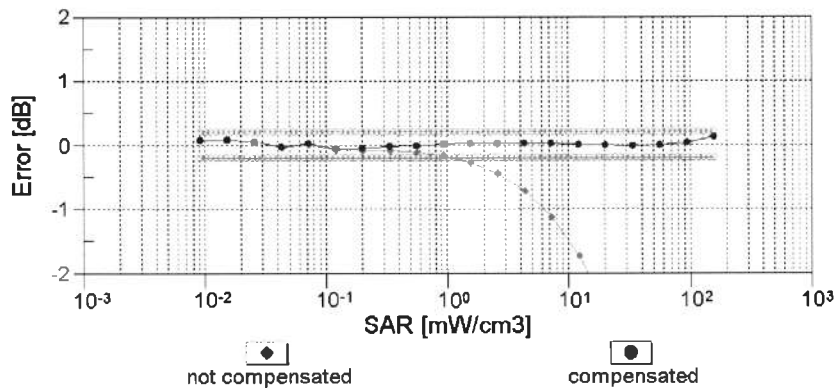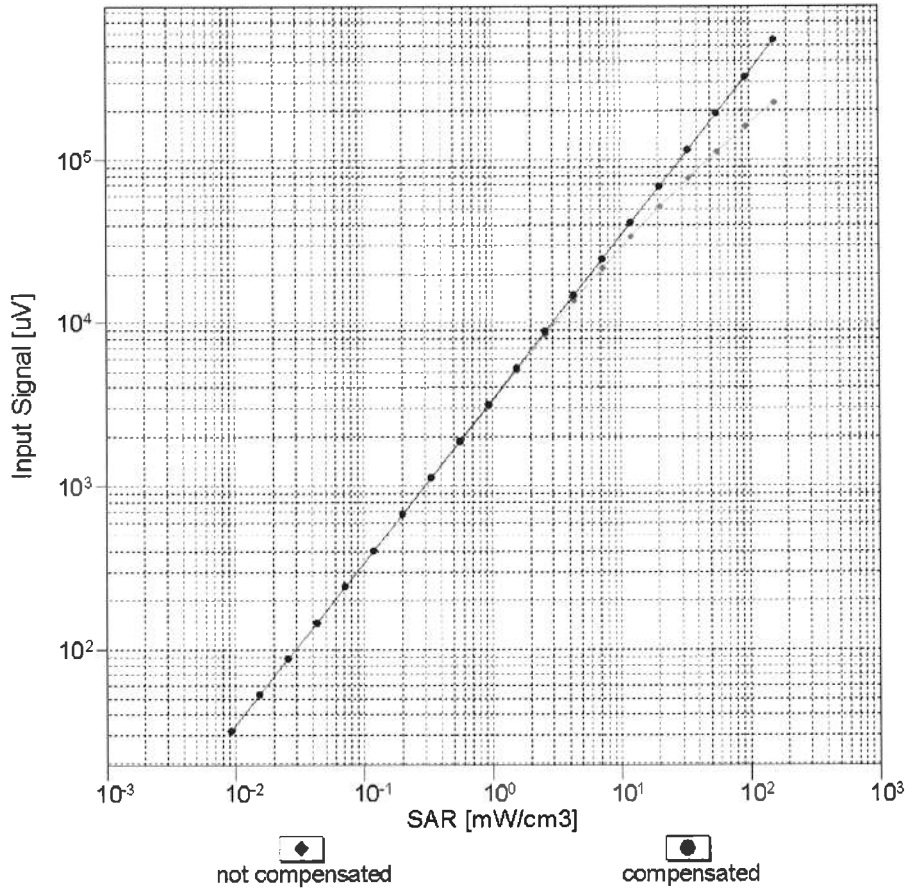


Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

Conversion Factor Assessment

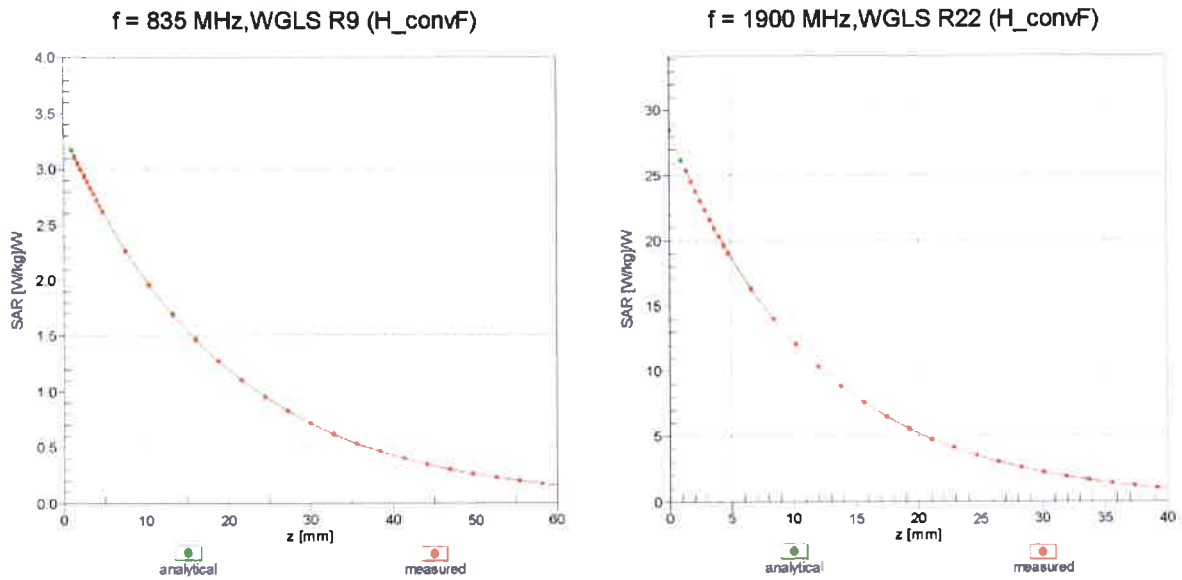

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

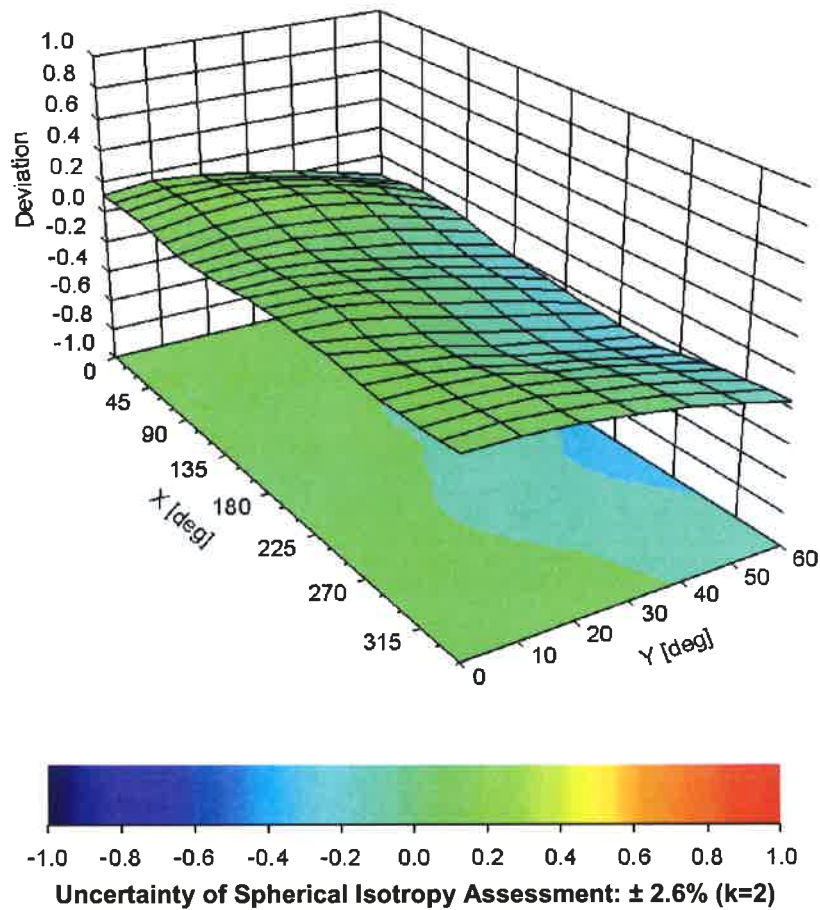

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3590

Other Probe Parameters

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | -142.1 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 2 mm |



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **EX3-3971_Mar14**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3971**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **March 31, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 04-Apr-13 (No. 217-01733) | Apr-14 |
| Power sensor E4412A | MY41498087 | 04-Apr-13 (No. 217-01733) | Apr-14 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 04-Apr-13 (No. 217-01737) | Apr-14 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-13 (No. 217-01735) | Apr-14 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 04-Apr-13 (No. 217-01738) | Apr-14 |
| Reference Probe ES3DV2 | SN: 3013 | 30-Dec-13 (No. ES3-3013_Dec13) | Dec-14 |
| DAE4 | SN: 660 | 13-Dec-13 (No. DAE4-660_Dec13) | Dec-14 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Apr-13) | In house check: Apr-16 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

| | Name | Function | Signature |
|----------------|-----------------------|------------------------------|-----------|
| Calibrated by: | Jeton Kastrati | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: April 1, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

| | |
|--------------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below *ConvF*).
- **NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe EX3DV4

SN:3971

Manufactured: December 30, 2013
Calibrated: March 31, 2014

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3971

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|--------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 0.41 | 0.53 | 0.50 | $\pm 10.1\%$ |
| DCP (mV) ^B | 99.1 | 98.1 | 98.6 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Unc ^E (k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 140.6 | $\pm 3.3\%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 143.4 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 149.6 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3971

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth (mm) ^G | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 41.9 | 0.89 | 10.30 | 10.30 | 10.30 | 0.37 | 0.95 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 10.00 | 10.00 | 10.00 | 0.45 | 0.79 | ± 12.0 % |
| 900 | 41.5 | 0.97 | 9.66 | 9.66 | 9.66 | 0.23 | 1.21 | ± 12.0 % |
| 900 | 41.5 | 0.97 | 9.82 | 9.82 | 9.82 | 0.34 | 0.93 | ± 12.0 % |
| 1450 | 40.5 | 1.20 | 8.84 | 8.84 | 8.84 | 0.27 | 1.12 | ± 12.0 % |
| 1640 | 40.3 | 1.29 | 8.44 | 8.44 | 8.44 | 0.80 | 0.50 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 8.40 | 8.40 | 8.40 | 0.32 | 0.91 | ± 12.0 % |
| 1810 | 40.0 | 1.40 | 8.21 | 8.21 | 8.21 | 0.56 | 0.71 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 8.19 | 8.19 | 8.19 | 0.31 | 0.91 | ± 12.0 % |
| 2000 | 40.0 | 1.40 | 8.19 | 8.19 | 8.19 | 0.55 | 0.66 | ± 12.0 % |
| 2300 | 39.5 | 1.67 | 7.77 | 7.77 | 7.77 | 0.61 | 0.64 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 7.43 | 7.43 | 7.43 | 0.39 | 0.83 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 7.15 | 7.15 | 7.15 | 0.37 | 0.87 | ± 12.0 % |
| 3500 | 37.9 | 2.91 | 6.87 | 6.87 | 6.87 | 0.50 | 0.93 | ± 13.1 % |
| 5200 | 36.0 | 4.66 | 5.22 | 5.22 | 5.22 | 0.30 | 1.80 | ± 13.1 % |
| 5300 | 35.9 | 4.76 | 4.81 | 4.81 | 4.81 | 0.40 | 1.80 | ± 13.1 % |
| 5500 | 35.6 | 4.96 | 4.93 | 4.93 | 4.93 | 0.40 | 1.80 | ± 13.1 % |
| 5600 | 35.5 | 5.07 | 4.55 | 4.55 | 4.55 | 0.50 | 1.80 | ± 13.1 % |
| 5800 | 35.3 | 5.27 | 4.53 | 4.53 | 4.53 | 0.50 | 1.80 | ± 13.1 % |

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3971

Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth (mm) ^G | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 55.5 | 0.96 | 9.91 | 9.91 | 9.91 | 0.49 | 0.81 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 9.74 | 9.74 | 9.74 | 0.56 | 0.73 | ± 12.0 % |
| 900 | 55.0 | 1.05 | 9.53 | 9.53 | 9.53 | 0.67 | 0.67 | ± 12.0 % |
| 1450 | 54.0 | 1.30 | 8.25 | 8.25 | 8.25 | 0.26 | 1.20 | ± 12.0 % |
| 1640 | 53.8 | 1.40 | 8.36 | 8.36 | 8.36 | 0.30 | 1.01 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 7.93 | 7.93 | 7.93 | 0.45 | 0.80 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 7.68 | 7.68 | 7.68 | 0.37 | 0.90 | ± 12.0 % |
| 2000 | 53.3 | 1.52 | 7.80 | 7.80 | 7.80 | 0.37 | 0.89 | ± 12.0 % |
| 2300 | 52.9 | 1.81 | 7.51 | 7.51 | 7.51 | 0.68 | 0.65 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 7.29 | 7.29 | 7.29 | 0.80 | 0.50 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 6.99 | 6.99 | 6.99 | 0.80 | 0.50 | ± 12.0 % |
| 3500 | 51.3 | 3.31 | 6.66 | 6.66 | 6.66 | 0.27 | 1.34 | ± 13.1 % |
| 5200 | 49.0 | 5.30 | 4.59 | 4.59 | 4.59 | 0.40 | 1.90 | ± 13.1 % |
| 5300 | 48.9 | 5.42 | 4.19 | 4.19 | 4.19 | 0.50 | 1.90 | ± 13.1 % |
| 5500 | 48.6 | 5.65 | 4.14 | 4.14 | 4.14 | 0.45 | 1.90 | ± 13.1 % |
| 5600 | 48.5 | 5.77 | 3.87 | 3.87 | 3.87 | 0.50 | 1.90 | ± 13.1 % |
| 5800 | 48.2 | 6.00 | 4.12 | 4.12 | 4.12 | 0.50 | 1.90 | ± 13.1 % |

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

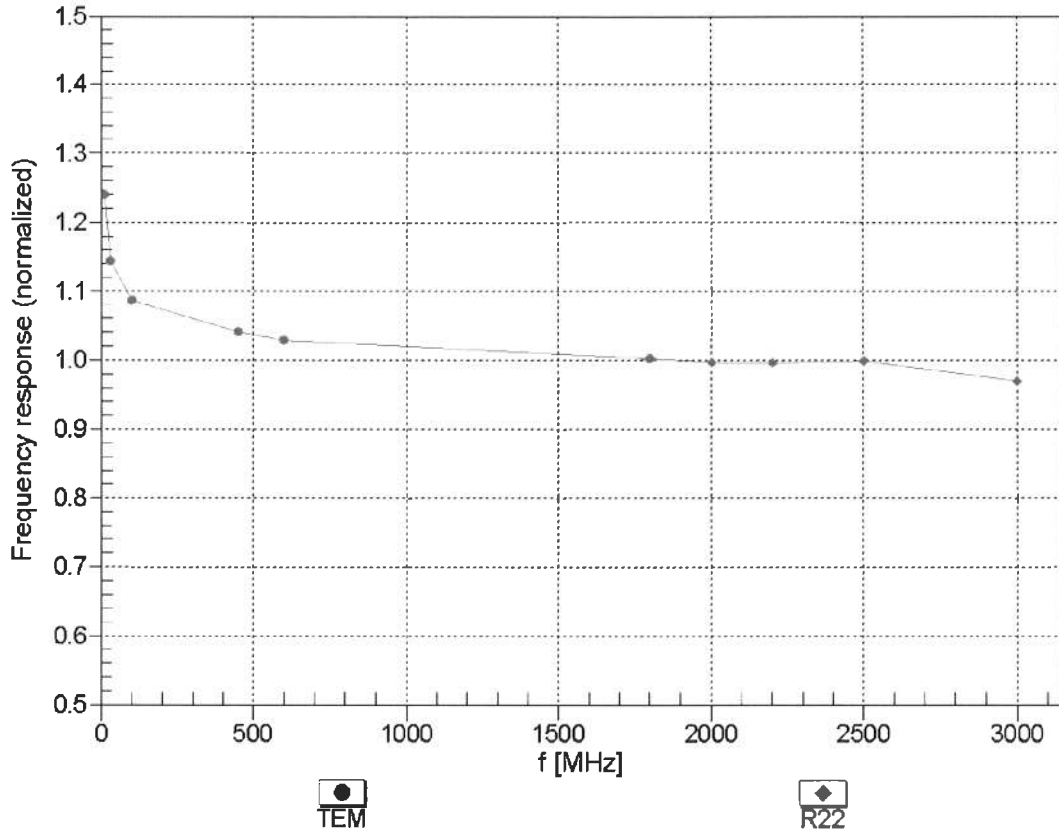



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM


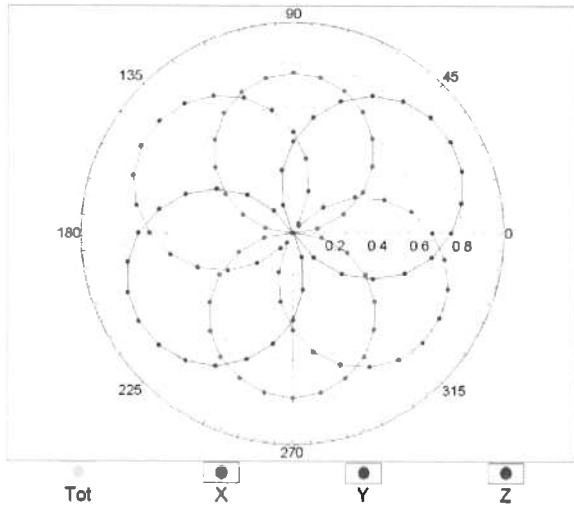


f=1800 MHz,R22

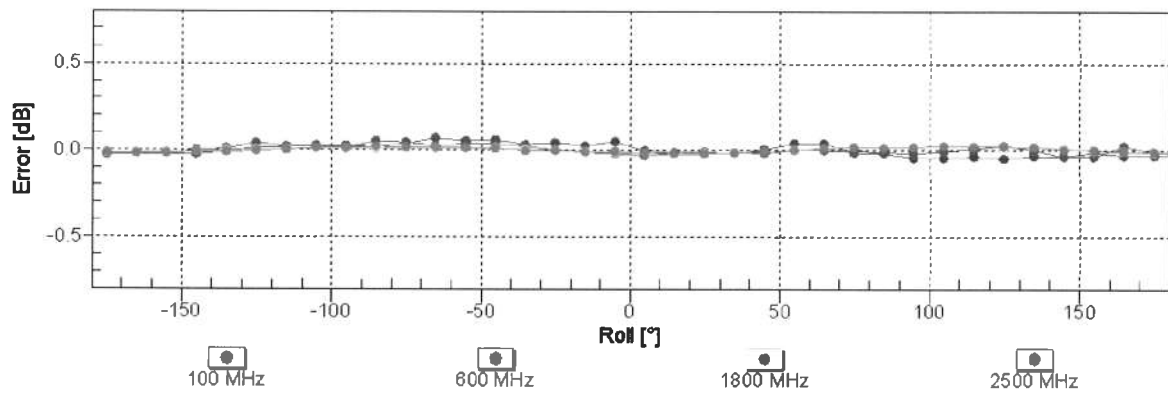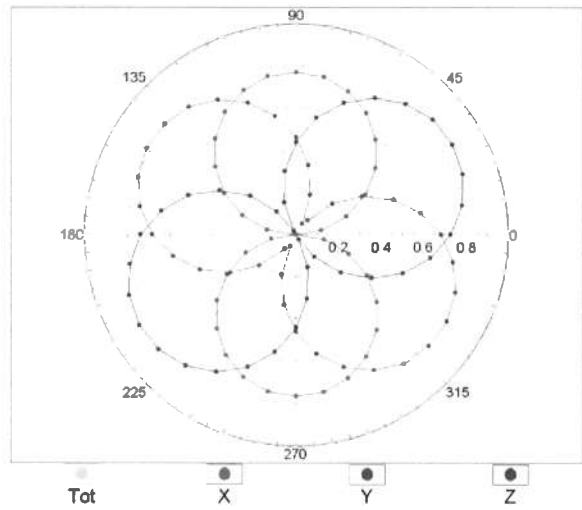


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$)

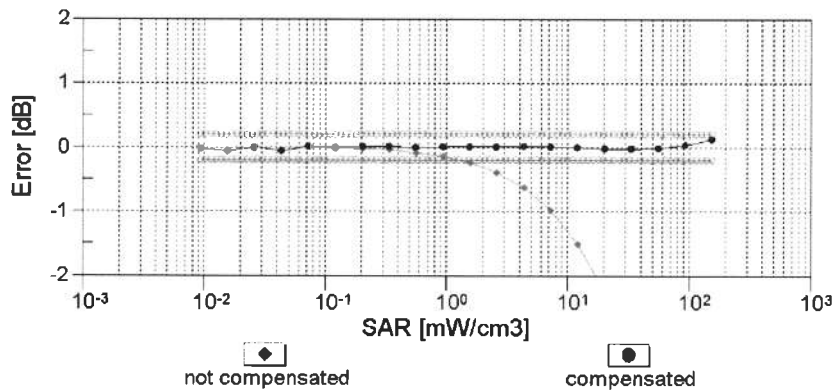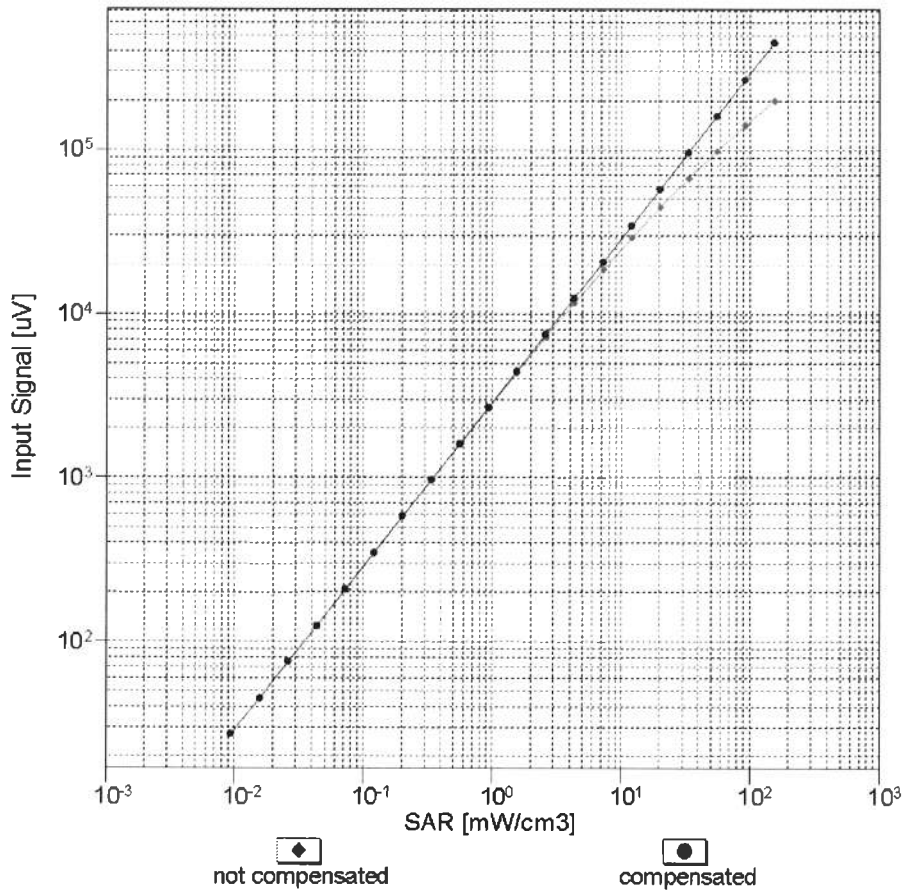


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

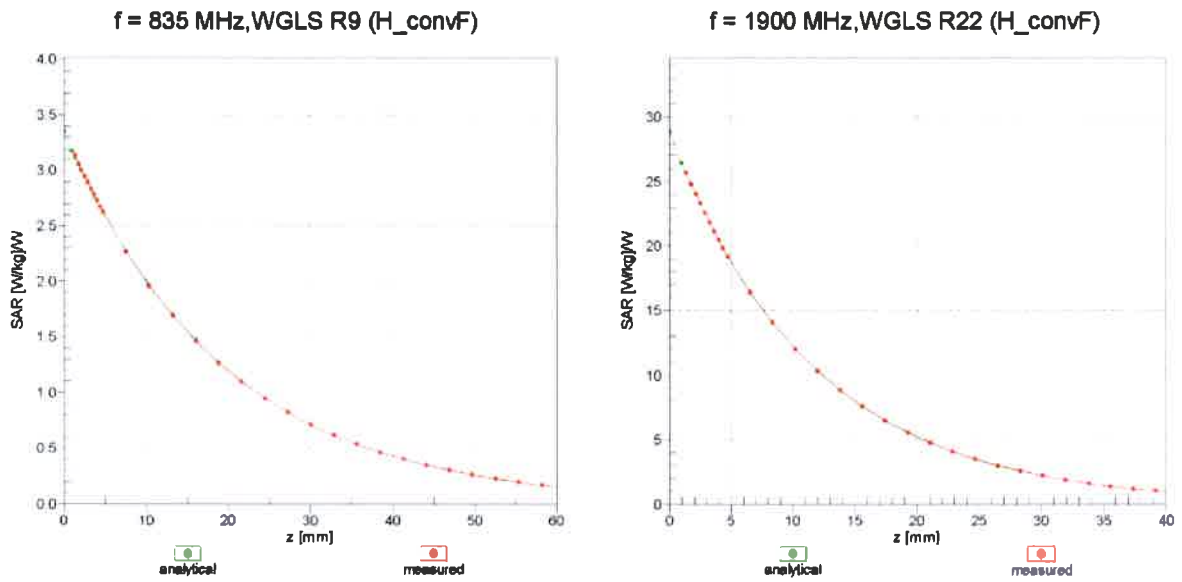

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

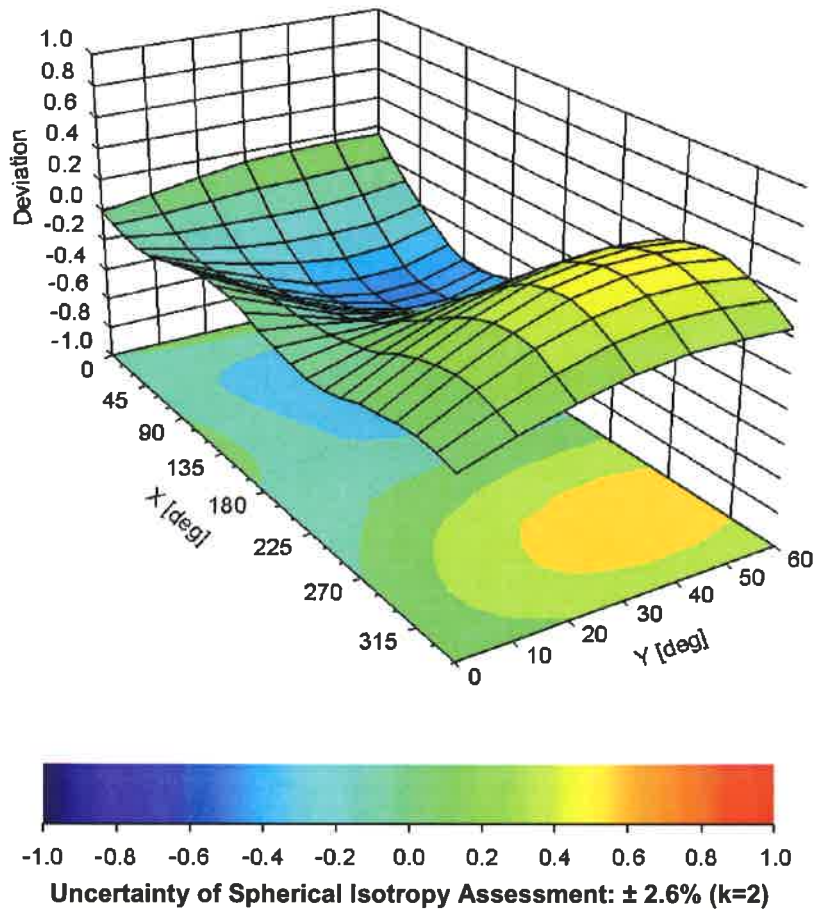

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3971

Other Probe Parameters

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | -105.3 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 2 mm |