

Partial FCC Test Report (PART 90 – LTE B14/B26)

Report No.: RFBASM-WTW-P21060063-3

FCC ID: QYLEM9190K

Test Model: EM9190

Received Date: Jun. 02, 2021

Test Date: Jun. 24 ~ Jul. 13, 2021

Issued Date: Nov. 16, 2021

Applicant: Getac Technology Corporation.

Address: 5F., Building A, No. 209, Sec.1, Nangang Rd., Nangang Dist., Taipei City
11568, Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: B2F., No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan

**FCC Registration /
Designation Number:** 427177 / TW0011



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty.....	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT.....	8
3.2 Configuration of System under Test.....	9
3.2.1 Description of Support Units.....	10
3.3 Test Mode Applicability and Tested Channel Detail	11
3.4 EUT Operating Conditions	12
3.5 General Description of Applied Standards and references	12
4 Test Types and Results	13
4.1 Output Power Measurement.....	13
4.1.1 Limits of Output Power Measurement	13
4.1.2 Test Procedures.....	13
4.1.3 Test Setup.....	14
4.1.4 Test Results	15
4.2 Radiated Emission Measurement.....	21
4.2.1 Limits of Radiated Emission Measurement	21
4.2.2 Test Procedure	21
4.2.3 Deviation from Test Standard	21
4.2.4 Test Setup.....	22
4.2.5 Test Results	23
5 Pictures of Test Arrangements	45
Appendix – Information of the Testing Laboratories	46

Release Control Record

Issue No.	Description	Date Issued
RFBASM-WTW-P21060063-3	Original Release	Nov. 16, 2021

1 Certificate of Conformity

Product: Wireless Module

Brand: Getac

Test Model: EM9190

Sample Status: Identical Prototype

Applicant: Getac Technology Corporation.

Test Date: Jun. 24 ~ Jul. 13, 2021

Standards: FCC Part 90, Subpart I, S, R
FCC Part 2

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Polly Chien , **Date:** Nov. 16, 2021
Polly Chien / Specialist

Approved by : Bruce Chen , **Date:** Nov. 16, 2021
Bruce Chen / Senior Engineer

2 Summary of Test Results

Applied Standard: FCC Part 90 & Part 2 (LTE 14)			
FCC Clause	Test Item	Result	Remarks
2.1046 90.542 (a)(7)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 90.539 (e)	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
90.210 (n)	Emission Masks	Pass	Meet the requirement of limit.
2.1053 90.543 (e)(2)(3)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 90.543 (e)(3)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 90.543 (e)(f)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -5.53 dB at 1586.00 MHz.

Applied Standard: FCC Part 90 & Part 2 (LTE 26)			
FCC Clause	Test Item	Result	Remarks
2.1046 90.635 (b)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	N/A	Refer to Note
2.1055 90.213	Frequency Stability	N/A	Refer to Note
2.1049 90.209	Occupied Bandwidth	N/A	Refer to Note
2.1051 90.691	Emission Masks	N/A	Refer to Note
2.1051 90.691	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 90.691	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -33.55 dB at 1638.00 MHz.

Note:

1. This report is a Class II change partial report. Therefore, only test item of Radiated Spurious Emissions tests and Effective Radiated Power were performed for this report. Other testing data please refer to Sporton International (Shenzhen) Inc. report no.: FG021501E_Rev. 02 and FW021501_Rev. 02 for module (Brand: Airprime, Model: EM9190).
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.0400 dB
	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~ 1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	1.0121 dB
	18GHz ~ 40GHz	1.1508 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent Technologies	N9038A	MY52260177	Aug. 24, 2020	Aug. 23, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 12, 2021	Apr. 11, 2022
HORN Antenna ETS-Lindgren	3117	00143293	Nov. 22, 2020	Nov. 21, 2021
BILOG Antenna SCHWARZBECK	VULB 9168	9168-616	Nov. 09, 2020	Nov. 08, 2021
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Nov. 22, 2020	Nov. 21, 2021
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 13, 2021	Apr. 12, 2022
MXG Vector signal generator Agilent	N5182B	MY53050430	Nov. 25, 2020	Nov. 24, 2021
Preamplifier Agilent	310N	187226	Jun. 17, 2021	Jun. 16, 2022
Preamplifier Agilent	83017A	MY39501357	Jun. 17, 2021	Jun. 16, 2022
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(RFC -SMS-100-SMS-12 0+RFC-SMS-100-S MS-400)	Jun. 17, 2021	Jun. 16, 2022
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(RFC -SMS-100-SMS-24)	Jun. 17, 2021	Jun. 16, 2022
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 19, 2019	Aug. 18, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSW43	101582	Apr. 01, 2021	Mar. 31, 2022

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HsinTien Chamber 1.

3 General Information

3.1 General Description of EUT

Product	Wireless Module	
Brand	Getac	
Test Model	EM9190	
Status of EUT	Identical Prototype	
Power Supply Rating	3.3 Vdc (Host equipment)	
Modulation Type	LTE	QPSK, 16QAM, 64QAM, 256QAM
Frequency Range	LTE Band 14 (Channel Bandwidth 5MHz)	790.5MHz ~ 795.5MHz
	LTE Band 14 (Channel Bandwidth 10MHz)	793.0MHz
	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	814.7 ~ 823.3 MHz
	LTE Band 26 (Channel Bandwidth: 3 MHz)	815.5 ~ 822.5 MHz
	LTE Band 26 (Channel Bandwidth: 5 MHz)	816.5 ~ 821.5 MHz
	LTE Band 26 (Channel Bandwidth: 10 MHz)	819 MHz
Max. ERP Power	LTE Band 14 (Channel Bandwidth 5MHz)	166.38 mW
	LTE Band 14 (Channel Bandwidth 10MHz)	166.99 mW
	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	151.98 mW
	LTE Band 26 (Channel Bandwidth: 3 MHz)	153.39 mW
	LTE Band 26 (Channel Bandwidth: 5 MHz)	154.81 mW
	LTE Band 26 (Channel Bandwidth: 10 MHz)	153.46 mW
Antenna Type	Refer to Note as below	
Accessory Device	N/A	
Data Cable Supplied	N/A	

Note:

1. The EUT is authorized for use in specific End-product. The model of the K120 was chosen for final test.

Product	Brand	Model	Description
Tablet	Getac	K120	For marketing purpose
		K120G2	
		K120Y (Y= 10 , Y can be 0-9, a-z, A-Z, "-", "_" or blank for marketing purpose)	

2. The antenna information is listed as below.

Antenna Type	Brand	Model	Antenna Gain	
			LTE B14	LTE B26
PIFA	Getac	K120 Main 5G	1.61	1.63
	Getac	K120 Aux 5G	0.40	0.56

* The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.


3. The End-product contains following accessory devices.

Part	Brand	Model	Specification
Adapter 1	Getac	MTA190474W4	I/P: 100-240Vac, 1.6A, 50-60Hz O/P: 19.0Vdc, 4.74A (90.0W)
Adapter 2	Chicony	A15-090P1A	I/P: 100-240Vac, 1.2A, 50-60Hz O/P: 19.0Vdc, 4.74A (90.0W)
Battery 1	Getac	BP3S1P2100S-01	11.1Vdc , 2040mAh, 24Wh
Battery 2	Getac	BP4S1P3450P-01	14.4Vdc , 3300mAh, 48Wh
Touch Pen	Getac	340142000064	-
Dock	Getac	K120 Keyboard Dock	-


4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

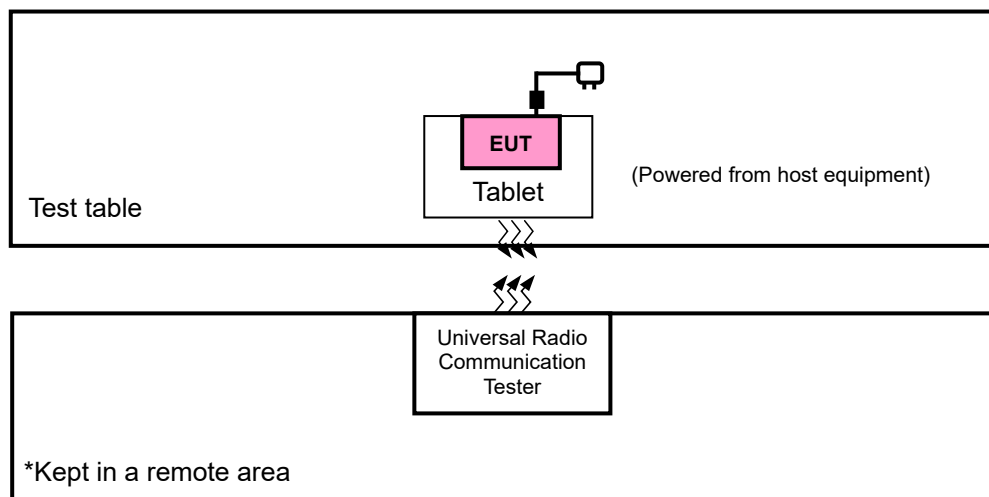

<E.R.P. Test>

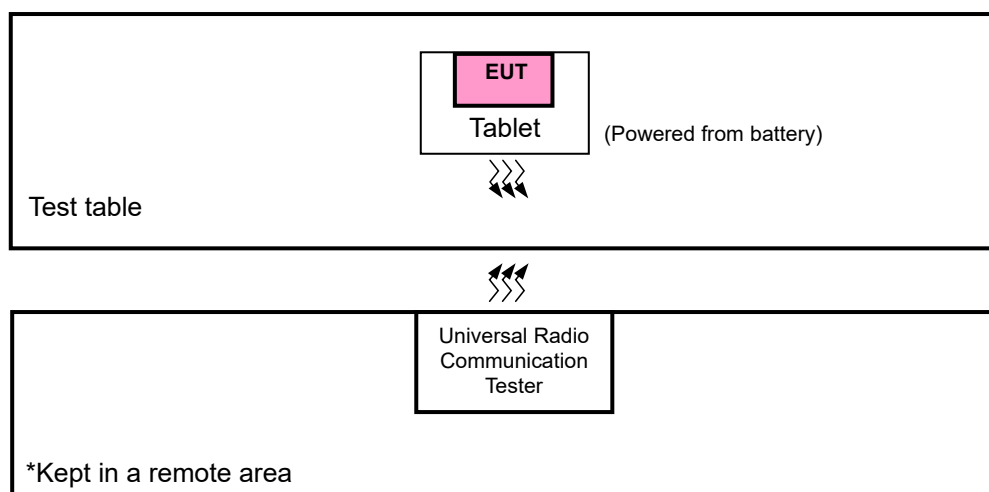

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Tablet	Getac	K120	N/A	N/A
2.	Universal Radio Communication Tester	Anritsu	MT8820C	6201300640	N/A

No.	Signal Cable Description Of The Above Support Units
1.	N/A

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item 1 was provided by client.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP	Radiated Emission
LTE Band 14	X-plane	X-axis
LTE Band 26	Z-plane	Z-axis

LTE Band 14

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23305 to 23355	23305, 23330, 23355	5 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset
		23330	23330	10 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset
		23330	23330	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	23305 to 23355	23305, 23330, 23355	5 MHz	QPSK	1 RB / 0 RB Offset
		23330	23330	10 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.

LTE Band 26

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB / 0 RB Offset
-	Radiated Emission	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 0 RB Offset

Note:

3. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
4. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 59 % RH	3.3 Vdc	Karl Lee
Radiated Emission	25 deg. C, 59 % RH	120 Vac, 60 Hz	Karl Lee, Charles Hsiao

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 90

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

KDB 971168 D02 Misc Rev Approv License Devices v02r01

ANSI/TIA/EIA-603-E 2016

Note: All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

LTE Band 14

Portable stations (hand-held devices) transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 3 watts ERP.

LTE Band 26

The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw) ERP.


4.1.2 Test Procedures

EIRP / ERP Measurement:


- a. All measurements were done at low, middle and high operational frequency range. RBW is 1.4 MHz ∙ 3 MHz ∙ 5 MHz ∙ 10 MHz for LTE mode, VBW $\geq 3 \times$ RBW. When the RBW setting value exceeds the maximum value set by the Spectrum instrument, the measurement method refers to ANSI C63.26 section 5.2.4.4.
- b. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. $EIRP = \text{Output power level} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$. Correction Factor (includes EIRP and ERP unit conversion factor) = Antenna gain of substitution horn. - Tx cable loss. Measurement method refers to ANSI C63.26 section 5.2.7 & 5.2.4.

4.1.3 Test Setup

**EIRP / ERP Measurement:
<Radiated Emission below or equal 1 GHz>**

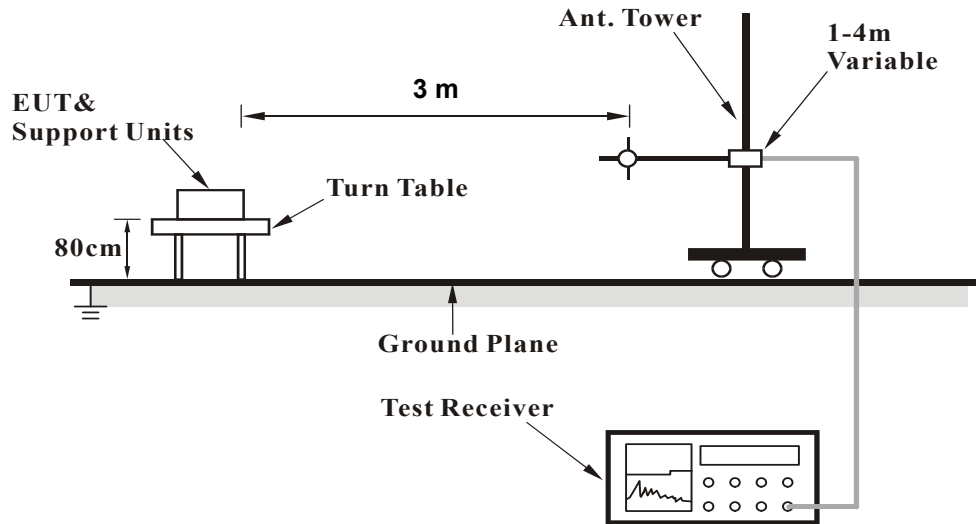

<Radiated Emission above 1 GHz>

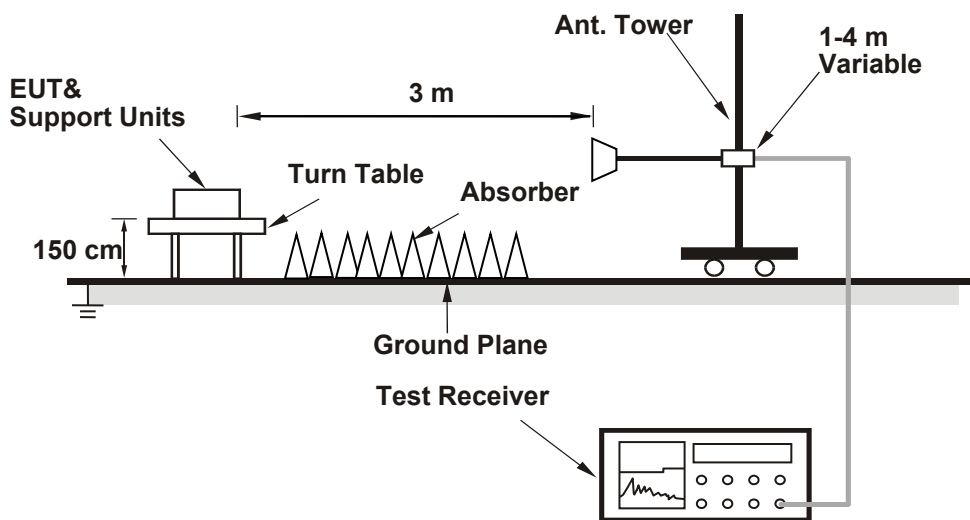

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 Test Results

ERP Power (dBm)

LTE Band 14							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23305	790.5	-10.56	32.77	22.21	166.38	H
	23330	793.0	-10.55	32.74	22.19	165.62	
	23355	795.5	-10.80	32.85	22.05	160.47	
	23305	790.5	-15.86	32.50	16.64	46.13	V
	23330	793.0	-15.93	32.52	16.59	45.60	
	23355	795.5	-16.31	32.62	16.31	42.76	
Channel Bandwidth: 5 MHz / 16QAM							
X	23305	790.5	-11.57	32.77	21.20	131.86	H
	23330	793.0	-11.55	32.74	21.19	131.55	
	23355	795.5	-11.81	32.85	21.04	127.17	
	23305	790.5	-16.86	32.50	15.64	36.64	V
	23330	793.0	-16.92	32.52	15.60	36.31	
	23355	795.5	-17.31	32.62	15.31	33.96	
Channel Bandwidth: 5 MHz / 64QAM							
X	23305	790.5	-12.56	32.77	20.21	104.98	H
	23330	793.0	-12.56	32.74	20.18	104.26	
	23355	795.5	-12.81	32.85	20.04	101.02	
	23305	790.5	-17.86	32.50	14.64	29.11	V
	23330	793.0	-17.92	32.52	14.60	28.84	
	23355	795.5	-18.32	32.62	14.30	26.92	
Channel Bandwidth: 5 MHz / 256QAM							
X	23305	790.5	-15.56	32.77	17.21	52.61	H
	23330	793.0	-15.57	32.74	17.17	52.13	
	23355	795.5	-15.82	32.85	17.03	50.51	
	23305	790.5	-20.86	32.50	11.64	14.59	V
	23330	793.0	-20.93	32.52	11.59	14.42	
	23355	795.5	-21.32	32.62	11.30	13.49	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 14							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23330	793.0	-10.51	32.74	22.23	166.99	H
	23330	793.0	-15.89	32.52	16.63	46.03	V
Channel Bandwidth: 10 MHz / 16QAM							
X	23330	793.0	-11.52	32.74	21.22	132.34	H
	23330	793.0	-16.89	32.52	15.63	36.56	V
Channel Bandwidth: 10 MHz / 64QAM							
X	23330	793.0	-12.52	32.74	20.22	105.12	H
	23330	793.0	-17.88	32.52	14.64	29.11	V
Channel Bandwidth: 10 MHz / 256QAM							
X	23330	793.0	-15.52	32.74	17.22	52.69	H
	23330	793.0	-20.89	32.52	11.63	14.55	V

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 26							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26697	814.7	-9.39	31.21	21.82	151.98	H
	26740	819	-9.56	31.30	21.74	149.28	
	26783	823.3	-9.58	31.22	21.64	145.95	
	26697	814.7	-12.93	31.50	18.57	72.01	V
	26740	819	-12.66	31.12	18.46	70.10	
	26783	823.3	-13.62	31.92	18.30	67.64	
Channel Bandwidth: 1.4 MHz / 16QAM							
Z	26697	814.7	-10.40	31.21	20.81	120.45	H
	26740	819	-10.56	31.30	20.74	118.58	
	26783	823.3	-10.58	31.22	20.64	115.93	
	26697	814.7	-13.92	31.50	17.58	57.33	V
	26740	819	-13.67	31.12	17.45	55.55	
	26783	823.3	-14.63	31.92	17.29	53.60	
Channel Bandwidth: 1.4 MHz / 64QAM							
Z	26697	814.7	-11.40	31.21	19.81	95.68	H
	26740	819	-11.57	31.30	19.73	93.97	
	26783	823.3	-11.59	31.22	19.63	91.88	
	26697	814.7	-14.92	31.50	16.58	45.54	V
	26740	819	-14.68	31.12	16.44	44.03	
	26783	823.3	-15.62	31.92	16.30	42.68	
Channel Bandwidth: 1.4 MHz / 256QAM							
Z	26697	814.7	-14.41	31.21	16.80	47.84	H
	26740	819	-14.56	31.30	16.74	47.21	
	26783	823.3	-14.60	31.22	16.62	45.94	
	26697	814.7	-17.92	31.50	13.58	22.82	V
	26740	819	-17.68	31.12	13.44	22.06	
	26783	823.3	-18.62	31.92	13.30	21.39	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 26							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26705	815.5	-9.35	31.21	21.86	153.39	H
	26740	819	-9.52	31.30	21.78	150.66	
	26775	822.5	-9.55	31.22	21.67	146.96	
	26705	815.5	-12.90	31.50	18.60	72.51	V
	26740	819	-12.63	31.12	18.49	70.58	
	26775	822.5	-13.58	31.92	18.34	68.27	
Channel Bandwidth: 3 MHz / 16QAM							
Z	26705	815.5	-10.35	31.21	20.86	121.84	H
	26740	819	-10.52	31.30	20.78	119.67	
	26775	822.5	-10.56	31.22	20.66	116.47	
	26705	815.5	-13.91	31.50	17.59	57.46	V
	26740	819	-13.64	31.12	17.48	55.94	
	26775	822.5	-14.58	31.92	17.34	54.23	
Channel Bandwidth: 3 MHz / 64QAM							
Z	26705	815.5	-11.35	31.21	19.86	96.78	H
	26740	819	-11.52	31.30	19.78	95.06	
	26775	822.5	-11.57	31.22	19.65	92.30	
	26705	815.5	-14.92	31.50	16.58	45.54	V
	26740	819	-14.64	31.12	16.48	44.43	
	26775	822.5	-15.57	31.92	16.35	43.17	
Channel Bandwidth: 3 MHz / 256QAM							
Z	26705	815.5	-14.35	31.21	16.86	48.51	H
	26740	819	-14.52	31.30	16.78	47.64	
	26775	822.5	-14.58	31.22	16.64	46.15	
	26705	815.5	-17.93	31.50	13.57	22.77	V
	26740	819	-17.63	31.12	13.49	22.32	
	26775	822.5	-18.57	31.92	13.35	21.64	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 26							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26715	816.5	-9.31	31.21	21.90	154.81	H
	26740	819	-9.48	31.30	21.82	152.05	
	26765	821.5	-9.51	31.22	21.71	148.32	
	26715	816.5	-12.86	31.50	18.64	73.18	V
	26740	819	-12.60	31.12	18.52	71.07	
	26765	821.5	-13.54	31.92	18.38	68.90	
Channel Bandwidth: 5 MHz / 16QAM							
Z	26715	816.5	-10.32	31.21	20.89	122.69	H
	26740	819	-10.49	31.30	20.81	120.50	
	26765	821.5	-10.52	31.22	20.70	117.54	
	26715	816.5	-13.87	31.50	17.63	58.00	V
	26740	819	-13.61	31.12	17.51	56.32	
	26765	821.5	-14.54	31.92	17.38	54.73	
Channel Bandwidth: 5 MHz / 64QAM							
Z	26715	816.5	-11.31	31.21	19.90	97.68	H
	26740	819	-11.49	31.30	19.81	95.72	
	26765	821.5	-11.52	31.22	19.70	93.37	
	26715	816.5	-14.87	31.50	16.63	46.07	V
	26740	819	-14.62	31.12	16.50	44.64	
	26765	821.5	-15.54	31.92	16.38	43.47	
Channel Bandwidth: 5 MHz / 256QAM							
Z	26715	816.5	-14.32	31.21	16.89	48.84	H
	26740	819	-14.49	31.30	16.81	47.97	
	26765	821.5	-14.52	31.22	16.70	46.80	
	26715	816.5	-17.86	31.50	13.64	23.14	V
	26740	819	-17.62	31.12	13.50	22.37	
	26765	821.5	-18.54	31.92	13.38	21.79	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 26							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Z	26740	819	-9.44	31.30	21.86	153.46	H
	26740	819	-12.57	31.12	18.55	71.56	V
Channel Bandwidth: 10 MHz / 16QAM							
Z	26740	819	-10.45	31.30	20.85	121.62	H
	26740	819	-13.56	31.12	17.56	56.98	V
Channel Bandwidth: 10 MHz / 64QAM							
Z	26740	819	-11.45	31.30	19.85	96.61	H
	26740	819	-14.55	31.12	16.57	45.36	V
Channel Bandwidth: 10 MHz / 256QAM							
Z	26740	819	-14.44	31.30	16.86	48.53	H
	26740	819	-17.56	31.12	13.56	22.68	V

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB)

4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

- (1) The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit of emission is equal to -13 dBm.
- (2) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

4.2.2 Test Procedure

- a. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- a. $EIRP = \text{Output power level} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. Correction Factor (includes EIRP and ERP unit conversion factor) = Antenna gain of substitution horn. - Tx cable loss. Measurement method refers to ANSI C63.26 section 5.5 and 5.2.7.
- b. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dB}$.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz: The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.2.3 Deviation from Test Standard


No deviation.

4.2.4 Test Setup

<Radiated Emission below or equal 1 GHz>

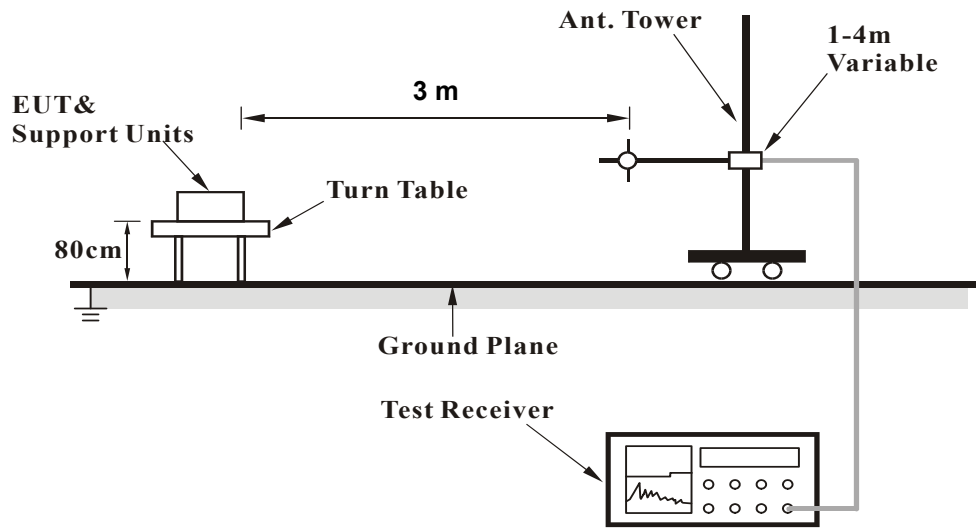

<Radiated Emission above 1 GHz>

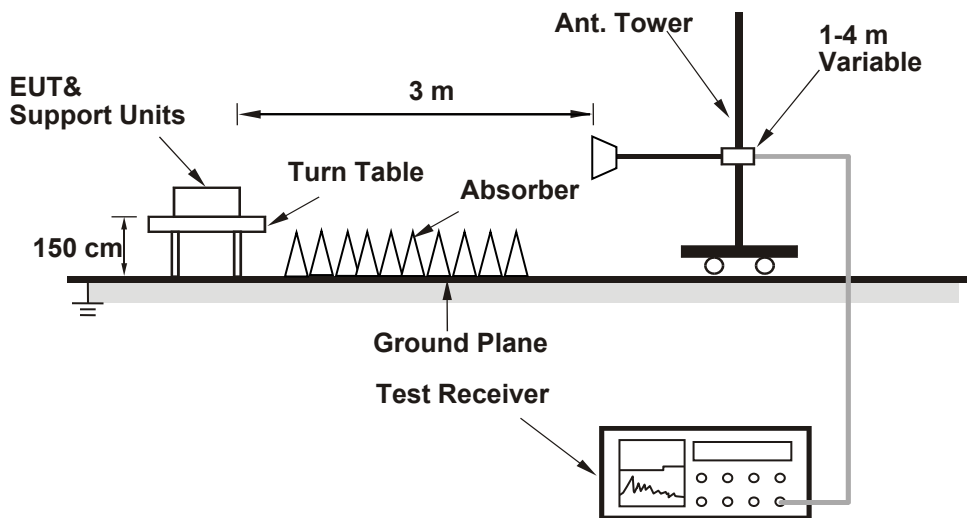

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

LTE Band 14
 Channel Bandwidth: 5 MHz / QPSK
 Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2021-07-13

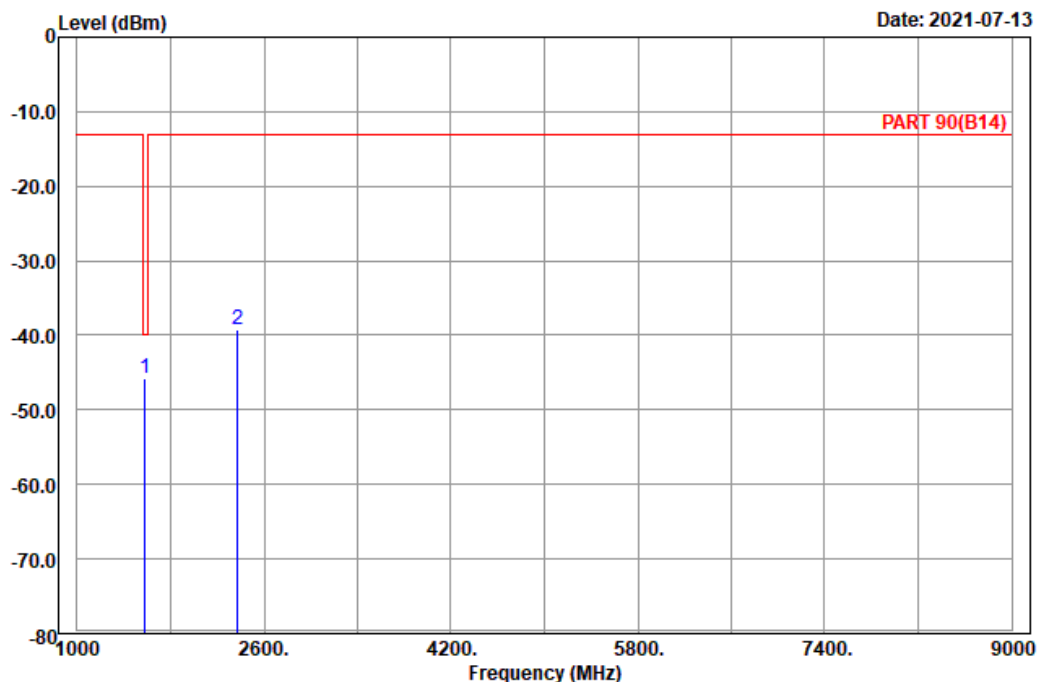

Site : 966 chamber 1
 Condition: PART 90(B14) Horizontal
 Remark : LTE_Band 14_Link_L-Ch
 Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	pp 1581.00	-45.72	-52.76	7.04	-40.00	-5.72	Peak
2	2371.50	-39.13	-50.08	10.95	-13.00	-26.13	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2021-07-13

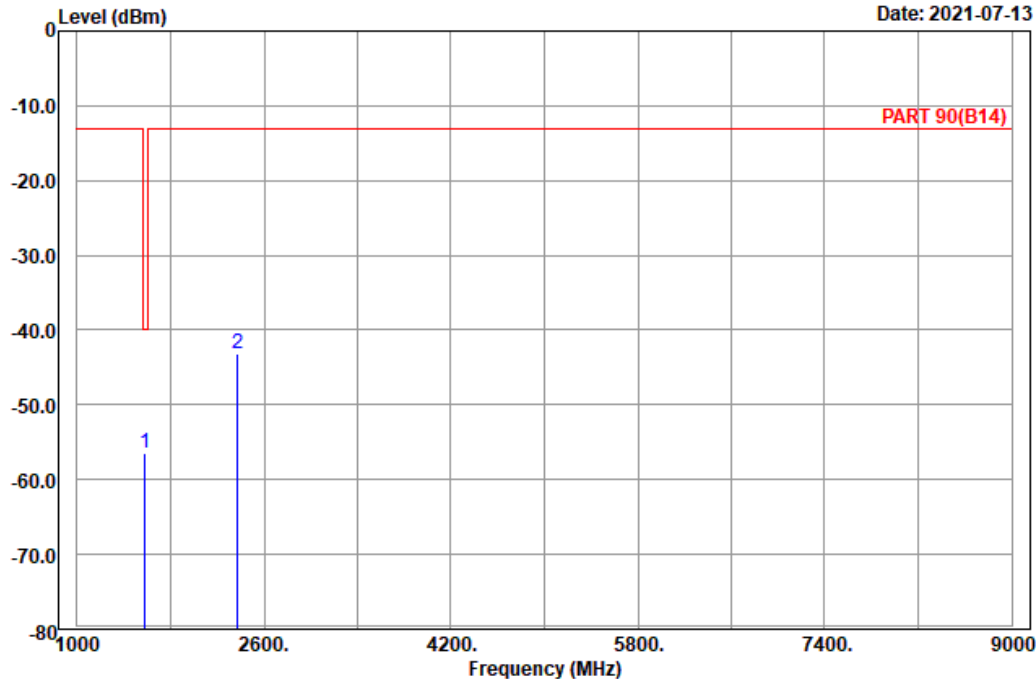

Site : 966 chamber 1
 Condition: PART 90(B14) Vertical
 Remark : LTE_Band 14_Link_L-Ch
 Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1 pp	1581.00	-56.52	-63.56	7.04	-40.00	-16.52	Peak
2	2371.50	-43.24	-54.19	10.95	-13.00	-30.24	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2021-07-13

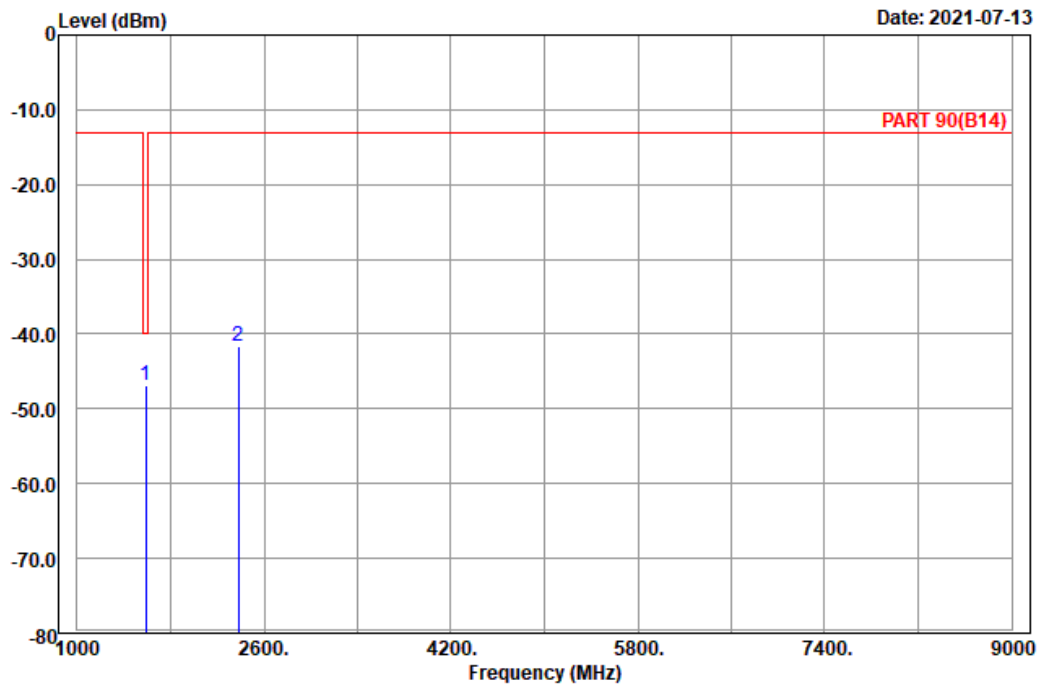

Site : 966 chamber 1
 Condition: PART 90(B14) Horizontal
 Remark : LTE_Band 14_Link_M-Ch
 Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	pp 1586.00	-46.94	-54.15	7.21	-40.00	-6.94	Peak
2	2379.00	-41.54	-52.50	10.96	-13.00	-28.54	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2021-07-13

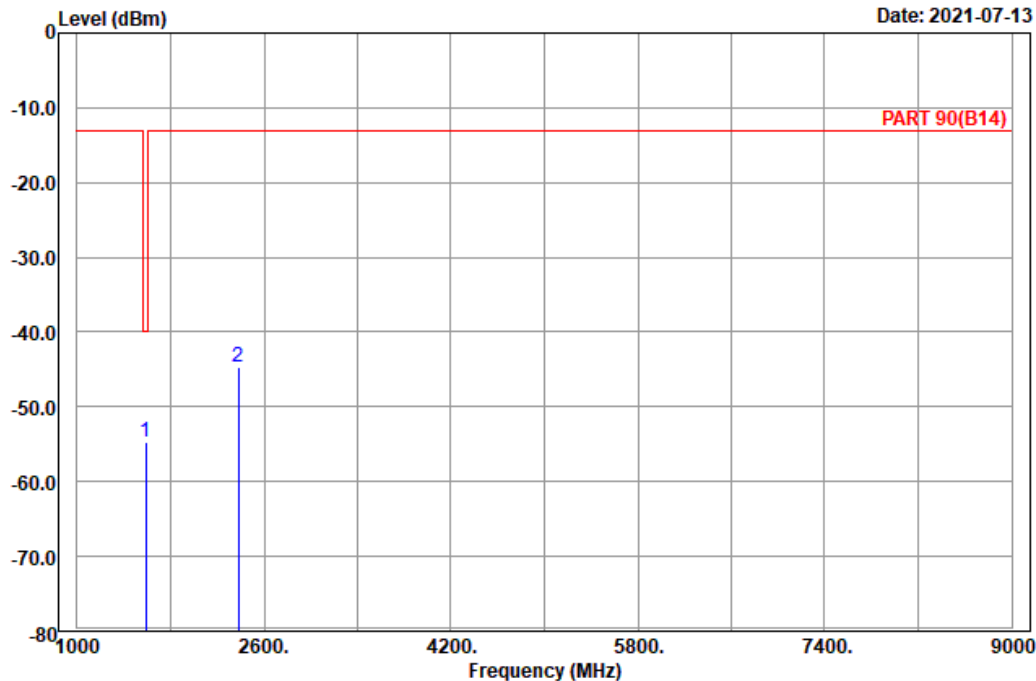

Site : 966 chamber 1
 Condition: PART 90(B14) Vertical
 Remark : LTE_Band 14_Link_M-Ch
 Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1 pp	1586.00	-54.70	-61.91	7.21	-40.00	-14.70	Peak
2	2379.00	-44.67	-55.63	10.96	-13.00	-31.67	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2021-07-13

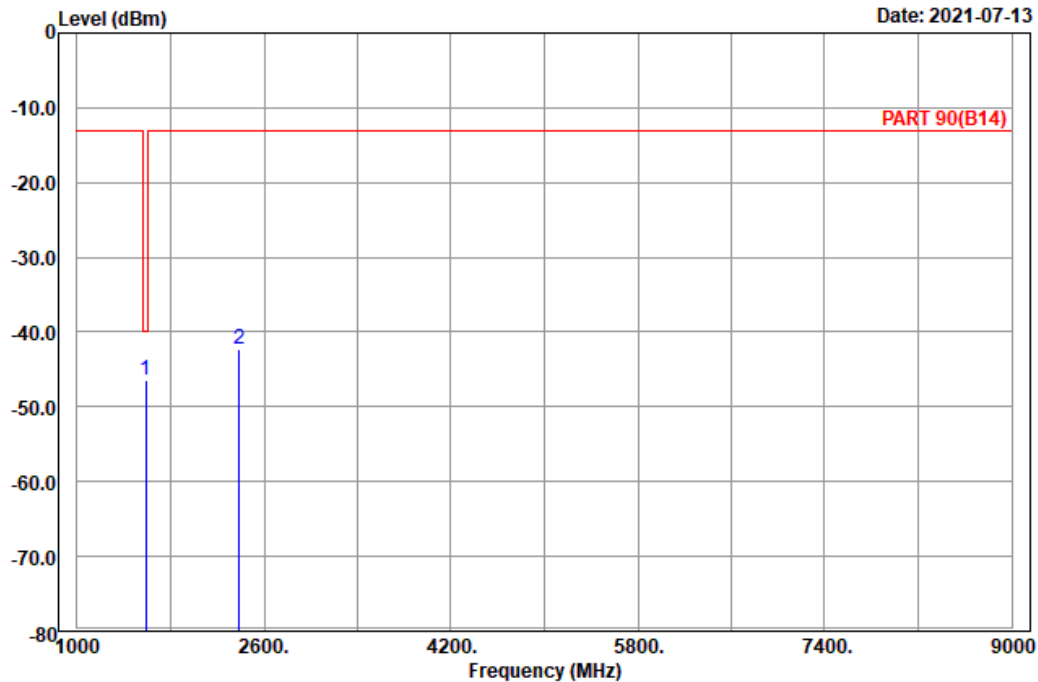

Site : 966 chamber 1
 Condition: PART 90(B14) Horizontal
 Remark : LTE_Band 14_Link_H-Ch
 Tested by: Karl Lee

	Read	Limit	Over				
Freq	Level	Level	Factor	Line			
MHz	dBm	dBm	dB	dBm			
1 pp	1591.00	-46.39	-53.60	7.21	-40.00	-6.39	Peak
2	2386.50	-42.37	-53.33	10.96	-13.00	-29.37	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2021-07-13

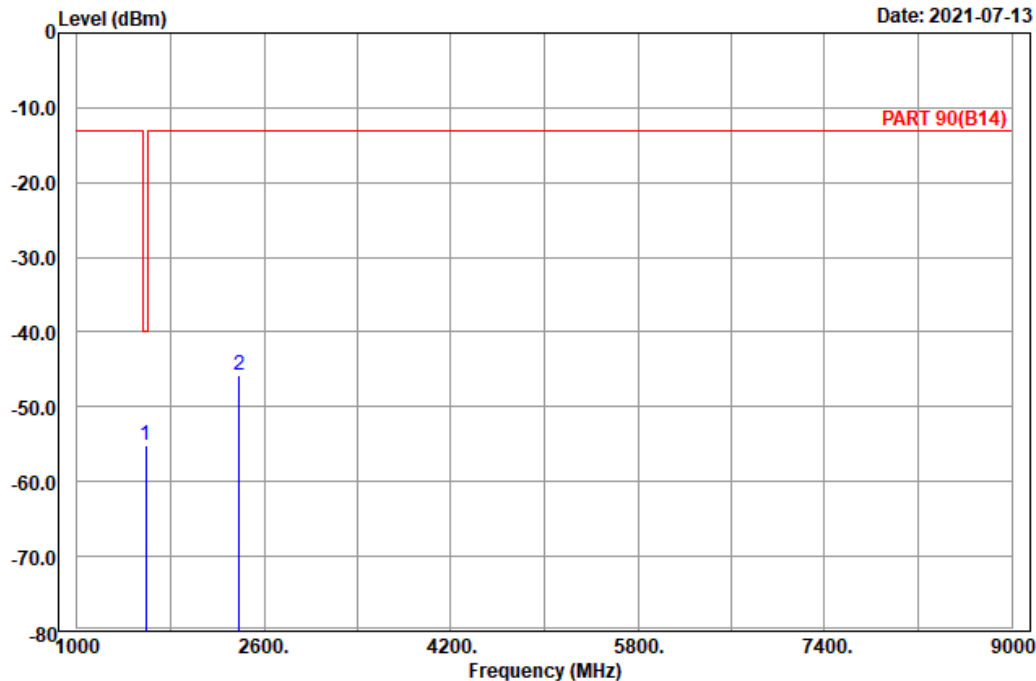

Site : 966 chamber 1
 Condition: PART 90(B14) Vertical
 Remark : LTE_Band 14_Link_H-Ch
 Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1 pp	1591.00	-55.25	-62.46	7.21	-40.00	-15.25	Peak
2	2386.50	-45.78	-56.74	10.96	-13.00	-32.78	Peak


Channel Bandwidth: 10 MHz / QPSK
Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

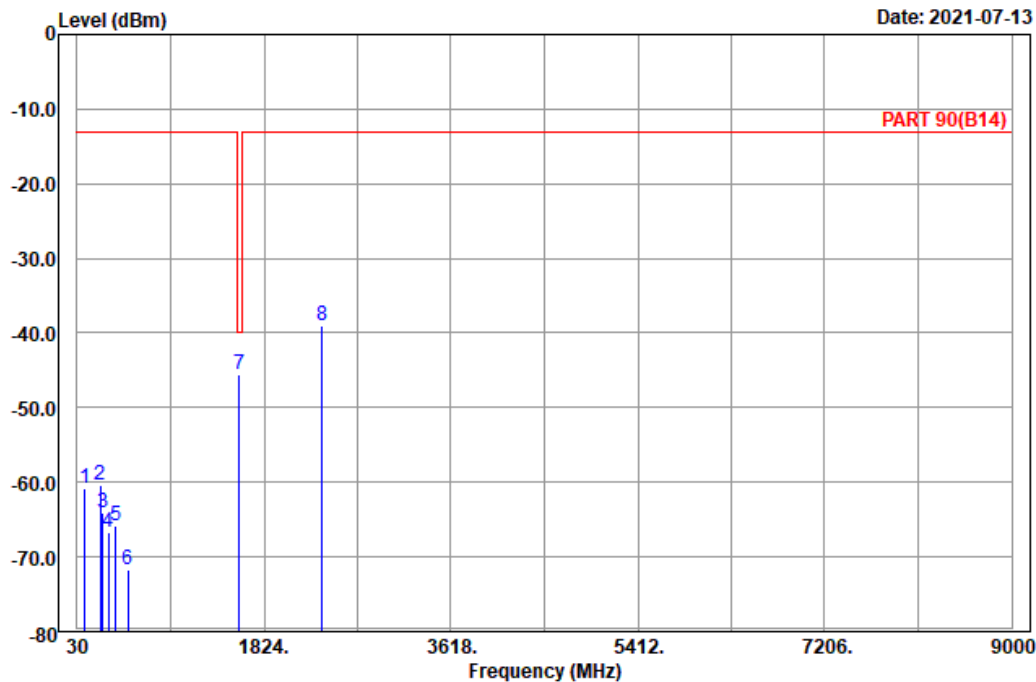

Site : 966 chamber 1
Condition: PART 90(B14) Horizontal
Remark : LTE_Band 14_Link_M-Ch
Tested by: Karl Lee

	Freq	Level	Read	Limit	Over	Remark
	MHz	dBm	Level	Line	Limit	
			dBm	dBm	dB	
1	101.55	-60.88	-50.99	-13.00	-47.88	Peak
2	252.75	-60.41	-54.88	-13.00	-47.41	Peak
3	273.54	-64.03	-58.31	-13.00	-51.03	Peak
4	332.20	-66.60	-61.02	-13.00	-53.60	Peak
5	400.10	-65.79	-63.03	-13.00	-52.79	Peak
6	518.40	-71.77	-67.84	-13.00	-58.77	Peak
7 pp	1586.00	-45.53	-52.74	-40.00	-5.53	Peak
8	2379.00	-39.11	-50.07	-13.00	-26.11	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2021-07-13

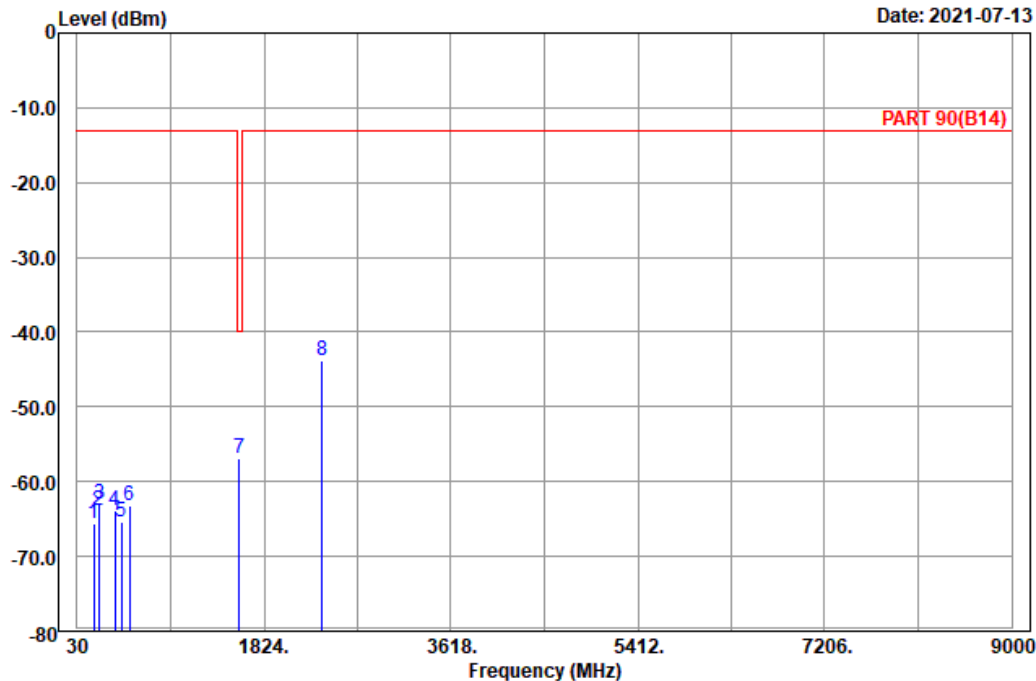

Site : 966 chamber 1
 Condition: PART 90(B14) Vertical
 Remark : LTE_Band 14_Link_M-Ch
 Tested by: Karl Lee

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	190.11	-65.72	-59.99	-5.73	-13.00	-52.72	Peak
2	237.63	-63.94	-58.26	-5.68	-13.00	-50.94	Peak
3	247.89	-62.91	-57.38	-5.53	-13.00	-49.91	Peak
4	392.40	-63.82	-60.72	-3.10	-13.00	-50.82	Peak
5	454.70	-65.33	-61.35	-3.98	-13.00	-52.33	Peak
6	533.80	-63.22	-60.35	-2.87	-13.00	-50.22	Peak
7 pp	1586.00	-56.95	-64.16	7.21	-40.00	-16.95	Peak
8	2379.00	-43.88	-54.84	10.96	-13.00	-30.88	Peak


LTE Band 26
 Channel Bandwidth: 1.4 MHz / QPSK
 Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

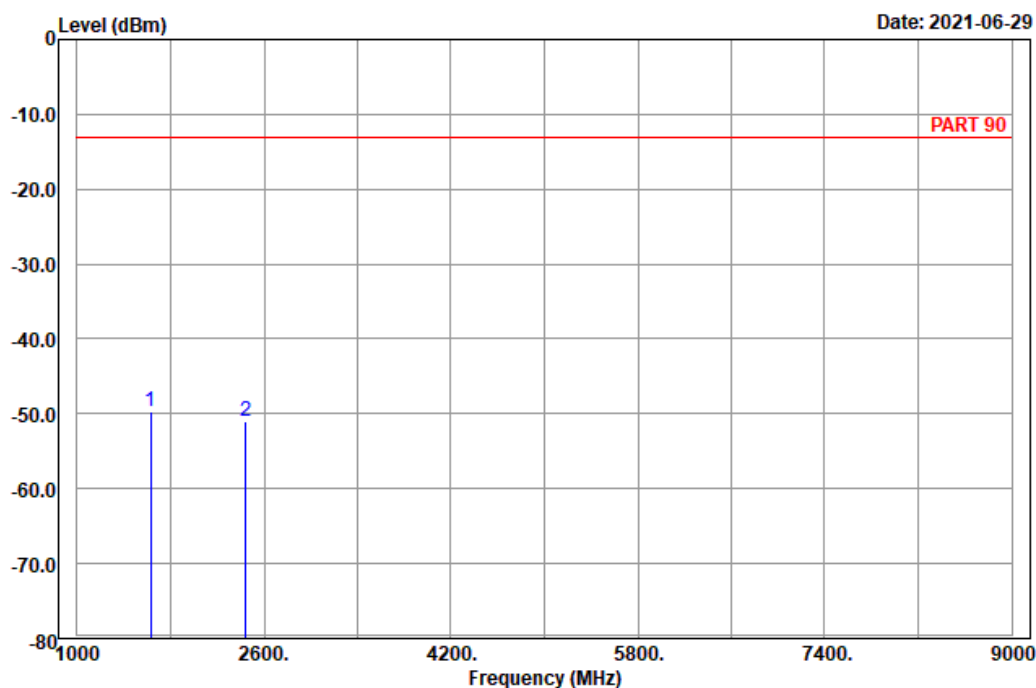

Site : 966 chamber 1
 Condition: PART 90 Horizontal
 Remark : LTE_Band 26_Link_L-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	pp 1629.40	-49.69	-57.25	7.56	-13.00	-36.69	Peak
2	2444.10	-51.00	-62.00	11.00	-13.00	-38.00	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2021-06-29

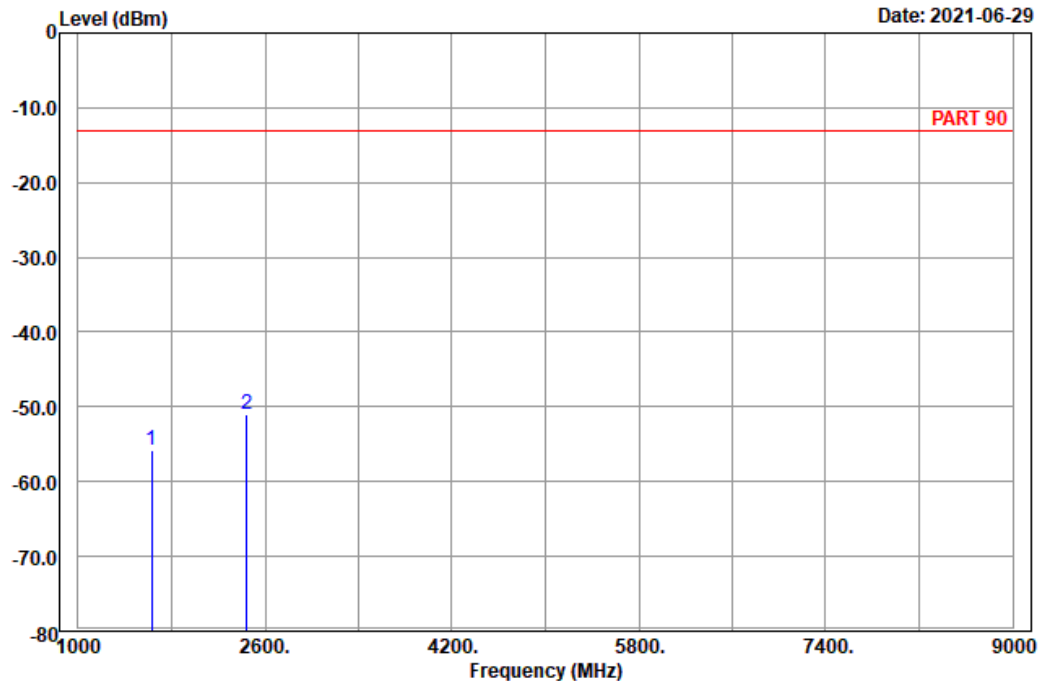

Site : 966 chamber 1
 Condition: PART 90 Vertical
 Remark : LTE_Band 26_Link_L-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1629.40	-55.78	-63.34	7.56	-13.00	-42.78	Peak
2	pp 2444.10	-50.90	-61.90	11.00	-13.00	-37.90	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 2021-06-29

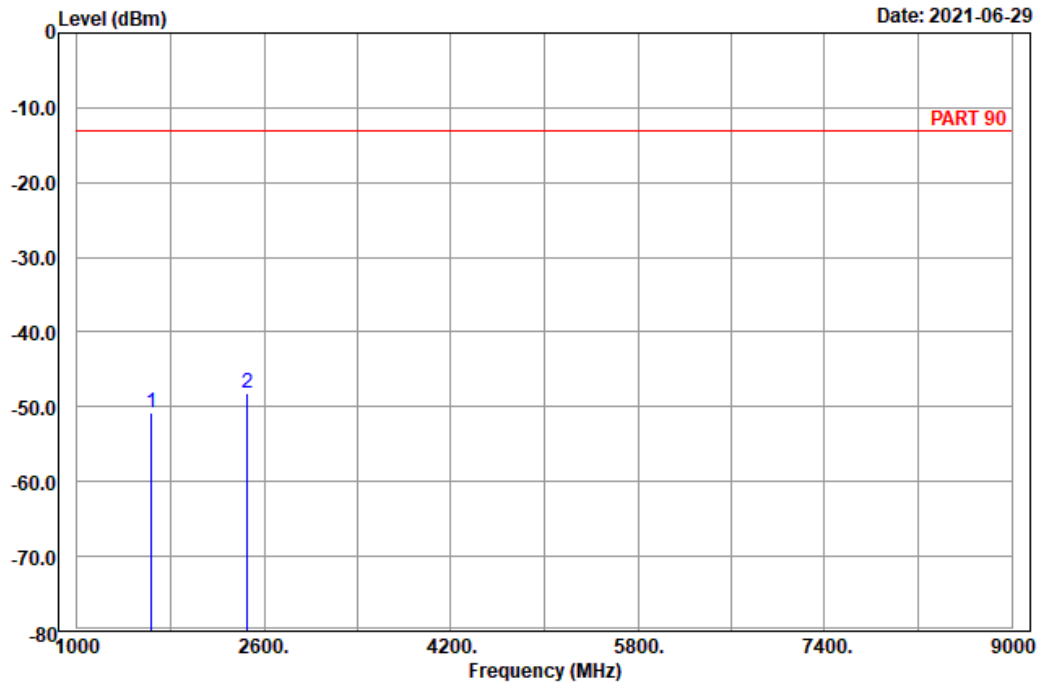

Site : 966 chamber 1
 Condition: PART 90 Horizontal
 Remark : LTE_Band 26_Link_M-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1638.00	-50.70	-58.26	7.56	-13.00	-37.70	Peak
2	2457.00	-48.23	-59.25	11.02	-13.00	-35.23	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2021-06-29

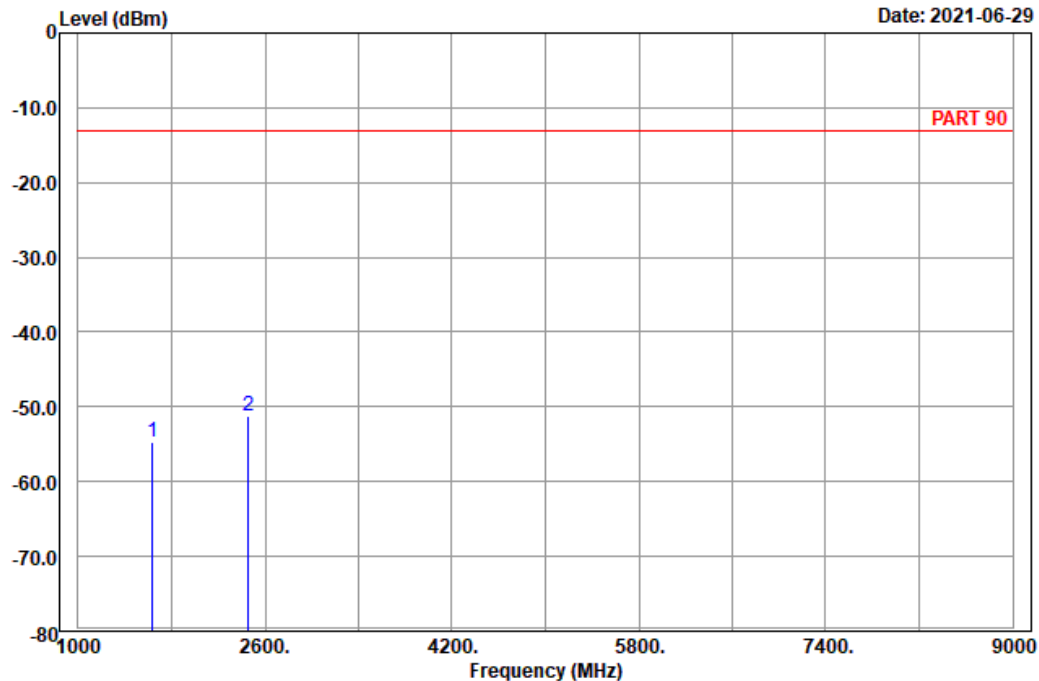

Site : 966 chamber 1
 Condition: PART 90 Vertical
 Remark : LTE_Band 26_Link_M-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1638.00	-54.62	-62.18	7.56	-13.00	-41.62	Peak
2	pp 2457.00	-51.12	-62.14	11.02	-13.00	-38.12	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

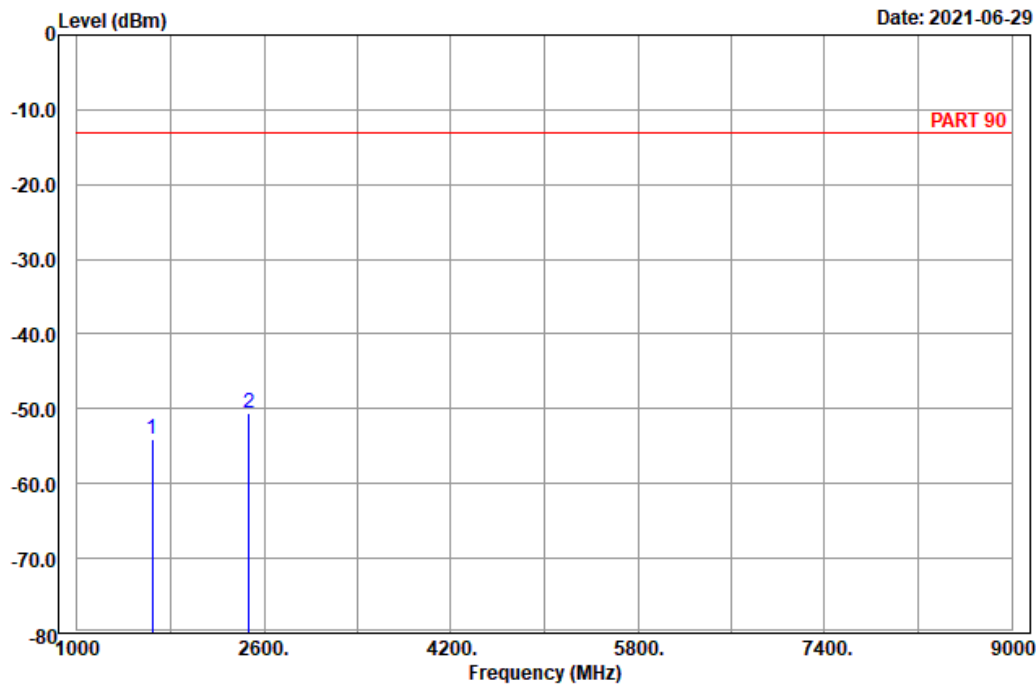

Site : 966 chamber 1
 Condition: PART 90 Horizontal
 Remark : LTE_Band 26_Link_H-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1646.60	-54.10	-61.83	7.73	-13.00	-41.10	Peak
2	pp 2469.90	-50.57	-61.60	11.03	-13.00	-37.57	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2021-06-29

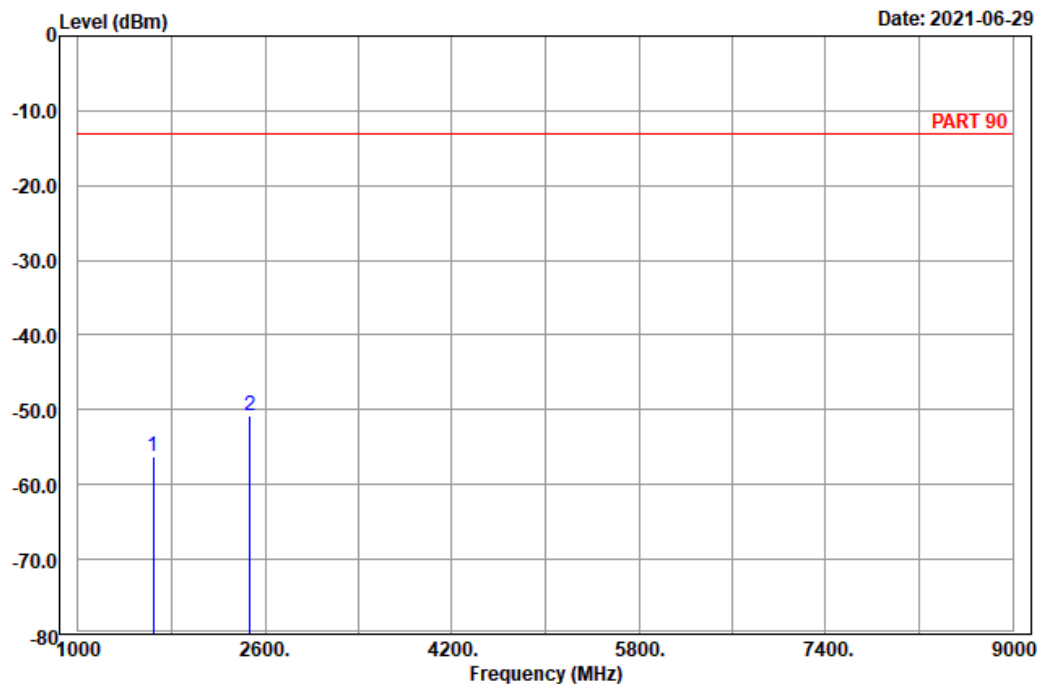

Site : 966 chamber 1
 Condition: PART 90 Vertical
 Remark : LTE_Band 26_Link_H-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1646.60	-56.15	-63.88	7.73	-13.00	-43.15	Peak
2 pp	2469.90	-50.85	-61.88	11.03	-13.00	-37.85	Peak


Channel Bandwidth: 5 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

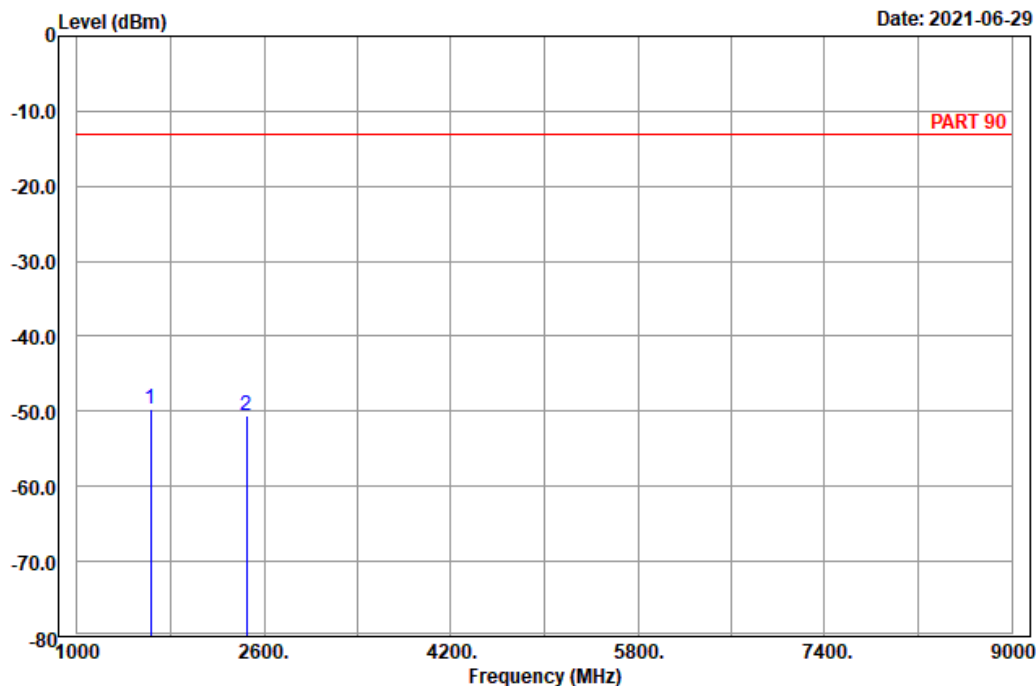

Site : 966 chamber 1
Condition: PART 90 Horizontal
Remark : LTE_Band 26_Link_L-Ch
Tested by: Charles Hsiao

	Read	Limit	Over				
Freq	Level	Level	Factor	Line	Limit	Remark	
MHz	dBm	dBm	dB	dBm	dB		
1 pp 1633.00	-49.67	-57.23	7.56	-13.00	-36.67	Peak	
2 2449.50	-50.60	-61.62	11.02	-13.00	-37.60	Peak	




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2021-06-29

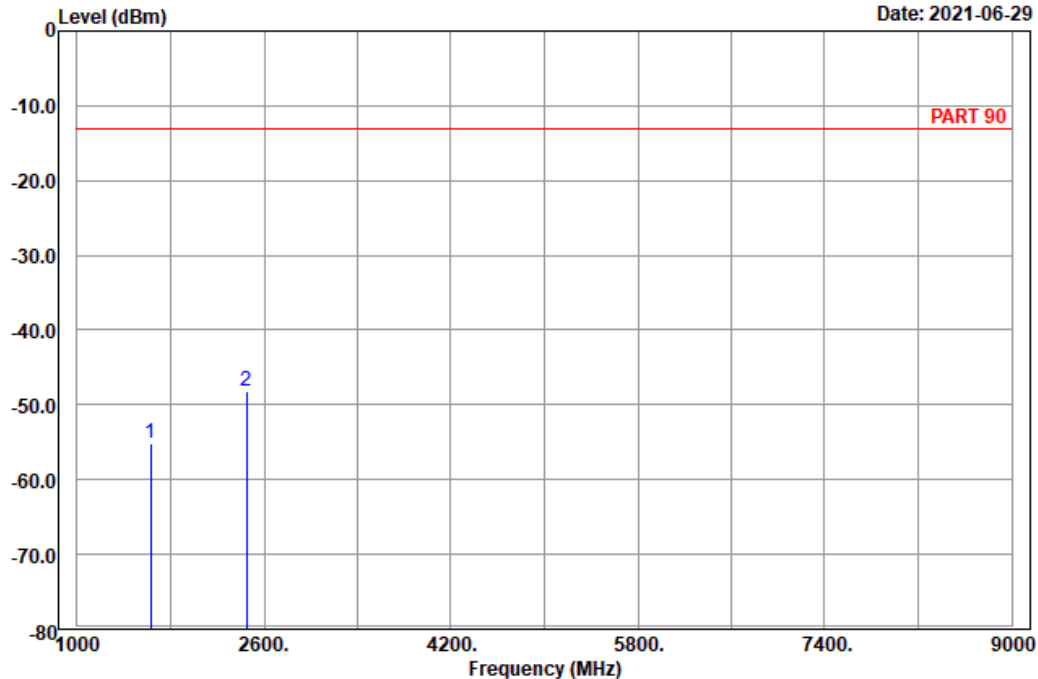

Site : 966 chamber 1
 Condition: PART 90 Vertical
 Remark : LTE_Band 26_Link_L-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1633.00	-55.18	-62.74	7.56	-13.00	-42.18	Peak
2	pp 2449.50	-48.15	-59.17	11.02	-13.00	-35.15	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 2021-06-29

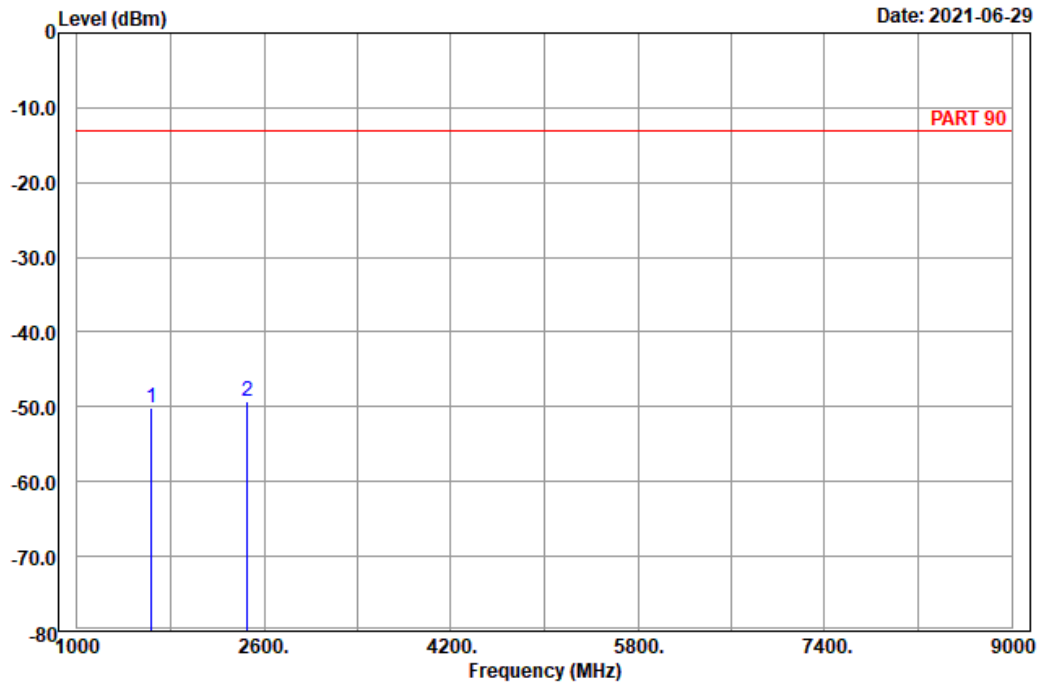

Site : 966 chamber 1
 Condition: PART 90 Horizontal
 Remark : LTE_Band 26_Link_M-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1638.00	-50.16	-57.72	7.56	-13.00	-37.16	Peak
2	2457.00	-49.37	-60.39	11.02	-13.00	-36.37	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2021-06-29

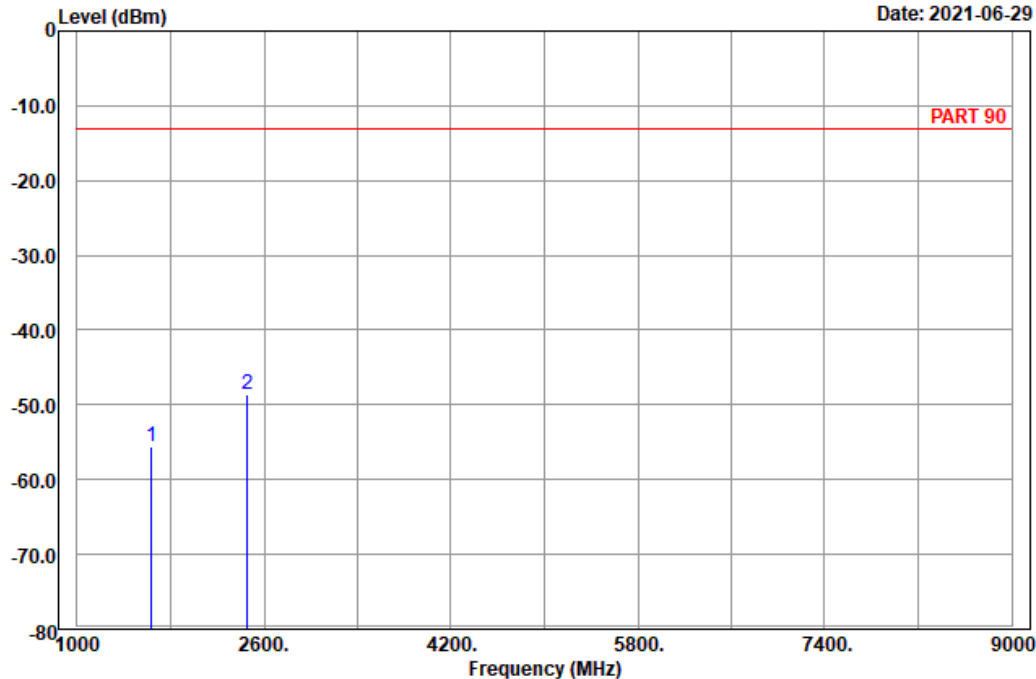

Site : 966 chamber 1
 Condition: PART 90 Vertical
 Remark : LTE_Band 26_Link_M-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1638.00	-55.66	-63.22	7.56	-13.00	-42.66	Peak
2	2457.00	-48.67	-59.69	11.02	-13.00	-35.67	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

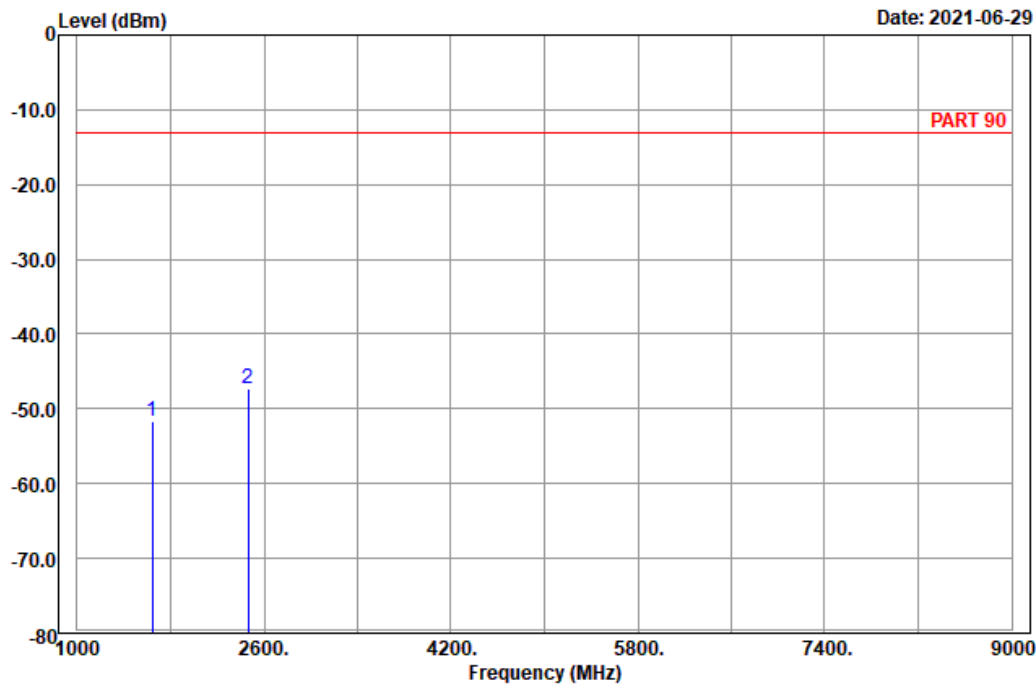

Site : 966 chamber 1
 Condition: PART 90 Horizontal
 Remark : LTE_Band 26_Link_H-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1643.00	-51.66	-59.39	7.73	-13.00	-38.66	Peak
2	2464.50	-47.37	-58.39	11.02	-13.00	-34.37	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2021-06-29

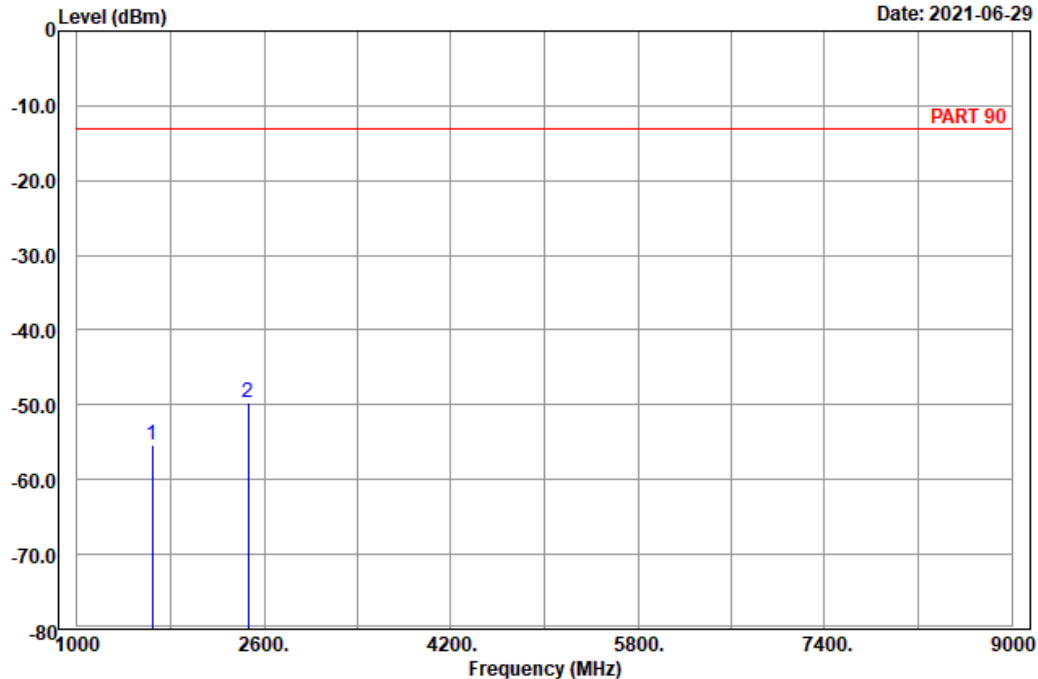

Site : 966 chamber 1
 Condition: PART 90 Vertical
 Remark : LTE_Band 26_Link_H-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1643.00	-55.30	-63.03	7.73	-13.00	-42.30	Peak
2	pp 2464.50	-49.76	-60.78	11.02	-13.00	-36.76	Peak


Channel Bandwidth: 10 MHz / QPSK
Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

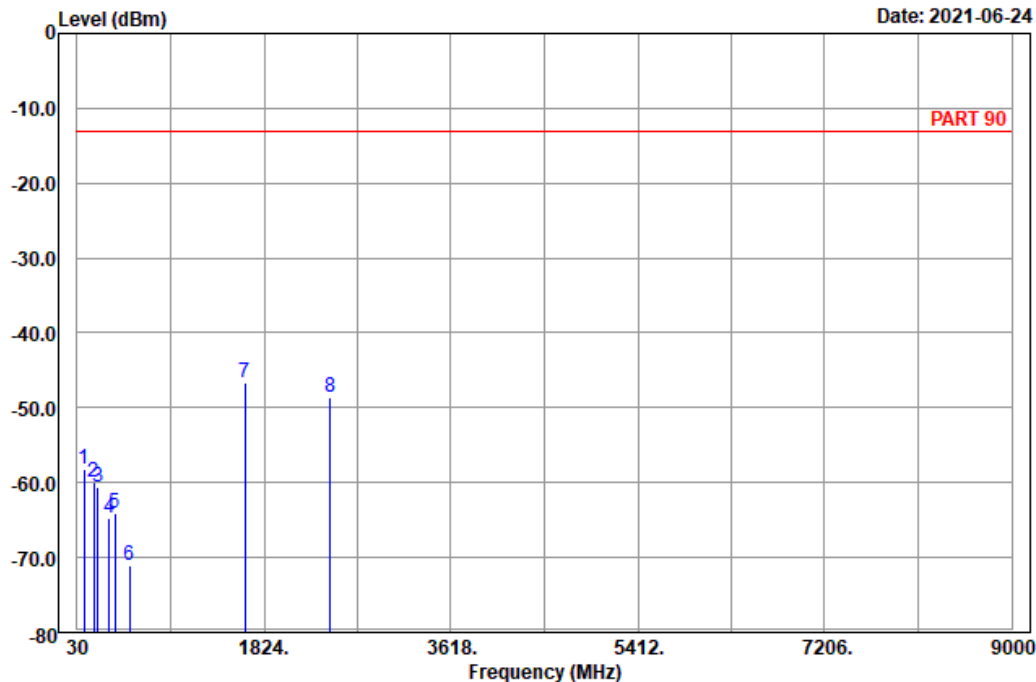

Site : 966 chamber 1
Condition: PART 90 Horizontal
Remark : LTE_Band 26_Link_M-Ch
Tested by: Charles Hsiao


	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	97.50	-58.10	-47.87	-10.23	-13.00	-45.10	Peak
2	186.60	-59.90	-54.23	-5.67	-13.00	-46.90	Peak
3	232.50	-60.69	-54.95	-5.74	-13.00	-47.69	Peak
4	339.20	-64.78	-59.28	-5.50	-13.00	-51.78	Peak
5	391.70	-64.10	-60.95	-3.15	-13.00	-51.10	Peak
6	533.80	-70.98	-68.11	-2.87	-13.00	-57.98	Peak
7 pp	1638.00	-46.55	-54.11	7.56	-13.00	-33.55	Peak
8	2457.00	-48.66	-59.68	11.02	-13.00	-35.66	Peak



A D T

Data: 10

Date: 2021-06-24

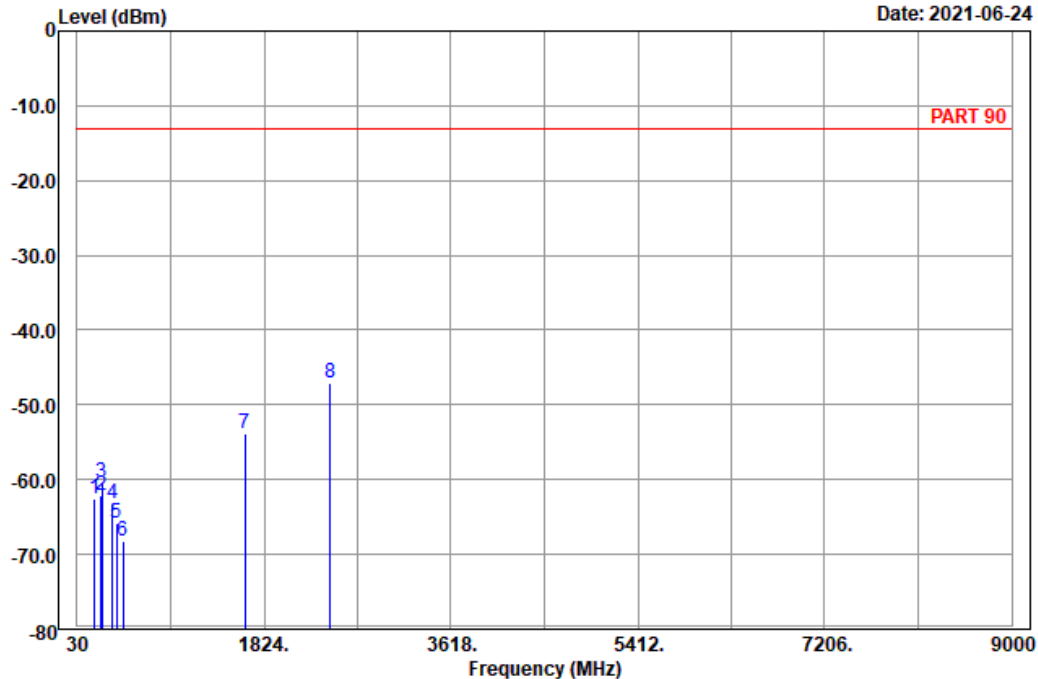

Site : 966 chamber 1
 Condition: PART 90 Vertical
 Remark : LTE_Band 26_Link_M-Ch
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	200.64	-62.62	-56.45	-6.17	-13.00	-49.62	Peak
2	257.61	-62.14	-56.56	-5.58	-13.00	-49.14	Peak
3	268.41	-60.32	-54.64	-5.68	-13.00	-47.32	Peak
4	368.60	-63.26	-58.86	-4.40	-13.00	-50.26	Peak
5	411.30	-65.75	-62.75	-3.00	-13.00	-52.75	Peak
6	469.40	-68.17	-63.77	-4.40	-13.00	-55.17	Peak
7	1638.00	-53.81	-61.37	7.56	-13.00	-40.81	Peak
8 pp	2457.00	-47.01	-58.03	11.02	-13.00	-34.01	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---