

CBSD-EUD Test Report

Applicant	:	Getac Technology Corporation
Product Name	:	Wireless Module
Trade Name	:	Getac
Model Number	:	EM9190U
Applicable Standard	:	FCC 47 CFR PART 96.47
Received Date	:	Jun. 26, 2023
Test Period	:	Jul. 04, 2023
Issued Date	:	Aug. 04, 2023

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd. No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.) Tel : +886-3-2710188 / Fax : +886-3-2710190



<u>Taiwan Accreditation F</u>oundation accreditation number: 1330 Frequency Range : 9 kHz to 40 GHz Test Firm Registration Number: 226252 (Bade test site) Test Firm Registration Number: 191812 (Wugu test site)

Note:

The test results are valid only for samples provided by customers and under the test conditions described in this report.
 This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
 The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.



Revision History

Version	Issued Date	Revisions	Revised By
00	Aug. 04, 2023	Initial Issue	Nina Lin



歐陸電子通訊檢測股份有限公司 Eurofins E&E Wireless Taiwan Co., Ltd.

Verification of Compliance

Applicant	:	Getac Technology Corporation
Product Name	:	Wireless Module
Trade Name	:	Getac
Model Number	:	EM9190U
FCC ID	:	QYLEM9190U
Applicable Standard	:	FCC 47 CFR PART 96.47
Test Result	:	Complied
Performing Lab.	:	Eurofins E&E Wireless Taiwan Co., Ltd. No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.) Tel : +886-3-2710188 / Fax : +886-3-2710190 Taiwan Accreditation Foundation accreditation number: 1330

Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By

:



TABLE OF CONTENTS

Gene	eral Information	5
1.1.	EUT Description	5
1.2.	Testing Location	5
1.3.	Product Specification of Equipment Under Test	5
1.4.	EUT Test Step	6
1.5.	Test Instruments	6
1.6.	Test Site Environment	6
Meas	surement Procedure	7
2.1.	End user device additional requirements Test	7
Test	Results	8
Appe	ndix : End user device additional requirements	8
	 1.1. 1.2. 1.3. 1.4. 1.5. 1.6. 1.7. Meas 2.1. Test 	General Information 1.1. EUT Description 1.2. Testing Location 1.3. Product Specification of Equipment Under Test 1.4. EUT Test Step 1.5. Test Instruments 1.6. Test Site Environment 1.7. Summary of Test Result Measurement Procedure 2.1. End user device additional requirements Test Appendix : End user device additional requirements

Appendix A. Test Setup Photographs



1 General Information

1.1. EUT Description

Applicant	Getac Technology Corporation 5F.,Building A,No.209,Sec.1 Nangang.,Rd., Taipei City, 11568, Taiwan
Product Name	Wireless Module
Trade Name	Getac
Model Number	EM9190U
FCC ID	QYLEM9190U
IMEI No.	351891305000595
Antenna Information	Refer to Section 1.4
Operate Temp. Range	-40 ~ +85 ℃
EUT Power Rating	DC 3.3 V

LTE				
Operation Band (EUTRA) :	Band 48			
Modulation type:	🛛 QPSK	⊠ 16QAM	🛛 64QAM	

1.2. Testing Location

Lab Name:Eurofins E&E Wireless Taiwan Co., Ltd.Site Address:□ No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)Site Address:■ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Product Specification of Equipment Under Test

Band	Antenna Type	Gain (dBi)	Note
n48	PIFA Antenna	0.5	



1.4. EUT Test Step

1	Setup the EUT shown on "Configuration of Test System Details".
2	Turn on the power of all equipment.
3	EUT run test program test.

1.5. Test Instruments

For Conducted

Test Period: Jul. 04, 2023

Testing Engineer: Eric Ou Yang,

E&E

	Test Site	RF02-BD				
Use	Equipment	Manufacturer	lanufacturer Model Number Serial Number Cal. Date Cal. Period			Cal. Period
\boxtimes	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Dec. 29, 2022	1 year

1.6. Test Site Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

1.7. Summary of Test Result

FCC Rule	Description	Result
§96.47	End user device additional requirements.	Pass

Decision Rule

Uncertainty is not included.

□ Uncertainty is included.



2 Measurement Procedure

2.1. End user device additional requirements Test

E&E

Limit

- (a) End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.
- An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

Test Procedure

The EUT was connects to a certified CBSD and spectrum analyzer. The following procedure is performed by applying WINNF-TS-0122 CBRS CBSD Test Specification:

1. Setup with low channel and power level 10 dBm/MHz.

Note. Set one of the BW supported by the EUD.

- 2. Enable AP service from EPC management.
- 3. Check EUD Tx frequency and power.
- 4. Disable AP service from EPC management.
- 5. Check EUD stops transmission within 10 seconds.
- 6. Setup with high channel and power level 15 dBm/MHz.


Note. Set one of the BW supported by the EUD.

- 7. Enable AP service from EPC management.
- 8. Check EUD Tx frequency and power.
- 9. Disable AP service from EPC management.
- 10. Check EUD stops transmission within 10 seconds.




3 Test Results

Appendix : End user device additional requirements

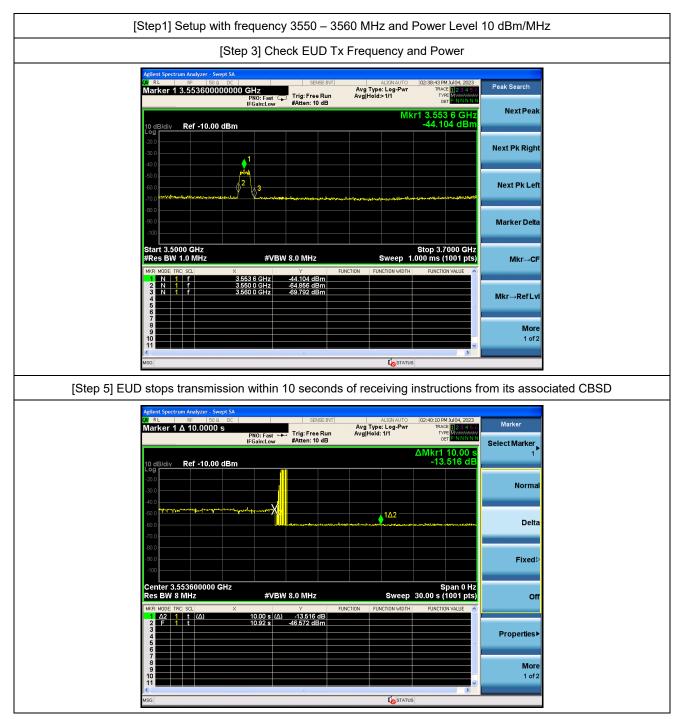



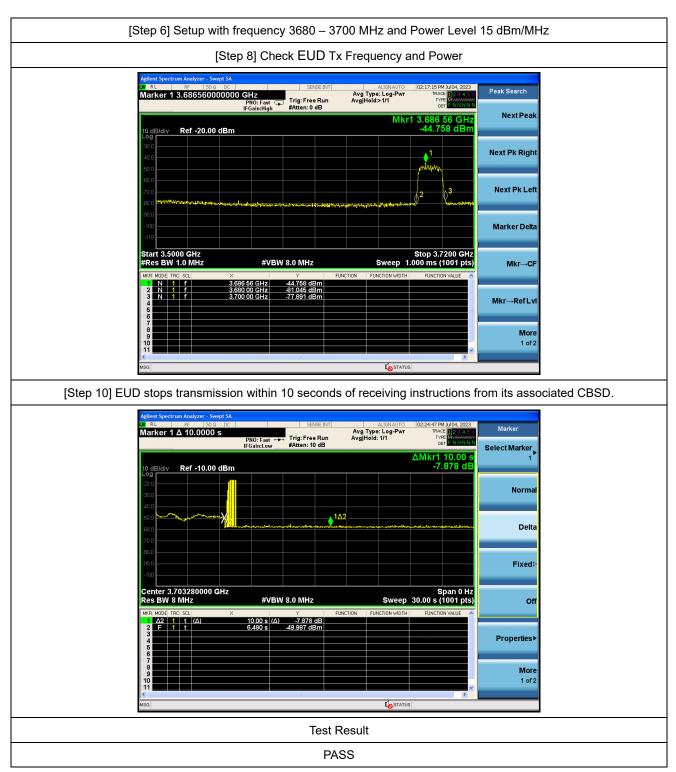

Notes: After changing the frequency , Power Level and Bandwidth,

The EUD discontinues operations , change frequencies , or change its operational power level within 10 seconds of

receiving instructions from its associated CBSD

Page 9 of 9