
Appendix C – Highest Test Plots

Test Date : 2024-08-06 | Ambient Temp : 22.5 °C | Tissue Temp : 21.3 °C

Test Mode**1_WCDMA II_RMC12.2K_Top Side_0mm_Ch9400_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 2	WCDMA, 10011 - CAC	1880.000, 9400	8.64	1.47	40.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.877	0.899
psSAR-10g [W/kg]	0.429	0.464
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		56.4
Dist 3dB Peak [mm]		8.2

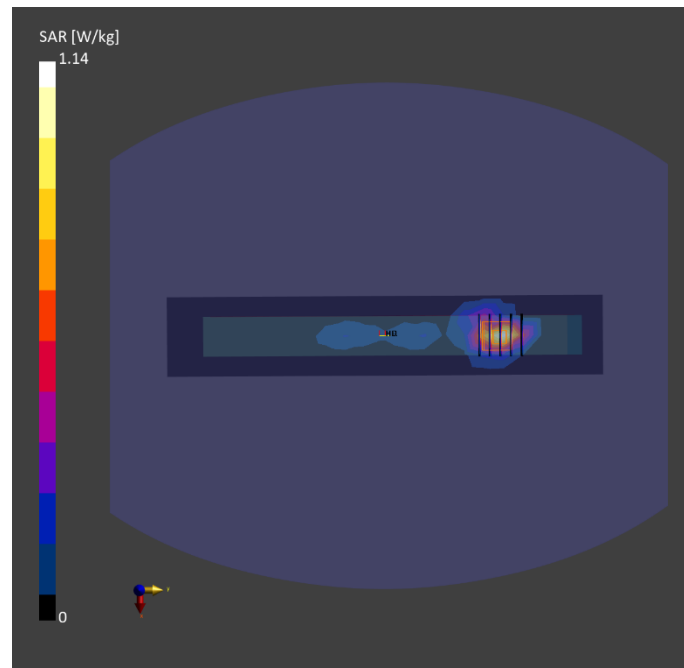

Test Date : 2024-08-08 | Ambient Temp : 22.7 °C | Tissue Temp : 21.5 °C

Test Mode**2_WCDMA IV_RMC12.2K_Top Side_0mm_Ch1513_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 4	WCDMA, 10011 - CAC	1752.600, 1513	7.9	1.38	39.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	1.05	0.940
psSAR-10g [W/kg]	0.530	0.577
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		59.9
Dist 3dB Peak [mm]		8.7

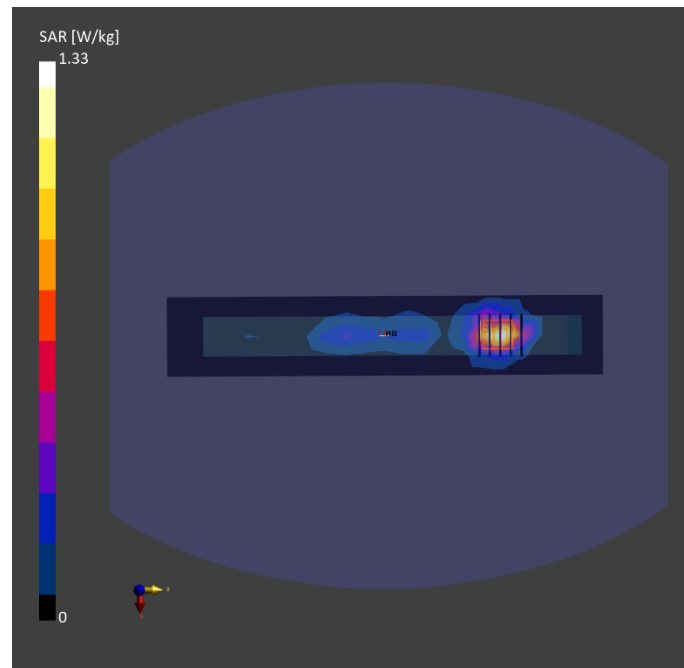

Test Date : 2024-08-07 | Ambient Temp : 22.6 °C | Tissue Temp : 21.3 °C

Test Mode**3_WCDMA V_RMC12.2K_Top Side_0mm_Ch4132_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 5	WCDMA, 10011 - CAC	826.400, 4132	9.15	0.963	42.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.992	0.944
psSAR-10g [W/kg]	0.587	0.561
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		53.7
Dist 3dB Peak [mm]		9.6

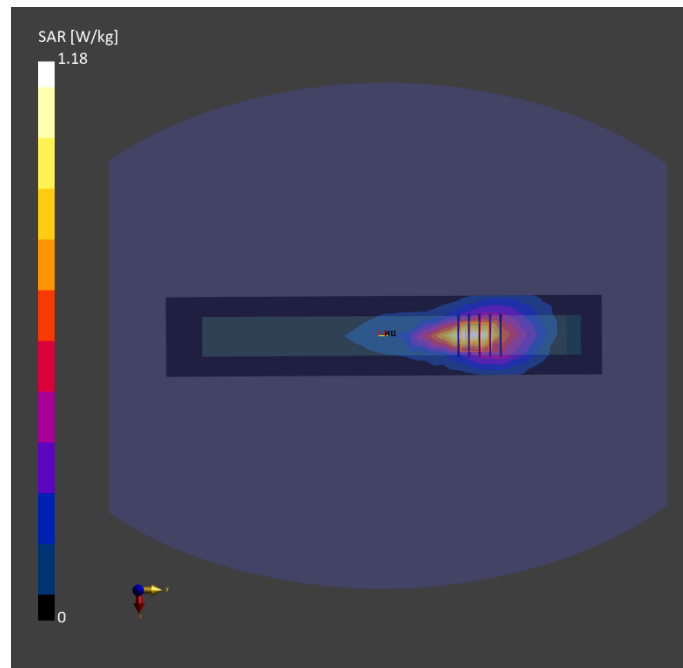

Test Date : 2024-08-07 | Ambient Temp : 22.6 °C | Tissue Temp : 21.3 °C

Test Mode**4_LTE 5_QPSK10M_Top Side_0mm_Ch20525_1RB_OS0_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 5	LTE-FDD, 10175 - CAH	836.500, 20525	9.15	0.966	42.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.968	0.916
psSAR-10g [W/kg]	0.572	0.544
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		54.1
Dist 3dB Peak [mm]		8.2

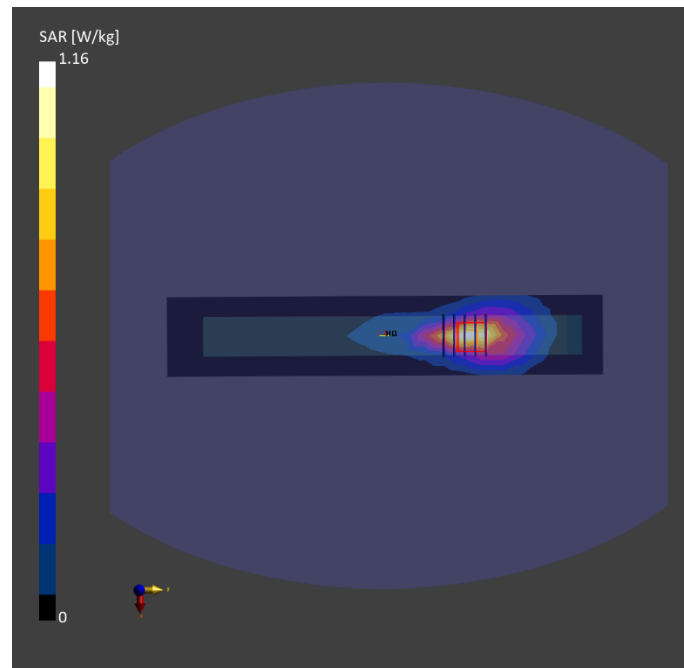

Test Date : 2024-08-11 | Ambient Temp : 22.8 °C | Tissue Temp : 21.4 °C

Test Mode**5_LTE 7_QPSK20M_Top Side_0mm_Ch21100_1RB_OS0_ANT Main_Battery1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 7	LTE-FDD, 10169 - CAF	2535.000, 21100	7.11	1.91	40.1

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 312.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.917	0.943
psSAR-10g [W/kg]	0.357	0.376
Power Drift [dB]		-0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		48.6
Dist 3dB Peak [mm]		4.8

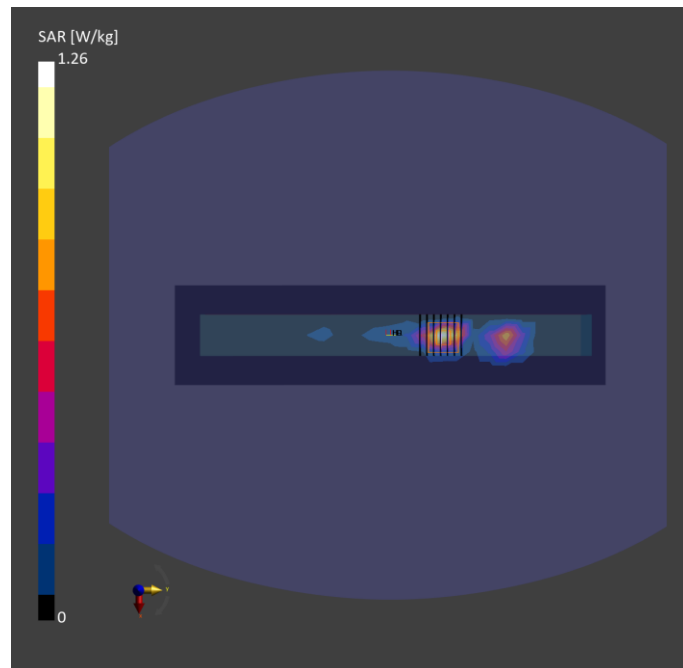

Test Date : 2024-08-06 | Ambient Temp : 22.5 °C | Tissue Temp : 21.3 °C

Test Mode**6_LTE 12_QPSK10M_Top Side_0mm_Ch23060_1RB_OS0_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 12	LTE-FDD, 10175 - CAH	704.000, 23060	9.37	0.910	43.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.841	0.741
psSAR-10g [W/kg]	0.507	0.424
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		58.1
Dist 3dB Peak [mm]		11.2

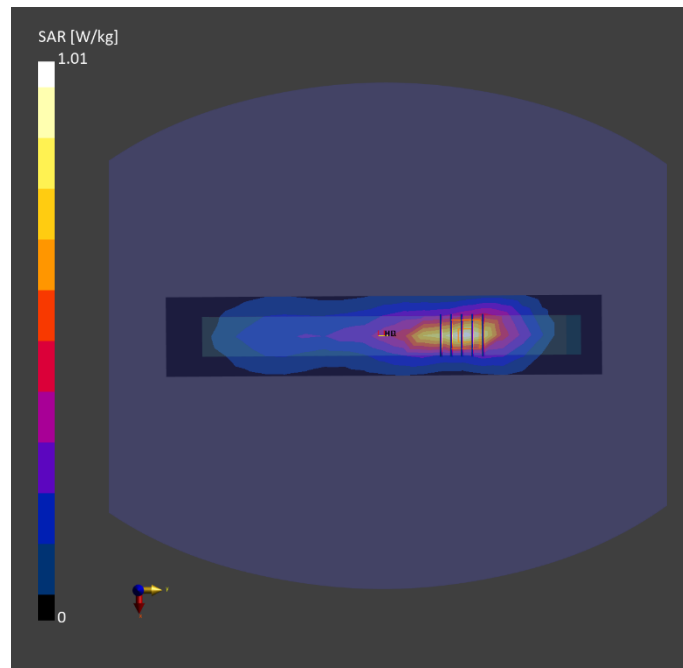

Test Date : 2024-08-06 | Ambient Temp : 22.5 °C | Tissue Temp : 21.3 °C

Test Mode**7_LTE 13_QPSK10M_Top Side_0mm_Ch23230_1RB_OS0_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 13	LTE-FDD, 10175 - CAH	782.000, 23230	9.37	0.940	42.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.743	0.741
psSAR-10g [W/kg]	0.434	0.413
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		53.7
Dist 3dB Peak [mm]		8.2

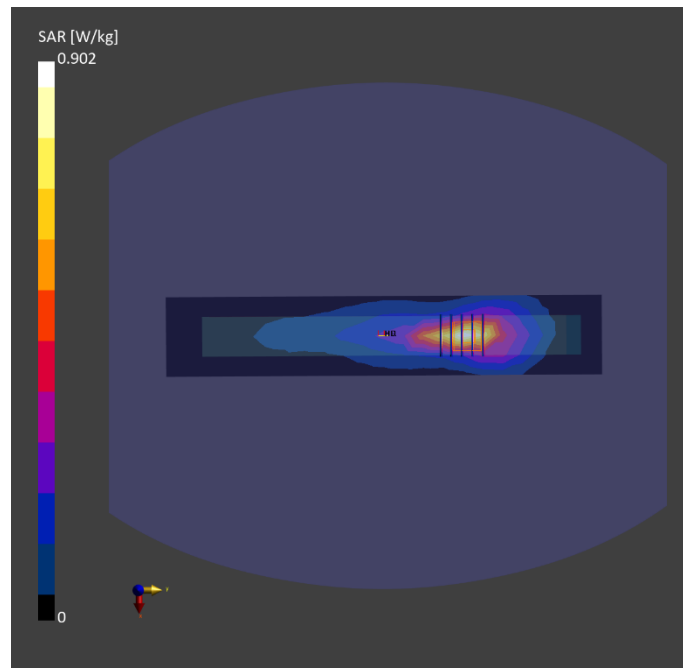

Test Date : 2024-09-10 | Ambient Temp : 22.9 °C | Tissue Temp : 21.8 °C

Test Mode**8_LTE 14_QPSK10M_Top Side_0mm_Ch23330_1RB_OS0_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 14	LTE-FDD, 10175 - CAH	793.000, 23330	9.37	0.920	42.6

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.671	0.670
psSAR-10g [W/kg]	0.391	0.374
Power Drift [dB]		-0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		53.9
Dist 3dB Peak [mm]		8.6

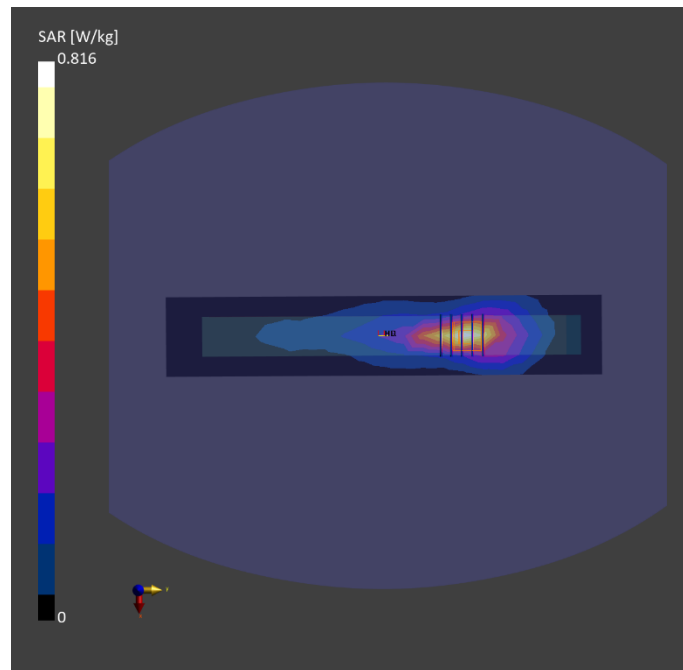

Test Date : 2024-08-08 | Ambient Temp : 22.7 °C | Tissue Temp : 21.5 °C

Test Mode**9_LTE 25_QPSK20M_Top Side_0mm_Ch26140_1RB_OS0_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 25	LTE-FDD, 10169 - CAF	1860.000, 26140	7.69	1.46	40.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.783	0.821
psSAR-10g [W/kg]	0.390	0.427
Power Drift [dB]		0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		58.6
Dist 3dB Peak [mm]		8.7

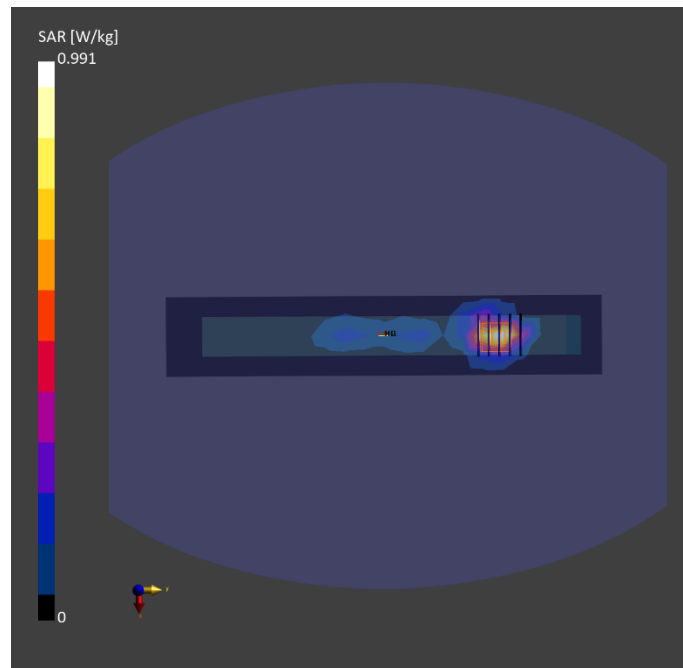

Test Date : 2024-09-10 | Ambient Temp : 22.9 °C | Tissue Temp : 21.8 °C

Test Mode**10_LTE 26_QPSK15M_Top Side_0mm_Ch26865_1RB_OS0_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 26	LTE-FDD, 10181 - CAF	831.500, 26865	9.15	0.937	42.5

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.765	0.761
psSAR-10g [W/kg]	0.446	0.426
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		55.2
Dist 3dB Peak [mm]		8.2

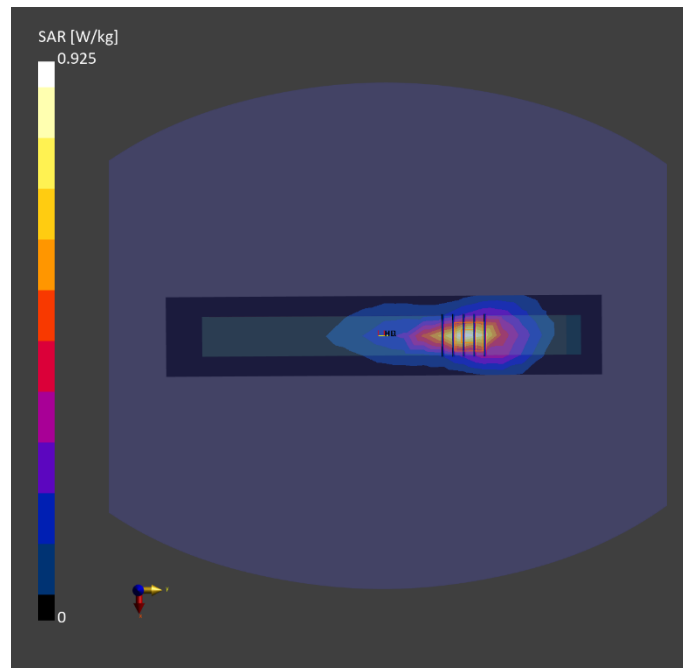

Test Date : 2024-08-11 | Ambient Temp : 22.8 °C | Tissue Temp : 21.4 °C

Test Mode**11_LTE 41_PC3_QPSK20M_Top Side_0mm_Ch41490_1RB_OS0_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 41	LTE-TDD, 10172 - CAH	2680.000, 41490	7.11	2.03	39.8

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 312.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.724	0.784
psSAR-10g [W/kg]	0.273	0.292
Power Drift [dB]		-0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		45.8
Dist 3dB Peak [mm]		6.0

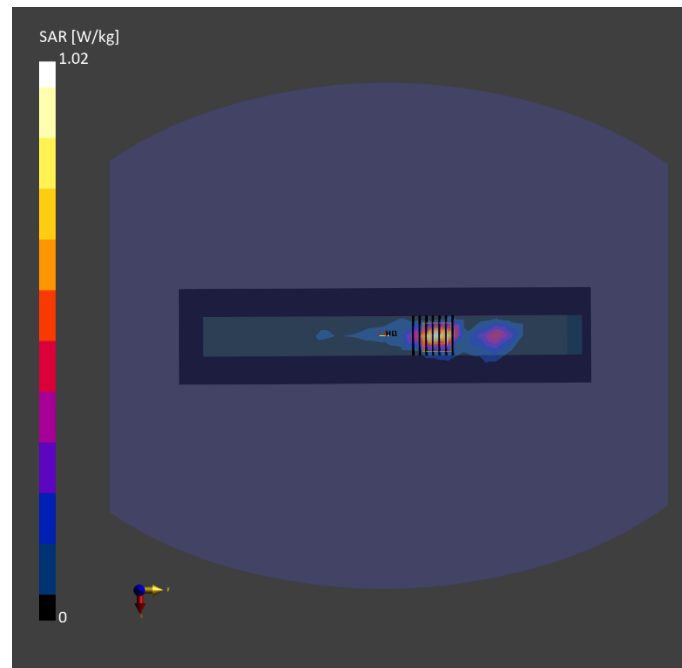

Test Date : 2024-08-09 | Ambient Temp : 22.4 °C | Tissue Temp : 21.2 °C

Test Mode**12_LTE 42_QPSK20M_Left Side_0mm_Ch43490_1RB_OS0_Ant MIMO 2_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 42	LTE-TDD, 10172 - CAH	3590.000, 43490	6.64	2.84	37.8

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 228.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.761	0.922
psSAR-10g [W/kg]	0.276	0.307
Power Drift [dB]		-0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		58.1
Dist 3dB Peak [mm]		5.7

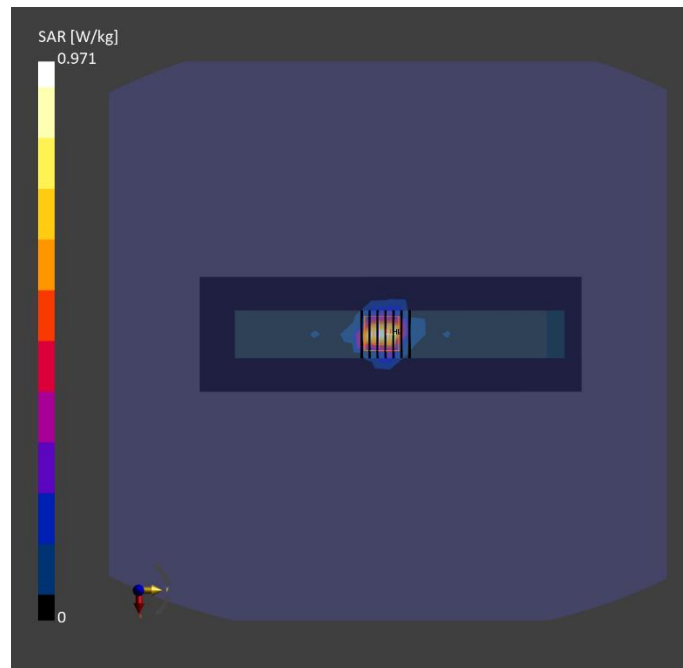

Test Date : 2024-09-09 | Ambient Temp : 22.6 °C | Tissue Temp : 21.5 °C

Test Mode**13_LTE 43_QPSK20M_Left Side_0mm_Ch44190_1RB_OS0_Ant MIMO 2_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 43	LTE-TDD, 10172 - CAH	3660.000, 44190	6.58	2.98	37.5

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 228.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.923	0.950
psSAR-10g [W/kg]	0.321	0.388
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		57.0
Dist 3dB Peak [mm]		5.7

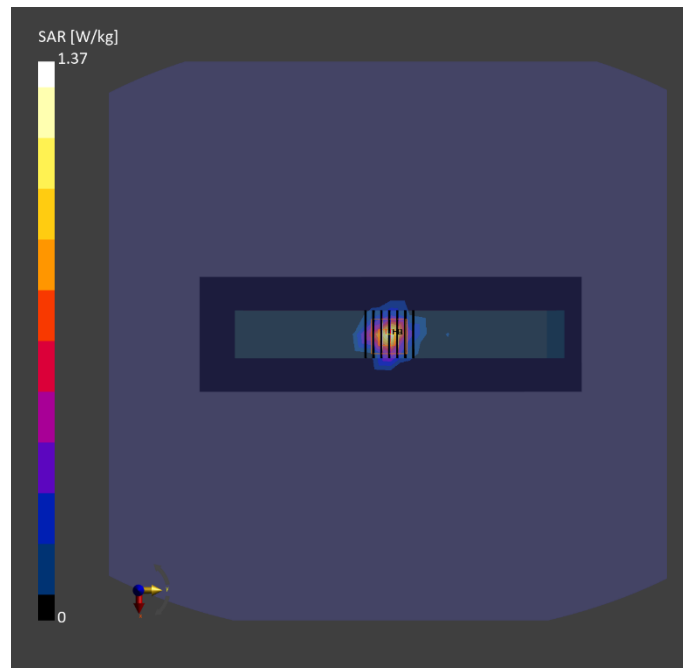

Test Date : 2024-08-09 | Ambient Temp : 22.4 °C | Tissue Temp : 21.2 °C

Test Mode**14_LTE 48_QPSK20M_Left Side_0mm_Ch55340_1RB_OS0_Ant MIMO 2_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A005	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 48	LTE-TDD, 10172 - CAH	3560.000, 55340	6.64	2.82	37.9

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 240.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.770	0.810
psSAR-10g [W/kg]	0.265	0.260
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		56.9
Dist 3dB Peak [mm]		5.4

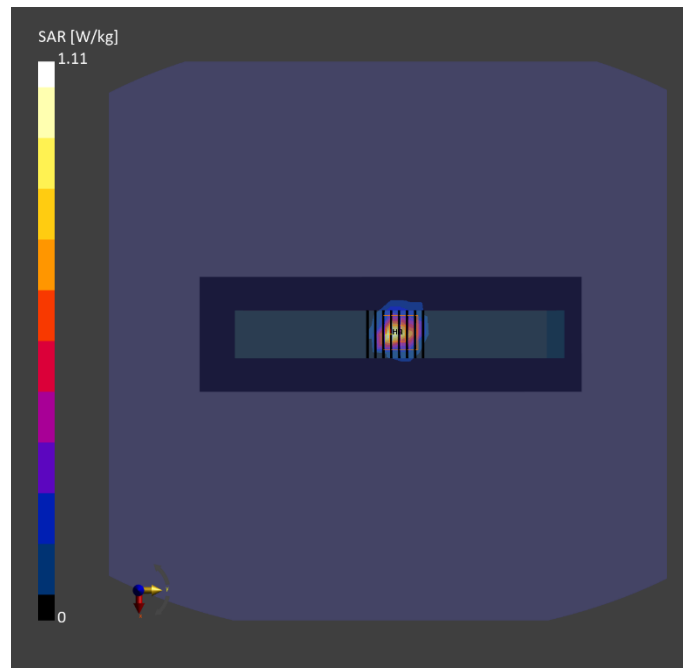

Test Date : 2024-08-08 | Ambient Temp : 22.7 °C | Tissue Temp : 21.5 °C

Test Mode**15_LTE 66_QPSK20M_Top Side_0mm_Ch132572_1RB_OS0_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 66	LTE-FDD, 10169 - CAF	1770.000, 132572	7.9	1.39	39.6

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.972	0.940
psSAR-10g [W/kg]	0.498	0.550
Power Drift [dB]		0.04
TSL Correction	Positive only	Positive only
M2 / M1 [%]		60.2
Dist 3dB Peak [mm]		8.6

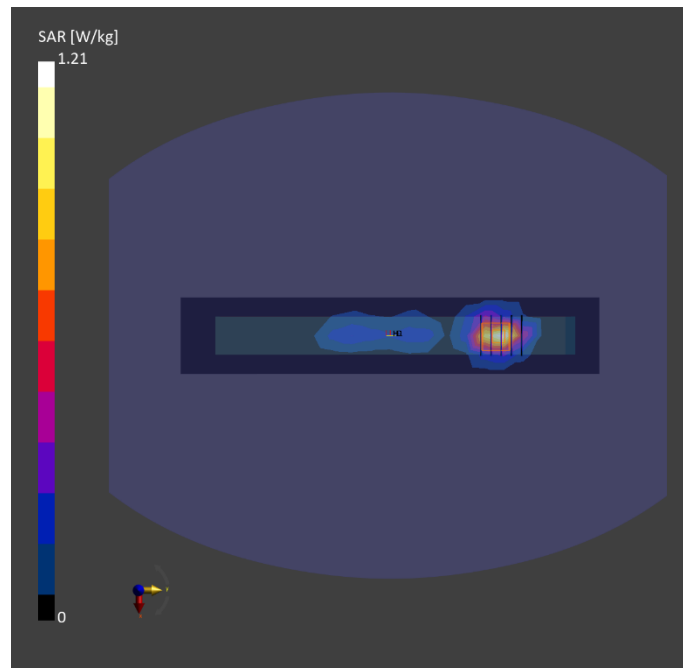

Test Date : 2024-08-06 | Ambient Temp : 22.5 °C | Tissue Temp : 21.3 °C

Test Mode**16_LTE 71_QPSK20M_Top Side_0mm_Ch133322_1RB_OS0_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 71	LTE-FDD, 10169 - CAF	683.000, 133322	9.37	0.903	43.1

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.551	0.653
psSAR-10g [W/kg]	0.357	0.369
Power Drift [dB]		0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		51.7
Dist 3dB Peak [mm]		9.6

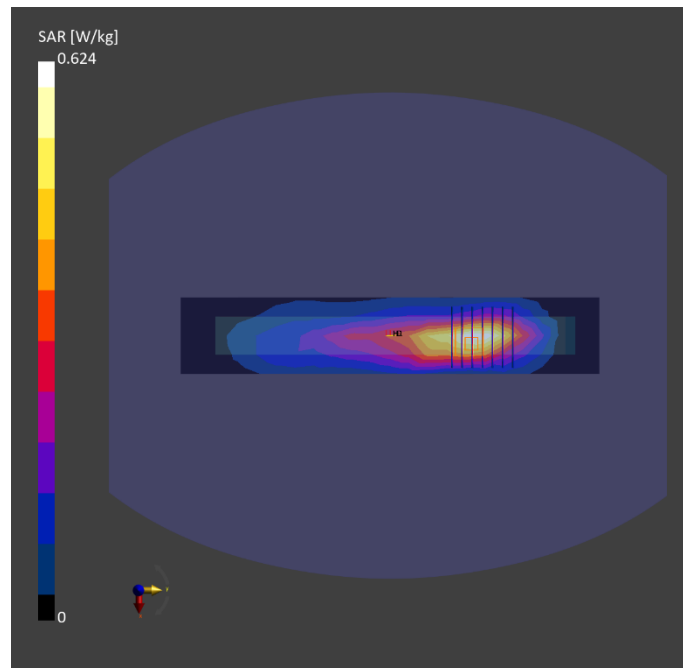

Test Date : 2024-08-08 | Ambient Temp : 22.7 °C | Tissue Temp : 21.5 °C

Test Mode**17_5GNR n2_DFT-S QPSK20M_Top Side_0mm_Ch376000_1RB_OS1_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n2	5G NR FR1 FDD, 10931 - AAC	1880.000, 376000	7.69	1.45	39.5

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.956	0.950
psSAR-10g [W/kg]	0.485	0.543
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		57.5
Dist 3dB Peak [mm]		8.6

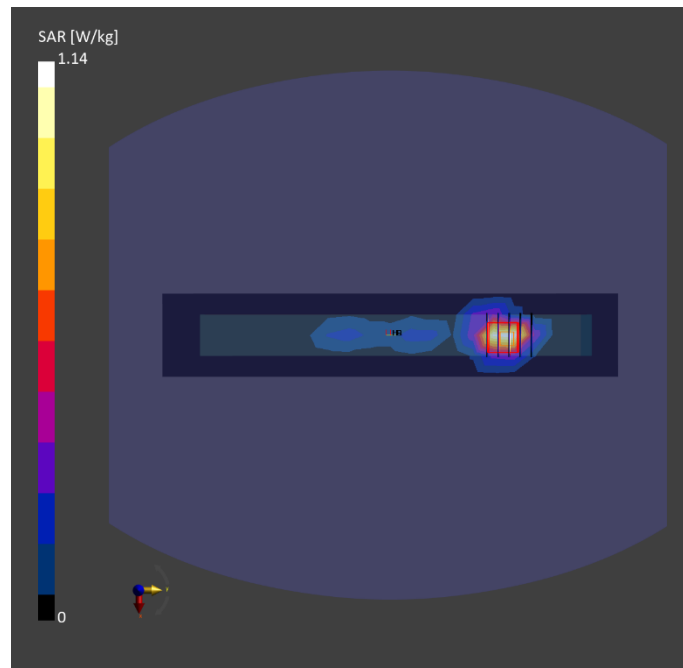

Test Date : 2024-08-07 | Ambient Temp : 22.6 °C | Tissue Temp : 21.3 °C

Test Mode**18_5GNR n5_DFT-S QPSK20M_Top Side_0mm_Ch167300_1RB_OS1_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n5	5G NR FR1 FDD, 10931 - AAC	836.500, 167300	9.15	0.966	42.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.956	0.950
psSAR-10g [W/kg]	0.561	0.542
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		54.5
Dist 3dB Peak [mm]		9.6

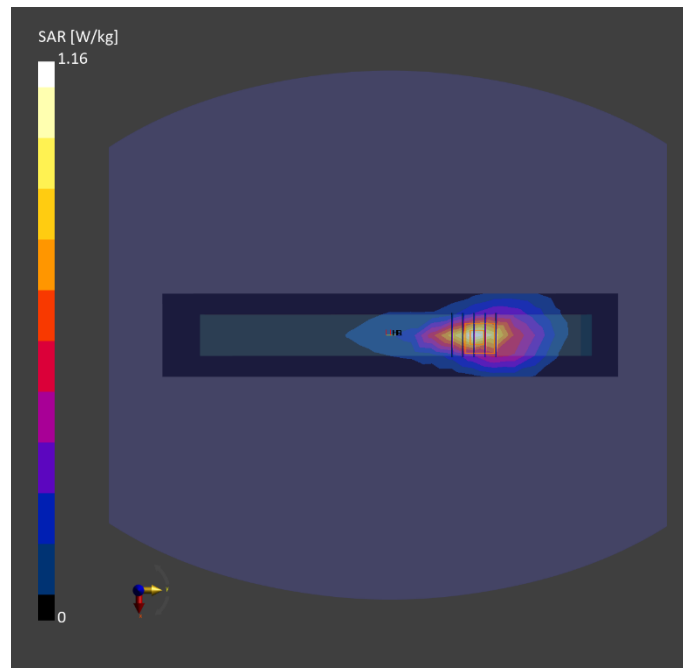

Test Date : 2024-08-11 | Ambient Temp : 22.8 °C | Tissue Temp : 21.4 °C

Test Mode**19_5GNR n7_DFT-S QPSK20M_Top Side_0mm_Ch502000_1RB_OS1_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n7	5G NR FR1 FDD, 10931 - AAC	2510.000, 502000	7.11	1.89	40.1

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 312.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.905	0.944
psSAR-10g [W/kg]	0.353	0.384
Power Drift [dB]		-0.06
TSL Correction	Positive only	Positive only
M2 / M1 [%]		48.5
Dist 3dB Peak [mm]		7.7

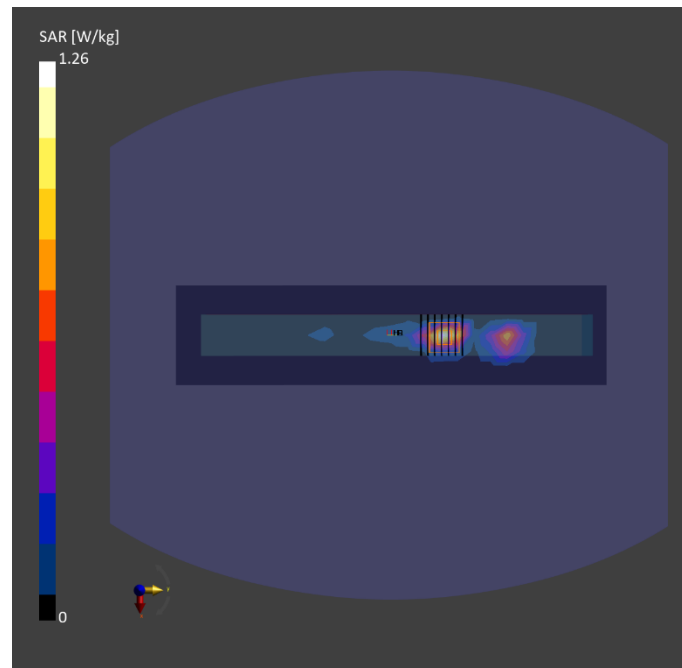

Test Date : 2024-08-08 | Ambient Temp : 22.7 °C | Tissue Temp : 21.5 °C

Test Mode**20_5GNR n25_DFT-S QPSK20M_Top Side_0mm_Ch381000_1RB_OS1_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n25	5G NR FR1 FDD, 10931 - AAC	1905.000, 381000	7.69	1.47	39.5

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.777	0.832
psSAR-10g [W/kg]	0.392	0.429
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		57.4
Dist 3dB Peak [mm]		8.8

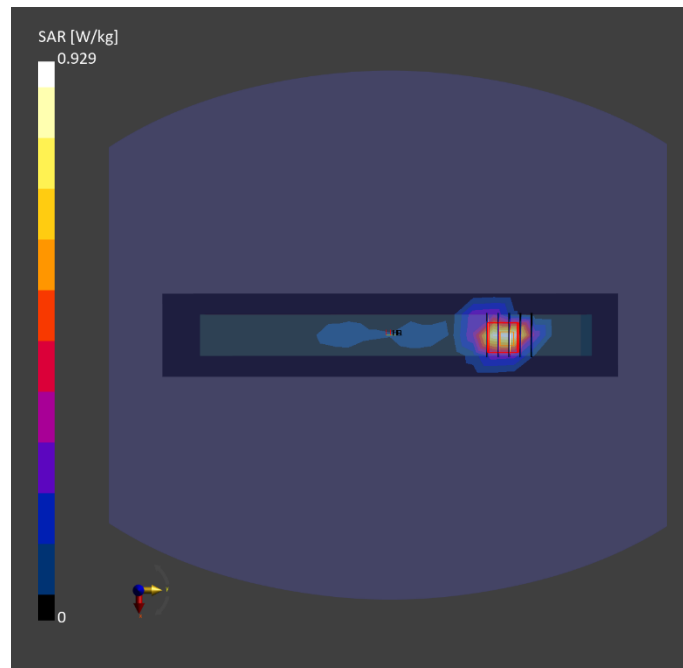

Test Date : 2024-09-10 | Ambient Temp : 22.8 °C | Tissue Temp : 21.4 °C

Test Mode**23_5GNR n38_DFT-S QPSK20M_Left Side_0mm_Ch516000_1RB_OS1_Ant Aux_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n38	5G NR FR1 TDD, 10900 - AAC	2580.000, 516000	7.11	1.95	40.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 312.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.482	0.549
psSAR-10g [W/kg]	0.186	0.194
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		42.3
Dist 3dB Peak [mm]		7.9

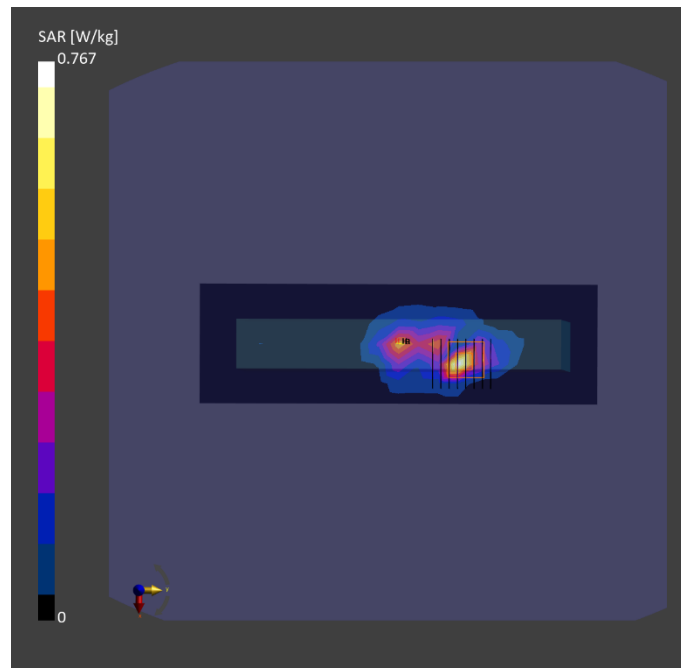

Test Date : 2024-09-10 | Ambient Temp : 22.9 °C | Tissue Temp : 21.8 °C

Test Mode**24_5GNR n41_DFT-S QPSK100M_Left Side_0mm_Ch513900_1RB_OS1_Ant Aux_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n41	5G NR FR1 TDD, 10866 - AAF	2569.500, 513900	7.11	2.01	39.1

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 228.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.675	0.865
psSAR-10g [W/kg]	0.261	0.330
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		44.3
Dist 3dB Peak [mm]		5.4

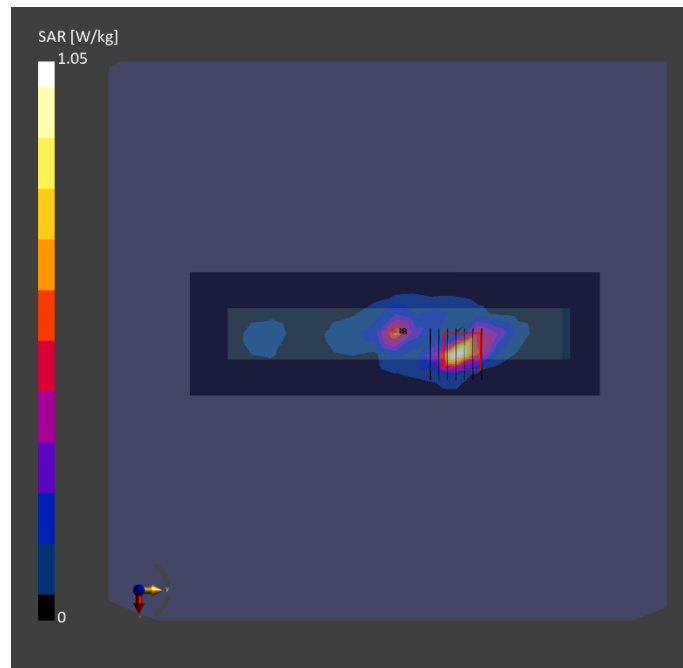

Test Date : 2024-09-09 | Ambient Temp : 22.6 °C | Tissue Temp : 21.5 °C

Test Mode**25_5GNR n48_DFT-S QPSK40M_Left Side_0mm_Ch645332_1RB_OS1_Ant MIMO 2_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n48	5G NR FR1 TDD, 10903 - AAD	3679.975, 645332	6.58	3.00	37.4

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 228.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.743	0.885
psSAR-10g [W/kg]	0.258	0.301
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		59.8
Dist 3dB Peak [mm]		5.7

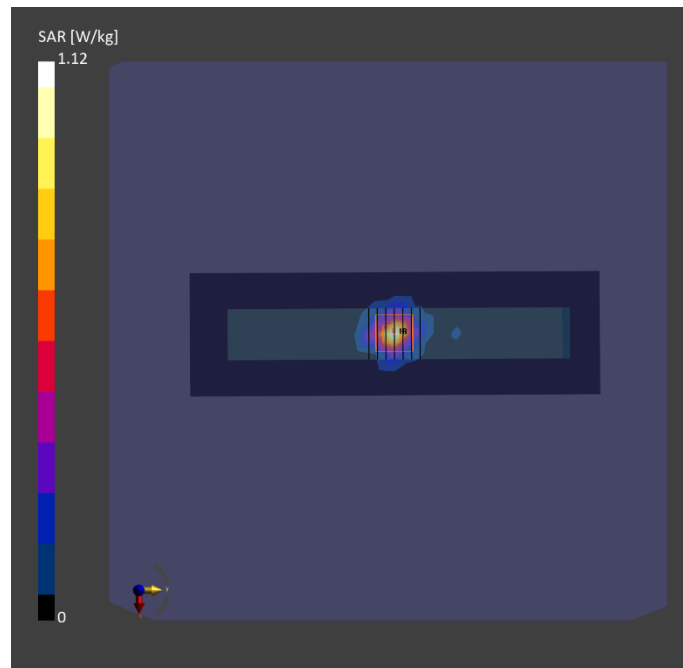

Test Date : 2024-08-08 | Ambient Temp : 22.7 °C | Tissue Temp : 21.5 °C

Test Mode**21_5GNR n66_DFT-S QPSK20M_Top Side_0mm_Ch349000_1RB_OS1_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n66	5G NR FR1 FDD, 10931 - AAC	1745.000, 349000	7.9	1.38	39.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.769	0.831
psSAR-10g [W/kg]	0.401	0.448
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		62.4
Dist 3dB Peak [mm]		9.8

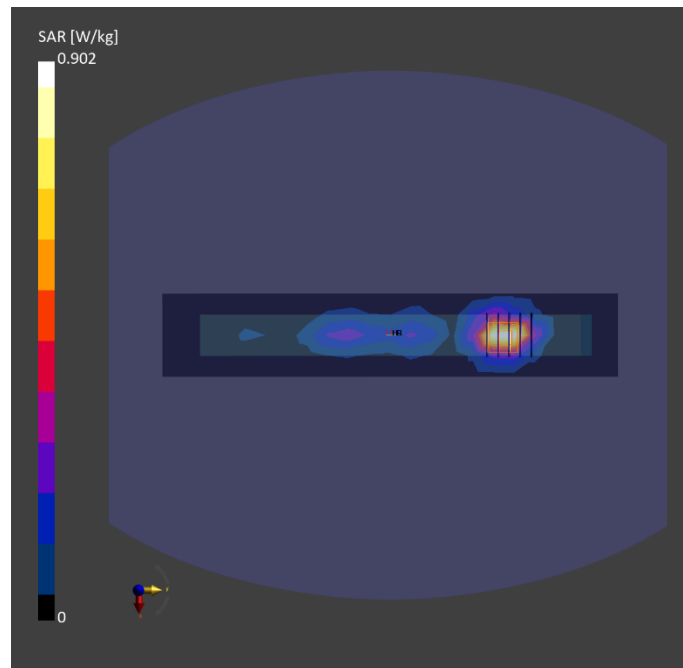

Test Date : 2024-08-06 | Ambient Temp : 22.5 °C | Tissue Temp : 21.3 °C

Test Mode**22_5GNR n71_DFT-S QPSK20M_Top Side_0mm_Ch137600_1RB_OS1_Ant Main_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n71	5G NR FR1 FDD, 10931 - AAC	688.000, 137600	9.37	0.904	43.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.826	0.825
psSAR-10g [W/kg]	0.502	0.488
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		59.2
Dist 3dB Peak [mm]		11.2

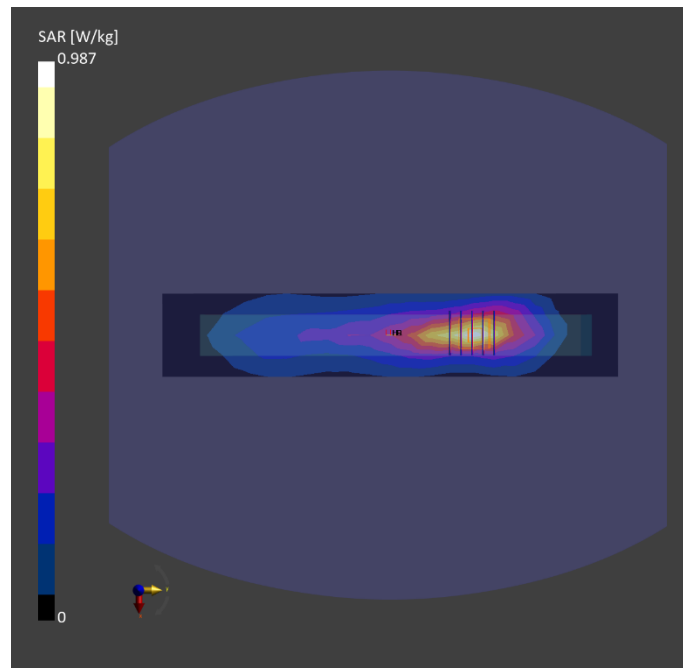

Test Date : 2024-09-05 | Ambient Temp : 22.7 °C | Tissue Temp : 21.5 °C

Test Mode**26_5GNR n77_DFT-S QPSK100M_Left Side_0mm_Ch659600_1RB_OS1_Ant MMO 2_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n77	5G NR FR1 TDD, 10866 - AAF	3894.000, 659600	6.49	3.03	38.3

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 228.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.867	0.940
psSAR-10g [W/kg]	0.304	0.349
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		59.7
Dist 3dB Peak [mm]		5.6

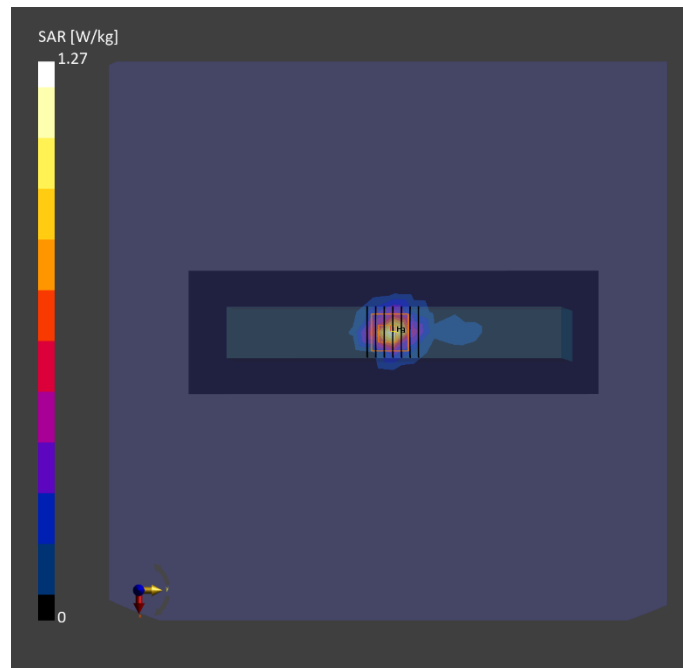

Test Date : 2024-09-05 | Ambient Temp : 22.7 °C | Tissue Temp : 21.5 °C

Test Mode**27_5GNR n78_DFT-S QPSK100M_Left Side_0mm_Ch650000_1RB_OS1_Ant MMO 2_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n78	5G NR FR1 TDD, 10866 - AAF	3750.000, 650000	6.58	2.88	38.5

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7737 / 2024-07-31	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 228.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.779	0.910
psSAR-10g [W/kg]	0.288	0.345
Power Drift [dB]		-0.07
TSL Correction	Positive only	Positive only
M2 / M1 [%]		58.9
Dist 3dB Peak [mm]		6.5

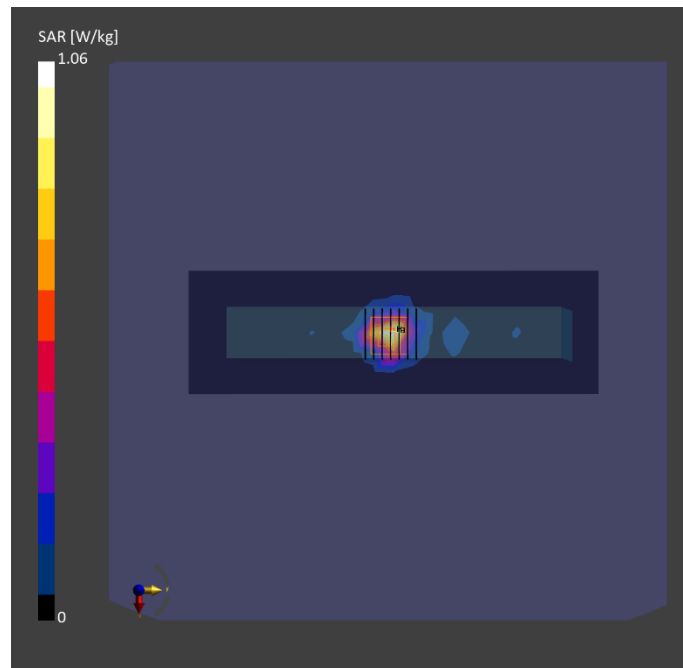

Test Date : 2024-07-31 | Ambient Temp : 21.9 °C | Tissue Temp : 20.9 °C

Test Mode**28_WLAN2.4G_802.11b_Right Side_0mm_Ch6_Ant 1_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 2.4GHz	WLAN, 10012 - CAB	2437.000, 6	7.05	1.78	39.9

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 228.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.671	0.721
psSAR-10g [W/kg]	0.307	0.308
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		35.0
Dist 3dB Peak [mm]		6.0

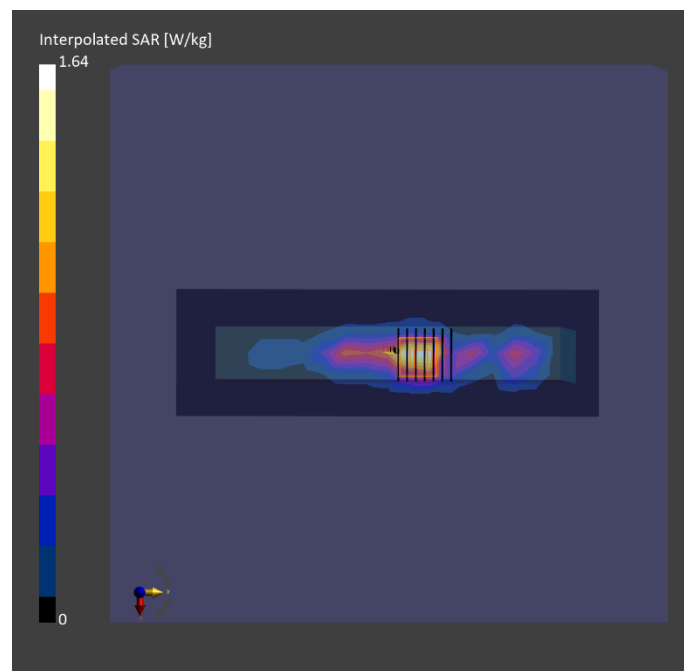

Test Date : 2024-08-01 | Ambient Temp : 22.1 °C | Tissue Temp : 21.2 °C

Test Mode**29_WLAN5.3G_802.11ac VHT160_Right Side_0mm_Ch50_Ant 0+1_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10554 - AAE	5250.000, 50	5.02	4.54	36.3

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	50.0 x 210.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.714	0.736
psSAR-10g [W/kg]	0.244	0.236
Power Drift [dB]		-0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		65.9
Dist 3dB Peak [mm]		6.9

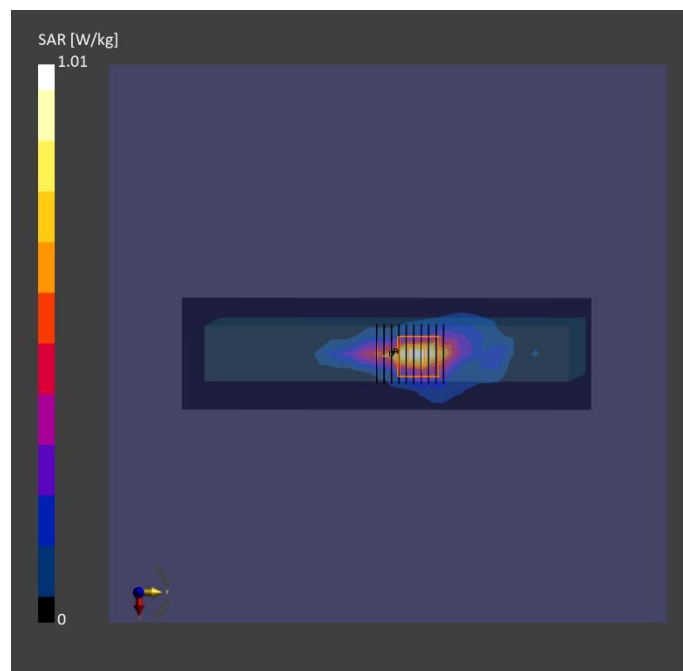

Test Date : 2024-08-01 | Ambient Temp : 22.1 °C | Tissue Temp : 21.2 °C

Test Mode**30_WLAN5.6G_802.11ac VHT160_Right Side_0mm_Ch114_Ant 1_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10554 - AAE	5570.000, 114	4.29	4.89	35.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	50.0 x 210.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.716	0.704
psSAR-10g [W/kg]	0.232	0.219
Power Drift [dB]		-0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		62.9
Dist 3dB Peak [mm]		6.6

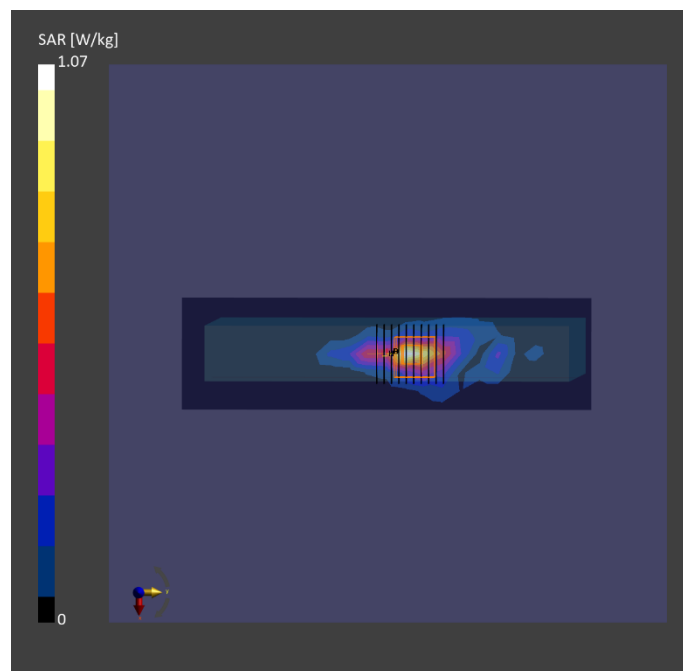

Test Date : 2024-08-01 | Ambient Temp : 22.1 °C | Tissue Temp : 21.2 °C

Test Mode**31_WLAN5.8G_802.11ac VHT80_Top Side_0mm_Ch155_Ant 0+1_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10544 - AAD	5775.000, 155	4.36	5.13	35.4

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	50.0 x 300.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.532	0.714
psSAR-10g [W/kg]	0.186	0.224
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		54.9
Dist 3dB Peak [mm]		6.6

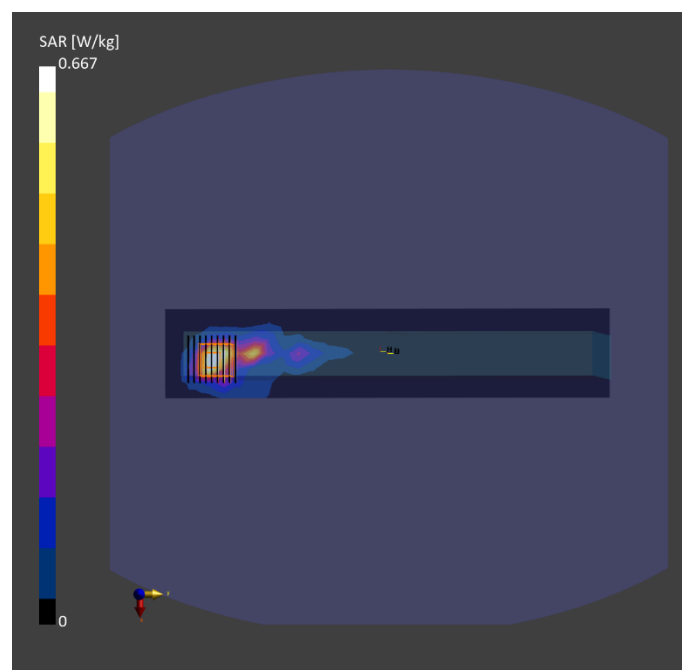

Test Date : 2024-07-31 | Ambient Temp : 21.9 °C | Tissue Temp : 20.9 °C

Test Mode**32_U-NII 6_802.11ax HE160_Top Side_0mm_Ch111_Ant 0+1_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	U-NII-6	WLAN, 10755 - AAC	6505.000, 111	4.47	5.99	34.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	51.0 x 306.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.346	0.411
psSAR-10g [W/kg]	0.108	0.124
psAPD (1.0 cm ² , sq) [W/m ²]		4.11
psAPD (4.0 cm ² , sq) [W/m ²]		2.84
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		51.0
Dist 3dB Peak [mm]		5.5

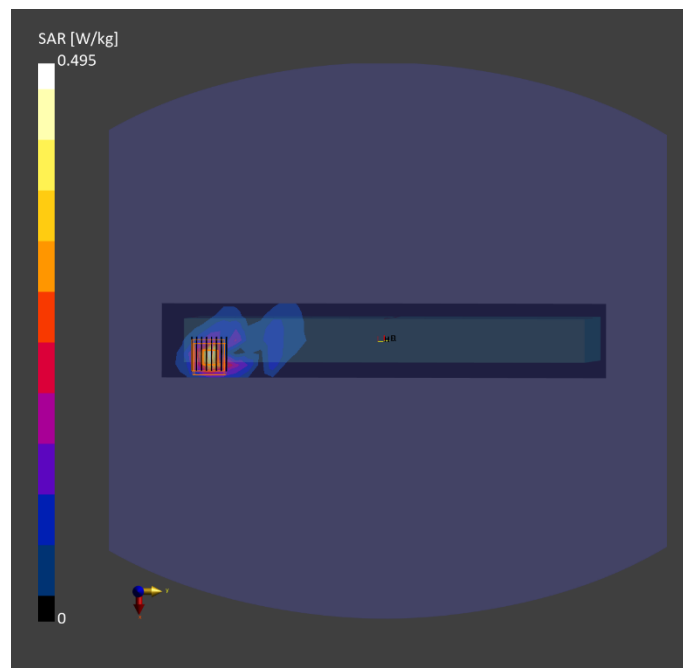

Test Date : 2024-07-31 | Ambient Temp : 21.9 °C | Tissue Temp : 20.9 °C

Test Mode**33_Bluetooth_GFSK_Right Side_0mm_Ch78_Ant 1_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	ISM 2.4 GHz Band	Bluetooth, 10032 - CAA	2480.000, 78	7.05	1.82	39.9

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7757 / 2023-08-22	DAE4 Sn1669 / 2024-05-16

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 108.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.114	0.120
psSAR-10g [W/kg]	0.049	0.048
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		30.2
Dist 3dB Peak [mm]		5.2

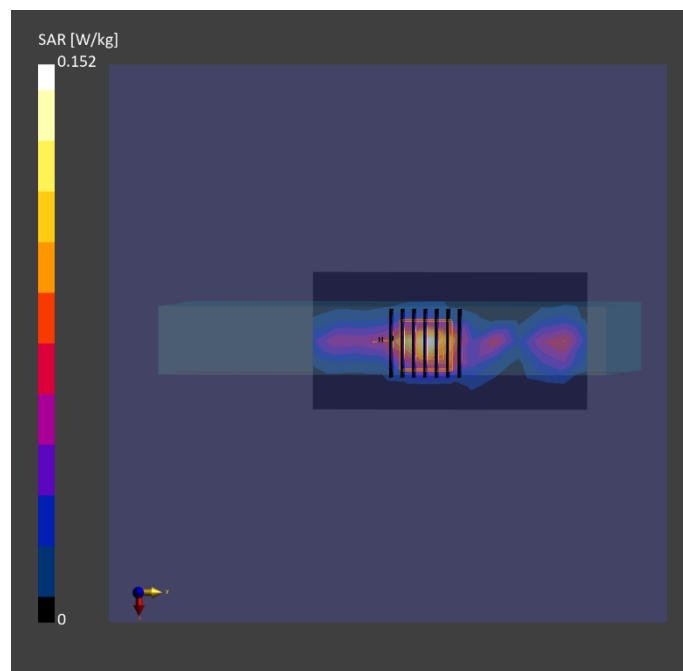

Date: 2024/7/30

34_RFID_PSK_Bottom Surface_0mm _Ant RFID_Battery 1

DUT: ZX10-Ex

Communication System: UID 0, NFC (0); Frequency: 13.56 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 13.56$ MHz; $\sigma = 0.731$ S/m; $\epsilon_r = 55.156$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN7650; ConvF(17.02, 18.46, 16.04) @ 13.56 MHz; Calibrated: 2024/6/4
- Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn541; Calibrated: 2024/3/11
- Phantom: ELI; Type: QD OVA 002 AA; Serial: 1175
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (121x201x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.00337 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.00521 W/kg

SAR(1 g) = 0.000813 W/kg; SAR(10 g) = 0.000262 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 10.4%

Maximum value of SAR (measured) = 0.00272 W/kg

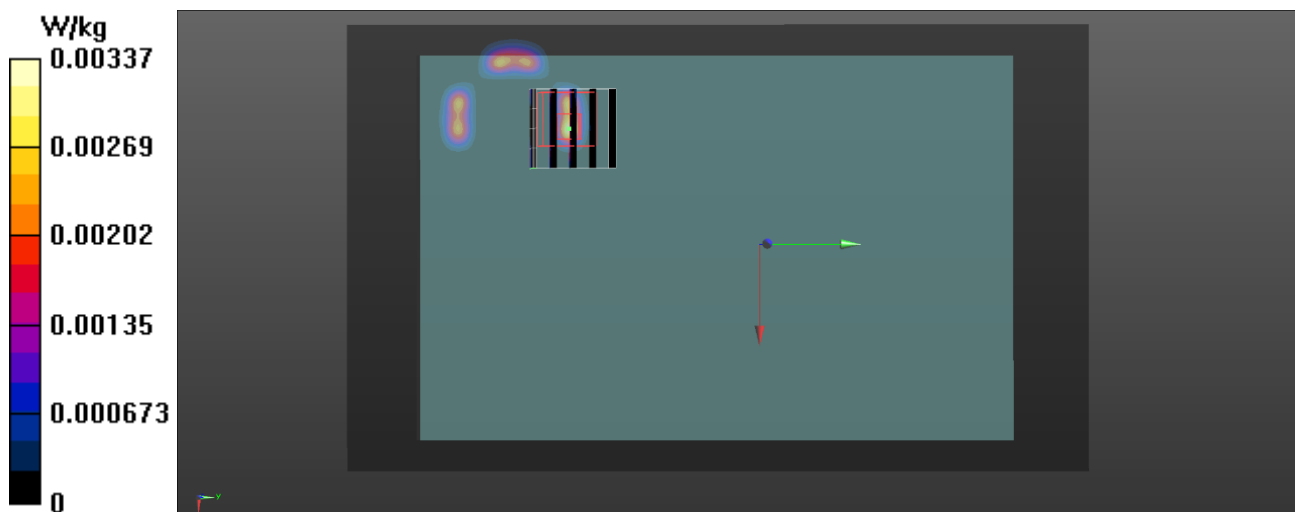

Test Date : 2024-08-05 | Ambient Temp : 22.5 °C

Test Mode**35_U-NII 6_802.11ax HE160_Top Side_0mm_Ch111_Ant 0+1_Battery 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX10-Ex	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	U-NII-6	WLAN, 10755 - AAC	6505.0, 111	1.0

Hardware Setup

Phantom	Medium	Probe Calibration Date	DAE Calibration Date
mmWave - 1102	Air	EUmmWV3 - SN9403_F1-55GHz / 2023-12-05	DAE4 Sn1742 / 2022-08-31

Scan Setup

	5G Scan
Grid Extents [mm]	92.0 x 92.0
Grid Steps [mm]	0.0542 x 0.0542
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Avg. Area [cm ²]	4.00
psPD n+ [W/m ²]	2.28
psPD tot+ [W/m ²]	3.78
psPD mod+ [W/m ²]	5.60
E max [V/m]	58.5
Power Drift [dB]	-0.17

