

CBSD-EUD Test Report

Applicant : Getac Technology Corporation

Product Name : Radio Module

Trade Name : Telit

Model Number : LN920A12-WW

Applicable Standard : FCC 47 CFR PART 96.47

Received Date : Oct. 31, 2023

Test Period : Jan. 09, 2024

Issued Date : Mar. 06, 2024

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd. No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Tel: +886-3-2710188 / Fax: +886-3-2710190

Taiwan Accreditation Foundation accreditation number: 1330

Frequency Range: 9 kHz to 325 GHz (Bade test site)
Test Firm Registration Number: 226252 (Bade test site)
Test Firm Registration Number: 191812 (Wugu test site)





Note:

- 1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
- 3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.



Revision History

Rev.	Issued Date	Description	Revised by
00	Mar. 06, 2024	Initial Issue	Snow Wang





Verification of Compliance

Applicant	:	Getac Technology Corporation
Product Name	:	Radio Module
Trade Name	:	Telit
Model Number	:	LN920A12-WW
FCC ID	:	QYLLN920ZX8
Applicable Standard	:	FCC 47 CFR PART 96.47
Test Result	:	Complied
Performing Lab.	:	Eurofins E&E Wireless Taiwan Co., Ltd. No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.) Tel: +886-3-2710188 / Fax: +886-3-2710190 Taiwan Accreditation Foundation accreditation number: 1330
standards. All indications of Pas	s/Fai	Ltd. tested the above equipment in accordance with the requirements set forth in the above it in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on frest results. The test results show that the equipment tested is capable of demonstrating documented in this report.
Approved By	:	



TABLE OF CONTENTS

1	Gene	eral Information	. 5
-		Summary of Test Result	
	1.2.	Testing Location	. 5
	1.3.	Test Site Environment	. 5
2	EUT	Description	. 6
	2.1.	Product Specification of Equipment Under Test	. 6
	2.2.	EUT Test Step	. 7
	2.3.	Test Instruments	. 7
3	Meas	surement Procedure	. 8
	3.1.	End user device additional requirements Test	. 8
4	Test	Results	. 9
	4.1.	End user device additional requirements	. 9

Appendix A. Test Setup Photographs

Report No.: USRC23O346003 Issued Date: Mar. 06, 2024

1 General Information

1.1. Summary of Test Result

FCC Rule	Description	Result
§96.47	End user device additional requirements.	Pass

Decision Rule

- Uncertainty is not included.
- □ Uncertainty is included.

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Site Address:

No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Test Site Environment

Items	Required (IEC 68-1)	Interval(*)	
Temperature (°C)	15-35	20-30	
Humidity (%RH)	25-75	45-75	

^(*)The measurement ambient temperature is within this range.



2 **EUT Description**

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity

responsibility for the authen	licity
Applicant	Getac Technology Corporation 5F., Building A, No. 209, Sec. 1, Nangang Rd., Nangang Dist., Taipei City, 115018, Taiwan
Product Name	Radio Module
Trade Name	Telit
Model Number	LN920A12-WW
FCC ID	QYLLN920ZX8
Host Information	Product Name: Tablet Trade Name: Getac Model Name: ZX80
IMEI No.	358989890011010
Antenna Information	Refer to Section 1.4
Operate Temp. Range	-10 ~ +50 °C
EUT Power Rating	DC 12 V, 3 A

LTE				
Operation Band (EUTRA) :	☑ Band 48			
Modulation type:		□ 16QAM	⊠ 64QAM	

EUT Modify Description:

Modify Description: Add host model: ZX80.

After our evaluation, the retest is required.

2.1. Product Specification of Equipment Under Test

Band	Antenna Type	Gain (dBi)	Note
Band 48	PIFA Antenna	2.66	

Note: The above information is provided by the manufacturer.



2.2. EUT Test Step

1	Setup the EUT shown on "Configuration of Test System Details".
2	Turn on the power of all equipment.
3	EUT run test program test.

2.3. **Test Instruments**

For Conducted

Test Period: Jan. 09, 2024 Testing Engineer: Eric Ou Yang,

Test Site		RF02-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
\boxtimes	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY63460166	Mar. 08, 2023	1 year




3 Measurement Procedure

3.1. End user device additional requirements Test

■ Limit

- (a) End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.
- (1) An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

■ Test Setup

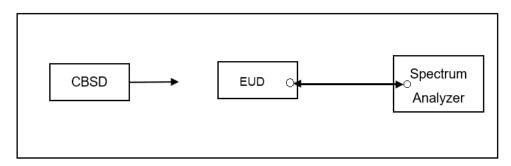

Note: CBSD (FCC ID: NR P27-SCE5164-n48). NR

■ Test Procedure

The EUT was connects to a certified CBSD and spectrum analyzer. The following procedure is performed by applying WINNF-TS-0122 CBRS CBSD Test Specification:

1. Setup with low channel and power level 10 dBm/MHz.

Note. Set one of the BW supported by the DUT.

- 2. Enable AP service from EPC management.
- 3. Check EUD Tx frequency and power.
- 4. Disable AP service from EPC management.
- 5. Check EUD stops transmission within 10 seconds.
- 6. Setup with high channel and power level 15 dBm/MHz.

Note. Set one of the BW supported by the DUT.

- 7. Enable AP service from EPC management.
- 8. Check EUD Tx frequency and power.
- 9. Disable AP service from EPC management.
- 10. Check EUD stops transmission within 10 seconds.



4 Test Results

4.1. End user device additional requirements







Notes: After changing the frequency, Power Level and Bandwidth,

The EUD discontinues operations , change frequencies , or change its operational power level within 10 seconds of receiving instructions from its associated CBSD

--- END---