

## Bluetooth

Frequency: 2480 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 2480$  MHz;  $\sigma = 1.814$  S/m;  $\epsilon_r = 39.04$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(8.16, 8.16, 8.16) @ 2480 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

## Body-Worn Camera/Rear\_0mm/Bluetooth/Ch 78\_With MAGNETIC

**MOUNT/Area Scan (9x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0226 W/kg

## Body-Worn Camera/Rear\_0mm/Bluetooth/Ch 78\_With MAGNETIC

**MOUNT/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.2580 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.0880 W/kg

**SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00564 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 37.8%

Maximum value of SAR (measured) = 0.0310 W/kg

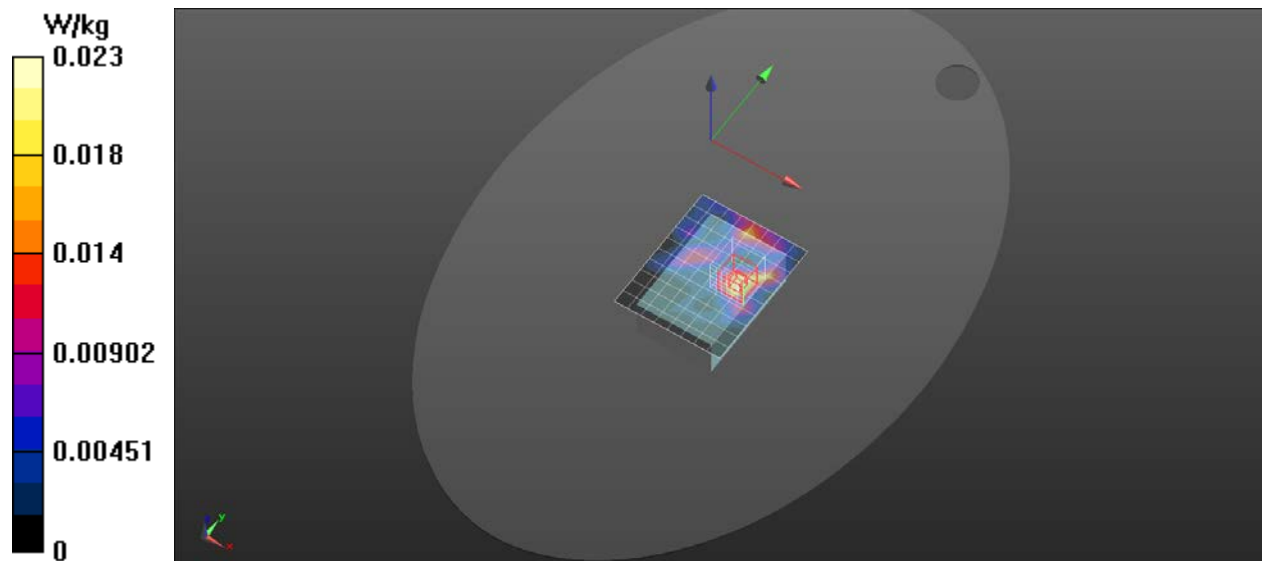

## WiFi 2.4G

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.793$  S/m;  $\epsilon_r = 39.082$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(8.16, 8.16, 8.16) @ 2462 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

### Body-Worn Camera/Rear\_0mm/802.11g/Ch 11\_With MAGNETIC

**MOUNT/Area Scan (9x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0773 W/kg

### Body-Worn Camera/Rear\_0mm/802.11g/Ch 11\_With MAGNETIC

**MOUNT/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.832 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.125 W/kg

**SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.023 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 45.9%

Maximum value of SAR (measured) = 0.0989 W/kg

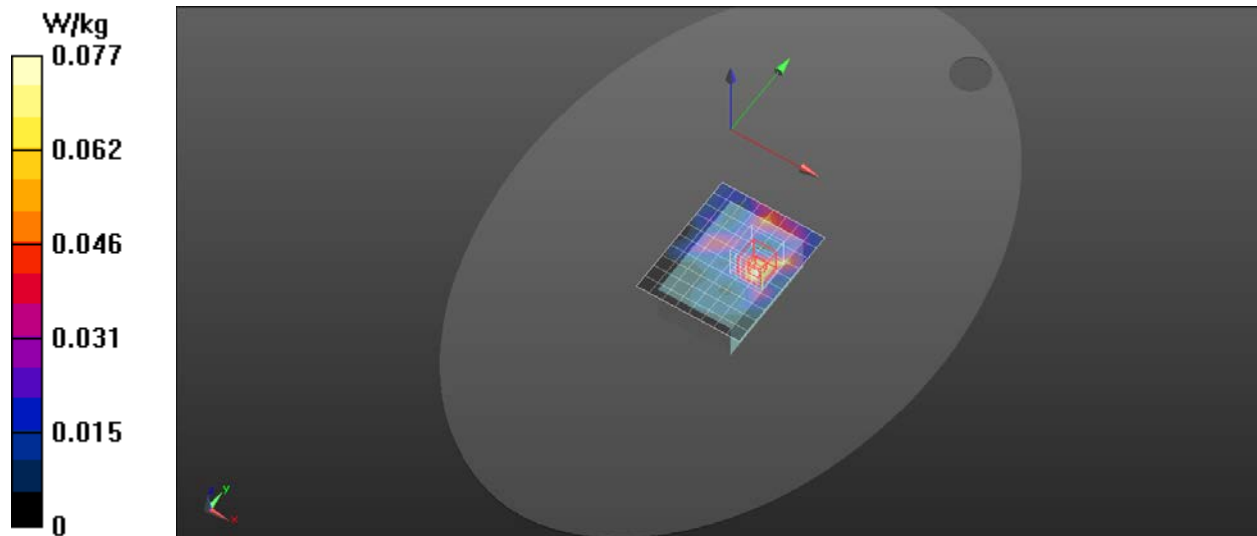

## WiFi 5G

Frequency: 5320 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 5320$  MHz;  $\sigma = 4.762$  S/m;  $\epsilon_r = 35.376$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(5.48, 5.48, 5.48) @ 5320 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

**Body-Worn Camera/Rear\_0mm/802.11a/Ch 64\_With ADJUSTABLE POCKET MOUNT/Area Scan (10x13x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.676 W/kg

**Body-Worn Camera/Rear\_0mm/802.11a/Ch 64\_With ADJUSTABLE POCKET MOUNT/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.138 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.335 W/kg; SAR(10 g) = 0.128 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.6%

Maximum value of SAR (measured) = 0.732 W/kg

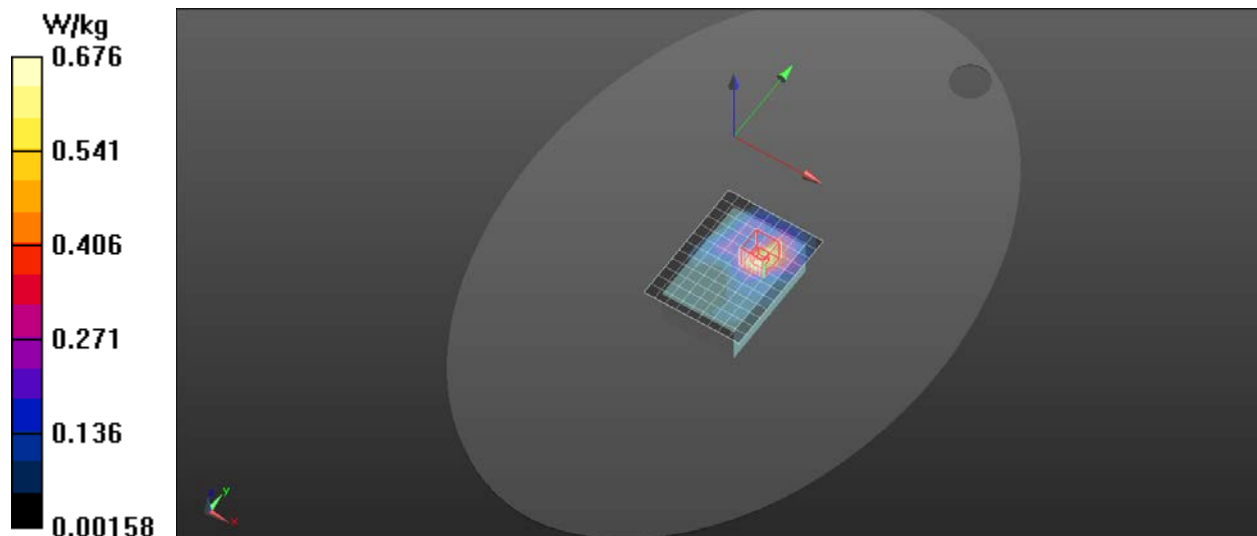

## WiFi 5G

Frequency: 5500 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.077$  S/m;  $\epsilon_r = 34.828$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(4.99, 4.99, 4.99) @ 5500 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

### Body-Worn Camera/Rear\_0mm/802.11a/Ch 100\_With ADJUSTABLE POCKET MOUNT/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.767 W/kg

### Body-Worn Camera/Rear\_0mm/802.11a/Ch 100\_With ADJUSTABLE POCKET MOUNT/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.580 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.153 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 0.846 W/kg

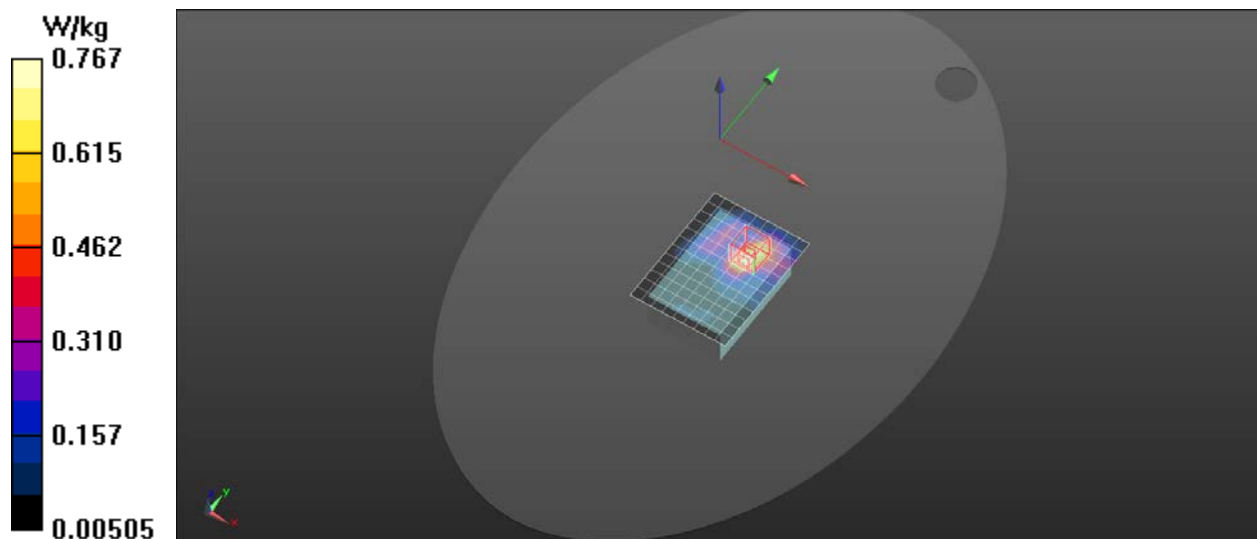

## WiFi 5G

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.367$  S/m;  $\epsilon_r = 34.313$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(5.05, 5.05, 5.05) @ 5745 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

### Body-Worn Camera/Rear\_0mm/802.11a/Ch 149\_With ADJUSTABLE POCKET MOUNT/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.632 W/kg

### Body-Worn Camera/Rear\_0mm/802.11a/Ch 149\_With ADJUSTABLE POCKET MOUNT/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.972 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.107 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 50%

Maximum value of SAR (measured) = 0.722 W/kg

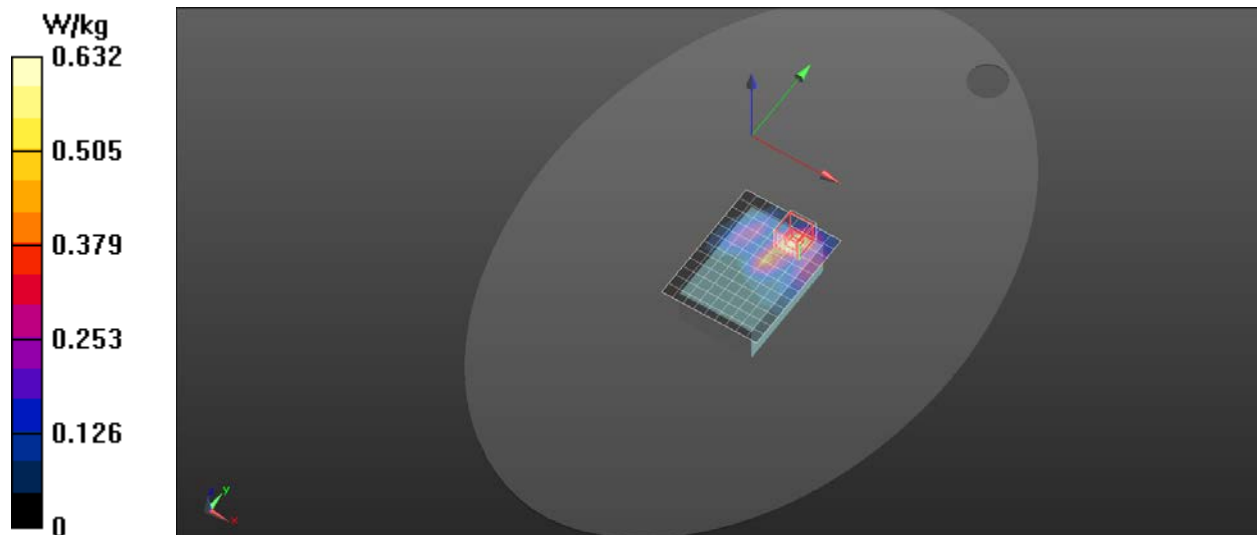

## LTE Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.371$  S/m;  $\epsilon_r = 41.041$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(8.41, 8.41, 8.41) @ 1860 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_2\_Ch 18700\_RB1,49/Area Scan (7x11x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.204 W/kg

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_2\_Ch 18700\_RB1,49/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.120 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.404 W/kg

**SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.057 W/kg**

Smallest distance from peaks to all points 3 dB below = 3.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.6%

Maximum value of SAR (measured) = 0.193 W/kg

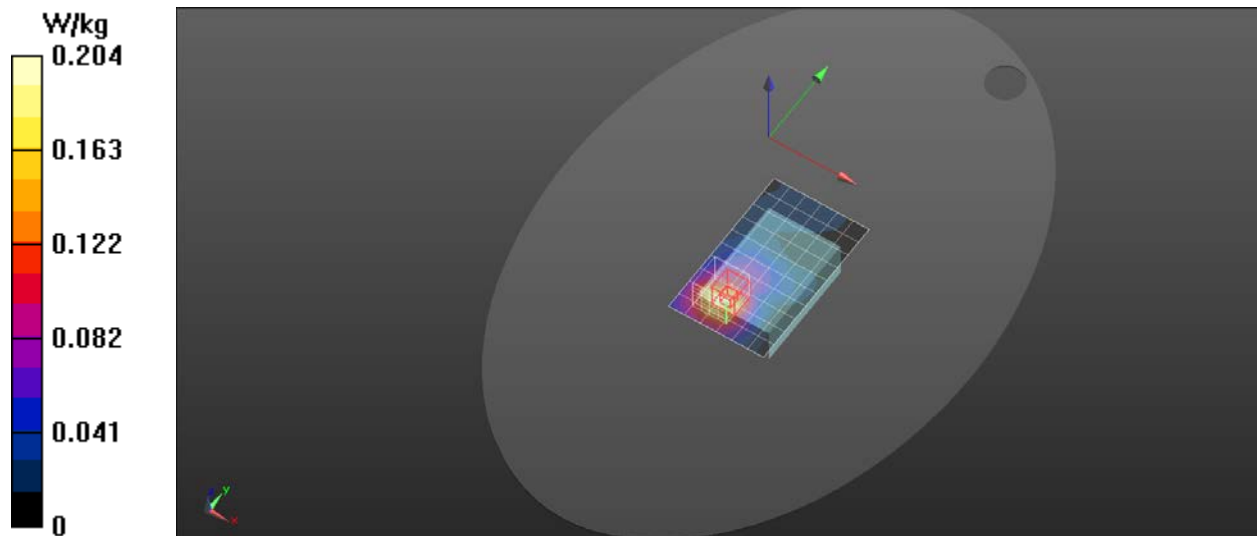

## LTE Band 4

Frequency: 1732.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.313$  S/m;  $\epsilon_r = 41.448$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(8.85, 8.85, 8.85) @ 1732.5 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_4\_Ch 20175\_RB1,49/Area Scan (7x11x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.258 W/kg

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_4\_Ch 20175\_RB1,49/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.382 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.301 W/kg

**SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.113 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.3%

Maximum value of SAR (measured) = 0.258 W/kg

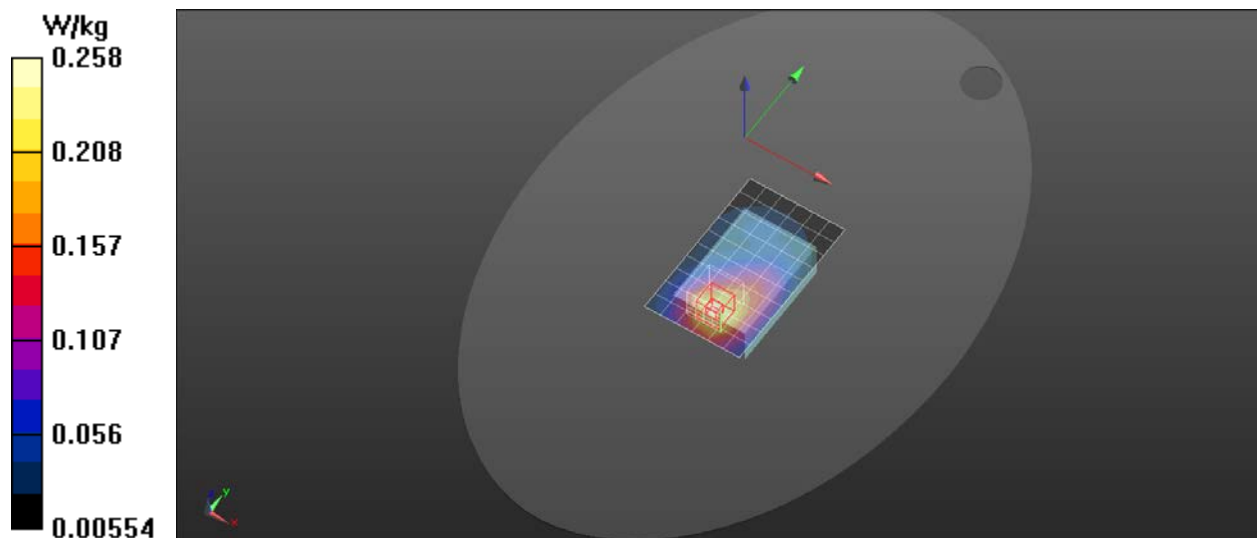

## LTE Band 5

Frequency: 829 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 829$  MHz;  $\sigma = 0.902$  S/m;  $\epsilon_r = 43.47$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(10.73, 10.73, 10.73) @ 829 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_5\_Ch 20450\_RB1,24/Area Scan (7x11x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.122 W/kg

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_5\_Ch 20450\_RB1,24/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.89 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.133 W/kg

**SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.075 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 74.7%

Maximum value of SAR (measured) = 0.121 W/kg

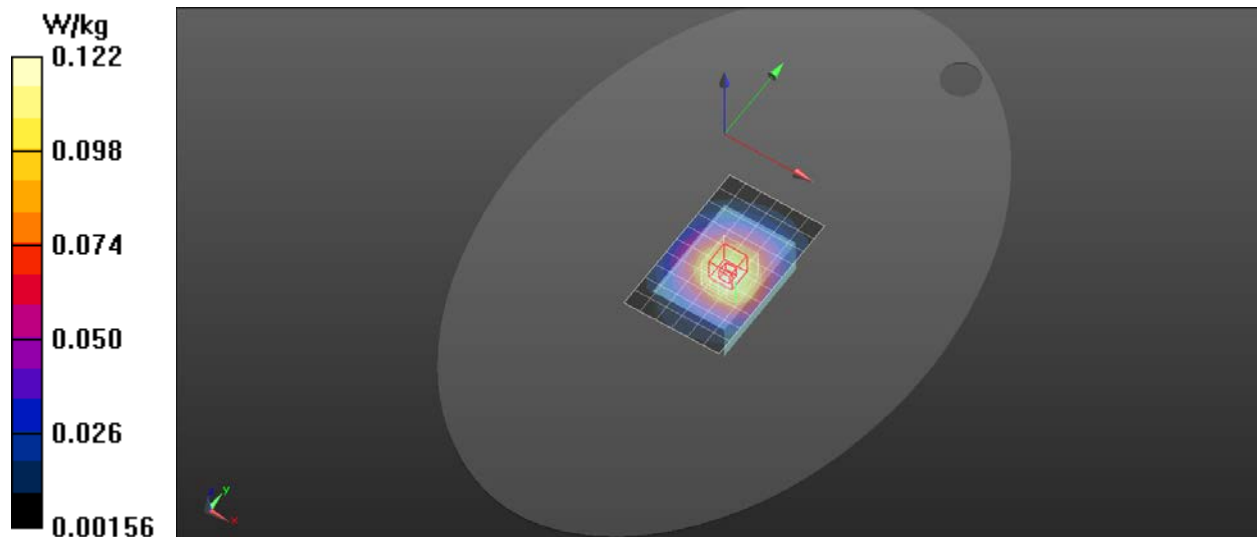



## LTE Band 12

Frequency: 711 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated):  $f = 711$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 42.115$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(10.99, 10.99, 10.99) @ 711 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_12\_Ch 23130\_RB1,24/Area Scan (7x11x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.225 W/kg

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_12\_Ch 23130\_RB1,24/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.42 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.249 W/kg

**SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.144 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 77.1%

Maximum value of SAR (measured) = 0.231 W/kg

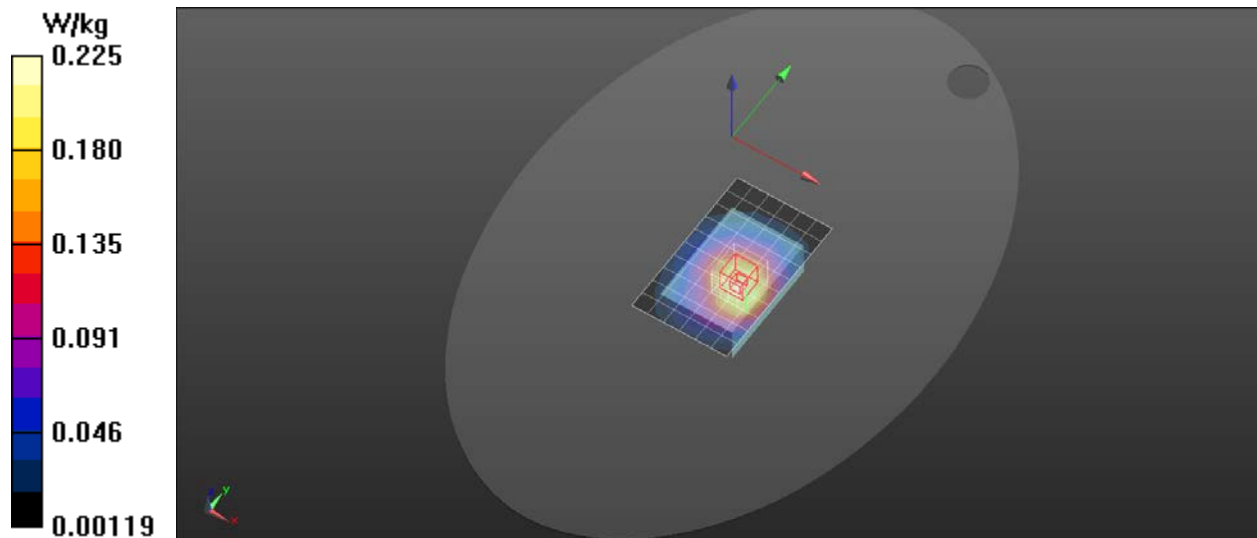

## LTE Band 13

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated):  $f = 782 \text{ MHz}$ ;  $\sigma = 0.934 \text{ S/m}$ ;  $\epsilon_r = 41.884$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(10.99, 10.99, 10.99) @ 782 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_13\_Ch 23230\_RB1,24/Area Scan (7x11x1):** Measurement

grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.182 W/kg

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_13\_Ch 23230\_RB1,24/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 13.73 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.187 W/kg

**SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.107 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 76.5%

Maximum value of SAR (measured) = 0.172 W/kg

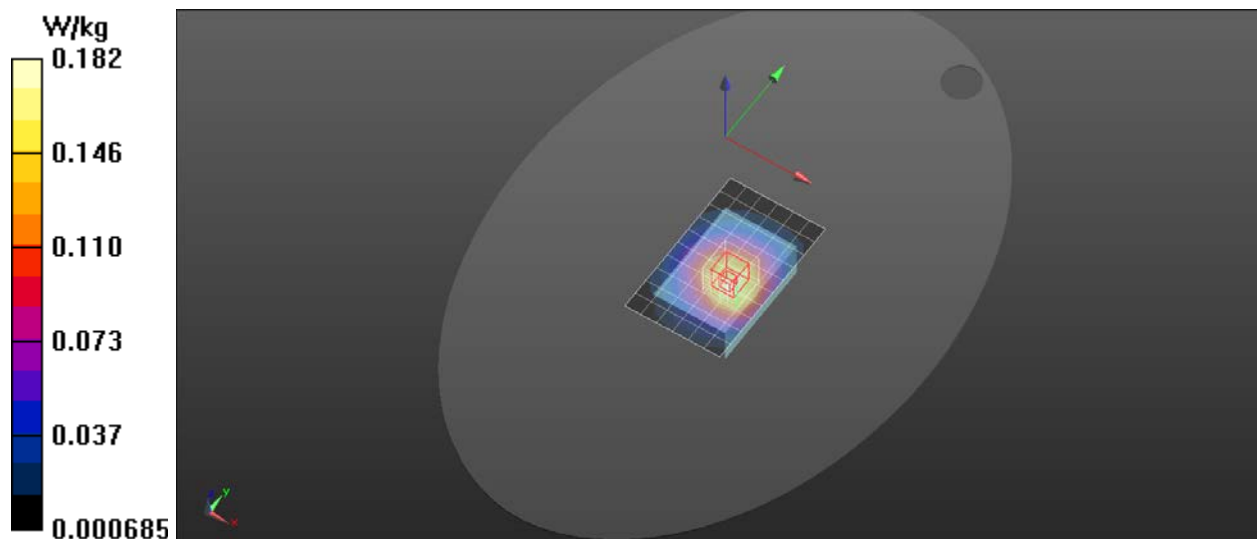

## LTE Band 14

Frequency: 793 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated):  $f = 793$  MHz;  $\sigma = 0.938$  S/m;  $\epsilon_r = 41.852$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(10.99, 10.99, 10.99) @ 793 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_14\_Ch 23330\_RB1,24/Area Scan (7x11x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.145 W/kg

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_14\_Ch 23330\_RB1,24/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.51 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.166 W/kg

**SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.095 W/kg**

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 77.3%

Maximum value of SAR (measured) = 0.152 W/kg

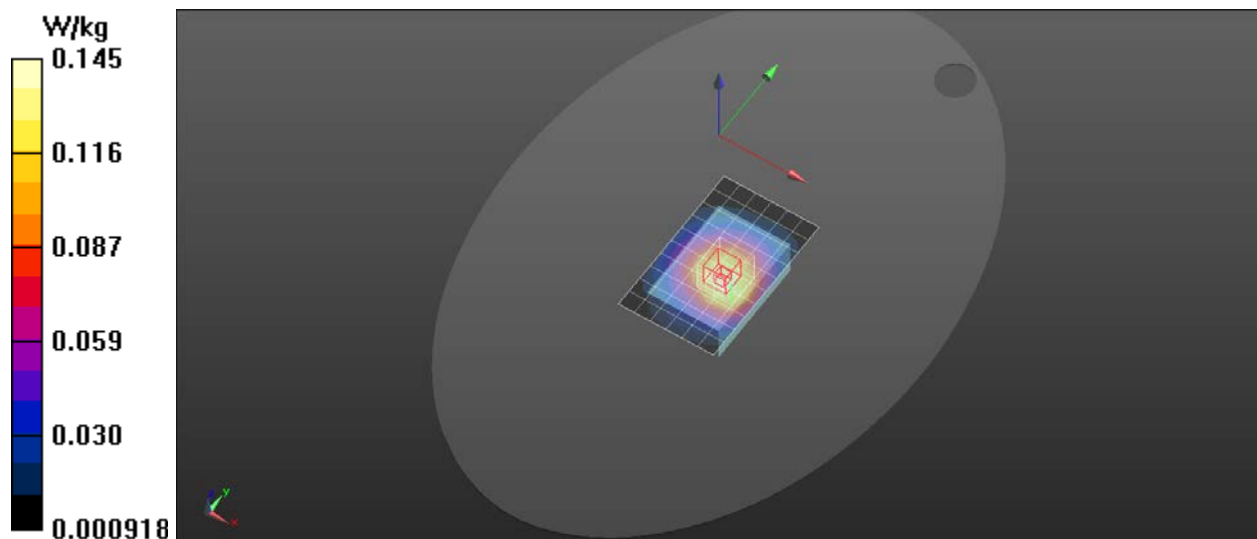

## LTE Band 25

Frequency: 1882.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.392$  S/m;  $\epsilon_r = 40.943$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(8.41, 8.41, 8.41) @ 1882.5 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_25\_Ch 26365\_RB1,49/Area Scan (7x11x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.182 W/kg

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_25\_Ch 26365\_RB1,49/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.573 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.255 W/kg

**SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.078 W/kg**

Smallest distance from peaks to all points 3 dB below = 17 mm

Ratio of SAR at M2 to SAR at M1 = 54.4%

Maximum value of SAR (measured) = 0.213 W/kg

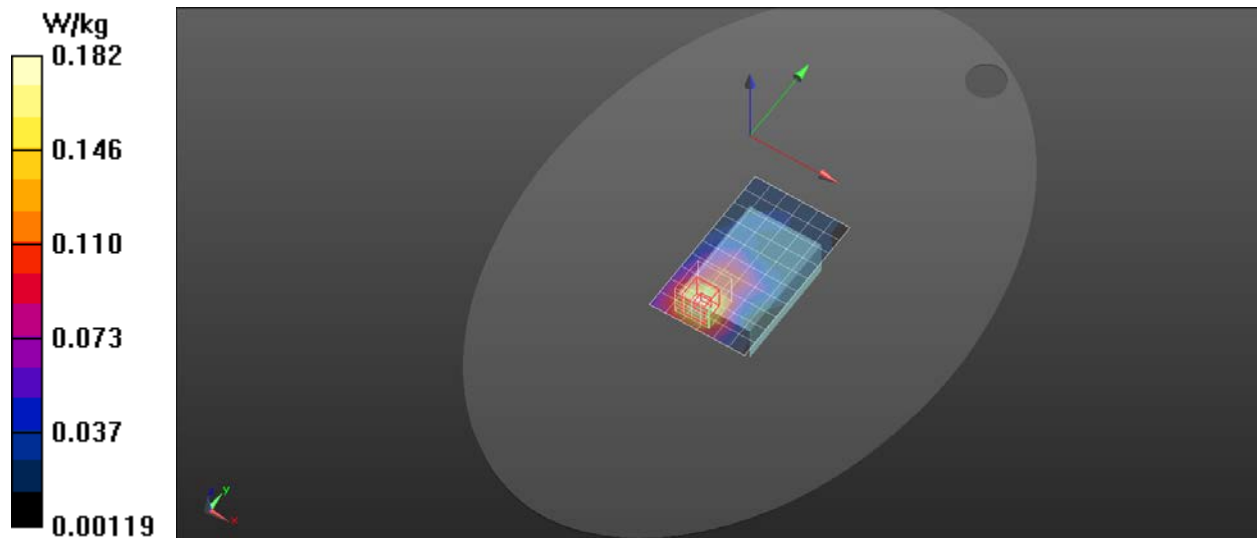

## LTE Band 26

Frequency: 831.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated):  $f = 831.5$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 43.445$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(10.73, 10.73, 10.73) @ 831.5 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_26\_Ch 26865\_RB1,37/Area Scan (7x11x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.105 W/kg

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_26\_Ch 26865\_RB1,37/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.98 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.123 W/kg

**SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.066 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 75.1%

Maximum value of SAR (measured) = 0.112 W/kg

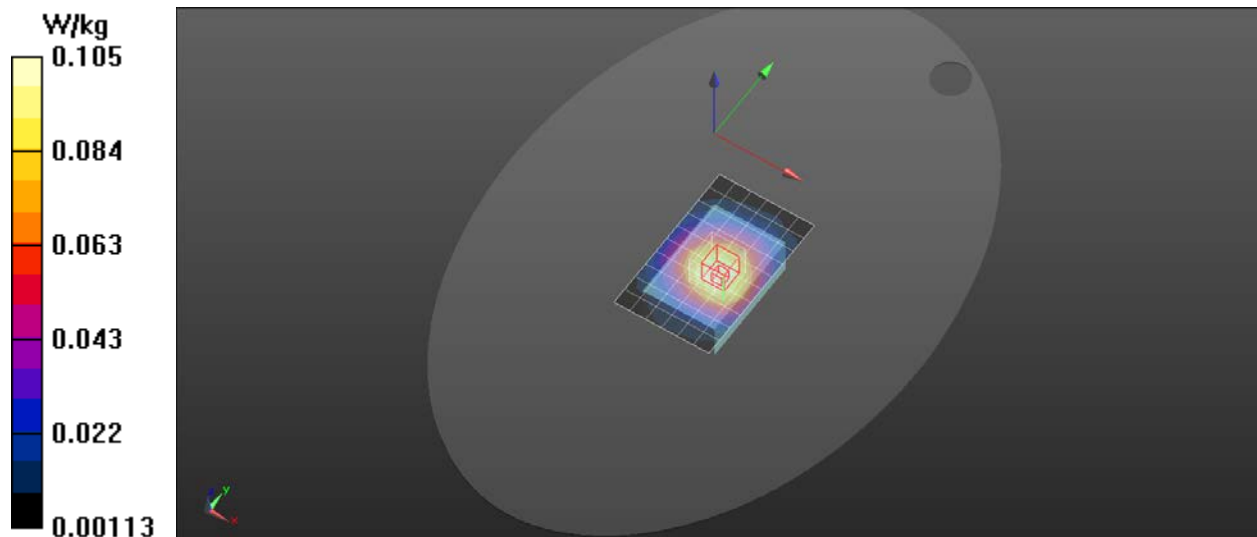

## LTE Band 66

Frequency: 1770 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.345$  S/m;  $\epsilon_r = 41.178$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(8.85, 8.85, 8.85) @ 1770 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_66\_Ch 132572\_RB1,49/Area Scan (7x11x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.236 W/kg

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_66\_Ch 132572\_RB1,49/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.179 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.293 W/kg

**SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.104 W/kg**

Smallest distance from peaks to all points 3 dB below = 22.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.5%

Maximum value of SAR (measured) = 0.248 W/kg

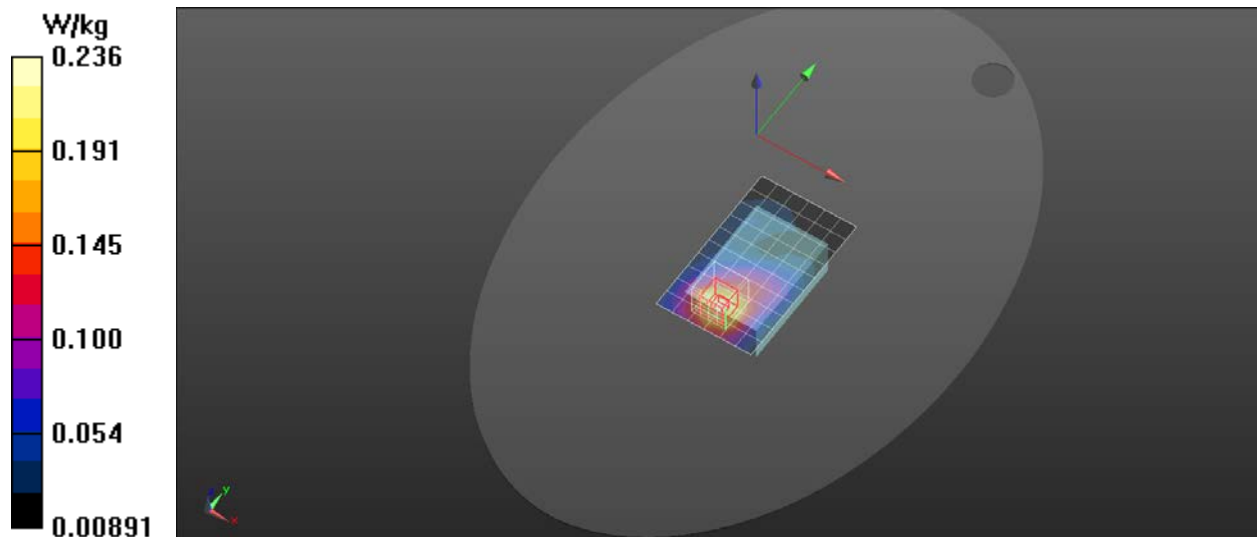

## LTE Band 71

Frequency: 688 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated):  $f = 688$  MHz;  $\sigma = 0.903$  S/m;  $\epsilon_r = 42.207$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7678; ConvF(10.99, 10.99, 10.99) @ 688 MHz; Calibrated: 2021/8/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_71\_Ch 133372\_RB1,49/Area Scan (7x11x1):** Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.142 W/kg

### Body-Worn Camera/Rear\_0mm\_With ADJUSTABLE POCKET

**MOUNT/LTE\_Band\_71\_Ch 133372\_RB1,49/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.53 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.153 W/kg

**SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.087 W/kg**

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 78.4%

Maximum value of SAR (measured) = 0.141 W/kg

