



Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5745 MHz		
Polarization:	Horizontal		
Remark:			

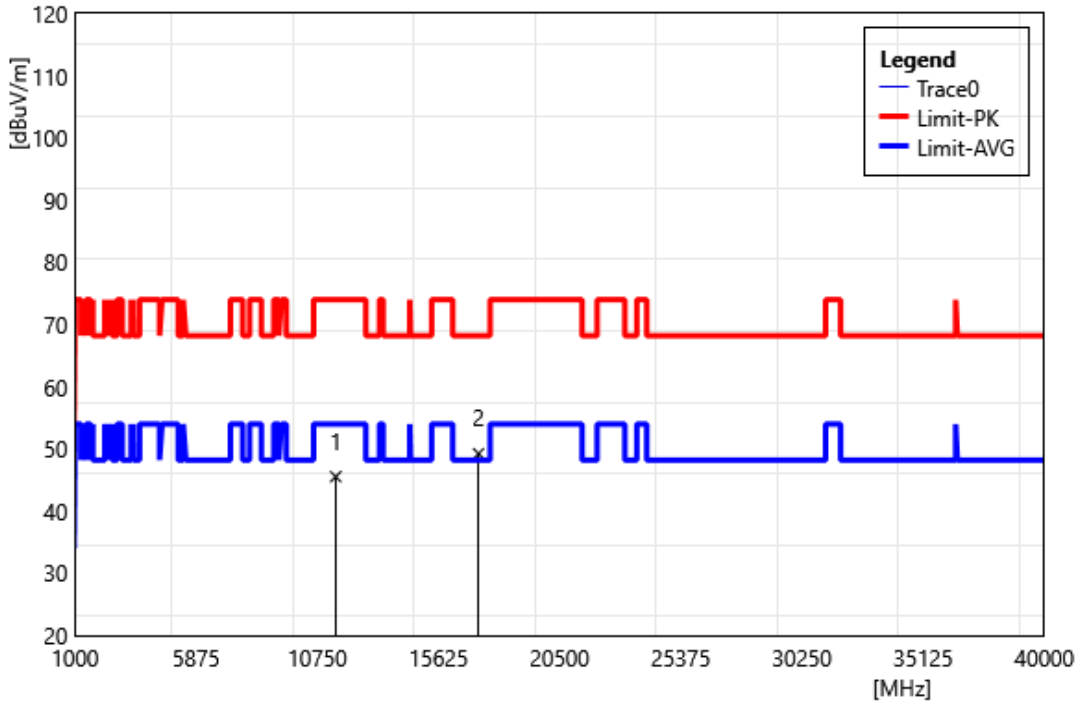


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	37.98	7.55	45.53	74.00	-28.47	PEAK
2	17235.00	41.83	7.39	49.22	68.20	-18.98	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5745 MHz		
Polarization:	Vertical		
Remark:			

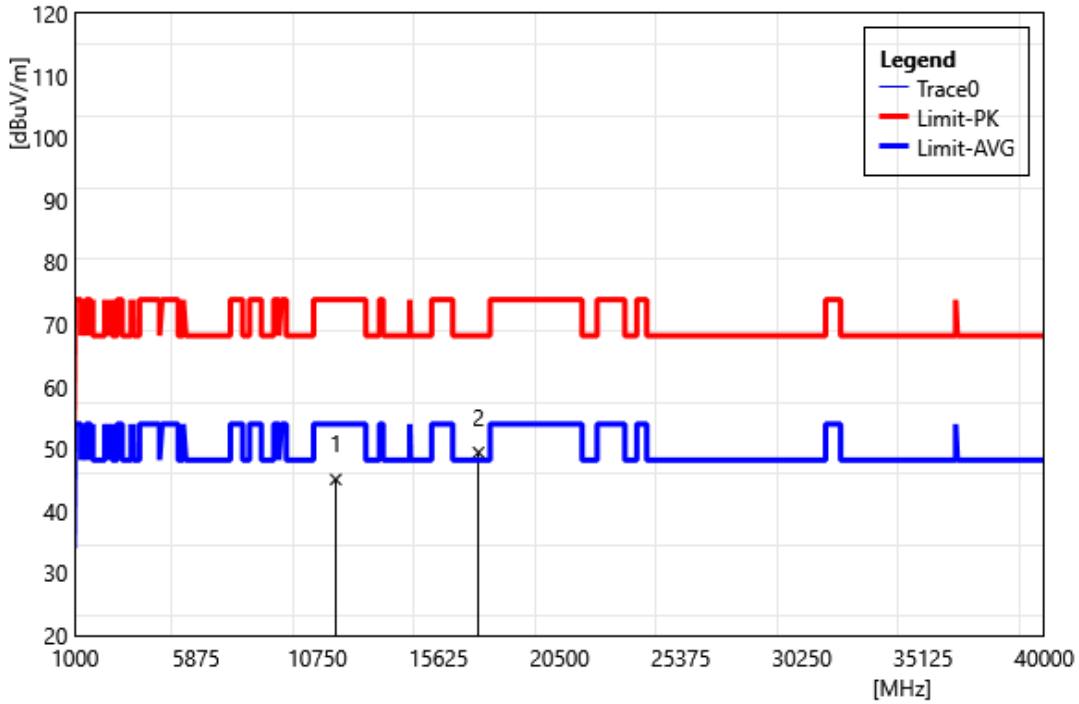


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	37.53	7.55	45.08	74.00	-28.92	PEAK
2	17235.00	42.02	7.39	49.41	68.20	-18.79	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5785 MHz		
Polarization:	Horizontal		
Remark:			

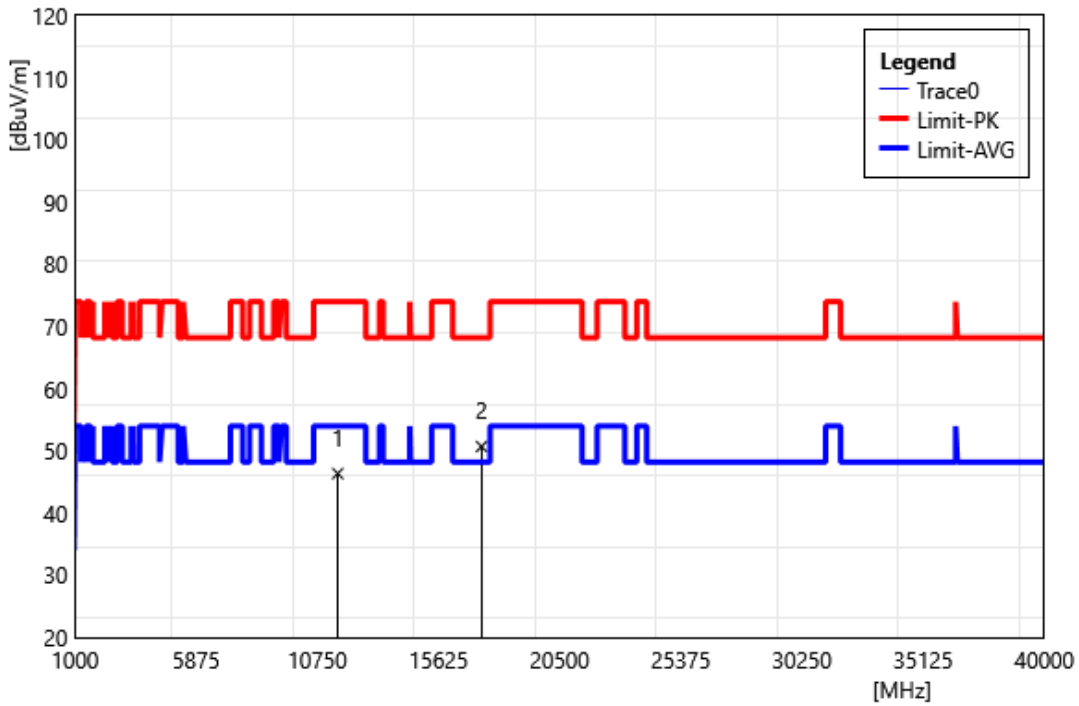


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	38.68	7.67	46.35	74.00	-27.65	PEAK
2	17355.00	43.48	7.22	50.70	68.20	-17.50	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5785 MHz		
Polarization:	Vertical		
Remark:			

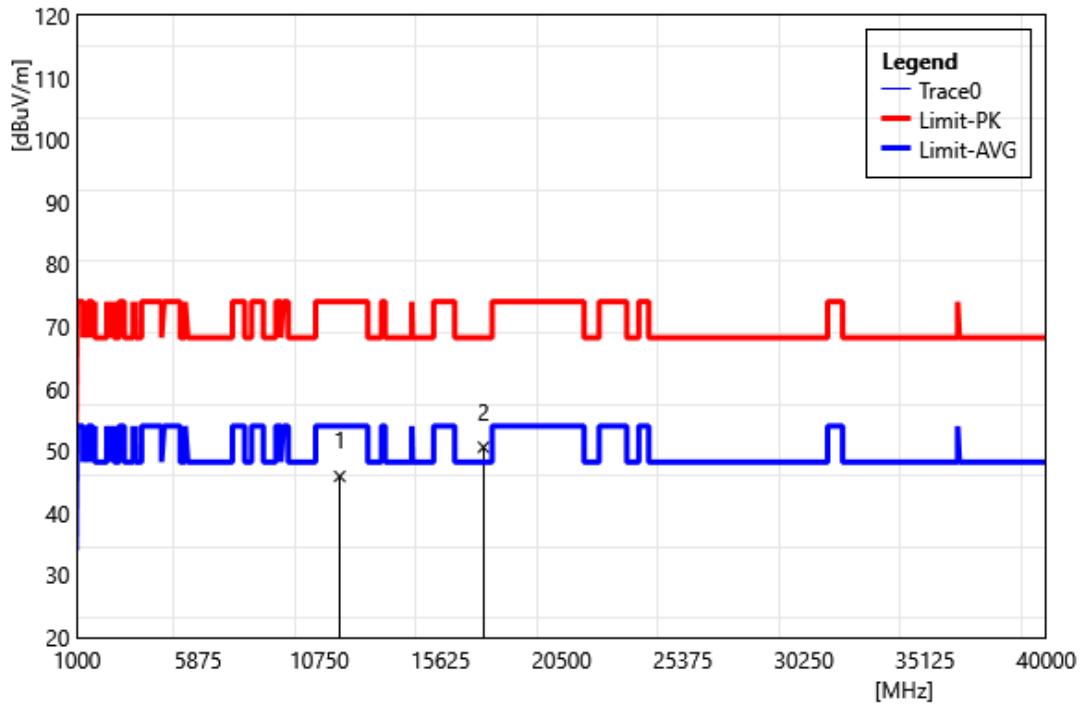


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	38.22	7.67	45.89	74.00	-28.11	PEAK
2	17355.00	43.37	7.22	50.59	68.20	-17.61	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5825 MHz		
Polarization:	Horizontal		
Remark:			

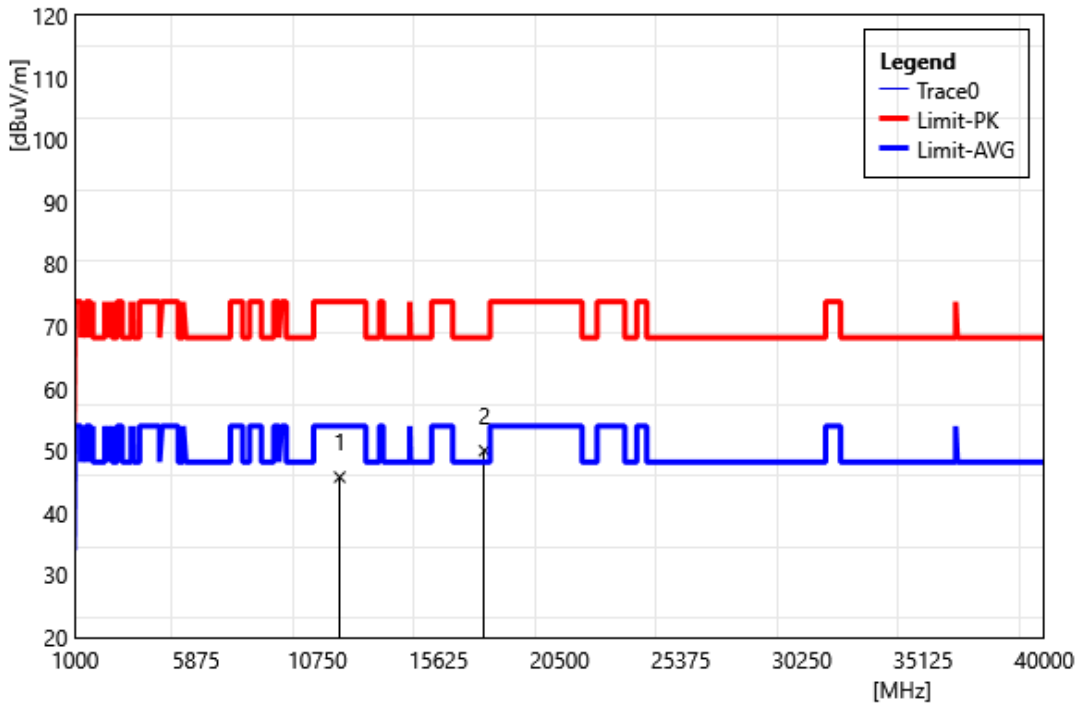


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	38.15	7.63	45.78	74.00	-28.22	PEAK
2	17475.00	43.07	6.96	50.03	68.20	-18.17	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5825 MHz		
Polarization:	Vertical		
Remark:			

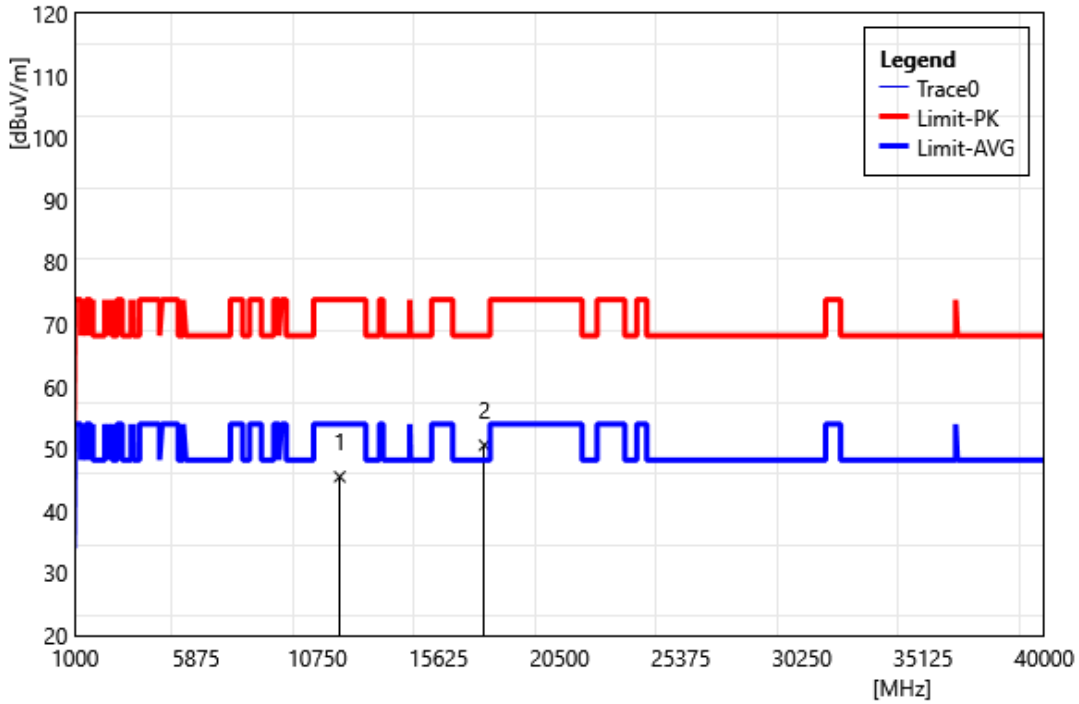


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	37.89	7.63	45.52	74.00	-28.48	PEAK
2	17475.00	43.63	6.96	50.59	68.20	-17.61	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190 MHz		
Polarization:	Horizontal		
Remark:			

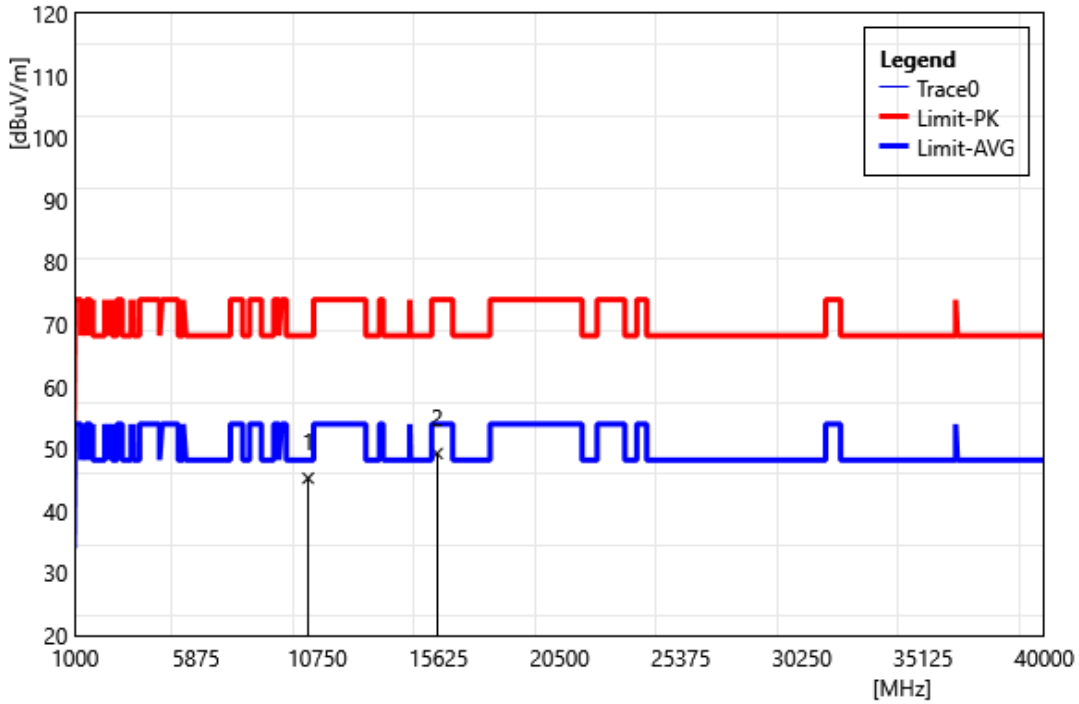

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10380.00	38.06	7.22	45.28	68.20	-22.92	PEAK
2	15570.00	40.28	8.98	49.26	74.00	-24.74	PEAK


Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190 MHz		
Polarization:	Vertical		
Remark:			

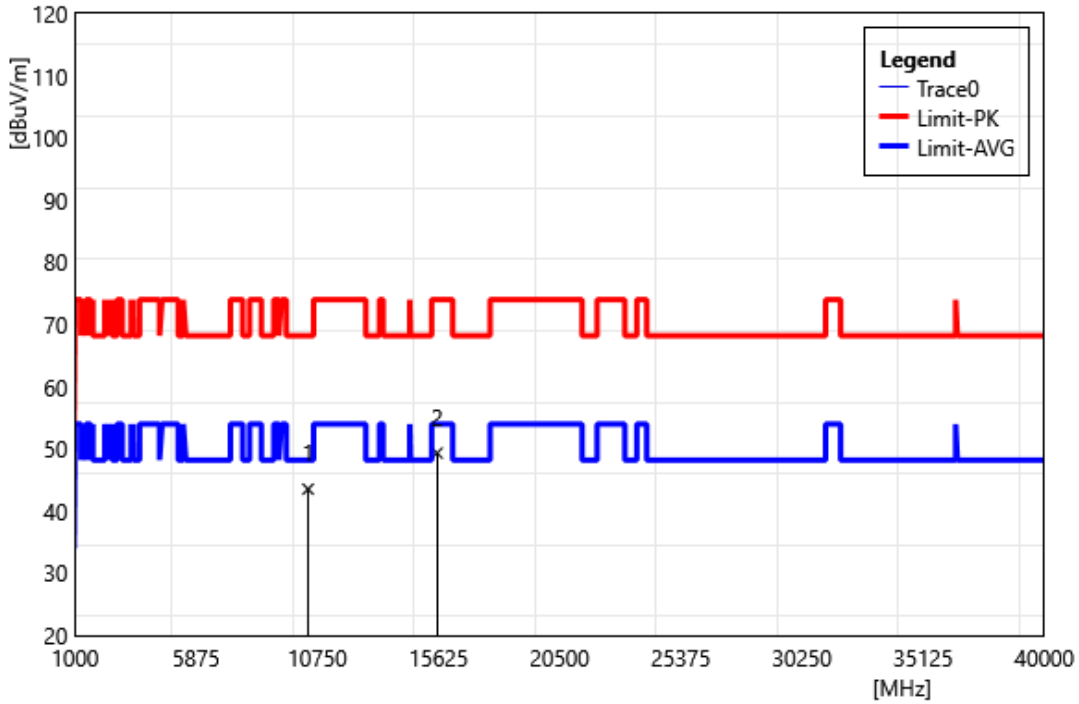

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10380.00	36.31	7.22	43.53	68.20	-24.67	PEAK
2	15570.00	40.35	8.98	49.33	74.00	-24.67	PEAK




Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5230 MHz		
Polarization:	Horizontal		
Remark:			

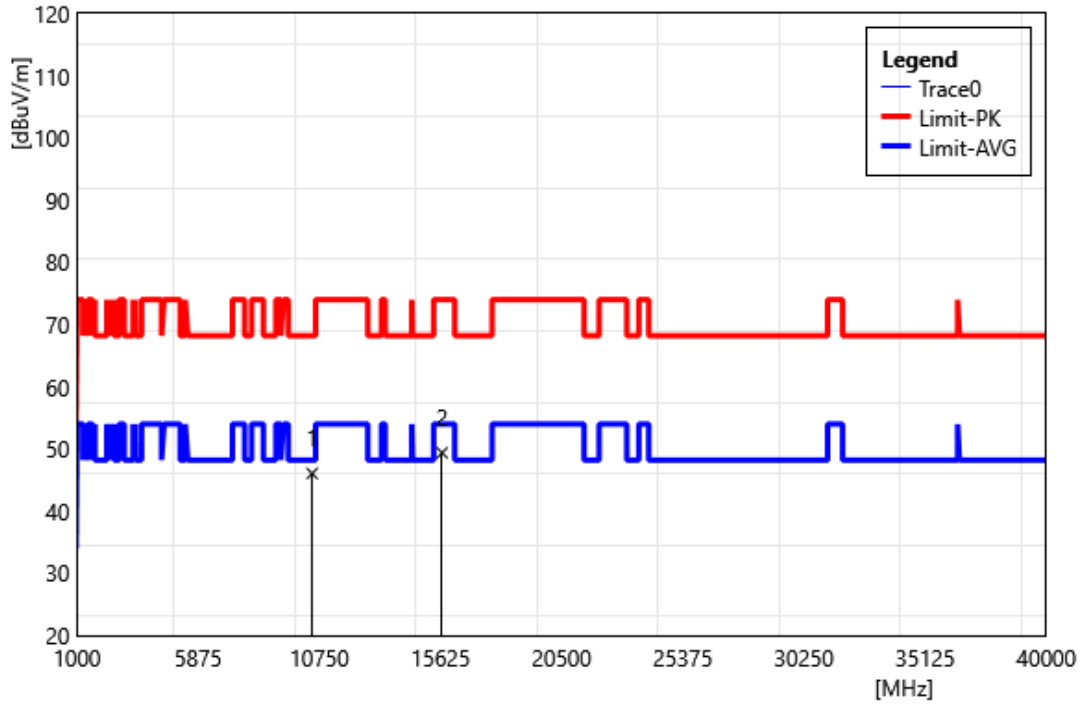


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10460.00	38.70	7.35	46.05	68.20	-22.15	PEAK
2	15690.00	40.35	9.00	49.35	74.00	-24.65	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5230 MHz		
Polarization:	Vertical		
Remark:			

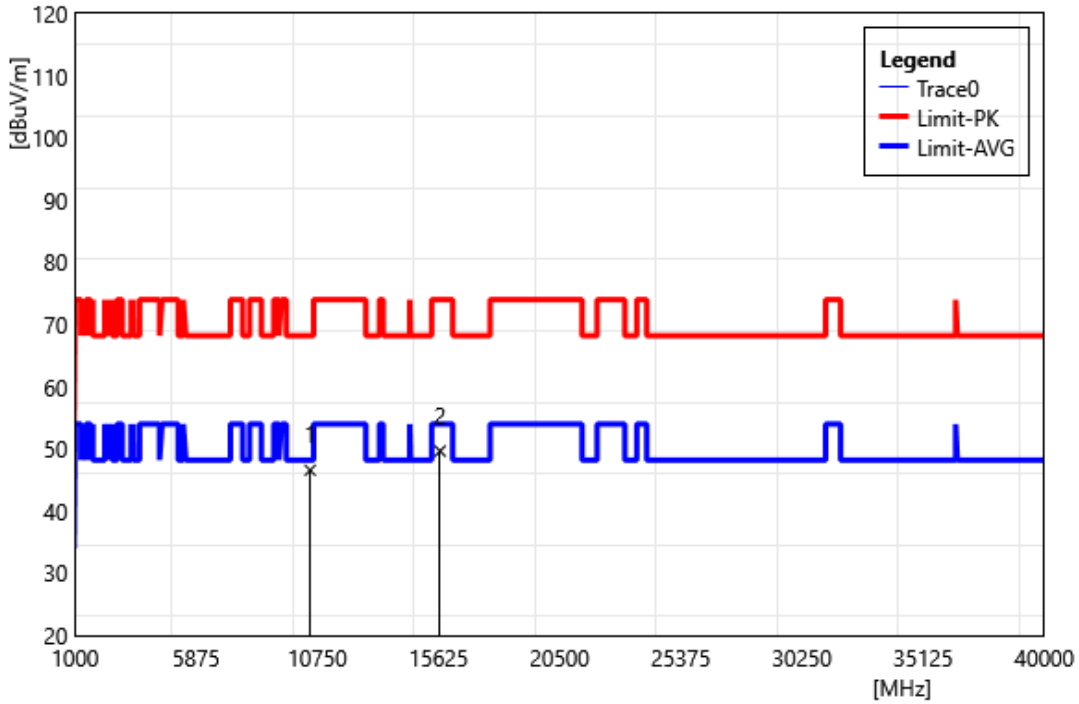


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10460.00	39.22	7.35	46.57	68.20	-21.63	PEAK
2	15690.00	40.65	9.00	49.65	74.00	-24.35	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5270 MHz		
Polarization:	Horizontal		
Remark:			

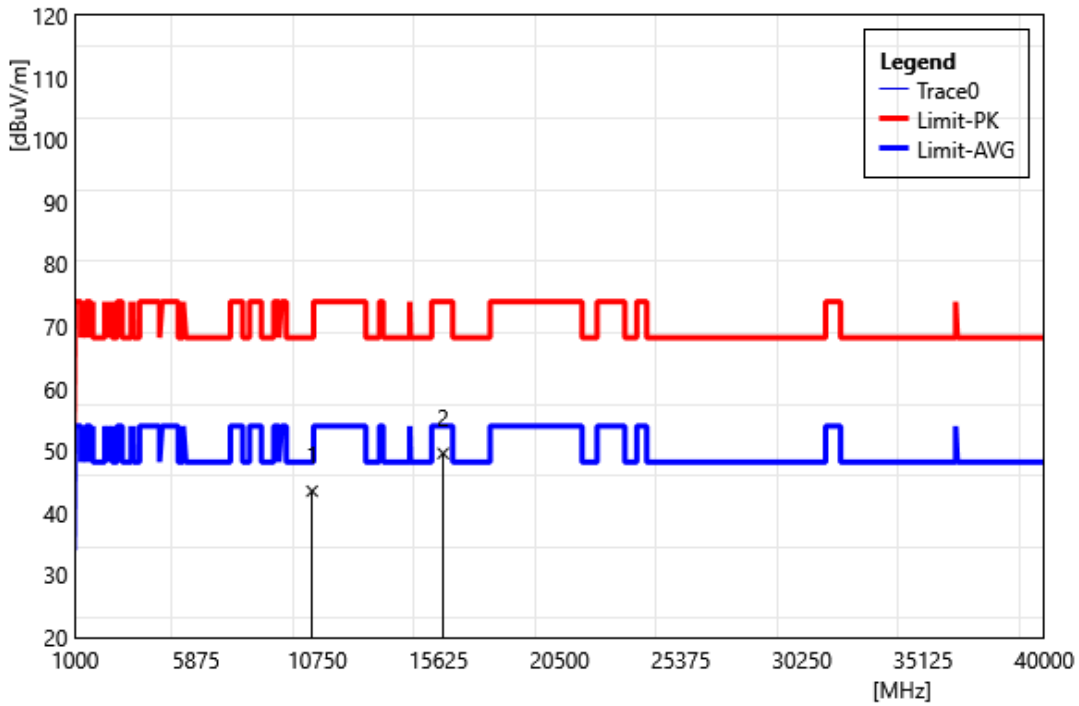


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10540.00	36.16	7.36	43.52	68.20	-24.68	PEAK
2	15810.00	40.09	9.50	49.59	74.00	-24.41	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5270 MHz		
Polarization:	Vertical		
Remark:			

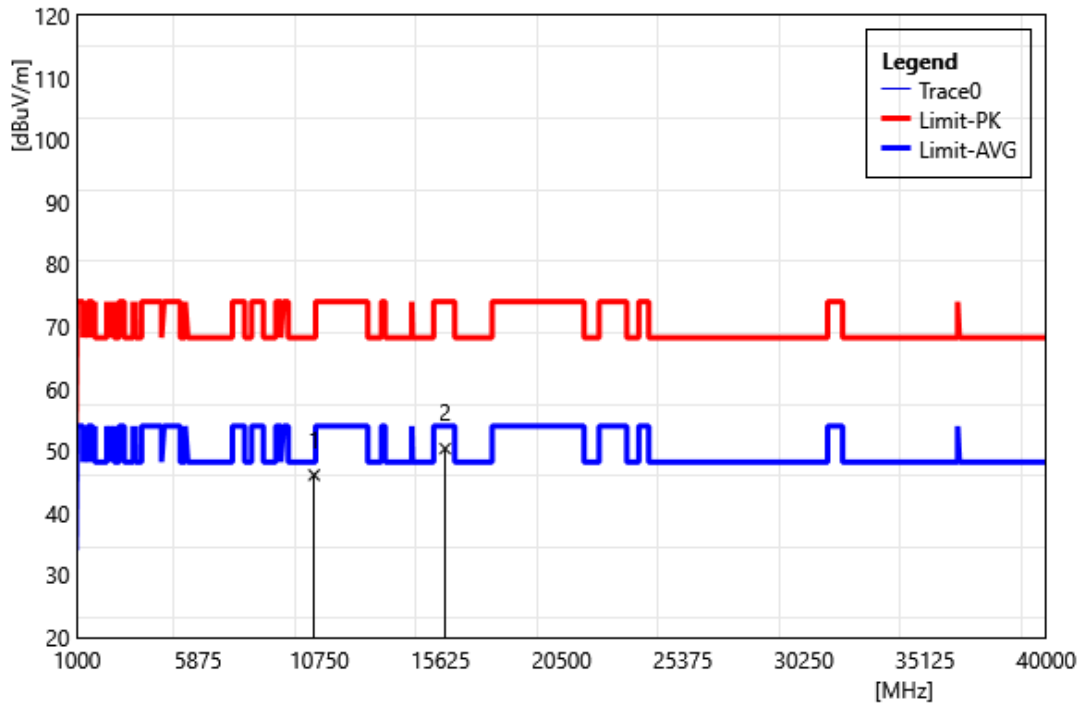


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10540.00	38.75	7.36	46.11	68.20	-22.09	PEAK
2	15810.00	40.86	9.50	50.36	74.00	-23.64	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5310 MHz		
Polarization:	Horizontal		
Remark:			

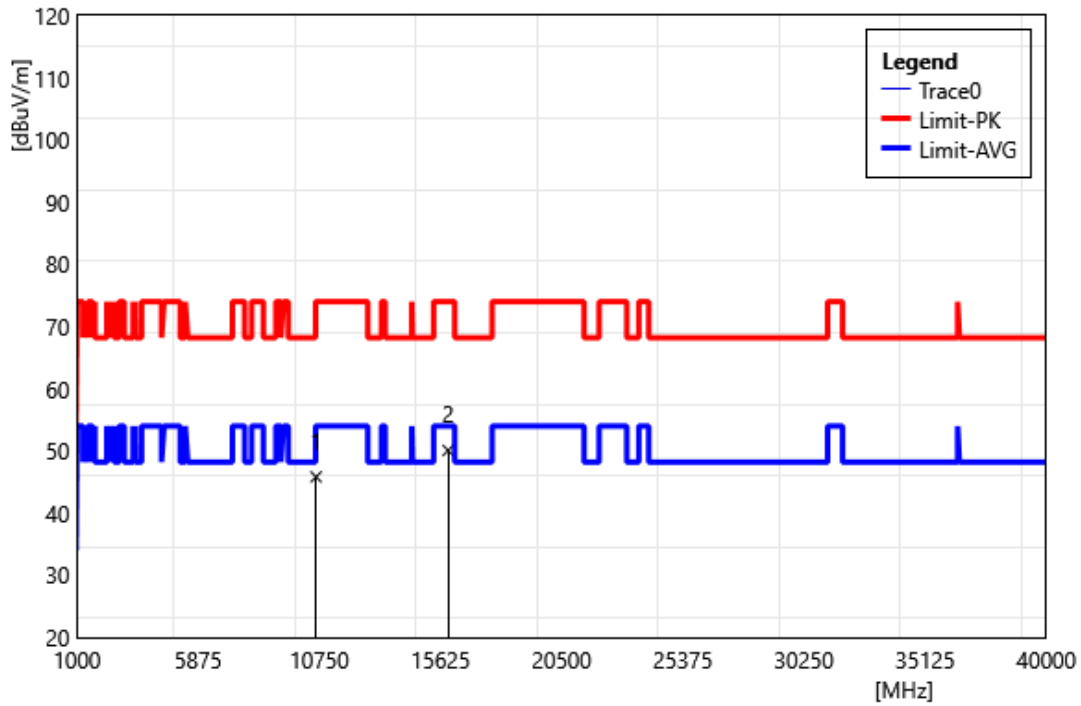


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10620.00	38.48	7.34	45.82	74.00	-28.18	PEAK
2	15930.00	40.59	9.48	50.07	74.00	-23.93	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5310 MHz		
Polarization:	Vertical		
Remark:			

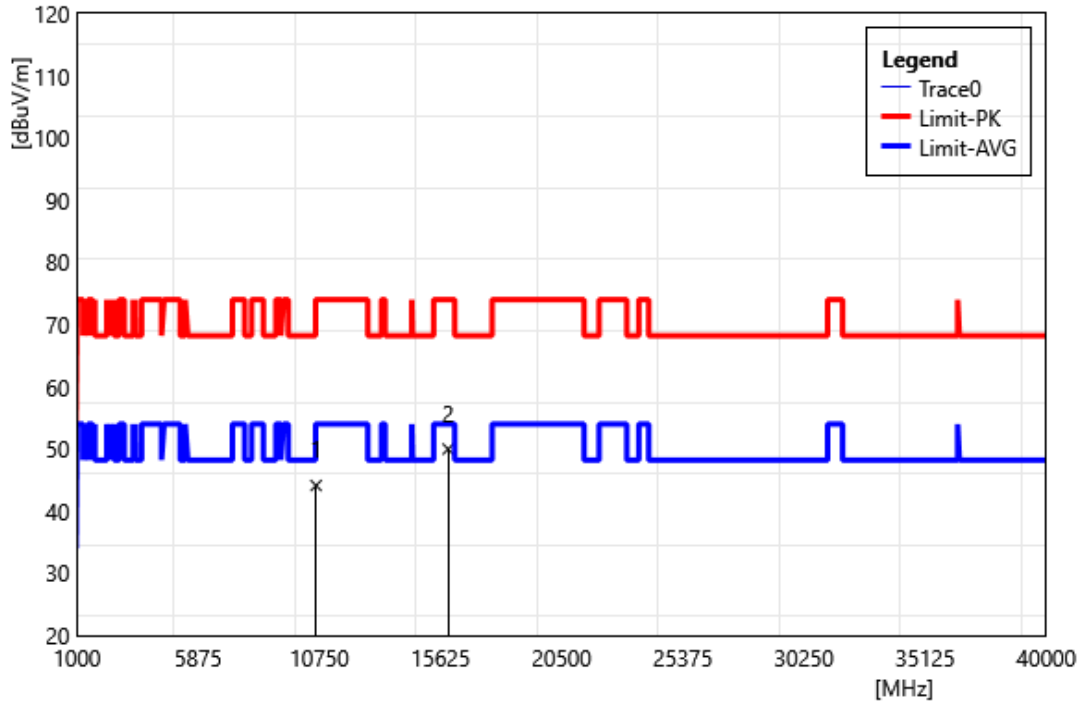


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10620.00	36.77	7.34	44.11	74.00	-29.89	PEAK
2	15930.00	40.49	9.48	49.97	74.00	-24.03	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5510 MHz		
Polarization:	Horizontal		
Remark:			

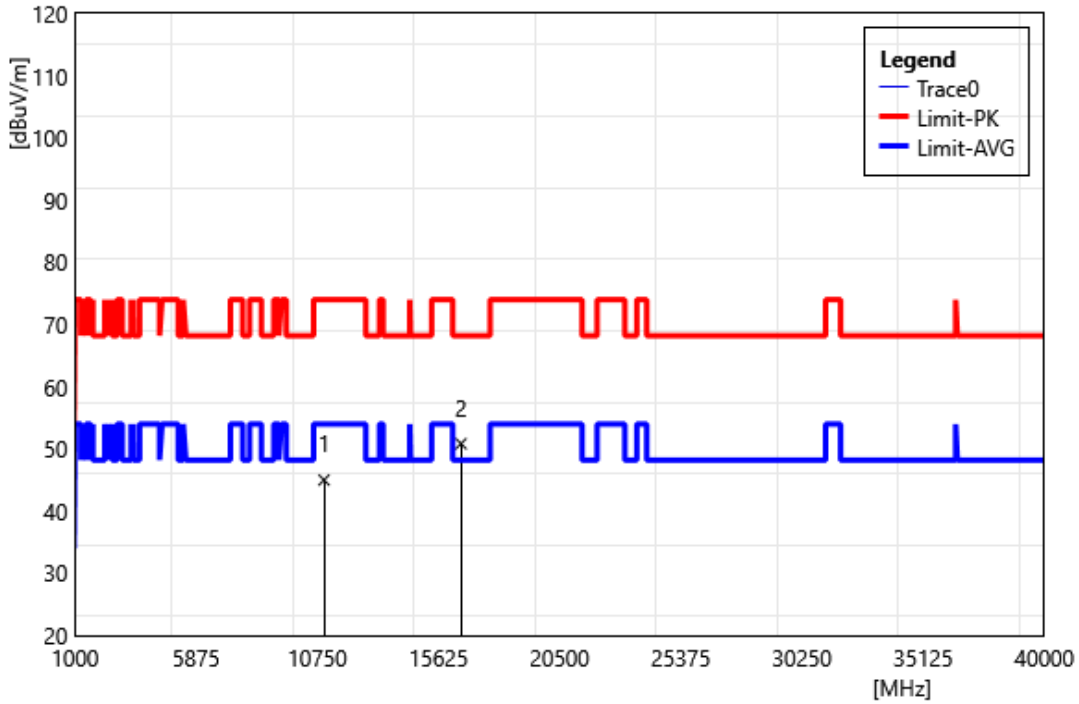

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11020.00	37.83	7.16	44.99	74.00	-29.01	PEAK
2	16530.00	41.71	9.12	50.83	68.20	-17.37	PEAK


Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5510 MHz		
Polarization:	Vertical		
Remark:			

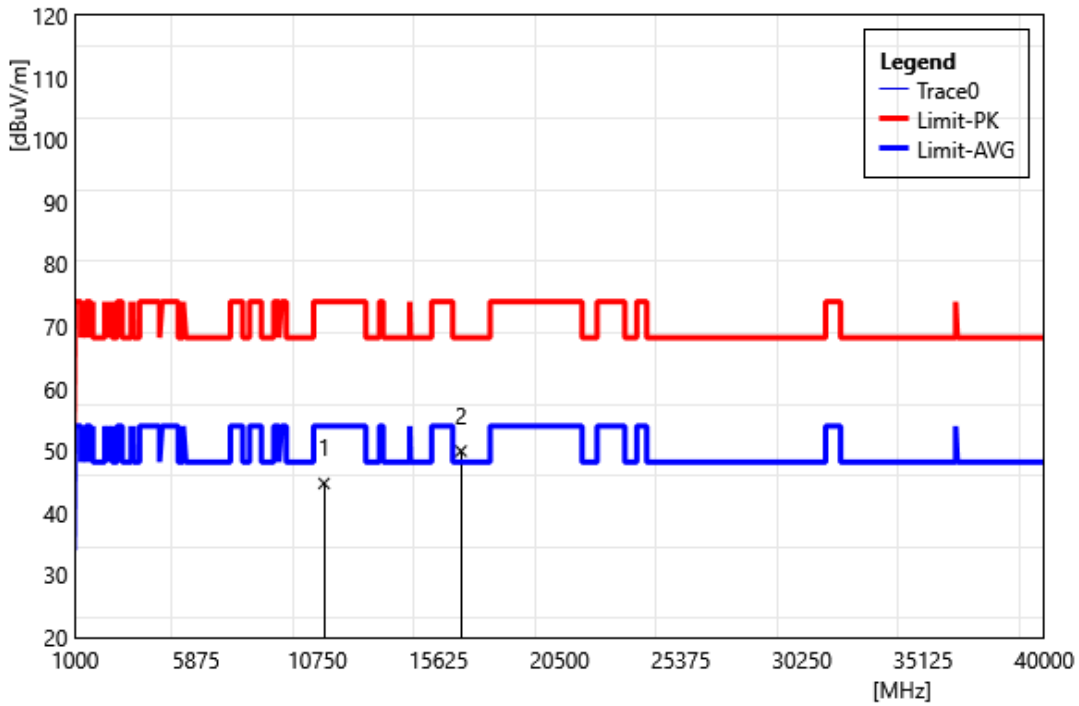

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11020.00	37.60	7.16	44.76	74.00	-29.24	PEAK
2	16530.00	40.84	9.12	49.96	68.20	-18.24	PEAK




Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5550 MHz		
Polarization:	Horizontal		
Remark:			

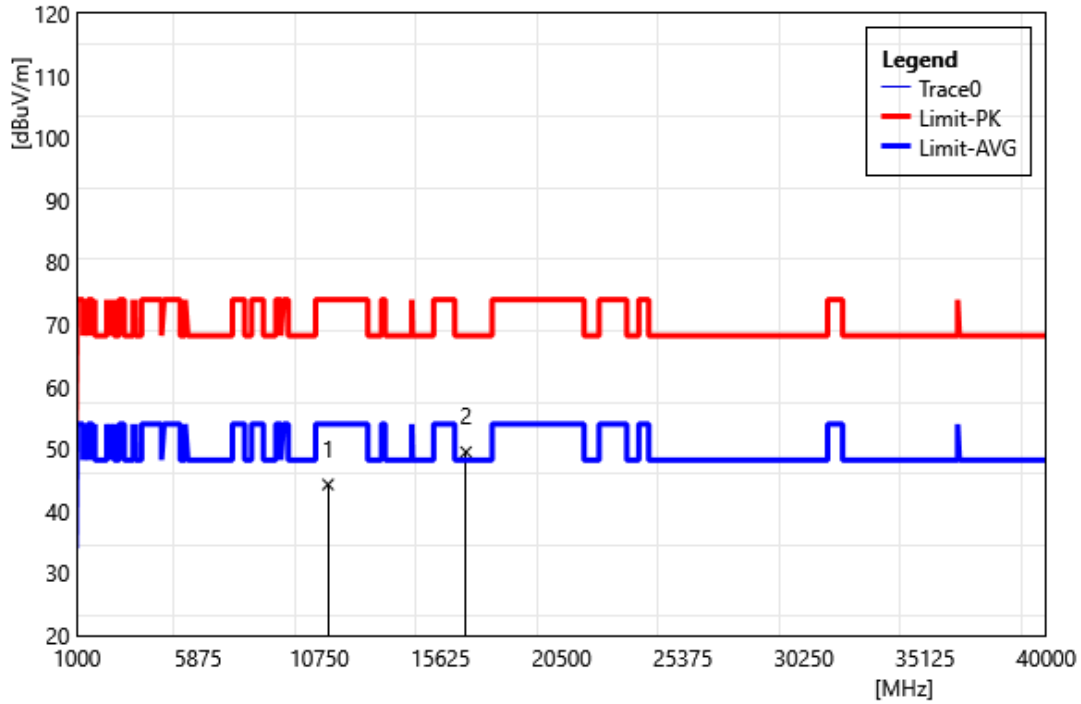


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11100.00	36.91	7.35	44.26	74.00	-29.74	PEAK
2	16650.00	40.62	8.87	49.49	68.20	-18.71	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5550 MHz		
Polarization:	Vertical		
Remark:			

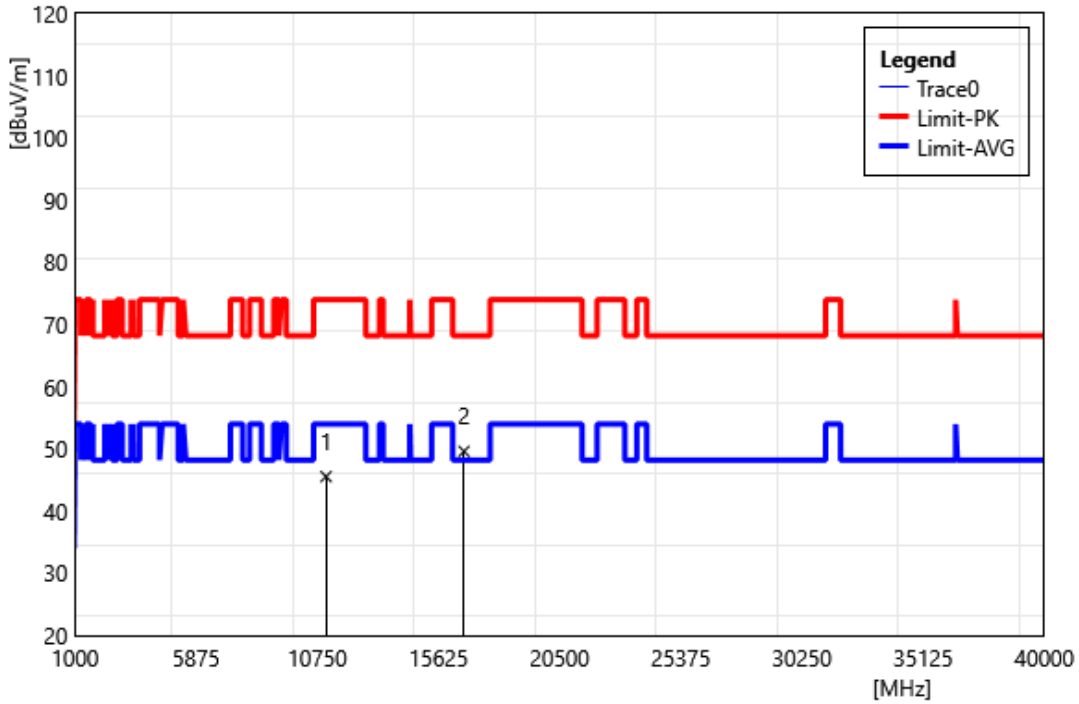


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11100.00	38.19	7.35	45.54	74.00	-28.46	PEAK
2	16650.00	40.72	8.87	49.59	68.20	-18.61	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5670 MHz		
Polarization:	Horizontal		
Remark:			

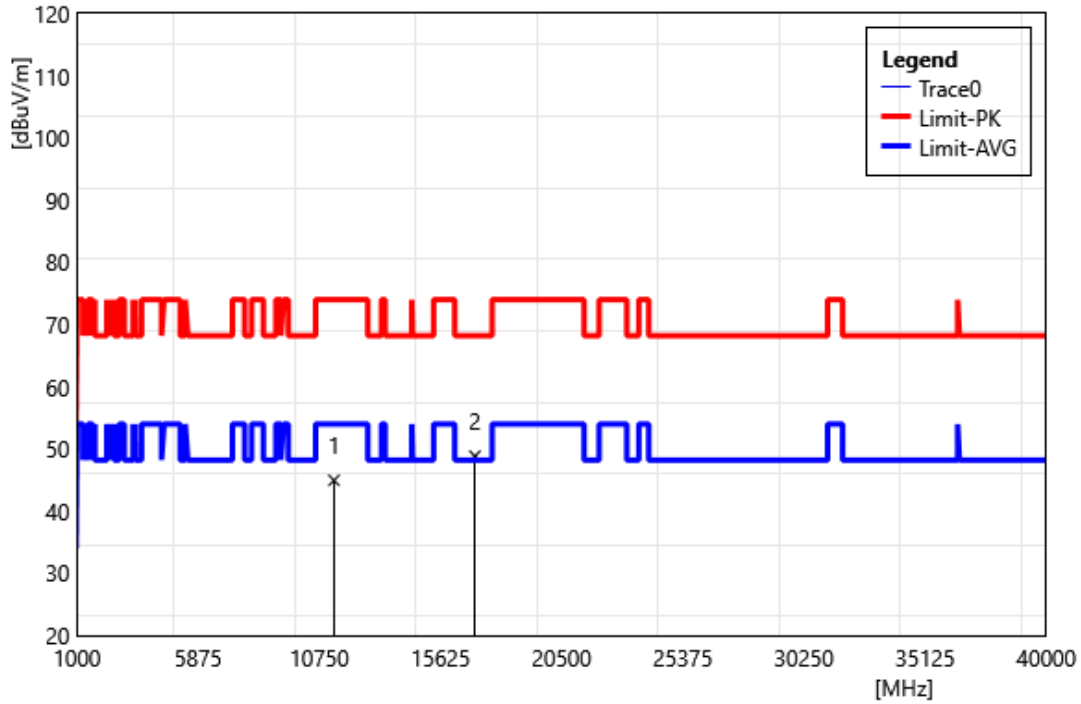


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11340.00	37.35	7.60	44.95	74.00	-29.05	PEAK
2	17010.00	41.52	7.31	48.83	68.20	-19.37	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5670 MHz		
Polarization:	Vertical		
Remark:			

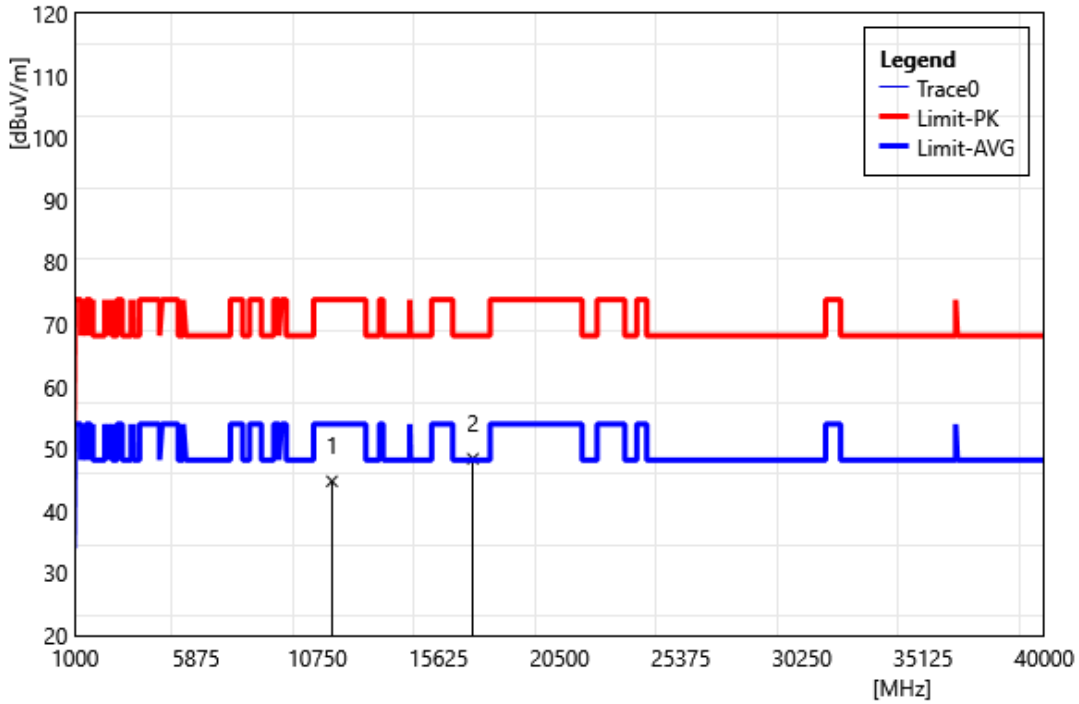


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11340.00	37.19	7.60	44.79	74.00	-29.21	PEAK
2	17010.00	41.10	7.31	48.41	68.20	-19.79	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5755 MHz		
Polarization:	Horizontal		
Remark:			

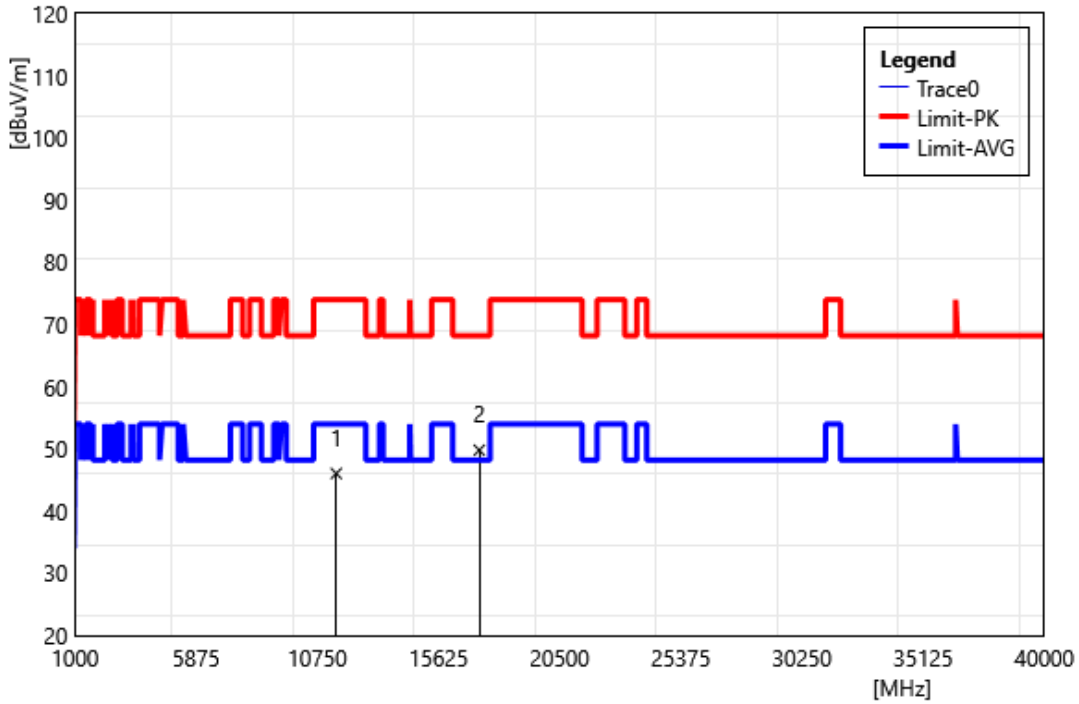


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	38.50	7.55	46.05	74.00	-27.95	PEAK
2	17265.00	42.44	7.36	49.80	68.20	-18.40	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5755 MHz		
Polarization:	Vertical		
Remark:			

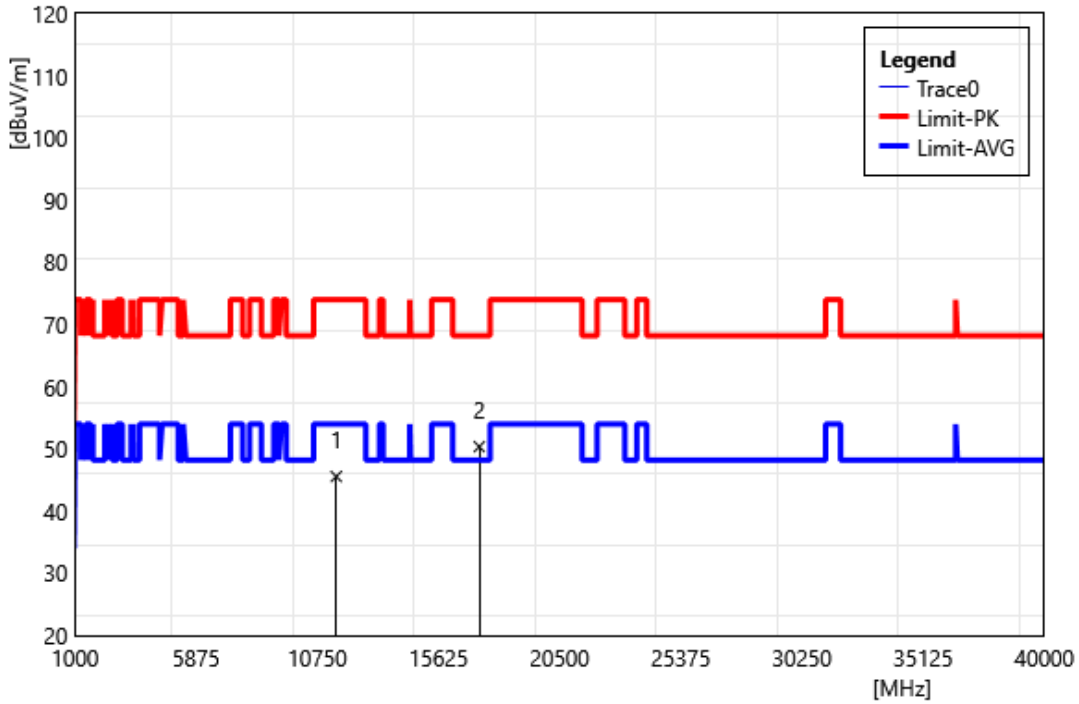


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	38.02	7.55	45.57	74.00	-28.43	PEAK
2	17265.00	43.01	7.36	50.37	68.20	-17.83	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5795 MHz		
Polarization:	Horizontal		
Remark:			

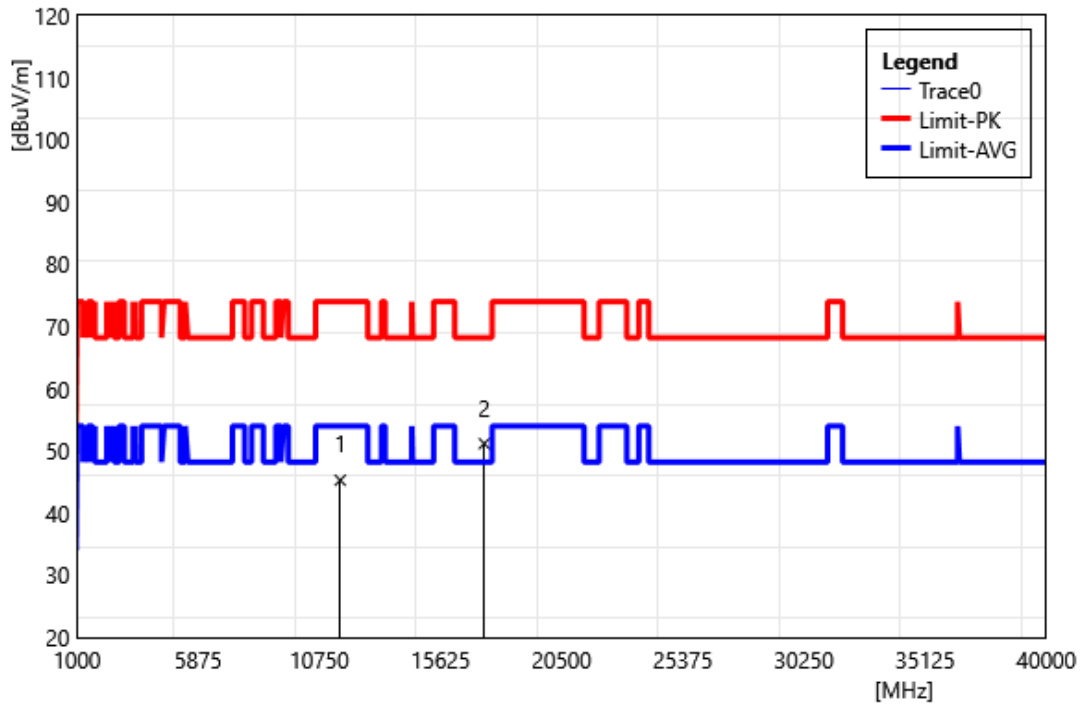

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	37.59	7.70	45.29	74.00	-28.71	PEAK
2	17385.00	43.98	7.18	51.16	68.20	-17.04	PEAK


Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5795 MHz		
Polarization:	Vertical		
Remark:			

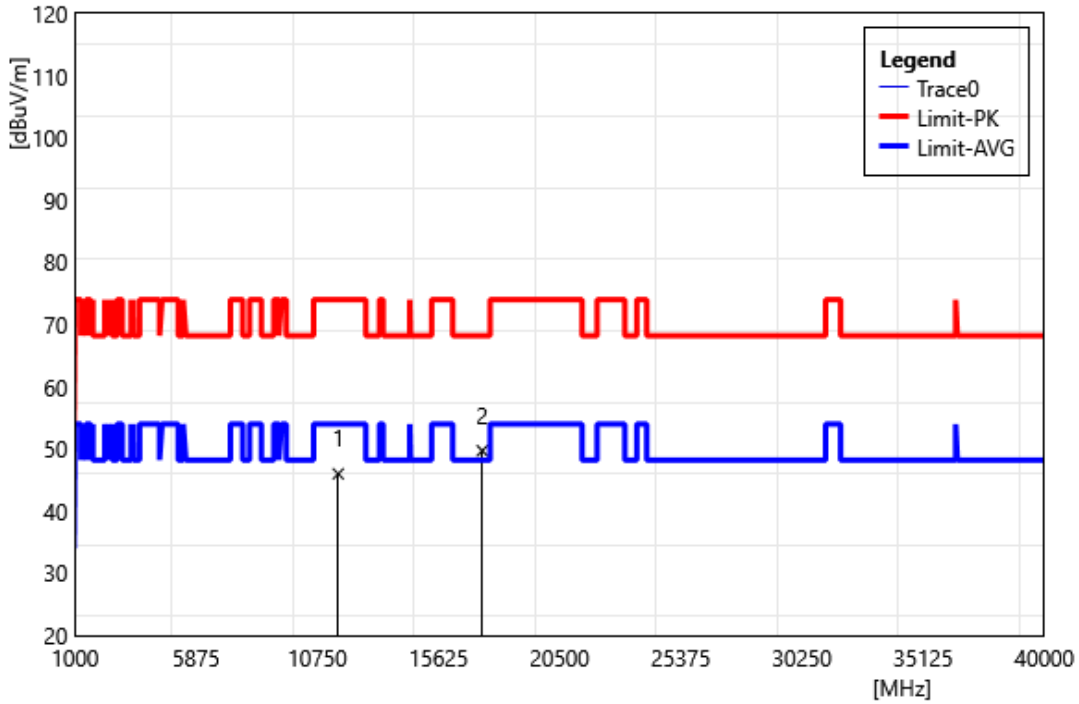

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	38.29	7.70	45.99	74.00	-28.01	PEAK
2	17385.00	42.52	7.18	49.70	68.20	-18.50	PEAK




Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210 MHz		
Polarization:	Horizontal		
Remark:			

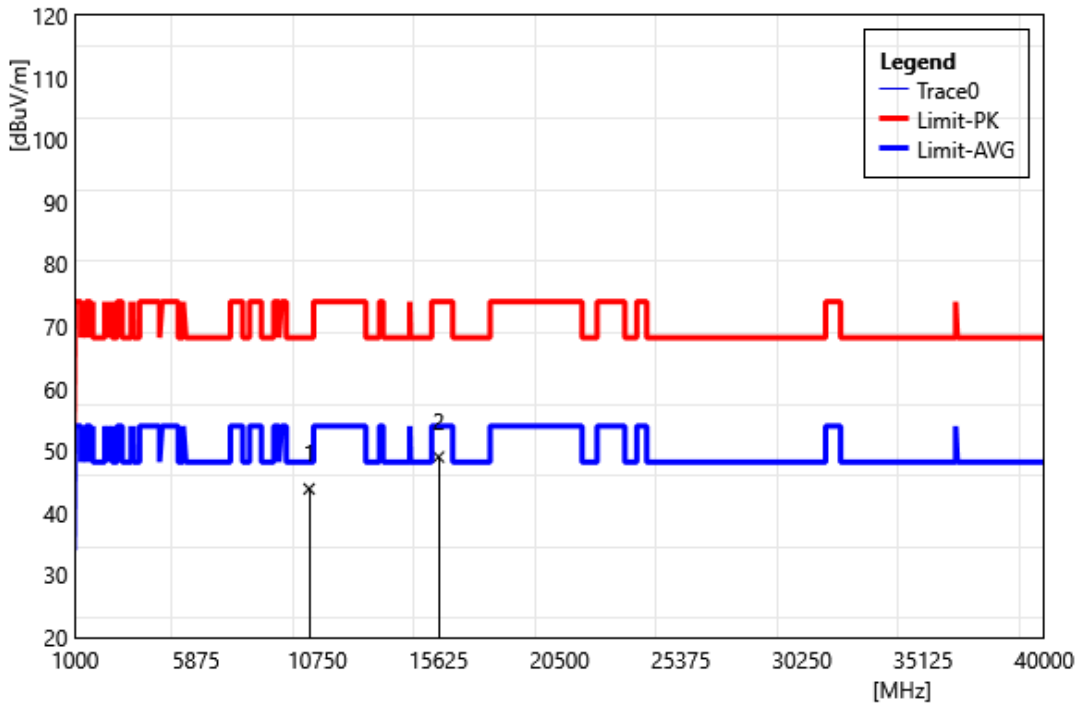


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	36.54	7.34	43.88	68.20	-24.32	PEAK
2	15630.00	40.03	8.99	49.02	74.00	-24.98	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210 MHz		
Polarization:	Vertical		
Remark:			

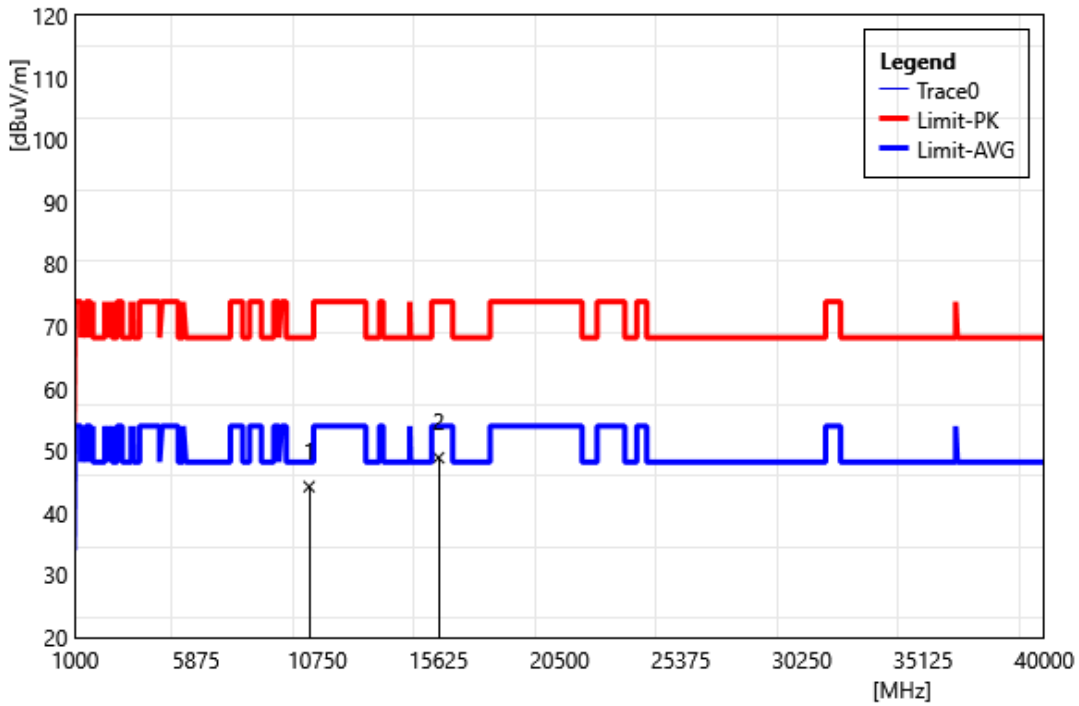


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	36.91	7.34	44.25	68.20	-23.95	PEAK
2	15630.00	39.90	8.99	48.89	74.00	-25.11	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5290 MHz		
Polarization:	Horizontal		
Remark:			

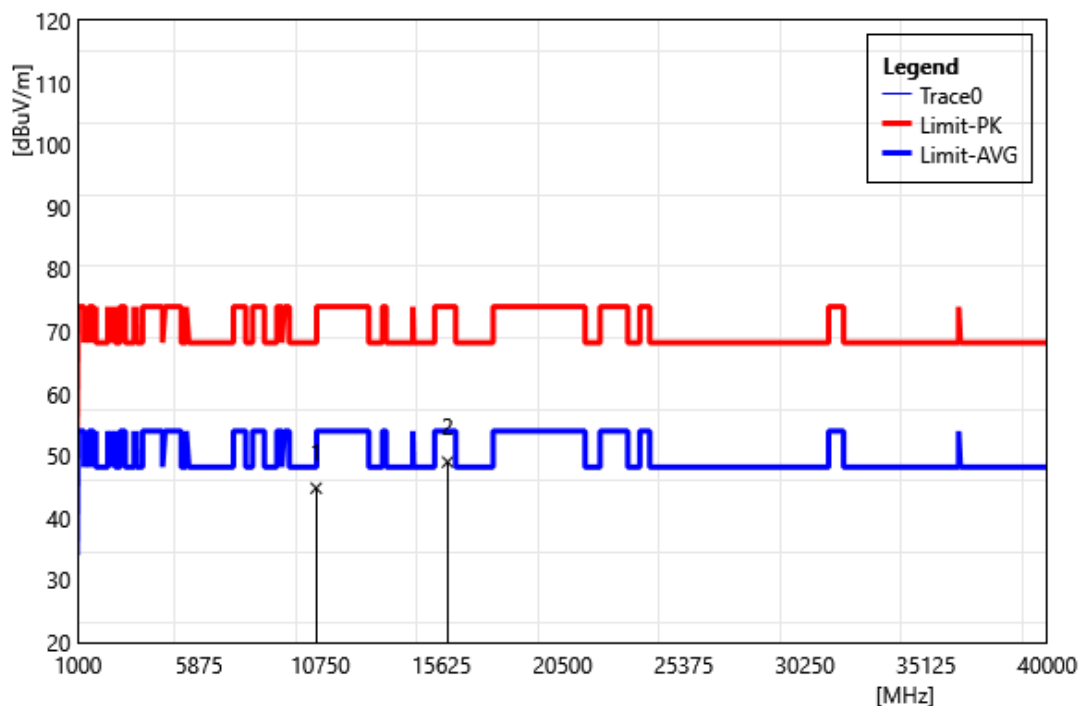


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10580.00	37.45	7.35	44.80	68.20	-23.40	PEAK
2	15870.00	39.57	9.43	49.00	74.00	-25.00	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5290 MHz		
Polarization:	Vertical		
Remark:			

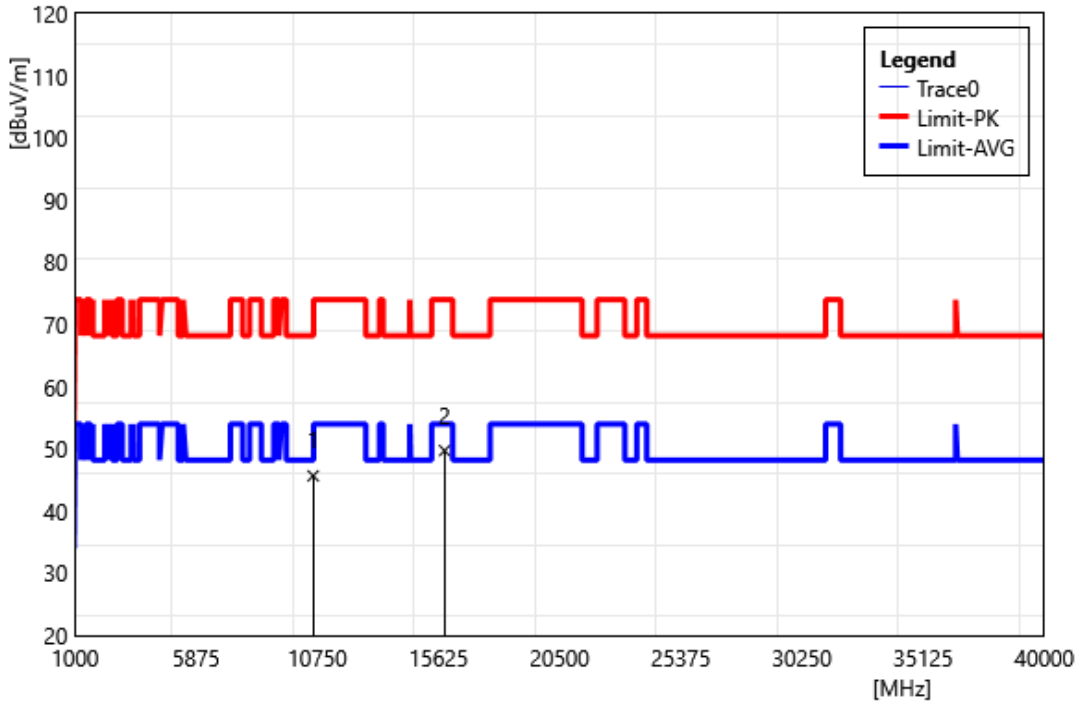


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10580.00	38.31	7.35	45.66	68.20	-22.54	PEAK
2	15870.00	40.30	9.43	49.73	74.00	-24.27	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5530 MHz		
Polarization:	Horizontal		
Remark:			

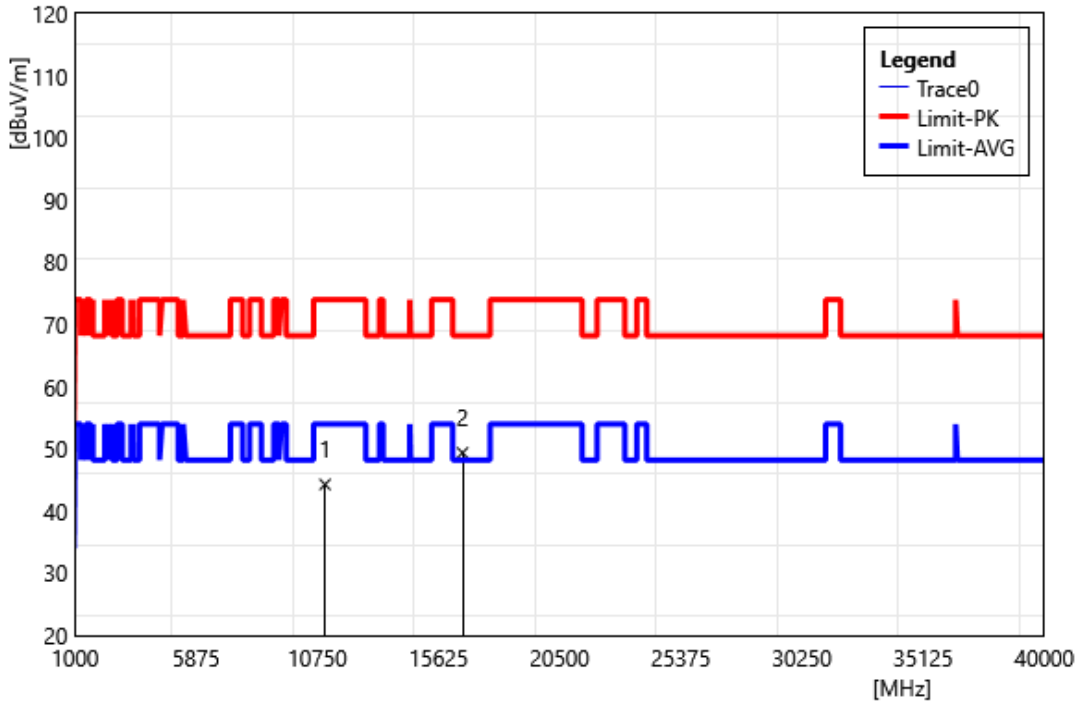


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11060.00	37.03	7.25	44.28	74.00	-29.72	PEAK
2	16590.00	40.31	9.06	49.37	68.20	-18.83	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5530 MHz		
Polarization:	Vertical		
Remark:			

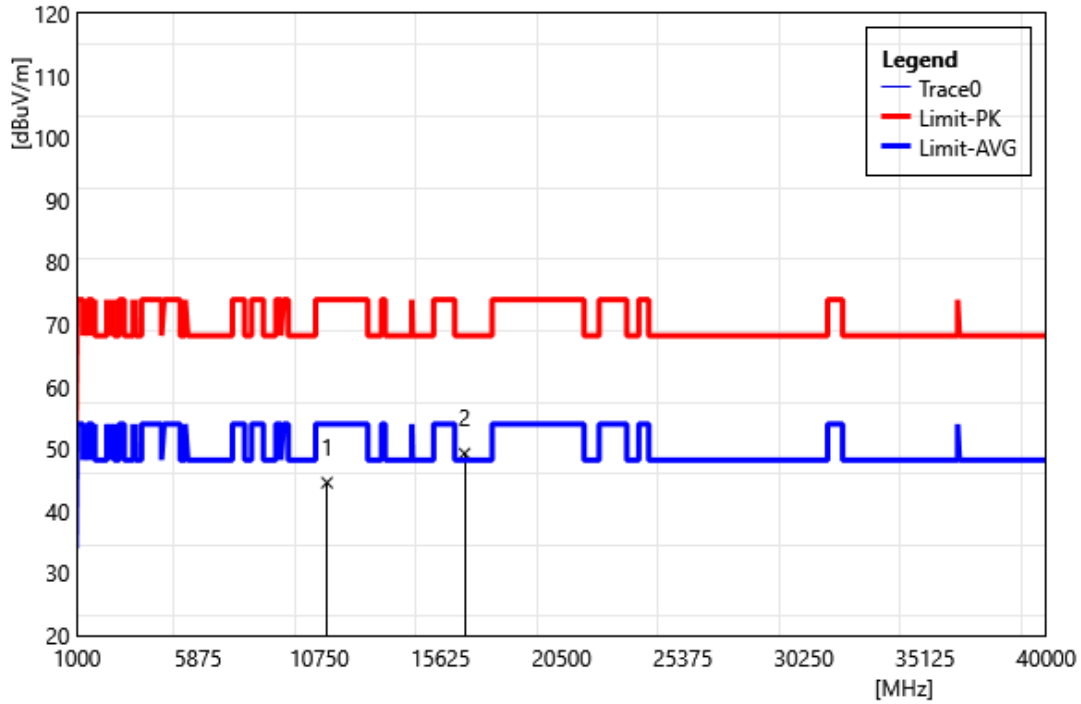


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11060.00	37.31	7.25	44.56	74.00	-29.44	PEAK
2	16590.00	40.20	9.06	49.26	68.20	-18.94	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5610 MHz		
Polarization:	Horizontal		
Remark:			

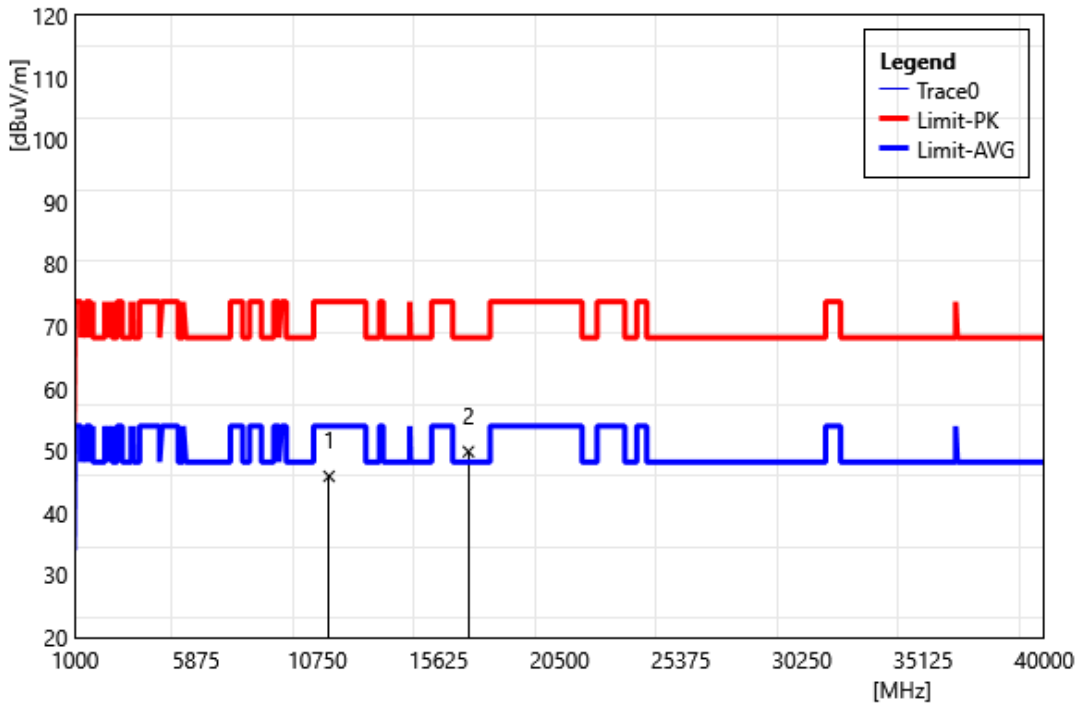

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	38.18	7.73	45.91	74.00	-28.09	PEAK
2	16830.00	41.66	8.22	49.88	68.20	-18.32	PEAK


Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5610 MHz		
Polarization:	Vertical		
Remark:			

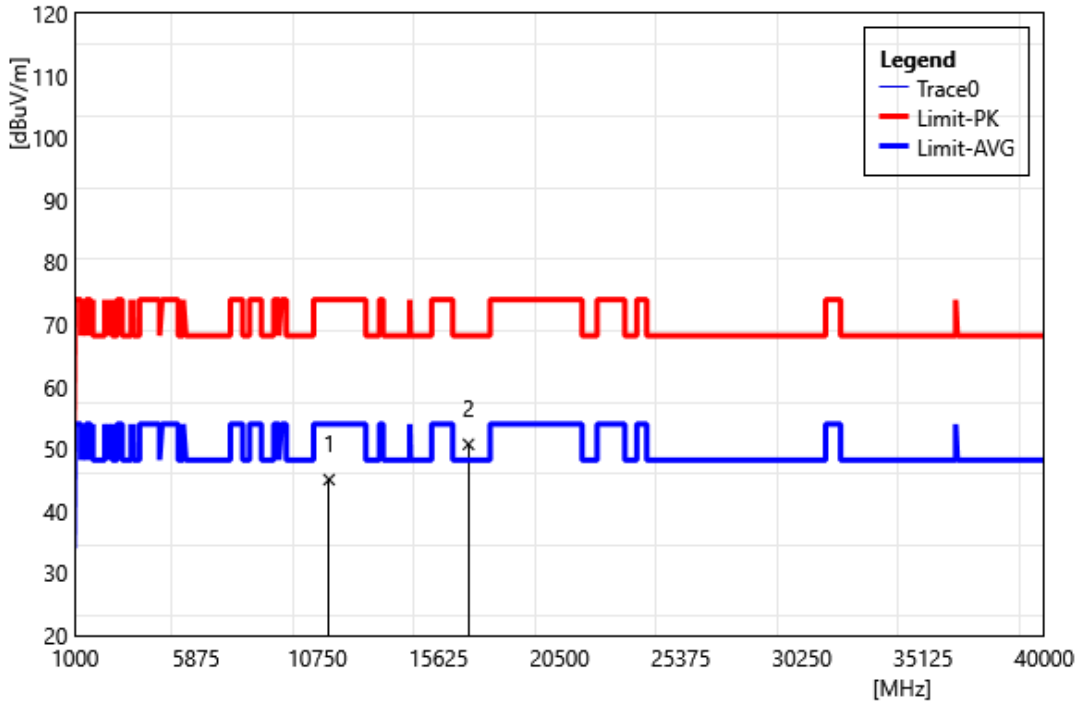

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	37.32	7.73	45.05	74.00	-28.95	PEAK
2	16830.00	42.51	8.22	50.73	68.20	-17.47	PEAK




Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775 MHz		
Polarization:	Horizontal		
Remark:			

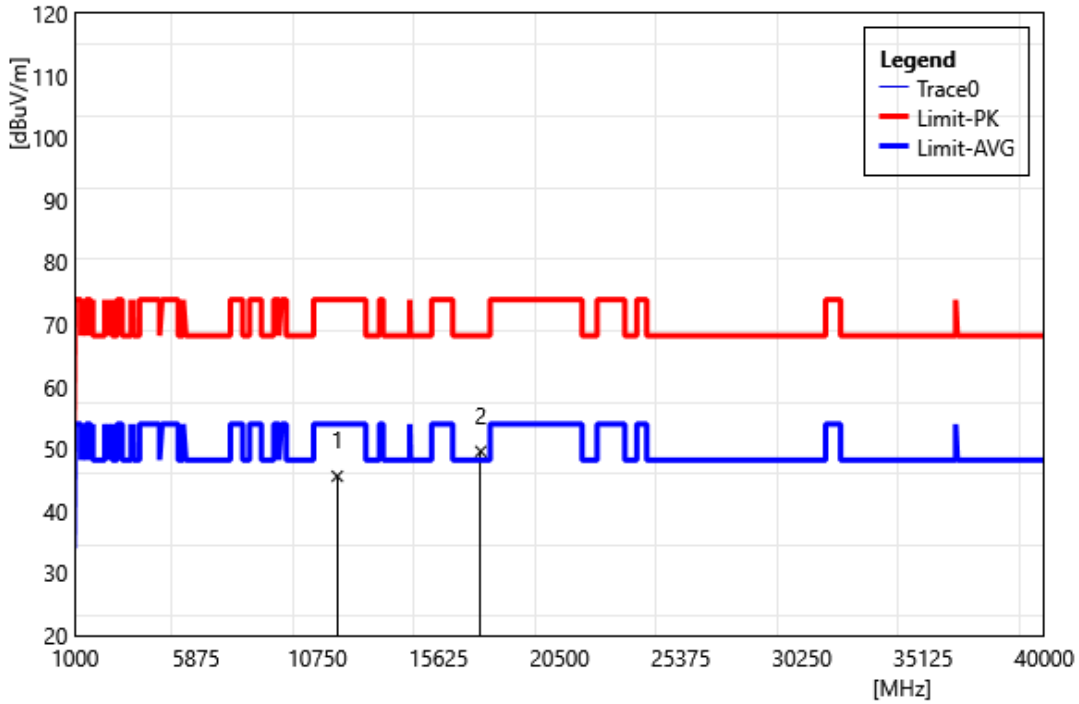


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	37.97	7.63	45.60	74.00	-28.40	PEAK
2	17325.00	42.29	7.29	49.58	68.20	-18.62	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775 MHz		
Polarization:	Vertical		
Remark:			

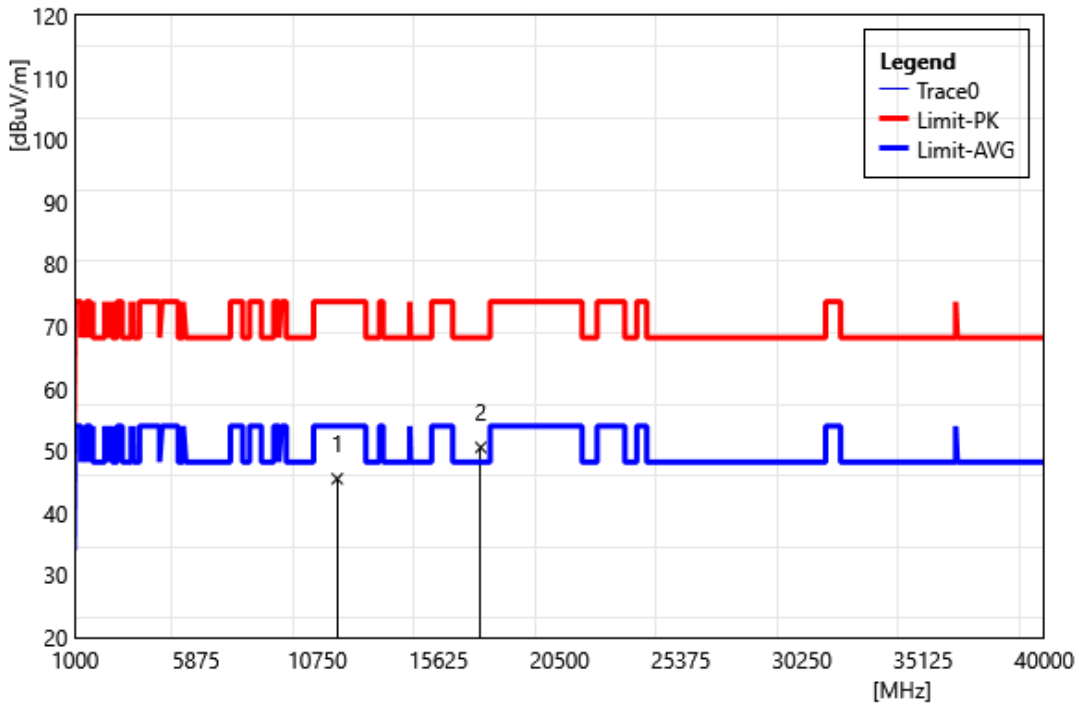


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	37.88	7.63	45.51	74.00	-28.49	PEAK
2	17325.00	43.27	7.29	50.56	68.20	-17.64	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 5250 MHz		
Polarization:	Horizontal		
Remark:			

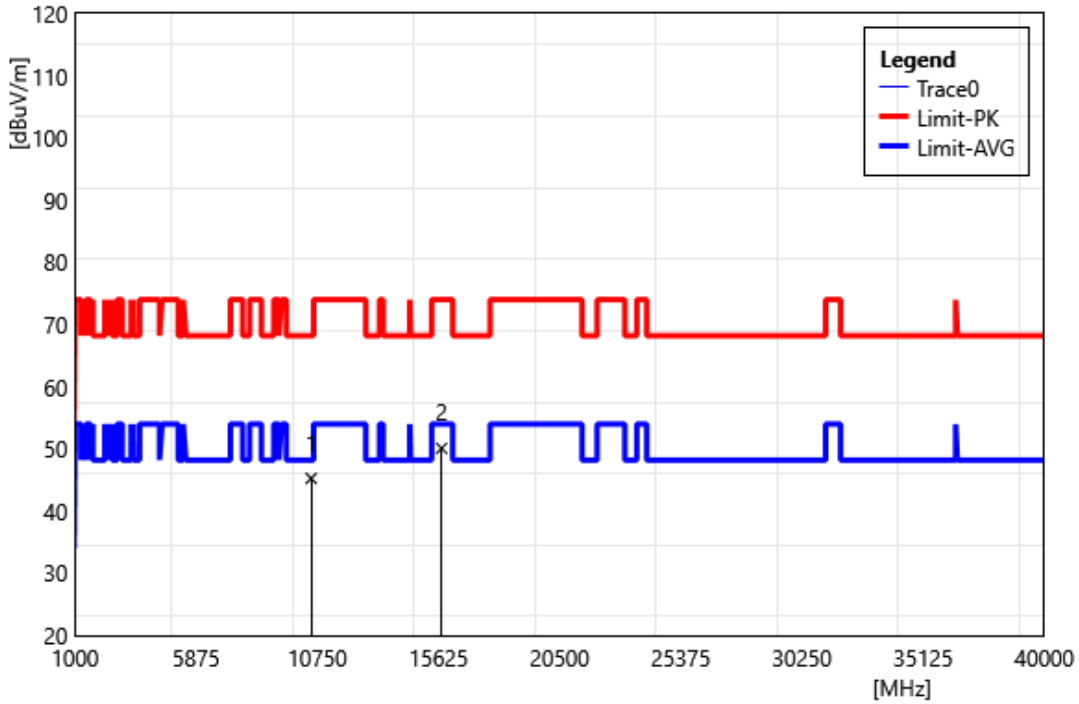


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10500.00	37.89	7.37	45.26	68.20	-22.94	PEAK
2	15750.00	40.82	9.26	50.08	74.00	-23.92	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 5250 MHz		
Polarization:	Vertical		
Remark:			

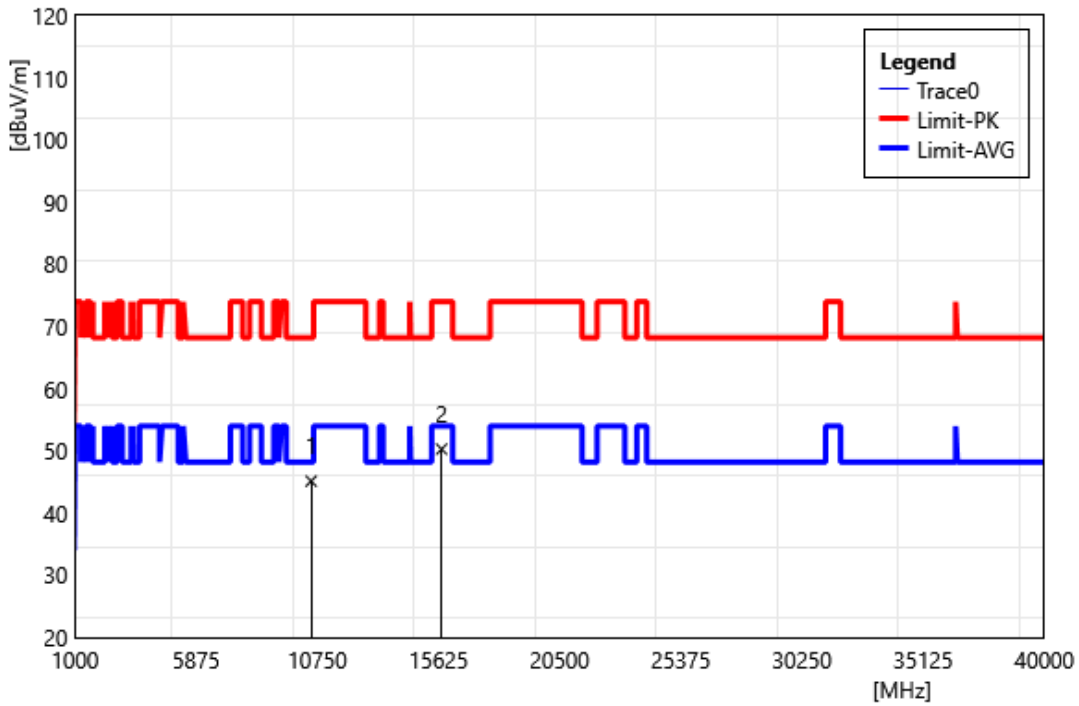


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10500.00	37.77	7.37	45.14	68.20	-23.06	PEAK
2	15750.00	41.03	9.26	50.29	74.00	-23.71	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 5570 MHz		
Polarization:	Horizontal		
Remark:			

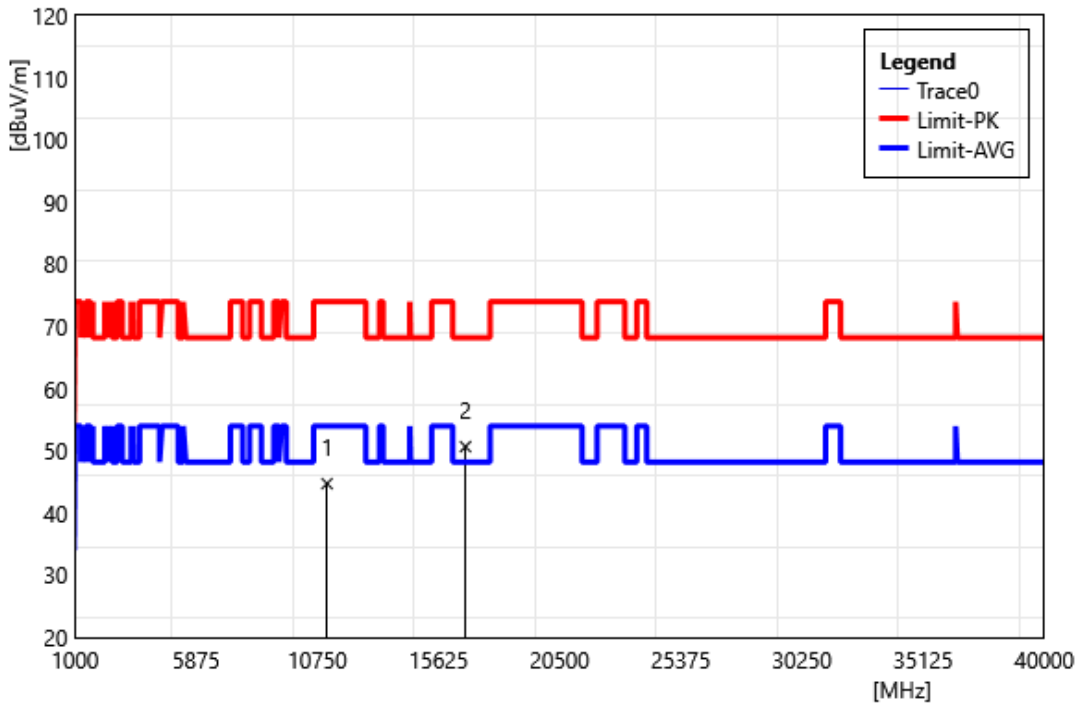


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11140.00	37.21	7.52	44.73	74.00	-29.27	PEAK
2	16710.00	42.01	8.67	50.68	68.20	-17.52	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE160 5570 MHz		
Polarization:	Vertical		
Remark:			

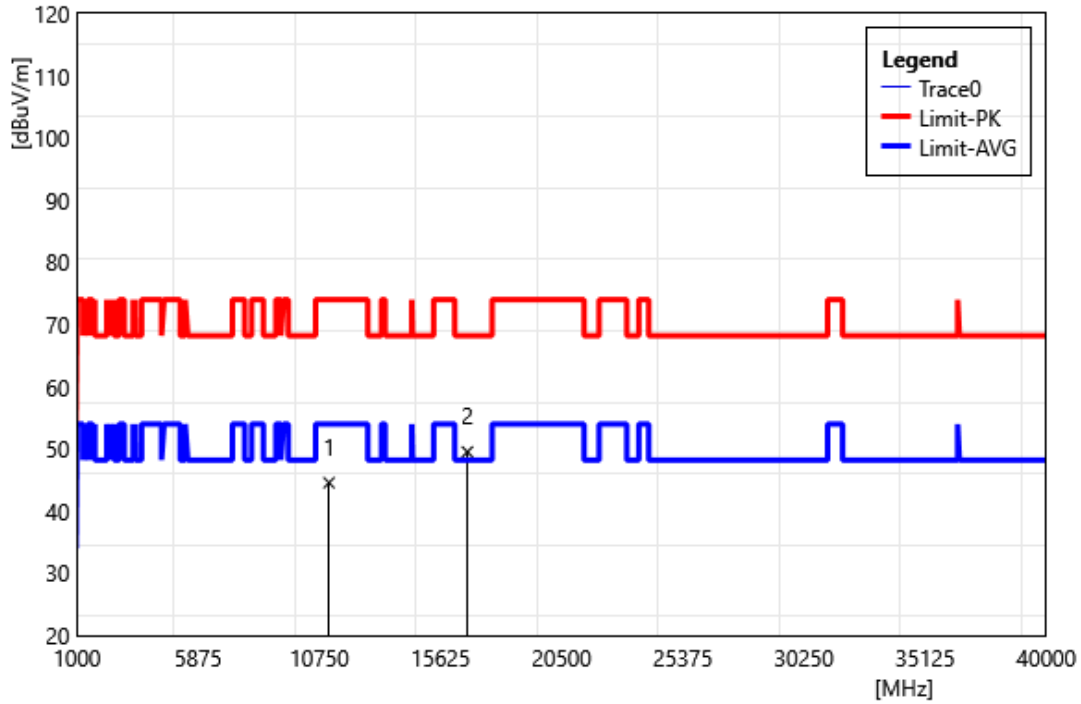


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11140.00	37.04	7.52	44.56	74.00	-29.44	PEAK
2	16710.00	40.85	8.67	49.52	68.20	-18.68	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	Simultaneous Transmitting		
Polarization:	Horizontal		
Remark:	Bluetooth + WLAN 5 GHz		

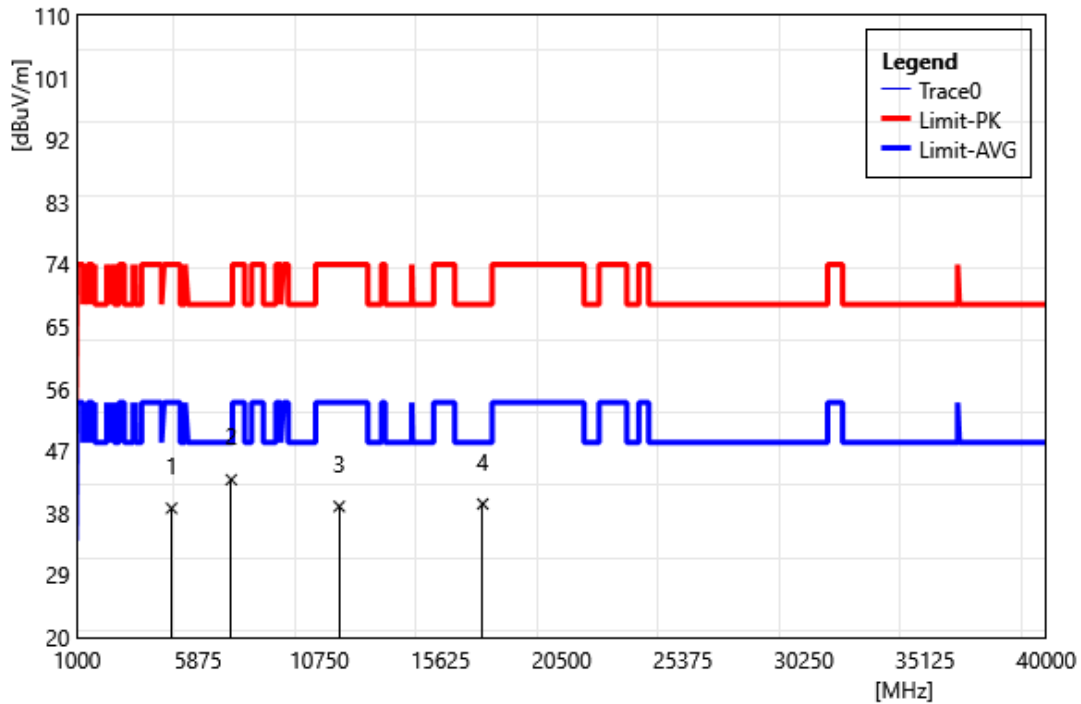

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4804.00	37.58	1.12	38.70	74.00	-35.30	PEAK
2	7206.00	36.60	6.22	42.82	68.20	-25.38	PEAK
3	11550.00	23.09	15.86	38.95	74.00	-35.05	PEAK
4	17325.00	16.47	22.85	39.32	68.20	-28.88	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	Simultaneous Transmitting		
Polarization:	Vertical		
Remark:	Bluetooth + WLAN 5 GHz		

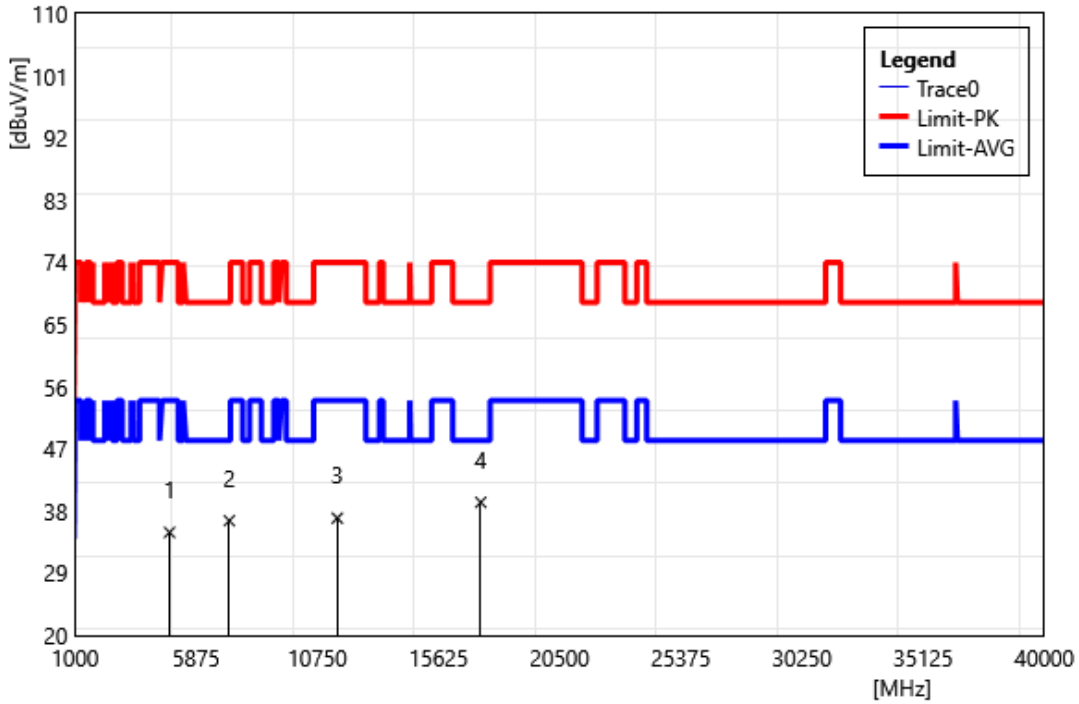


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4804.00	32.30	2.61	34.91	74.00	-39.09	PEAK
2	7206.00	26.23	10.38	36.61	68.20	-31.59	PEAK
3	11550.00	21.12	15.86	36.98	74.00	-37.02	PEAK
4	17325.00	16.41	22.85	39.26	68.20	-28.94	PEAK



**Band Edge**


Peak

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5180 MHz		
Polarization:	Horizontal		
Remark:			

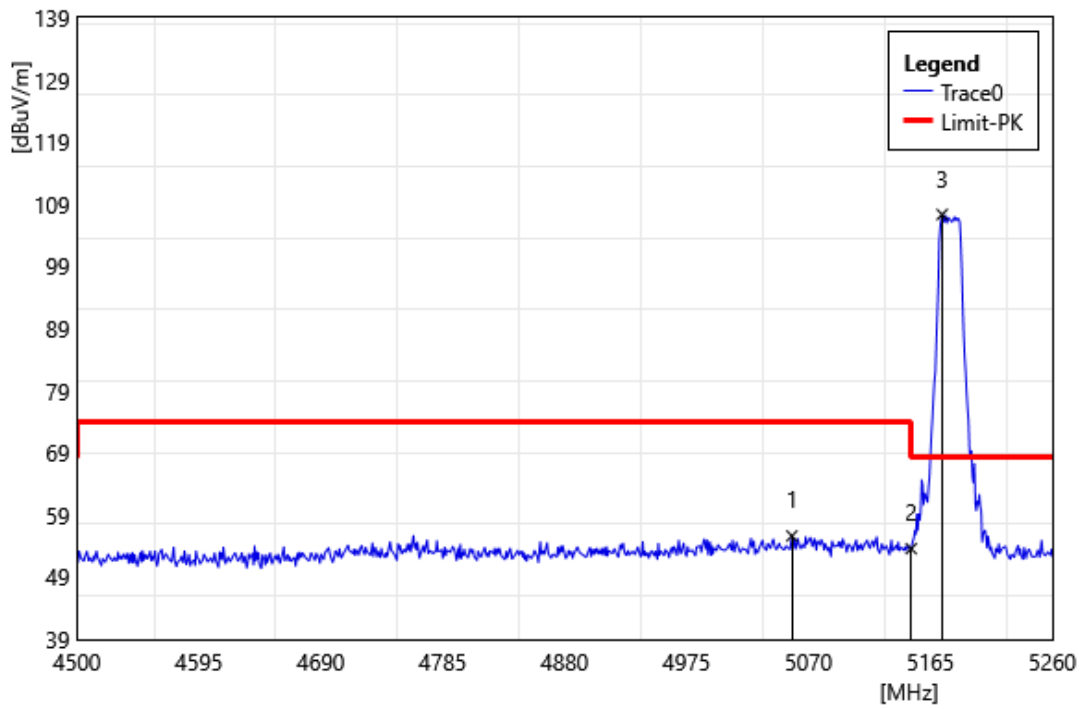


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5057.08	53.97	1.67	55.64	74.00	-18.36	PEAK
2	5150.00	51.96	1.64	53.60	74.00	-20.40	PEAK
3	5174.12	105.62	1.72	107.34	68.20	39.14	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5180 MHz		
Polarization:	Vertical		
Remark:			

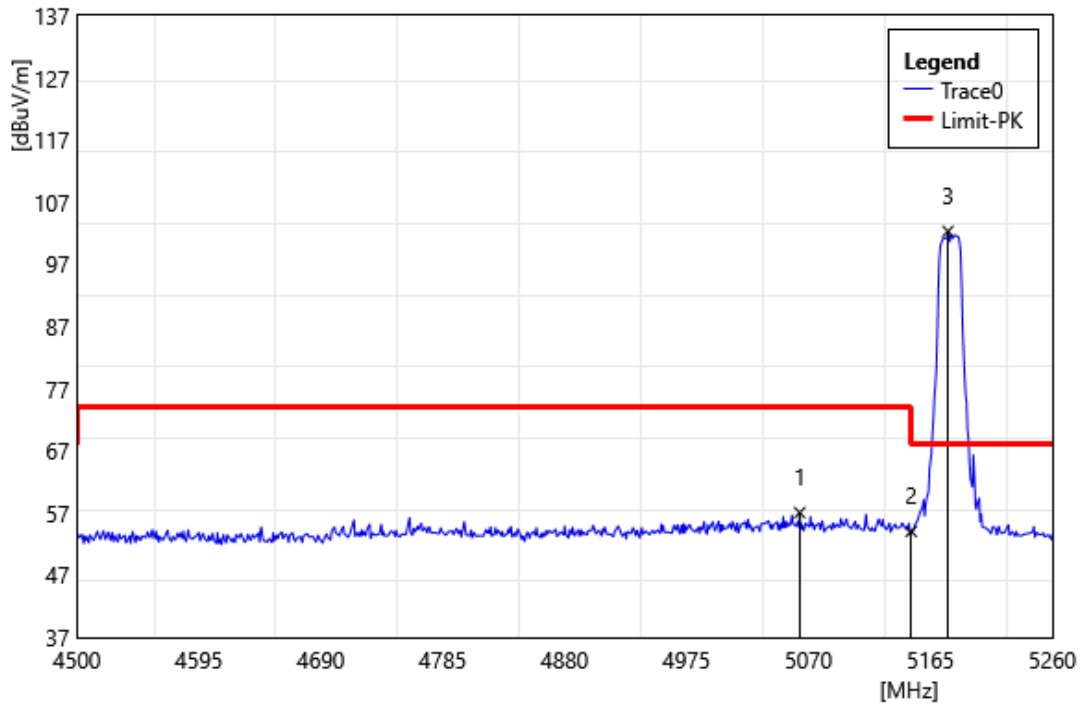


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5063.16	55.40	1.68	57.08	74.00	-16.92	PEAK
2	5150.00	52.41	1.64	54.05	74.00	-19.95	PEAK
3	5178.68	100.57	1.73	102.30	68.20	34.10	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5320 MHz		
Polarization:	Horizontal		
Remark:			

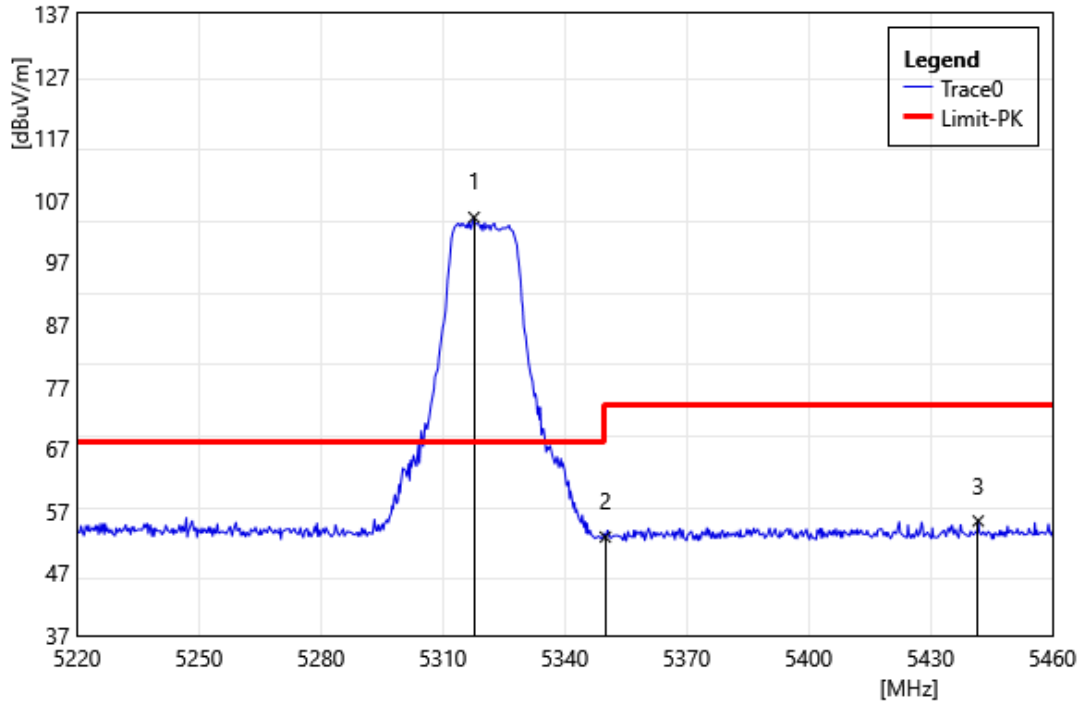


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5317.68	102.97	1.27	104.24	68.20	36.04	PEAK
2	5350.00	51.59	1.23	52.82	74.00	-21.18	PEAK
3	5441.76	53.68	1.72	55.41	74.00	-18.60	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5320 MHz		
Polarization:	Vertical		
Remark:			

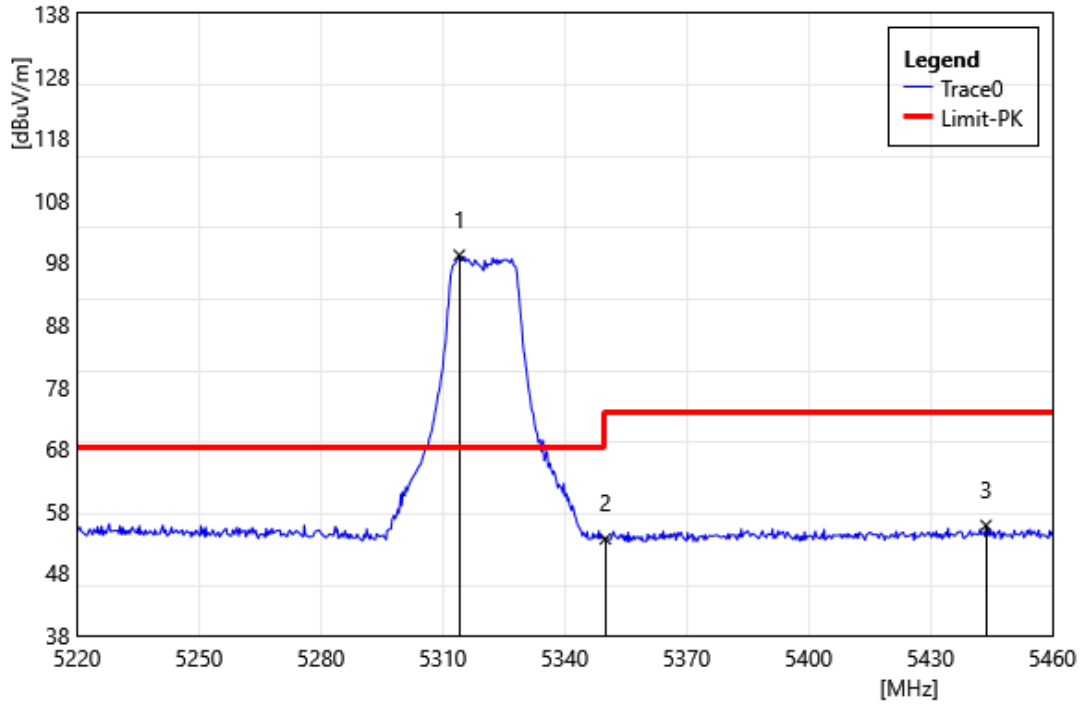


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5314.08	97.88	1.28	99.16	68.20	30.96	PEAK
2	5350.00	52.27	1.23	53.50	74.00	-20.50	PEAK
3	5443.68	53.97	1.72	55.69	74.00	-18.31	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5500 MHz		
Polarization:	Horizontal		
Remark:			

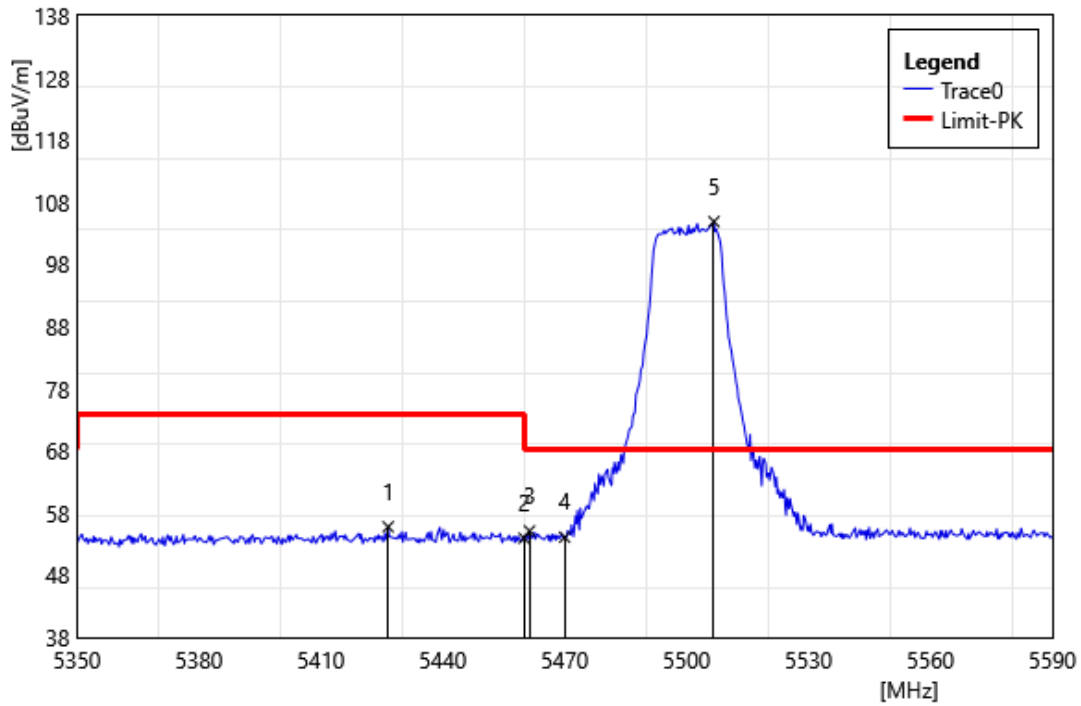


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5426.56	54.09	1.70	55.79	74.00	-18.21	PEAK
2	5460.00	52.17	1.79	53.96	74.00	-20.04	PEAK
3	5461.36	53.32	1.80	55.12	68.20	-13.08	PEAK
4	5470.00	52.28	1.84	54.12	68.20	-14.08	PEAK
5	5506.72	102.87	2.01	104.88	68.20	36.68	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5500 MHz		
Polarization:	Vertical		
Remark:			

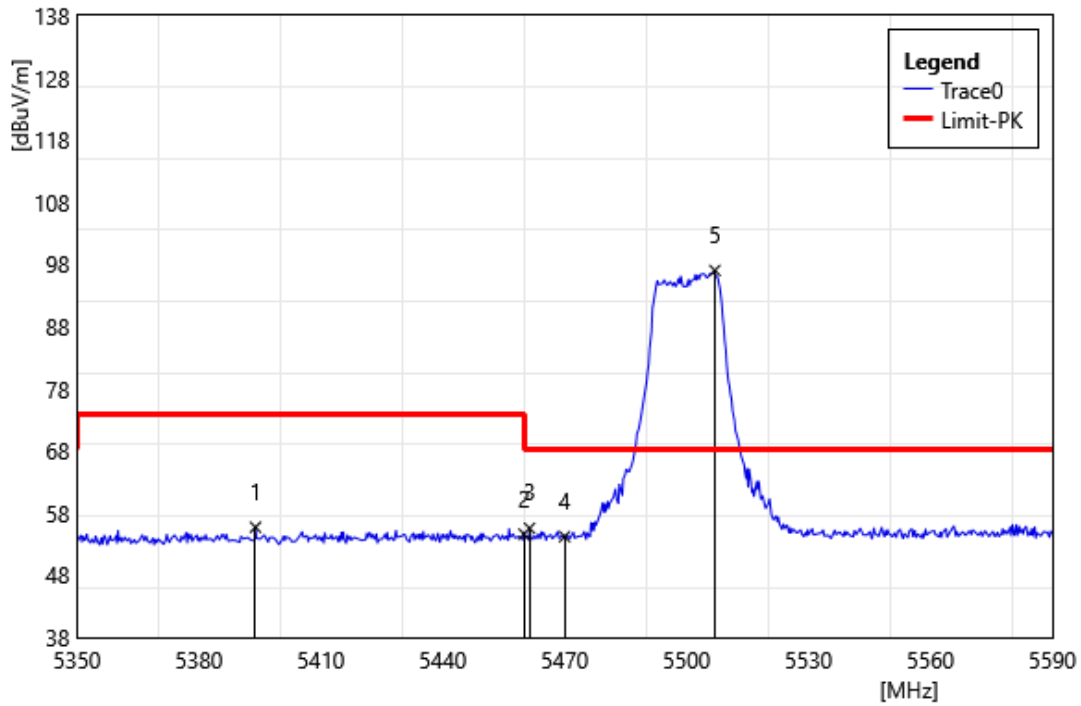


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5393.92	54.10	1.62	55.72	74.00	-18.28	PEAK
2	5460.00	52.83	1.79	54.62	74.00	-19.38	PEAK
3	5461.36	53.75	1.80	55.55	68.20	-12.65	PEAK
4	5470.00	52.37	1.84	54.21	68.20	-13.99	PEAK
5	5506.96	95.01	2.01	97.02	68.20	28.82	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5700 MHz		
Polarization:	Horizontal		
Remark:			

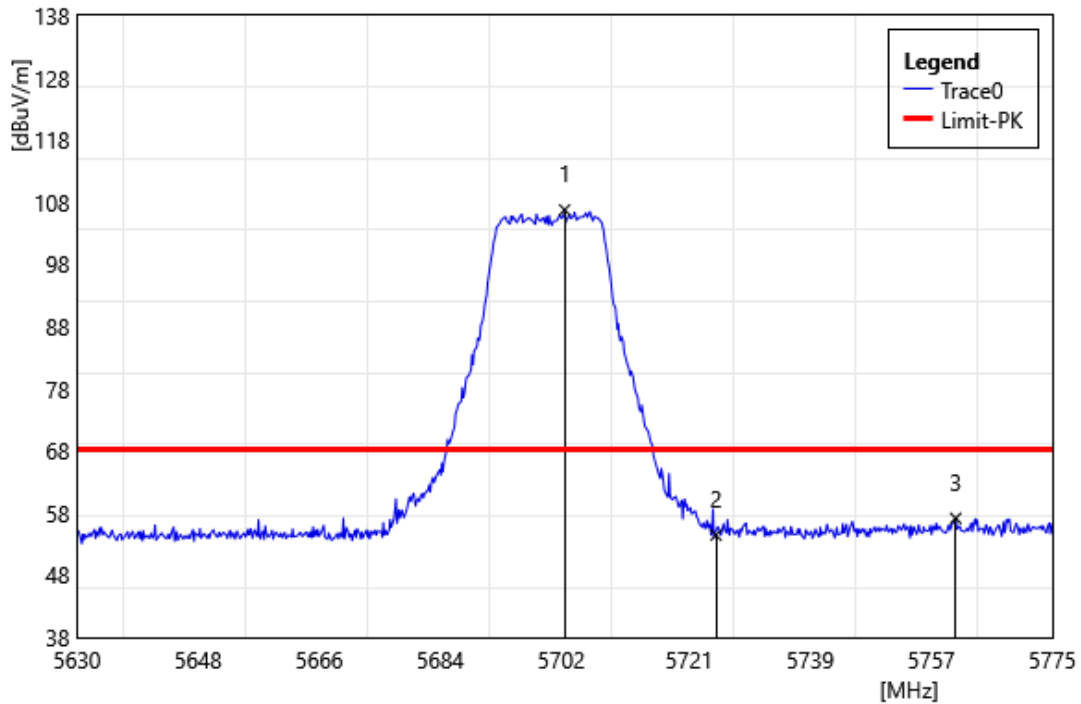

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5702.50	104.12	2.65	106.77	68.20	38.57	PEAK
2	5725.00	51.52	2.92	54.44	68.20	-13.76	PEAK
3	5760.65	53.89	3.27	57.16	68.20	-11.04	PEAK


Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5700 MHz		
Polarization:	Vertical		
Remark:			

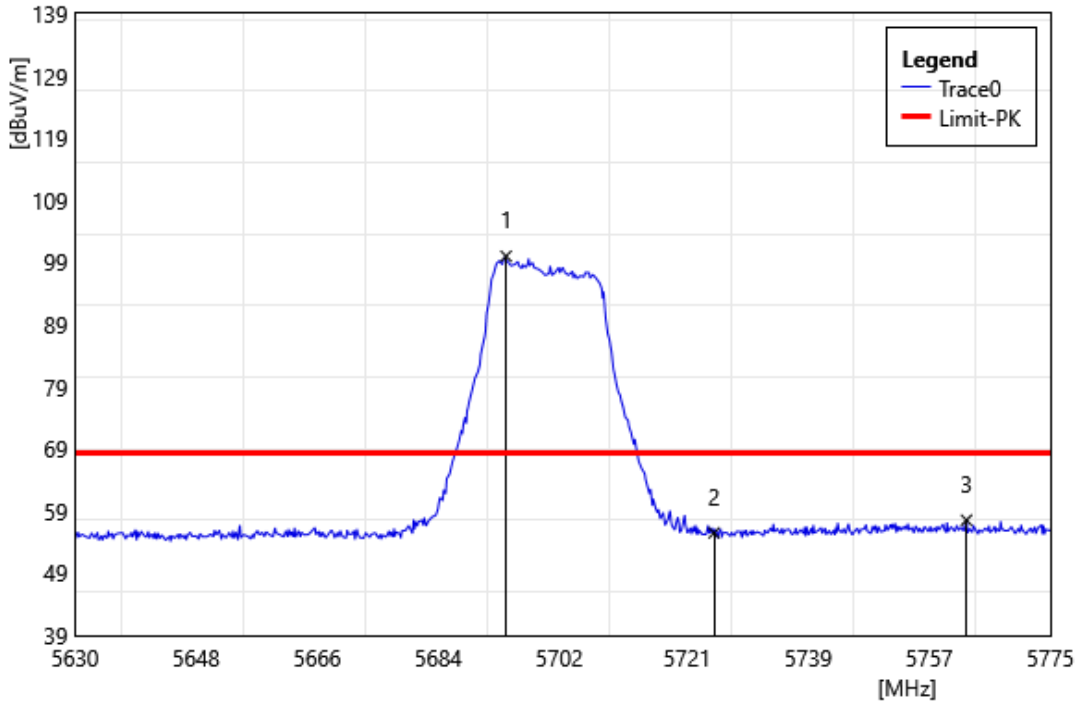

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5694.09	97.37	2.62	99.99	68.20	31.79	PEAK
2	5725.00	52.57	2.92	55.49	68.20	-12.71	PEAK
3	5762.53	54.25	3.29	57.54	68.20	-10.66	PEAK




Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5745 MHz		
Polarization:	Horizontal		
Remark:			

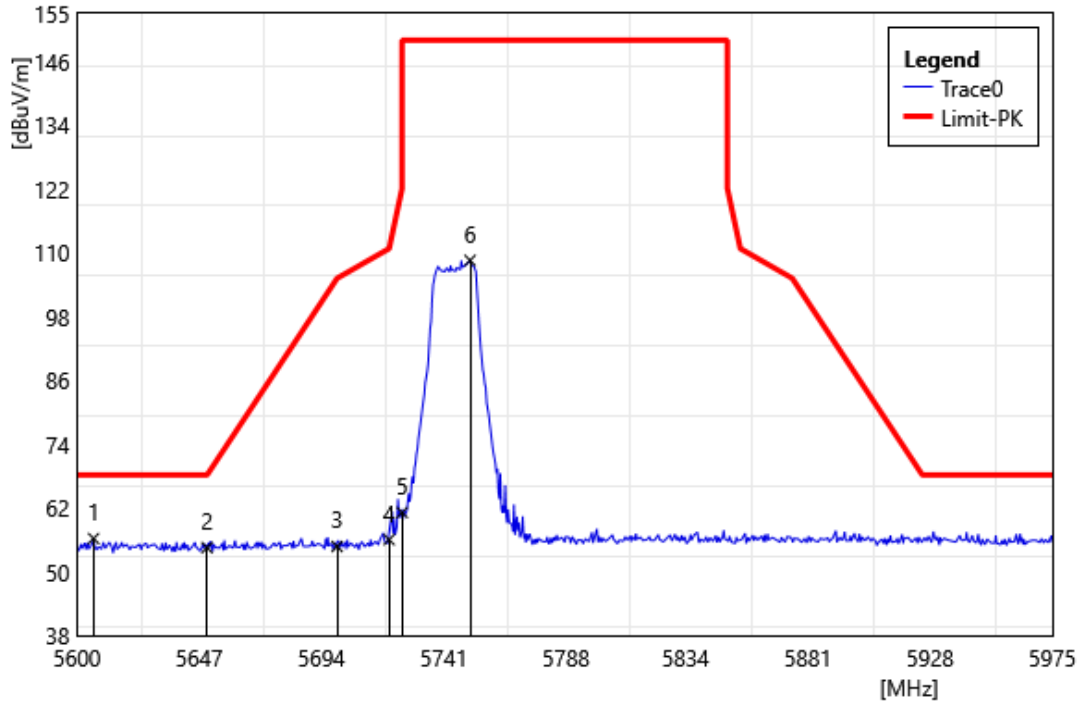


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5606.38	53.82	2.40	56.22	68.20	-11.98	PEAK
2	5650.00	52.01	2.51	54.52	68.20	-13.68	PEAK
3	5700.00	52.11	2.63	54.74	105.20	-50.46	PEAK
4	5720.00	53.16	2.86	56.02	110.80	-54.78	PEAK
5	5725.00	58.20	2.92	61.12	150.00	-88.88	PEAK
6	5751.13	105.35	3.22	108.57	150.00	-41.43	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5745 MHz		
Polarization:	Vertical		
Remark:			

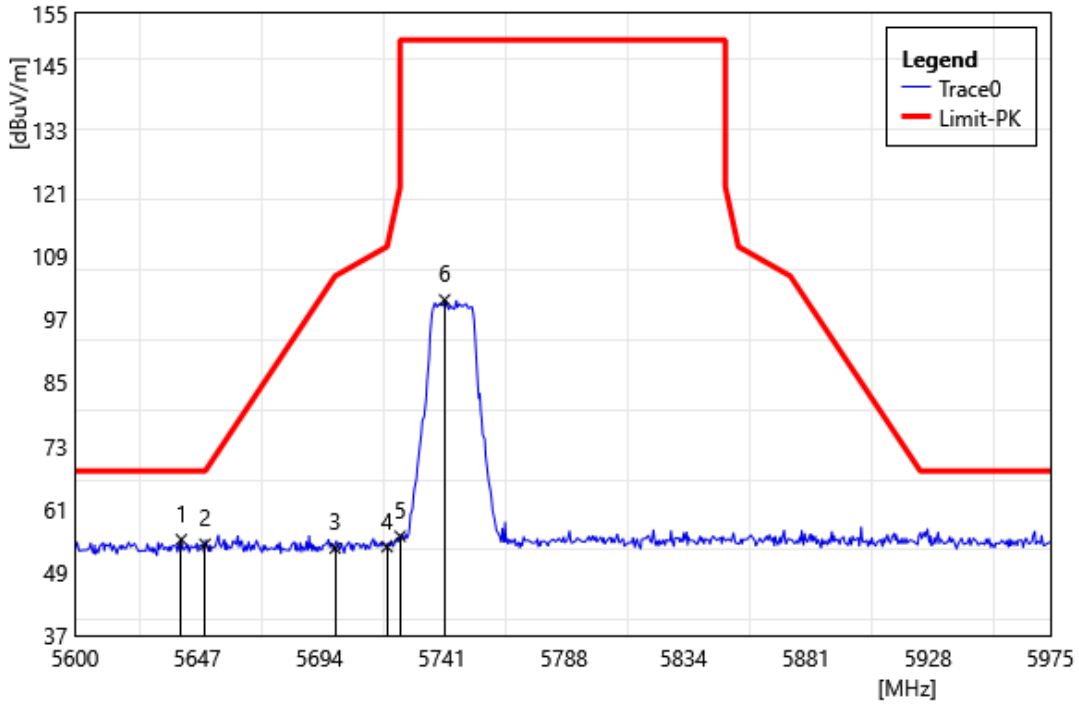


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5640.88	52.71	2.48	55.19	68.20	-13.01	PEAK
2	5650.00	51.81	2.51	54.32	68.20	-13.88	PEAK
3	5700.00	50.93	2.63	53.56	105.20	-51.64	PEAK
4	5720.00	50.98	2.86	53.84	110.80	-56.96	PEAK
5	5725.00	52.90	2.92	55.82	150.00	-94.18	PEAK
6	5742.13	97.56	3.12	100.68	150.00	-49.32	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5825 MHz		
Polarization:	Horizontal		
Remark:			

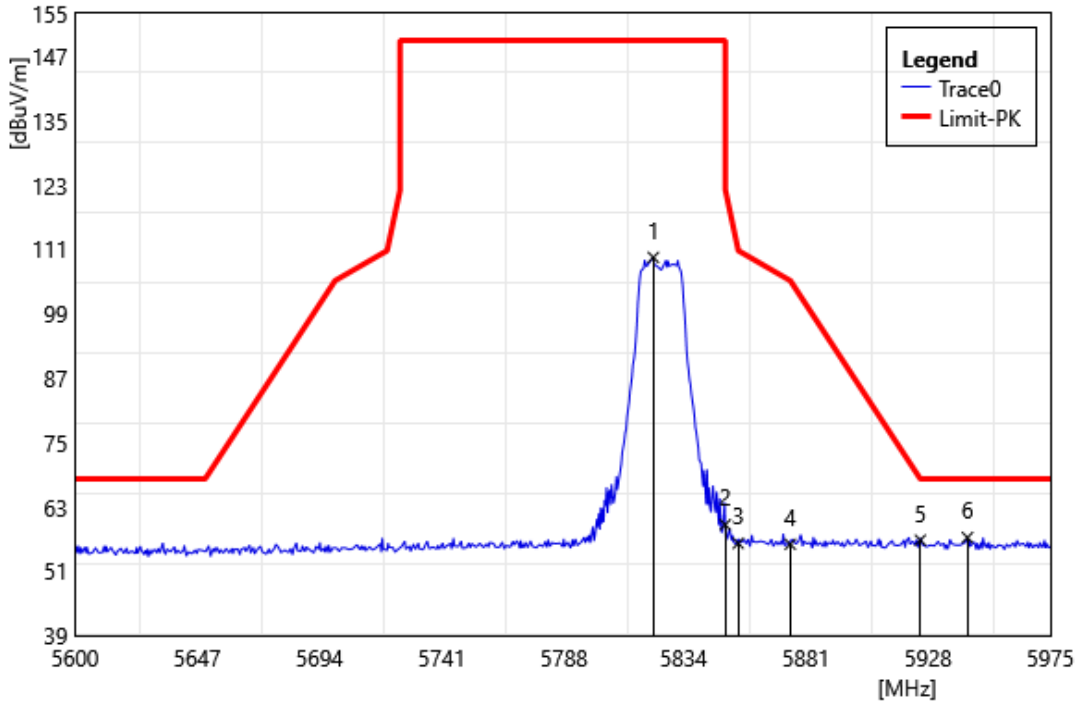


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5822.38	106.11	3.42	109.53	150.00	-40.47	PEAK
2	5850.00	56.34	3.31	59.65	122.20	-62.55	PEAK
3	5855.00	52.88	3.30	56.18	110.80	-54.62	PEAK
4	5875.00	52.75	3.26	56.01	105.20	-49.19	PEAK
5	5925.00	53.62	3.15	56.77	68.20	-11.43	PEAK
6	5943.13	54.16	3.11	57.27	68.20	-10.93	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5825 MHz		
Polarization:	Vertical		
Remark:			

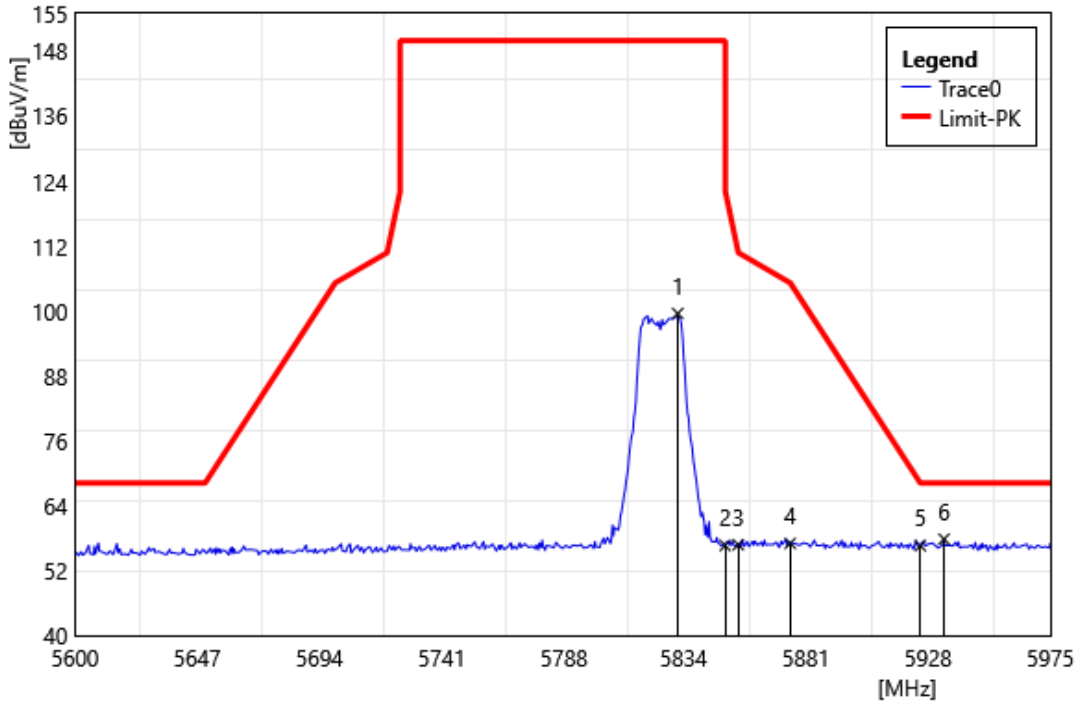


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5831.75	96.17	3.38	99.55	150.00	-50.45	PEAK
2	5850.00	53.33	3.31	56.64	122.20	-65.56	PEAK
3	5855.00	53.46	3.30	56.76	110.80	-54.04	PEAK
4	5875.00	53.76	3.26	57.02	105.20	-48.18	PEAK
5	5925.00	53.45	3.15	56.60	68.20	-11.60	PEAK
6	5934.13	54.69	3.12	57.81	68.20	-10.39	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5180 MHz		
Polarization:	Horizontal		
Remark:			

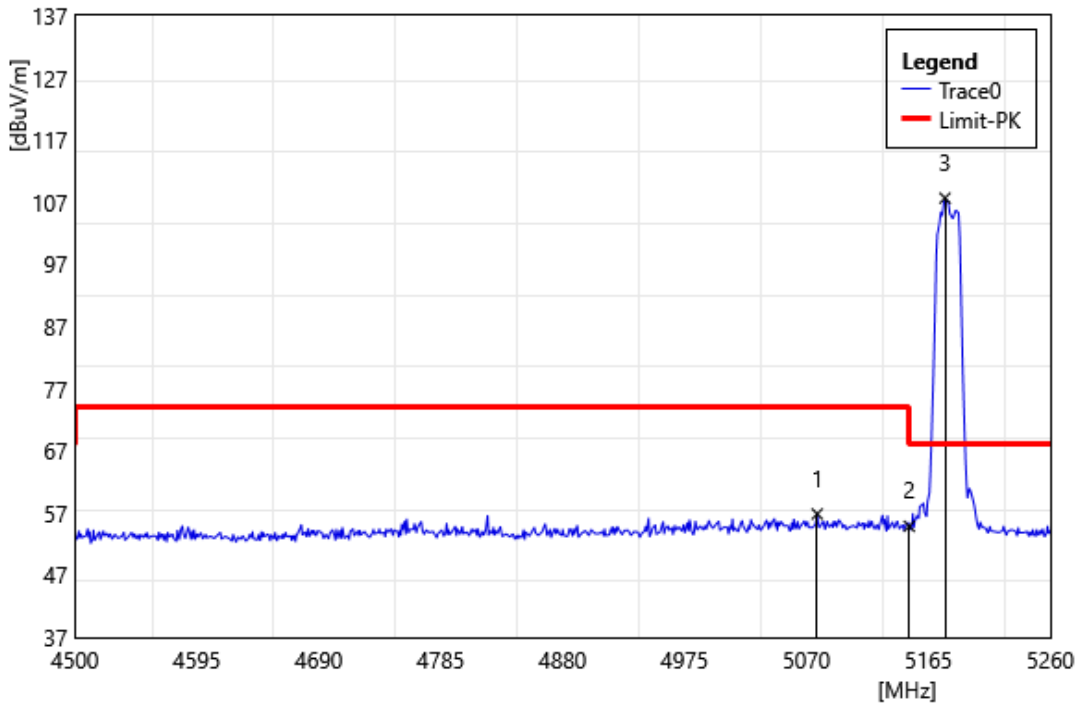


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5078.36	55.17	1.69	56.86	74.00	-17.14	PEAK
2	5150.00	53.24	1.64	54.88	74.00	-19.12	PEAK
3	5177.92	105.93	1.73	107.66	68.20	39.46	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5180 MHz		
Polarization:	Vertical		
Remark:			

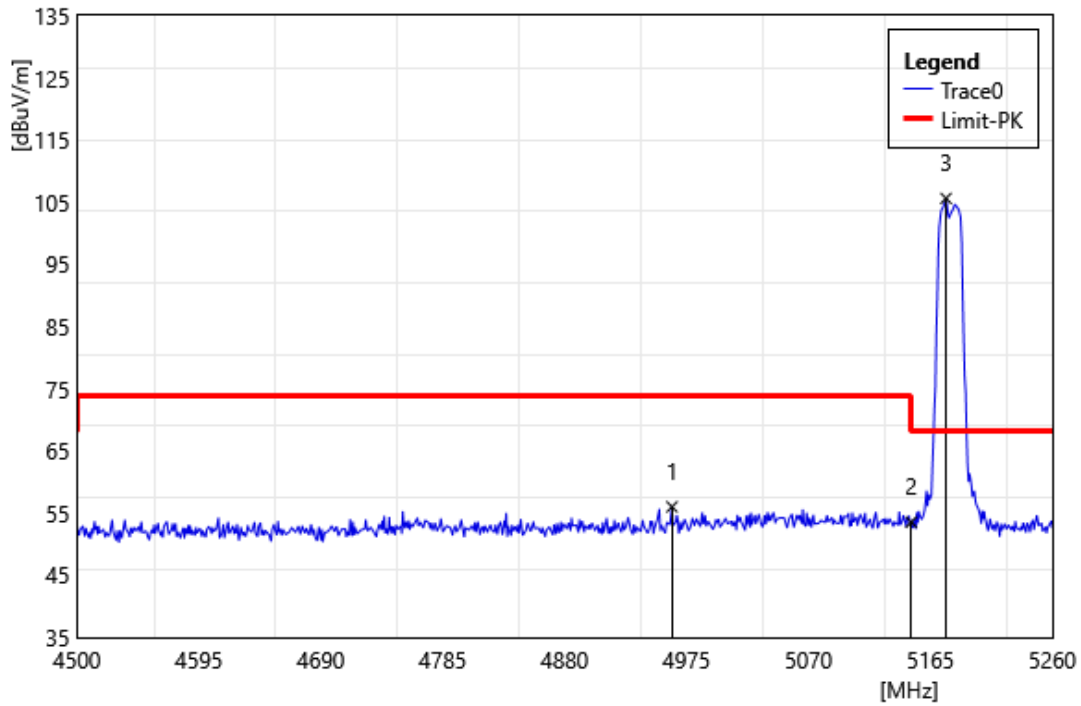


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4963.60	54.65	1.36	56.01	74.00	-17.99	PEAK
2	5150.00	51.90	1.64	53.54	74.00	-20.46	PEAK
3	5177.16	103.89	1.72	105.61	68.20	37.41	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5320 MHz		
Polarization:	Horizontal		
Remark:			

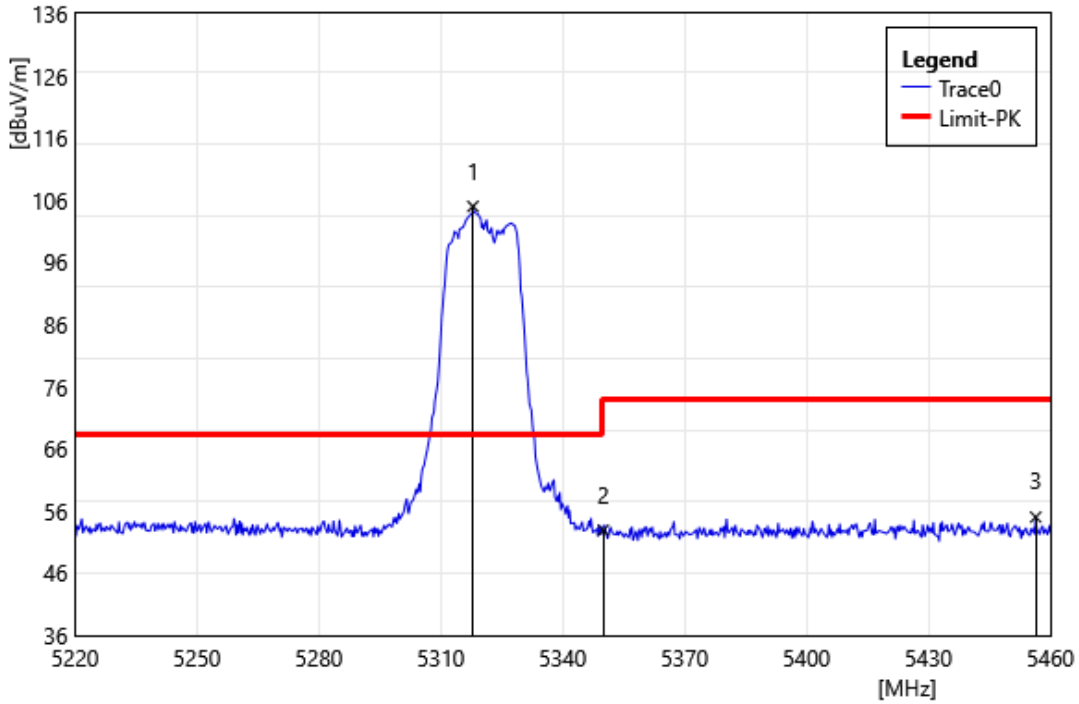

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5317.92	103.72	1.27	105.00	68.20	36.80	PEAK
2	5350.00	51.69	1.23	52.92	74.00	-21.08	PEAK
3	5456.40	53.27	1.77	55.04	74.00	-18.96	PEAK


Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5320 MHz		
Polarization:	Vertical		
Remark:			

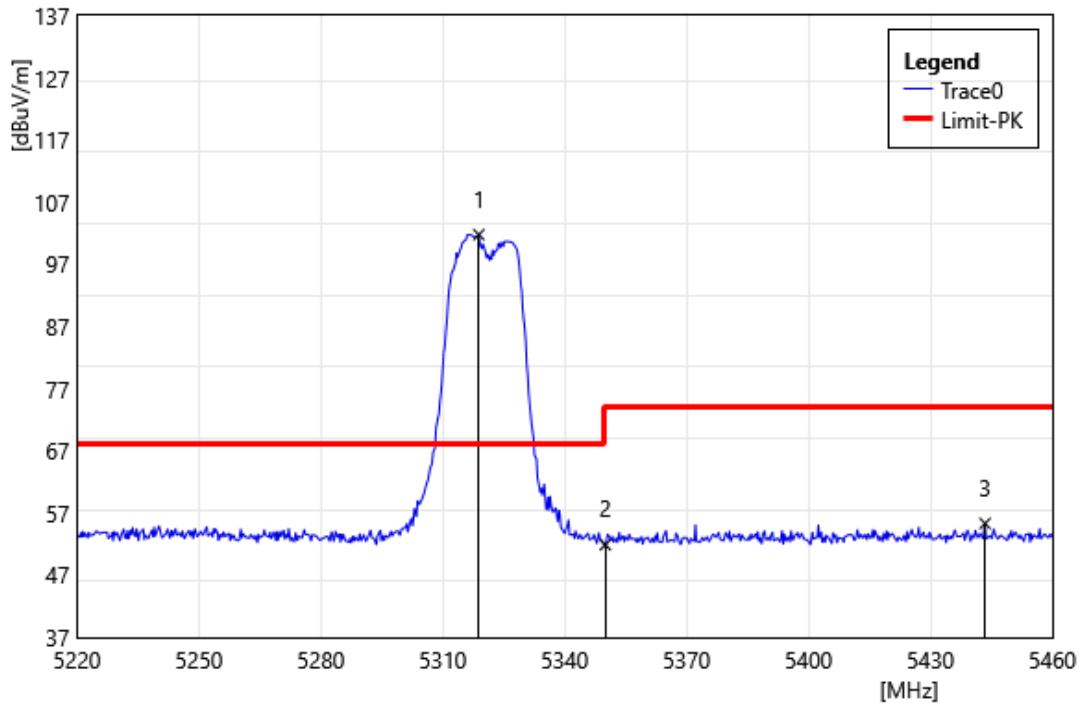

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5318.88	100.51	1.27	101.78	68.20	33.58	PEAK
2	5350.00	50.67	1.23	51.90	74.00	-22.10	PEAK
3	5443.44	53.62	1.72	55.34	74.00	-18.67	PEAK




Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5500 MHz		
Polarization:	Horizontal		
Remark:			

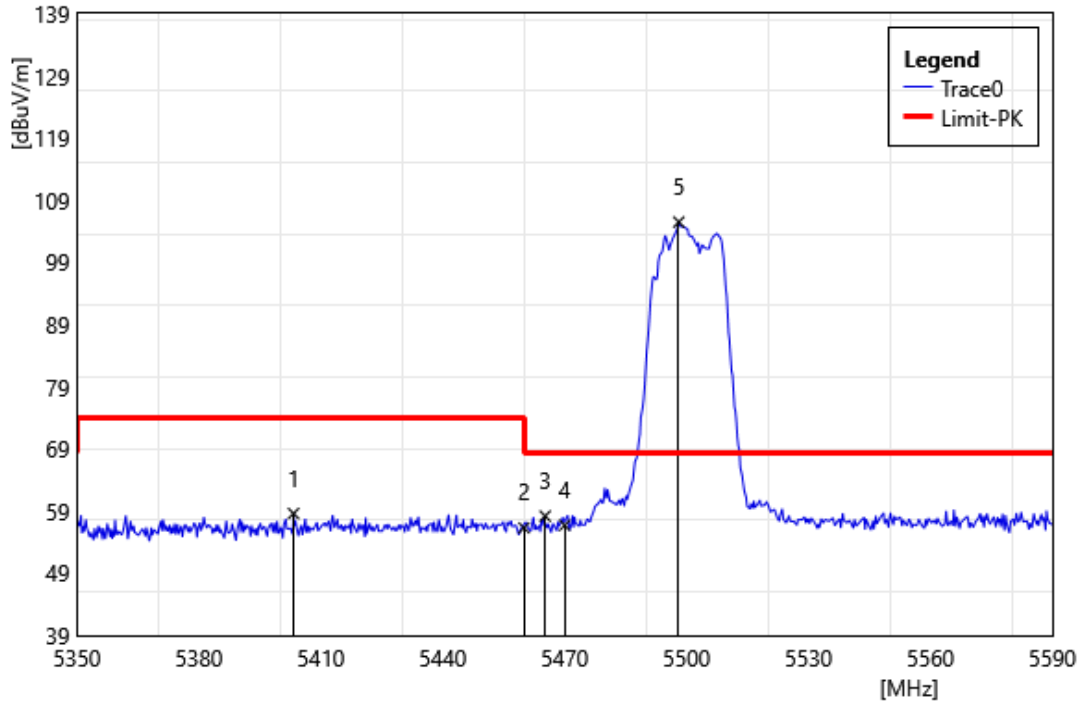


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5403.28	56.94	1.67	58.61	74.00	-15.39	PEAK
2	5460.00	54.50	1.79	56.29	74.00	-17.71	PEAK
3	5465.20	56.39	1.81	58.20	68.20	-10.00	PEAK
4	5470.00	54.87	1.84	56.71	68.20	-11.49	PEAK
5	5498.08	103.50	1.98	105.49	68.20	37.29	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5500 MHz		
Polarization:	Vertical		
Remark:			

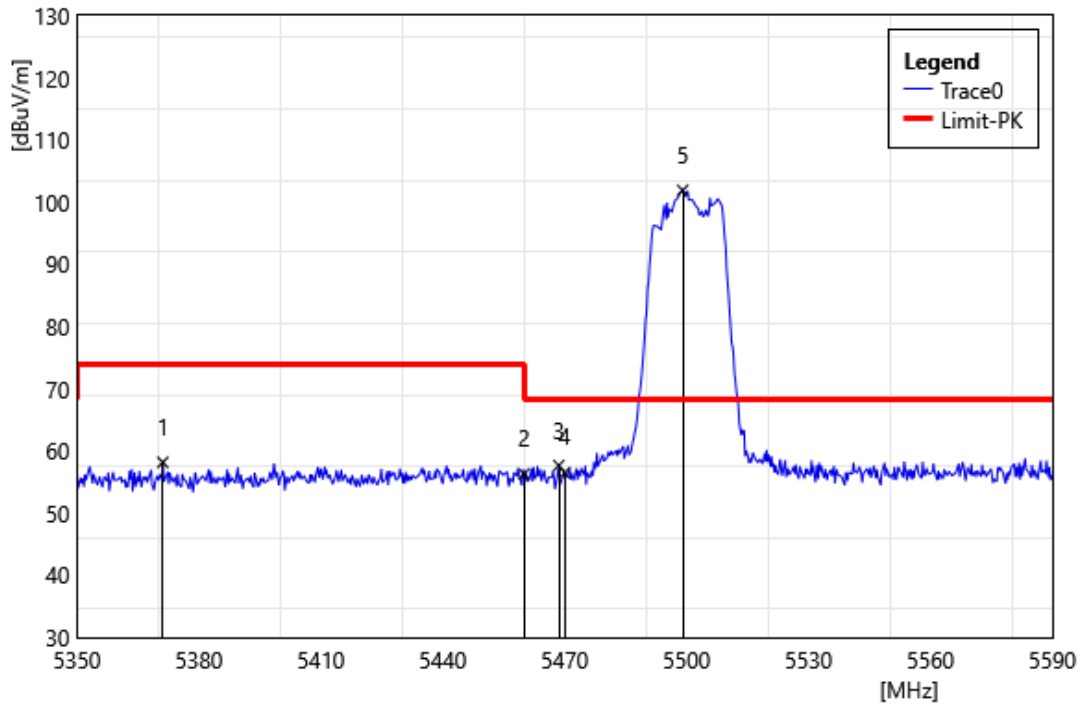


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5371.12	56.74	1.42	58.16	74.00	-15.84	PEAK
2	5460.00	54.51	1.79	56.30	74.00	-17.70	PEAK
3	5468.56	55.81	1.83	57.64	68.20	-10.56	PEAK
4	5470.00	54.65	1.84	56.49	68.20	-11.71	PEAK
5	5499.04	99.91	1.99	101.90	68.20	33.70	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5700 MHz		
Polarization:	Horizontal		
Remark:			

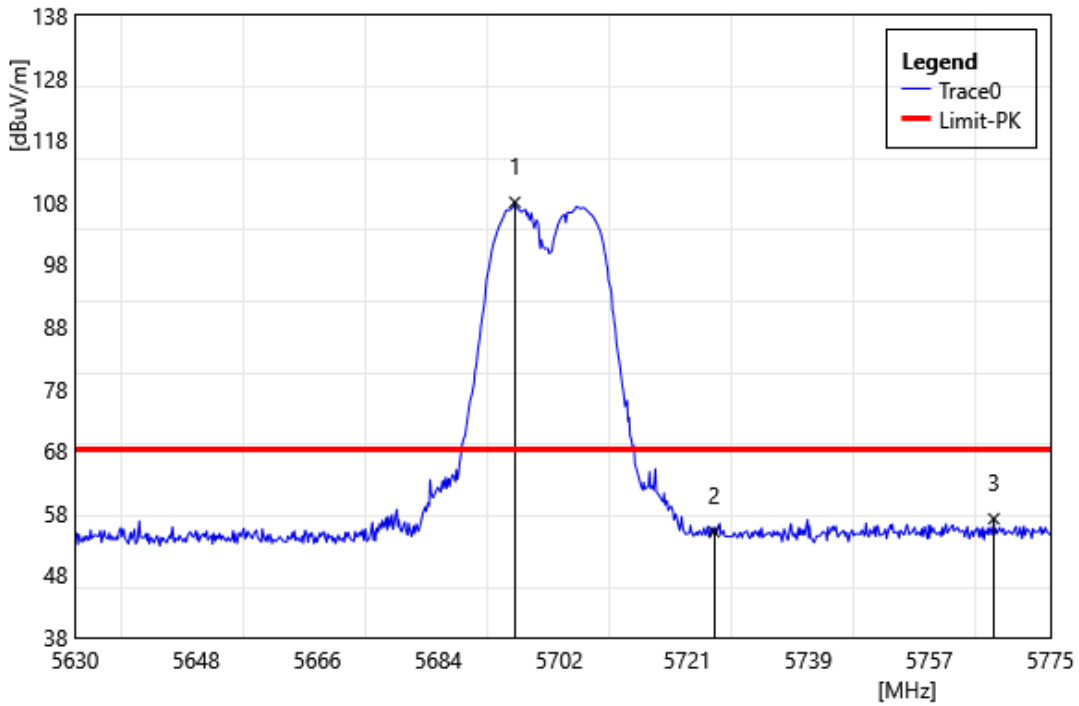


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5695.40	105.37	2.62	107.99	68.20	39.79	PEAK
2	5725.00	52.07	2.92	54.99	68.20	-13.21	PEAK
3	5766.59	53.77	3.31	57.08	68.20	-11.12	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5700 MHz		
Polarization:	Vertical		
Remark:			

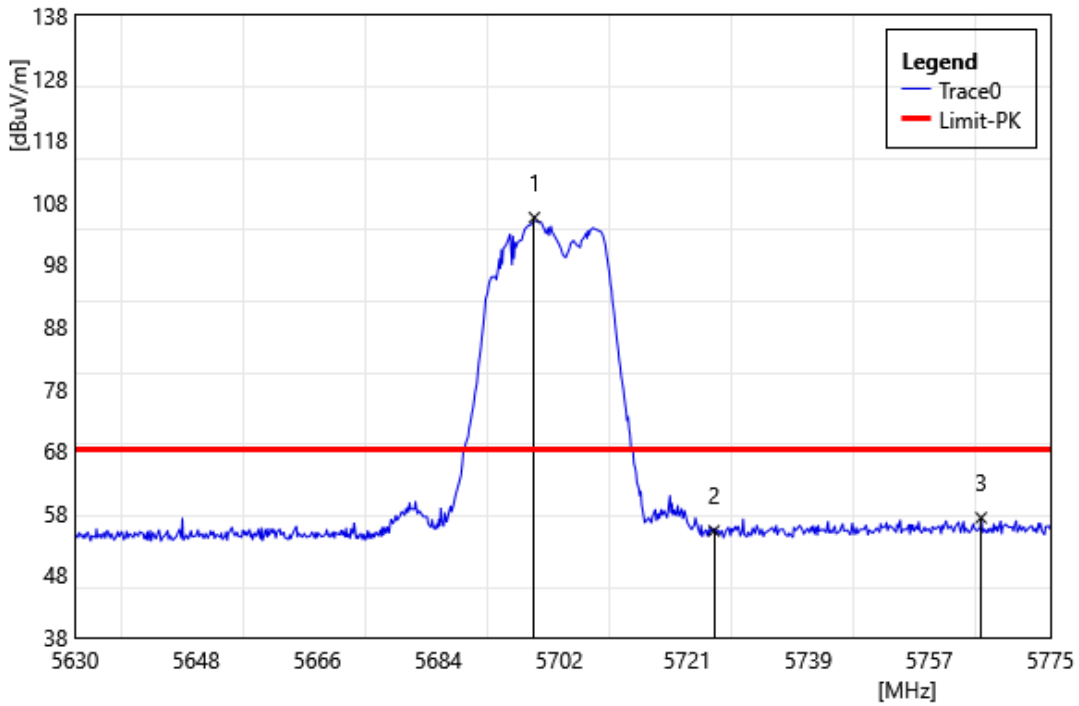


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5698.30	102.88	2.63	105.51	68.20	37.31	PEAK
2	5725.00	52.22	2.92	55.14	68.20	-13.06	PEAK
3	5764.71	53.94	3.30	57.24	68.20	-10.96	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5745 MHz		
Polarization:	Horizontal		
Remark:			

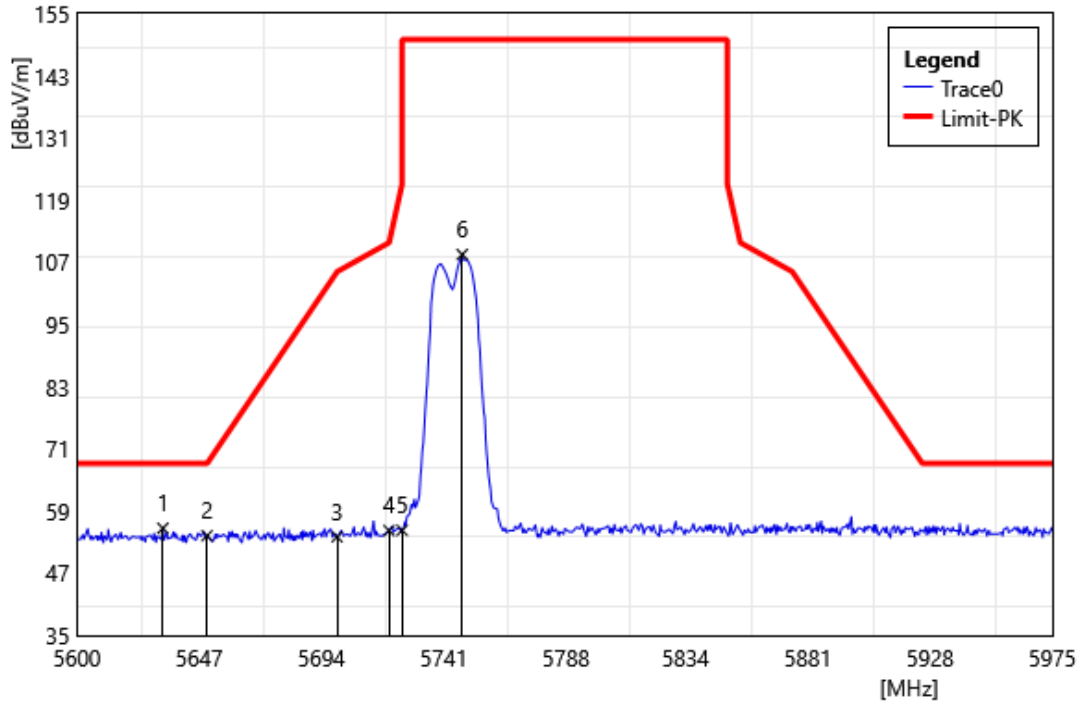


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5633.00	53.21	2.47	55.68	68.20	-12.52	PEAK
2	5650.00	51.72	2.51	54.23	68.20	-13.97	PEAK
3	5700.00	51.40	2.63	54.03	105.20	-51.17	PEAK
4	5720.00	52.37	2.86	55.23	110.80	-55.57	PEAK
5	5725.00	52.36	2.92	55.28	150.00	-94.72	PEAK
6	5748.13	105.32	3.19	108.51	150.00	-41.49	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5745 MHz		
Polarization:	Vertical		
Remark:			

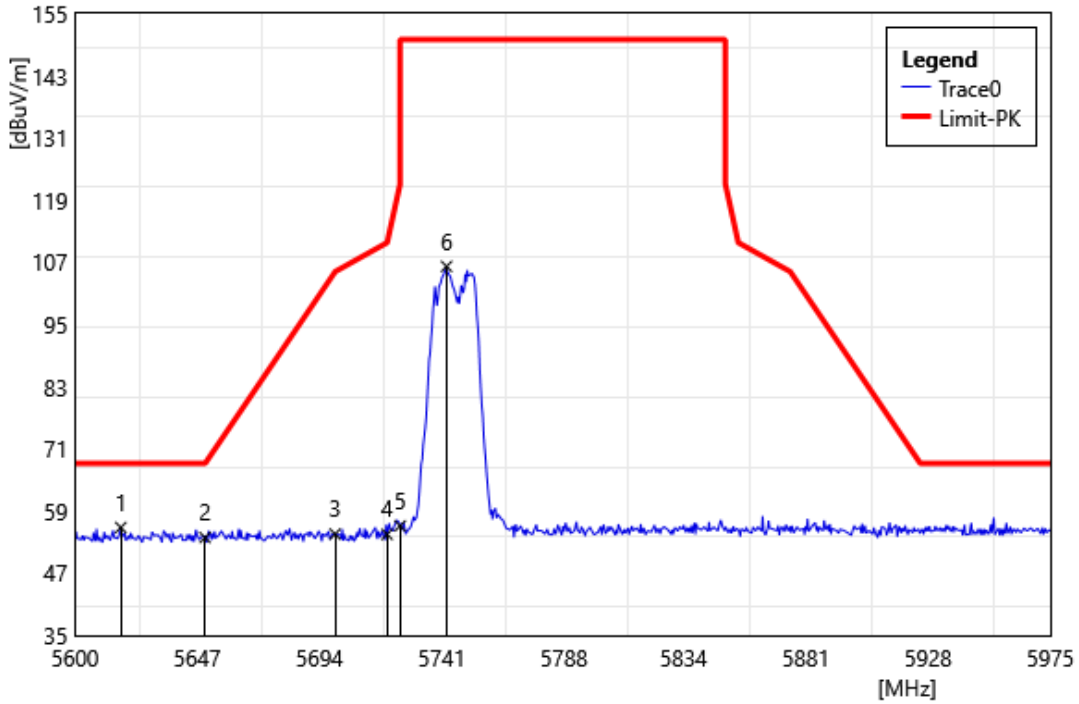


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5617.63	53.40	2.44	55.84	68.20	-12.36	PEAK
2	5650.00	51.38	2.51	53.89	68.20	-14.31	PEAK
3	5700.00	51.94	2.63	54.57	105.20	-50.63	PEAK
4	5720.00	51.64	2.86	54.50	110.80	-56.30	PEAK
5	5725.00	53.22	2.92	56.15	150.00	-93.86	PEAK
6	5742.88	103.10	3.13	106.23	150.00	-43.77	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5825 MHz		
Polarization:	Horizontal		
Remark:			

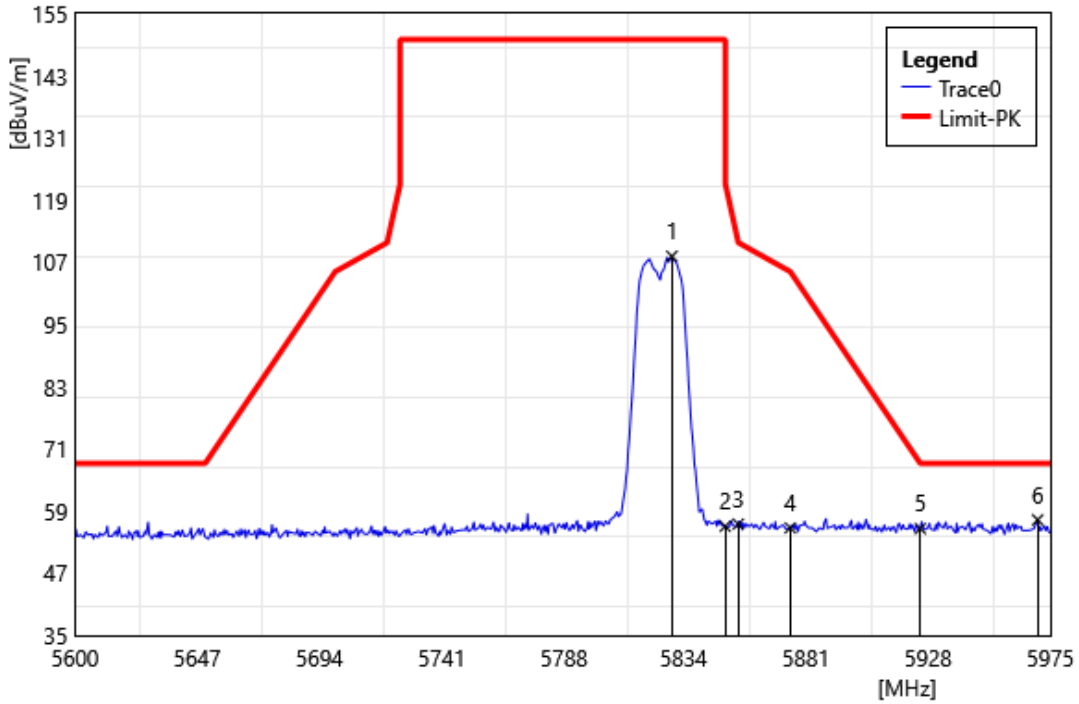

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5829.50	104.78	3.39	108.17	150.00	-41.83	PEAK
2	5850.00	52.75	3.31	56.06	122.20	-66.14	PEAK
3	5855.00	53.19	3.30	56.49	110.80	-54.31	PEAK
4	5875.00	52.49	3.26	55.75	105.20	-49.45	PEAK
5	5925.00	52.47	3.15	55.62	68.20	-12.58	PEAK
6	5970.13	54.22	3.08	57.30	68.20	-10.90	PEAK


Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT20 5825 MHz		
Polarization:	Vertical		
Remark:			

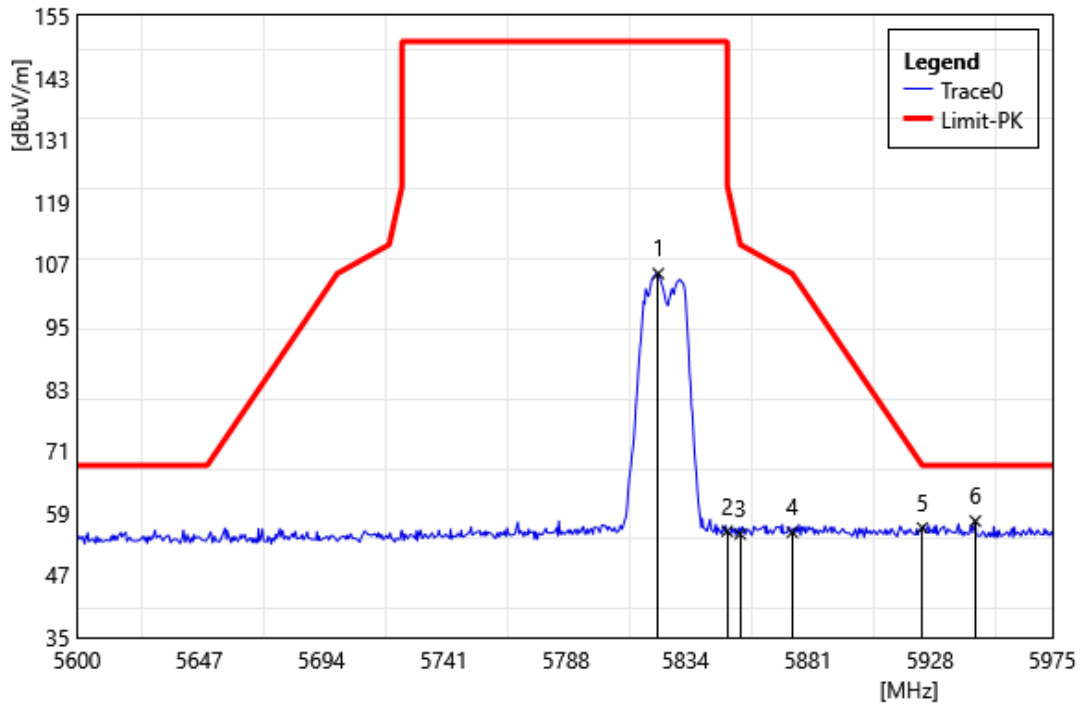

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5823.50	101.81	3.41	105.22	150.00	-44.78	PEAK
2	5850.00	52.21	3.31	55.52	122.20	-66.68	PEAK
3	5855.00	51.65	3.30	54.95	110.80	-55.85	PEAK
4	5875.00	52.01	3.26	55.27	105.20	-49.93	PEAK
5	5925.00	53.01	3.15	56.16	68.20	-12.04	PEAK
6	5945.38	54.35	3.10	57.45	68.20	-10.75	PEAK




Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5190 MHz		
Polarization:	Horizontal		
Remark:			

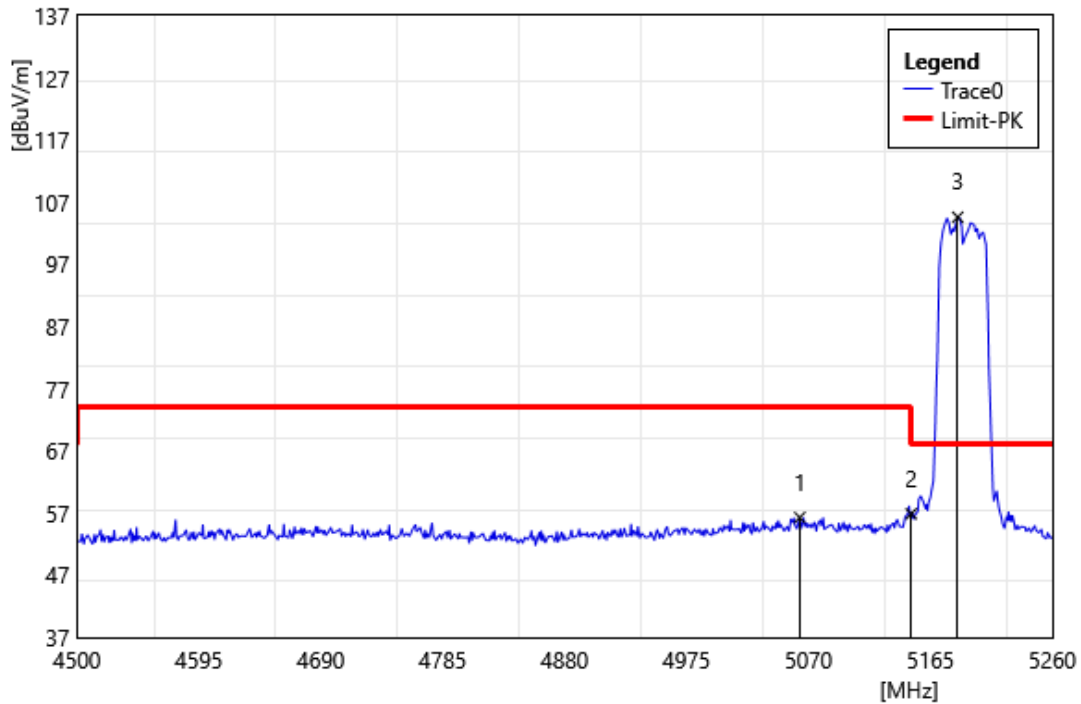


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5063.16	54.61	1.68	56.29	74.00	-17.71	PEAK
2	5150.00	55.24	1.64	56.88	74.00	-17.12	PEAK
3	5186.28	102.86	1.74	104.60	68.20	36.40	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5190 MHz		
Polarization:	Vertical		
Remark:			

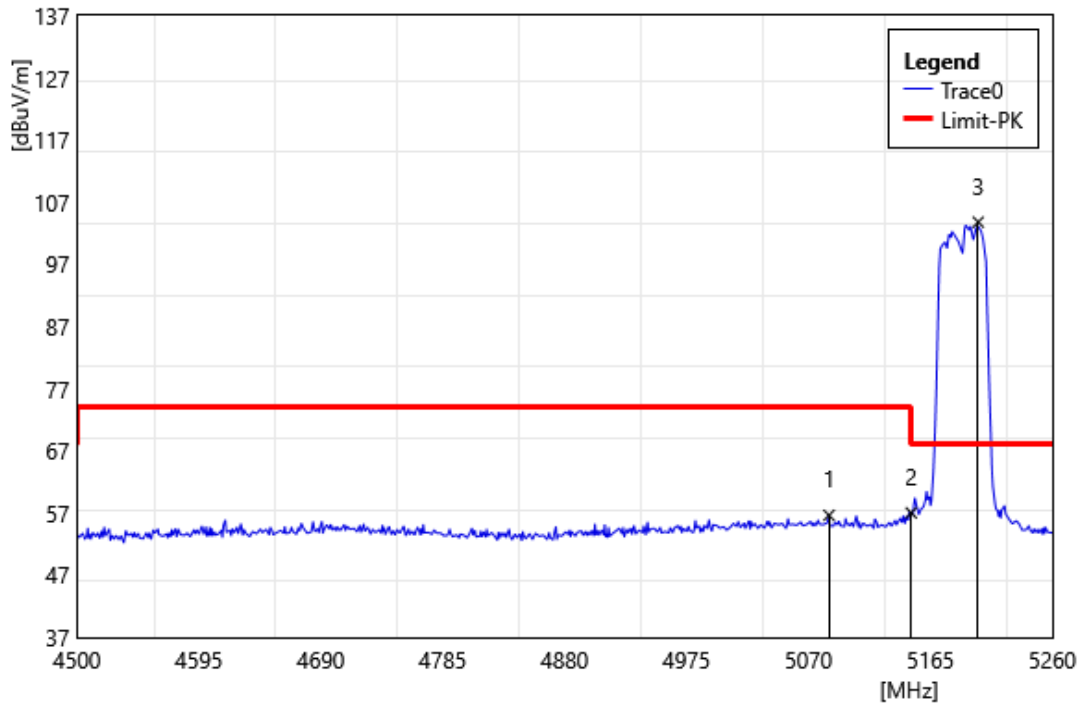


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5085.96	54.94	1.70	56.64	74.00	-17.36	PEAK
2	5150.00	55.40	1.64	57.04	74.00	-16.96	PEAK
3	5202.24	102.03	1.77	103.80	68.20	35.60	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5310 MHz		
Polarization:	Horizontal		
Remark:			

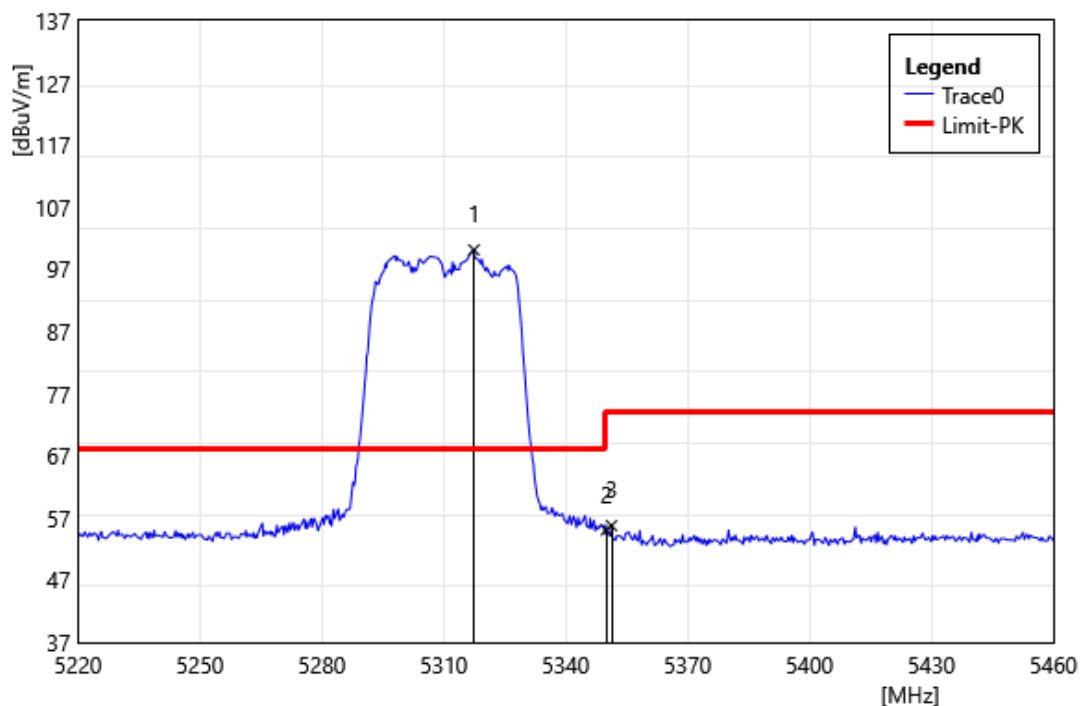


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5317.44	98.85	1.28	100.13	68.20	31.93	PEAK
2	5350.00	53.86	1.23	55.09	74.00	-18.91	PEAK
3	5351.28	54.53	1.25	55.78	74.00	-18.22	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5310 MHz		
Polarization:	Vertical		
Remark:			

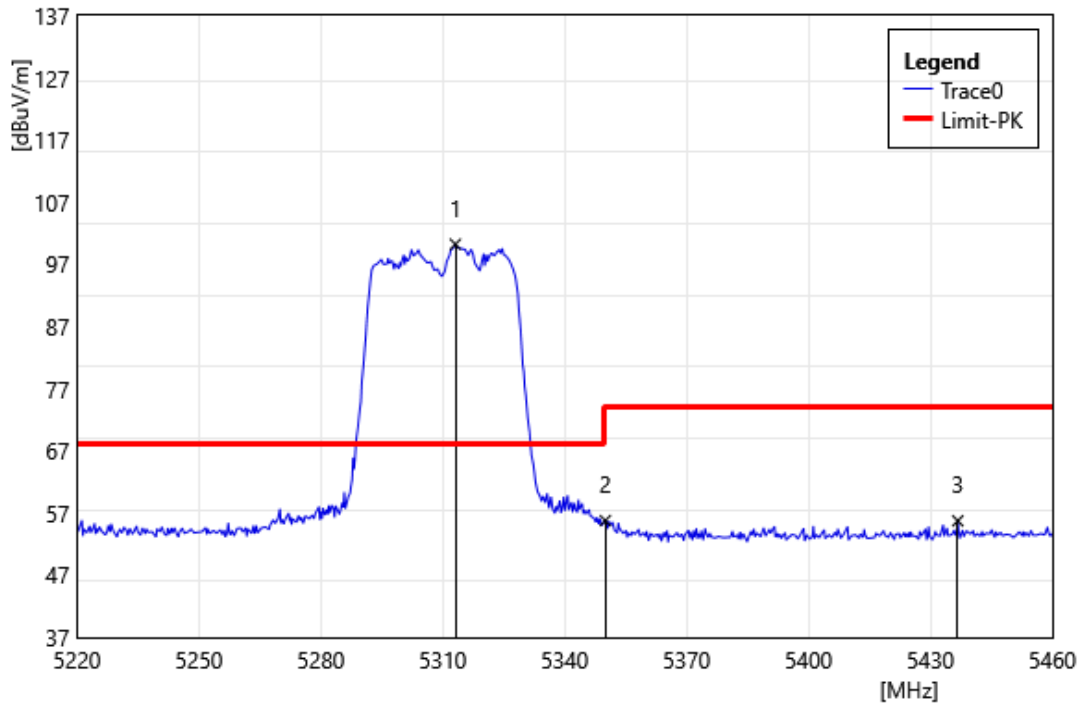


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5313.12	98.96	1.28	100.24	68.20	32.04	PEAK
2	5350.00	54.56	1.23	55.79	74.00	-18.21	PEAK
3	5436.72	54.04	1.71	55.75	74.00	-18.25	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5510 MHz		
Polarization:	Horizontal		
Remark:			

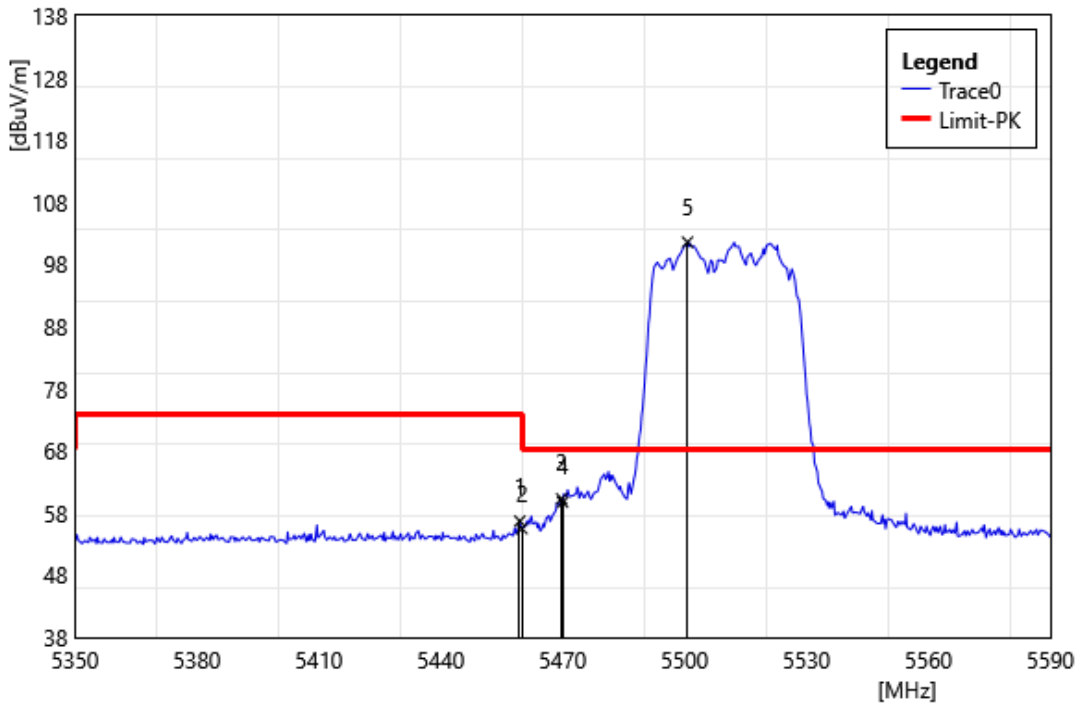


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.44	54.92	1.79	56.71	74.00	-17.29	PEAK
2	5460.00	53.70	1.79	55.49	74.00	-18.51	PEAK
3	5469.76	58.46	1.84	60.30	68.20	-7.91	PEAK
4	5470.00	57.90	1.84	59.74	68.20	-8.46	PEAK
5	5500.72	99.59	1.99	101.58	68.20	33.38	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5510 MHz		
Polarization:	Vertical		
Remark:			

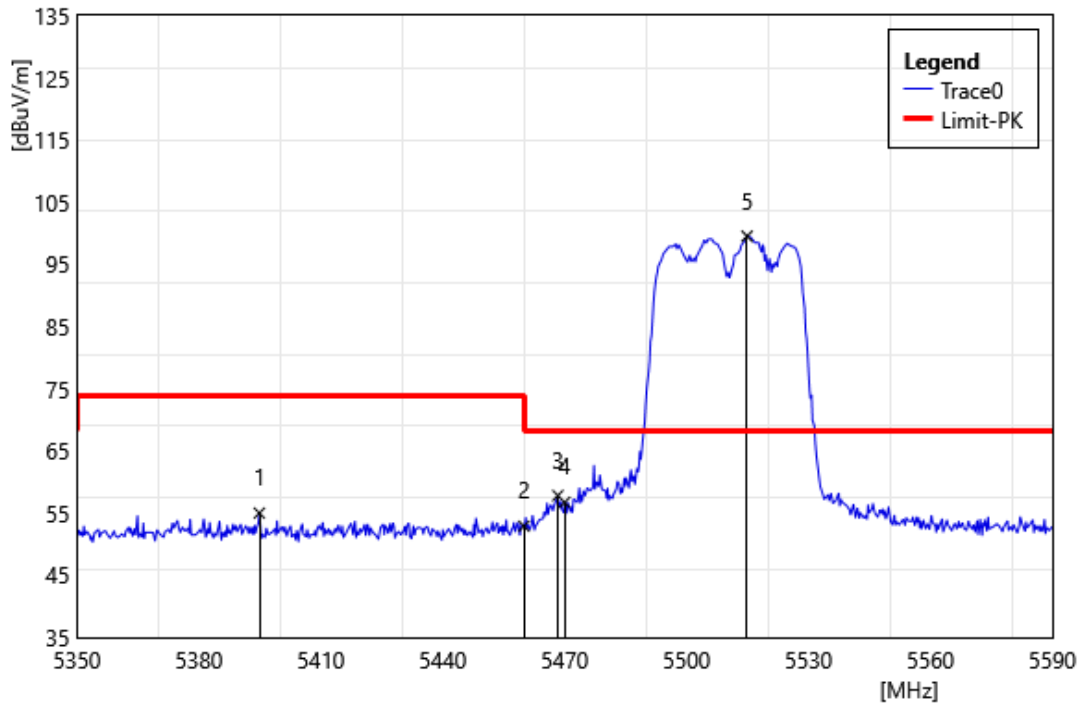


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5394.88	53.37	1.63	55.00	74.00	-19.00	PEAK
2	5460.00	51.10	1.79	52.89	74.00	-21.11	PEAK
3	5468.32	55.98	1.83	57.81	68.20	-10.39	PEAK
4	5470.00	54.89	1.84	56.73	68.20	-11.47	PEAK
5	5514.88	97.50	2.03	99.53	68.20	31.33	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5670 MHz		
Polarization:	Horizontal		
Remark:			

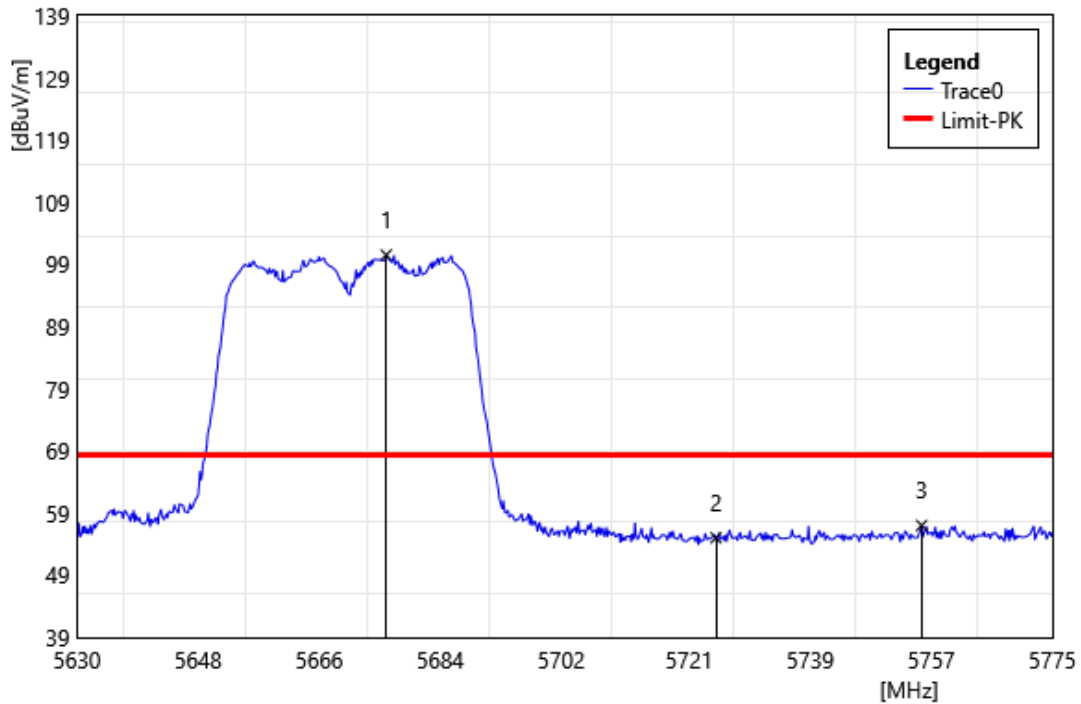

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5675.97	97.93	2.57	100.50	68.20	32.30	PEAK
2	5725.00	52.10	2.92	55.02	68.20	-13.18	PEAK
3	5755.57	53.76	3.24	57.00	68.20	-11.21	PEAK


Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5670 MHz		
Polarization:	Vertical		
Remark:			

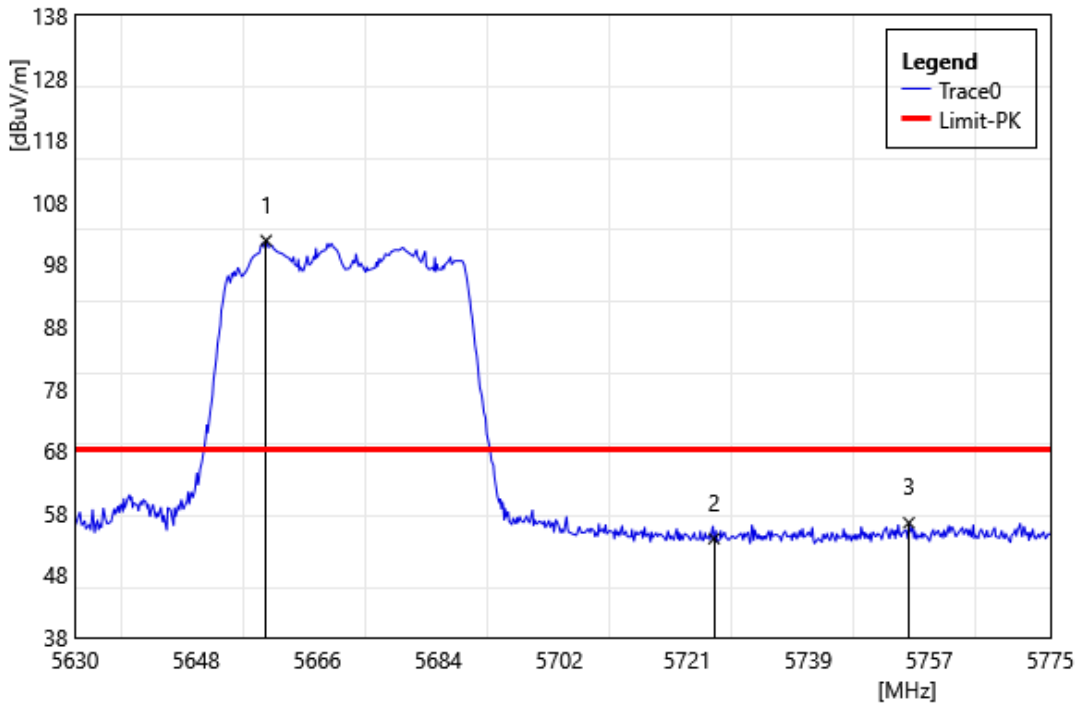

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5658.42	99.30	2.53	101.83	68.20	33.63	PEAK
2	5725.00	50.96	2.92	53.88	68.20	-14.32	PEAK
3	5753.98	53.20	3.24	56.45	68.20	-11.76	PEAK




Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5755 MHz		
Polarization:	Horizontal		
Remark:			

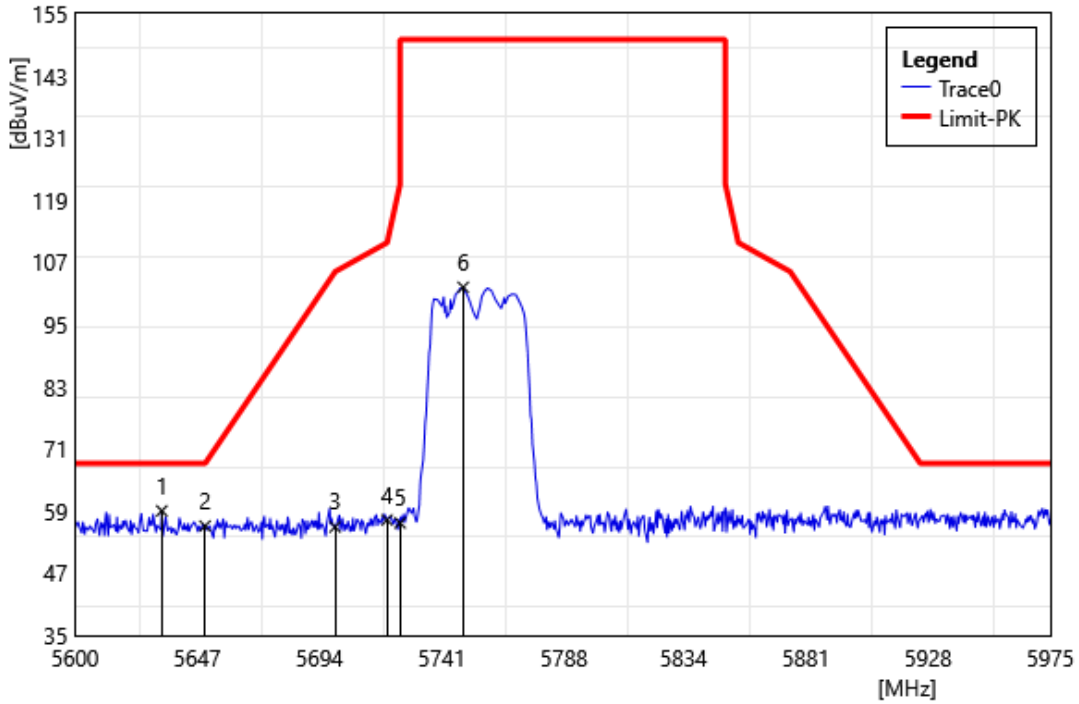


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5633.38	56.57	2.47	59.04	68.20	-9.16	PEAK
2	5650.00	53.62	2.51	56.13	68.20	-12.07	PEAK
3	5700.00	53.29	2.63	55.92	105.20	-49.28	PEAK
4	5720.00	54.43	2.86	57.29	110.80	-53.51	PEAK
5	5725.00	53.77	2.92	56.69	150.00	-93.31	PEAK
6	5749.25	99.01	3.20	102.21	150.00	-47.79	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5755 MHz		
Polarization:	Vertical		
Remark:			

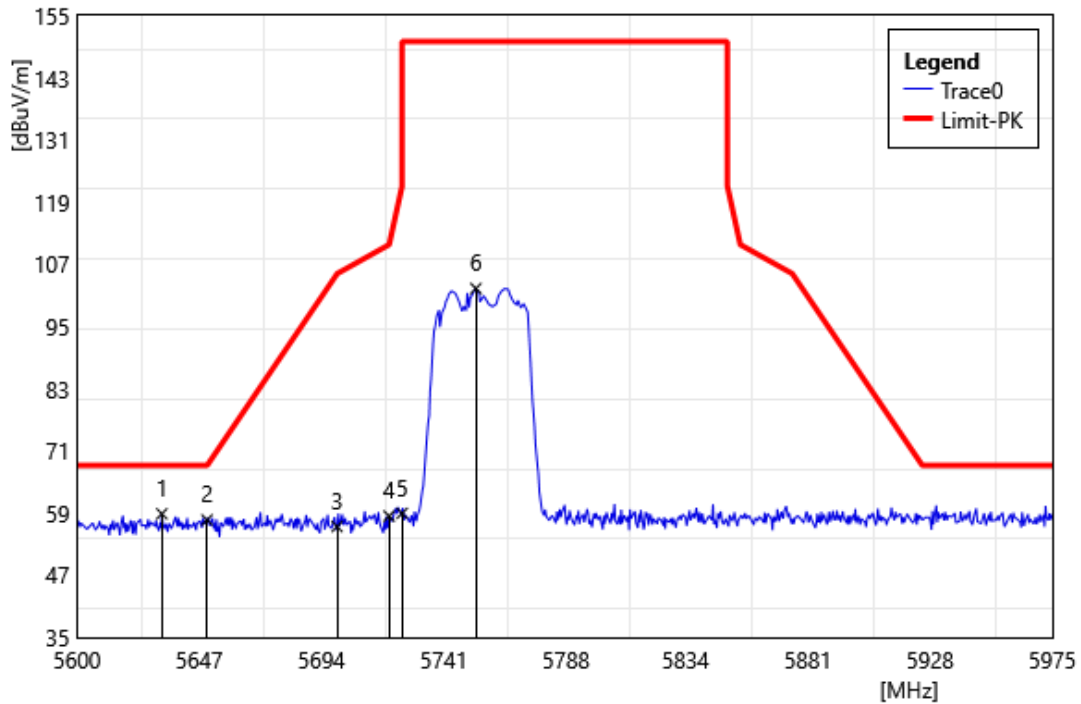


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5632.63	56.38	2.47	58.85	68.20	-9.35	PEAK
2	5650.00	55.18	2.51	57.69	68.20	-10.51	PEAK
3	5700.00	53.77	2.63	56.40	105.20	-48.80	PEAK
4	5720.00	55.55	2.86	58.41	110.80	-52.39	PEAK
5	5725.00	56.04	2.92	58.96	150.00	-91.04	PEAK
6	5753.38	99.10	3.23	102.34	150.00	-47.67	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5795 MHz		
Polarization:	Vertical		
Remark:			

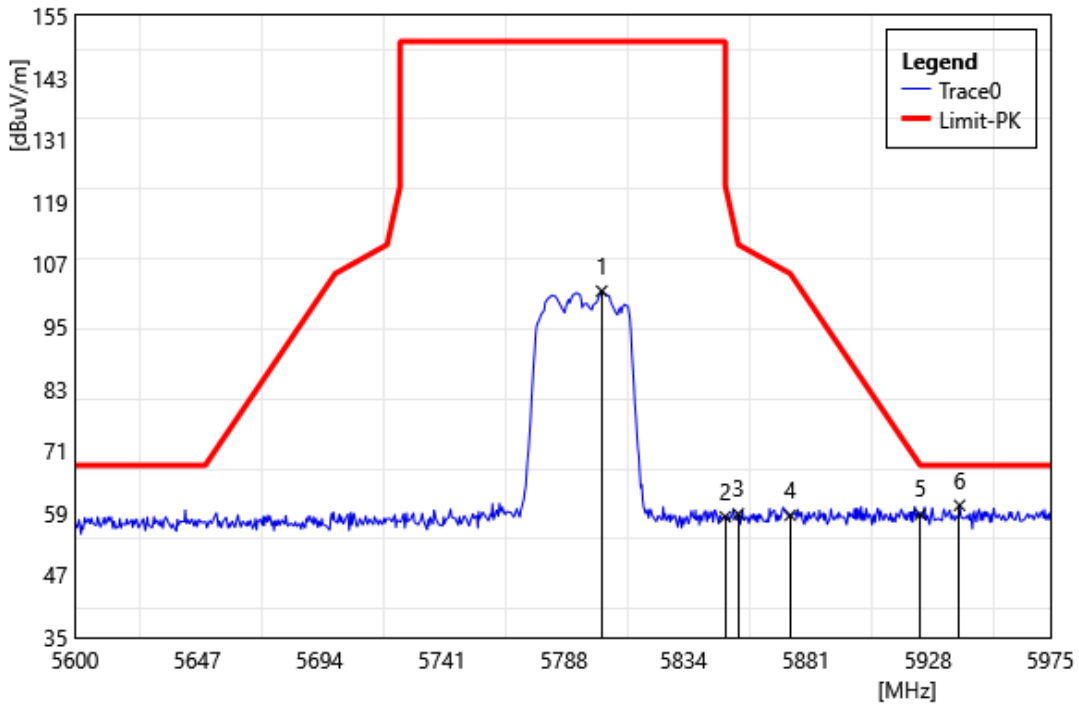


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5802.50	98.34	3.50	101.84	150.00	-48.16	PEAK
2	5850.00	54.97	3.31	58.28	122.20	-63.92	PEAK
3	5855.00	55.52	3.30	58.82	110.80	-51.98	PEAK
4	5875.00	55.30	3.26	58.56	105.20	-46.64	PEAK
5	5925.00	55.61	3.15	58.76	68.20	-9.44	PEAK
6	5940.13	57.38	3.11	60.49	68.20	-7.71	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n HT40 5795 MHz		
Polarization:	Horizontal		
Remark:			

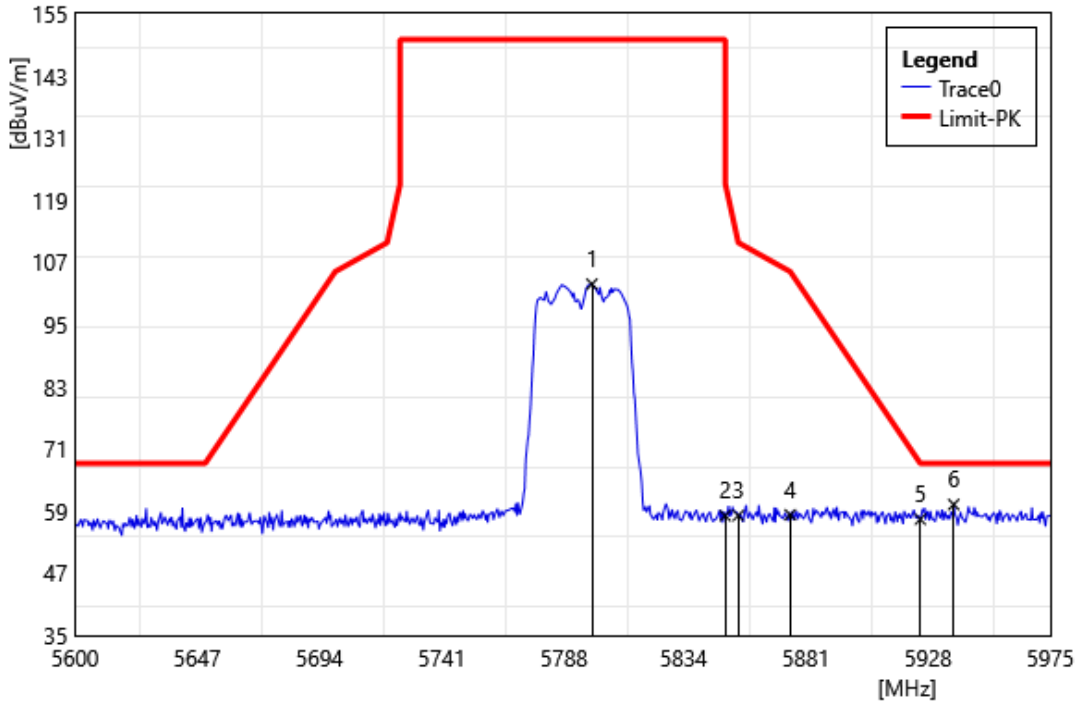


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5798.75	99.30	3.50	102.80	150.00	-47.20	PEAK
2	5850.00	54.79	3.31	58.10	122.20	-64.10	PEAK
3	5855.00	54.84	3.30	58.14	110.80	-52.66	PEAK
4	5875.00	55.02	3.26	58.28	105.20	-46.92	PEAK
5	5925.00	54.27	3.15	57.42	68.20	-10.78	PEAK
6	5937.88	57.15	3.12	60.27	68.20	-7.93	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n VHT80 5210 MHz		
Polarization:	Horizontal		
Remark:			

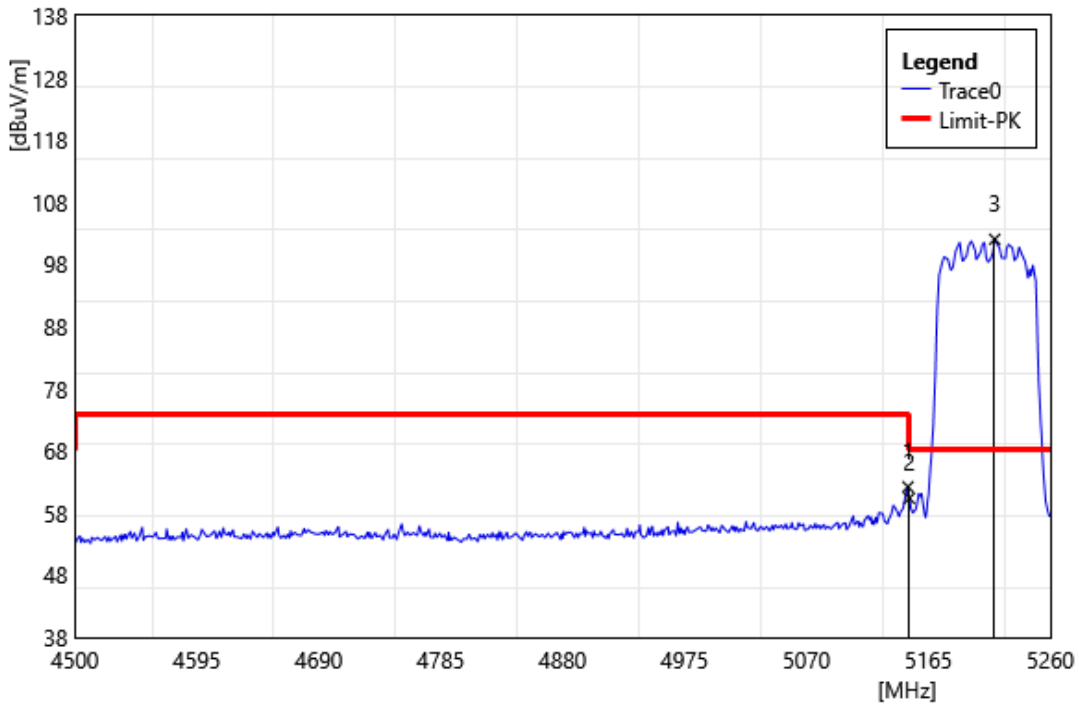


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5149.04	60.57	1.64	62.21	74.00	-11.79	PEAK
2	5150.00	58.73	1.64	60.37	74.00	-13.63	PEAK
3	5216.68	100.35	1.68	102.03	68.20	33.83	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n VHT80 5210 MHz		
Polarization:	Vertical		
Remark:			

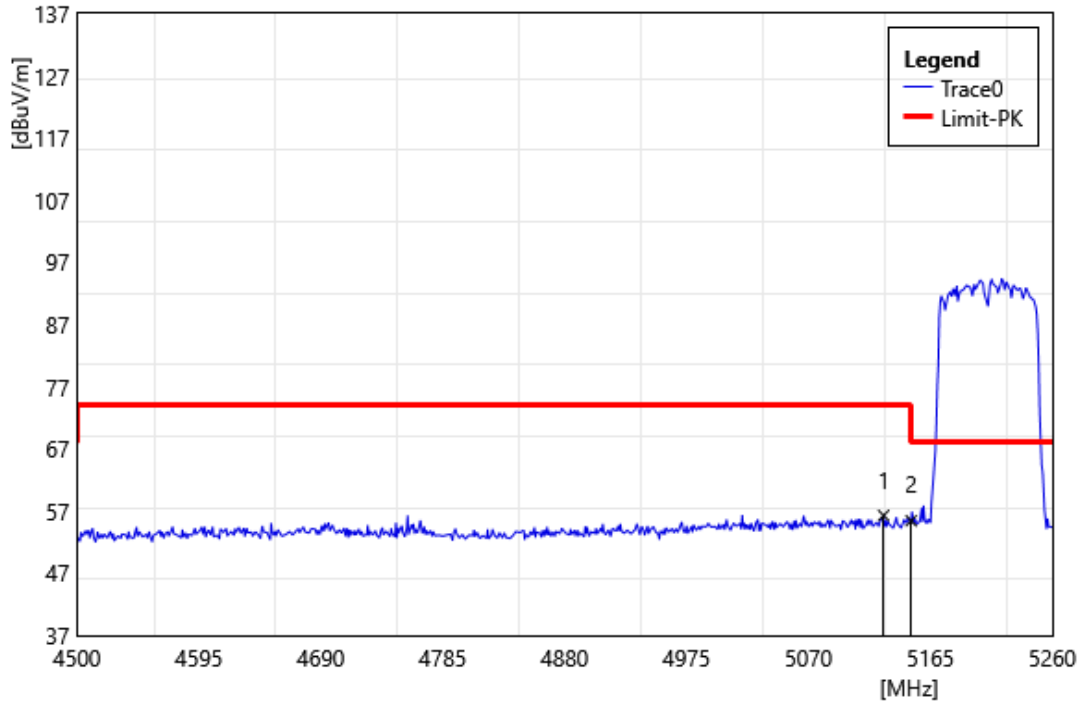


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5128.52	54.63	1.67	56.30	74.00	-17.70	PEAK
2	5150.00	53.80	1.64	55.44	74.00	-18.56	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n VHT80 5290 MHz		
Polarization:	Horizontal		
Remark:			

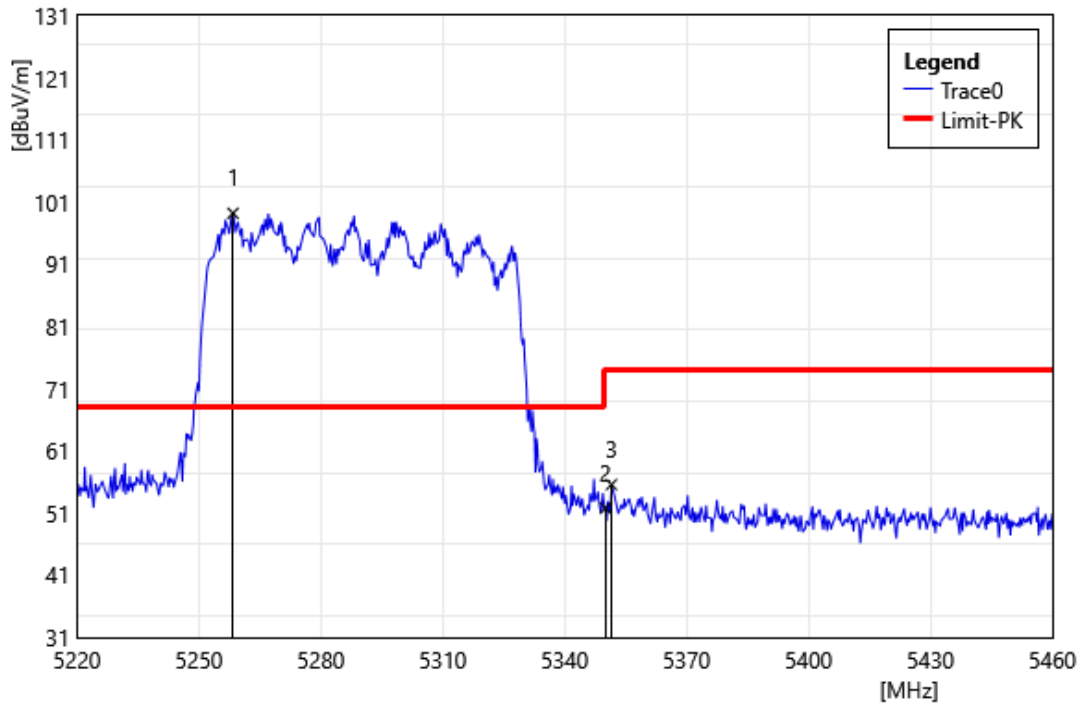

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5258.40	97.75	1.47	99.22	68.20	31.02	PEAK
2	5350.00	50.57	1.23	51.80	74.00	-22.20	PEAK
3	5351.52	54.33	1.25	55.58	74.00	-18.42	PEAK


Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n VHT80 5290 MHz		
Polarization:	Vertical		
Remark:			

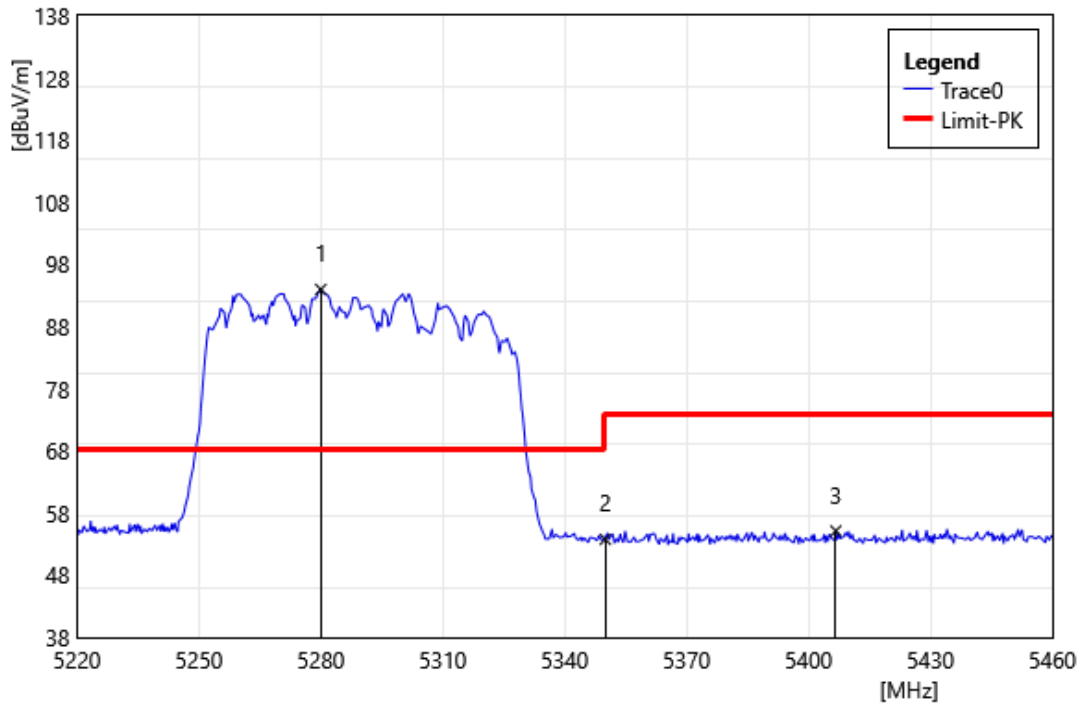

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5280.00	92.58	1.38	93.96	68.20	25.76	PEAK
2	5350.00	52.53	1.23	53.76	74.00	-20.24	PEAK
3	5406.72	53.44	1.68	55.12	74.00	-18.88	PEAK




Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n VHT80 5530 MHz		
Polarization:	Horizontal		
Remark:			

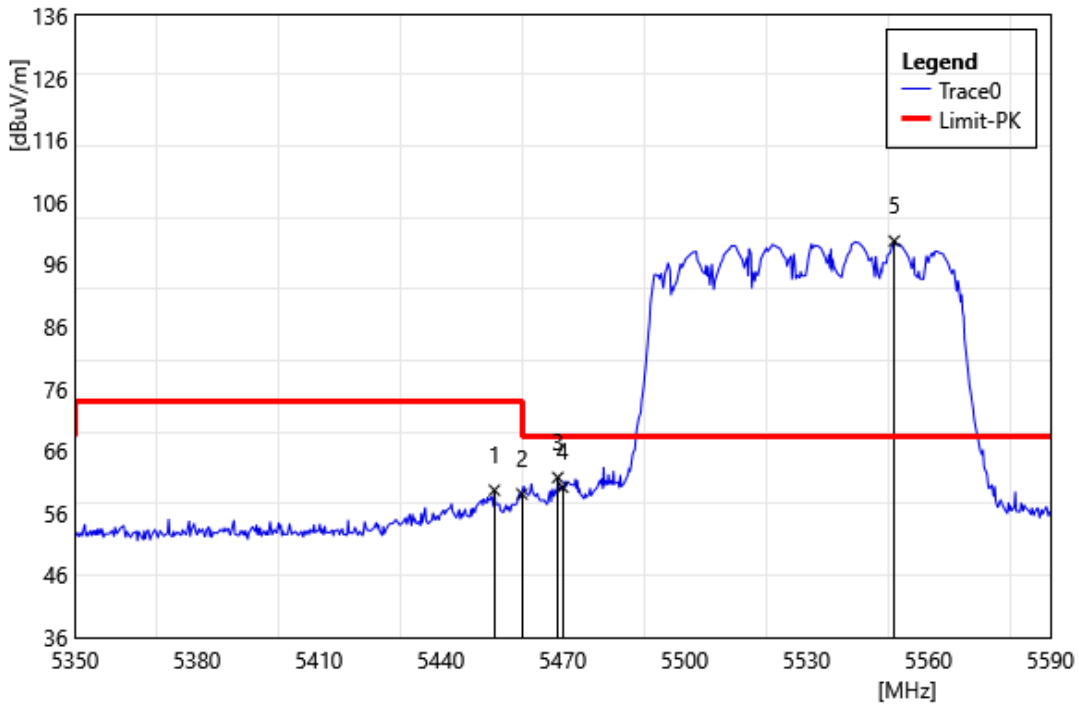


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.20	57.91	1.75	59.66	74.00	-14.34	PEAK
2	5460.00	57.29	1.79	59.08	74.00	-14.92	PEAK
3	5468.80	59.89	1.84	61.73	68.20	-6.48	PEAK
4	5470.00	58.32	1.84	60.16	68.20	-8.04	PEAK
5	5551.60	97.61	2.15	99.76	68.20	31.56	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n VHT80 5530 MHz		
Polarization:	Vertical		
Remark:			

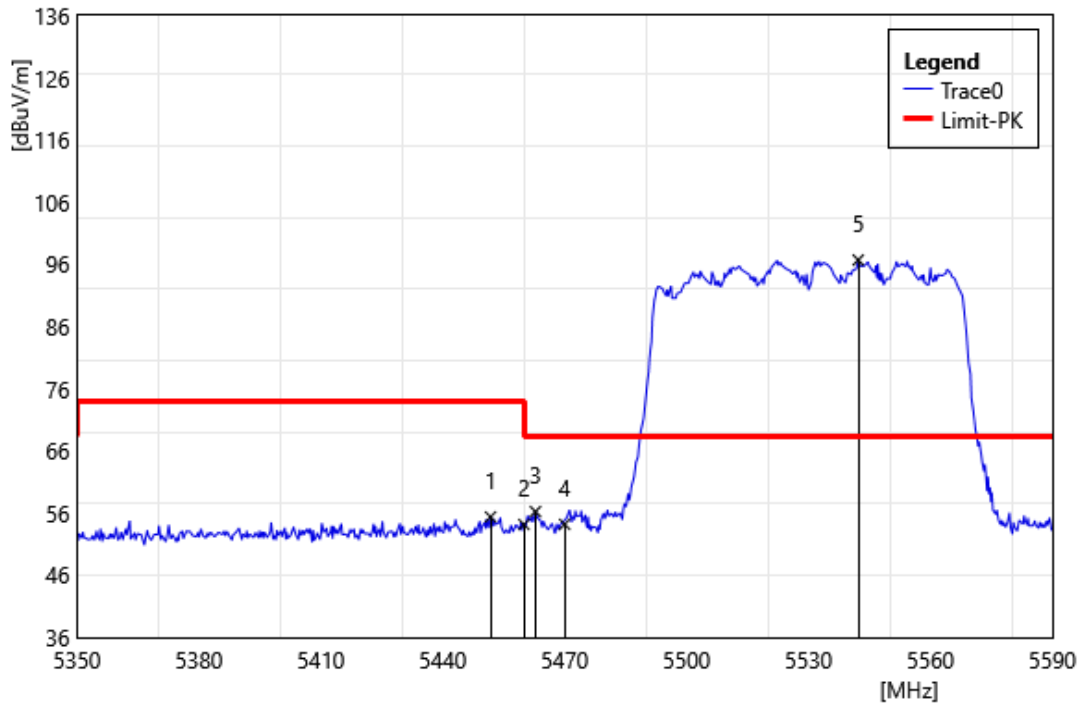


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5451.76	53.63	1.75	55.38	74.00	-18.62	PEAK
2	5460.00	52.38	1.79	54.17	74.00	-19.83	PEAK
3	5462.80	54.44	1.80	56.24	68.20	-11.96	PEAK
4	5470.00	52.35	1.84	54.19	68.20	-14.01	PEAK
5	5542.24	94.59	2.11	96.70	68.20	28.50	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n VHT80 5610 MHz		
Polarization:	Horizontal		
Remark:			

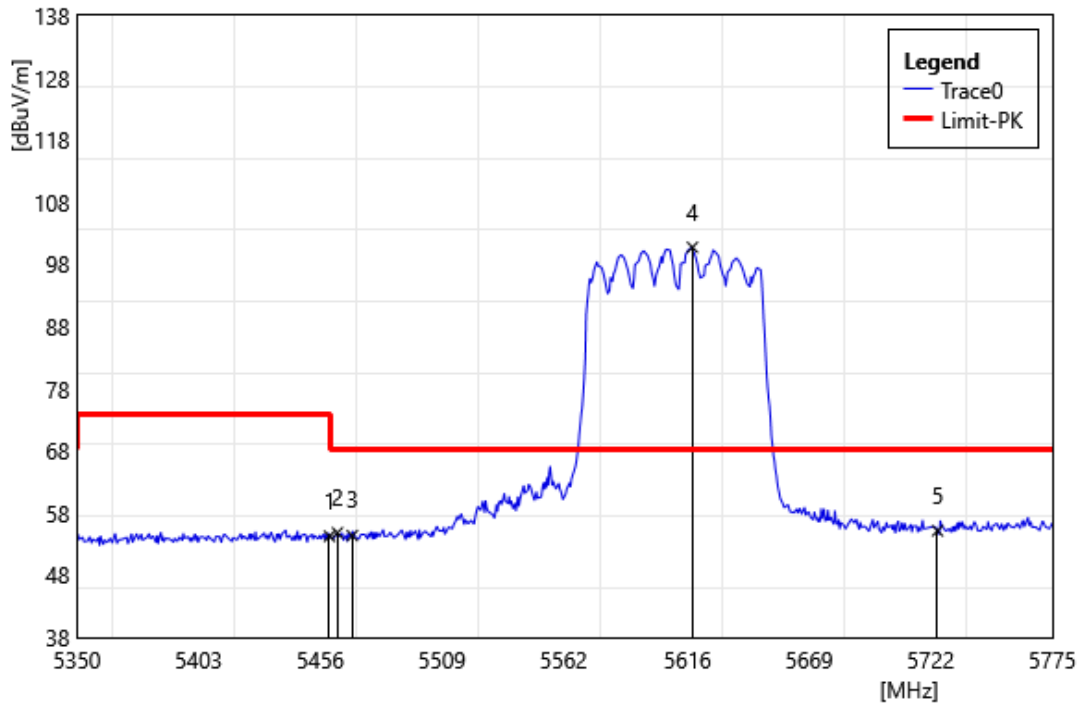


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5460.00	52.48	1.79	54.27	74.00	-19.73	PEAK
2	5463.48	53.03	1.80	54.83	68.20	-13.37	PEAK
3	5470.00	52.54	1.84	54.38	68.20	-13.83	PEAK
4	5618.18	98.30	2.44	100.74	68.20	32.54	PEAK
5	5725.00	52.23	2.92	55.15	68.20	-13.05	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n VHT80 5610 MHz		
Polarization:	Vertical		
Remark:			

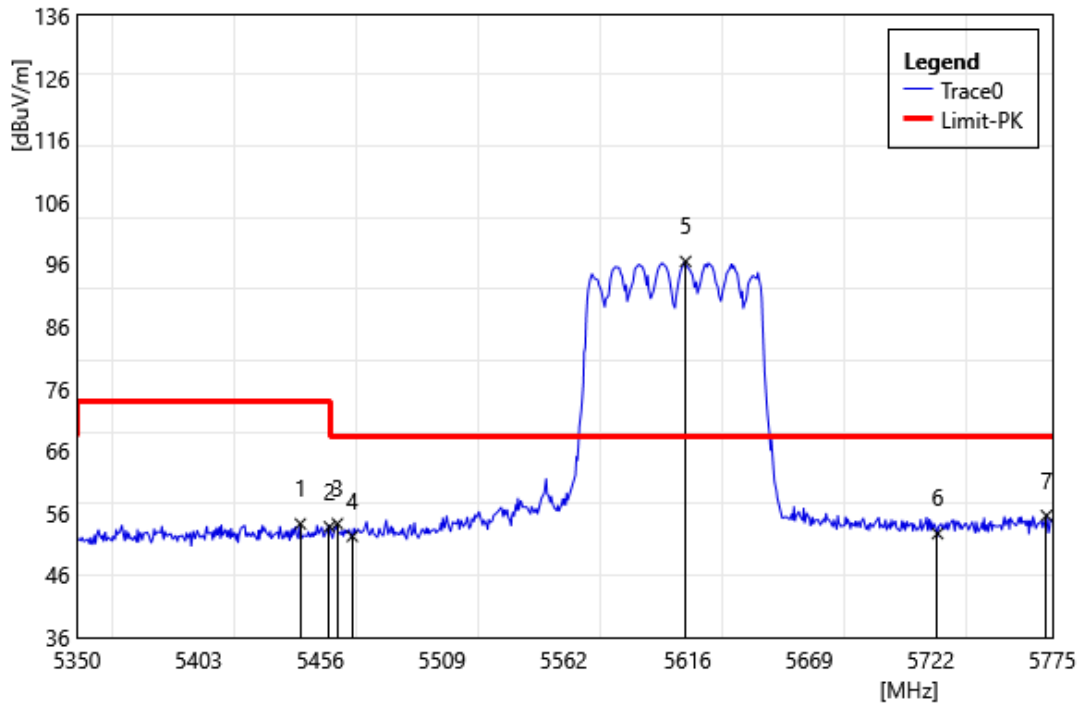


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5447.33	52.54	1.72	54.26	74.00	-19.74	PEAK
2	5460.00	52.00	1.79	53.79	74.00	-20.21	PEAK
3	5463.48	52.49	1.80	54.29	68.20	-13.91	PEAK
4	5470.00	50.42	1.84	52.26	68.20	-15.94	PEAK
5	5615.20	94.04	2.43	96.47	68.20	28.27	PEAK
6	5725.00	49.77	2.92	52.69	68.20	-15.51	PEAK
7	5772.45	52.25	3.34	55.59	68.20	-12.61	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n VHT80 5775 MHz		
Polarization:	Horizontal		
Remark:			

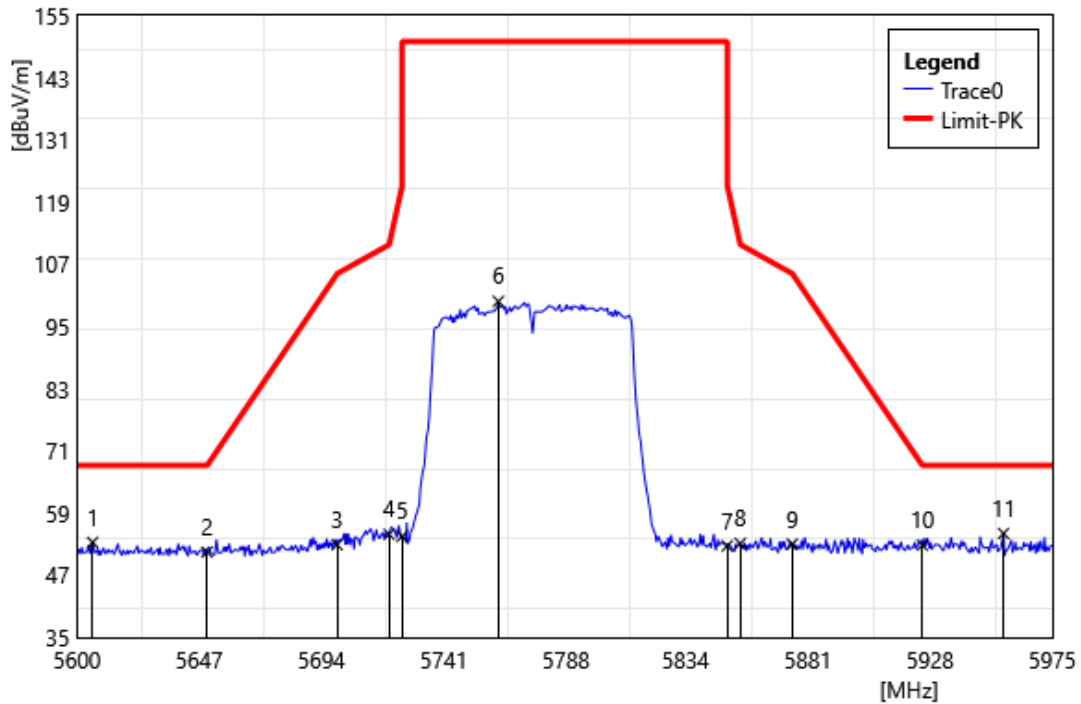


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5606.00	50.94	2.40	53.34	68.20	-14.86	PEAK
2	5650.00	48.96	2.51	51.47	68.20	-16.73	PEAK
3	5700.00	50.27	2.63	52.90	105.20	-52.30	PEAK
4	5720.00	52.04	2.86	54.90	110.80	-55.90	PEAK
5	5725.00	51.60	2.92	54.52	150.00	-95.48	PEAK
6	5762.00	96.57	3.29	99.86	150.00	-50.14	PEAK
7	5850.00	49.36	3.31	52.67	122.20	-69.53	PEAK
8	5855.00	49.83	3.30	53.13	110.80	-57.67	PEAK
9	5875.00	49.76	3.26	53.02	105.20	-52.18	PEAK
10	5925.00	49.66	3.15	52.81	68.20	-15.39	PEAK
11	5956.25	51.97	3.09	55.06	68.20	-13.14	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n VHT80 5775 MHz		
Polarization:	Vertical		
Remark:			

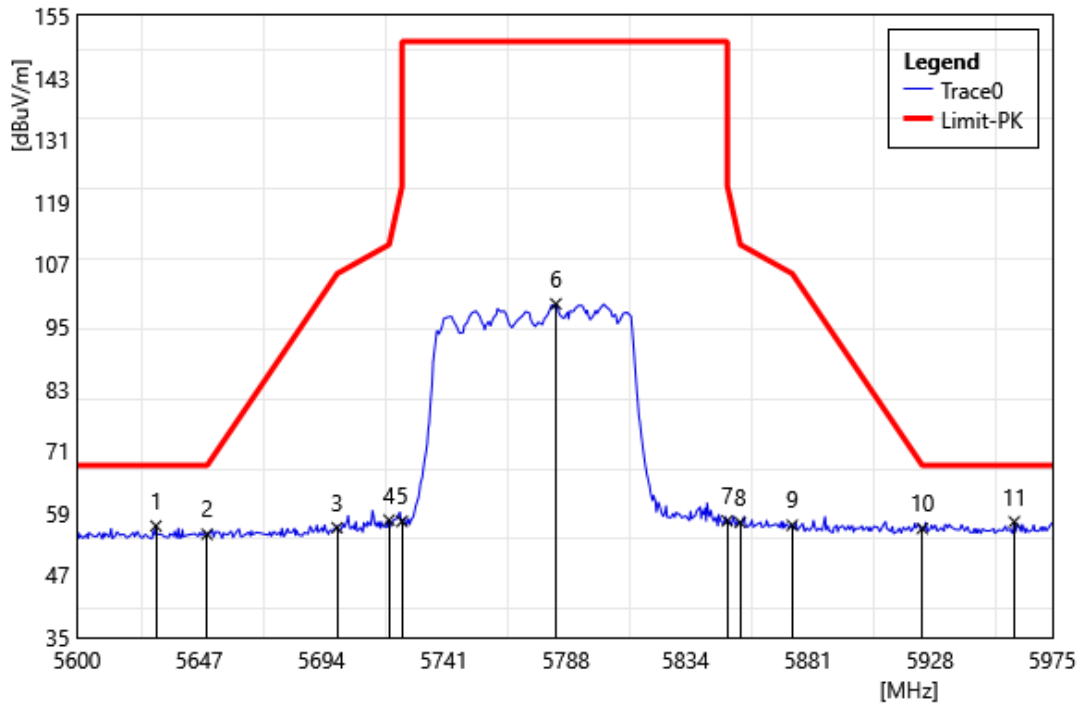


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5630.38	54.05	2.46	56.51	68.20	-11.69	PEAK
2	5650.00	52.40	2.51	54.91	68.20	-13.29	PEAK
3	5700.00	53.55	2.63	56.18	105.20	-49.02	PEAK
4	5720.00	54.78	2.86	57.64	110.80	-53.16	PEAK
5	5725.00	54.49	2.92	57.41	150.00	-92.59	PEAK
6	5784.13	95.97	3.41	99.38	150.00	-50.62	PEAK
7	5850.00	54.18	3.31	57.49	122.20	-64.71	PEAK
8	5855.00	53.90	3.30	57.20	110.80	-53.60	PEAK
9	5875.00	53.39	3.26	56.65	105.20	-48.55	PEAK
10	5925.00	52.86	3.15	56.01	68.20	-12.19	PEAK
11	5960.38	54.23	3.09	57.32	68.20	-10.88	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n VHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

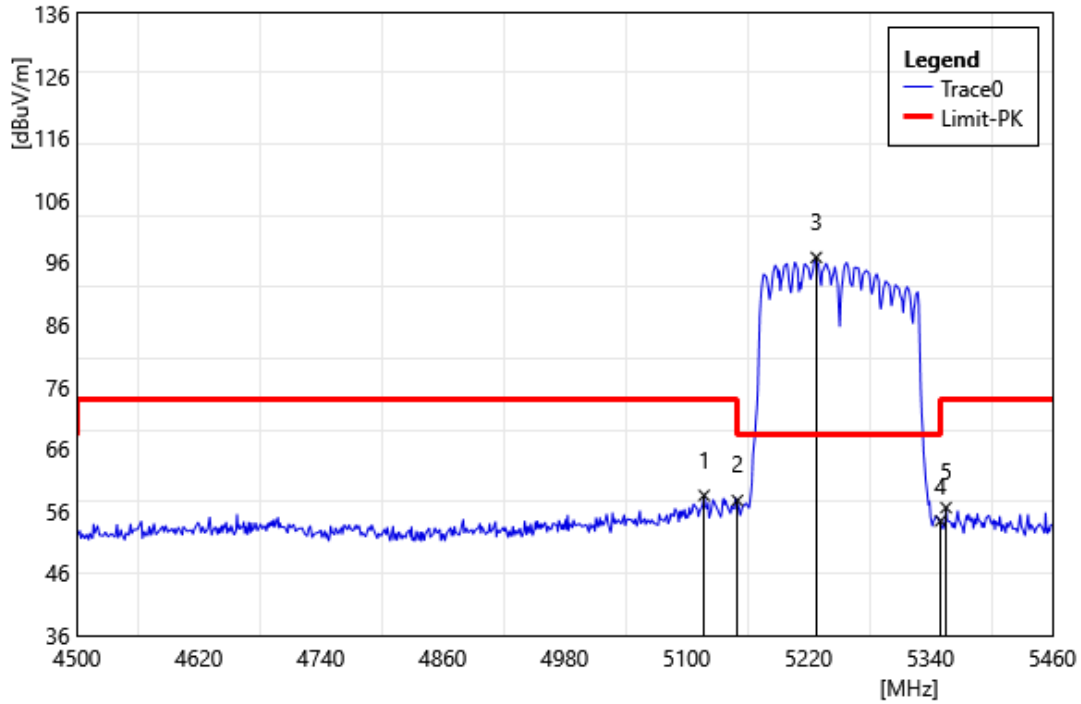

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5117.28	56.82	1.70	58.52	74.00	-15.48	PEAK
2	5150.00	56.07	1.64	57.71	74.00	-16.29	PEAK
3	5227.68	95.18	1.61	96.79	68.20	28.59	PEAK
4	5350.00	53.18	1.23	54.41	74.00	-19.59	PEAK
5	5355.36	55.27	1.28	56.55	74.00	-17.45	PEAK


Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n VHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

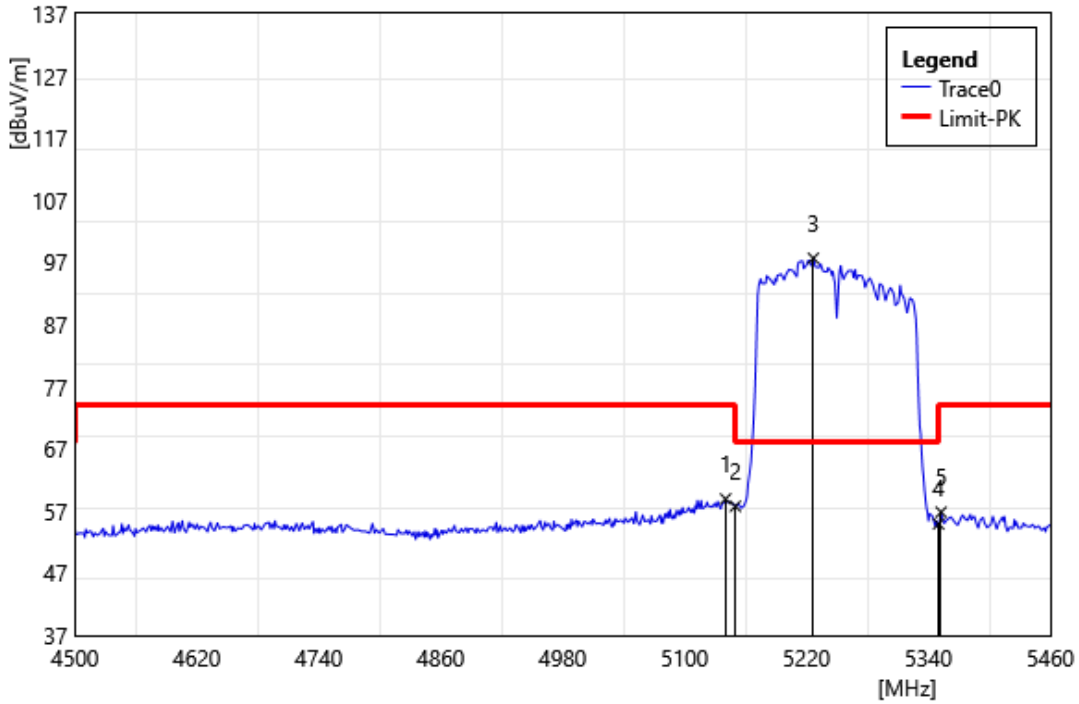

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5140.32	57.29	1.66	58.95	74.00	-15.05	PEAK
2	5150.00	56.13	1.64	57.77	74.00	-16.23	PEAK
3	5226.72	96.04	1.62	97.66	68.20	29.46	PEAK
4	5350.00	53.70	1.23	54.93	74.00	-19.07	PEAK
5	5352.48	55.56	1.26	56.82	74.00	-17.18	PEAK




Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n VHT160 5570 MHz		
Polarization:	Horizontal		
Remark:			

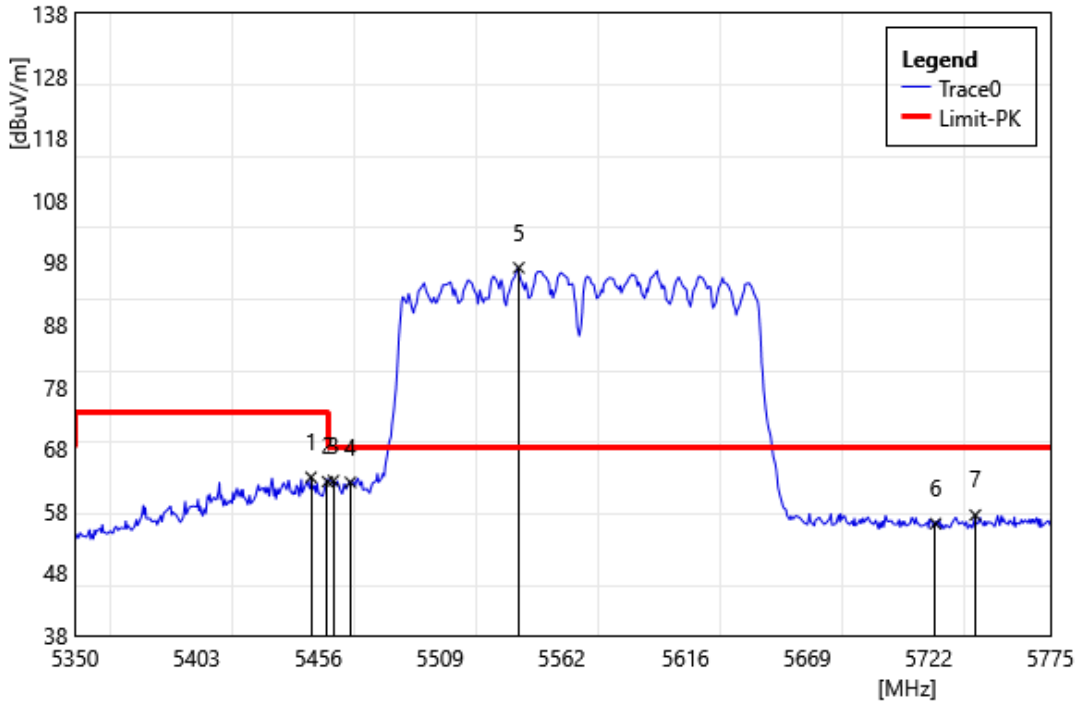


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.85	61.69	1.75	63.44	74.00	-10.56	PEAK
2	5460.00	60.94	1.79	62.73	74.00	-11.27	PEAK
3	5462.63	61.10	1.80	62.90	68.20	-5.30	PEAK
4	5470.00	60.78	1.84	62.62	68.20	-5.58	PEAK
5	5543.38	95.02	2.12	97.14	68.20	28.94	PEAK
6	5725.00	53.05	2.92	55.97	68.20	-12.23	PEAK
7	5742.28	54.23	3.12	57.35	68.20	-10.85	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11n VHT160 5570 MHz		
Polarization:	Vertical		
Remark:			

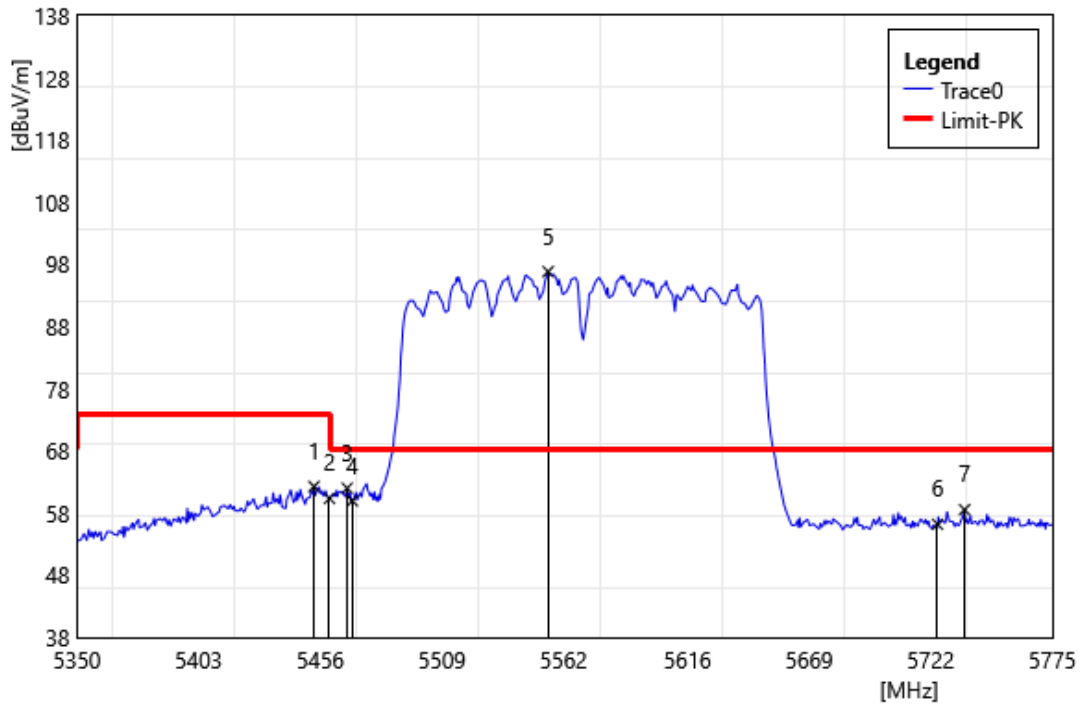


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.28	60.52	1.75	62.27	74.00	-11.73	PEAK
2	5460.00	58.56	1.79	60.35	74.00	-13.65	PEAK
3	5467.73	60.18	1.82	62.00	68.20	-6.20	PEAK
4	5470.00	58.12	1.84	59.96	68.20	-8.24	PEAK
5	5555.28	94.66	2.17	96.83	68.20	28.63	PEAK
6	5725.00	53.28	2.92	56.20	68.20	-12.00	PEAK
7	5736.75	55.48	3.06	58.54	68.20	-9.66	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5180 MHz		
Polarization:	Horizontal		
Remark:			

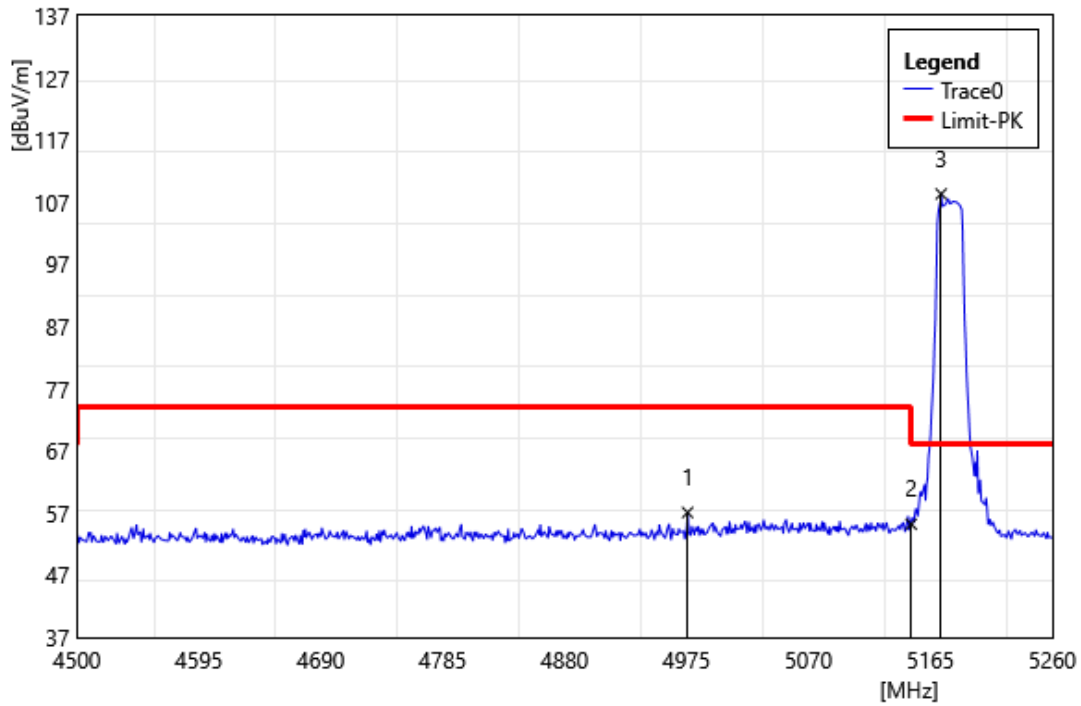


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4975.76	55.69	1.41	57.10	74.00	-16.90	PEAK
2	5150.00	53.58	1.64	55.22	74.00	-18.78	PEAK
3	5173.36	106.61	1.72	108.33	68.20	40.13	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5180 MHz		
Polarization:	Vertical		
Remark:			

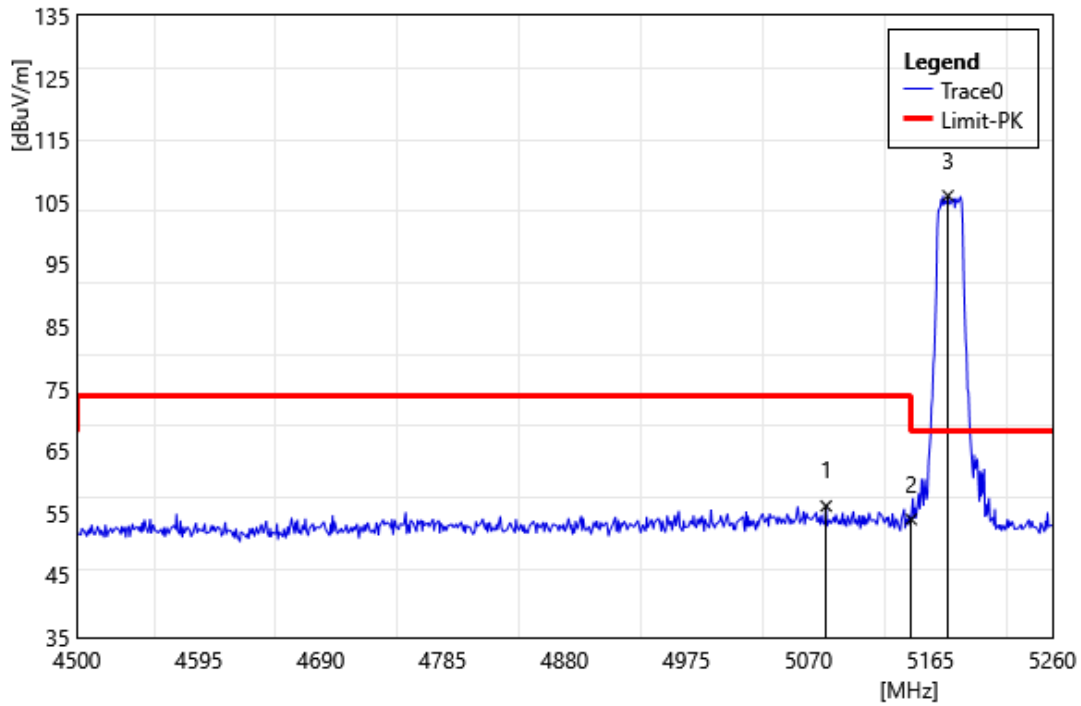


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5083.68	54.43	1.70	56.13	74.00	-17.87	PEAK
2	5150.00	52.34	1.64	53.98	74.00	-20.02	PEAK
3	5178.68	104.30	1.73	106.03	68.20	37.83	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5320 MHz		
Polarization:	Horizontal		
Remark:			

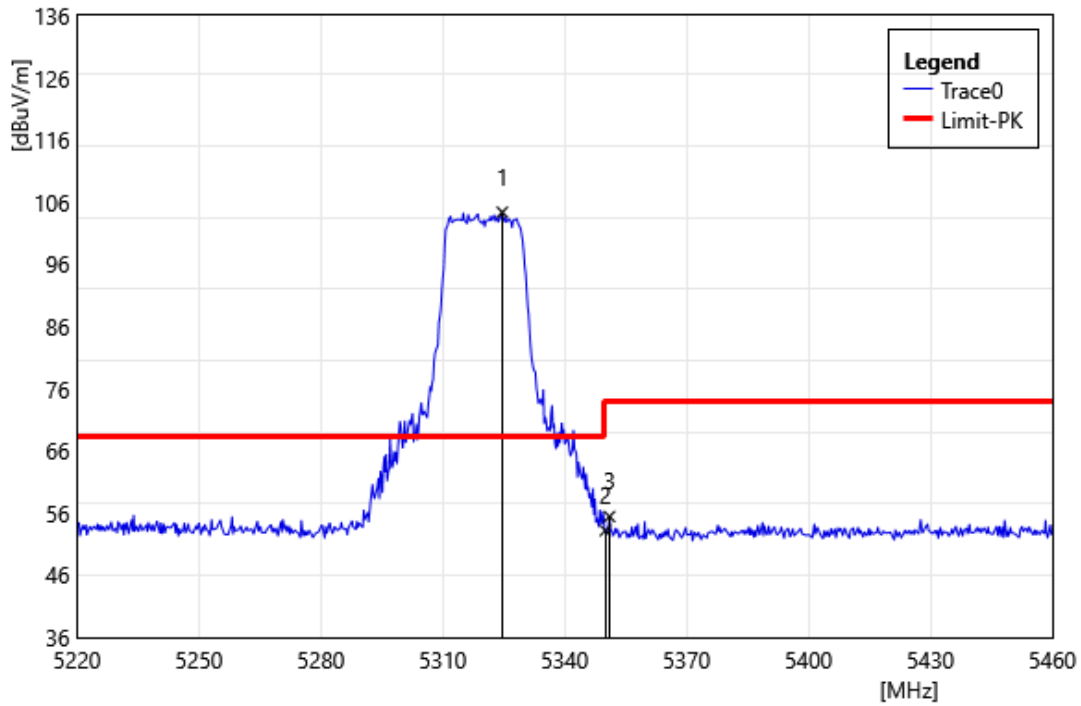


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5324.64	103.12	1.26	104.38	68.20	36.18	PEAK
2	5350.00	51.95	1.23	53.18	74.00	-20.82	PEAK
3	5351.04	54.19	1.25	55.44	74.00	-18.56	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5320 MHz		
Polarization:	Vertical		
Remark:			

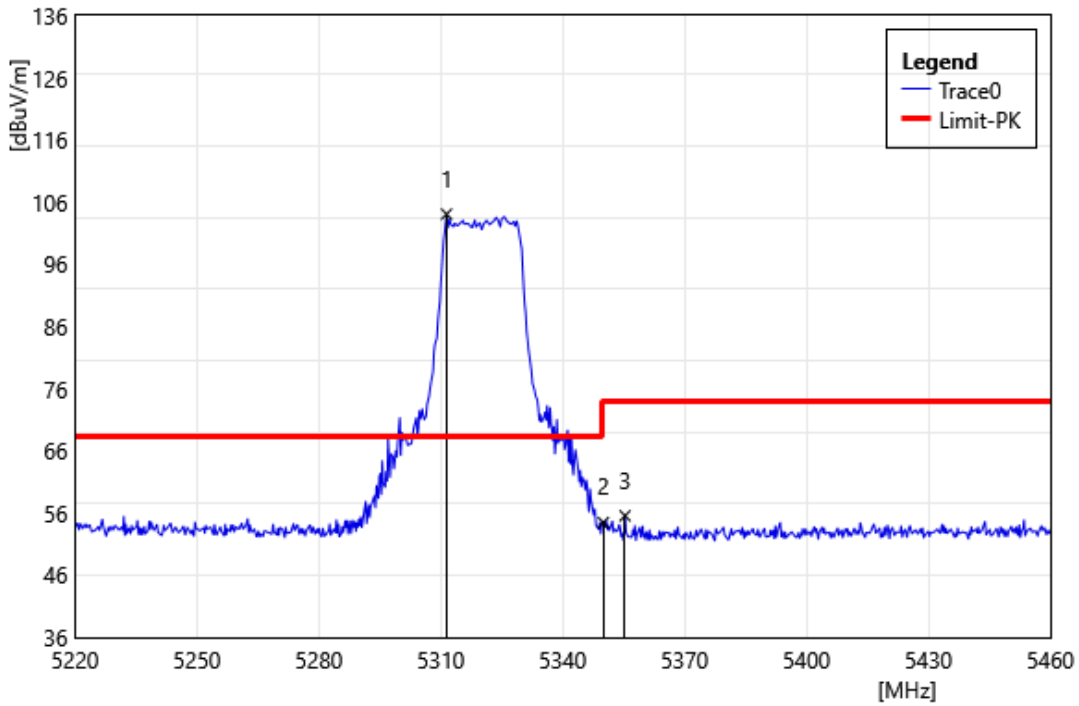


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5311.44	102.78	1.29	104.08	68.20	35.88	PEAK
2	5350.00	53.24	1.23	54.47	74.00	-19.53	PEAK
3	5355.36	54.28	1.28	55.56	74.00	-18.45	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5500 MHz		
Polarization:	Horizontal		
Remark:			

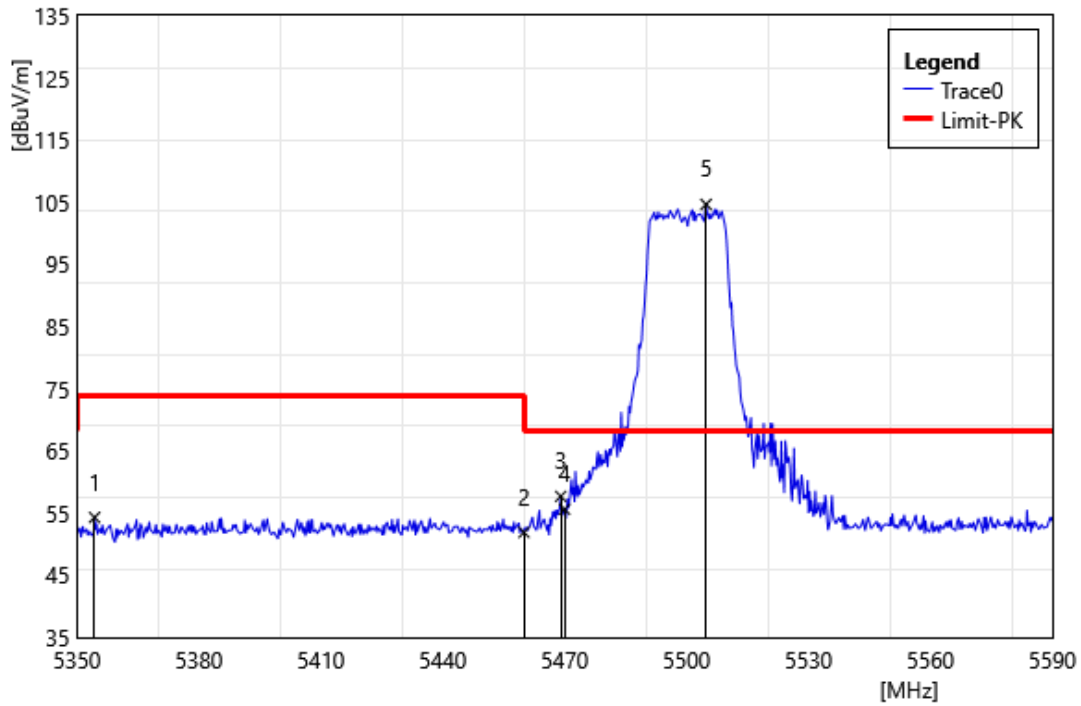

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5354.32	53.03	1.27	54.30	74.00	-19.70	PEAK
2	5460.00	50.10	1.79	51.89	74.00	-22.11	PEAK
3	5469.04	55.84	1.84	57.68	68.20	-10.52	PEAK
4	5470.00	53.78	1.84	55.62	68.20	-12.58	PEAK
5	5504.80	102.65	2.00	104.65	68.20	36.45	PEAK


Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5500 MHz		
Polarization:	Vertical		
Remark:			

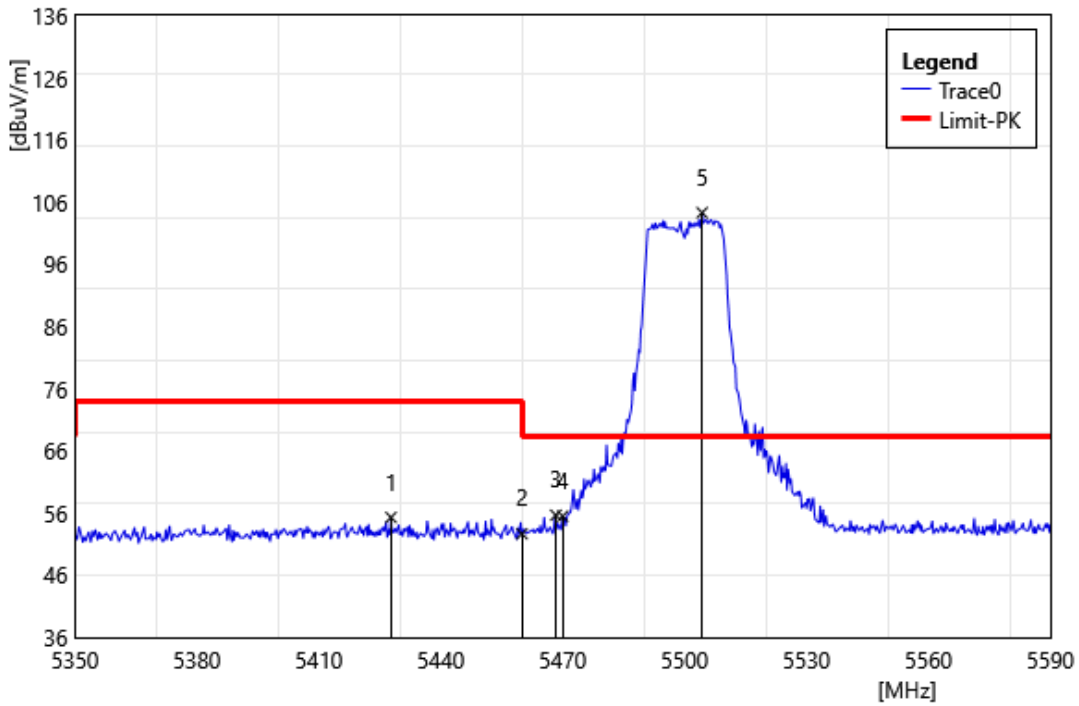

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5427.76	53.60	1.70	55.30	74.00	-18.70	PEAK
2	5460.00	50.87	1.79	52.66	74.00	-21.34	PEAK
3	5468.32	53.84	1.83	55.67	68.20	-12.53	PEAK
4	5470.00	53.67	1.84	55.51	68.20	-12.69	PEAK
5	5504.32	102.31	2.00	104.31	68.20	36.11	PEAK




Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5700 MHz		
Polarization:	Horizontal		
Remark:			

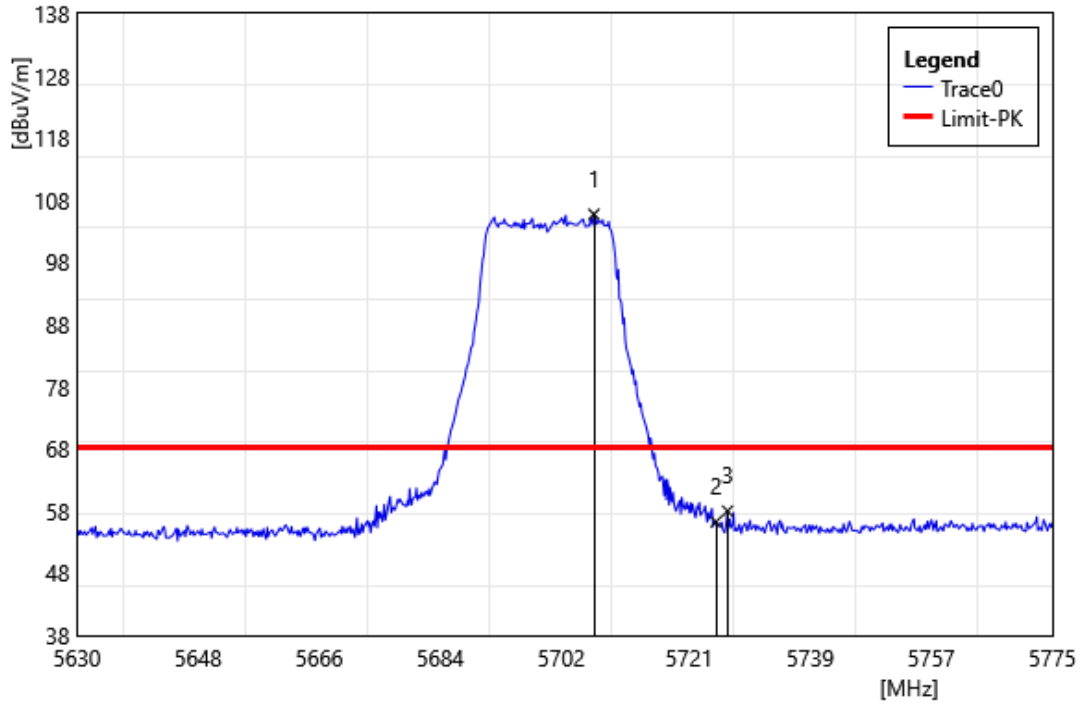


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5706.85	103.02	2.71	105.73	68.20	37.53	PEAK
2	5725.00	53.35	2.92	56.27	68.20	-11.93	PEAK
3	5726.72	55.05	2.95	58.00	68.20	-10.20	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5700 MHz		
Polarization:	Vertical		
Remark:			

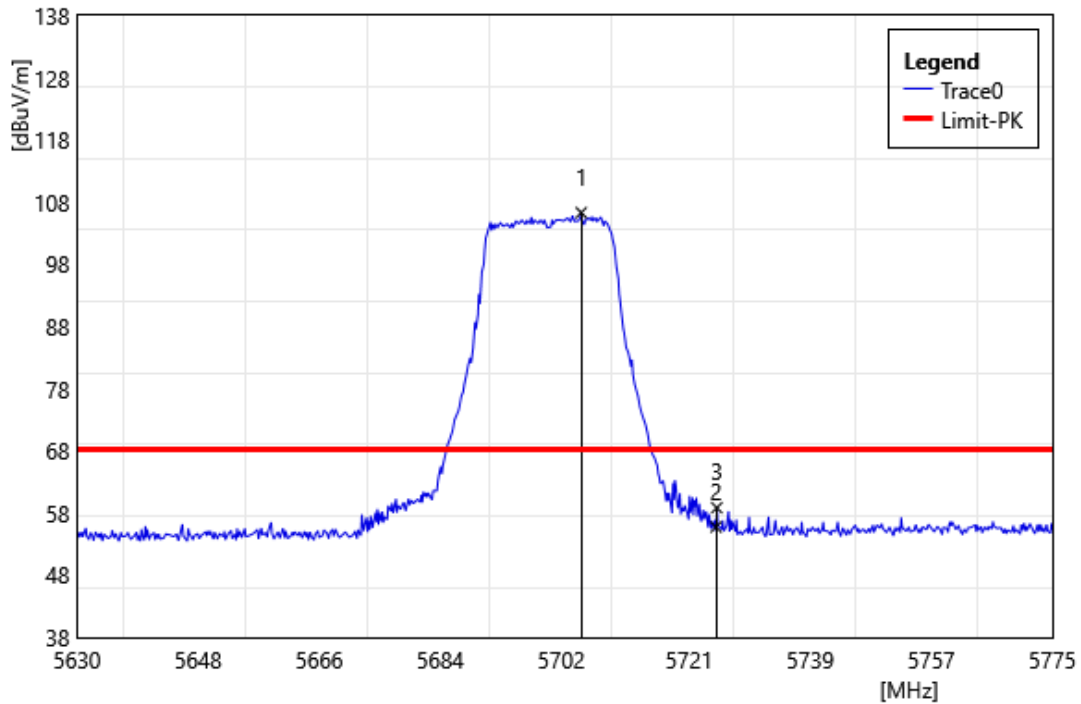


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5704.97	103.63	2.69	106.32	68.20	38.12	PEAK
2	5725.00	52.83	2.92	55.75	68.20	-12.45	PEAK
3	5725.12	55.94	2.92	58.86	68.20	-9.34	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5745 MHz		
Polarization:	Horizontal		
Remark:			

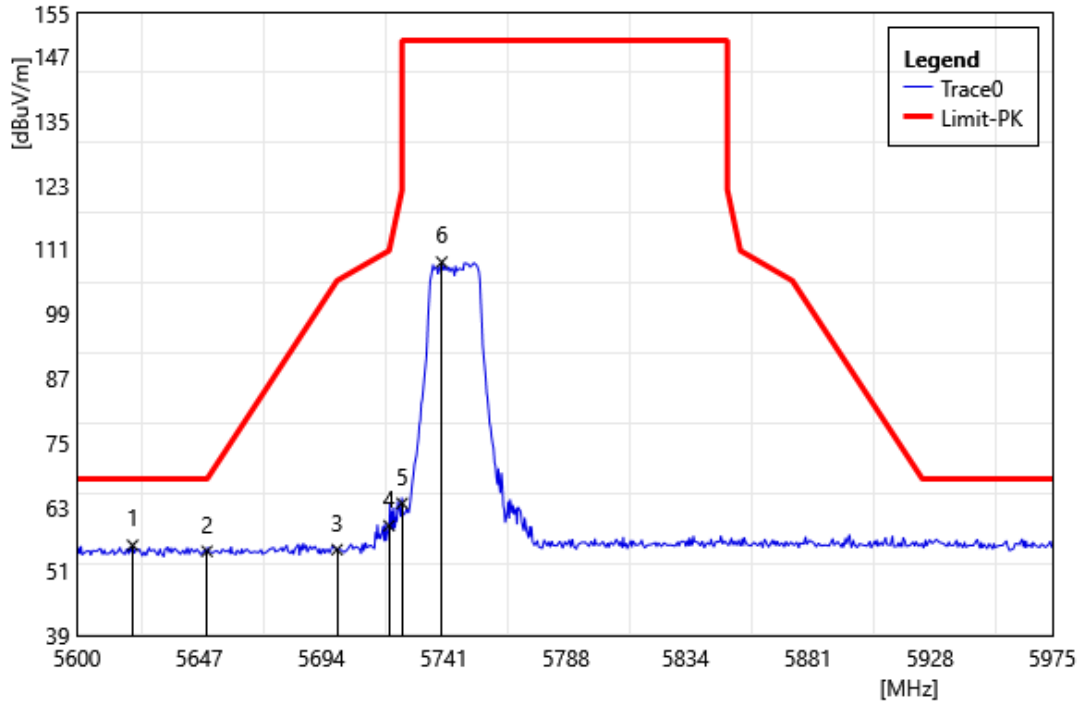


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5621.38	53.37	2.44	55.81	68.20	-12.39	PEAK
2	5650.00	52.19	2.51	54.70	68.20	-13.50	PEAK
3	5700.00	52.37	2.63	55.00	105.20	-50.20	PEAK
4	5720.00	56.61	2.86	59.47	110.80	-51.33	PEAK
5	5725.00	60.72	2.92	63.64	150.00	-86.36	PEAK
6	5740.25	105.54	3.10	108.64	150.00	-41.36	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5745 MHz		
Polarization:	Vertical		
Remark:			

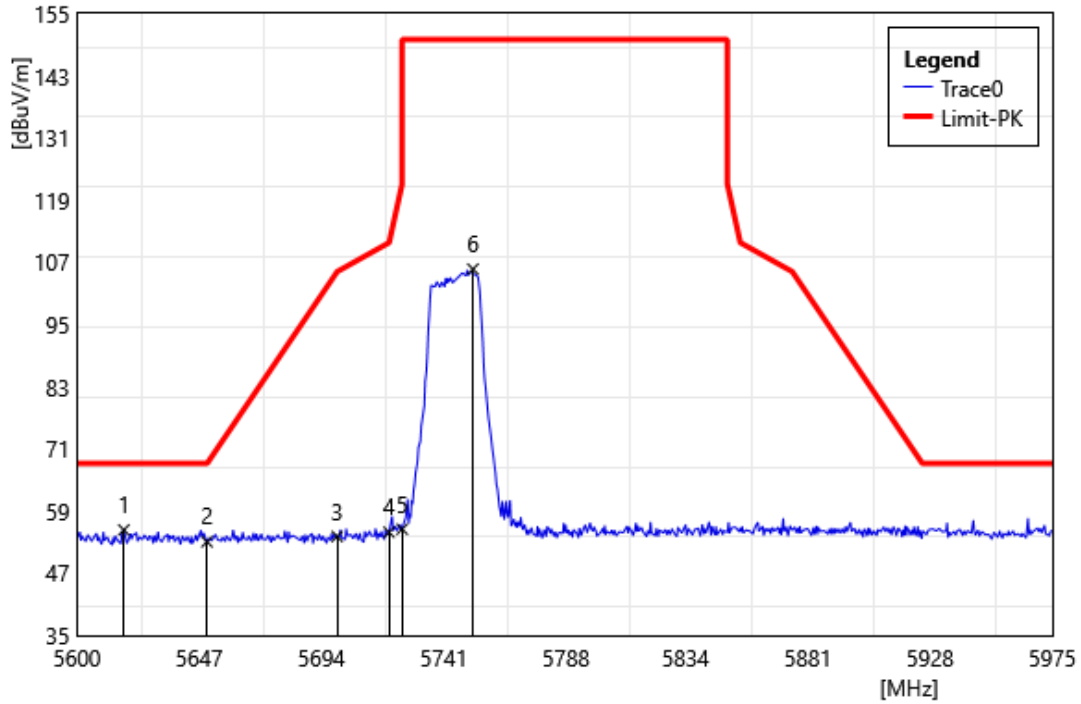


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5618.00	52.93	2.44	55.37	68.20	-12.83	PEAK
2	5650.00	50.56	2.51	53.07	68.20	-15.13	PEAK
3	5700.00	51.47	2.63	54.10	105.20	-51.10	PEAK
4	5720.00	52.06	2.86	54.92	110.80	-55.88	PEAK
5	5725.00	52.59	2.92	55.51	150.00	-94.49	PEAK
6	5752.25	102.48	3.23	105.71	150.00	-44.30	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5825 MHz		
Polarization:	Horizontal		
Remark:			

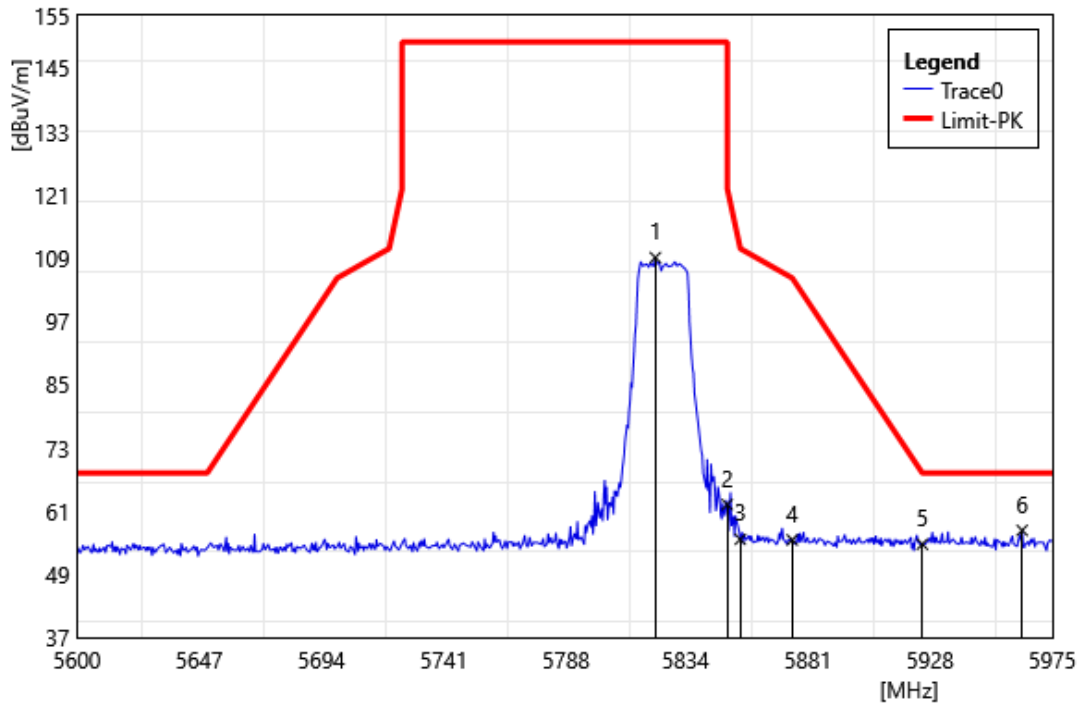


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5822.38	105.68	3.42	109.10	150.00	-40.90	PEAK
2	5850.00	58.90	3.31	62.21	122.20	-59.99	PEAK
3	5855.00	52.33	3.30	55.63	110.80	-55.17	PEAK
4	5875.00	52.24	3.26	55.50	105.20	-49.70	PEAK
5	5925.00	51.54	3.15	54.69	68.20	-13.51	PEAK
6	5963.38	54.23	3.08	57.31	68.20	-10.89	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5825 MHz		
Polarization:	Vertical		
Remark:			

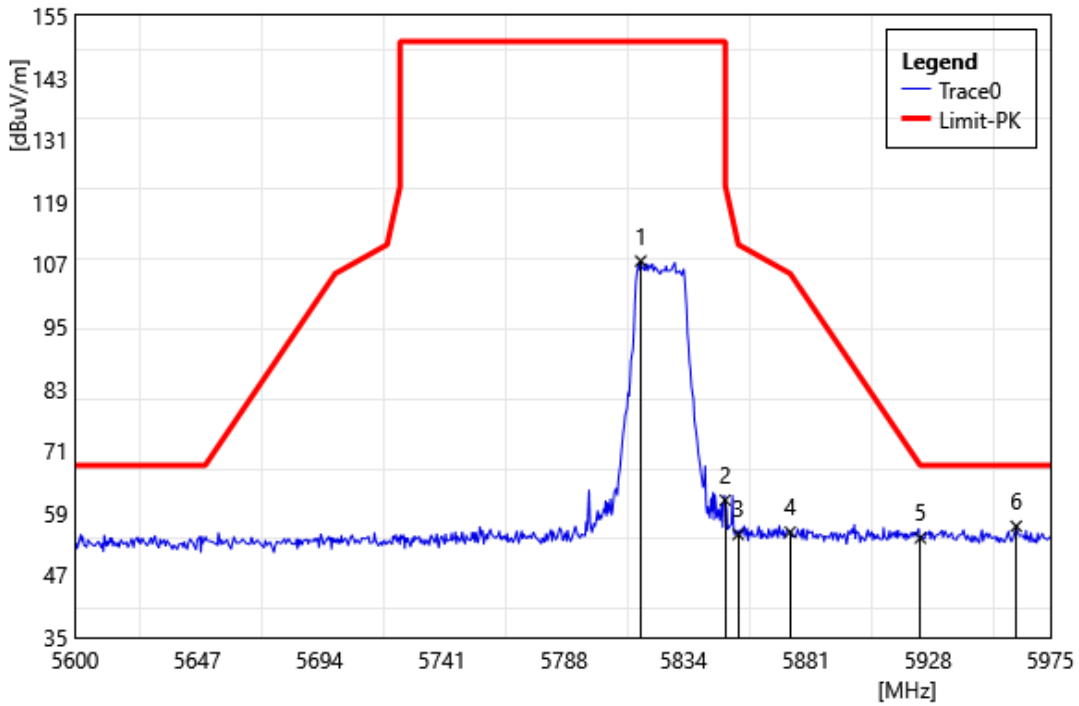


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5817.50	104.21	3.43	107.64	150.00	-42.36	PEAK
2	5850.00	58.17	3.31	61.48	122.20	-60.72	PEAK
3	5855.00	51.59	3.30	54.89	110.80	-55.91	PEAK
4	5875.00	52.08	3.26	55.34	105.20	-49.86	PEAK
5	5925.00	51.03	3.15	54.18	68.20	-14.02	PEAK
6	5961.88	53.36	3.09	56.45	68.20	-11.75	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190 MHz		
Polarization:	Horizontal		
Remark:			

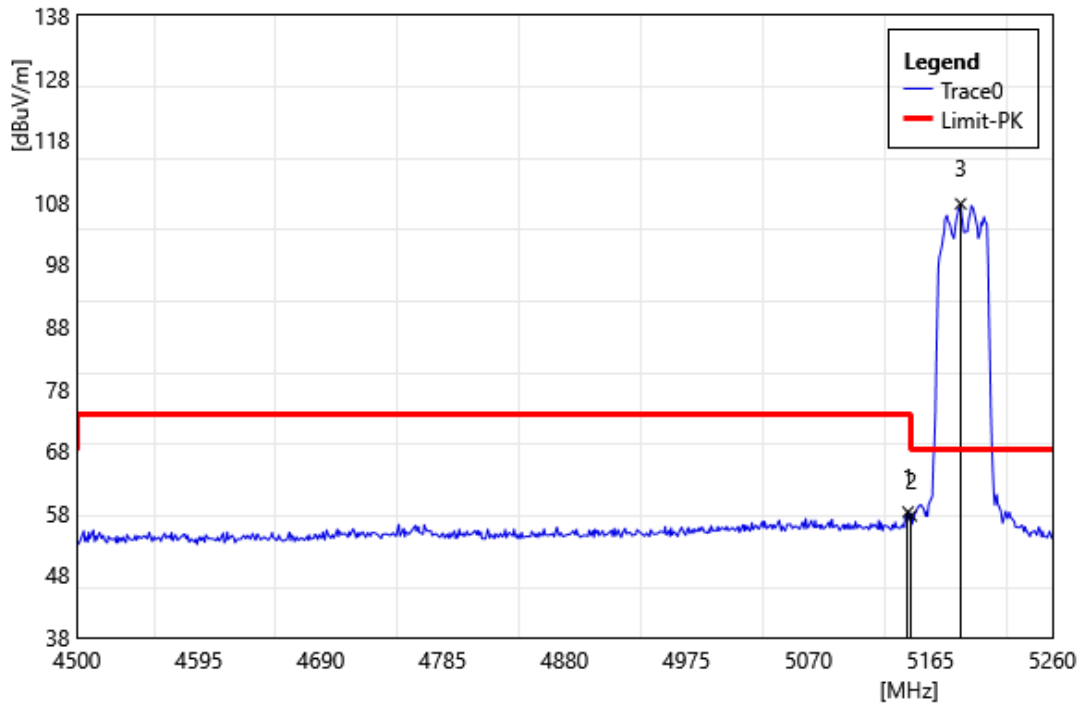

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	56.53	1.65	58.18	74.00	-15.82	PEAK
2	5150.00	55.92	1.64	57.56	74.00	-16.44	PEAK
3	5188.56	105.98	1.75	107.73	68.20	39.53	PEAK


Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190 MHz		
Polarization:	Vertical		
Remark:			

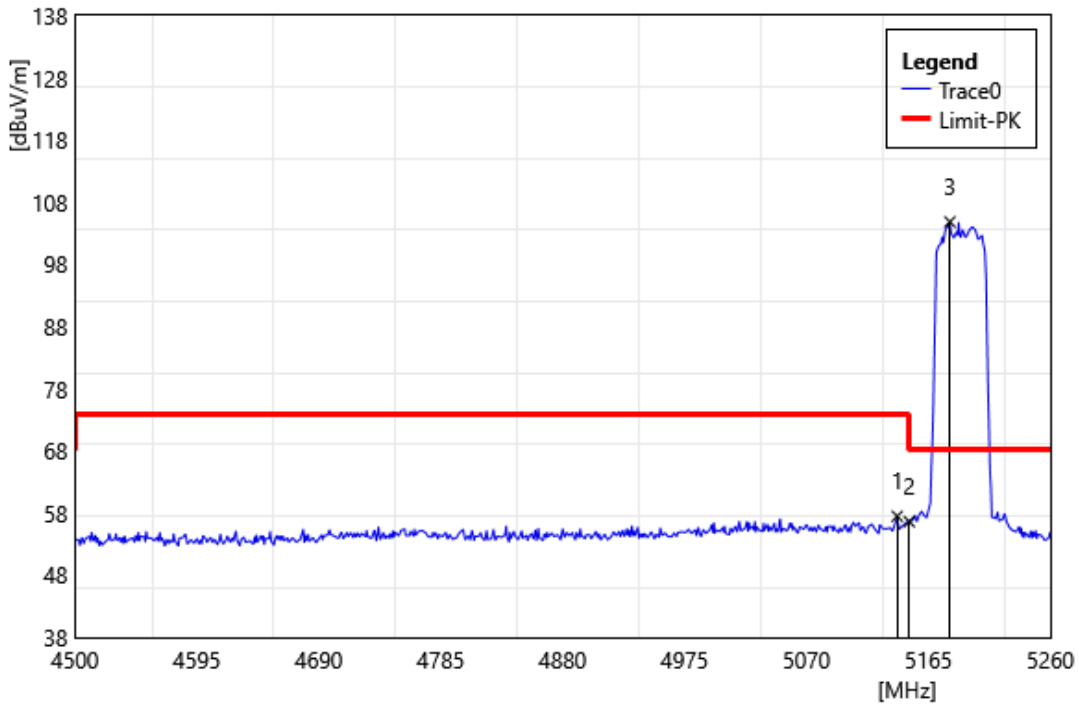

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5140.68	55.83	1.66	57.49	74.00	-16.51	PEAK
2	5150.00	54.98	1.64	56.62	74.00	-17.38	PEAK
3	5181.72	103.09	1.73	104.82	68.20	36.62	PEAK




Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5310 MHz		
Polarization:	Horizontal		
Remark:			

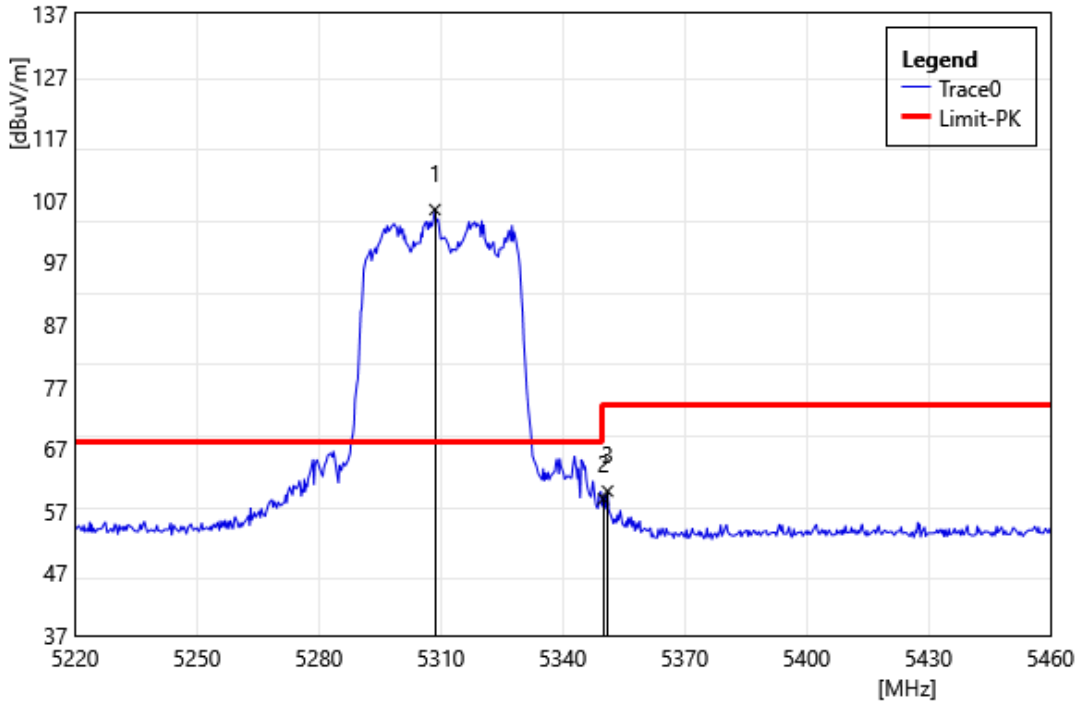


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5308.56	104.19	1.29	105.48	68.20	37.28	PEAK
2	5350.00	57.71	1.23	58.94	74.00	-15.06	PEAK
3	5351.04	58.96	1.25	60.21	74.00	-13.79	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5310 MHz		
Polarization:	Vertical		
Remark:			

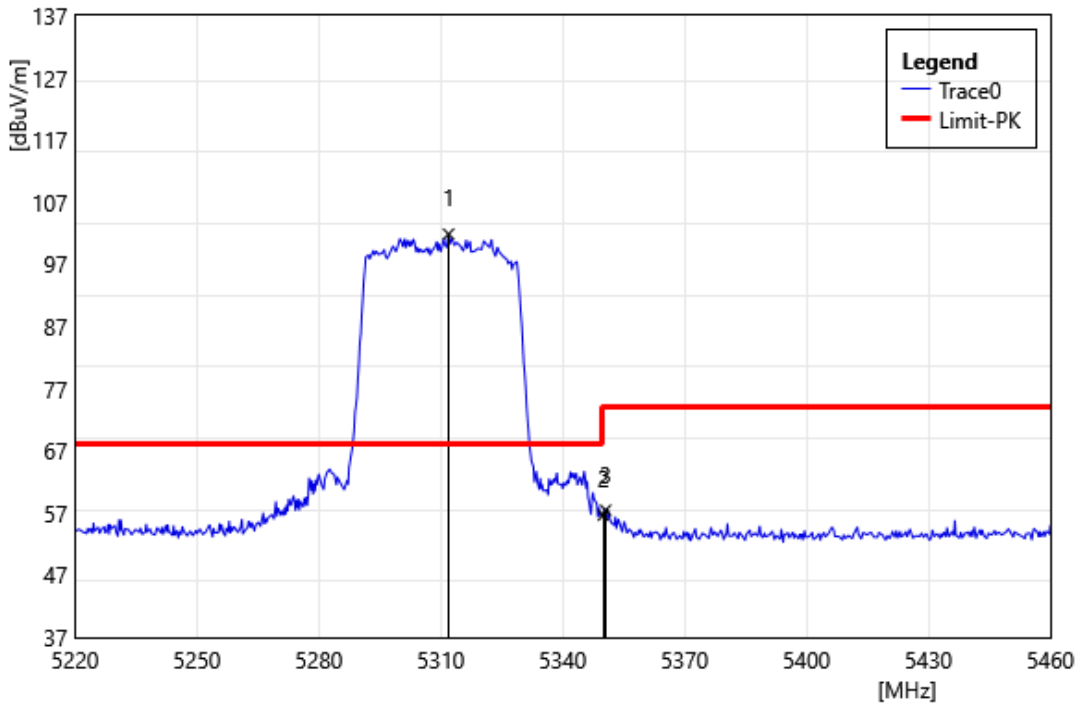


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5311.92	100.58	1.29	101.87	68.20	33.67	PEAK
2	5350.00	55.41	1.23	56.64	74.00	-17.36	PEAK
3	5350.56	56.20	1.24	57.45	74.00	-16.56	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5510 MHz		
Polarization:	Horizontal		
Remark:			

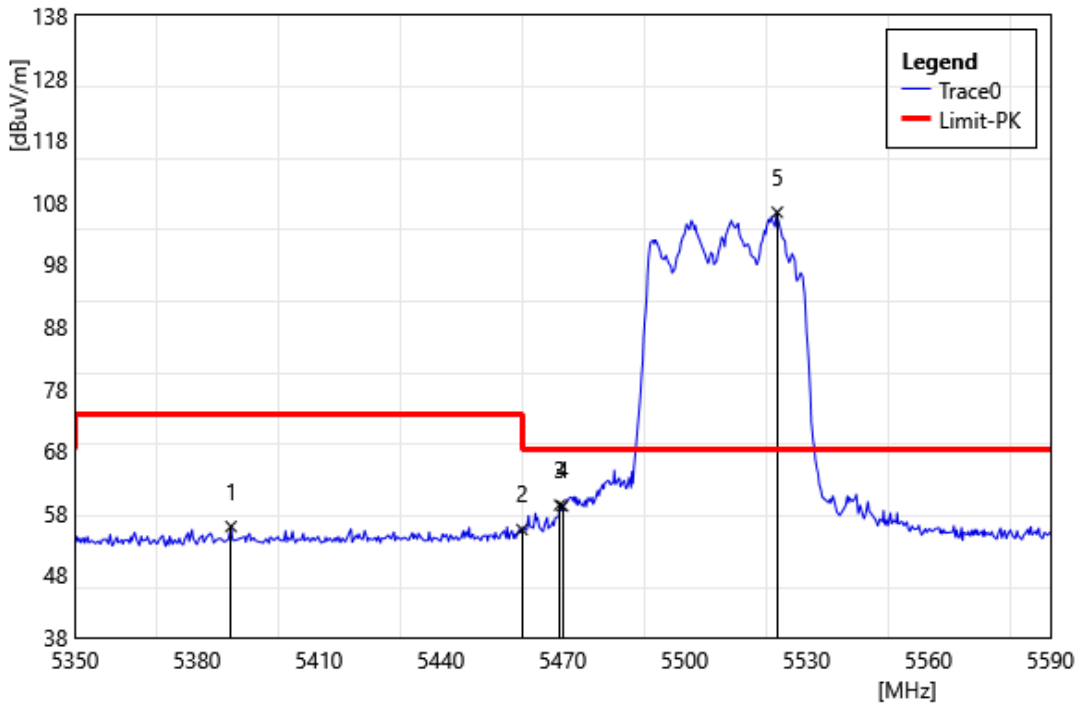


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5388.40	54.25	1.57	55.82	74.00	-18.18	PEAK
2	5460.00	53.55	1.79	55.34	74.00	-18.66	PEAK
3	5469.28	57.44	1.84	59.28	68.20	-8.92	PEAK
4	5470.00	57.29	1.84	59.13	68.20	-9.07	PEAK
5	5522.80	104.31	2.06	106.37	68.20	38.17	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5510 MHz		
Polarization:	Vertical		
Remark:			

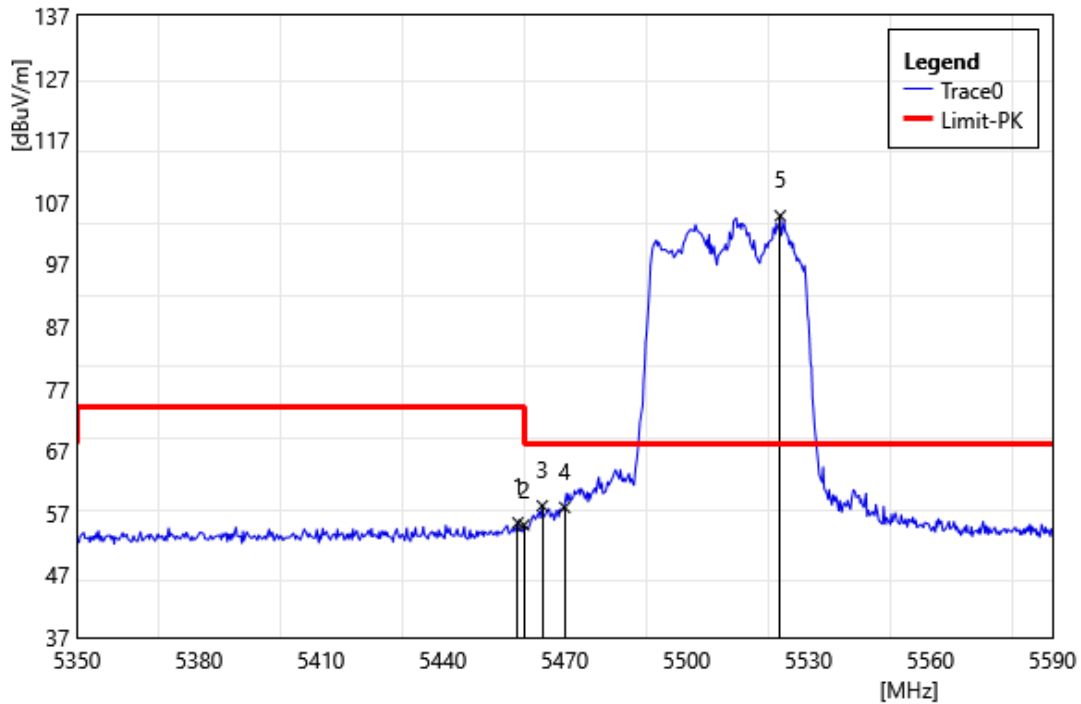


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.48	53.66	1.77	55.43	74.00	-18.57	PEAK
2	5460.00	53.30	1.79	55.09	74.00	-18.91	PEAK
3	5464.48	56.36	1.81	58.17	68.20	-10.03	PEAK
4	5470.00	56.07	1.84	57.91	68.20	-10.29	PEAK
5	5523.04	102.76	2.06	104.82	68.20	36.62	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5670 MHz		
Polarization:	Horizontal		
Remark:			

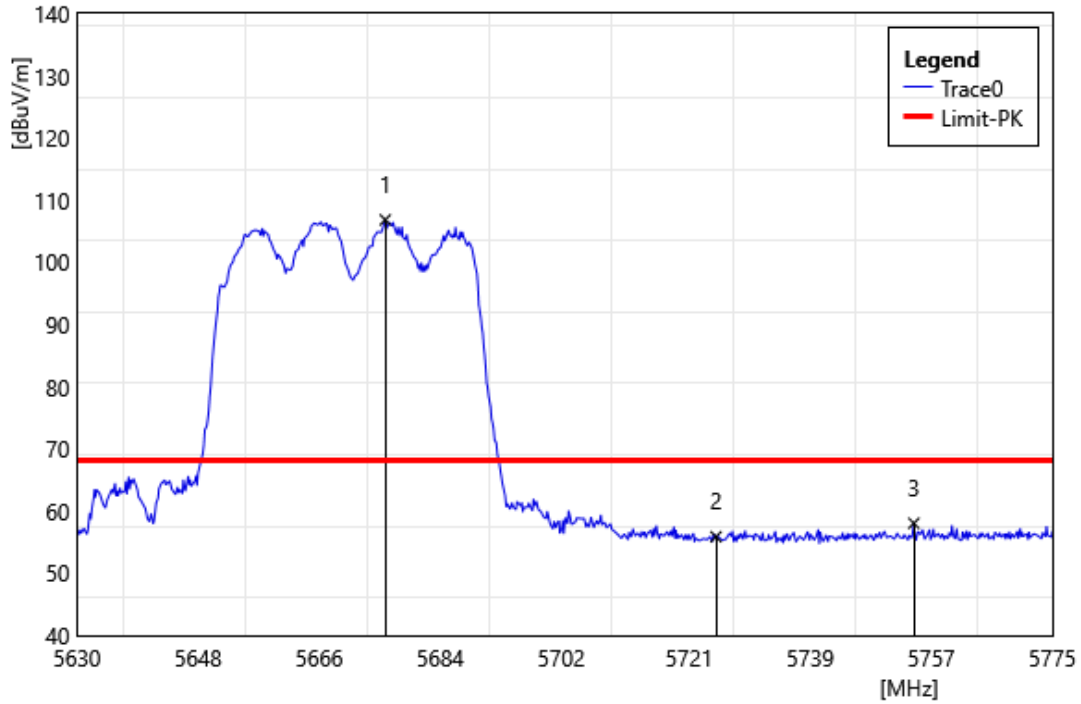


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5675.82	104.27	2.57	106.84	68.20	38.64	PEAK
2	5725.00	52.95	2.92	55.87	68.20	-12.33	PEAK
3	5754.41	54.79	3.24	58.03	68.20	-10.17	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5670 MHz		
Polarization:	Vertical		
Remark:			

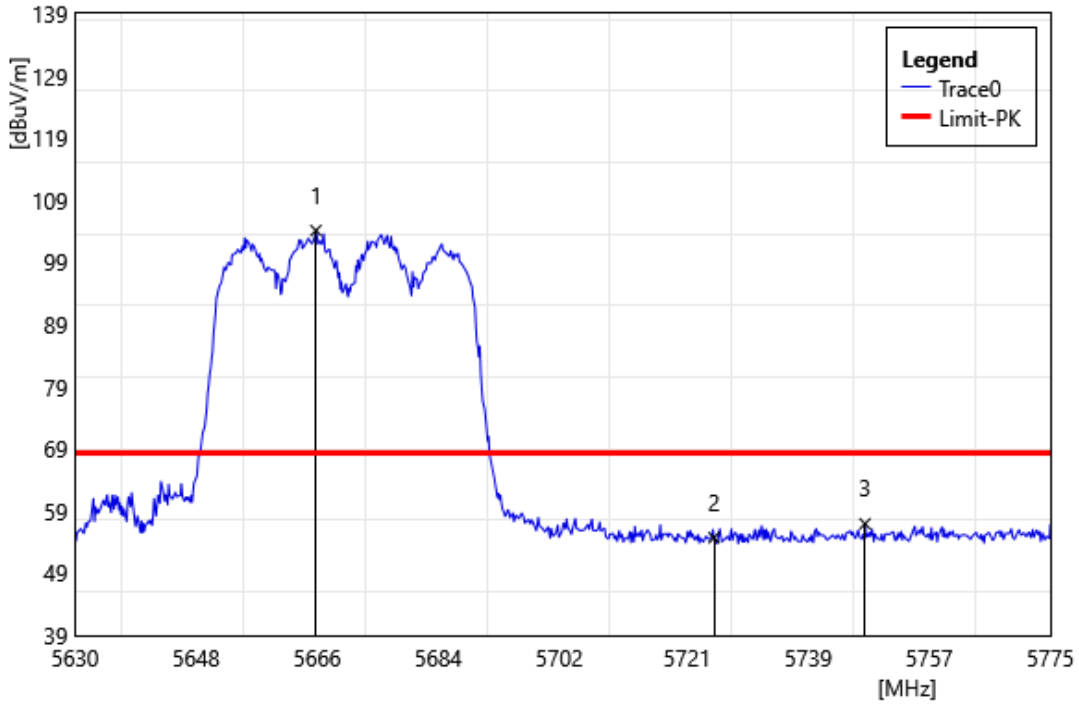


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5665.82	101.57	2.54	104.11	68.20	35.91	PEAK
2	5725.00	51.80	2.92	54.72	68.20	-13.48	PEAK
3	5747.45	53.78	3.18	56.97	68.20	-11.24	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5755 MHz		
Polarization:	Horizontal		
Remark:			

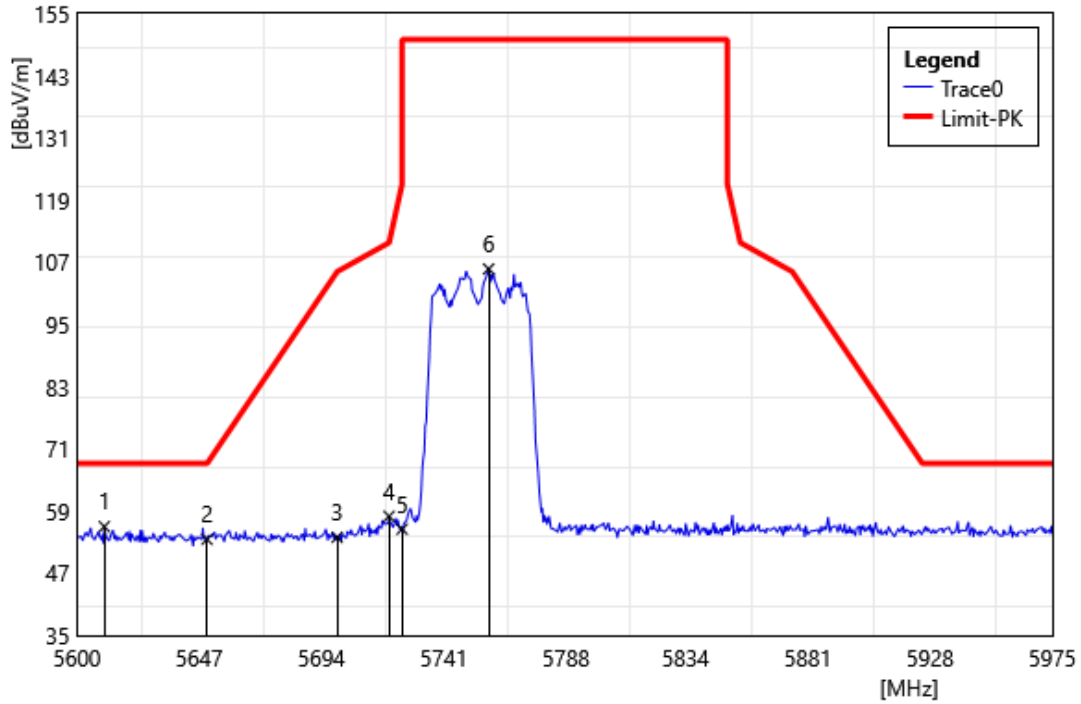

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5610.50	53.57	2.42	55.99	68.20	-12.21	PEAK
2	5650.00	51.03	2.51	53.54	68.20	-14.66	PEAK
3	5700.00	51.30	2.63	53.93	105.20	-51.27	PEAK
4	5720.00	55.14	2.86	58.00	110.80	-52.80	PEAK
5	5725.00	52.60	2.92	55.52	150.00	-94.48	PEAK
6	5758.25	102.46	3.26	105.72	150.00	-44.28	PEAK


Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5755 MHz		
Polarization:	Vertical		
Remark:			

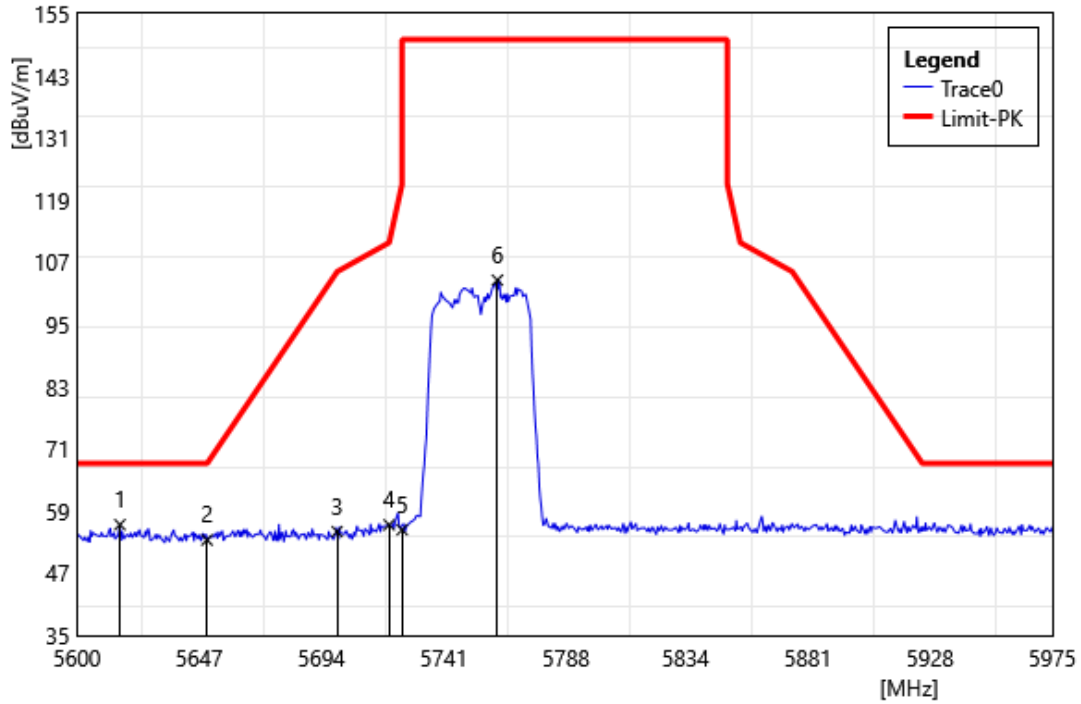

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5616.50	53.95	2.43	56.38	68.20	-11.82	PEAK
2	5650.00	50.91	2.51	53.42	68.20	-14.78	PEAK
3	5700.00	52.41	2.63	55.04	105.20	-50.16	PEAK
4	5720.00	53.47	2.86	56.33	110.80	-54.47	PEAK
5	5725.00	52.48	2.92	55.40	150.00	-94.60	PEAK
6	5761.63	100.29	3.28	103.57	150.00	-46.43	PEAK




Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5795 MHz		
Polarization:	Horizontal		
Remark:			

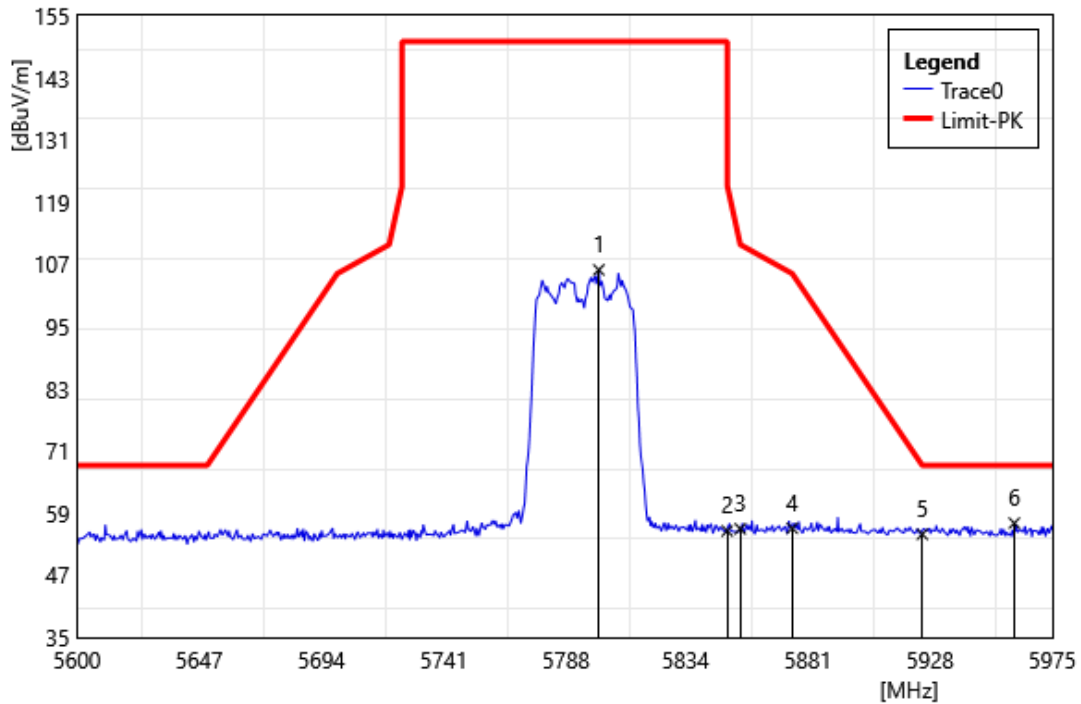


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5800.63	102.44	3.50	105.94	150.00	-44.06	PEAK
2	5850.00	52.24	3.31	55.55	122.20	-66.65	PEAK
3	5855.00	52.66	3.30	55.96	110.80	-54.84	PEAK
4	5875.00	52.80	3.26	56.06	105.20	-49.14	PEAK
5	5925.00	51.76	3.15	54.91	68.20	-13.29	PEAK
6	5960.38	53.97	3.09	57.06	68.20	-11.14	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5795 MHz		
Polarization:	Vertical		
Remark:			

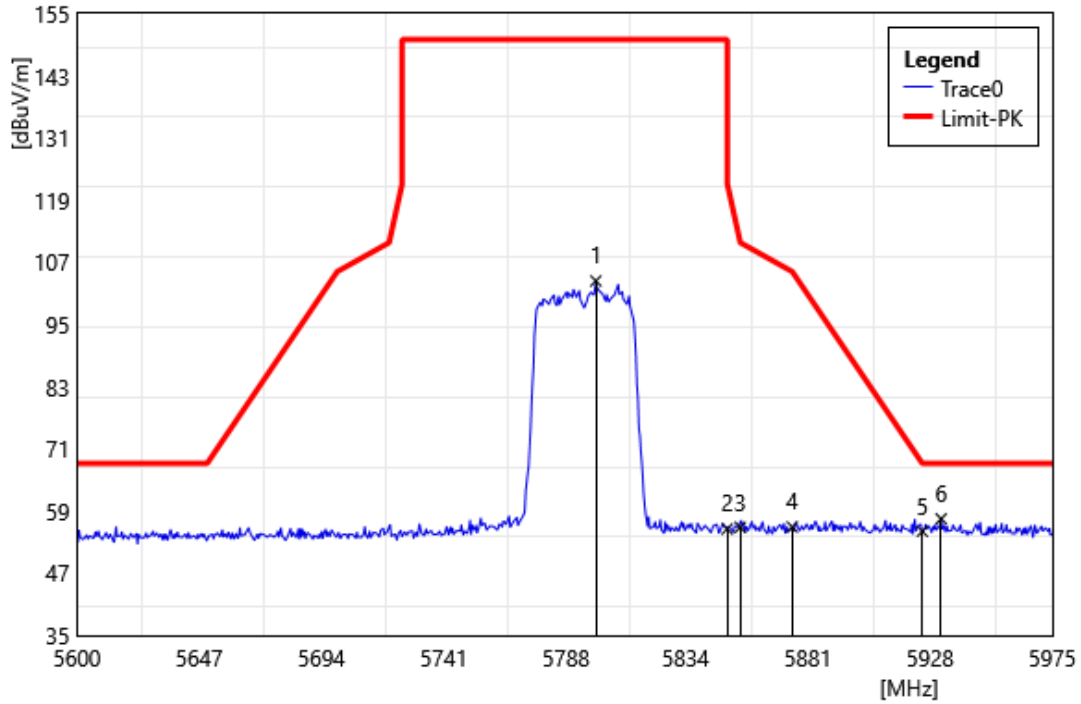


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5799.50	99.92	3.50	103.42	150.00	-46.58	PEAK
2	5850.00	52.24	3.31	55.55	122.20	-66.65	PEAK
3	5855.00	52.57	3.30	55.87	110.80	-54.93	PEAK
4	5875.00	52.66	3.26	55.92	105.20	-49.28	PEAK
5	5925.00	51.96	3.15	55.11	68.20	-13.09	PEAK
6	5932.25	54.37	3.13	57.50	68.20	-10.70	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210 MHz		
Polarization:	Horizontal		
Remark:			

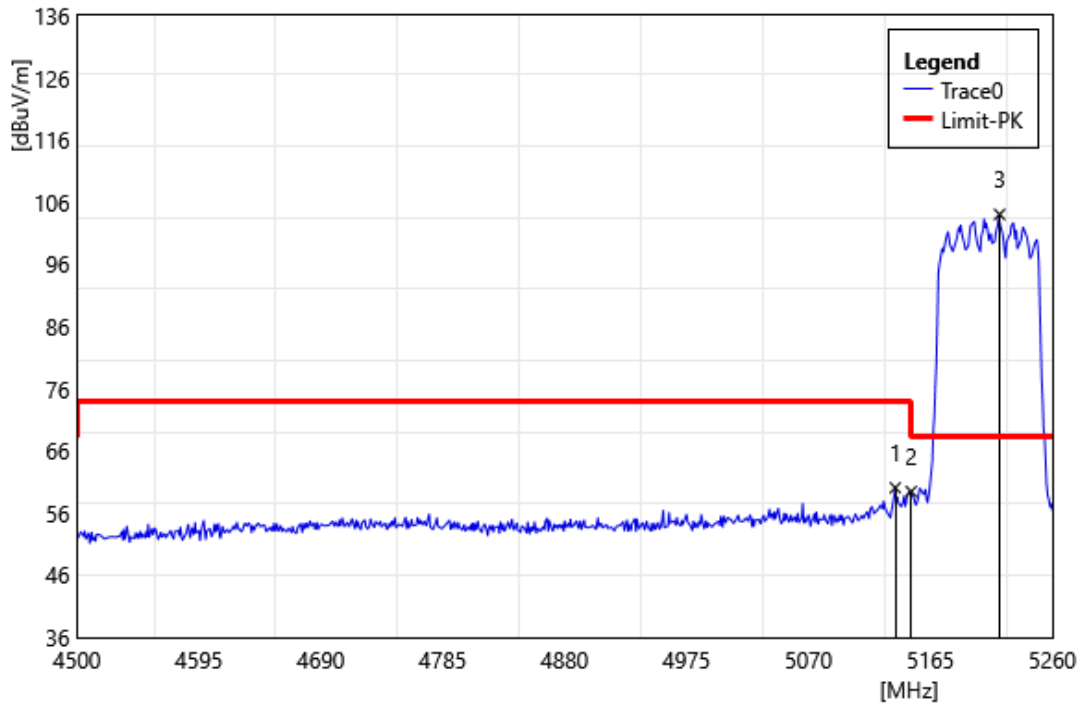

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5137.64	58.40	1.66	60.06	74.00	-13.94	PEAK
2	5150.00	57.82	1.64	59.46	74.00	-14.54	PEAK
3	5218.96	102.36	1.67	104.03	68.20	35.83	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210 MHz		
Polarization:	Vertical		
Remark:			

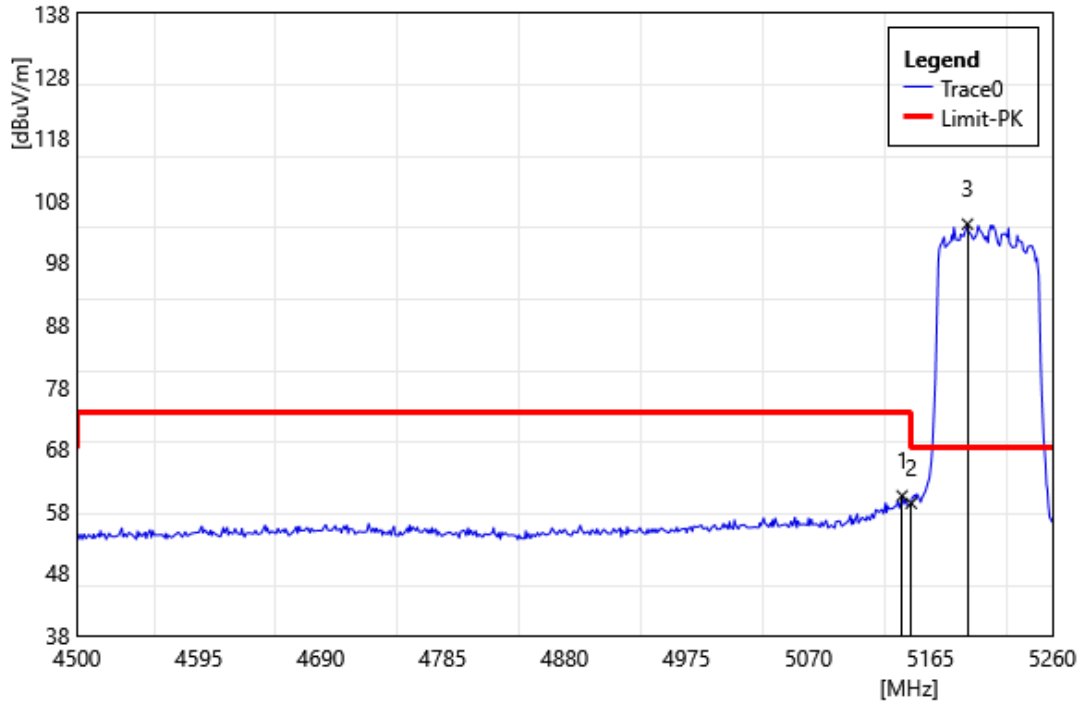

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.96	58.79	1.65	60.44	74.00	-13.56	PEAK
2	5150.00	57.61	1.64	59.25	74.00	-14.75	PEAK
3	5193.88	102.38	1.77	104.15	68.20	35.95	PEAK