

**FCC TEST REPORT****For****Body Worn Camera****Trade Name: Getac****Model: BC-03**

Issued to

**Getac Technology Corp.****5F, Building A2, No.209, Sec.1, Nangang Rd., Nangang Dist., Taipei City 11568,  
Taiwan.**

Issued by

**Compliance Certification Services Inc.****No.11, Wugong 6th Rd., Wugu Dist.,  
New Taipei City 24891,  
Taiwan. (R.O.C.)****Issued Date: 2019/05/17**

**Note:** *This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies. The test results in the report only apply to the tested sample.*

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

### Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	2019/05/17	Initial Issue	ALL	Stella Chang

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

## Table of Contents

<b>1</b>	<b>Certificate of Compliance (SAR Evaluation)</b> .....	<b>5</b>
<b>2</b>	<b>Description of Equipment Under Test</b> .....	<b>6</b>
2.1	Summary of Highest SAR Values .....	7
<b>3</b>	<b>Requirements for Compliance Testing Defined</b> .....	<b>8</b>
3.1	Requirements for Compliance Testing Defined by the FCC .....	8
<b>4</b>	<b>Dosimetric Assessment System</b> .....	<b>9</b>
4.1	Measurement System Diagram .....	10
4.2	System Components .....	11
<b>5</b>	<b>Evaluation Procedures</b> .....	<b>14</b>
<b>6</b>	<b>SAR Measurement Procedures</b> .....	<b>16</b>
6.1	Normal SAR Test Procedure .....	16
<b>7</b>	<b>Measurement Uncertainty</b> .....	<b>18</b>
<b>8</b>	<b>Device Under Test</b> .....	<b>19</b>
8.1	Wireless Technologies .....	19
8.2	Maximum Tune-up Power .....	20
8.3	Simultaneous Transmission .....	22
<b>9</b>	<b>General LTE SAR Test and Reporting Considerations</b> .....	<b>23</b>
<b>10</b>	<b>Power Reduction by Proximity Sensing</b> .....	<b>25</b>
10.1	Procedures for determining proximity sensor triggering distances .....	25
10.2	Procedures for determining antenna and proximity sensor coverage .....	26
10.3	Proximity Sensor Status Table of trigger distance .....	27
10.4	Tilt angle influences to proximity sensor triggering .....	29
10.5	Power Reduction per Air-interface .....	30
10.6	Proximity Sensor Coverage Area .....	35
<b>11</b>	<b>RF Output Power Measurement</b> .....	<b>36</b>
11.1	WCDMA Power Measurement Requirements .....	36
11.2	LTE Power Measurement Requirements .....	36
11.2.1	WCDMA Band .....	38
11.2.2	LTE Band .....	41
11.3	Wi-Fi (2.4GHz Band) .....	61
11.4	Wi-Fi (5GHz Band) .....	62
11.5	Bluetooth .....	65
<b>12</b>	<b>Summary of SAR Test Exclusion Configurations</b> .....	<b>66</b>

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190115W01-SF

12.1	Standalone SAR Test Exclusion Calculations .....	66
12.1.1	SAR Exclusion Calculations for Wi Fi Antenna < 50mm from the User .....	67
12.1.2	SAR Exclusion Calculations for Wi-Fi Antenna > 50mm from the User .....	69
12.1.3	SAR Required Test Configuration .....	71
<b>13</b>	<b>Exposure Limit .....</b>	<b>72</b>
<b>14</b>	<b>Tissue Dielectric Properties.....</b>	<b>73</b>
14.1	Test Liquid Confirmation.....	73
14.2	Typical Composition of Ingredients for Liquid Tissue Phantoms.....	74
14.3	Simulating Liquids Parameter Check Results .....	75
<b>15</b>	<b>Measurement Uncertainty.....</b>	<b>76</b>
<b>16</b>	<b>System Performance Check.....</b>	<b>77</b>
16.1	System Performance Check Results .....	78
<b>17</b>	<b>SAR Measurements Results .....</b>	<b>79</b>
<b>18</b>	<b>Simultaneous Transmission SAR Analysis.....</b>	<b>88</b>
18.1	Sum of the SAR for Simultaneous Transmission Analysis .....	88
18.1.1	Sum of the SAR for WLAN & WWAN.....	88
<b>19</b>	<b>Equipment List &amp; Calibration Status .....</b>	<b>89</b>
<b>20</b>	<b>Facilities .....</b>	<b>90</b>
<b>21</b>	<b>Reference .....</b>	<b>90</b>
<b>22</b>	<b>Attachments.....</b>	<b>91</b>

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190115W01-SF

# 1 Certificate of Compliance (SAR Evaluation)

**Applicant** Getac Technology Corp  
5F, Building A, No.209, Sec.1, Nangang Rd., Nangang Dist., Taipei City 11568, Taiwan.

**Equipment Under Test:** Body Worn Camera

**Trade Name:** Getac

**Model Number:** BC-03

**Date of Test:** May 6 ~ May 8, 2019

**Device Category:** Portable Devices

**Exposure Category:** General Population/Uncontrolled Exposure

Applicable Standards	
FCC	<ul style="list-style-type: none"> <li>● IEEE 1528 2013</li> <li>● KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04</li> <li>● KDB 865664 D02 RF Exposure Reporting v01r02</li> <li>● KDB 447498 D01 General RF Exposure Guidance v06</li> <li>● KDB 616217 D04 SAR for laptop and tablets v01r02</li> <li>● KDB 248227 D01 SAR Measurement Guidance for 802.11 Transmitters v02r02</li> <li>● KDB 941225 D05 SAR for LTE Device v02r05</li> </ul>
Limit	
1.6 W/kg	
Test Result	
Pass	

The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Tested by:

Alex Wu  
Section Manager  
Compliance Certification Services Inc.

Stella Chang  
SAR Engineer  
Compliance Certification Services Inc.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190115W01-SF

## 2 Description of Equipment Under Test

Product	Body Worn Camera		
Trade Name	Getac		
Model Number	BC-03		
WWAN Module	Sierra	Model:	WP7603
Transmitter	UMTS & LTE		
Modulation Technique	Operating Mode	TX Freq Range (MHz)	
	WCDMA Band II	1850 ~ 1910	
	WCDMA Band IV	1710 ~ 1755	
	WCDMA Band V	824 ~ 849	
	LTE Band 2	1850 ~ 1910	
	LTE Band 4	1710 ~ 1755	
	LTE Band 5	824 ~ 849	
WWAN Antenna Specification	Brand name	Getac	
	Parts Number	Main:ANTA0ZV11661LTEA2	
		Aux:ANTA0ZV11661LTEA3	
Type	PIFA		
Collocated Transmitter	AMPAK	Model:	AP-6255
	Wi-Fi & Bluetooth		
Collocated Transmitter Modulation Technique	Bluetooth:GFSK for 1Mbps; $\pi/4$ -DQPSK for 2Mbps;8DPSK for 3Mbps		
	802.11a: Orthogonal Frequency Division Multiplexing (OFDM)		
	802.11b: Direct Sequence Spread Spectrum(DSSS)		
	802.11g: Orthogonal Frequency Division Multiplexing (OFDM)		
	802.11ac: Orthogonal Frequency Division Multiplexing (OFDM)		
WLAN Antenna Specification	Brand name	Getac	
	Parts Number	Main:ANTA0ZV11661WLAN1	
	Type	PIFA	
Rechargeable Li-polymer Battery-alternate	Brand : Getac Model : BP151P3450P Rating : 3.6V/13Wh		

**Note:**

1. The sample selected for test was prototype that representative to production product and was provided by manufacturer.

**2.1 Summary of Highest SAR Values**

Results for highest reported SAR values for each frequency band and mode

Technology/Band	Test configuration	Mode	Highest Reported 1g-SAR (W/kg)
WCDMA BAND II	Edge 2	RMC 12.2K bps	1.144
WCDMA BAND IV	Edge 2	RMC 12.2K bps	1.176
WCDMA BAND V	Rear	RMC 12.2K bps	0.302
LTE BAND 2	Edge 2	QPSK	1.12
LTE BAND 4	Edge 2	QPSK	1.184
LTE BAND 5	Rear	QPSK	0.295
LTE BAND 12	Edge 2	QPSK	0.352
WIFI 2.4 GHz	Edge 2	802.11b	0.225
WIFI 5 GHz	Edge 1	802.11a	0.241

Result for highest Simultaneous Transmission SAR values

Technology/Band	Test configuration	Mode	Sum of Highest Reported 1g-SAR (W/kg)
LTE band 4+WiFi 2.4 GHz	Edge 2	QPSK	1.409

Note : WLAN SAR result refer to FCC report T181222W03-SF, Market segmentation difference only .

### 3 Requirements for Compliance Testing Defined

#### 3.1 Requirements for Compliance Testing Defined by the FCC

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996 [1]. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 W/kg for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the FCC 47 CFR §2.1093 and IEEE Std 1528-2013.




## 4 Dosimetric Assessment System

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m) which positions the probes with a positional repeatability of better than  $\pm 0.02$  mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetric probe EX3DV4-SN:7466 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure with accuracy of better than  $\pm 10\%$ . The spherical isotropy was evaluated with the procedure and found to be better than  $\pm 0.25$  dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE 1528 2013.

Report No.: T190115W01-SF

## 4.1 Measurement System Diagram

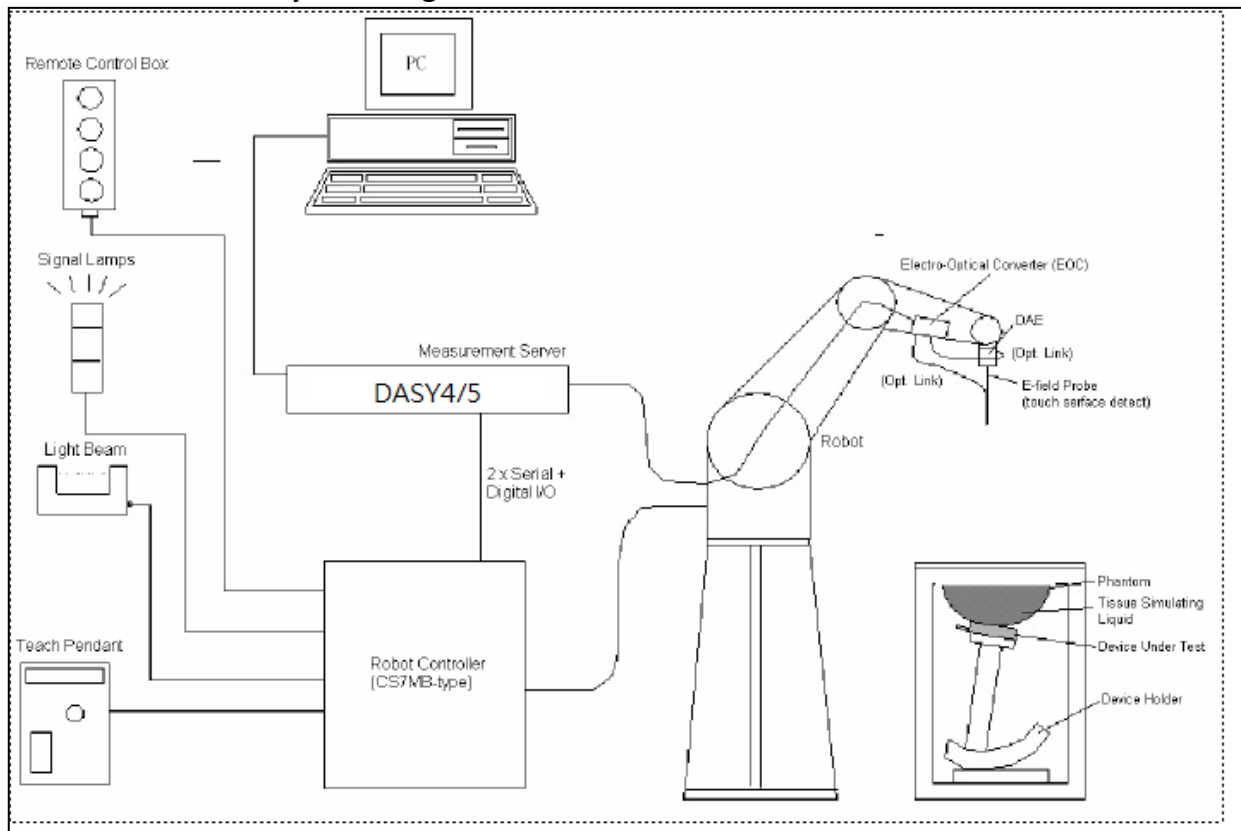

**The DASY4/5 system for performing compliance tests consists of the following items:**


- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7 or Windows XP.
- DASY4 software version: 4.7, Build 80. DASY5 software version: 52.8.8.1222.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190115W01-SF

## 4.2 System Components



DASY4/DASY5 Measurement Server	
	<p>The DASY4/DASY5 measurement server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chip disk and 64MB RAM. The necessary circuits for communication with either the DAE3 electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4/DASY5 I/O-board, which is directly connected to the PC/104 bus of the CPU board.</p> <p>The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.</p>
	<p>The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server. Calibration: No calibration required.</p>

Data Acquisition Electronics (DAE)	
	<p>The data acquisition electronics (DAE4) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.</p>


This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190115W01-SF


**EX3DV4 Isotropic E-Field Probe for Dosimetric Measurements**

	<p><b>Construction:</b> Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)</p> <p><b>Calibration:</b> Basic Broad Band Calibration in air: 10-3000 MHz. Conversion Factors (CF) for HSL 900 and HSL 1800 CF-Calibration for other liquids and frequencies upon request.</p> <p><b>Frequency:</b> 10 MHz to &gt; 6 GHz; Linearity: <math>\pm 0.2</math> dB (30 MHz to 3 GHz)</p> <p><b>Directivity:</b> <math>\pm 0.3</math> dB in HSL (rotation around probe axis) <math>\pm 0.5</math> dB in HSL (rotation normal to probe axis)</p> <p><b>Dynamic Range:</b> 10 <math>\mu</math>W/g to &gt; 100 mW/g; Linearity: <math>\pm 0.2</math> dB (noise: typically &lt; 1 <math>\mu</math>W/g)</p>
	<p><b>Dimensions:</b> Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1 mm</p> <p><b>Application:</b> High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.</p>

**SAM Phantom (V4.0)**


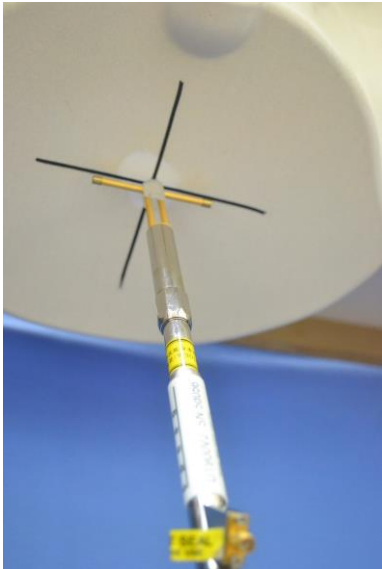
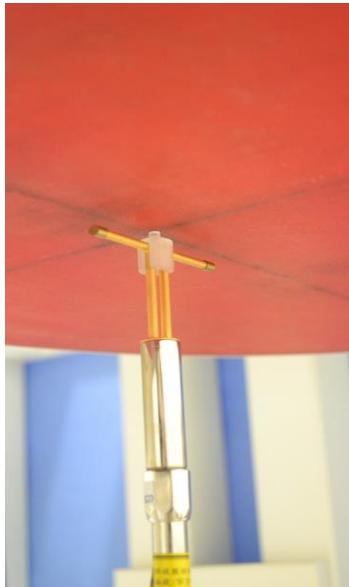
	<p><b>Construction:</b> The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 2013, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.</p> <p><b>Shell Thickness:</b> 2 <math>\pm 0.2</math> mm</p> <p><b>Filling Volume:</b> Approx. 25 liters</p> <p><b>Dimensions:</b> Height: 810mm; Length: 1000mm; Width: 500mm</p>
---	---

**SAM Phantom (ELI4)**

	<p><b>Construction:</b> Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY4/DASY5 and higher and is compatible with all SPEAG dosimetric probes and dipoles</p> <p><b>Shell Thickness:</b> 2.0 <math>\pm 0.2</math> mm (sagging: &lt;1%)</p> <p><b>Filling Volume:</b> Approx. 25 liters</p> <p><b>Dimensions:</b> Major ellipse axis: 600 mm <b>Minor axis:</b> 400 mm 500mm</p>
---	--

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190115W01-SF

<b>Device Holder for SAM Twin Phantom</b>	
	<p><b>Construction:</b> In combination with the Twin SAM Phantom V4.0 or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).</p>
<b>System Validation Kits for SAM Phantom (V4.0)</b>	
	<p><b>Construction:</b> Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.</p> <p><b>Frequency:</b> 750, 835, 1750, 1900, 2450 MHz</p> <p><b>Return loss:</b> &gt; 20 dB at specified validation position</p> <p><b>Power capability:</b> &gt; 100 W (f &lt; 1GHz); &gt; 40 W (f &gt; 1GHz)</p> <p><b>Dimensions:</b>  D750V3: dipole length: 178 mm; overall height: 330 mm  D1750V2: dipole length: 75.2 mm; overall height: 301.5 mm  D2450V2: dipole length: 51.5 mm; overall height: 290 mm  D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm</p>
<b>System Validation Kits for ELI4 phantom</b>	
	<p><b>Construction:</b> Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.</p> <p><b>Frequency:</b> 750 1750, 2450, 5300, 5600, 5800 MHz</p> <p><b>Return loss:</b> &gt; 20 dB at specified validation position</p> <p><b>Power capability:</b> &gt; 100 W (f &lt; 1GHz); &gt; 40 W (f &gt; 1GHz)</p> <p><b>Dimensions:</b>  D750V3: dipole length: 178 mm; overall height: 330 mm  D1750V2: dipole length: 72.5 mm; overall height: 300 mm  D2450V2: dipole length: 51.5 mm; overall height: 290 mm  D5GV2: dipole length: 20.6 mm; overall height: 300 mm</p>

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190115W01-SF

## 5 Evaluation Procedures

### Data Evaluation

The DASYS4/DASYS5 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	$ConvF_i$
	- Diode compression point	$dcp_i$
Device parameters:	- Frequency	$f$
	- Crest factor	$cf$
Media parameters:	- Conductivity	$\sigma$
	- Density	$\rho$

These parameters must be set correctly in the software. They can be found in the component documents or be imported into the software from the configuration files issued for the DASYS components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with	$V_i$	= Compensated signal of channel i	(i = x, y, z)
	$U_i$	= Input signal of channel i	(i = x, y, z)
	$cf$	= Crest factor of exciting field	(DASY parameter)
	$dcp_i$	= Diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H-field probes:

$$H_i = \sqrt{V_i} \cdot \frac{a_{i10} + a_{i11}f + a_{i12}f^2}{f}$$

with	$V_i$	= Compensated signal of channel i	(i = x, y, z)
	$Norm_i$	= Sensor sensitivity of channel i	(i = x, y, z)

$\mu V/(V/m)^2$  for E0field Probes

$ConvF$	= Sensitivity enhancement in solution
$a_{ij}$	= Sensor sensitivity factors for H-field probes
$f$	= Carrier frequency (GHz)
$E_i$	= Electric field strength of channel i in V/m
$H_i$	= Magnetic field strength of channel i in A/m

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

**Report No.:** T190115W01-SF

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with

- $SAR$  = local specific absorption rate in W/kg
- $E_{tot}$  = total field strength in V/m
- $\sigma$  = conductivity in [mho/m] or [Siemens/m]
- $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{377} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with

- $P_{pwe}$  = Equivalent power density of a plane wave in mW/cm<sup>2</sup>
- $E_{tot}$  = total electric field strength in V/m
- $H_{tot}$  = total magnetic field strength in A/m



## 6 SAR Measurement Procedures

### 6.1 Normal SAR Test Procedure

- **Power Reference Measurement**

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

- **Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4/DASY5 software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, the grid resolution has to less than 15 mm by 15 mm at frequency  $\leq 2$ GHz; the grid resolution has to less than 12mm by 12 mm at frequency between 2GHz to 4GHz; grid resolution has to less than 10 mm by 10 mm at frequency between 4GHz to 6GHz.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$	$\leq 2$ GHz: $\leq 15$ mm 2 – 3 GHz: $\leq 12$ mm	3 – 4 GHz: $\leq 12$ mm 4 – 6 GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



Report No.: T190115W01-SF

• **Zoom Scan**

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures points in accordance with the frequency can be divided into three parts. (1)The zoom scan volume was set to 5x5x7 points at frequency  $\leq 2$ GHz. (2) The zoom scan volume was set to 7x7x7 points at frequency between 2GHz to 4GHz (3) The zoom scan volume was set to 7x7x12 points at frequency between 4GHz to 6GHz. The measures points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly.

According to KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01

			$\leq 3$ GHz	$> 3$ GHz
Maximum zoom scan spatial resolution: $\Delta X_{Zoom}, \Delta Y_{Zoom}$			$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm	3 – 4 GHz: $\leq 5$ mm 4 – 6 GHz: $\leq 4$ mm
Maximum zoom scan spatial resolution, normal to phantom surface	Uniform grid: $\Delta z_{Zoom}(n)$		$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ :between 1 <sup>st</sup> two points losest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Maximum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	

• **Power Drift Measurement**

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have DASY4/DASY5 software stop the measurements if this limit is exceeded.

• **Z-Scan**

The Z Scan job measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. A user can anchor the grid to the current probe location. As with any other grids, the local Z-axis of the anchor location establishes the Z-axis of the grid.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

## 7 Measurement Uncertainty

According to KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz section 2.8.2, SAR measurement uncertainty analysis is required in SAR reports only when the highest measured SAR in a frequency band is  $\geq 1.5$  W/kg for 1-g SAR, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

## 8 Device Under Test

### 8.1 Wireless Technologies

Wireless technologies	Tx Frequency Bands	Operating mode	Duty Cycle used for testing
WCDMA	BAND II BAND IV BAND V	UMTS Rel. 99 HSDPA HSUPA	100%
LTE	Band 2 Band 4 Band 5 Band 12	QPSK 16QAM	100%
Wi-Fi	2.4 / 5GHz Band	802.11b 802.11g 802.11n(HT20) 802.11n(HT40) 802.11a 802.11a(HT20) 802.11a (HT40) 802.11a (VHT80)	100%
Bluetooth	2.4GHz	2.1 4.0	NA

Report No.: T190115W01-SF

## 8.2 Maximum Tune-up Power

P-sensor off

Tolerance (dB): $\pm 1$		RF Output Power (dBm)	
Band	Mode	Target	Max. tune-up power
WCDMA Band 2	R99	22.0	23.0
	HSDPA	21.0	22.0
	HSUPA	21.5	22.5
WCDMA Band 4	R99	22.0	23.0
	HSDPA	21.0	22.0
	HSUPA	21.5	22.5
WCDMA Band 5	R99	22.0	23.0
	HSDPA	21.0	22.0
	HSUPA	21.5	22.5
LTE Band 2	QPSK	22.0	23.0
LTE Band 4	QPSK	22.0	23.0
LTE Band 5	QPSK	22.0	23.0
LTE Band 12	QPSK	22.0	23.0

P-sensor on

Band	Mode	Target	Max. tune-up power
WCDMA Band 2	R99	20.0	21.0
	HSDPA	19.0	20.0
	HSUPA	19.0	20.0
WCDMA Band 4	R99	18.0	19.0
	HSDPA	17.0	18.0
	HSUPA	17.0	18.0
LTE Band 2	QPSK	19.5	20.5
LTE Band 4	QPSK	17.0	18.0

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Tolerance (dB): ±	1.5	RF Output Power (dBm)	
Band (GHz)	Mode	Target	Max. tune-up power
2.4	802.11b	16.00	17.50
	802.11g	15.00	16.50
	802.11n HT20	12.00	13.50
Tolerance (dB): ±	1.5	RF Output Power (dBm)	
Band (GHz)	Mode	Target	Max. tune-up power
5.2 (UNII-1)	802.11a	8.00	9.50
	802.11n HT20	4.00	5.50
	802.11n HT40	4.00	5.50
	802.11ac VHT80	4.00	5.50
5.3 (UNII-2A)	802.11a	8.00	9.50
	802.11n HT20	4.00	5.50
	802.11n HT40	4.00	5.50
	802.11ac VHT80	4.00	5.50
5.5 (UNII-2C)	802.11a	10.00	11.50
	802.11n HT20	5.00	6.50
	802.11n HT40	6.00	7.50
	802.11ac VHT80	6.00	7.50
5.8 (UNII-3)	802.11a	10.00	11.50
	802.11n HT20	5.00	6.50
	802.11n HT40	6.00	7.50
	802.11ac VHT80	6.00	7.50
Mode		Max. tune-up power(dBm)	
Bluetooth		6.0	
Bluetooth LE		6.0	

Note : WLAN power result refer to FCC report T181222W03-SF, Market segmentation difference only .

Report No.: T190115W01-SF

### 8.3 Simultaneous Transmission

RF Exposure Condition	Transmit Configurations
WWAN + Wi-Fi	<p><b>WCDMA + WIFI/BT</b>                      WCDMA Band 2/4/5 + BT (Chain 0)                      WCDMA Band 2/4/5+ 2.4GHz (Chain 0)                      WCDMA Band 2/4/5+ 5GHz (Chain 0)</p> <p><b>LTE + Wi-Fi / BT</b>                      LTE Band 2/4/5/12 + BT (Chain 0)                      LTE Band 2/4/5/12+ 2.4GHz (Chain 0)                      LTE Band 2/4/5/12+ 5GHz (Chain 0)</p> <p><b>Wi-Fi</b>                      2.4GHz(Chain 0)                      5GHz(Chain 0)</p> <p><b>BT</b>                      BT (Chain 0)</p>

**Note(s):**

1. For WWAN mode only Chain 0 can be used as transmitting and Chain 1 only be used as receiving.

## 9 General LTE SAR Test and Reporting Considerations

KDB 941225 D05 SAR for LTE Devices V02

Item	Description	Information						
1	Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Channel Bandwidth					
			1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz
		Low	18607/ 1850.7	18615/ 1851.5	18625/ 1852.5	18650/ 1855	18675/ 1857.5	18700/ 1860
		Mid	18900/ 11880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
		High	19192/ 1909.2	19184/ 1908.4	19175/ 1907.5	19150/ 1905	19125/ 1902.5	19100/ 1900
		Band 4	Channel Bandwidth					
			1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz
		Low	19957/ 1710.7	19965/ 1711.5	19975/ 1712.5	20000/ 1715	20025/ 1717.5	20050/ 1720
		Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
		High	20392/ 1754.2	20384/ 1753.4	20375/ 1752.5	20350/ 1750	20325/ 1747.5	20300/ 1745
		Band 5	Channel Bandwidth					
			1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz
		Low	20407/ 824.7	20415/ 825.5	20425/ 826.5	20450/ 829		
		Mid	20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5		
		High	20642/ 848.2	20643/ 847.4	20625/ 846.5	20600/ 844		
		Band 12	Channel Bandwidth					
			1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz
		Low	23017/6 99.7	23025/7 00.5	23035/ 701.5	23060/7 04		
		Mid	23095/7 07.5	23095/7 07.5	23095/ 707.5	23095/ 707.5		
		High	23173/7 15.3	23165/7 14.5	23155/ 713.5	23130/7 11.5		

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

**Report No.:** T190115W01-SF  
KDB 941225 D05 SAR for LTE Devices V02 (Continued)

Item	Description	Information																																						
2	Descriptions of the LTE transmitter and antenna implementation;	A single antenna is used for LTE Transmit and Receive. A Secondary antenna is used for LTE Receive Only.																																						
3	Maximum power reduction (MPR)	<p>As per 3GPP 36.101 v9.11.0 (2012-03), Release 9</p> <p><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N<sub>RB</sub>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>MPR is permanently built-in by design A-MPR was disabled</p>	Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)																																	
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																		
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																	
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																	
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																	
4	Power Reduction	Yes																																						

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。



## 10 Power Reduction by Proximity Sensing

A proximity sensor for power reduction is implemented in this device to address RF exposure compliance when the cellular antenna is positioned close to the user's body. The sensor's mechanical structure is designed to fit within the enclosure design used in this device and also extended around the edge and top of the antenna element in order to optimize sensitivity in these orientations. This design combines the antenna printed directly on a plastic part and proximity sensor FPC (Flexible Printed Circuit) bonded together into one piece. According to KDB 616217 D04 SAR for laptop and tablets v01r02)

### 10.1 Procedures for determining proximity sensor triggering distances

The following procedures should be applied to determine proximity sensor triggering distances for the back surface and individual edges of a tablet. Conducted power is monitored qualitatively to identify the general triggering characteristics and recorded quantitatively, versus spacing, as required by the procedures. Unless there is built-in test software that reports the triggering conditions and enables the power levels to be confirmed separately, monitoring of conducted power during the triggering tests typically requires internal access to the antenna ports inside the tablet, which may interfere with the triggering tests.

- (1) The relevant transmitter should be set to operate at its normal maximum output power.
- (2) The entire back surface or edge of the tablet is positioned below a flat phantom filled with the required tissue-equivalent medium, and positioned at least 20 mm further than the distance that triggers power reduction.
- (3) It should be ensured that the cables required for power measurements are not interfering with the proximity sensor. Cable losses should be properly compensated to report the measured power results.
- (4) The back surface or edge is moved toward the phantom in 3 mm steps until the sensor triggers.
- (5) The back surface or edge is then moved back (further away) from the phantom by at least 5 mm or until maximum output power is returned to the normal maximum level.
- (6) The back surface or edge is again moved toward the phantom, but in 1 mm steps, until it is at least 5 mm past the triggering point or touching the phantom. If 1 mm resolution is not suitable for the sensor triggering sensitivity, a KDB inquiry should be submitted to determine alternative test configurations.
- (7) If the tablet is not touching the phantom, it is moved in 3 mm steps until it touches the phantom to confirm that the sensor remains triggered and the maximum power stays reduced.
- (8) The process is then reversed by moving the tablet away from the phantom according to steps 4) to 7), to determine triggering release, until it is at least 10 mm beyond the point that triggers the return of normal maximum power.
- (9) The measured output power within  $\pm 5$  mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom should be tabulated in the SAR report.
- (10) If the sensor design and implementation allow additional variations for triggering distance tolerances, multiple samples should be tested to determine the most conservative distance required for SAR evaluation.
- (11) To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

## 10.2 Procedures for determining antenna and proximity sensor coverage

The sensing regions are usually limited to areas near the sensor element. If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. The following are used to determine if additional SAR measurements may be necessary due to sensor and antenna offset. 25 These procedures do not apply and are not required for configurations where the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

- (1) The back surface or edge of the tablet is positioned at a test separation distance less than or equal to the distance required for back surface or edge triggering, with both the antenna and sensor pad located at least 20 mm laterally outside the edge (boundary) of the phantom, along the direction of maximum antenna and sensor offset. For the back surface, if the direction of maximum offset is not aligned with the tablet coordinates (physical edges) the tablet test position would not be aligned with the phantom coordinates (orientations). Each applicable tablet edge should be positioned perpendicularly to the phantom to determine sensor coverage. For antennas and/or sensors located near the corner of a tablet, both adjacent edges must be considered.
- (2) The similar sequence of steps applied to determine sensor triggering distance in section 6.2 are used to verify back surface and edge sensor coverage by moving the tablet (sensor and antenna) horizontally toward the phantom while maintaining the same vertical separation between the back surface or edge and the phantom.
- (3) After the exact location where triggering of power reduction is determined, with respect to the sensor and antenna, the tablet movement should be continued, in 3 mm increments, until both the sensor and antenna(s) are fully under the phantom and at least 20 mm inside the phantom edge.
- (4) The process is then repeated from the opposite direction, starting at the other end of the maximum antenna and sensor offset, by rotating the tablet 180° along the vertical axis.
- (5) The triggering points should be documented graphically, with the antenna and sensor clearly identified, along with all relevant dimensions.
- (6) If the subsequently measured peak SAR location for the antenna is not between the triggering points, established by the sensor coverage tests from opposite ends of the antenna and sensor, additional SAR tests may be required for conditions where only part of the back surface or edge of a tablet corresponding to the antenna is in proximity to the user and the sensor may not be triggering as desired. A KDB inquiry must be submitted by the test lab to determine if additional tests are required and the proper test configurations to use for testing. This may include situations where the sensor coverage region is too small for the antenna, the sensor is located too far away from the antenna, the sensor location is insufficient to cover multiple antennas or the antenna is at the corner of a tablet etc.

Report No.: T190115W01-SF

### 10.3 Proximity Sensor Status Table of trigger distance

As per the KDB 616217 D04 SAR for laptop and tablets v01r02, section 6.2, the following procedure is used to determine the triggering distances.

Proximity Sensor Status Table when DUT is moving towards the phantom

Distance to the DUT (mm)	Proximity Sensor Status – Rear Surface	Proximity Sensor Status – Top-Edge
30	OFF	OFF
27	OFF	OFF
25	OFF	OFF
24	OFF	OFF
23	OFF	OFF
22	OFF	OFF
21	OFF	OFF
20	OFF	OFF
19	OFF	OFF
18	OFF	OFF
17	OFF	OFF
16	OFF	ON
15	OFF	ON
14	OFF	ON
13	OFF	ON
12	OFF	ON
11	OFF	ON
10	OFF	ON
9	OFF	ON
8	OFF	ON
7	OFF	ON
6	OFF	ON
5	OFF	ON
4	OFF	ON
3	OFF	ON
2	OFF	ON
1	OFF	ON
0	OFF	ON

Edge Power Back-off

Rear Power Back-off


Body Phantom

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

**Report No.:** T190115W01-SF

Proximity Sensor Status Table when DUT is moving away from the phantom

Distance to the DUT (mm)	Proximity Sensor Status – Rear Surface	Proximity Sensor Status – Top-Edge
0	OFF	ON
1	OFF	ON
2	OFF	ON
3	OFF	ON
4	OFF	ON
5	OFF	ON
6	OFF	ON
7	OFF	ON
8	OFF	ON
9	OFF	ON
10	OFF	ON
11	OFF	ON
12	OFF	ON
13	OFF	ON
14	OFF	ON
15	OFF	ON
16	OFF	ON
17	OFF	OFF
18	OFF	OFF
19	OFF	OFF
20	OFF	OFF
21	OFF	OFF
22	OFF	OFF
23	OFF	OFF
24	OFF	OFF
25	OFF	OFF
27	OFF	OFF
30	OFF	OFF



Rear Power Back-off


Edge Power Back-off

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190115W01-SF

### 10.4 Tilt angle influences to proximity sensor triggering

As per the KDB 616217 D04 SAR for laptop and tablets v01r02, section 6.4, the following procedure is used to determine the tilt angle influences to proximity sensor triggering.

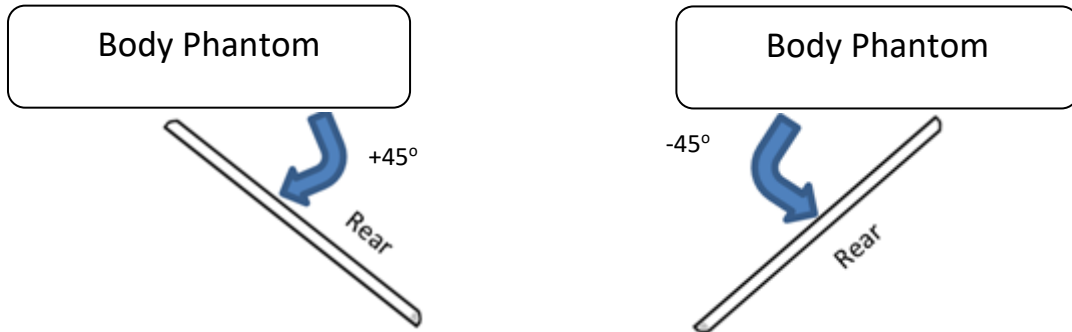

Distance to the DUT (mm)	Proximity Sensor Status 0° to +45°	Proximity Sensor Status 0° to -45°
16	ON	ON
15	ON	ON
14	ON	ON
13	ON	ON
12	ON	ON
11	ON	ON
10	ON	ON
9	ON	ON
8	ON	ON
7	ON	ON
6	ON	ON
5	ON	ON
4	ON	ON
3	ON	ON
2	ON	ON
1	ON	ON
0	ON	ON


This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190115W01-SF


## 10.5 Power Reduction per Air-interface

The following graphs show the power level and the distance from the DUT to the flat phantom for the Top-Edge and Rear Surface.

### WCDMA Band 2

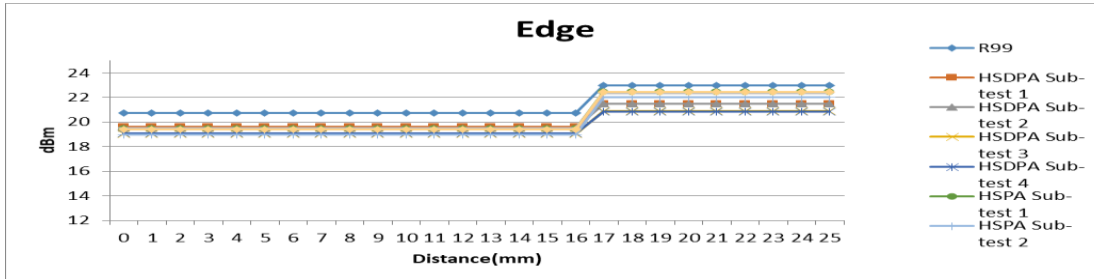


### WCDMA Band 4

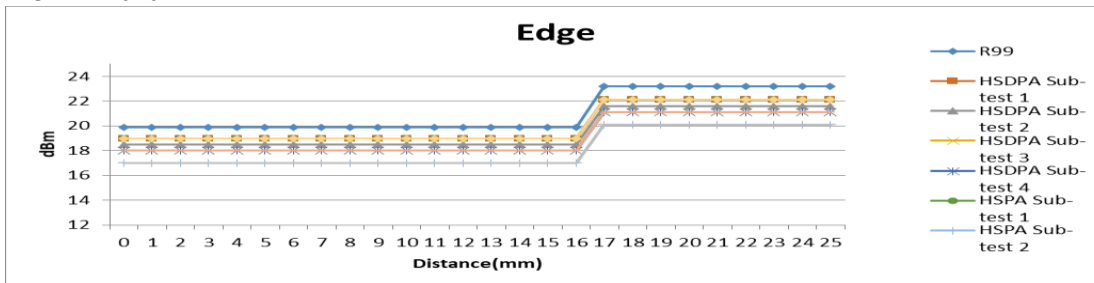


This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

### LTE Band 2

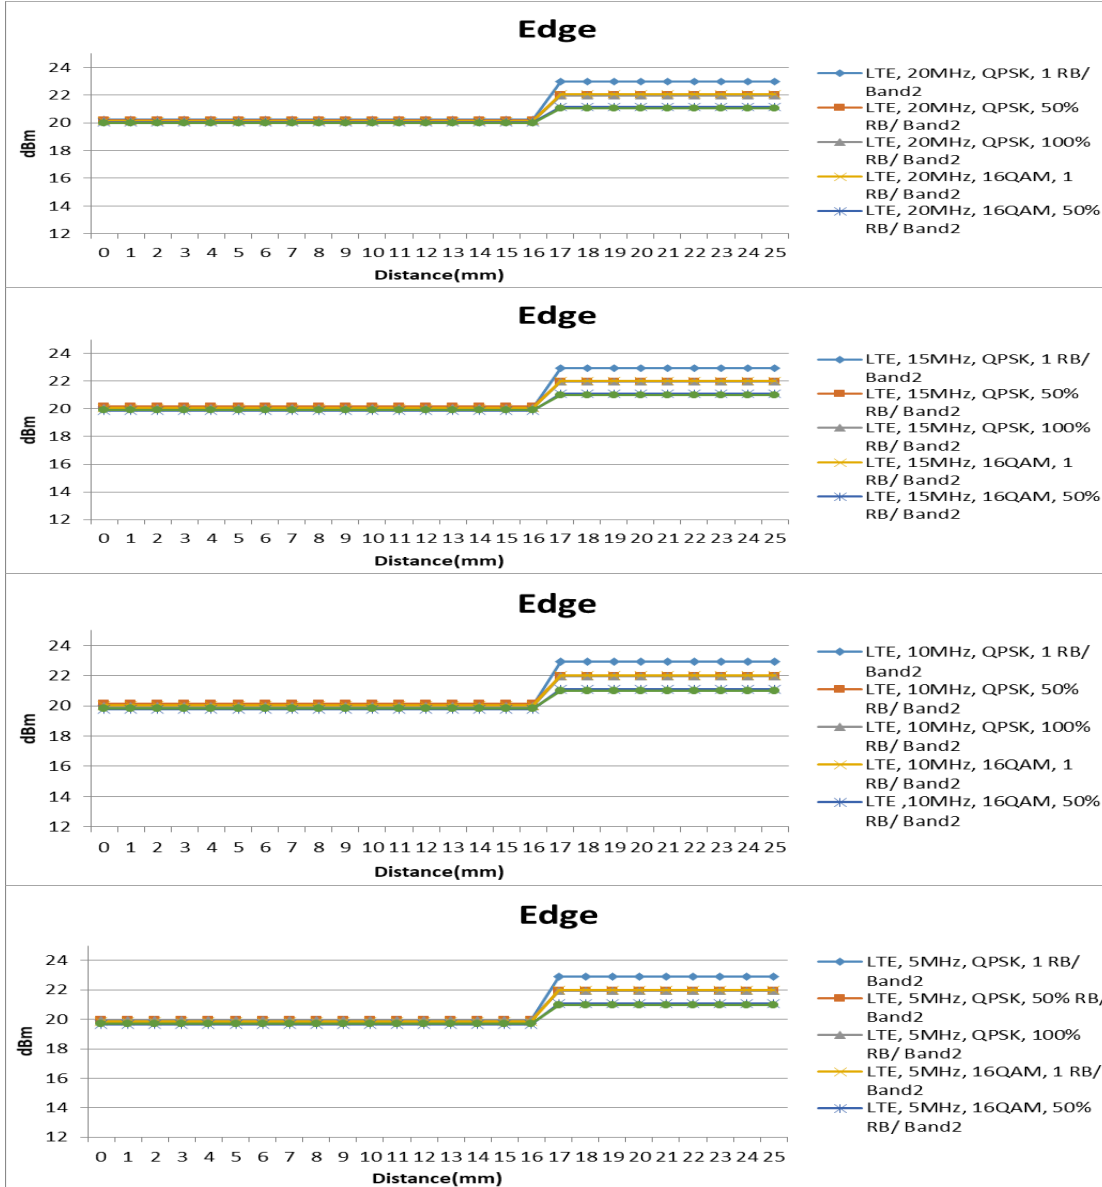


This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

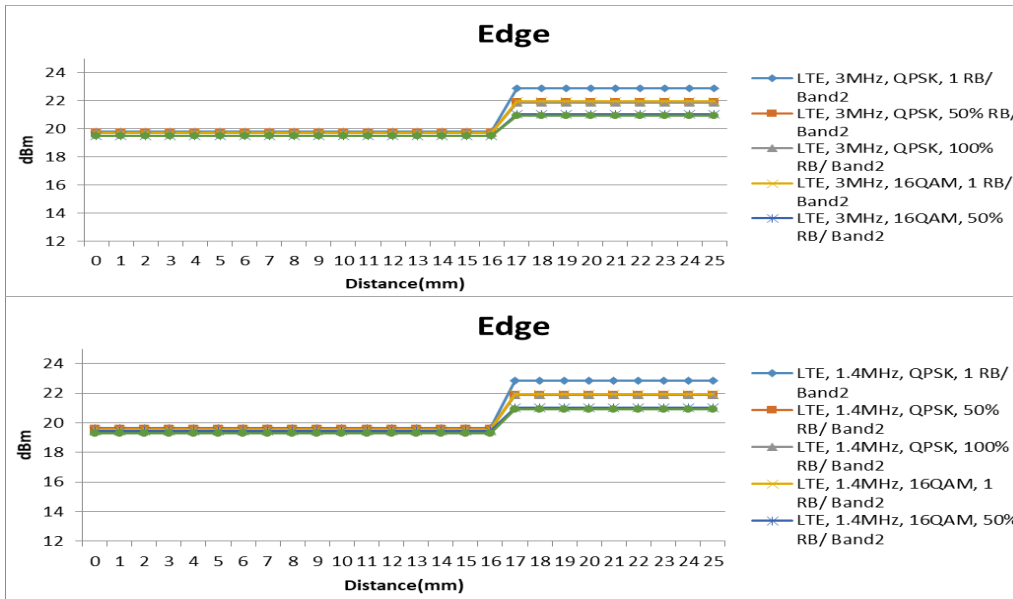


This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。



### LTE Band 4

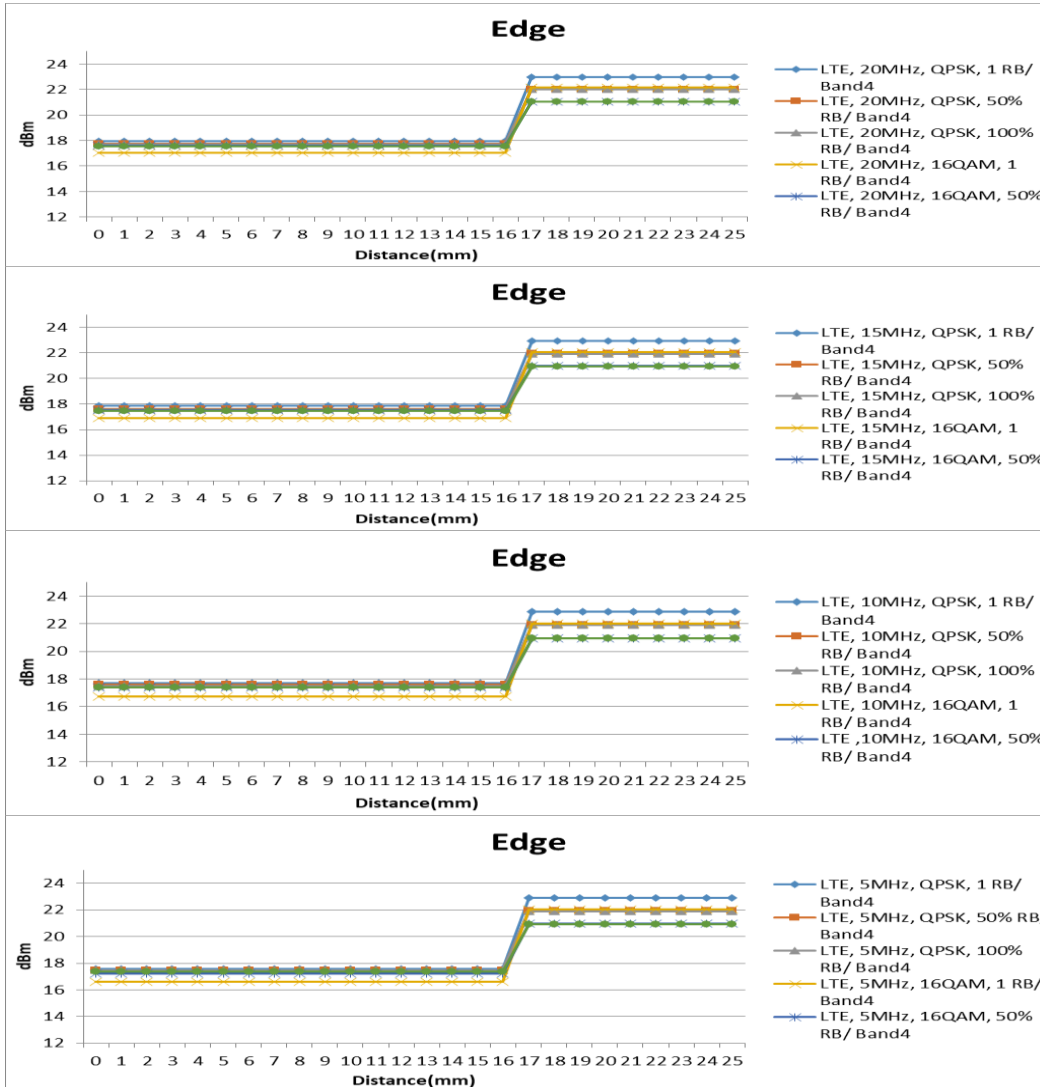

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

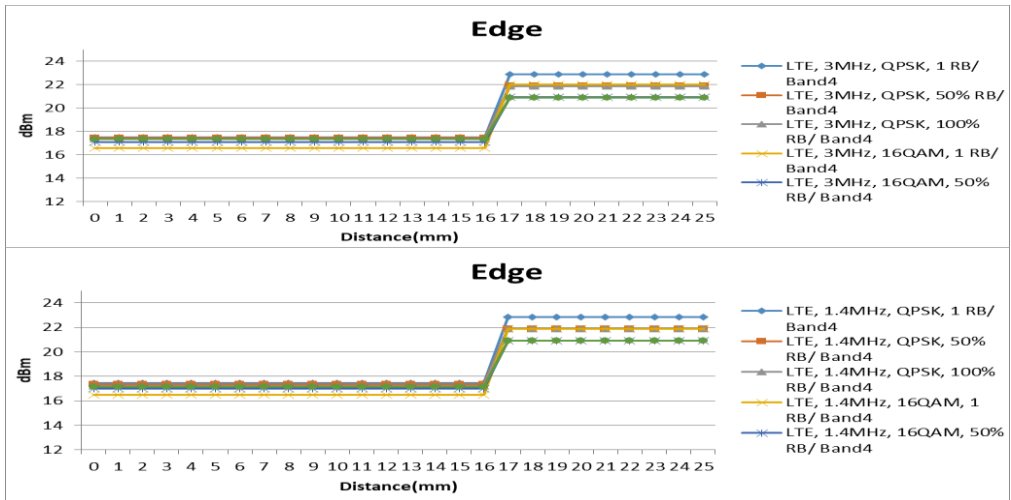

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

## 10.6 Proximity Sensor Coverage Area

According to KDB 616217 D04, Proximity Sensor Coverage Area of not request when the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

## 11 RF Output Power Measurement

### 11.1 WCDMA Power Measurement Requirements

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 V8.5.0 specification. The EUT supports power Class 3, which has a nominal maximum output power of 22 dBm (+2.0/-2.0) 12.2kps RMC is used for this testing. Power control set to All bits up. A summary of these settings are illustrated below:

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	$\beta_c/\beta_d$	8/15

### 11.2 LTE Power Measurement Requirements

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (22 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS\_01".

Report No.: T190115W01-SF

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks ( $N_{RB}$ )	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	$\leq 1$
			5	>6	$\leq 1$
			10	>6	$\leq 1$
			15	>8	$\leq 1$
			20	>10	$\leq 1$
NS_04	6.6.2.2.2	41	5	>6	$\leq 1$
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	$\geq 50$	$\leq 1$
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	$\leq 3$
NS_09	6.6.3.3.4	21	10, 15	> 40	$\leq 1$
				> 55	$\leq 2$
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 <sup>1</sup>	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190115W01-SF

**11.2.1 WCDMA Band**  
**Output power table**

Band	Mode	UL/DL Channel No.	Frequency(MHz)	Average power(dBm)	
				W/o Power back-off	W/ Power back-off
WCDMA Band II	Rel 99	9262/9662	1852.4	22.91	20.61
		9400/9800	1880.0	22.99	20.75
		9538/9983	1907.6	22.77	20.57
WCDMA Band IV	Rel 99	1312/1537	1712.4	22.81	18.81
		1412/1637	1732.4	22.83	18.99
		1513/1738	1752.6	22.67	18.77
WCDMA Band V	Rel 99	4132/4157	826.4	22.59	
		4182/4407	836.4	22.58	
		4233/4458	846.6	22.54	

Band	Mode	UL/DL Channel No.	Frequency(MHz)	Average power(dBm)	
				W/o Power back-off	W/ Power back-off
HSDPA II	1	9262/9662	1852.4	21.34	19.54
		9400/9800	1880.0	21.46	19.63
		9538/9983	1907.6	21.33	19.56
	2	9262/9662	1852.4	21.58	19.49
		9400/9800	1880.0	21.50	19.49
		9538/9983	1907.6	21.36	19.60
	3	9262/9662	1852.4	21.05	18.94
		9400/9800	1880.0	20.88	19.04
		9538/9983	1907.6	20.89	19.11
	4	9262/9662	1852.4	21.06	18.97
		9400/9800	1880.0	20.85	19.06
		9538/9983	1907.6	20.92	19.07
HSDPA IV	1	1312/1537	1712.4	21.69	17.93
		1412/1637	1732.4	21.68	17.98
		1513/1738	1752.6	21.46	17.81
	2	1312/1537	1712.4	21.71	17.87
		1412/1637	1732.4	21.72	17.97
		1513/1738	1752.6	21.39	17.86
	3	1312/1537	1712.4	21.22	17.39
		1412/1637	1732.4	21.22	17.54
		1513/1738	1752.6	20.83	17.34
	4	1312/1537	1712.4	21.23	17.38
		1412/1637	1732.4	21.19	17.55
		1513/1738	1752.6	20.84	17.24

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

HSDPA V	1	4132/4157	826.4	21.62	
		4182/4407	836.4	21.58	
		4233/4458	846.6	21.43	
	2	4132/4157	826.4	21.25	
		4182/4407	836.4	21.67	
		4233/4458	846.6	21.29	
	3	4132/4157	826.4	20.79	
		4182/4407	836.4	21.08	
		4233/4458	846.6	20.82	
	4	4132/4157	826.4	20.74	
		4182/4407	836.4	21.04	
		4233/4458	846.6	20.78	

Band	Mode	UL/DL Channel No.	Frequency(MHz)	Average power(dBm)	
				W/o Power back-off	W/ Power back-off
HSUPA II	1	9262/9662	1852.4	22.40	19.49
		9400/9800	1880.0	22.45	19.43
		9538/9983	1907.6	21.20	19.39
	2	9262/9662	1852.4	21.80	18.96
		9400/9800	1880.0	22.03	18.97
		9538/9983	1907.6	20.94	18.93
	3	9262/9662	1852.4	22.39	19.52
		9400/9800	1880.0	22.35	19.42
		9538/9983	1907.6	21.24	19.48
	4	9262/9662	1852.4	22.19	19.51
		9400/9800	1880.0	22.32	19.49
		9538/9983	1907.6	21.34	19.49
	5	9262/9662	1852.4	22.37	19.53
		9400/9800	1880.0	22.43	19.38
		9538/9983	1907.6	21.31	19.55
HSUPA IV	1	1312/1537	1712.4	21.38	17.84
		1412/1637	1732.4	21.52	17.89
		1513/1738	1752.6	21.48	17.69
	2	1312/1537	1712.4	20.91	17.26
		1412/1637	1732.4	21.09	17.45
		1513/1738	1752.6	20.97	17.29
	3	1312/1537	1712.4	21.45	17.73
		1412/1637	1732.4	21.65	17.92
		1513/1738	1752.6	21.39	17.74
	4	1312/1537	1712.4	21.43	17.77
		1412/1637	1732.4	21.52	18.00
		1513/1738	1752.6	21.44	17.75
	5	1312/1537	1712.4	21.38	17.76
		1412/1637	1732.4	21.67	17.98
		1513/1738	1752.6	21.39	17.84

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

HSUPA V	1	4132/4157	826.4	20.89	
		4182/4407	836.4	21.07	
		4233/4458	846.6	20.97	
	2	4132/4157	826.4	20.59	
		4182/4407	836.4	20.64	
		4233/4458	846.6	20.63	
	3	4132/4157	826.4	20.81	
		4182/4407	836.4	21.15	
		4233/4458	846.6	20.98	
	4	4132/4157	826.4	21.09	
		4182/4407	836.4	21.11	
		4233/4458	846.6	21.17	
	5	4132/4157	826.4	20.82	
		4182/4407	836.4	21.08	
		4233/4458	846.6	20.93	

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。



Report No.: T190115W01-SF

**11.2.2 LTE Band**

**Output power table**

**Band 2**

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)		
								W/o Power back-off	W/ Power back-off	
2	1.4	18607	1850.7	QPSK	1	0	0	22.86	19.62	
					1	2	0	22.83	19.42	
					1	5	0	22.43	19.74	
					3	0	1	21.89	19.57	
					3	1	1	21.83	19.50	
					3	2	1	21.73	19.17	
				16QAM	6	0	1	21.87	19.54	
					1	0	1	21.93	19.55	
					1	2	1	21.84	19.67	
					1	5	1	21.67	18.76	
					3	0	2	21.03	19.43	
					3	1	2	20.99	19.42	
		18900	1880.0	QPSK	1880.0	3	2	2	20.90	19.43
						6	0	2	20.93	19.30
						1	0	0	22.78	19.84
						1	2	0	22.77	19.62
						1	5	0	22.80	19.65
						3	0	1	21.93	19.51
				16QAM	3	1	1	21.99	19.45	
					3	2	1	21.87	19.77	
					6	0	1	21.87	19.67	
					1	0	1	22.17	19.16	
					1	2	1	22.23	19.20	
					1	5	1	21.87	19.36	
		19192	1909.2	QPSK	1909.2	3	0	2	20.91	19.67
						3	1	2	21.00	19.55
						3	2	2	20.86	19.55
						6	0	2	20.87	19.44
						1	0	0	22.73	19.68
						1	2	0	22.77	19.48
				16QAM	1	5	0	22.62	19.55	
					3	0	1	21.84	19.58	
					3	1	1	21.94	19.75	
					3	2	1	21.85	19.14	
					6	0	1	21.85	19.70	
					1	0	1	22.00	19.52	
16QAM	1	2	1	22.15	19.09					
	1	5	1	21.91	19.41					
	3	0	2	20.82	19.50					
	3	1	2	20.89	19.37					
	3	2	2	20.82	19.44					
	6	0	2	20.77	19.40					

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
2	3	18615	1851.5	QPSK	1	0	0	22.87	19.82
					1	7	0	22.84	19.55
					1	14	0	22.44	19.78
					8	0	1	21.90	19.78
					8	4	1	21.84	19.62
					8	7	1	21.74	19.27
				15	0	1	21.88	19.75	
				16QAM	1	0	1	21.94	19.69
					1	7	1	21.85	19.80
		1	14		1	21.68	18.97		
		18900	1880.0	QPSK	1	0	0	22.79	19.88
					1	7	0	22.78	19.68
					1	14	0	22.81	19.78
					8	0	1	21.94	19.71
					8	4	1	22.00	19.56
					8	7	1	21.88	19.85
				15	0	1	21.88	19.78	
				16QAM	1	0	1	22.18	19.32
	1				7	1	22.24	19.28	
	1	14	1		21.88	19.47			
	19184	1908.4	QPSK	1	0	0	22.75	19.81	
				1	7	0	22.79	19.53	
				1	14	0	22.64	19.69	
				8	0	1	21.86	19.76	
				8	4	1	21.96	19.79	
				8	7	1	21.87	19.34	
				15	0	1	21.87	19.78	
				16QAM	1	0	1	22.02	19.63
					1	7	1	22.17	19.13
			1		14	1	21.93	19.43	
			8		0	2	20.84	19.67	
			8		4	2	20.91	19.48	
			8		7	2	20.84	19.52	
			15		0	2	20.79	19.58	

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190115W01-SF

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
2	5	18625	1852.5	QPSK	1	0	0	22.92	19.98
					1	12	0	22.89	19.70
					1	24	0	22.49	19.85
					12	0	1	21.95	19.98
					12	6	1	21.89	19.66
					12	11	1	21.79	19.44
				25	0	1	21.93	19.96	
				16QAM	1	0	1	21.99	19.87
					1	12	1	21.90	19.83
					1	24	1	21.73	19.17
					12	0	2	21.09	19.67
					12	6	2	21.05	19.67
		12	11		2	20.96	19.70		
		18900	1880.0	QPSK	1	0	0	22.83	19.94
					1	12	0	22.82	19.87
					1	24	0	22.85	19.97
					12	0	1	21.98	19.80
					12	6	1	22.04	19.76
					12	11	1	21.92	20.04
				25	0	1	21.92	19.85	
				16QAM	1	0	1	22.22	19.46
					1	12	1	22.28	19.37
					1	24	1	21.92	19.64
					12	0	2	20.96	20.01
					12	6	2	21.05	19.72
		12	11		2	20.91	19.88		
		19175	1907.5	QPSK	25	0	2	20.92	19.79
					1	0	0	22.80	19.92
					1	12	0	22.84	19.71
					1	24	0	22.69	19.72
					12	0	1	21.91	19.87
					12	6	1	22.01	19.96
				12	11	1	21.92	19.49	
				25	0	1	21.92	19.86	
				16QAM	1	0	1	22.07	19.80
					1	12	1	22.22	19.30
1	24				1	21.98	19.54		
12	0				2	20.89	19.88		
12	6	2	20.96		19.61				
12	11	2	20.89		19.72				
25	0	2	20.84	19.70					

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)		
								W/o Power back-off	W/ Power back-off	
2	10	18650	1855.0	QPSK	1	0	0	22.94	20.03	
					1	24	0	22.91	19.72	
					1	49	0	22.51	19.94	
					25	0	1	21.97	20.14	
					25	12	1	21.91	19.80	
					25	24	1	21.81	19.59	
				50	0	1	21.95	20.01		
				50	0	1	21.95	20.01		
				16QAM	1	0	1	22.01	20.05	
					1	24	1	21.92	19.95	
					1	49	1	21.75	19.19	
					25	0	2	21.11	19.78	
		25	12		2	21.07	19.71			
		25	24		2	20.98	19.76			
		18900	1880.0	QPSK	1880.0	1	0	0	22.85	20.03
						1	24	0	22.84	20.05
						1	49	0	22.87	20.10
						25	0	1	22.00	19.88
						25	12	1	22.06	19.86
						25	24	1	21.94	20.09
				50	0	1	21.94	19.87		
				50	0	2	21.01	19.84		
				16QAM	1	0	1	22.24	19.60	
					1	24	1	22.30	19.51	
					1	49	1	21.94	19.80	
					25	0	2	20.98	20.11	
		25	12		2	21.07	19.83			
		25	24		2	20.93	19.90			
		19150	1905.0	QPSK	1905.0	1	0	0	22.83	20.03
						1	24	0	22.87	19.92
						1	49	0	22.72	19.90
						25	0	1	21.94	19.90
						25	12	1	22.04	19.99
						25	24	1	21.95	19.65
				50	0	1	21.95	19.92		
				50	0	2	21.01	19.85		
16QAM	1			0	1	22.10	19.85			
	1			24	1	22.25	19.40			
	1			49	1	22.01	19.63			
	25			0	2	20.92	20.00			
	25	12	2	20.99	19.74					
	25	24	2	20.92	19.75					
50	0	2	20.87	19.89						

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
2	15	18675	1857.5	QPSK	1	0	0	22.95	20.05
					1	37	0	22.92	19.92
					1	74	0	22.52	19.99
					36	0	1	21.98	20.16
					36	18	1	21.92	19.93
					36	35	1	21.82	19.71
				75	0	1	21.96	20.06	
				16QAM	1	0	1	22.02	20.07
					1	37	1	21.93	20.09
		1	74		1	21.76	19.22		
		36	0		2	21.12	19.89		
		36	18		2	21.08	19.88		
		36	35		2	20.99	19.96		
		18900	1880.0	QPSK	1	0	0	22.86	20.06
					1	37	0	22.85	20.07
					1	74	0	22.88	20.12
					36	0	1	22.01	19.99
					36	18	1	22.07	20.00
	36				35	1	21.95	20.15	
	75			0	1	21.95	20.02		
	16QAM			1	0	1	22.25	19.64	
				1	37	1	22.31	19.63	
		1	74	1	21.95	19.98			
		36	0	2	20.99	20.13			
		36	18	2	21.08	20.04			
		36	35	2	20.94	20.01			
	19125	1902.5	QPSK	1	0	0	22.84	20.14	
				1	37	0	22.88	20.02	
				1	74	0	22.73	19.99	
				36	0	1	21.95	19.96	
				36	18	1	22.05	20.01	
				36	35	1	21.96	19.81	
			75	0	1	21.96	20.03		
			16QAM	1	0	1	22.11	20.05	
				1	37	1	22.26	19.49	
	1	74		1	22.02	19.66			
36	0	2		20.93	20.11				
36	18	2		21.00	19.88				
36	35	2		20.93	19.96				
75	0	2	20.88	20.09					

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)		
								W/o Power back-off	W/ Power back-off	
2	20	18700	1860.0	QPSK	1	0	0	22.98	20.23	
					1	49	0	22.95	20.07	
					1	99	0	22.55	20.09	
					50	0	1	22.01	20.18	
					50	24	1	21.95	19.99	
					50	49	1	21.85	19.91	
				16QAM	100	0	1	21.99	20.15	
					1	0	1	22.05	20.15	
					1	49	1	21.96	20.22	
					1	99	1	21.79	19.39	
					50	0	2	21.15	20.06	
					50	24	2	21.11	19.91	
		18900	1880.0	QPSK	1880.0	1	0	0	22.92	20.21
						1	49	0	22.91	20.19
						1	99	0	22.94	20.18
						50	0	1	22.07	20.13
						50	24	1	22.13	20.14
						50	49	1	22.01	20.17
				16QAM	100	0	1	22.01	20.11	
					1	0	1	22.31	19.84	
					1	49	1	22.37	19.81	
					1	99	1	22.01	20.12	
					50	0	2	21.05	20.15	
					50	24	2	21.14	20.13	
		19100	1900.0	QPSK	1900.0	1	0	0	22.91	20.22
						1	49	0	22.95	20.20
						1	99	0	22.80	20.03
						50	0	1	22.02	20.12
						50	24	1	22.12	20.03
						50	49	1	22.03	20.00
				16QAM	100	0	1	22.03	20.05	
					1	0	1	22.18	20.15	
					1	49	1	22.33	19.65	
					1	99	1	22.09	19.81	
					50	0	2	21.00	20.13	
					50	24	2	21.07	19.98	
				50	49	2	21.00	20.15		
				100	0	2	20.95	20.16		

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band 4

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)		
								W/o Power back-off	W/ Power back-off	
4	1.4	19957	1710.7	QPSK	1	0	0	22.85	17.44	
					1	2	0	22.79	17.40	
					1	5	0	22.55	16.99	
					3	0	1	21.89	17.33	
					3	1	1	22.06	17.43	
					3	2	1	21.86	17.09	
				6	0	1	21.87	17.20		
				6	0	1	21.87	17.20		
				16QAM	1	0	1	22.00	16.50	
					1	2	1	21.94	17.30	
					1	5	1	21.89	16.48	
					3	0	2	20.93	17.00	
		3	1		2	21.00	17.08			
		3	2		2	20.86	17.20			
		20175	1732.5	QPSK	1732.5	1	0	0	22.84	17.28
						1	2	0	22.72	17.05
						1	5	0	22.62	17.14
						3	0	1	21.89	17.05
						3	1	1	21.82	16.97
						3	2	1	21.76	16.93
				6	0	1	21.84	16.96		
				16QAM	1	0	1	21.86	16.80	
					1	2	1	21.83	16.69	
					1	5	1	21.80	16.49	
					3	0	2	20.86	17.19	
					3	1	2	20.83	17.01	
		3	2		2	20.87	17.06			
		20392	1754.2	QPSK	1754.2	1	0	0	22.62	17.16
						1	2	0	22.69	17.09
						1	5	0	22.66	17.48
						3	0	1	21.84	16.96
						3	1	1	21.82	17.02
						3	2	1	21.80	16.88
				6	0	1	21.93	16.94		
				16QAM	1	0	1	21.94	17.29	
					1	2	1	22.00	16.91	
1	5				1	21.97	16.90			
3	0				2	21.86	17.33			
3	1				2	21.75	17.07			
3	2	2	21.67		16.72					
6	0	2	21.70	17.14						

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)		
								W/o Power back-off	W/ Power back-off	
4	3	19965	1711.5	QPSK	1	0	0	22.86	17.50	
					1	7	0	22.80	17.52	
					1	14	0	22.56	17.19	
					8	0	1	21.90	17.44	
					8	4	1	22.07	17.55	
					8	7	1	21.87	17.30	
				16QAM	15	0	1	21.88	17.34	
					1	0	1	22.01	16.57	
					1	7	1	21.95	17.50	
					1	14	1	21.90	16.64	
					8	0	2	20.94	17.07	
					8	4	2	21.01	17.22	
		20175	1732.5	QPSK	1732.5	8	7	2	20.87	17.31
						8	0	2	20.90	17.34
						1	0	0	22.85	17.43
						1	7	0	22.73	17.23
						1	14	0	22.63	17.26
						8	0	1	21.90	17.19
				16QAM	8	4	1	21.83	17.07	
					8	7	1	21.77	17.08	
					15	0	1	21.85	17.02	
					1	0	1	21.87	17.00	
					1	7	1	21.84	16.86	
					1	14	1	21.81	16.58	
		20384	1753.4	QPSK	1753.4	8	0	2	20.87	17.28
						8	4	2	20.84	17.08
						8	7	2	20.88	17.12
						15	0	2	20.78	17.14
						1	0	0	22.63	17.32
						1	7	0	22.70	17.24
				16QAM	1	14	0	22.67	17.52	
					8	0	1	21.85	17.17	
					8	4	1	21.83	17.17	
					8	7	1	21.81	17.02	
					15	0	1	21.94	17.12	
					1	0	1	21.95	17.37	
16QAM	1	7	1	22.01	16.97					
	1	14	1	21.98	17.05					
	8	0	2	21.87	17.52					
	8	4	2	21.76	17.22					
	8	7	2	21.68	16.80					
	15	0	2	21.71	17.17					

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。



Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
4	5	19975	1712.5	QPSK	1	0	0	22.88	17.57
					1	12	0	22.82	17.61
					1	24	0	22.58	17.27
					12	0	1	21.92	17.47
					12	6	1	22.09	17.59
					12	11	1	21.89	17.42
				25	0	1	21.90	17.45	
				16QAM	1	0	1	22.03	16.59
					1	12	1	21.97	17.54
					1	24	1	21.92	16.85
					12	0	2	20.96	17.22
					12	6	2	21.03	17.31
		12	11		2	20.89	17.48		
		25	0	2	20.92	17.36			
		20175	1732.5	QPSK	1	0	0	22.86	17.57
					1	12	0	22.74	17.40
					1	24	0	22.64	17.36
					12	0	1	21.91	17.37
					12	6	1	21.84	17.18
					12	11	1	21.78	17.20
				25	0	1	21.86	17.05	
				16QAM	1	0	1	21.88	17.15
					1	12	1	21.85	16.97
					1	24	1	21.82	16.62
					12	0	2	20.88	17.39
					12	6	2	20.85	17.28
		12	11		2	20.89	17.16		
		25	0	2	20.79	17.25			
		20375	1752.5	QPSK	1	0	0	22.64	17.38
					1	12	0	22.71	17.35
1	24				0	22.68	17.54		
12	0				1	21.86	17.19		
12	6				1	21.84	17.33		
12	11				1	21.82	17.12		
25	0			1	21.95	17.32			
16QAM	1			0	1	21.96	17.50		
	1			12	1	22.02	17.08		
	1			24	1	21.99	17.19		
	12			0	2	21.88	17.58		
	12			6	2	21.77	17.41		
	12	11	2	21.69	16.98				
25	0	2	21.72	17.35					

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)		
								W/o Power back-off	W/ Power back-off	
4	10	20000	1715.0	QPSK	1	0	0	22.89	17.69	
					1	24	0	22.83	17.64	
					1	49	0	22.59	17.36	
					25	0	1	21.93	17.59	
					25	12	1	22.10	17.62	
					25	24	1	21.90	17.59	
				16QAM	50	0	1	21.91	17.50	
					1	0	1	22.04	16.75	
					1	24	1	21.98	17.75	
					1	49	1	21.93	16.96	
					25	0	2	20.97	17.40	
					25	12	2	21.04	17.39	
		20175	1732.5	QPSK	1732.5	1	0	0	22.88	17.63
						1	24	0	22.76	17.51
						1	49	0	22.66	17.42
						25	0	1	21.93	17.57
						25	12	1	21.86	17.36
						25	24	1	21.80	17.26
				16QAM	50	0	1	21.88	17.24	
					1	0	1	21.90	17.35	
					1	24	1	21.87	17.18	
					1	49	1	21.84	16.82	
					25	0	2	20.90	17.46	
					25	12	2	20.87	17.38	
		20350	1750.0	QPSK	1750.0	1	0	0	22.67	17.57
						1	24	0	22.74	17.48
						1	49	0	22.71	17.57
25	0					1	21.89	17.37		
25	12					1	21.87	17.43		
25	24					1	21.85	17.29		
16QAM	50			0	1	21.98	17.35			
	1			0	1	21.99	17.58			
	1			24	1	22.05	17.13			
	1			49	1	22.02	17.38			
	25			0	2	21.91	17.65			
	25			12	2	21.80	17.62			
25	24	2	21.72	17.19						
50	0	2	21.75	17.47						

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-off
4	15	20025	1717.5	QPSK	1	0	0	22.92	17.86
					1	37	0	22.86	17.80
					1	74	0	22.62	17.50
					36	0	1	21.96	17.64
					36	18	1	22.13	17.65
					36	35	1	21.93	17.64
				75	0	1	21.94	17.57	
				1	0	1	22.07	16.90	
				1	37	1	22.01	17.77	
				1	74	1	21.96	17.03	
				36	0	2	21.00	17.52	
				36	18	2	21.07	17.58	
		36	35	2	20.93	17.65			
		75	0	2	20.96	17.48			
		1	0	0	22.90	17.74			
		1	37	0	22.78	17.70			
		1	74	0	22.68	17.44			
		36	0	1	21.95	17.63			
		36	18	1	21.88	17.50			
		36	35	1	21.82	17.45			
		75	0	1	21.90	17.45			
		1	0	1	21.92	17.54			
		1	37	1	21.89	17.39			
		1	74	1	21.86	17.01			
		36	0	2	20.92	17.62			
		36	18	2	20.89	17.48			
		36	35	2	20.93	17.42			
		75	0	2	20.83	17.57			
		1	0	0	22.69	17.69			
		1	37	0	22.76	17.61			
		1	74	0	22.73	17.68			
		36	0	1	21.91	17.39			
		36	18	1	21.89	17.51			
		36	35	1	21.87	17.33			
		75	0	1	22.00	17.44			
		1	0	1	22.01	17.64			
1	37	1	22.07	17.30					
1	74	1	22.04	17.52					
36	0	2	21.93	17.78					
36	18	2	21.82	17.67					
36	35	2	21.74	17.32					
75	0	2	21.77	17.53					

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)		
								W/o Power back-off	W/ Power back-off	
4	20	20050	1720.0	QPSK	1	0	0	23.00	17.97	
					1	49	0	22.94	17.83	
					1	99	0	22.70	17.57	
					50	0	1	22.04	17.74	
					50	24	1	22.21	17.71	
					50	49	1	22.01	17.78	
				100	0	1	22.02	17.72		
				16QAM	1	0	1	22.15	17.04	
					1	49	1	22.09	17.82	
					1	99	1	22.04	17.22	
					50	0	2	21.08	17.59	
					50	24	2	21.15	17.73	
		50	49		2	21.01	17.69			
		100	0	2	21.04	17.55				
		20175	1732.5	QPSK	1732.5	1	0	0	22.96	17.93
						1	49	0	22.84	17.73
						1	99	0	22.74	17.52
						50	0	1	22.01	17.65
						50	24	1	21.94	17.57
						50	49	1	21.88	17.60
				100	0	1	21.96	17.63		
				16QAM	1	0	1	21.98	17.59	
					1	49	1	21.95	17.53	
					1	99	1	21.92	17.09	
					50	0	2	20.98	17.71	
					50	24	2	20.95	17.63	
		50	49		2	20.99	17.56			
		100	0	2	20.89	17.63				
		20300	1745.0	QPSK	1745.0	1	0	0	22.74	17.72
						1	49	0	22.81	17.81
1	99					0	22.78	17.82		
50	0					1	21.96	17.43		
50	24					1	21.94	17.69		
50	49					1	21.92	17.54		
100	0			1	22.05	17.64				
16QAM	1			0	1	22.06	17.70			
	1			49	1	22.12	17.48			
	1			99	1	22.09	17.69			
	50			0	2	21.98	17.84			
	50			24	2	21.87	17.77			
	50	49	2	21.79	17.51					
100	0	2	21.82	17.64						

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band 5

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)		
								W/o Power back-off	W/ Power back-on	
5	1.4	20407	824.7	QPSK	1	0	0	22.67		
					1	2	0	22.59		
					1	5	0	22.55		
					3	0	1	21.88		
					3	1	1	21.74		
					3	2	1	21.55		
				16QAM	6	0	1	21.67		
					1	0	1	21.81		
					1	2	1	21.80		
					1	5	1	21.78		
					3	0	2	20.88		
					3	1	2	20.81		
		20525	836.5	QPSK	836.5	3	2	2	20.78	
						6	0	2	20.84	
						1	0	0	22.19	
						1	2	0	22.12	
						1	5	0	22.07	
						3	0	1	21.47	
				16QAM	3	1	1	21.36		
					3	2	1	21.30		
					6	0	1	21.22		
					1	0	1	21.64		
					1	2	1	21.62		
					1	5	1	21.53		
		20642	848.2	QPSK	848.2	3	0	2	20.47	
						3	1	2	20.34	
						3	2	2	20.38	
						6	0	2	20.23	
						1	0	0	22.57	
						1	2	0	22.60	
				16QAM	1	5	0	22.48		
					3	0	1	21.57		
					3	1	1	21.61		
					3	2	1	21.68		
					6	0	1	21.73		
					1	0	1	21.77		
16QAM	1	2	1	21.64						
	1	5	1	21.97						
	3	0	2	20.64						
	3	1	2	20.78						
	3	2	2	20.76						
	6	0	2	20.76						

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-on
5	3	20415	825.5	QPSK	1	0	0	22.70	
					1	7	0	22.62	
					1	14	0	22.58	
					8	0	1	21.91	
					8	4	1	21.77	
					8	7	1	21.58	
				15	0	1	21.70		
				16QAM	1	0	1	21.84	
					1	7	1	21.83	
					1	14	1	21.81	
					8	0	2	20.91	
					8	4	2	20.84	
		8	7		2	20.81			
		20525	836.5	QPSK	1	0	0	22.20	
					1	7	0	22.13	
					1	14	0	22.08	
					8	0	1	21.48	
					8	4	1	21.37	
					8	7	1	21.31	
				15	0	1	21.23		
				16QAM	1	0	1	21.65	
					1	7	1	21.63	
					1	14	1	21.54	
					8	0	2	20.48	
					8	4	2	20.35	
		8	7		2	20.39			
		20634	847.4	QPSK	1	0	0	22.59	
					1	7	0	22.62	
					1	14	0	22.50	
					8	0	1	21.59	
8	4				1	21.63			
8	7				1	21.70			
15	0			1	21.75				
16QAM	1			0	1	21.79			
	1			7	1	21.66			
	1			14	1	21.99			
	8			0	2	20.66			
	8			4	2	20.80			
	8	7	2	20.78					
15	0	2	20.78						

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)			
								W/o Power back-off	W/ Power back-on		
5	5	20425	826.5	QPSK	1	0	0	22.72			
					1	12	0	22.64			
					1	24	0	22.60			
					12	0	1	21.93			
					12	6	1	21.79			
					12	11	1	21.60			
				16QAM	25	0	1	21.72			
					1	0	1	21.86			
					1	12	1	21.85			
					1	24	1	21.83			
					12	0	2	20.93			
					12	6	2	20.86			
		20525	836.5	QPSK	836.5	QPSK	1	0	0	22.21	
							1	12	0	22.14	
							1	24	0	22.09	
							12	0	1	21.49	
							12	6	1	21.38	
							12	11	1	21.32	
				16QAM	25	0	1	21.24			
					1	0	1	21.66			
					1	12	1	21.64			
					1	24	1	21.55			
					12	0	2	20.49			
					12	6	2	20.36			
		20625	846.5	QPSK	846.5	QPSK	1	0	0	22.61	
							1	12	0	22.64	
							1	24	0	22.52	
							12	0	1	21.61	
							12	6	1	21.65	
							12	11	1	21.72	
				16QAM	25	0	1	21.77			
					1	0	1	21.81			
					1	12	1	21.68			
					1	24	1	22.01			
					12	0	2	20.68			
					12	6	2	20.82			
					12	11	2	20.80			
					25	0	2	20.80			

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)		
								W/o Power back-off	W/ Power back-on	
5	10	20450	829.0	QPSK	1	0	0	22.77		
					1	24	0	22.69		
					1	49	0	22.65		
					25	0	1	21.98		
					25	12	1	21.84		
					25	24	1	21.65		
				16QAM	50	0	1	21.77		
					1	0	1	21.91		
					1	24	1	21.90		
					1	49	1	21.88		
					25	0	2	20.98		
					25	12	2	20.91		
		20525	836.5	QPSK	836.5	1	0	0	22.25	
						1	24	0	22.18	
						1	49	0	22.13	
						25	0	1	21.53	
						25	12	1	21.42	
						25	24	1	21.36	
				16QAM	50	0	1	21.28		
					1	0	1	21.70		
					1	24	1	21.68		
					1	49	1	21.59		
					25	0	2	20.53		
					25	12	2	20.40		
		20600	844.0	QPSK	844.0	1	0	0	22.68	
						1	24	0	22.71	
						1	49	0	22.59	
						25	0	1	21.68	
						25	12	1	21.72	
						25	24	1	21.79	
16QAM	50			0	1	21.84				
	1			0	1	21.88				
	1			24	1	21.75				
	1			49	1	22.08				
	25			0	2	20.75				
	25			12	2	20.89				
25	24	2	20.87							
50	0	2	20.87							

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。



Band 12

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)		
								W/o Power back-off	W/ Power back-on	
12	1.4	23017	699.7	QPSK	1	0	0	22.15		
					1	2	0	22.07		
					1	5	0	21.98		
					3	0	1	21.92		
					3	1	1	21.62		
					3	2	1	21.41		
				6	0	1	21.50			
				16QAM	1	0	1	21.85		
					1	2	1	21.83		
					1	5	1	21.78		
					3	0	2	20.52		
					3	1	2	20.44		
		3	2		2	20.37				
		23095	707.5	QPSK	707.5	1	0	0	22.12	
						1	2	0	21.99	
						1	5	0	22.09	
						3	0	1	21.17	
						3	1	1	21.13	
						3	2	1	21.10	
				6	0	1	21.11			
				16QAM	1	0	1	21.16		
					1	2	1	21.18		
					1	5	1	21.13		
					3	0	2	20.26		
					3	1	2	20.23		
		3	2		2	20.13				
		23173	715.3	QPSK	715.3	1	0	0	21.98	
						1	2	0	22.01	
						1	5	0	21.93	
						3	0	1	21.21	
3	1					1	21.16			
3	2					1	21.11			
6	0			1	21.08					
16QAM	1			0	1	21.43				
	1			2	1	21.37				
	1			5	1	21.33				
	3			0	2	20.49				
	3			1	2	20.41				
	3	2	2	20.38						
6	0	2	20.42							

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-on
12	3	23025	700.5	QPSK	1	0	0	22.18	
					1	7	0	22.10	
					1	14	0	22.01	
					8	0	1	21.95	
					8	4	1	21.65	
					8	7	1	21.44	
				15	0	1	21.53		
				16QAM	1	0	1	21.88	
					1	7	1	21.86	
					1	14	1	21.81	
					8	0	2	20.55	
					8	4	2	20.47	
		8	7		2	20.40			
		23095	707.5	QPSK	1	0	0	22.13	
					1	7	0	22.00	
					1	14	0	22.10	
					8	0	1	21.18	
					8	4	1	21.14	
					8	7	1	21.11	
				15	0	1	21.12		
				16QAM	1	0	1	21.17	
					1	7	1	21.19	
					1	14	1	21.14	
					8	0	2	20.27	
					8	4	2	20.24	
		8	7		2	20.14			
		23165	714.5	QPSK	1	0	0	22.00	
					1	7	0	22.03	
					1	14	0	21.95	
					8	0	1	21.23	
8	4				1	21.18			
8	7				1	21.13			
15	0			1	21.10				
16QAM	1			0	1	21.45			
	1			7	1	21.39			
	1			14	1	21.35			
	8			0	2	20.51			
	8			4	2	20.43			
	8	7	2	20.40					
15	0	2	20.44						

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)					
								W/o Power back-off	W/ Power back-on				
12	5	23035	701.5	QPSK	1	0	0	22.20					
					1	12	0	22.12					
					1	24	0	22.03					
					12	0	1	21.97					
					12	6	1	21.67					
					12	11	1	21.46					
				16QAM	25	0	1	21.55					
					1	0	1	21.90					
					1	12	1	21.88					
					1	24	1	21.83					
					12	0	2	20.57					
					12	6	2	20.49					
		23095	707.5	QPSK	707.5	QPSK	12	11	2	20.42			
							12	11	2	20.42			
							25	0	2	20.50			
							1	0	0	22.14			
							1	12	0	22.01			
							1	24	0	22.11			
				16QAM	16QAM	16QAM	16QAM	16QAM	12	0	1	21.19	
									12	6	1	21.15	
									12	11	1	21.12	
									25	0	1	21.13	
									1	0	1	21.18	
									1	12	1	21.20	
		23155	713.5	QPSK	713.5	QPSK	1	24	1	21.15			
							12	0	2	20.28			
							12	6	2	20.25			
							12	11	2	20.15			
							25	0	2	20.11			
							1	0	0	22.02			
				16QAM	16QAM	16QAM	16QAM	16QAM	1	12	0	22.05	
									1	24	0	21.97	
									12	0	1	21.25	
									12	6	1	21.20	
									12	11	1	21.15	
									25	0	1	21.12	
16QAM	16QAM	16QAM	16QAM	16QAM	1	0	1	21.47					
					1	12	1	21.41					
					1	24	1	21.37					
					12	0	2	20.53					
					12	6	2	20.45					
					12	11	2	20.42					
25	0	2	20.46										

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	
								W/o Power back-off	W/ Power back-on
12	10	23060	704.0	QPSK	1	0	0	22.25	
					1	24	0	22.17	
					1	49	0	22.08	
					25	0	1	22.02	
					25	12	1	21.72	
					25	24	1	21.51	
				50	0	1	21.60		
				16QAM	1	0	1	21.95	
					1	24	1	21.93	
					1	49	1	21.88	
					25	0	2	20.62	
					25	12	2	20.54	
		25	24		2	20.47			
		50	0	2	20.55				
		23095	707.5	QPSK	1	0	0	22.18	
					1	24	0	22.05	
					1	49	0	22.15	
					25	0	1	21.23	
					25	12	1	21.19	
					25	24	1	21.16	
				50	0	1	21.17		
				16QAM	1	0	1	21.22	
					1	24	1	21.24	
					1	49	1	21.19	
					25	0	2	20.32	
					25	12	2	20.29	
		25	24		2	20.19			
		50	0	2	20.15				
		23130	711.0	QPSK	1	0	0	22.09	
					1	24	0	22.12	
1	49				0	22.04			
25	0				1	21.32			
25	12				1	21.27			
25	24				1	21.22			
50	0			1	21.19				
16QAM	1			0	1	21.54			
	1			24	1	21.48			
	1			49	1	21.44			
	25			0	2	20.60			
	25			12	2	20.52			
	25	24	2	20.49					
50	0	2	20.53						

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

### 11.3 Wi-Fi (2.4GHz Band)

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Avg. Pwr (dBm)			Maximum Tune-up Pwr (dBm)			SAR Test (Yes/No)	Note
					Main	Aux	MIMO	Main	Aux	MIMO		
2.4	802.11b	1	1	2412	16.34			17.50			Yes	
			6	2437	16.77			17.50				
			11	2462	17.15			17.50				
	802.11g	6	1	2412	No Required			16.50			No	1
			6	2437				16.50				
			11	2462				16.50				
	802.11n HT20	MCS0	1	2412	No Required			13.50			No	1
			6	2437				13.50				
			11	2462				13.50				

1. Output Power and SAR is not required for 802.11 g/n HT20/n HT40 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. WLAN power result refer to FCC report T181222W03-SF, Market segmentation difference only.

Report No.: T190115W01-SF

### 11.4 Wi-Fi (5GHz Band)

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Avg. Pwr (dBm)			Maximum Tune-up Pwr (dBm)			SAR Test (Yes/No)	Note
					Main	Aux	MIMO	Main	Aux	MIMO		
5.2 (U-NII 1)	802.11a	6	36-48	5180-5240	Not Required			9.50			No	1
	802.11n (HT20)	MCS0	36-48	5180-5240				5.50			No	1
	802.11n (HT40)	MCS0	38-46	5190-5230				5.50			No	1
	802.11ac (VHT80)	VHT0	42	5210				5.50			No	1
5.3 (U-NII 2A)	802.11a	6	52	5260	7.18			9.50			Yes	
		6	56	5280	7.58			9.50			Yes	
		6	60	5300	7.86			9.50			Yes	
		6	64	5320	8.13			9.50			Yes	
	802.11n (HT20)	MCS0	52-64	5260-5320	Not Required			5.50			No	2
	802.11n (HT40)	MCS0	54-62	5270-5310				5.50			No	2
	802.11ac (VHT80)	VHT0	58	5290				5.50			No	2

**Note(s):**

- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
  - $\leq 1.2$  W/kg, SAR is not required for UNII band I.
  - $> 1.2$  W/kg, both bands should be tested independently for SAR.
- Output Power and SAR measurement is not required for 802.11n HT20/n HT40/802.11ac channels when the specified maximum tune-up powers are less or same with 802.11a .
- WLAN power result refer to FCC report T181222W03-SF, Market segmentation difference only .

Report No.: T190115W01-SF

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Avg. Pwr (dBm)			Maximum Tune-up Pwr (dBm)			SAR Test (Yes/No)	Note
					Main	Aux	MIMO	Main	Aux	MIMO		
5.5 (U-NII-2C)	802.11a	6	100	5500	9.05			11.50			Yes	
	802.11a	6	104	5520	9.37			11.50			Yes	
	802.11a	6	108	5540	9.65			11.50			Yes	
	802.11a	6	112	5560	9.85			11.50			Yes	
	802.11a	6	116	5580	9.90			11.50			Yes	
	802.11a	6	120	5600	10.10			11.50			Yes	
	802.11a	6	124	5620	10.13			11.50			Yes	
	802.11a	6	128	5640	9.96			11.50			Yes	
	802.11a	6	132	5660	9.98			11.50			Yes	
	802.11a	6	136	5680	9.85			11.50			Yes	
	802.11a	6	140	5700	9.76			11.50			Yes	
	802.11n (HT20)	MCS0	100-144	5500-5720	Not Required			6.50			No	1
	802.11n (HT40)	MCS0	102-142	5510-5710				7.50			No	1
802.11ac (VHT80)	VHT0	106-138	5530-5690	7.50						No	1	

**Note(s):**

- Output Power and SAR measurement is not required for 802.11n HT20/n HT40/802.11ac channels when the specified maximum tune-up powers are less or same with 802.11n HT20/HT40/802.11ac and the measured SAR is  $\leq 1.2$  W/Kg.
- Output Power and SAR measurement is not required for / 802.11n HT20/n HT40 /802.11ac channels when the specified maximum tune-up powers are less or same with 802.11 a.
- WLAN power result refer to FCC report T181222W03-SF, Market segmentation difference only .

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

**Report No.:** T190115W01-SF

Band (GHz)	Mode	Data rate (Mbps)	Ch #	Freq. (MHz)	Avg. Pwr (dBm)			Maximum Tune-up Pwr (dBm)			SAR Test (Yes/No)	Note
					Main	Aux	MIMO	Main	Aux	MIMO		
5.8 (U-NII-3)	802.11a	6	149	5745	9.21			11.50			Yes	
		6	153	5765	9.25			11.50			Yes	
		6	157	5785	9.27			11.50			Yes	
		6	161	5805	9.22			11.50			Yes	
		6	165	5825	9.17			11.50			Yes	
	802.11n (HT20)	MCS0	149-165	5745-5825	Not Required			6.50			No	1
	802.11n (HT40)	MCS0	151-159	5755-5795				6.50			No	1
	802.11ac (VHT80)	VHT0	155	5775				6.50			No	1

**Note(s):**

- Output Power and SAR measurement is not required for 802.11n HT20/n HT40/802.11ac channels when the specified maximum tune-up powers are less or same with 802.11n HT20/HT40/802.11ac and the measured SAR is  $\leq 1.2$  W/Kg.
- Output Power and SAR measurement is not required for / 802.11n HT20/n HT40 /802.11ac channels when the specified maximum tune-up powers are less or same with 802.11 a.
- WLAN power result refer to FCC report T181222W03-SF, Market segmentation difference only .

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。



Report No.: T190115W01-SF

### 11.5 Bluetooth

Modulation	Channel No.	Frequency(MHz)	Avg. power(dBm)
DH5	Low	2402	4.9
	Middle	2441	5.7
	High	2480	5.8
3DH5	Low	2402	-0.7
	Middle	2441	-0.3
	High	2480	0.0
BLE	Low	2402	4.3
	Middle	2440	5.4
	High	2480	5.7

Per exclusion calculations in Section 12, SAR testing for Bluetooth is not required.  
BT power result refer to FCC report T181222W03-SF, Market segmentation difference only .

## 12 Summary of SAR Test Exclusion Configurations

### 12.1 Standalone SAR Test Exclusion Calculations

Since the Dedicated Host Approach is applied, the standalone SAR test exclusion procedure in KDB 447498 section 4.3.1 is applied in conjunction with KDB 616217 section 4.3 to determine the minimum test separation distance:

1. According to KDB 447498 Section 4.1 5) if the antenna is at close proximity to user then the outer surface of the DUT should be treated as the radiating surface. The test separation distance is then determined by the smallest distance between the outer surface of the device and the user. For the purposes of this report close proximity has been defined as closer than 50 mm. For antennas <50 mm from the rear or edge the separation distance used for the estimated SAR calculations is 0 mm.
2. When the minimum test separation distance is < 5mm, a distance of 5mm is applied to determine SAR test exclusion.
3. When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.
4. If the antenna to DUT adjacent edge or bottom separation distance >50mm the actual antenna to user separation distance is used to determine SAR exclusion and estimated SAR value.

Refer to Appendix for the specific details on the antenna-to-antenna and antenna-to-edge distances used for test exclusion calculations.

Report No.: T190115W01-SF

### 12.1.1 SAR Exclusion Calculations for Wi Fi Antenna < 50mm from the User

According to KDB 447498 v06 r02 in section 4.3.1, if the calculated threshold value is > 3 then SAR testing is required.

#### For WWAN

Full Power, Proximity Sensor Off.

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
			dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
	WCDMA Band II	1880.0	23.0	200	10.00	6.00	1.00	7.00	70.00	27.40	45.70	274.20	39.20	>50mm
	WCDMA Band IV	1732.4	23.0	200	10.00	6.00	1.00	7.00	70.00	26.30	43.90	263.20	37.60	>50mm
	WCDMA Band V	826.4	23.0	200	10.00	6.00	1.00	7.00	70.00	18.20	30.30	181.80	26.00	>50mm
	LTE Band 2	1860.0	23.0	200	10.00	6.00	1.00	7.00	70.00	27.30	45.50	272.80	39.00	>50mm
	LTE Band 4	1720.0	23.0	200	10.00	6.00	1.00	7.00	70.00	26.20	43.70	262.30	37.50	>50mm
	LTE Band 5	829.0	23.0	200	10.00	6.00	1.00	7.00	70.00	18.20	30.30	182.10	26.00	>50mm
	LTE Band 12	704.0	23.0	200	10.00	6.00	1.00	7.00	70.00	16.80	28.00	167.80	24.00	>50mm

Power back off, Proximity Sensor On.

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
			dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
	WCDMA Band II	1880.0	21.0	126	10.00	6.00	1.00	7.00	70.00	17.30	28.80	172.80	24.70	>50mm
	WCDMA Band IV	1732.4	19.0	79	10.00	6.00	1.00	7.00	70.00	10.40	17.30	104.00	14.90	>50mm
	LTE Band 2	1860.0	20.5	112	10.00	6.00	1.00	7.00	70.00	15.30	25.50	152.70	21.80	>50mm
	LTE Band 4	1720.0	18.0	63	10.00	6.00	1.00	7.00	70.00	8.30	13.80	82.60	11.80	>50mm

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190115W01-SF

For WLAN

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
			dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main	2.4GHz	2412	17.5	56	10.00	6.31	10.27	61.45	52.33	8.70	13.78	8.47	>50mm	>50mm
Wi-Fi Main	5.3GHz U-NII-2A	5320	9.5	9	10.00	6.31	10.27	61.45	52.33	2.08	3.29	2.02	>50mm	>50mm
Wi-Fi Main	5.5GHz U-NII-2C	5500	11.5	14	10.00	6.31	10.27	61.45	52.33	3.28	5.20	3.20	>50mm	>50mm
Wi-Fi Main	5.8GHz U-NII-3	5785	11.5	14	10.00	6.31	10.27	61.45	52.33	3.37	5.34	3.28	>50mm	>50mm
Wi-Fi Main	BLE	2440	6.0	4	10.00	6.31	10.27	61.45	52.33	0.62	0.99	0.61	>50mm	>50mm

Note: Bluetooth Calculated Threshold Value not > 3, then SAR testing not required.

Report No.: T190115W01-SF

### 12.1.2 SAR Exclusion Calculations for Wi-Fi Antenna > 50mm from the User

According to KDB 447498 v06 r02, if the calculated Power threshold is less than the output power then SAR testing is required.

#### For WWAN

Full Power, Proximity Sensor Off.

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
			dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
	WCDMA Band II	1880.0	23.0	200	10.00	6.00	1.00	7.00	70.00	<50mm	<50mm	<50mm	<50mm	309.40
	WCDMA Band IV	1732.4	23.0	200	10.00	6.00	1.00	7.00	70.00	<50mm	<50mm	<50mm	<50mm	313.96
	WCDMA Band V	826.4	23.0	200	10.00	6.00	1.00	7.00	70.00	<50mm	<50mm	<50mm	<50mm	365.00
	LTE Band 2	1860.0	23.0	200	10.00	6.00	1.00	7.00	70.00	<50mm	<50mm	<50mm	<50mm	309.99
	LTE Band 4	1720.0	23.0	200	10.00	6.00	1.00	7.00	70.00	<50mm	<50mm	<50mm	<50mm	314.37
	LTE Band 5	829.0	23.0	200	10.00	6.00	1.00	7.00	70.00	<50mm	<50mm	<50mm	<50mm	364.75
	LTE Band 12	704.0	23.0	200	10.00	6.00	1.00	7.00	70.00	<50mm	<50mm	<50mm	<50mm	378.77

Power back off, Proximity Sensor On.

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
			dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
	WCDMA Band II	1880.0	21.0	126	10.00	6.00	1.00	7.00	70.00	<50mm	<50mm	<50mm	<50mm	309.399
	WCDMA Band IV	1732.4	19.0	79	10.00	6.00	1.00	7.00	70.00	<50mm	<50mm	<50mm	<50mm	313.964
	LTE Band 2	1860.0	20.5	112	10.00	6.00	1.00	7.00	70.00	<50mm	<50mm	<50mm	<50mm	309.985
	LTE Band 4	1720.0	18.0	63	10.00	6.00	1.00	7.00	70.00	<50mm	<50mm	<50mm	<50mm	314.374

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190115W01-SF

For WLAN

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)					Calculated Threshold Value				
			dBm	mW	Rear	Edge1	Edge2	Edge3	Edge4	Rear	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main	2.4GHz	2412	17.5	56	10	6.31	10.27	61.45	52.33	<50mm	<50mm	<50mm	211.08	119.88
Wi-Fi Main	5.3GHz U-NII-2A	5320	9.5	9	10	6.31	10.27	61.45	52.33	<50mm	<50mm	<50mm	179.53	88.33
Wi-Fi Main	5.5GHz U-NII-2C	5500	11.5	14	10	6.31	10.27	61.45	52.33	<50mm	<50mm	<50mm	178.46	87.26
Wi-Fi Main	5.8GHz U-NII-3	5785	11.5	14	10	6.31	10.27	61.45	52.33	<50mm	<50mm	<50mm	176.86	85.66
Wi-Fi Main	BLE	2440	6.0	4	10	6.31	10.27	61.45	52.33	<50mm	<50mm	<50mm	210.53	119.33

Note. Bluetooth Calculated Threshold Value not > 3, then SAR testing not required.

Report No.: T190115W01-SF

### 12.1.3 SAR Required Test Configuration

Full Power, Proximity Sensor Off

Test Configurations	Rear	Edge1	Edge2	Edge3	Edge4
WCDMA Band 2	Yes	Yes	Yes	Yes	No
WCDMA Band 4	Yes	Yes	Yes	Yes	No
WCDMA Band 5	Yes	Yes	Yes	Yes	No
LTE Band 2	Yes	Yes	Yes	Yes	No
LTE Band 4	Yes	Yes	Yes	Yes	No
LTE Band 5	Yes	Yes	Yes	Yes	No
LTE Band 12	Yes	Yes	Yes	Yes	No
Wi-Fi 2.4GHz	Yes	Yes	Yes	No	No
Wi-Fi 5.3GHz	Yes	Yes	Yes	No	No
Wi-Fi 5.5GHz	Yes	Yes	Yes	No	No
Wi-Fi 5.8GHz	Yes	Yes	Yes	No	No
Bluetooth	No	No	No	No	No

Note(s):

1. Yes = SAR is required.
2. No = SAR is not required.

Power back off, Proximity Sensor On

Test Configurations	Rear	Edge1	Edge2	Edge3	Edge4
WCDMA Band 2	Yes	Yes	Yes	Yes	No
WCDMA Band 4	Yes	Yes	Yes	Yes	No
LTE Band 2	Yes	Yes	Yes	Yes	No
LTE Band 4	Yes	Yes	Yes	Yes	No

Note(s):

1. Yes = SAR is required.
2. No = SAR is not required.

## 13 Exposure Limit

### (A). Limits for Occupational/Controlled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.4	8.0	2.0

### (B). Limits for General Population/Uncontrolled Exposure (W/kg)

<u>Whole-Body</u>	<u>Partial-Body</u>	<u>Hands, Wrists, Feet and Ankles</u>
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

#### Population/Uncontrolled Environments:

are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

#### Occupational/Controlled Environments:

are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

**NOTE**  
**GENERAL POPULATION/UNCONTROLLED EXPOSURE**  
**PARTIAL BODY LIMIT**  
**1.6 W/kg**



## 14 Tissue Dielectric Properties

### 14.1 Test Liquid Confirmation

#### Simulating Liquids Parameter Check

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values.

The relative permittivity and conductivity of the tissue material should be within  $\pm 5\%$  of the values given in the table below.  $5\%$  may not be easily achieved at certain frequencies.

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE 1528 2013 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in IEEE 1528 2013 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE 1528 2013.

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190115W01-SF

### 14.2 Typical Composition of Ingredients for Liquid Tissue Phantoms

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

alt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ<sup>+</sup> resistivity

HEC: Hydroxy thyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra-pure): Polyethylene glycol mono [4-(1, 1, 3, 3-tetramethylbutyl)phenyl]ether

#### Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2

### 14.3 Simulating Liquids Parameter Check Results

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, $\epsilon_r$	Target Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon_r$	Measured $e''$	Measured Conductivity, $\sigma$ (S/m)	% dev $\epsilon_r$	% dev $\sigma$
Body	May, 06. 2019	704.00	55.710	0.960	57.520	23.63	0.926	-3.25%	3.54%
		750.00	55.531	0.963	57.156	23.28	0.971	-2.93%	-0.79%
		826.40	55.234	0.969	56.531	21.54	0.990	-2.35%	-2.17%
		829.00	55.218	0.963	56.488	21.49	0.991	-2.30%	-2.91%
		835.00	55.200	0.970	56.437	21.47	0.997	-2.24%	-2.78%
	May, 07. 2019	1712.40	53.531	1.465	51.516	14.67	1.428	3.76%	2.53%
		1720.00	53.511	1.469	51.505	14.66	1.434	3.75%	2.38%
		1732.40	53.478	1.477	51.460	14.63	1.448	3.77%	1.96%
		1750.00	53.432	1.488	51.402	14.66	1.466	3.80%	1.51%
	May, 08. 2019	1752.60	53.425	1.490	51.386	14.64	1.475	3.82%	1.01%
		1860.00	53.300	1.520	51.026	14.90	1.542	4.27%	-1.45%
		1880.00	53.300	1.520	50.955	14.90	1.558	4.40%	-2.50%
		1900.00	53.300	1.520	50.891	15.01	1.586	4.52%	-4.34%

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, $\epsilon_r$	Target Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon_r$	Measured $e''$	Measured Conductivity, $\sigma$ (S/m)	% dev $\epsilon_r$	% dev $\sigma$
Body	May, 06. 2019	2412.00	52.751	1.914	53.788	14.46	1.940	-1.97%	-1.37%
		2437.00	52.717	1.938	53.690	14.54	1.971	-1.85%	-1.72%
		2450.00	52.700	1.950	53.668	14.61	1.991	-1.84%	-2.10%
		2462.00	52.684	1.961	53.645	14.63	2.004	-1.82%	-2.17%
		5300.00	48.879	5.416	49.056	18.06	5.323	-0.36%	1.72%
		5320.00	48.851	5.439	48.939	18.09	5.353	-0.18%	1.59%
		5500.00	48.607	5.650	48.420	18.46	5.650	0.39%	-0.01%
		5600.00	48.471	5.766	48.093	18.64	5.806	0.78%	-0.69%
		5620.00	48.444	5.790	47.995	18.68	5.839	0.93%	-0.85%
		5700.00	48.336	5.883	47.733	18.83	5.971	1.25%	-1.49%
		5785.00	48.220	5.982	47.409	19.00	6.114	1.68%	-2.20%
		5800.00	48.200	6.000	47.392	19.04	6.143	1.68%	-2.38%

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

## 15 Measurement Uncertainty

According to KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz section 2.8.2, SAR measurement uncertainty analysis is required in SAR reports only when the highest measured SAR in a frequency band is  $\geq 1.5$  W/kg for 1-g SAR, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

## 16 System Performance Check

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications. The system performance check results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

### System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be  $\geq 15.0$  cm
- The DASY5 system with an E-field probe EX3DV4 SN: 7466 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15 mm (below 1 GHz) and 10 mm (above 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 10mm was aligned with the dipole.
- Special 7x7x7 fine cube was chosen for cube integration ( $dx=dy= 5$  mm,  $dz= 5$  mm).
- Distance between probe sensors and phantom surface was set to 3.0 mm.
- The dipole input power (forward power) was 100 mW $\pm$ 3%.
- The results are normalized to 1 W input power.

### Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D750V3	1015	2018/8/23	750	1g	8.23	8.62
				10g	5.34	5.71
D835V2	4d063	2018/8/23	835	1g	9.48	9.56
				10g	6.10	6.28
D1750V2	1008	2018/8/30	1750	1g	36.50	37.00
				10g	19.30	19.80
D1900V2	5d018	2018/06/21	1900	1g	40.1	40.2
				10g	21.2	21.4
D2450V2	869	2018/06/19	2450	1g	52.3	50.5
				10g	24.8	24.0
D5GHzV2	1040	2018/06/28	5300	1g	82.2	76.4
				10g	23.6	21.4
D5GHzV2	1040	2018/06/28	5600	1g	85.3	81.5
				10g	24.5	22.7
D5GHzV2	1040	2018/06/28	5800	1g	80.6	77.3
				10g	23.0	21.3

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190115W01-SF

### 16.1 System Performance Check Results

Date	System Dipole			Parameters	Target	Measured	Deviation[%]	Limited[%]
	Type	Serial No.	Liquid					
2019/5/6	D750V3	1015	Body	1g SAR:	8.62	8.36	-3.02	± 10
				10g SAR:	5.71	5.60	-1.93	± 10
2019/5/6	D835V2	4d063	Body	1g SAR:	9.56	9.76	2.09	± 10
				10g SAR:	6.28	6.32	0.64	± 10
2019/5/7	D1750V2	1008	Body	1g SAR:	37.00	35.72	-3.46	± 10
				10g SAR:	19.80	18.52	-6.46	± 10
2019/5/8	D1900V2	5d018	Body	1g SAR:	40.20	39.52	-1.69	± 10
				10g SAR:	21.40	20.40	-4.67	± 10
2019/5/6	D2450V2	869	Body	1g SAR:	50.50	53.20	5.35	± 10
				10g SAR:	24.00	25.68	7.00	± 10
2019/5/6	D5GHzV2	1040	Body	1g SAR:	76.40	75.40	-1.31	± 10
				10g SAR:	21.40	21.10	-1.40	± 10
2019/5/6	D5GHzV2	1040	Body	1g SAR:	81.50	80.50	-1.23	± 10
				10g SAR:	22.70	22.40	-1.32	± 10
2019/5/6	D5GHzV2	1040	Body	1g SAR:	77.30	74.80	-3.23	± 10
				10g SAR:	21.30	20.80	-2.35	± 10

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

## 17 SAR Measurements Results

### WCDMA BAND II:

Power back off (On/Off)	Mode	Test Position	Channel	Freq. (MHz)	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot.
						Tune up limit	Measured				
On	Rel 99 RMC 12.2Kbps	Edge 2	9400	1880.0	5	21.00	20.75	1.05	1.112	3.1	
						21.00	20.75	1.08	1.144	3.2	
Off	Rel 99 RMC 12.2Kbps	Edge 1	9400	1880.0	5	23.00	22.99	0.091	0.091		
		Edge2	9400	1880.0	15	23.00	22.99	0.683	0.685		
		Edge 3	9400	1880.0	5	23.00	22.99	0.410	0.411		
		Edge 4	9400	1880.0	5	23.00	22.99	0.043	0.043		
		Rear	9400	1880.0	5	23.00	22.99	0.385	0.386		

### Note(s):

- Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel.  $\geq 0.8$  W/kg and transmission band  $\leq 100$  MHz (Per KDB 447498 D01 v06)
- Power on position ref to power off position of worse case .
- Repeated measurements are required only when the measured SAR is  $\geq 0.80$  W/kg. If the measured SAR values are  $< 1.45$  W/kg with  $\leq 20\%$  variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04)
  - Original SAR = 1.112 W/kg, therefore two times repeat SAR is required.
  - Repeat SAR = 1.144W/kg  $< 1.45$ W/kg  
SAR variation= 2.88 %  $< 20\%$

**WCDMA BAND IV:**

Power back off (On/Off)	Mode	Test Position	Channel	Freq. (MHz)	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot
On	Rel 99 RMC 12.2Kbps	Edge 2	1412	1732.4	5	19.00	18.99	1.090	1.093		
			1312	1712.4	5	19.00	18.81	1.120	1.170	3.1	
			1513	1752.6	5	19.00	18.77	1.030	1.086		
			1312	1712.4	5	19.00	18.81	1.120	1.170	3.2	
Off	Rel 99 RMC 12.2Kbps	Edge 1	1412	1732.4	5	23.00	22.83	0.059	0.061		
		Edge 2	1412	1732.4	15	23.00	22.83	1.090	1.134		
			1312	1712.4	15	23.00	22.81	1.000	1.045		
			1513	1752.6	15	23.00	22.67	1.090	1.176	3.3	
			1513	1752.6	15	23.00	22.67	0.933	1.007	3.4	
		Edge 3	1412	1732.4	5	23.00	22.83	0.577	0.600		
		Edge 4	1412	1732.4	5	23.00	22.83	0.248	0.258		
		Rear	1412	1732.4	5	23.00	22.83	0.655	0.681		

**Note(s):**

1. Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel.  $\geq 0.8$  W/kg and transmission band  $\leq 100$  MHz (Per KDB 447498 D01 v06)
2. Power on position ref to power off position of worse case .
3. Repeated measurements are required only when the measured SAR is  $\geq 0.80$  W/kg. If the measured SAR values are  $< 1.45$  W/kg with  $\leq 20\%$  variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04)
  - 3.1 Original SAR = 1.117 W/kg, therefore two times repeat SAR is required.
  - 3.2 Repeat SAR = 1.117W/kg  $< 1.45$ W/kg  
SAR variation= 0 %  $< 20\%$
  - 3.3 Original SAR = 1.176 W/kg, therefore two times repeat SAR is required.
  - 3.4 Repeat SAR = 1.007W/kg  $< 1.45$ W/kg  
SAR variation= -14.37 %  $< 20\%$



**WCDMA BAND V:**

Power back off (On/Off)	Mode	Test Position	Channel	Freq. (MHz)	Dist. (mm)	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot
						Tune up limit	Measured				
Off	Rel 99 RMCs 12.2Kbps	Edge 1	4132	826.4	5	23.00	22.59	0.174	0.191		
		Edge2	4132	826.4	5	23.00	22.59	0.237	0.260		
		Edge 3	4132	826.4	5	23.00	22.59	0.091	0.100		
		Edge 4	4132	826.4	5	23.00	22.59	0.040	0.043		
		Rear	4132	826.4	5	23.00	22.59	0.275	0.302		

**Note(s):**

1. Testing of other required channels within the operating mode of a frequency band is required when the reported 1-g SAR for the mid-band or highest output power channel.  $\geq 0.8$  W/kg and transmission band  $\leq 100$  MHz (Per KDB 447498 D01 v06)

Report No.: T190115W01-SF

**LTE Band 2 (20MHz Bandwidth):**

Power back off (On/Off)	Mode	Test Position	Channel	Freq. (MHz)	Dist. (mm)	UL RB Allocation	UL RB Start	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot
								Tune up limit	Measured				
On	QPSK	Edge 2	18700	1860.0	5	1	0	20.50	20.23	1.020	1.085		
			18700	1860.0		50	0	20.50	20.18	1.040	1.120	4.1	
			18700	1860.0		100	0	20.50	20.15	1.010	1.095		
			18700	1860.0		50	0	20.50	20.18	1.040	1.120	4.2	
Off	QPSK	Edge1	18700	1860.0	5	1	0	23.00	22.98	0.045	0.045		
			18700	1860.0		50	0	23.00	22.01	0.036	0.046		
		Edge2	18700	1860.0	15	1	0	23.00	22.98	0.711	0.714		
			18700	1860.0		50	0	23.00	22.01	0.548	0.688		
		Edge3	18700	1860.0	5	1	0	23.00	22.98	0.351	0.353		
			18700	1860.0		50	0	23.00	22.01	0.285	0.358		
		Edge4	18700	1860.0	5	1	0	23.00	22.98	0.053	0.053		
			18700	1860.0		50	0	23.00	22.01	0.032	0.041		
		Rear	18700	1860.0	5	1	0	23.00	22.98	0.311	0.312		
			18700	1860.0		50	0	23.00	22.01	0.256	0.322		

**Note(s):**

- When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. (Per KDB 941225 D05 v02r05)
- Power on position ref to power off position of worse case .
- The highest reported SAR for 1 RB and 50% RB allocation are  $\geq 0.8$  W/kg, SAR is required of 100% RB. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation  $< 1.45$  W/kg. (Per KDB 941225 D05 v02r05)
- Repeated measurements are required only when the measured SAR is  $\geq 0.80$  W/kg. If the measured SAR values are  $< 1.45$  W/kg with  $\leq 20\%$  variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04)
  - Original SAR = 1.120 W/kg, therefore two times repeat SAR is required.
  - Repeat SAR = 1.095W/kg  $< 1.45$ W/kg  
SAR variation=  $-2.23\% < 20\%$

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190115W01-SF

**LTE Band 4 (20MHz Bandwidth):**

Power back off (On/Off)	Mode	Test Position	Channel	Freq. (MHz)	Dist. (mm)	UL RB Allocation	UL RB Start	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot
								Tune up limit	Measured				
On	QPSK	Edge 2	20050	1720.0	5	1	0	18.00	17.97	1.110	1.118		
			20050	1720.0		50	0	18.00	17.74	1.100	1.168		
			20050	1720.0		100	0	18.00	17.72	1.110	1.184	4.1	
			20050	1720.0		100	0	18.00	17.72	1.090	1.163	4.2	
Off	QPSK	Edge1	20050	1720.0	5	1	0	23.00	23.00	0.037	0.037		
			20050	1720.0		50	0	23.00	22.04	0.029	0.036		
		Edge2	20050	1720.0	15	1	0	23.00	23.00	1.100	1.100		
			20050	1720.0		50	0	23.00	22.04	0.886	1.105		
			20050	1720.0		100	0	23.00	22.02	0.890	1.115	4.3	
		Edge3	20050	1720.0	5	1	0	23.00	23.00	0.527	0.527		
			20050	1720.0		50	0	23.00	22.04	0.400	0.499		
		Edge4	20050	1720.0	5	1	0	23.00	23.00	0.255	0.255		
			20050	1720.0		50	0	23.00	22.04	0.194	0.242		
		Rear	20050	1720.0	5	1	0	23.00	23.00	0.471	0.471		
			20050	1720.0		50	0	23.00	22.04	0.389	0.485		

**Note(s):**

- When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. (Per KDB 941225 D05 v02r05)
- Power on position ref to power off position of worse case .
- The highest reported SAR for 1 RB and 50% RB allocation are  $\geq 0.8$  W/kg, SAR is required of 100% RB. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation  $< 1.45$  W/kg. (Per KDB 941225 D05 v02r05)
- Repeated measurements are required only when the measured SAR is  $\geq 0.80$  W/kg. If the measured SAR values are  $< 1.45$  W/kg with  $\leq 20\%$  variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04)
  - Original SAR = 1.184 W/kg, therefore two times repeat SAR is required.
  - Repeat SAR = 1.163W/kg  $< 1.45$ W/kg  
SAR variation= -1.77 %  $< 20\%$
  - Original SAR = 1.115 W/kg, therefore two times repeat SAR is required.
  - Repeat SAR = 1.080 W/kg  $< 1.45$ W/kg  
SAR variation= -3.14 %  $< 20\%$

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

**LTE Band 5 (10MHz Bandwidth):**

Power back off (On/Off)	Mode	Test Position	Channel	Freq. (MHz)	Dist. (mm)	UL RB Allocation	UL RB Start	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot
								Tune up limit	Measured				
Off	QPSK	Edge1	20450	829.0	5	1	0	23.00	22.77	0.206	0.217		
			20450	829.0		25	0	23.00	21.98	0.168	0.212		
		Edge2	20450	829.0	5	1	0	23.00	22.77	0.252	0.266		
			20450	829.0		25	0	23.00	21.98	0.200	0.253		
		Edge3	20450	829.0	5	1	0	23.00	22.77	0.096	0.101		
			20450	829.0		25	0	23.00	21.98	0.074	0.093		
		Edge4	20450	829.0	5	1	0	23.00	22.77	0.039	0.041		
			20450	829.0		25	0	23.00	21.98	0.031	0.039		
		Rear	20450	829.0	5	1	0	23.00	22.77	0.274	0.289		
			20450	829.0		25	0	23.00	21.98	0.233	0.295		

**Note(s):**

1. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. (Per KDB 941225 D05 v02r05)
2. The highest reported SAR for 1 RB and 50% RB allocation are  $\geq 0.8$  W/kg, SAR is required of 100% RB. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation  $< 1.45$  W/kg. (Per KDB 941225 D05 v02r05)

Report No.: T190115W01-SF

LTE Band 12 (10MHz Bandwidth):

Power back off (On/Off)	Mode	Test Position	Channel	Freq. (MHz)	Dist. (mm)	UL RB Allocation	UL RB Start	Power (dBm)		Measured 1g SAR (W/kg)	Reported SAR(W/kg)	Note	Plot
								Tune up limit	Measured				
Off	QPSK	Edge1	23060	704.0	5	1	0	23.00	22.25	0.070	0.084		
			23060	704.0		25	0	23.00	22.02	0.056	0.070		
		Edge2	23060	704.0	5	1	0	23.00	22.25	0.296	0.352		
			23060	704.0		25	0	23.00	22.02	0.233	0.292		
		Edge3	23060	704.0	5	1	0	23.00	22.25	0.076	0.090		
			23060	704.0		25	0	23.00	22.02	0.061	0.076		
		Edge4	23060	704.0	5	1	0	23.00	22.25	0.021	0.025		
			23060	704.0		25	0	23.00	22.02	0.018	0.022		
		Rear	23060	704.0	5	1	0	23.00	22.25	0.137	0.163		
			23060	704.0		25	0	23.00	22.02	0.110	0.138		

Note(s):

1. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. (Per KDB 941225 D05 v02r05)
2. The highest reported SAR for 1 RB and 50% RB allocation are  $\geq 0.8$  W/kg, SAR is required of 100% RB. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation  $< 1.45$  W/kg. (Per KDB 941225 D05 v02r05)

Report No.: T190115W01-SF

Wi-Fi (2.4GHz Band):

Test Mode	Band (GHz)	Mode	Dist. (mm)	Test Position	Ch#	Freq. (MHz)	Chain	Power (dBm)		Area Scan 1g SAR (W/kg)	Zoom Scan 1g SAR (W/kg)	Reported SAR (W/kg)	Note	Plot No.
								Tune up limit	Meas.					
	2.4GHz	802.11b	5	Edge 1	11	2462	0	17.50	17.15	0.040	0.039	0.042		
			5	Edge 2	11	2462	0	17.50	17.15	0.123	0.133	0.144		
			5	Edge 2	1	2412	0	17.50	16.34	0.167	0.172	0.225		
			5	Edge 2	6	2437	0	17.50	16.77	0.160	0.167	0.198		
			5	Edge 3	11	2462	0	17.50	17.15	0.065	0.064	0.069		
			5	Edge 4	11	2462	0	17.50	17.15	0.004	0.002	0.003		
			5	Rear	11	2462	0	17.50	17.15	0.041	0.042	0.046		

Note(s):

1. According to Notice 2016-DRS001, based on the IEEE 1528 and IEC 62209 requirements, the high, mid and low channels for the configuration with the highest SAR value must be tested regardless of the SAR value measured.
2. WLAN result refer to FCC report T181222W03-SF, Market segmentation difference only .

Report No.: T190115W01-SF

Wi-Fi (5GHz Band):

Test Mode	Band (GHz)	Mode	Dist. (mm)	Test Position	Ch#	Freq. (MHz)	Chain	Power (dBm)		Area Scan 1g SAR (W/Kg)	Meas. 1g SAR (W/kg)	Reported SAR (W/kg)	Note	Plot No.
								Tune up limit	Meas.					
Tablet	5.3 (U-NII-2A)	802.11a	5	Edge 1	64	5320	0	9.5	8.13	0.059	0.065	0.089		
			5	Edge 2	64	5320	0	9.5	8.13	0.078	0.085	0.116		
			5	Edge 3	64	5320	0	9.5	8.13	0.010	0.011	0.015		
			5	Edge 4	64	5320	0	9.5	8.13	0.015	0.016	0.022		
			5	Rear	64	5320	0	9.5	8.13	0.034	0.033	0.045		
	5.5 (U-NII-2C)	802.11a	5	Edge 1	100	5500	0	11.5	9.05	0.134	0.137	0.241		
			5	Edge 1	124	5620	0	11.5	10.13	0.089	0.089	0.122		
			5	Edge 1	140	5700	0	11.5	9.76	0.072	0.065	0.096		
			5	Edge 2	124	5620	0	11.5	10.13	0.073	0.080	0.110		
			5	Edge 3	124	5620	0	11.5	10.13	0.016	0.016	0.022		
			5	Edge 4	124	5620	0	11.5	10.13	0.015	0.015	0.021		
	5.8 (U-NII-3)	802.11a	5	Rear	124	5620	0	11.5	10.13	0.031	0.023	0.032		
			5	Edge 1	157	5785	0	11.5	9.27	0.051	0.044	0.074		
			5	Edge 2	157	5785	0	11.5	9.27	0.040	0.042	0.070		
			5	Edge 3	157	5785	0	11.5	9.27	0.009	0.013	0.021		
			5	Edge 4	157	5785	0	11.5	9.27	0.011	0.012	0.021		
	5	Rear	157	5785	0	11.5	9.27	0.014	0.011	0.011	0.019			

Note(s):

1. According to Notice 2016-DRS001, based on the IEEE 1528 and IEC 62209 requirements, the high, mid and low channels for the configuration with the highest SAR value must be tested regardless of the SAR value measured.
2. WLAN result refer to FCC report T181222W03-SF, Market segmentation difference only .

## 18 Simultaneous Transmission SAR Analysis

### 18.1 Sum of the SAR for Simultaneous Transmission Analysis

#### 18.1.1 Sum of the SAR for WLAN & WWAN

WCDMA Band IV+2.4G Band

Test Position	Simultaneous Transmission Scenario		1+2 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2		
	LTE Band IV	Wi-Fi Main 2.4 GHz Band		
Edge 2	1.176	0.225	1.401	No

Note(s):

As the Sum of the SAR is less than 1.6W/Kg, so SPLSR is not required.

WCDMA Band II+5G Band

Test Position	Simultaneous Transmission Scenario		1+2 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2		
	LTE Band IV	Wi-Fi Main 5 GHz Band		
Edge 2	1.176	0.085	1.261	No

Note(s):

As the Sum of the SAR is less than 1.6W/Kg, so SPLSR is not required.

LTE Band IV +2.4G Band

Test Position	Simultaneous Transmission Scenario		1+2 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2		
	LTE Band XXIII	Wi-Fi Main 2.4 GHz Band		
Edge 2	1.184	0.225	1.409	No

Note(s):

As the Sum of the SAR is less than 1.6W/Kg, so SPLSR is not required.

LTE Band IV +5G Band

Test Position	Simultaneous Transmission Scenario		1+2 Summed 1g SAR(W/kg)	SPLSR (Yes/No)
	1	2		
	LTE Band XXIII	Wi-Fi Main 5 GHz Band		
Edge 2	1.184	0.085	1.269	No

Note(s):

As the Sum of the SAR is less than 1.6W/Kg, so SPLSR is not required.



**19 Equipment List & Calibration Status**

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Cycle(year)	Calibration Due
Wireless Communication Test Set	Agilent	E5515C 8960	MY48361017	1	2019/08/20
Radio Communication Analyzer	Anritsu	MT8820C	6201240043	1	2019/07/11
S-Parameter Network Analyzer	Agilent	E5071C	MY46316981	1	2019/01/09
Electronic Probe kit	Hewlett Packard	85070D	N/A	N/A	N/A
Power Meter	Agilent	E4416A	GB41291611	1	2019/08/19
Power Sensor	Agilent	8481H	MY41091956	1	2019/08/19
Data Acquisition Electronics (DAE)	SPEAG	DAE4	1336	1	2019/08/05
Dosimetric E-Field Probe	SPEAG	EX3DV4	7466	1	2020/02/03
750MHz System Validation Dipole	SPEAG	D750V	1015	1	2019/08/22
835MHz System Validation Dipole	SPEAG	D835V2	4d063	1	2018/8/23
1750MHz System Validation Dipole	SPEAG	D1750V2	1008	1	2019/08/29
1900MHz System Validation Dipole	SPEAG	D1900V2	5d018	1	2018/6/21
2450 MHz System Validation Dipole	SPEAG	D2450V2	869	1	2019/06/18
5000 MHz System Validation Dipole	SPEAG	D5GHzV2	1023	1	2019/06/27
Robot	Staubli	RX90L	F02/5T69A1/A/01	N/A	N/A
Amplifier	Mini-Circuit	ZVE-8G	665500309	N/A	N/A
Amplifier	Mini-Circuit	ZHL-1724HLN	D072602#2	N/A	N/A
Thermometer	Comet	S3120	12932714	1	2020/02/27
Signal Grenerator	Aglient	83630B	3844A01022	1	2020/05/27
Directional Couplers	Aglient	87301D	MY44350252	1	2019/07/23

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Report No.: T190115W01-SF

## 20 Facilities

All measurement facilities used to collect the measurement data are located at

- No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang, Taoyuan Hsien, Taiwan, R.O.C.
- No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
- No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

## 21 Reference

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environmental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commission, Office of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645{652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz - 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 2005.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15{17, 1997, pp. 120{124.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23{25 June, 1996, pp. 172{175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard K. uhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865{1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992..Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

## 22 Attachments

Exhibit	Content
1	System Performance Check Plots
2	SAR Test Data Plots
3	SAR Equipment calibration report
4	T190115W01-SF PHOTOS

**END OF REPORT**

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。