

RF TEST REPORT

FCC

APPLICANT

Nike, Inc.

MODEL NAME

Nike Adapt LE-04

FCC ID

QYU-LE04

REPORT NUMBER

HA220214-GGC-001-R01

TEST REPORT

Date of Issue
April 29, 2022

Test Site
Hyundai C-Tech, Inc. dba HCT America, Inc.
1726 Ringwood Ave, San Jose, CA 95131, USA

| | |
|---------------------------|---|
| Applicant | Nike, Inc. |
| Applicant Address | One Bowerman Drive Beaverton, OR 97005, USA |
| FCC ID | QYU-LE04 |
| Model Name | Nike Adapt LE-04 |
| EUT Type | Wireless Communication Device |
| Modulation Type | GFSK |
| FCC Classification | Digital Transmission System (DTS) |
| FCC Rule Part(s) | Part 15.247 |
| Test Procedure | ANSI C63.10-2013, KDB 558074 D01 v05r02 |

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures required. The results of testing in this report apply only to the product which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Hyundai C-Tech, Inc. dba HCT America, Inc. certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Tested By

Yongsoo Park

Test Engineer

Reviewed By

Sunwoo Kim

Technical Manager

REVISION HISTORY

The revision history for this document is shown in table.

| TEST REPORT NO. | DATE | DESCRIPTION |
|----------------------|----------------|---------------|
| HA220214-GGC-001-R01 | April 29, 2022 | Initial Issue |
| | | |
| | | |
| | | |

TABLE OF CONTENTS

| | |
|---|----|
| 1. GENERAL INFORMATION | 4 |
| 2. METHODOLOGY | 6 |
| 3. INSTRUMENT CALIBRATION | 6 |
| 4. FACILITIES AND ACCREDITATIONS | 7 |
| 5. ANTENNA REQUIREMENTS | 8 |
| 6. MEASUREMENT UNCERTAINTY | 9 |
| 7. DESCRIPTION OF TESTS | 10 |
| 8. SUMMARY OF TEST RESULTS | 22 |
| 9. TEST RESULT | 26 |
| 9.1 DUTY CYCLE | 26 |
| 9.2. 6 dB BANDWIDTH / 99% BANDWIDTH MEASUREMENT | 27 |
| 9.3. OUTPUT POWER | 29 |
| 9.4. POWER SPECTRAL DENSITY | 31 |
| 9.5. CONDUCTED BAND EDGE & SPURIOUS EMISSIONS | 32 |
| 9.6. RADIATED SPURIOUS EMISSIONS | 34 |
| 9.7. RADIATED RESTRICTED BAND EDGES | 45 |
| 10. LIST OF TEST EQUIPMENT | 47 |
| APPENDIX A. TEST SETUP PHOTOS | 48 |
| APPENDIX B. PHOTOGRAPHS OF EUT | 49 |

1. GENERAL INFORMATION

EUT DESCRIPTION

| | |
|------------------------------|---|
| Model | Nike Adapt LE-04 |
| EUT Type | Wireless Communication Device |
| Power Supply | Wireless battery charging Lithium-Ion Battery ; 3.8 VDC, 270 mAh |
| RF Specification | Bluetooth LE V5.0 (1 Mbps) : GFSK |
| Transmitter Chain | Bluetooth LE (1Mbps) : SISO |
| Operating Environment | Indoor and outdoor |
| Operating Temperature | 0 °C ~ 45 °C |

RF SPECIFICATION SUBJECT TO THE REPORT

| | |
|--|---|
| RF Specification | Bluetooth LE (1Mbps) |
| Transmitter Chain | 1 |
| Frequency Range | 2402 MHz - 2480 MHz |
| Max. RF Output Power | 6.297 dBm (4.263 mW) |
| Modulation Type | GFSK |
| Number of Channels | 40 Channels |
| Antenna Specification ¹⁾ | Antenna Type : Sheet Metal Antenna Peak Gain : 2.9 dBi |
| Firmware Version ²⁾ | 0.0.5 |
| Hardware Version ²⁾ | LE-04 |
| Date(s) of Tests | February 14, 2022 ~ February 18, 2022 |

Note(s) :

1. Antenna information is based on the document provided.
2. Firmware and Hardware Versions are provided by the client.

OPERATING FREQUENCY CHANNELS

| Bluetooth LE | | | | | |
|--------------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 0 | 2402 | 14 | 2430 | 28 | 2458 |
| 1 | 2404 | 15 | 2432 | 29 | 2460 |
| 2 | 2406 | 16 | 2434 | 30 | 2462 |
| 3 | 2408 | 17 | 2436 | 31 | 2464 |
| 4 | 2410 | 18 | 2438 | 32 | 2466 |
| 5 | 2412 | 19 | 2440 | 33 | 2468 |
| 6 | 2414 | 20 | 2442 | 34 | 2470 |
| 7 | 2416 | 21 | 2444 | 35 | 2472 |
| 8 | 2418 | 22 | 2446 | 36 | 2474 |
| 9 | 2420 | 23 | 2448 | 37 | 2476 |
| 10 | 2422 | 24 | 2450 | 38 | 2478 |
| 11 | 2424 | 25 | 2452 | 39 | 2480 |
| 12 | 2426 | 26 | 2454 | - | - |
| 13 | 2428 | 27 | 2456 | - | - |

2. METHODOLOGY

FCC KDB 558074 D01 DTS Measurement Guidance v05r02 dated April 2nd, 2019 entitled "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) and the measurement procedure described in ANSI C63.10(Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rule Part 15 Subpart C and the Section 2.1091 under the FCC Rule Part 2 .

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. Also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emission, the relative positions of this hand-held transmitter (EUT) were rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

Conducted Antenna Terminal

KDB 558074 D01 v05r02

DESCRIPTION OF TEST MODES

The EUT has been tested at BLE test mode. Test software provided by the manufacturer was used to control the channels, power setting, continuous TX and normal RX mode. The EUT is equipped with Bluetooth LE with the data rate 1 Mbps.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC (Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at 1726 Ringwood Avenue, San Jose, California 95131, USA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.



EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antenna of this E.U.T is permanently attached and there is no provision for connection to an external antenna.
- (2) The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.


All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter | Expanded Uncertainty |
|----------------------------------|----------------------|
| Output Power, Conducted | ± 0.35 dB |
| Occupied Bandwidth | ± 12.4 kHz |
| Unwanted Emissions, Conducted | ± 0.46 dB |
| Radiated Emissions (below 1 GHz) | ± 6.09 dB |
| Radiated Emissions (Above 1 GHz) | ± 5.23 dB |

7. DESCRIPTION OF TESTS

7.1. DUTY CYCLE

TEST SETUP

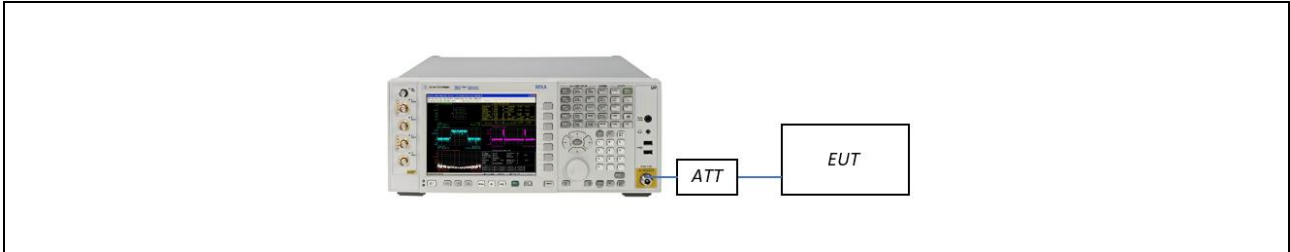

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.
Zero-span measurement method was used, 6 (b) in KDB 558074 D01 v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

- RBW = 8 MHz (the largest available value)
- VBW = 8 MHz (\geq RBW)
- SPAN = 0 Hz
- Detector = Peak
- Number of points in sweep > 100
- Trace mode = Clear write
- Measure T_{total} and T_{on}
- Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 * \log(1/\text{Duty Cycle})$

7.2. 6 dB BANDWIDTH / 99 % OCCUPIED BANDWIDTH


LIMIT

§15.247(a)(2) / RSS-247(Issue 2) Section 5.2

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6 dB bandwidth is 500 kHz.

TEST SETUP

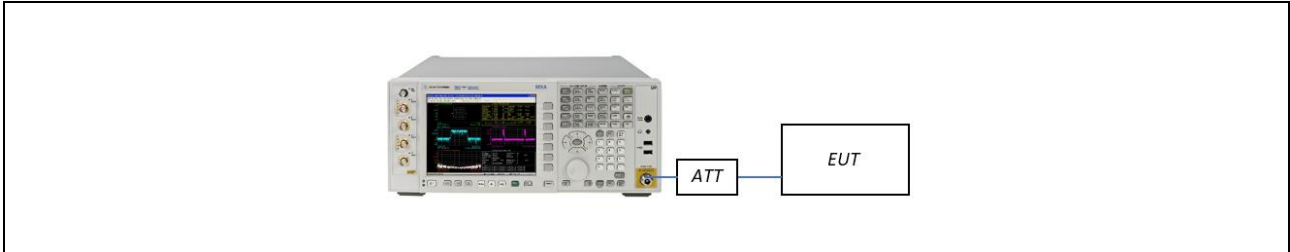

TEST PROCEDURE (6 dB BANDWIDTH)

Section 8.2 in KDB 558074 D01 v05r02, Subclause 11.8 in ANSI 63.10-2013

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer setting :

- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- Allow the trace to stabilize
- Use X dB bandwidth measurement function from the spectrum analyzer by setting X dB to 6 dB

TEST PROCEDURE (99% Bandwidth) for ISED

The transmitter output is connected to the spectrum analyzer.

- RBW = 1% ~ 5% of the occupied bandwidth
- VBW $\approx 3 \times$ RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- Allow the trace to stabilize

Note(s) :

We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.


7.3. OUTPUT POWER

LIMIT

§15.247(b)(3) / RSS-247(Issue2) Section 5.4.4

The maximum permissible conducted output power is 1 Watt.

TEST SETUP

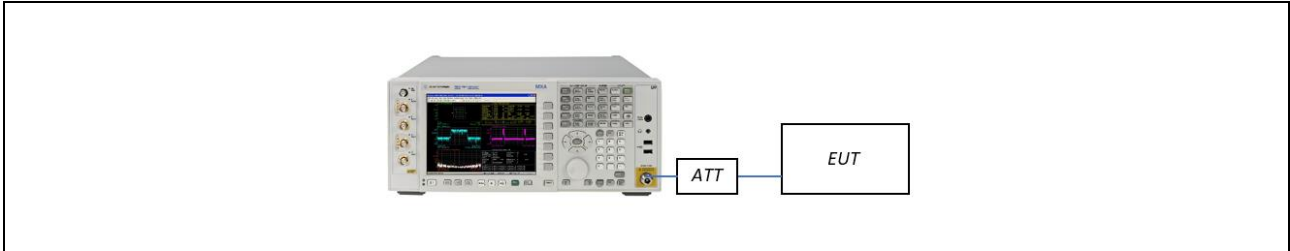

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

TX condition of the EUT is the actual operating mode by RF test program.

The Spectrum Analyzer setting :

Peak Power (Section 8.3.1.1 in KDB 558074 D01 v05r02, Subclause 11.9.1.1 in ANSI 63.10-2013)

- RBW \geq DTS Bandwidth
- VBW $\geq 3 \times$ RBW
- SPAN $\geq 3 \times$ RBW
- Detector Mode = Peak
- Sweep = auto couple
- Trace Mode = max hold
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level

Average Power (Section 8.3.2.2 in KDB 558074 D01 v05r02, Subclause 11.9.2.2 in ANSI 63.10-2013)

- We use the spectrum analyzer's integrated band power measurement function.
- Measure the duty cycle.
- Set span to at least 1.5 times the OBW.
- RBW = 1-5 % of the OBW, not to exceed 1 MHz
- VBW $\geq 3 \times$ RBW
- Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging)
- Do not use sweep triggering. Allow the sweep to "free run".
- Trace average at least 100 traces in power averaging (RMS) mode.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

- Conducted Output Power (Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power (Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor


7.4. POWER SPECTRAL DENSITY

LIMIT

§15.247(e) / RSS-247(Issue 2) Section 5.2

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

TEST SETUP

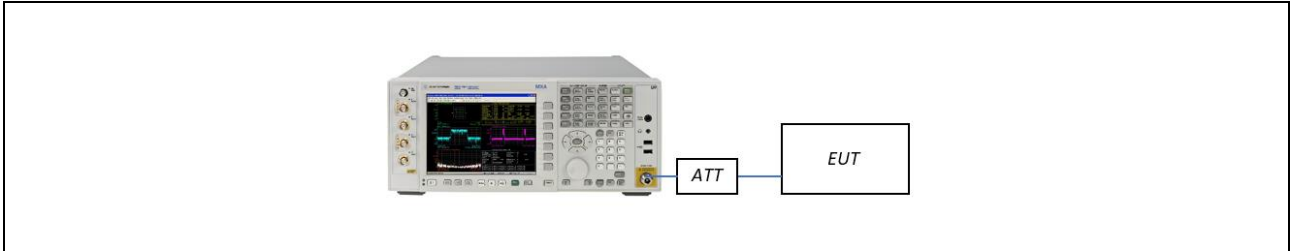

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 D01 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- Set analyzer center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- $VBW \geq 3 \times RBW$.
- Sweep = auto couple
- Detector = power averaging (rms) or sample detector (when rms not available).
- Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- Employ trace averaging (rms) mode over a minimum of 100 traces
- Use the peak marker function to determine the maximum amplitude level.
- Use the peak marker function to determine the maximum amplitude level within the RBW. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- if then duty factor shall be added to adjust the result if the duty cycle is less than 98%

7.5. CONDUCTED BAND EDGE (OUT OF BAND EMISSIONS) / CONDUCTED SPURIOUS EMISSIONS


LIMIT

§15.247(d) / RSS-247(Issue 2) Section 5.5

The maximum conducted (peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 20 dBc]

TEST SETUP

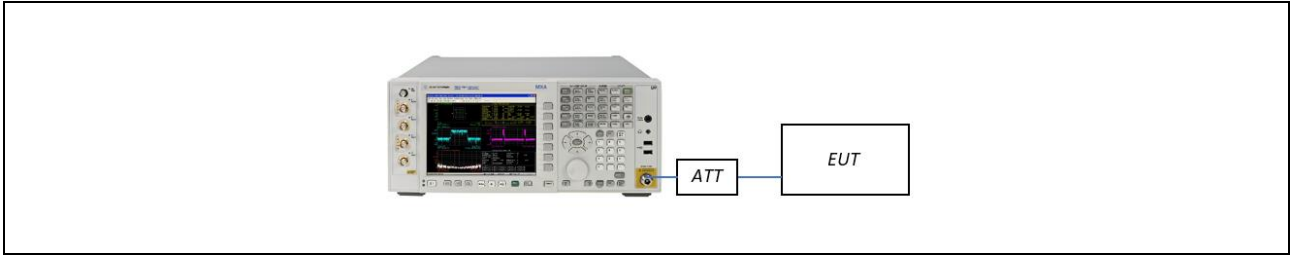

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 D01 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW
- Set span to encompass the spectrum to be examined.
- Detector = Peak
- Trace Mode = max hold
- Sweep time = auto couple
- Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- Allow trace to fully stabilize.
- Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

7.6. RADIATED EMISSIONS

RADIATION EMISSION LIMIT

| FCC : 47 CFR § 15.209 | | |
|-----------------------|-----------------------|--------------------------|
| Frequency (MHz) | Field Strength (uV/m) | Measurement Distance (m) |
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

| ISED : RSS-GEN Section 8.9 | | |
|----------------------------|-----------------------|--------------------------|
| Frequency (MHz) | Field Strength (uV/m) | Measurement Distance (m) |
| 0.009 – 0.490 | 6.37/F(kHz) | 300 |
| 0.490 – 1.705 | 63.7/F(kHz) | 30 |
| 1.705 – 30 | 0.08 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

RECEIVER RADIATED EMISSION LIMIT

| ISED : RSS-GEN Section 7.3 | | |
|----------------------------|-----------------------|--------------------------|
| Frequency (MHz) | Field Strength (uV/m) | Measurement Distance (m) |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |


RESTRICTED BANDS OF OPERATION

| FCC : 47 CFR § 15.205(a) | | | | |
|---------------------------------|------------------------|------------------------|------------------------|------------------------|
| Frequency (MHz) | Frequency (MHz) | Frequency (MHz) | Frequency (MHz) | Frequency (MHz) |
| 0.090 - 0.110 | 12.29 - 12.293 | 149.9 - 150.05 | 1660.0 - 1710.0 | 8025 - 8500 |
| 0.495 - 0.505 | 12.51975 - 12.52025 | 156.52475 - 156.52525 | 1718.8 - 1722.2 | 9000 - 9200 |
| 2.1735 - 2.1905 | 12.57675 - 12.57725 | 156.7 - 156.9 | 2200.0 - 2300.0 | 9300 - 9500 |
| 4.125 - 4.128 | 13.36 - 13.41 | 162.0125 - 167.17 | 2310.0 - 2390.0 | 10600 - 12700 |
| 4.17725 - 4.17775 | 16.42 - 16.423 | 167.72 - 173.2 | 2483.5 - 2500.0 | 13250 - 13400 |
| 4.20725 - 4.20775 | 16.69475 - 16.69525 | 240.0 - 285.0 | 2690.0 - 2900.0 | 14470 - 14500 |
| 6.215 - 6.218 | 16.80425 - 16.80475 | 322.0 - 335.4 | 3260.0 - 3267.0 | 15350 - 16200 |
| 6.26775 - 6.26825 | 25.5 - 25.67 | 399.9 - 410.0 | 3332.0 - 3339.0 | 17700 - 21400 |
| 6.31175 - 6.31225 | 37.5 - 38.25 | 608.0 - 614.0 | 3345.8 - 3358.0 | 22010 - 23120 |
| 8.291 - 8.294 | 73 - 74.6 | 960.0 - 1240.0 | 3600.0 - 4400.0 | 23600 - 24000 |
| 8.362 - 8.366 | 74.8 - 75.2 | 1300.0 - 1427.0 | 4500.0 - 5150.0 | 31200 - 31800 |
| 8.37625 - 8.38675 | 108 - 121.94 | 1435.0 - 1626.5 | 5350.0 - 5460.0 | 36430 - 36500 |
| 8.41425 - 8.41475 | 123 - 138 | 1645.5 - 1646.5 | 7250.0 - 7750.0 | Above 38600 |


| ISED : RSS-GEN Section 8.10 | | | | |
|------------------------------------|------------------------|------------------------|------------------------|------------------------|
| Frequency (MHz) | Frequency (MHz) | Frequency (MHz) | Frequency (MHz) | Frequency (MHz) |
| 0.090 - 0.110 | 8.37625 - 8.38675 | 108 - 138 | 1660 - 1710 | 8025 - 8500 |
| 0.495 - 0.505 | 8.41425 - 8.41475 | 149.9 - 150.05 | 1718.8 - 1722.2 | 9000 - 9200 |
| 2.1735 - 2.1905 | 12.29 - 12.293 | 156.52475 - 156.52525 | 2200 - 2300 | 9300 - 9500 |
| 3.020 - 3.026 | 12.51975 - 12.52025 | 156.7 - 156.9 | 2310 - 2390 | 10600 - 12700 |
| 4.125 - 4.128 | 12.57675 - 12.57725 | 162.0125 - 167.17 | 2483.5 - 2500 | 13250 - 13400 |
| 4.17725 - 4.17775 | 13.36 - 13.41 | 167.72 - 173.2 | 2655 - 2900 | 14470 - 14500 |
| 4.20725 - 4.20775 | 16.42 - 16.423 | 240 - 285 | 3260 - 3267 | 15350 - 16200 |
| 5.677 - 5.683 | 16.69475 - 16.69525 | 322 - 335.4 | 3332 - 3339 | 17700 - 21400 |
| 6.215 - 6.218 | 16.80425 - 16.80475 | 399.9 - 410 | 3345.8 - 3358 | 22010 - 23120 |
| 6.26775 - 6.26825 | 25.5 - 25.67 | 608 - 614 | 3500 - 4400 | 23600 - 24000 |
| 6.31175 - 6.31225 | 37.5 - 38.25 | 960 - 1427 | 4500 - 5150 | 31200 - 31800 |
| 8.291 - 8.294 | 73 - 74.6 | 1435 - 1626.5 | 5350 - 5460 | 36430 - 36500 |
| 8.362 - 8.366 | 74.8 - 75.2 | 1645.5 - 1646.5 | 7250 - 7750 | Above 38600 |

TEST SETUP


Below 30 MHz

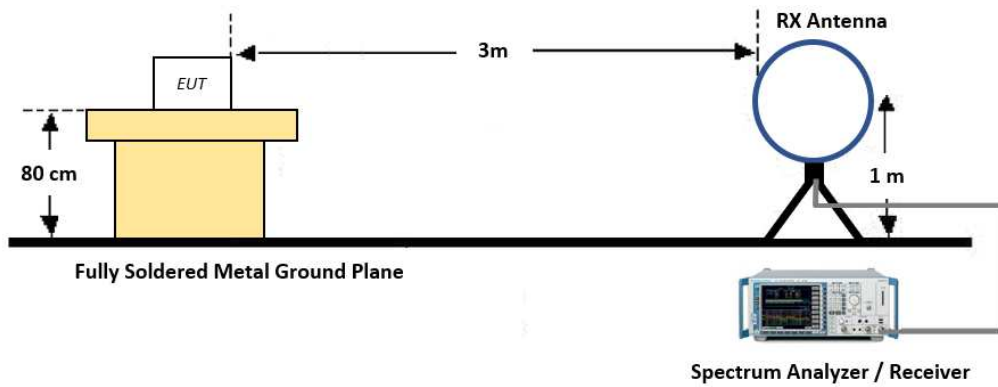

30 MHz - 1 GHz

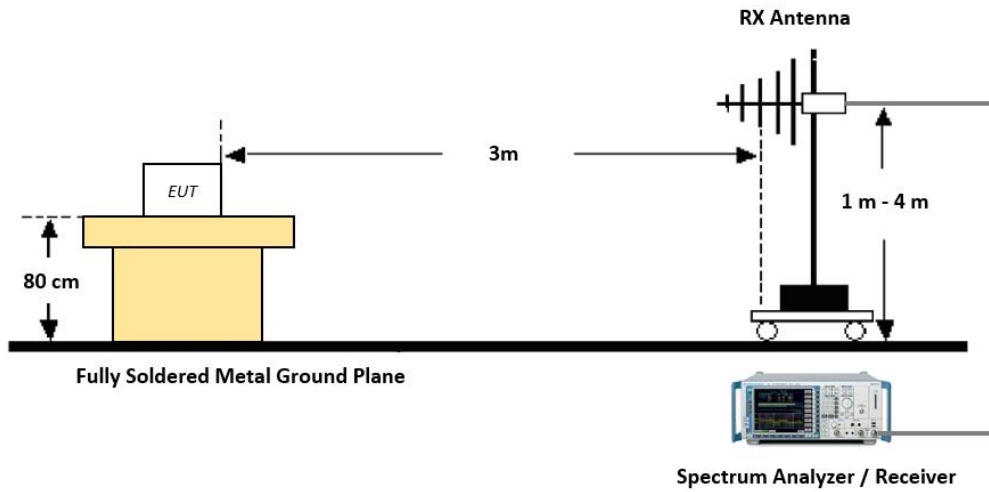

Above 1 GHz

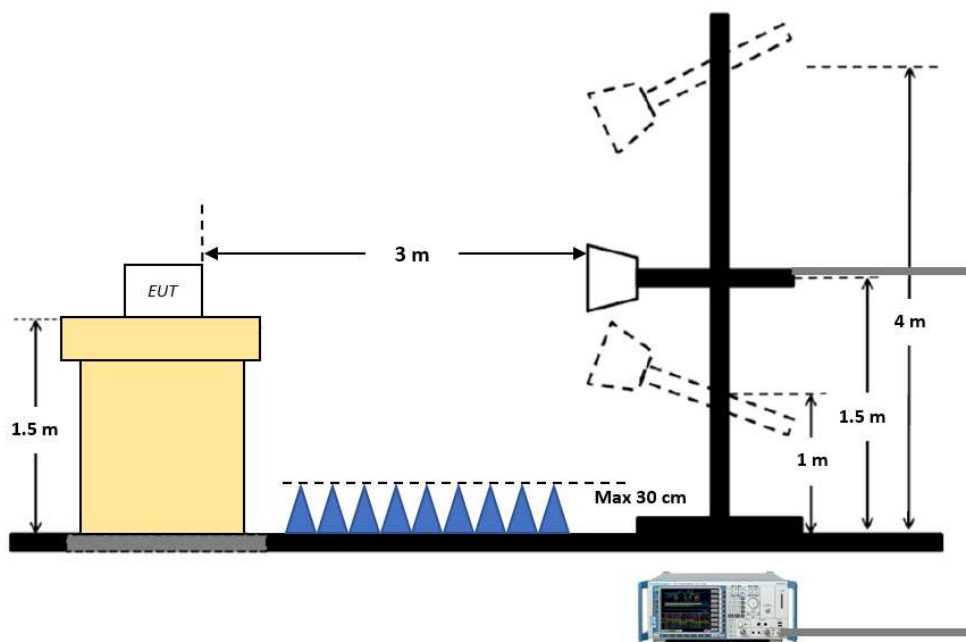

TEST PROCEDURE OF RADIATED SPURIOUS EMISSION (BELOW 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor (0.009 MHz – 0.490 MHz) = $40 \cdot \log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$
Measurement Distance: 3 m
7. Distance Correction Factor (0.490 MHz – 30 MHz) = $40 \cdot \log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$
Measurement Distance: 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 9 kHz
 - VBW $\geq 3 \cdot \text{RBW}$
9. Total = Reading Value + Antenna Factor (A.F) + Cable Loss (C.L)
10. There is a comparison data both open-field test site and alternative test site – semi-Anechoic chamber according to 414788 D01. And the results are properly calibrated.

TEST PROCEDURE OF RADIATED SPURIOUS EMISSION (30 MHz – 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
 - (1) Measurement Type (Peak):
 - Measured Frequency Range: 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 100 kHz
 - VBW $\geq 3 \cdot \text{RBW}$
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range: 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
6. Total = Reading Value + Antenna Factor (A.F) + Cable Loss (C.L)

TEST PROCEDURE OF RADIATED SPURIOUS EMISSION (ABOVE 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted or would be lesser if no specific emissions from the EUT are recorded (*i.e.*: margin > 20 dB from the applicable limit) and considered that is already beyond the background noise floor.

11. Sample Calculation

(1) Total (Peak) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)

(2) Total (Average, Duty $\geq 98\%$) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)

(3) Total (Average, Duty $< 98\%$) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Duty Cycle Factor

(4) Alternative Method : Total (Average) = Total (Peak) + $20 \log(\text{Duty Cycle})$

TEST PROCEDURE OF RADIATED RESTRICTED BAND EDGE

1. Radiated test is performed with hopping off (if there is any)
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak):

- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW ≥ 3 *RBW

(2) Measurement Type(Average): Duty cycle $\geq 98\%$,

- Measured Frequency Range : 2310 MHz – 2390 MHz / 2483.5 MHz – 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW ≥ 3 *RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 2310 MHz – 2390 MHz / 2483.5 MHz – 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW ≥ 3 *RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted or would be lesser if no specific emissions from the EUT are recorded (*i.e.*: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Sample Calculation

(1) Total (Peak) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

(2) Total (Average, Duty $\geq 98\%$) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)

(3) Total (Average, Duty $< 98\%$) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Duty Cycle Factor

7.7. AC POWER LINE CONDUCTED EMISSIONS

LIMIT

47 CFR § 15.207, RSS-GEN Section 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).

| Frequency Range (MHz) | Limits (dBμV) | |
|-----------------------|---------------|-----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56* | 56 to 46* |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

TEST SETUP

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

According to FCC KDB 174176 D01 Line Conducted FAQ v01r01 :

Devices Operating Above 30 MHz

For a device with a permanent or detachable antenna operating above 30 MHz, measurements must be performed with the antenna connected as specified in clause 6.2 of ANSI C63.10-2013.

Devices Operating Below 30 MHz

For a device with a permanent or detachable antenna operating at or below 30 MHz, the FCC will accept measurements performed with a suitable dummy load in lieu of the antenna under the following conditions:

- (1) Perform the AC power-line conducted tests with the antenna connected to determine compliance with Section 15.207 limits outside the transmitter's fundamental emission band;
- (2) Retest with a dummy load in lieu of the antenna to determine compliance with Section 15.207 limits within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network which simulates the antenna in the fundamental frequency band. All measurements must be performed as specified in clause 6.2 of ANSI C63.10-2013.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

8. SUMMARY OF TEST RESULTS

| Test Description | FCC Part Section(s) | Test Limit | Test Condition | Test Result |
|-------------------------------------|--------------------------|-----------------|----------------|-------------------|
| 6 dB Bandwidth | §15.247(a)(2) | ≥ 500 kHz | Conducted | PASS |
| Occupied Bandwidth | - | - | | PASS |
| Conducted Maximum Peak Output Power | §15.247(b)(3) | ≤ 1 W | | PASS |
| Maximum e.i.r.p. | - | ≤ 4 W e.i.r.p. | | PASS |
| Power Spectral Density | §15.247(e) | ≤ 8 dBm / 3 kHz | | PASS |
| Band Edge (Out of Band emissions) | §15.247(d) | ≥ 20 dBc | | PASS |
| AC Power line Conducted Emissions | §15.207 | cf. Section 7.7 | | N/A ¹⁾ |
| Radiated Spurious Emissions | §15.247(d) §15.209 | cf. Section 7.6 | Radiated | PASS |
| Radiated Restricted Band Edge | §15.247(d) §15.205(a) | cf. Section 7.6 | | PASS |

Note(s) :

1. This device is not directly connected to the AC line, only wireless charging.

WORST CASE CONFIGURATION

RADIATED TEST


1. EUT Axis

- All X, Y, and Z positions for horizontal / vertical antenna polarization were investigated to find the worst-case position.
 - Stand Alone : Y position was selected for the final evaluation.
 - Wireless charging mode : X position only

OUTPUT POWER SETTING

| Frequency (MHz) | Channel | Output Power Setting |
|-----------------|---------|----------------------|
| 2402 | 0 | 4 |
| 2440 | 19 | 4 |
| 2480 | 39 | 4 |

TEST CONFIGURATION

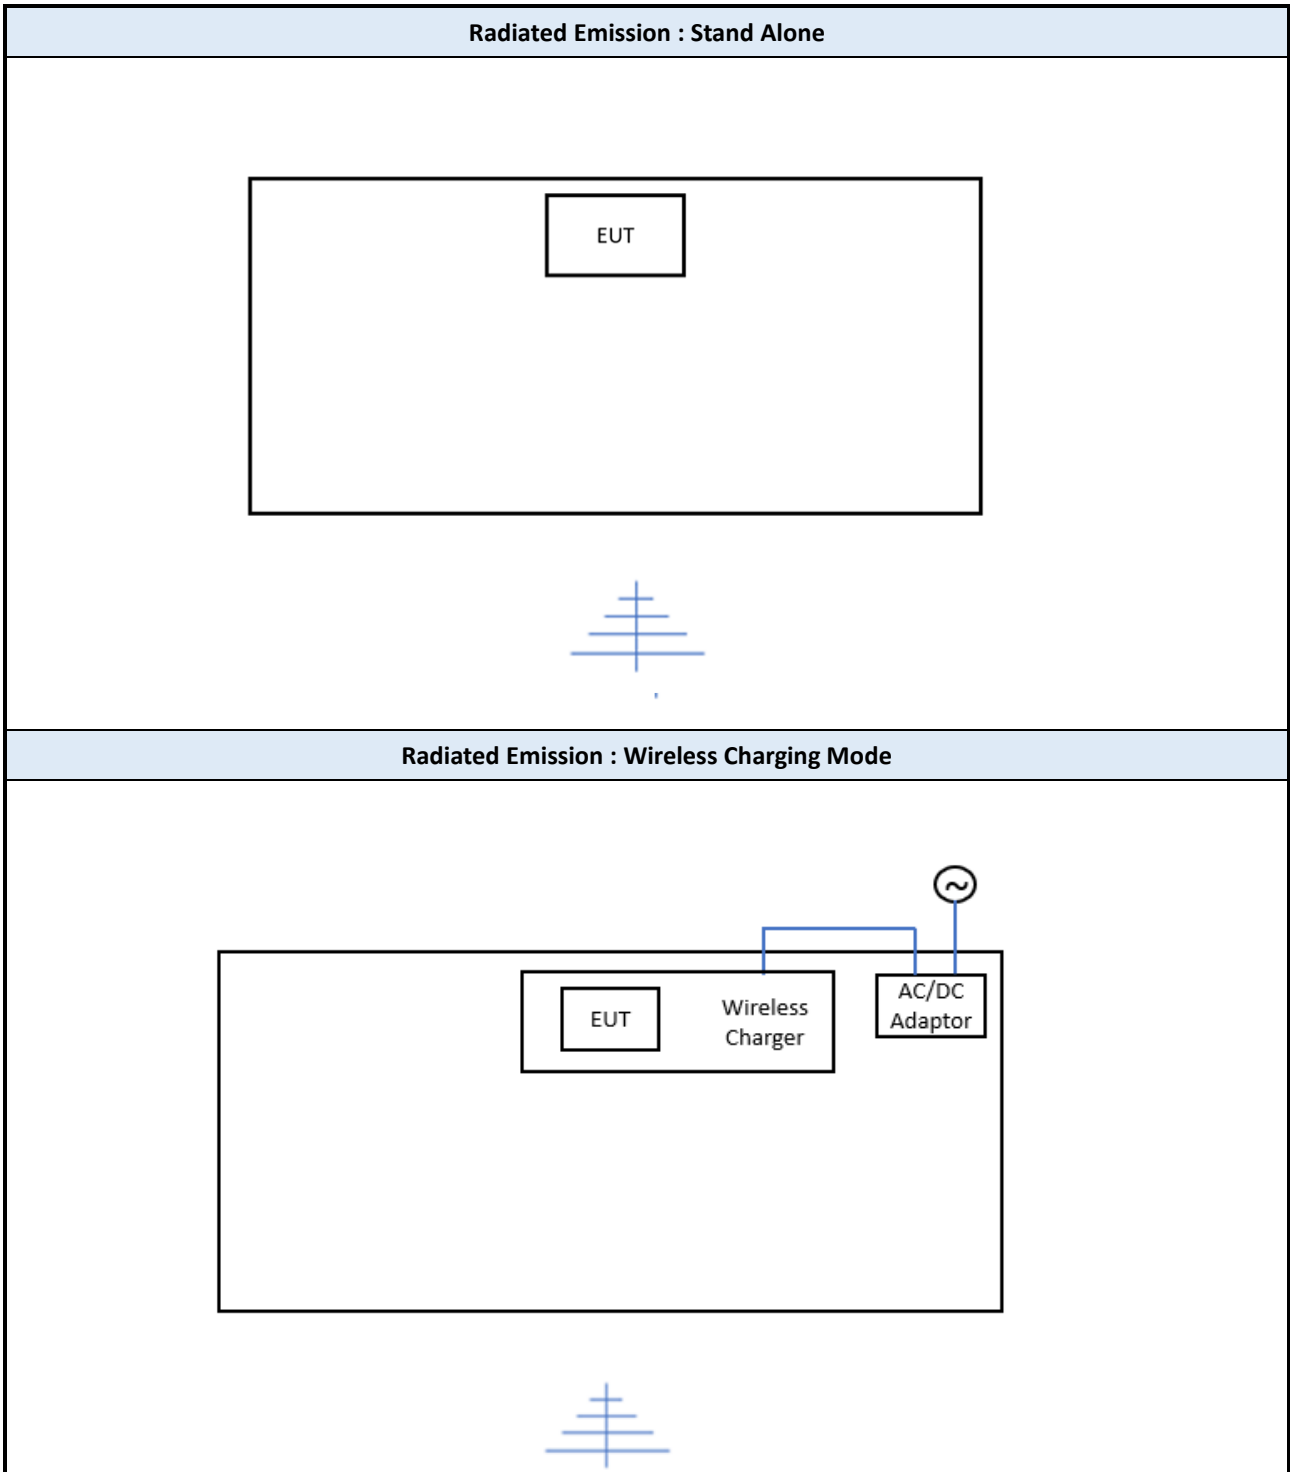

a

LIST OF SUPPORT EQUIPMENT


| Equipment Type | Model No. | Serial Number | Manufacturer | Qty | Note |
|------------------|------------------|-------------------|-------------------------------|-----|-----------------------------|
| Wireless Charger | Adapt Charger2.0 | SFEV120321.0009C1 | Nike | 1 | - |
| AC/DC Adaptor | ASUC88a-P20W12 | 2152 | Shenzhen Aquilstar Technology | 1 | 100-240 V~, 1.5 A, 50-60 Hz |

9. TEST RESULT

9.1 DUTY CYCLE

| Mode | Data Rate | T _{on} (ms) | T _{total} (ms) | Duty Cycle | Duty Factor (dB) | VBW(1/T) (Hz) |
|--------------|-----------|----------------------|-------------------------|------------|------------------|---------------|
| Bluetooth LE | 1 Mbps | 0.394 | 0.624 | 0.631 | 2.001 | 2539 |


▣ TEST PLOTS

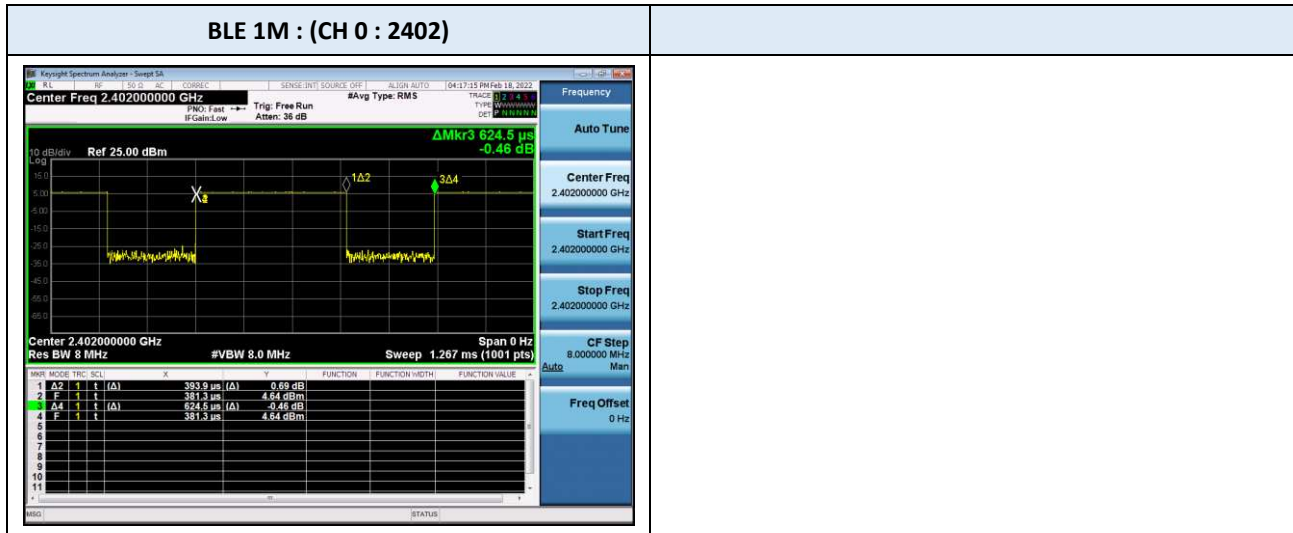

9.2. 6 dB BANDWIDTH / 99% BANDWIDTH MEASUREMENT

| BLE 1M | | 99% Bandwidth (kHz) | 6 dB Bandwidth (kHz) | |
|-----------------|---------|---------------------|----------------------|-------|
| Frequency (MHz) | Channel | Result | Result | Limit |
| 2402 | 0 | 1031.8 | 675.6 | ≥ 500 |
| 2440 | 19 | 1046.7 | 681.7 | |
| 2480 | 39 | 1065.2 | 718.3 | |

TEST PLOTS

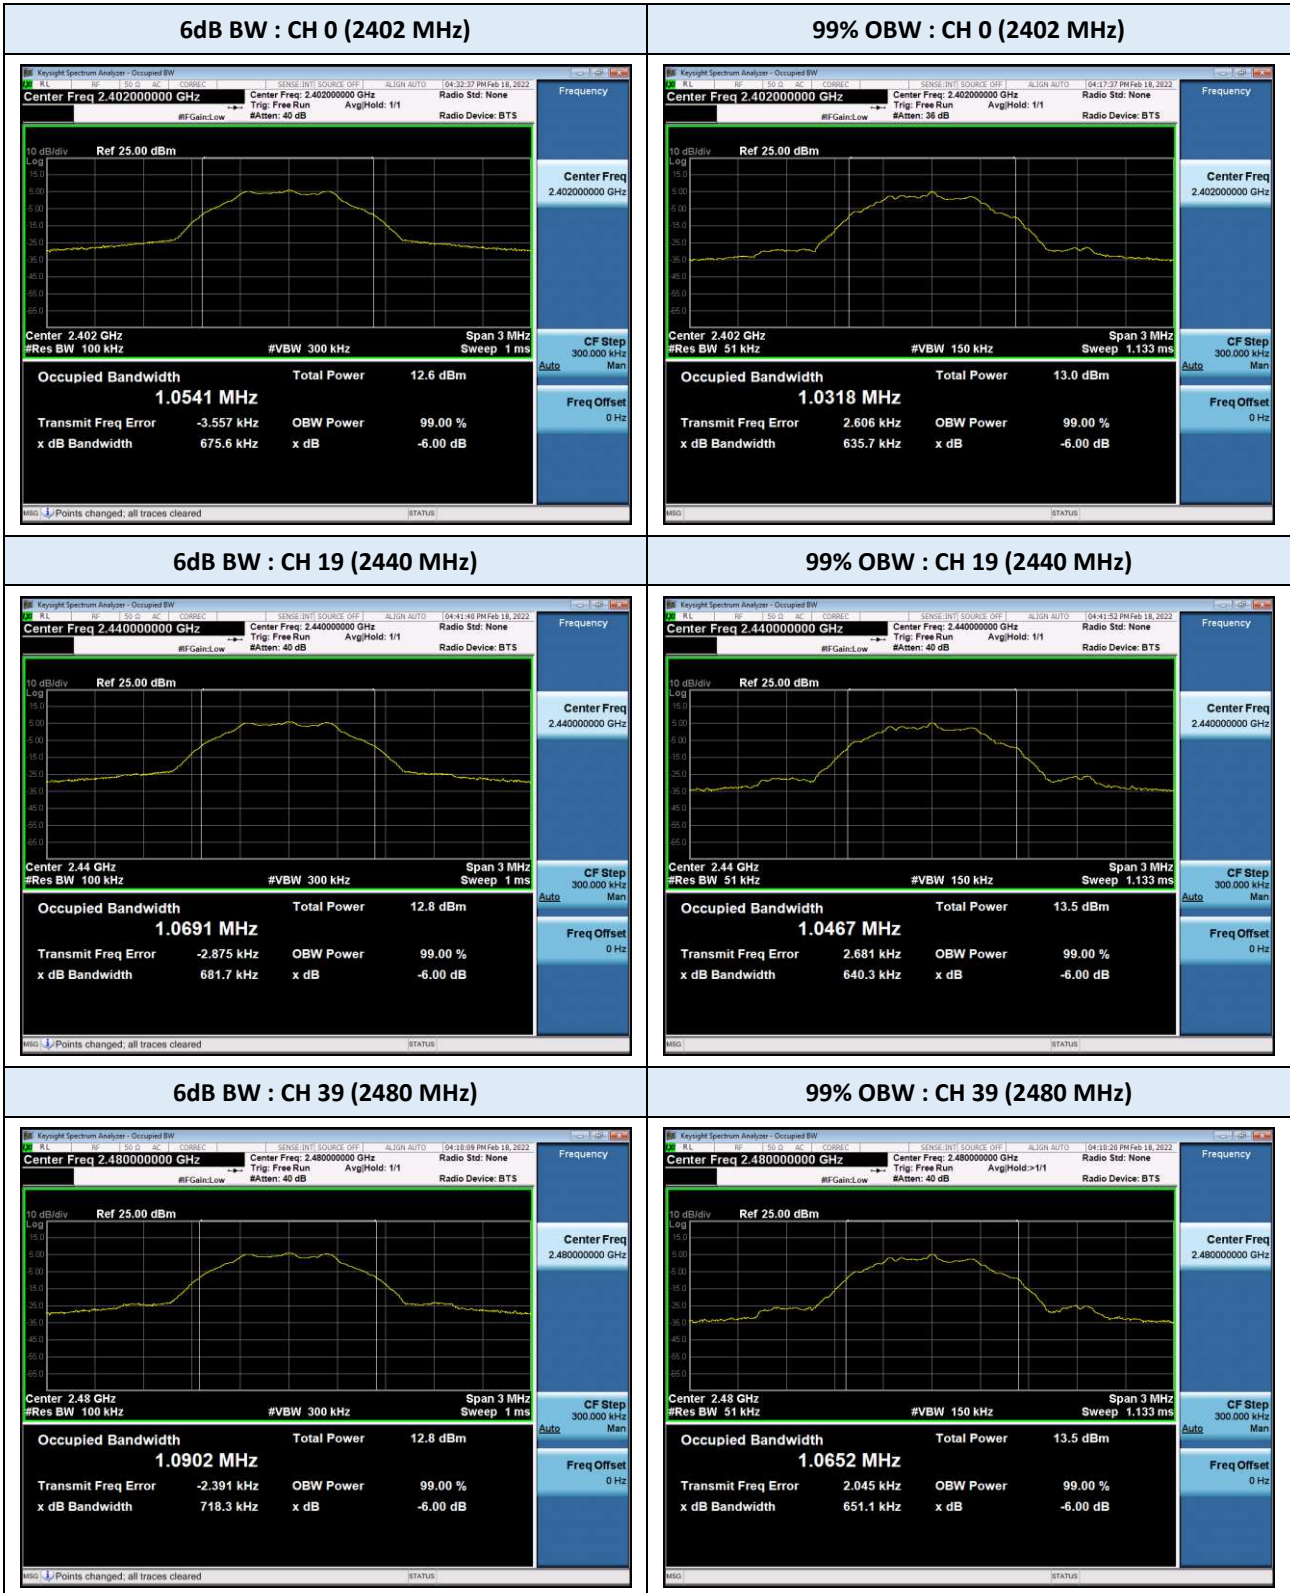

9.3. OUTPUT POWER

Peak Power

| BLE 1M | | Test Result | | |
|-----------------|-------------|----------------------|-------------|-----------|
| Frequency (MHz) | Channel No. | Measured Power (dBm) | Limit (dBm) | Result |
| 2402 | 0 | 6.093 | ≤ 30 | Compliant |
| 2440 | 19 | 6.297 | ≤ 30 | Compliant |
| 2480 | 39 | 6.262 | ≤ 30 | Compliant |


Average Power

| BLE 1M | | Test Result | | | | |
|-----------------|-------------|----------------------|------------------|--------------------|-------------|-----------|
| Frequency (MHz) | Channel No. | Measured Power (dBm) | Duty Factor (dB) | Power + Duty (dBm) | Limit (dBm) | Result |
| 2402 | 0 | 3.927 | 2.001 | 5.928 | ≤ 30 | Compliant |
| 2440 | 19 | 4.072 | 2.001 | 6.073 | ≤ 30 | Compliant |
| 2480 | 39 | 4.046 | 2.001 | 6.047 | ≤ 30 | Compliant |

Note(s) :

1. The output power results in plot include the spectrum offset, which is a combination loss of the attenuator and the cable used for testing.

TEST PLOTS

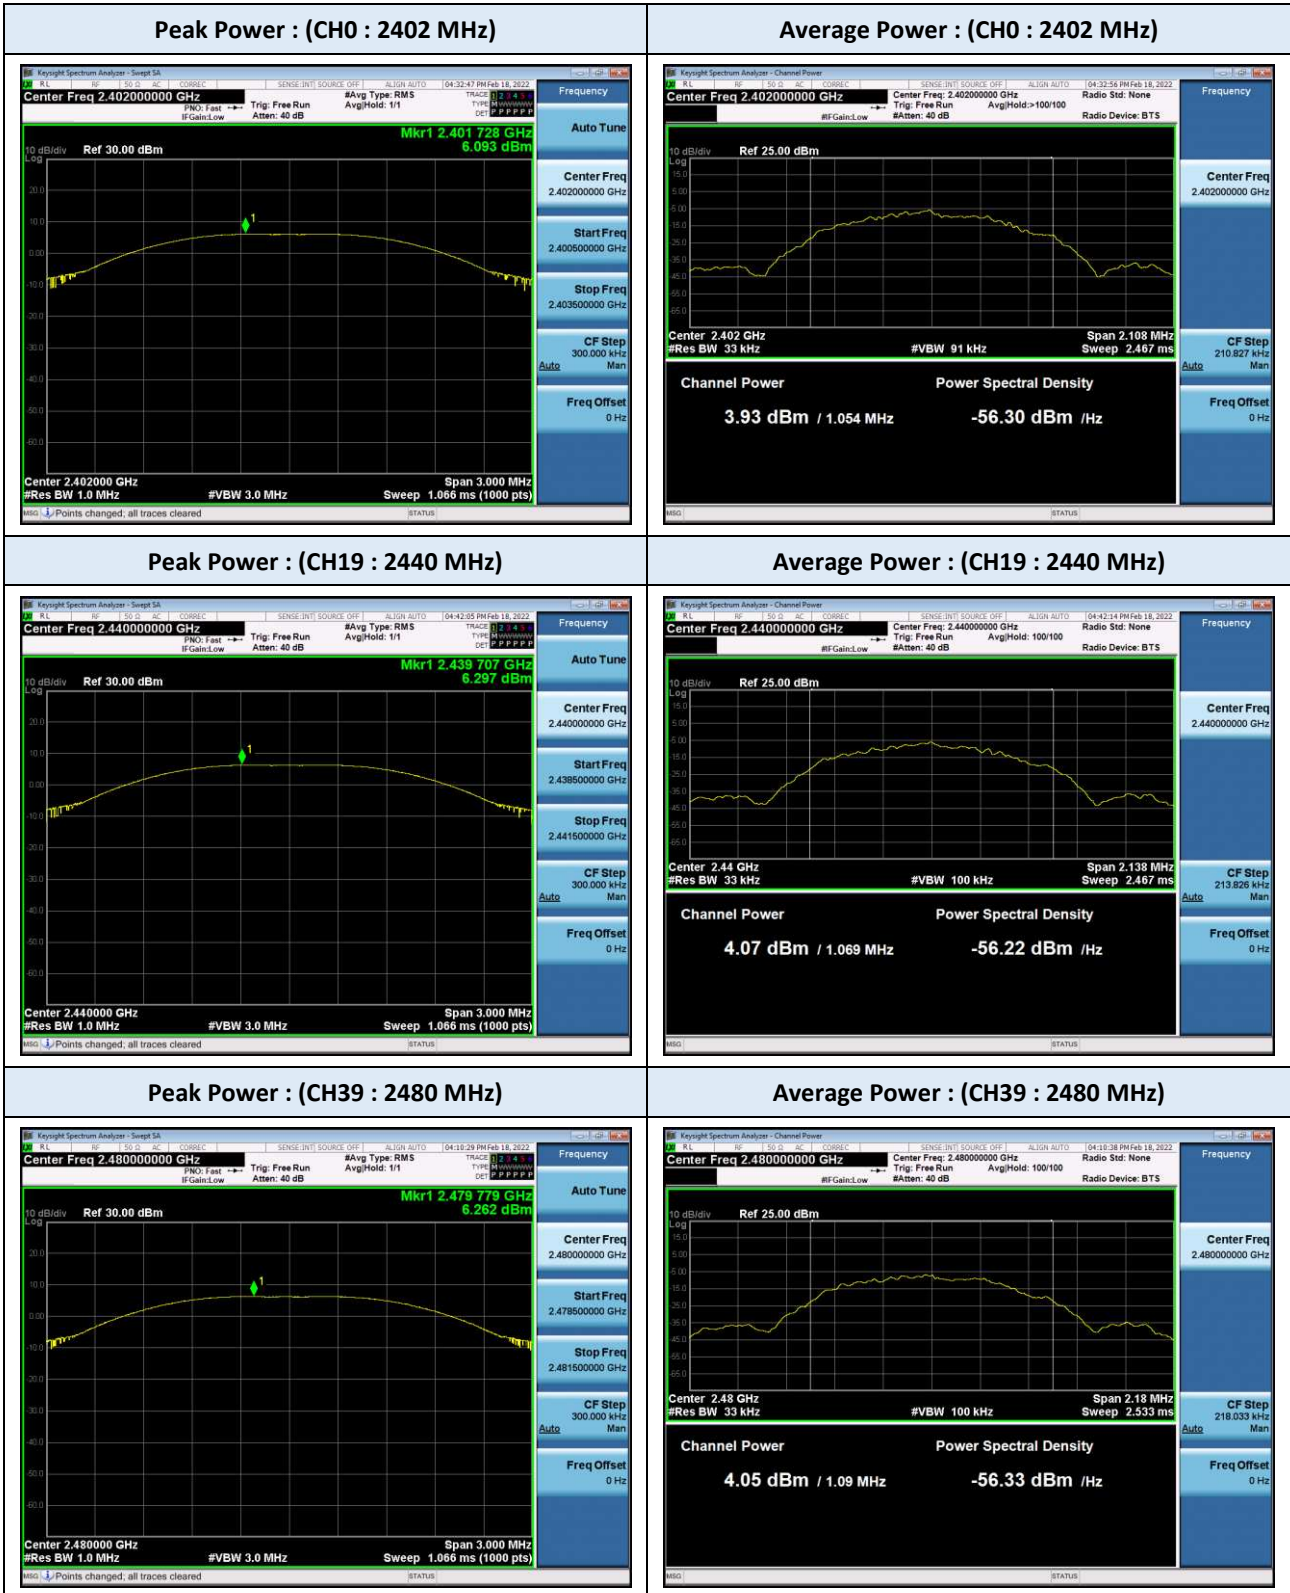


9.4. POWER SPECTRAL DENSITY

| BLE 1M | | Test Result | | |
|-----------------|-------------|---------------------------|------------------|-----------|
| Frequency (MHz) | Channel No. | Measured Level (dBm/3kHz) | Limit (dBm/3kHz) | Result |
| 2402 | 0 | -9.270 | ≤ 8.000 | Compliant |
| 2440 | 19 | -9.346 | ≤ 8.000 | Compliant |
| 2480 | 39 | -9.711 | ≤ 8.000 | Compliant |

Note(s) :

- The output power results in plot include the spectrum offset, which is a combination loss of the attenuator and the cable used for testing

TEST PLOTS

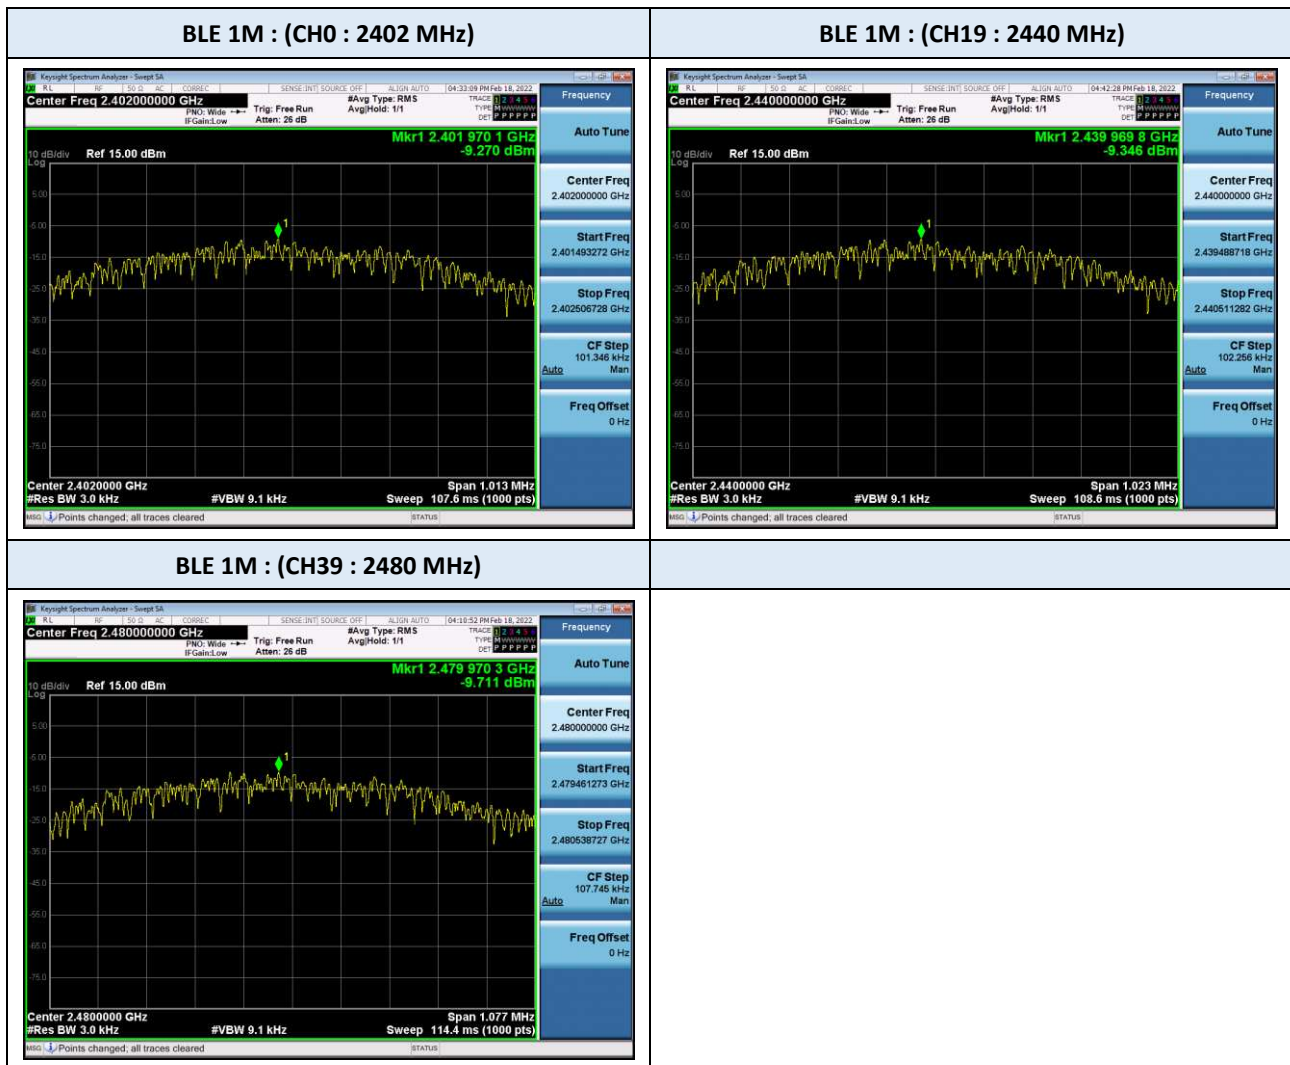


9.5. CONDUCTED BAND EDGE & SPURIOUS EMISSIONS

Out of Band Emissions at the Band Edge

| BLE 1M (MCU) | | | Test Result | | |
|-----------------|-------------|----------|---------------------|-------------|-----------|
| Frequency [MHz] | Channel No. | Position | Measured Level [dB] | Limit [dBc] | Result |
| 2402 | 0 | Low | 37.594 | ≥ 20 | Compliant |
| 2480 | 39 | High | 41.144 | ≥ 20 | Compliant |


TEST PLOTS

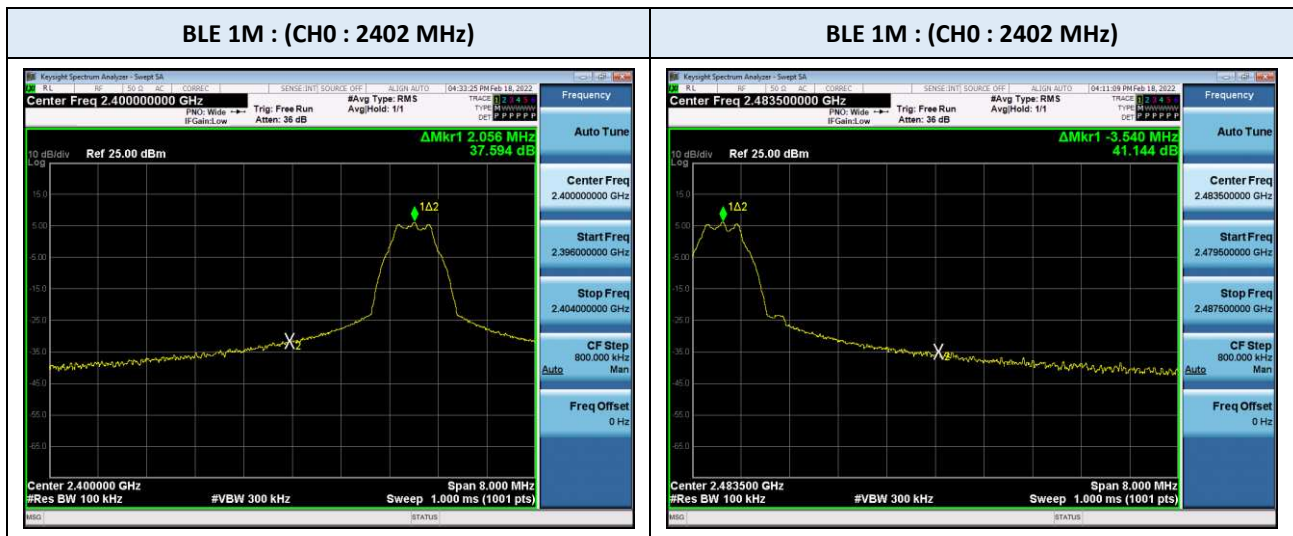

Conducted Spurious Emissions

| BLE 1M (MCU) | | | Test Result | | |
|-----------------|-------------|----------|----------------------|-------------|-----------|
| Frequency [MHz] | Channel No. | Position | Measured Level [dBc] | Limit [dBc] | Result |
| 2402 | 0 | Low | 58.320 | ≥ 20 | Compliant |
| 2440 | 19 | Middle | 60.291 | ≥ 20 | Compliant |
| 2480 | 39 | High | 56.304 | ≥ 20 | Compliant |

TEST PLOTS

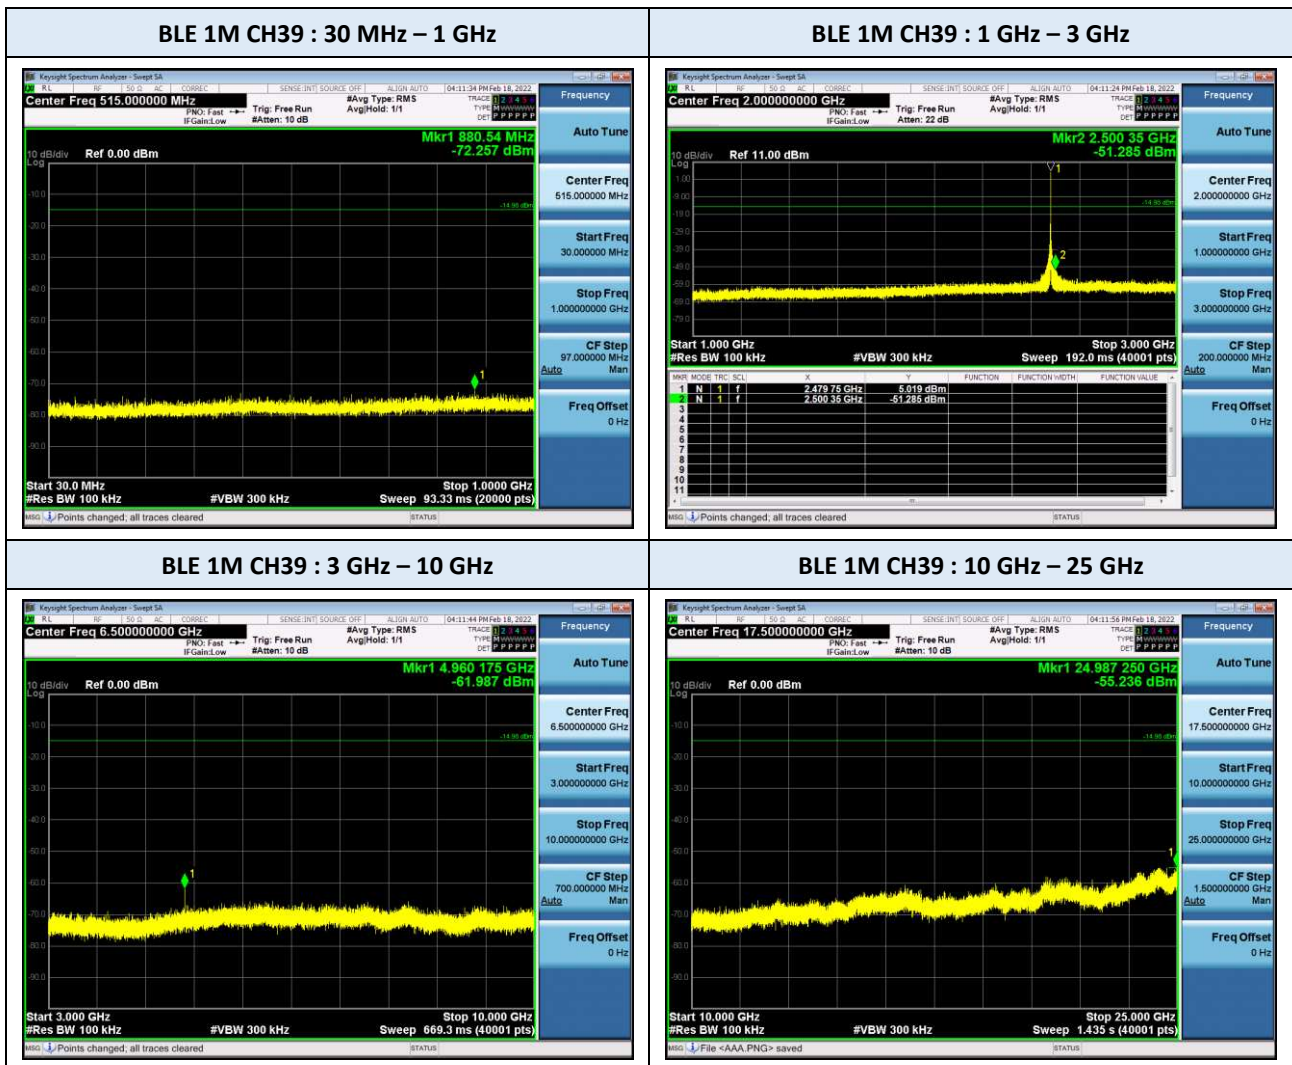

Note(s) :
The plots included in this report are only at the worst-case channel.

9.6. RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Test Mode BLE 1M : Stand Alone
 Operating Frequency 2480 MHz (CH 39)

| Frequency (MHz) | Polarization | Reading (dBuV) | Corr. ¹⁾ (dB) | Total (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Measurement Type |
|-----------------|--------------|----------------|--------------------------|----------------|----------------|-------------|------------------|
| No peak found | | | | | | | |

Test Mode BLE 1M : Wireless charging mode
 Operating Frequency 2480 MHz (CH 39)

| Frequency (MHz) | Polarization | Reading (dBuV) | Corr. ¹⁾ (dB) | Total (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Measurement Type |
|-----------------|--------------|----------------|--------------------------|----------------|----------------|-------------|------------------|
| 0.012 | V | 15.6 | 19.8 | 35.4 | 126 | 90.6 | QP |
| 0.031 | H | 20.5 | 19.3 | 39.8 | 117.8 | 78.0 | QP |
| 0.131 | H | 69.6 | 19.4 | 89.0 | 105.3 | 16.3 | QP |
| 0.131 | V | 56.5 | 19.4 | 75.9 | 105.3 | 29.4 | QP |
| 0.157 | V | 22.6 | 19.4 | 42.0 | 103.7 | 61.7 | QP |
| 0.159 | H | 34.3 | 19.4 | 53.7 | 103.6 | 49.9 | QP |
| 0.297 | V | 16.0 | 19.3 | 35.3 | 98.2 | 62.9 | QP |
| 0.391 | H | 22.1 | 19.3 | 41.4 | 95.8 | 54.4 | QP |

Note(s) :

1. Correction Factor: Antenna Factor + Cable loss + Pre-amplifier Gain

Frequency Range : 30 MHz – 1 GHz

Test Mode BLE 1M : Stand Alone
 Operating Frequency 2402 MHz (CH 0)

| Frequency (MHz) | Polarization | Reading (dBuV) | Corr. ¹⁾ (dB) | Total (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Measurement Type |
|-----------------|--------------|----------------|--------------------------|----------------|----------------|-------------|------------------|
| No peak found | | | | | | | |

Test Mode BLE 1M : Stand Alone
 Operating Frequency 2440 MHz (CH 19)

| Frequency (MHz) | Polarization | Reading (dBuV) | Corr. ¹⁾ (dB) | Total (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Measurement Type |
|-----------------|--------------|----------------|--------------------------|----------------|----------------|-------------|------------------|
| No peak found | | | | | | | |

Test Mode BLE 1M : Stand Alone
 Operating Frequency 24802 MHz (CH 39)

| Frequency (MHz) | Polarization | Reading (dBuV) | Corr. ¹⁾ (dB) | Total (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Measurement Type |
|-----------------|--------------|----------------|--------------------------|----------------|----------------|-------------|------------------|
| No peak found | | | | | | | |

Note(s) :

1. Correction Factor: Antenna Factor + Cable loss + Pre-amplifier Gain

Frequency Range : 30 MHz – 1 GHz (Continued)

Test Mode BLE 1M : Wireless charging mode
 Operating Frequency 2402 MHz (CH 0)

| Frequency (MHz) | Polarization | Reading (dBuV) | Corr. ¹⁾ (dB) | Total (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Measurement Type |
|-----------------|--------------|----------------|--------------------------|----------------|----------------|-------------|------------------|
| 33.928 | V | 41.3 | -2.7 | 38.6 | 40 | 1.4 | QP |
| 42.064 | V | 40.5 | -8.6 | 31.9 | 40 | 8.1 | QP |
| 66.023 | V | 39.3 | -12.8 | 26.5 | 40 | 13.5 | QP |
| 279.987 | H | 41.8 | -5.9 | 35.9 | 46 | 10.1 | QP |
| 482.362 | H | 34.0 | -2.5 | 31.5 | 46 | 14.5 | QP |
| 680.028 | H | 31.8 | 1.1 | 32.9 | 46 | 13.1 | QP |

Test Mode BLE 1M : Wireless charging mode
 Operating Frequency 2440 MHz (CH 19)

| Frequency (MHz) | Polarization | Reading (dBuV) | Corr. ¹⁾ (dB) | Total (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Measurement Type |
|-----------------|--------------|----------------|--------------------------|----------------|----------------|-------------|------------------|
| 32.903 | V | 40.3 | -2.1 | 38.2 | 40 | 1.8 | QP |
| 41.488 | V | 40.3 | -8.1 | 32.2 | 40 | 7.8 | QP |
| 66.022 | V | 39.0 | -12.8 | 26.2 | 40 | 13.8 | QP |
| 279.248 | H | 41.6 | -5.9 | 35.7 | 46 | 10.3 | QP |
| 481.043 | H | 34.4 | -2.5 | 31.9 | 46 | 14.1 | QP |
| 680.083 | H | 31.7 | 1.1 | 32.8 | 46 | 13.2 | QP |

Test Mode BLE 1M : Wireless charging mode
 Operating Frequency 24802 MHz (CH 39)

| Frequency (MHz) | Polarization | Reading (dBuV) | Corr. ¹⁾ (dB) | Total (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Measurement Type |
|-----------------|--------------|----------------|--------------------------|----------------|----------------|-------------|------------------|
| 33.930 | V | 41.5 | -2.7 | 38.8 | 40 | 1.2 | QP |
| 42.070 | V | 40.2 | -8.6 | 31.6 | 40 | 8.4 | QP |
| 66.026 | V | 39.3 | -12.8 | 26.5 | 40 | 13.5 | QP |
| 279.992 | H | 41.9 | -5.9 | 36.0 | 46 | 10.0 | QP |
| 501.129 | H | 34.2 | -2.2 | 32.0 | 46 | 14.0 | QP |
| 680.091 | H | 31.7 | 1.1 | 32.8 | 46 | 13.2 | QP |
| 753.720 | H | 24.1 | 2.3 | 26.4 | 46 | 19.6 | QP |

Note(s) :

1. Correction Factor: Antenna Factor + Cable loss + Pre-amplifier Gain

Frequency Range : Above 1 GHz

Test Mode BLE 1M : Stand Alone
 Operating Frequency 2402 MHz (CH 0)

| Frequency (MHz) | Polarization | Reading (dBuV) | | Factor (dB) | | Level (dBuV/m) | | Limit (dBuV/m) | | Margin (dB) | |
|-----------------|--------------|----------------|------|---------------------|------|----------------|------|----------------|----|-------------|------|
| | | AV | PK | Corr. ¹⁾ | Duty | AV | PK | AV | PK | AV | PK |
| 4765.423 | H | 33.7 | 43.6 | -5.4 | 2.0 | 30.3 | 38.2 | 54 | 74 | 23.7 | 35.8 |
| 4804.010 | V | 35.3 | 45.1 | -5.2 | 2.0 | 32.1 | 39.9 | 54 | 74 | 21.9 | 34.1 |
| 4804.414 | H | 41 | 48.1 | -5.2 | 2.0 | 37.8 | 42.9 | 54 | 74 | 16.2 | 31.1 |

Test Mode BLE 1M : Stand Alone
 Operating Frequency 2402 MHz (CH 0)

| Frequency (MHz) | Polarization | Reading (dBuV) | | Factor (dB) | | Level (dBuV/m) | | Limit (dBuV/m) | | Margin (dB) | |
|-----------------|--------------|----------------|------|---------------------|------|----------------|------|----------------|----|-------------|------|
| | | AV | PK | Corr. ¹⁾ | Duty | AV | PK | AV | PK | AV | PK |
| 4865.210 | H | 33.7 | 47.7 | -5.1 | 2.0 | 30.6 | 42.6 | 54 | 74 | 23.4 | 31.4 |
| 4879.961 | V | 37.8 | 46.2 | -5.0 | 2.0 | 34.8 | 41.2 | 54 | 74 | 19.2 | 32.8 |
| 4880.491 | H | 43.6 | 50.7 | -5.0 | 2.0 | 40.6 | 45.7 | 54 | 74 | 13.4 | 28.3 |

Test Mode BLE 1M : Stand Alone
 Operating Frequency 2402 MHz (CH 0)

| Frequency (MHz) | Polarization | Reading (dBuV) | | Factor (dB) | | Level (dBuV/m) | | Limit (dBuV/m) | | Margin (dB) | |
|-----------------|--------------|----------------|------|---------------------|------|----------------|------|----------------|----|-------------|------|
| | | AV | PK | Corr. ¹⁾ | Duty | AV | PK | AV | PK | AV | PK |
| 4959.946 | V | 40.6 | 48.5 | -4.8 | 2.0 | 37.8 | 43.7 | 54 | 74 | 16.2 | 30.3 |
| 4960.045 | H | 46.1 | 52.6 | -4.8 | 2.0 | 43.3 | 47.8 | 54 | 74 | 10.7 | 26.2 |

Note(s) :

1. Correction Factor: Antenna Factor + Cable loss + Pre-amplifier Gain
2. AV Level = Measured Power(dBm) + Correction Factor(dB) + Duty Cycle Factor(dB).

Frequency Range : Above 1 GHz (Continued)

Test Mode BLE 1M : Wireless charging mode
 Operating Frequency 2402 MHz (CH 0)

| Frequency (MHz) | Polarization | Reading (dBuV) | | Factor (dB) | | Level (dBuV/m) | | Limit (dBuV/m) | | Margin (dB) | |
|-----------------|--------------|----------------|------|---------------------|------|----------------|------|----------------|----|-------------|------|
| | | AV | PK | Corr. ¹⁾ | Duty | AV | PK | AV | PK | AV | PK |
| 4803.364 | H | 41.7 | 49.5 | -5.2 | 2.0 | 38.5 | 44.3 | 54 | 74 | 15.5 | 29.7 |
| 4803.973 | V | 42.7 | 49.5 | -5.2 | 2.0 | 39.5 | 44.3 | 54 | 74 | 14.5 | 29.7 |

Test Mode BLE 1M : Wireless charging mode
 Operating Frequency 2402 MHz (CH 0)

| Frequency (MHz) | Polarization | Reading (dBuV) | | Factor (dB) | | Level (dBuV/m) | | Limit (dBuV/m) | | Margin (dB) | |
|-----------------|--------------|----------------|------|---------------------|------|----------------|------|----------------|----|-------------|------|
| | | AV | PK | Corr. ¹⁾ | Duty | AV | PK | AV | PK | AV | PK |
| 4859.867 | V | 33.4 | 43.4 | -5.1 | 2.0 | 30.3 | 38.3 | 54 | 74 | 23.7 | 35.7 |
| 4880.061 | V | 41.8 | 49.4 | -5.0 | 2.0 | 38.8 | 44.4 | 54 | 74 | 15.2 | 29.6 |
| 4880.526 | H | 39.3 | 47.8 | -5.0 | 2.0 | 36.3 | 42.8 | 54 | 74 | 17.7 | 31.2 |



Test Mode BLE 1M : Wireless charging mode
 Operating Frequency 2402 MHz (CH 0)

| Frequency (MHz) | Polarization | Reading (dBuV) | | Factor (dB) | | Level (dBuV/m) | | Limit (dBuV/m) | | Margin (dB) | |
|-----------------|--------------|----------------|------|---------------------|------|----------------|------|----------------|----|-------------|------|
| | | AV | PK | Corr. ¹⁾ | Duty | AV | PK | AV | PK | AV | PK |
| 4959.947 | V | 42.4 | 49.0 | -4.8 | 2.0 | 39.6 | 44.2 | 54 | 74 | 14.4 | 29.8 |
| 4959.976 | H | 41.4 | 48.4 | -4.8 | 2.0 | 38.6 | 43.6 | 54 | 74 | 15.4 | 30.4 |

Note(s) :

1. Correction Factor: Antenna Factor + Cable loss + Pre-amplifier Gain
2. AV Level = Measured Power(dBm) + Correction Factor(dB) + Duty Cycle Factor(dB).



▣ TEST PLOTS

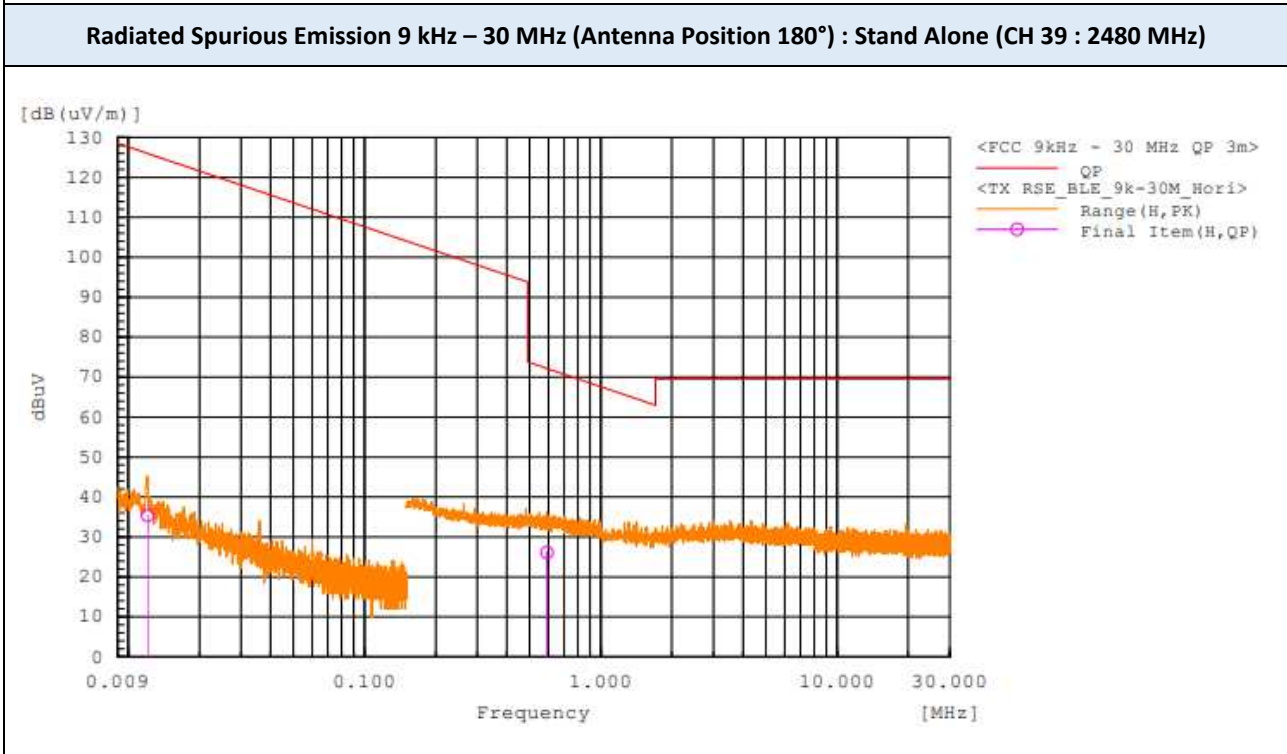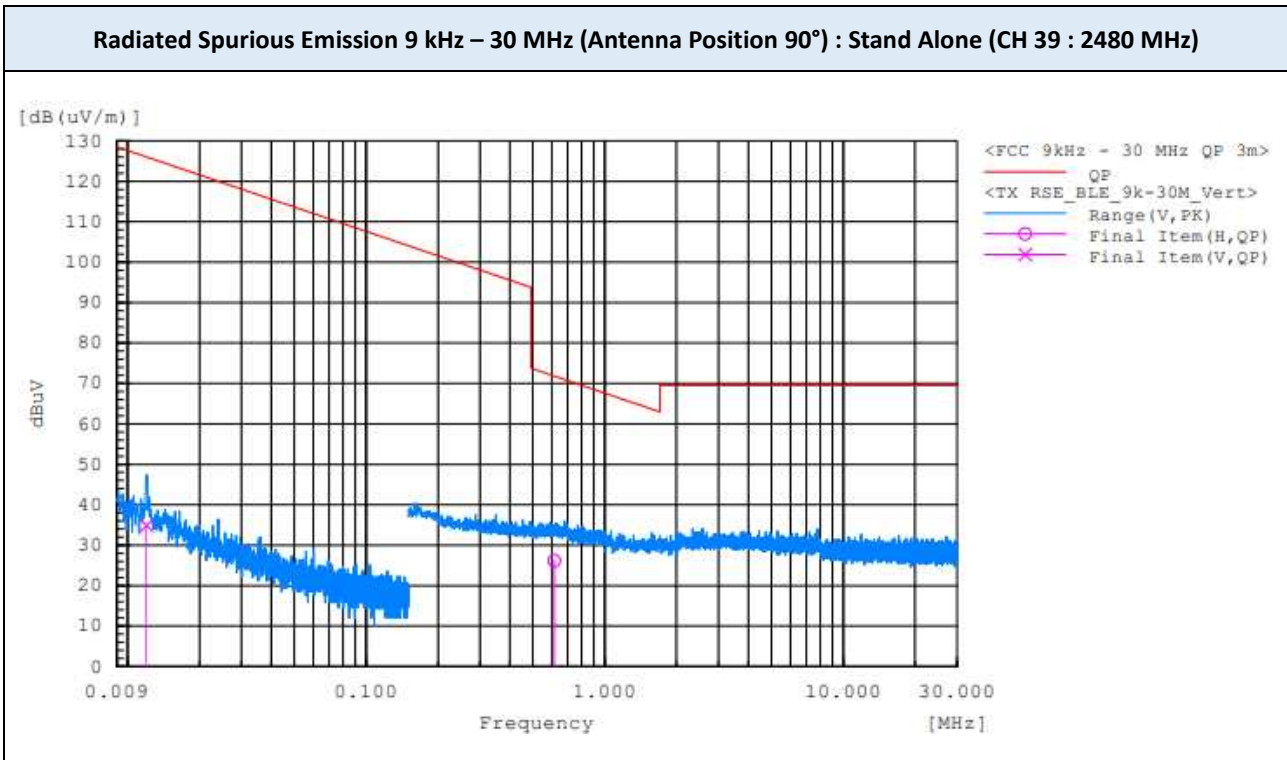

Note:



The worst-case plots are included in this report.

▣ TEST PLOTS

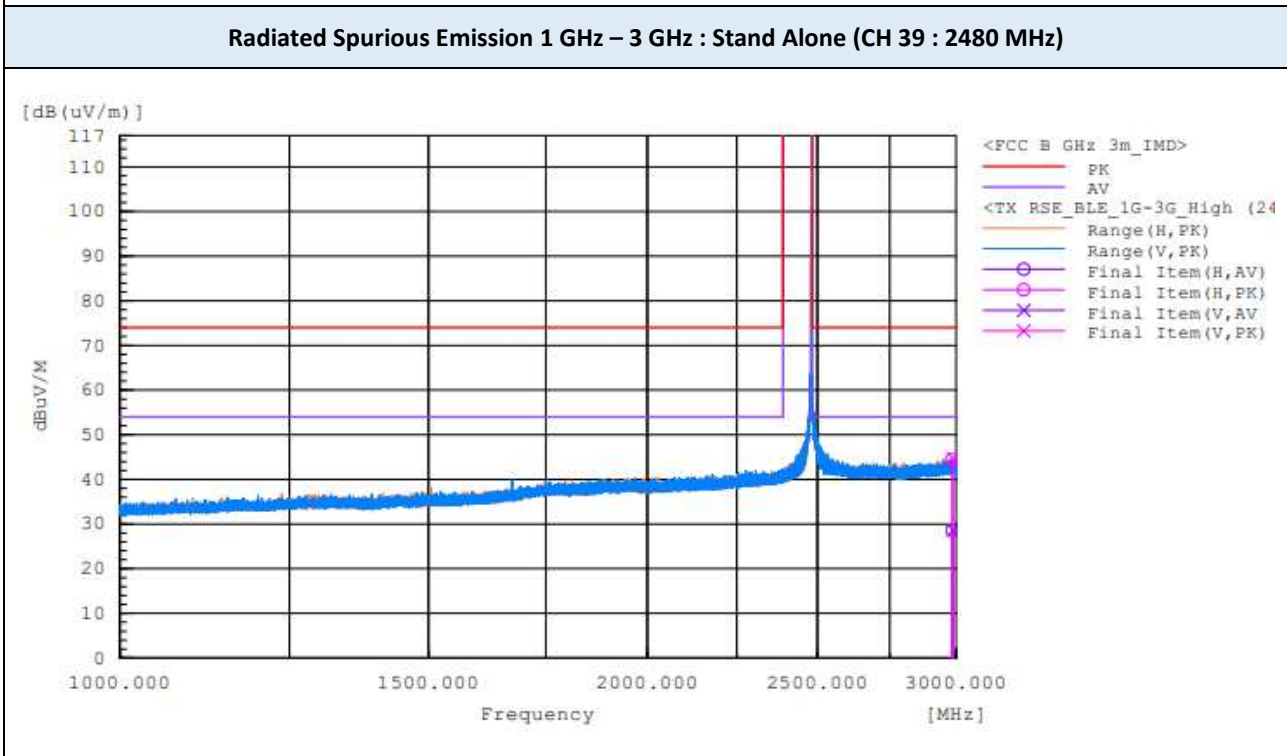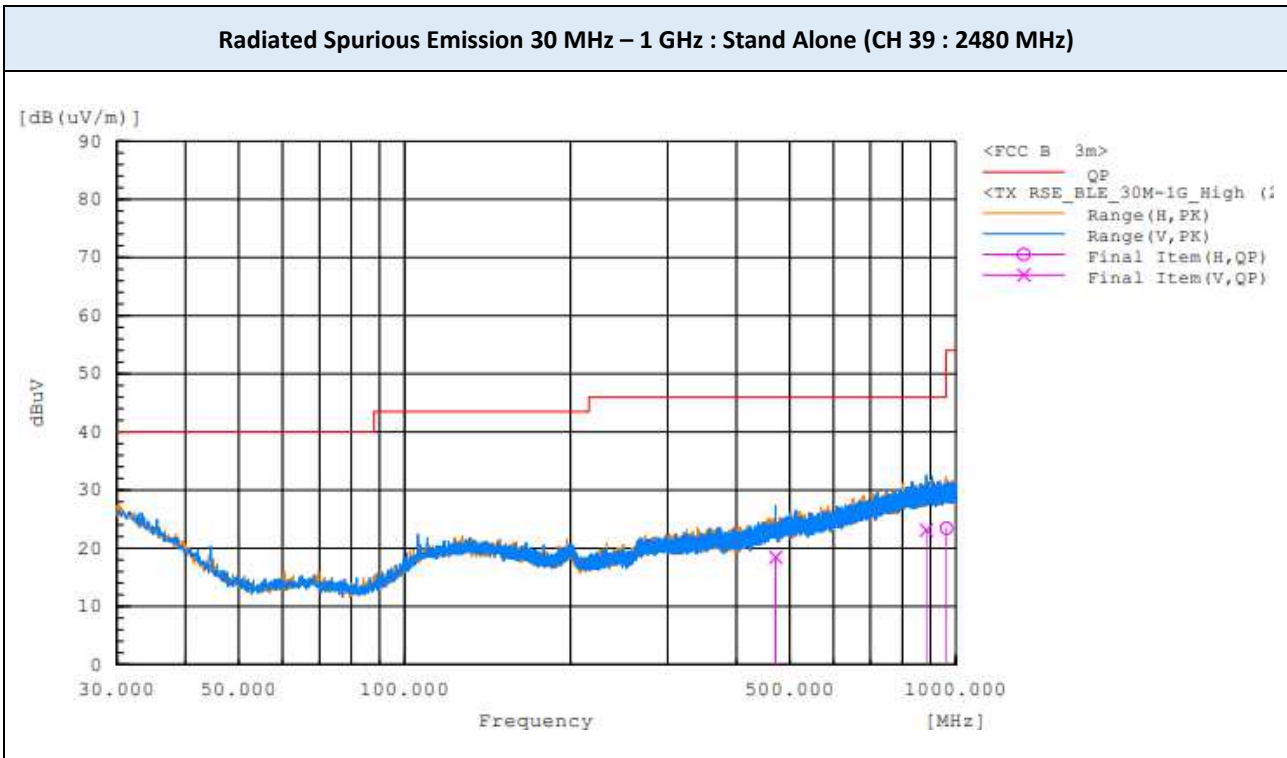

Note:
The worst-case plots are included in this report.

▣ TEST PLOTS

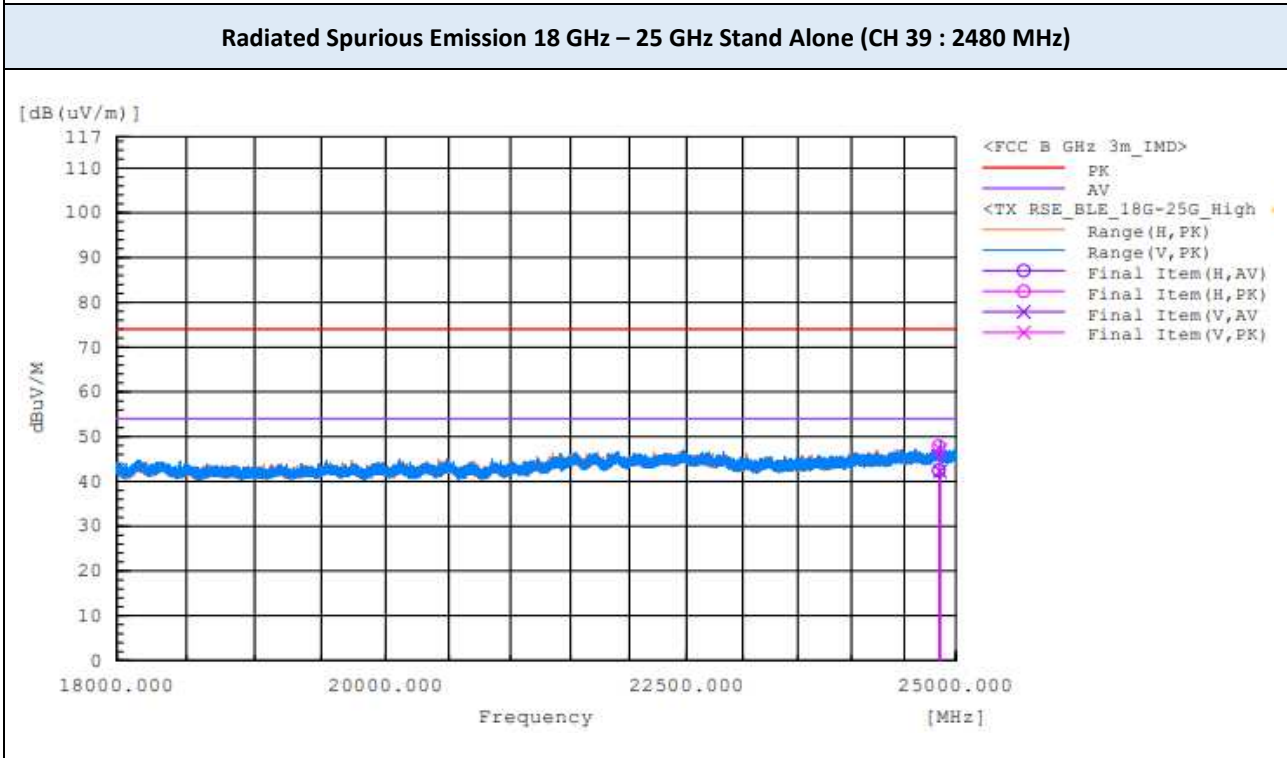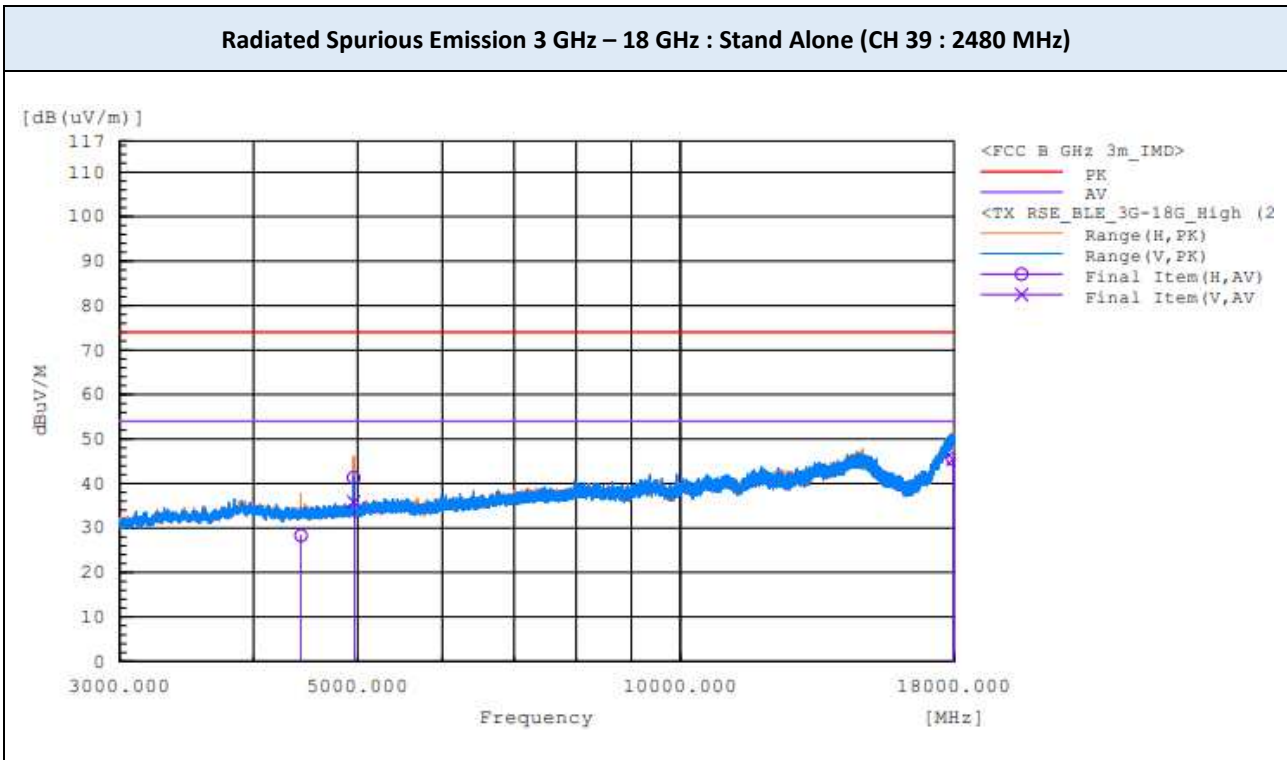


Note:


The worst-case plots are included in this report.

▣ TEST PLOTS

Radiated Spurious Emission 9 kHz – 30 MHz (Antenna Position 90°) : Wireless charging mode (CH 39 : 2480 MHz)

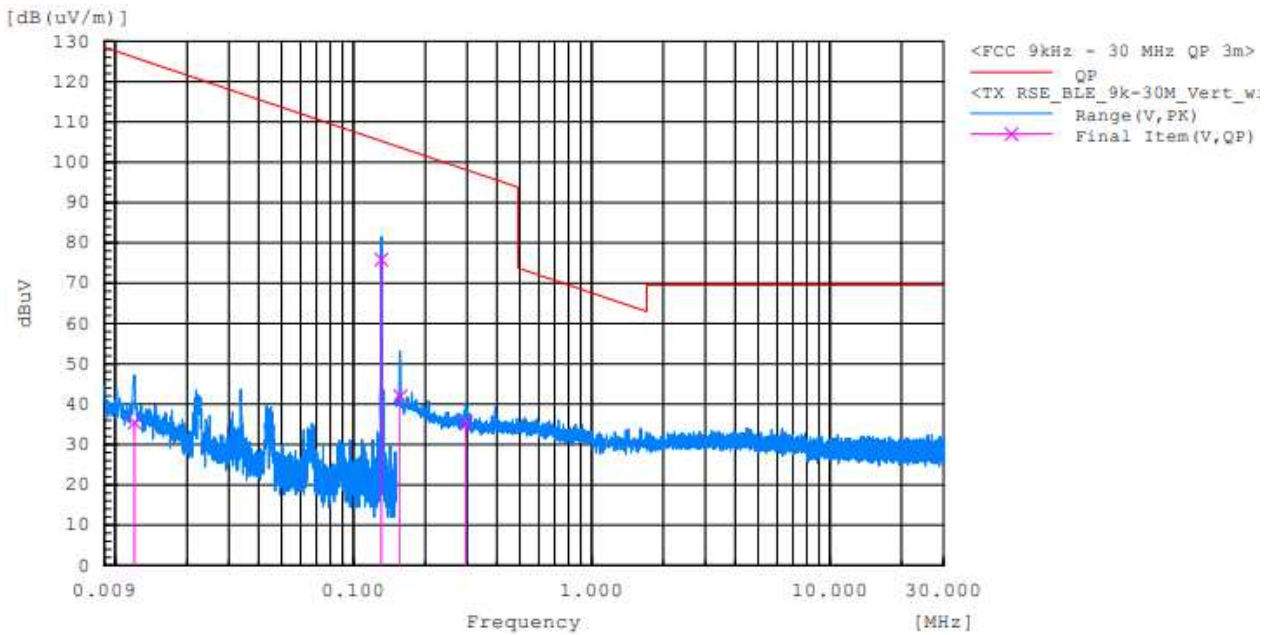



Radiated Spurious Emission 9 kHz – 30 MHz (Antenna Position 180°) : Wireless charging mode (CH 39 : 2480 MHz)

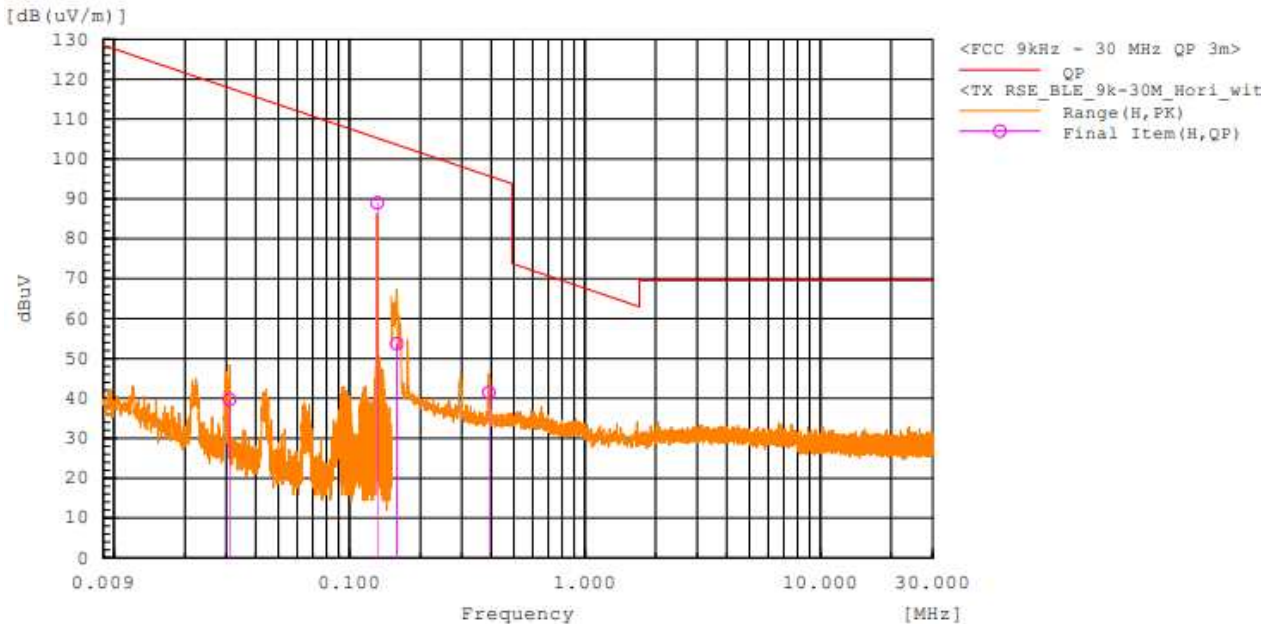

Note:



The worst-case plots are included in this report.

▣ TEST PLOTS

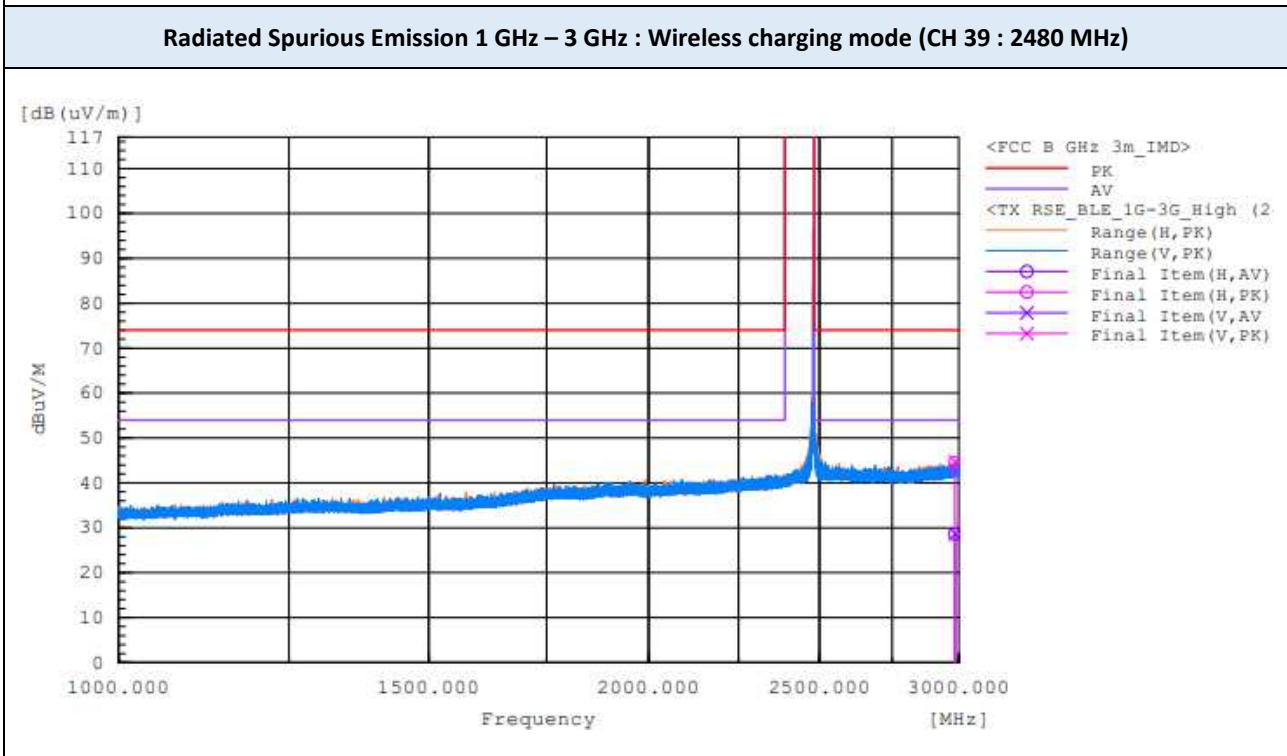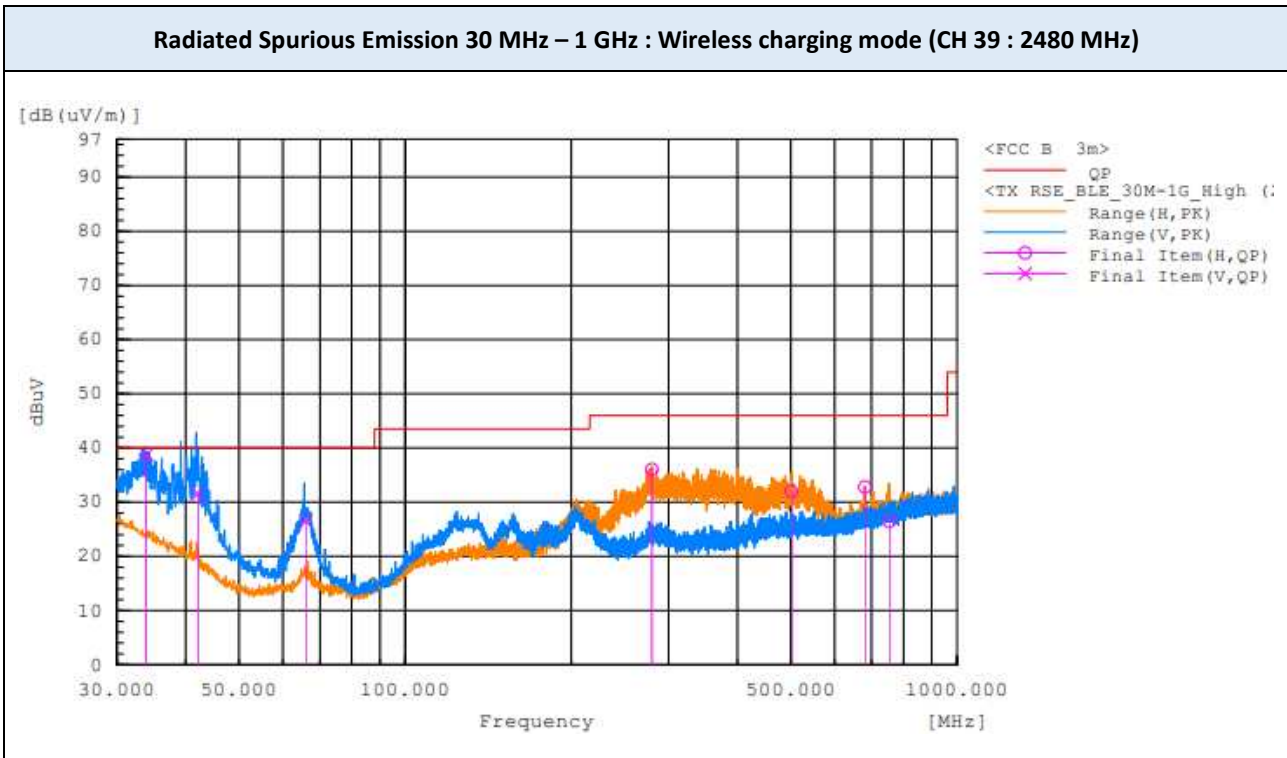

Note:
The worst-case plots are included in this report.

▣ TEST PLOTS

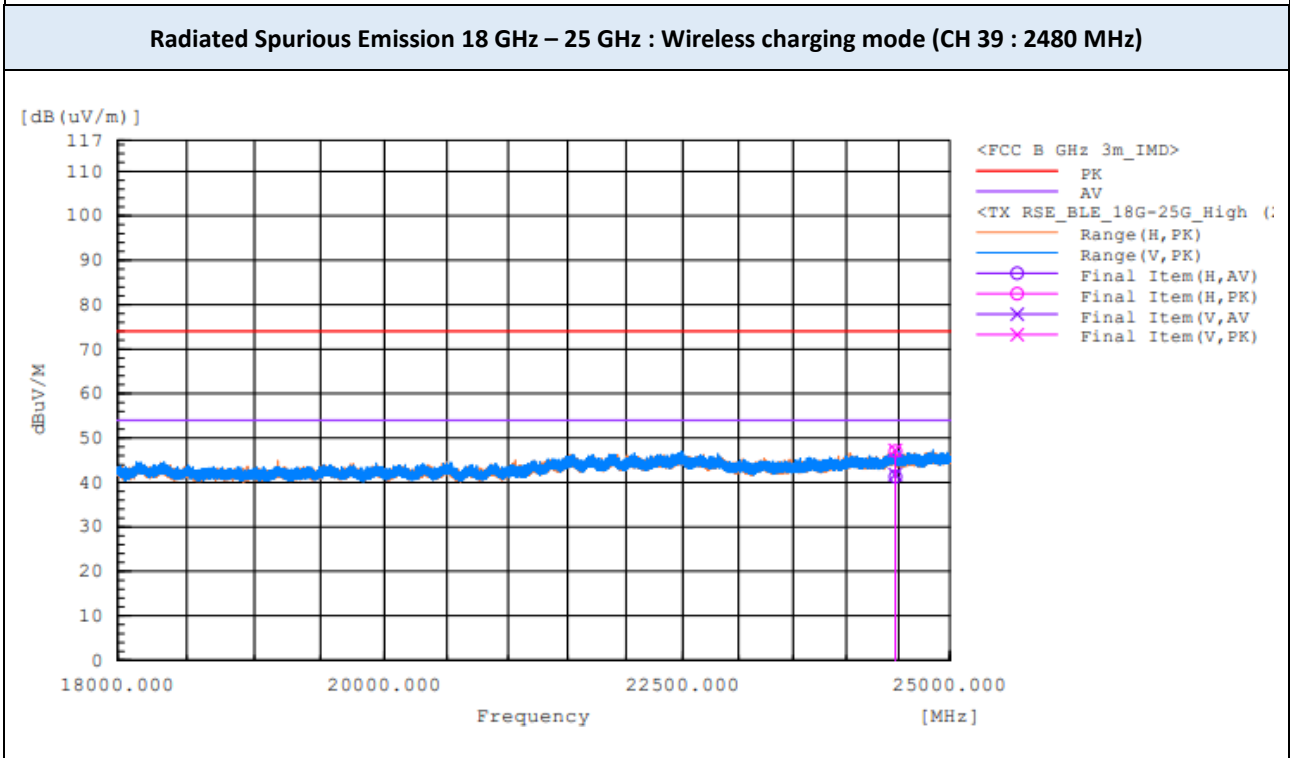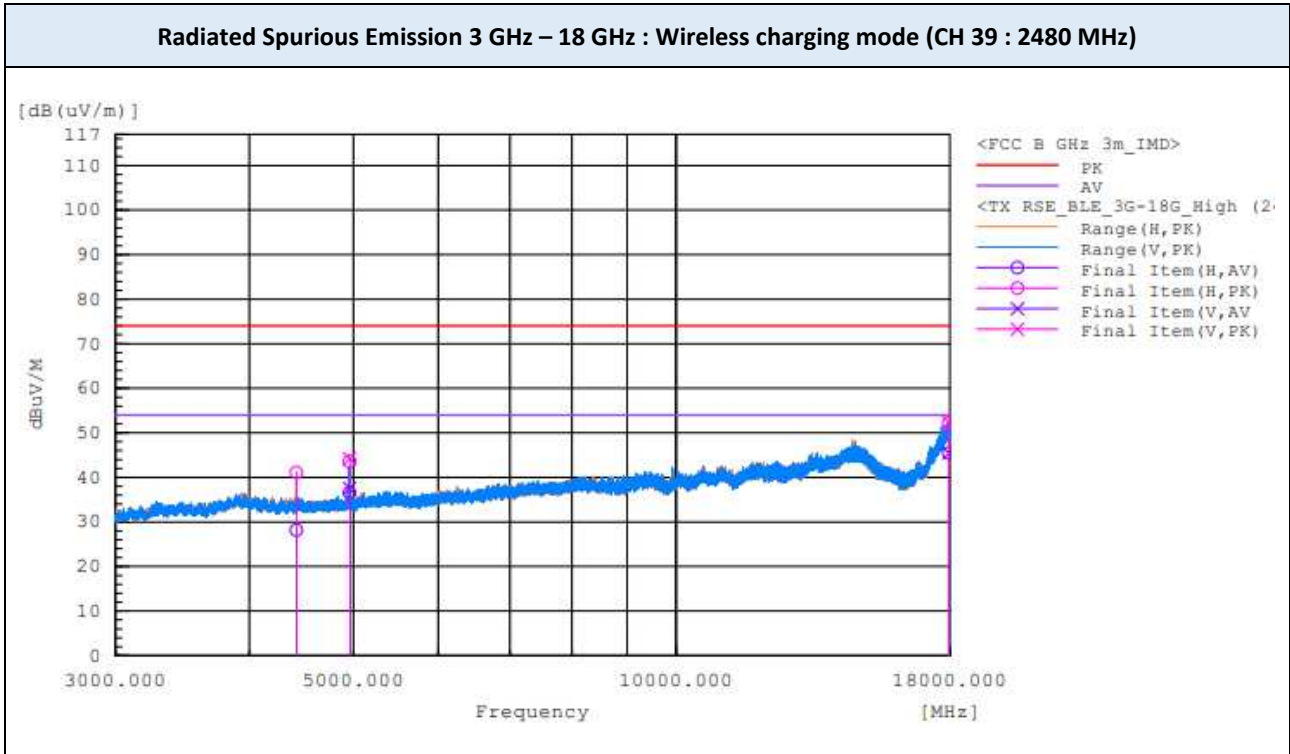

Note:
The worst-case plots are included in this report.

9.7. RADIATED RESTRICTED BAND EDGES

Test Mode BLE 1M : Stand Alone
 Operating Frequency 2402 MHz (CH 0)

| Frequency (MHz) | Polarization | Reading (dBuV) | | Factor (dB) | | Level (dBuV/m) | | Limit (dBuV/m) | | Margin (dB) | |
|-----------------|--------------|----------------|------|---------------------|------|----------------|------|----------------|----|-------------|------|
| | | AV | PK | Corr. ¹⁾ | Duty | AV | PK | AV | PK | AV | PK |
| 2389.710 | V | 2.7 | 18.0 | 31.0 | 2.0 | 35.7 | 49.0 | 54 | 74 | 18.3 | 25.0 |
| 2389.986 | H | 4 | 18.8 | 31.0 | 2.0 | 37.0 | 49.8 | 54 | 74 | 17.0 | 24.2 |


Test Mode BLE 1M : Stand Alone
 Operating Frequency 2480 MHz (CH 39)

| Frequency (MHz) | Polarization | Reading (dBuV) | | Factor (dB) | | Level (dBuV/m) | | Limit (dBuV/m) | | Margin (dB) | |
|-----------------|--------------|----------------|------|---------------------|------|----------------|------|----------------|----|-------------|------|
| | | AV | PK | Corr. ¹⁾ | Duty | AV | PK | AV | PK | AV | PK |
| 2483.505 | V | 14.8 | 28.2 | 31.6 | 2.0 | 48.4 | 59.8 | 54 | 74 | 5.6 | 14.2 |
| 2483.514 | H | 14 | 26.7 | 31.6 | 2.0 | 47.6 | 58.3 | 54 | 74 | 6.4 | 15.7 |

Note(s) :

1. Correction Factor: Antenna Factor + Cable loss + Pre-amplifier Gain
2. AV Level = Measured Power(dBm) + Correction Factor(dB) + Duty Cycle Factor(dB).

TEST PLOTS

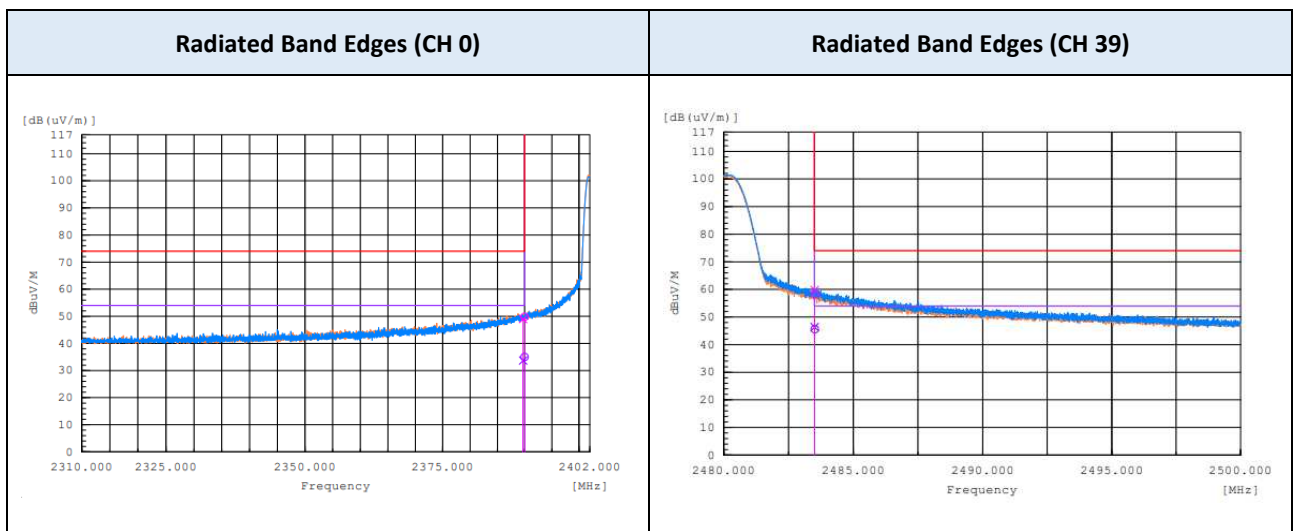

Test Mode BLE 1M : Wireless charging mode
 Operating Frequency 2402 MHz (CH 0)

| Frequency (MHz) | Polarization | Reading (dBuV) | | Factor (dB) | | Level (dBuV/m) | | Limit (dBuV/m) | | Margin (dB) | |
|-----------------|--------------|----------------|------|---------------------|------|----------------|------|----------------|----|-------------|------|
| | | AV | PK | Corr. ¹⁾ | Duty | AV | PK | AV | PK | AV | PK |
| 2389.997 | V | 1.4 | 18.4 | 31.0 | 2.0 | 34.4 | 49.4 | 54 | 74 | 19.6 | 24.6 |
| 2389.424 | H | 1.5 | 17.9 | 31.0 | 2.0 | 34.5 | 48.9 | 54 | 74 | 19.5 | 25.1 |


Test Mode BLE 1M : Wireless charging mode
 Operating Frequency 2480 MHz (CH 39)

| Frequency (MHz) | Polarization | Reading (dBuV) | | Factor (dB) | | Level (dBuV/m) | | Limit (dBuV/m) | | Margin (dB) | |
|-----------------|--------------|----------------|------|---------------------|------|----------------|------|----------------|----|-------------|------|
| | | AV | PK | Corr. ¹⁾ | Duty | AV | PK | AV | PK | AV | PK |
| 2483.518 | V | 10.1 | 22.4 | 31.6 | 2.0 | 43.7 | 54.0 | 54 | 74 | 10.3 | 20.0 |
| 2483.602 | H | 10.2 | 22.8 | 31.6 | 2.0 | 43.8 | 54.4 | 54 | 74 | 10.2 | 19.6 |

Note(s) :

1. Correction Factor: Antenna Factor + Cable loss + Preamplifier Gain
2. AV Level = Measured Power(dBm) + Correction Factor(dB) + Duty Cycle Factor(dB).

TEST PLOTS

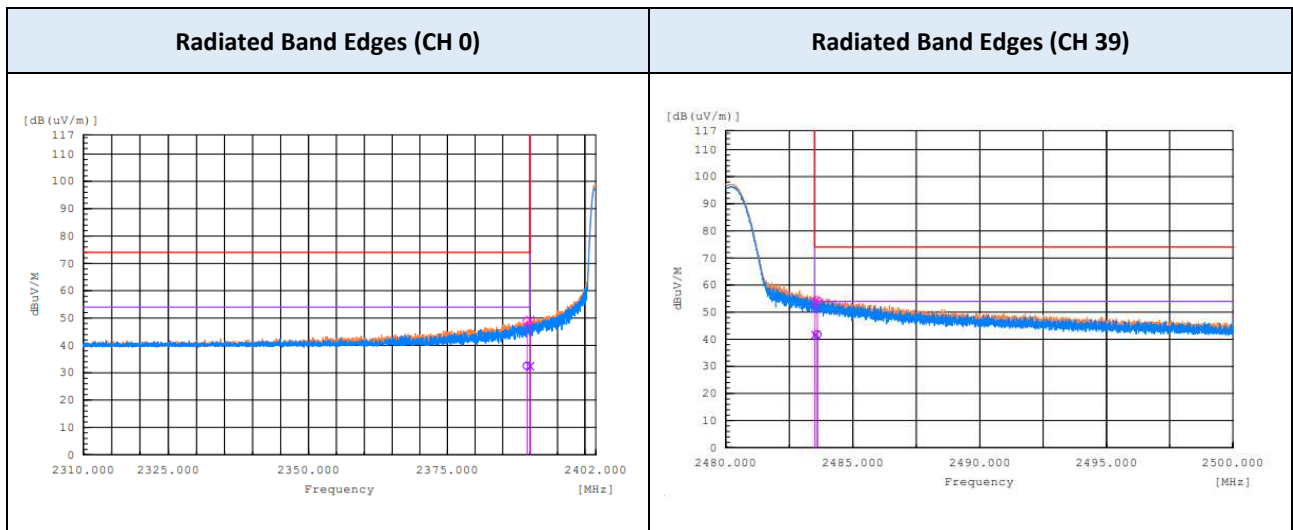

10. LIST OF TEST EQUIPMENT

| No. | Instrument | Model No. | Calibration Due (mm/dd/yy) | Manufacture | Serial No. |
|-------------------------------------|---------------------------------------|----------------------------|----------------------------|-----------------|------------|
| <input checked="" type="checkbox"/> | Signal Analyzer (20 Hz ~ 40.0 GHz) | ESU40 | 12/03/2022 | Rohde & Schwarz | 100529 |
| <input checked="" type="checkbox"/> | Signal Analyzer (1 Hz ~ 40.0 GHz) | ESW44 | 10/25/2022 | Rohde & Schwarz | 102015 |
| <input checked="" type="checkbox"/> | Signal Analyzer (10 Hz ~ 26.5 GHz) | N9020A | 11/04/2022 | Keysight | MY52091291 |
| <input type="checkbox"/> | Attenuator (20 dB, DC ~ 26.5 GHz) | CFADC262002 | 01/13/2023 | CERNEX | - |
| <input checked="" type="checkbox"/> | Attenuator (10 dB, DC ~ 26.5 GHz) | CFADC261002 | 01/13/2023 | CERNEX | - |
| <input checked="" type="checkbox"/> | Loop Antenna (0.009 ~ 30 MHz) | HLA 6121 | 09/15/2023 | TESEQ | 43964 |
| <input checked="" type="checkbox"/> | BI-LOG Antenna (30 MHz ~ 6 GHz) | JB6 | 10/26/2022 | Sunol | A071116 |
| <input checked="" type="checkbox"/> | LNA (30 MHz ~ 1GHz) | 8447D | 07/26/2022 | HP | 2443A03587 |
| <input checked="" type="checkbox"/> | Horn Antenna (1 GHz ~ 18 GHz) | DRH-118 | 10/21/2022 | Sunol | A070516 |
| <input checked="" type="checkbox"/> | LNA (1 GHz ~ 18 GHz) | PAM-118A | 07/06/2022 | Com-Power | 18040074 |
| <input checked="" type="checkbox"/> | Horn Antenna (18 GHz ~ 40 GHz) | DRH-1840 | 02/16/2023 | Sunol | 17121 |
| <input checked="" type="checkbox"/> | LNA (18 GHz ~ 40 GHz) | CBL18405045-01 | 02/10/2023 | CERNEX, Inc. | 27973 |
| <input checked="" type="checkbox"/> | High Pass Filter | WHK10-2520-3000-18000-40EF | 01/13/2023 | Wainwright | 9 |
| <input type="checkbox"/> | High Pass Filter | WHKX8-6090-7000-18000-40SS | 01/13/2023 | Wainwright | 23 |
| <input type="checkbox"/> | EMI Test Receiver | ESR3 | 12/03/2022 | Rohde & Schwarz | 102363 |
| <input type="checkbox"/> | LISN | ENV216 | 01/19/2023 | Rohde & Schwarz | 101349 |

Note(s):

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

APPENDIX A. TEST SETUP PHOTOS

The setup photos are provided as a separate document.

APPENDIX B. PHOTOGRAPHS OF EUT

B.1. EXTERNAL PHOTOS

The external photos are provided as a separate document.

B.2. INTERNAL PHOTOS

The internal photos are provided as a separate document.

END OF TEST REPORT