



849 NW State Road 45
Newberry, FL 32669 USA
Ph: 888.472.2424 or 352.472.5500
Fax: 352.472.2030
Email: info@timcoengr.com
Website: www.timcoengr.com

FCC PART 15.249 TEST REPORT

UNLICENSED INTENTIONAL RADIATOR

Applicant	SABINE, INC.	
Address	13301 US HIGHWAY 441	
	ALACHUA FL 32615 USA	
FCC ID	QYXSW65	
Product Description	UHF BELTPACK TRANSMITTER	
Date Sample Received	11/3/2008	
Date Tested	11/7/2008	
Tested By	NAM NGUYEN	
Approved By	MARIO DE ARANZETA	
Report Number	2014ZUT8TestReport.doc	
Test Results	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate # 0955-01

TABLE OF CONTENT

GENERAL REMARKS.....	3
GENERAL INFORMATION	4
BAND PLAN	5
EMC EQUIPMENT LIST.....	6
TEST PROCEDURES.....	7
RADIATION INTERFERENCE	8
OCCUPIED BANDWIDTH	10
BAND EDGE COMPLIANCE	11
POWER LINE CONDUCTED INTERFERENCE	12

APPLICANT: SABINE, INC.

FCC ID: QYXSW65

REPORT: S\SABINE\2014ZUT8\2014ZUT8TestReport.doc

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Authorized Signatory Name:

Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: 11/7/2008

APPLICANT: SABINE, INC.

FCC ID: QYXSW65

REPORT: S\SABINE\2014ZUT8\2014ZUT8TestReport.doc

GENERAL INFORMATION

DUT Specification

The test results relate only to the items tested.		
Applicable Standard	Part 15.249	
DUT Description	UHF BELTPACK TRANSMITTER	
FCC ID	QYXSW65	
Operating Frequency	TX: 902.2-927.5 MHz	RX: Same
DUT Power Source	<input type="checkbox"/> 110-120Vac/50- 60Hz	
	<input type="checkbox"/> DC Power	
	<input checked="" type="checkbox"/> Battery Operated Exclusively	
Test Item	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable
Antenna Connector	FCC Rules require that the antenna connector be unique.	
Test Facility	Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA.	
Test Conditions	Temperature: 26°C Relative humidity: 50%	
Test Exercise	The DUT was placed in continuous transmit mode of operation.	

Test Supporting Equipment

Supporting Device	Manufacturer	Model / FCC ID	Serial Number
N/A			

APPLICANT: SABINE, INC.

FCC ID: QYXSW65

REPORT: S\SABINE\2014ZUT8\2014ZUT8TestReport.doc

BAND PLAN

Channel	Frequency MHz
1	902.214367
2	902.730122
3	903.761633
4	904.277388
5	905.308898
6	905.824653
7	906.856163
8	907.371918
9	908.403429
10	908.919184
11	909.950694
12	910.466449
13	911.497959
14	912.013714
15	913.045224
16	913.560980
17	914.592490
18	915.108245
19	916.139755
20	916.655510
21	917.687020
22	918.202776
23	919.234286
24	919.750041
25	920.781551
26	921.297306
27	922.328816
28	922.844571
29	923.876082
30	924.391837
31	925.423347
32	925.939102
33	926.970612
34	927.486367

APPLICANT: SABINE, INC.

FCC ID: QYXSW65

REPORT: S\SABINE\2014ZUT8\2014ZUT8TestReport.doc

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/10/10
AC Voltmeter	HP	400FL	2213A14261	CAL 5/14/07	5/14/09
Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 3/30/07	3/30/09
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/3/06	3/3/09
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 4/5/06	4/5/09
Frequency Counter	HP	5385A	2730A03025	CAL 7/6/07	7/6/09
Hygro-Thermometer	Extech	445703	0602	CAL 11/15/07	11/15/09
Antenna: Log-Periodic	Electro-Metrics	LPA-30	409	7/18/07	7/18/09
Measuring Tape-7.5M	Kraftixx	7.5M PROFI		CHAR 11/13/07	11/13/09
Modulation Analyzer	HP	8901A	3435A06868	CAL 5/9/07	5/9/09
Digital Multimeter	Fluke	FLUKE-77-3	79510405	CAL 5/14/07	5/14/09
System One	Audio Precision	System One	SYS1-45868	CHAR 2/27/08	2/27/10
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/30/07	11/30/09
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/30/07	11/30/09
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/30/07	11/30/09
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/30/07	11/30/09
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/08	4/25/10

APPLICANT: SABINE, INC.

FCC ID: QYXSW65

REPORT: S\SABINE\2014ZUT8\2014ZUT8TestReport.doc

TEST PROCEDURES

Radiation Interference: ANSI C63.4-2003 using a spectrum analyzer, a preselector, a quasi-peak adapter, and an appropriate antenna. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100 kHz with an appropriate sweep speed and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

$$\begin{array}{llll}
 \text{Freq (MHz)} & \text{Meter Reading} & + \text{ACF} & + \text{CL} = \text{FS} \\
 33 & 20 \text{ dB}\mu\text{V} & + 10.36 \text{ dB} & + 0.5 = 30.86 \text{ dB}\mu\text{V/m} @ 3\text{m}
 \end{array}$$

Power Line Conducted Interference: The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The spectrum was scanned from 0.15 to 30 MHz.

Occupied Bandwidth: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division.

ANSI C63.4-2003 10.1 Measurement Procedures: The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. Emissions attenuated more than 20 dB below the permissible value are not reported.

APPLICANT: SABINE, INC.

FCC ID: QYXSW65

REPORT: S\SABINE\2014ZUT8\2014ZUT8TestReport.doc

RADIATION INTERFERENCE

Rules Part No.: 15.249, 15.209

Requirements:

Frequency	Limits
Part 15.209	
9 to 490 kHz	2400/F (kHz) μ V/m @ 300 meters
490 to 1705 kHz	24000/F (kHz) μ V/m @ 30 meters
1705 kHz to 30 MHz	29.54 dB μ V/m @ 30 meters
30 - 88	40.0 dB μ V/m @ 3 meters
80 - 216	43.5 dB μ V/m @ 3 meters
216 - 960	46.0 dB μ V/m @ 3 meters
Above 960	54.0 dB μ V/m @ 3 meters
Part 15.249	
Fundamental 902 - 928 MHz	94.0 dB μ V/m @ 3 meters
Fundamental 2.4 - 2.4835 MHz	94.0 dB μ V/m @ 3 meters
Harmonics	54.0 dB μ V/m @ 3 meters

Test Data:

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Pol	Coax Loss dB	Correction Factor dB	Field Strength dB μ V/m	Margin dB
902.2	902.2	60.9	H	1.95	23.32	86.17	7.83
902.2	902.2	69.1	V	1.95	22.68	93.73	0.27
902.2	1,804.00	10.3	V	2.74	29.95	42.99	11.01
902.2	1,804.00	10.7	H	2.74	29.95	43.39	10.61
902.2	2,706.00	7.4	H	3.39	32.54	43.33	10.67
902.2	2,706.00	7.9	V	3.39	32.54	43.83	10.17
902.2	3,608.00	7.4	V	4.15	32.97	44.52	9.48
902.2	3,608.00	7.8	H	4.15	32.97	44.92	9.08
914.4	914.40	60.4	H	1.97	23.36	85.73	8.27
914.4	914.40	68.8	V	1.97	22.60	93.37	0.63
914.4	1,828.80	10.2	H	2.76	30.10	43.06	10.94
914.4	1,828.80	10.6	V	2.76	30.10	43.46	10.54
914.4	2,743.20	6.8	H	3.42	32.55	42.77	11.23
914.4	2,743.20	7.2	V	3.42	32.55	43.17	10.83
914.4	3,657.60	7.0	H	4.19	33.05	44.24	9.76
914.4	3,657.60	8.2	V	4.19	33.05	45.44	8.56
927.3	927.30	58.4	H	1.99	23.45	83.84	10.16
927.3	927.30	67.6	V	1.99	22.67	92.26	1.74
927.3	1,854.60	10.5	V	2.78	30.27	43.55	10.45
927.3	1,854.60	11.6	H	2.78	30.27	44.65	9.35
927.3	2,781.90	7.9	H	3.45	32.56	43.91	10.09

APPLICANT: SABINE, INC.

FCC ID: QYXSW65

REPORT: S\SABINE\2014ZUT8\2014ZUT8TestReport.doc

TEST DATA CONTD.

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Pol	Coax Loss dB	Correction Factor dB	Field Strength dB μ V/m	Margin dB
927.3	2,781.90	8.2	V	3.45	32.56	44.21	9.79
927.3	3,709.20	7.7	H	4.24	33.13	45.07	8.93
927.3	3,709.20	9.5	V	4.24	33.13	46.87	7.13

APPLICANT: SABINE, INC.

FCC ID: QYXSW65

REPORT: S\SABINE\2014ZUT8\2014ZUT8TestReport.doc

OCCUPIED BANDWIDTH


Rules Part No.: 15.249 (d)

Requirements: The field strength of any emissions appearing outside the bandedges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.209.

Test Data:

NOTES:

SABINE, INC. - FCC ID: QYXSW70-T
 OCCUPIED BANDWIDTH PLOT

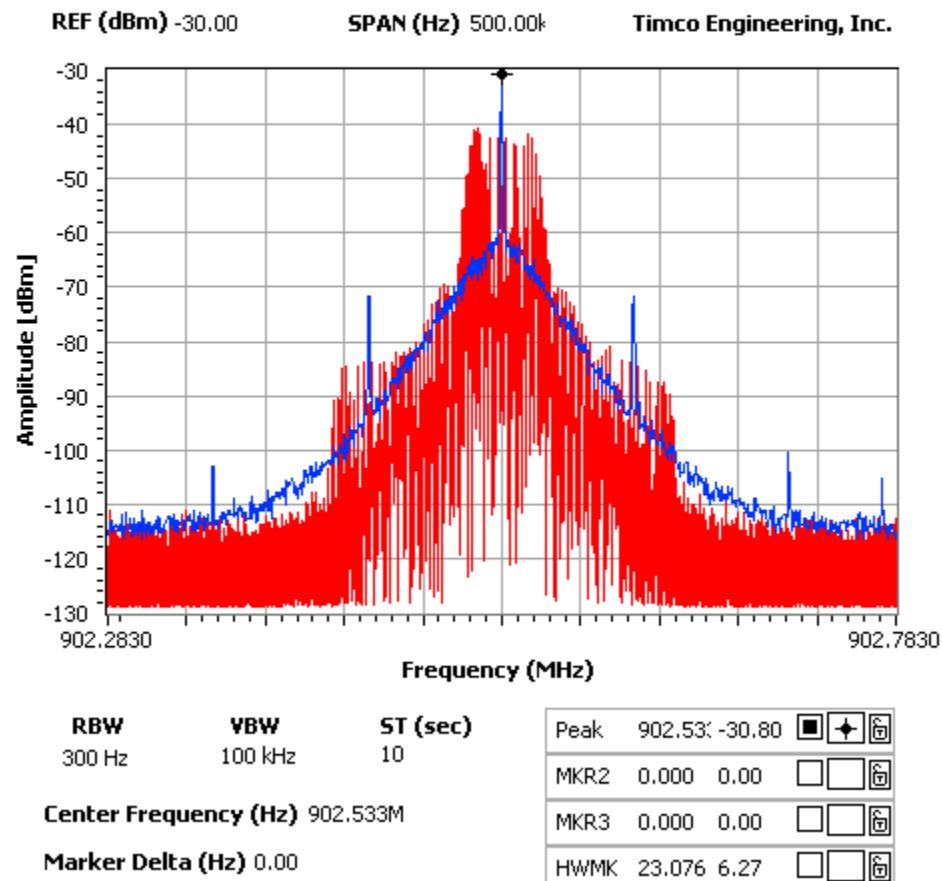

APPLICANT: SABINE, INC.

FCC ID: QYXSW65

REPORT: S\SABINE\2014ZUT8\2014ZUT8TestReport.doc



BAND EDGE COMPLIANCE

Rules Part No.: 15.249 (d)

Requirements: 40 dBc or in the case of restricted bands 54 dB μ V/m.

Test Data:

See occupied bandwidth plot

APPLICANT: SABINE, INC.
FCC ID: QYXSW65
REPORT: S\SABINE\2014ZUT8\2014ZUT8TestReport.doc

POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: 15.207

Requirements:

Frequency (MHz)	Quasi Peak Limits (dB μ V)	Average Limits (dB μ V)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5.0 – 30	60	50

Test Data: The attached graphs represent the emissions read for power line conducted for this device. Both lines were observed.

N/A
 Battery or vehicle powered DUT.

APPLICANT: SABINE, INC.
 FCC ID: QYXSW65
 REPORT: S\SABINE\2014ZUT8\2014ZUT8TestReport.doc