



LS RESEARCH LLC

Wireless Product Development

W66 N220 Commerce Court • Cedarburg, WI 53012

Phone: 262.375.4400 • Fax: 262.375.4248

www.lsr.com



TESTING CERT #1255.01

TEST REPORT #: TR 312281 A
LSR Job #: C- 1589

Compliance Testing of:
PM550 radio Module

Test Date(s):
November 13th to 21st 2012

Prepared For:
TekTone Sound and Signal Mfg., Inc.
Attn: Johnny Henson
277 Industrial Park Drive
Franklin, NC 28734

This Test Report is issued under the Authority of:
Khairul Aidi Zainal, Senior EMC Engineer

Signature:  Date: 12/11/12

Test Report Reviewed by:
Shane Rismeyer, EMC Engineer

Signature:  Date: 12/11/12

Project Engineer:
Khairul Aidi Zainal, Senior EMC Engineer.

Signature:  Date: 11/29/12

This Test Report may not be reproduced, except in full, without written approval of LS Research, LLC.

TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION	4
1.1 - Scope.....	4
1.2 – Normative References	4
1.3 - LS Research, LLC Test Facility	5
1.4 – Location of Testing.....	5
1.5 – Test Equipment Utilized	5
EXHIBIT 2. PERFORMANCE ASSESSMENT	6
2.1 – Client Information	6
2.2 - Equipment Under Test (EUT) Information	6
2.3 - Associated Antenna Description	6
2.4 - EUT'S Technical Specifications	7
2.5 - Product Description.....	8
EXHIBIT 3. EUT OPERATING CONDITIONS & CONFIGURATIONS DURING TESTS	9
3.1 - Climate Test Conditions.....	9
3.2 - Applicability & Summary Of EMC Emission Test Results	9
3.3 - Modifications Incorporated In The EUT For Compliance Purposes	10
3.4 - Deviations & Exclusions From Test Specifications	10
3.5 – EUT Duty Cycle during testing:.....	10
EXHIBIT 4. DECLARATION OF CONFORMITY	11
EXHIBIT 5. RADIATED EMISSIONS TEST	12
5.1 - Test Setup.....	12
5.2 - Test Procedure	12
5.3 - Test Equipment Utilized	13
5.4 - Test Results	13
5.5 - Calculation of Radiated Emissions Limits and reported data.....	14
5.6 - Radiated Emissions Test Data Chart	15
5.7 - Test Setup Photo(s) – Radiated Emissions Test	19
5.8 – Screen Captures.....	20
EXHIBIT 6. CONDUCTED EMISSIONS TEST, AC POWER LINE	23
6.1 Test Setup.....	23
6.2 Test Procedure	23
6.3 Test Equipment Utilized	23
6.4 Test Results	23
EXHIBIT 7. OCCUPIED BANDWIDTH	28

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 2 of 45

7.1 - Limits.....	28
7.2 - Method of Measurements	28
7.3 - Test Data	28
7.4 – Screen Captures	29
EXHIBIT 8. BAND EDGE MEASUREMENTS	30
8.1 - Method of Measurements	30
8.2. Band edge captures.....	31
EXHIBIT 9. POWER OUTPUT (CONDUCTED)	33
9.1 - Method of Measurements	33
9.2 - Test Data	33
9.3 – Screen Captures.....	34
EXHIBIT 10. CONDUCTED SPURIOUS EMISSIONS	35
10.1 - Limits.....	35
10.2 – Conducted Harmonic And Spurious RF Measurements	35
10.3 - Test Data	36
EXHIBIT 11. POWER SPECTRAL DENSITIES: 15.247(e)	39
11.1 Limits	39
11.2 Test Data.....	39
11.4 Screen Captures – Power Spectral Density	40
EXHIBIT 12. FREQUENCY & POWER STABILITY OVER VOLTAGE VARIATIONS.....	41
EXHIBIT 13. MPE CALCULATIONS	42
APPENDIX A – Test Equipment List.....	43
APPENDIX B – Test Standards: CURRENT PUBLICATION DATES RADIO	44
APPENDIX C - Uncertainty Statement.....	45

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 3 of 45

EXHIBIT 1. INTRODUCTION

1.1 - Scope

References:	FCC Part 15, Subpart C, Section 15.247 RSS GEN issue 3 and RSS 210 issue 8 Annex 8
Title:	FCC : Telecommunication – Code of Federal Regulations, CFR 47, Part 15. IC : Low-power License-exempt Radio-communication Devices (All Frequency Bands): Category I Equipment
Purpose of Test:	To gain FCC and IC Certification Authorization for Low-Power License-Exempt Transmitters.
Test Procedures:	FCC KDB 558074 D01 DTS Measurement Guidance v02
Environmental Classification:	Commercial or Business Residential

1.2 - Normative References

Publication	Year	Title
FCC CFR Parts 0-15	2011	Code of Federal Regulations – Telecommunications
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
RSS-210 Annex 8	2010	Low-power License-exempt Radio communication Devices (All Frequency Bands): Category I Equipment
RSS-GEN Issue 3	2010	General Requirements and Information for the Certification of Radio Apparatus
ANSI C63.10	2009	American National Standard for Testing Unlicensed Wireless Devices
FCC KDB 558074 D01 DTS Meas Guidance v02	2012	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 4 of 45

1.3 - LS Research, LLC Test Facility



LS Research, LLC is accredited by A2LA (American Association for Laboratory Accreditation) as conforming to ISO/IEC 17025, 2005 "General Requirements for the Competence of Calibration and Testing Laboratories".

LS Research, LLC's scope of accreditation includes all test methods listed herein, unless otherwise noted.

1.4 - Location of Testing

All testing was performed at the following location utilizing the facilities listed below, unless otherwise noted.

LS Research, LLC
W66 N220 Commerce Court
Cedarburg, Wisconsin, 53012 USA,

List of Facilities Located at LS Research, LLC:

Compact Chamber
Semi-Anechoic Chamber
Open Area Test Site (OATS)

1.5 - Test Equipment Utilized

A complete list of equipment utilized in testing is provided in Appendix A of this test report. Calibration dates are indicated in Appendix A. All test equipment is calibrated by a calibration laboratory accredited to the requirements of ISO/IEC 17025, and traceable to the SI standard.

Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 5 of 45

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1 - Client Information

Manufacturer Name:	TekTone Sound and Signal Mfg., Inc.
Address:	277 Industrial Park Road Franklin, NC 28734
Contact Name:	Johnny Henson

2.2 - Equipment Under Test (EUT) Information

The following information has been supplied by the applicant.

Product Name:	PM550 Radio Module
Model Number:	PM550
Serial Number:	12260010,12340007,12060045

2.3 - Associated Antenna Description

The antennas associated with the radio are:

1. PCB L insert antenna
2. Bent wire quarter wave dipole

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007,12060045	Page 6 of 45

2.4 - EUT'S Technical Specifications

<i>EUT Frequency Range (in MHz)</i>	906 MHz to 924 MHz
<i>RF Power in Watts</i>	<input checked="" type="checkbox"/> <i>Conducted Measurement</i> <input type="checkbox"/> <i>EIRP</i>
<i>Minimum:</i>	0.005623 Watts
<i>Maximum:</i>	0.006309 Watts
<i>Occupied Bandwidth</i>	<i>6 dB: 833.3 kHz</i> <i>99%: 1.234 MHz</i>
<i>Type of Modulation</i>	O-QPSK
<i>Emission Designator</i>	1M23G1D
<i>Transmitter Spurious (worst case) at 3 meters</i>	48.9 dB μ V/m at 3696MHz
<i>Stepped (Y/N)</i>	Yes
<i>Step Value:</i>	22 Steps at 1dB each step
<i>Frequency Tolerance %, Hz, ppm</i>	Better than 100ppm
<i>Microprocessor Model # (if applicable)</i>	TI MSP430F5528IRGC
<i>Antenna Information</i>	
<i>Detachable/non-detachable</i>	Non-detachable
<i>Type</i>	1. PCB L insert antenna 2. Wire dipole (bended to fit different cases).
<i>Gain</i>	PCB L insert = 1.2dBi Bended Wire dipole = 6.9 dBi (both gains based on field strength measurements over conducting ground plane)
<i>EUT will be operated under FCC Rule Part(s)</i>	Title 47 part 15.247
<i>EUT will be operated under RSS Rule Part(s)</i>	RSS 210
<i>Modular Filing</i>	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
<i>Portable or Mobile?</i>	mobile

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 7 of 45

RF Technical Information:

Type of Evaluation (check one)	SAR Evaluation: Device Used in the Vicinity of the Human Head
	SAR Evaluation: Body-worn Device
	<input checked="" type="checkbox"/> RF Evaluation

If RF Evaluation checked above, test engineer to complete the following:

Evaluated against exposure limits: General Public Use Controlled Use

Duty Cycle used in evaluation: 100 %

Standard used for evaluation: OET 65

Measurement Distance: 20 cm

RF Value: 0.06148 V/m A/m W/m²

Measured Computed Calculated

2.5 - Product Description

A 900 MHz radio transceiver used in multiple end devices of a nurse call station.

Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 8 of 45

EXHIBIT 3. EUT OPERATING CONDITIONS & CONFIGURATIONS DURING TESTS

3.1 - Climate Test Conditions

Temperature:	70 -71° F
Humidity:	32-42%
Pressure:	728-741mmHg

3.2 - Applicability & Summary Of EMC Emission Test Results

FCC and IC Paragraph	Test Requirements	Compliance (Yes/No)
FCC : 15.207 IC : RSS GEN sect. 7.2.2	Power Line Conducted Emissions Measurements	Pass
FCC : 15.247 (a)(1) IC : RSS 210 A8.1 (a)	20 dB Bandwidth	N/A
FCC : 15.247(b) & 1.1310 IC : RSS 210 A8.4	Maximum Output Power	Yes
FCC : 15.247(i), 1.1307, 1.1310, 2.1091 & 2.1093 IC : RSS 102	RF Exposure Limit	Yes
FCC :15.247(d) IC : RSS 210 A8.5	RF Conducted Spurious Emissions at the Transmitter Antenna Terminal	Yes
FCC:15.247 (a)(2) IC: RSS 210 A8.2 (a)	6 dB Bandwidth of a Digital Modulation System	Yes
FCC:15.247 (d) IC: RSS 210 A8.2 (b)	Power Spectral Density of a Digital Modulation System	Yes
FCC : 15.247(c), 15.209 & 15.205 IC : RSS 210 A8.2(b), section 2.2, 2.6 and 2.7	Transmitter Radiated Emissions	Yes
The digital circuit portion of the EUT has been tested and verified to comply with FCC Part 15, Subpart B, Class B Digital Devices (RSS GEN and RSS 210 of IC) and the associated Radio Receiver has also been tested and found to comply with Part 15, Subpart B – Radio Receivers (RSS GEN and RSS 210 of IC). The Receiver Test Report is available upon request.		

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 9 of 45

3.3 - Modifications Incorporated In The EUT For Compliance Purposes


None Yes (explain below)

3.4 - Deviations & Exclusions From Test Specifications


None Yes (explain below)

3.5 - EUT Duty Cycle during testing:


EUT was operated at 100% duty cycle during testing. Please refer to plots below:

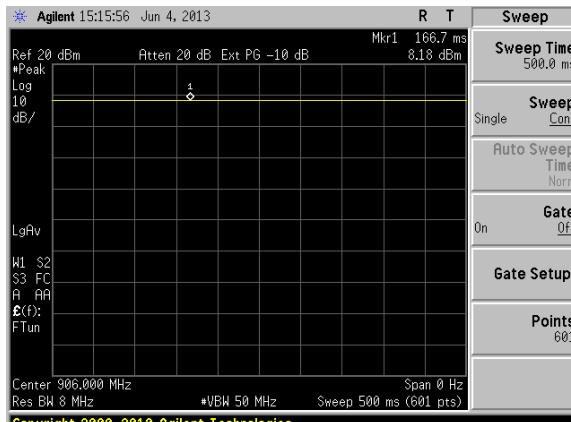

Channel 1 (906MHz)

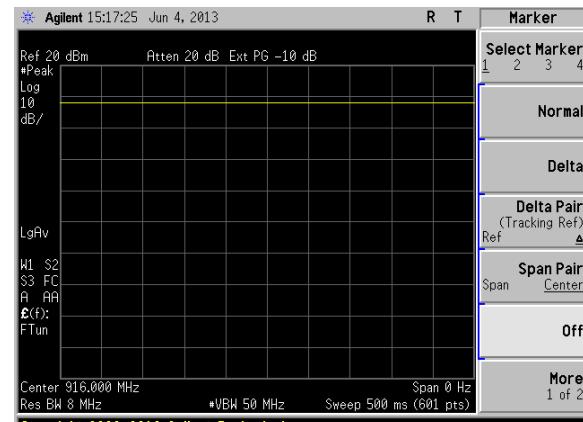

Channel 6 (916MHz)

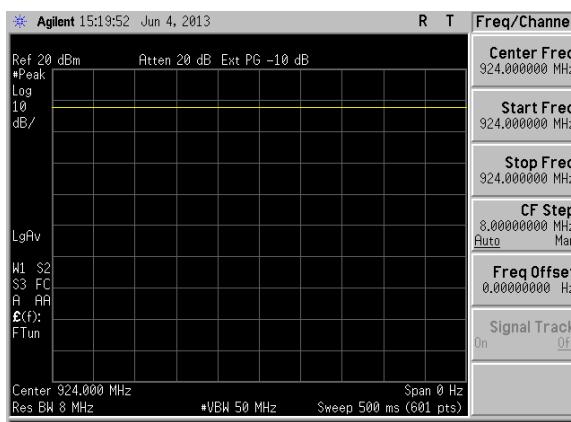

Channel 10 (924MHz)

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 10 of 45

EXHIBIT 4. DECLARATION OF CONFORMITY

The EUT was found to MEET the requirements as described within the specification of FCC Title 47, CFR Part 15.247, and Industry Canada RSS-210, Issue 8 (2010), Annex 8.

Note: If some emissions are seen to be within 3 dB of their respective limits; as these levels are within the tolerances of the test equipment and site employed, there is a possibility that this unit, or a similar unit selected out of production may not meet the required limit specification if tested by another agency.

LS Research, LLC certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specifications. The results in this Test Report apply only to the item(s) tested on the above-specified dates. Any modifications made to the EUT subsequent to the indicated test date(s) will invalidate the data herein, and void this certification.

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 11 of 45

EXHIBIT 5. RADIATED EMISSIONS TEST

5.1 - Test Setup

The test setup was assembled in accordance with Title 47, CFR FCC Part 15, RSS GEN and ANSI C63.4-2003. The EUT was placed on an 80cm high non-conductive pedestal, centered on a flush mounted 2-meter diameter turntable inside a 3 meter Semi-Anechoic, FCC listed Chamber. The EUT was operated in 100% duty cycle, continuous transmit mode for final testing using power as provided by coin cell batteries. The unit has the capability to operate on 3 channels, controllable via instructions on 'Hyperterminal'.

The applicable limits apply at a 3 meter distance. The calculations to determine these limits are detailed in the following pages. Please refer to Appendix A for a complete list of test equipment. The test sample was operated on one of three (3) standard channels: low (906MHz), middle (916MHz) and high (924MHz) to comply with FCC Part 15.31(m). The unit has the capability to operate on 3 channels, controllable via instructions on 'Hyperterminal'.

5.2 - Test Procedure

Radiated RF measurements were performed on the EUT in a 3 meter Semi-Anechoic, FCC listed Chamber. The frequency range from 30 MHz to 10000 MHz was scanned and investigated. The radiated RF emission levels were manually noted at the various fixed degree settings of azimuth on the turntable and antenna height. The EUT was placed on a non-conductive pedestal in the 3 meter Semi-Anechoic Chamber, with the antenna mast placed such that the antenna was 3 meters from the EUT. A Biconical Antenna was used to measure emissions from 30 MHz to 300 MHz, and a Log Periodic Antenna was used to measure emissions from 300 MHz to 1000 MHz. A Double-Ridged Waveguide Horn Antenna was used from 1 GHz to 10 GHz. The maximum radiated RF emissions between 30MHz to 4 GHz were found by raising and lowering the sense antenna between 1 and 4 meters in height, using both horizontal and vertical antenna polarities. Between 4GHz to 10GHz, the sense antenna was raised and lowered between 1 and 1.8 meters in height.

The EUT was positioned in 3 orthogonal orientations.

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 12 of 45

5.3 - Test Equipment Utilized

A list of the test equipment and antennas utilized for the Radiated Emissions test can be found in Appendix A. This list includes calibration information and equipment descriptions. All equipment is calibrated and used according to the operation manuals supplied by the manufacturers. All calibrations of the antennas used were performed at a calibration laboratory accredited to ISO 17025, and are traceable to the SI standard. In addition, the Connecting Cables were measured for losses using a calibrated Signal Generator and an EMI Receiver. The resulting correction factors and the cable loss factors from these calibrations were entered into the EMI Receiver database. As a result, the data taken from the EMI Receiver accounts for the antenna correction factor as well as cable loss or other corrections, and can therefore be entered into the database as a corrected meter reading. The EMI Receiver was operated with a resolution bandwidth of 120 kHz for measurements below 1 GHz (video bandwidth of 300 kHz), and a bandwidth of 1 MHz for measurements above 1 GHz (video bandwidth of 1 MHz).

5.4 - Test Results

The EUT was found to **MEET** the Radiated Emissions requirements of Title 47 CFR, FCC Part 15.247 and Canada RSS-210, Issue 8 (2010), Annex 8 for a DTS transmitter. The frequencies with significant RF signal strength were recorded and plotted as shown in the Data Charts and Graphs.

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 13 of 45

5.5 - Calculation of Radiated Emissions Limits and reported data.

Reported data:

For both fundamental and spurious emissions measurement, the data reported includes all necessary correction factors. These correction factors are loaded onto the EMI receiver when measurements are performed.

Reported Measurement data = Raw receiver measurement (dB μ V/m) + Antenna correction Factor + Cable factor (dB) + Miscellaneous factors when applicable (dB) – amplification factor when applicable (dB).

Generic example of reported data at 200 MHz:

Reported Measurement data = 18.2 (raw receiver measurement) + 15.8 (antenna factor) + 1.45 (cable factor) = 35.45 (dB μ V/m).

As specified in 15.247 (d) and RSS 210 A8.5, radiated emissions that fall within the restricted band described in 15.205(c) for FCC and section 2.2 of RSS 210 for IC, must comply with the general emissions limit.

The following table depicts the general radiated emission limits above 30 MHz. These limits are obtained from Title 47 CFR, Part 15.209, for radiated emissions measurements. These limits were applied to any signals found in the 15.205 restricted bands. The mentioned limits correspond to those limits listed in RSS GEN.

Frequency (MHz)	3 m Limit μ V/m	3 m Limit (dB μ V/m)	1 m Limit (dB μ V/m)
30-88	100	40.0	-
88-216	150	43.5	-
216-960	200	46.0	-
960-24,000	500	54.0	63.5

Sample conversion of field strength (μ V/m to dB μ V/m):
dB μ V/m = 20 log₁₀ (100) = 40 dB μ V/m (from 30-88 MHz)

Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 14 of 45

5.6 - Radiated Emissions Test Data Chart

Manufacturer:	TekTone Sound and Signal Mfg.				
Date(s) of Test:	11/13/12 to 11/20/12				
Project Engineer(s):	Khairul Aidi Zainal				
Test Engineer(s):	Aidi Zainal, Peter Feilen, Mike Hintzke				
Voltage:	3.0 VDC				
Operation Mode:	continuous transmit, modulated (100% duty cycle).				
Environmental Conditions in the Lab:	Temperature: 71° F Relative Humidity: 30%				
EUT Power:		Single Phase 120VAC		3 Phase	VAC
	X	Bench DC power supply		Other:	
EUT Placement:	X	80cm non-conductive pedestal		10cm Spacers	
EUT Test Location:	X	3 Meter Semi-Anechoic FCC Listed Chamber		3/10m OATS	
Measurements:		Pre-Compliance		Preliminary	X Final
Detectors Used:	X	Peak	X	Quasi-Peak	X Average

The following table depicts the level of radiated emissions determined not to be a function of the transmitter:

Frequency (MHz)	Antenna Polarization	Antenna Height (cm)	Table Azimuth (degrees)	Q. Peak Reading (dB μ V/m)	QP Limit (dB μ V/m)	Margin (dB)
939.73	H	145.0	80	36.8	46.0	9.2
988.73	H	145.0	80	27.3	54.0	26.8
940.44	V	230.0	165	30.8	46.0	15.2
890.22	H	145.0	80	30.7	46.0	15.3
72.14	V	100.0	0	25.3	40.0	14.7
296.76	H	100.0	0	24.6	46.0	21.5

Notes:

1. H: Horizontal, V: Vertical, S: Side, F: Flat.
2. Refer to exhibit 5.5 on explanation of how data is reported.
3. Emissions reported above were not a function of the transmitter hence did not change with the different channels.

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 15 of 45

RADIATED EMISSIONS DATA CHART (continued)

The following table depicts the level of radiated emissions of channel 906 MHz in the restricted band:

1. Module with PCB L insert antenna

Frequency (MHz)	Height (m)	Azimuth (degree)	Peak Reading (dB μ V/m)	Avg Limit (dB μ V/m)	Margin (dB)	Antenna Polarity	EUT orientation
3624	1.14	202	45.1	54.0	8.9	Horizontal	Vertical
4530	1.00	45	52.3	63.5	11.2	Horizontal	Vertical

2. Module with wire antenna (different bends)

Bend 1:

Frequency (MHz)	Height (m)	Azimuth (degree)	Peak Reading (dB μ V/m)	Avg Limit (dB μ V/m)	Margin (dB)	Antenna Polarity	EUT orientation
3624	1.26	46	48.2	54.0	5.8	Horizontal	Vertical

Bend 2:

Frequency (MHz)	Height (m)	Azimuth (degree)	Peak Reading (dB μ V/m)	Avg Limit (dB μ V/m)	Margin (dB)	Antenna Polarity	EUT orientation
3624	1.12	308	45.7	54.0	8.3	Horizontal	Vertical

Notes:

1. Peak measurement compared to average limit.
2. H: Horizontal, V: Vertical, S: Side, F: Flat.
3. Measurements above 4 GHz were made at 1 meters of separation from the EUT. The limits were adjusted to reflect this measurement distance.
4. Refer to exhibit 5.5 on explanation of how data is reported.

Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 16 of 45

The following table depicts the level of significant radiated emissions of channel 916 MHz in the restricted band:

1. Module with PCB L insert antenna

Frequency (MHz)	Height (m)	Azimuth (degree)	Peak Reading (dB μ V/m)	Avg Limit (dB μ V/m)	Margin (dB)	Antenna Polarity	EUT orientation
3664	1.13	199	45.4	54.0	8.6	Horizontal	Vertical
4580	1.00	52.5	52.8	63.5	10.7	Horizontal	Vertical

2. Module with wire antenna (different bends)

Bend 1:

Frequency (MHz)	Height (m)	Azimuth (degree)	Peak Reading (dB μ V/m)	Avg Limit (dB μ V/m)	Margin (dB)	Antenna Polarity	EUT orientation
3664	1.09	42	47.4	54.0	6.6	Horizontal	Vertical

Bend 2:

Frequency (MHz)	Height (m)	Azimuth (degree)	Peak Reading (dB μ V/m)	Avg Limit (dB μ V/m)	Margin (dB)	Antenna Polarity	EUT orientation
3664	1.00	44	48.6	54	5.4	Horizontal	Side

Notes:

1. Peak measurement compared to average limit.
2. H: Horizontal, V: Vertical, S: Side, F: Flat.
3. Measurements above 4 GHz were made at 1 meters of separation from the EUT. The limits were adjusted to reflect this measurement distance.
4. Refer to exhibit 5.5 on explanation of how data is reported.

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 17 of 45

The following table depicts the level of significant radiated emissions of channel 924 MHz in the restricted band:

1. Module with PCB L insert antenna

Frequency (MHz)	Height (m)	Azimuth (degree)	Peak Reading (dB μ V/m)	Avg Limit (dB μ V/m)	Margin (dB)	Antenna Polarity	EUT orientation
3696	1.11	195	45.1	54.0	8.9	Horizontal	Vertical
4620	1.00	50.2	53.2	63.5	10.4	Horizontal	Vertical

2. Module with wire antenna (different bends)

Bend 1:

Frequency (MHz)	Height (m)	Azimuth (degree)	Peak Reading (dB μ V/m)	Avg Limit (dB μ V/m)	Margin (dB)	Antenna Polarity	EUT orientation
3696	1.20	40	48.9	54.0	5.1	Horizontal	Vertical

Bend 2:

Frequency (MHz)	Height (m)	Azimuth (degree)	Peak Reading (dB μ V/m)	Avg Limit (dB μ V/m)	Margin (dB)	Antenna Polarity	EUT orientation
3696	1.01	31	48.8	54.0	5.2	Horizontal	Side

Notes:

1. Peak measurement compared to average limit.
2. H: Horizontal, V: Vertical, S: Side, F: Flat.
3. Measurements above 4 GHz were made at 1 meters of separation from the EUT. The limits were adjusted to reflect this measurement distance.
4. Refer to exhibit 5.5 on explanation of how data is reported.

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 18 of 45

5.7 - Test Setup Photo(s) – Radiated Emissions Test


This section is not available.

Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 19 of 45


5.8 – Screen Captures.

The screen captures below are those using the Peak detector of the analyzer and are representative of the worst case emissions.

30 to 300 MHz, 3m distance.

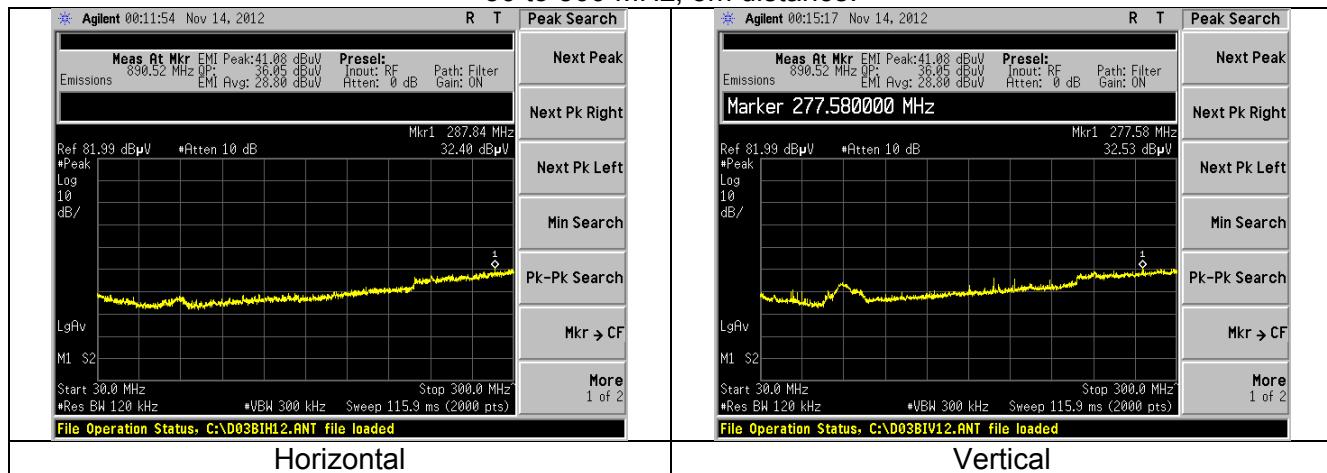


300 to 892 MHz, 3m distance.

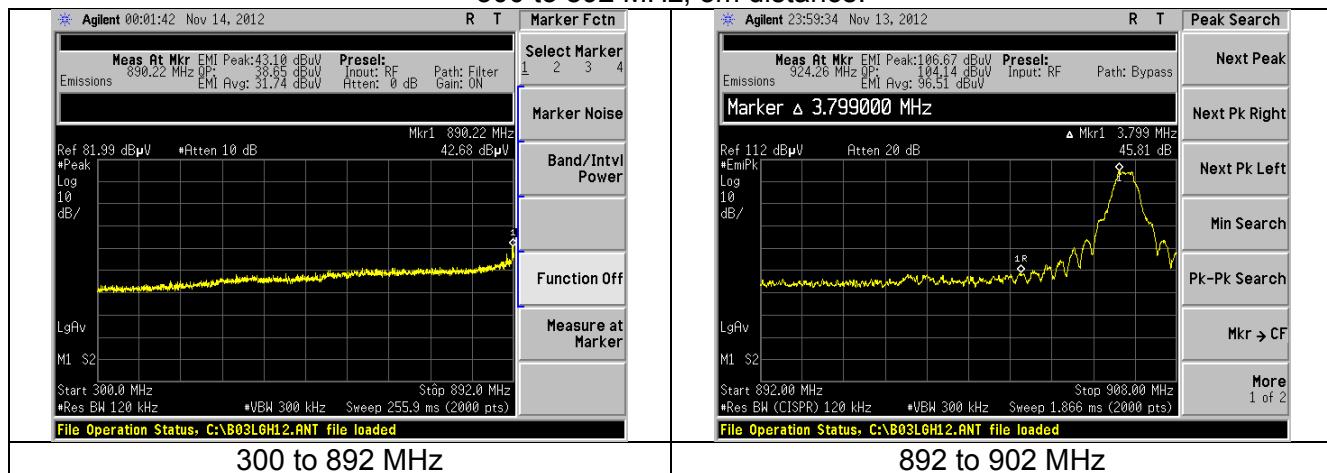


Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 20 of 45

922 to 960 MHz, 3m distance.

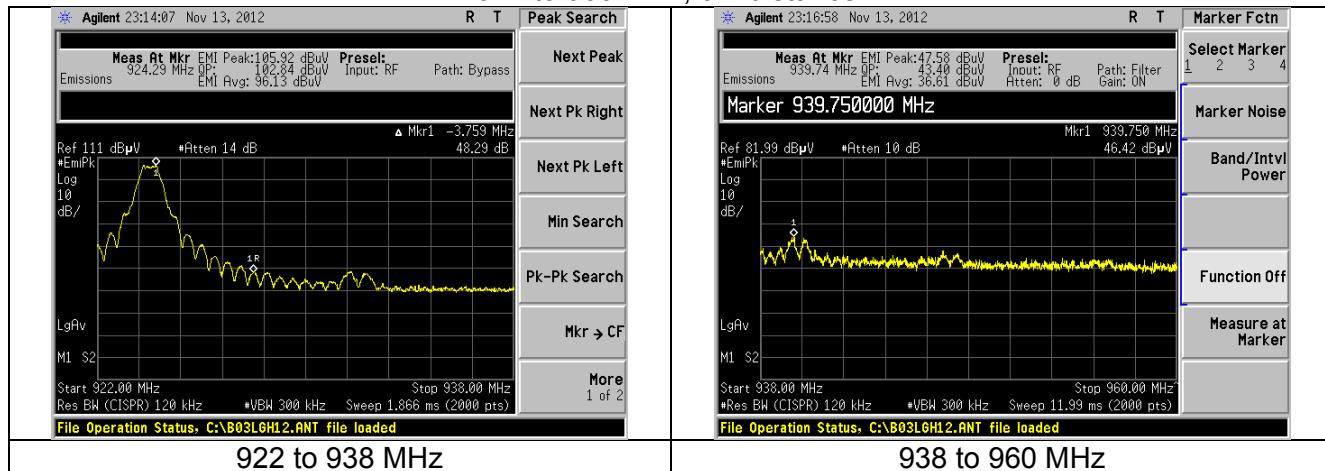


960 to 1000 MHz, 3m distance.

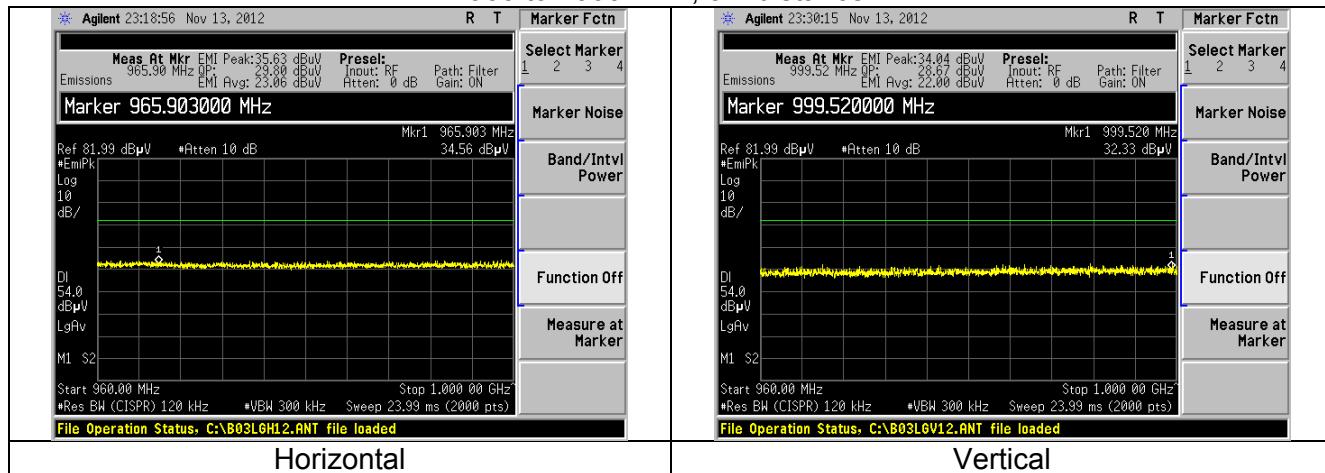


Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 21 of 45

1000 to 4000 MHz, 3m distance.

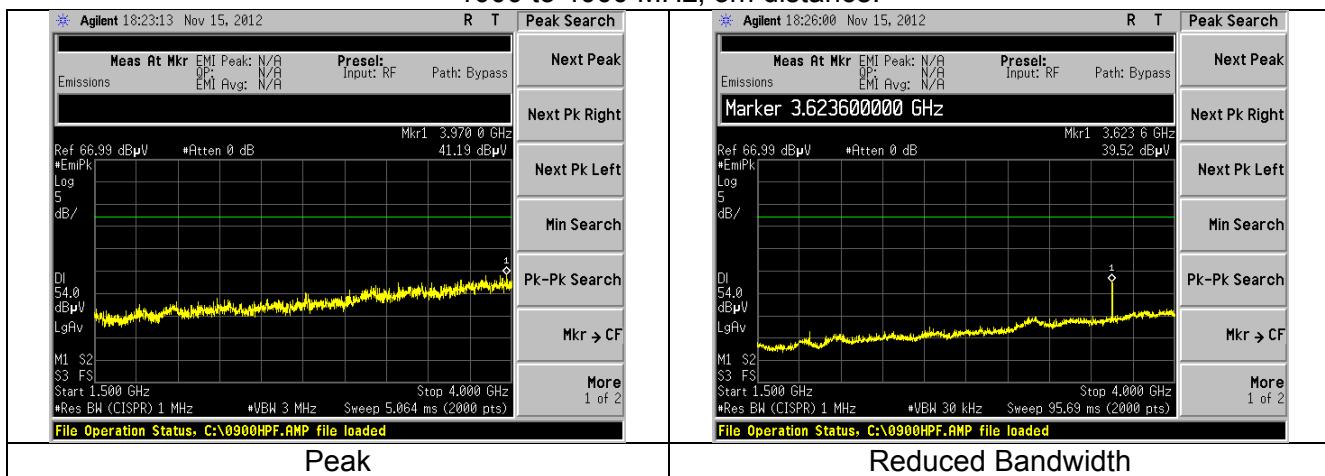

4000 to 10000 MHz, 1m distance.

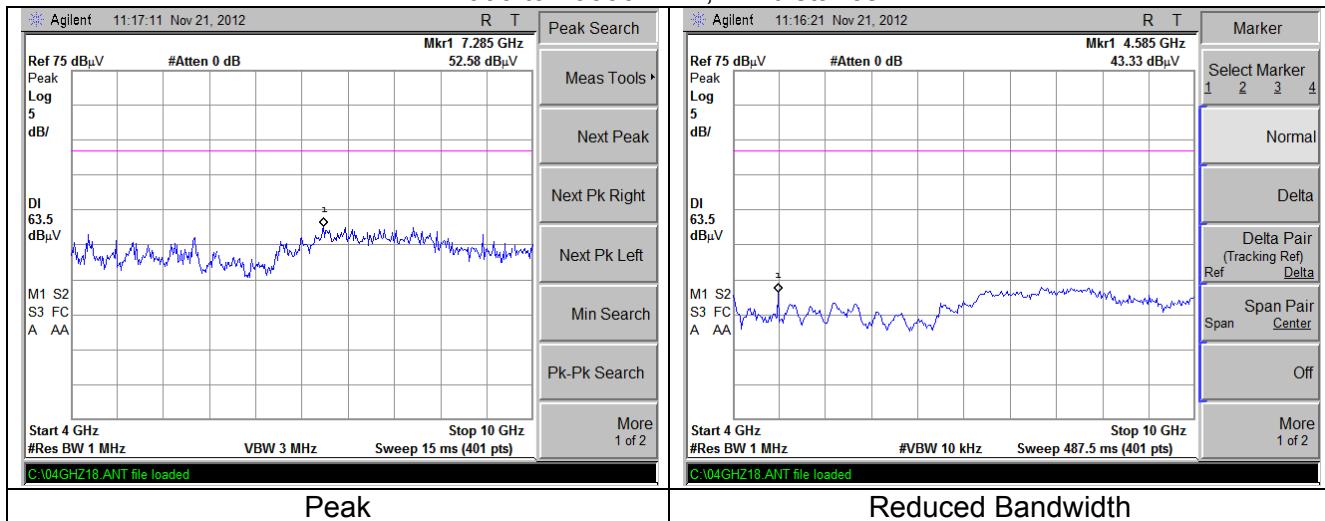

Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 22 of 45

EXHIBIT 6. CONDUCTED EMISSIONS TEST, AC POWER LINE

6.1 Test Setup

The test area and setup are in accordance with ANSI C63.4 and with Title 47 CFR, FCC Part 15, Industry Canada RSS-210 and RSS GEN. The EUT was placed on a non-conductive wooden table, with a height of 80 cm above the reference ground plane. The EUT was connected to a USB port of a generic laptop and set to transmit. The Generic laptop power supply was then plugged into a 50Ω (ohm), 50/250 μ H Line Impedance Stabilization Network (LISN). The AC power supply of 120V was provided via an appropriate broadband EMI Filter, and then to the LISN line input. Final readings were then taken and recorded. After the EUT was setup and connected to the LISN, the RF Sampling Port of the LISN was connected to a 10 dB Attenuator-Limiter, and then to EMI receiver System. The EMCO LISN used has the ability to terminate the unused port with a 50Ω (ohm) load when switched to either L1 (line) or L2 (neutral).

6.2 Test Procedure

The EUT was investigated in 100% duty cycle, continuous modulated transmit mode for this portion of the testing. The appropriate frequency range and bandwidths were selected on the EMI Receiver, and measurements were made. The bandwidth used for these measurements is 9 kHz, as specified in CISPR 16-1, Section 1, Table 1, for Quasi-Peak and Average detectors in the frequency range of 150 kHz to 30 MHz. Final readings were then taken and recorded.

This test was performed on the EUT while it was powered using an off-the-shelf wall AC to DC power supply.

6.3 Test Equipment Utilized

A list of the test equipment and accessories utilized for the Conducted Emissions test is provided in Appendix A. This list includes calibration information and equipment descriptions. All equipment is calibrated and used according to the operation manuals supplied by the manufacturers. Calibrations of the LISN and Limiter were performed at an IEC/ISO 17025 accredited calibration laboratory, traceable to the SI standard. All cables are calibrated and checked periodically for conformance. The emissions are measured on the EMI System, which has automatic correction for all factors stored in memory and allows direct readings to be taken.

6.4 Test Results

The EUT was found to **MEET** the Conducted Emission requirements of FCC Part 15.207 and RSS GEN 7.2.2 for Conducted Emissions for an Intentional Radiator. See the Data Charts and Graphs for more details of the test results.

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 23 of 45

6.5 FCC Limits of Conducted Emissions at the AC Mains Ports

Frequency Range (MHz)	Class B Limits (dB μ V)		Measuring Bandwidth
	Quasi-Peak	Average	
0.150 -0.50 *	66-56	56-46	RBW = 9 kHz VBW \geq 9 kHz for QP VBW = 1 Hz for Average
0.5 – 5.0	56	46	
5.0 – 30	60	50	
* The limit decreases linearly with the logarithm of the frequency in this range.			

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 24 of 45

6.6

CONDUCTED EMISSIONS TEST DATA CHART

Frequency Range inspected: 150 KHz to 30 MHz

Manufacturer:	TekTone Sound and signal			
Date(s) of Test:	11/21/12			
Project Engineer:	Khairul Aidi Zainal			
Test Engineer:	Mike Hintzke			
Voltage:	120 VAC			
Operation Mode:	Continuous transmit, modulated (100% duty cycle)			
Environmental Conditions in the Lab:	Temperature: 71°F Relative Humidity: 32%			
Test Location:	X	AC Mains Test area		Chamber
EUT Placed On:	X	40cm from Vertical Ground Plane		10cm Spacers
	X	80cm above Ground Plane		Other:
Measurements:		Pre-Compliance	Preliminary	X Final
Detectors Used:	Peak	X	Quasi-Peak	X Average

Frequency (MHz)	Line	Quasi-Peak			Average		
		Q-Peak Reading (dB μ V)	Q-Peak Limit (dB μ V)	Quasi-Peak Margin (dB)	Average Reading (dB μ V)	Average Limit (dB μ V)	Average Margin (dB)
26.110	L1	46.2	60.0	13.8	40.4	50.0	9.6
23.810	L1	43.8	60.0	16.2	42.8	50.0	7.2
21.280	L1	38.4	60.0	21.6	32.6	50.0	17.4
25.790	L2	44.9	60.0	15.1	39.9	50.0	10.1
15.830	L2	39.9	60.0	20.1	33.6	50.0	16.4
24.000	L2	37.7	60.0	22.3	36.3	50.0	13.7

Notes:

- 1) The emissions listed are characteristic of the power supply used, and did not change by the EUT.


Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 25 of 45

6.7 Test Setup Photo(s) – Conducted Emissions Test
This section is not available.

6.8 Screen Captures – Conducted Emissions Test

Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 26 of 45

These screen captures represent Peak Emissions. For conducted emission measurements, both a Quasi-Peak detector function and an Average detector function are utilized. The emissions must meet both the Quasi-peak limit and the Average limit as described in 47 CFR 15.207 and RSS GEN 7.2.2 (Table 2).

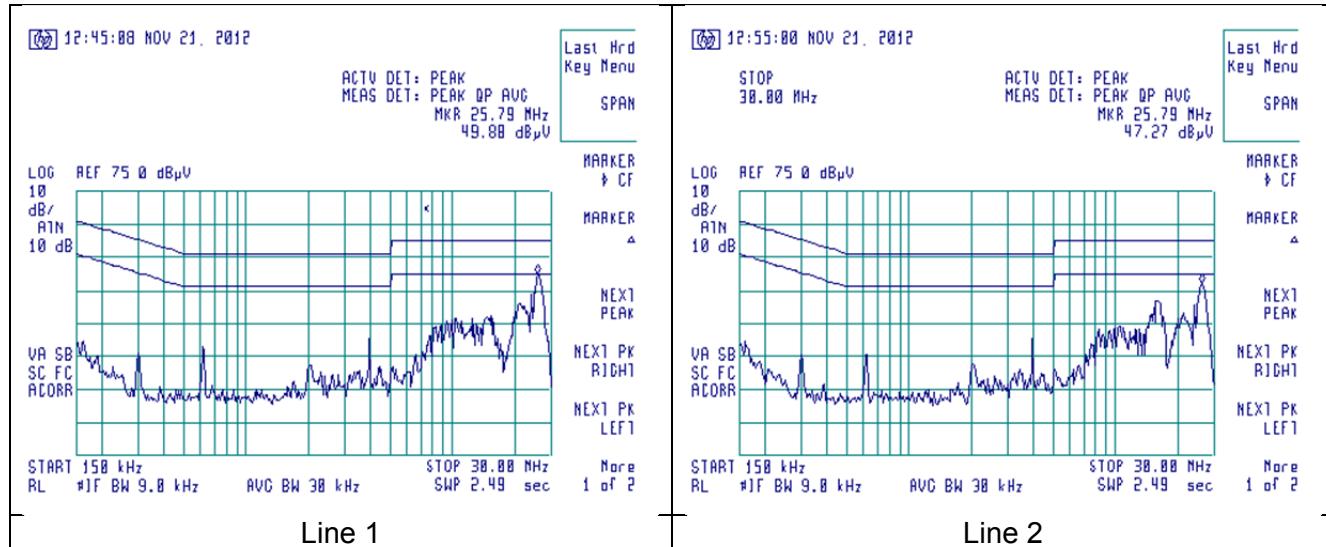

Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 27 of 45

EXHIBIT 7. OCCUPIED BANDWIDTH

Test Engineer(s): Peter Feilen

7.1 - Limits

For a DTS system operating in the 902 to 928 MHz band, the minimum 6dB emission bandwidth limit is 500 kHz.

7.2 - Method of Measurements

Industry Canada (IC RSS GEN 4.6.1) also requires the measurement of the 99% bandwidth in addition to the 6dB emission bandwidth. For this portion of the tests, a direct measurement of the transmitted signal was performed at the antenna port of the EUT, via a cable connection to a spectrum analyzer. An attenuator was placed in series with the cable to protect the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings thereby allowing direct measurements, without the need for any further corrections. The EUT was configured to run in a 100% duty cycle, continuous transmit mode, while being supplied with typical data as a modulation source. A bandwidth measurement function that is built into the spectrum analyzer was used to measure the 99 % and 6dB bandwidth.


7.3 - Test Data

Channel (MHz)	6dB (kHz)	99% (MHz)
906	758.3	1.23
916	833.3	1.23
924	650.0	1.23


Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 28 of 45

7.4 – Screen Captures


Lowest Channel, 906 MHz

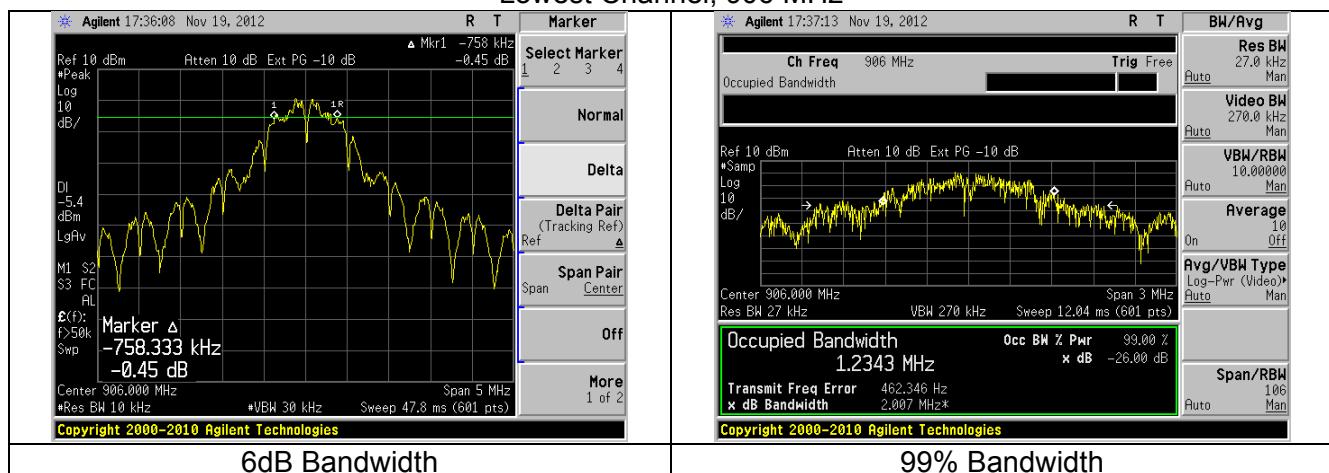

Middle Channel, 916 MHz

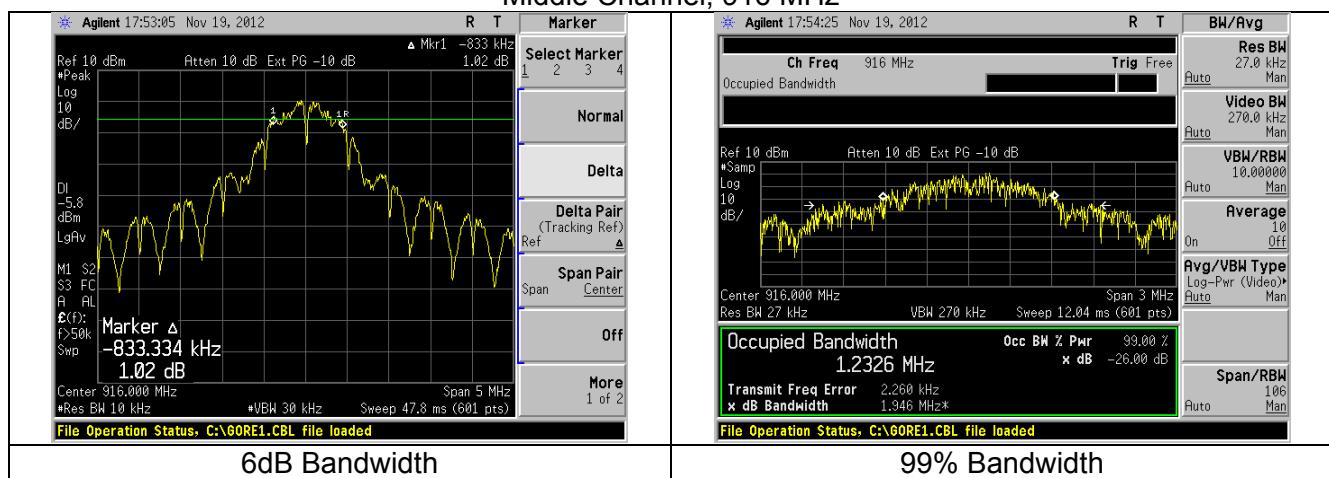

Highest Channel, 924 MHz

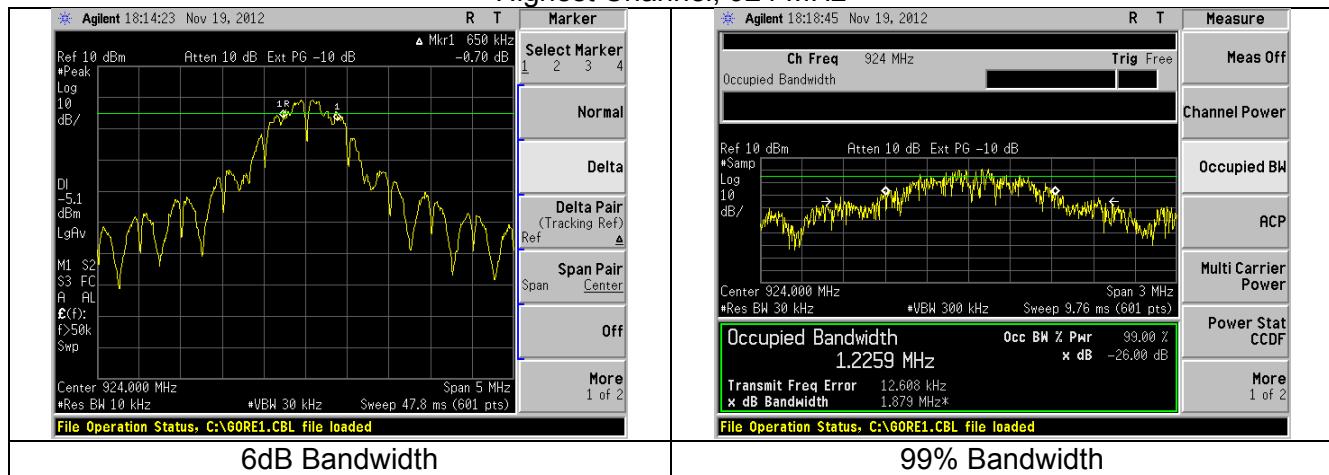

Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 29 of 45

EXHIBIT 8. BAND EDGE MEASUREMENTS

Test Engineer(s): Peter Feilen

8.1 - Method of Measurements

FCC 15.247(d) require a measurement of spurious emission levels to be at least 20 dB lower than the fundamental emission level, in particular at the Band-Edges where the intentional radiator operates. Also, RSS 210 Section 2.2 requires that unwanted emissions meet limits listed in RSS GEN and also to the limits in the applicable annex. The following screen captures demonstrate compliance of the intentional radiator at the 902 - 928 MHz Band-Edges. The EUT was operated in 100% duty cycle continuous transmit mode with continuous modulation, with internally generated data as the modulating source. The EUT was operated at the lowest channel for the investigation of the lower Band-Edge, and at the highest channel for the investigation of the higher Band-Edge.

The Band-edge measurements were performed conducted and radiated. The measurement of band-edge was performed to satisfy FCC 15.247(d).


Conducted measurements of the spurious emission were performed with a measurement bandwidth of 100kHz.

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 30 of 45


8.2. Band edge captures.

Radiated Band-edge:

A. PCB L insert antenna.

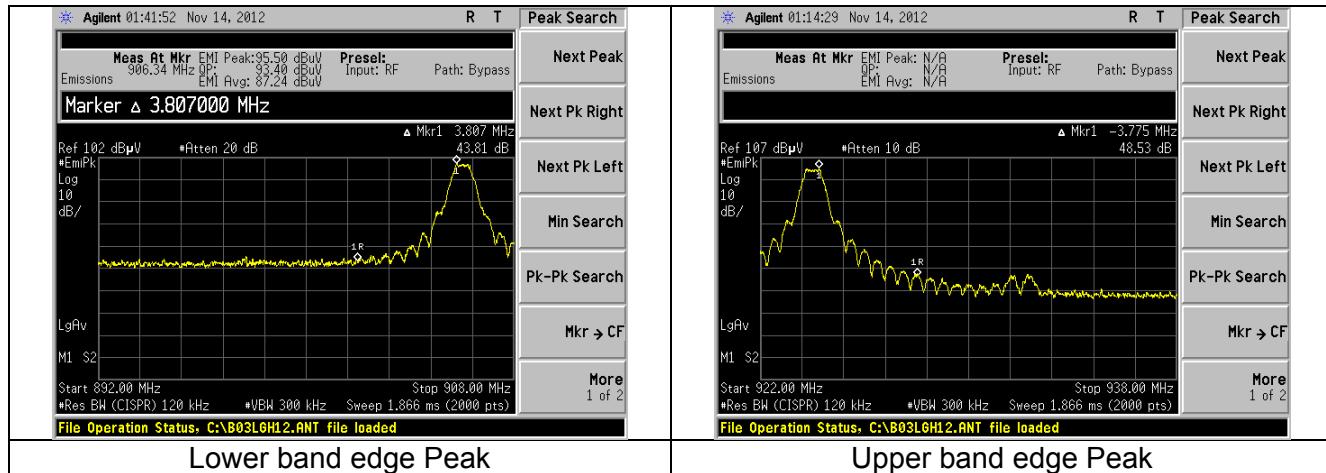


B. Wire dipole Bend 1.

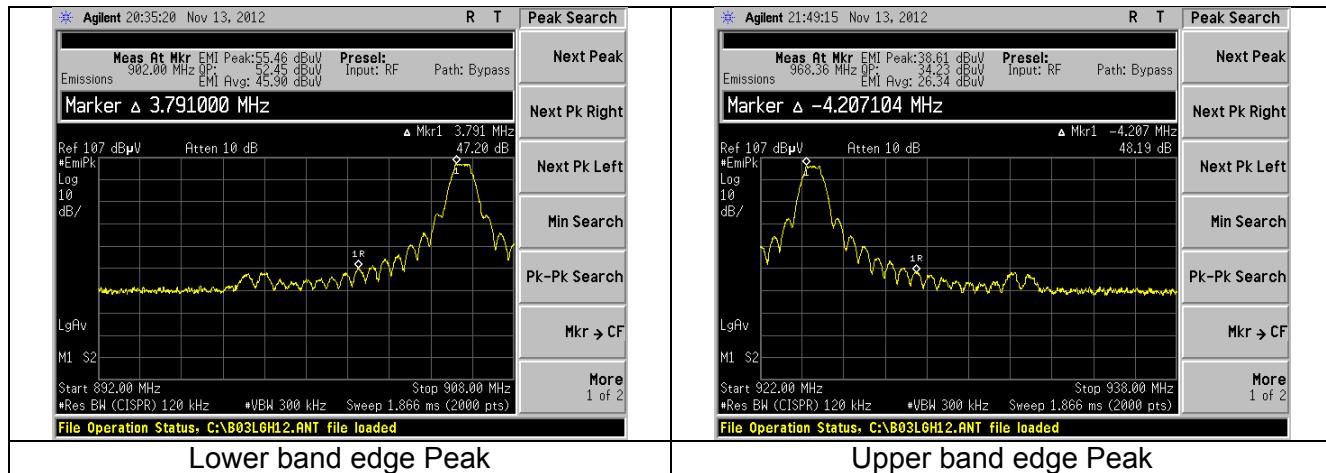


Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 31 of 45

C. Wire dipole Bend 2.

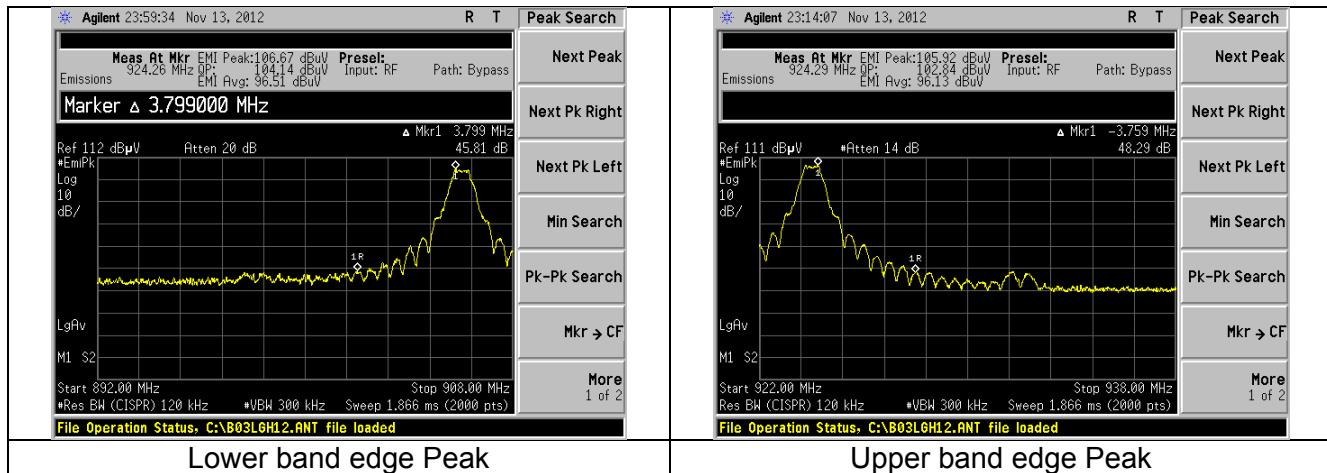

Conducted Band-edge:

A. Continuously transmitting and modulated.

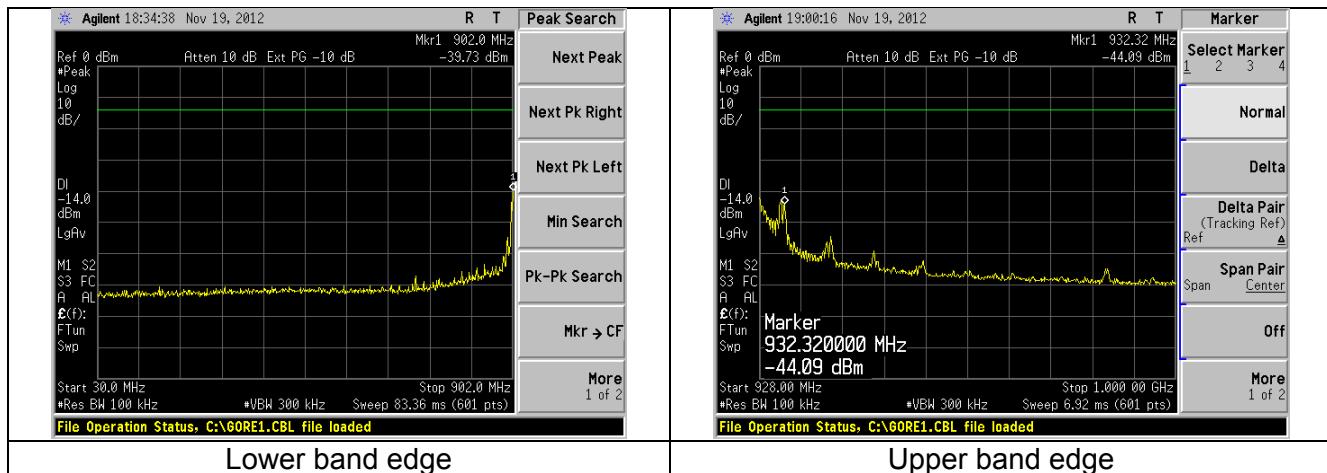

Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 32 of 45

EXHIBIT 9. POWER OUTPUT (CONDUCTED)

Test Engineer(s): Peter Feilen

9.1 - Method of Measurements

The conducted RF output power of the EUT was measured at the antenna port using a short RF cable along with an attenuator as protection for the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings there by allowing direct measurements without the need for any further corrections. The unit was configured to run in a 100% duty cycle continuous transmit mode, while being supplied with typical data as a modulation source. The spectrum analyzer was used with the appropriate resolution bandwidth, with measurements from a peak detector presented in the chart below.

The measurement method per KDB 558074 D01 DTS Measurement Guide v02 was option 1 (Section 8.1.1).


9.2 - Test Data

Channel (MHz)	Power (dBm)	Limit (dBm)	Margin (dB)
906	8.0	30	22.0
916	7.8	30	22.2
924	7.5	30	22.5


Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 33 of 45

9.3 – Screen Captures.


Lowest Channel, 906MHz

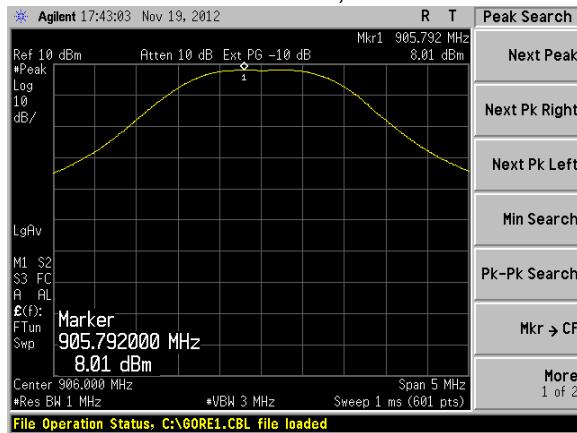

Middle Channel, 916MHz

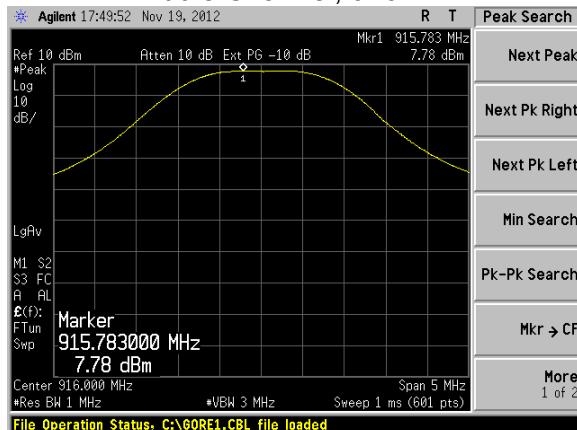

Highest Channel, 924MHz

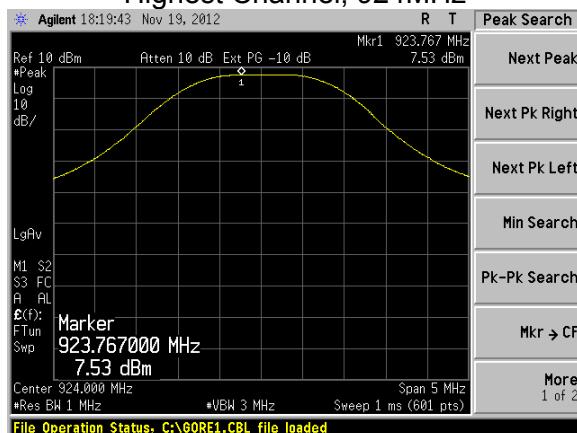

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 34 of 45

EXHIBIT 10. CONDUCTED SPURIOUS EMISSIONS

Test Engineer(s): Peter Feilen

10.1 - Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 db below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

10.2 - Conducted Harmonic And Spurious RF Measurements

FCC Part 15.247(d) and IC RSS 210 A8.5 both require a measurement of conducted harmonic and spurious RF emission levels, as reference to the carrier level when measured in a 100 kHz bandwidth. For this test, the spurious and harmonic RF emissions from the EUT were measured at the EUT antenna port using a short RF cable along with an attenuator as protection for the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings, thereby allowing direct readings of the measurements made without the need for any further corrections. A spectrum analyzer was used with the resolution bandwidth set to 100 kHz for this portion of the tests. The unit was configured to run in a 100% duty cycle continuous transmit mode, while being supplied with typical data as a modulation source. The spectrum analyzer was used with measurements from a peak detector presented in the chart below. Screen captures were acquired and any noticeable spurious and harmonic signals were identified and measured.

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 35 of 45


10.3 - Test Data

Harmonics	Channel\Frequency		
	1\906MHz	6\916MHz	10\924MHz
fo	6.0 dBm	6.0 dBm	6.0 dBm
2fo	-56.7 dBm	-64.4 dBm	-56.9 dBm
3fo	-66.9 dBm	-65.6 dBm	-67.8 dBm
4fo	-73.8 dBm	-73.4 dBm	-73.9 dBm
5fo	-78.6 dBm	-77.6 dBm	-77.2 dBm
6fo	-79.0 dBm	-70.5 dBm	-79.2 dBm
7fo	-79.3 dBm	-78.5 dBm	-76.7 dBm
8fo	-75.6 dBm	-75.3 dBm	-77.3 dBm
9fo	-77.9 dBm	-76.9 dBm	-76.8 dBm
10fo	-75.0 dBm	-76.4 dBm	-76.5 dBm


Frequency (MHz)	Channel	Level (dBm)
902.00	1	-39.51
928.00	10	-42.25
931.72	10	-43.17
932.32	10	-44.09
1847.00	10	-64.08
5500.00	10	-69.34
929.68	1	-60.01
1813.00	1	-65.15
1833.00	6	-65.35

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 36 of 45

30 MHz to 902 MHz

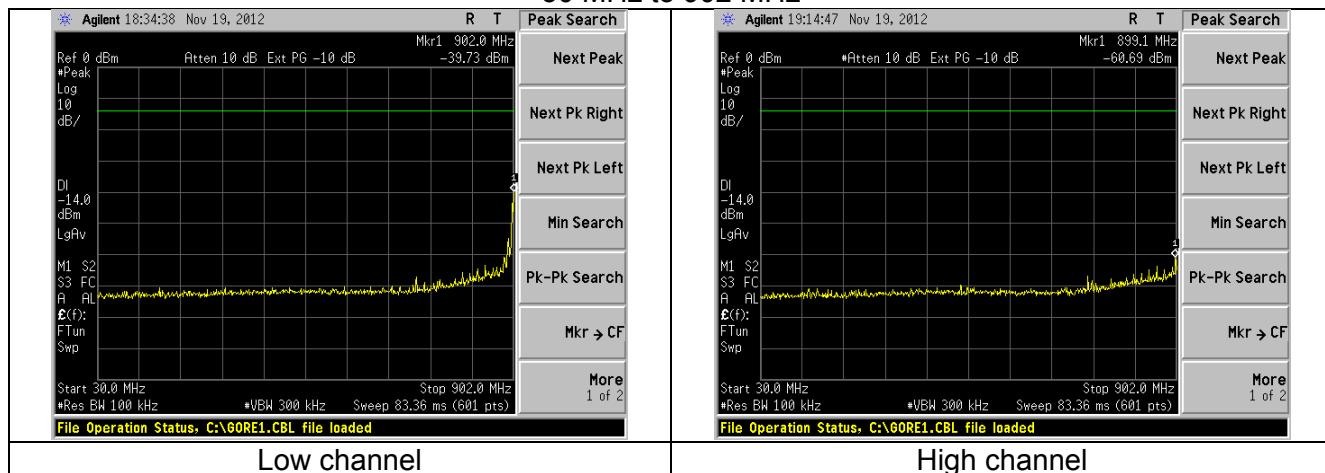


928 MHz to 1000 MHz

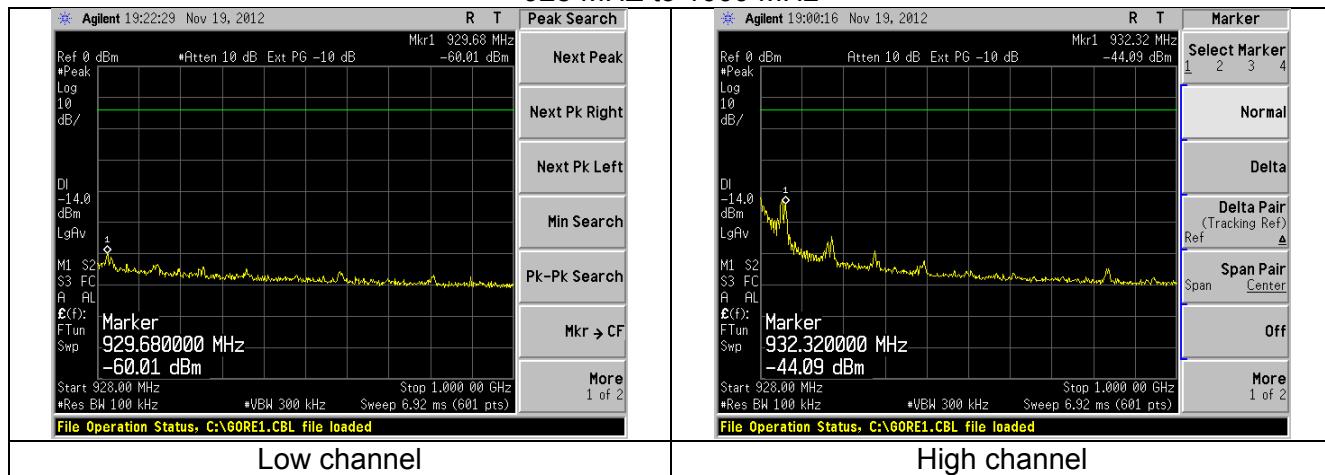


Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 37 of 45

1000 MHZ to 5000 MHz

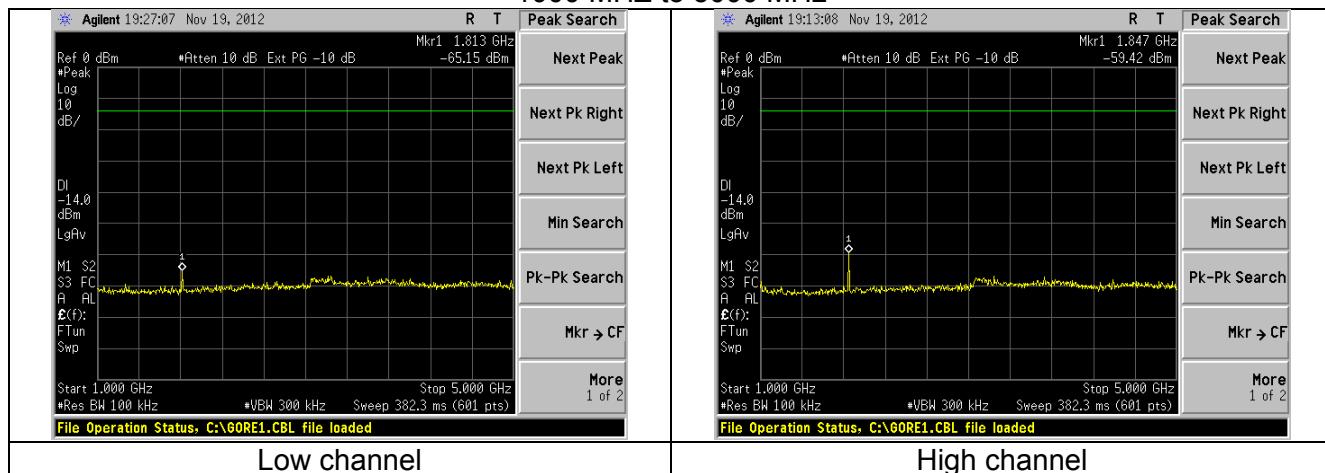

5000 MHZ to 10000 MHz

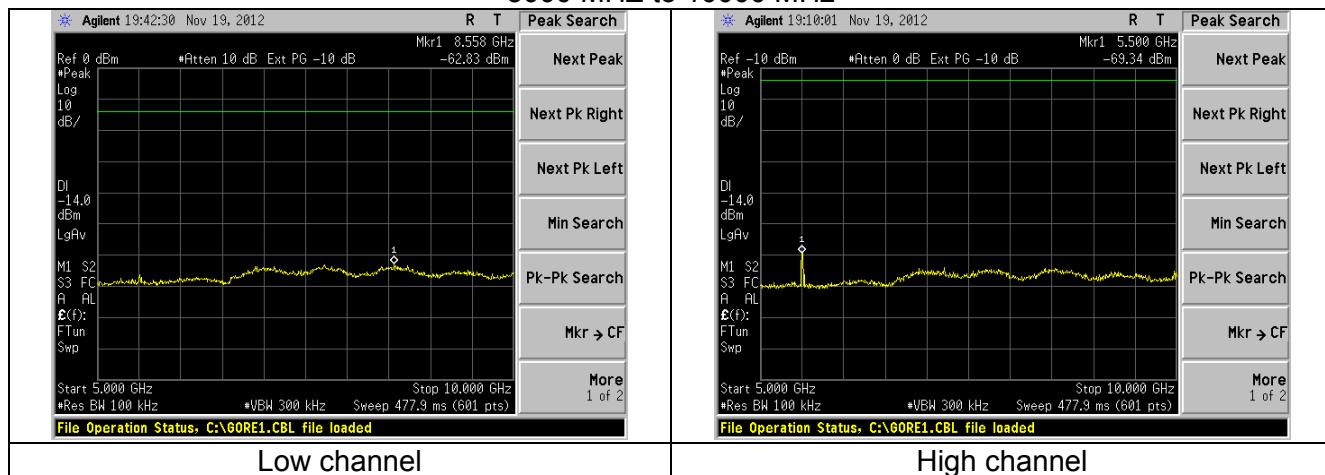

Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 38 of 45

EXHIBIT 11. POWER SPECTRAL DENSITIES: 15.247(e)

11.1 Limits

For digitally modulate systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

The measurement method per KDB 558074 D01 DTS Measurement Guide v02 was option 1 (Section 9.1).

In accordance with FCC Part 15.247(e) and RSS 210 A8.2(b), the peak power spectral density should not exceed +8 dBm in any 3 kHz band. This measurement was performed along with the conducted power output readings performed as described in previous sections. The peak output frequency for each representative frequency was scanned, with a narrow bandwidth, and reduced sweep, and a power density measurement was performed. The highest density was found to be no greater than -4.3 dBm, which is under the allowable limit by 12.3 dB.


11.2 Test Data

Frequency (MHz)	Peak PSD (dBm)	Limit (dBm)	Margin (dB)
906	-4.3	8	12.3
916	-4.8	8	12.8
924	-4.4	8	12.4

Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 39 of 45

11.4 Screen Captures – Power Spectral Density


Low Channel

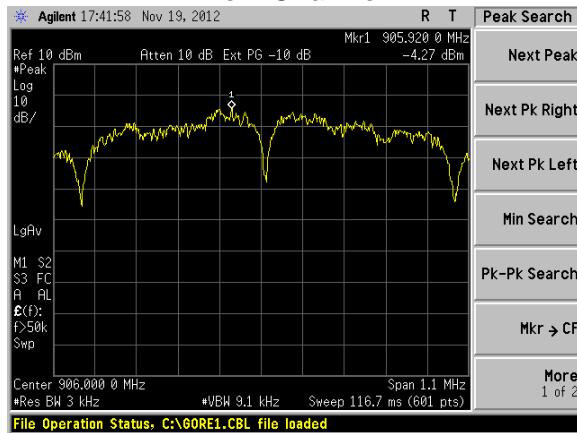

Middle Channel



High Channel

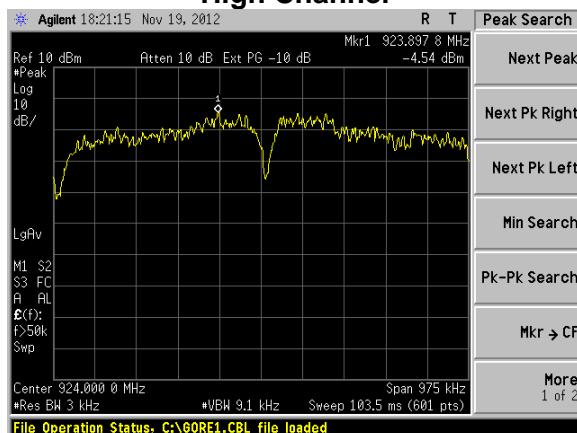

Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 40 of 45

EXHIBIT 12. FREQUENCY & POWER STABILITY OVER VOLTAGE VARIATIONS

Test Engineer(s): Khairul Aidi Zainal

The power and frequency stability of the device was examined as a function of the input voltage available to the EUT. A Spectrum Analyzer was used to measure the power and frequency at the appropriate frequency markers. Power was supplied by an external bench-type DC power supply and was varied $\pm 15\%$ from the nominal.

2.55 VDC		3.00 VDC		3.45 VDC	
Power (dBm)	Frequency (Hz)	Power (dBm)	Frequency (Hz)	Power (dBm)	Frequency (Hz)
8.0	906011680	8.0	906011700	8.0	906011700
7.8	916011850	7.8	916012020	7.8	916012020
7.5	924012010	7.5	924011840	7.6	924012180

Channel	max	min	freq drift (Hz)
Low	906011700	906011680	20
Middle	916012020	916011850	170
High	924012180	924011840	340

The EUT has better than 100 PPM frequency stability.

The power was then cycled On/Off to observe system response. No unusual response was observed, the emission characteristics were well behaved, and the system returned to the same state of operation as before the power cycle.

Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 41 of 45

EXHIBIT 13. MPE CALCULATIONS

The following MPE calculations are based on a measured conducted RF power of 8.0dBm as presented to the antenna. The peak gain of this antenna, based on field strength measurements over a conducting ground plane is 6.9dBi.

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = \frac{PG}{4\pi R^2}$$

where: S = power density

P = power input to the antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal: 8.00 (dBm)

Maximum peak output power at antenna input terminal: 6.310 (mW)

Antenna gain(typical): 6.9 (dBi)

Maximum antenna gain: 4.898 (numeric)

Prediction distance: 20 (cm)

Prediction frequency: 906 (MHz)

MPE limit for uncontrolled exposure at prediction frequency: 0.6 (mW/cm²)

Power density at prediction frequency: 0.006148 (mW/cm²)

Maximum allowable antenna gain: 26.8 (dBi)

Margin of Compliance at 20 cm = 19.9 dB

Prepared For:TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #:12260010,12340007, 12060045	Page 42 of 45

APPENDIX A - Test Equipment List



Date: 13-Nov-2012

Type Test: AC Mains

Job #: C-1589

Prepared By: Mike

Customer: TekTone Sound and Signal

Quote #: 312281

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960013	EMI Receiver	HP	8546A System	3617A00320;3448A	1/22/2011	1/22/2012	Active Calibration
2	EE 960014	EMI Receiver-filter section	HP	8546A	3440A00296	1/22/2011	1/22/2012	Active Calibration
3	AA 960072	Transient Limiter	HP	11947A	3107A02515	9/20/2012	9/20/2013	Active Calibration
4	AA 960008	LSN	EMCO	38162NM	9701-1057	1/30/2012	1/30/2013	Active Calibration

Project Engineer: Aidi

Quality Assurance: Aidi



Date: 13-Nov-2012

Type Test: Conducted Measurements

Job #: C-1589

Prepared By: Peter

Customer: TekTone Sound and Signal

Quote #: 312281

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	AA 960143	Phaseflex	Gore	EK0110010480	5546519	6/12/2011	6/12/2013	Active Calibration
2	EE 960073	SpectrumAnalyzer	Agilent	E4446A	US45300564	59/2012	59/2013	Active Calibration

Project Engineer: Aidi

Quality Assurance: Peter



Date: 13-Nov-2012

Type Test: Radiated measurements

Job #: C-1589

Prepared By: Aidi

Customer: TekTone Sound and Signal

Quote #: 312281

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	CC 000221C	SpectrumAnalyzer	HP	E4407B	U339160256	6/5/2012	6/5/2013	Active Calibration
2	AA 960156	900MHz High Pass Filter	KWM	HFF-L-14195	unknown	6/29/2012	6/29/2013	Active Calibration
3	AA 960081	Double Ridge Horn Antenna	EMCO	3115	6907	1/6/2012	1/6/2013	Active Calibration
4	EE 960147	Pre-Amp	Adv. Micro	WLA 612	123101	1/6/2012	1/6/2013	Active Calibration
5	AA 960144	Phaseflex	Gore	EK0110010720	5000373	6/12/2011	6/12/2013	Active Calibration
6	AA 960078	Log Periodic Antenna	EMCO	93146	9701-4855	1/15/2011	1/15/2012	Active Calibration
7	AA 960005	Bi-conical Antenna	EMCO	931109	9601-2200	6/26/2012	6/26/2013	Active Calibration
8	EE 960156	100MHz-1GHz Analog Signal Generator	Agilent	N5181A	MY 49060062	6/30/2012	6/30/2013	Active Calibration
9	EE 960157	3Hz-13.2GHz SpectrumAnalyzer	Agilent	E4445A	MY 49250225	6/29/2012	6/29/2013	Active Calibration
10	EE 960159	RF Preselector	Agilent	N8039A	MY 46520110	6/29/2012	6/29/2013	Active Calibration
11	AA 960007	Double Ridge Horn Antenna	EMCO	3115	9314-1439	5/16/2012	5/16/2013	Active Calibration
12	EE 960147	Pre-Amp	Adv. Micro	WLA 612	123101	1/6/2012	1/6/2013	Active Calibration

Project Engineer: Aidi

Quality Assurance: Shane

Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 43 of 45

APPENDIX B – Test Standards: CURRENT PUBLICATION DATES RADIO

STANDARD #	DATE	Am. 1	Am. 2
ANSI C63.4	2003		
ANSI C63.10	2009		
FCC 47 CFR, Parts 0-15, 18, 90, 95	2012		
RSS GEN	2010		
RSS 210	2010		

Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 44 of 45

APPENDIX C - Uncertainty Statement

Table of Expanded Uncertainty Values, (K=2) for Specified Measurements

Measurement Type	Particular Configuration	Uncertainty Values
Radiated Emissions	3 – Meter chamber, Biconical Antenna	4.82 dB
Radiated Emissions	3-Meter Chamber, Log Periodic Antenna	4.88 dB
Radiated Emissions	3-Meter Chamber, Horn Antenna	4.85 dB
Radiated Emissions	10-Meter OATS, Biconical Antenna	4.32 dB
Radiated Emissions	10-Meter OATS, Log Periodic Antenna	3.63 dB
Absolute Conducted Emissions	Agilent PSA/ESA Series	1.38 dB
AC Line Conducted Emissions	Shielded Room/EMCO LISN	3.20 dB
Temperature/Humidity	Thermo-hygrometer	0.64° / 2.88 %RH

Prepared For: TekTone Sound and Signal	EUT: PM550 Radio module	LS Research, LLC
Report #: TR 312281 A	Model #: PM550	Template: 15.247
LSR Job #: C-1589	Serial #: 12260010, 12340007, 12060045	Page 45 of 45