

TEST REPORT

Test Report No.: 1-8238/19-01-60-A



Testing Laboratory

CTC advanced GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken/Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.ctcadvanced.com>
e-mail: mail@ctcadvanced.com

Accredited Test Laboratory:
The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

Applicant

Bury GmbH & Co. KG
Robert-Koch-Str. 1-7
32584 Löhne/GERMANY
Phone: +49 5732 9706-100
Contact: Johann Dshus
e-mail: dshus@bury.com
Phone: +49 (0) 5 73 29 70 62 77

Manufacturer

Bury Sp. z o.o.
Wojska Polskiego 4
39-300 Mielec / POLAND

Test Standard/s

FCC - Title 47 CFR Chapter I - Subchapter I §1.1310
FCC KDB 680106 D01
Exposure Wireless Charging Apps v03
Radiofrequency radiation exposure limits.
RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: WLC
Device type: mobile device
Model name: **Ladestaufach**
S/N serial number: 4663
FCC-ID: QZ9-LADESTAUFACH
Hardware status: 9180P04
Software status: X034
Frequency: Wireless charging 110 kHz
Antenna: Integrated coils
Battery option: 12 V car battery
Accessories: --
Test sample status: identical prototype
Exposure category: general population / uncontrolled environment

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test Report authorised:

Alexander Hnatovskiy
Lab Manager
Radio Communications

Test performed:

Marco Scigliano
Testing Manager
Radio Communications

1 Table of contents

1	Table of contents.....	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	Statement of compliance.....	3
3	Test standard/s:.....	4
3.1	RF exposure limits	4
4	Summary of Measurement Results	5
5	Test Environment	5
6	Test Set-up.....	6
6.1	Measurement system.....	6
6.1.1	Broadband Electromagnetic Field Test system.....	6
6.1.2	Test equipment list	7
6.1.3	Averaging.....	7
6.1.4	Uncertainties.....	8
6.1.4.1	Typical uncertainty of EHP-50F	8
6.1.5	Validation procedure.....	8
6.1.6	Definition of test position and distances.....	9
6.1.7	Anisotrophical probe behaviour management.....	9
6.1.8	Measurement distances with EHP probes	9
6.2	Test results	10
6.3	Final verdict	11
Annex A:	Photo documentation.....	11
Annex B:	Document History.....	12
Annex C:	Further Information	12

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

2.2 Application details

Date of receipt of order:	2020-05-05
Date of receipt of test item:	2020-07-13
Start of test:	2020-07-13
End of test:	2020-07-13

2.3 Statement of compliance

The EMF values found for the Ladestaufach WLC are below the maximum allowed levels according to the standards listed in section 3.

3 Test standard/s:

Test Standard	Version	Test Standard Description
FCC - Title 47 CFR Chapter I - Subchapter I §1.1310	04.06.2013	Radiofrequency radiation exposure limits.
FCC KDB 680106 D01 Exposure Wireless Charging Apps v03	04.09.2018	RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications

3.1 RF exposure limits

Reference levels for general public (uncontrolled environment) exposure to time-varying electric and magnetic fields

According to: CFR47, Subpart I - §1.1310 Radiofrequency radiation exposure limits				
Frequency Range (MHz)	Electric Field (V/m)	Magnetic Field (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
Occupational / Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/ f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1500	--	--	f/300	6
1500-100000	--	--	5	6
General Population / Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100000	--	--	1.0	30

According to **FCC KDB 680106 D01 Paragraph 3 RF Exposure Requirements clause 3** the Emission-Limits in the frequency range from 100 to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of **CFR 47 – Section 1.310** as following (measurement distance shall be 20cm from the center of the probe to the top side and 15cm from the center of the probe to the edge of the device):

	E-field V / m	H-field A/m	B-field µT
0.3 – 3.0 MHz	614	1.63	2.0
0.3 – 3.0 MHz* (50% criteria)	307	0.815	1.0

*) **FCC KDB 680106 D01 Paragraph 5b(5)** demands, that the aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit (1.6A/m) which results in an H-Field limit of 0.815 A/m. A device that complies with the 50% criteria is deemed to comply, without any further investigation through the FCC.

4 Summary of Measurement Results

<input checked="" type="checkbox"/>	No deviations from the technical specifications ascertained
<input type="checkbox"/>	Deviations from the technical specifications ascertained

The following safety distances from the human body to the module are required for bystanders when the device is used for wireless charging. These are below the limitations defined in FCC KDB 680106 D01 and CFR 47 – Section 1.310.

Side	Safety Distance [cm]	Limits
Top	9	H- Field: 1.63 A/m E-Field: 614 V/m
Other sides	9	
Distances that full fill 50% Criteria:		
Top	20	H- Field: 0.895 A/m E-Field: 307 V/m
Other sides	15	

5 Test Environment

Ambient temperature:	20 – 24 °C
Relative humidity content:	40 – 50 %
Air pressure:	not relevant for this kind of testing
Power supply:	230 V / 50 Hz

6 Test Set-up

6.1 Measurement system

6.1.1 Broadband Electromagnetic Field Test system



A state of the art Broadband Electromagnetic Field Test system was used. The probes of the system are fitted with three sensors which measure the field strength of the X, Y and Z plane directions separately. The field strength is calculated by the instrument's processor by summing the squares of the three measured values.

The frequency range 5 Hz to 60 GHz is covered.

Depending on the used probe type Electric and Magnetic Field or Electric Field only is detectable.

- | | | |
|-----------|-------------------|-----------------------------|
| • EHP-50D | 5 Hz to 100 kHz | Electric and Magnetic Field |
| • EHP-50F | 5 Hz to 400 kHz | Electric and Magnetic Field |
| • HF 3061 | 300 kHz to 30 MHz | Magnetic Field |
| • EF 0691 | 100 kHz to 6 GHz | Electric Field |
| • EF 6092 | 100 MHz to 60 GHz | Electric Field |

6.1.2 Test equipment list

	Manufacturer	Device	Type	Serial number	Last Calibration
<input type="checkbox"/>	Narda	Electric and Magnetic Field Meter	NBM-550	F-0319	2019-02-06
<input type="checkbox"/>	Narda	Electric and Magnetic Field Meter	NBM-520	D-1234	2019-05-15
<input type="checkbox"/>	Narda	Electric Field Probe (100 kHz - 6 GHz)	EF 0691	G-0027	2019-02-06
<input type="checkbox"/>	Narda	Electric Field Probe (100 MHz - 60 GHz)	EF 6092	A-0071	2019-05-15
<input type="checkbox"/>	Narda	Magnetic Field Probe (300 kHz to 30 MHz)	HF 3061	D-0404	2019-02-06
<input type="checkbox"/>	Narda	Electric and Magnetic Field Analyser (5 Hz – 100 kHz)	EHP-50D	230WX50108	2019-02-12
<input checked="" type="checkbox"/>	Narda	Electric and Magnetic Field Analyser (5 Hz – 400 kHz)	EHP-50F	000WX60907	2018-09-04

Devices used during the test Devices not used during the test

6.1.3 Averaging

For time efficient testing an average of 8 seconds was used. With some spot checks was verified, that caused by the time structure of the measured responses, the results did not change with a 6-minute-averaging.

6.1.4 Uncertainties

The probe uncertainties stated by the manufacturer are considered to be the main relevant and dominant issues.

6.1.4.1 Typical uncertainty of EHP-50F

The uncertainties stated in this document have been determined according to EA-4/2 [4].

They were estimated as expanded uncertainty obtained multiplying the standard by the coverage factor $k=2$, corresponding to a confidence level of about 95%.

The total uncertainty of the probe derived from typical contributions of linearity, anisotropy, frequency response, temperature, relative humidity and with/without contribution of uncertainty of calibration.

Magnetic probe ⁽¹⁾	Magnetic flux density	Total expanded uncertainty (k=2)	
		Without contribution of uncertainty of calibration U_{EHP50F} (%)	With contribution of uncertainty of calibration U_T (%)
Frequency at 50Hz	0.05 μ T to < 100 μ T	2.3	3.0 ⁽²⁾
	100 μ T to < 3000 μ T	2.6	3.8 ⁽³⁾
Frequency from 5 to 40 Hz	0.05 μ T to < 10 μ T	5.3	5.7 ⁽²⁾
Frequency from 40 to 100kHz	0.05 μ T to < 10 μ T	4.9	5.3 ⁽²⁾

(1) This uncertainty budget is for an ambient temperature of (23 +/- 4) °C, and relative humidity of (50 +/- 5) %
The expanded uncertainty for magnetic flux density for values close to 50 nT is calculated with negligible contribution of noise level.

(2) The uncertainty of calibration used is 2.0%

(3) The uncertainty of calibration used is 2.8%

Electric probe ⁽⁴⁾	Electric field range	Total expanded uncertainty (k=2)	
		Without contribution of uncertainty of calibration U_{EHP50F} (%)	With contribution of uncertainty of calibration U_T (%)
Frequency at 50Hz	1 V/m to 1000 V/m	7.1	7.4 ⁽⁵⁾
	1 V/m to < 100 kV/m	7.8	8.2 ⁽⁶⁾
Frequency from 5 Hz to 100 kHz	1 V/m to <1000 V/m	8.8	9.2 ⁽⁶⁾

(4) This uncertainty budget is for an ambient temperature of (23 +/- 4) °C, and relative humidity of (50 +/- 5) %

(5) The uncertainty of calibration used is 2.0%

(6) The uncertainty of calibration used is 2.5%

6.1.5 Validation procedure

Before performing the tests the empty test chamber was checked for system immanent frequency responses. The following background signal level was detected. All levels are small enough to allow accurate proof of the limits to be considered.

Probe	Frequency Range	Magnetic Flux Density (B) in μ T	Electrical Field Strength in V/m	Remark
EHP-50F	5 – 1000 Hz	0.006	0.50	
EHP-50F	4 – 400 kHz	0.004	0.235	

6.1.6 Definition of test position and distances

In absence of an equipment specific regulation with given test distances, all not further noted test positions were measured in “touched” mode, the probe radome touching the DUT at the defined test position. Due to the mechanical concept of the used probe a distance between DUT surface and electrical centre of the probe antennas remains.

Probe type	Maximum distance (cm)	
	Magnetic Field	Electrical Field
EHP-50F	4	4

6.1.7 Anisotrophical probe behaviour management

As EMF measurements for safety and health aspects are often performed in the nearfield of a radiation source it is important to be aware of the not ideal isotropic performance of a typical probe and how to reproduce reliable results.

During measurements the following steps are performed to get always the highest possible field strength result and validate that the measured results are always the worst case scenario with the highest energy emitted by the source.


Step 1: Finding the position of the highest radiated field source with a basic probe orientation.

Step2: Turning the probe to all possible orientations to find the orientation that delivers the maximum field strength.

6.1.8 Measurement distances with EHP probes

In lack of better possibilities to measure in the nearfield at very low frequencies, the touch position of the probe towards the source in the orientation that delivers the largest field is considered as 0cm between source and probe.

The following pictures show the position of the axis

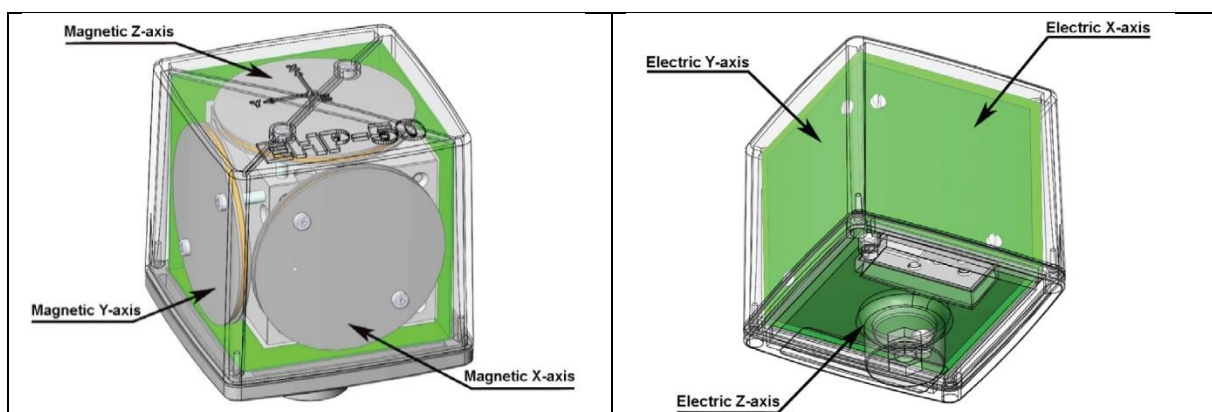

Probe dimensions: 8 x 8 x 8 cm

Electrical center: 4 cm

Distance of probes to the outer housing: according to manufacturer (0.9cm)

6.2 Test results

For considering worst-case conditions all measurements were performed at smallest possible distance from the device under test. Limits shown in the tables below are the lowest ones within the wideband frequency range of the field probe applied.

Test positions see photo documentation (Annex A).

During the measurements the DUT was charging a dummy load. The dummy load was positioned in that way that the largest values for radiated field strengths were emitted.

Test results for H-field strengths - 110 kHz				
test position	distance* (cm)	H (A/m)	Limit (A/m)	Limit vs. 50% criteria (A/m)
top	0	4.2	1.63	0.815
	9	1.48	1.63	0.815
	20	0.165	1.63	0.815
front	0	0.3	1.63	0.815
front	15	0.127	1.63	0.815
left	0	2.2	1.63	0.815
	9	0.890	1.63	0.815
	15	0.101	1.63	0.815
right	0	1.1	1.63	0.815
	9	0.691	1.63	0.815
	15	0.153	1.63	0.815

Table 1: Test results E-/ H-field@110 kHz measured with EHP 50F probe

Test results for E-field strengths - 110 kHz				
test position	distance* (cm)	E (V/m)	Limit (V/m)	Limit vs. 50% criteria (A/m)
top	0	0.88	614	307
front	0	0.36	614	307
left	0	0.28	614	307
right	0	0.36	614	307

Table 2: Test results E-field@110 kHz measured with EHP 50F probe

*) for 0 cm distance, all results were measured with the probe in touch position using the worst case orientation as described in chapter 6.1.7 Anisotrophical probe behaviour management and 6.1.8 Measurement distances with EHP probes.

6.3 Final verdict

The following safety distances from the human body to the module are required for bystanders when the device is used for wireless charging. These are below the limitations defined in FCC KDB 680106 D01 and CFR 47 – Section 1.310.

Side	Safety Distance [cm]	Limits
Top	9	H- Field:1.63 A/m E-Field: 614 V/m
Other sides	9	
Distances that full fill 50% Criteria:		
Top	20	H- Field:0.895 A/m E-Field: 307 V/m
Other sides	15	

Annex A: Photo documentation

Photo documentation is described in the additional document:

Appendix to test report no. 1-8238/19-01-60-A Photo documentation

Annex B: Document History

Version	Applied Changes	Date of Release
	Initial Release	2020-07-23
-A	Corrected results table, evaluation and safety distances.	2020-09-24

Annex C: Further Information**Glossary**

DUT	-	Device under Test
EUT	-	Equipment under Test
HW	-	Hardware
Inv. No.	-	Inventory number
N/A	-	not applicable
S/N	-	Serial Number