

## User Manual - FCC & ISED related statements

### **Approval and declaration of conformity**

This device complies with Part 15 and Part 18 of the FCC Rules and with RSS-210 and RSS-Gen of the Industry Canada Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

CAN RSS-216 / CNR-216

CAN ICES-001 (B) / NMB-001 (B)

FCC ID: QZ9-WCACs

IC: 5927A-WCACs

HVIN: WCA CS NFC LCI

PMN: WCA CS NFC LCI

### **NOTICE:**

Changes or modifications made to this equipment not expressly approved by BURY GmbH & Co. KG may void the FCC authorization to operate this equipment.

### **NOTE:**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 and to Part 18 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

**Intended Use:**

**WPT:**

## Wireless charging dock


### Principle

The wireless charging dock permits the following functions to be performed wirelessly:

- ▶ Charging of Qi-compatible mobile phones or other mobile devices which support the Qi standard.
- ▶ Charging the BMW display key.
- ▶ Connection of the mobile telephone to the external aerial.


### Overview

Tray crosswise in the centre console:

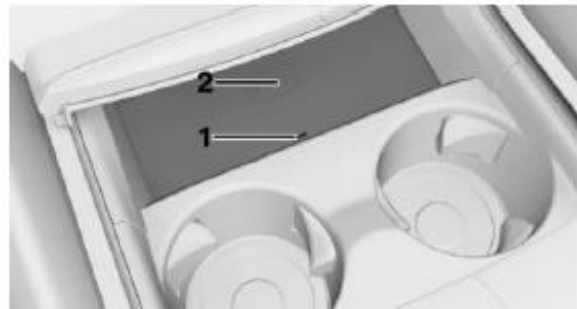

- 1 LED
- 2 Storage area

Tray on the left in the centre console:

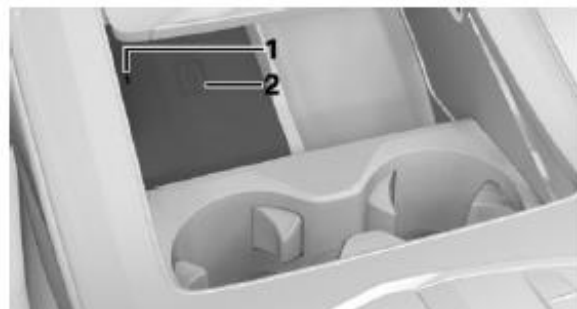


- 1 LED
- 2 Storage area

## NFC:

### Activating the Key Card

Dock with thermal cup holder:

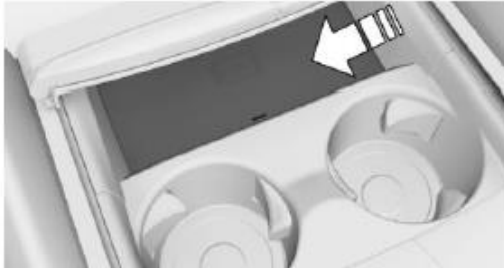

Dock without thermal cup holder:



1. Open the cover of the smartphone dock.
2. Place the Key Card in the middle of the smartphone tray.
3. Follow the instructions on the control display to activate the Key Card.

### Deactivating the Key Card

1. "CAR"
2. "Settings"
3. "Doors/ vehicle access"
4. "Digital Key"
5. Select Key Card.
6. "Key active."

A deactivated Key Card will remain in the list of registered digital keys.

### Starting the engine

Dock with thermal cup holder:



Dock without thermal cup holder:



1. Open the cover of the smartphone dock.
2. Place the activated Key Card in the middle of the smartphone tray.
3. Press the Start/Stop button to start the engine.

With wireless charging tray: The Key Card can be taken out of the tray after starting the engine so that the tray can be used to charge compatible smartphones.