



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Trapeze Networks, Inc.
Applicant Address	5753 W. Las Positas Blvd., Pleasanton, CA 94588 USA
FCC ID	QZE303
Manufacturer's company	Wistron NeWeb Corporation
Manufacturer Address	No.10-1,Li-hsin Road I,Hsinchu Science Park,Hsinchu 300,Taiwan, R.O.C.

Product Name	Dual Mode 2.4GHz/5GHz Access Point
Brand Name	Trapeze
Model Name	430
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Feb. 01, 2008
Final Test Date	Mar. 03, 2008
Submission Type	Original Equipment



### Statement

**Test result included is only for the 802.11b/g part and 802.11a (5725 ~ 5850MHz) of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies .....	5
3.5. Table for Test Modes.....	6
3.6. Table for Testing Locations.....	6
3.7. Table for Supporting Units .....	7
3.8. Table for Parameters of Test Software Setting .....	7
3.9. Test Configurations .....	8
<b>4. TEST RESULT .....</b>	<b>11</b>
4.1. AC Power Line Conducted Emissions Measurement.....	11
4.2. Maximum Conducted Output Power Measurement.....	15
4.3. Power Spectral Density Measurement .....	33
4.4. 6dB Spectrum Bandwidth Measurement .....	40
4.5. Radiated Emissions Measurement .....	47
4.6. Band Edge Emissions Measurement .....	71
4.7. Antenna Requirements .....	78
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>79</b>
<b>6. TEST LOCATION.....</b>	<b>81</b>
<b>7. TAF CERTIFICATE OF ACCREDITATION .....</b>	<b>82</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT.....</b>	<b>A1 ~ A36</b>
<b>APPENDIX B. TEST PHOTOS.....</b>	<b>B1 ~ B5</b>
<b>APPENDIX C. MPE REPORT .....</b>	<b>C1 ~ C3</b>






## 1. CERTIFICATE OF COMPLIANCE

Product Name : Dual Mode 2.4GHz/5GHz Access Point  
Brand Name : Trapeze  
Model Name : 430  
Applicant : Trapeze Networks, Inc.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Feb. 01, 2008 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

  
Wayne Hsu

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	7.20 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	5.59 dB
4.3	15.247(e)	Power Spectral Density	Complies	4.92 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.44 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.72 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From POE
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11b/g: 11 ; 11a: 5
Channel Band Width (99%)	11b: 15.28 MHz ; 11g: 16.48 MHz ; 11a: 16.36 MHz
Conducted Output Power	11b: 24.41 dBm ; 11g: 23.51 dBm ; 11a: 23.12 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

#### Antenna & Band width

Antenna	Three (TX)	
Band width Mode	20 MHz	40 MHz
802.11b	V	X
802.11g	V	X
802.11a	V	X

#### 3.2. Accessories

N/A


### 3.3. Table for Filed Antenna

#### For 2.4GHz Band

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
B1	WNC	MP-432	PCB Antenna	UFL	4.38	TX / RX Ant.
B2	WNC	MP-432	PCB Antenna	UFL	4.38	TX / RX Ant.
B3	WNC	MP-432	PCB Antenna	UFL	4.38	TX / RX Ant.

#### For 5GHz Band

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
A1	WNC	MP-432	PCB Antenna	UFL	3.75	TX / RX Ant.
A2	WNC	MP-432	PCB Antenna	UFL	3.75	TX / RX Ant.
A3	WNC	MP-432	PCB Antenna	UFL	3.75	TX / RX Ant.

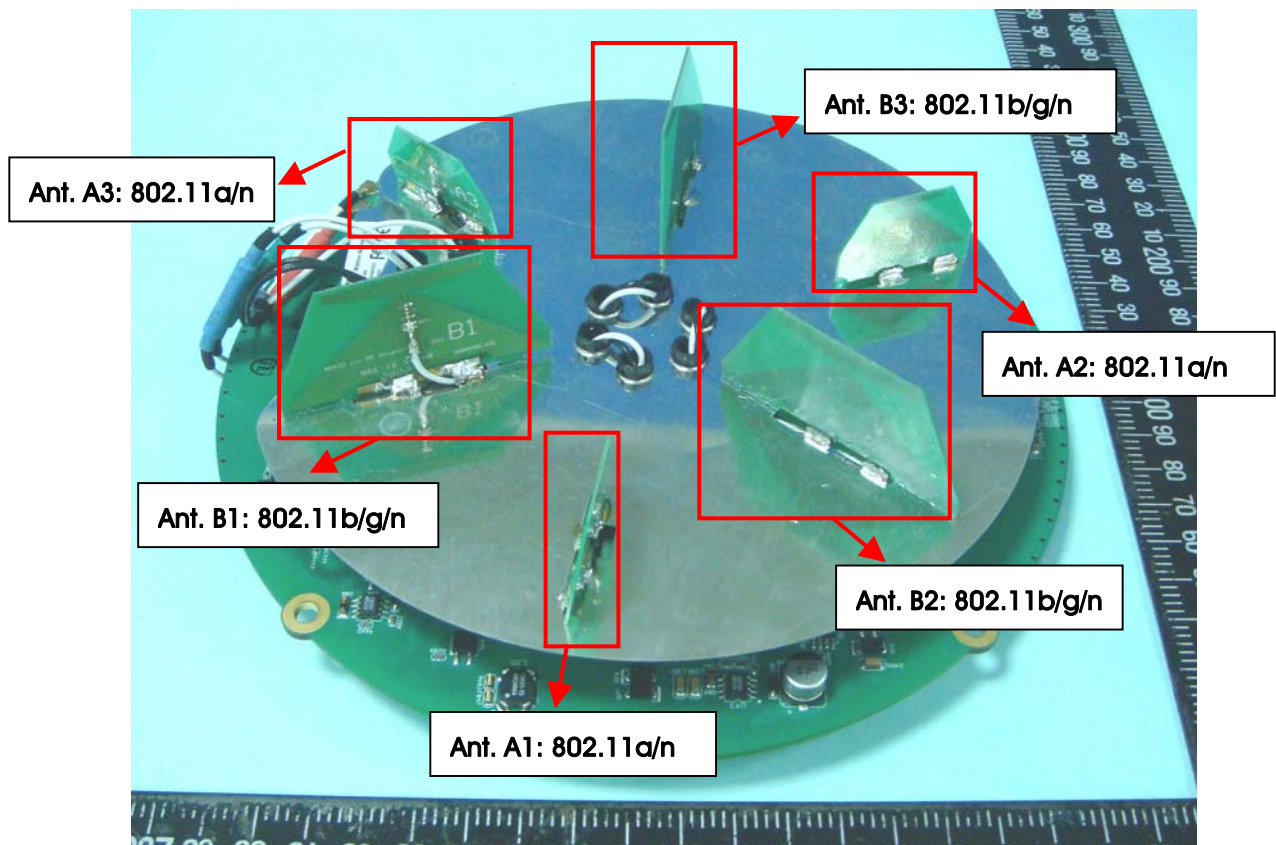

### 3.4. Table for Carrier Frequencies

#### Frequency Allocation for 802.11b/g

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

#### Frequency Allocation for 802.11a

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz	149	5745 MHz	161	5805 MHz
	153	5765 MHz	165	5825 MHz
	157	5785 MHz		



### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	Auto	-	-
Maximum Peak Conducted Output Power	11b/BPSK	1 Mbps	1/6/11	B1, B2, B3, B1+B2+B3
	11g/BPSK	6 Mbps	1/6/11	B1, B2, B3, B1+B2+B3
	11a/BPSK	6 Mbps	149/157/165	A1, A2, A3, A1+A2+A3
Power Spectral Density 6dB Spectrum Bandwidth	11b/BPSK	1 Mbps	1/6/11	B1+B2+B3
	11g/BPSK	6 Mbps	1/6/11	B1+B2+B3
	11a/BPSK	6 Mbps	149/157/165	A1+A2+A3
Radiated Emissions 9kHz~1GHz	Normal Link	Auto	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	11b/BPSK	1 Mbps	1/6/11	B1+B2+B3
	11g/BPSK	6 Mbps	1/6/11	B1+B2+B3
	11a/BPSK	6 Mbps	149/157/165	A1+A2+A3
Band Edge Emissions	11b/BPSK	1 Mbps	1/11	B1+B2+B3
	11g/BPSK	6 Mbps	1/11	B1+B2+B3
	11a/BPSK	6 Mbps	149/157/165	A1+A2+A3

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D520	E2KWM3945ABG
Notebook	DELL	D400	E2K24GBRL
SMARTBIT	TRAPEZE	MX200R	DOC
POE	PHIHONG	POE30U-560(G)-VC-R	DOC

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11b/g Ant. B1 +Ant. B2+Ant. B3

Test Software Version	ART		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	18	19	18
IEEE 802.11g	14	18	14

#### Power Parameters of IEEE 802.11a Ant. A1 +Ant. A2+Ant. A3

Test Software Version	ART		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	18	18	18

During the test, the following programs under WIN XP were executed:


Executed "HyperTerminal" to control the EUT continuously transmit RF signal.

Executed "ping.exe" to link with the remote workstation to receive and transmit signal by LAN and WLAN.


### 3.9. Test Configurations

#### 3.9.1. Radiation Emissions Test Configuration


Test Configuration: 9KHz~1GHz

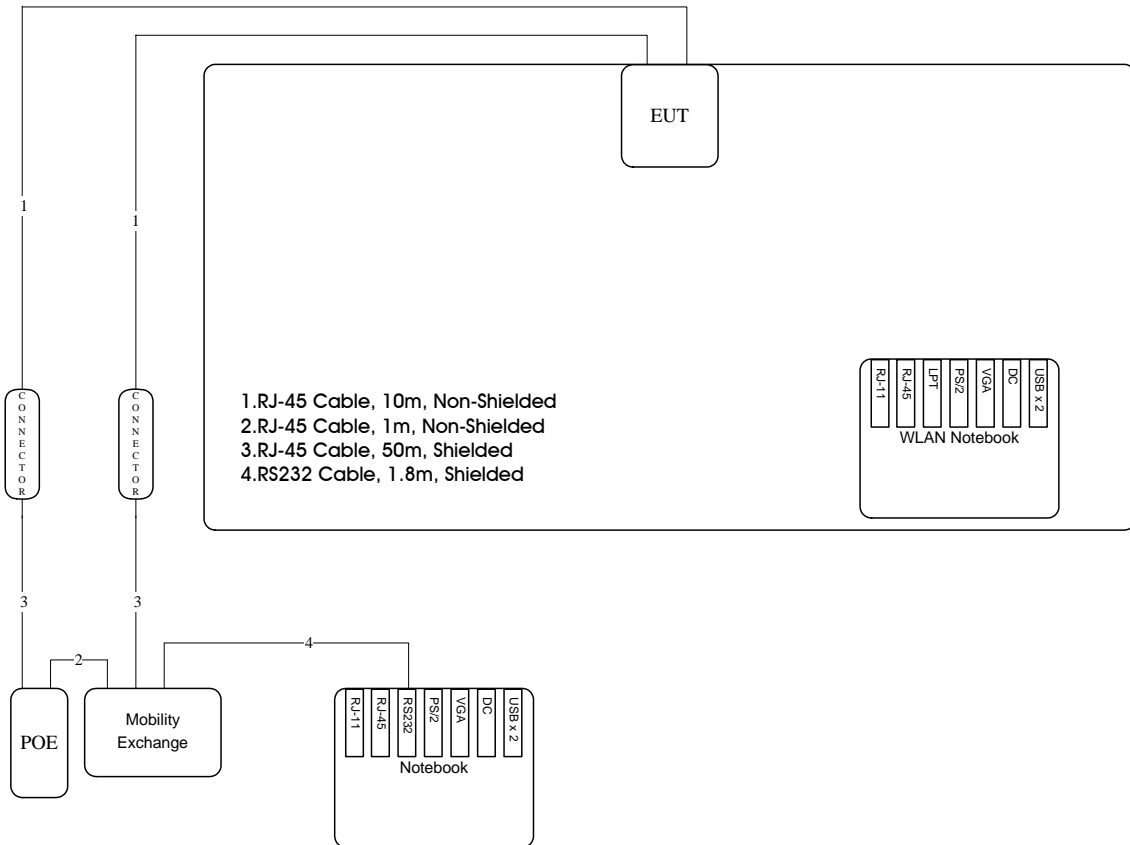

Test Configuration: above 1GHz

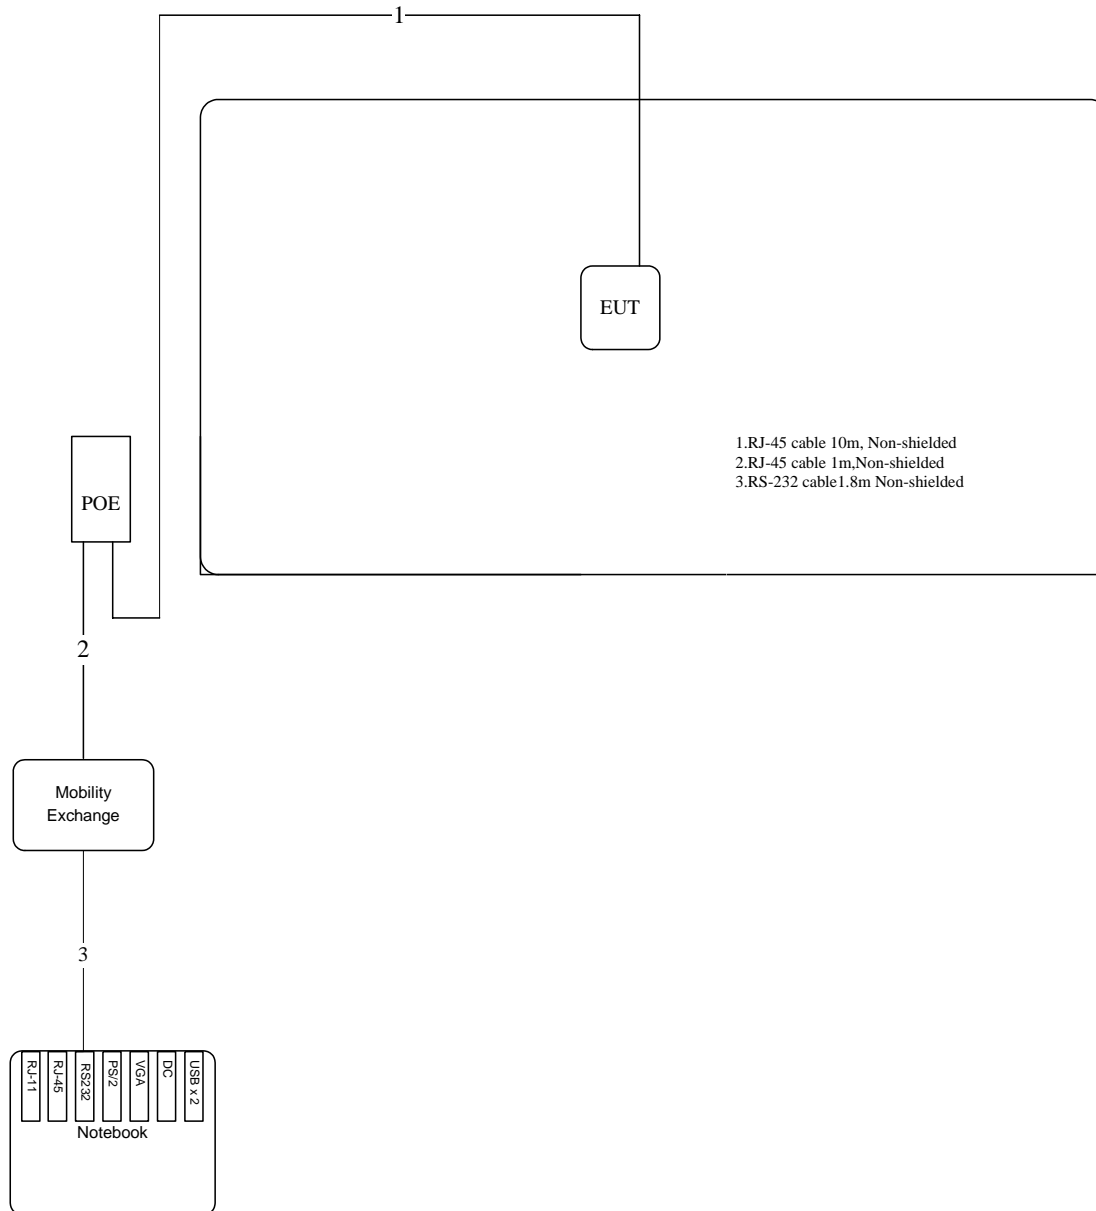

### 3.9.2. AC Power Line Conduction Emissions Test Configuration

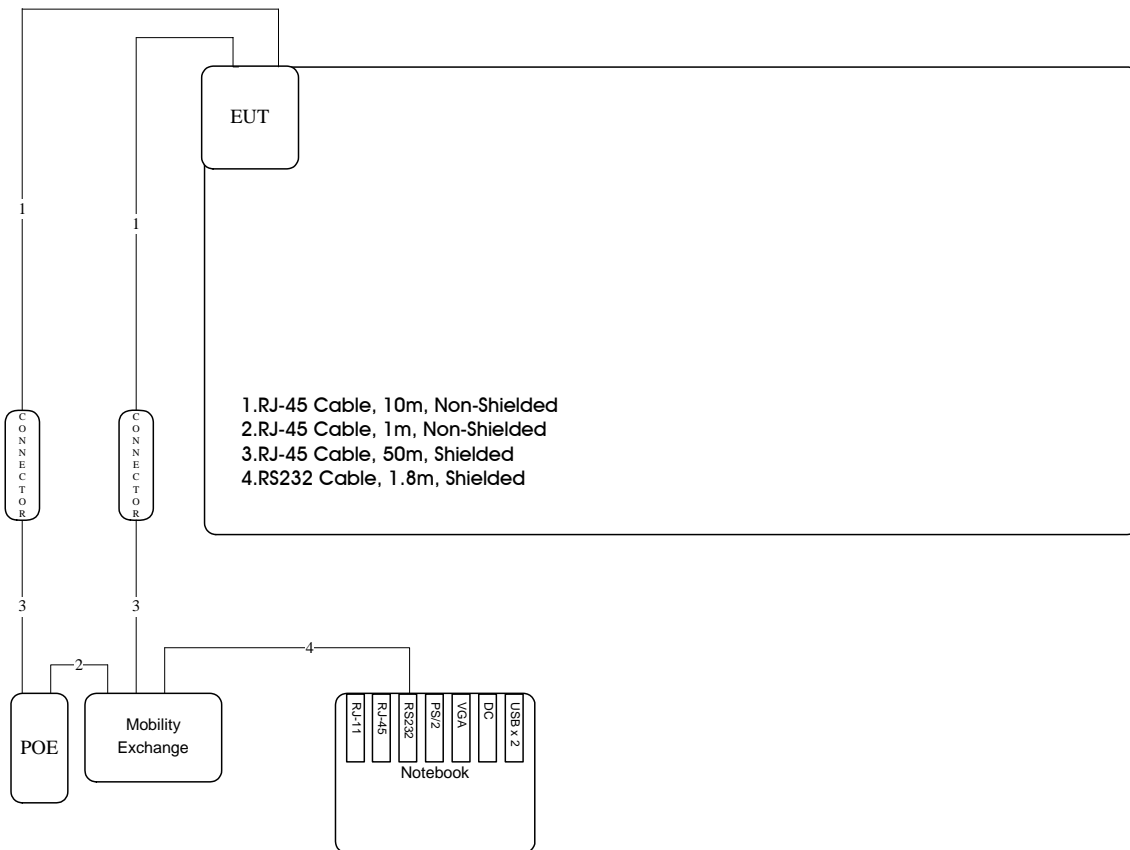

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

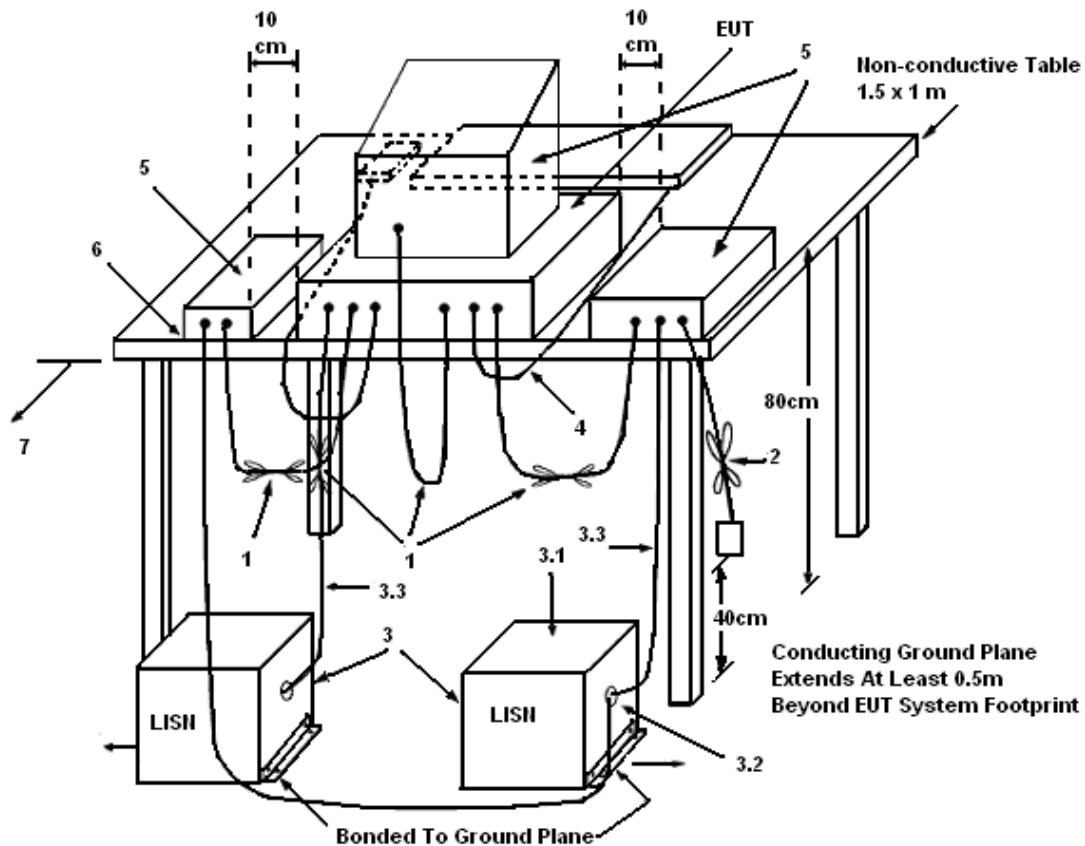

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50 \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

4.1.7. Results of AC Power Line Conducted Emissions Measurement


Temperature	23°C	Humidity	54%
Test Engineer	Rex Chiu	Phase	Line
Configuration	Normal Link		

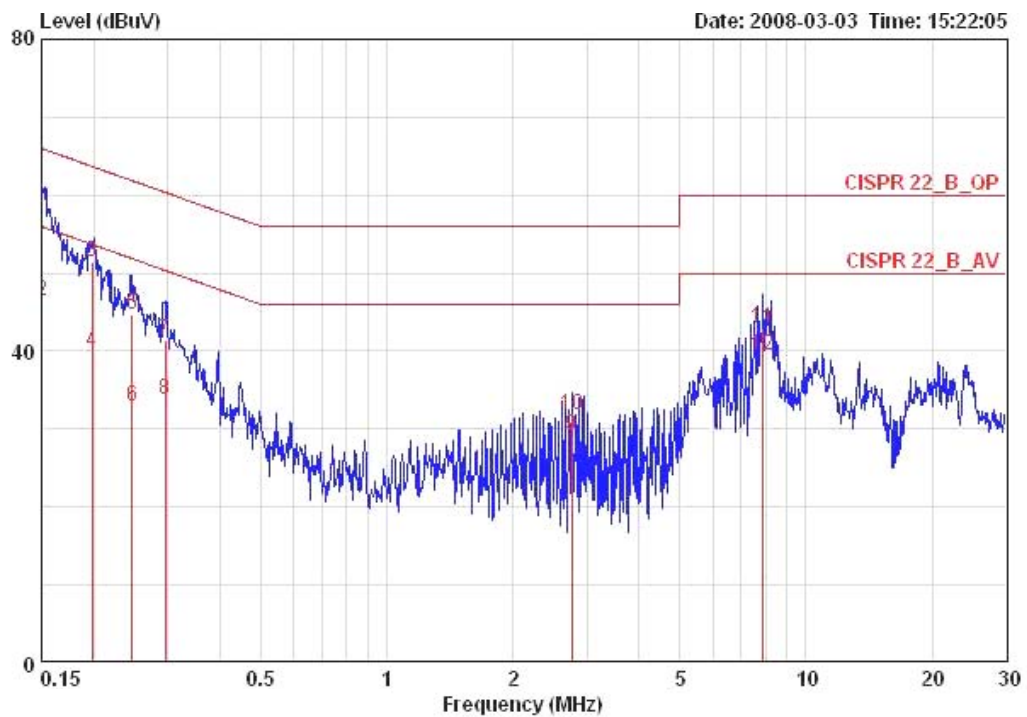

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15000	58.42	-7.58	66.00	58.02	0.20	0.20	QP	LINE
2	0.15000	46.52	-9.48	56.00	46.12	0.20	0.20	AVERAGE	LINE
3	0.19769	51.35	-12.36	63.71	51.05	0.10	0.20	QP	LINE
4	0.19769	39.93	-13.78	53.71	39.63	0.10	0.20	AVERAGE	LINE
5	0.24652	44.73	-17.14	61.87	44.43	0.10	0.20	QP	LINE
6	0.24652	33.02	-18.85	51.87	32.72	0.10	0.20	AVERAGE	LINE
7	0.29615	41.44	-18.91	60.35	41.14	0.10	0.20	QP	LINE
8	0.29615	33.88	-16.47	50.35	33.58	0.10	0.20	AVERAGE	LINE
9	2.765	29.17	-16.83	46.00	28.97	0.00	0.20	AVERAGE	LINE
10	2.765	31.85	-24.15	56.00	31.65	0.00	0.20	QP	LINE
11	7.899	42.90	-17.10	60.00	42.43	0.07	0.40	QP	LINE
12	7.899	39.37	-10.63	50.00	38.90	0.07	0.40	AVERAGE	LINE



Temperature	23°C	Humidity	54%
Test Engineer	Rex Chiu	Phase	Neutral
Configuration	Normal Link		

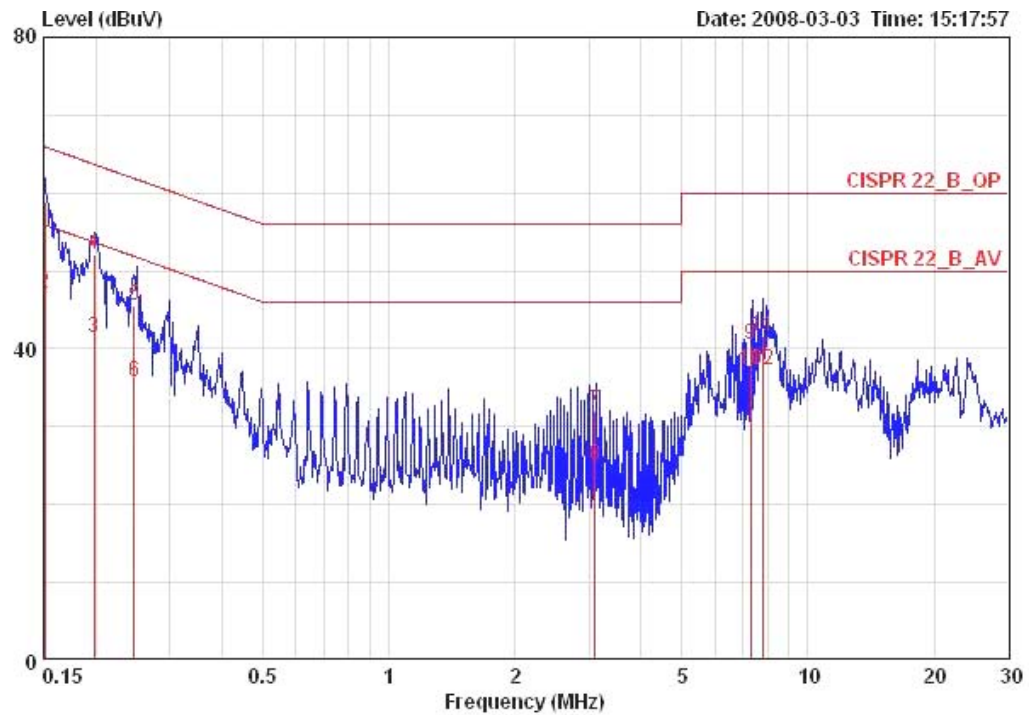

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15080	58.76	-7.20	65.96	58.26	0.30	0.20	QP	NEUTRAL
2	0.15080	47.09	-8.87	55.96	46.59	0.30	0.20	AVERAGE	NEUTRAL
3	0.19783	41.43	-12.27	53.70	41.03	0.20	0.20	AVERAGE	NEUTRAL
4	0.19783	52.18	-11.52	63.70	51.78	0.20	0.20	QP	NEUTRAL
5	0.24718	45.47	-16.38	61.85	45.09	0.18	0.20	QP	NEUTRAL
6	0.24718	35.82	-16.03	51.85	35.44	0.18	0.20	AVERAGE	NEUTRAL
7	3.110	32.14	-23.86	56.00	31.82	0.10	0.22	QP	NEUTRAL
8	3.110	25.02	-20.98	46.00	24.70	0.10	0.22	AVERAGE	NEUTRAL
9	7.307	40.45	-19.55	60.00	39.99	0.10	0.36	QP	NEUTRAL
10	7.307	37.18	-12.82	50.00	36.72	0.10	0.36	AVERAGE	NEUTRAL
11	7.806	41.59	-18.41	60.00	41.09	0.10	0.40	QP	NEUTRAL
12	7.806	37.38	-12.62	50.00	36.88	0.10	0.40	AVERAGE	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	MAX HOLD
Sweep Time	Auto

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

### 4.2.4. Test Setup Layout

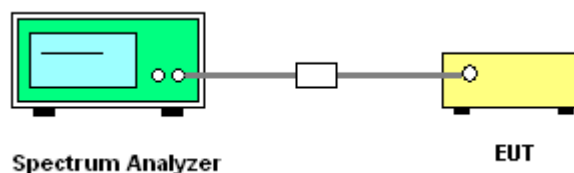

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	802.11b/g

##### Configuration IEEE 802.11b Ant. B1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	18.42	30.00	Complies
6	2437 MHz	18.93	30.00	Complies
11	2462 MHz	18.23	30.00	Complies

##### Configuration IEEE 802.11b Ant. B2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.20	30.00	Complies
6	2437 MHz	20.17	30.00	Complies
11	2462 MHz	19.32	30.00	Complies

##### Configuration IEEE 802.11b Ant. B3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.05	30.00	Complies
6	2437 MHz	19.73	30.00	Complies
11	2462 MHz	18.93	30.00	Complies

##### Configuration IEEE 802.11b Ant. B1 +Ant. B2+Ant. B3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	23.67	30.00	Complies
6	2437 MHz	24.41	30.00	Complies
11	2462 MHz	23.62	30.00	Complies

**Configuration IEEE 802.11g Ant. B1**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	14.97	30.00	Complies
6	2437 MHz	18.07	30.00	Complies
11	2462 MHz	14.52	30.00	Complies

**Configuration IEEE 802.11g Ant. B2**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	15.35	30.00	Complies
6	2437 MHz	19.39	30.00	Complies
11	2462 MHz	15.21	30.00	Complies

**Configuration IEEE 802.11g Ant. B3**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	15.29	30.00	Complies
6	2437 MHz	18.67	30.00	Complies
11	2462 MHz	15.06	30.00	Complies

**Configuration IEEE 802.11g Ant. B1 +Ant. B2+Ant. B3**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.98	30.00	Complies
6	2437 MHz	23.51	30.00	Complies
11	2462 MHz	19.71	30.00	Complies

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	802.11a

**Configuration IEEE 802.11a Ant. A1**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	18.06	29.08	Complies
157	5875 MHz	17.93	29.08	Complies
165	5825 MHz	17.81	29.08	Complies

**Configuration IEEE 802.11a Ant. A2**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	18.76	29.08	Complies
157	5875 MHz	18.84	29.08	Complies
165	5825 MHz	18.95	29.08	Complies


**Configuration IEEE 802.11a Ant. A3**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	18.20	29.08	Complies
157	5875 MHz	18.05	29.08	Complies
165	5825 MHz	17.63	29.08	Complies

**Configuration IEEE 802.11a Ant. A1+Ant. A2+Ant. A3**


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	23.12	29.08	Complies
157	5875 MHz	23.06	29.08	Complies
165	5825 MHz	22.94	29.08	Complies

### Conducted Output Power Plot on Configuration IEEE 802.11b Ant. B1 / 2412 MHz

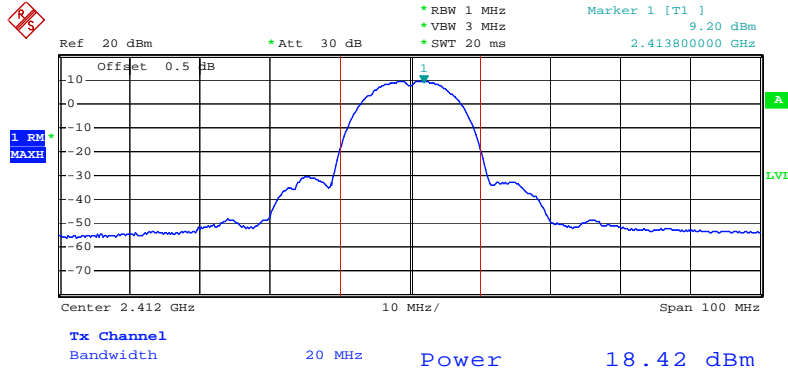


Date: 13.FEB.2008 07:25:26

### Conducted Output Power Plot on Configuration IEEE 802.11b Ant. B2 / 2412 MHz

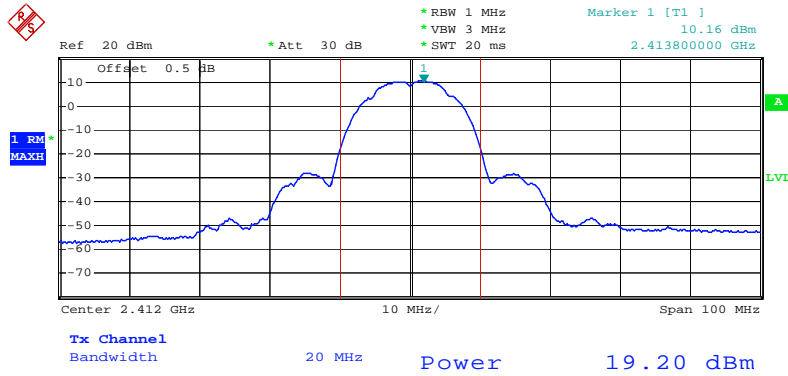


Date: 13.FEB.2008 07:26:04

**Conducted Output Power Plot on Configuration IEEE 802.11b Ant. B3/ 2412 MHz**

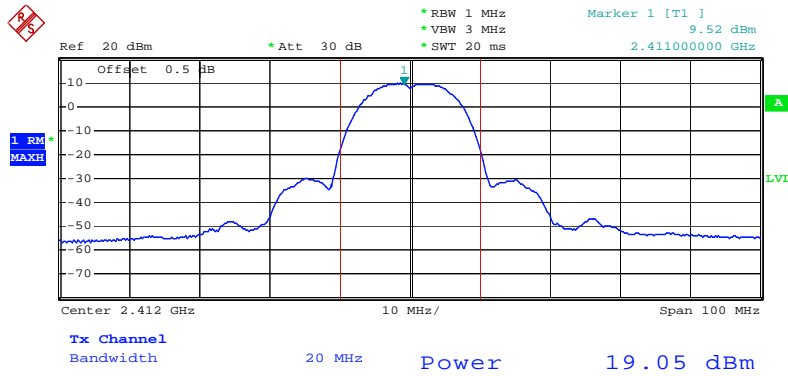


Date: 13.FEB.2008 07:26:39

**Conducted Output Power Plot on Configuration IEEE 802.11b Ant. B1/ 2437 MHz**

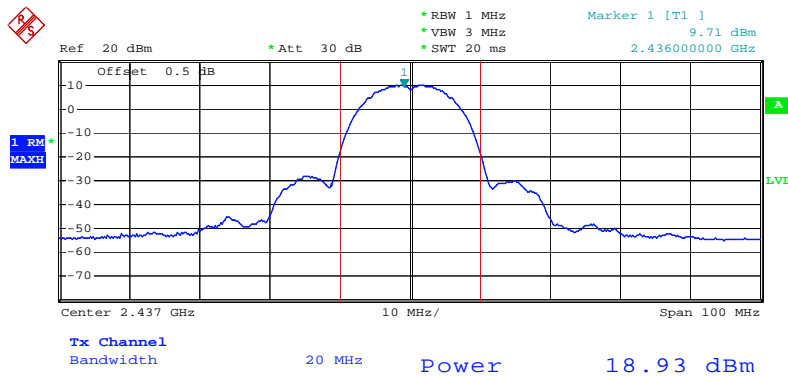


Date: 13.FEB.2008 07:27:56

### Conducted Output Power Plot on Configuration IEEE 802.11b Ant. B2/ 2437 MHz

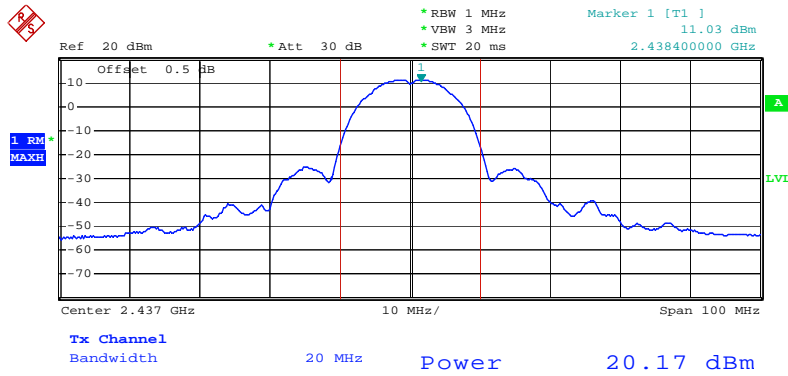

Date: 13.FEB.2008 07:27:34


### Conducted Output Power Plot on Configuration IEEE 802.11b Ant. B3/ 2437 MHz

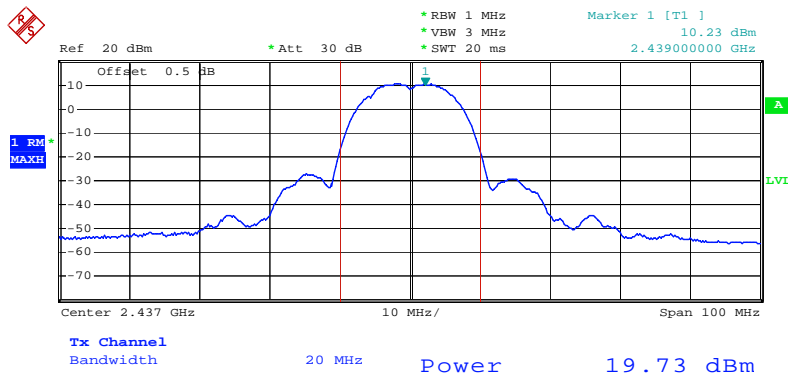

Date: 13.FEB.2008 07:27:18




### Conducted Output Power Plot on Configuration IEEE 802.11b Ant. B1/ 2462 MHz

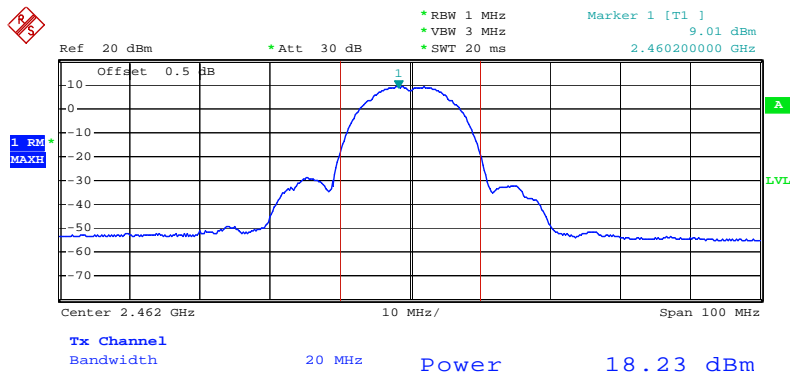


Date: 13.FEB.2008 07:28:36

### Conducted Output Power Plot on Configuration IEEE 802.11b Ant. B2/ 2462 MHz

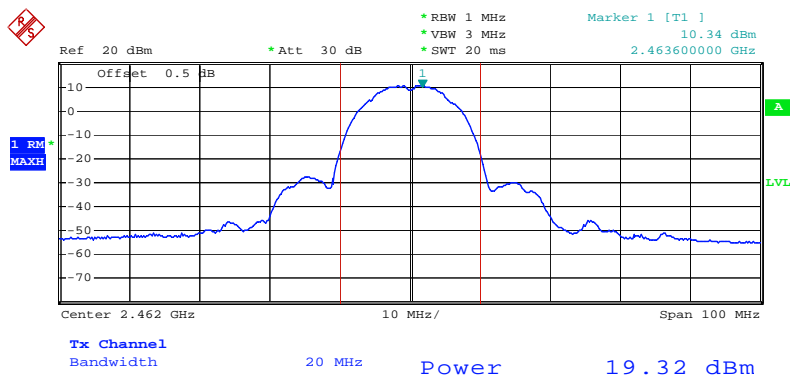


Date: 13.FEB.2008 07:28:51

**Conducted Output Power Plot on Configuration IEEE 802.11b Ant. B3/ 2462 MHz**

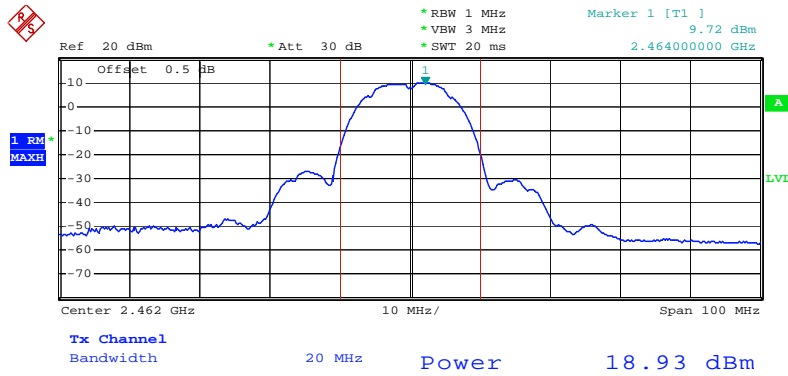


Date: 13.FEB.2008 07:29:08

**Conducted Output Power Plot on Configuration IEEE 802.11g Ant. B1/ 2412 MHz**

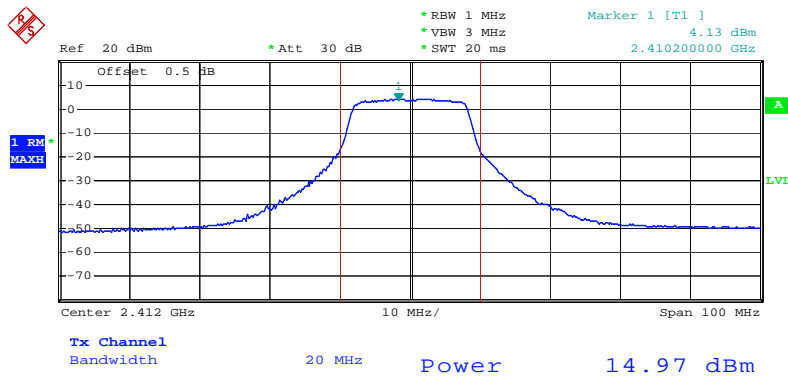


Date: 13.FEB.2008 07:31:10

### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. B2/ 2412 MHz

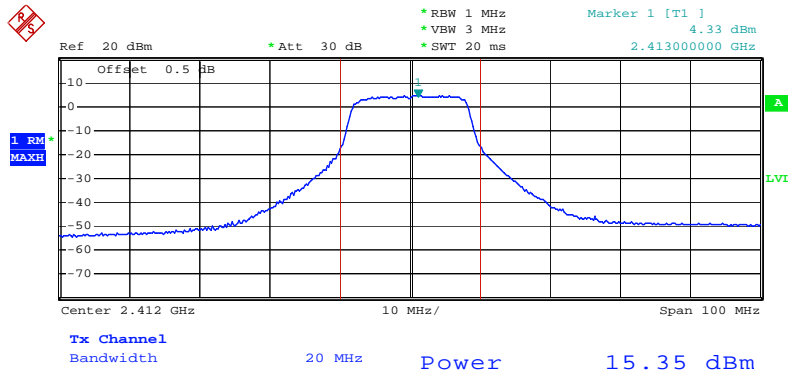


Date: 13.FEB.2008 07:30:40

### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. B3/ 2412 MHz

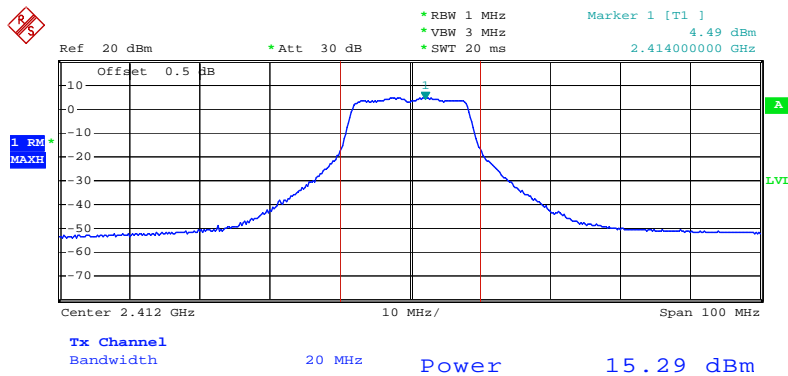


Date: 13.FEB.2008 07:30:09

### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. B1/ 2437 MHz

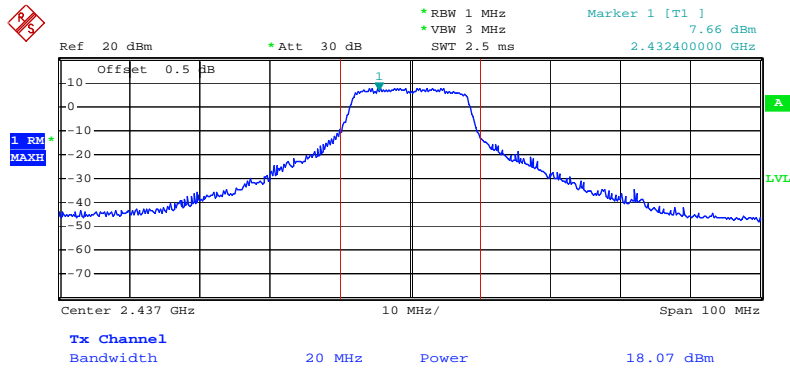


Date: 21.FEB.2008 09:08:13

### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. B2/ 2437 MHz

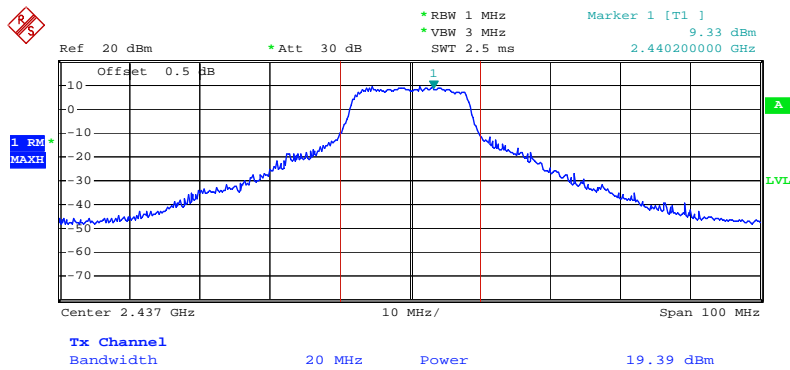


Date: 21.FEB.2008 09:09:00

**Conducted Output Power Plot on Configuration IEEE 802.11g Ant. B3/ 2437 MHz**

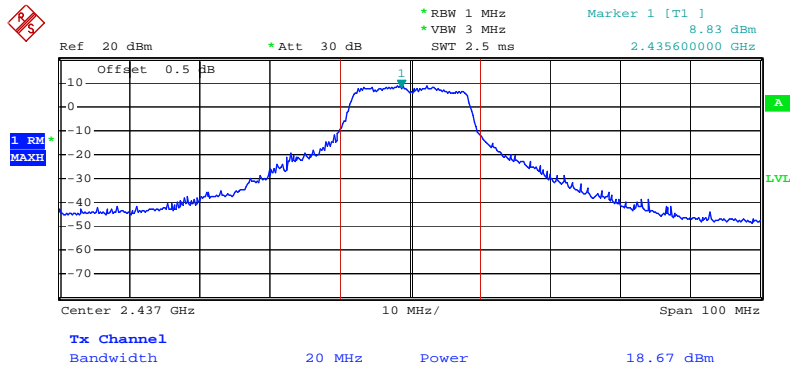


Date: 21.FEB.2008 09:09:18

**Conducted Output Power Plot on Configuration IEEE 802.11g Ant. B1/ 2462 MHz**

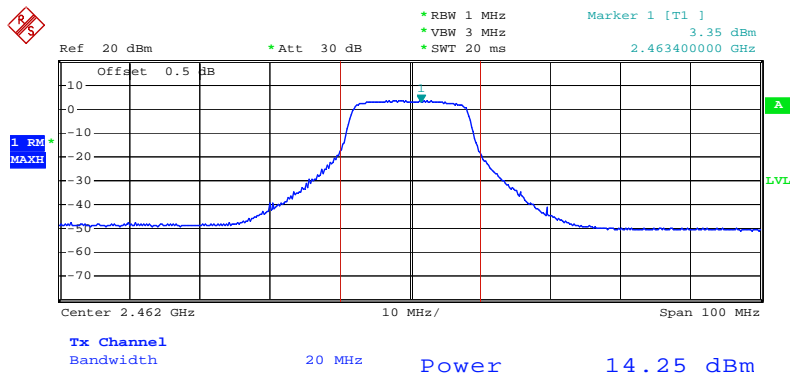


Date: 13.FEB.2008 07:33:18

### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. B2/ 2462 MHz

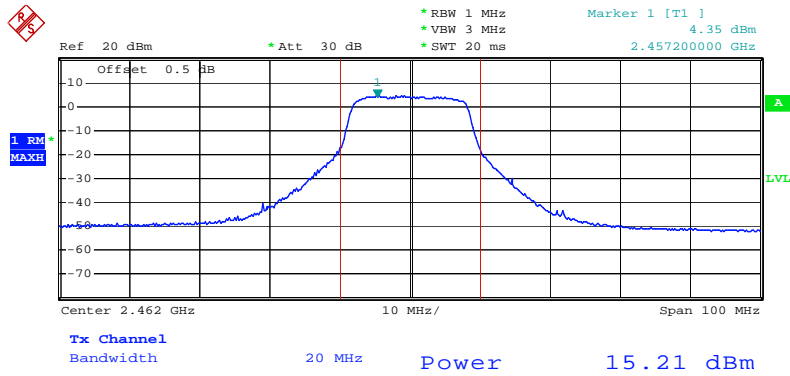


Date: 13.FEB.2008 07:33:00

### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. B3/ 2462 MHz

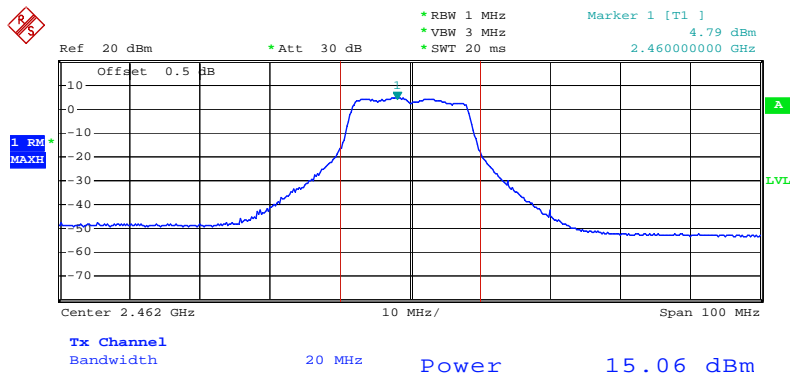


Date: 13.FEB.2008 07:32:44

**Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A1/ 5745 MHz**

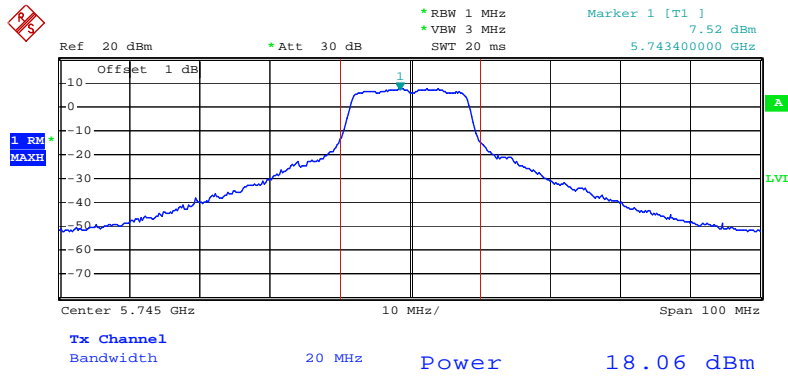


Date: 13.FEB.2008 08:55:48

**Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A2/ 5745 MHz**

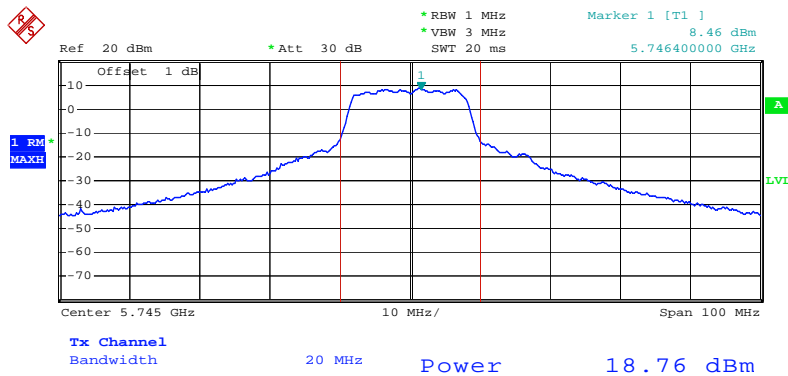


Date: 13.FEB.2008 08:56:12

### Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A3/ 5745 MHz

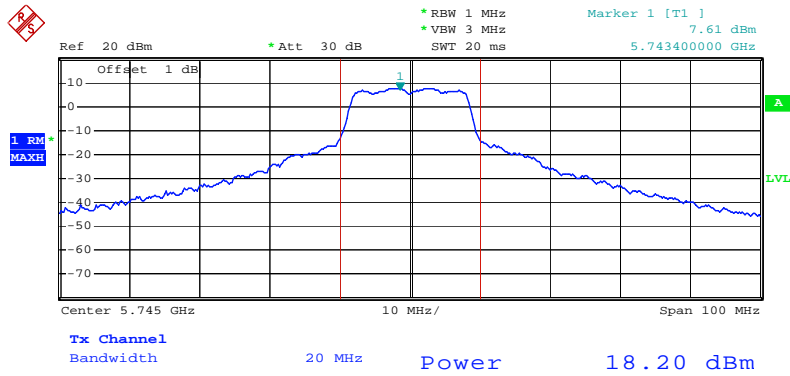

Date: 13.FEB.2008 08:56:35


### Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A1/ 5785 MHz

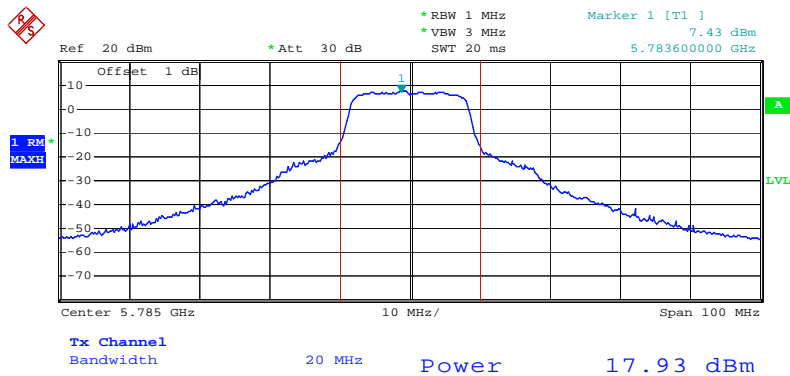

Date: 13.FEB.2008 08:57:59




### Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A2/ 5785 MHz

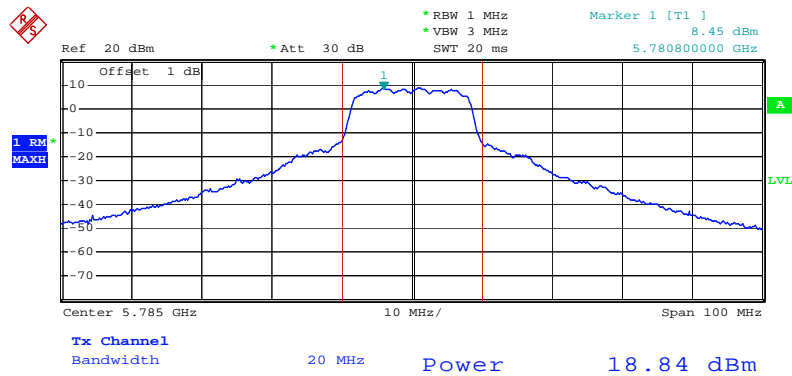


Date: 13.FEB.2008 08:57:40

### Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A3/ 5785 MHz

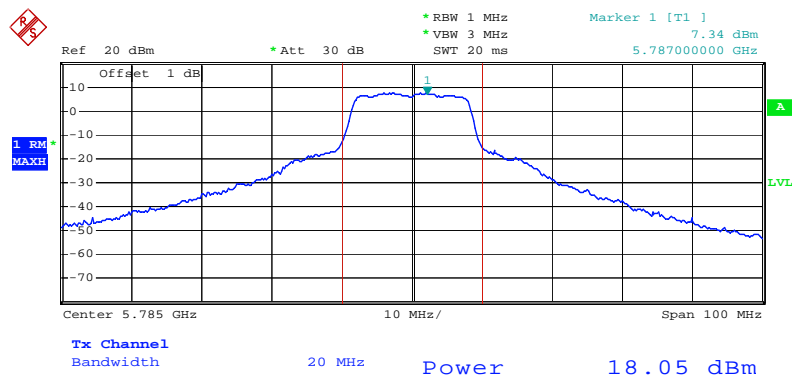


Date: 13.FEB.2008 08:57:20

### Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A1/ 5825 MHz

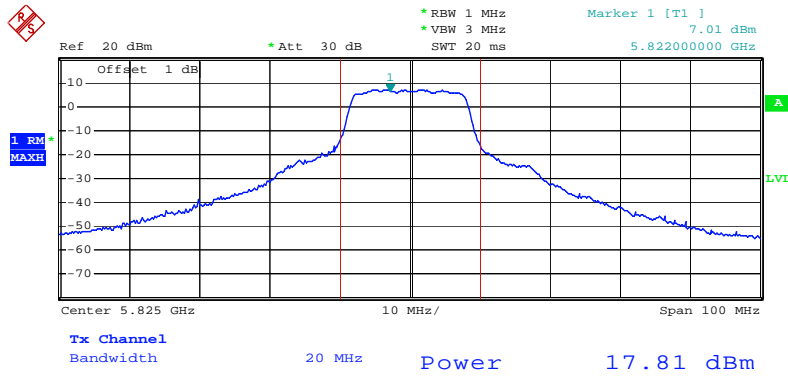


Date: 13.FEB.2008 08:58:27

### Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A2/ 5825 MHz

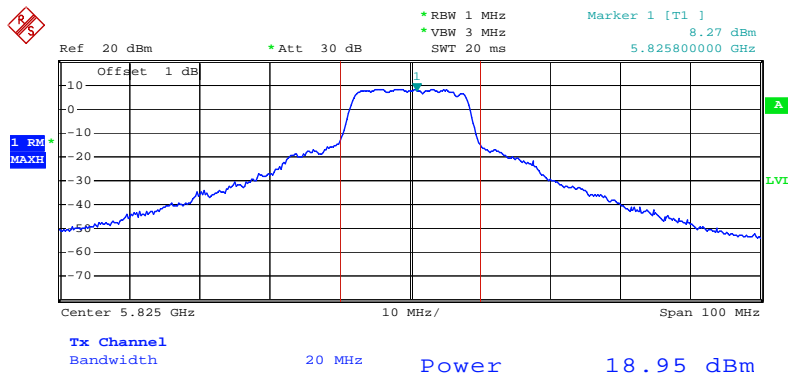

Date: 13.FEB.2008 08:58:43

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A3/ 5825 MHz

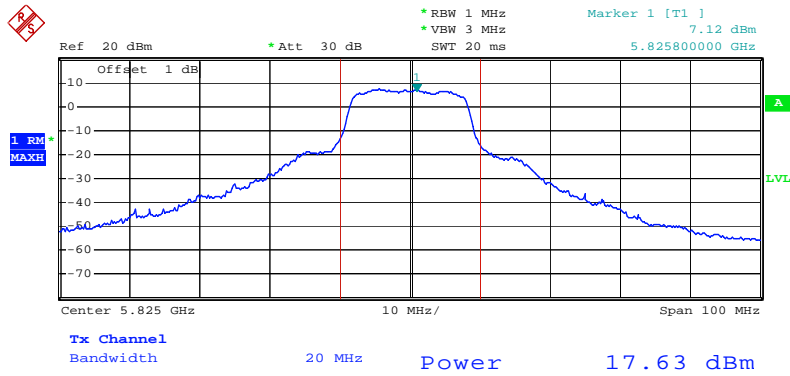

Date: 13.FEB.2008 08:58:59

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

#### 4.3.4. Test Setup Layout

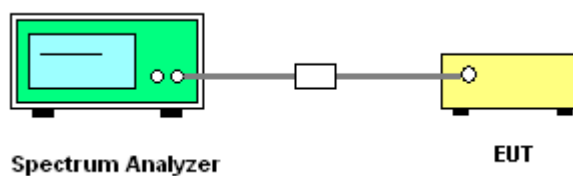

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	802.11a/b/g

##### Configuration IEEE 802.11b Ant. B1+Ant. B2+Ant. B3

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	3.17	8.00	Complies
6	2437 MHz	1.70	8.00	Complies
11	2462 MHz	1.06	8.00	Complies


##### Configuration IEEE 802.11g Ant. B1+Ant. B2+Ant. B3

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-0.67	8.00	Complies
6	2437 MHz	3.10	8.00	Complies
11	2462 MHz	-1.92	8.00	Complies

##### Configuration IEEE 802.11a Ant. A1+Ant. A2+Ant. A3


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	-11.49	8.00	Complies
157	5785 MHz	-6.28	8.00	Complies
165	5825 MHz	-8.63	8.00	Complies

**Power Density Plot on Configuration IEEE 802.11b Ant. B1 +Ant. B2+Ant. B3/ 2412 MHz**

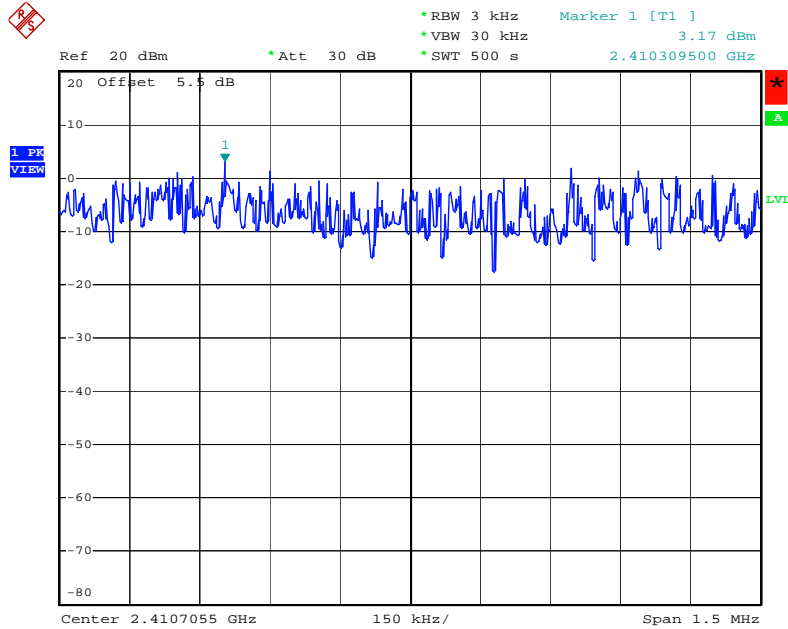


Date: 13.FEB.2008 08:06:00

**Power Density Plot on Configuration IEEE 802.11b Ant. B1 +Ant. B2+Ant. B3 / 2437 MHz**

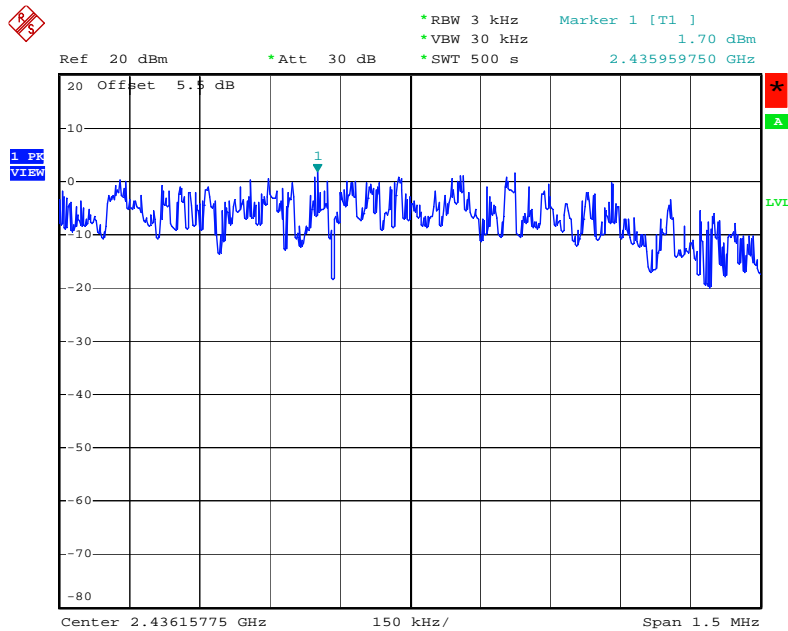


Date: 13.FEB.2008 08:05:07

**Power Density Plot on Configuration IEEE 802.11b Ant. B1 +Ant. B2+Ant. B3 / 2462 MHz**

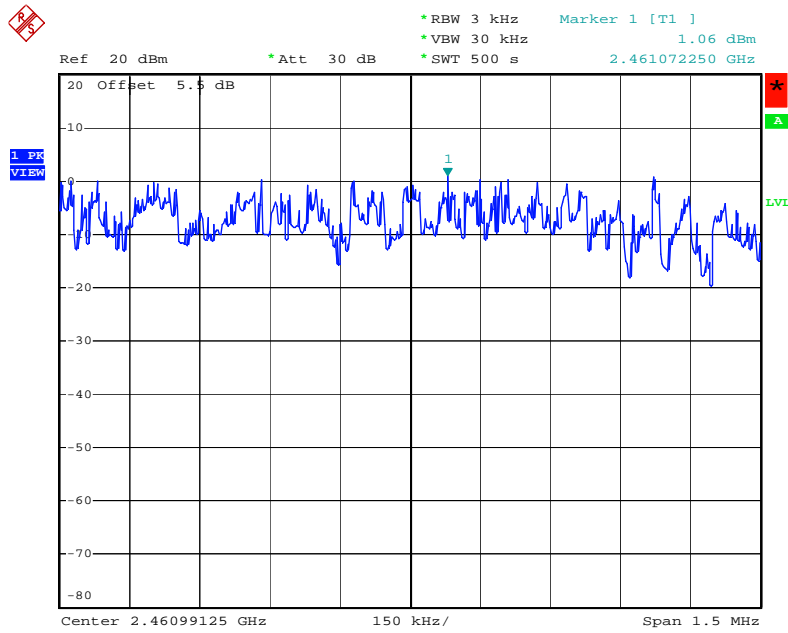


Date: 13.FEB.2008 08:03:45

**Power Density Plot on Configuration IEEE 802.11g Ant. B1 +Ant. B2+Ant. B3 / 2412 MHz**

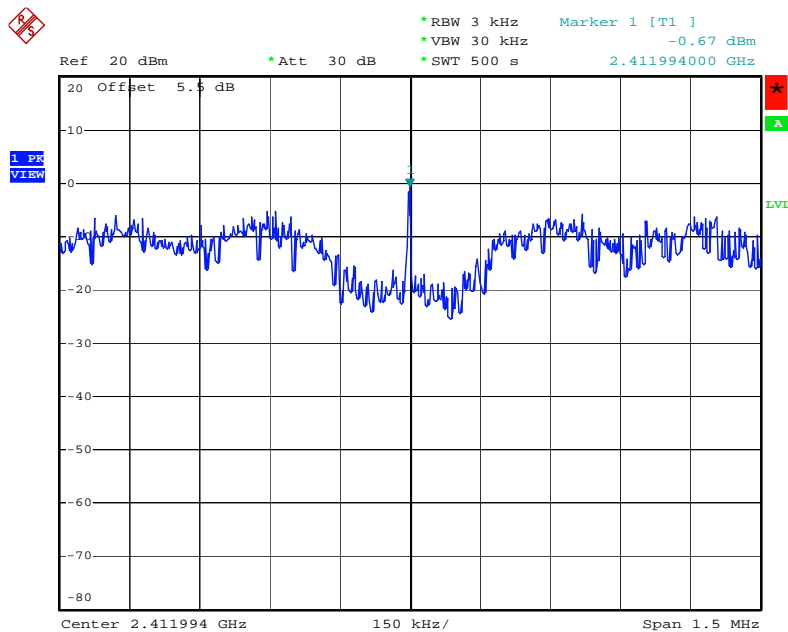


Date: 13.FEB.2008 10:37:59

**Power Density Plot on Configuration IEEE 802.11g Ant. B1+Ant. B2+Ant. B3 / 2437 MHz**

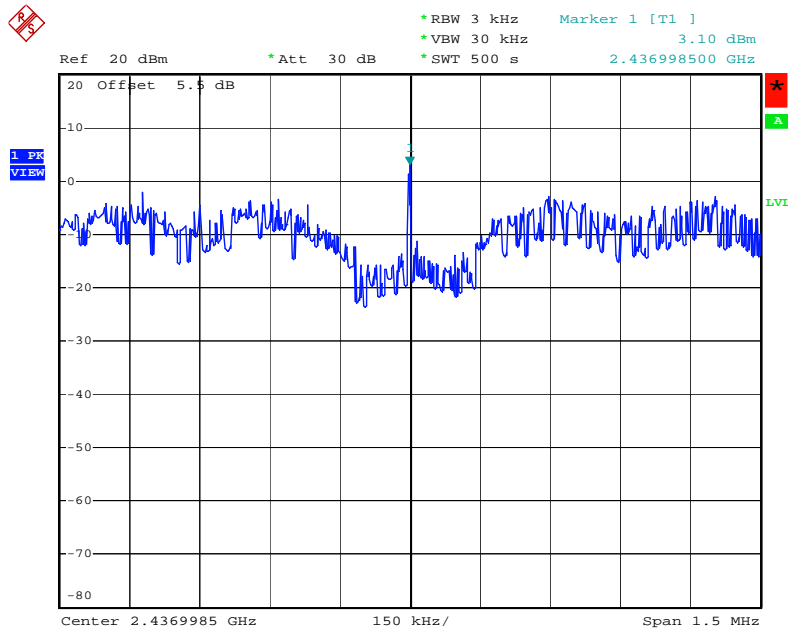

Date: 21.FEB.2008 10:08:26


**Power Density Plot on Configuration IEEE 802.11g Ant. B1+Ant. B2+Ant. B3 / 2462 MHz**

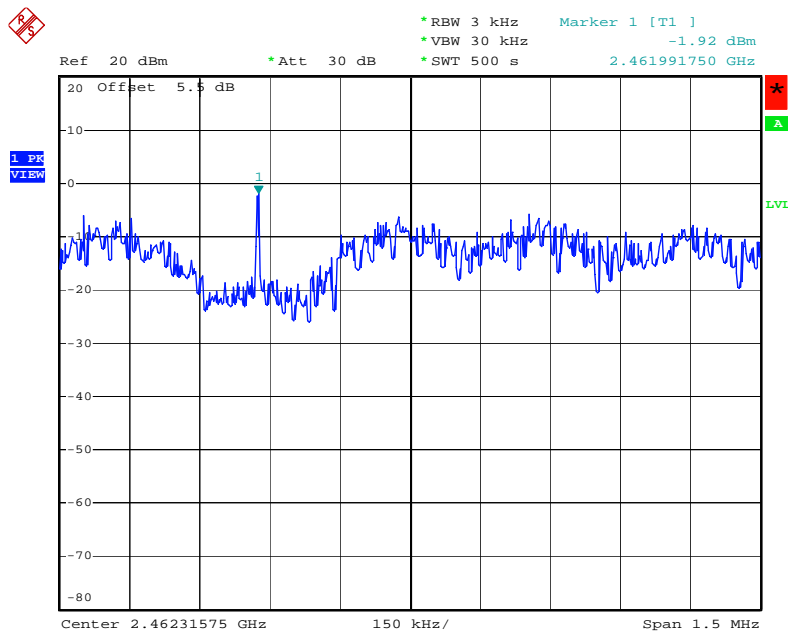

Date: 13.FEB.2008 10:39:44




**Power Density Plot on Configuration IEEE 802.11a Ant. A1+Ant. A2+Ant. A3 / 5745 MHz**

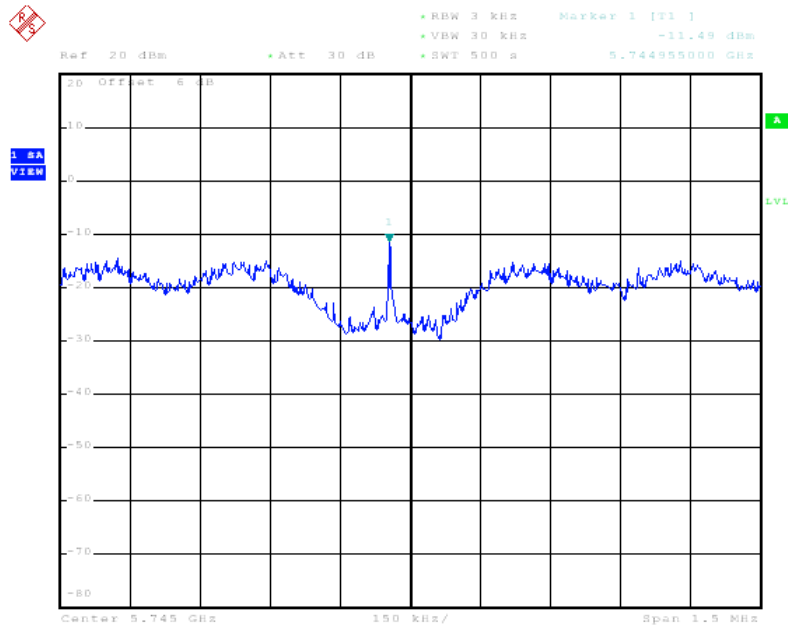


Date: 13.FEB.2008 11:17:49

**Power Density Plot on Configuration IEEE 802.11a Ant. A1+Ant. A2+Ant. A3 / 5785 MHz**

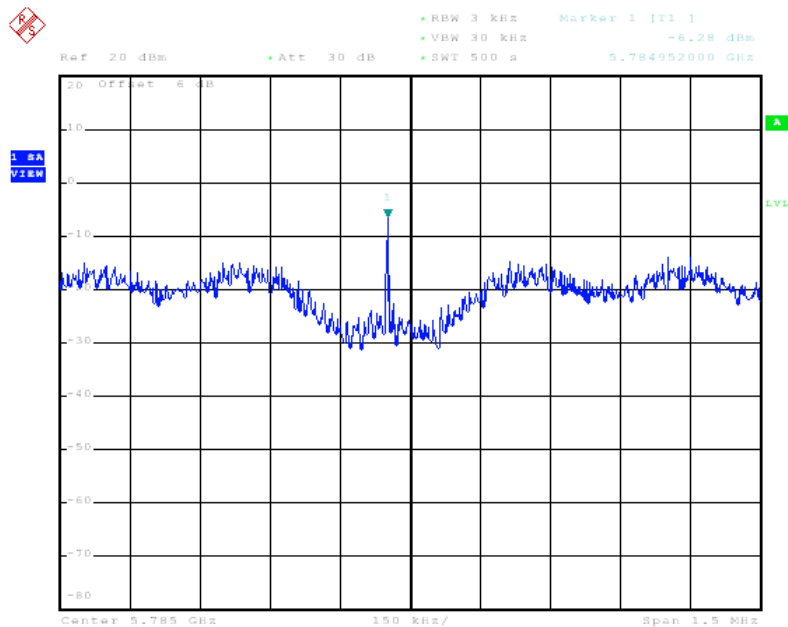

Date: 13.FEB.2008 10:04:17

Power Density Plot on Configuration IEEE 802.11a Ant. A1 +Ant. A2+Ant. A3 / 5825 MHz

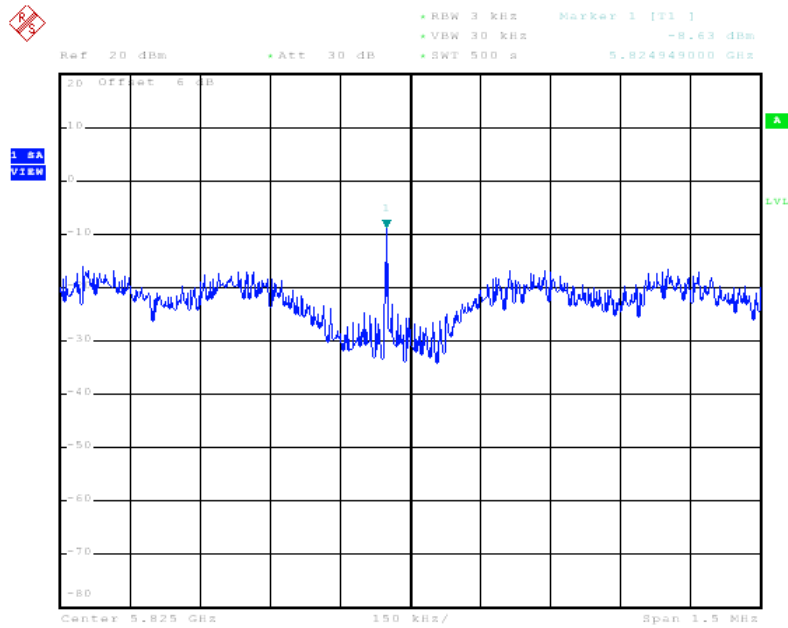

Date: 13.FEB.2008 10:08:56

## 4.4. 6dB Spectrum Bandwidth Measurement

### 4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.
4. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

### 4.4.4. Test Setup Layout

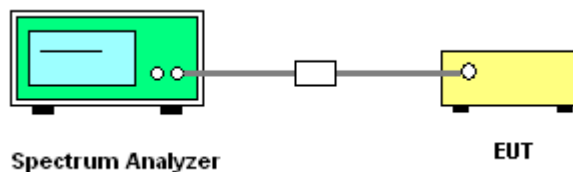

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	802.11a/b/g

##### Configuration IEEE 802.11b Ant. B1 +Ant. B2+Ant. B3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	12.04	15.32	500	Complies
6	2437 MHz	11.32	15.28	500	Complies
11	2462 MHz	11.12	15.28	500	Complies


##### Configuration IEEE 802.11g Ant. B1 +Ant. B2+Ant. B3

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.44	16.48	500	Complies
6	2437 MHz	16.36	16.44	500	Complies
11	2462 MHz	16.36	16.48	500	Complies

##### Configuration IEEE 802.11a Ant. A1 +Ant. A2+Ant. A3


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	15.44	16.36	500	Complies
157	5785 MHz	15.32	16.36	500	Complies
165	5825 MHz	13.12	16.36	500	Complies

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. B1+Ant. B2+Ant. B3/ 2412 MHz

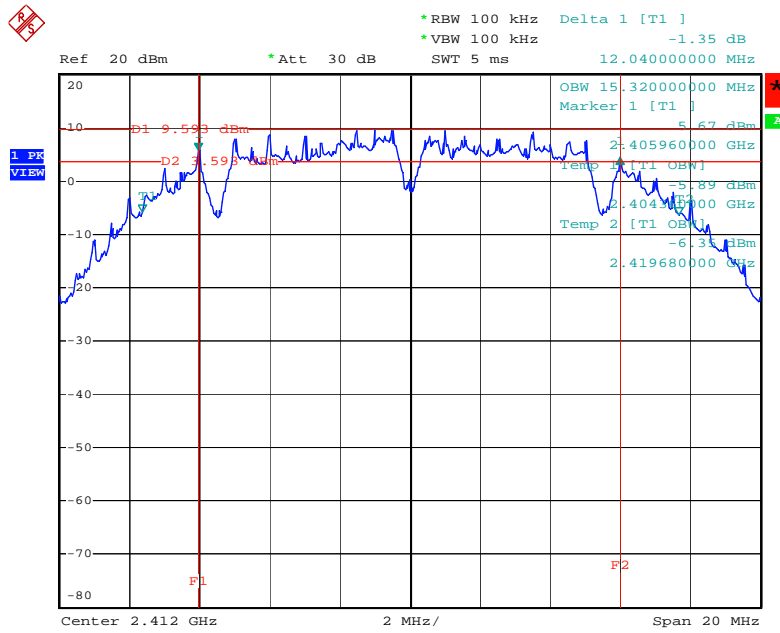


Date: 13.FEB.2008 08:05:34

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. B1+Ant. B2+Ant. B3/ 2437 MHz

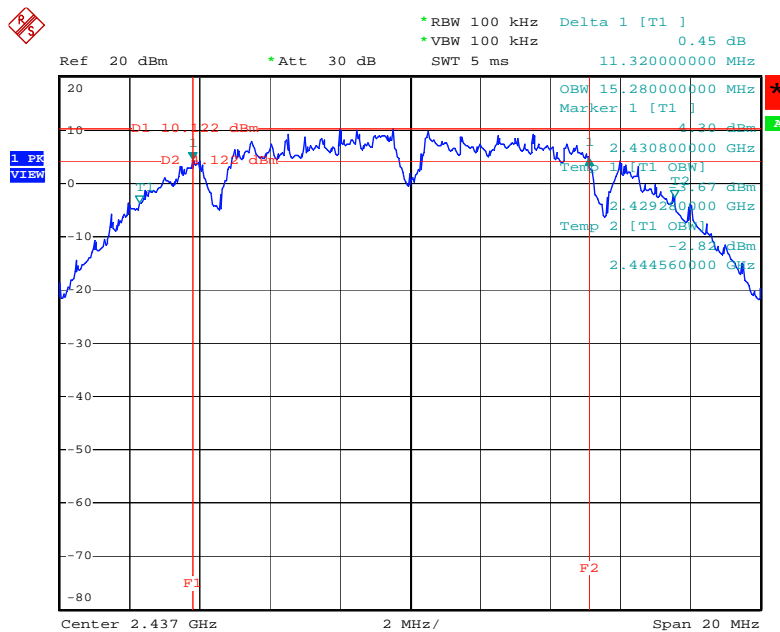


Date: 13.FEB.2008 08:04:51

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. B1+Ant. B2+Ant. B3 / 2462 MHz

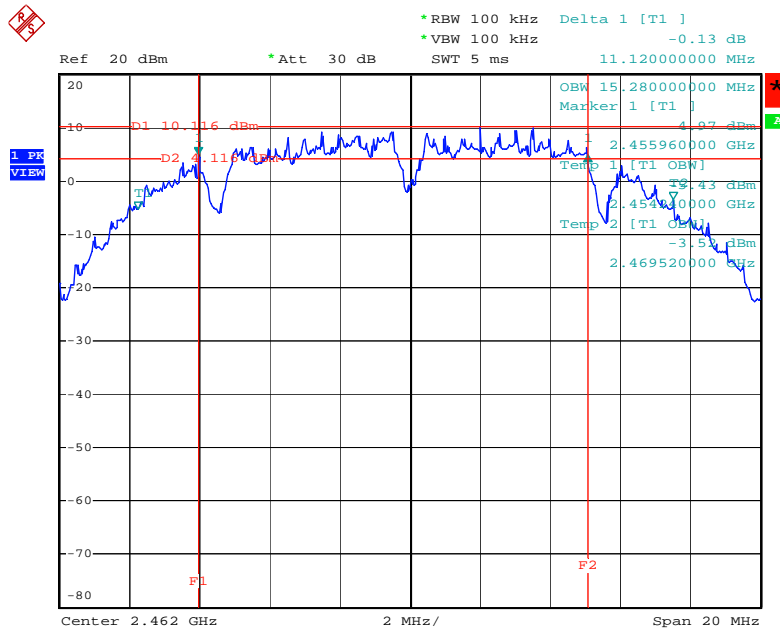


Date: 13.FEB.2008 08:03:30

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. B1+Ant. B2+Ant. B3 / 2412 MHz

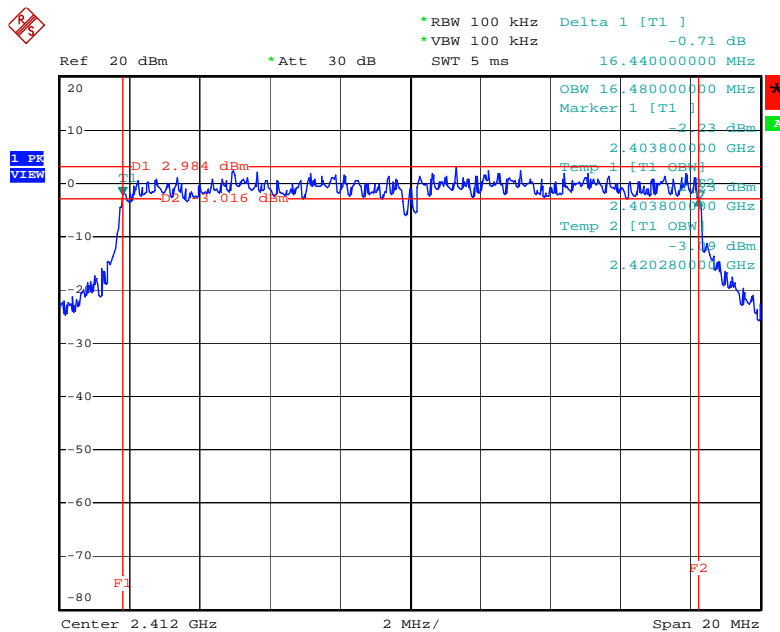


Date: 13.FEB.2008 10:37:34

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. B1+Ant. B2+Ant. B3/ 2437 MHz

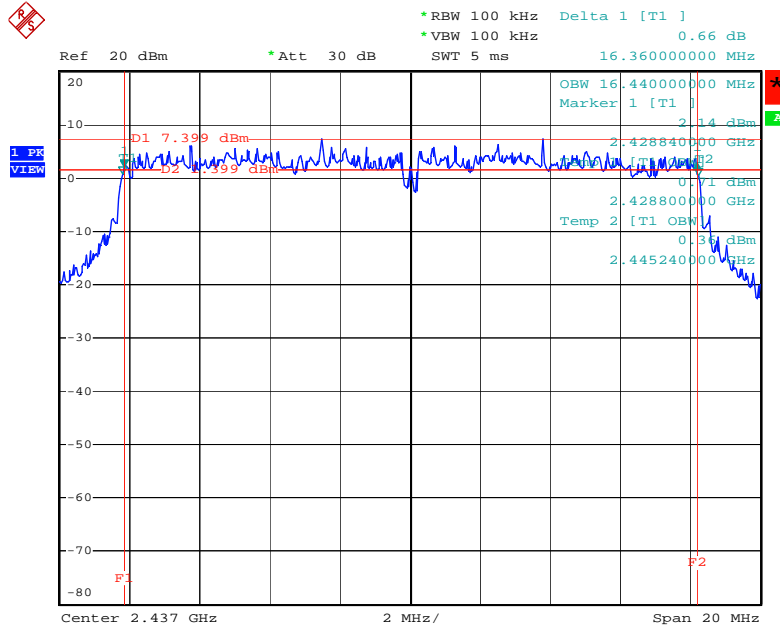


Date: 21.FEB.2008 10:08:10

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. B1+Ant. B2+Ant. B3/ 2462 MHz

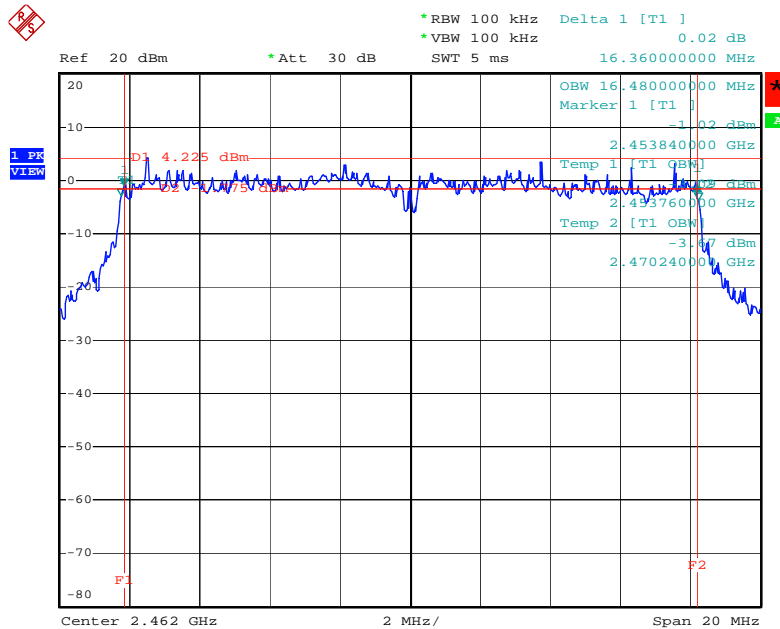


Date: 13.FEB.2008 10:39:29

6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A1+Ant. A2+Ant. A3 / 5745MHz

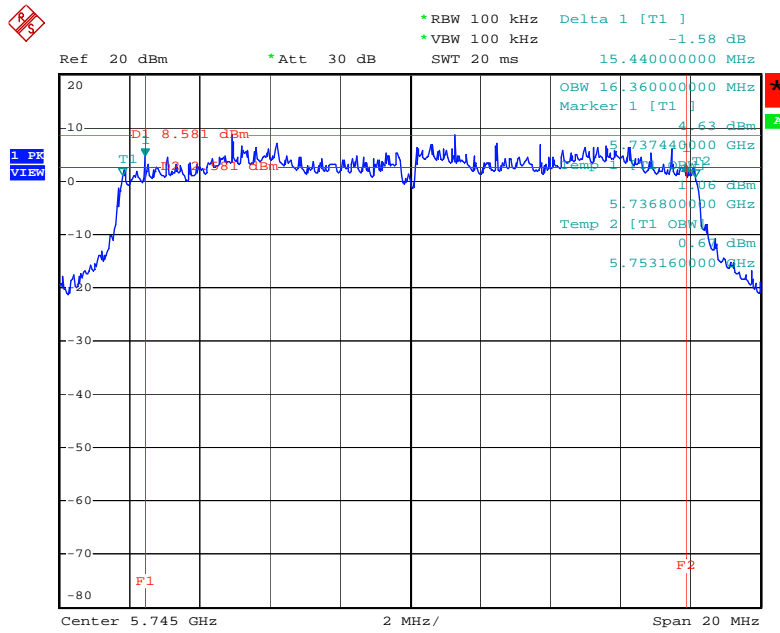

Date: 13.FEB.2008 11:13:59


6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A1+Ant. A2+Ant. A3 / 5785 MHz

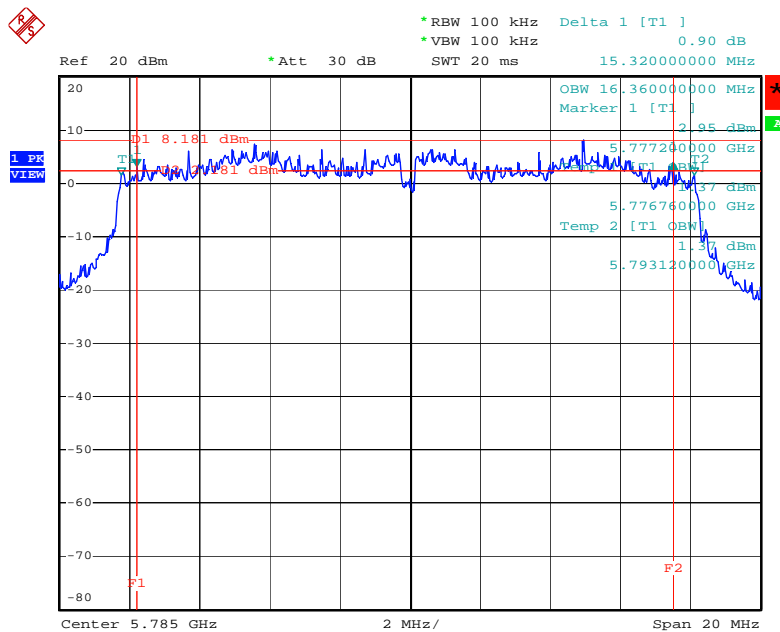

Date: 13.FEB.2008 10:00:28



6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A1+Ant. A2+Ant. A3 / 5825MHz

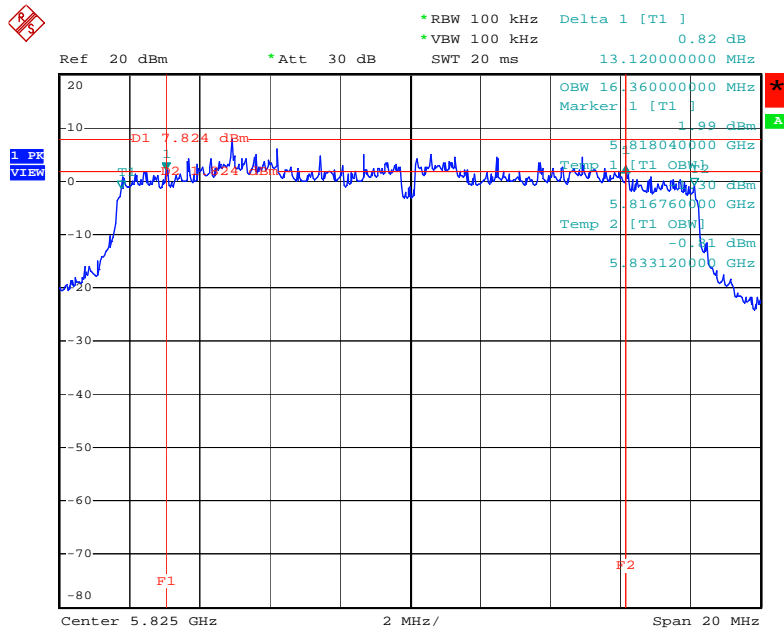

Date: 13.FEB.2008 10:05:06

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100KHz / 100KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout

For radiated emissions below 30MHz

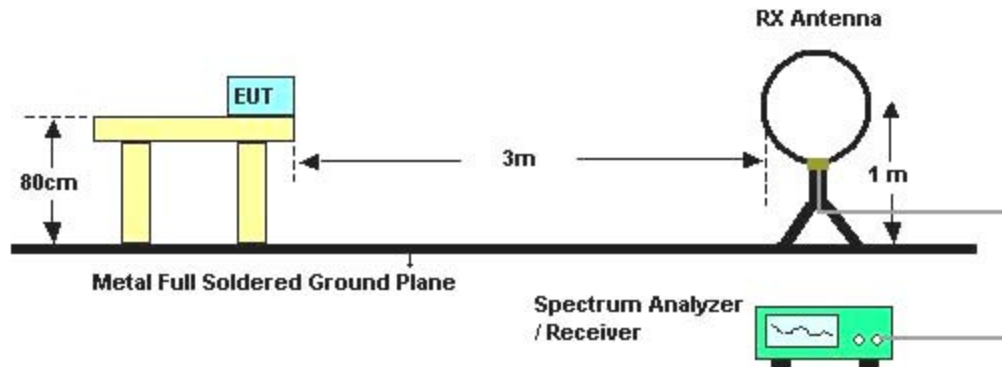

For radiated emissions above 30MHz

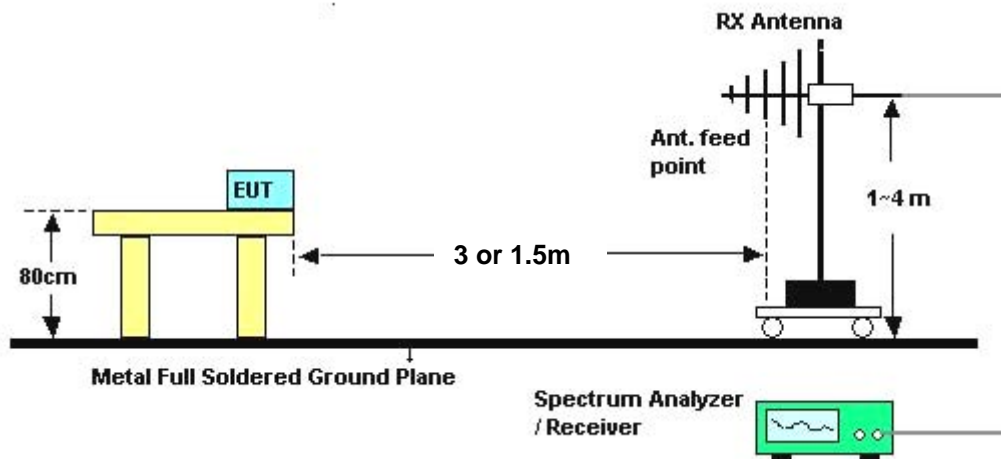

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	Normal Link

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	23°C	Humidity	54%
Test Engineer	Jax Chen	Configurations	Normal Link

Horizontal

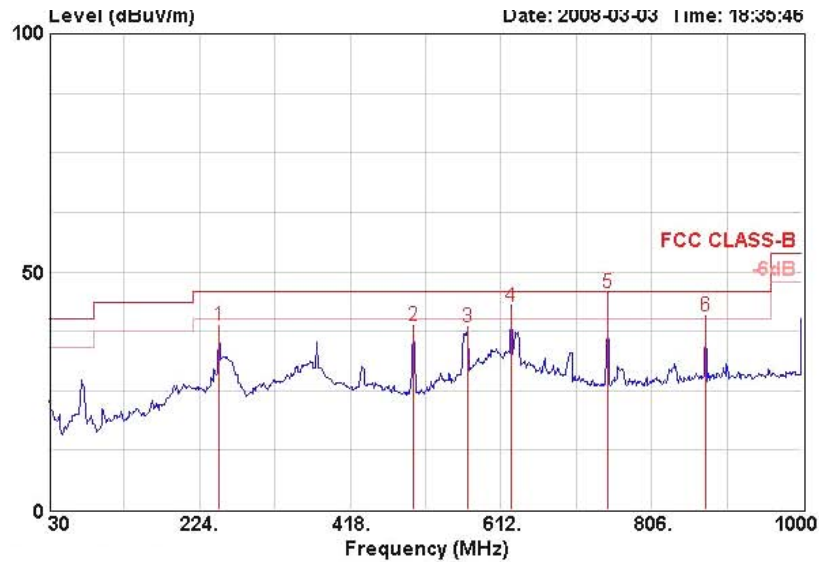

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Pha
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	249.220	38.77	-7.23	46.00	50.34	12.70	1.15	25.42	Peak	100	0	HORIZON
2	498.510	38.74	-7.26	46.00	45.68	17.60	1.80	26.33	Peak	100	0	HORIZON
3	568.350	38.37	-7.63	46.00	44.44	18.40	1.78	26.26	Peak	100	0	HORIZON
4 !	625.000	42.85	-3.15	46.00	48.10	18.85	2.11	26.22	QP	139	150	HORIZON
5 @	750.000	45.56	-0.44	46.00	48.70	19.43	2.48	25.05	QP	109	187	HORIZON
6 !	874.870	40.79	-5.21	46.00	42.89	20.34	2.62	25.05	Peak	100	0	HORIZON

**Vertical**

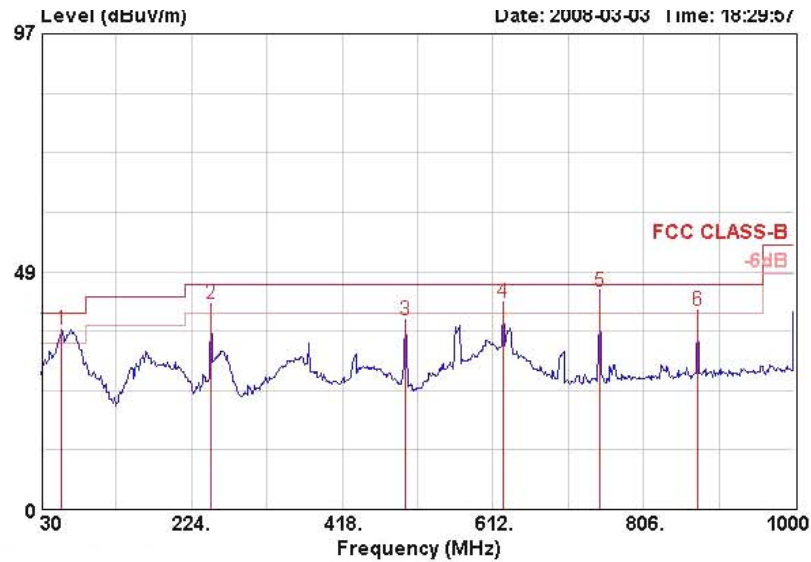

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Pha
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 !	56.190	36.77	-3.23	40.00	55.14	7.47	0.45	26.28	Peak	400	0	VERTICA
2 !	249.220	42.11	-3.89	46.00	53.69	12.70	1.15	25.42	Peak	400	0	VERTICA
3	498.510	38.59	-7.41	46.00	45.53	17.60	1.80	26.33	Peak	400	0	VERTICA
4 !	625.580	42.13	-3.87	46.00	47.38	18.85	2.12	26.21	Peak	400	0	VERTICA
5 !	750.000	44.36	-1.64	46.00	47.50	19.43	2.48	25.05	QP	100	234	VERTICA
6 !	874.870	40.64	-5.36	46.00	42.73	20.34	2.62	25.05	Peak	400	0	VERTICA

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	23°C	Humidity	62%
Test Engineer	Jax Chen	Configurations	802.11b CH 1 Ant. B1 +Ant. B2+ Ant. B3


Horizontal

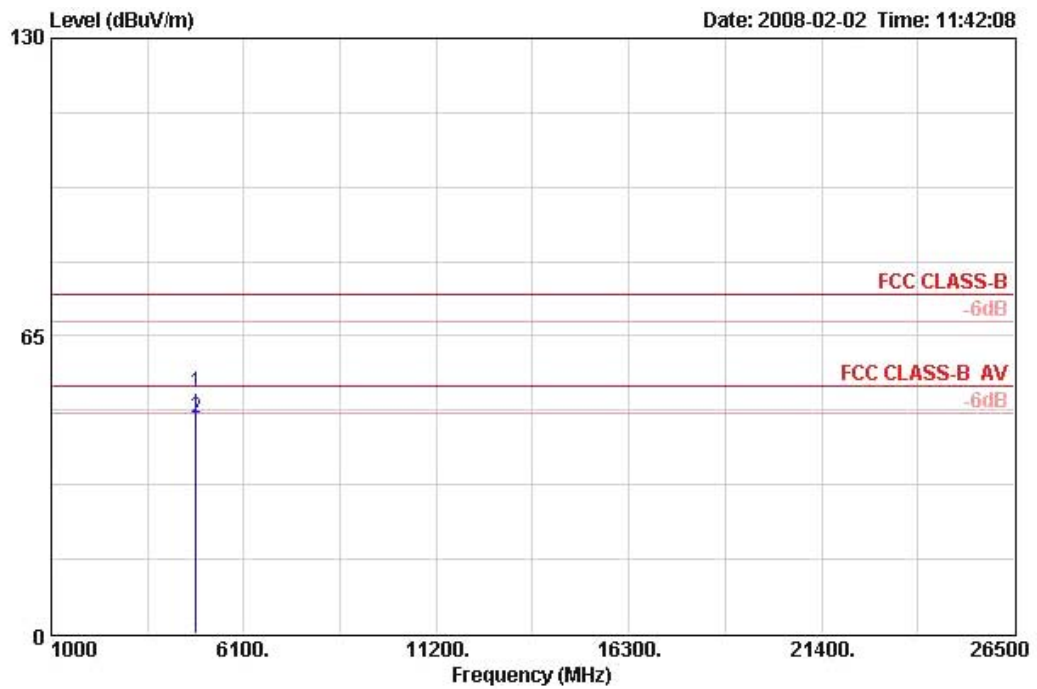

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4824.008	52.63	-21.37	74.00	48.34	33.06	6.40	35.16	PEAK	113	313	HORIZONTAL
2	4824.008	47.08	-6.92	54.00	42.79	33.06	6.40	35.16	AVERAGE	113	313	HORIZONTAL




Vertical

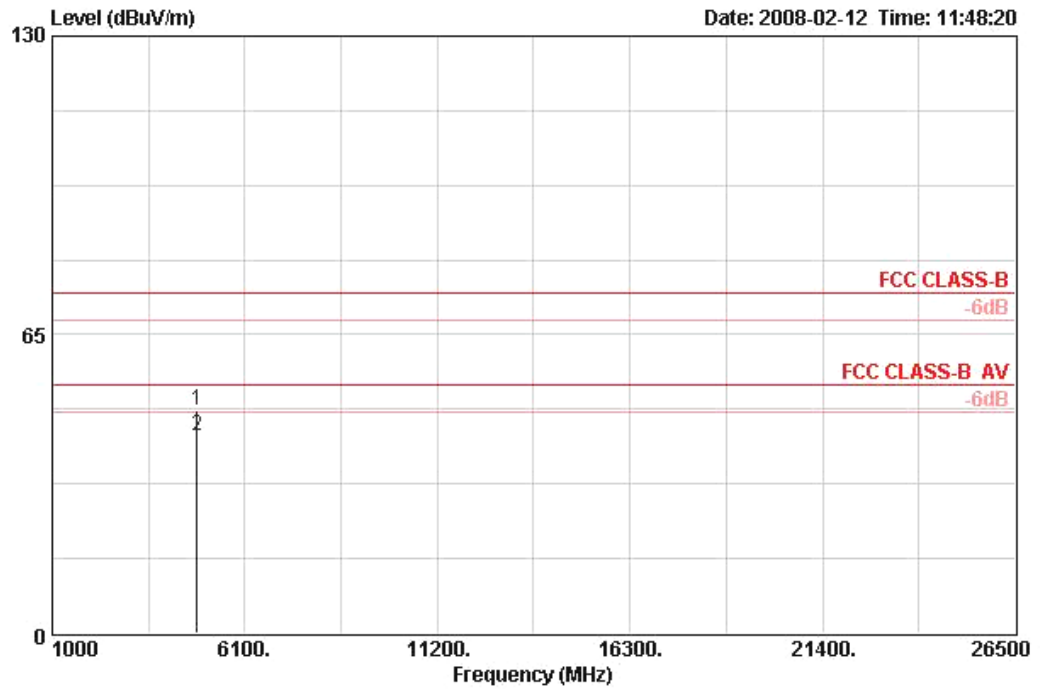

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4823.720	48.44	-25.56	74.00	44.15	33.06	6.40	35.16	PEAK	109	226	VERTICAL
2	4823.970	42.95	-11.05	54.00	38.66	33.06	6.40	35.16	AVERAGE	109	226	VERTICAL


Temperature	23°C	Humidity	62%
Test Engineer	Jax Chen	Configurations	802.11b CH 6 Ant. B1 +Ant. B2+ Ant. B3

**Horizontal**

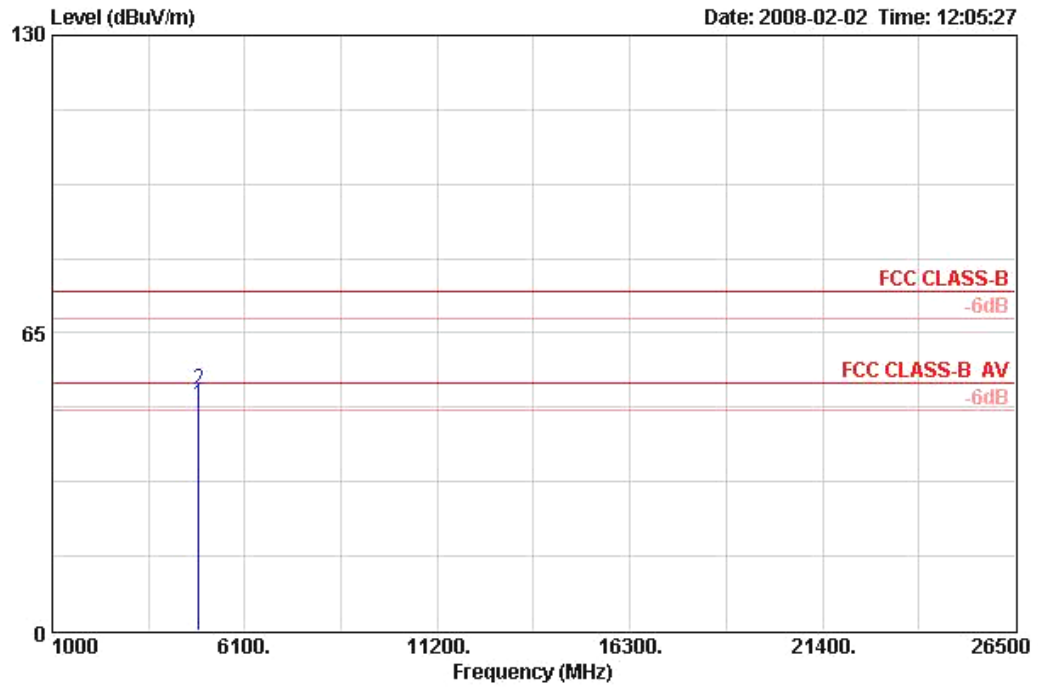

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4874.010	49.16	-4.84	54.00	44.74	33.16	6.42	35.15	AVERAGE	112	311	HORIZONTAL
2	4874.010	52.75	-21.25	74.00	48.32	33.16	6.42	35.15	PEAK	112	311	HORIZONTAL


**Vertical**

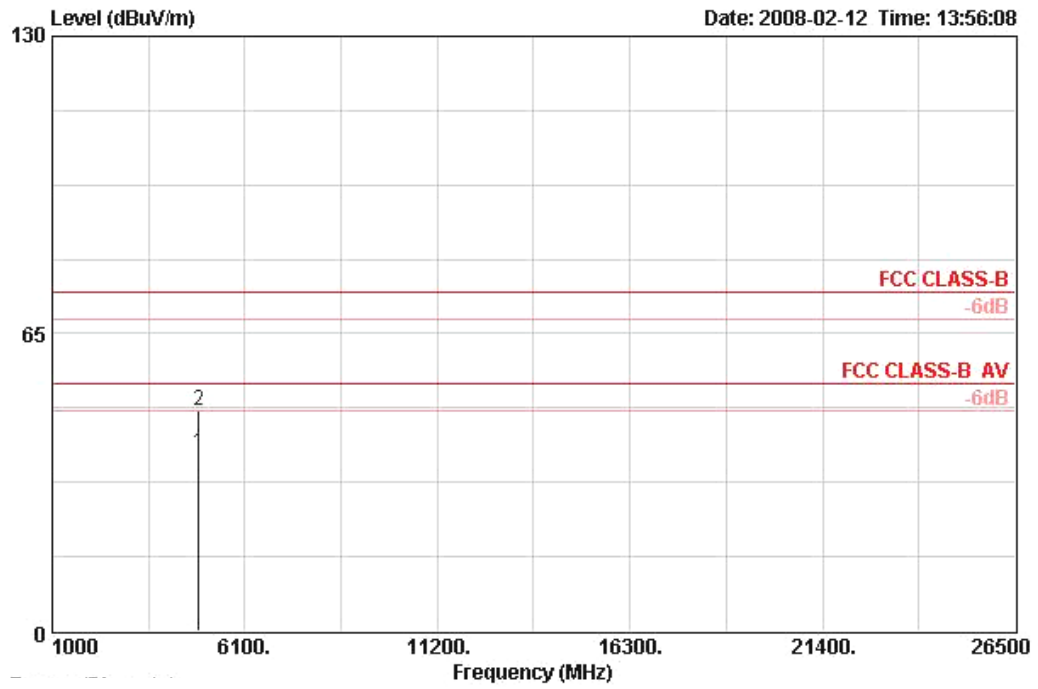

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4874.070	38.92	-15.08	54.00	34.50	33.16	6.42	35.15	AVERAGE	108	221	VERTICAL
2	4874.170	47.97	-26.03	74.00	43.55	33.16	6.42	35.15	PEAK	108	221	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	802.11b CH 11 Ant. B1+Ant. B2+ Ant. B3

**Horizontal**

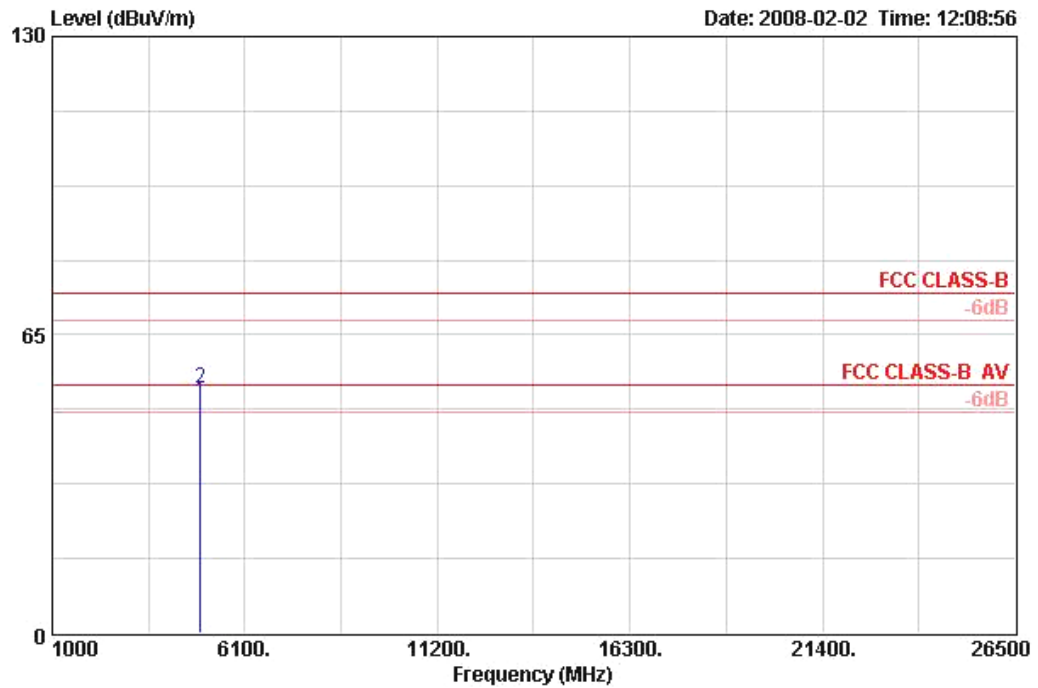

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4923.980	50.35	-3.65	54.00	45.79	33.26	6.44	35.14	AVERAGE	112	311	HORIZONTAL
2	4923.980	53.46	-20.54	74.00	48.90	33.26	6.44	35.14	PEAK	112	311	HORIZONTAL


**Vertical**

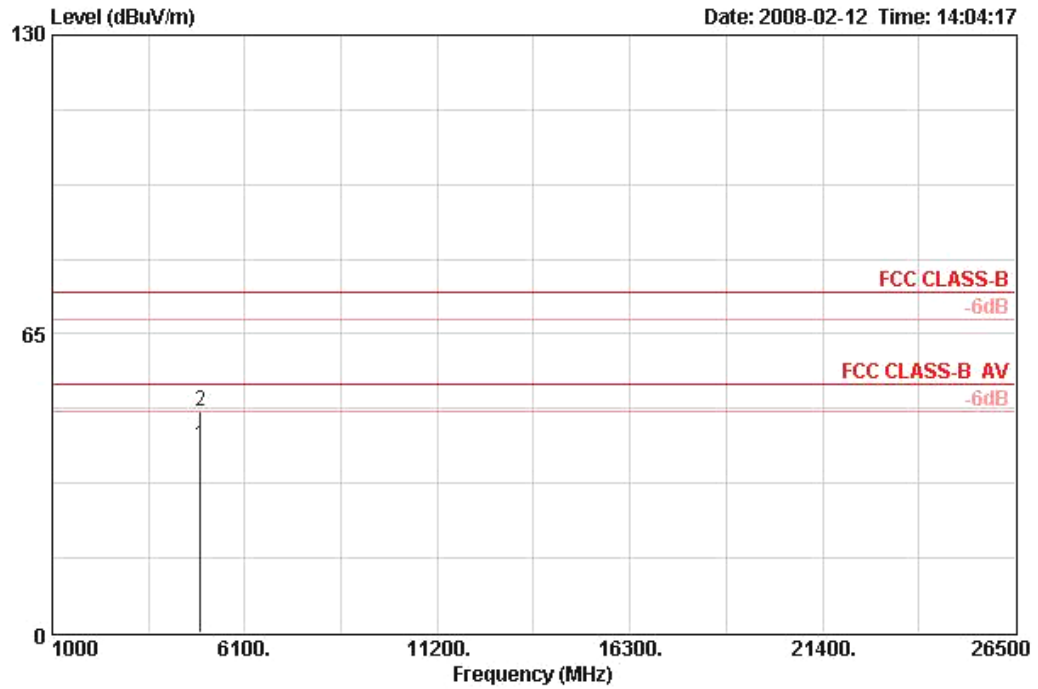

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4924.070	40.66	-13.34	54.00	36.11	33.26	6.44	35.14	AVERAGE	114	285	VERTICAL
2	4924.090	48.16	-25.84	74.00	43.60	33.26	6.44	35.14	PEAK	114	285	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	802.11g CH 1 Ant. B1+Ant. B2+ Ant. B3

**Horizontal**

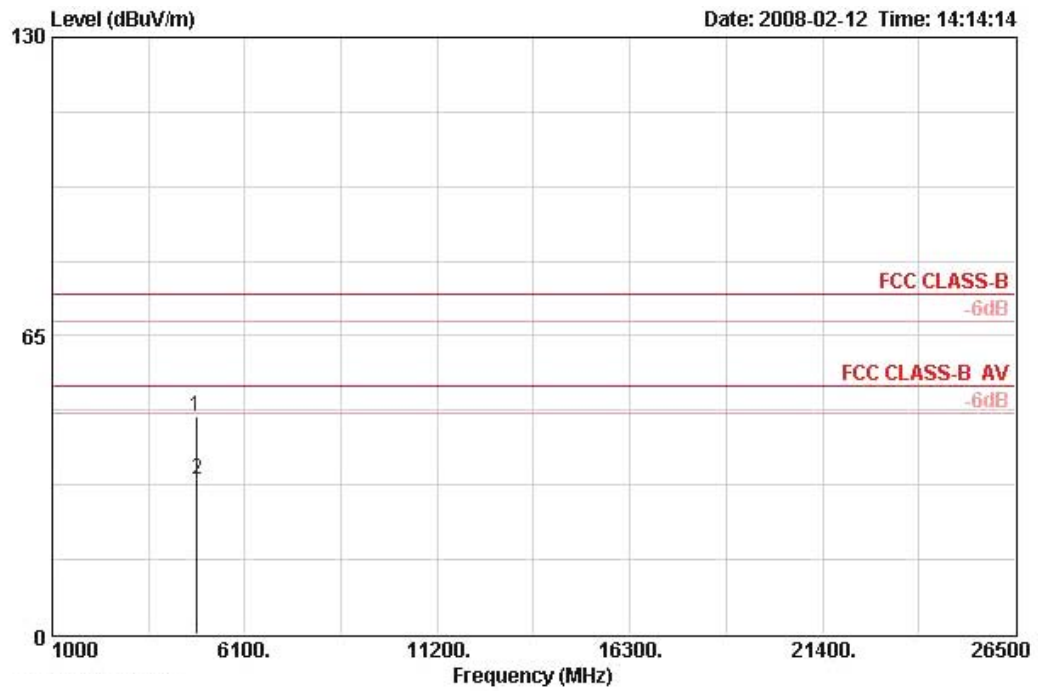

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4822.280	47.29	-26.71	74.00	43.00	33.06	6.40	35.16	PEAK	100	361	HORIZONTAL
2	4823.930	33.65	-20.35	54.00	29.37	33.06	6.40	35.16	AVERAGE	100	361	HORIZONTAL


**Vertical**

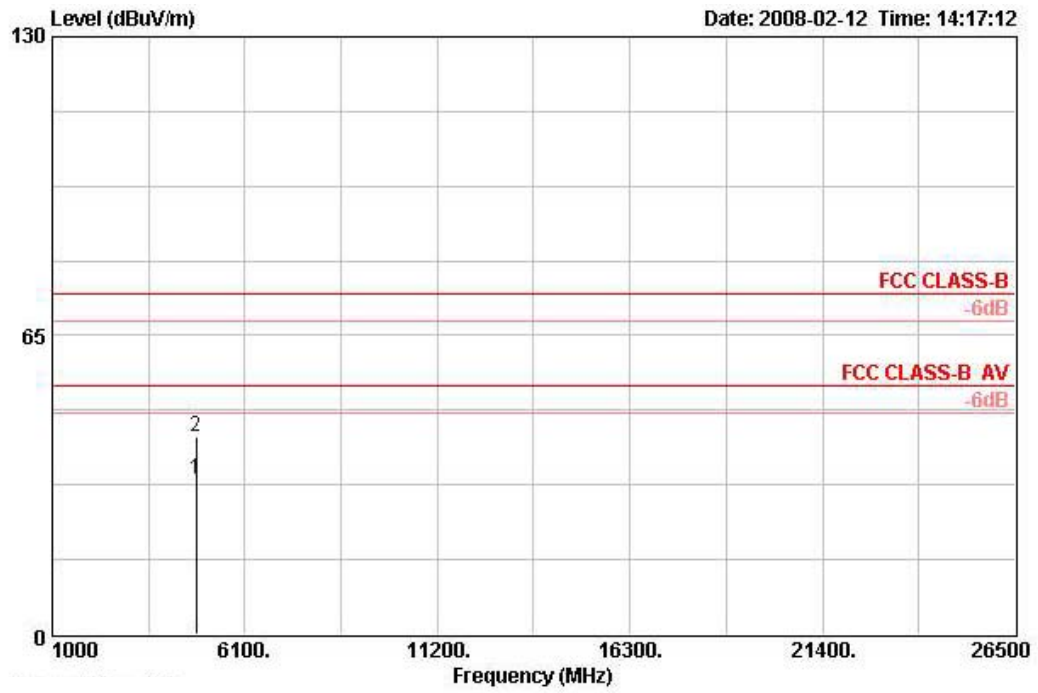

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4821.820	33.61	-20.39	54.00	29.32	33.06	6.40	35.16	AVERAGE	100	0	VERTICAL
2	4822.720	42.99	-31.01	74.00	38.70	33.06	6.40	35.16	PEAK	100	0	VERTICAL

<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	802.11g CH 6 Ant. B1+Ant. B2+ Ant. B3


**Horizontal**

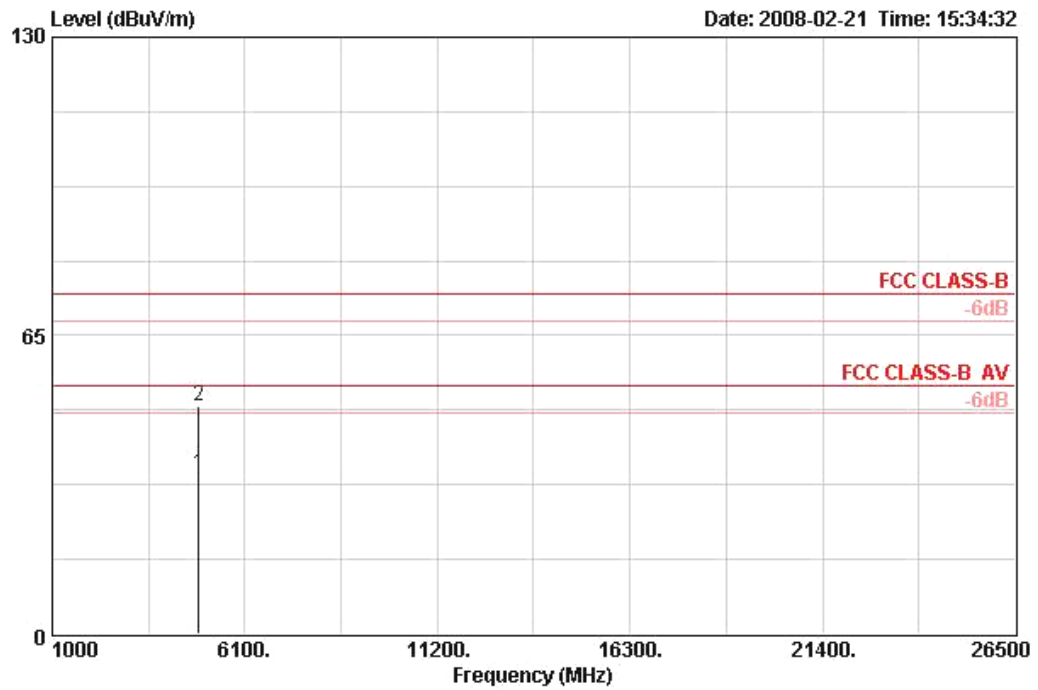

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4874.200	34.69	-19.31	54.00	30.27	33.16	6.42	35.15	AVERAGE	114	268	HORIZONTAL
2	4874.800	49.71	-24.29	74.00	45.29	33.16	6.42	35.15	PEAK	114	268	HORIZONTAL




**Vertical**

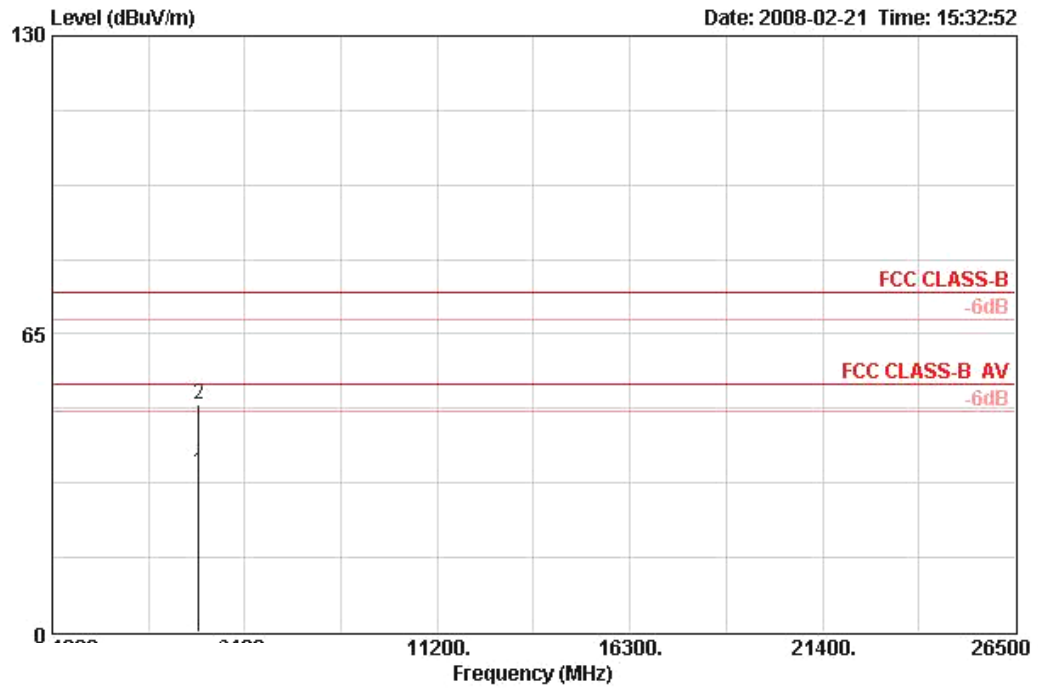

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4875.040	34.79	-19.21	54.00	30.36	33.16	6.42	35.15	AVERAGE	149	300	VERTICAL
2	4875.380	49.48	-24.52	74.00	45.06	33.16	6.42	35.15	PEAK	149	300	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	802.11g CH 11 Ant. B1 +Ant. B2 + Ant. B3

**Horizontal**

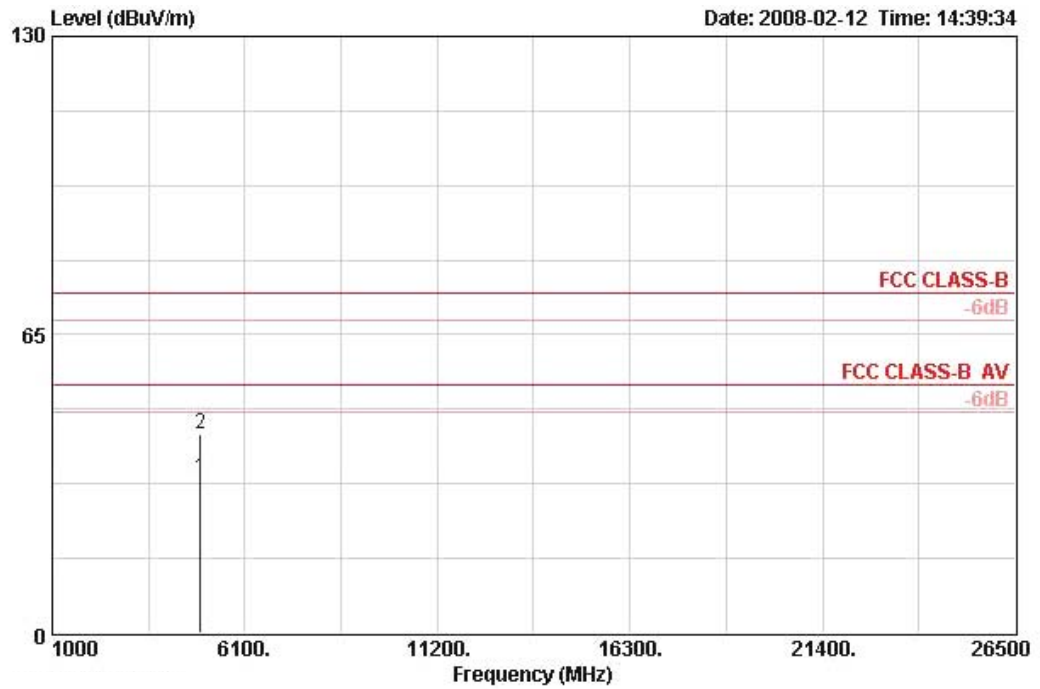

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4923.570	33.79	-20.21	54.00	29.23	33.26	6.44	35.14	AVERAGE	100	361	HORIZONTAL
2	4924.930	43.41	-30.59	74.00	38.85	33.26	6.44	35.14	PEAK	100	361	HORIZONTAL

**Vertical**

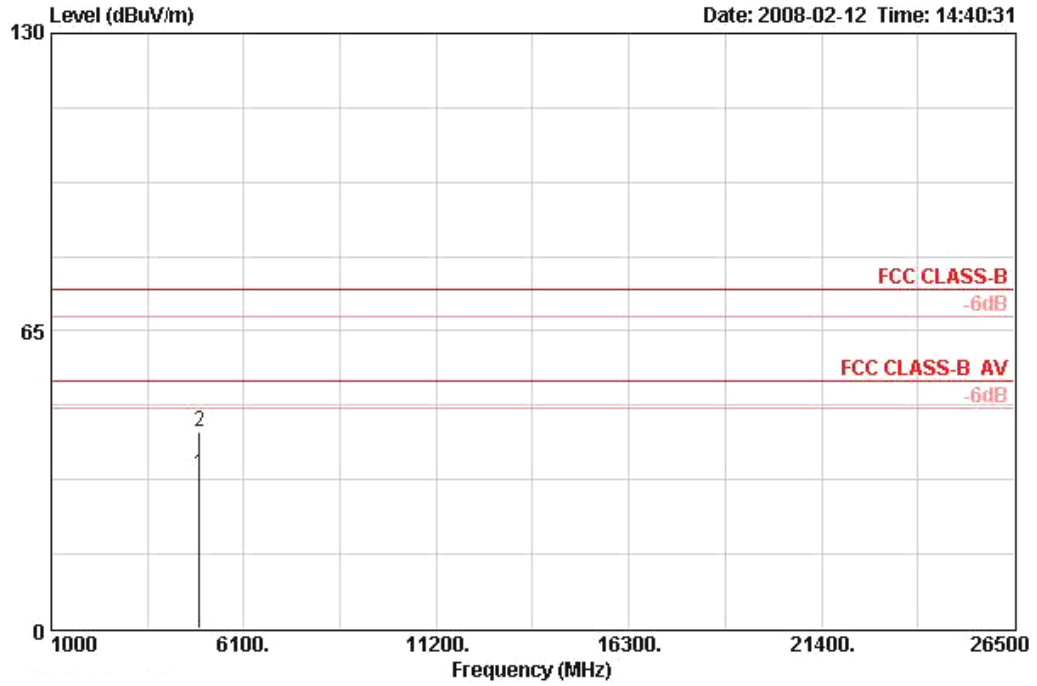

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4922.080	33.55	-20.45	54.00	28.99	33.26	6.44	35.14	AVERAGE	100	0	VERTICAL
2	4922.580	43.12	-30.88	74.00	38.56	33.26	6.44	35.14	PEAK	100	0	VERTICAL

**Note:**


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	23°C	Humidity	62%
Test Engineer	Jax Chen	Configurations	802.11a CH 149 Ant. A1 + Ant. A2+Ant. A3

**Horizontal**

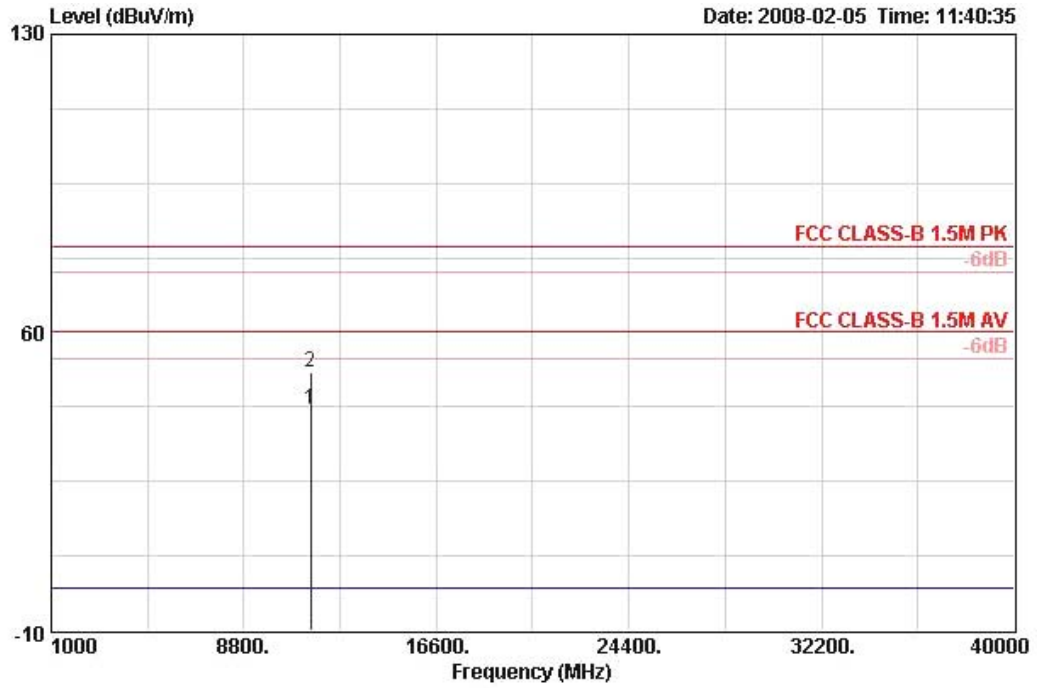

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11491.400	41.78	-18.22	60.00	28.21	38.78	9.78	34.98	AVERAGE	102	353	HORIZONTAL
2	11491.650	50.62	-29.38	80.00	37.05	38.78	9.78	34.98	PEAK	102	353	HORIZONTAL


Vertical

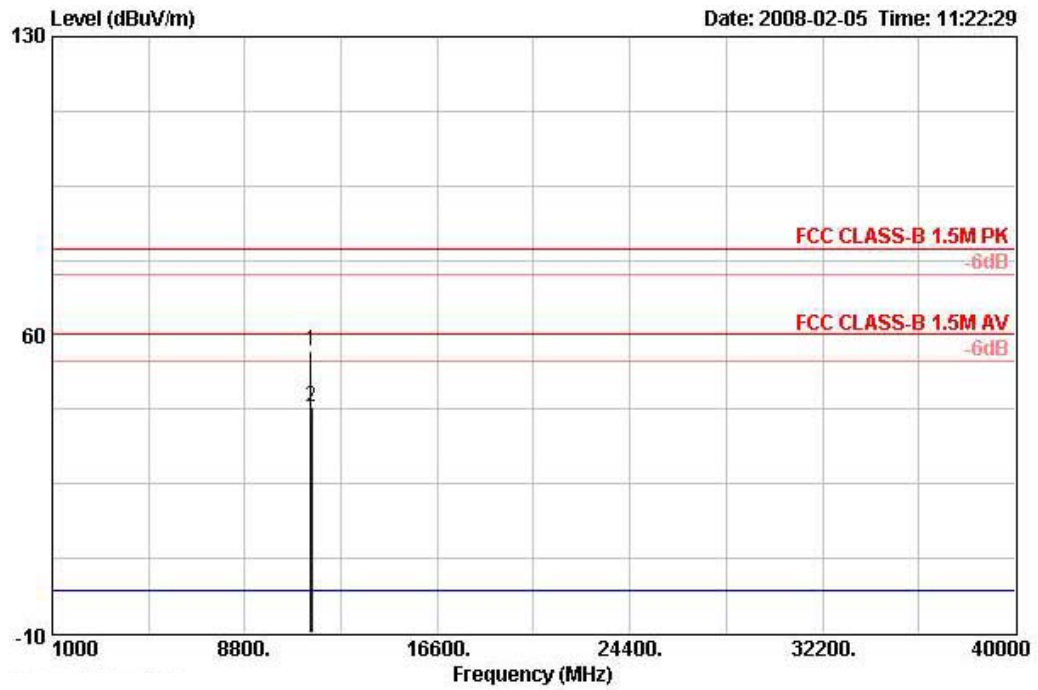

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11489.100	56.29	-23.71	80.00	42.71	38.78	9.78	34.98	PEAK	100	209	VERTICAL
2	11489.830	42.86	-17.14	60.00	29.28	38.78	9.78	34.98	AVERAGE	100	209	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	802.11a CH 157 Ant. A1 + Ant. A2+Ant. A3

**Horizontal**

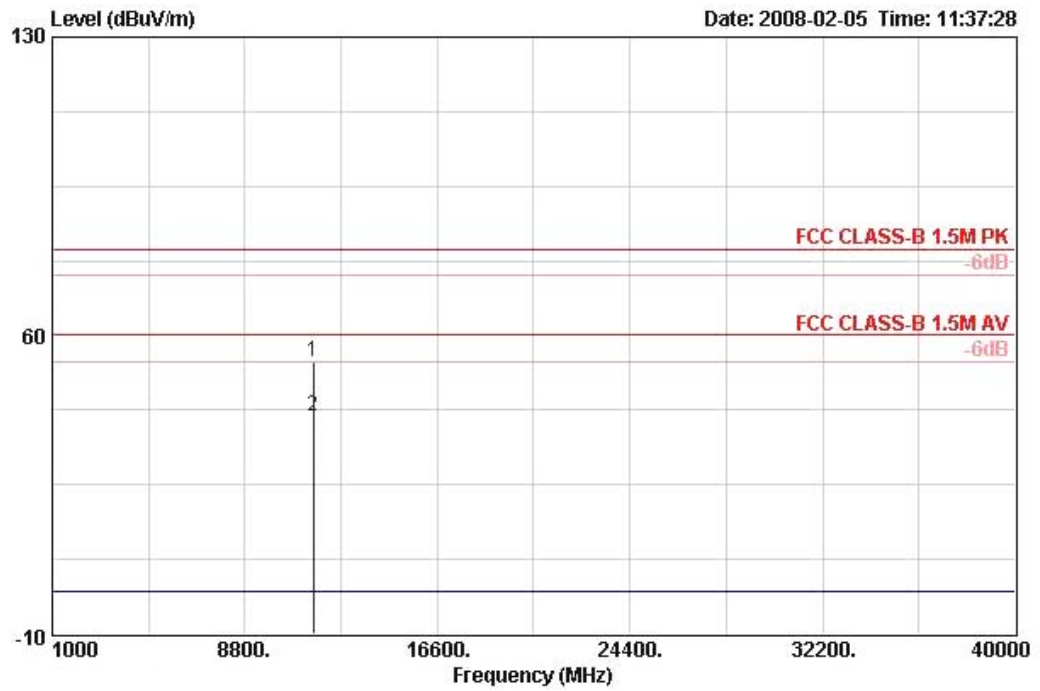

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11567.720	53.87	-26.13	80.00	40.25	38.83	9.79	35.00	PEAK	100	360	HORIZONTAL
2	11570.270	40.98	-19.02	60.00	27.35	38.83	9.80	35.00	AVERAGE	100	360	HORIZONTAL


**Vertical**

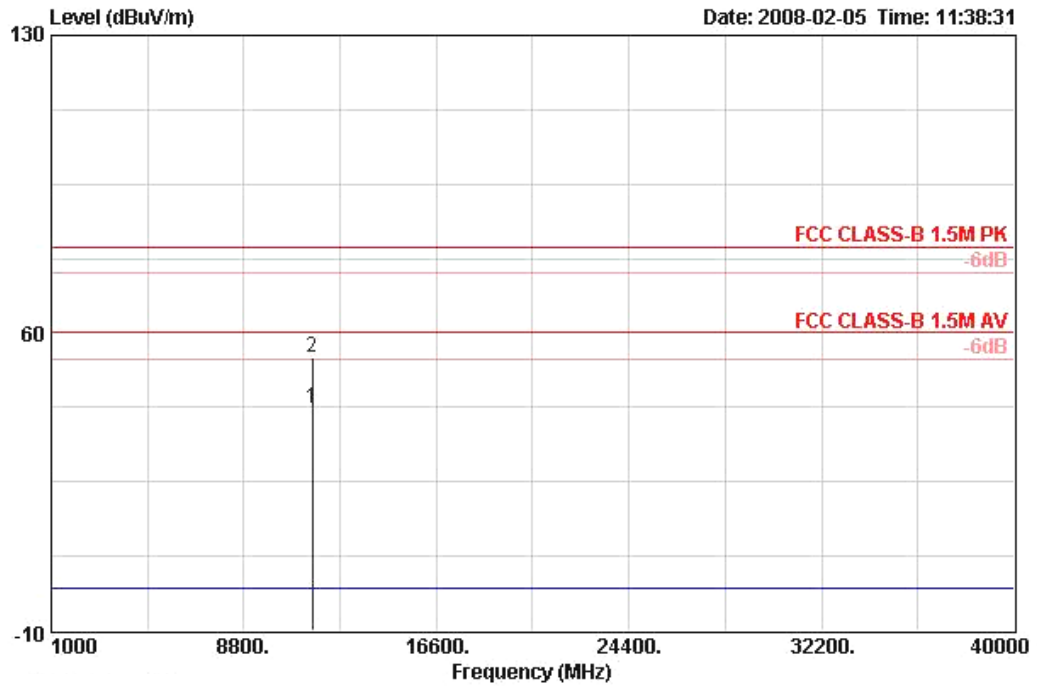

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11570.090	42.06	-17.94	60.00	28.44	38.83	9.80	35.00	AVERAGE	100	290	VERTICAL
2	11570.090	54.40	-5.60	60.00	40.78	38.83	9.80	35.00	AVERAGE	100	290	VERTICAL

<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Jax Chen	<b>Configurations</b>	802.11a CH 165 Ant. A1 + Ant. A2+Ant. A3


**Horizontal**

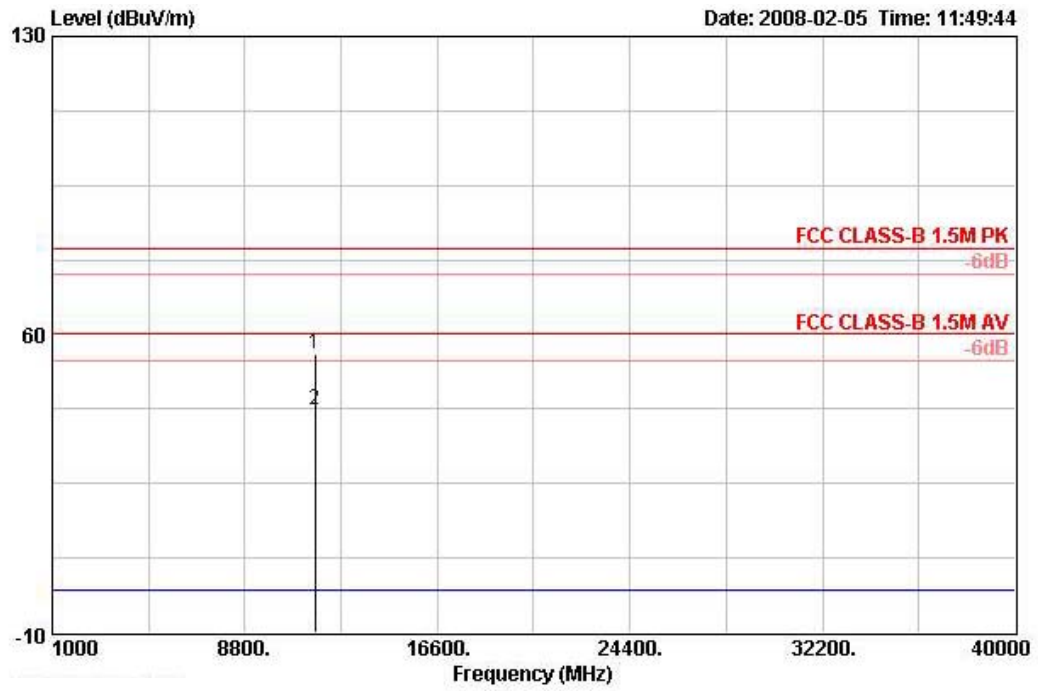

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11647.800	55.28	-24.72	80.00	41.62	38.86	9.82	35.01	PEAK	103	360	HORIZONTAL
2	11651.560	42.43	-17.57	60.00	28.76	38.86	9.82	35.01	AVERAGE	103	360	HORIZONTAL



**Vertical**

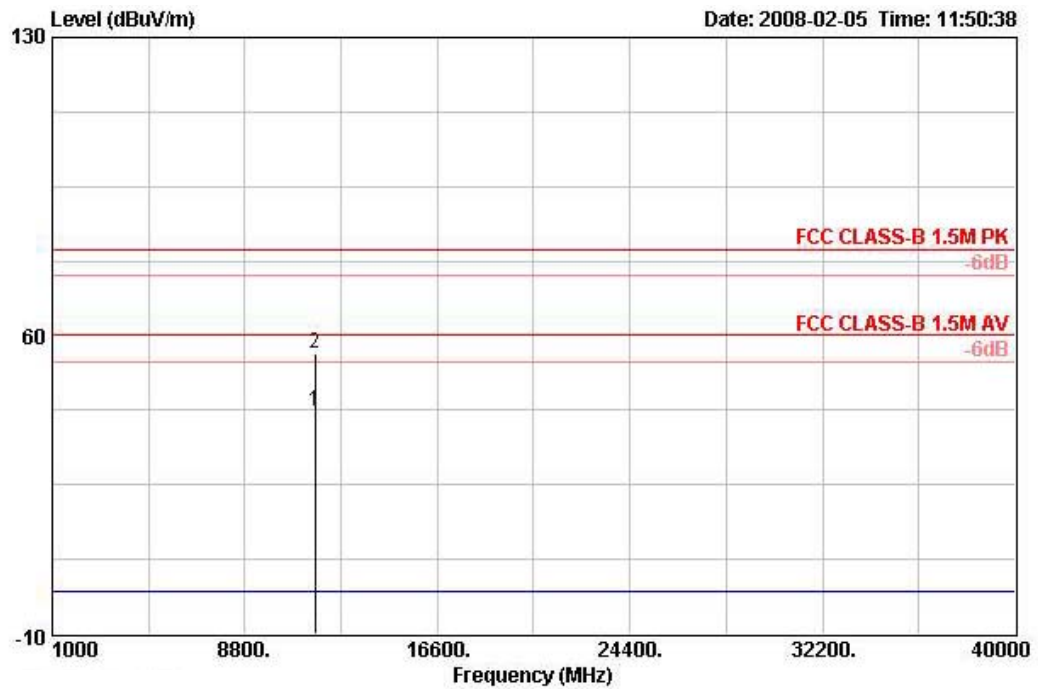

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11648.880	42.41	-17.59	60.00	28.75	38.86	9.82	35.01	AVERAGE	103	0	VERTICAL
2	11650.460	55.74	-24.26	80.00	42.08	38.86	9.82	35.01	PEAK	103	0	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Band Edge Emissions Measurement

### 4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

### 4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

### 4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

### 4.6.5. Test Deviation

There is no deviation with the original standard.

### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	802.11b CH 1, 6, 11 Ant. B1 + Ant. B2+Ant. B3

Channel 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 ☉	2386.120	67.48	-6.52	74.00	35.18	28.17	4.13	0.00	PEAK	161	28	HORIZONTAL
2 ☉	2386.360	52.07	-1.93	54.00	19.77	28.17	4.13	0.00	AVERAGE	161	28	HORIZONTAL
3 ☉	2414.600	117.17			84.81	28.21	4.15	0.00	PEAK	161	28	HORIZONTAL
4	2414.800	113.75			81.38	28.21	4.15	0.00	AVERAGE	161	28	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 ☉	2438.600	118.76			86.29	28.29	4.18	0.00	PEAK	161	28	HORIZONTAL
2 ☉	2439.800	115.36			82.89	28.29	4.18	0.00	AVERAGE	161	28	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2437MHz.

Channel 11

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 ☉	2459.800	112.91			80.39	28.32	4.20	0.00	AVERAGE	162	124	HORIZONTAL
2 ☉	2461.000	118.64			86.12	28.32	4.20	0.00	PEAK	162	124	HORIZONTAL
3 ☉	2487.960	51.26	-2.74	54.00	18.63	28.40	4.23	0.00	AVERAGE	162	124	HORIZONTAL
4	2488.060	61.75	-12.25	74.00	29.12	28.40	4.23	0.00	PEAK	162	124	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	802.11g CH 1, 6, 11 Ant. B1+ Ant. B2+Ant. B3

**Channel 1**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	2389.460	59.99	-14.01	74.00	27.69	28.17	4.13	0.00	PEAK	148	154	HORIZONTAL
2	2390.000	53.28	-0.72	54.00	20.95	28.17	4.15	0.00	AVERAGE	148	154	HORIZONTAL
3	2413.200	107.84			75.48	28.21	4.15	0.00	AVERAGE	148	154	HORIZONTAL
4	2413.400	116.96			84.59	28.21	4.15	0.00	PEAK	148	154	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	4874.200	34.69			30.27	33.16	6.42	35.15	AVERAGE	114	268	HORIZONTAL
2	4874.800	49.71			45.29	33.16	6.42	35.15	PEAK	114	268	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2437 MHz.

**Channel 11**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	2458.400	116.54			84.02	28.32	4.20	0.00	PEAK	148	143	HORIZONTAL
2	2460.000	103.89			71.36	28.32	4.20	0.00	AVERAGE	148	143	HORIZONTAL
3	2483.500	52.05	-1.95	54.00	19.46	28.36	4.23	0.00	AVERAGE	148	143	HORIZONTAL
4	2483.700	71.20	-2.80	74.00	38.61	28.36	4.23	0.00	PEAK	148	143	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	802.11a CH 149, 157, 165 Ant. A1 + Ant. A2+Ant. A3

**Channel 149**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 ☺	5741.000	118.38			77.20	34.35	6.84	0.00	PEAK	131	0	HORIZONTAL
2 ☺	5744.000	104.80			63.62	34.35	6.84	0.00	AVERAGE	131	0	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5745 MHz.

**Channel 157**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 ☺	5781.000	120.31			79.11	34.36	6.85	0.00	PEAK	120	198	HORIZONTAL
2 ☺	5787.000	106.37			65.15	34.36	6.86	0.00	AVERAGE	120	198	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5785 MHz.

**Channel 165**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 ☺	5819.400	118.13			76.89	34.36	6.88	0.00	PEAK	133	320	HORIZONTAL
2 ☺	5822.400	104.24			63.00	34.37	6.88	0.00	AVERAGE	133	320	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5825 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


**For Emission not in Restricted Band**

**Low Band Edge Plot on Configuration IEEE 802.11b Ant. B1 +Ant. B2+Ant. B3/ 2412 MHz**

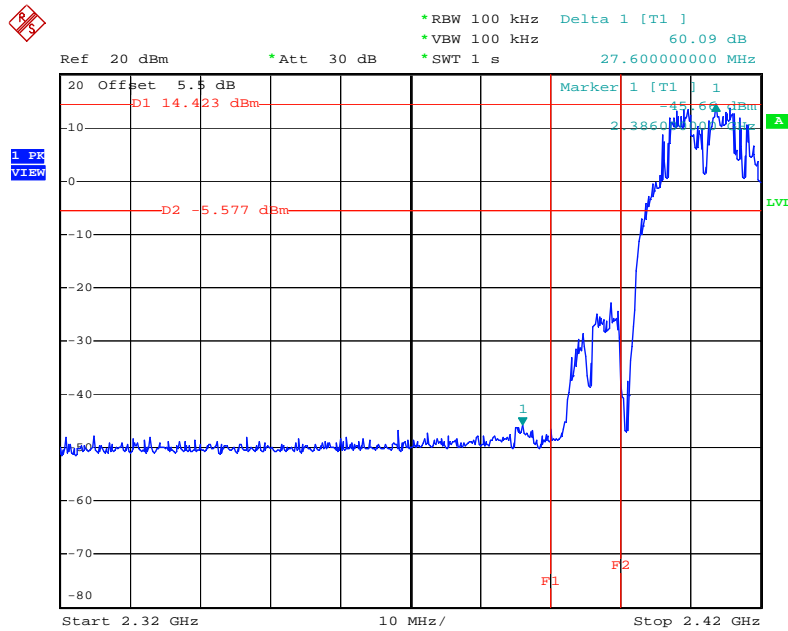


Date: 13.FEB.2008 08:06:11

**High Band Edge Plot on Configuration IEEE 802.11b Ant. B1 +Ant. B2+Ant. B3/ 2462 MHz**

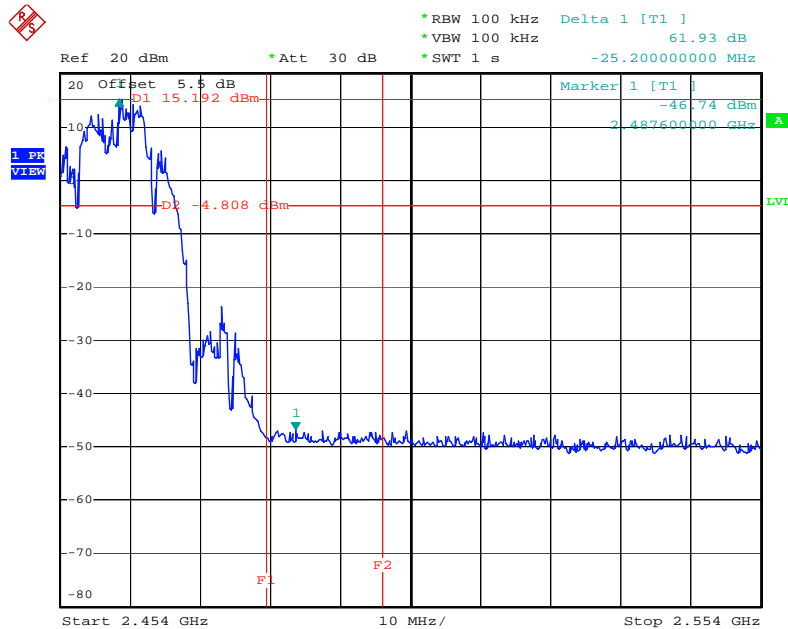


Date: 13.FEB.2008 08:03:53

**Low Band Edge Plot on Configuration IEEE 802.11g Ant. B1 +Ant. B2+Ant. B3/ 2412 MHz / Mode 2**

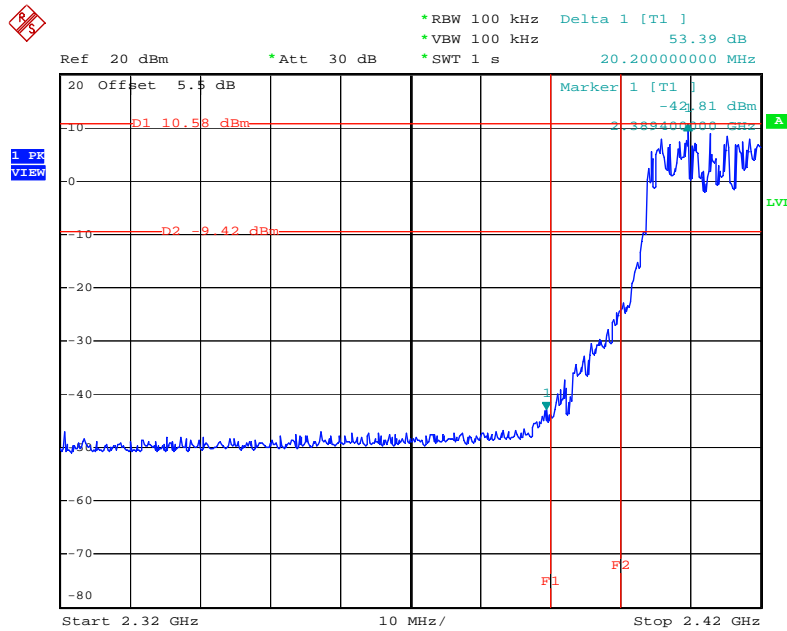


Date: 13.FEB.2008 10:38:08

**High Band Edge Plot on Configuration IEEE 802.11g Ant. B1 +Ant. B2+Ant. B3/ 2462 MHz / Mode 2**

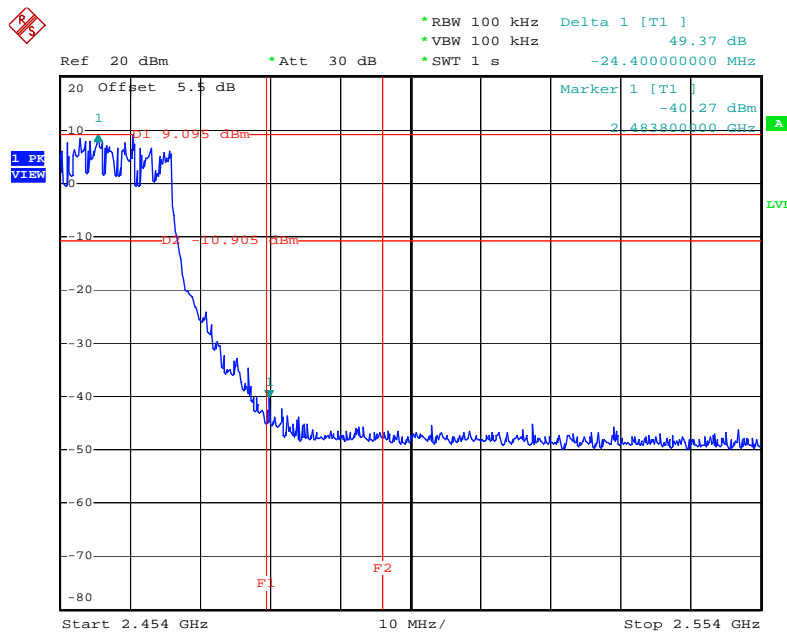


Date: 13.FEB.2008 10:39:53

**Low Band Edge Plot on Configuration IEEE 802.11a Ant. A1+Ant. A2+Ant. A / 5745 MHz**

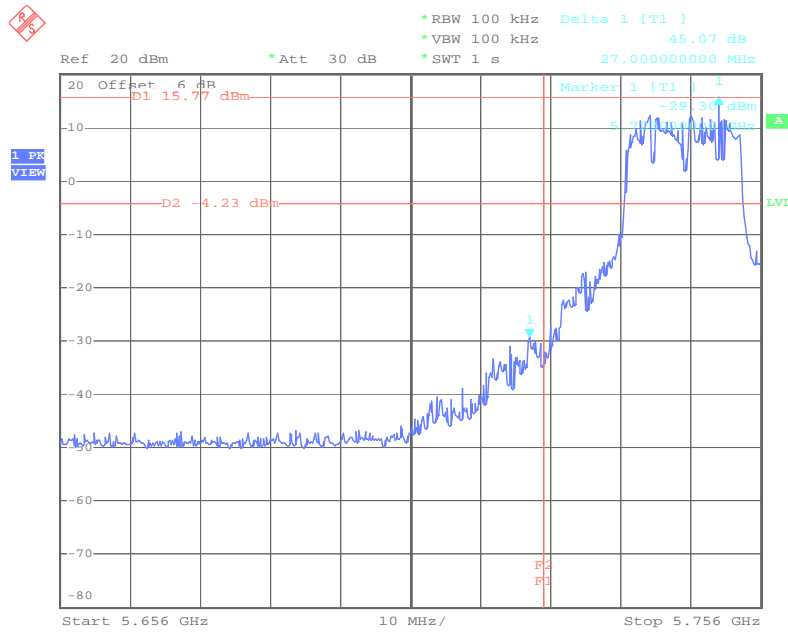

Date: 13.FEB.2008 11:17:58

**High Band Edge Plot on Configuration IEEE 802.11a Ant. A1+Ant. A2+Ant. A / 5825 MHz**

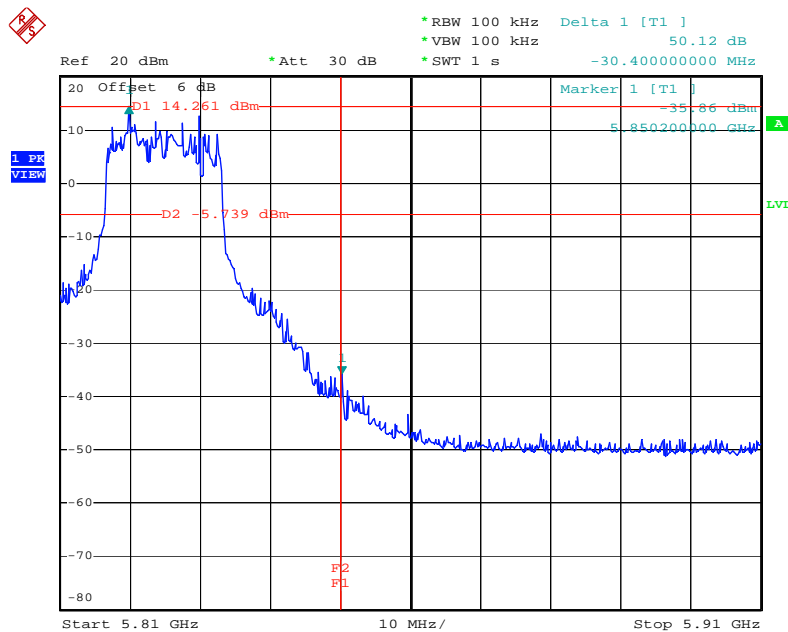

Date: 13.FEB.2008 10:09:04



## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9kHz – 2.75GHz	Jul. 14, 2007	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 31, 2007	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2007	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2007	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz –30MHz	May 09, 2007	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
Isolation Transformer	Erika Fiedler OHG	D-65396 Walluf	58	45MHz-2.15GHz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 14, 2007	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 14, 2008	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jun. 07, 2007	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 22, 2007*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100305	9 kHz - 40 GHz	Sep. 27, 2007	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 21, 2007	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 04, 2007	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Dec. 17, 2007	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 27, 2007	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 04, 2007*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 03, 2007	Conducted (TH01-HY)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2007	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2007	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2007	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 07, 2007	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

\* Calibration Interval of instruments listed above is two year.

NCR means Non-Calibration required.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-070110

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sporton International Inc.**

**EMC & Wireless Communications Laboratory**

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory



Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : January 10, 2007

P1, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.