



SLG Asia Test Labs & Service (HK) Limited

Test Report

According to

FCC PART 15 Subpart C

FCC ID: QZHSC335T

Test Report Number: H1M21208-0331-P-15



TEST REPORT

Summary | FCC Part 15C

Test Report No.: H1M21208-0331-P-15

Date of issue.....: 24.08.2012

Testing Laboratory name: SLG Asia Test Labs & Service (HK) Limited

Address.....: 26/F., Tamson Plaza, 161 Wai Yip Street,
Kwun Tong, Kowloon, Hong Kong

Applicant's name: Styling City Industries Limited

Address.....: Unit 418, International Plaza, 20 Sheung Yuet Road, Kowloon Bay,
Kowloon, Hong Kong

Manufacturer's name: Styling City Industries Limited

Address.....: Unit 418, International Plaza, 20 Sheung Yuet Road, Kowloon Bay,
Kowloon, Hong Kong

Test specification

Standard(s) applied: [FCC Rules 47 CFR Part15 Subpart C \(Section 15.231\)](#)

Test item description: Wireless Door Chime Transmitter

Brand Name: ---

Model and/or type reference.....: SC335T

Rating(s): 3V (CR2302) battery

Summary of Test Results

Pass

The Summary of Test Results based on a technical opinion belongs to the applied standard(s).

Disclaimer

Further details of testing are provided in particular chapters of this Test Report.

This document base on General Terms and Conditions of SLG Asia Test Labs & Service (HK) Limited, which the applicant accepted with order confirmation.

Emphasized conditions or project related conditions:

Released Test Reports apply only to the specific samples tested under stated test conditions. It is the applicant's responsibility to assure that additional production units of the tested model(s) are manufactured in same construction and with identical electrical and mechanical components to meet the same quality as tested model(s). The applicant/manufacturer/importer is responsible for any modifications made to the production units which result in non-compliance to the applied and/or relevant regulations. SLG Asia Test Labs & Service (HK) Limited shall have no liability for any deductions, inferences or generalizations drawn by the client or others from any kind of issued reports. Reports are confidential property of the client. As a mutual protection to the applicant, the clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.



TABLE OF CONTENTS

1	General Information	3
1.1	Test Report	3
1.2	Test Location	4
1.3	Details of applicant	4
1.4	Manufacturer	4
1.5	Application details	5
1.6	Test item	5
1.7	General Test Conditions	6
2	Test result Summary	7
3	Test results	8
3	Transmitter parameter	8
3.1	Field Strength of the Fundamental Wave	8
3.2	Field strength of Spurious Emissions	9
3.3	Emission Bandwidth	13
3.4	Automatically Deactivation	15
4	Normative references	16
5	Disclaimer	17
5.1	Revision Notes	17
Annex: A – Photos of test item	Number of Pages	1
Annex: B – External Photos of test item	Number of Pages	1
Annex: C – Internal Photos of test item	Number of Pages	1



1 General Information

1.1 Test Report

Tested by:

24.08.2012

Mr. Karl Lau

Date

Test Engineer

Signature

Approved by:

24.08.2012

Mr. F. Schulz

Date

Laboratory Manager

Signature



1.2 Test Location

All tests were carrying by personnel from:

Name: SLG Asia Test Labs & Service (HK) Limited
Address: 26/F., Tamson Plaza, 161 Wai Yip Street
Kwun Tong, Kowloon, Hong Kong

Telephone: +852 2389 2200
Fax: +852 2389 3073

The Test facility for radiated measurements is located at:

Name : Hong Kong Productivity Council
Address: EMC Centre, LG1, HKPC Building, 78 Tat Chee Avenue
Kowloon, Hong Kong

The Hong Kong Laboratory Accreditation Scheme (HOKLAS)
Reg. No.082

FCC registered measurement facility
Reg. No.90656

1.3 Details of applicant

Name: Styling City Industries Limited
Address: Unit 418, International Plaza, 20 Sheung Yuet Road
Kowloon Bay, Kowloon, Hong Kong

Contact: Mr. K.W. Lam
Telephone: +852 2751 9023
Fax: +852 2751 9817

1.4 Manufacturer

Name: Styling City Industries Limited
Address: Unit 418, International Plaza, 20 Sheung Yuet Road
Kowloon Bay, Kowloon, Hong Kong

Contact: Mr. K.W. Lam
Telephone: +852 2751 9023
Fax: +852 2751 9817



1.5 Application details

Date of receipt of application: 09.08.2012
Date of receipt of test item: 09.08.2012
Date (s) of performance of tests: 09.08.2012 - 24.08.2012

1.6 Test item

Description of test item: Wireless Door Chime Transmitter
Type identification: SC335T
Brand Name: ---

Equipment category: Transmitter
Device Type: Periodic Operation 15.231
Operation frequency range: 434 MHz
No of channels: 1
Emission designator: L1D
Operation mode: simplex
Type of antenna: integral
Power supply: 3V (CR2302) battery

All information was provided by the applicant)

Test configurations:

The system was configured for testing in a typical fashion (as a customer would normally use it). And its antenna was permanently attached to the EUT (Made on the PCB). One LED is located on the front appearance. This manually operated transmitter will continuously transmit signal during a time period of 2 seconds after the button is pressed. And it will deactivate after this 2s period till the button is pressed again.



1.7 General Test Conditions

Environmental reference conditions

If not defined otherwise by the Technical Committee responsible for the generic standard and/or the product standard the climatic conditions during the tests are to be within the limits specified by the manufacturer for the operation of the EUT and the test equipment.

The climatic conditions during the tests were within the following limits:

Temperature	Humidity	Atmospheric pressure
15 °C - 35 °C	30 % - 60 %	860 hPa - 1060 hPa

If explicitly required in the test base (basic) the climatic values are recorded and documented separately for the respective test.

Calibration of measurement and test equipment

All measurement and testing equipment that has a significant influence on the accuracy of qualitative measurements and tests is subject to a periodical in-house system of calibration and servicing that is part of the quality management system of the EMC laboratory of SLG Asia Test Labs & Service (HK) Limited.

Measurement uncertainties

All tests are subject to measurement uncertainties. The overall measurement uncertainty of a measurement is defined as the range of which can be supposed that it contains the true value with a specified probability. This probability is 95 % for the generally specified measurement uncertainty (so-called expanded measurement uncertainty).

The limits for emission measurements and the test levels for immunity tests in the applied standards were defined taking into consideration the accuracy limits for measurement and testing equipment required by the basic standards.

All measurement and test results of the EMC laboratory of SLG Asia Test Labs & Service (HK) Limited fulfil the requirements for measurement uncertainties according to the standards applied.



2 Test result Summary

FCC Rules 47CFR PART 15.231

Requirements according standard:		
FCC Rule	Test description	Verdict
Section 15.231(b) 1	Field strength of Fundamental	Pass
Section 15.231(b) 2, 15.209	Field strength of spurious emission	Pass
Section 15.231(c)	Emission bandwidth	Pass
Section 15.231(a) 1	Automatically deactivation	Pass

Test case verdicts

- P - Pass Test item does meet the requirement*
F - Fail Test item does not meet the requirement
N.A. - Not Applicable Test case does not apply to the test object



3 Test results

3 Transmitter parameter

3.1 Field Strength of the Fundamental Wave

Test results

Calculation of test results:

Such factors like antenna factor and cable loss are already included in the provided measurement results. All results measured with peak detector.

Frequency [MHz]	Antenna Polarization	Result [dB μ V/m]	Limit [dB μ V/m]	Margin (dB)
433.926	Vertical	72.89	80.8	7.91
433.926	Horizontal	59.07	80.8	21.73

Note: The limit is met. For the diagrams see Appendix B.

Limit 15.231(b)

Fundamental Frequency [MHz]	Limit	
	[μ V/m]	[dB μ V/m]
434	10,965	80.8

Fundamental Frequency [MHz]	Field strength of fundamental limit [μ V/m]
40,66 – 40,70	2,250
70 - 130	1,250
130 - 174	1,250 to 3,750**
174 - 260	3,750
260 - 470	3,750 to 12,000**
Above 470	12,000

According to section 15.35(b), when average radiated emission measurements are specified, including emission measurement below 1000MHz, there also is limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated.




3.2 Field strength of Spurious Emissions

(a) Measurement up to 30 MHz

Note: No Relevant emissions are expected in the frequency range 9 kHz to 30 MHz. Nevertheless a check using a near field probe was performed. No relevant emissions have been observed. Consequently no final measurement was performed.

(b) Measurement above 30 MHz

Measurement Procedure

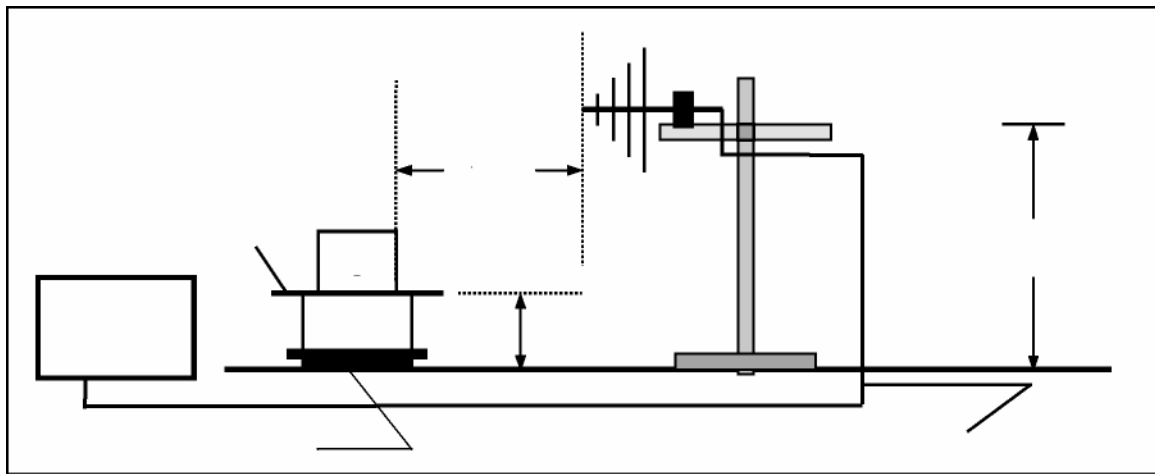

The equipment under test is placed on a non metallic table with 0.8 m height. The power supply and the RF connection points are close to the equipment under test at the floor inside a connection box. The cables to this connection box are shielded and below the double floor. The receiving antenna is placed in a height at 1.0 m to 4.0 m and in a distance of 3 m.

Measurement Equipment Used:

Test equipment	Type	S/N	Manufacturer	Cal Due Date
Semi-anechoic Chamber	Nil	Nil	Frankonia	May 13
Test Receiver	ESU 26	100050	Rohde & Schwarz	Aug 13
Bi-conical Antenna	HK116	841489/016	Rohde & Schwarz	Mar 13
Log.-Periodic Antenna	HL223	841516/020	Rohde & Schwarz	Feb 13
Horn Antenna	3115	9002-3351	EMCO	Feb 13
Active Loop Antenna	6502	9107-2651	EMCO	Dec 12

Calculation of test results:

Such factors like antenna factor and cable loss are already included in the provided measurement results. All results measured with peak detector.

SLG Asia Test Labs & Service (HK) Limited



Test results:

Frequency [MHz]	Antenna Polarization	Result [dB μ V/m]	Limit Field Strength [dB μ V/m]	Margin (dB)
868.54	Vertical	19.38	60.8	41.42
868.54	Horizontal	12.45	60.8	48.35
1301*	Vertical	24.31	54	29.69
1301*	Horizontal	23.94	54	30.06
1733	Vertical	26.51	60.8	34.29
1733	Horizontal	26.20	60.8	34.60

* This frequency fall into the restricted band.

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics which above 5th Emissions 20dB lower than the limit are not reported.

SLG Asia Test Labs & Service (HK) Limited



Limits for Field strength of Spurious Emission:

1. Limit 15.231(b)

Fundamental Frequency [MHz]	Limit [dB μ V/m]
434	60.8

Fundamental Frequency [MHz]	Field strength of Spurious Emission limit [μ V/m]
40,66 – 40,70	225
70 - 130	125
130 - 174	125 to 375**
174 - 260	375
260 - 470	375 to 1,250**
Above 470	1,250

According to section 15.35(b), when average radiated emission measurements are specified, including emission measurement below 1000MHz, there also is limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated.

2. A radiated emission test applies to harmonic/spurs that fall in the restricted bands as listed in § 15.205(a). The maximum permitted QP (< 1GHz) and average (> 1GHz) field strength is listed in § 15.209(a).

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
10.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	
13.36-13.41			



3. FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency of Emission [MHz]	Field strength [$\mu\text{V}/\text{m}$]	Field Strength [dB $\mu\text{V}/\text{m}$]
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0



3.3 Emission Bandwidth


Limit

The bandwidth of the emission shall be no wider than 0.25% of the centre frequency for devices operating above 70 MHz and below 900MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the centre frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.


Test result

Measurement of Necessary Bandwidth (BN)

Used Frequency	Measured Bandwidth	Limit	Verdict
434 MHz	331.6 kHz	1085 kHz	Pass
Measurement uncertainty	<10Hz		

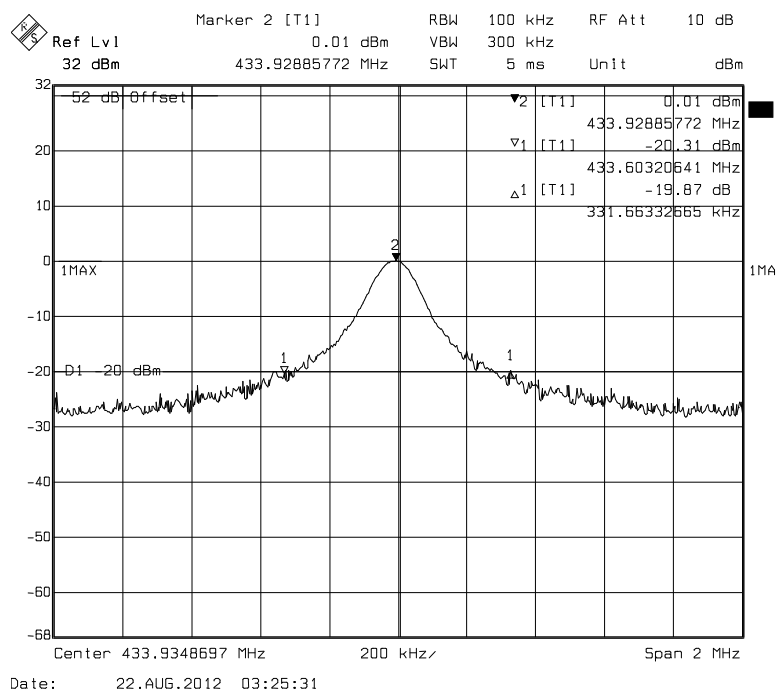

Emission Bandwidth

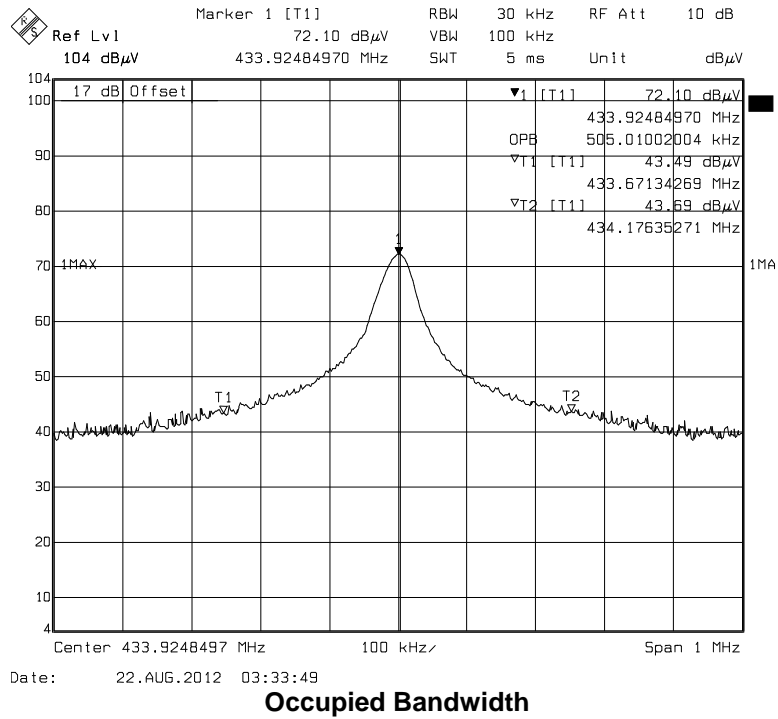



3.4 Automatically Deactivation

This transmitter is activated manually by a switch and is deactivated automatically within 2 seconds after release the switch as measured. It fulfills all requirements according Section 15.231(a).

Measured deactivation time: 1.73s

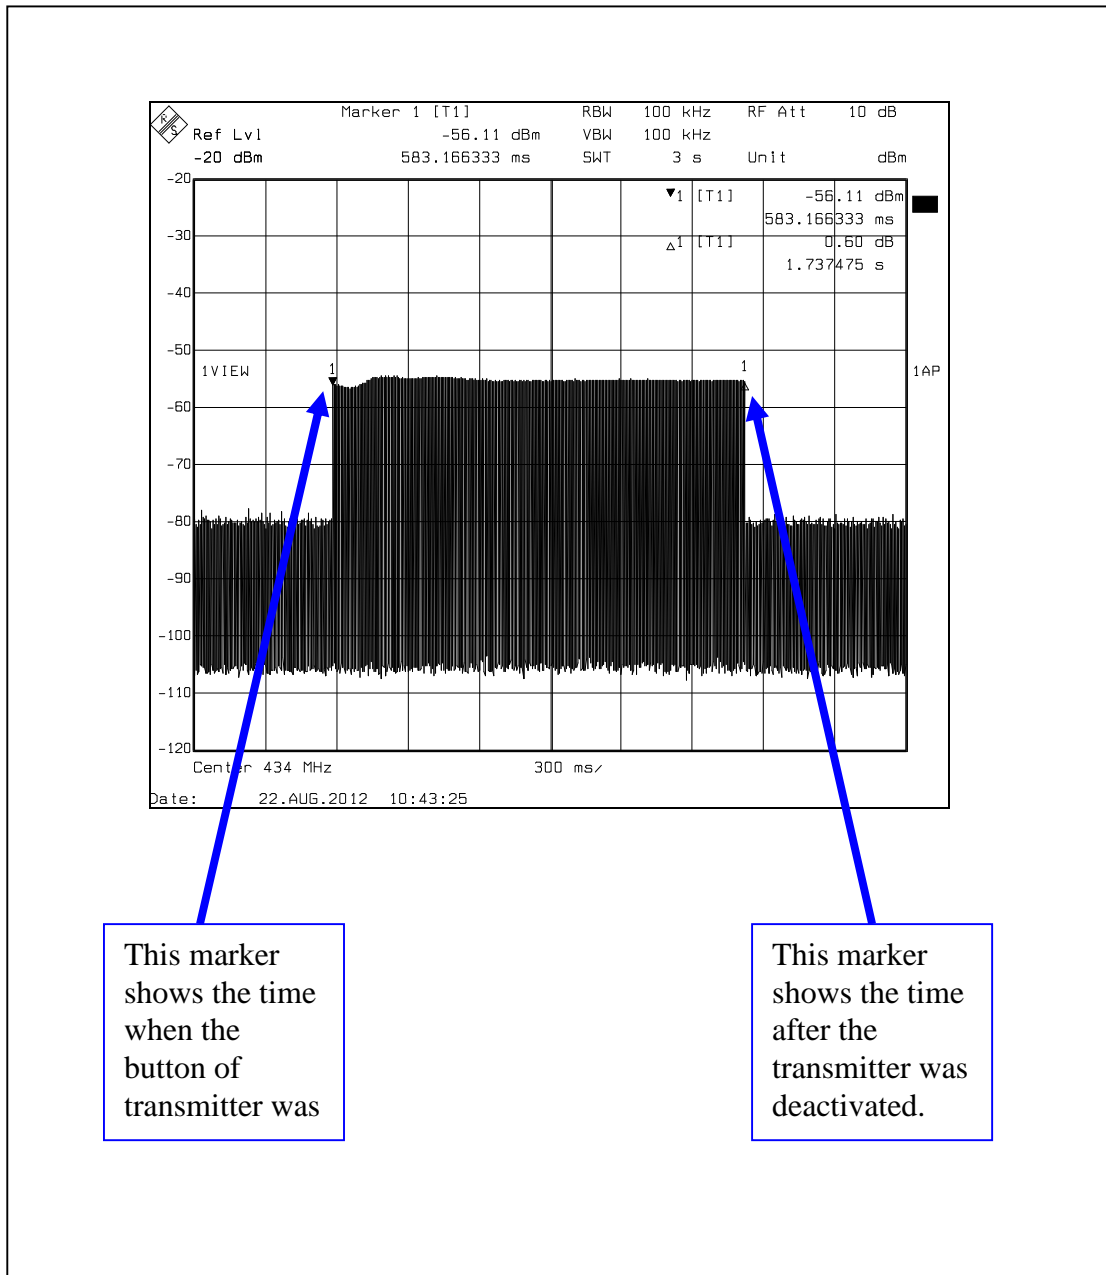


Diagram of deactivation time



4 Normative references

- /1/ FCC Rules 47 CFR PART 15 Subpart: 2012
Radio Frequency Devices
- /2/ ANSI C63.4-2009
Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and
Electronic Equipment in the Range of 9 kHz to 40 GHz



5 Disclaimer

This document based on General Terms and Conditions of SLG Asia Test Labs & Service (HK) Limited which the applicant accepted with order confirmation.

Emphasized conditions or project related conditions:

Released Test Reports apply only to the specific samples tested under stated test conditions. It is the applicant's responsibility to assure that additional production units of the tested model(s) are manufactured in same construction and with identical electrical and mechanical components to meet the same quality as tested model(s). The applicant/manufacturer/importer is responsible for any modifications made to the production units which result in non-compliance to the applied and/or relevant regulations.

SLG Asia Test Labs & Service (HK) Limited shall have no liability for any deductions inferences or generalizations drawn by the client or others from any kind of issued reports. Reports are confidential property of the client as a mutual protection to the applicant the clients. The public and ourselves extracts from the test report shall not be reproduced except in full without our written approval.

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications as appropriate. The complexity of the technical specifications means that full and thorough testing is impractical for both technical and economic reasons. Furthermore there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification. Neither is there any guarantee that such a test sample will interact with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in clause 1.6 of this report. The test report may only be reproduced or published in full.

Reproducing or publishing extracts of the report requires the prior written approval of SLG Asia Test Labs & Service (HK) Limited.

5.1 Revision Notes

This revised Report replaces the all former Test Reports based on number H1M21208-0331-P-15. These former Test Reports are not longer valid. Every Revision of the original report is recorded below and identified by the || symbol beside the text.

Revision No.	Revision
H1M21208-0331-P-15	Original Test Report