



# RadioRouter<sup>®</sup> Base Station Outdoor Installation Guide

*Issue Date: 09-23-2003*

*Version 0.2*

Flarion Technologies, Inc.  
Bedminster One  
135 Route 202/206  
South Bedminster, NJ 07921  
Web: [www.flarion.com](http://www.flarion.com)  
email: [info@flarion.com](mailto:info@flarion.com)  
Tel: (908) 947 7000  
Fax: (908) 947 2050



**Intentionally blank page**



## **COPYRIGHT AND TRADEMARK STATEMENT**

*Copyright© 2003 Flarion Technologies, Inc. All rights reserved.*

*Flarion™, flash-OFDM™, RadioRouter®, Vector-LDPC™ and FlashView™ are among the trademarks of Flarion Technologies, Inc. Trademarks of other companies contained herein are the property of their respective owners. Data subject to change without notice. Printed in USA. FTDS-200 013003*

## **Regulatory Compliance Information**

The Flarion RadioRouter complies with the following regulatory compliance requirements:

- **Safety**
  - UL 60950 — Underwriters Laboratories, Inc.
  - CAN/CSA -C22.2 No. 60950 — Canadian Standards Association
  - EN 60950 — European Norm
  - IEC 60950 — International Electrotechnical Commission
- **EMC — Electromagnetic Compatibility**
  - FCC Part 15 (CFR 47) Class A — Federal Communications Commission, Code of Federal Regulations
  - ICES-003 Class A — Interference-Causing Equipment Standard
  - EN55022 Class A
  - CISPR22 Class A
- **Telecom**
  - FCC Part 24 — Personal Communications Services
- **Industry/Environmental**
  - GR-63-CORE NEBS Level 3 — Network Equipment Building System
  - GR-1089-CORE NEBS Level 3 — Electromagnetic Compatibility and Electrical Safety
  - ETSI EN 300 019-2-3 V2.1.2 — European Telecommunications Standards Institute
  - GR-487-CORE — Generic Requirements for Electronic Equipment Cabinets

## **FCC Class A Statement**

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense. (CFR reference 15.105)



Modifying the equipment without Flarion's authorization may result in the equipment no longer complying with FCC requirements for Class A digital device. In that event, your right to use the equipment may be limited by FCC regulations, and you may be required to correct any interference to radio or television communications at your own expense. (CFR reference 15.21)

### **Canadian Class A Statement**

This Class 'A' digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe 'A' est conforme à la norme NMB-003 du Canada.

---

## HOW TO USE THIS MANUAL

This manual is intended for use by qualified engineering personnel only. The RadioRouter Base Station Outdoor Installation Guide covers all of the necessary information required to install the Outdoor RadioRouter Base Station. It contains the following sections:

- Overview
- Verifying the Site Preparation
- Installing the Cabinet
- Connecting the Power System
- Connecting the Core Network Cables
- Installing the Alarm Connections
- Connecting the Antennas Cables
- Powering Up the RadioRouter
- Powering Down the RadioRouter
- Verifying the Installation

A list of abbreviations used in this manual can be found at the end of this manual, see *Appendix C - List of Abbreviations*.

There is certain critical information contained within this manual that **MUST** be adhered to. Failure to observe this information can result in death or serious injury. Such information is marked as follows:

### WARNING:



**WARNINGS ARE ALWAYS IN UPPER CASE. WARNINGS RELATE TO POTENTIAL LOSS OF LIFE OR SERIOUS INJURY. YOU MUST OBEY ALL WARNINGS.**

### CAUTION:



**Normal Cautions are in bold type. Cautions relate to potential damage to equipment. You must obey all cautions.**

### ESD CAUTION:



**This is an ESD caution. This is signified by the electrostatic symbol which appears to the left of the caution information.**



*Note:*

*Notes are displayed in italic. Notes contain certain information that may be valuable to the reader.*



---

## TABLE OF CONTENTS

|   |         |
|---|---------|
| 1. Overview .....   | Page 1  |
| 1.1. Installation Equipment .....                           | Page 2  |
| 2. Verifying the Site Preparation .....                     | Page 3  |
| 2.1. Site Preparation Checklist — Outdoor BaseStation ..... | Page 3  |
| 2.2. Preparing the Floor .....                              | Page 3  |
| 3. Installing the Cabinet .....                             | Page 6  |
| 4. Connecting the Power System .....                        | Page 12 |
| 5. Connecting the Core Network Cables .....                 | Page 18 |
| 6. Connecting the Antennas .....                            | Page 24 |
| 7. Powering Up the Cabinet .....                            | Page 28 |
| 8. Powering Down the Cabinet .....                          | Page 33 |
| 9. Verifying the Installation .....                         | Page 35 |

## LIST OF PROCEDURES

|  |         |
|--|---------|
| Procedure 3-1 Removing the Cabinet from the Pallet ..... | Page 6  |
| Procedure 3-2 Lifting the Cabinet .....                  | Page 10 |
| Procedure 3-3 Mounting the Cabinet to the Concrete ..... | Page 11 |
| Procedure 4-1 Routing the Power Cable .....              | Page 12 |
| Procedure 4-2 Connecting the Power Cable .....           | Page 14 |
| Procedure 4-3 Connecting the Ground Cable .....          | Page 15 |
| Procedure 5-1 Routing the T1 Cables .....                | Page 18 |
| Procedure 5-2 Connecting the T1 Cables .....             | Page 20 |
| Procedure 6-1 Connecting the Antenna Cables .....        | Page 26 |
| Procedure 7-1 Powering Up the Cabinet .....              | Page 30 |
| Procedure 8-1 Powering Down the Cabinet .....            | Page 33 |

## LIST OF TABLES

|  |         |
|--|---------|
| Table 7.1 Power On Expected LEDs ..... | Page 32 |
|--|---------|

## LIST OF FIGURES

|  |        |
|--|--------|
| Figure 2.1 Clearance Hole in Base of Cabinet .....                 | Page 4 |
| Figure 2.2 Clearance Holes in RadioRouter Base — Bottom View ..... | Page 5 |

---

|   |         |
|---|---------|
| Figure 3.1 Outdoor Cabinet Rear Screw Panels.....                 | Page 7  |
| Figure 3.2 Side Screw Panels .....                                | Page 7  |
| Figure 3.3 Battery Tray — Front View .....                        | Page 8  |
| Figure 3.4 Battery Tray Open .....                                | Page 9  |
| Figure 3.5 Eyebolts for Lifting Cabinet .....                     | Page 10 |
| Figure 4.1 Power Cable Entry — Rear View .....                    | Page 12 |
| Figure 4.2 Path of Power Cable to AC Load Center — Rear View..... | Page 13 |
| Figure 4.3 Load Center Connections.....                           | Page 14 |
| Figure 4.4 Main Ground — Side View.....                           | Page 15 |
| Figure 4.5 Roxtec Assembly .....                                  | Page 16 |
| Figure 4.6 Main Ground with Cable.....                            | Page 17 |
| Figure 5.1 Access to T1 Connections — Rear View .....             | Page 18 |
| Figure 5.2 Cable Clearance Holes .....                            | Page 19 |
| Figure 5.3 T1 Termination Box — Rear View .....                   | Page 20 |
| Figure 5.4 T1 Termination Box Open .....                          | Page 21 |
| Figure 5.5 T1 Connections on 66 Block.....                        | Page 22 |
| Figure 6.1 Antenna Connectors — Side View .....                   | Page 25 |
| Figure 6.2 Antenna Connectors Schematic — Top View .....          | Page 25 |
| Figure 6.3 Antenna Cable Installed .....                          | Page 26 |
| Figure 6.4 Cables Installed in Cabinet .....                      | Page 27 |
| Figure 7.1 AC Load Center— Rear View .....                        | Page 28 |
| Figure 7.2 DC Power Distribution Panel — Front View .....         | Page 29 |
| Figure 7.3 Turning AC Breakers On .....                           | Page 30 |
| Figure 7.4 Low Voltage Disconnect.....                            | Page 31 |
| Figure 7.5 DC Battery Breakers .....                              | Page 31 |
| Figure 7.6 DC Circuit Breakers .....                              | Page 32 |

## APPENDICES

|   |           |
|---|-----------|
| Appendix A RadioRouter Outdoor BaseStation Site Preparation Punchlist ..... | Page A -1 |
| Appendix B Outdoor BaseStation Installation Punchlist.....                  | Page B -1 |
| Appendix C List of Abbreviations.....                                       | Page C -1 |



---

## Chapter 1. Overview

---

The RadioRouter BaseStation Outdoor Installation Guide covers all of the necessary information required to physically install the RadioRouter BaseStation hardware. This guide assumes that a suitable site has already been prepared. A checklist is provided to assess the site prior to installation.

Once the physical installation is complete, the RadioRouter BaseStation can be configured and commissioned. Instructions for the configuration process can be found in the RadioRouter BaseStation Commissioning Guide.

The RadioRouter BaseStation has the following physical characteristics:

- Standard EIA 19 inch rack mount
- 44 U of electronics mounting height
- 62.5"H X 49.2"W X 42.6"D with door and rear panel installed
- 1133 lbs with 2 hour battery backup
- Inherent forced air cooling heat exchanger system with PA's and Filters cooled with direct external air
- Front and rear access provided for maintenance
- Welded aluminum construction
- Antenna and T1 cable entry from rear
- Power cable entry from side
- Vented battery compartment with removable drawer access
- Color: Antique Ivory

### **WARNING:**



**THE RADIOROUTER BASESTATION OUTDOOR CABINET WEIGHS APPROXIMATELY 1150 LB AND IS TOP HEAVY. CARE MUST BE TAKEN TO HANDLE THE CABINET PROPERLY WITHOUT DANGER TO THE INSTALLATION PERSONNEL OR OTHER NEARBY EQUIPMENT.**

**IT IS THE RESPONSIBILITY OF THE INSTALLER TO ENSURE THAT ALL LOCAL, STATE, AND FEDERAL SAFETY REQUIREMENTS ARE FOLLOWED.**

### ESD CAUTION:



**It is the responsibility of the installer to ensure that all necessary precautions are taken to avoid electrostatic discharge damage to the equipment.**

*Note:*

*All installation work must be coordinated with the carrier to insure compliance with carrier requirements regarding scheduling work during maintenance windows.*

## 1.1. Installation Equipment

In addition to standard installation tools, you will need the following:

- Southco Belcore 216 key — part number E3-12-1.
- Tamper resistant insert hex bit — Wiha part number 71940 is required.
- Handle hex tool key — Sierra Pacific part number 392-K or equivalent.
- Conduit pull box with hole diameter 1.375" to 1.50".

It is recommended that special equipment be used to move the RadioRouter cabinet. The following list gives examples of equipment which can be used:

- Pallet jack with 27" width across the jacks. Pallet jack 4YX97 from Dayton or equivalent.
- Hoist or crane with heavy duty structural straps or chains — 1500 lb load capability.

---

## Chapter 2. Verifying the Site Preparation

---

Before you begin the physical installation of the RadioRouter BaseStation, confirm that the site preparation is complete. The checklist that follows identifies all items that must be in place before the installation can begin. If any items are incomplete or missing, fill out the Punchlist in *Appendix A - RadioRouter Outdoor BaseStation Site Preparation Punchlist*.

### 2.1. Site Preparation Checklist — Outdoor BaseStation

- **Floor Plan**
  - Architectural drawing or sketch of site indicating location of all equipment to be installed including base station cabinet and cables.
  - Floor plan allows adequate space for cabinet — at least 24" front, 12" side, and 24" rear
- **Environment**
  - Cement slab for mounting cabinet
  - Temperature range –40°C to 46°C
- **Electrical system**
  - Split phase 240 VAC (120/240 VAC) or three-wire plus ground 240 VAC service
  - External Service Entrance with main breaker and surge suppressor
- **Antenna plant**
  - Mounting plate with antenna connectors
- **T1 connection**
  - Network interface unit in the demarcation point
  - T1 surge suppressor installed
- **Cables**
  - AC power cabling: #12 AWG or heavier. Sufficient length to reach base station plus 36".
  - Ground cabling to master ground bar: #6 to #2 AWG
  - RF cabling: Andrews 1/2" SuperFlex jumpers or equivalent. Sufficient length to reach base station plus 24". Color Code as described in *Chapter 6. Connecting the Antennas*.
  - T1 cabling: 100 ohm twisted pair cable, Beldin 9570 or equivalent. Sufficient length to reach base station plus 36".


### 2.2. Preparing the Floor

A concrete slab at the outdoor base station location must be provided for mounting. Install concrete anchors in the slab for 3/8" size bolts, 1" minimum length. Use corrosion resistant anchors.

Locate the anchors to match the mounting hole pattern of the outdoor cabinet assembly. There are a total of 6 clearance holes in the base of the cabinet, 1 in each corner and 2 located centrally. *Figure 2.1 Clearance Hole in Base of Cabinet* shows the clearance hole in the rear right corner of the cabinet near the antenna connections. *Figure 2.2 Clearance Holes in RadioRouter Base — Bottom View* shows the location of all six holes.



***Figure 2.1 Clearance Hole in Base of Cabinet***

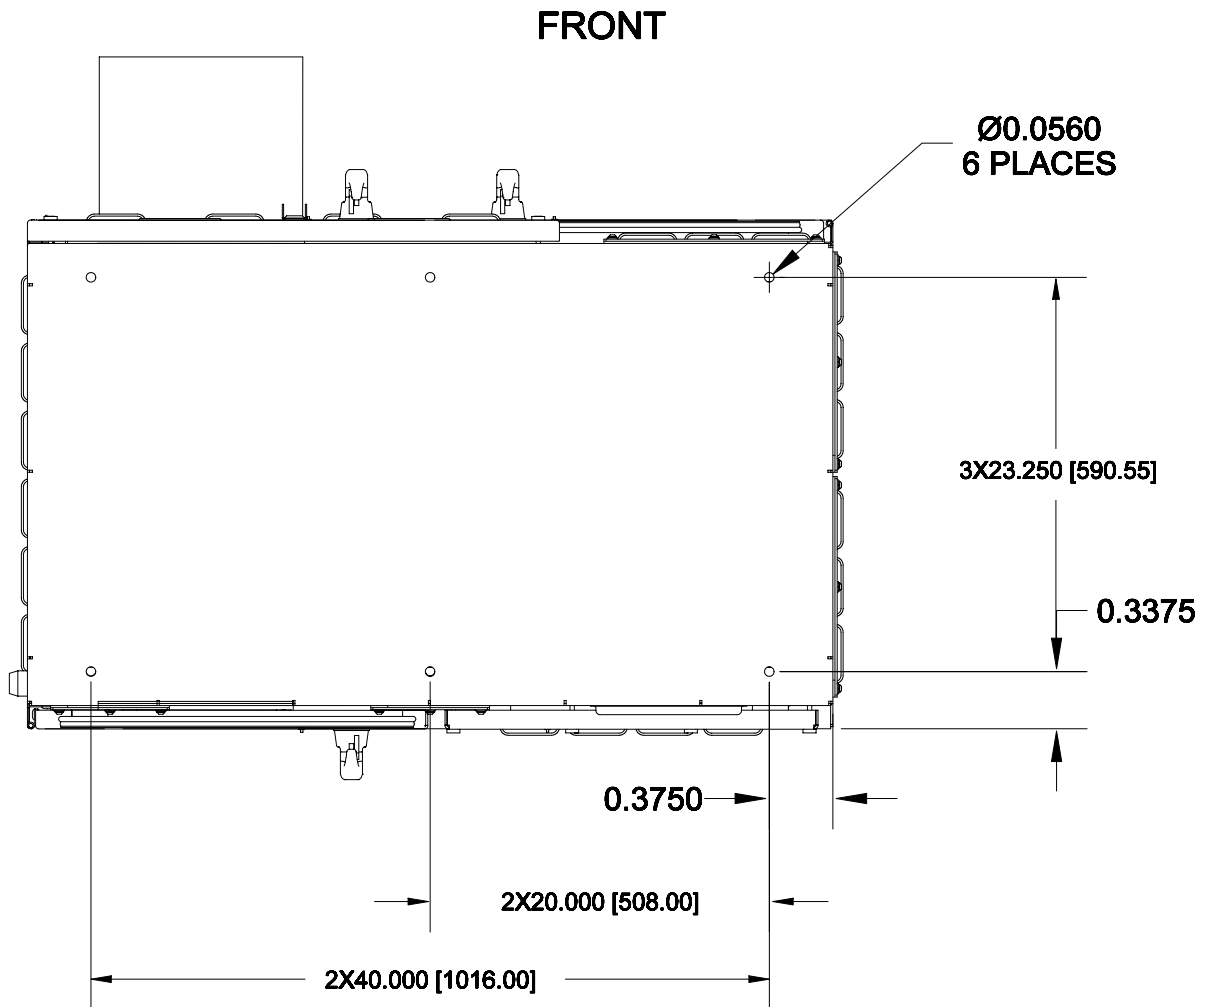

**Figure 2.2 Clearance Holes in RadioRouter Base — Bottom View**

## Chapter 3. Installing the Cabinet

---

The RadioRouter BaseStation cabinet is shipped assembled, shrouded in cardboard, and mounted on a shipping pallet.

### WARNING:



**THE RADIOROUTER BASESTATION OUTDOOR CABINET WEIGHS APPROXIMATELY 1150 LB AND IS TOP HEAVY. CARE MUST BE TAKEN TO HANDLE THE CABINET PROPERLY WITHOUT DANGER TO THE INSTALLATION PERSONNEL OR OTHER NEARBY EQUIPMENT.**

Equipment that can be used to move the base station is described in *Section 1.1. Installation Equipment*.

### Procedure 3-1 Removing the Cabinet from the Pallet

When this procedure is completed, the cabinet will be free to move directly into place.

1. Remove the cardboard shroud and discard.
2. Inspect the cabinet for damage. If there is any damage, fill out the Punchlist in *Appendix B - Outdoor BaseStation Installation Punchlist*. If the damage is minor and does not prevent continuation of the installation procedures, continue with the installation. If the damage prevents continuation of the installation, contact the Project Manager for instructions.
3. Remove the rear access screw panels. *Figure 3.1 Outdoor Cabinet Rear Screw Panels* shows the location of the panels. A tamper resistant insert hex bit, Wiha part number 71940, is required to remove the tamper resistant screws.

#### Note:

*Save all removed screws. Reinstallation of the rear panel and side panels is required, and you must use the same tamper resistant screws that were removed.*



***Figure 3.1 Outdoor Cabinet Rear Screw Panels***

4. Remove the side access screw panels using the tamper resistant insert hex bit. See *Figure 3.2 Side Screw Panels*.



***Figure 3.2 Side Screw Panels***

5. Locate the battery tray on the front of the cabinet. See *Figure 3.3 Battery Tray — Front View*.



***Figure 3.3 Battery Tray — Front View***

6. Unscrew the two screws in the front of the tray. Use a 7/16" socket for the hex head bolts.
7. Unlock the tray lock with a Southco Belcore 216 key part number E3-12-1.



8. Slide the battery tray out completely. See *Figure 3.4 Battery Tray Open*.



***Figure 3.4 Battery Tray Open***

9. Remove all four cabinet to pallet mounting bolts. You may have to access the front bolts from the rear access panels.
10. Close the battery tray.
11. Lock the tray and replace the two screws.
12. The cabinet is now ready to be moved into place.

### Procedure 3-2 Lifting the Cabinet

The cabinet can be lifted by a hoist or crane using heavy duty structural straps or chains with 1500 lb load capability. Attach the straps or chains with hooks to the four eyebolts located at the top of the cabinet. *Figure 3.5 Eyebolts for Lifting Cabinet* shows the location of the eyebolts.

*Note:*

*Before lifting the cabinet into place, make sure all necessary mounting holes have been drilled in the concrete slab. See Section 2.2. Preparing the Floor.*



***Figure 3.5 Eyebolts for Lifting Cabinet***

### **Procedure 3-3 Mounting the Cabinet to the Concrete**

Once the cabinet has been moved to its final location, it must be bolted to the concrete.

1. Align the clearance holes in the base of the cabinet to the threaded holes in the concrete.
2. Bolt the cabinet to the concrete using 3/8" diameter bolts, 1" minimum length, and flat washers. Use corrosion resistant screws and washers.
3. Tighten the bolts to 180 in-lb +/- 25 in-lb.
4. Replace the rear and side access panels after all of the system cables have been routed.

## Chapter 4. Connecting the Power System

---

The RadioRouter BaseStation Outdoor Cabinet requires a connection to AC power. This chapter contains procedures for routing the power cable and connecting to power and ground.

### WARNING:



**WHEN PERFORMING ANY TASKS INVOLVING THE POWER SYSTEMS, MAKE SURE THAT THE POWER IS NOT LIVE. ALL POWER OPERATIONS SHOULD BE PERFORMED BY QUALIFIED PERSONNEL ONLY.**

### Procedure 4-1 Routing the Power Cable


The main power cable is routed into the cabinet from the left rear of the cabinet up to the AC Load Center. See *Figure 4.1 Power Cable Entry — Rear View* and *Figure 4.2 Path of Power Cable to AC Load Center — Rear View*. Internal cabinet wiring routes the power from the load center to the equipment in the base station.

For this procedure you will need:

- Handle hex tool key — Sierra Pacific part number 392-K or equivalent
- Conduit pull box with hole diameter 1.375" to 1.50"



***Figure 4.1 Power Cable Entry — Rear View***

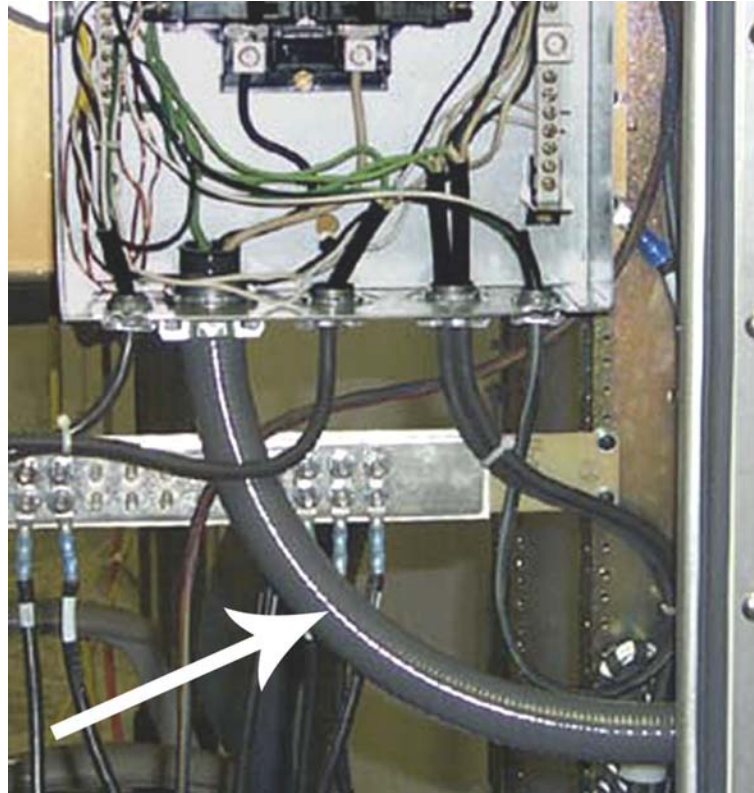


***Figure 4.2 Path of Power Cable to AC Load Center — Rear View***

1. Open the rear door of the cabinet using the handle hex tool key.
2. Route the cable through the side conduit connector hole into the 1" flexible conduit provided.
3. Interface to the 1" bulkhead conduit fitting provided on the outside of the cabinet with a conduit pull box with hole diameter 1.375" to 1.50". The interface must be leak tight.
4. Route the cable through the flexible conduit up to the AC load center.

## Procedure 4-2 Connecting the Power Cable

1. Locate the AC power connection points in the Load Center. See *Figure 4.3 Load Center Connections*.

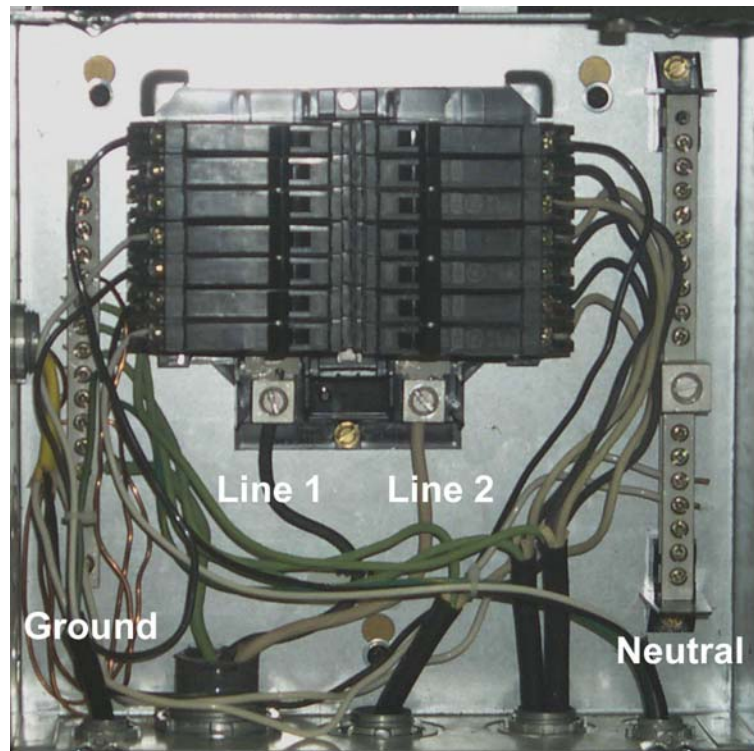

***Figure 4.3 Load Center Connections***

2. Connect the power cable to the screw terminals for Neutral, Ground, Line 1, and Line 2. Use #12 AWG wire or heavier.
3. Connect the other end of the cable to the AC power source in the Service Entrance.

### Procedure 4-3 Connecting the Ground Cable

The cabinet must be connected to earth ground at the installation site.

#### CAUTION:



**Failure to properly connect the cabinet to ground could result in permanent damage to the equipment.**

1. Locate the main ground connection. It is located inside the lower side panel on the lightning suppression bar next to the antenna connections. See *Figure 4.4 Main Ground — Side View*.



***Figure 4.4 Main Ground — Side View***

2. Remove the outer panel and seal inserts of the Roxtec assembly. See *Figure 4.5 Roxtec Assembly*. Additional information and instructions for the assembly are available on line from Roxtec.




***Figure 4.5 Roxtec Assembly***

3. Route the ground cable into the lower compartment through the rectangular opening.



4. Connect the ground cable to the connectors with 6 to 2 AWG wire with a 2-hole lug for a 1/4" diameter stud. See *Figure 4.6 Main Ground with Cable*.

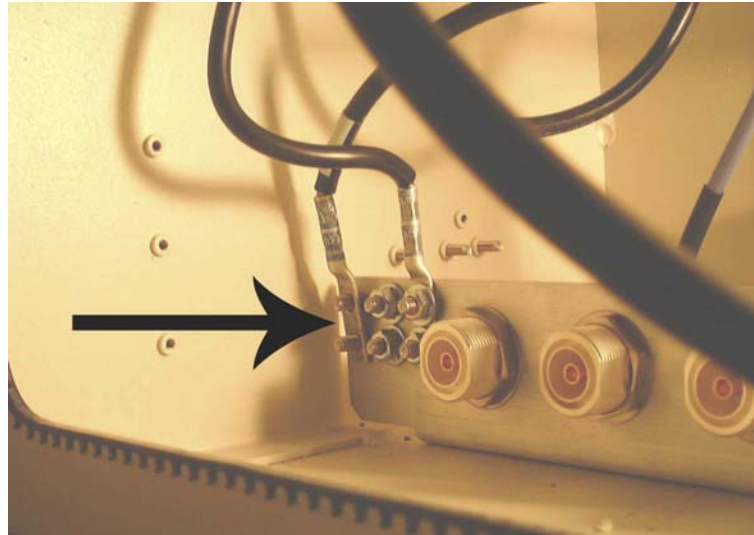

***Figure 4.6 Main Ground with Cable***

5. Fasten the lug on to the stud with the nuts provided. Tighten nuts to 40–50 in-lb torque.
6. Connect the other end of the cable to the Master Ground Bar or other suitable ground source available at the installation site.
7. Reinstall the Roxtec seal inserts and outer panel after all of the system cables have been routed. The seal inserts are installed tight against each cable and are held in place when the outer panel is installed. See *Figure 6.4 Cables Installed in Cabinet*.

## Chapter 5. Connecting the Core Network Cables

---

The RadioRouter BaseStation accesses the core network through a T1 connection.

### Procedure 5-1 Routing the T1 Cables

1. Remove the rear access panel above the Roxtec cable entry ports. See *Figure 5.1 Access to T1 Connections — Rear View*. Use a 7/8" socket for the hex head bolts.



**Figure 5.1 Access to T1 Connections — Rear View**

2. If they have not already been removed, remove the outer panel and seal inserts of the Roxtec assembly.

3. Insert the cables through the rectangular opening into the lower compartment of the cabinet.
4. Route the cables through the internal cable clearance holes into the electronics compartment. *Figure 5.2 Cable Clearance Holes* shows the clearance holes.



***Figure 5.2 Cable Clearance Holes***

5. Reinstall the Roxtec seal inserts and outer panel after all of the system cables have been routed. The seal inserts are installed tight against each cable and are held in place when the outer panel is installed. See *Figure 6.4 Cables Installed in Cabinet*.

## Procedure 5-2 Connecting the T1 Cables


T1 connections are made using a 66 punch down block or using cables terminated in RJ-48 connectors. Both connectors are located in the T1 termination box shown in *Figure 5.3 T1 Termination Box — Rear View*.



***Figure 5.3 T1 Termination Box — Rear View***

1. Loosen the two latch screws on the right of the T1 termination box. Open the box.

2. Route the cable through the existing cable grip in the T1 termination box as shown in *Figure 5.4 T1 Termination Box Open*. Seal by tightening the cable grip seal nut.

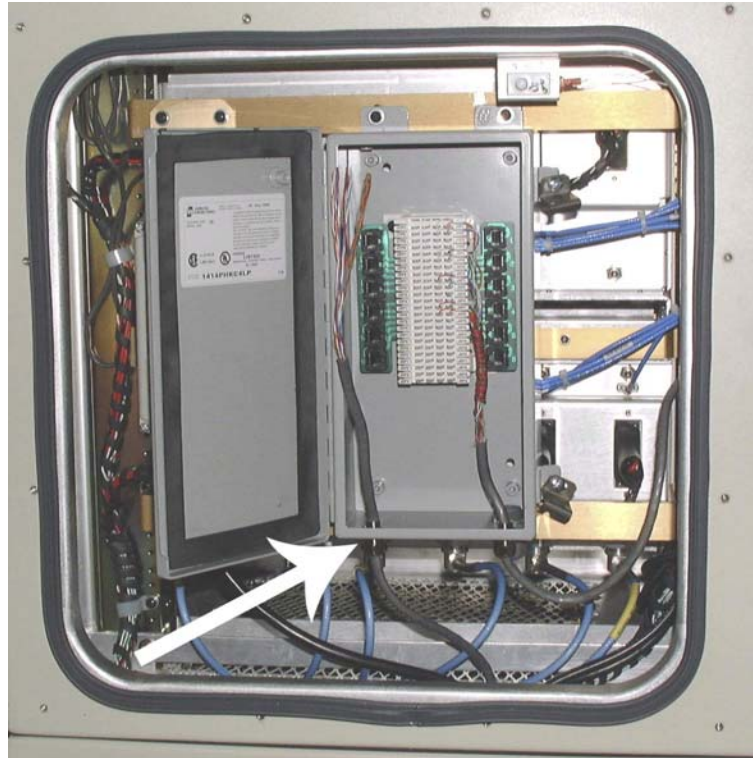

**Figure 5.4 T1 Termination Box Open**

3. To install T1 using RJ-48 plugs, insert the plugs in the connectors to the left of the 66 block. Begin with port 1 on top and continue down for additional ports. Up to 4 T1 ports may be connected.
4. To install T1 using the 66 block, expose an appropriate length of wire. Attach to the punch down insulation displacing terminals according to the diagram in *Figure 5.5 T1 Connections on 66 Block*.

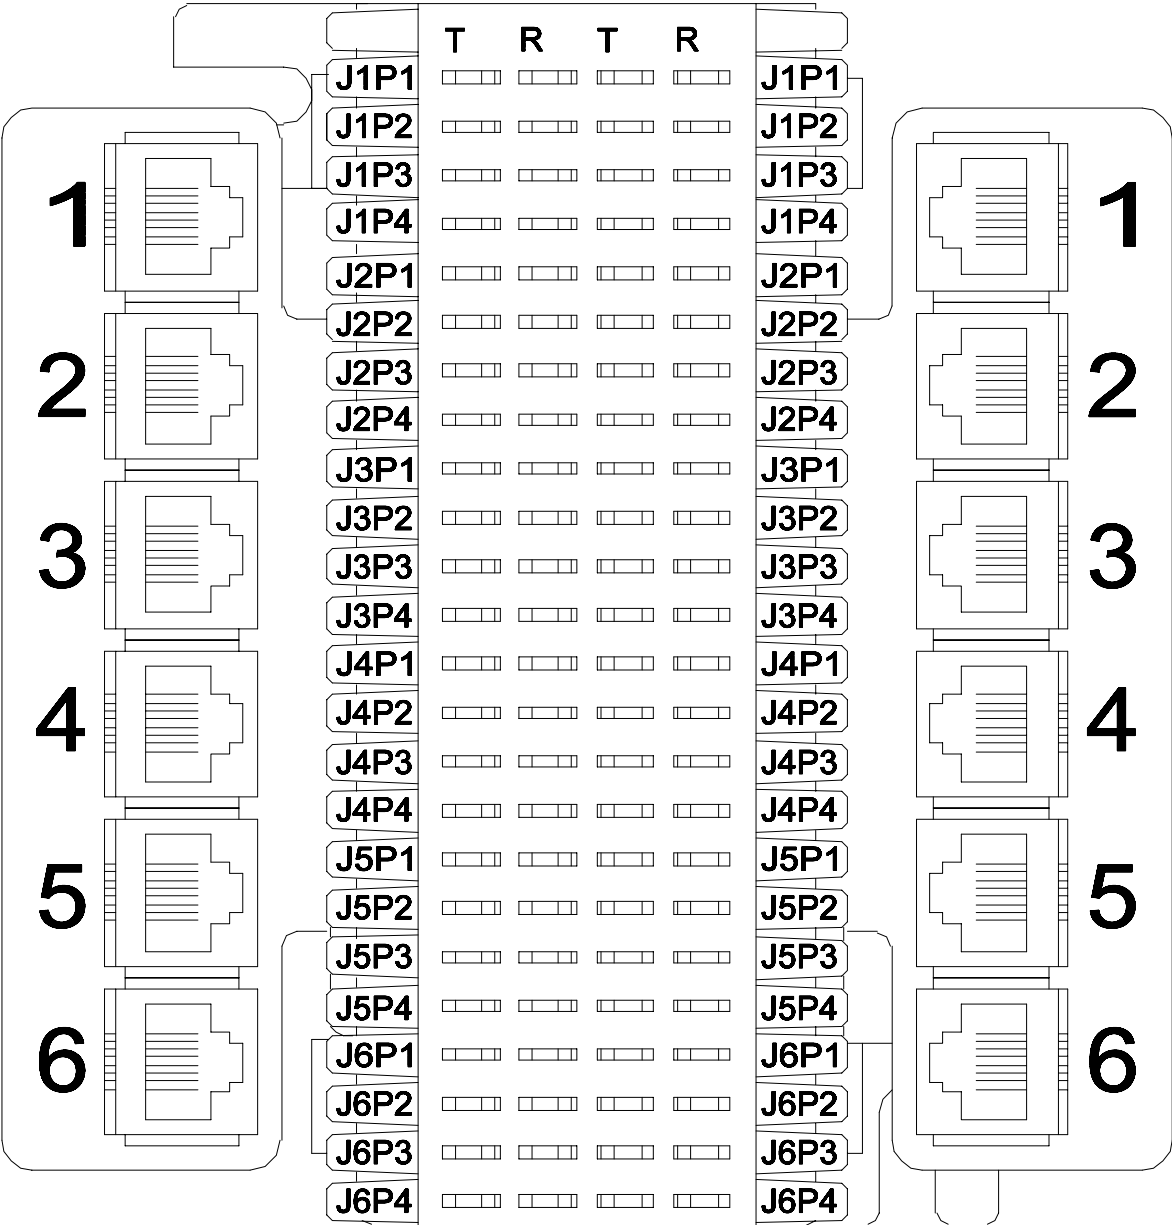


Figure 5.5 T1 Connections on 66 Block

5. After all connections are made, close the door of the T1 termination box. Secure the box with the existing latch screws.
6. Replace the rear panel using hex head bolts and cup washers. Torque each bolt until the gasket is completely compressed and a hard stop is achieved.

## Chapter 6. Connecting the Antennas

---

### CAUTION:



Antenna cables may be prepared for installation, but do not connect the cables to the cabinet until the completion of RF Commissioning. Instructions for RF Commissioning can be found in the *RadioRouter RF Commissioning Guide*.

**All antenna operations should be performed by qualified personnel only. Installers must meet the requirements of FCC Bulletin OET 65 and coax terminations and have expertise working with RF coaxial cable. Care must be taken not to crimp or damage the cables.**

There are six 7/16" DIN Female antenna connectors. See *Figure 6.1 Antenna Connectors — Side View* and *Figure 6.2 Antenna Connectors Schematic — Top View*. When viewed from the front of the cabinet from *left to right*, the connectors are:

1. Alpha sector Tx/Rx
2. Beta sector Tx/Rx
3. Gamma sector Tx/Rx
4. Alpha sector Rx only
5. Beta sector Rx only
6. Gamma sector Rx only


The antenna cables that attach to the connectors should be clearly labeled with color-coded bands as follows:

1. Alpha sector Tx/Rx — 1 white band
2. Beta sector Tx/Rx — 1 blue band
3. Gamma sector Tx/Rx — 1 green band
4. Alpha sector RX only — 2 white bands
5. Beta sector Rx only — 2 blue bands
6. Gamma sector Rx only — 2 green bands






**Figure 6.1 Antenna Connectors — Side View**

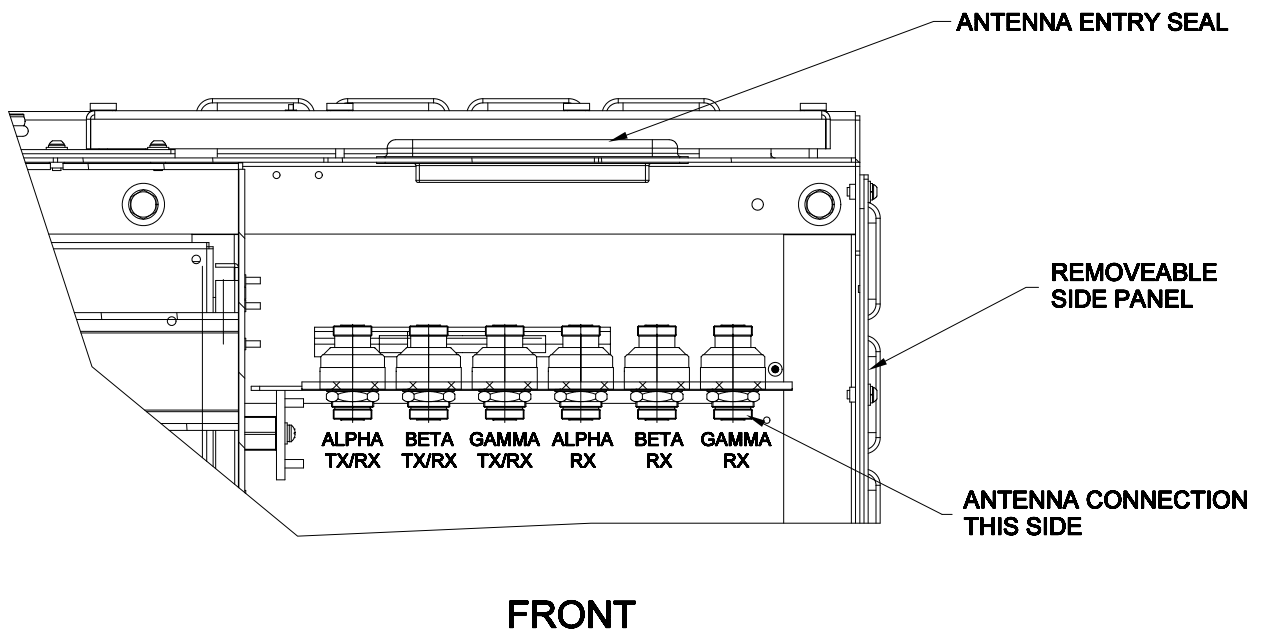

**Figure 6.2 Antenna Connectors Schematic — Top View**

## Procedure 6-1 Connecting the Antenna Cables


1. If they have not been removed already, remove the side access screw panels using a tamper resistant insert hex bit. See *Figure 3.2 Side Screw Panels*.
2. If they have not been removed already, remove the outer panel and seal inserts of the Roxtec assembly on the rear of the cabinet. See *Figure 4.5 Roxtec Assembly*
3. Route the antenna cable through the rectangular opening in the rear of the cabinet.
4. Route the cable with the proper bend radius and connect it to the lightning suppressors shown in *Figure 6.3 Antenna Cable Installed*.

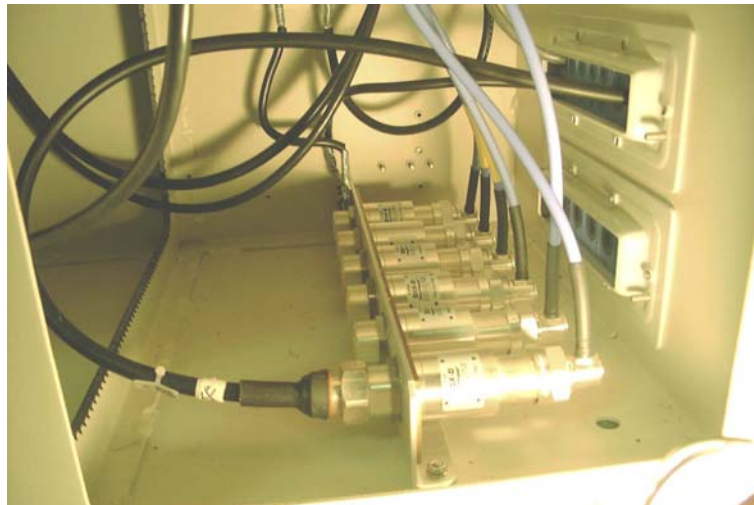

**Figure 6.3 Antenna Cable Installed**

5. Fully seat the connector and hand tighten with an appropriate tool. The cable connector nut is 1 1/4" hex across flats.
6. Repeat *Step 3* through *Step 5* for all antenna cables.

7. Reinstall the Roxtec seal inserts and outer panel after all of the system cables have been routed. The seal inserts are installed tight against each cable and are held in place when the outer panel is installed as shown in *Figure 6.4 Cables Installed in Cabinet*.

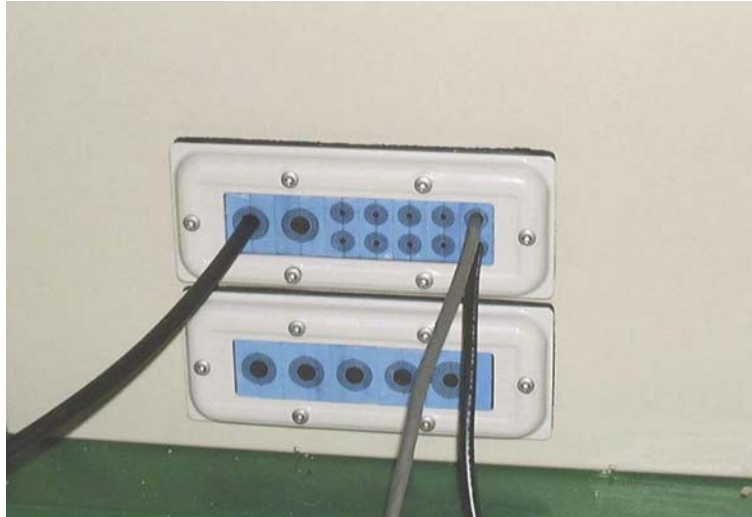

***Figure 6.4 Cables Installed in Cabinet***

## Chapter 7. Powering Up the Cabinet

---


The cabinet requires AC power to operate. Before attempting to power up the cabinet, verify that AC power is available. It may be necessary to wait for a maintenance window to connect the cabinet to AC power and perform this procedure.

**WARNING:**




**ALL POWER OPERATIONS SHOULD BE PERFORMED BY QUALIFIED PERSONNEL ONLY. BEFORE ATTEMPTING TO POWER UP THE SYSTEM, CONFIRM THAT ALL POWER CONNECTIONS HAVE BEEN MADE PROPERLY.**

The base station is powered up using the AC circuit breakers shown in *Figure 7.1 AC Load Center— Rear View* and the DC circuit breakers shown in *Figure 7.2 DC Power Distribution Panel — Front View*.

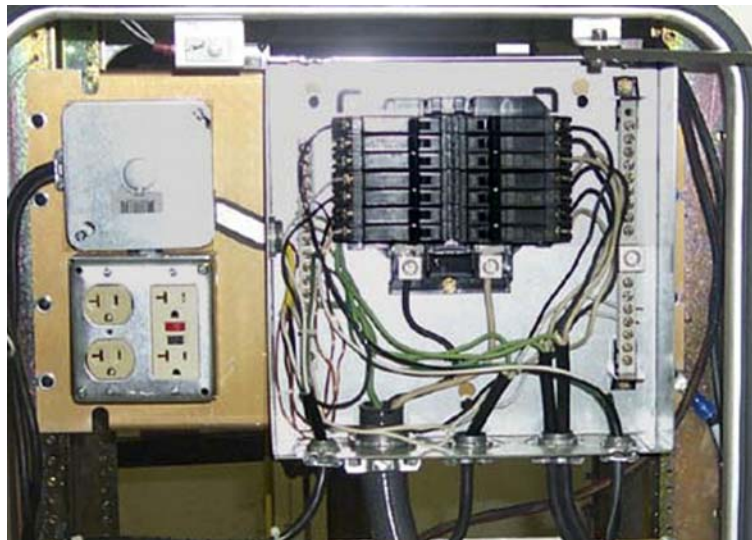

***Figure 7.1 AC Load Center— Rear View***

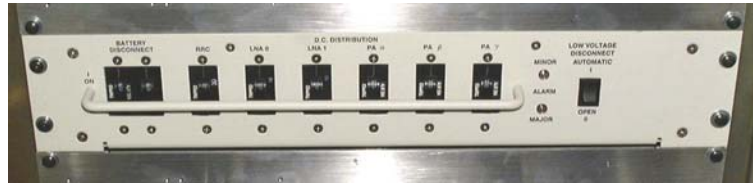


**Figure 7.2 DC Power Distribution Panel — Front View**

## Procedure 7-1 Powering Up the Cabinet


The cabinet is powered up using the AC circuit breakers in the Load Center at the rear of the cabinet and the DC circuit breakers on the distribution panel on the front of the cabinet.

1. Turn all of the DC circuit breakers to the Off position. Make sure that the Low Voltage Disconnect switch is set to Automatic.
2. Turn on the AC circuit breakers in the following order. Begin with the top, left breaker. See *Figure 7.3 Turning AC Breakers On*.
  - Utility Outlet
  - Surge Suppressor
  - Heater
  - Heat Exchanger
  - Continuing with the top right breaker: Battery Heater
  - Rectifier #1
  - Rectifier #2
  - Rectifier #3

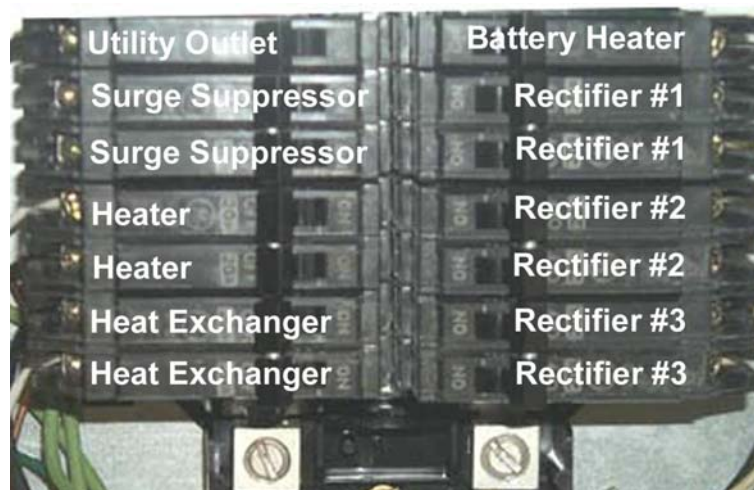


**Figure 7.3 Turning AC Breakers On**

3. On the DC power distribution panel, make sure that the Low Voltage Disconnect switch is set to AUTOMATIC. See *Figure 7.4 Low Voltage Disconnect*.

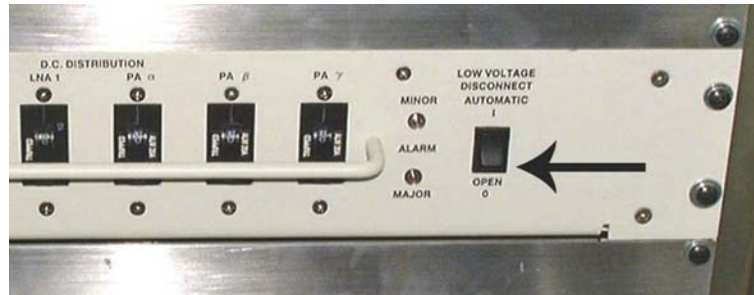

**Figure 7.4 Low Voltage Disconnect**


4. Turn on the Battery Disconnect breaker. The Battery Disconnect breaker is on the left as you face the front of the cabinet. See *Figure 7.5 DC Battery Breakers*.

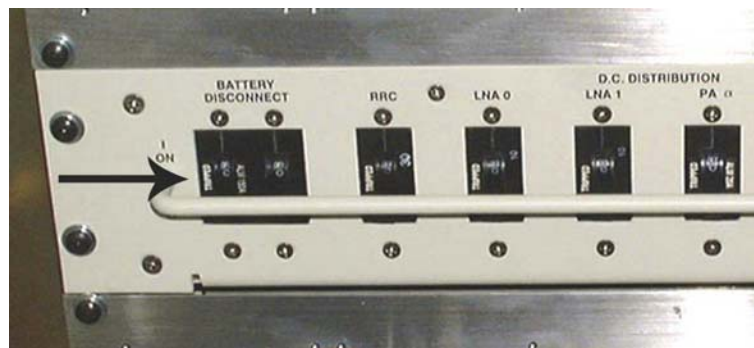

**Figure 7.5 DC Battery Breakers**



5. Turn on the RRC breaker. The RRC breaker is to the right of the Battery Disconnect breaker. See *Figure 7.6 DC Circuit Breakers*.

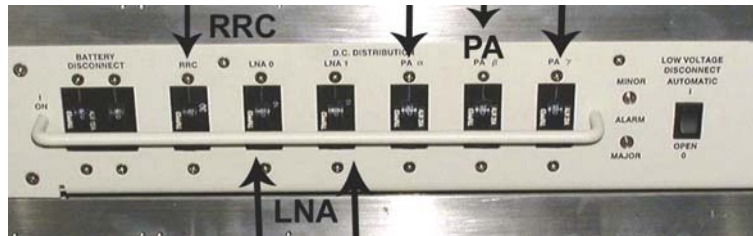

**Figure 7.6 DC Circuit Breakers**

6. Turn on the LNA breakers which are located next to the RRC breaker.
7. Turn on the PA breakers. The PA breakers are on the right of the LNA breakers.
8. Verify that the LEDs on the front of the cabinet match *Table 7.1 Power On Expected LEDs*. If the LEDs do not match the table, power the system down and check the wiring.

**Table 7.1 Power On Expected LEDs**

| Unit         | LED Name              | Condition |
|--------------|-----------------------|-----------|
| PDU          | FAULT                 | Green     |
| PDU          | Service               | Green     |
| PDU Fan Tray | FAN                   | Green     |
| RRC          | FAN STATUS            | Green     |
| RRC          | FAN STATUS            | Green     |
| PCU1         | ON (GREEN) FAIL (RED) | Green     |
| PCU2         | ON (GREEN) FAIL (RED) | Green     |

9. Replace all side and rear panels using the original tamper resistant screws. Close all doors.



---

## Chapter 8. Powering Down the Cabinet

---

The RadioRouter BaseStation is powered down using a PC connected to the COM1 port on the MCU board. This helps ensure that all system files are closed before the power is shut off. The PC should be running a terminal emulation such as Microsoft Windows HyperTerminal.

The following settings should be used for HyperTerminal sessions:

- Bits per second: 9600
- Data bits: 8
- Parity: None
- Stop bits: 1
- Flow control: None

### WARNING:



**ALL POWER OPERATIONS SHOULD BE PERFORMED BY QUALIFIED PERSONNEL ONLY.**

### Procedure 8-1 Powering Down the Cabinet

1. Connect a PC to the serial port of the MCU.
2. Run a terminal emulator such as Microsoft Window HyperTerminal.
3. At the `Login:` prompt, type `root` and press **Enter**.
4. At the `Password:` prompt, type the root login password and press **Enter**.
5. At the `BS_Name#>` prompt, type `halt` and press **Enter**. Be careful not to touch any other keys after hitting **Enter** or the system will restart.
6. The system will display the message `System Halted` followed by the message `Press any key to reboot`. Do not press any keys.
7. Turn off the DC breakers in reverse order to how they were turned on. See *Figure 7.6 DC Circuit Breakers* through *Figure 7.4 Low Voltage Disconnect*.
  - PA breakers
  - LNA breakers

- RRC breaker
  - Battery breakers
8. Turn off the AC breakers beginning with the bottom right breaker as follows. See *Figure 7.3 Turning AC Breakers On*.
- Rectifier #3
  - Rectifier #2
  - Rectifier #1
  - Battery Heater
  - Continuing with the bottom left breaker: Heat Exchanger
  - Heater
  - Surge Suppressor
  - Utility Outlet

## Chapter 9. Verifying the Installation

---

Verifying the proper installation of the cabinet must be done before the installation can be considered complete.

Verify all of the following items:

1. Clearance requirements are met — at least 24" front, 12" side, and 24" rear. There must be room to open the cabinet doors for service.
2. The base station is powered up. All the LEDs in *Table 7.1 Power On Expected LEDs* must reflect the states listed in the table. The system should remain in the powered up state. If it is necessary to power down the base station, do so *only* in accordance with the instructions in *Chapter 8. Powering Down the Cabinet*.
3. Correct terminations on all T1 cables.
4. No kinks in RF cables.
5. RF cable markings match those specified in *Chapter 6. Connecting the Antennas*.

Intentionally blank page



## APPENDIX A

### RadioRouter Outdoor BaseStation Site Preparation Punchlist

| Site Preparation Items   | If Okay ✓ OR Describe Outage |
|--|------------------------------|
| <b>Environment</b>   |                              |
| Adequate Clearance: 24" front, 12" side, 24" rear  |                              |
| Cement slab for mounting cabinet   |                              |
| <b>Electrical system</b>   |                              |
| 240 VAC Service  |                              |
| External Service Entrance w/main breaker and surge suppressor                                |                              |
| <b>Antenna plant</b>   |                              |
| Mounting plate with antenna connectors   |                              |
| <b>T1 connection</b>   |                              |
| Network Interface Unit in Demarc point   |                              |
| Surge suppressor installed   |                              |
| <b>Cables</b>  |                              |
| AC power cabling: #12 AWG THHN or THWN — length to reach cabinet plus 36"                    |                              |
| Ground cabling to master ground bar: #6 to #2 AWG THHN or THWN                               |                              |
| RF cabling — Andrews 1/2" SuperFlex jumpers — length to reach cabinet plus 24". Color coded. |                              |
| T1 cabling — 100 ohm twisted pair — length to reach cabinet plus 36"                         |                              |



Intentionally blank page



## APPENDIX B

### Outdoor BaseStation Installation Punchlist

| Installation Items           | If Okay ✓ OR Describe Outage |
|------------------------------|------------------------------|
| <b>Overall</b>               |                              |
| Cabinet is physically intact |                              |
| <b>RadioRouter Chassis</b>   |                              |
| MCU                          |                              |
| BHU                          |                              |
| PCU                          |                              |
| BBU                          |                              |
| TXU                          |                              |
| RXU                          |                              |
| AIU                          |                              |
| <b>LNA/Duplexers</b>         |                              |
| <b>Power Subsystem</b>       |                              |
| <b>T1</b>                    |                              |
| <b>Antenna Connections</b>   |                              |
| <b>Battery</b>               |                              |
| <b>Other</b>                 |                              |



Intentionally blank page



## APPENDIX C

### List of Abbreviations

|        |  |
|--------|--|
| AA     | Authentication and Authorization           |
| ADC    | Analog-to-Digital Converter                |
| BBU    | Baseband Unit                              |
| BHU    | Backhaul Unit                              |
| DAC    | Digital-to-Analog Converter                |
| DNS    | Domain Name Server                         |
| DSX    | Digital Signal Cross-Connect               |
| FA     | Foreign Agent                              |
| FFT    | Fast Fourier Transform                     |
| LNA    | Low Noise Amplifier                        |
| MCU    | Master Control Unit                        |
| MLPPP  | Multi-Link Point-to-Point Protocol         |
| NTP    | Network Termination Point                  |
| OCXO   | Oven Controlled Crystal Oscillator         |
| PA     | Power Amplifier                            |
| PCU    | Power Conditioning Unit                    |
| RADIUS | Remote Authentication Dial In User Service |
| RRC    | Radio Router Chassis                       |
| SNMP   | Simple Network Management Protocol         |
| TXU    | Transmit Unit                              |