



**ADDENDUM TO XCEEDID TEST REPORT FC08-023**

**FOR THE**

**PROX/SMART CARD READER, XF1500P & XF1500CS4**

**FCC PART 15 SUBPART B SECTIONS 15.107 & 15.109 CLASS B,  
SUBPART C SECTIONS 15.207, 15.209 & 15.225 AND RSS-210 ISSUE 7**

**TESTING**

**DATE OF ISSUE: JUNE 25, 2008**

**PREPARED FOR:**

XceedID  
500 Golden Ridge Road, Bldg. 1  
Golden, CO 80401

W.O. No.: 87587

**PREPARED BY:**

Mary Ellen Clayton  
CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

Date of test: February 14-25, 2008

**Report No.: FC08-023A**

This report contains a total of 42 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc. The results in this report apply only to the items tested, as identified herein.

## TABLE OF CONTENTS

Administrative Information .....	3
Approvals .....	3
Summary of Results .....	4
Conditions During Testing .....	4
FCC 15.31(e) Voltage Variation .....	5
FCC 15.31(m) Number Of Channels .....	5
FCC 15.33(a) Frequency Ranges Tested .....	5
FCC 15.35 Analyzer Bandwidth Settings .....	5
FCC 15.203 Antenna Requirements .....	5
EUT Operating Frequency .....	5
Temperature And Humidity During Testing .....	5
Equipment Under Test (EUT) Description .....	6
Equipment Under Test .....	6
Peripheral Devices .....	6
Report of Emissions Measurements .....	7
Testing Parameters .....	7
FCC 15.107/15.207 Conducted Emissions .....	9
FCC 15.109 Radiated Emissions .....	18
FCC 15.209 Radiated Emissions .....	23
Fcc 15.225 Emissions Mask .....	33
FCC 15.225(a) Field Strength of Fundamental .....	35
FCC 15.225(e) Frequency Stability .....	38
RSS-GEN 99% Bandwidth .....	40

## ADMINISTRATIVE INFORMATION

**DATE OF TEST:** February 14-25, 2008

**DATE OF RECEIPT:** February 14, 2008

**REPRESENTATIVE:** Mike Conlin

**MANUFACTURER:**

XceedID  
500 Golden Ridge Road, Bldg. 1  
Golden, CO 80401

**TEST LOCATION:**

CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

**TEST METHOD:** ANSI C63.4 (2003), RSS-210 Issue 7 and RSS-GEN Issue 2

**PURPOSE OF TEST:**

**Original Report:** To perform the testing of the Prox/Smart Card Reader, XF1500P & XF1500CS4 with the requirements for FCC Part 15 Subpart B Sections 15.107 & 15.109 Class B, Subpart C Sections 15.207, 15.209 & 15.225 and RSS-210 devices.


**Addendum A:** To revise page 5 of the test report to correct the 15.109 frequency range tested to 30-1000MHz with no new testing.

## APPROVALS

**QUALITY ASSURANCE:**

Steve Behm, Director of Engineering Services

**TEST PERSONNEL:**

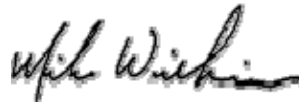A handwritten signature in black ink, appearing to read "Mike Wilkinson".

---

Mike Wilkinson, EMC Engineer/Lab  
Manager

## SUMMARY OF RESULTS

Test	Specification/Method	Results
Voltage Variations	FCC Part 15.31(e)	Pass
Conducted Emissions	FCC Part 15 Subpart B Section 15.107 Class B/15.207	Pass
Radiated Emissions	FCC Part 15 Subpart B Section 15.109 Class B	Pass
Field Strength of Spurious Emissions	FCC Part 15 Subpart C Section 15.209	Pass
Emissions Mask	FCC Part 15 Subpart C Section 15.225	Pass
Field Strength of Fundamental	FCC Part 15 Subpart C Section 15.225(a)	Pass
Frequency Stability	FCC Part 15 Subpart C Section 15.225(e)	Pass
99% Bandwidth	RSS-210/RSS-GEN	Pass

## CONDITIONS DURING TESTING

No modifications to the EUT were necessary during testing.

### **FCC 15.31(e) Voltage Variations**

Power variations per FCC15.31(e) was performed on EUT with no variation in output power noted.

### **FCC 15.31(m) Number Of Channels**

This device was tested on two channels.

### **FCC 15.33(a) Frequency Ranges Tested**

15.107/15.207 Conducted Emissions: 150 kHz – 30 MHz

15.109 Radiated Emissions: 30 MHz – 1000 MHz

15.209 Radiated Emissions: 9 kHz - 1000 MHz

15.225 Radiated Emissions: Carrier

<b>FCC SECTION 15.35: ANALYZER BANDWIDTH SETTINGS PER FREQUENCY RANGE</b>			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz

### **FCC 15.203 Antenna Requirements**

The antenna is an integral part of the EUT and is non-removable; therefore the EUT complies with Section 15.203 of the FCC rules.

### **EUT Operating Frequency**

The EUT was operating at 125kHz and 13.56MHz.

### **Temperature And Humidity During Testing**

The temperature during testing was within +15°C and + 35°C.

The relative humidity was between 20% and 75%.

## **EQUIPMENT UNDER TEST (EUT) DESCRIPTION**

The customer declares the EUT tested by CKC Laboratories was representative of a production unit.

## **EQUIPMENT UNDER TEST**

### **Prox/Smart Card Reader**

Manuf: XceedID  
Model: XF1500P  
Serial: 0022

### **Prox/Smart Card Reader**

Manuf: XceedID  
Model: XF1500CS4  
Serial: 0020

## **PERIPHERAL DEVICES**

The EUT was tested with the following peripheral device(s):

### **Power Supply**

Manuf: Topward  
Model: TPS-4000  
Serial: 918520

## REPORT OF EMISSIONS MEASUREMENTS

### TESTING PARAMETERS

The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

### CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in  $\text{dB}\mu\text{V}/\text{m}$ , the spectrum analyzer reading in  $\text{dB}\mu\text{V}$  was corrected by using the following formula. This reading was then compared to the applicable specification limit.

SAMPLE CALCULATIONS		
	Meter reading	( $\text{dB}\mu\text{V}$ )
+	Antenna Factor	(dB)
+	Cable Loss	(dB)
-	Distance Correction	(dB)
-	Preamplifier Gain	(dB)
=	Corrected Reading	( $\text{dB}\mu\text{V}/\text{m}$ )

## **TEST INSTRUMENTATION AND ANALYZER SETTINGS**

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. The following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used. When conducted emissions testing was performed, a 10 dB external attenuator was used with internal offset correction in the analyzer.

## **SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS**

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "Peak" mode. Whenever a "Quasi-Peak" or "Average" reading is listed as one of the highest readings, this is indicated as a "QP" or an "Ave" on the appropriate rows of the data sheets. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

### **Peak**

In this mode, the spectrum analyzer/receiver readings were recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature of the measuring device called "peak hold," the measuring device had the ability to measure transients or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

### **Quasi-Peak**

When the true peak values exceeded or were within 2 dB of the specification limit, quasi-peak measurements were taken using the quasi-peak detector.


### **Average**

For certain frequencies, average measurements may be made using the spectrum analyzer/receiver. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.



## FCC 15.107/15.207 CONDUCTED EMISSIONS

### Test Setup Photos

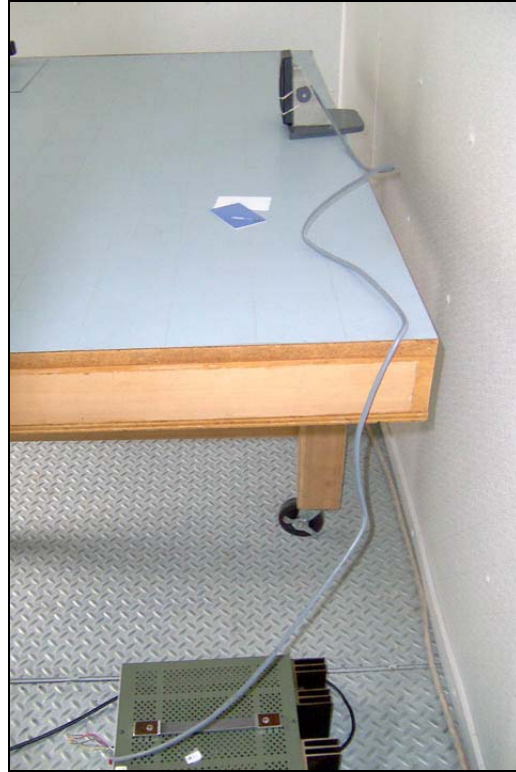

## Test Data Sheets

Test Location: CKC Laboratories, Inc. • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **XceedID**  
 Specification: **FCC 15.107B/15.207 - AVE**  
 Work Order #: **87587**  
 Test Type: **Conducted Emissions**  
 Equipment: **Prox/Smart Card Reader**  
 Manufacturer: **XceedID**  
 Model: **XF1500P**  
 S/N: **0022**

Date: 2/20/2008  
 Time: 09:05:02  
 Sequence#: 42  
 Tested By: Mike Wilkinson  
 120V 60Hz

### Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
Oscilloscope	US37340242	07/27/2007	07/27/2009	02713
150kHz HP Filter TTE	G7754	01/22/2008	01/22/2010	02608
Internal LISN Cable	N/A	03/23/2007	03/23/2009	CAB-SITED-INT-LISN
LISN, 8028-50-TS-24-BNC	8379276, 280	05/07/2007	05/07/2009	1248 & 1249

### Equipment Under Test (\* = EUT):

Function	Manufacturer	Model #	S/N
Prox/Smart Card Reader*	XceedID	XF1500P	0022

### Support Devices:

Function	Manufacturer	Model #	S/N
Power Supply	Topward	TPS-4000	918520

### Test Conditions / Notes:

FCC 15.107(a) Class B/15.207. EUT is a proximity reader operating at 125kHz and 13.56MHz. The EUT is transmitting continuously. The equipment is powered via 12VDC power supply. Digital output operation verified before and after each test with the O-Scope. Frequency Range Investigated: 150kHz to 30 MHz. Temperature: 22°C, Relative Humidity: 40%. SA RES BW = 9kHz, VID BW = 9kHz.

### Transducer Legend:

T1=CAB-SITED INT LISN 100k-30M	T2=Filter 150kHz HP AN02608
T3=LISN -280 - BK	

### Measurement Data:


Reading listed by margin.

Test Lead: Black

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	13.559M	30.2	+10.9	+0.2	+0.8		+0.0	42.1	50.0	-7.9	Black
Ave											
^	13.559M	41.1	+10.9	+0.2	+0.8		+0.0	53.0	50.0	+3.0	Black
3	27.121M	19.3	+11.0	+0.2	+1.3		+0.0	31.8	50.0	-18.2	Black
4	4.364M	9.4	+11.0	+0.1	+0.3		+0.0	20.8	46.0	-25.2	Black

5	4.128M	9.4	+11.0	+0.1	+0.3	+0.0	20.8	46.0	-25.2	Black
6	1.811M	8.2	+11.5	+0.2	+0.2	+0.0	20.1	46.0	-25.9	Black
7	3.631M	7.2	+11.1	+0.1	+0.3	+0.0	18.7	46.0	-27.3	Black
8	11.515M	10.7	+10.8	+0.2	+0.6	+0.0	22.3	50.0	-27.7	Black
9	180.000k	10.6	+11.7	+0.4	+0.2	+0.0	22.9	54.5	-31.6	Black
10	6.823M	5.0	+10.9	+0.1	+0.4	+0.0	16.4	50.0	-33.6	Black

CKC Laboratories, Inc. Date: 2/20/2008 Time: 09:05:02 XceedID WO#: 87587  
FCC 15.207 - AVE Test Lead: Black 120V 60Hz Sequence#: 42  
XceedID M/N XF1500P (EXTATTN)

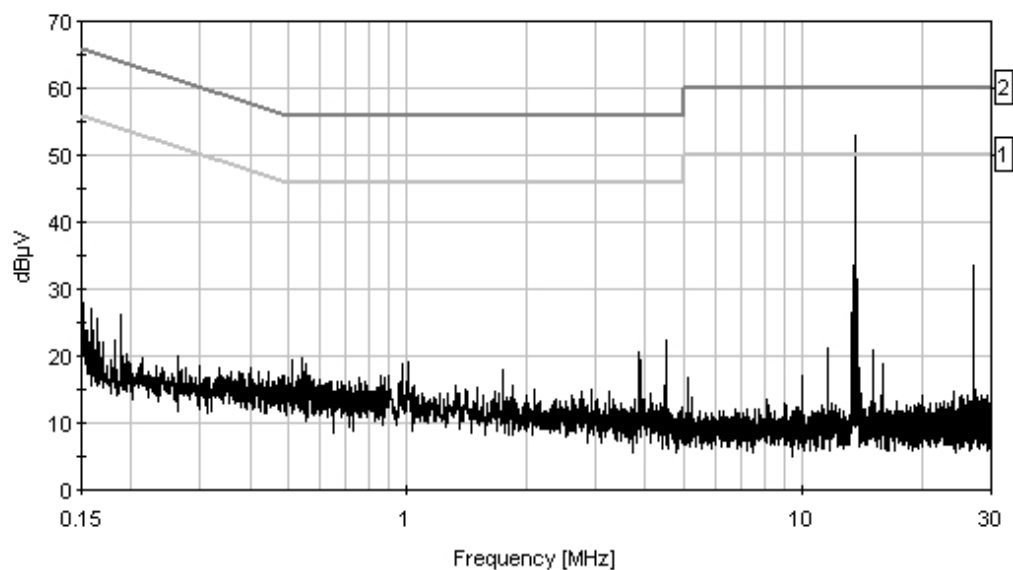

— Sweep Data      — 1 - FCC 15.207 - AVE      — 2 - FCC 15.207 - QP

Test Location: CKC Laboratories, Inc. • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **XceedID**  
 Specification: **FCC 15.107B/15.207 - AVE**  
 Work Order #: **87587**  
 Test Type: **Conducted Emissions**  
 Equipment: **Prox/Smart Card Reader**  
 Manufacturer: **XceedID**  
 Model: **XF1500P**  
 S/N: **0022**

Date: 2/20/2008  
 Time: 08:58:29  
 Sequence#: 41  
 Tested By: Mike Wilkinson  
 120V 60Hz

**Test Equipment:**

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
Oscilloscope	US37340242	07/27/2007	07/27/2009	02713
150kHz HP Filter TTE	G7754	01/22/2008	01/22/2010	02608
Internal LISN Cable	N/A	03/23/2007	03/23/2009	CAB-SITED-INT-LISN
LISN, 8028-50-TS-24-BNC	8379276, 280	05/07/2007	05/07/2009	1248 & 1249

**Equipment Under Test (\* = EUT):**

Function	Manufacturer	Model #	S/N
Prox/Smart Card Reader*	XceedID	XF1500P	0022

**Support Devices:**

Function	Manufacturer	Model #	S/N
Power Supply	Topward	TPS-4000	918520

**Test Conditions / Notes:**

FCC 15.107(a) Class B/15.207. EUT is a proximity reader operating at 125kHz and 13.56MHz. The EUT is transmitting continuously. The equipment is powered via 12VDC power supply. Digital output operation verified before and after each test with the O-Scope. Frequency Range Investigated: 150kHz to 30 MHz. Temperature: 22°C, Relative Humidity: 40%. SA RES BW = 9kHz, VID BW = 9kHz.

**Transducer Legend:**

T1=CAB-SITED INT LISN 100k-30M	T2=Filter 150kHz HP AN02608
T3=LISN -276 - WT	

**Measurement Data:**


Reading listed by margin.

Test Lead: White

Measurement Data		Reading listed by margin					Test Lead: White				
#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	Dist dB	Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	13.561M	29.6	+10.9	+0.2	+1.2		+0.0	41.9	50.0	-8.1	White
Ave											
^	13.561M	44.9	+10.9	+0.2	+1.2		+0.0	57.2	50.0	+7.2	White
3	27.121M	21.4	+11.0	+0.2	+1.6		+0.0	34.2	50.0	-15.8	White
4	11.538M	16.9	+10.8	+0.2	+1.0		+0.0	28.9	50.0	-21.1	White
5	4.380M	10.4	+11.0	+0.1	+0.4		+0.0	21.9	46.0	-24.1	White
6	1.027M	9.5	+11.8	+0.2	+0.2		+0.0	21.7	46.0	-24.3	White

7	150.000k	15.9	+11.6	+2.9	+0.1	+0.0	30.5	56.0	-25.5	White
8	4.013M	6.9	+11.0	+0.1	+0.3	+0.0	18.3	46.0	-27.7	White
9	9.997M	7.0	+10.8	+0.2	+0.8	+0.0	18.8	50.0	-31.2	White

CKC Laboratories, Inc. Date: 2/20/2008 Time: 08:58:29 XceedID WVO#: 87587  
FCC 15.207 - AVE Test Lead: White 120V 60Hz Sequence#: 41  
XceedID M/N XF1500P (EXTATTN)

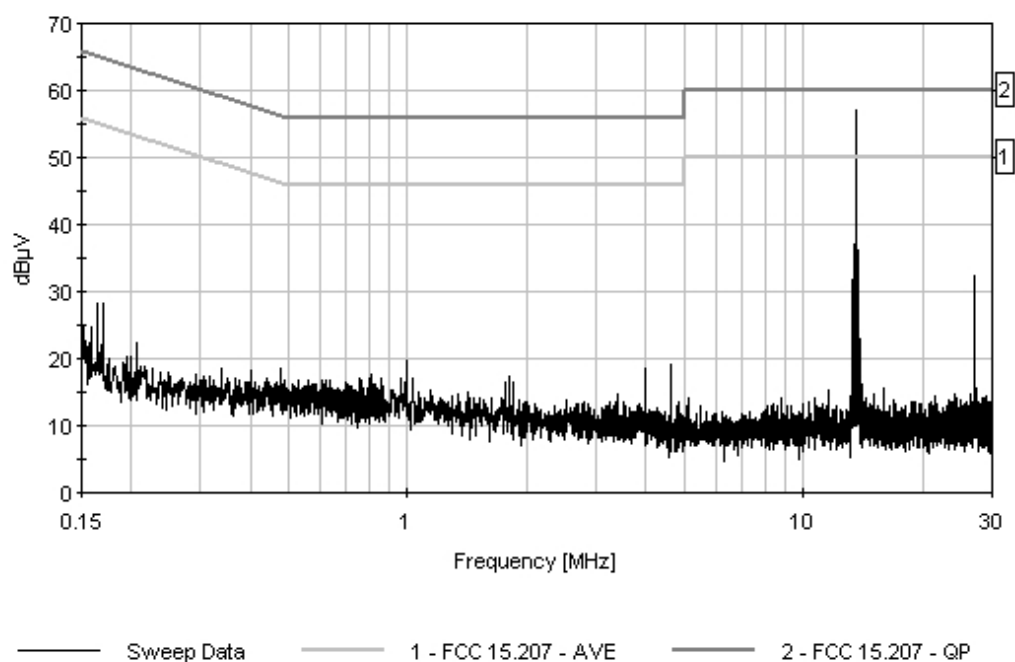

Test Location: CKC Laboratories, Inc. • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **XceedID**  
 Specification: **FCC 15/107B/15.207 - AVE**  
 Work Order #: **87587**  
 Test Type: **Conducted Emissions**  
 Equipment: **Prox/Smart Card Reader**  
 Manufacturer: **XceedID**  
 Model: **XF1500CS4**  
 S/N: **0020**

Date: 2/20/2008  
 Time: 10:37:19  
 Sequence#: 43  
 Tested By: Mike Wilkinson  
 120V 60Hz

**Test Equipment:**

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
Oscilloscope	US37340242	07/27/2007	07/27/2009	02713
150kHz HP Filter TTE	G7754	01/22/2008	01/22/2010	02608
Internal LISN Cable	N/A	03/23/2007	03/23/2009	CAB-SITED-INT-LISN
LISN, 8028-50-TS-24-BNC	8379276, 280	05/07/2007	05/07/2009	1248 & 1249

**Equipment Under Test (\* = EUT):**

Function	Manufacturer	Model #	S/N
Prox/Smart Card Reader*	XceedID	XF1500CS4	0020

**Support Devices:**

Function	Manufacturer	Model #	S/N
Power Supply	Topward	TPS-4000	918520

**Test Conditions / Notes:**

FCC 15.107(a) Class B/15.207. EUT is a proximity reader operating at 125kHz and 13.56MHz. The EUT is transmitting continuously. The equipment is powered via 12VDC power supply. Digital output operation verified before and after each test with the O-Scope. Frequency Range Investigated: 150kHz to 30 MHz. Temperature: 22°C, Relative Humidity: 40%. SA RES BW =9kHz, VID BW = 9kHz.

**Transducer Legend:**

T1=CAB-SITED INT LISN 100k-30M	T2=Filter 150kHz HP AN02608
T3=LISN -280 - BK	

**Measurement Data:**


Reading listed by margin.

Test Lead: Black

Measurement Data		Reading listed by margin:					Test Load: Black				
#	Freq MHz	Rdng dBμ V	T1 dB	T2 dB	T3 dB	dB	Dist Table	Corr dBμ V	Spec dBμ V	Margin dB	Polar Ant
1	13.560M	49.5	+10.9	+0.2	+0.8		+0.0	61.4	50.0	+11.4	Black
									Carrier with antenna attached		
2	13.560M	19.6	+10.9	+0.2	+0.8		+0.0	31.5	50.0	-18.5	Black
									Carrier with dummy load		
3	27.120M	17.1	+11.0	+0.2	+1.3		+0.0	29.6	50.0	-20.4	Black
4	186.000k	19.7	+11.7	+0.4	+0.2		+0.0	32.0	54.2	-22.2	Black
5	1.027M	9.4	+11.8	+0.2	+0.2		+0.0	21.6	46.0	-24.4	Black

6	4.369M	9.9	+11.0	+0.1	+0.3	+0.0	21.3	46.0	-24.7	Black
7	1.821M	8.7	+11.5	+0.2	+0.2	+0.0	20.6	46.0	-25.4	Black
8	11.538M	8.2	+10.8	+0.2	+0.6	+0.0	19.8	50.0	-30.2	Black
9	8.172M	6.2	+10.8	+0.1	+0.4	+0.0	17.5	50.0	-32.5	Black

CKC Laboratories, Inc. Date: 2/20/2008 Time: 10:37:19 XceedID WVO#: 87587  
FCC 15.207 - AVE Test Lead: Black 120V 60Hz Sequence#: 43  
XceedID M/N XF1500CS4 (EXTATTN)

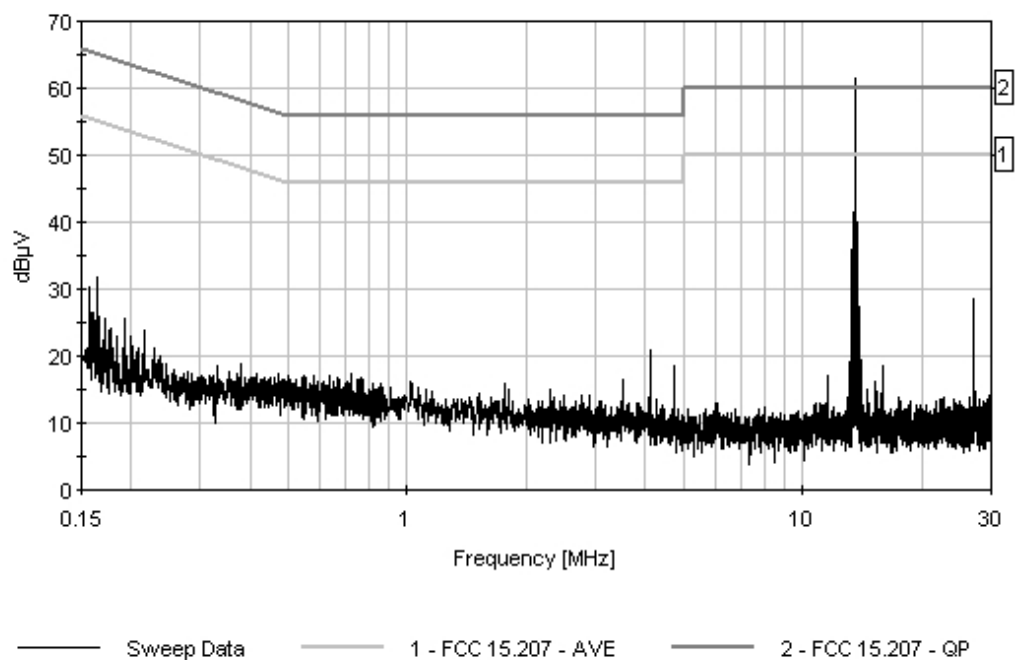

Test Location: CKC Laboratories, Inc. • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **XceedID**  
 Specification: **FCC 15.107B/15.207 - AVE**  
 Work Order #: **87587**  
 Test Type: **Conducted Emissions**  
 Equipment: **Prox/Smart Card Reader**  
 Manufacturer: **XceedID**  
 Model: **XF1500CS4**  
 S/N: **0020**

Date: 2/20/2008  
 Time: 10:44:42  
 Sequence#: 44  
 Tested By: Mike Wilkinson  
 120V 60Hz

**Test Equipment:**

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
Oscilloscope	US37340242	07/27/2007	07/27/2009	02713
150kHz HP Filter TTE	G7754	01/22/2008	01/22/2010	02608
Internal LISN Cable	N/A	03/23/2007	03/23/2009	CAB-SITED-INT-LISN
LISN, 8028-50-TS-24-BNC	8379276, 280	05/07/2007	05/07/2009	1248 & 1249

**Equipment Under Test (\* = EUT):**

Function	Manufacturer	Model #	S/N
Prox/Smart Card Reader*	XceedID	XF1500CS4	0020

**Support Devices:**

Function	Manufacturer	Model #	S/N
Power Supply	Topward	TPS-4000	918520

**Test Conditions / Notes:**

FCC 15.107(a) Class B/15.207. EUT is a proximity reader operating at 125kHz and 13.56MHz. The EUT is transmitting continuously. The equipment is powered via 12VDC power supply. Digital output operation verified before and after each test with the O-Scope. Frequency Range Investigated: 150kHz to 30 MHz. Temperature: 22°C, Relative Humidity: 40%. SA RES BW =9kHz, VID BW = 9kHz.

**Transducer Legend:**

T1=CAB-SITED INT LISN 100k-30M	T2=Filter 150kHz HP AN02608
T3=LISN -276 - WT	

**Measurement Data:**

Reading listed by margin.


Test Lead: White

Measurement Data		Reading listed by margin:					Test Lead: White				
#	Freq MHz	Rdng dBμ V	T1 dB	T2 dB	T3 dB	dB	Dist Table	Corr dBμ V	Spec dBμ V	Margin dB	Polar Ant
1	13.560M	49.5	+10.9	+0.2	+1.2		+0.0	61.8	50.0	+11.8	White
									Carrier with antenna attached		
2	13.561M	19.5	+10.9	+0.2	+1.2		+0.0	31.8	50.0	-18.2	White
									Carrier with dummy load		
3	27.120M	16.5	+11.0	+0.2	+1.6		+0.0	29.3	50.0	-20.7	White
4	4.369M	9.4	+11.0	+0.1	+0.4		+0.0	20.9	46.0	-25.1	White
5	4.132M	9.4	+11.0	+0.1	+0.3		+0.0	20.8	46.0	-25.2	White



6	1.027M	8.4	+11.8	+0.2	+0.2	+0.0	20.6	46.0	-25.4	White
7	1.750M	7.3	+11.5	+0.2	+0.2	+0.0	19.2	46.0	-26.8	White
8	2.887M	4.9	+11.2	+0.1	+0.3	+0.0	16.5	46.0	-29.5	White
9	150.000k	11.9	+11.6	+2.9	+0.1	+0.0	26.5	56.0	-29.5	White
10	11.526M	8.1	+10.8	+0.2	+1.0	+0.0	20.1	50.0	-29.9	White

CKC Laboratories, Inc. Date: 2/20/2008 Time: 10:44:42 XceedID WO#: 87587  
FCC 15.207 - AVE Test Lead: White 120V 60Hz Sequence#: 44  
XceedID M/N XF1500CS4 (EXTATTN)

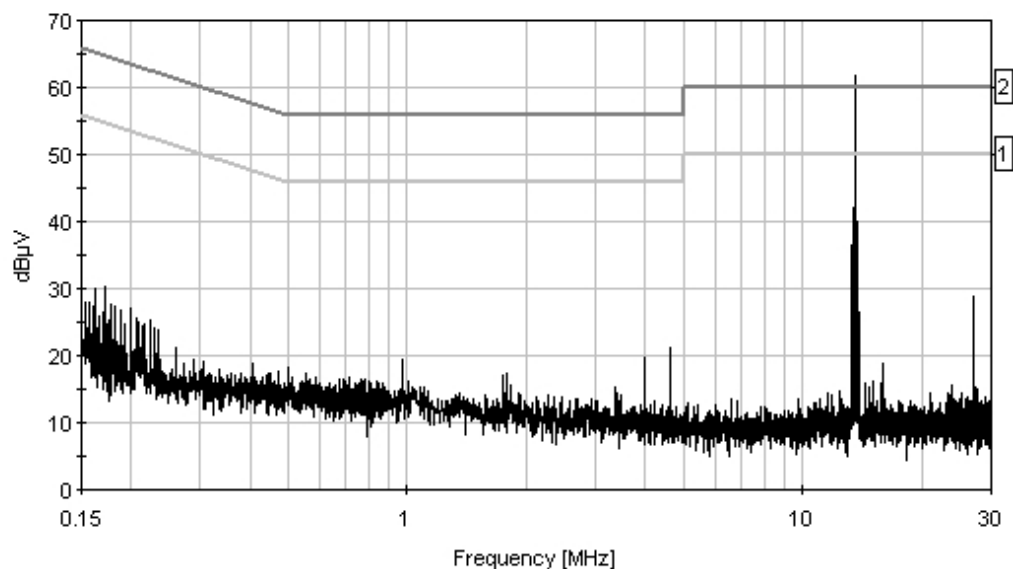

— Sweep Data      — 1 - FCC 15.207 - AVE      — 2 - FCC 15.207 - QP

## FCC 15.109 RADIATED EMISSIONS

### Test Setup Photos



## Test Data Sheets

Test Location: CKC Laboratories, Inc. • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **XceedID**  
 Specification: **15.109 CLASS B**  
 Work Order #: **87587**  
 Test Type: **Radiated Scan**  
 Equipment: **Prox/Smart Card Reader**  
 Manufacturer: XceedID  
 Model: XF1500P  
 S/N: 0022

Date: 2/14/2008  
 Time: 14:15:01  
 Sequence#: 3  
 Tested By: Mike Wilkinson

### Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
HP 8447D Preamp	1937A02604	03/14/2007	03/14/2009	00099
Chase CBL6111C Bilog	2456	12/30/2006	12/30/2008	01991
10M SITE CBL MAST CBL	N/A	03/23/2007	03/23/2009	CAB-SITED10M
Oscilloscope	US37340242	07/27/2007	07/27/2009	02713

### Equipment Under Test (\* = EUT):

Function	Manufacturer	Model #	S/N
Prox/Smart Card Reader*	XceedID	XF1500P	0022

### Support Devices:

Function	Manufacturer	Model #	S/N
Power Supply	Topward	TPS-4000	918520

### Test Conditions / Notes:

EUT is a proximity reader operating at 13.56MHz and 125kHz. The EUT is transmitting continuously. The equipment is powered via 12VDC power supply. Digital output operation verified before and after each test with the O-Scope. Frequency Range Investigated: 30-1000MHz. Temperature: 22°C, Relative Humidity: 40%.

### Transducer Legend:

T1=AMP AN00099	T2=ANT AN01991 25-1000MHz
T3=CAB-SITED10M-9k-1G	

### Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	191.999M	40.0	-26.7	+9.1	+4.0		+10.0	36.4	43.5	-7.1	Vert
QP											
2	191.996M	33.3	-26.7	+9.1	+4.0		+10.0	29.7	43.5	-13.8	Horiz
3	263.999M	29.0	-26.4	+12.8	+5.2		+10.0	30.6	46.0	-15.4	Vert
4	143.999M	29.8	-26.9	+11.4	+3.5		+10.0	27.8	43.5	-15.7	Vert
5	159.996M	29.9	-26.9	+10.7	+3.7		+10.0	27.4	43.5	-16.1	Horiz
6	255.999M	28.4	-26.4	+12.6	+5.1		+10.0	29.7	46.0	-16.3	Vert

7	207.999M	28.9	-26.6	+9.7	+4.3	+10.0	26.3	43.5	-17.2	Vert
8	239.999M	27.4	-26.4	+11.9	+4.8	+10.0	27.7	46.0	-18.3	Vert
9	263.996M	26.0	-26.4	+12.8	+5.2	+10.0	27.6	46.0	-18.4	Horiz
10	128.000M	26.5	-27.0	+11.7	+3.3	+10.0	24.5	43.5	-19.0	Horiz
11	72.000M	28.5	-27.1	+6.5	+2.3	+10.0	20.2	40.0	-19.8	Horiz

Test Location: CKC Laboratories, Inc. • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **XceedID**  
 Specification: **15.109 CLASS B**  
 Work Order #: **87587**  
 Test Type: **Radiated Scan**  
 Equipment: **Prox/Smart Card Reader**  
 Manufacturer: **XceedID**  
 Model: **XF1500CS4**  
 S/N: **0020**

Date: 2/14/2008  
 Time: 15:30:07  
 Sequence#: 6  
 Tested By: Mike Wilkinson

**Test Equipment:**

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
HP 8447D Preamp	1937A02604	03/14/2007	03/14/2009	00099
Chase CBL6111C Bilog	2456	12/30/2006	12/30/2008	01991
10M SITE CBL MAST CBL	N/A	03/23/2007	03/23/2009	CAB-SITED10M
Oscilloscope	US37340242	07/27/2007	07/27/2009	02713

**Equipment Under Test (\* = EUT):**

Function	Manufacturer	Model #	S/N
Prox/Smart Card Reader*	XceedID	XF1500CS4	0020

**Support Devices:**

Function	Manufacturer	Model #	S/N
Power Supply	Topward	TPS-4000	918520

**Test Conditions / Notes:**

EUT is a proximity reader operating at 13.56MHz and 125kHz. The EUT is transmitting continuously. The equipment is powered via 12VDC power supply. Digital output operation verified before and after each test with the O-Scope. Frequency Range Investigated: 30-1000MHz. Temperature: 22°C, Relative Humidity: 40%.

**Transducer Legend:**

T1=AMP AN00099	T2=ANT AN01991 25-1000MHz
T3=CAB-SITED10M-9k-1G	

**Measurement Data:**

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	192.001M	36.4	-26.7	+9.1	+4.0	+10.0	32.8	43.5	-10.7	Vert
2	384.003M	26.3	-27.1	+15.5	+6.2	+10.0	30.9	46.0	-15.1	Vert
3	264.003M	29.1	-26.4	+12.8	+5.2	+10.0	30.7	46.0	-15.3	Vert
4	256.003M	28.9	-26.4	+12.6	+5.1	+10.0	30.2	46.0	-15.8	Vert
5	320.003M	26.1	-26.5	+14.0	+5.5	+10.0	29.1	46.0	-16.9	Vert

6	160.006M	28.2	-26.9	+10.7	+3.7	+10.0	25.7	43.5	-17.8	Vert
7	144.006M	27.2	-26.9	+11.4	+3.5	+10.0	25.2	43.5	-18.3	Vert
8	200.003M	27.8	-26.7	+9.1	+4.1	+10.0	24.3	43.5	-19.2	Vert
9	208.003M	26.6	-26.6	+9.7	+4.3	+10.0	24.0	43.5	-19.5	Vert
10	240.003M	25.5	-26.4	+11.9	+4.8	+10.0	25.8	46.0	-20.2	Vert

## FCC 15.209 RADIATED EMISSIONS

### Test Setup Photos



## Test Data Sheets

Test Location: CKC Laboratories, Inc. • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **XceedID**  
 Specification: **FCC 15.209**  
 Work Order #: **87587** Date: 2/18/2008  
 Test Type: **Radiated Scan** Time: 10:40:12  
 Equipment: **Prox/Smart Card Reader** Sequence#: 20  
 Manufacturer: XceedID Tested By: Mike Wilkinson  
 Model: XF1500P  
 S/N: 0022

### Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
EMCO Loop Antenna	1074	05/01/2007	05/01/2009	00226
10M SITE CBL MAST CBL	N/A	03/23/2007	03/23/2009	CAB-SITED10M
Oscilloscope	US37340242	07/27/2007	07/27/2009	02713

### Equipment Under Test (\* = EUT):

Function	Manufacturer	Model #	S/N
Prox/Smart Card Reader*	XceedID	XF1500P	0022

### Support Devices:

Function	Manufacturer	Model #	S/N
Power Supply	Topward	TPS-4000	918520

### Test Conditions / Notes:

EUT is a proximity reader operating at 125kHz and 13.56MHz. The EUT is transmitting continuously. The equipment is powered via 12VDC power supply. Digital output operation verified before and after each test with the O-Scope. Power variations per FCC 15.31(e) was performed on EUT with no variation in output power noted. Frequency Range Investigated: Carrier (125kHz). Temperature: 22°C, Relative Humidity: 40%. SA RES BW = 200Hz, VID BW = 620Hz.

### Transducer Legend:

T1=CAB-SITED10M-9k-1G	T2=Mag Loop - AN 00226 - 9kHz-30M
-----------------------	-----------------------------------

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	dB	dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	124.993k	45.5	+0.2	+9.9			-59.0	-3.4	25.7	-29.1	Vert
2	124.993k	37.5	+0.2	+9.9			-59.0	-11.4	25.7	-37.1	Horiz



Test Location: CKC Laboratories, Inc. • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **XceedID**  
 Specification: **FCC 15.209**  
 Work Order #: **87587**  
 Test Type: **Radiated Scan**  
 Equipment: **Prox/Smart Card Reader**  
 Manufacturer: **XceedID**  
 Model: **XF1500P**  
 S/N: **0022**

Date: 2/18/2008  
 Time: 10:30:18  
 Sequence#: 19  
 Tested By: Mike Wilkinson

**Test Equipment:**

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
EMCO Loop Antenna	1074	05/01/2007	05/01/2009	00226
10M SITE CBL MAST CBL	N/A	03/23/2007	03/23/2009	CAB-SITED10M
Oscilloscope	US37340242	07/27/2007	07/27/2009	02713

**Equipment Under Test (\* = EUT):**

Function	Manufacturer	Model #	S/N
Prox/Smart Card Reader*	XceedID	XF1500P	0022

**Support Devices:**

Function	Manufacturer	Model #	S/N
Power Supply	Topward	TPS-4000	918520

**Test Conditions / Notes:**

EUT is a proximity reader operating at 125kHz and 13.56MHz. The EUT is transmitting continuously. The equipment is powered via 12VDC power supply. Digital output operation verified before and after each test with the O-Scope. Frequency Range Investigated: 9kHz to 30MHz. Temperature: 22°C, Relative Humidity: 40%. SA RES BW = 200Hz, VID BW = 620Hz.

**Transducer Legend:**

T1=CAB-SITED10M-9k-1G	T2=Mag Loop - AN 00226 - 9kHz-30M
-----------------------	-----------------------------------

**Measurement Data:**

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	dB	dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	27.119M	12.7	+1.4	+7.1			-19.0	2.2	29.5	-27.3	Horiz
									13.56MHz carrier harmonic		
2	27.119M	8.6	+1.4	+7.1			-19.0	-1.9	29.5	-31.4	Vert
									13.56MHz carrier harmonic		
3	249.980k	29.7	+0.2	+9.8			-59.0	-19.3	19.6	-38.9	Vert
									125kHz carrier harmonic		
4	249.988k	29.0	+0.2	+9.8			-59.0	-20.0	19.6	-39.6	Horiz
									125kHz carrier harmonic		

Test Location: CKC Laboratories, Inc. • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **XceedID**  
 Specification: **FCC 15.209**  
 Work Order #: **87587**  
 Test Type: **Radiated Scan**  
 Equipment: **Prox/Smart Card Reader**  
 Manufacturer: **XceedID**  
 Model: **XF1500P**  
 S/N: **0022**

Date: 2/14/2008  
 Time: 12:05:29  
 Sequence#: 1  
 Tested By: Mike Wilkinson

**Test Equipment:**

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
HP 8447D Preamp	1937A02604	03/14/2007	03/14/2009	00099
Chase CBL6111C Bilog	2456	12/30/2006	12/30/2008	01991
10M SITE CBL MAST CBL	N/A	03/23/2007	03/23/2009	CAB-SITED10M
Oscilloscope	US37340242	07/27/2007	07/27/2009	02713

**Equipment Under Test (\* = EUT):**

Function	Manufacturer	Model #	S/N
Prox/Smart Card Reader*	XceedID	XF1500P	0022

**Support Devices:**

Function	Manufacturer	Model #	S/N
Power Supply	Topward	TPS-4000	918520

**Test Conditions / Notes:**

EUT is a proximity reader operating at 13.56MHz and 125kHz. The EUT is transmitting continuously. The equipment is powered via 12VDC power supply. Digital output operation verified before and after each test with the O-Scope. Frequency Range Investigated: 30-1000MHz. Temperature: 22°C, Relative Humidity: 40%.

**Transducer Legend:**

T1=AMP AN00099	T2=ANT AN01991 25-1000MHz
T3=CAB-SITED10M-9k-1G	

**Measurement Data:**

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	54.239M	39.2	-27.1	+8.2	+2.0	+10.0	32.3	40.0	-7.7	Verti
2	189.845M	39.4	-26.7	+9.1	+4.0	+10.0	35.8	43.5	-7.7	Verti
3	176.285M	37.6	-26.8	+9.3	+3.9	+10.0	34.0	43.5	-9.5	Verti
4	420.374M	30.6	-27.4	+16.4	+6.6	+10.0	36.2	46.0	-9.8	Verti
5	40.683M	28.2	-27.2	+14.0	+1.7	+10.0	26.7	40.0	-13.3	Horiz
6	203.409M	33.0	-26.7	+9.4	+4.2	+10.0	29.9	43.5	-13.6	Verti

7	135.603M	30.4	-27.0	+11.6	+3.4	+10.0	28.4	43.5	-15.1	Verti
8	149.164M	29.8	-26.9	+11.1	+3.6	+10.0	27.6	43.5	-15.9	Verti
9	216.965M	30.0	-26.6	+10.3	+4.4	+10.0	28.1	46.0	-17.9	Verti
10	203.404M	28.5	-26.7	+9.4	+4.2	+10.0	25.4	43.5	-18.1	Horiz
11	122.037M	24.8	-27.0	+11.6	+3.3	+10.0	22.7	43.5	-20.8	Verti

Test Location: CKC Laboratories, Inc. • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **XceedID**  
 Specification: **FCC 15.209**  
 Work Order #: **87587**  
 Test Type: **Radiated Scan**  
 Equipment: **Prox/Smart Card Reader**  
 Manufacturer: **XceedID**  
 Model: **XF1500CS4**  
 S/N: **0020**

Date: 2/19/2008  
 Time: 09:10:17  
 Sequence#: 24  
 Tested By: Mike Wilkinson

**Test Equipment:**

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
EMCO Loop Antenna	1074	05/01/2007	05/01/2009	00226
10M SITE CBL MAST CBL	N/A	03/23/2007	03/23/2009	CAB-SITED10M
Oscilloscope	US37340242	07/27/2007	07/27/2009	02713

**Equipment Under Test (\* = EUT):**

Function	Manufacturer	Model #	S/N
Prox/Smart Card Reader*	XceedID	XF1500CS4	0020

**Support Devices:**

Function	Manufacturer	Model #	S/N
Power Supply	Topward	TPS-4000	918520

**Test Conditions / Notes:**

EUT is a proximity reader operating at 125kHz and 13.56MHz. The EUT is transmitting continuously. The equipment is powered via 12VDC power supply. Digital output operation verified before and after each test with the O-Scope. Power variations per FCC 15.31(e) was performed on EUT with no variation in output power noted. Frequency Range Investigated: Carrier (125kHz). Temperature: 22°C, Relative Humidity: 40%. SA RES BW = 200Hz, VID BW = 620Hz.

**Transducer Legend:**

T1=CAB-SITED10M-9k-1G	T2=Mag Loop - AN 00226 - 9kHz-30M
-----------------------	-----------------------------------

**Measurement Data:**

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	dB	dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	125.001k	45.6	+0.2	+9.9			-59.0	-3.3	25.7	-29.0	Vert
2	125.001k	37.4	+0.2	+9.9			-59.0	-11.5	25.7	-37.2	Horiz

Test Location: CKC Laboratories, Inc. • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **XceedID**  
 Specification: **FCC 15.209**  
 Work Order #: **87587**  
 Test Type: **Radiated Scan**  
 Equipment: **Prox/Smart Card Reader**  
 Manufacturer: **XceedID**  
 Model: **XF1500CS4**  
 S/N: **0020**

Date: 2/18/2008  
 Time: 15:58:33  
 Sequence#: 23  
 Tested By: Mike Wilkinson

**Test Equipment:**

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
EMCO Loop Antenna	1074	05/01/2007	05/01/2009	00226
10M SITE CBL MAST CBL	N/A	03/23/2007	03/23/2009	CAB-SITED10M
Oscilloscope	US37340242	07/27/2007	07/27/2009	02713

**Equipment Under Test (\* = EUT):**

Function	Manufacturer	Model #	S/N
Prox/Smart Card Reader*	XceedID	XF1500CS4	0020

**Support Devices:**

Function	Manufacturer	Model #	S/N
Power Supply	Topward	TPS-4000	918520

**Test Conditions / Notes:**

EUT is a proximity reader operating at 125kHz and 13.56MHz. The EUT is transmitting continuously. The equipment is powered via 12VDC power supply. Digital output operation verified before and after each test with the O-Scope. Frequency Range Investigated: 9kHz to 30MHz. Temperature: 22°C, Relative Humidity: 40%. SA RES BW = CISPR.

**Transducer Legend:**

T1=CAB-SITED10M-9k-1G	T2=Mag Loop - AN 00226 - 9kHz-30M
-----------------------	-----------------------------------

**Measurement Data:**

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	dB	dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	27.121M	15.4	+1.4	+7.1			-19.0	4.9	29.5	-24.6	Horiz
									13.56 Carrier Harmonic		
2	27.120M	10.4	+1.4	+7.1			-19.0	-0.1	29.5	-29.6	Vert
									13.56 Carrier Harmonic		
3	250.022k	31.1	+0.2	+9.8			-59.0	-17.9	19.6	-37.5	Vert
									125 kHz Carrier Harmonics		
4	250.022k	29.2	+0.2	+9.8			-59.0	-19.8	19.6	-39.4	Horiz
									125 kHz Carrier Harmonics		

Test Location: CKC Laboratories, Inc. • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **XceedID**  
 Specification: **FCC 15.209**  
 Work Order #: **87587**  
 Test Type: **Radiated Scan**  
 Equipment: **Prox/Smart Card Reader**  
 Manufacturer: **XceedID**  
 Model: **XF1500CS4**  
 S/N: **0020**

Date: 2/14/2008  
 Time: 15:12:21  
 Sequence#: 5  
 Tested By: Mike Wilkinson

**Test Equipment:**

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
HP 8447D Preamp	1937A02604	03/14/2007	03/14/2009	00099
Chase CBL6111C Bilog	2456	12/30/2006	12/30/2008	01991
10M SITE CBL MAST CBL	N/A	03/23/2007	03/23/2009	CAB-SITED10M
Oscilloscope	US37340242	07/27/2007	07/27/2009	02713

**Equipment Under Test (\* = EUT):**

Function	Manufacturer	Model #	S/N
Prox/Smart Card Reader*	XceedID	XF1500CS4	0020

**Support Devices:**

Function	Manufacturer	Model #	S/N
Power Supply	Topward	TPS-4000	918520

**Test Conditions / Notes:**

EUT is a proximity reader operating at 13.56MHz and 125kHz. The EUT is transmitting continuously. The equipment is powered via 12VDC power supply. Digital output operation verified before and after each test with the O-Scope. Frequency Range Investigated: 30-1000MHz. Temperature: 22°C, Relative Humidity: 40%.

**Transducer Legend:**

T1=AMP AN00099	T2=ANT AN01991 25-1000MHz
T3=CAB-SITED10M-9k-1G	

**Measurement Data:**

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	45.875M	36.2	-27.1	+10.8	+1.8		+10.0	31.7	40.0	-8.3	Vert
2	34.375M	30.7	-27.2	+16.6	+1.6		+10.0	31.7	40.0	-8.3	Vert
3	30.875M	27.9	-27.2	+18.7	+1.5		+10.0	30.9	40.0	-9.1	Vert
4	42.250M	32.4	-27.2	+12.9	+1.7		+10.0	29.8	40.0	-10.2	Vert
5	59.625M	32.5	-27.2	+6.9	+2.2		+10.0	24.4	40.0	-15.6	Vert
6	55.750M	30.6	-27.2	+7.8	+2.1		+10.0	23.3	40.0	-16.7	Horiz
7	64.250M	30.3	-27.2	+6.5	+2.2		+10.0	21.8	40.0	-18.2	Horiz

Test Location: CKC Laboratories, Inc. • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **XceedID**  
 Specification: **FCC 15.209**  
 Work Order #: **87587**  
 Test Type: **Radiated Scan**  
 Equipment: **Prox/Smart Card Reader**  
 Manufacturer: **XceedID**  
 Model: **XF1500CS4**  
 S/N: **0020**

Date: 2/14/2008  
 Time: 14:55:05  
 Sequence#: 4  
 Tested By: Mike Wilkinson

**Test Equipment:**

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
HP 8447D Preamp	1937A02604	03/14/2007	03/14/2009	00099
Chase CBL6111C Bilog	2456	12/30/2006	12/30/2008	01991
10M SITE CBL MAST CBL	N/A	03/23/2007	03/23/2009	CAB-SITED10M
Oscilloscope	US37340242	07/27/2007	07/27/2009	02713

**Equipment Under Test (\* = EUT):**

Function	Manufacturer	Model #	S/N
Prox/Smart Card Reader*	XceedID	XF1500CS4	0020

**Support Devices:**

Function	Manufacturer	Model #	S/N
Power Supply	Topward	TPS-4000	918520

**Test Conditions / Notes:**

EUT is a proximity reader operating at 13.56MHz and 125kHz. The EUT is transmitting continuously. The equipment is powered via 12VDC power supply. Digital output operation verified before and after each test with the O-Scope. Frequency Range Investigated: 30-1000MHz. Temperature: 22°C, Relative Humidity: 40%.

**Transducer Legend:**

T1=AMP AN00099	T2=ANT AN01991 25-1000MHz
T3=CAB-SITED10M-9k-1G	

**Measurement Data:**

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	162.727M	39.9	-26.8	+10.4	+3.8		+10.0	37.3	43.5	-6.2	Vert
	QP										
2	162.730M	37.9	-26.8	+10.4	+3.8		+10.0	35.3	43.5	-8.2	Horiz
3	54.238M	38.4	-27.1	+8.2	+2.0		+10.0	31.5	40.0	-8.5	Vert
	QP										
4	501.722M	29.4	-27.7	+18.2	+7.3		+10.0	37.2	46.0	-8.8	Horiz
5	474.607M	29.5	-27.6	+17.7	+7.1		+10.0	36.7	46.0	-9.3	Horiz
6	406.800M	29.4	-27.3	+16.1	+6.5		+10.0	34.7	46.0	-11.3	Horiz

7	176.287M	35.3	-26.8	+9.3	+3.9	+10.0	31.7	43.5	-11.8	Vert
8	406.819M	28.8	-27.3	+16.1	+6.5	+10.0	34.1	46.0	-11.9	Vert
9	352.543M	29.0	-26.7	+14.8	+5.6	+10.0	32.7	46.0	-13.3	Horiz
10	393.257M	26.9	-27.2	+15.8	+6.3	+10.0	31.8	46.0	-14.2	Vert
11	135.605M	29.7	-27.0	+11.6	+3.4	+10.0	27.7	43.5	-15.8	Vert
12	149.166M	29.2	-26.9	+11.1	+3.6	+10.0	27.0	43.5	-16.5	Vert
13	352.573M	24.6	-26.7	+14.8	+5.6	+10.0	28.3	46.0	-17.7	Vert
14	203.408M	28.6	-26.7	+9.4	+4.2	+10.0	25.5	43.5	-18.0	Vert
15	67.803M	30.2	-27.1	+6.3	+2.3	+10.0	21.7	40.0	-18.3	Vert
16	216.972M	27.6	-26.6	+10.3	+4.4	+10.0	25.7	46.0	-20.3	Horiz
17	216.968M	26.2	-26.6	+10.3	+4.4	+10.0	24.3	46.0	-21.7	Vert



## FCC 15.225 EMISSIONS MASK

### Test Equipment

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
EMCO Loop Antenna	1074	05/01/2007	05/01/2009	00226
10M SITE CBL MAST CBL	N/A	03/23/2007	03/23/2009	CAB-SITED10M


### Test Setup Photos




## Test Conditions

EUT is a proximity reader operating at 125kHz and 13.56MHz. The EUT is transmitting continuously. The equipment is powered via 12VDC power supply. Digital output operation verified before and after each test with the O-Scope. Frequency Range Investigated: Carrier (13.56MHz). Temperature: 22°C, Relative Humidity: 40%.

## Test Data

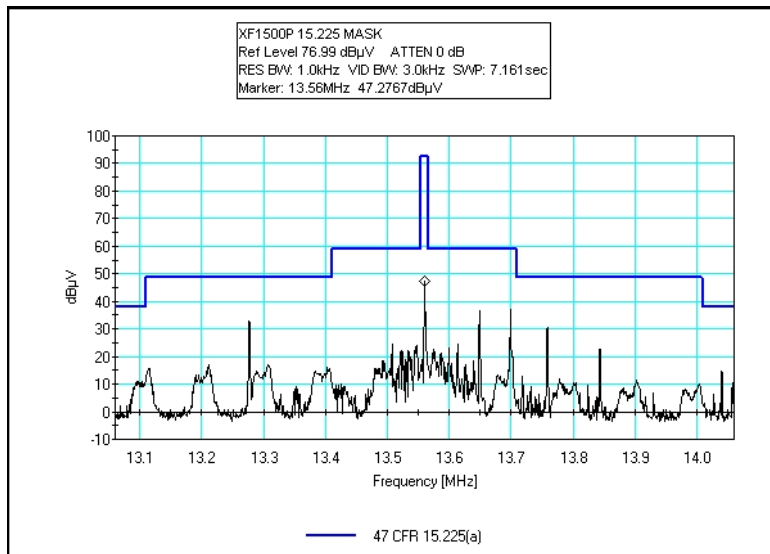

XF1500P

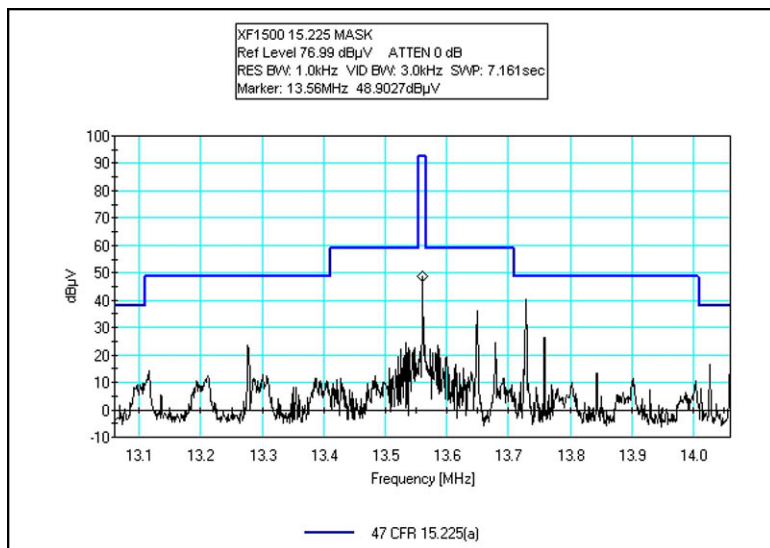

XF1500CS4

## FCC 15.225(a) FIELD STRENGTH OF FUNDAMENTAL

### Test Setup Photos



## Test Data Sheets

Test Location: CKC Laboratories, Inc. • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **XceedID**  
 Specification: **47 CFR 15.225(a)**  
 Work Order #: **87587**  
 Test Type: **Radiated Scan**  
 Equipment: **Prox/Smart Card Reader**  
 Manufacturer: XceedID  
 Model: XF1500P  
 S/N: 0022

Date: 2/18/2008  
 Time: 11:38:55  
 Sequence#: 21  
 Tested By: Mike Wilkinson

### Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
EMCO Loop Antenna	1074	05/01/2007	05/01/2009	00226
10M SITE CBL MAST CBL	N/A	03/23/2007	03/23/2009	CAB-SITED10M
Oscilloscope	US37340242	07/27/2007	07/27/2009	02713

### Equipment Under Test (\* = EUT):

Function	Manufacturer	Model #	S/N
Prox/Smart Card Reader*	XceedID	XF1500P	0022

### Support Devices:

Function	Manufacturer	Model #	S/N
Power Supply	Topward	TPS-4000	918520

### Test Conditions / Notes:

EUT is a proximity reader operating at 125kHz and 13.56MHz. The EUT is transmitting continuously. The equipment is powered via 12VDC power supply. Digital output operation verified before and after each test with the O-Scope. Frequency Range Investigated: Carrier (13.56MHz). Temperature: 22°C, Relative Humidity: 40%. SA RES BW = 200Hz, VID BW = 620Hz.

### Transducer Legend:

T1=CAB-SITED10M-9k-1G	T2=Mag Loop - AN 00226 - 9kHz-30M
-----------------------	-----------------------------------

### Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	dB	dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	13.560M	49.7	+1.0	+9.6			-19.0	41.3	84.0	-42.7	Vert
2	13.560M	44.9	+1.0	+9.6			-19.0	36.5	84.0	-47.5	Horiz

Test Location: CKC Laboratories, Inc. • 4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **XceedID**  
 Specification: **47 CFR 15.225(a)**  
 Work Order #: **87587**  
 Test Type: **Radiated Scan**  
 Equipment: **Prox/Smart Card Reader**  
 Manufacturer: **XceedID**  
 Model: **XF1500CS4**  
 S/N: **0020**

Date: 2/18/2008  
 Time: 15:36:46  
 Sequence#: 22  
 Tested By: Mike Wilkinson

**Test Equipment:**

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
EMCO Loop Antenna	1074	05/01/2007	05/01/2009	00226
10M SITE CBL MAST CBL	N/A	03/23/2007	03/23/2009	CAB-SITED10M
Oscilloscope	US37340242	07/27/2007	07/27/2009	02713

**Equipment Under Test (\* = EUT):**

Function	Manufacturer	Model #	S/N
Prox/Smart Card Reader*	XceedID	XF1500CS4	0020

**Support Devices:**

Function	Manufacturer	Model #	S/N
Power Supply	Topward	TPS-4000	918520

**Test Conditions / Notes:**

EUT is a proximity reader operating at 125kHz and 13.56MHz. The EUT is transmitting continuously. The equipment is powered via 12VDC power supply. Digital output operation verified before and after each test with the O-Scope. Frequency Range Investigated: Carrier (13.56MHz). Temperature: 22°C, Relative Humidity: 40%. SA RES BW = 9kHz, VID BW = 27kHz.

**Transducer Legend:**

T1=CAB-SITED10M-9k-1G	T2=Mag Loop - AN 00226 - 9kHz-30M
-----------------------	-----------------------------------

**Measurement Data:** Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	dB	dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	13.561M	50.1	+1.0	+9.6			-19.0	41.7	84.0	-42.3	Vert
2	13.560M	42.2	+1.0	+9.6			-19.0	33.8	84.0	-50.2	Horiz

## FCC 15.225(e) FREQUENCY STABILITY

### Test Equipment

Function	S/N	Cal Date	Cal Due	Asset #
Agilent E4446A SA	US44300407	1/3/2007	1/3/2009	2660
EMCO Loop Antenna	1074	5/1/2007	5/1/2009	226
Solar Loop Sensor	N/A	3/4/2007	3/4/2009	170
Thermotron Temperature Chamber	11899	12/21/2006	12/21/2008	1879
HP 6205C Dual DC Power Supply	2228A01775	7/19/2007	7/19/20	762
DVM Fluke 70	55230270	4/12/2006	4/12/2008	P00756

### Test Conditions

Equipment is placed inside of a temperature chamber. EUT power is provided via bench supply. Power variations per FCC 15.31(e) was performed on each EUT with no variation in output power noted.

### Test Setup Photos





## Test Data

**Customer:** XceedID  
**WO#:** 87587  
**Date:** 25-Feb-08  
**Test Engineer:** Mike Wilkinson  
**Operating Voltage:** 12.00 VDC  
**Frequency Limit:** 0.01 %

## Temperature Variations

Channel Frequency:		XF1500CS4 13.560000	Dev. (MHz)
Temp (C)	Voltage		
-30	12.00		
-20	12.00	13.56040	0.00040
-10	12.00	13.56037	0.00037
0	12.00	13.56036	0.00036
10	12.00	13.56035	0.00035
20	12.00	13.56036	0.00036
30	12.00	13.56031	0.00031
40	12.00	13.56024	0.00024
50	12.00	13.56022	0.00022

Channel Frequency:		XF1500P 13.560000	Dev. (MHz)
		13.56035	0.00035
		13.56033	0.00033
		13.56030	0.00030
		13.56031	0.00031
		13.56032	0.00032
		13.56030	0.00030
		13.56025	0.00025
		13.56020	0.00020

## Voltage Variations ( $\pm 15\%$ )

20	10.20	13.56031	0.00031
20	12.00	13.56036	0.00036
20	13.80	13.56029	0.00029

13.56028	0.00028
13.56032	0.00032
13.56033	0.00033

<b>Max Deviation (MHz)</b>	<b>0.00040</b>
<b>Max Deviation (%)</b>	<b>0.00295</b>
	<b>PASS</b>

<b>0.00035</b>
<b>0.00258</b>
<b>PASS</b>

## RSS-GEN 99% BANDWIDTH

### Test Equipment

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
EMCO Loop Antenna	1074	05/01/2007	05/01/2009	00226
10M SITE CBL MAST CBL	N/A	03/23/2007	03/23/2009	CAB-SITED10M

### Test Setup Photos




### Test Conditions


EUT is a proximity reader operating at 125kHz and 13.56MHz. The EUT is transmitting continuously. The equipment is powered via 12VDC power supply. Digital output operation verified before and after each test with the O-Scope. Frequency Range Investigated: Carrier (13.56MHz). Temperature: 22°C, Relative Humidity: 40%.




## Plots

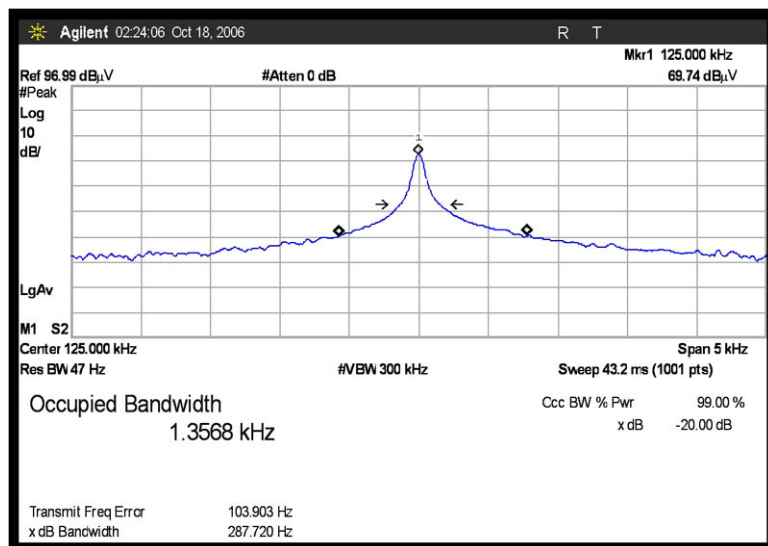


XF1500P 125 kHz

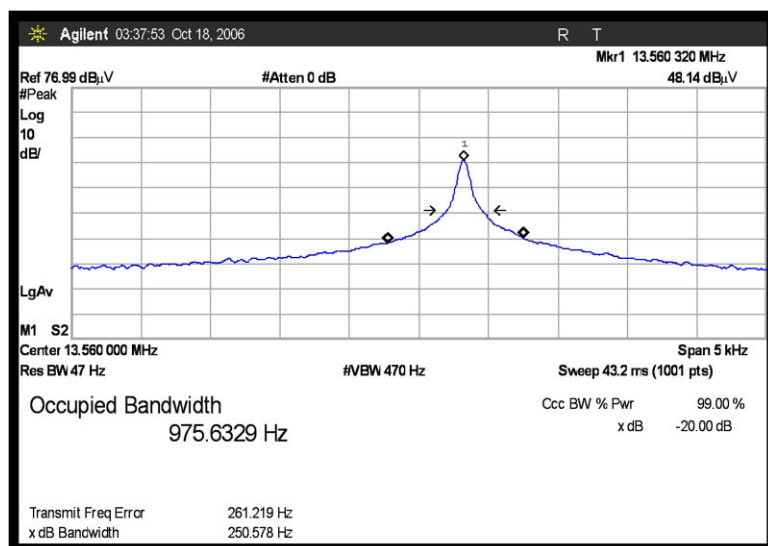

XF1500P 13.56 MHz

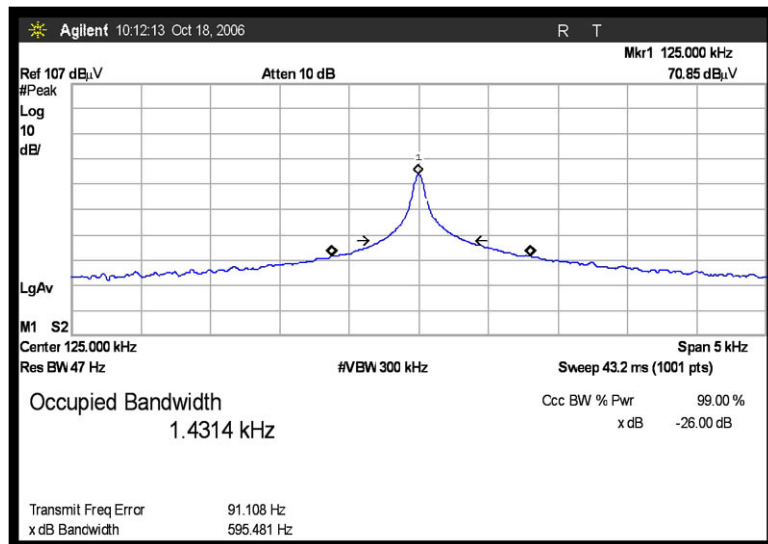

XF1500CS4 125 kHz

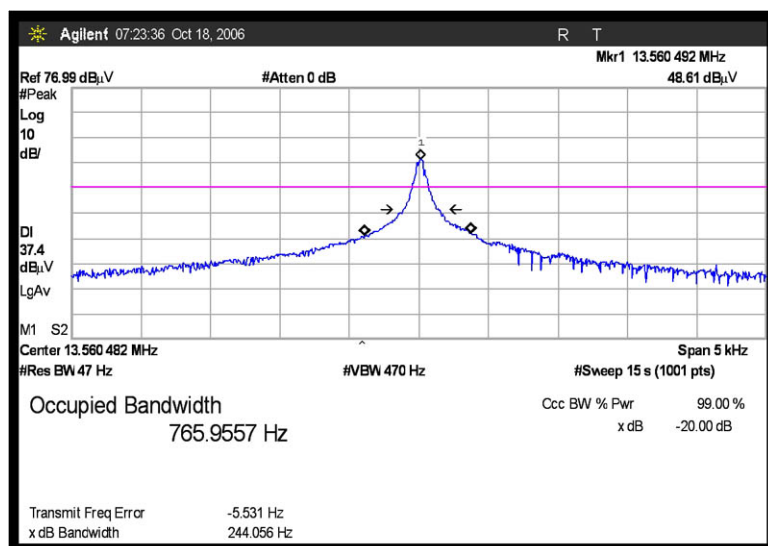

XF1500CS4 13.56 MHz