



683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea. 449-080

Tel: +82-31-321-2664 Fax: +82-31-321-1664

<http://www.digitalemc.com>**CERTIFICATE OF COMPLIANCE**
FCC Part 22, 24 Certification

Dates of Tests: September 22 ~ 30, 2008

Test Report S/N: DR50110810B

Test Site : DIGITAL EMC CO., LTD.

Model No.

R2NSDT1100

APPLICANT

EpiValley Co., Ltd.

Classification	:	Licensed Non-Broadcast Station Transmitter (TNB)
FCC Rule Part(s)	:	§22(H), §24(E), §2
EUT Type	:	HSDPA USB Modem
Model name	:	SDT1100
Serial number	:	Identical prototype
TX Frequency Range	:	GSM Cellular Band: 824.2 ~ 848.8 MHz GSM PCS Band: 1850.2 ~ 1909.8 MHz WCDMA Cellular Band: 826.4 ~ 846.6MHz WCDMA PCS Band: 1852.4 ~ 1907.6MHz
Max. RF Output Power	:	GSM Cellular Band: 33.44dBm ERP(2.206W) GSM PCS Band: 29.58dBm EIRP(0.908W) WCDMA Cellular Band: 26.38dBm ERP(0.434W) WCDMA PCS Band: 23.45dBm EIRP(0.221W)
Emission Designators:	:	GSM Cellular Band: 252KGXW GSM PCS Band: 251KGXW WCDMA Cellular Band: 4M22F9W WCDMA PCS Band: 4M25F9W
Date of Issue	:	October 02, 2008

TABLE OF CONTENTS

◆	AUTHORIZATION LETTER	
◆	CONFIDENTIALITY LETTER(S)	
◆	TEST REPORT	
	1.1 SCOPE	3
	2.1 GENERAL INFORMATION	4
	3.1 DESCRIPTION OF TESTS	5
	3.2 SUMMARY OF TESTS	8
	4.1 TEST DATA	9
	4.1.1 CONDUCTED OUTPUT POWER	9
	4.1.2 EFFECTIVE RADIATED POWER OUTPUT	10
	4.1.3 CDMA RADIATED MEASUREMENTS	11
	4.1.4 FREQUENCY STABILITY(CDAM)	23
	5.1 PLOTS OF EMISSIONS	31
	6.1 LIST OF TEST EQUIPMENT	32
	7.1 SAMPLE CALCULATIONS	34
	8.1 CONCLUSION	35
◆	TEST PLOTS	
◆	FCC ID LABEL & LOCATION	
◆	TEST SETUP PHOTOGRAPHS	
◆	EXTERNAL PHOTOGRAPHS	
◆	INTERNAL PHOTOGRAPHS	
◆	BLOCK DIAGRAM(S)	
◆	SCHEMATIC DIAGRAM(S)	
◆	OPERATIONAL DESCRIPTION	
◆	PARTS LIST	
◆	PARTS LOCATION	
◆	USER'S MANUAL	

MEASUREMENT REPORT

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

§2.1033 General Information

Applicant: EpiValley Co., Ltd.
Address: Roadland EZ Tower #511, 513, Gumi-dong, Bundang-Gu,
 Sungnam-City, Kyunggi-Do, Korea
Attention: Woo Won Choung

- FCC ID: R2NSDT1100
- Quantity: Quantity production is planned
- Emission Designators: GSM Cellular Band: 252KGXW
 GSM PCS Band: 251KGXW
 WCDMA Cellular Band: 4M22F9W
 WCDMA PCS Band: 4M25F9W
- Freq. Range: GSM Cellular Band: 824.2 ~ 848.8MHz(TX) / 869.2 ~ 893.8MHz(RX)
 GSM PCS Band: 1850.2 ~ 1909.8MHz(TX) / 1930.2 ~ 1989.8MHz(RX)
 WCDMA Cellular Band: 826.4 ~ 846.6MHz(TX) / 871.4 ~ 891.6MHz(RX)
 WCDMA PCS Band: 1852.4 ~ 1907.6MHz(TX) / 1932.4 ~ 1987.6MHz(RX)
- Max. Power Rating: GSM Cellular Band: 33.44dBm
 GSM PCS Band: 29.58dBm
 WCDMA Cellular Band: 26.38dBm
 WCDMA PCS Band: 23.45dBm
- FCC Classification(s): Licensed Non-Broadcast Station Transmitter (TNB)
- Equipment (EUT) Type: HSDPA USB Modem
- Mode: GSM / WCDMA
- Frequency Tolerance: ± 0.00025 % (2.5ppm)
- FCC Rule Part(s): §22(H), §24(E), §2
- Dates of Tests: September 22 ~ 30, 2008
- Place of Tests: DIGITAL EMC
- Test Report S/N: DR50110810B

2.1. General Information

This report contains the result of tests performed by:

DIGITAL EMC CO., LTD.

Address : 683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea. 449-080

<http://www.digitalemccom> E-mail : harveysung@digitalemccom

Tel: +82-31-321-2664 Fax: +82-31-321-1664

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competents of calibration and testing laboratory".

This laboratory is accredited by NVLAP for NVLAP Lab. Code : 200559-0.

Test operator: engineer

October 02, 2008

Dong -Chul CHA



Data

Name

Signature

Report Reviewed By: manager

October 02, 2008

Harvey Sung



Data

Name

Signature

Ordering party:

Company name : EpiValley Co., Ltd.
 Address : Roadland EZ Tower #511, 513, Gumi-dong, Bundang-Gu,
 Zipcode : 463-500
 City/town : Sungnam-City, Kyunggi-Do
 Country : Korea
 Date of order : September 12, 2008

3.1 DESCRIPTION OF TESTS

3.1.1 Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (c) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

3.1.2 Occupied Bandwidth

The 99% power bandwidth was measured with a calibrated spectrum analyzer.

3.1.3 Spurious and Harmonic Emissions at Antenna Terminal

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.

3.1.5 Radiation Spurious and Harmonic Emissions

Radiation and harmonic emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

3.1 DESCRIPTION OF TESTS

(Continued...)

3.1.6 Frequency Stability/Temperature Variation.

The frequency stability of the transmitter is measured by:

- a) **Temperature:** The temperature is varied from -30°C to $+50^{\circ}\text{C}$ increments using an environmental chamber.
- b) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the normal voltage for non hand-carried battery equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 ($\pm 2.5\text{ppm}$) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (25°C to 27°C to provide a reference)
2. The equipment is tuned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C up to $+50^{\circ}\text{C}$. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.1 DESCRIPTION OF TESTS

(Continued...)

3.1.7 Radiated Emission

Final test was performed according to ANSI C63.4-2003 at the open field test site. There are no deviations from the standard.

The EUT was placed in a 0.8m high table along with the peripherals. The turn table was separated from the antenna distance 3meters. Cables were placed in a position to produce maximum emissions as determined by experimentation, and operation mode was selected for maximum.

The frequencies and amplitudes of maximum emission were measured at varying azimuths, antenna heights and antenna polarities. Reported are maximized emission levels.

These tests were performed at 120kHz of 6dB bandwidth.

3.1.8 Conducted Emission

The power line conducted interference measurements were performed according to ANSI C63.4-2003 in a shielded enclosure with peripherals placed on a table, 0.8m high over a metal floor. It was located more than required distance away from the shielded enclosure wall. There are no deviations from the standard.

The EUT was plugged into the LISN and the frequency range of interest scanned.

Reported are maximized emission levels.

These tests were performed at 9kHz of 6dB bandwidth.

3.2 Summary of tests

FCC Part Section(s)	Parameter	Status (note 1)
22.913(a) / 24.232(b), 2.1046	Power Output	C
22.917 / 24.238, 2.1049(h)(i)	Occupied Bandwidth	C
22.917(b) / 24.238(b)	Emission Bandwidth	C
22.917 / 24.238 2.1051	Emission Limits Transmitter	C
2.1053 (a)	Field Strength of Spurious Radiation	C
2.1055	Frequency Stability	C
<p>Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable</p> <p>Note 2: The JBP (Computing device peripheral) portion of this device was tested and approved by FCC DOC procedure.</p>		

The sample was tested according to the following specification:

FCC Parts §22(H), §24(E), §2; ANSI C-63.4-2003

4.1 TEST DATA

4.1.1 Conducted Output Power

A base station simulator(R&S, M/N: CMU200) was used to establish communication with **HSDPA USB Modem**. The base station simulator parameters were set to produce the maximum power from the EUT. The EUT was tested under all configurations and the highest power is reported in WCDMA modes and GSM modes. The GSM and WCDMA conducted powers are reported below respectively.

- GSM Mode

Band	Channel	Conducted Output Power(dBm)				
		GSM	GPRS		EDGE	
			Class 10	Class 12	Class 10	Class 12
Cellular	128	31.01	30.93	30.93	26.68	26.67
	190	30.95	30.86	30.86	26.60	26.61
	251	30.92	30.81	30.81	26.52	26.51
PCS	128	30.09	30.07	30.06	26.82	26.82
	190	29.77	29.68	29.68	26.50	26.50
	251	29.21	29.18	29.19	26.06	26.06

- WCDMA Mode

3GPP Release Version	Band	Channel	Conducted Output Power(dBm)					
			HSDPA Inactive	HSDPA Active				
				15/2	15/15	15/15	15/15	Bc
				15/15	15/15	15/8	15/4	Bd
				15/2	15/12	15/8	15/4	Bc/Bd
			1	2	3	4	Sub-Test	
5	Cellular	4132	23.61	23.45	23.44	23.10	23.18	
		4182	23.41	23.13	23.11	22.81	22.90	
		4233	23.54	23.49	23.52	23.13	23.27	
	PCS	9262	23.12	23.09	23.03	22.80	22.84	
		9400	23.51	23.35	23.43	22.95	23.05	
		9538	22.86	22.55	22.54	22.35	22.33	

According to above power table, this device was tested following worst case mode.

- Worst case: GSM Cellular Band - GSM mode
- GSM PCS Band - GSM mode
- WCDMA Cellular Band - 12.2Kbps RMC Inactive mode
- WCDMA PCS Band - 12.2Kbps RMC Inactive mode

4.1.2 Effective Radiated Power Output

A. POWER: High (Cellular Band)

Mode	Freq. Tuned (MHz)	REF. LEVEL (dBm)	POL (H/V)	ERP (dBm)	ERP (W)	Supplied Power	Note
GSM	824.20	-4.62	HOR	33.44	2.206	DC 12V	
	836.60	-5.81	HOR	32.63	1.831	DC 12V	-
	848.80	-7.61	HOR	30.01	1.001	DC 12V	-
WCDMA	826.40	-11.20	HOR	26.38	0.434	DC 12V	-
	836.40	-13.12	HOR	24.36	0.273	DC 12V	-
	846.60	-13.48	HOR	23.93	0.247	DC 12V	-

B. POWER: High (PCS Band)

Mode	Freq. Tuned (MHz)	REF. LEVEL (dBm)	POL (H/V)	EIRP (dBm)	EIRP (W)	Supplied Power	Note
GSM	1850.20	-11.17	VER	28.19	0.658	DC 12V	-
	1880.00	-11.69	VER	29.58	0.908	DC 12V	-
	1909.80	-13.31	VER	27.38	0.547	DC 12V	-
WCDMA	1852.40	-17.09	VER	22.45	0.176	DC 12V	-
	1880.00	-18.00	VER	23.45	0.221	DC 12V	-
	1907.60	-18.84	VER	21.94	0.156	DC 12V	-

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole antenna or horn antenna was substituted in place of the EUT. This antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole antenna or horn antenna is measured. The ERP or EIRP is recorded.

4.1.3 Radiated Measurements

Field Strength of SPURIOUS Radiation

TEST MODE : GSM
 OPERATING FREQUENCY : 824.2 MHz
 CHANNEL : 128(Low)
 MEASURED OUTPUT POWER : 33.44 dBm = 2.206 W
 MODULATION SIGNAL : GSM (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 46.44 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1648.40	-44.30	6.31	-37.99	H	71.43
1648.40	-40.38	6.31	-34.07	V	67.51
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

4.1.3 Radiated Measurements

(Continued...)

Field Strength of SPURIOUS Radiation

TEST MODE : GSM
 OPERATING FREQUENCY : 836.6 MHz
 CHANNEL : 190(Mid)
 MEASURED OUTPUT POWER : 32.63 dBm = 1.831 W
 MODULATION SIGNAL : GSM (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 45.63 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1673.20	-42.95	6.36	-36.59	H	69.22
1673.20	-37.83	6.36	-31.47	V	64.10
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

4.1.3 Radiated Measurements

(Continued...)

Field Strength of SPURIOUS Radiation

TEST MODE : GSM
 OPERATING FREQUENCY : 848.8 MHz
 CHANNEL : 251(High)
 MEASURED OUTPUT POWER : 30.01 dBm = 1.001 W
 MODULATION SIGNAL : GSM (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 43.01 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1697.60	-38.70	6.41	-32.29	H	62.30
1697.60	-46.58	6.41	-40.17	V	70.18
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

4.1.3 Radiated Measurements

(Continued...)

Field Strength of SPURIOUS Radiation

TEST MODE : WCDMA
 OPERATING FREQUENCY : 826.4 MHz
 CHANNEL : 4132(Low)
 MEASURED OUTPUT POWER : 26.38 dBm = 0.434 W
 MODULATION SIGNAL : WCDMA (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 39.38 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1652.80	-52.22	6.31	-45.91	H	72.29
1652.80	-51.59	6.31	-45.28	V	71.66
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

4.1.3 Radiated Measurements

(Continued...)

Field Strength of SPURIOUS Radiation

TEST MODE : WCDMA
 OPERATING FREQUENCY : 836.4 MHz
 CHANNEL : 4183(Mid)
 MEASURED OUTPUT POWER : 24.36 dBm = 0.273 W
 MODULATION SIGNAL : WCDMA (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 37.36 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1672.80	-55.40	6.36	-49.04	H	73.40
1672.80	-57.19	6.36	-50.83	V	75.19
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

4.1.3 Radiated Measurements

(Continued...)

Field Strength of SPURIOUS Radiation

TEST MODE : WCDMA
 OPERATING FREQUENCY : 846.6 MHz
 CHANNEL : 4233(High)
 MEASURED OUTPUT POWER : 23.93 dBm = 0.247 W
 MODULATION SIGNAL : WCDMA (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 36.93 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1693.20	-49.20	6.40	-42.80	H	66.73
1693.20	-53.70	6.40	-47.30	V	71.23
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

4.1.3 Radiated Measurements

(Continued...)

Field Strength of SPURIOUS Radiation

TEST MODE : GSM
 OPERATING FREQUENCY : 1850.2 MHz
 CHANNEL : 512(Low)
 MEASURED OUTPUT POWER : 28.19 dBm = 0.658 W
 MODULATION SIGNAL : GSM (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 41.19 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3700.40	-42.99	9.60	-33.39	H	61.58
3700.40	-43.51	9.60	-33.91	V	62.10
5550.60	-42.41	11.02	-31.39	H	59.58
5550.60	-34.83	11.02	-23.81	V	52.00
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

4.1.3 Radiated Measurements

(Continued...)

Field Strength of SPURIOUS Radiation

TEST MODE : GSM
 OPERATING FREQUENCY : 1880.0 MHz
 CHANNEL : 661(Mid)
 MEASURED OUTPUT POWER : 29.58 dBm = 0.908 W
 MODULATION SIGNAL : GSM (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 42.58 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-39.26	9.59	-29.67	H	59.25
3760.00	-37.59	9.59	-28.00	V	57.58
5640.00	-42.69	11.02	-31.67	H	61.25
5640.00	-36.92	11.02	-25.90	V	55.48
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

4.1.3 Radiated Measurements

(Continued...)

Field Strength of SPURIOUS Radiation

TEST MODE : GSM
 OPERATING FREQUENCY : 1909.8 MHz
 CHANNEL : 810(High)
 MEASURED OUTPUT POWER : 27.38 dBm = 0.547 W
 MODULATION SIGNAL : GSM (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 40.38 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3819.60	-37.75	9.58	-28.17	H	55.55
3819.60	-36.68	9.58	-27.10	V	54.48
5729.40	-50.61	11.14	-39.47	H	66.85
5729.40	-38.94	11.14	-27.80	V	55.18
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

4.1.3 Radiated Measurements

(Continued...)

Field Strength of SPURIOUS Radiation

TEST MODE : WCDMA
 OPERATING FREQUENCY : 1852.4 MHz
 CHANNEL : 9262(Low)
 MEASURED OUTPUT POWER : 22.45 dBm = 0.176 W
 MODULATION SIGNAL : WGSN (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 35.45 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3704.80	-42.05	9.60	-32.45	H	54.90
3704.80	-44.02	9.60	-34.42	V	56.87
5557.20	-40.37	11.02	-29.35	H	51.80
5557.20	-36.04	11.02	-25.02	V	47.47
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

4.1.3 Radiated Measurements

(Continued...)

Field Strength of SPURIOUS Radiation

TEST MODE : WCDMA
 OPERATING FREQUENCY : 1880.00 MHz
 CHANNEL : 9400(Mid)
 MEASURED OUTPUT POWER : 23.45 dBm = 0.221 W
 MODULATION SIGNAL : WCDMA (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 36.45 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-47.73	9.59	-38.14	H	61.59
3760.00	-45.95	9.59	-36.36	V	59.81
5640.00	-40.46	11.02	-29.44	H	52.89
5640.00	-34.78	11.02	-23.76	V	47.21
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

4.1.3 Radiated Measurements

(Continued...)

Field Strength of SPURIOUS Radiation

TEST MODE : WCDMA
 OPERATING FREQUENCY : 1907.6 MHz
 CHANNEL : 9538(High)
 MEASURED OUTPUT POWER : 21.94 dBm = 0.156 W
 MODULATION SIGNAL : WCDMA (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 34.94 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3815.20	-45.01	9.58	-35.43	H	57.37
3815.20	-47.71	9.58	-38.13	V	60.07
5722.80	-37.37	11.14	-26.23	H	48.17
5722.80	-33.14	11.14	-22.00	V	43.94
-	-	-	-	-	-

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.



4.1.4 Frequency Stability (GSM Cellular Band)

OPERATING FREQUENCY : 836,599,985 Hz
 CHANNEL : 0190(Mid)
 REFERENCE VOLTAGE : 12 VDC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (dB)	FREQ (Hz)	Deviation (%)
100%	12	+25(Ref)	836,599,985	0.000000
100%		-30	836,599,967	-0.000002
100%		-20	836,599,949	-0.000004
100%		-10	836,599,975	-0.000001
100%		0	836,599,980	-0.000001
100%		+10	836,599,974	-0.000001
100%		+20	836,599,970	-0.000002
100%		+25	836,599,976	-0.000001
100%		+30	836,599,955	-0.000004
100%		+40	836,599,950	-0.000004
100%		+50	836,599,976	-0.000001
85%	10.2	+25	836,599,980	-0.000001
115%	13.8	+25	836,599,978	-0.000001
BATT.ENDPOINT	-	+25	-	-

4.1.4 Frequency Stability (GSM Cellular Band)

(Continued...)

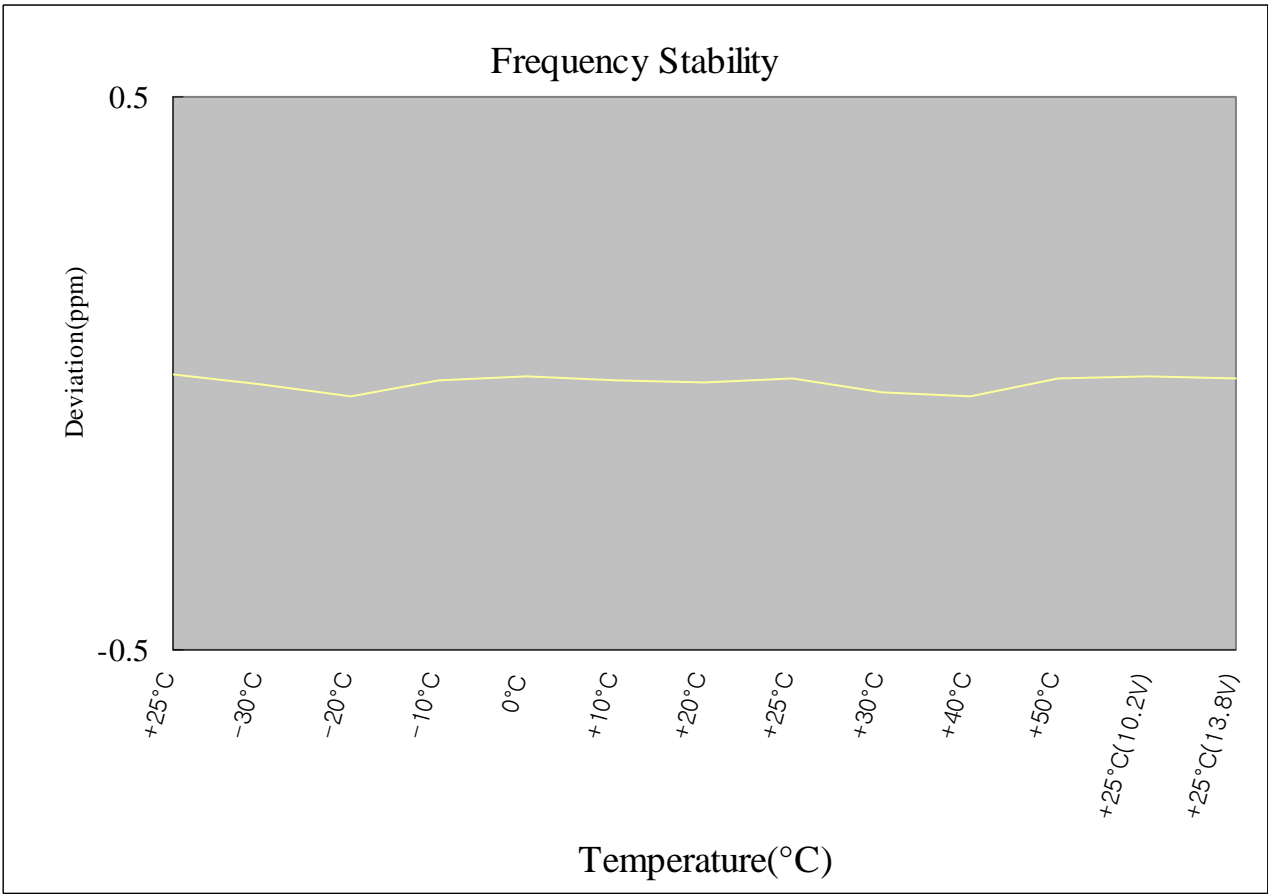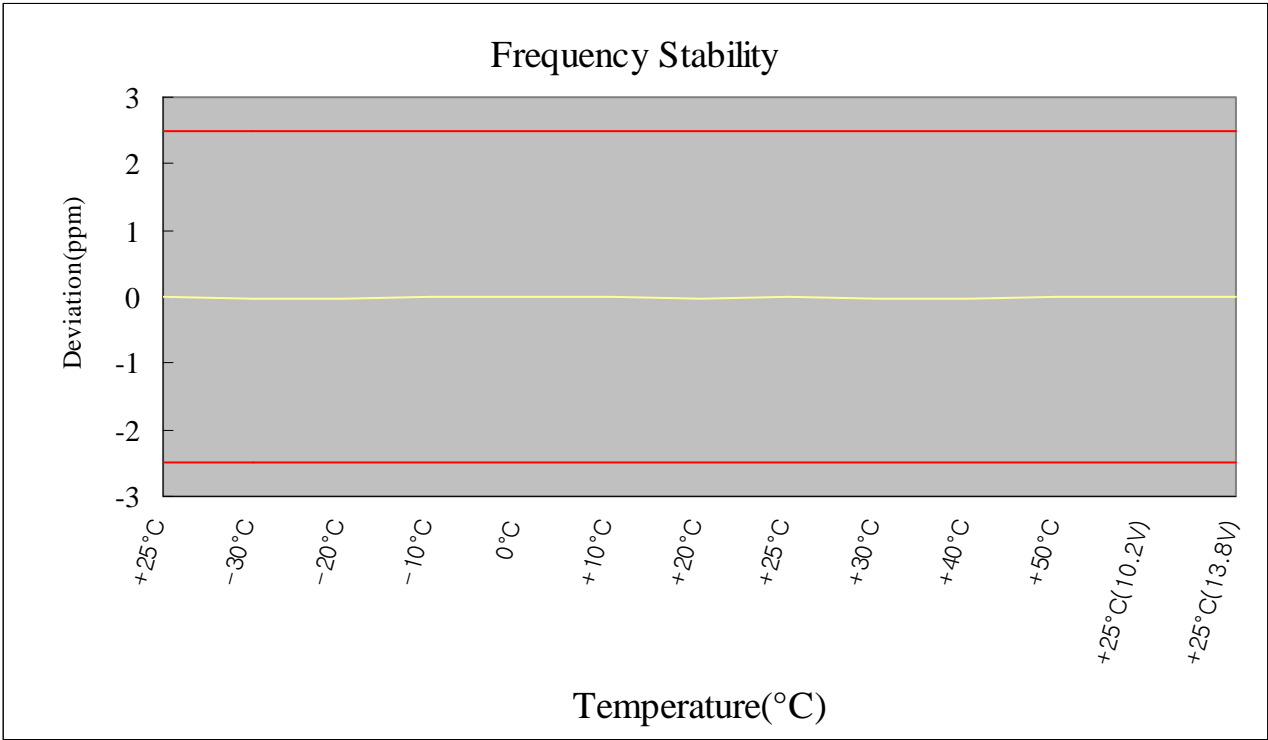

4.1.4 Frequency Stability (GSM PCS Band)



(Continued...)

OPERATING FREQUENCY : 1,879,999,952 Hz
 CHANNEL : 661(Mid)
 REFERENCE VOLTAGE : 12 VDC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (dB)	FREQ (Hz)	Deviation (%)
100%	12	+25(Ref)	1,879,999,952	0.000000
100%		-30	1,879,999,950	0.000000
100%		-20	1,879,999,956	0.000000
100%		-10	1,879,999,962	0.000001
100%		0	1,879,999,960	0.000000
100%		+10	1,879,999,945	0.000000
100%		+20	1,879,999,957	0.000000
100%		+25	1,879,999,951	0.000000
100%		+30	1,879,999,945	0.000000
100%		+40	1,879,999,949	0.000000
100%		+50	1,879,999,954	0.000000
85%	10.2	+25	1,879,999,949	0.000000
115%	13.8	+25	1,879,999,957	0.000000
BATT.ENDPOINT	-	+25	-	-

4.1.4 Frequency Stability (GSM PCS Band)

(Continued...)

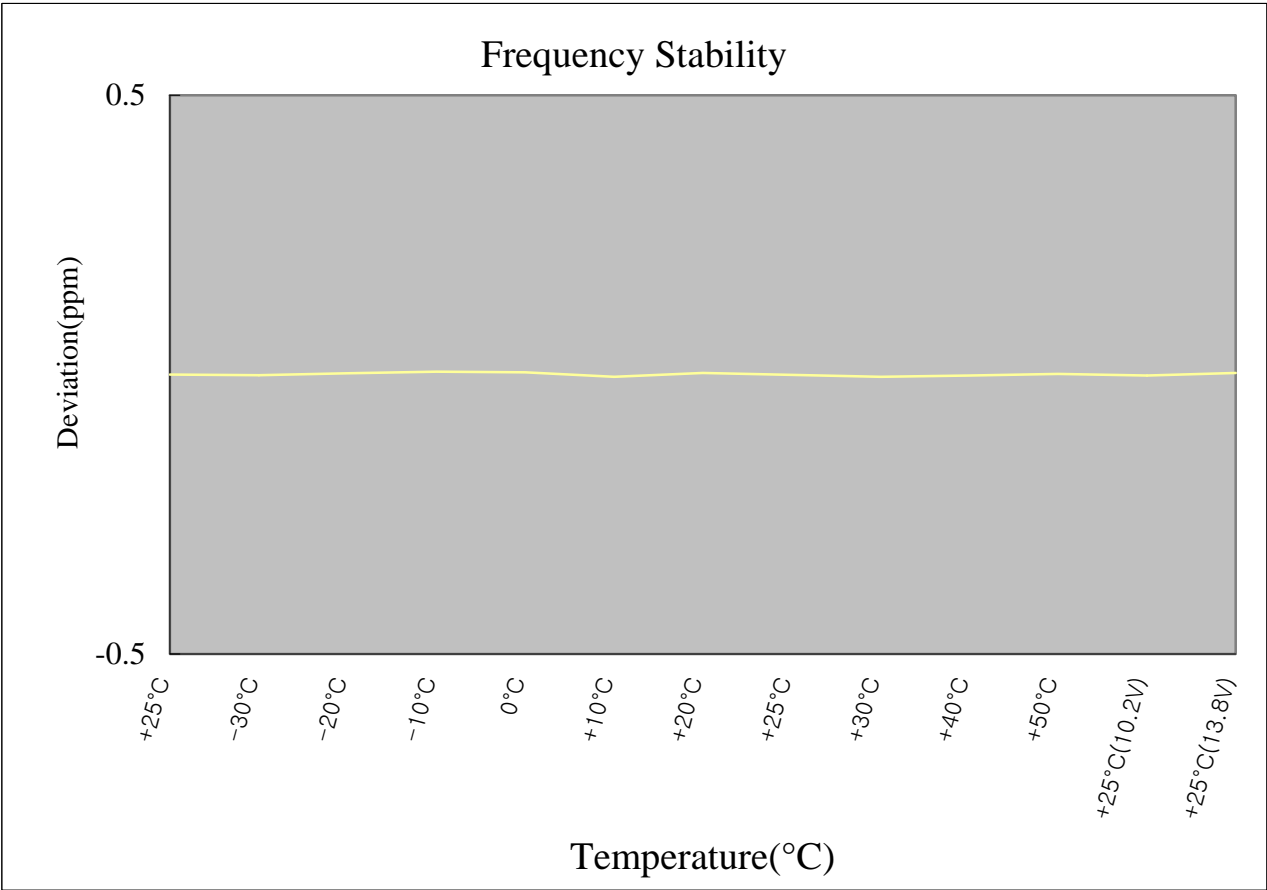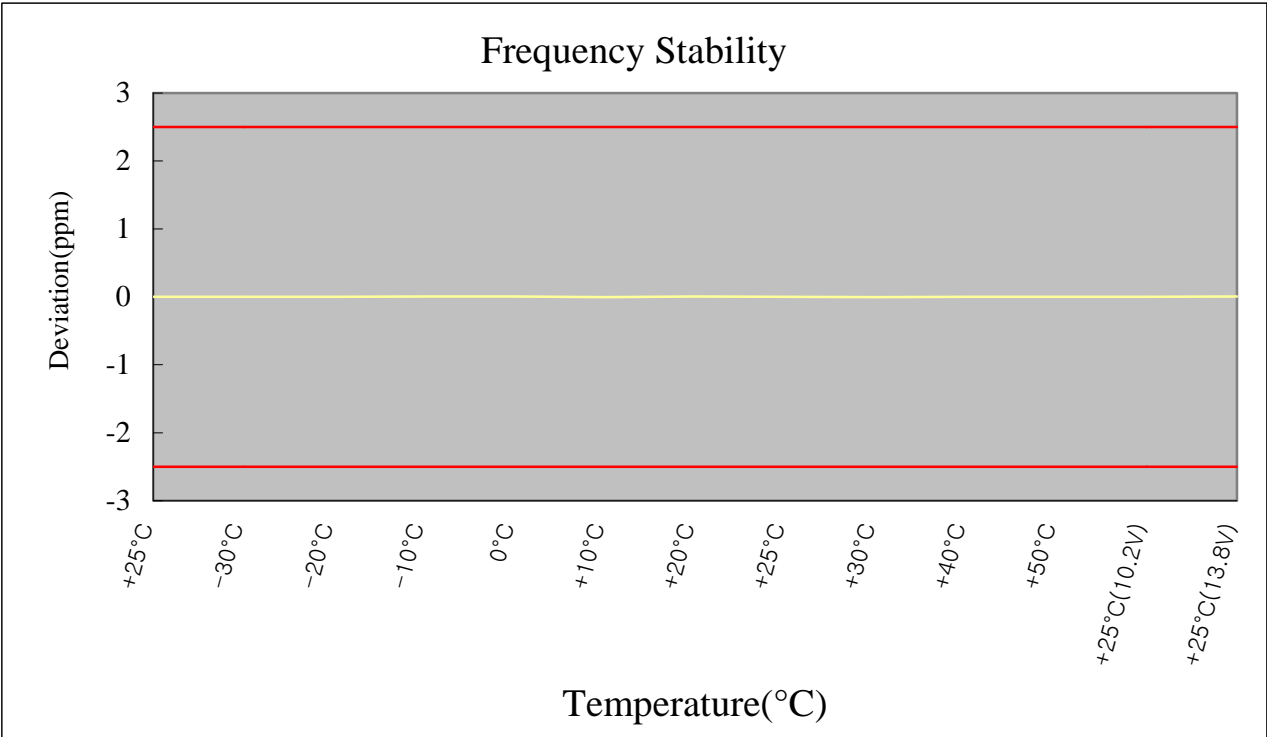

4.1.4 Frequency Stability (WCDMA Cellular Band)



(Continued...)

OPERATING FREQUENCY : 836,399,968 Hz
 CHANNEL : 4182(Mid)
 REFERENCE VOLTAGE : 12 VDC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (dB)	FREQ (Hz)	Deviation (%)
100%	12	+25(Ref)	836,399,968	0.000000
100%		-30	836,399,972	0.000000
100%		-20	836,399,969	0.000000
100%		-10	836,399,974	0.000001
100%		0	836,399,971	0.000000
100%		+10	836,399,970	0.000000
100%		+20	836,399,965	0.000000
100%		+25	836,399,970	0.000000
100%		+30	836,399,975	0.000001
100%		+40	836,399,967	0.000000
100%		+50	836,399,970	0.000000
85%	10.2	+25	836,399,972	0.000000
115%	13.8	+25	836,399,966	0.000000
BATT.ENDPOINT	-	+25	-	-

4.1.4 Frequency Stability (WCDMA Cellular Band)

(Continued...)

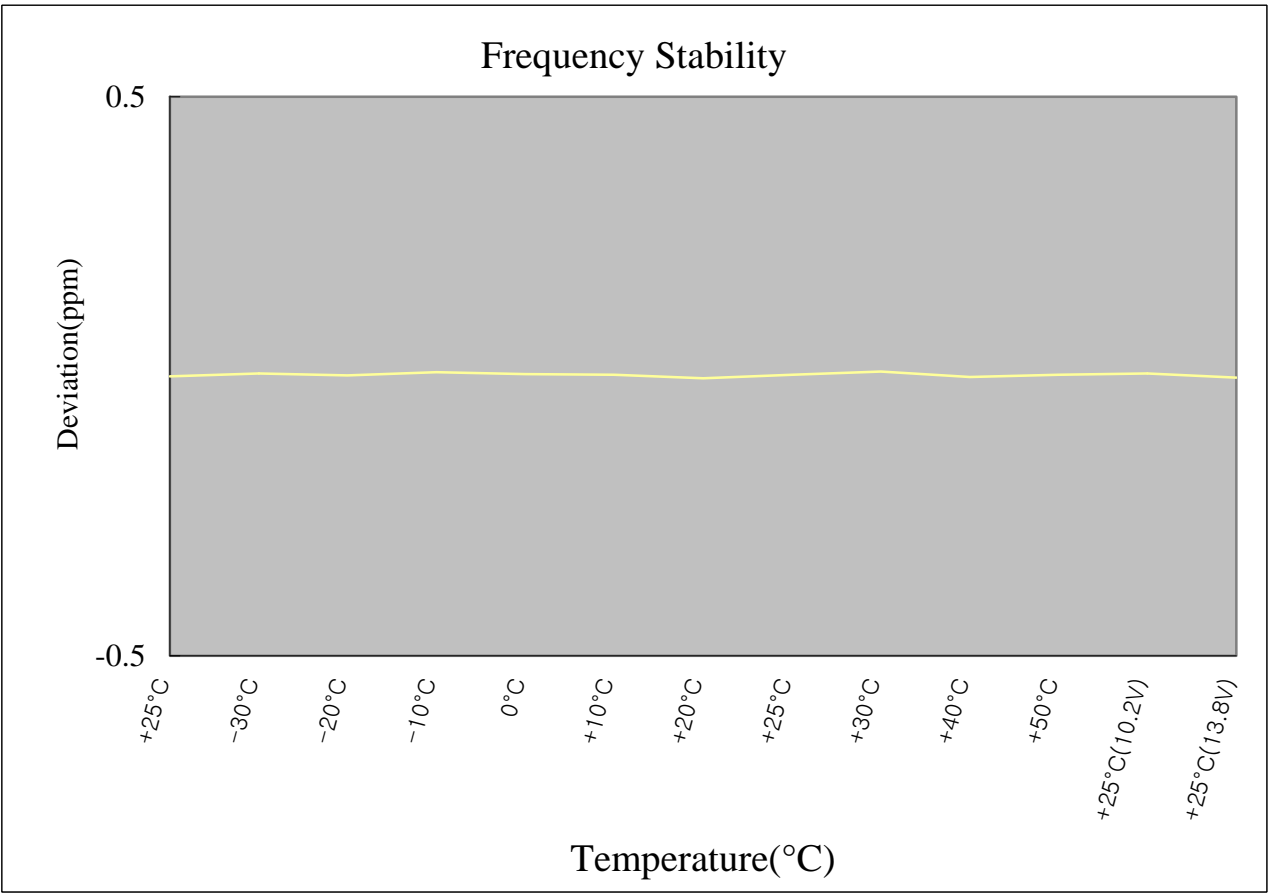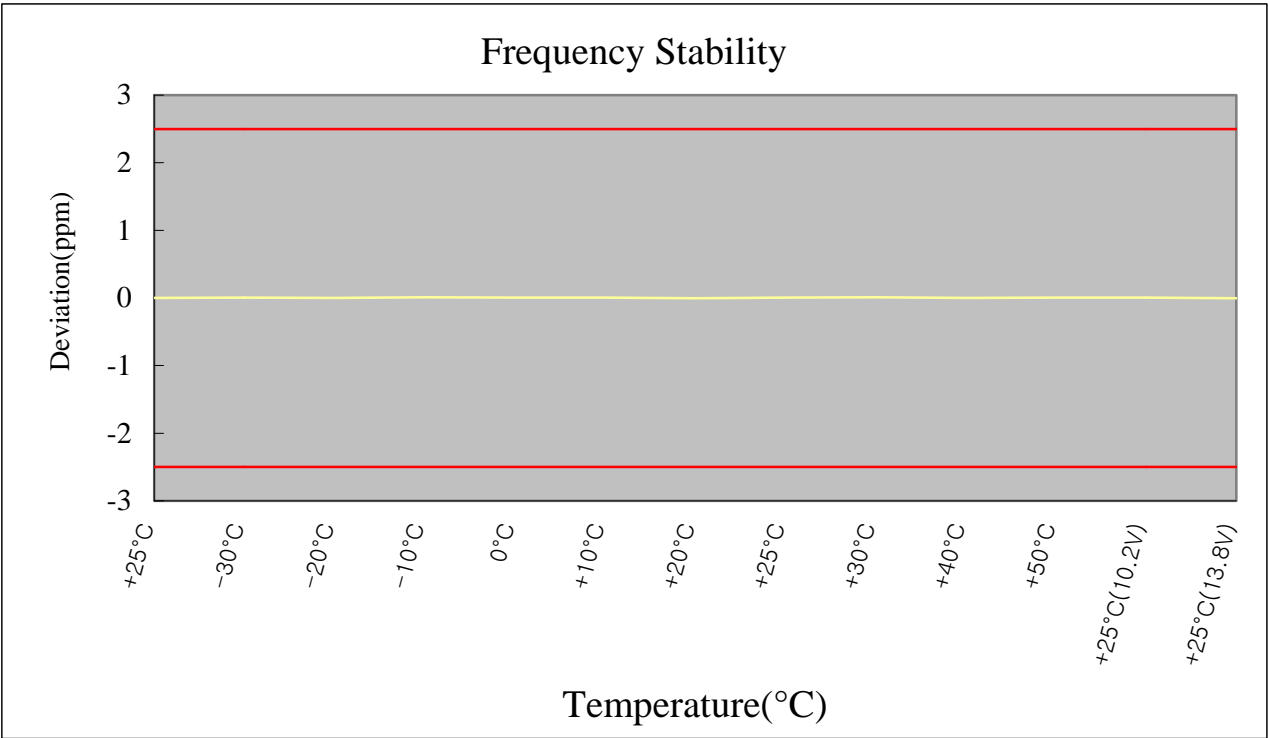

4.1.4 Frequency Stability (WCDMA PCS Band)



(Continued...)

OPERATING FREQUENCY : 1,879,999,940 Hz
 CHANNEL : 9400(Mid)
 REFERENCE VOLTAGE : 12 VDC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (dB)	FREQ (Hz)	Deviation (%)
100%	12	+25(Ref)	1,879,999,940	0.000000
100%		-30	1,879,999,948	0.000000
100%		-20	1,879,999,942	0.000000
100%		-10	1,879,999,973	0.000002
100%		0	1,879,999,967	0.000001
100%		+10	1,879,999,956	0.000001
100%		+20	1,879,999,950	0.000001
100%		+25	1,879,999,971	0.000002
100%		+30	1,879,999,964	0.000001
100%		+40	1,879,999,951	0.000001
100%		+50	1,879,999,945	0.000000
85%	10.2	+25	1,879,999,950	0.000001
115%	13.8	+25	1,879,999,945	0.000000
BATT.ENDPOINT	-	+25	-	-

4.1.4 Frequency Stability (WCDMA PCS Band)

(Continued...)

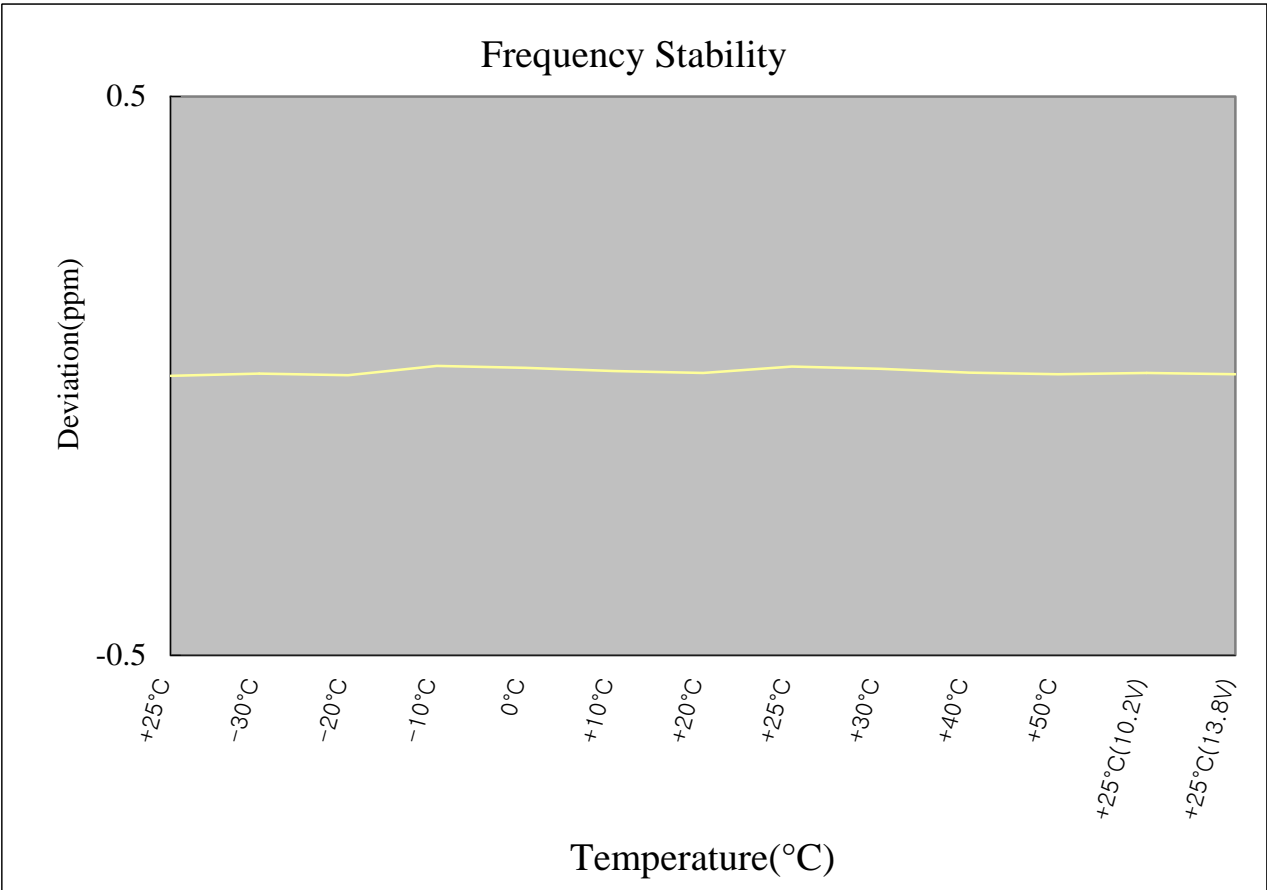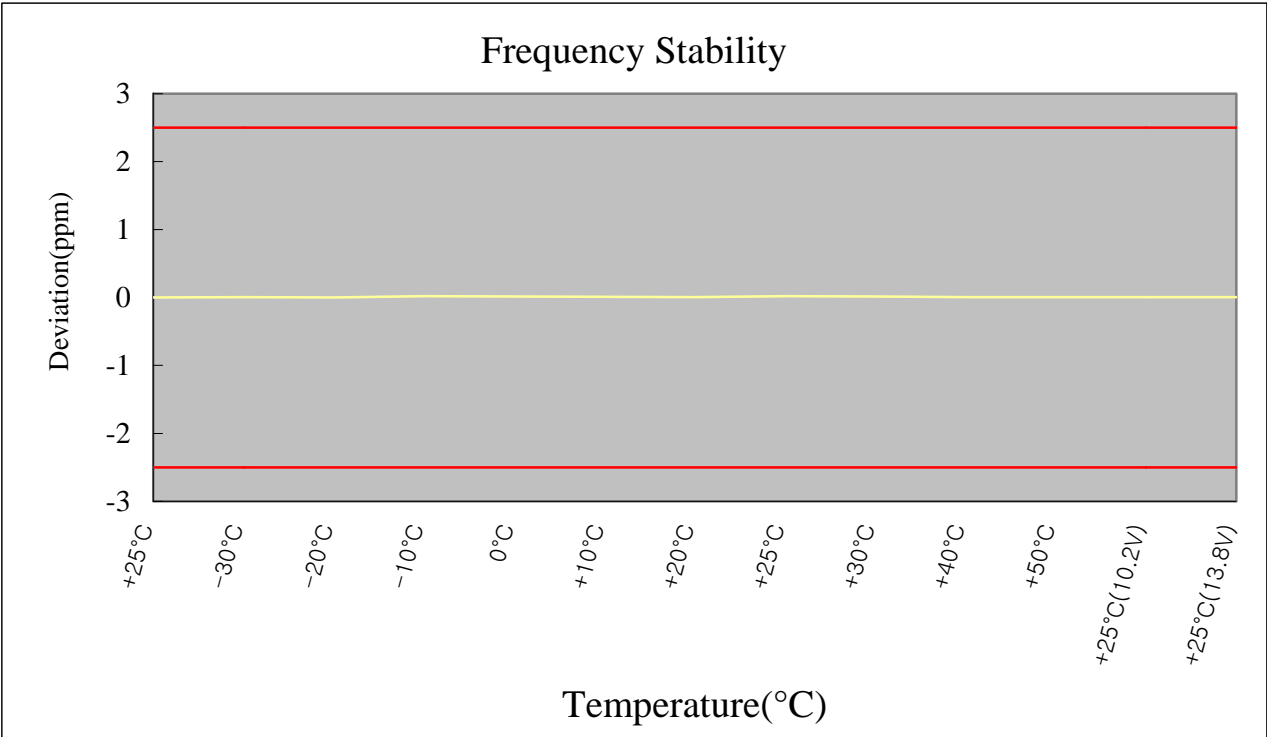

5.1 PLOTS OF EMISSIONS

(SEE ATTACHMENT “Test Plots”)

6.1 LIST OF TEST EQUIPMENT

	Type	Manufacturer	Model	Cal.Due.Date (dd/mm/yy)	Next.Due.Date (dd/mm/yy)	S/N
01	Spectrum Analyzer	Agilent	E4404B	21/03/08	21/03/09	US41061134
02	Spectrum Analyzer	Agilent	E4440A	15/11/07	15/11/08	MY45304199
03	Spectrum Analyzer	H.P	8563E	09/10/07	09/10/08	3551A04634
04	Spectrum Analyzer	H.P	8591E	26/04/08	26/04/09	3649A05889
05	Spectrum Analyzer	Rohde Schwarz	FSP	09/09/08	09/09/09	100385
06	EMI TEST RECEIVER	R&S	ESU	11/01/08	11/01/09	100014
07	EMI TEST RECEIVER	R&S	ESCI	13/05/08	13/05/09	100364
08	Power Meter	H.P	EMP-442A	10/07/08	10/07/09	GB37170413
09	Power Sensor	H.P	8481A	11/03/08	11/03/09	3318A96566
10	Power Divider	Agilent	11636B	17/12/07	17/12/08	56471
11	Signal Generator	Rohde Schwarz	SMR20	02/04/08	02/04/09	101251
12	Signal Generator	H.P	ESG-3000A	09/07/08	09/07/09	US37230529
13	Vector Signal Generator	Rohde Schwarz	SMJ100A	17/01/08	17/01/09	100148
14	Audio Analyzer	H.P	8903B	09/07/08	09/07/09	3011A09448
15	Modulation Analyzer	H.P	8901B	18/07/08	18/07/09	3028A03029
16	Oscilloscope	Tektronix	TDS3052	02/11/07	02/11/08	B016821
17	8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	31/07/08	31/07/09	GB43461134
18	Universal Radio communication Tester	Rohde Schwarz	CMU 200	02/04/08	02/04/09	107631
19	Bluetooth Tester	TESCOM	TC-3000A	01/08/08	01/08/09	3000A4A0121
20	Power Splitter	WEINSCHEL	1593	05/10/07	05/10/08	332
21	Power Splitter	Anritsu	K241B	19/10/07	19/10/08	020611
22	BAND Reject Filter	Microwave Circuits	N0308372	18/10/07	18/10/08	3125-01DC0312
23	BAND Reject Filter	Wainwright	WRCG1750	18/10/07	18/10/08	2
24	AC Power supply	DAEKWANG	5KVA	20/03/08	20/03/09	20060321-1
25	DC Power Supply	H.P	6622A	20/03/08	20/03/09	3448A03760
26	DC Power Supply	HP	6633A	20/03/08	20/03/09	3524A06634
27	HORN ANT	ETS	3115	13/06/08	13/06/09	6419
28	HORN ANT	ETS	3115	10/09/08	10/09/09	21097
29	HORN ANT	A.H.Systems	SAS-574	13/06/08	13/06/09	154
30	HORN ANT	A.H.Systems	SAS-574	13/06/08	13/06/09	155
31	Dipole Antenna	Schwarzbeck	VHA9103	19/12/07	19/12/08	2116

	Type	Manufacturer	Model	Cal.Due.Date (dd/mm/yy)	Next.Due.Date (dd/mm/yy)	S/N
32	Dipole Antenna	Schwarzbeck	VHA9103	19/12/07	19/12/08	2117
33	Dipole Antenna	Schwarzbeck	UHA9105	20/12/07	20/12/08	2261
34	Dipole Antenna	Schwarzbeck	UHA9105	20/12/07	20/12/08	2262
35	TEMP & HUMIDITY Chamber	JISCO	J-RHC2	02/10/07	02/10/08	021031
36	Log Periodic Antenna	Schwarzbeck	UHALP9108A1	01/10/07	01/10/08	1098
37	Biconical Antenna	Schwarzbeck	VHA9103	13/06/08	13/06/09	2233
38	Digital Multimeter	H.P	34401A	20/03/08	20/03/09	3146A13475,US36122178
39	Attenuator (10dB)	WEINSCHTEL	23-10-34	05/10/07	05/10/08	BP4386
40	Attenuator (10dB)	WEINSCHTEL	23-10-34	30/01/08	30/01/09	BP4387
41	High-Pass Filter	ANRITSU	MP526D	08/10/07	08/10/08	MP27756
42	Attenuator (3dB)	Agilent	8491B	01/08/08	01/08/09	MY39260700
43	Attenuator (20dB)	Aeroflex/Weinschel	86-20-11	25/10/07	25/10/08	432
44	Attenuator (10dB)	Aeroflex/Weinschel	86-10-11	25/10/07	25/10/08	446
45	Attenuator (10dB)	Aeroflex/Weinschel	86-10-11	25/10/07	25/10/08	408
46	Type N Coaxial CIRCULATOR	NOVA MICROWAVE	0088CAN	11/07/08	11/07/09	788
47	Type N Coaxial CIRCULATOR	NOVA MICROWAVE	0185CAN	11/07/08	11/07/09	790
48	Type N Coaxial CIRCULATOR	NOVA MICROWAVE	0215CAN	11/07/08	11/07/09	112
49	Amplifier (25dB)	Agilent	8447D	21/05/08	21/05/09	2944A10144
50	Amplifier (30dB)	Agilent	8449B	25/10/07	25/10/08	3008A01590
51	Amplifier (22dB)	H.P	8447E	27/02/08	27/02/09	2945A02865
52	Position Controller	TOKIN	5901T	N/A	N/A	14173
53	Driver	TOKIN	5902T2	N/A	N/A	14174
54	LISN	Kyorits	KNW-407	04/08/08	04/08/09	8-317-8
55	LISN	Kyorits	KNW-242	06/10/07	06/10/08	8-654-15
56	CVCF	NF Electronic	4420	21/03/08	21/03/09	304935/337980
57	Software	ToYo EMI	EP5/RE	N/A	N/A	Ver 2.0.800
58	Software	ToYo EMI	EP5/CE	N/A	N/A	Ver 2.0.801
59	Software	AUDIX	e3	N/A	N/A	Ver 3.0
60	Software	Agilent	Benchlink	N/A	N/A	A.01.09 021211

7.1 SAMPLE CALCULATIONS

A. Emission Designator

- Cellular Band -

Emission Designator = 252KGXW

GSM BW = 252.0544 KHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

Emission Designator = 4M22F9W

WCDMA BW = 4.2235MHz

F = Frequency Modulation

9 = Composite Digital Information

W = Combination (Audio/Data)

- PCS Band -

Emission Designator = 251KGXW

GSM BW = 251.2333 KHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

Emission Designator = 4M25F9W

WCDMA BW = 4.2469Hz

F = Frequency Modulation

9 = Composite Digital Information

W = Combination (Audio/Data)

8.1 CONCLUSION

The data collected shows that the **EpiValley Co., Ltd.** HSDPA USB Modem (**FCC ID: R2NSDT1100**) complies with all the requirements of Parts 2 and 22, 24 of the FCC rules.