

DIGITAL EMC CO., LTD

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:464

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.886 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.34, 6.34, 6.34); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2008-01-14; Ambient Temp: 21.0; Tissue Temp: 20.7

Dipole Validation


Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.014 dB

Peak SAR (extrapolated) = 3.57 W/kg

SAR(1 g) = 2.4 mW/g; SAR(10 g) = 1.57 mW/g

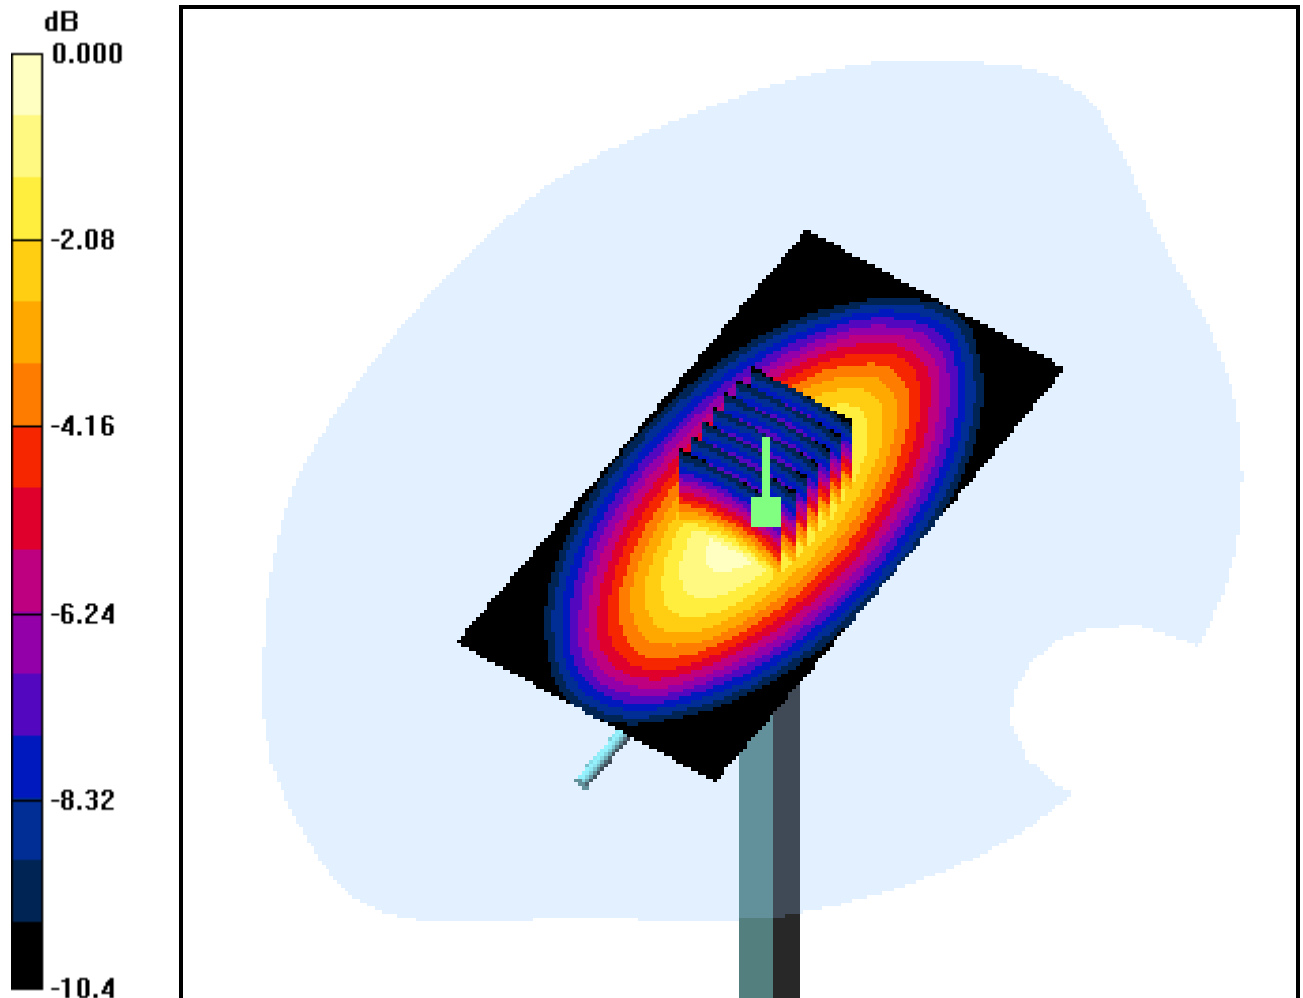

0 dB = 2.58mW/g

DIGITAL EMC CO., LTD

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d029

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(5.27, 5.27, 5.27); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2008-01-15; Ambient Temp: 20.9; Tissue Temp: 20.7

Dipole Validation


Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.086 dB

Peak SAR (extrapolated) = 19.6 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) = 4.91 mW/g

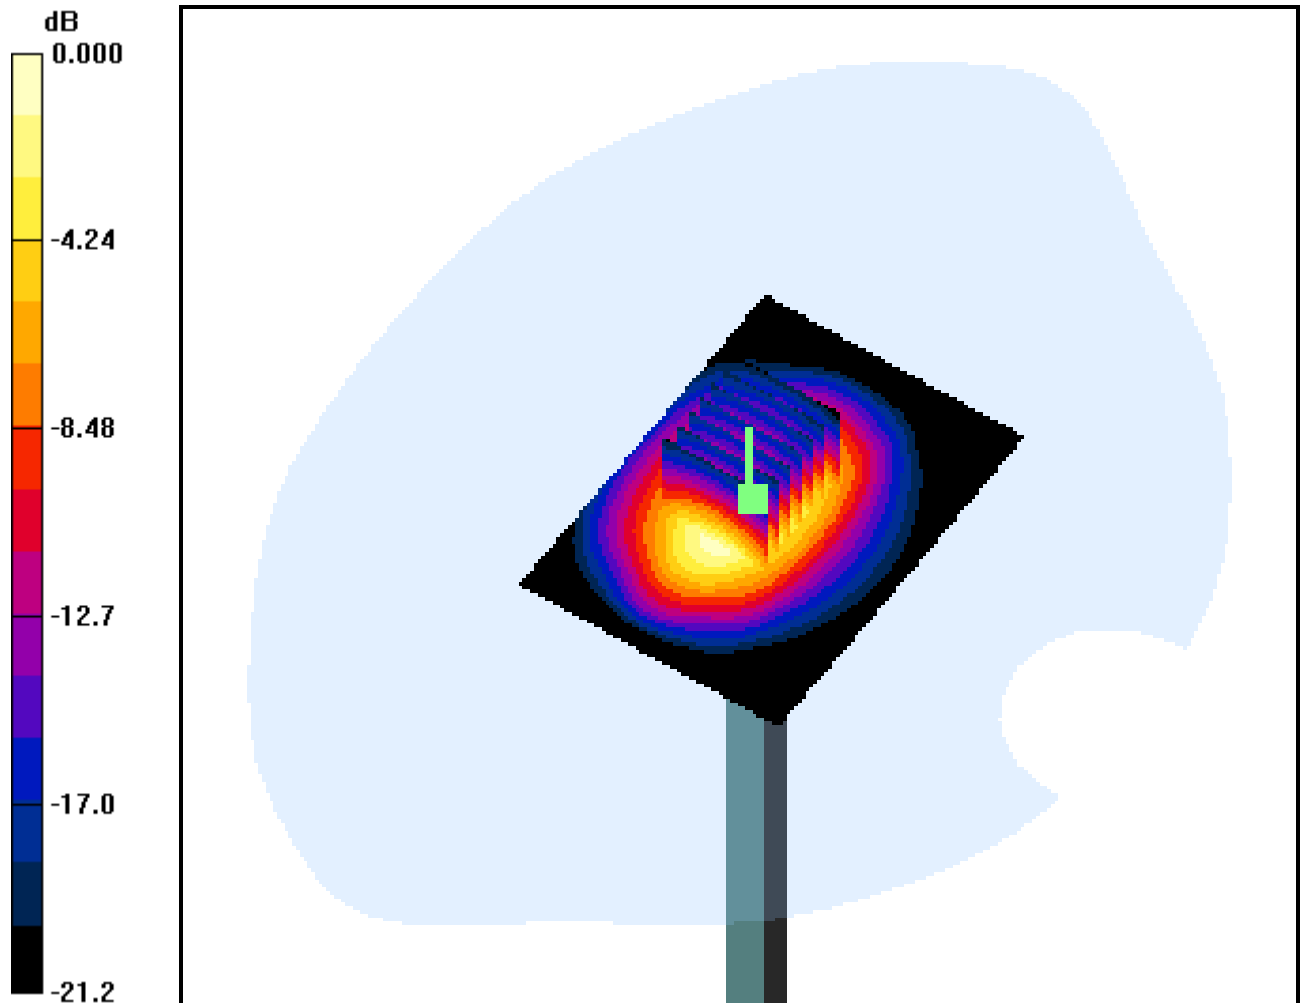

0 dB = 11.3mW/g

DIGITAL EMC CO., LTD

DUT: SEC-7089; Type: USB Modem; Laptop: Toshiba M100

Communication System: FCC CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 824.7 \text{ MHz}$; $\sigma = 0.953 \text{ mho/m}$; $\epsilon_r = 54.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.22, 6.22, 6.22); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2008-01-14; Ambient Temp: 21.0; Tissue Temp: 20.7

4.5mm from Body, CDMA_Cellular Ch.1013, Ant Internal


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.887 W/kg

SAR(1 g) = 0.579 mW/g; SAR(10 g) = 0.363 mW/g

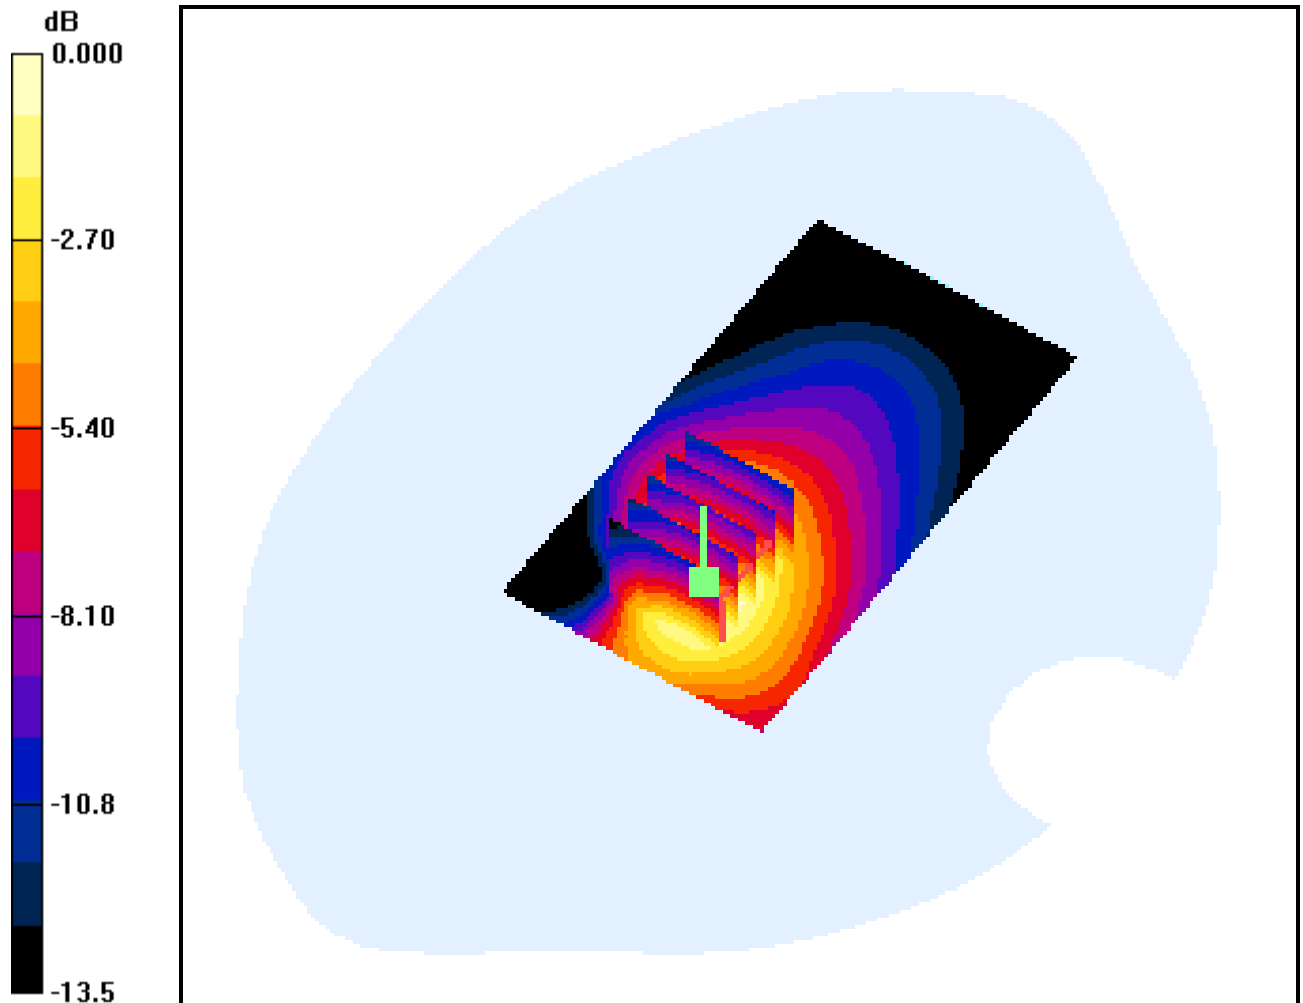

0 dB = 0.619mW/g

DIGITAL EMC CO., LTD

DUT: SEC-7089; Type: USB Modem; Laptop: Toshiba M100

Communication System: FCC CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.52 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.22, 6.22, 6.22); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2008-01-14; Ambient Temp: 21.0; Tissue Temp: 20.7

4.5mm from Body, CDMA_Cellular Ch.384, Ant Internal


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.054 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.765 mW/g; SAR(10 g) = 0.492 mW/g

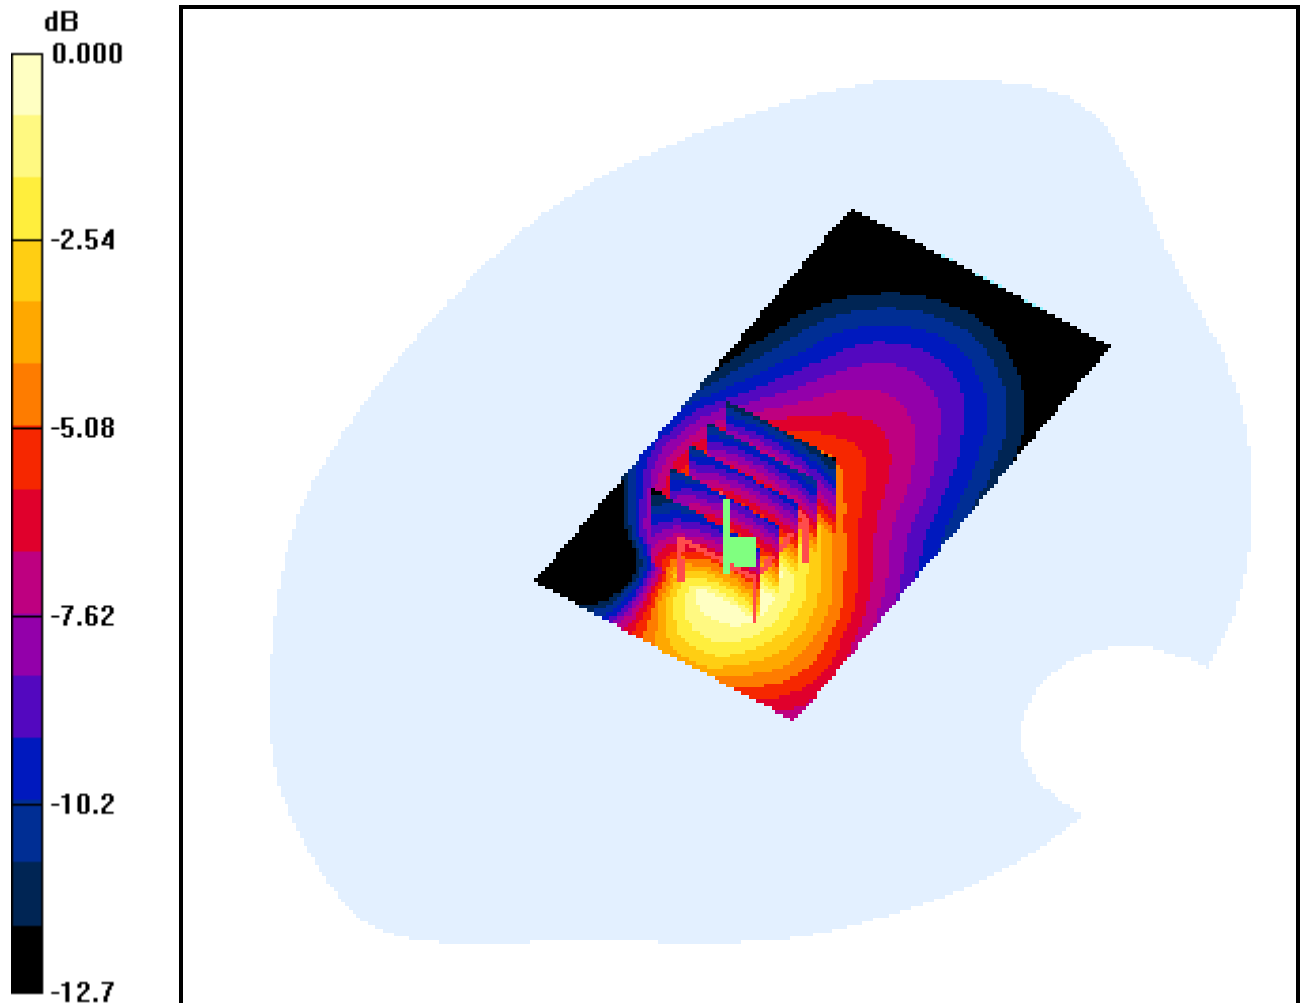

0 dB = 0.805mW/g

DIGITAL EMC CO., LTD

DUT: SEC-7089; Type: USB Modem; Laptop: Toshiba M100

Communication System: FCC CDMA; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 848.31 \text{ MHz}$; $\sigma = 0.972 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.22, 6.22, 6.22); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2008-01-14; Ambient Temp: 21.0; Tissue Temp: 20.7

4.5mm from Body, CDMA_Cellular Ch.777, Ant Internal


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.022 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.820 mW/g; SAR(10 g) = 0.483 mW/g

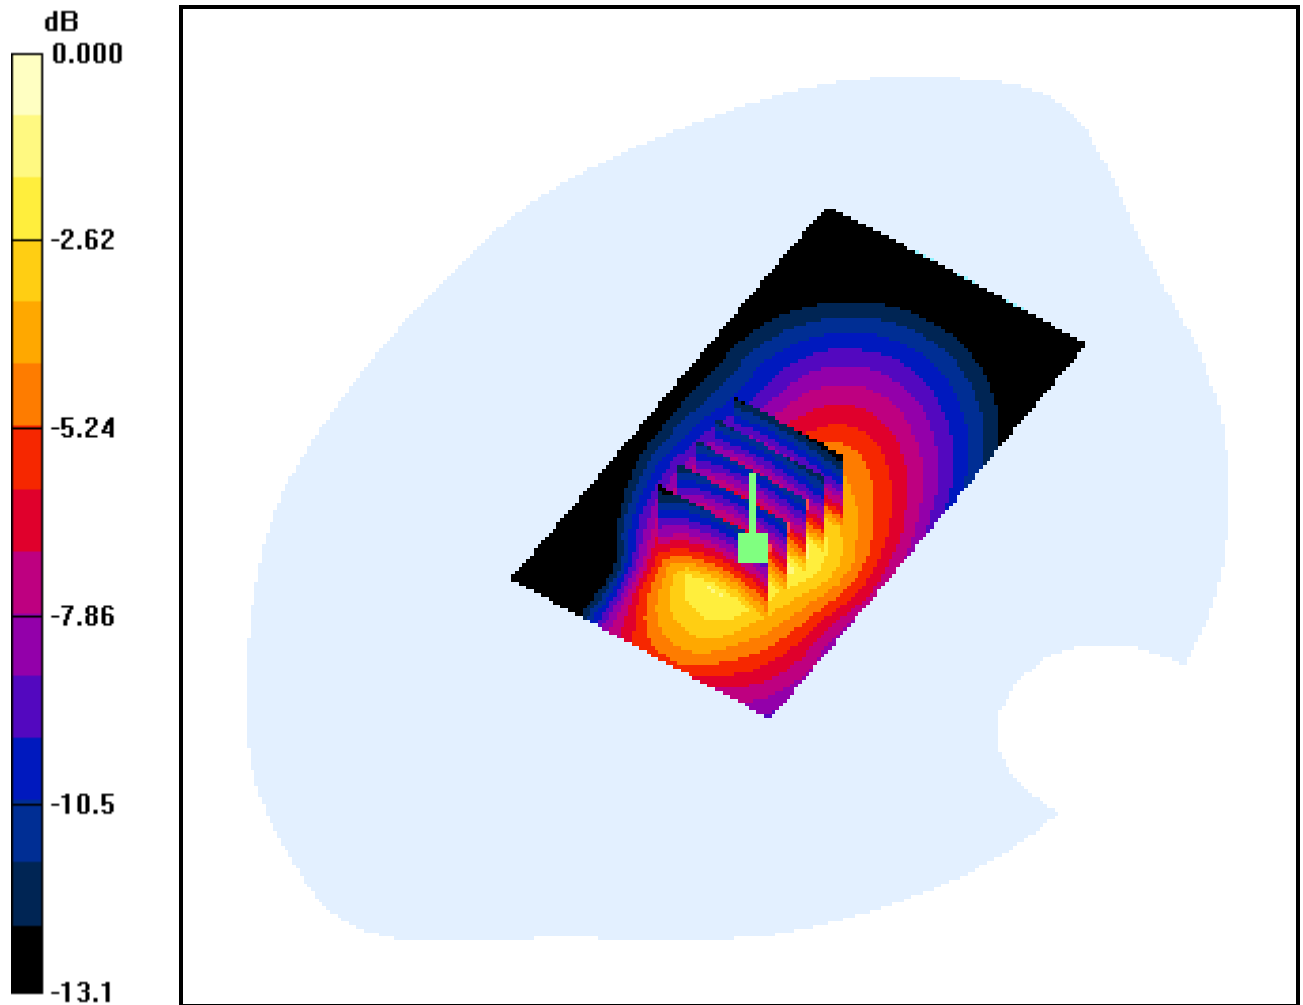

0 dB = 0.929mW/g

DIGITAL EMC CO., LTD

DUT: SEC-7089; Type: USB Modem; Laptop: Toshiba M100

Communication System: FCC_PCS; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1851.25$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2008-01-15; Ambient Temp: 20.9; Tissue Temp: 20.7

4.5mm from Body, CDMA_PCS Ch.25, Ant Internal


Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.045 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.605 mW/g; SAR(10 g) = 0.319 mW/g

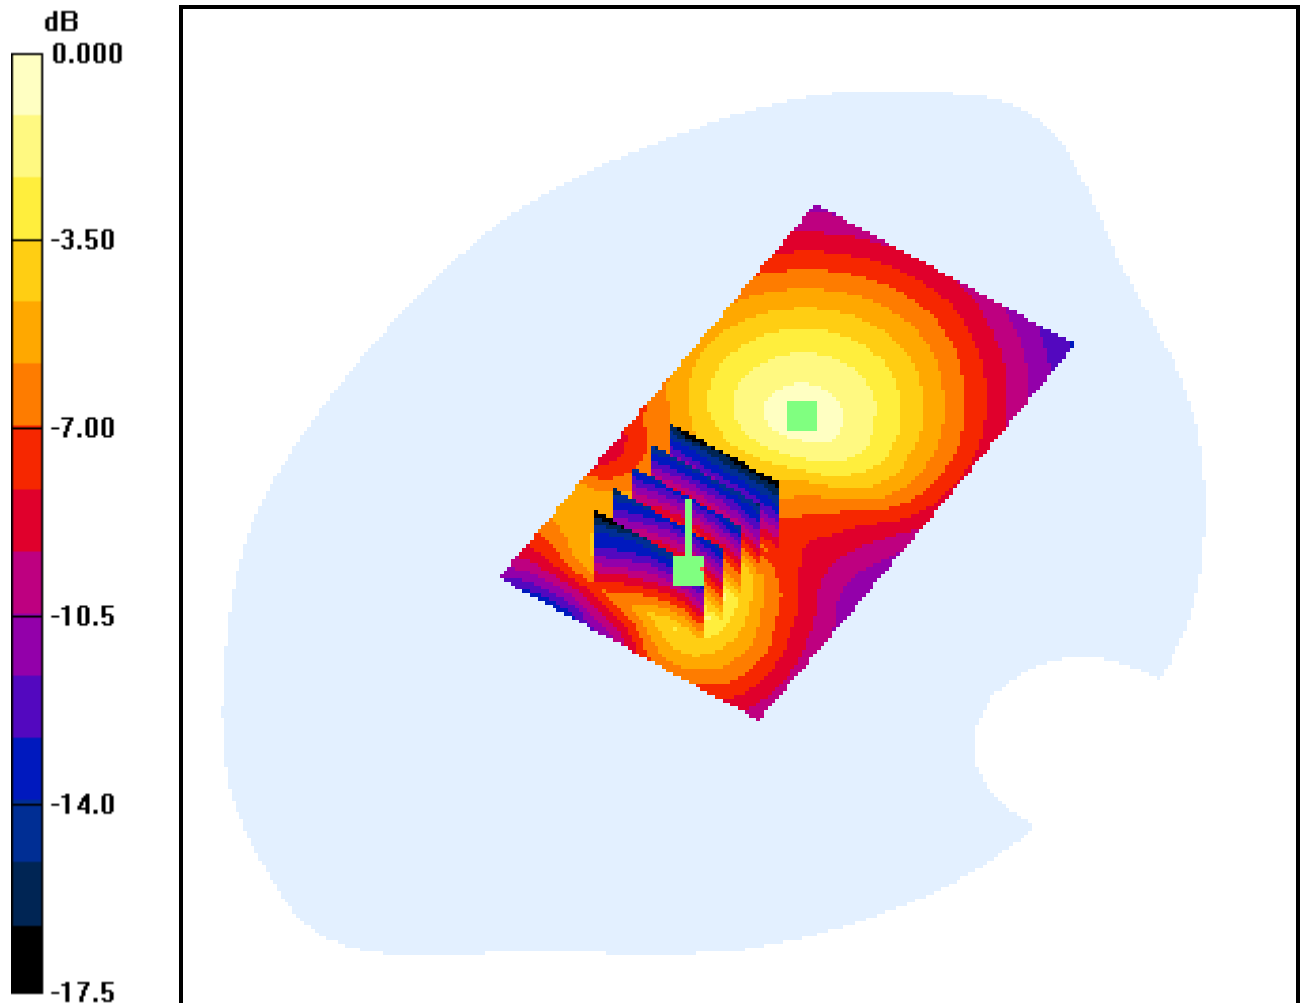

0 dB = 0.691mW/g

DIGITAL EMC CO., LTD

DUT: SEC-7089; Type: USB Modem; Laptop: Toshiba M100

Communication System: FCC_PCS; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1851.25$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2008-01-15; Ambient Temp: 20.9; Tissue Temp: 20.7

4.5mm from Body, CDMA_PCS Ch.25, Ant Internal


Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.045 dB

Peak SAR (extrapolated) = 0.812 W/kg

SAR(1 g) = 0.542 mW/g; SAR(10 g) = 0.342 mW/g

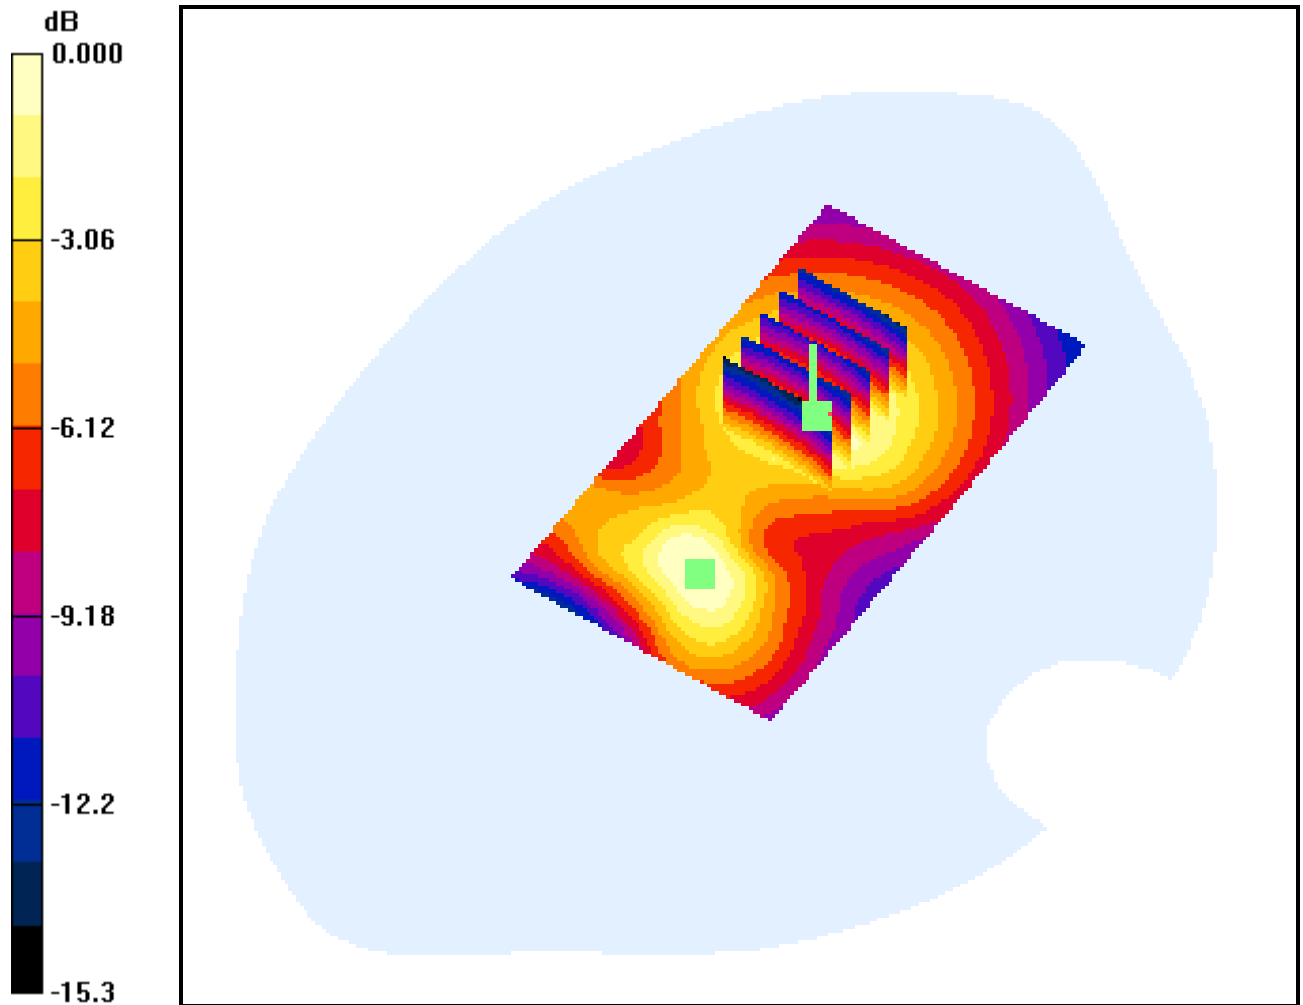

0 dB = 0.585mW/g

DIGITAL EMC CO., LTD

DUT: SEC-7089; Type: USB Modem; Laptop: Toshiba M100

Communication System: FCC_PCS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2008-01-15; Ambient Temp: 20.9; Tissue Temp: 20.7

4.5mm from Body, CDMA_PCS Ch.600, Ant Internal


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.893 W/kg

SAR(1 g) = 0.585 mW/g; SAR(10 g) = 0.366 mW/g

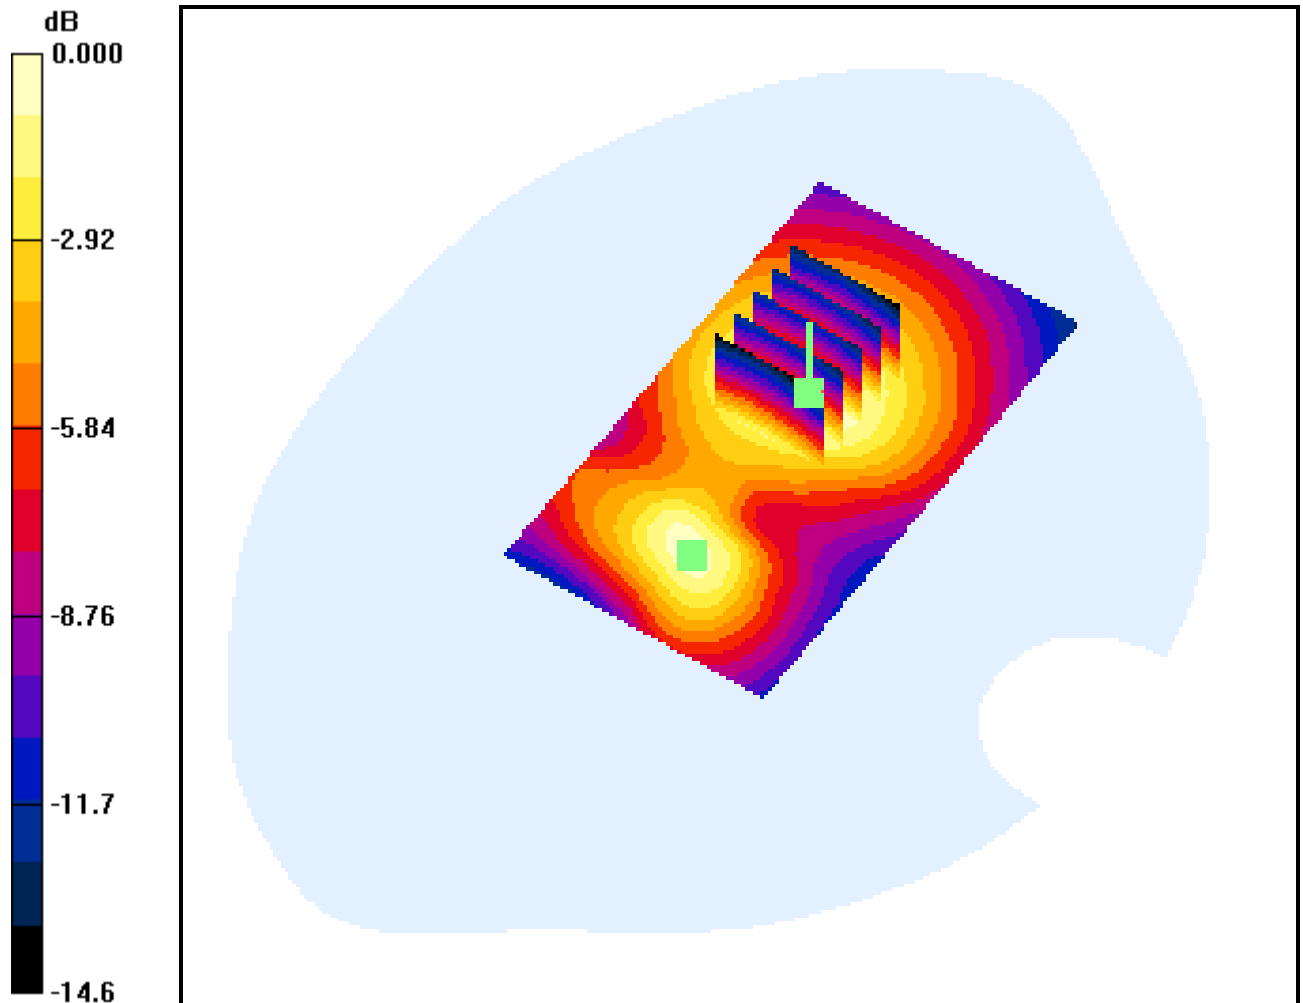

0 dB = 0.632mW/g

DIGITAL EMC CO., LTD

DUT: SEC-7089; Type: USB Modem; Laptop: Toshiba M100

Communication System: FCC_PCS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn520

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2008-01-15; Ambient Temp: 20.9; Tissue Temp: 20.7

4.5mm from Body, CDMA_PCS Ch.600, Ant Internal


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.001 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.576 mW/g; SAR(10 g) = 0.304 mW/g

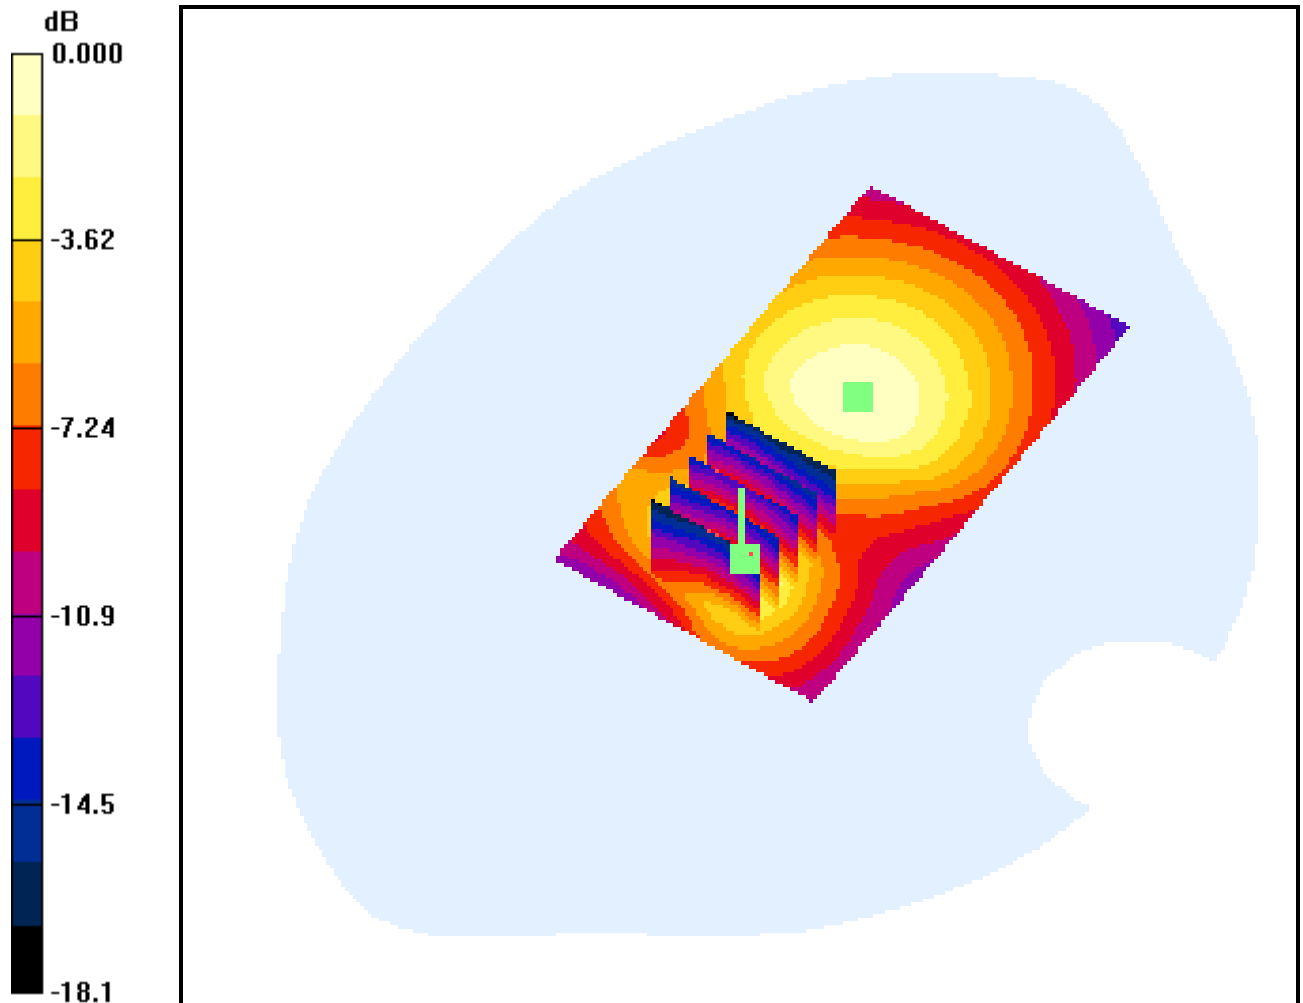

0 dB = 0.632mW/g

DIGITAL EMC CO., LTD

DUT: SEC-7089; Type: USB Modem; Laptop: Toshiba M100

Communication System: FCC_PCS; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1908.75 \text{ MHz}$; $\sigma = 1.58 \text{ mho/m}$; $\epsilon_r = 52.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2008-01-15; Ambient Temp: 20.9; Tissue Temp: 20.7

4.5mm from Body, CDMA_PCS Ch.1175, Ant Internal


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.166 dB

Peak SAR (extrapolated) = 0.827 W/kg

SAR(1 g) = 0.541 mW/g; SAR(10 g) = 0.336 mW/g

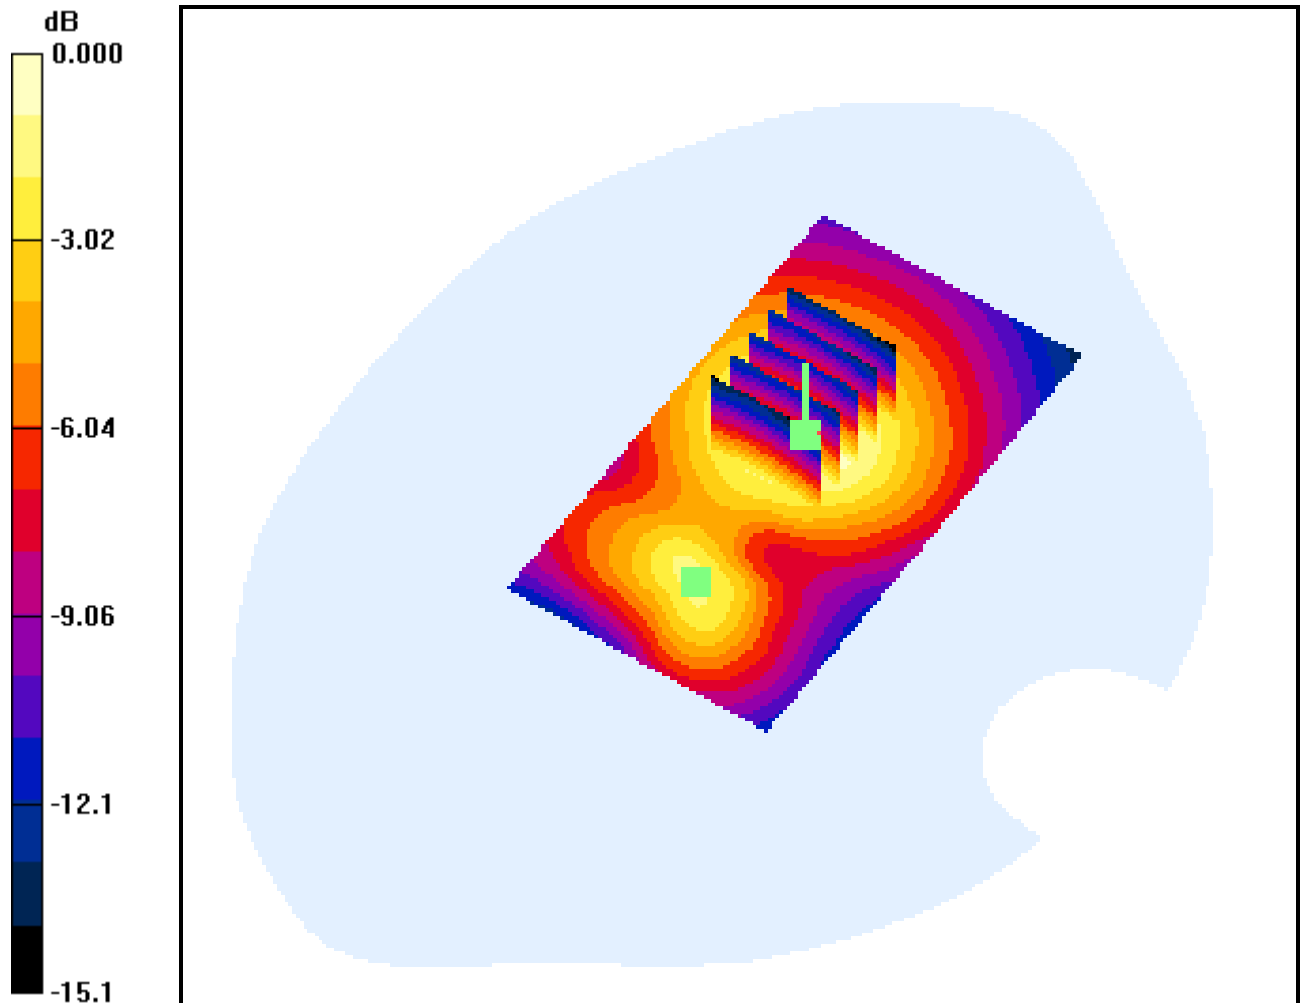

0 dB = 0.580mW/g

DIGITAL EMC CO., LTD

DUT: SEC-7089; Type: USB Modem; Laptop: Toshiba M100

Communication System: FCC_PCS; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1908.75 \text{ MHz}$; $\sigma = 1.58 \text{ mho/m}$; $\epsilon_r = 52.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2008-01-15; Ambient Temp: 20.9; Tissue Temp: 20.7

4.5mm from Body, CDMA_PCS Ch.1175, Ant Internal


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.166 dB

Peak SAR (extrapolated) = 0.669 W/kg

SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.203 mW/g

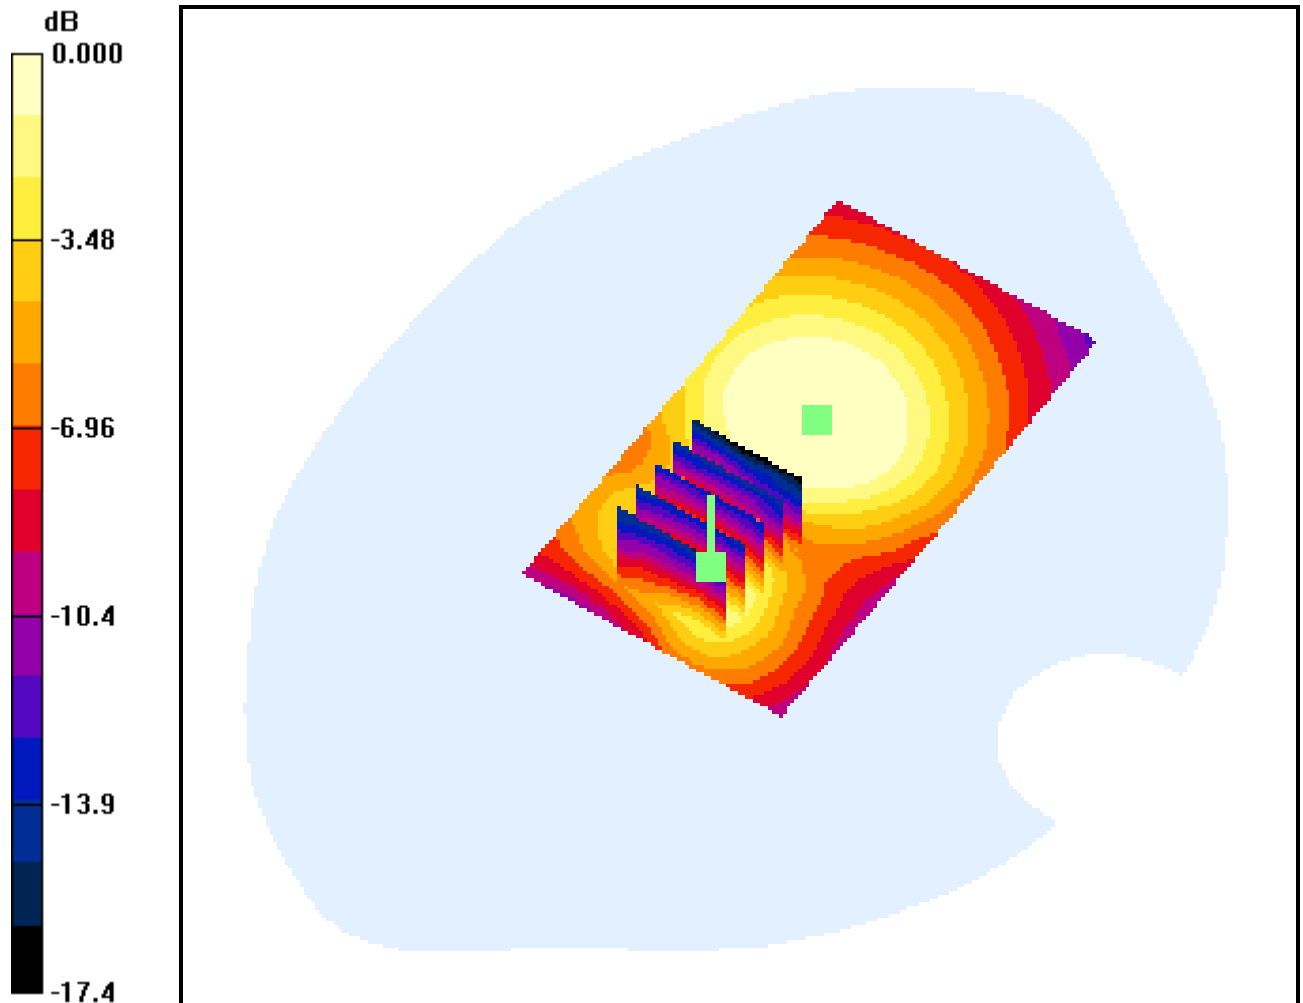

0 dB = 0.405mW/g

DIGITAL EMC CO., LTD

DUT: SEC-7089; Type: USB Modem; Laptop: Toshiba M100

Communication System: FCC CDMA; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 848.31 \text{ MHz}$; $\sigma = 0.972 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(6.22, 6.22, 6.22); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2008-01-14; Ambient Temp: 21.0; Tissue Temp: 20.7

4.5mm from Body, CDMA_Cellular Ch.777, Ant Internal


Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.022 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.820 mW/g; SAR(10 g) = 0.483 mW/g

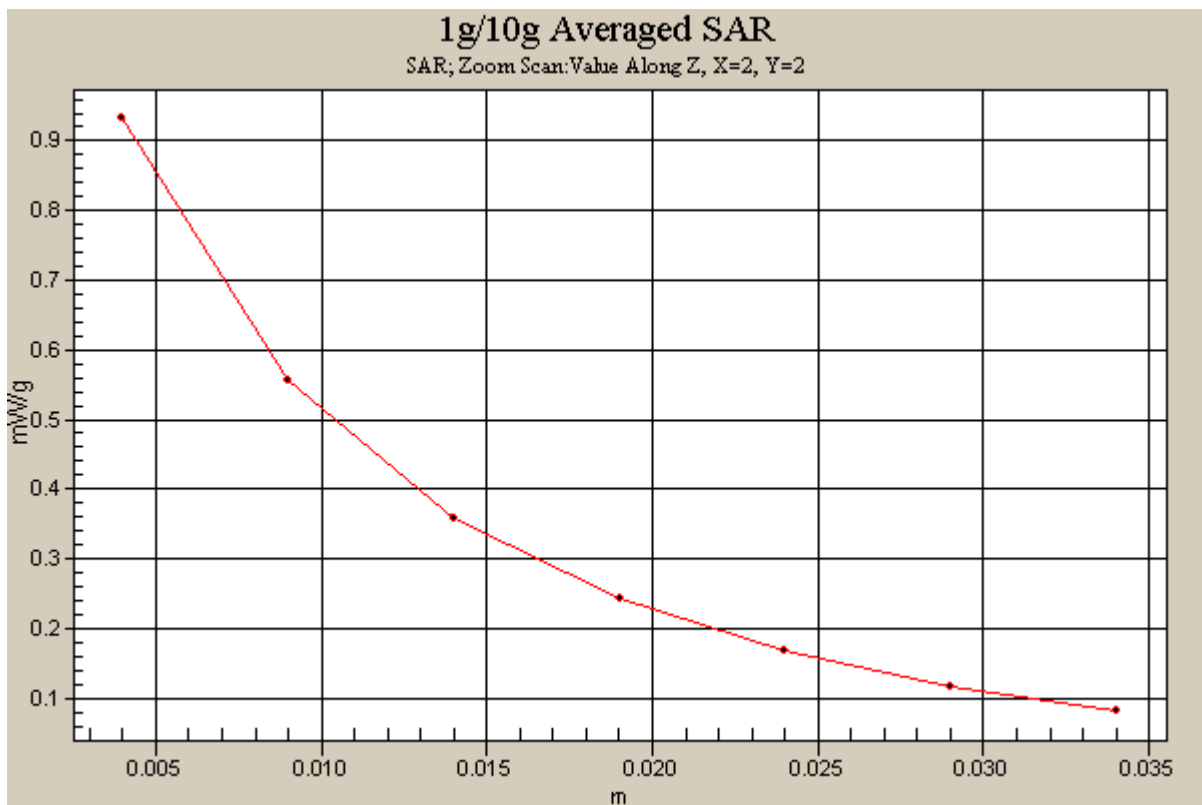

DIGITAL EMC CO., LTD

DUT: SEC-7089; Type: USB Modem; Laptop: Toshiba M100

Communication System: FCC_PCS; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1851.25$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1702; ConvF(4.93, 4.93, 4.93); Calibrated: 2007-03-20; Electronics: DAE3 Sn520
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

Test Date: 2008-01-15; Ambient Temp: 20.9; Tissue Temp: 20.7

4.5mm from Body, PCS_EVDO Ch.25, Ant Internal

Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.045 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.605 mW/g; SAR(10 g) = 0.319 mW/g

