



DIGITAL EMC CO., LTD.

683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea. 449-080

Tel: +82-31-321-2664 Fax: +82-31-321-1664

<http://www.digitalemc.com>

CERTIFICATION OF COMPLIANCE

CERTIFICATE OF COMPLIANCE FCC Part 22 & 24 Certification

Dates of Tests: December 21, 2009 ~ February 17, 2010
Test Report S/N: DR50111003A
Test Site : DIGITAL EMC CO., LTD.

FCC ID.

R2NSER-8189

APPLICANT

EpiValley Co., Ltd.

| | | |
|----------------------|---|---|
| Purpose | : | Original Grant |
| Classification | : | Licensed Non-Broadcast Station Transmitter(PCB) |
| EUT Type | : | CDMA 1x EV-DO USB Modem with WLAN |
| Model name | : | SER-8189 |
| Serial number | : | Identical prototype |
| FCC Rule Part(s) | : | §22(H), §24(E), §2 |
| TX Frequency Range | : | Cellular Band: 824.70 ~ 848.31 MHz PCS Band: 1851.25 ~ 1908.75 MHz |
| RX Frequency Range | : | Cellular Band: 869.70 ~ 893.31 MHz PCS Band: 1931.25 ~ 1988.75 MHz |
| Max. RF Output Power | : | Cellular Band – 0.433W ERP PCS Band – 0.321W EIRP |
| Date of Issue | : | March 2, 2010 |

The Test results relate only to the tested sample. It is not allowed to copy this report even partly without the allowance of DIGITAL EMC CO., LTD.

TABLE OF CONTENTS

| | | |
|---|---------------------------------------|----|
| ◆ | AUTHORIZATION LETTER | |
| ◆ | CONFIDENTIALITY LETTER(S) | |
| ◆ | TEST REPORT | |
| | 1.1 SCOPE | 3 |
| | 2.1 GENERAL INFORMATION | 4 |
| | 3.1 DESCRIPTION OF TESTS | 5 |
| | 3.2 SUMMARY OF TESTS | 8 |
| | 4.1 TEST DATA | 9 |
| | 4.1.1 CONDUCTED OUTPUT POWER | 9 |
| | 4.1.2 EFFECTIVE RADIATED POWER OUTPUT | 10 |
| | 4.1.3 CDMA RADIATED MEASUREMENTS | 11 |
| | 4.1.4 FREQUENCY STABILITY(CDAM) | 17 |
| | 5.1 PLOTS OF EMISSIONS | 21 |
| | 6.1 LIST OF TEST EQUIPMENT | 22 |
| | 7.1 SAMPLE CALCULATIONS | 24 |
| | 8.1 CONCLUSION | 25 |
| ◆ | TEST PLOTS | |
| ◆ | FCC ID LABEL & LOCATION | |
| ◆ | TEST SETUP PHOTOGRAPHS | |
| ◆ | EXTERNAL PHOTOGRAPHS | |
| ◆ | INTERNAL PHOTOGRAPHS | |
| ◆ | BLOCK DIAGRAM(S) | |
| ◆ | SCHEMATIC DIAGRAM(S) | |
| ◆ | OPERATIONAL DESCRIPTION | |
| ◆ | PARTS LIST | |
| ◆ | PARTS LOCATION | |
| ◆ | USER'S MANUAL | |

MEASUREMENT REPORT

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

§2.1033 General Information

Applicant: EpiValley Co., Ltd.

Address: Lordland EZ Tower #511, 513, Gumi-dong, Bundang-Gu, Sungnam-City, Kyunggi-Do, Korea

Attention: Woo Won Choung

- FCC ID: R2NSER-8189
- Quantity: Quantity production is planned
- Emission Designators: Cellular Band: 1M29F9W
PCS Band: 1M30F9W
- Tx Freq. Range: Cellular Band: 824.70 ~ 848.31 MHz
PCS Band: 1851.25 ~ 1908.75 MHz
- Rx Freq. Range: Cellular Band: 869.70 ~ 893.31 MHz
PCS Band: 1931.25 ~ 1988.75 MHz
- Max. Power Rating: Cellular Band: 0.433W ERP(26.36dBm)
PCS Band: 0.321W EIRP(25.06dBm)
- FCC Classification(s): Licensed Portable Transmitter (PCB)
- Equipment (EUT) Type: EVDO 1X USB Modem with WLAN
- Mode: CDMA
- Frequency Tolerance: $\pm 0.00025 \%$ (2.5ppm)
- FCC Rule Part(s): §22(H), §24(E), §2
- Dates of Tests: December 21, 2009 ~ February 17, 2010
- Place of Tests: DIGITAL EMC
- Test Report S/N: DR50111003A

2.1. General Information

This report contains the result of tests performed by:

DIGITAL EMC CO., LTD.

Address : 683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea. 449-080

<http://www.digitalemccom> E-mail: harveysung@digitalemccom

Tel: +82-31-321-2664 Fax: +82-31-321-1664

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competents of calibration and testing laboratory".

Tested by: *Engineer*

March 2, 2010

D.C. CHA



Date

Name

Signature

Reviewed by: *Manager*

March 2, 2010

W.J. Lee



Date

Name

Signature

Applicant:

Company name : EpiValley Co., Ltd.

Address : Lordland EZ Tower #511, 513, Gumi-dong, Bundang-Gu, Sungnam City, Kyunggi-Do, Korea

Date of order : November 24, 2009

3.1 DESCRIPTION OF TESTS

3.1.1 Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (c) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

3.1.2 Occupied Bandwidth

The 99% power bandwidth was measured with a calibrated spectrum analyzer.

3.1.3 Spurious and Harmonic Emissions at Antenna Terminal

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.

3.1.5 Radiation Spurious and Harmonic Emissions

Radiation and harmonic emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

3.1 DESCRIPTION OF TESTS

(Continued...)

3.1.6 Frequency Stability/Temperature Variation.

The frequency stability of the transmitter is measured by:

- a) **Temperature:** The temperature is varied from -30°C to +50°C increments using an environmental chamber.
- b) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the normal voltage for non hand-carried battery equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***Specification** - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.*

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (25°C to 27 °C to provide a reference)
2. The equipment is tuned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C up to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.1 DESCRIPTION OF TESTS

(Continued...)

3.1.7 Radiated Emission

Final test was performed according to ANSI C63.4-2003 at the open field test site. There are no deviations from the standard.

The EUT was placed in a 0.8m high table along with the peripherals. The turn table was separated from the antenna distance 3meters. Cables were placed in a position to produce maximum emissions as determined by experimentation, and operation mode was selected for maximum.

The frequencies and amplitudes of maximum emission were measured at varying azimuths, antenna heights and antenna polarities. Reported are maximized emission levels.

These tests were performed at 120kHz of 6dB bandwidth.

3.1.8 Conducted Emission

The power line conducted interference measurements were performed according to ANSI C63.4-2003 in a shielded enclosure with peripherals placed on a table, 0.8m high over a metal floor. It was located more than required distance away from the shielded enclosure wall. There are no deviations from the standard.

The EUT was plugged into the LISN and the frequency range of interest scanned.

Reported are maximized emission levels.

These tests were performed at 9kHz of 6dB bandwidth.

3.2 Summary of tests

| FCC Part Section(s) | Parameter | Status Note 1 |
|---|--------------------------------------|------------------|
| 22.913(a) / 24.232(b), 2.1046 | Power Output | C |
| 22.917 / 24.238, 2.1049(h)(i) | Occupied Bandwidth | C |
| 22.917(b) / 24.238(b) | Emission Bandwidth | C |
| 22.917 / 24.238 2.1051 | Emission Limits Transmitter | C |
| 2.1053 (a) | Field Strength of Spurious Radiation | C |
| 2.1055 | Frequency Stability | C |
| <p>Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable</p> <p>Note 2: The JBP (Computing device peripheral) portion of this device was tested and approved by FCC DOC procedure.</p> | | |

The sample was tested according to the following specification:

FCC Parts §22(H), §24(E), §2; ANSI C-63.4-2003

4.1 TEST DATA

4.1.1 Conducted Output Power

The output power was measured under all R.C.s and S.O.s which are listed below measurement data. The worst case output power is reported with SO55 of RC1 for CELLULAR band and PCS band. Therefore this device was tested under **SO2** of **RC1** for **CELLULAR band** and **PCS band**.

SAR Measurement Procedures for 3G Devices(Released October 2007)

- verify maximum output power
 - on high, middle and low channels
 - according to 3GPP2 C.S0011 / TIA-98-E, Sec. 4.4.5
- Power measurement configurations
 1. 1xRRT
 - Test Mode 1(C.S0011 Table 4.4.5.2-1), SO55, RC1, Traffic Channel @9600bps
 - Test Mode 3(C.S0011 Table 4.4.5.2-2), SO55 or SO32, RC3, FCH @9600bps
 - Test Mode 3(C.S0011 Table 4.4.5.2-2), SO32, RC3, FCH+SCH @9600bps
 - other configurations supported by the DUT
 - power control
 - Bits Hold for FCH+SCH
 - otherwise ALL Bits Up
 2. Ev-DO Rev.0
 - FTAP: 2 slot version of 307.2Kbps(ACK in all slots)
 - RTAP: 153.6Kbps in sub type 0/1 PHY Configuration
 3. Ev-DO Rev.A
 - FETAP: 2 slot version of 307.2Kbps(ACK in all slots)
 - RETAP: 4096 bits payload with 16 slot termination target
 - In Subtype 2PHY configuration

- Measurement data

| Band | Channel | 1X RRT | | | | | EvDo (Rev.0) | | EvDo (Rev.A) | |
|----------|---------|--------|-------|-------|-------|----------------|-----------------|-------|-----------------|-------|
| | | RC1 | RC1 | RC3 | RC3 | RC3 | | | | |
| | | SO2 | SO55 | SO2 | SO55 | SO32 (TDSO) | FTAP | RTAP | FETAP | RETAP |
| Cellular | 1013 | 24.53 | 24.48 | 24.52 | 24.50 | 24.49 | 24.42 | 24.25 | 24.44 | 24.31 |
| | 0384 | 24.10 | 24.09 | 23.99 | 24.02 | 23.98 | 23.98 | 23.99 | 23.96 | 24.00 |
| | 0777 | 24.22 | 24.20 | 24.12 | 24.16 | 24.15 | 24.09 | 24.10 | 24.06 | 24.07 |
| PCS | 0025 | 24.53 | 24.48 | 24.52 | 24.50 | 24.49 | 24.42 | 24.25 | 24.44 | 24.31 |
| | 0600 | 23.40 | 23.39 | 23.29 | 23.30 | 23.25 | 23.33 | 23.34 | 23.33 | 23.34 |
| | 1175 | 24.15 | 24.13 | 24.00 | 24.09 | 24.01 | 24.03 | 24.00 | 24.02 | 23.99 |

4.1.2 Effective Radiated Power Output

A. POWER: High (Cellular Band)

| Band | Freq. Tuned (MHz) | REF. LEVEL (dBm) | POL (H/V) | ERP (dBm) | ERP (W) | Supplied Power | Note |
|----------|-------------------|------------------|-----------|-----------|---------|----------------|-----------|
| Cellular | 824.70 | -12.21 | H | 26.36 | 0.433 | Battery | RC1 & SO2 |
| | 836.52 | -12.41 | H | 25.91 | 0.390 | Battery | RC1 & SO2 |
| | 848.31 | -14.52 | H | 24.92 | 0.310 | Battery | RC1 & SO2 |
| | 824.70 | -12.25 | H | 26.24 | 0.421 | Adapter | RC1 & SO2 |

B. POWER: High (PCS Band)

| Band | Freq. Tuned (MHz) | REF. LEVEL (dBm) | POL (H/V) | EIRP (dBm) | EIRP (W) | Supplied Power | Note |
|------|-------------------|------------------|-----------|------------|----------|----------------|-----------|
| PCS | 1851.25 | -13.64 | H | 25.06 | 0.321 | Battery | RC1 & SO2 |
| | 1880.00 | -15.60 | H | 23.82 | 0.241 | Battery | RC1 & SO2 |
| | 1908.75 | -17.41 | H | 22.07 | 0.161 | Battery | RC1 & SO2 |
| | 1851.25 | -13.89 | H | 24.92 | 0.310 | Adapter | RC1 & SO2 |

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

4.1.3 Radiated Measurements

Field Strength of SPURIOUS Radiation

TEST MODE : Cellular
 OPERATING FREQUENCY : 824.70 MHz
 CHANNEL : 1013(Low)
 MEASURED OUTPUT POWER : 26.36 dBm = 0.433 W
 MODULATION SIGNAL : CDMA (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W)$ = 39.36 dBc

| Freq. (MHz) | POL (H/V) | LEVEL@ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBd) | CORRECT GENERATOR LEVEL (dBm) | (dBc) |
|----------------|--------------|---|--|--|-------|
| 1649.40 | H | -36.94 | 5.63 | -31.31 | 57.67 |
| 1649.40 | V | -47.11 | 5.63 | -41.48 | 67.84 |
| 2474.10 | H | -36.21 | 7.01 | -29.20 | 55.56 |
| 2474.10 | V | -43.05 | 7.01 | -36.04 | 62.40 |

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

4.1.3 Radiated Measurements

(Continued...)

Field Strength of SPURIOUS Radiation

TEST MODE : Cellular
 OPERATING FREQUENCY : 836.52 MHz
 CHANNEL : 384(Mid)
 MEASURED OUTPUT POWER : 25.91 dBm = 0.390 W
 MODULATION SIGNAL : CDMA (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W)$ = 38.91 dBc

| Freq. (MHz) | POL (H/V) | LEVEL@ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBd) | CORRECT GENERATOR LEVEL (dBm) | (dBc) |
|----------------|--------------|---|--|--|-------|
| 1673.04 | H | -35.65 | 5.69 | -29.96 | 55.87 |
| 1673.04 | V | -44.41 | 5.69 | -38.72 | 64.63 |
| 2509.56 | H | -31.08 | 7.05 | -24.03 | 49.94 |
| 2509.56 | V | -45.56 | 7.05 | -38.51 | 64.42 |

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

4.1.3 Radiated Measurements

(Continued...)

Field Strength of SPURIOUS Radiation

TEST MODE : Cellular
 OPERATING FREQUENCY : 848.31 MHz
 CHANNEL : 777(High)
 MEASURED OUTPUT POWER : 24.92 dBm = 0.310 W
 MODULATION SIGNAL : CDMA (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) = 37.92$ dBc

| Freq. (MHz) | POL (H/V) | LEVEL@ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBd) | CORRECT GENERATOR LEVEL (dBm) | (dBc) |
|----------------|--------------|---|--|--|-------|
| 1696.62 | H | -33.71 | 5.75 | -27.96 | 52.88 |
| 1696.62 | V | -44.74 | 5.75 | -38.99 | 63.91 |
| 2544.93 | H | -32.52 | 7.09 | -25.43 | 50.35 |
| 2544.93 | V | -48.58 | 7.09 | -41.49 | 66.41 |

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

4.1.3 Radiated Measurements

Field Strength of SPURIOUS Radiation

TEST MODE : PCS
 OPERATING FREQUENCY : 1851.25 MHz
 CHANNEL : 0025(Low)
 MEASURED OUTPUT POWER : 25.06 dBm = 0.321 W
 MODULATION SIGNAL : CDMA (Internal)
 DISTANCE : 3 meters
 LIMIT : $43 + 10 \log_{10} (W) =$ 38.06 dBc

| Freq. (MHz) | POL (H/V) | LEVEL@ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBd) | CORRECT GENERATOR LEVEL (dBm) | (dBc) |
|----------------|--------------|---|--|--|-------|
| 3702.50 | H | -32.34 | 9.60 | -22.74 | 47.80 |
| 3702.50 | V | -33.02 | 9.60 | -23.42 | 48.48 |
| 5553.75 | H | -41.83 | 11.12 | -30.71 | 55.77 |
| 5553.75 | V | -40.18 | 11.12 | -29.06 | 54.12 |

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

4.1.3 Radiated Measurements

(Continued...)

Field Strength of SPURIOUS Radiation

TEST MODE : _____ PCS
 OPERATING FREQUENCY : _____ 1880.00 _____ MHz
 CHANNEL : _____ 0600(Mid) _____
 MEASURED OUTPUT POWER : _____ 23.82 _____ dBm = _____ 0.241 _____ W
 MODULATION SIGNAL : CDMA (Internal)
 DISTANCE : _____ 3 _____ meters
 LIMIT : $43 + 10 \log_{10} (W)$ = _____ 36.82 _____ dBc

| Freq. (MHz) | POL (H/V) | LEVEL@ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBd) | CORRECT GENERATOR LEVEL (dBm) | (dBc) |
|----------------|--------------|---|--|--|-------|
| 3760.00 | H | -31.40 | 9.59 | -21.81 | 45.63 |
| 3760.00 | V | -33.25 | 9.59 | -23.66 | 47.48 |
| 5640.00 | H | -39.87 | 11.15 | -28.72 | 52.54 |
| 5640.00 | V | -39.85 | 11.15 | -28.70 | 52.52 |

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

4.1.3 Radiated Measurements

(Continued...)

Field Strength of SPURIOUS Radiation

TEST MODE : _____ PCS
 OPERATING FREQUENCY : _____ 1908.75 _____ MHz
 CHANNEL : _____ 1175(High) _____
 MEASURED OUTPUT POWER : _____ 22.07 _____ dBm = _____ 0.161 _____ W
 MODULATION SIGNAL : CDMA (Internal)
 DISTANCE : _____ 3 _____ meters
 LIMIT : $43 + 10 \log_{10} (W)$ = _____ 35.07 _____ dBc

| Freq. (MHz) | POL (H/V) | LEVEL@ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBd) | CORRECT GENERATOR LEVEL (dBm) | (dBc) |
|----------------|--------------|---|--|--|-------|
| 3817.50 | H | -28.69 | 9.58 | -19.11 | 41.18 |
| 3817.50 | V | -29.11 | 9.58 | -19.53 | 41.60 |
| 5726.25 | H | -39.04 | 11.18 | -27.86 | 49.93 |
| 5726.25 | V | -40.55 | 11.18 | -29.37 | 51.44 |

NOTE

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.



4.1.4 Frequency Stability (Cellular Band)

OPERATING FREQUENCY : 836,519,992 Hz
 CHANNEL : 0384(Mid)
 REFERENCE VOLTAGE : 3.7 VDC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm

| VOLTAGE (%) | POWER (VAC) | TEMP (dB) | FREQ (Hz) | Deviation (ppm) |
|----------------|----------------|--------------|--------------|--------------------|
| 100% | 3.7 | +25(Ref) | 836,519,992 | 0.000 |
| 100% | | -30 | 836,519,990 | -0.002 |
| 100% | | -20 | 836,519,995 | 0.004 |
| 100% | | -10 | 836,519,995 | 0.004 |
| 100% | | 0 | 836,519,997 | 0.006 |
| 100% | | +10 | 836,520,004 | 0.014 |
| 100% | | +20 | 836,520,003 | 0.013 |
| 100% | | +30 | 836,520,007 | 0.018 |
| 100% | | +40 | 836,520,002 | 0.012 |
| 100% | | +50 | 836,520,006 | 0.017 |
| 85% | 3.15 | +25 | - | - |
| 115% | 4.26 | +25 | 836,520,007 | 0.018 |
| BATT.ENDPOINT | 3.20 | +25 | 836,520,006 | 0.017 |

4.1.4 Frequency Stability (Cellular Band)

(Continued...)

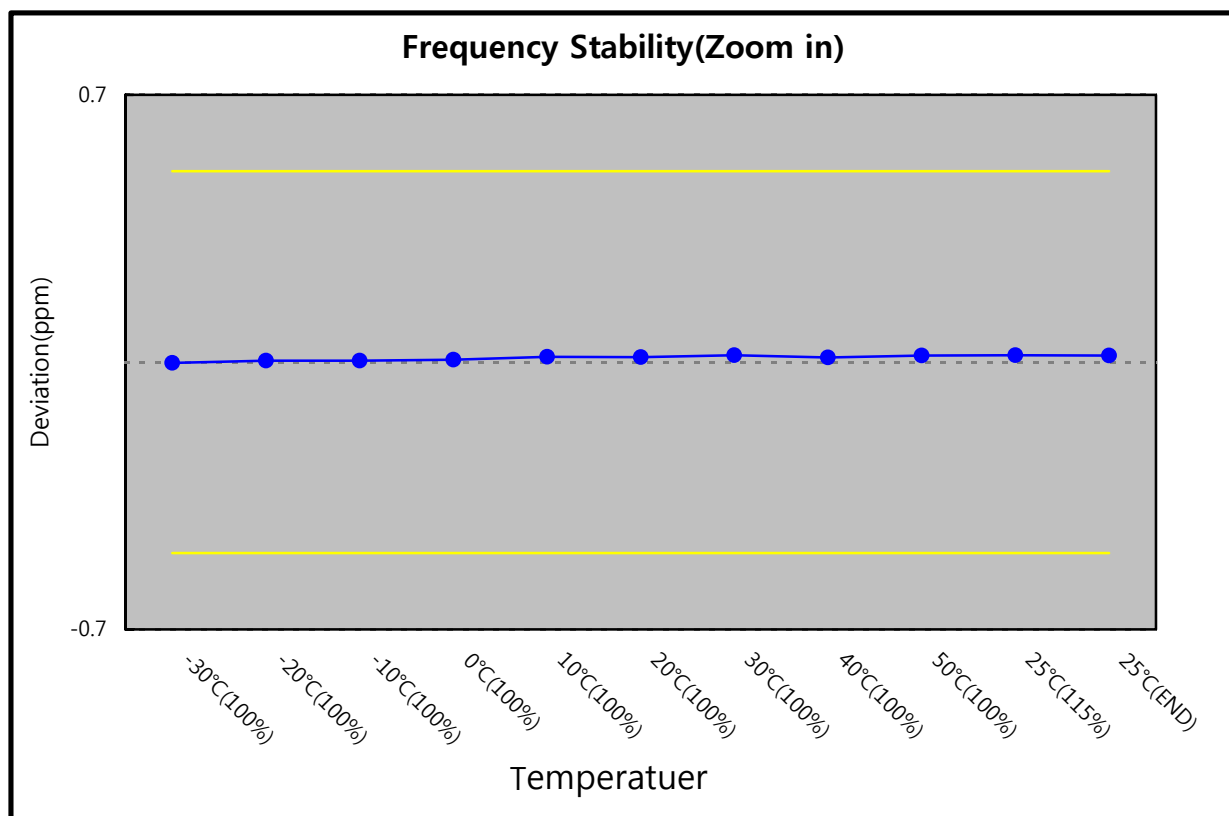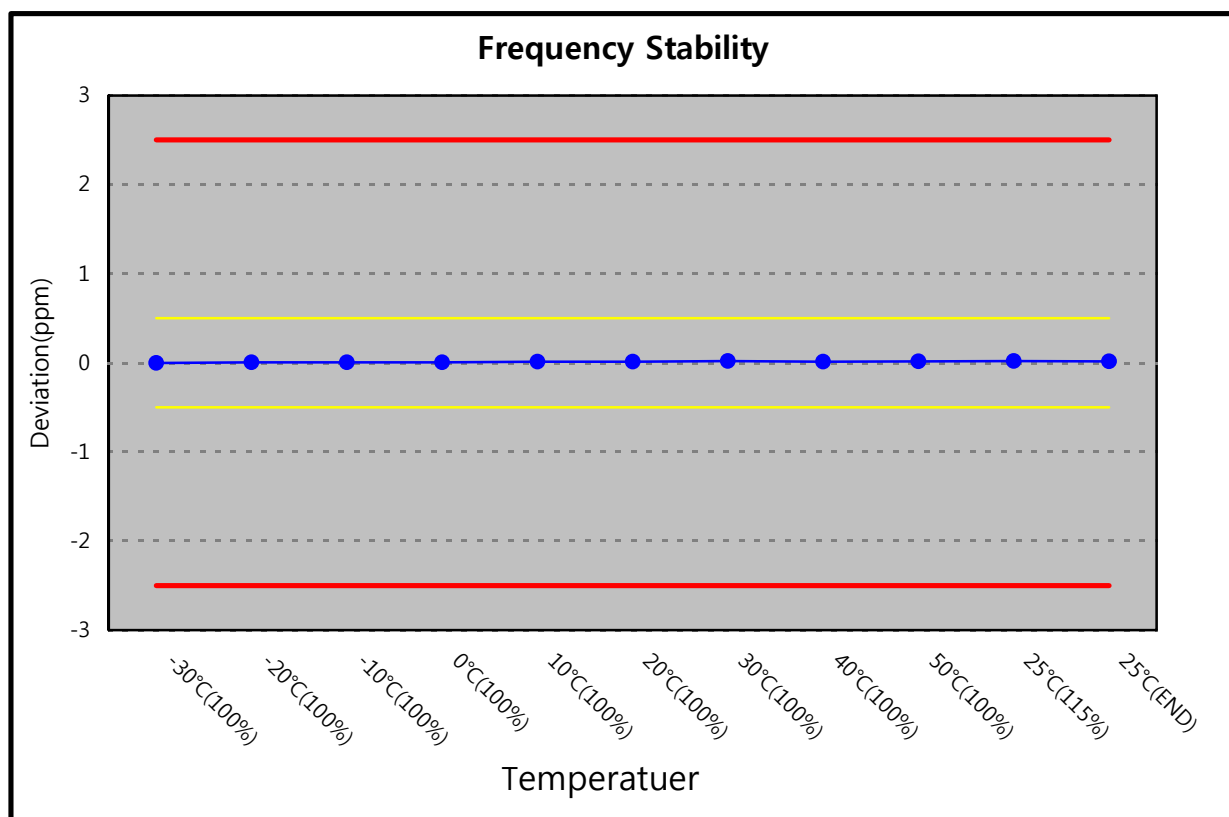

4.1.4 Frequency Stability (PCS Band)



(Continued...)

OPERATING FREQUENCY : 836,519,995 Hz
 CHANNEL : 600(Mid)
 REFERENCE VOLTAGE : 3.7 VDC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm

| VOLTAGE (%) | POWER (VAC) | TEMP (dB) | FREQ (Hz) | Deviation (ppm) |
|----------------|----------------|--------------|---------------|--------------------|
| 100% | 3.7 | +25(Ref) | 1,879,999,995 | 0.000 |
| 100% | | -30 | 1,880,000,004 | 0.005 |
| 100% | | -20 | 1,880,000,007 | 0.006 |
| 100% | | -10 | 1,879,999,995 | 0.000 |
| 100% | | 0 | 1,879,999,996 | 0.001 |
| 100% | | +10 | 1,880,000,007 | 0.006 |
| 100% | | +20 | 1,880,000,004 | 0.005 |
| 100% | | +30 | 1,880,000,003 | 0.004 |
| 100% | | +40 | 1,880,000,011 | 0.009 |
| 100% | | +50 | 1,880,000,009 | 0.007 |
| 85% | 3.15 | +25 | - | - |
| 115% | 4.26 | +25 | 1,880,000,013 | 0.010 |
| BATT.ENDPOINT | 3.20 | +25 | 1,880,000,007 | 0.006 |

4.1.4 Frequency Stability (PCS Band)

(Continued...)

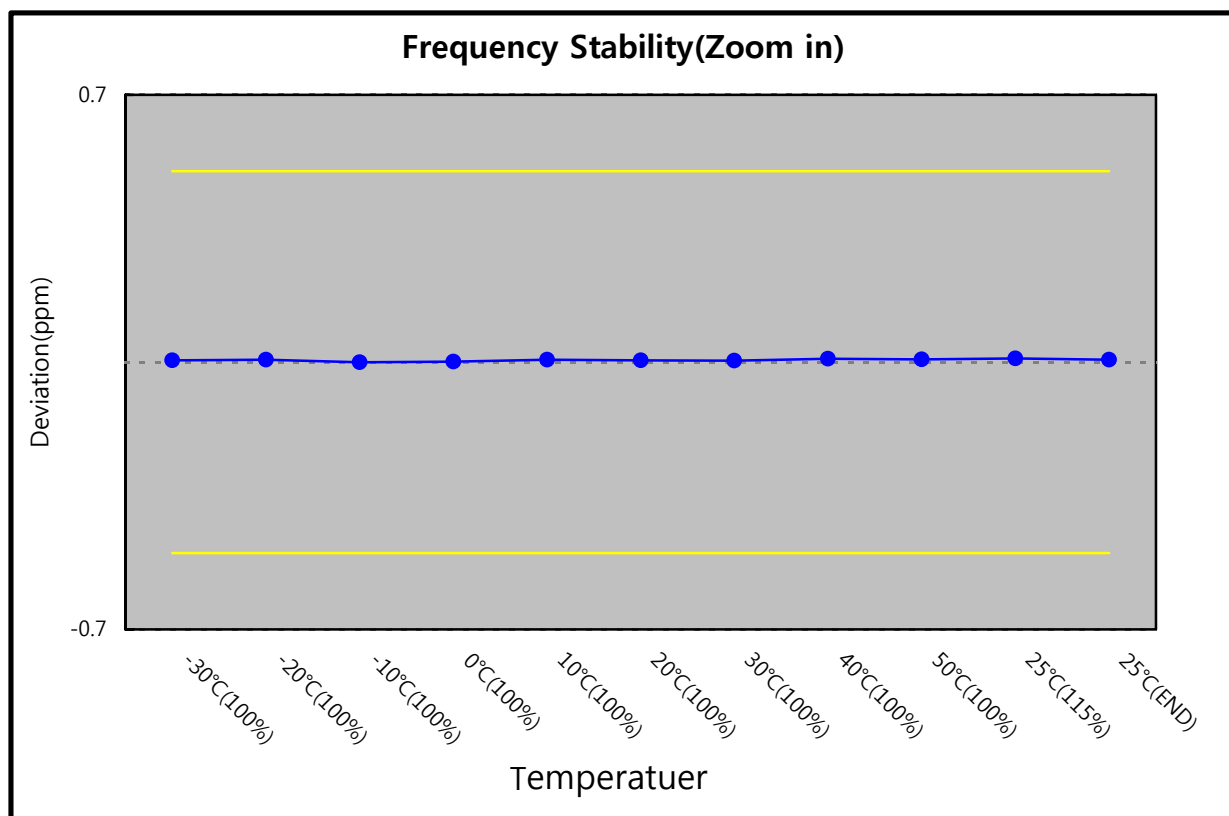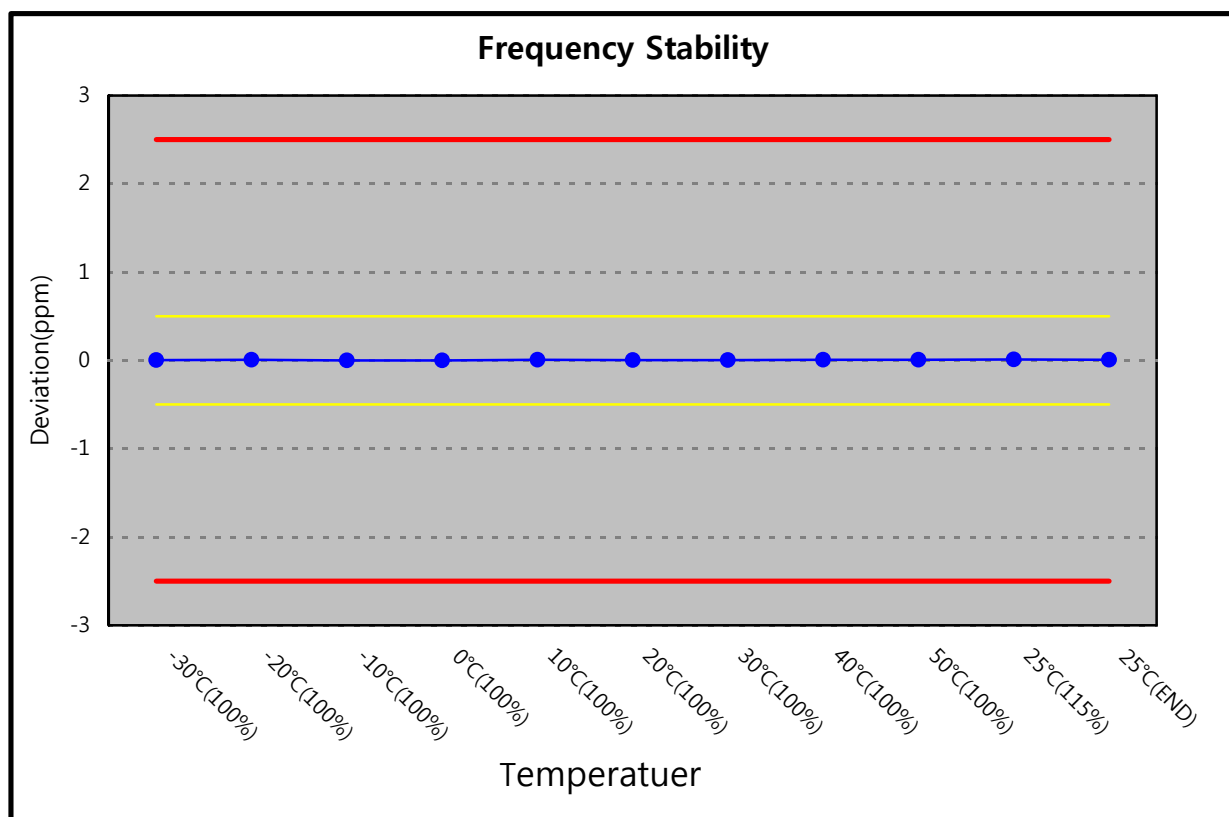

5.1 PLOTS OF EMISSIONS

(SEE ATTACHMENT “Test Plots”)

6.1 TEST EQUIPMENT

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment.

| | Type | Manufacturer | Model | Cal.Due.Date (dd/mm/yy) | Next.Due.Date (dd/mm/yy) | S/N |
|-------------------------------------|---|--------------------|--------------------------------|----------------------------|-----------------------------|------------------------|
| <input checked="" type="checkbox"/> | Spectrum Analyzer | Agilent | E4440A | 25/09/09 | 25/09/10 | MY45304199 |
| <input type="checkbox"/> | Spectrum Analyzer | Rohde Schwarz | FSQ26 | 05/06/09 | 05/06/10 | 200445 |
| <input type="checkbox"/> | Spectrum Analyzer(RE) | H.P | 8563E | 13/10/09 | 13/10/10 | 3551A04634 |
| <input type="checkbox"/> | Power Meter | H.P | EMP-442A | 02/07/09 | 02/07/10 | GB37170413 |
| <input type="checkbox"/> | Power Sensor | H.P | 8481A | 02/07/09 | 02/07/10 | 3318A96332 |
| <input type="checkbox"/> | Power Divider | Agilent | 11636B | 13/10/09 | 13/10/10 | 56471 |
| <input checked="" type="checkbox"/> | Power Splitter | Anritsu | K241B | 13/10/09 | 13/10/10 | 20611 |
| <input type="checkbox"/> | Power Splitter | Anritsu | K241B | 02/07/09 | 02/07/10 | 017060 |
| <input type="checkbox"/> | Frequency Counter | H.P | 5342A | 13/07/09 | 13/07/10 | 2119A04450 |
| <input checked="" type="checkbox"/> | TEMP & HUMIDITY Chamber | JISCO | KR-100/J-RHC2 | 10/10/09 | 10/10/10 | 30604493/021031 |
| <input checked="" type="checkbox"/> | Digital Multimeter | H.P | 34401A | 13/03/09 | 13/03/10 | 3146A13475, US36122178 |
| <input type="checkbox"/> | Multifunction Synthesizer | HP | 8904A | 06/10/09 | 06/10/10 | 3633A08404 |
| <input checked="" type="checkbox"/> | Signal Generator | Rohde Schwarz | SMR20 | 13/03/09 | 13/03/10 | 101251 |
| <input type="checkbox"/> | Signal Generator | H.P | ESG-3000A | 02/07/09 | 02/07/10 | US37230529 |
| <input checked="" type="checkbox"/> | Vector Signal Generator | Rohde Schwarz | SMJ100A | 11/01/10 | 11/01/11 | 100148 |
| <input type="checkbox"/> | Audio Analyzer | H.P | 8903B | 02/07/09 | 02/07/10 | 3011A09448 |
| <input type="checkbox"/> | Modulation Analyzer | H.P | 8901B | 02/07/09 | 02/07/10 | 3028A03029 |
| <input checked="" type="checkbox"/> | 8960 Series 10 Wireless Comms. Test Set | Agilent | E5515C | 02/07/09 | 02/07/10 | GB43461134 |
| <input type="checkbox"/> | Universal Radio communication Tester | Rohde Schwarz | CMU 200 | 19/05/09 | 19/05/10 | 106760 |
| <input type="checkbox"/> | Bluetooth Tester | TESCOM | TC-3000B | 02/07/09 | 02/07/10 | 3000B000268 |
| <input type="checkbox"/> | Thermo hygrometer | BODYCOM | BJ5478 | 28/01/10 | 28/01/11 | 090205-3 |
| <input checked="" type="checkbox"/> | Thermo hygrometer | BODYCOM | BJ5478 | 28/01/10 | 28/01/11 | 090205-2 |
| <input type="checkbox"/> | Thermo hygrometer | BODYCOM | BJ5478 | 28/01/10 | 28/01/11 | 090205-4 |
| <input checked="" type="checkbox"/> | AC Power supply | DAEKWANG | 5KVA | 13/03/09 | 13/03/10 | 20060321-1 |
| <input checked="" type="checkbox"/> | DC Power Supply | HP | 6622A | 13/03/09 | 13/03/10 | 3448A03760 |
| <input type="checkbox"/> | DC Power Supply | HP | 6633A | 13/03/09 | 13/03/10 | 3524A06634 |
| <input checked="" type="checkbox"/> | BAND Reject Filter | Microwave Circuits | N0308372 | 06/10/09 | 06/10/10 | 3125-01DC0352 |
| <input type="checkbox"/> | BAND Reject Filter | Wainwright | WRCG1750 | 06/10/09 | 06/10/10 | 2 |
| <input type="checkbox"/> | High-Pass Filter | ANRITSU | MP526D | 06/10/09 | 06/10/10 | M27756 |
| <input checked="" type="checkbox"/> | High-pass filter | Wainwright | WHKX2.1 | N/A | N/A | 1 |
| <input type="checkbox"/> | High-Pass Filter | Wainwright | WHKX3.0 | N/A | N/A | 9 |
| <input type="checkbox"/> | High-Pass Filter | Wainwright | WHNX5.0 | N/A | N/A | 8 |
| <input type="checkbox"/> | High-Pass Filter | Wainwright | WHNX8.5 | N/A | N/A | 1 |
| <input type="checkbox"/> | Tunable Notch Filter | Wainwright | WRCT800.0/960.0-0.2/40-8SSK | N/A | N/A | 32 |
| <input type="checkbox"/> | Tunable Notch Filter | Wainwright | WRCD1700.0/2000.0-0.2/40-10SSK | N/A | N/A | 53 |
| <input type="checkbox"/> | Tunable Notch Filter | Wainwright | WRCT1900.0/2200.0-5/40-10SSK | N/A | N/A | 30 |
| <input checked="" type="checkbox"/> | HORN ANT | ETS | 3115 | 17/06/09 | 17/06/10 | 6419 |
| <input checked="" type="checkbox"/> | HORN ANT | ETS | 3115 | 23/09/09 | 23/09/10 | 21097 |

| | Type | Manufacturer | Model | Cal.Due.Date (dd/mm/yy) | Next.Due.Date (dd/mm/yy) | S/N |
|-------------------------------------|------------------------------|----------------|------------------|----------------------------|-----------------------------|---------------|
| <input type="checkbox"/> | HORN ANT | A.H.Systems | SAS-574 | 10/06/09 | 10/06/10 | 154 |
| <input type="checkbox"/> | HORN ANT | A.H.Systems | SAS-574 | 10/06/09 | 10/06/10 | 155 |
| <input checked="" type="checkbox"/> | Dipole Antenna | Schwarzbeck | VHA9103 | 06/10/09 | 06/10/10 | 2116 |
| <input checked="" type="checkbox"/> | Dipole Antenna | Schwarzbeck | VHA9103 | 06/10/09 | 06/10/10 | 2117 |
| <input checked="" type="checkbox"/> | Dipole Antenna | Schwarzbeck | UHA9105 | 05/10/09 | 05/10/10 | 2261 |
| <input checked="" type="checkbox"/> | Dipole Antenna | Schwarzbeck | UHA9105 | 05/10/09 | 05/10/10 | 2262 |
| <input type="checkbox"/> | LOOP Antenna | ETS | 6502 | 14/09/09 | 14/09/10 | 3471 |
| <input type="checkbox"/> | Coaxial Fixed Attenuators | Agilent | 8491B | 02/07/09 | 02/07/10 | MY39260700 |
| <input checked="" type="checkbox"/> | Attenuator (3dB) | WEINSCHL | 56-3 | 16/12/09 | 16/12/10 | Y2342 |
| <input type="checkbox"/> | Attenuator (3dB) | WEINSCHL | 56-3 | 16/12/09 | 16/12/10 | Y2370 |
| <input type="checkbox"/> | Attenuator (10dB) | WEINSCHL | 23-10-34 | 01/10/09 | 01/10/10 | BP4386 |
| <input type="checkbox"/> | Attenuator (10dB) | WEINSCHL | 23-10-34 | 11/01/10 | 11/01/11 | BP4387 |
| <input type="checkbox"/> | Attenuator (20dB) | WEINSCHL | 86-20-11 | 06/10/09 | 06/10/10 | 432 |
| <input type="checkbox"/> | Attenuator (10dB) | WEINSCHL | 31696 | 06/10/09 | 06/10/10 | 446 |
| <input type="checkbox"/> | Attenuator (10dB) | WEINSCHL | 31696 | 06/10/09 | 06/10/10 | 408 |
| <input type="checkbox"/> | Attenuator (40dB) | WEINSCHL | 57-40-33 | 01/10/09 | 01/10/10 | NN837 |
| <input type="checkbox"/> | Attenuator (30dB) | JFW | 50FH-030-300 | 13/03/09 | 13/03/10 | 060320-1 |
| <input type="checkbox"/> | Type N Coaxial CIRCULATOR | NOVA MICROWAVE | 0088CAN | 02/07/09 | 02/07/10 | 788 |
| <input type="checkbox"/> | Type N Coaxial CIRCULATOR | NOVA MICROWAVE | 0185CAN | 02/07/09 | 02/07/10 | 790 |
| <input type="checkbox"/> | Type N Coaxial CIRCULATOR | NOVA MICROWAVE | 0215CAN | 02/07/09 | 02/07/10 | 112 |
| <input checked="" type="checkbox"/> | Amplifier (30dB) | Agilent | 8449B | 10/10/09 | 10/10/10 | 3008A01590 |
| <input checked="" type="checkbox"/> | Amplifier | EMPOWER | BBS3Q7ELU | 02/11/09 | 02/11/10 | 1020 |
| <input type="checkbox"/> | RF Power Amplifier | OPHIRRF | 5069F | 02/07/09 | 02/07/10 | 1006 |
| <input type="checkbox"/> | EMI TEST RECEIVER | R&S | ESU | 29/01/10 | 29/01/11 | 100014 |
| <input type="checkbox"/> | BILOG ANTENNA | SCHAFFNER | CBL6112B | 02/06/09 | 02/06/10 | 2737 |
| <input type="checkbox"/> | Amplifier (22dB) | H.P | 8447E | 29/01/10 | 29/01/11 | 2945A02865 |
| <input type="checkbox"/> | EMI TEST RECEIVER | R&S | ESCI | 12/05/09 | 12/05/10 | 100364 |
| <input checked="" type="checkbox"/> | LOG-PERIODIC ANT. | Schwarzbeck | UHALP9108A | 30/05/09 | 30/05/10 | 590 |
| <input checked="" type="checkbox"/> | BICONICAL ANT. | Schwarzbeck | VHA 9103 | 02/06/09 | 02/06/10 | 2233 |
| <input type="checkbox"/> | LOG-PERIODIC ANT. | Schwarzbeck | UHALP 9108 A-1 | 07/10/09 | 07/10/10 | 1098 |
| <input type="checkbox"/> | BICONICAL ANT. | Schwarzbeck | VHA 9103 | 06/10/09 | 06/10/10 | 91031946 |
| <input type="checkbox"/> | Low Noise Pre Amplifier | TSJ | MLA-100K01-B01-2 | 13/03/09 | 13/03/10 | 1252741 |
| <input checked="" type="checkbox"/> | Amplifier (25dB) | Agilent | 8447D | 12/05/09 | 12/05/10 | 2944A10144 |
| <input type="checkbox"/> | Amplifier (25dB) | Agilent | 8447D | 03/07/09 | 03/07/10 | 2648A04922 |
| <input type="checkbox"/> | Spectrum Analyzer(CE) | H.P | 8591E | 26/04/09 | 26/04/10 | 3649A05889 |
| <input type="checkbox"/> | LISN | Kyoritsu | KNW-407 | 29/01/10 | 29/01/11 | 8-317-8 |
| <input type="checkbox"/> | LISN | Kyoritsu | KNW-242 | 29/01/10 | 29/01/11 | 8-654-15 |
| <input type="checkbox"/> | CVCF | NF Electronic | 4420 | 13/03/09 | 13/03/10 | 304935/337980 |
| <input type="checkbox"/> | 50 ohm Terminator | HME | CT-01 | 12/01/10 | 12/01/11 | N/A |
| <input type="checkbox"/> | RFI/FIELD Intensity Meter | Kyoritsu | KNM-2402 | 03/07/09 | 03/07/10 | 4N-170-3 |

7.1 SAMPLE CALCULATIONS

A. Emission Designator

- Cellular Band -

Emission Designator = 1M29F9W

CDMA BW = 1.2852 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

(Measured at the 99.75% power bandwidth)

- PCS Band -

Emission Designator = 1M30F9W

CDMA BW = 1.3048 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

(Measured at the 99.75% power bandwidth)

8.1 CONCLUSION

The data collected shows that the **EpiValley Co., Ltd. CDMA 1x EV-DO USB Modem with WLAN (FCC ID: R2NSEC-8189)** complies with all the requirements of Parts 2 , 22 and 24 of the FCC rules.