

SAR TEST REPORT

Test item : CDMA 1x EV-DO USB Modem with WLAN
Model No. : SER-8189
Order No. : 1008-00775
Date of receipt : 2010-08-26
Test duration : 2010-08-30 ~ 2010-09-02
Date of issue : 2010-09-10
Use of report : FCC Original Grant

Applicant : EpiCom Co., Ltd
Lordland EZ Tower #511, 513, Gumi-dong, Bundang-Gu, Sunghnam City,
Kyunggi-Do, Korea

Test laboratory : Digital EMC Co., Ltd.
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Kyunggi-Do, 449-080, Korea

Test specification : §2.1093, FCC/OET Bulletin 65 Supplement C[July 2001]
Test environment : See appended test report
Test result : ☒ Pass ☐ Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:


Witnessed by:

Reviewed by:



Engineer
S.K.Ryu

N/A

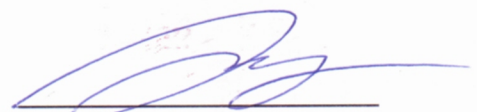

Technical director
Harvey Sung

CONTENTS

1. General Information.....	5
1.1 Equipment information	5
2. INTROCUCTION/SAR DEFINITION	5
2.1 SAR Definition	5
3. SAR MEASUREMENT SETUP	6
3.1 Robotic System.....	6
3.2 System Hardware	6
3.3 System Electronics	6
3.4 Probe Measurement System	7
3.5 Probe Specifications	7
4. Probe Calibration Process	8
4.1 Dosimetric Assessment Procedure	8
4.2 Free Space Assessment	8
4.3 Temperature Assessment *	8
5. PHANTOM & EQUIVALENT TISSUES	9
5.1 SAM Phantom.....	9
5.2 Brain & Muscle Simulating Mixture Characterization	9
5.3 Device Holder for Transmitters	9
6. TEST SYSTEM SPECIFICATIONS	10
6.1 Automated Test System Specifications	10
7. DOSIMETRIC ASSESSMENT & PHANTOM SPECS	11
7.1 Measurement Procedure	11
7.2 Specific Anthropomorphic Mannequin (SAM) Specifications ...	11
8. DEFINITION OF REFERENCE POINTS	12
8.1 EAR Reference Point.....	12
8.2 Handset Reference Points	12
9. TEST CONFIGURATION POSITIONS	13

9.1 Positioning for Cheek/Touch	13
9.2 Positioning for Ear / 15 ° Tilt	14
9.3 Body Holster /Belt Clip Configurations.....	15
10. ANSI / IEEE C95.1-1992 RF EXPOSURE LIMITS.....	16
10.1 Uncontrolled Environment.....	16
10.2 Controlled Environment	16
11. IEEE P1528 –MEASUREMENT UNCERTAINTIES	17
12. SYSTEM VERIFICATION	18
12.1 Tissue Verification	18
12.2 Test System Validation	18
13. Multiple TRANSMITTERS SAR CONSIDERATIONS	19
13.1 Introduction	19
13.2 Output Power Thresholds for Unlicensed Transmitters.....	19
13.3 Multiple Antenna Transmission Information for SER-8189	19
13.3.1 The closest separation distance between CDMA and W-LAN antennas.....	19
13.3.2 W-LAN(802.11b) out power	19
13.4 Summary of SAR Evaluation Requirements for Cell phones with Multiple Transmitters.....	20
14. FCC 3G SAR MEASUREMENT PROCEDURES – OCT. 2007 ..	21
14.1 SAR MEASUREMENT CONDITIONS FOR CDMA2000	21
14.2 Body SAR Measurements.....	21
14.3 1x RTT Support.....	21
15. Configuring 802.11 a/b/g Transmitters for SAR Measurement	22
15.1 SAR Testing with IEEE 802.11 a/b/g Transmitters	22
15.2 General Device Setup.....	22
15.3 Frequency Channel Configurations	22
16. SAR TEST DATA SUMMARY AND POWER TABLE	23
16.1 Max. Power Output Table for SER-8189 (Cellular, PCS)	23
16.2 Max. Power Output Table for SER-8189 (W-LAN)	23

17. SAR TEST DATA SUMMARY 24

18. SAR TEST EQUOPMENT 29

19.CONCLUSION..... 30

20. REFERENCES 31

1. General Information

1.1 Equipment information

FCC Equipment Class	Licensed Non-Broadcast Station Transmitter(PCB)
Equipment type	CDMA 1x EV-DO USB Modem with WLAN
Equipment model name	SER-8189
Equipment add model name	N/A
Equipment serial no.	Identical prototype
TX Frequency Range	824.70 ~ 848.31 MHz(CDMA Cellular) / 1851.25 ~ 1908.75 MHz(PCS1900) 2412 ~ 2462 MHz (IEEE 802.11 b/g)
RX Frequency Range	869.70 ~ 893.31 MHz(CDMA Cellular) / 1931.25~ 1988.75MHz (PCS1900) 2412 ~ 2462 MHz (IEEE 802.11 b/g)
Max. SAR Measurement	0.638 mW/g CDMA Cellular Body SAR 1.110 mW/g CDMA PCS Body SAR 0.044 mW/g W-LAN Body SAR

2. INTROCUCTION/SAR DEFINITION

In 1974, the International Radiation Protection Association (IRPA) formed a working group on non-ionizing radiation (NIR), which examined the problems arising in the field of Protection against the various types of NIR. At the IRPA Congress in Paris in 1977, this working group became the International Non-Ionizing Radiation Committee (INIRC).

In cooperation with the Environmental Health Division of the World Health Organization (WHO), the IRPA/INIRC developed a number of health criteria documents on NIR as part of WHO'S Environmental Health Criteria Programme, sponsored by the United Nations Environment Programme (UNEP). Each document includes an overview of the physical characteristics, measurement and instrumentation, sources, and applications of NIR, a thorough review of the literature on biological effects, and an evaluation of the health risks of exposure to NIR. These health criteria have provided the scientific database for the subsequent development of exposure limits and codes of practice relating to NIR.

At the Eighth International Congress of the IRPA (Montreal, 18-22 May 1992), a new, independent scientific organization-the International Commission on Non-Ionizing Radiation Protection (ICNIRP)-was established as a successor to the IRPA/INIRC. The functions of the Commission are to investigate the hazards that may be associated with the different forms of NIR, develop international guidelines on NIR exposure to static and extremely-low-frequency (ELF) electric and magnetic fields have been reviewed by UNEP/WHO/IRPA (1984, 1987). Those publications and a number of others, including UNEP/WHO/IRPA (1993) and Allen et al. (1991), provided the scientific rationale for these guidelines.

A glossary of terms appears in the Appendix.

2.1 SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 1.1)

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dV} \right)$$

Figure 1.1
SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{E^2}{\rho}$$

Where:

σ = conductivity of the tissue-simulant material (S/m)

ρ = mass density of the tissue-simulant material (kg/m³)

E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

3. SAR MEASUREMENT SETUP

3.1 Robotic System

Measurements are performed using the DASY4 automated dosimetric assessment system. The DASY4 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Pentium III computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 2.1).

3.2 System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the Micron Pentium IV 500 MHz computer with Windows NT system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical to digital electric signal of the DAE and transfers data to the PC plug-in card.

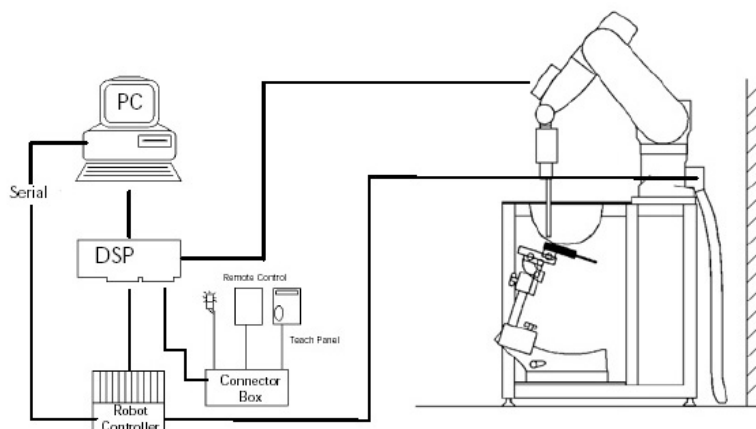


Figure 2.1 SAR Measurement System Setup

3.3 System Electronics

The DAE3 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built-in VME-bus computer. The system is described in detail in [7].

3.4 Probe Measurement System



Figure 3.1 DAE System

The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration [7] (see Fig. 3.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip (see Fig. 3.3). It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting (see Fig. 3.1). The approach is stopped at reaching the maximum.

3.5 Probe Specifications

Calibration: In air from 10 MHz to 6.0 GHz

In brain and muscle simulating tissue at Frequencies of
835 MHz, 1750 MHz, 1900 MHz, 2450 MHz, 2600 MHz, 3500 MHz

Frequency: 10 MHz to 6 GHz

Linearity: ± 0.2 dB (30 MHz to 6 GHz)

Dynamic: 10 mW/kg to 100 W/kg

Range: Linearity: ± 0.2 dB

Dimensions: Overall length: 330 mm

Tip length: 20 mm

Body diameter: 12 mm

Tip diameter: 2.5 mm

Distance from probe tip to sensor center: 1 mm

Application: SAR Dosimetry Testing
Compliance tests of mobile phones




Figure 3.1 Triangular Probe Configuration



Figure 3.2 Probe Thick-Film Technique

4. Probe Calibration Process

4.1 Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure described in [8] with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in [9] and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe is tested.

4.2 Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz (see Fig. 4.1), and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees.

4.3 Temperature Assessment *

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor based temperature probe is used in conjunction with the E-field probe (see Fig. 4.2).

$$SAR = C \frac{\Delta T}{\Delta t}$$

where:

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

where:

σ = simulated tissue conductivity,

ρ = Tissue density (1.25 g/cm³ for brain tissue)

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

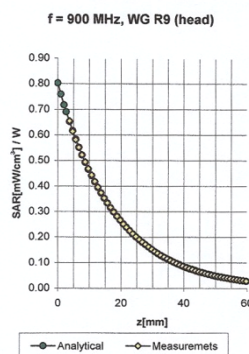


Figure 4.1 E-Field and Temperature Measurements at 900MHz[7]

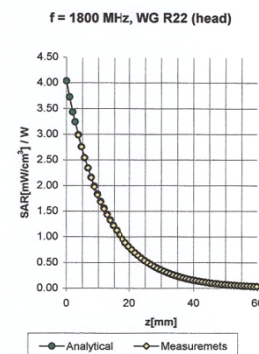


Figure 4.2 E-Field and Temperature Measurements at 1900MHz[7]

5. PHANTOM & EQUIVALENT TISSUES

5.1 SAM Phantom




Figure 5.1 SAM Twin Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a woodentable. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users [11][12]. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid.

Referencemarkings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 5.1)

5.2 Brain & Muscle Simulating Mixture Characterization



Figure 5.2 Simulated Tissue

The brain and muscle mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution (see Table 6.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations. The mixture characterizations used for the brain and muscle tissues simulating liquids are according to the data by C. Gabriel and G. Hartsgrrove [13]. (see Fig. 5.2)

Table 5.1 Composition of the Muscle Tissue Equivalent Matter

INGREDIENTS		SIMULATING TISSUE					
		835 MHz Brain	835 MHz Muscle	1900 MHz Brain	1900 MHz Muscle	2450MHz Brain	2450MHz Muscle
Mixture Percentage							
WATER		41.45	52.50	54.90	40.40	62.70	73.20
DGBE		0.000	0.000	44.92	58.00	0.000	26.70
SUGAR		56.00	45.00	0.000	0.000	0.000	0.000
SALT		1.450	1.400	0.180	0.500	0.500	0.040
BACTERICIDE		0.100	0.100	0.000	0.100	36.80	0.000
HEC		1.000	1.000	0.000	1.000	0.000	0.000
Dielectric Constant	Target	41.50	55.20	40.00	53.30	39.2	52.7
Conductivity (S/m)	Target	0.900	0.970	1.400	1.520	1.80	1.95

5.3 Device Holder for Transmitters



Figure 5.2 Mounting Device

In combination with the SAM Twin Phantom V4.0 the Mounting Device (see Fig. 5.2), enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately, and repeatably positioned according to the FCC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

● Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations [12]. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

6. TEST SYSTEM SPECIFICATIONS

6.1 Automated Test System Specifications

Positioner

Robot:StäubliUnimation Corp. Robot Model: RX60L
Repeatability:0.02 mm
No. of axis:6

Data Acquisition Electronic (DAE) System Cell Controller

Processor:Pentium 4 CPU
Clock Speed: 3 GHz
Operating System:Window 2000
Data Card: DASY4 PC-Board

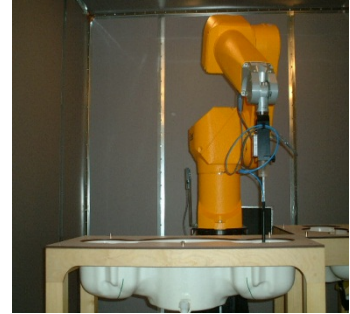


Figure 6.1 DASY4 Test System

Data Converter

Features:Signal,multiplexer,A/D converter. & control logic
Software:DASY4
Connecting Lines:Optical downlink for data and status info
 Optical uplink for commands and clock

PC Interface Card

Function:24 bit (64 MHz) DSP for real time processing
 Link to DAE 3
 16 bit A/D converter for surface detection system
 serial link to robot
 direct emergency stop output for robot

E-Field Probes

Model: EX3DV4 S/N: 3643
Construction:Triangular core fiber optic detection system
Frequency:10 MHz to 6 GHz
Linearity:±0.2dB (30MHz to 6GHz)

Phantom

Phantom:SAM Twin Phantom (V4.0)
Shell Material:Vivac Composite
Thickness:2.0 ± 0.2 mm

7. DOSIMETRIC ASSESSMENT & PHANTOM SPECS

7.1 Measurement Procedure




Figure 7.1 Sample Sar Area Scan

The evaluation was performed using the following procedure:

1. The SAR measurement was taken at a selected spatial reference point to monitor power variations during testing. This fixed location point was measured and used as a reference value.
2. The SAR distribution at the exposed side of the head was measured at a distance of 3.9mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15 mm x 15 mm.
3. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation. Around this point, a volume of 32 mm x 32 mm x 30 mm (fine resolution volume scan, zoom scan) was assessed by measuring 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see Fig. 7.1):
 - a. The data at the surface was extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. The extrapolation was based on a least square algorithm [15]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - b. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions) [15][16]. The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as procedure #1, was re-measured. If the value changed by more than 5%, the evaluation is repeated.

7.2 Specific Anthropomorphic Mannequin (SAM) Specifications

The phantom for handset SAR assessment testing is a low-loss dielectric shell, with shape and dimensions derived from the anthropometric data of the 90th percentile adult male head dimensions as tabulated by the US Army. The SAM Twin Phantom shell is bisected along the mid-sagittal plane into right and left halves (see Fig. 7.2). The perimeter sidewalls of each phantom halves are extended to allow filling with liquid to a depth that is sufficient to minimize reflections from the upper surface. The liquid depth is maintained at a minimum depth of 15cm to minimize reflections from the upper surface.



Figure 7.2 SAM Twin Phantom shell

8. DEFINITION OF REFERENCE POINTS

8.1 EAR Reference Point




Figure 8.2 Close-up side view of ERPs

Figure 8.1 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERPs are 15mm posterior to the entrance to the Ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 9.2. The plane Passing, through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck- Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 8.2). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5]



Figure 8.1 Front, back and side view of SAM Twin Phantom

8.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Fig. 8.3). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

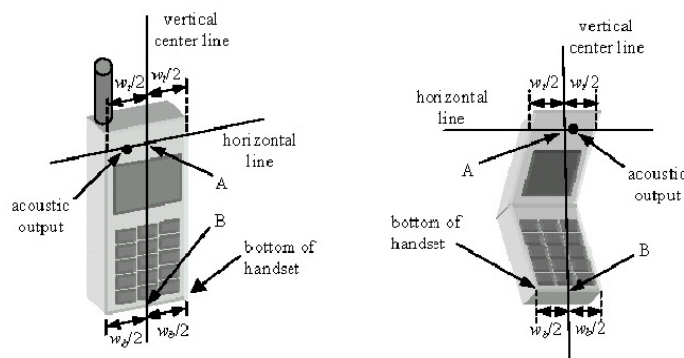


Figure 8.3 Handset Vertical Center & Horizontal Line Reference Points

9. TEST CONFIGURATION POSITIONS

9.1 Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

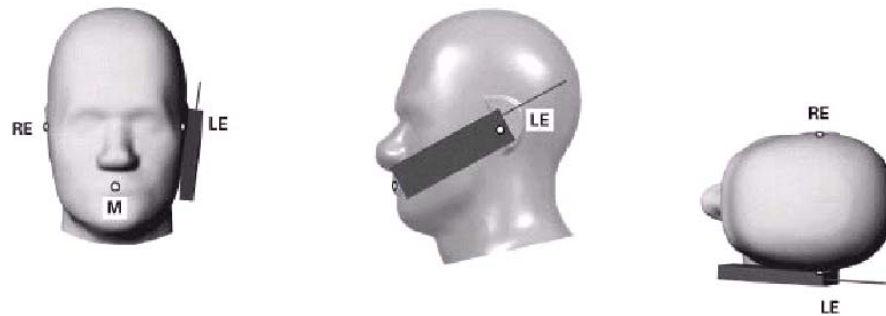


Figure 9.1 Front, Side and Top View of Cheek/Touch Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). See Figure 9.2)




Figure 9.2 Side view w/ relevant markings

9. TEST CONFIGURATION POSITIONS (Continued)

9.2 Positioning for Ear / 15 ° Tilt

With the test device aligned in the "Cheek/Touch Position":

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15degree.
2. The phone was then rotated around the horizontal line by 15 degree.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 9.3).

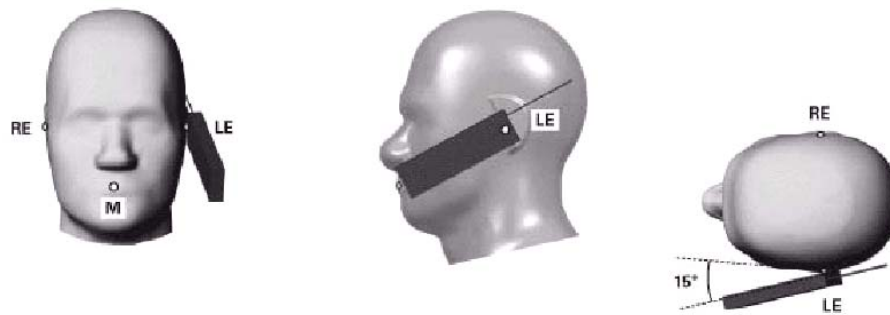


Figure 9.3 Front, Side and Top View of Ear/15° Tilt Position




Figure 9.4 Side view w/ relevant markings

9. TEST CONFIGURATION POSITIONS (Continued)

9.3 Body Holster /Belt Clip Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.5). A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are supplied with the device, the device is tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.



Figure 9.5 Body Belt Clip & Holster Configurations

Body-worn accessories may not always be supplied or available as options for some Devices intended to be authorized for body-worn use. In this case, a test configuration where a separation distance between the back of the device and the flat phantom is used. All test position spacings are documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessory(ies), including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

In all cases SAR measurements are performed to investigate the worst-case positioning. Worst-case positioning is then documented and used to perform Body SAR testing. In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and cautions statements are included in the user's manual.

10. ANSI / IEEE C95.1-1992 RF EXPOSURE LIMITS

10.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

10.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 10.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-1992

	HUMAN EXPOSURE LIMITS	
	General Public Exposure (W/kg) or (mW/g)	Occupational Exposure (W/kg) or (mW/g)
Whole-Body average SAR (W/kg)	0.08	0.40
Localized SAR (head and trunk) (W/kg)	1.60	8.00
Localized SAR (limbs) (W/kg)	4.00	20.0

11. IEEE P1528 –MEASUREMENT UNCERTAINTIES

Error Description	Uncertain value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 4.8	Normal	1	1	$\pm 4.8 \%$	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	0.7	$\pm 1.9 \%$	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	0.7	$\pm 3.9 \%$	∞
Boundary Effects	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.6 \%$	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
Detection limits	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.6 \%$	∞
Readout Electronics	± 1.0	Normal	1	1	$\pm 1.0 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.5 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF Ambient Conditions	± 3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.2 \%$	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.6 \%$	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 1.8 \%$	∞
Liquid conductivity (Meas.)	± 2.5	Normal	1	0.64	$\pm 1.6 \%$	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 1.7 \%$	∞
Liquid permittivity (Meas.)	± 2.5	Normal	1	0.6	$\pm 1.5 \%$	∞
Combined Standard Uncertainty					$\pm 10.3 \%$	330
Expanded Uncertainty (k=2)					$\pm 20.6 \%$	

The above measurement uncertainties are according to IEEE P1528 (2003)

12. SYSTEM VERIFICATION

12.1 Tissue Verification

Table 12.1 Simulated Tissue Verification

MEASURED TISSUE PARAMETERS					
Date(s)	Target Frequency	Dielectric constant: ϵ		Conductivity: σ	
		Target	Measured	Target	Measured
August.30, 2010	835 MHz Muscle	55.2	53.9	0.97	0.941
August.31, 2010	1900 MHz Muscle	53.3	53.9	1.52	1.570
September.02,2010	2450 MHz Muscle	52.7	53.5	1.95	2.100

12.2 Test System Validation

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at 835 MHz, 1900 MHz and 2450 MHz by using the system validation kit(s). (Graphic Plots Attached)

Table 12.2 System Validation

SYSTEM DIPOLE VALIDATION TARGET & MEASURED (835 MHz / 1900 MHz / 2450 MHz values are normalized to a forward power of 1/4 W)					
Date(s)	System Validation Kit:	Target Frequency	Targeted SAR _{1g} (mW/g)	Measured SAR _{1g} (mW/g)	Deviation (%)
August.30, 2010	D-835V2, S/N: 464	835 MHz Muscle	2.375	2.25	-5.26
August.31, 2010	D-1900V2, S/N: 5d029	1900 MHz Muscle	9.925	10.7	7.81
September.02,2010	D-2450V2, S/N: 726	2450 MHz Muscle	13.1	12.7	-3.05

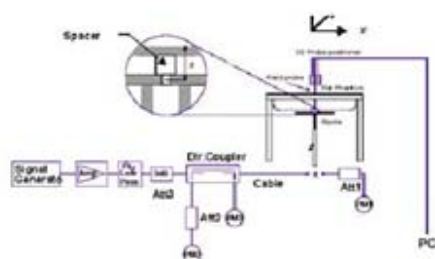


Figure 15.1 Dipole Validation Test Setup

13. Multiple TRANSMITTERS SAR CONSIDERATIONS

13.1 Introduction





The following procedures adopted from “FCC SAR Evaluation Considerations for Handsets with Multiple Transmitters”(v01r05 #648474) on September 2008 are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

13.2 Output Power Thresholds for Unlicensed Transmitters

	2.45	5.15-5.35	5.47-5.85	GHz
P Ref	12	5	5	mW
Device output power should be rounded to the nearest mW to compare with values specified in this table				

13.3 Multiple Antenna Transmission Information for SER-8189

13.3.1 The closest separation distance between CDMA and W-LAN antennas

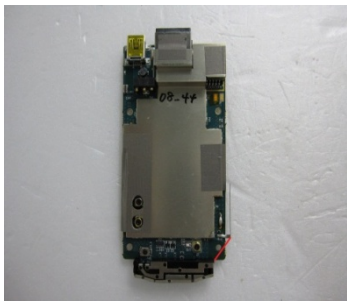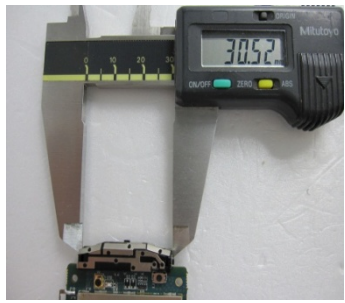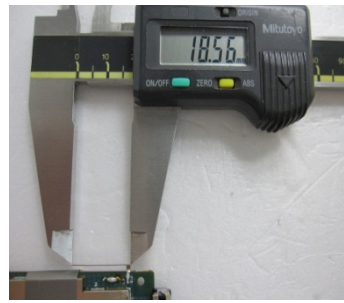			
Antenna Location	CDMA : 3.05 cm	W-LAN : 1.86 cm	CDMA – W-LAN : 0.96 cm

13.3.2 W-LAN(802.11b) out power

Frequency		Power(dBm)	Power(W)
W-LAN	2412 MHz	7.27	0.0053
	2437 MHz	8.17	0.0066
	2462 MHz	8.90	0.0078

Note 1: Unlicensed transmitter's stand alone SAR is not required when following condition.

- Output power $\leq P_{Ref}$, antenna distance from other antennas $> 2.5\text{cm}$ each with either output power $\leq P_{Ref}$ or 1-g SAR $< 1.2\text{ W/kg}$
- The DUT's antenna distance is less than 2.5 cm therefore W-LAN stand alone SAR is required.

Note 2 : SAR For Simultaneous transmission

- When $(\text{CDMA_Cellular}_{sar} + \text{W-LAN}_{sar}) > 1.6\text{ W/kg}$, then simultaneous transmission is not performed.
- When $(\text{CDMA_PCS}_{sar} + \text{W-LAN}_{sar}) > 1.6\text{ W/kg}$, then simultaneous transmission is not performed.

13.4 Summary of SAR Evaluation Requirements for Cell phones with Multiple Transmitters

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	<u>Routine evaluation required</u>	SAR not required: <u>Unlicensed only</u> <ul style="list-style-type: none"> o when stand-alone 1-g SAR is not required and antenna is > 5 cm from other antennas <u>Licensed & Unlicensed</u> <ul style="list-style-type: none"> o when the sum of the 1-g SAR is <1.6 W/kg for all simultaneous transmitting antennas o when SAR to antenna separation ratio of simultaneous transmitting antenna pair is < 0.3
Unlicensed Transmitters	<p>When there is no simultaneous transmission –</p> <ul style="list-style-type: none"> o output < 60/f: SAR not required o output $\geq 60/f$: stand-alone SAR required <p>When there is simultaneous transmission –</p> <p><u>Stand-alone SAR not required when</u></p> <ul style="list-style-type: none"> o output $\leq 2 \cdot P_{Ref}$ and antenna is > 5.0 cm from other antennas o output $\leq P_{Ref}$ and antenna is > 2.5 cm from other antennas, each either output power output $\leq P_{Ref}$ or 1-g SAR < 1.2 W/Kg <p><u>Otherwise stand-alone SAR is required</u></p> <p>When stand-alone SAR is required</p> <ul style="list-style-type: none"> o test SAR on highest output channel for each wireless mode and exposure condition o if SAR for highest output channel is > 50% of SAR limit, evaluate all channels according to normal procedures 	<p>SAR required:</p> <p><u>Licensed & Unlicensed</u></p> <p>antenna pairs with SAR to antenna separation ratio ≥ 0.3; test is only required for the configuration that results in the highest SAR in standalone configuration for each wireless mode and exposure condition</p> <p>Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply</p>

14. FCC 3G SAR MEASUREMENT PROCEDURES – OCT. 2007

FCC 3G MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under average power.

14.1 SAR MEASUREMENT CONDITIONS FOR CDMA2000

The following procedures were followed according to FCC "SAR Measurements Procedures for 3G Devices" v02, October 2007.

Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by "SAR Measurement Procedures for 3G Devices", June 2006.

Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in "All Up" condition.

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 13-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH0 and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH0 data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 13-2 was applied.
5. FCHs were configured at full rate for maximum SAR with "All Up" power control bits.

Table 13-1
Parameters for Max. Power for RC1

Parameter	Units	Value
\bar{I}_{or}	dBm/1.23 MHz	-104
$\frac{\text{Pilot } E_c}{I_{or}}$	dB	-7
$\frac{\text{Traffic } E_c}{I_{or}}$	dB	-7.4

Table 13-2
Parameters for Max. Power for RC3

Parameter	Units	Value
\bar{I}_{or}	dBm/1.23 MHz	-86
$\frac{\text{Pilot } E_c}{I_{or}}$	dB	-7
$\frac{\text{Traffic } E_c}{I_{or}}$	dB	-7.4

14.2 Body SAR Measurements

SAR is measured using FTAP/RTAP and FETAP/RETAP respectively for Rev. 0 and Rev. A devices. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer Configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer Configurations. Both FTAP and FETAP are configured with a Forward Traffic Channel data rate corresponding to the 2-slot version of 307.2 kbps with the ACK Channel transmitting in all slots. AT power control should be in All Bits Up conditions for TAP/ETAP.

Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0. SAR for Subtype 2 Physical Layer configurations is not required for Rev. A when the maximum average output of each RF channels is less than that measured in Subtype 0/1 Physical layer configurations. Otherwise, SAR is measured on the maximum output channel for Rev. A using the exposure configuration that results in the highest SAR for that RF channels in Rev 0. Head SAR is required for EV-DO devices that support operations next to the ear; for example, with VOIP, using Subtype 2 Physical Layer configurations according to the required handset test configurations.

14.3 1x RTT Support

For EV-DO devices that also support 1xRTT voice and/or data operations, SAR is not required for 1xRTT when the maximum average output of each channel is less than 1/4 dB higher than that measured in Subtype 0/1 Physical Layer configurations for Rev. 0. Otherwise, the 'Body SAR Measurements' procedures in the 'CDMA-2000 1x Handsets' section should be applied

15. Configuring 802.11 a/b/g Transmitters for SAR Measurement

15.1 SAR Testing with IEEE 802.11 a/b/g Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

15.2 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

15.3 Frequency Channel Configurations

802.11 a/b/g and 4.9 GHz operation modes are tested independently according to the service requirements in each frequency band. 802.11 b/g modes are tested on channels 1, 6 and 11. 802.11a is tested for UNII operations on channels 36 and 48 in the 5.15-5.25 GHz Band; channels 52 and 64 in the 5.25-5.35 GHz band; channels 104, 116, 124 and 136 in the 5.470-5.725 GHz BAND; and channel 149 and 161 in the 5.8 GHz band. When 5.8 GHz § 15.247 is also available, channels 149, 157 and 165 should be tested of the UNII channels. 4.9 GHz is tested on channels 1, 10 and 5 or 6, whichever has the higher output power, for 5MHz channels; channels 11, 15 and 19 for 10MHz channels; and channels 21 and 25 for 20MHz channels. These are referred to as the “default test channels”. 802.11g mode was evaluated only if the output power was 0.25 dB higher than the 802.11b mode.

Table 15.1802.11 Test channels per FCC Requirements

Mode	GHz	Channel	Turbo Channel	“Default Test Channels”			
				§15.247		UNII	
				802.11b	802.11g		
802.11 b/g	2.412	1 [±]		✓	▽		
	2.437	6	6	✓	▽		
	2.462	11 [±]		✓	▽		
802.11a	5.18	36				✓	
	5.20	40	42 (5.21 GHz)				*
	5.22	44					*
	5.24	48	50 (5.25 GHz)			✓	
	5.26	52				✓	
	5.28	56	58 (5.29 GHz)				*
	5.30	60					*
	5.32	64				✓	
	5.500	100	Unknown				*
	5.520	104				✓	
	5.540	108					*
	5.560	112					*
	5.580	116				✓	
	5.600	120					*
	5.620	124				✓	
	5.640	128					*
	5.660	132					*
	5.680	136				✓	
	5.700	140					*
	5.745	149		✓		✓	
	5.765	153	152 (5.76 GHz)		*		*
	5.785	157		✓			*
	5.805	161	160 (5.80 GHz)		*	✓	
	5.825	165		✓			

16. SAR TEST DATA SUMMARY AND POWER TABLE

See Measurement Result Data Pages

Procedures Used To Establish Test Signal

The EUT was placed into simulated call mode (CDMA Cellular, PCS, W-LAN (802.11b)) using manufacturers test codes. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR [4]. When test modes are not available or inappropriate for testing a EUT, the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

Device Test Conditions

The EUT is battery operated. Each SAR measurement was taken with a fully charged battery. In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power. If a conducted power deviation of more than 5% occurred, the test was repeated.

16.1 Max. Power Output Table for SER-8189 (Cellular, PCS)

Band	Channel	1X RRT					EvDo (Rev.0)		EvDo (Rev.A)	
		RC1	RC1	RC3	RC3	RC3	FTAP	RTAP	FETAP	RETAP
		SO2	SO55	SO2	SO55	SO32 (TDSO)				
Cellular	1013	24.53	24.48	24.52	24.50	24.49	24.42	24.25	24.44	24.31
	0384	24.10	24.09	23.99	24.02	23.98	23.98	23.99	23.96	24.00
	0777	24.22	24.20	24.12	24.16	24.15	24.09	24.10	24.06	24.07
PCS	0025	24.53	24.48	24.52	24.50	24.49	24.42	24.25	24.44	24.31
	0600	23.40	23.39	23.29	23.30	23.25	23.33	23.34	23.33	23.34
	1175	24.15	24.13	24.00	24.09	24.01	24.03	24.00	24.02	23.99

16.2 Max. Power Output Table for SER-8189 (W-LAN)

Mode	Frequency (MHz)	Channel No.	Measured Data (dBm)
802.11b	2412	1	7.27
	2437	6	8.17
	2462	11	8.90
802.11g	2412	1	3.16
	2437	6	4.31
	2462	11	5.21

※ SAR is not required for 802.11g channels when the maximum average output power is less than $\frac{1}{4}$ dB higher than that measured on the corresponding 802.11b channels.

17. SAR TEST DATA SUMMARY

Mixture Type: 835 MHz Body(EV-DO Rev. O)

17.1 MEASUREMENT RESULTS (CDMA Cellular Body SAR)							
FREQUENCY		Begin Power (dBm)	Drift Power (dB)	Mode	Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch						
836.52	384	23.98	0.170	Cellular	10 mm [Top]	Internal	0.019
836.52	384	23.98	0.164	Cellular	10 mm [Bottom]	Internal	0.083
836.52	384	23.98	0.287	Cellular	10 mm [H - Up]	Internal	0.486
824.70	1013	24.42	0.099	Cellular	10 mm [H - Down]	Internal	0.601
836.52	384	23.98	0.011	Cellular	10 mm [H - Down]	Internal	0.526
848.31	777	24.09	0.116	Cellular	10 mm [H - Down]	Internal	0.466
836.52	384	23.98	0.191	Cellular	10 mm [V - Front]	Internal	0.262
836.52	384	23.98	0.123	Cellular	10 mm [V - Back]	Internal	0.266
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/ Occupational Exposure							Body 1.6 W/kg (mW/g) averaged over 1 gram

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-body position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak.
5. Test Signal Call Mode ☐ Continuous Tx On ☐ Manu. Test Codes ☒ Base Station Simulator
6. Tissue parameters and temperatures are listed on the SAR plots.
7. Liquid tissue depth is 15.0cm.±0.1
8. CDMA and WLAN Simultaneous SAR is not required, Because the sum of the 1g SAR is <1.6 W/kg.

17. SAR TEST DATA SUMMARY (Continued)

Mixture Type: **835 MHz Body**(EV-DO Rev. A)

17.2 MEASUREMENT RESULTS (CDMA Cellular Body SAR)							
FREQUENCY		Begin Power (dBm)	Drift Power (dB)	Mode	Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch						
824.70	1013	24.44	0.095	Cellular	10 mm [H - Down]	Internal	0.638
836.52	384	23.96	0.315	Cellular	10 mm [H - Down]	Internal	0.471
848.31	777	24.06	0.095	Cellular	10 mm [H - Down]	Internal	0.497
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/ Occupational Exposure							Body 1.6 W/kg (mW/g) averaged over 1 gram

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-body position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak.
5. Test Signal Call Mode ☐ Continuous Tx On ☐ Manu. Test Codes ☒ Base Station Simulator
6. Tissue parameters and temperatures are listed on the SAR plots.
7. Liquid tissue depth is 15.0cm.±0.1
8. CDMA and WLAN Simultaneous SAR is not required, Because the sum of the 1g SAR is <1.6 W/kg.
9. SAR tests of EV-DO Rev. A were repeated on worst case position of EV-DO Rev. 0.

17. SAR TEST DATA SUMMARY (Continued)

Mixture Type: 1900 MHz Body(EV-DO Rev. O)

17.3 MEASUREMENT RESULTS (CDMA PCS Body SAR)							
FREQUENCY		Begin Power (dBm)	Drift Power (dB)	Mode	Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch						
1880.00	600	23.33	0.183	PCS	10 mm [Top]	Internal	0.092
1851.25	25	24.42	-0.322	PCS	10 mm [Bottom]	Internal	0.778
1880.00	600	23.33	-0.231	PCS	10 mm [Bottom]	Internal	0.829
1908.75	1175	24.03	-0.130	PCS	10 mm [Bottom]	Internal	0.795
1851.25	25	24.42	-0.241	PCS	10 mm [H - Up]	Internal	0.984
1880.00	600	23.33	0.173	PCS	10 mm [H - Up]	Internal	0.904
1908.75	1175	24.03	-0.221	PCS	10 mm [H - Up]	Internal	0.801
1851.25	25	24.42	0.077	PCS	10 mm [H - Down]	Internal	0.982
1880.00	600	23.33	0.119	PCS	10mm [H - Down]	Internal	0.986
1908.75	1175	24.03	0.019	PCS	10 mm [H - Down]	Internal	1.030
1880.00	600	23.33	-0.128	PCS	10 mm [V - Front]	Internal	0.726
1880.00	600	23.33	-0.017	PCS	10 mm [V - Back]	Internal	0.151
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/ Occupational Exposure							Body 1.6 W/kg (mW/g) averaged over 1 gram

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-body position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak.
5. Test Signal Call Mode ☐ Continuous Tx On ☐ Manu. Test Codes ☒ Base Station Simulator
6. Tissue parameters and temperatures are listed on the SAR plots.
7. Liquid tissue depth is 15.0cm.±0.1
8. CDMA and WLAN Simultaneous SAR is not required, Because the sum of the 1g SAR is <1.6 W/kg.

17. SAR TEST DATA SUMMARY (Continued)

Mixture Type: **1900 MHz Body**(EV-DO Rev. A)

17.4 MEASUREMENT RESULTS (CDMA PCS Body SAR)							
FREQUENCY		Begin Power (dBm)	Drift Power (dB)	Mode	Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch						
1851.25	25	24.44	0.308	PCS	10 mm [H - Down]	Internal	0.986
1880.00	600	23.33	0.345	PCS	10 mm [H - Down]	Internal	1.110
1908.75	1175	24.02	-0.243	PCS	10 mm [H - Down]	Internal	1.05
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/ Occupational Exposure							Body 1.6 W/kg (mW/g) averaged over 1 gram

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-body position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak.
5. Test Signal Call Mode ☐ Continuous Tx On ☐ Manu. Test Codes ☒ Base Station Simulator
6. Tissue parameters and temperatures are listed on the SAR plots.
7. Liquid tissue depth is 15.0cm.±0.1
8. CDMA and WLAN Simultaneous SAR is not required, Because the sum of the 1g SAR is <1.6 W/kg.
9. SAR tests of EV-DO Rev. A were repeated on worst case position of EV-DO Rev. 0.

17. SAR TEST DATA SUMMARY (Continued)

Mixture Type: 2450 MHz Body

17.5 MEASUREMENT RESULTS (W-LAN(802.11b) Body SAR)							
FREQUENCY		Begin Power (dBm)	Drift Power (dB)	Mode	Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch						
2437	6	8.17	0.218	W-LAN	10 mm [Top]	Internal	0.019
2437	6	8.17	-0.241	W-LAN	10 mm [Bottom]	Internal	0.028
2437	6	8.17	-0.294	W-LAN	10 mm [H - Up]	Internal	0.037
2437	6	8.17	0.268	W-LAN	10 mm [H - Down]	Internal	0.033
2412	1	7.27	0.039	W-LAN	10 mm [V - Front]	Internal	0.044
2437	6	8.17	-0.113	W-LAN	10 mm [V - Front]	Internal	0.042
2462	11	8.90	-0.055	W-LAN	10 mm [V - Front]	Internal	0.029
2437	6	8.17	-0.005	W-LAN	10mm [V - Back]	Internal	0.018
ANSI / IEEE C95.1 1992 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/ Occupational Exposure							Body 1.6 W/kg (mW/g) averaged over 1 gram

NOTE:

1. The test data reported are the worst-case SAR value with the antenna-body position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
2. All modes of operation were investigated, and worst-case results are reported.
3. Prior to testing the conducted output power was measured.
4. The EUT is tested 2nd hot-spot peak, if it is less than 2dB below the highest peak.
5. Battery is fully charged for all readings.
6. Test Signal Call Mode ☒ Continuous Tx On ☐ Manu. Test Codes ☐ Base Station Simulator
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15.0cm.±0.1
9. The 802.11b modes of this DUT were programmed to be in continuously transmitting mode.

18. SAR TEST EQUIPMENT

Table 18.1 Test Equipment Calibration

EQUIPMENT SPECIFICATIONS			
Type	Calibration Date	Next Calibration Date	Serial Number
Robot	N/A	N/A	F02/5Q85A1/A/01
Robot Controller	N/A	N/A	F02/5Q85A1/C/01
Joystick	N/A	N/A	D221340031
Hicron Computer 1.1GHz Pentium Celeron ,Window 2000	N/A	N/A	N/A
Data Acquisition Electronics	November 19, 2009	November 19, 2010	520
Dosimetric E-Field Probe	January 26, 2010	January 26, 2011	3643
Dummy Probe	N/A	N/A	N/A
Sam Phantom	N/A	N/A	N/A
Probe Alignment Unit LB	N/A	N/A	321
SPEAG Validation Dipole D835 MHz	March 22, 2010	March 22, 2012	464
SPEAG Validation Dipole D1900 MHz	March 23, 2010	March 23, 2012	5d029
SPEAG Validation Dipole D2450 MHz	March 18, 2010	March 18, 2012	726
Head/Body Equivalent Matter(835MHz)	January 2010	January 2011	N/A
Head/Body Equivalent Matter(1900MHz)	January 2010	January 2011	N/A
Head/Body Equivalent Matter(2450MHz)	January 2010	January 2011	N/A
HP EPM-442A Power Meter	March 12, 2010	March 12, 2011	GB37170267
HP ESG-3000A Signal Generator	July 01, 2010	July 01, 2011	US37230529
Attenuator (10dB)	January 11, 2010	January 11, 2011	BP4387
Attenuator (3dB)	July 01, 2010	July 01, 2011	MY39260700
Low pass filter (1.5GHz)	January 11, 2010	January 11, 2011	N/A
Low pass filter (3.0GHz)	October 13, 2009	October 13, 2010	N/A
Dual Directional Coupler	January 11, 2010	January 11, 2011	50228
Amplifier	November 02, 2009	November 02, 2010	1020 D/C 0221
Network Analyzer	March 12, 2010	March 12, 2011	3410J01204
HP85070D Dielectric Probe Kit	N/A	N/A	LISO1440118
SEMITEC Engineering	N/A	N/A	Shield Room
8960Series 10 Wireless Comms Test Set	July 02, 2010	July 02, 2011	GB43461134

NOTE:

The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Validation measurement is performed by Digital EMC. before each test. The brain simulating material is calibrated by Digital EMC using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.

19.CONCLUSION

Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

20. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1 - 1992, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, April 2006.
- [3] ANSI/IEEE C95.3 - 2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [4] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, July 2001.
- [5] IEEE Standards Coordinating Committee 34 — IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [9] K. Polovč, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids. Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no. 3, Aug. 1995.
- [15] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [18] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [19] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [20] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [21] FCC SAR Measurement Procedures for 3G Devices v2.0, October 2007
- [22] FCC SAR Considerations for Cell Phones with Multiple Transmitters v01r02 #648474, April 2008
- [23] 447498 D01 Mobile Portable RF Exposure v04, Published on: Nov 16 2009
- [24] 447498 D02 SAR Procedures for Dongle Xmttr v02, Published on: Nov 16 2009