




**GRGTEST****TEST REPORT**

<b>Report No.:</b>	<b>EM201200596-2</b>		<b>Application No.:</b>	<b>ZJ00022277</b>		
<b>Client:</b>	Hunan Ocean Wing Ecommerce Limited Company					
<b>Address:</b>	Room 2301, Best-one Metro Building, No.359 Furong Middle Road, Yuhua District, Changsha, Hunan					
<b>Sample Description:</b>	Compact WI-FI Repeater					
<b>Model:</b>	66ANWNWR					
<b>Adding model:</b>	/					
<b>FCC ID:</b>	R2U66ANWNWR					
<b>Test Specification:</b>	FCC PART 15 SUBPART B:2010					
<b>Test date:</b>	2012-11-05 to 11-09					
<b>Issue Date:</b>	2012-11-09					
<b>Test Result:</b>	Pass.					
<b>Prepared By:</b>	<b>Reviewed By:</b>	<b>Approved By:</b>				
Lynn Xiao / Test Engineer	Jane Cao / Technical Assistance	Gavin Wu / Manager				
						
Date:2012-11-09	Date:2012-11-09	Date:2012-11-09				
<b>Other Aspects:</b>						
<i>None</i>						
<b>Abbreviations:</b> <i>ok / P = passed; fail / F = failed; n.a. / N = not applicable</i>						
The test result in this test report refers exclusively to the presented test sample. This report shall not be reproduced except in full, without the written approval of GRGT.						

## **DIRECTIONS OF TEST**

- 1. This station carries out test task according to the national regulation of verifications which can be traced to National Primary Standards and BIPM.**
- 2. The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.**
- 3. If there is any objection concerning the test, the client should inform the laboratory within 15 days from the date of receiving the test report.**

## TABLE OF CONTENTS

<b>1. TEST RESULT SUMMARY.....</b>	<b>4</b>
<b>2. GENERAL DESCRIPTION OF EUT.....</b>	<b>5</b>
<b>2.1 APPLICANT .....</b>	<b>5</b>
<b>2.2 MANFACTURER.....</b>	<b>5</b>
<b>2.3 BASIC DESCRIPTION OF EQUIPMENT UNDER TEST .....</b>	<b>5</b>
<b>2.4 TEST OPERATION MODES .....</b>	<b>5</b>
<b>2.5 LOCAL SUPPORTIVE INSTRUMENTS .....</b>	<b>5</b>
<b>3. LABORATORY AND ACCREDITATIONS .....</b>	<b>6</b>
<b>3.1 LABORATORY .....</b>	<b>6</b>
<b>3.2 ACCREDITATIONS .....</b>	<b>6</b>
<b>3.3 MEASUREMENT UNCERTAINTY.....</b>	<b>6</b>
<b>3.4 LIST OF USED TEST EQUIPMENT AT GRT.....</b>	<b>7</b>
<b>4. EMISSION TEST.....</b>	<b>8</b>
<b>4.1 RADIATED ELECTROMAGNETIC DISTURBANCE MEASUREMENT .....</b>	<b>8</b>
<b>4.1.1 LIMITS.....</b>	<b>8</b>
<b>4.1.2 TEST PROCEDURE.....</b>	<b>8</b>
<b>4.1.3 TEST SETUP .....</b>	<b>9</b>
<b>4.1.4 TEST RESULTS .....</b>	<b>10</b>
<b>4.2 CONDUCTED EMISSION MEASUREMENT .....</b>	<b>12</b>
<b>4.2.1 LIMITS.....</b>	<b>12</b>
<b>4.2.2 TEST PROCEDURES .....</b>	<b>12</b>
<b>4.2.3 TEST SETUP .....</b>	<b>13</b>
<b>4.2.4 TEST RESULTS .....</b>	<b>14</b>
<b>APPENDIX A: PHOTOGRAPH OF THE TEST ARRANGEMENT.....</b>	<b>16</b>
<b>APPENDIX B: PHOTOGRAPH OF THE EUT .....</b>	<b>17</b>

## 1. TEST RESULT SUMMARY

<b>FCC PART 15 SUBPART B:2010</b>			
<b>Standard</b>	<b>Item</b>	<b>Limit / Severity</b>	<b>Result</b>
<b>FCC PART 15 SUBPART B:2010</b>	Conducted Emission	Class B	PASS
	Radiated Emission	Class B	PASS

## 2. GENERAL DESCRIPTION OF EUT

### 2.1 APPLICANT

Name: Hunan Ocean Wing Ecommerce Limited Company  
Address: Room 2301, Best-one Metro Building, No.359 Furong Middle Road, Yuhua District, Changsha, Hunan

### 2.2 MANFACTURER

Name: Shenzhen Gongjin Electronics Co., Ltd  
Address: B116,B118,A211-A213,B201-B213,A311-A313,B411-413,BF08-09 Nanshan Medical Instrument Industry Park,1019# Nanhai Road,Nanshan District,Shenzhen,Guangdong,518067,P.R.China

### 2.3 BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

Equipment: Compact WI-FI Repeater  
Model No.: 66ANWNWR  
Adding Model: /  
Trade Name: ANKER  
Power Supply: PLC power , AC 120V,60Hz  
Note:

### 2.4 TEST OPERATION MODES

Emission: Test mode: Internet

### 2.5 LOCAL SUPPORTIVE INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number
Notebook	Lenovo	E46A	EB24320428

### 3. LABORATORY AND ACCREDITATIONS

#### 3.1 LABORATORY

The tests and measurements refer to this report were performed by EMC Laboratory of Guangzhou GRG Metrology and Test Technology Co., Ltd.

Add. : 163 Pingyun Rd, West of Huangpu Ave, Guangzhou, 510656, P. R. China

Telephone: +86-20-38699959, 38699960, 38699961

Fax : +86-20-38695185

#### 3.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC Listed Lab No. 688188
<b>China</b>	CNAS NO.L0446
<b>China</b>	DILAC No.DL175
<b>Canada</b>	Registration No.:8355A-1

#### 3.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

<b>Measurement</b>		<b>Frequency</b>	<b>Uncertainty</b>
Radiated Emission	Horizontal	30MHz ~ 1000MHz	4.2dB
	Vertical	30MHz ~ 1000MHz	4.4dB
Conducted Emission		9kHz ~ 30MHz	3.1 dB

This uncertainty represents an expanded uncertainty factor of  $k=2$ .

**3.4 LIST OF USED TEST EQUIPMENT AT GRGT**

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
<b>Radiated Emission</b>				
Bi-Log Antenna	ETS-LINDGRE N	3142C	75971	2014-05-26
EMI Receiver	R&S	ESU40	100106	2013-02-04
<b>Conducted Emission</b>				
EMI Receiver	R&S	ESCI	100529	2013-07-30
L.I.S.N	SCHWARZBEC K	NSLK 8127	8127450	2013-08-06

## 4. EMISSION TEST

### 4.1 RADIATED ELECTROMAGNETIC DISTURBANCE MEASUREMENT

#### 4.1.1 LIMITS

Frequency (MHz)	Quasi-peak(dB $\mu$ V/m)
30 ~ 88	40
88~216	43.5
216 ~ 960	46
Above 960	54

NOTE: (1) The lower limit shall apply at the transition frequencies.

#### 4.1.2 TEST PROCEDURE

##### 1) Procedure of Preliminary Test

Radiated emission tests shall be made with the receive or transmit antenna located at a horizontal distance of 3 m plus half of the maximum width of the EUT being tested, measured from the centre of the EUT. The tests shall be performed with the equipment configured as closely as possible to its typical, practical operation. Unless stated otherwise, cables and wiring shall be as specified by the manufacturer and the equipment shall be in its housing (or cabinet) with all covers and access panels in place. Any deviation from normal EUT operating conditions shall be included in the test report.

The EUT (on a non-conductive support structure, where applicable) shall be placed on a remotely operated turntable, to allow the EUT to be rotated. The height of the EUT above the ground plane shall be according to the following requirements.

- Table-top equipment is placed on a non-conductive set-up table with height  $0,8\text{ m} \pm 0,01\text{ m}$ , ANSI C63.4 specifies the method to determine the impact of the non-conductive set-up table on test results.
- Floor-standing equipment is placed on a non-conductive support, as specified in the applicable product standard. If there are no EUT height placement requirements in the product standard, the EUT shall be placed on a non-conductive support at a height of 5 cm to 15 cm above the ground plane.


Interface cables, loads, and devices should be connected to at least one of each type of the interface ports of the EUT and, where practical, each cable shall be terminated in a device typical for its actual use. Where there are multiple interface ports of the same type, a typical number of these devices shall be connected to devices or loads. It is sufficient to connect only one of the loads, provided that it can be shown, for example by preliminary testing, that the connection of further ports would not significantly increase the level of disturbance (that is, more than 2 dB) or significantly degrade the immunity level.

The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

## 2) Procedure of Final Test


EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test. The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level. Record at least six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only QP reading is presented. The test data of the worst-case condition(s) was recorded.

### 4.1.3 TEST SETUP

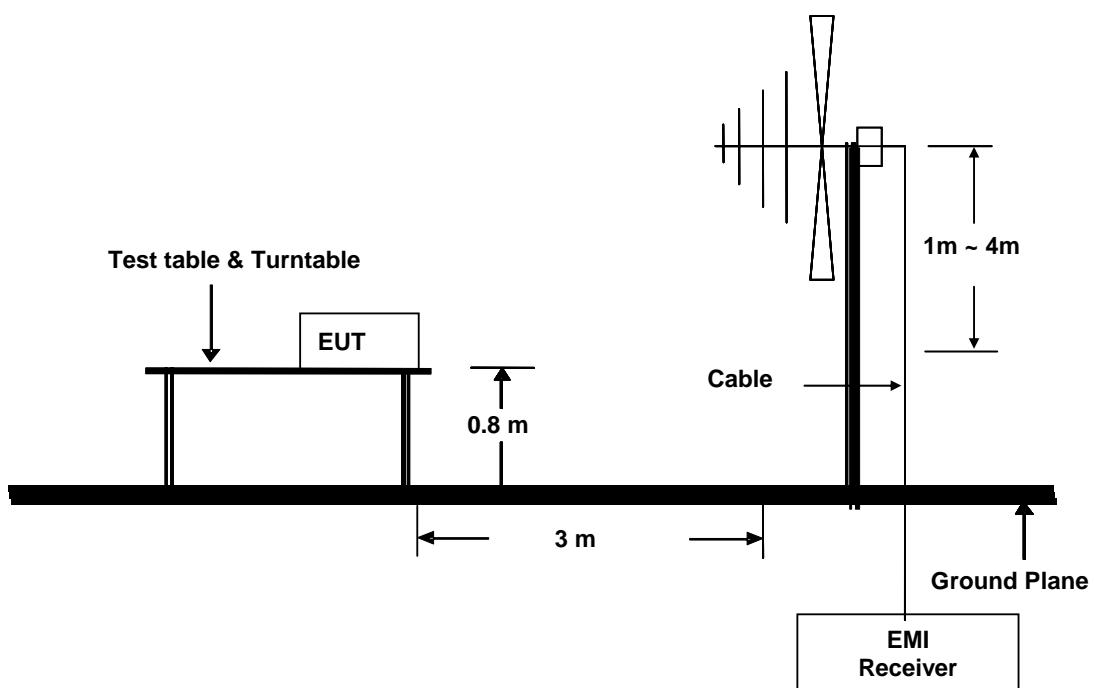


#### 4.1.4 TEST RESULTS

Project No.:	ZJ00022277	Polarization:	Horizontal
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	2012-11-8
Temp./Hum.(%RH):	23/55%RH	Time:	9:15:32
EUT:	Compact WI-FI Repeater	Distance:	3m
Model:	66ANWNWR	Test Result:	Pass
Note:	Internet		

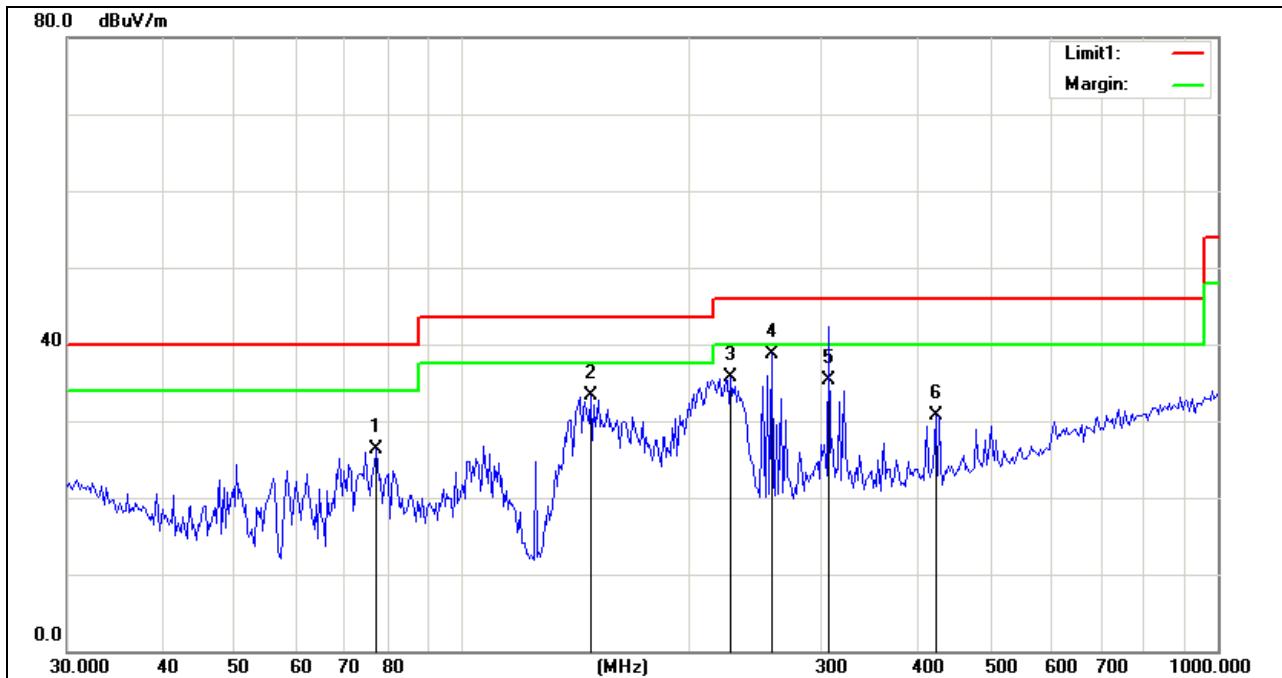

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	77.1129	18.07	8.30	26.37	40.00	-13.63	QP
2	147.9879	23.42	9.94	33.36	43.50	-10.14	QP
3	226.8324	22.94	12.81	35.75	46.00	-10.25	QP
4	256.6826	24.95	13.85	38.80	46.00	-7.20	QP
5	305.5288	19.88	15.38	35.26	46.00	-10.74	QP
6	423.2548	12.44	18.34	30.78	46.00	-15.22	QP

Project No.:	ZJ00022277	Polarization:	Vertical
Standard:	(RE)FCC PART 15 class B 3m	Power Source:	AC 120V/60Hz
Test item:	Radiation Test	Date:	2012-11-8
Temp./Hum.(%RH):	23/55%RH	Time:	8:56:09
EUT:	Compact WI-FI Repeater	Distance:	3m
Model:	66ANWNWR	Test Result:	Pass
Note:	Internet		

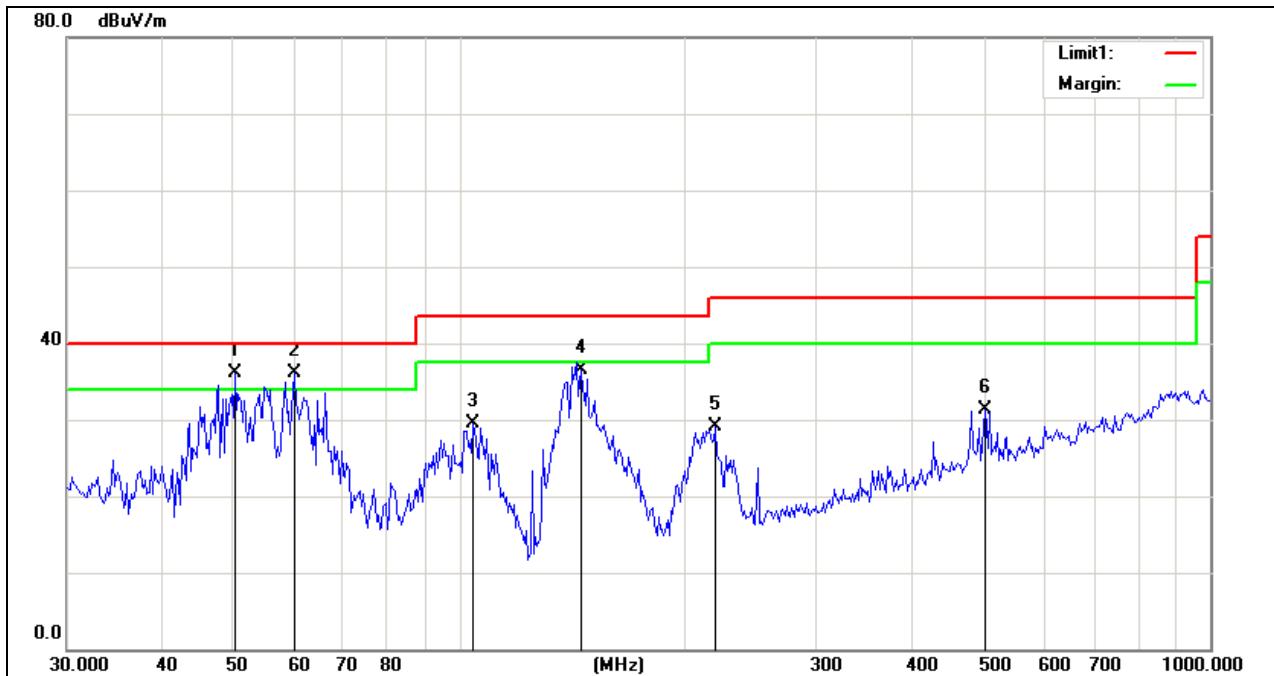

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	50.3092	26.34	9.68	36.02	40.00	-3.98	QP
2	60.2205	28.17	8.01	36.18	40.00	-3.82	QP
3	104.4515	19.76	9.77	29.53	43.50	-13.97	QP
4	145.5140	26.80	9.70	36.50	43.50	-7.00	QP
5	219.3118	16.62	12.45	29.07	46.00	-16.93	QP
6	500.9763	11.45	19.79	31.24	46.00	-14.76	QP

## 4.2 CONDUCTED EMISSION MEASUREMENT

### 4.2.1 LIMITS

Frequency range	Limits (dB $\mu$ V)	
	Quasi-peak	Average
150kHz ~ 0.5MHz	66 ~ 56	56 ~ 46
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

**NOTE:** (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases in line with the logarithm of the frequency in the range of 150kHz to 0.5MHz.

### 4.2.2 TEST PROCEDURES

#### Procedure of Preliminary Test

For measurement of the disturbance voltage the equipment under test (EUT) is connected to the power supply mains and any other extended network via one or more artificial network(s). An EUT, whether intended to be grounded or not, and which is to be used on a table is configured as follows:

- Either the bottom or the rear of the EUT shall be at a controlled distance of 40 cm from a reference ground plane. This ground plane is normally the wall or floor of a shielded room. It may also be a grounded metal plane of at least 2 m by 2 m. This is physically accomplished as follows:
  - 1) place the EUT on a table of non-conducting material which is at least 80 cm high. Place the EUT so that it is 40 cm from the wall of the shielded room, or
  - 2) place the EUT on a table of non-conducting material which is 40 cm high so that the bottom of the EUT is 40 cm above the ground plane;
    - All other conductive surfaces of the EUT shall be at least 80 cm from the reference ground plane;
    - The EUT are placed on the floor that one side of the housings is 40 cm from the vertical reference ground plane and other metallic parts;
    - Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth forming a bundle 30 cm to 40 cm long, hanging approximately in the middle between the ground plane and the table.
    - I/O cables that are connected to a peripheral shall be bundled in the centre. The end of the cable may be terminated if required using correct terminating impedance. The total length shall not exceed 1 m.


The test mode(s) described in Item 2.4 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.4 producing the highest emission level. The EUT configuration and cable configuration of the above highest emission levels were recorded for reference of the final test.

#### Procedure of Final Test

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test. A scan was taken on both power lines, recording at least the six highest emissions. Emission frequency and amplitude were recorded


into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. The test data of the worst-case condition(s) was recorded.

#### 4.2.3 TEST SETUP

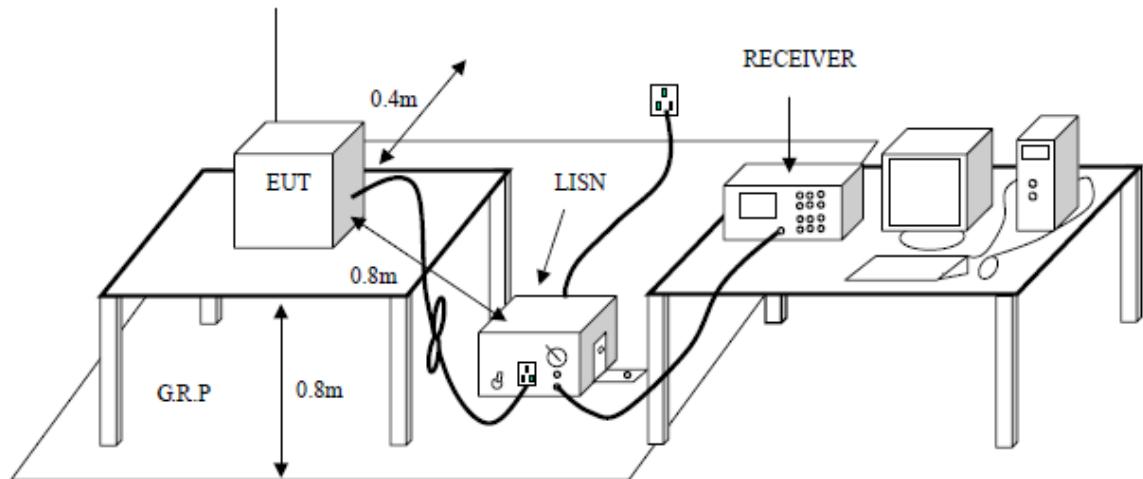


#### 4.2.4 TEST RESULTS

Project No.:	<b>ZJ00022277</b>	Probe:	<b>L1</b>
Standard:	<b>(CE)FCC PART 15 class B _QP</b>	Power Source:	<b>AC 120V/60Hz</b>
Test item:	<b>Conduction Test</b>	Date:	<b>2012-10-08</b>
Temp./Hum.(%RH):	<b>25/57%RH</b>	Time:	<b>8:19:23</b>
EUT:	<b>Compact WI-FI Repeater</b>	Test Result:	<b>Pass</b>
Model:	<b>66ANWNWR</b>		
<b>Note:</b>			

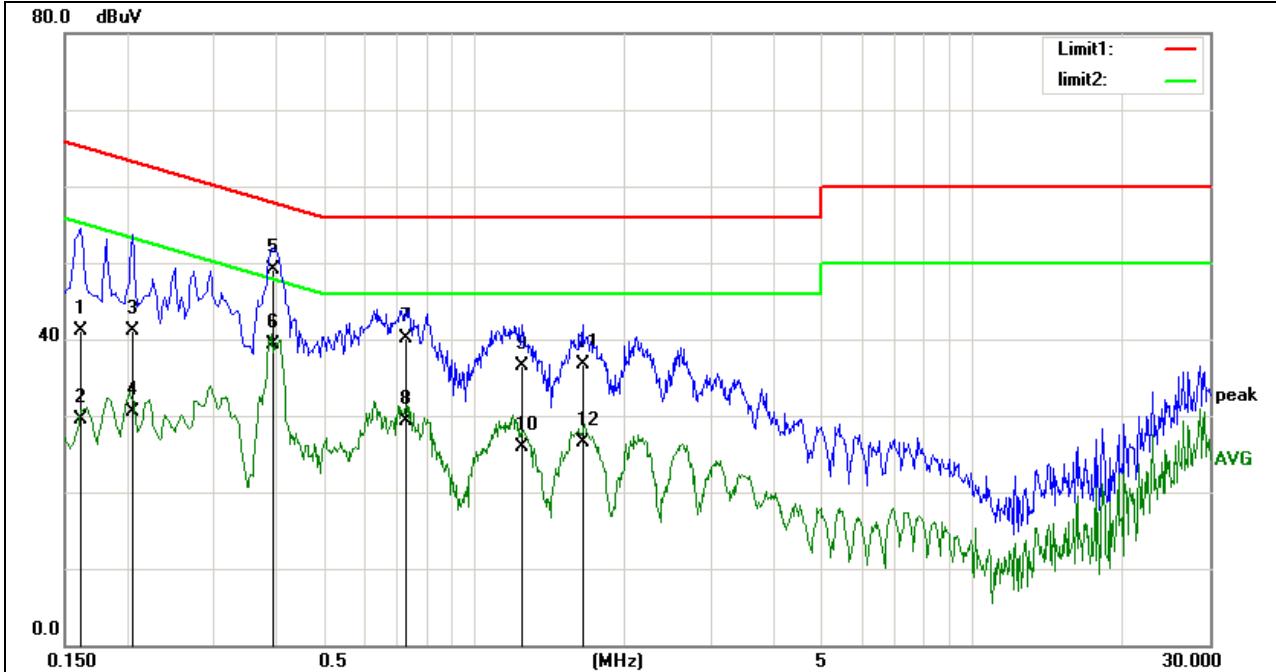


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1620	39.31	1.79	41.10	65.36	-24.26	QP
2	0.1620	27.81	1.79	29.60	55.36	-25.76	AVG
3	0.2060	40.20	1.00	41.20	63.36	-22.16	QP
4	0.2060	29.50	1.00	30.50	53.36	-22.86	AVG
5	0.3940	48.46	0.74	49.20	57.98	-8.78	QP
6	0.3940	38.56	0.74	39.30	47.98	-8.68	AVG
7	0.7300	39.79	0.41	40.20	56.00	-15.80	QP
8	0.7300	28.99	0.41	29.40	46.00	-16.60	AVG
9	1.2460	36.00	0.50	36.50	56.00	-19.50	QP
10	1.2460	25.50	0.50	26.00	46.00	-20.00	AVG
11	1.6460	36.13	0.57	36.70	56.00	-19.30	QP
12	1.6460	26.03	0.57	26.60	46.00	-19.40	AVG



Project No.:	<b>ZJ00022277</b>	Probe:	<b>N</b>
Standard:	<b>(CE)FCC PART 15 class B _QP</b>	Power Source:	<b>AC 120V/60Hz</b>
Test item:	<b>Conduction Test</b>	Date:	<b>2012-10-08</b>
Temp./Hum.(%RH):	<b>25/57%RH</b>	Time:	<b>8:19:23</b>
EUT:	<b>Compact WI-FI Repeater</b>	Test Result:	<b>Pass</b>
Model:	<b>66ANWNWR</b>		
Note:			

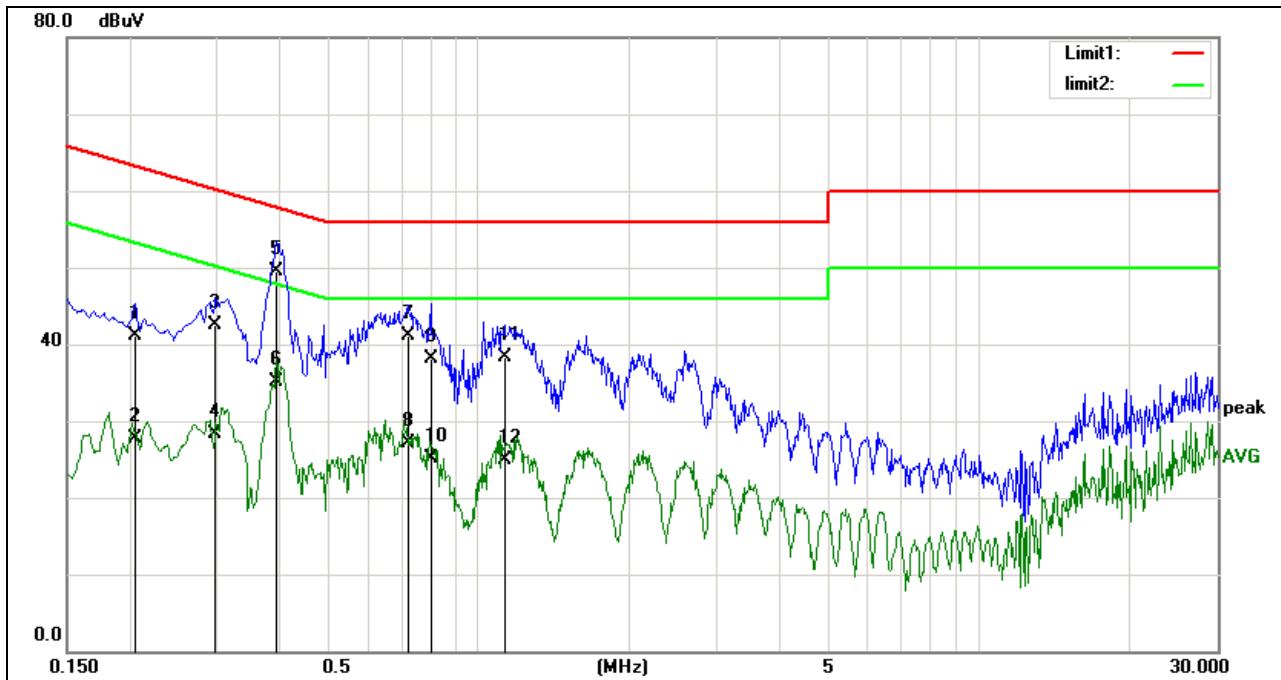

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2060	40.20	1.00	41.20	63.36	-22.16	QP
2	0.2060	26.80	1.00	27.80	53.36	-25.56	AVG
3	0.2980	41.69	0.91	42.60	60.30	-17.70	QP
4	0.2980	27.39	0.91	28.30	50.30	-22.00	AVG
5	0.3940	48.86	0.74	49.60	57.98	-8.38	QP
6	0.3940	34.36	0.74	35.10	47.98	-12.88	AVG
7	0.7220	40.79	0.41	41.20	56.00	-14.80	QP
8	0.7220	26.69	0.41	27.10	46.00	-18.90	AVG
9	0.8020	37.79	0.41	38.20	56.00	-17.80	QP
10	0.8020	24.69	0.41	25.10	46.00	-20.90	AVG
11	1.1260	37.78	0.52	38.30	56.00	-17.70	QP
12	1.1260	24.48	0.52	25.00	46.00	-21.00	AVG

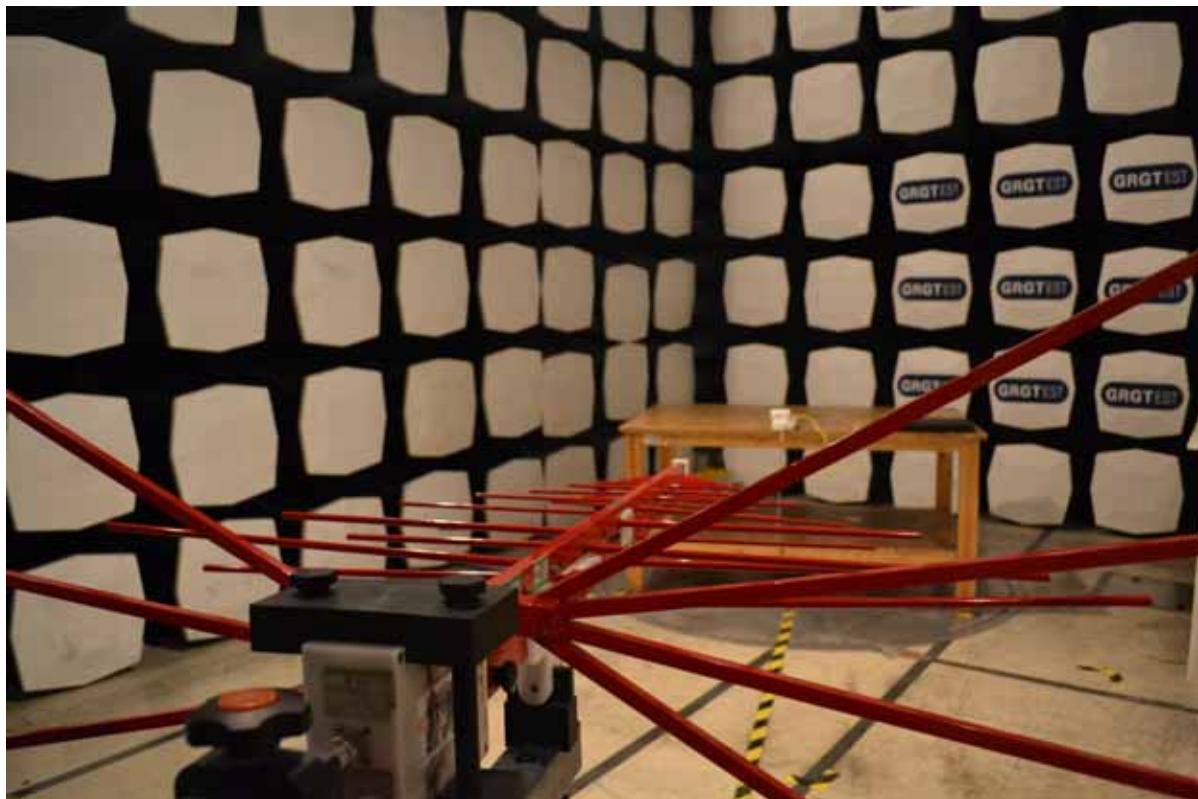**APPENDIX A: PHOTOGRAPH OF THE TEST ARRANGEMENT****Radiated Emission****Conducted Emission**

**APPENDIX B: PHOTOGRAPH OF THE EUT**

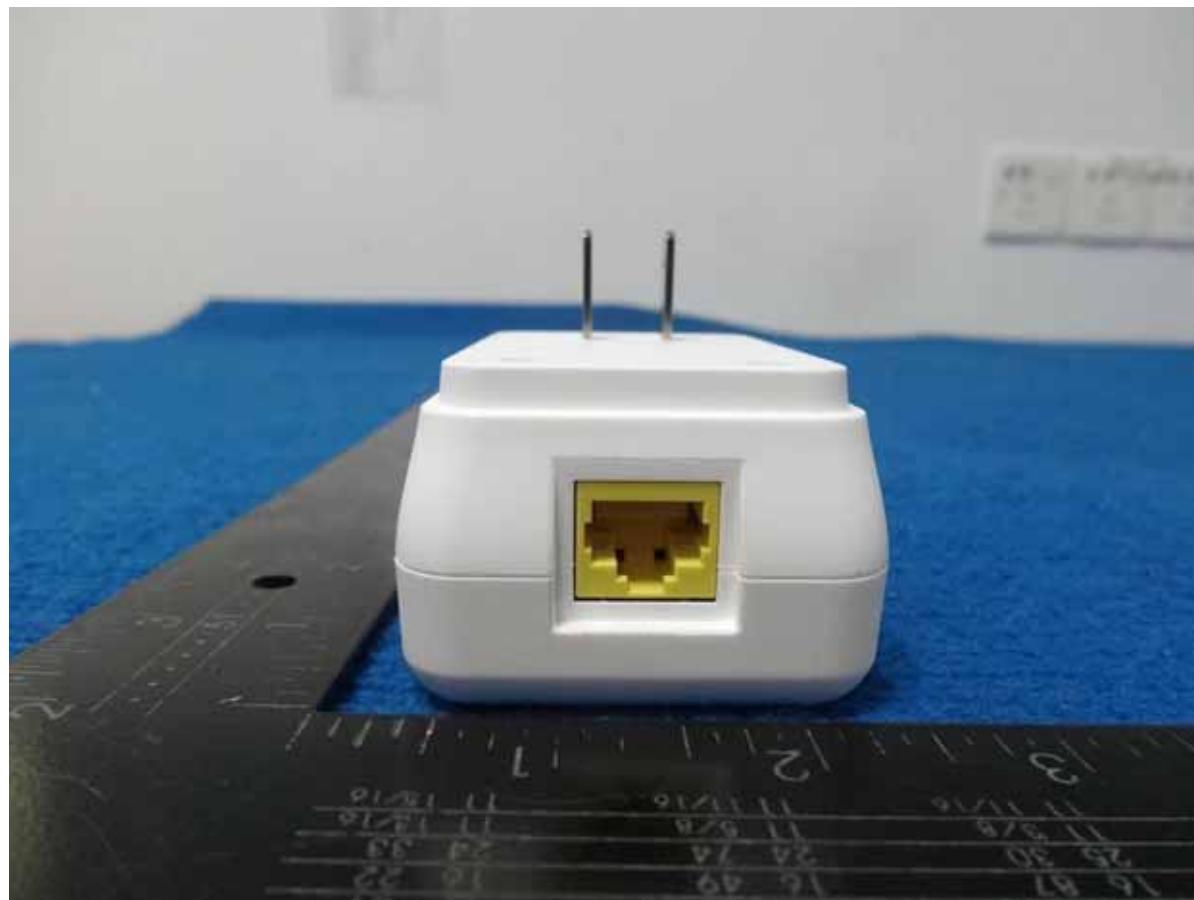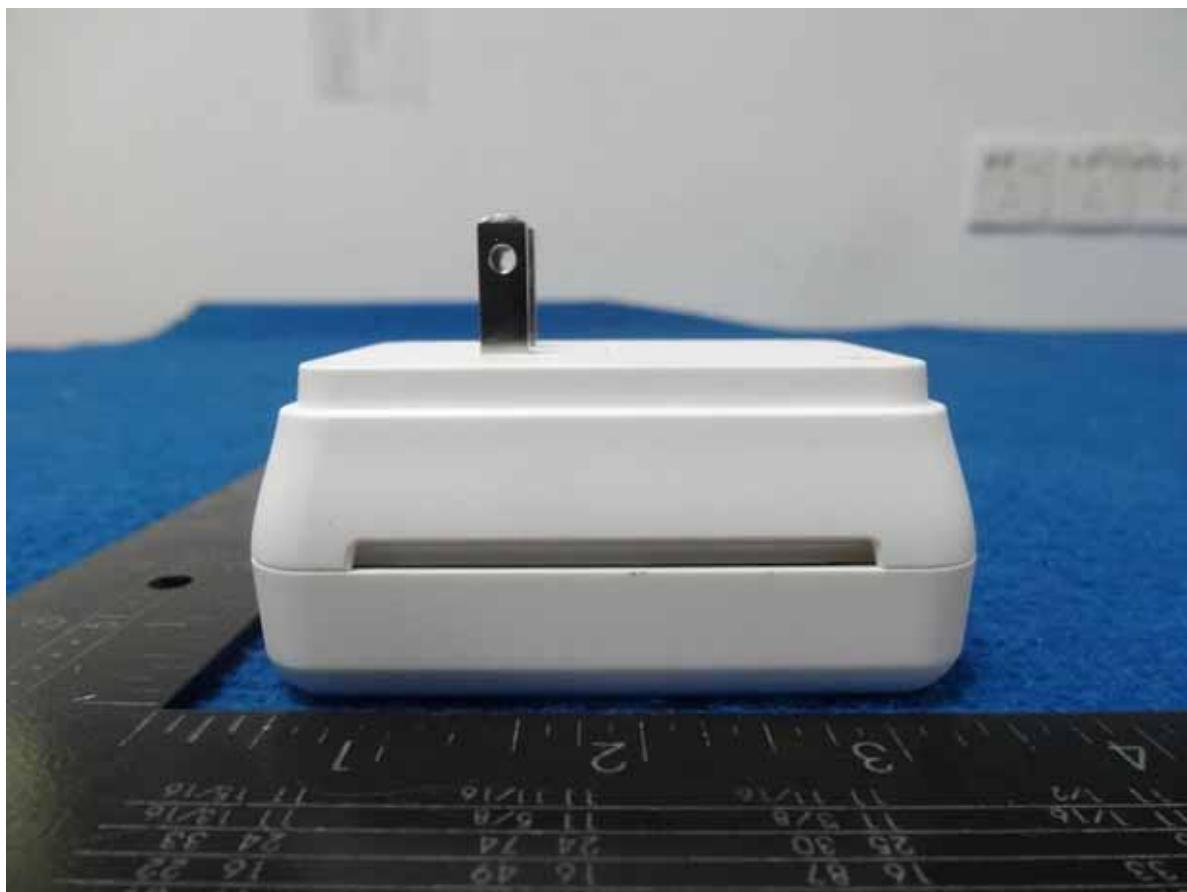





-----This is the last page of the report.-----