



EMC TEST REPORT for Intentional Radiator (BT Function)

No. 130300367SHA-002

Applicant : Control4
11734 S. Election Drive Suite 200, Draper, Utah,
United States 84020

Manufacturer : Hansong (Nanjing) Technology Ltd.
8 Kangping Road, jiangning Econ. And Tech.
Development Zone, Nanjing, 211106, China

Equipment : Wireless Music Bridge

Type/Model : C4-WMB-B

SUMMARY

The equipment complies with the requirements according to the following standard(s):

47CFR Part 15 (2012): Radio Frequency Devices

ANSI C63.4 (2003): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

RSS-210 Issue 8 (December 2010): Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

RSS-Gen Issue 3 (December 2010): General Requirements and Information for the Certification of Radiocommunication Equipment

Date of issue: May 13, 2013

Prepared by:

Wakeyou Wang (*Project Engineer*)

Reviewed by:

Daniel Zhao (*Reviewer*)



FCC ID: R33C4WMB
IC: 7848A-C4WMB

Description of Test Facility

Name: Intertek Testing Services Ltd. Shanghai ETL Semko
Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R. China

FCC Registration Number: 236597
IC Assigned Code: 2042B-1

Name of contact: Steve Li
Tel: +86 21 64956565 ext. 214
Fax: +86 21 54262335 ext. 214

Content

SUMMARY.....	1
DESCRIPTION OF TEST FACILITY.....	2
1. GENERAL INFORMATION	5
1.1 Applicant Information.....	5
1.2 Identification of the EUT	5
1.3 Technical specification	6
1.4 Mode of operation during the test / Test peripherals used.....	6
2. TEST SPECIFICATION	7
2.1 Instrument list	7
2.2 Test Standard	7
2.3 Test Summary	8
3. 20 dB BANDWIDTH.....	9
3.1 Limit.....	9
3.2 Test Configuration	9
3.3 Test Procedure and test setup.....	9
3.4 Test Protocol	10
4. CARRIER FREQUENCY SEPARATION	14
4.1 Limit.....	14
4.2 Test Configuration	14
4.3 Test Procedure and test setup.....	14
4.4 Test Protocol	15
5. MAXIMUM PEAK OUTPUT POWER.....	19
5.1 Test limit	19
5.2 Test Configuration	19
5.3 Test procedure and test setup.....	19
5.4 Test protocol	20
6. RADIATED SPURIOUS EMISSIONS.....	24
6.1 Test limit	24
6.2 Test Configuration	24
6.3 Test procedure and test setup.....	25
6.4 Test protocol	26
7. CONDUCTED SPURIOUS EMISSIONS & BAND EDGE	33
7.1 Limit.....	33
7.2 Test Configuration	33
7.3 Test procedure and test setup.....	33
7.4 Test protocol	34
8. POWER LINE CONDUCTED EMISSION	35
8.1 Limit.....	35
8.2 Test configuration	35
EMI receiver	35
8.3 Test procedure and test set up.....	36
8.4 Test protocol	37
9. NUMBER OF HOPPING FREQUENCIES.....	39
9.1 Limit.....	39
9.2 Test Configuration	39

9.3 Test procedure and test setup	39
9.4 Test protocol	40
10. DWELL TIME	41
10.1 Limit.....	41
10.2 Test Configuration	41
10.3 Test procedure and test setup	41
10.4 Test protocol	42
11. OCCUPIED BANDWIDTH	45
11.1 Test limit	45
11.2 Test Configuration	45
11.3 Test procedure and test setup	45
11.4 Test protocol	46
12. SPURIOUS EMISSION FOR RECEIVER	50
12.1 Test limit	50
12.2 Test Configuration	50
12.3 Test procedure and test setup	50
12.4 Test protocol	51



1. General Information

1.1 Applicant Information

Applicant:	Control4 11734 S. Election Drive Suite 200, Draper, Utah, United States 84020	
Name of contact:	James Russell	
Tel:	+1 801 523 3100	
Fax:	+1 801 523 3199	
Manufacturer:	Hansong (Nanjing) Technology Ltd. 8 Kangping Road, jiangning Econ. And Tech. Development Zone, Nanjing, 211106, China	
Sample received date	:	March 14, 2013
Sample Identification No	:	*0130314-30-001*
Date of test	:	March 14, 2013 ~ May 9, 2013

1.2 Identification of the EUT

Equipment:	Wireless Music Bridge
Type/model:	C4-WMB-B
FCC ID:	R33C4WMB
IC:	7848A-C4WMB



1.3 Technical specification

Operation Frequency Band:	2402 - 2480 MHz
Modulation:	GFSK, $\pi/4$ -DQPSK and 8DQPSK
Gain of Antenna:	Internal PCB antenna, 3.0dBi max
Rating:	DC 5V powered by <i>AC/DC adapter input AC 100-240V, 50/60Hz; Output DC 5V, 1.0A</i>
Description of EUT:	The EUT is a wireless audio device. It contains Both Wi-Fi and Bluetooth functions. Among this report, only Bluetooth function was assessed. There are two AC/DC adapters applied, namely <i>Kingwall AS100-050-AD120</i> and <i>Phihong PSAC05R-050</i> .
Channel Description:	The channel spacing is 1MHz.

1.4 Mode of operation during the test / Test peripherals used

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

The lowest, middle and highest channel were tested as representatives (2402MHz, 2441MHz and 2480MHz).

Test Peripherals:

PC: HP Compaq 6280 Pro Microtower

2. Test Specification

2.1 Instrument list

Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
Semi-anechoic chamber	-	Albatross project	EC 3048	2012-5-12	2013-5-11
Test Receiver	ESCS 30	R&S	EC 2107	2011-10-21	2012-10-20
A.M.N.	ESH2-Z5	R&S	EC 3119	2013-1-9	2014-1-8
A.M.N.	ENV4200	R&S	EC3558	2012-8-11	2013-8-10
High Pass Filter	WHKX 1.0/15G-10SS	Wainwright	EC4297-1	2013-1-9	2014-1-8
High Pass Filter	WHKX 2.8/18G-12SS	Wainwright	EC4297-2	2013-1-9	2014-1-8
High Pass Filter	WHKX 7.0/1.8G-8SS	Wainwright	EC4297-3	2013-1-9	2014-1-8
Band Reject Filter	WRCGV 2400/2483- 2390/2493- 35/10SS	Wainwright	EC4297-4	2013-1-9	2014-1-8
Test Receiver	FSV40	R&S	/	2011-10-21	2012-10-20
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2013-4-12	2014-4-11
Pre-amplifier	Tpa0118-40	R&S	EC 4792-2	2013-4-12	2014-4-11
Horn antenna	HF 906	R&S	EC 3049	2011-5-13	2013-5-12
Horn antenna	3117	ETS	EC 4792-1	2012-4-17	2014-4-16
Horn antenna	HAP18-26W		EC 4792-3	2012-4-10	2014-4-9
Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2011-5-16	2013-5-15
Test Receiver	ESCS 30	R&S	EC 2107	2012-10-21	2013-10-20
Test Receiver	ESIB 26	R&S	EC 3045	2012-10-21	2013-10-20
Test Receiver	ESCI 7	R&S	EC4501	2012-12-13	2013-12-12

2.2 Test Standard

47CFR Part 15 (2012)
ANSI C63.4: 2003
RSS-210 Issue 8 (December 2010)
RSS-Gen Issue 3 (December 2010)

2.3 Test Summary

This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
20 dB Bandwidth	15.247(a)(1)	RSS-210 Issue 8 Annex 8	Tested
Carrier Frequency Separation	15.247(a)(1)	RSS-210 Issue 8 Annex 8	Pass
Output power	15.247(b)(1)	RSS-210 Issue 8 Annex 8	Pass
Radiated Spurious Emissions	15.205 & 15.209	RSS-210 Issue 8 Clause 2	Pass
Conducted Spurious Emissions & Band Edge	15.247(d)	RSS-210 Issue 8 Annex 8	Pass
Power line conducted emission	15.207	RSS-Gen Issue 3 Clause 7.2.4	Pass
Number of Hopping Frequencies	15.247(a)(1)(iii)	RSS-210 Issue 8 Annex 8	Pass
Dwell time	15.247(a)(1)(iii)	RSS-210 Issue 8 Annex 8	Pass
Occupied bandwidth	-	RSS-Gen Issue 3 Clause 4.6.1	Tested
Spurious emission for receiver	15B	RSS-310 Issue 3 Clause 3.1	NA

Note: "NA" means "not applied".

3. 20 dB Bandwidth


Test result: **Tested**

3.1 Limit

☐ Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

☒ Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

3.2 Test Configuration

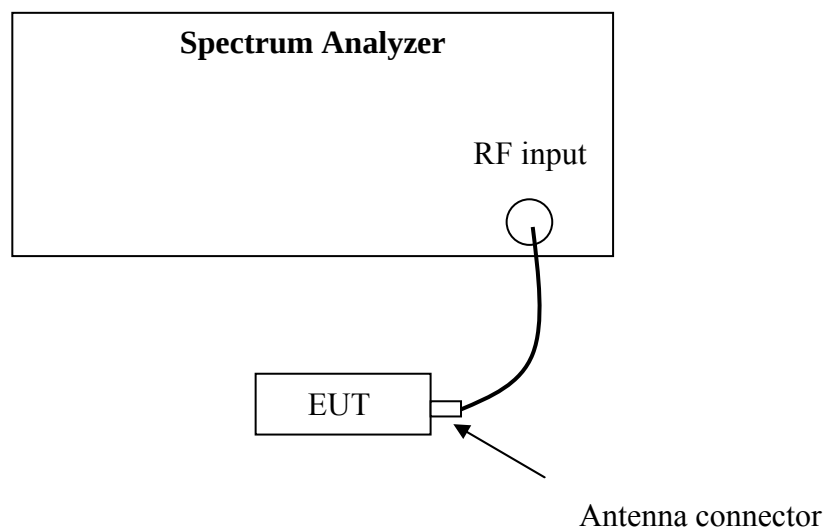

3.3 Test Procedure and test setup

The 20 bandwidth per FCC § 15.247(a)(1) is measured using the Spectrum Analyzer with Span = 2 to 3 times the 20 dB bandwidth, $RBW \geq 1\%$ of the 20 dB bandwidth, $VBW \geq RBW$, Sweep = auto, Detector = peak, Trace = max hold.


The test was performed at 3 channels (lowest, middle and highest channel).

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

3.4 Test Protocol


Temperature : 25°C
Relative Humidity : 55 %

Mode	CH	20dB Bandwidth (kHz)	Two-thirds of Bandwidth (kHz)
GFSK	L	804.60	536.4
	M	788.40	525.6
	H	793.80	529.2

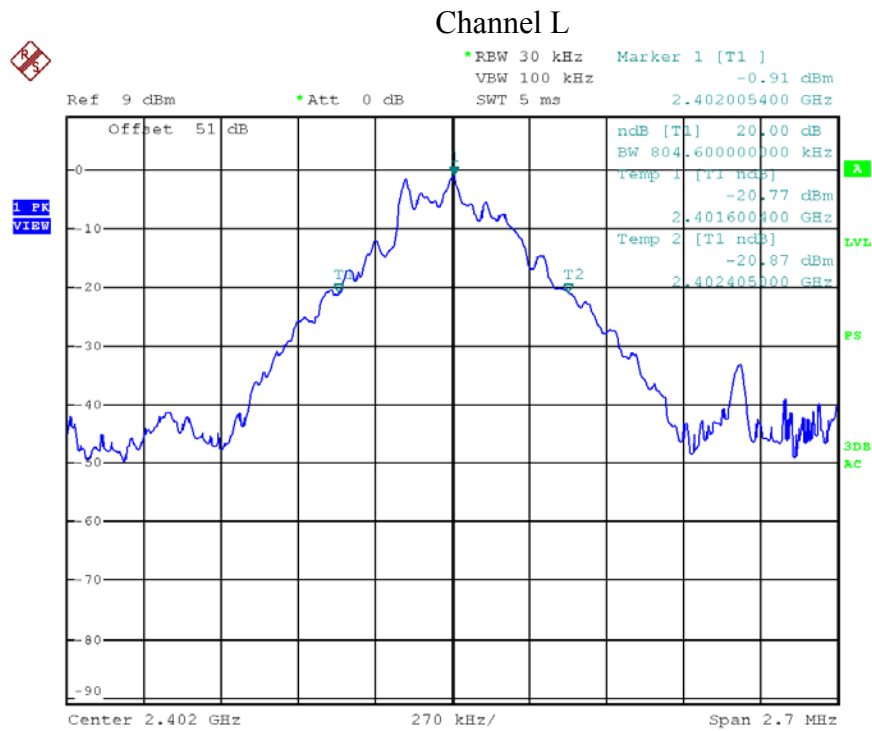


Date: 17.APR.2013 15:40:21

Channel M

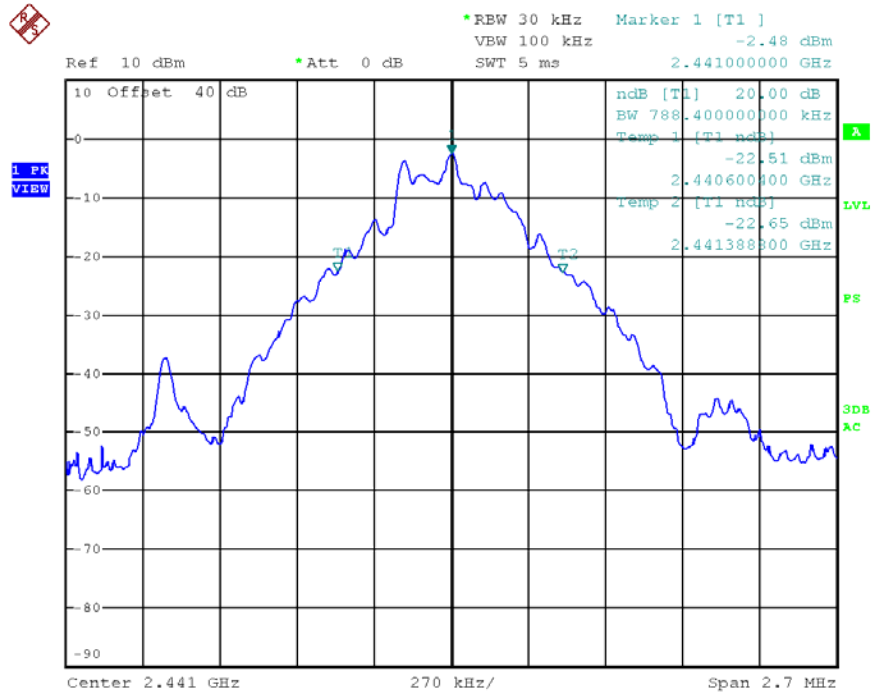


Date: 17.APR.2013 16:33:07

Channel H

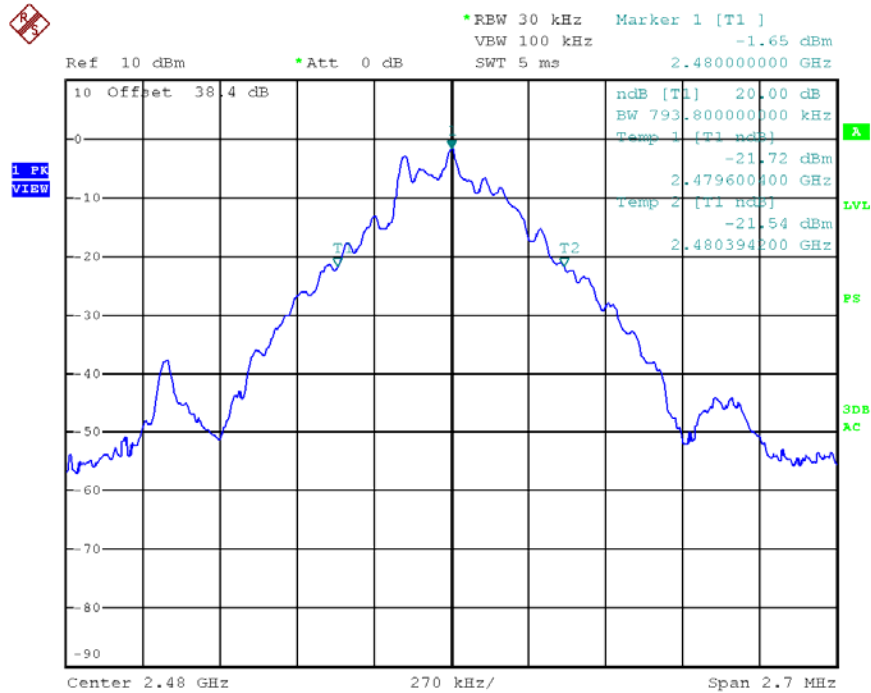


Date: 17.APR.2013 16:47:59

Mode	CH	20dB Bandwidth (kHz)	Two-thirds of Bandwidth (kHz)
8DQPSK	L	1220	813.33
	M	1260	840.00
	H	1264	842.67

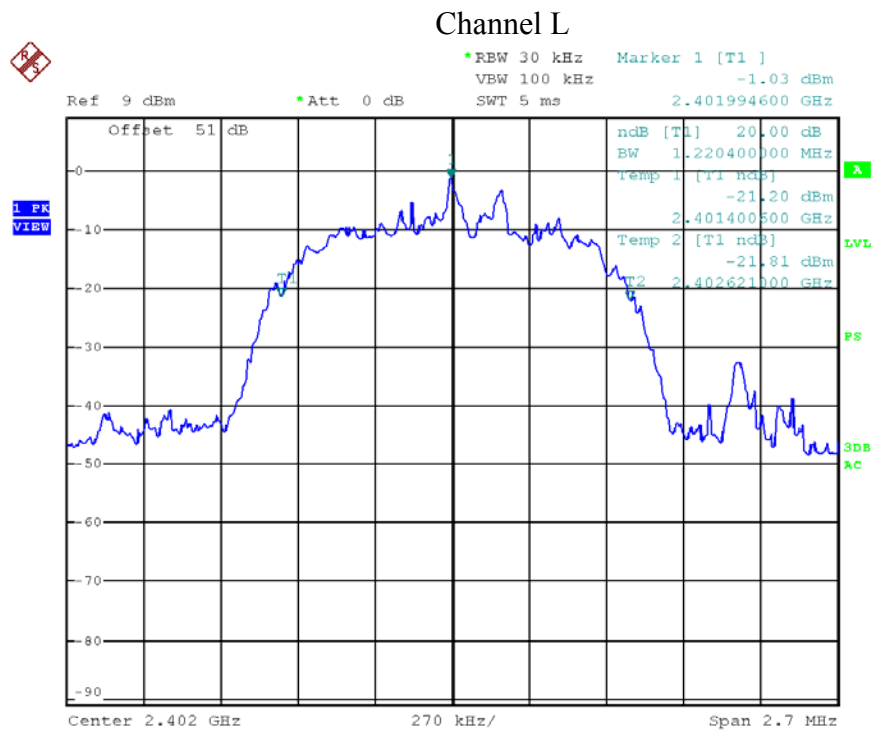


Date: 17.APR.2013 16:01:25

Channel M

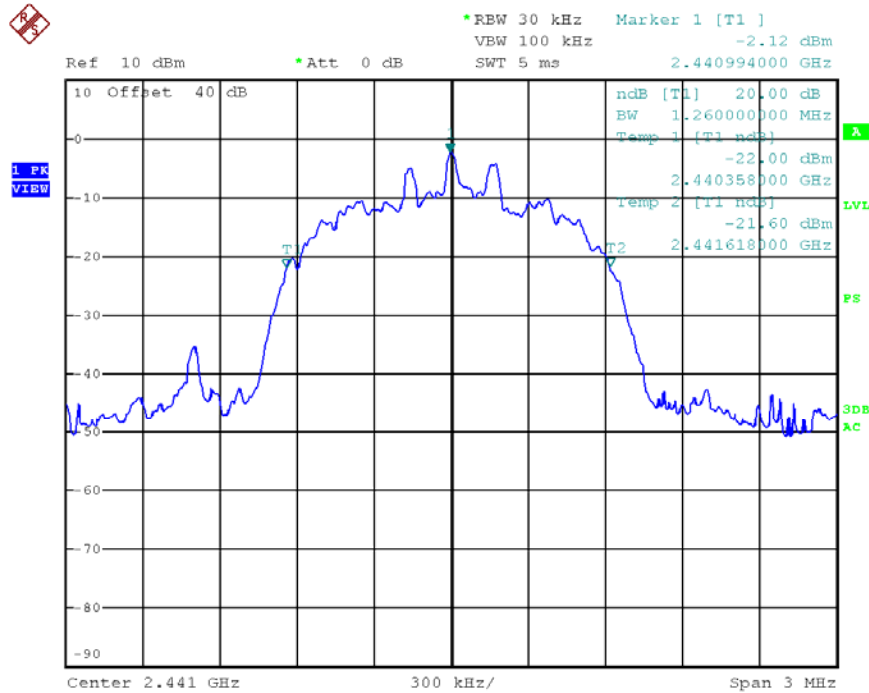

Date: 17.APR.2013 16:35:11

Channel H

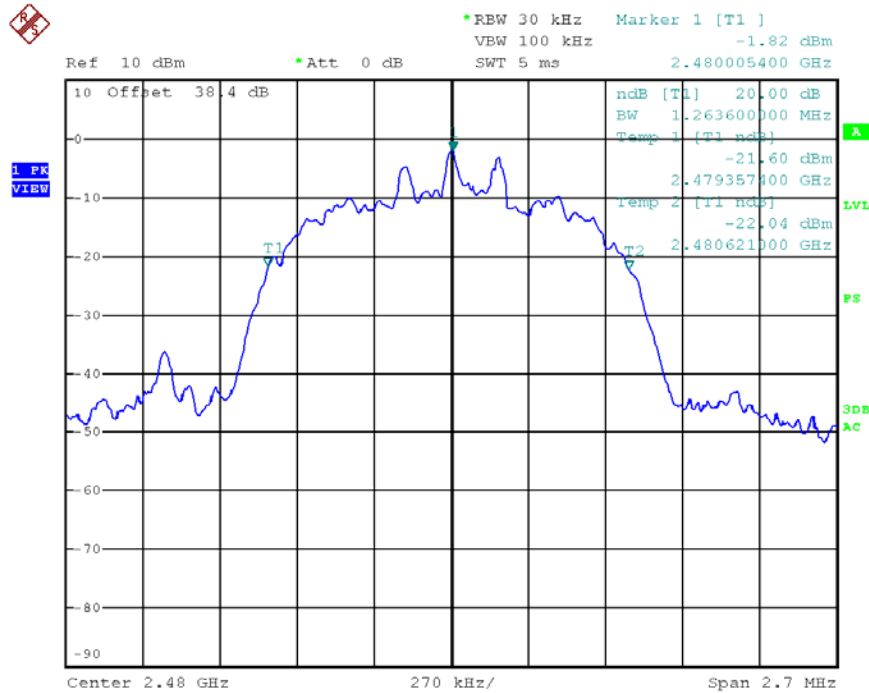

Date: 17.APR.2013 16:48:37


4. Carrier Frequency Separation

Test result: Pass

4.1 Limit

- ☐ Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- ☒ Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

4.2 Test Configuration

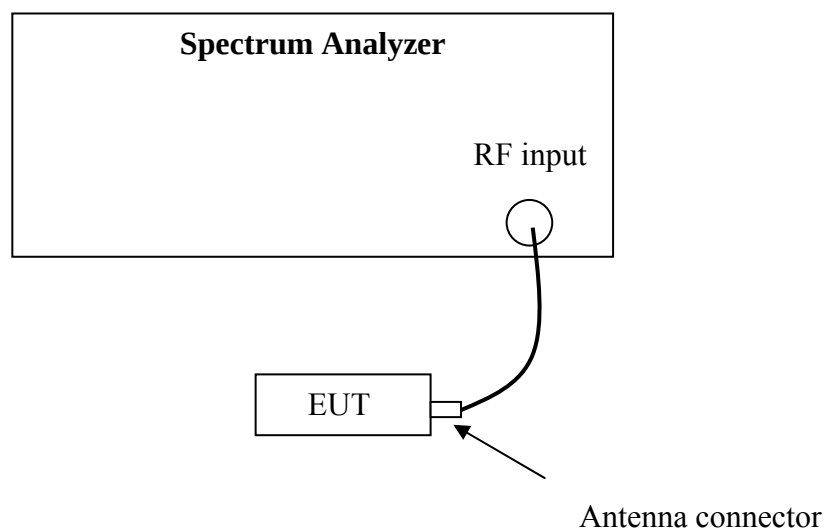

4.3 Test Procedure and test setup

The Carrier Frequency Separation per FCC § 15.247(a)(1) is measured using the Spectrum Analyzer with Span can capture two adjacent channels, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector = peak, Trace = max hold.


The test was performed at 3 channels (lowest, middle and highest channel).

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)


4.4 Test Protocol

Temperature : 22°C
Relative Humidity : 55 %

Mode	CH	Frequency Separation (kHz)	Limit (kHz)
GFSK	L	990.00	≥ 536.4
	M	1014.00	≥ 525.6
	H	1008.00	≥ 529.2

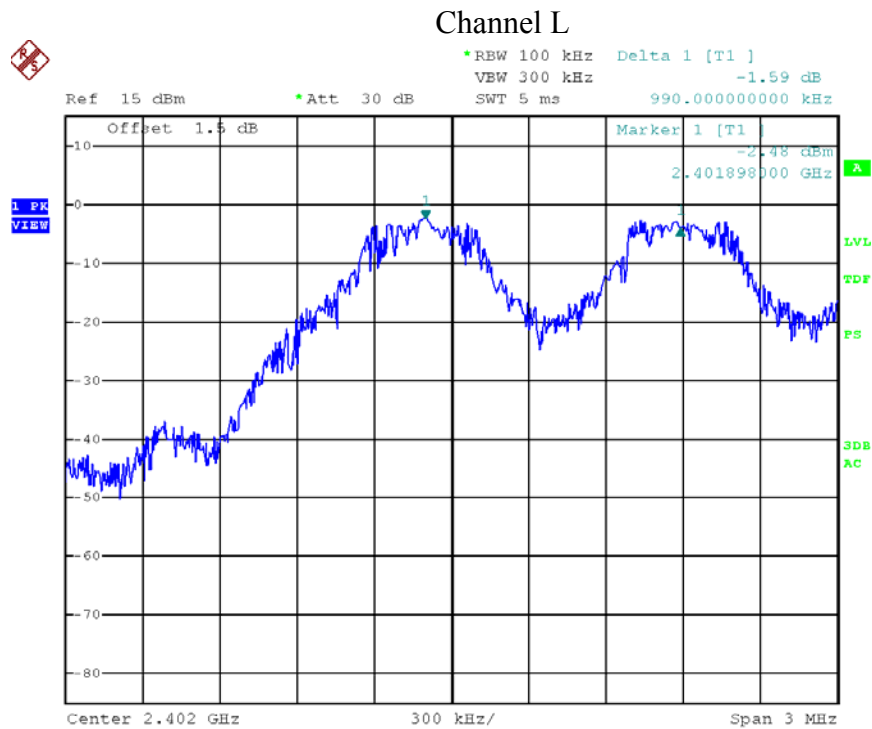


Channel M

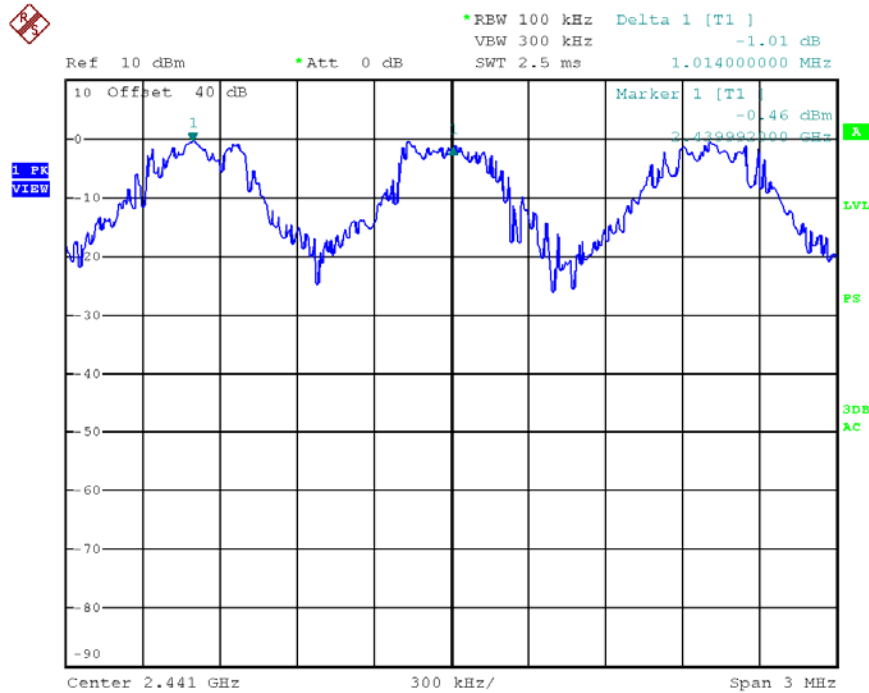


Date: 17.APR.2013 16:36:32

Channel H

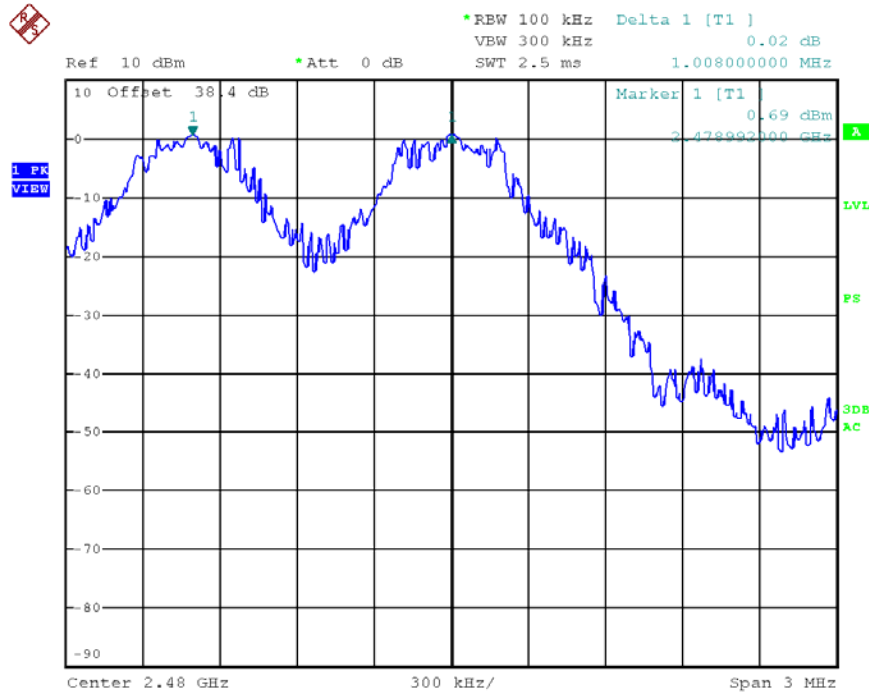


Date: 17.APR.2013 16:51:24

Mode	CH	Frequency Separation (kHz)	Limit (kHz)
8DQPSK	L	1003.00	≥813.33
	M	1002.00	≥840.00
	H	1014.00	≥842.67

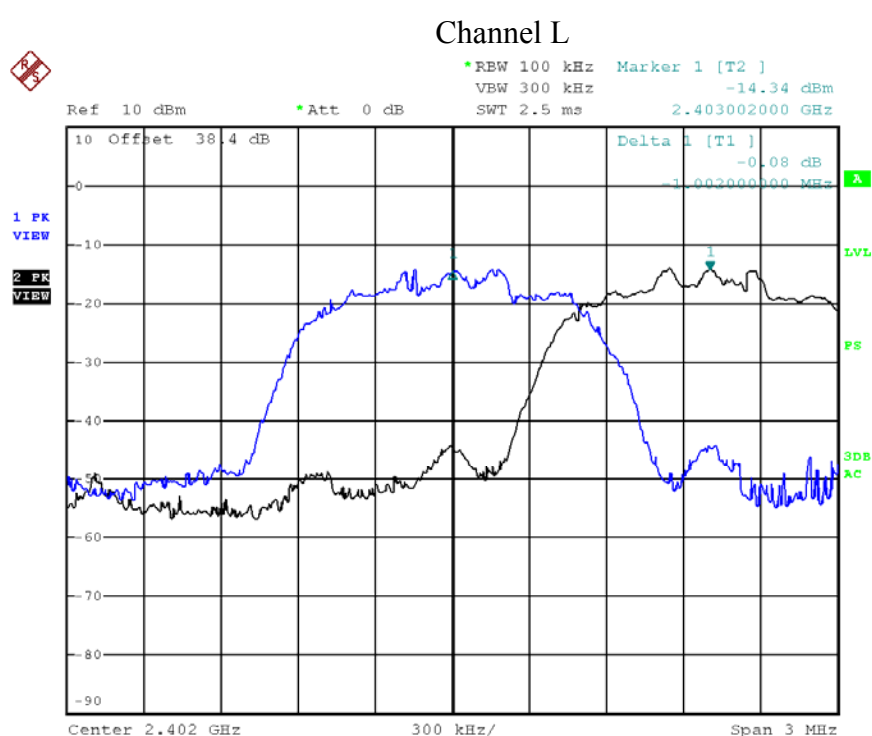


Date: 17.APR.2013 16:58:58

Channel M

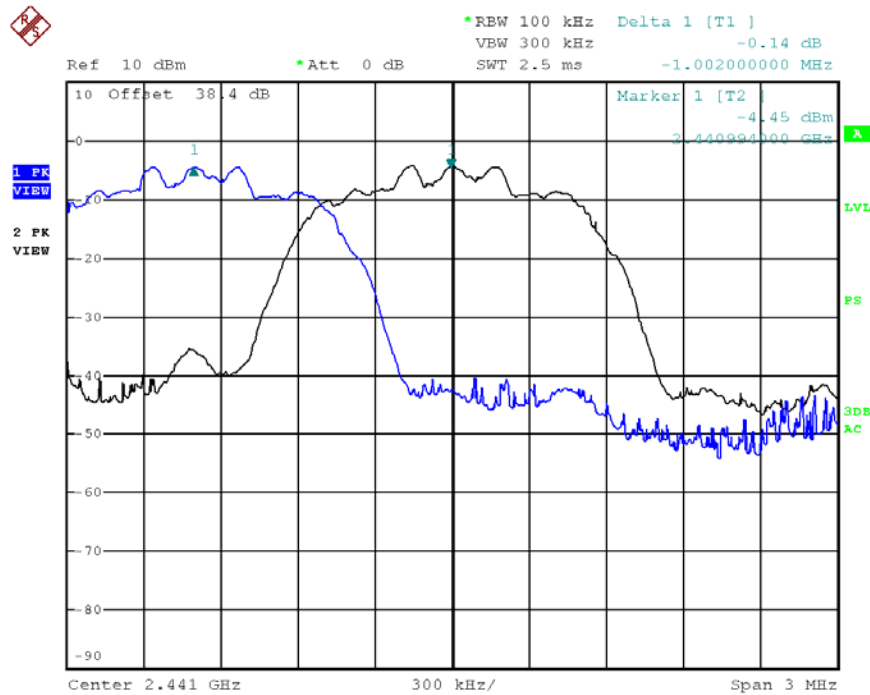

Date: 17.APR.2013 16:57:24

Channel H

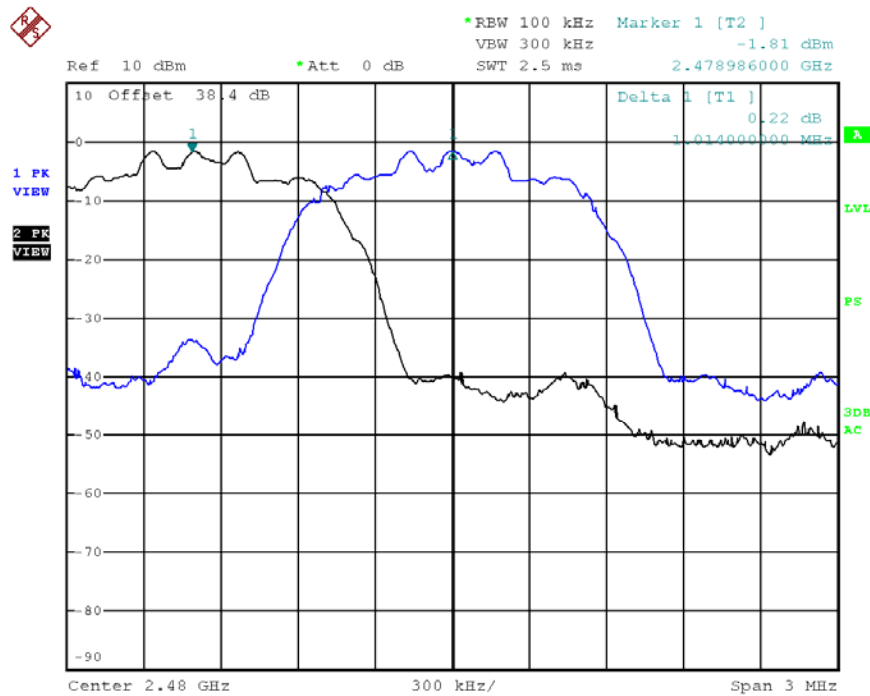

Date: 17.APR.2013 16:55:12


5. Maximum peak output power

Test result: Pass

5.1 Test limit

- ☐ For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt
- ☒ For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts
If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.
- ☐ For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

5.2 Test Configuration

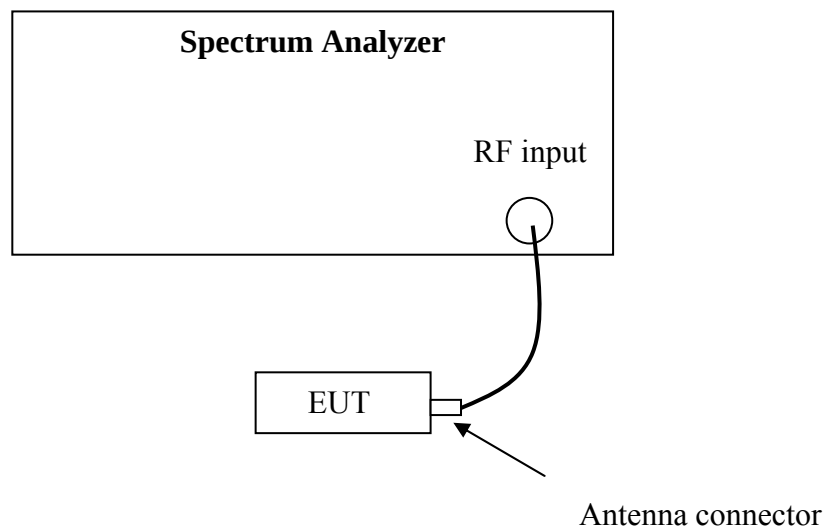

5.3 Test procedure and test setup


The power output per FCC § 15.247(b) is measured using the Spectrum Analyzer with Span = 5 times the 20 dB bandwidth, RBW $\geq$ the 20 dB bandwidth, VBW $\geq$ RBW, Sweep = auto, Detector = peak, Trace = max hold.
The test was performed at 3 channels (lowest, middle and highest channel).
The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

5.4 Test protocol

Temperature : 25 °C
Relative Humidity : 55 %


Mode	CH	Cable loss (dB)	Corrected reading (dBm)	Limit (dBm)
GFSK	L	1.00	3.23	≤21.00
	M	1.00	2.50	
	H	1.00	1.80	

The maximum EIRP of the EUT = 3.23dBm + 3.00dBi = 6.23dBm = 0.00420W which is lower than the EIRP limit of RSS-210.

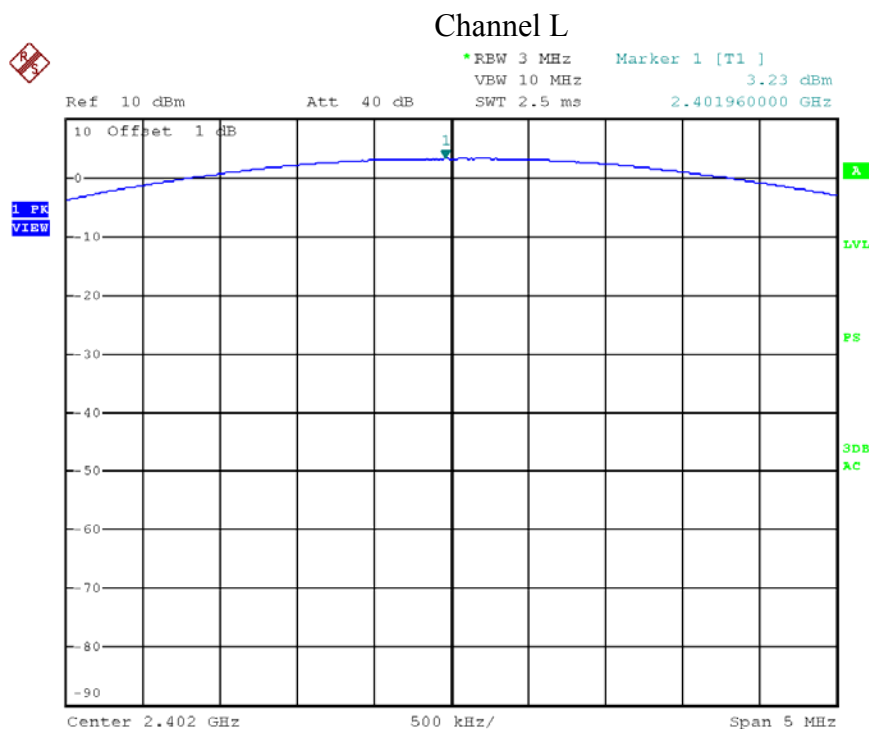


Date: 7.MAY.2013 17:16:00

Channel M

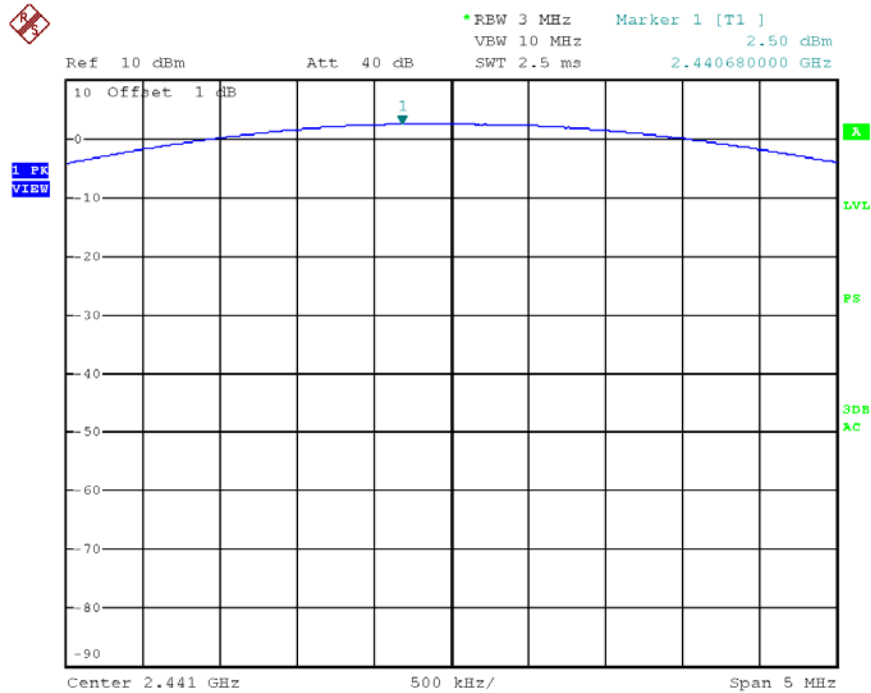


Date: 7.MAY.2013 17:17:02

Channel H

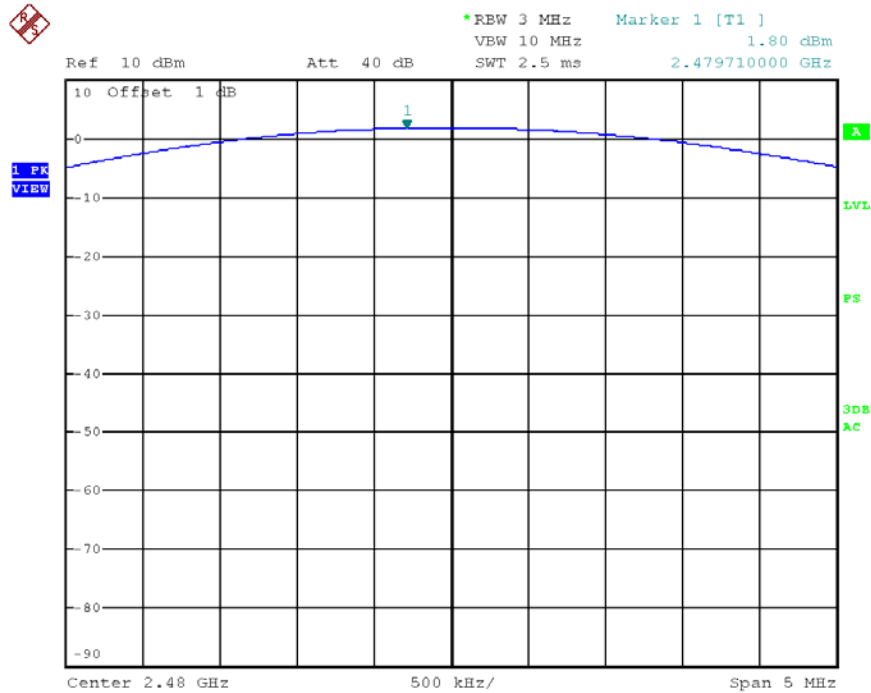


Date: 7.MAY.2013 17:17:27

Mode	CH	Cable loss (dB)	Corrected reading (dBm)	Limit (dBm)
8DQPSK	L	1.00	2.56	≤ 21.00
	M	1.00	1.83	
	H	1.00	0.88	

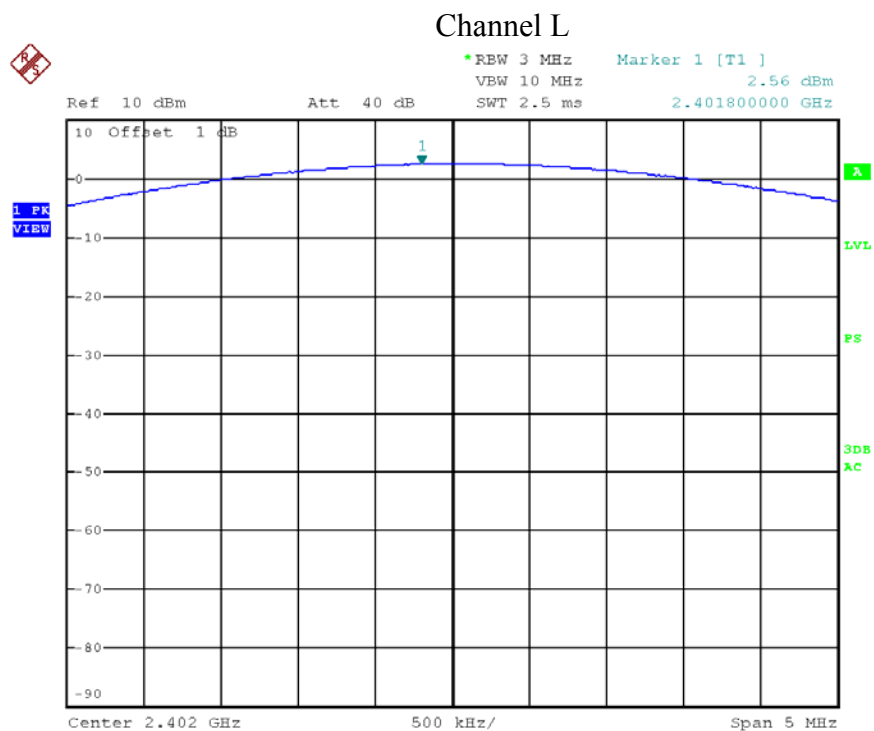


Date: 7.MAY.2013 17:20:47

Channel M

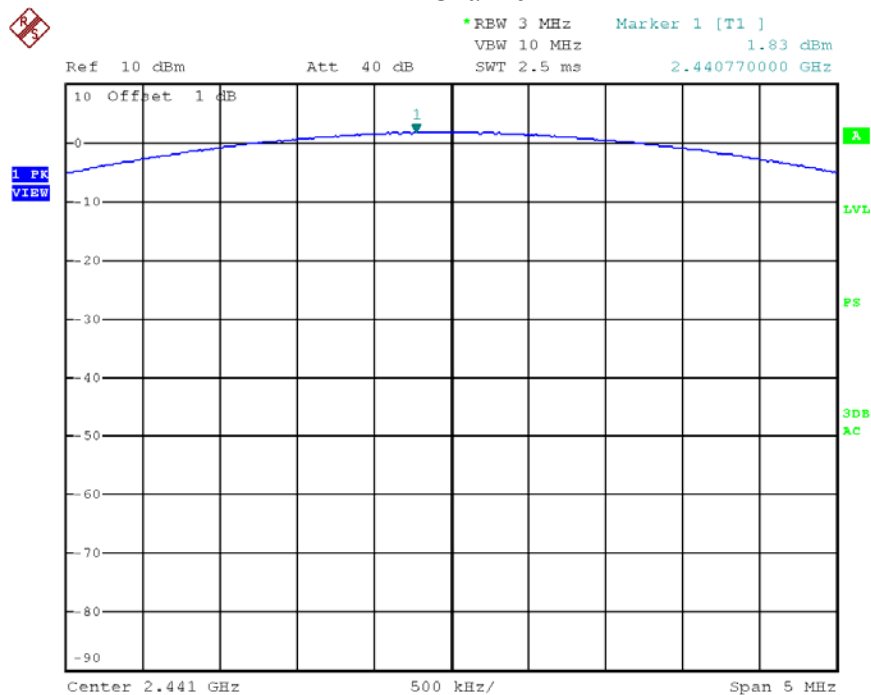

Date: 7.MAY.2013 17:21:11

Channel H

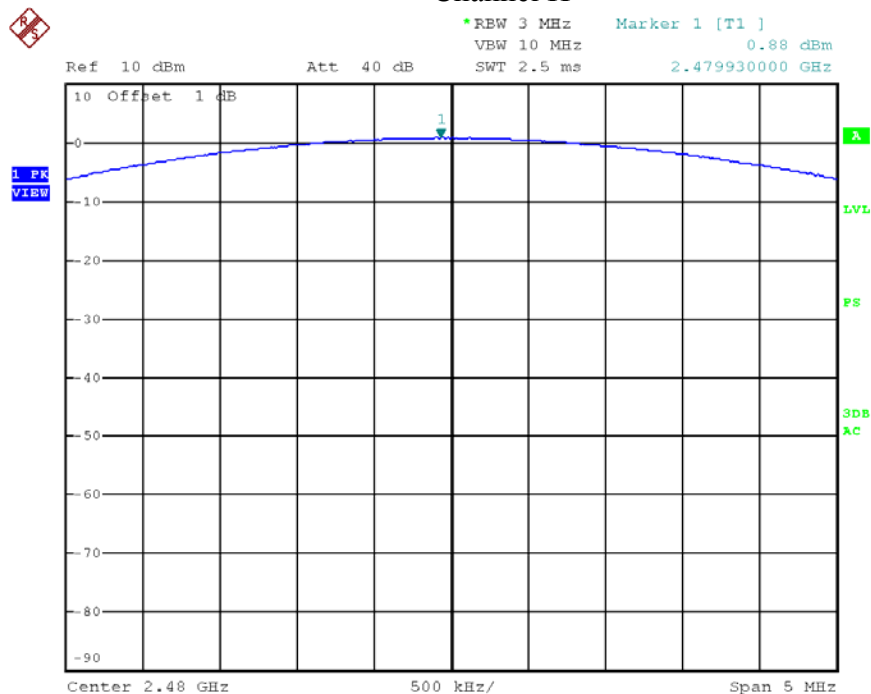

Date: 7.MAY.2013 17:21:38

6. Radiated Spurious Emissions


Test result: **PASS**

6.1 Test limit

The radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

6.2 Test Configuration

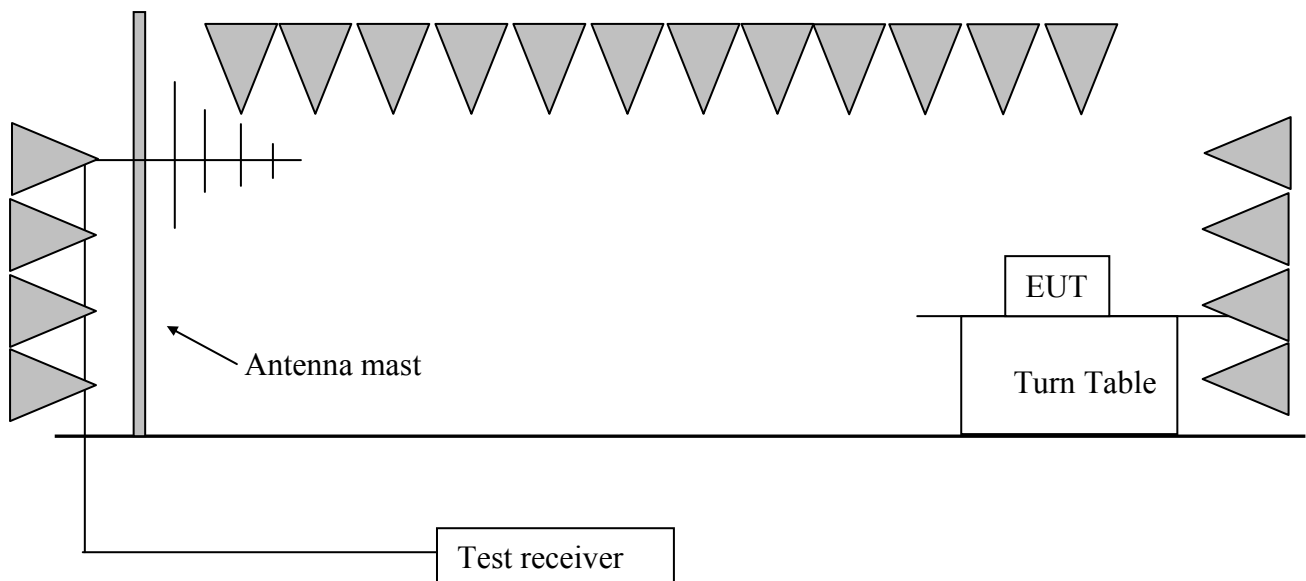

6.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:

RBW = 100kHz, VBW = 300kHz (30MHz~1GHz)

RBW = 1MHz, VBW = 3MHz (>1GHz for PK);

RBW = 1MHz, VBW = 10Hz (>1GHz for AV);

If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”.

6.4 Test protocol

Mode GFSK

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	2402.33	34.10	96.50	Fundamental	/	PK
	V	113.59	15.10	31.50	43.50	12.00	PK
	V	480.98	19.70	37.50	46.00	8.50	PK
	H	1000.00	24.70	52.20	54.00	1.80	PK
	V	2389.24	34.10	50.10	54.00	3.90	PK
	H	3196.39	-5.60	42.70	54.00	11.30	PK
	H	4795.59	-0.80	56.20	74.00	17.80	PK
	H	4804.00	-0.80	33.10	54.00	20.90	AV
	H	8274.55	8.30	43.40	54.00	10.60	PK
M	V	2441.18	34.30	97.00	Fundamental	/	PK
	V	113.59	15.10	31.50	43.50	12.00	PK
	V	480.98	19.70	37.50	46.00	8.50	PK
	H	1000.00	24.70	52.20	54.00	1.80	PK
	H	3252.51	-5.40	43.60	54.00	10.40	PK
	H	4879.76	-0.50	55.30	74.00	18.70	PK
	H	4880.51	-0.50	32.60	54.00	21.40	AV
	H	8484.97	8.50	42.70	54.00	11.30	PK
H	V	2480.16	34.50	97.60	Fundamental	/	PK
	V	113.59	15.10	31.50	43.50	12.00	PK
	V	480.98	19.70	37.50	46.00	8.50	PK
	H	1000.00	24.70	52.20	54.00	1.80	PK
	V	2485.87	34.50	50.10	54.00	3.90	PK
	H	3294.58	-5.20	43.30	54.00	10.70	PK
	H	4963.93	-0.20	55.80	74.00	18.20	PK
	H	4960.37	-0.20	32.60	54.00	21.40	AV
	H	8288.58	8.30	43.20	54.00	10.80	PK

Mode 8DQPSK


CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	2402.67	34.10	95.80	Fundamental	/	PK
	V	113.59	15.10	31.50	43.50	12.00	PK
	V	480.98	19.70	37.50	46.00	8.50	PK
	H	1000.00	24.70	52.20	54.00	1.80	PK
	V	2389.66	34.10	50.00	54.00	4.00	PK
	H	3196.42	-5.60	42.50	54.00	11.50	PK
	H	4798.51	-0.80	56.10	74.00	17.90	PK
	H	4804.20	-0.80	32.90	54.00	21.10	AV
	H	8274.55	8.30	43.50	54.00	10.50	PK
M	V	2441.78	34.30	96.30	Fundamental	/	PK
	V	113.59	15.10	31.50	43.50	12.00	PK
	V	480.98	19.70	37.50	46.00	8.50	PK
	H	1000.00	24.70	52.20	54.00	1.80	PK
	H	3252.25	-5.40	43.30	54.00	10.70	PK
	H	4881.04	-0.50	55.50	74.00	18.50	PK
	H	4880.30	-0.50	32.70	54.00	21.30	AV
	H	8484.97	8.50	42.60	54.00	11.40	PK
H	V	2479.83	34.50	97.00	Fundamental	/	PK
	V	113.59	15.10	31.50	43.50	12.00	PK
	V	480.98	19.70	37.50	46.00	8.50	PK
	H	1000.00	24.70	52.20	54.00	1.80	PK
	V	2485.34	34.50	50.30	54.00	3.60	PK
	H	3294.49	-5.20	43.40	54.00	10.60	PK
	H	4962.11	-0.20	55.60	74.00	18.80	PK
	H	4960.96	-0.20	32.70	54.00	21.30	AV
	H	8288.27	8.30	43.40	54.00	10.60	PK




- Remark:
1. For fundamental emission, no amplifier is employed.
 2. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed)
 3. Corrected Reading = Original Receiver Reading + Correct Factor
 4. Margin = limit – Corrected Reading
 5. If the PK reading is lower than AV limit, the AV test can be elided.
 6. The emission was conducted from 30MHz to 25GHz.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV.
Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$; Corrected Reading =
 $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$
Assuming limit = 54dBuV/m, Corrected Reading = 10.20dBuV/m, then Margin =
 $54 - 10.20 = 43.80\text{dBuV/m}$


Horizontal, powered by Kingwall AS100-050-AD120

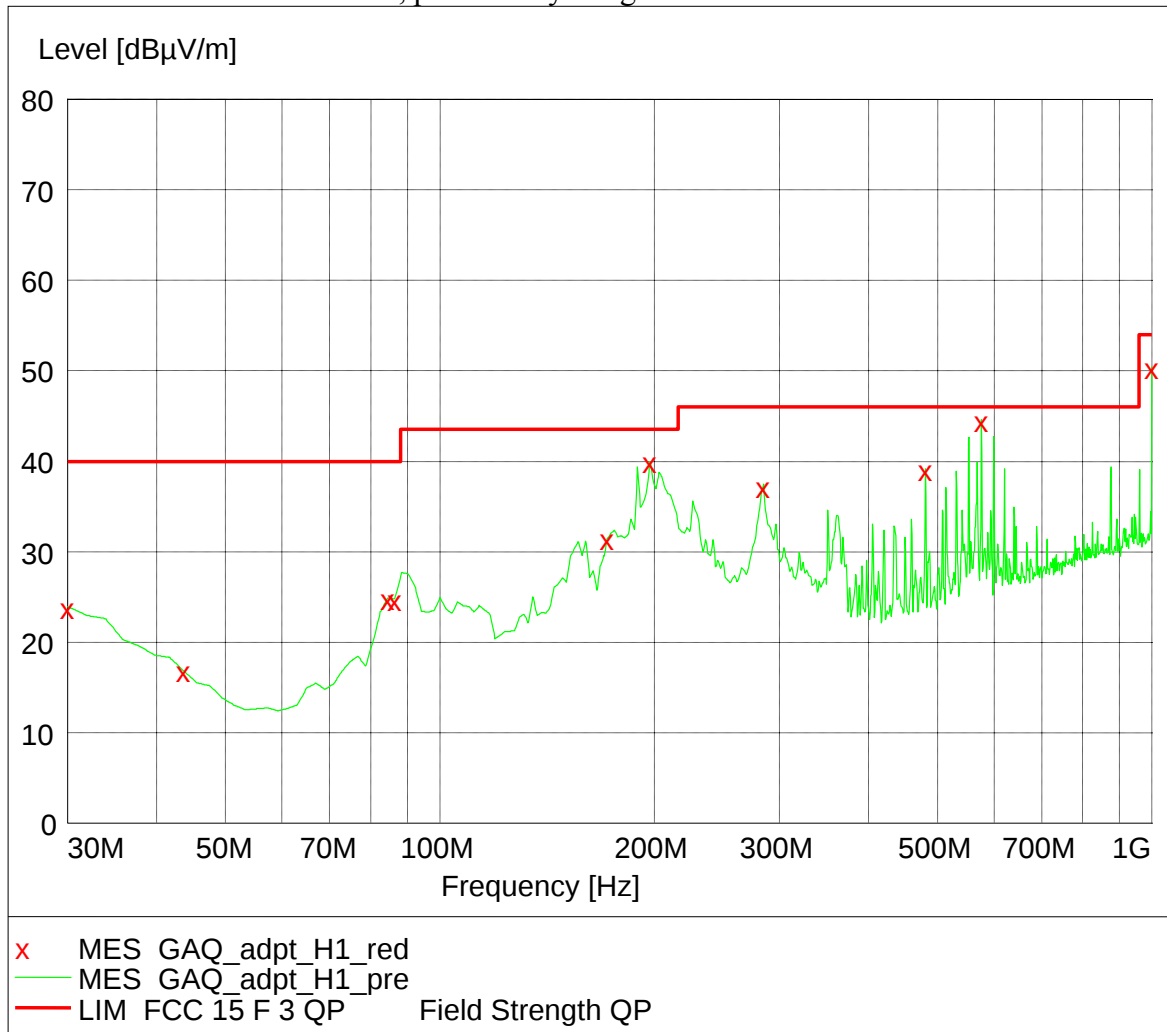


Vertical, powered by Kingwall AS100-050-AD120

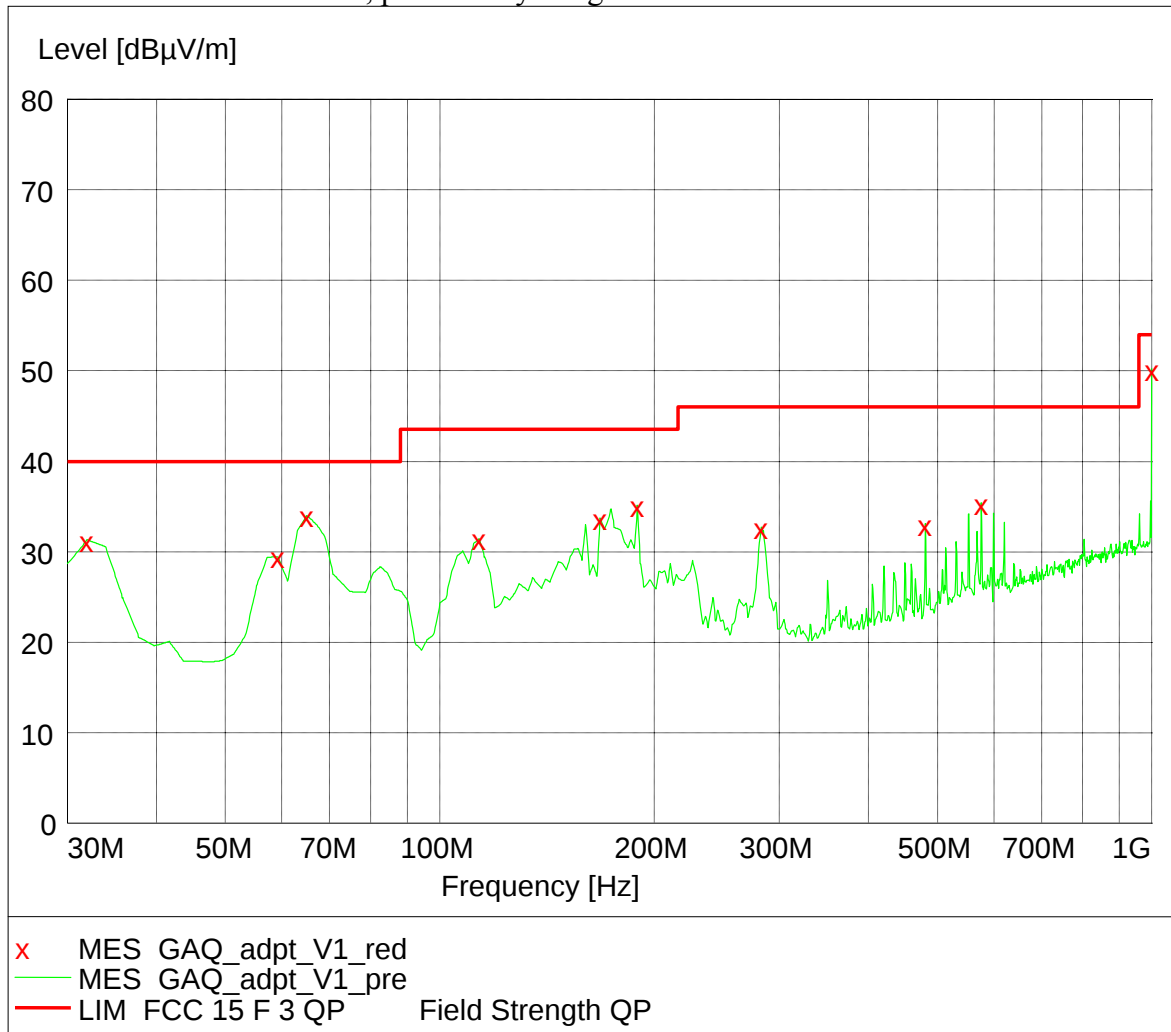

Horizontal, powered by Phihong PSAC05R-050

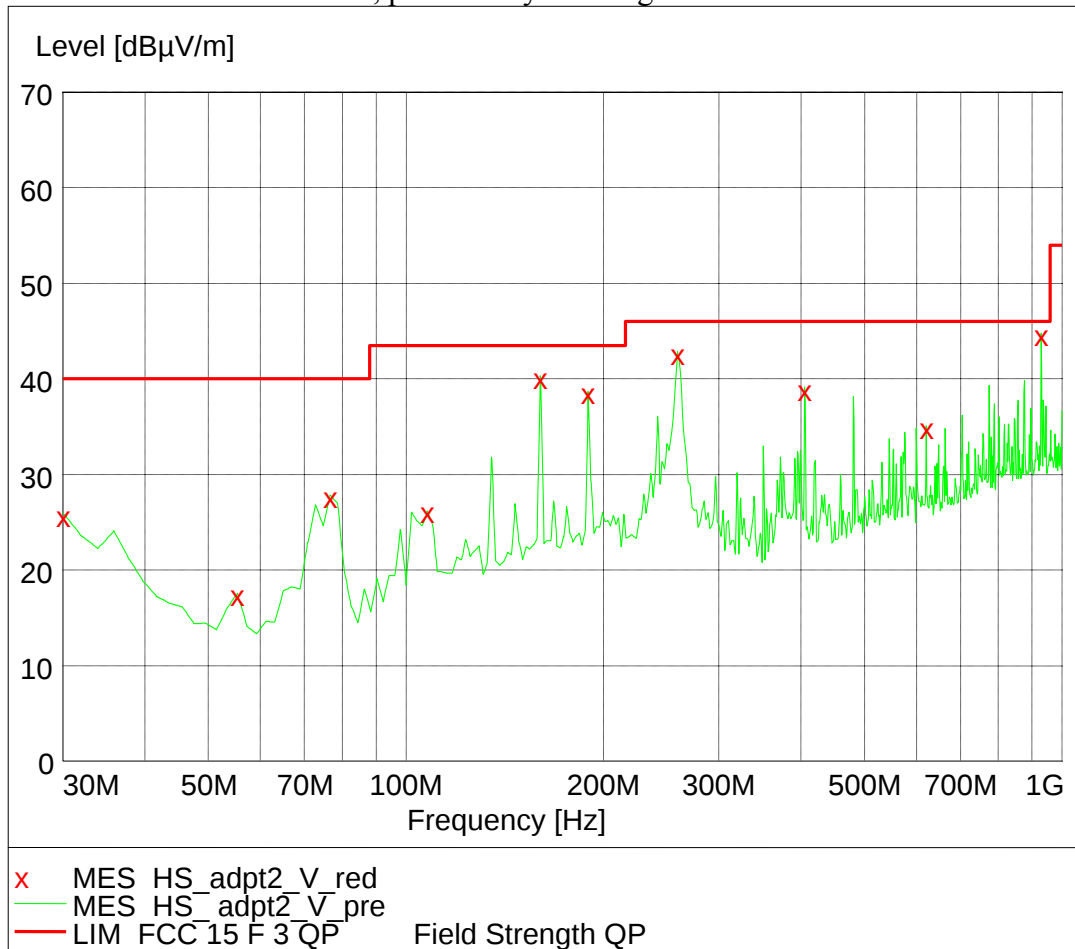

Vertical, powered by Phihong PSAC05R-050

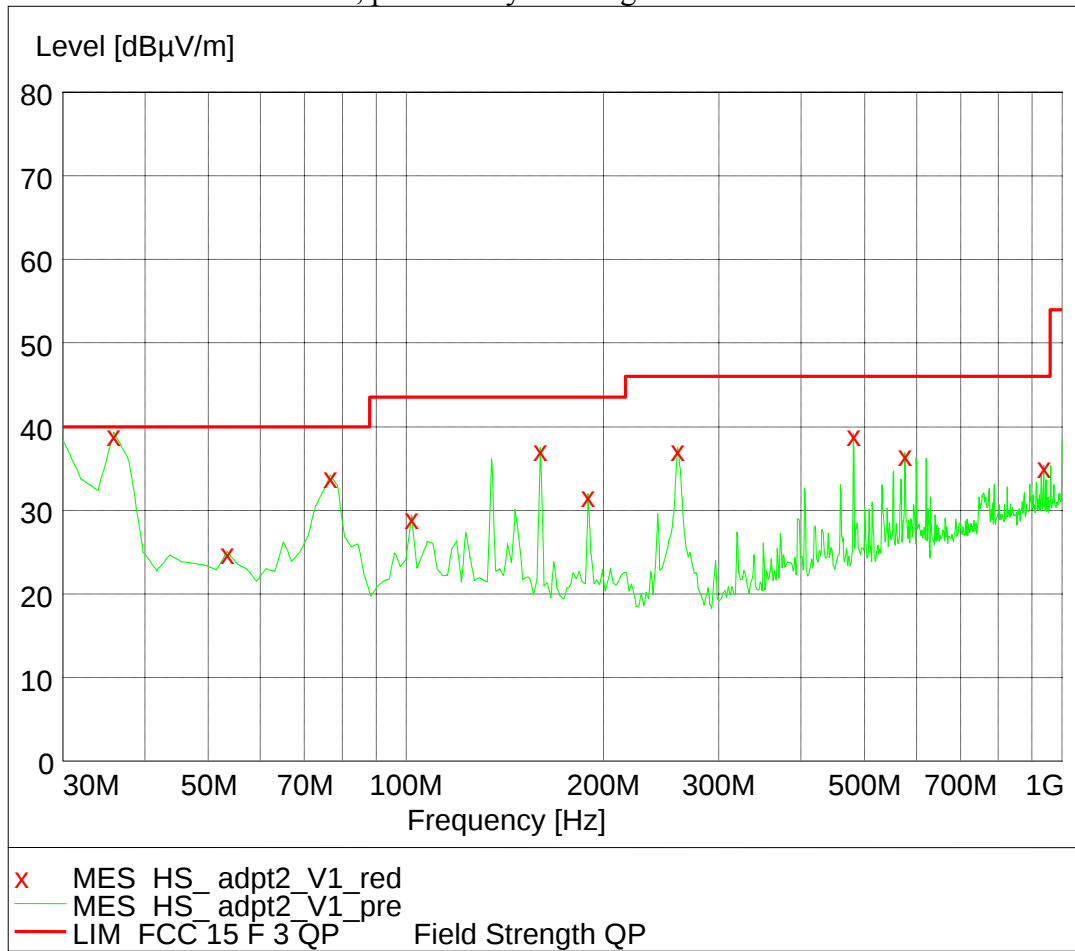


7. Conducted Spurious Emissions & Band Edge

Test result: PASS

7.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.2 Test Configuration

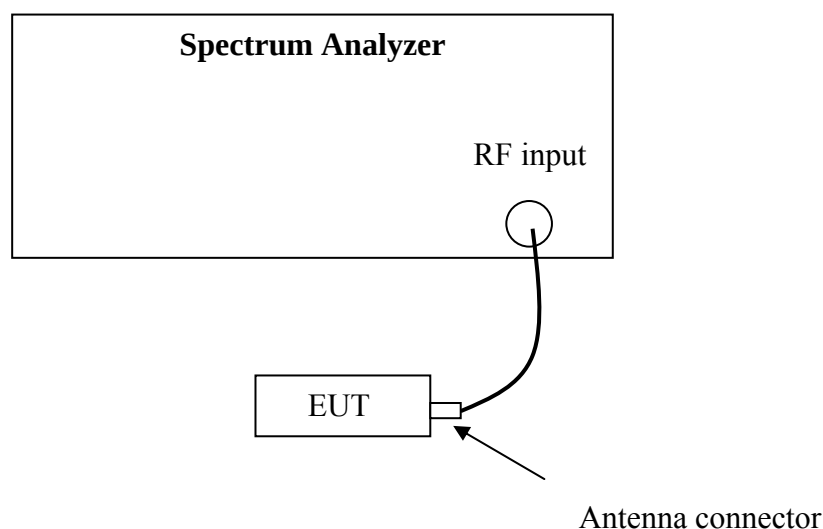

7.3 Test procedure and test setup

The Conducted Spurious Emissions per FCC § 15.247(d) is measured using the Spectrum Analyzer with Span wide enough capturing all spurious from the lowest emission frequency of the EUT up to 10th harmonics, RBW = 100kHz, VBW $\geq$ RBW, Sweep = auto, Detector = peak, Trace = max hold.

The test was performed at 3 channels (lowest, middle and highest channel).

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

7.4 Test protocol

Model	CH	Max reading among band (dBm)	The most restrict Attenuation outside band (dB)	Limit (dB)
GFSK	L	-0.10	36.10	≥20
	M	-0.46	35.70	
	H	-0.72	35.30	

Note: The test was performed from 9kHz to 26GHz and the worst data is listed here.

Model	CH	Max reading among band (dBm)	The most restrict Attenuation outside band (dB)	Limit (dB)
8DQPSK	L	-0.32	33.10	≥20
	M	-0.86	34.60	
	H	-1.14	34.30	

Note: The test was performed from 9kHz to 26GHz and the worst data is listed here.


8. Power line conducted emission

Test result: Pass

8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50
* Decreases with the logarithm of the frequency.		

8.2 Test configuration

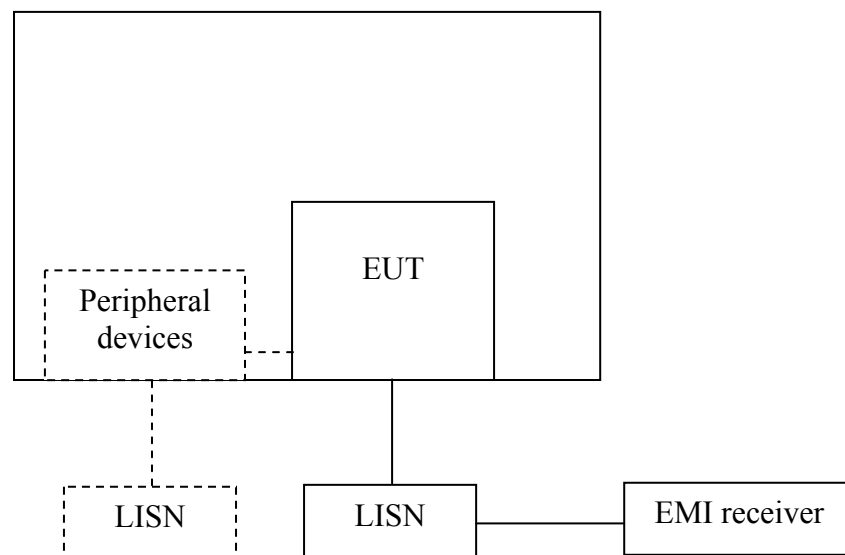

☒ For table top equipment, wooden support is 0.8m height table

☐ For floor standing equipment, wooden support is 0.1m height rack.


8.3 Test procedure and test set up

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a $50\Omega/50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega/50\mu\text{H}$ coupling impedance with 50Ω termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement. The bandwidth of the test receiver is set at 9 kHz.


8.4 Test protocol

Kingwall AS100-050-AD120

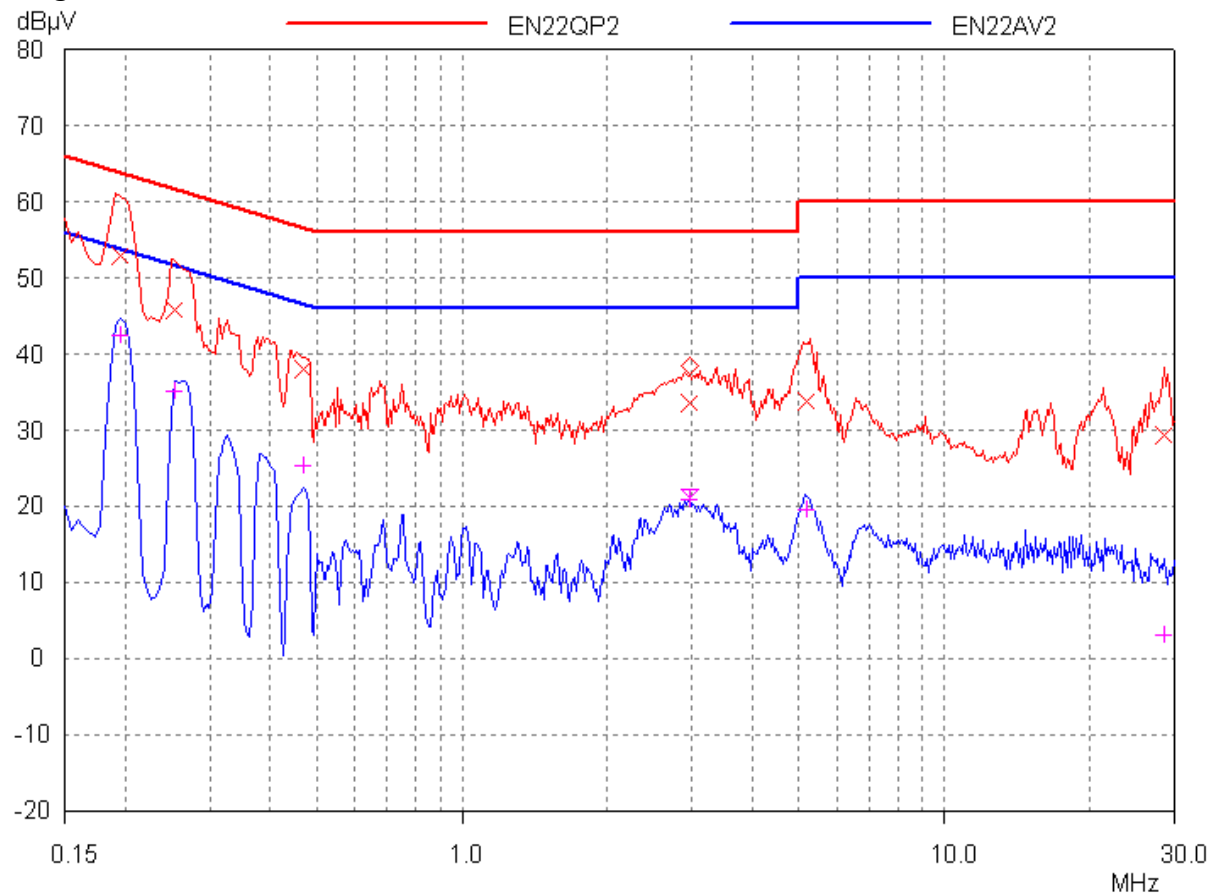

Frequency	Correct Factor (dB)	Corrected Reading (dBuV)		Limit (dBuV)		Margin (dB)	
		QP	AV	QP	AV	QP	AV
0.20 (N)	3.00	52.85	42.44	63.82	53.82	10.97	11.38
0.25 (N)	3.00	45.85	35.22	61.64	51.64	15.79	16.42
0.47 (N)	3.00	38.27	25.41	56.52	46.52	18.25	21.11
2.93 (L)	3.00	33.50	20.88	56.00	46.00	22.50	25.12
5.15 (N)	3.00	33.70	19.59	60.00	50.00	26.30	30.41
28.46 (L)	3.00	23.33	3.07	60.00	50.00	30.67	46.93
Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB). 2. Margin (dB) = Limit - Corrected Reading.							

Phihong PSAC05R-050

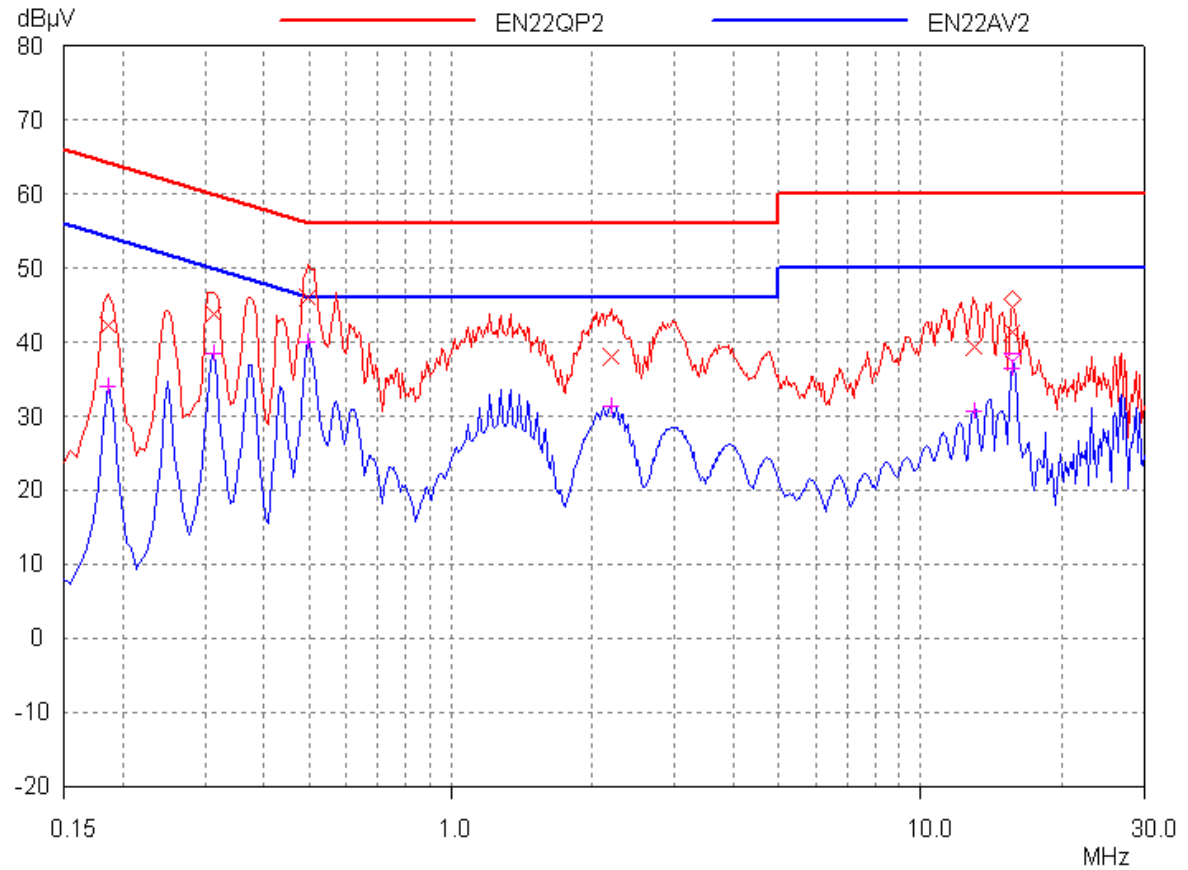

Frequency	Correct Factor (dB)	Corrected Reading (dBuV)		Limit (dBuV)		Margin (dB)	
		QP	AV	QP	AV	QP	AV
0.19 (L)	3.00	42.15	33.98	64.21	54.21	22.06	20.23
0.31 (N)	3.00	43.86	38.55	59.92	49.92	16.06	11.37
0.50 (L)	3.00	46.12	40.11	56.06	46.06	9.94	5.95
2.18 (L)	3.00	38.09	31.29	56.00	46.00	17.91	14.71
13.00 (L)	3.00	39.29	30.59	60.00	50.00	20.71	19.41
15.67 (L)	3.00	41.31	36.39	60.00	50.00	18.69	13.61
Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB). 2. Margin (dB) = Limit - Corrected Reading.							


9. Number of Hopping Frequencies

Test result: Pass

9.1 Limit

Number of Hopping Frequencies in the 2400-2483.5 MHz band shall use at least 15 channels.

9.2 Test Configuration

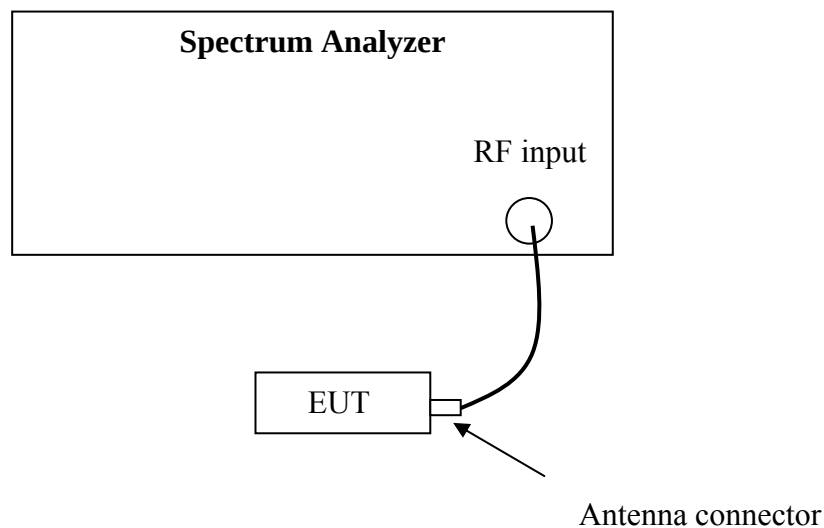


9.3 Test procedure and test setup

The channel number per FCC §15.247(a)(1)(iii) is measured using the Spectrum Analyzer with RBW=100kHz, VBW $\geq$ RBW, Sweep = auto, Detector = peak, Trace = max hold. The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).

9.4 Test protocol

Channel Number	Limit
79	≥ 15

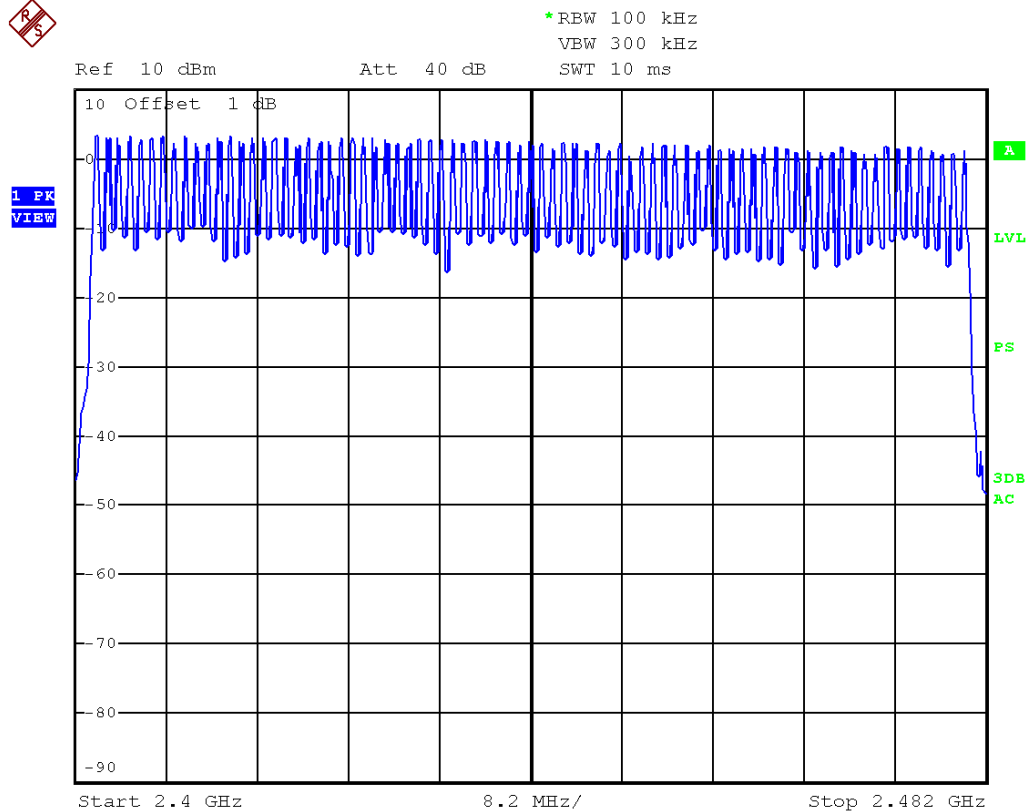

Date: 7.MAY.2013 17:26:46


10. Dwell Time

Test result: Pass

10.1 Limit

The dwell time on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

10.2 Test Configuration

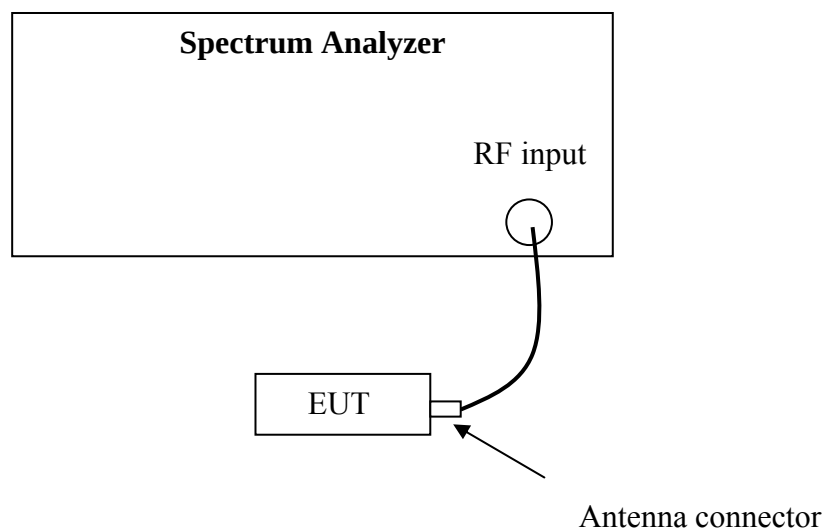

10.3 Test procedure and test setup

Dwell time per FCC § 15.247(a)(1)(iii) is measured using the Spectrum Analyzer with Span = 0, RBW=1MHz, VBW $\geq$ RBW, Sweep can capture the entire dwell time, Detector = peak, Trace = max hold.

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).


10.4 Test protocol

Packet	Occupancy time for single hop (ms) O	CH	Real observed period (s) P	Hops among Observed period I	Dwell time (s) T	Limit (s)
DH1	0.42	L	3.16	32	0.13	≤0.4
		M	3.16	32	0.13	
		H	3.16	32	0.13	
DH3	1.67	L	3.16	16	0.27	
		M	3.16	16	0.27	
		H	3.16	16	0.27	
DH5	2.94	L	3.16	11	0.32	
		M	3.16	11	0.32	
		H	3.16	11	0.32	

Remark: 1. There are 79 channels in all. So the complete observed period $P = 0.4 * 79 = 31.6$ s.


2. Average time of occupancy $T = O * I * 31.6 / P$

Single pulse of DH1

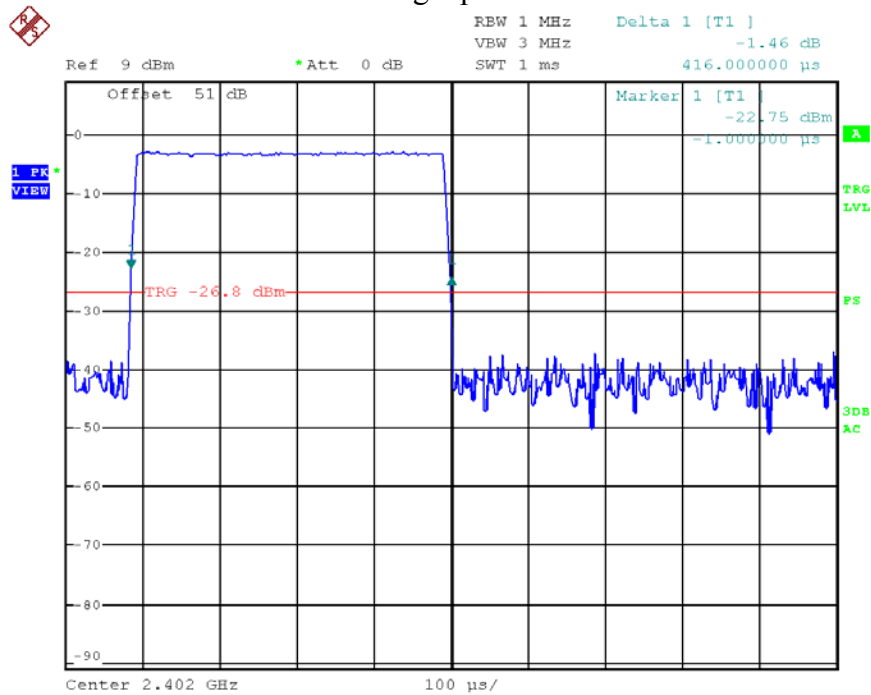


Date: 17.APR.2013 16:20:58

Single pulse of DH3

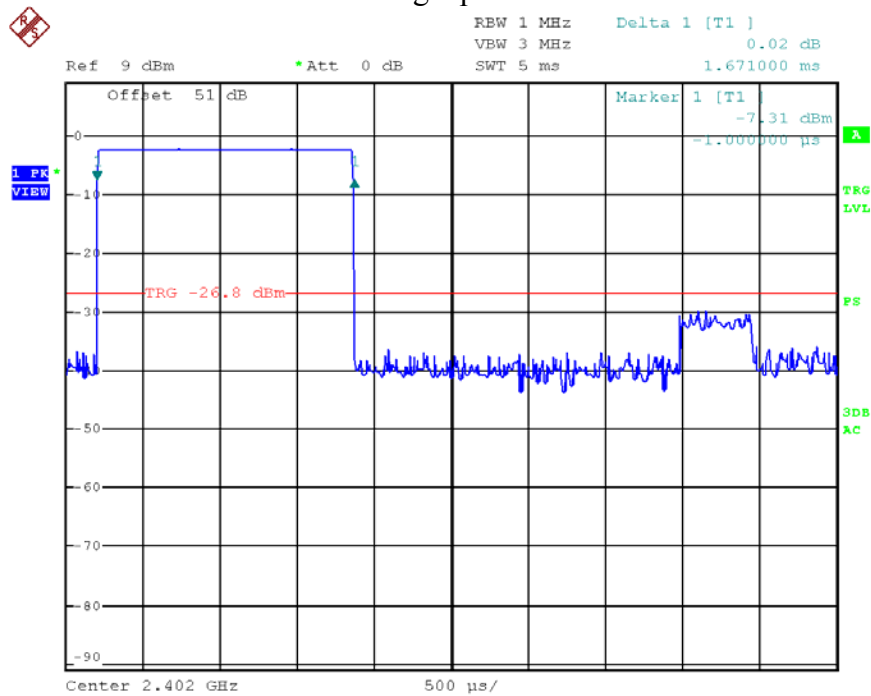

Date: 17.APR.2013 16:22:52

Single pulse of DH5

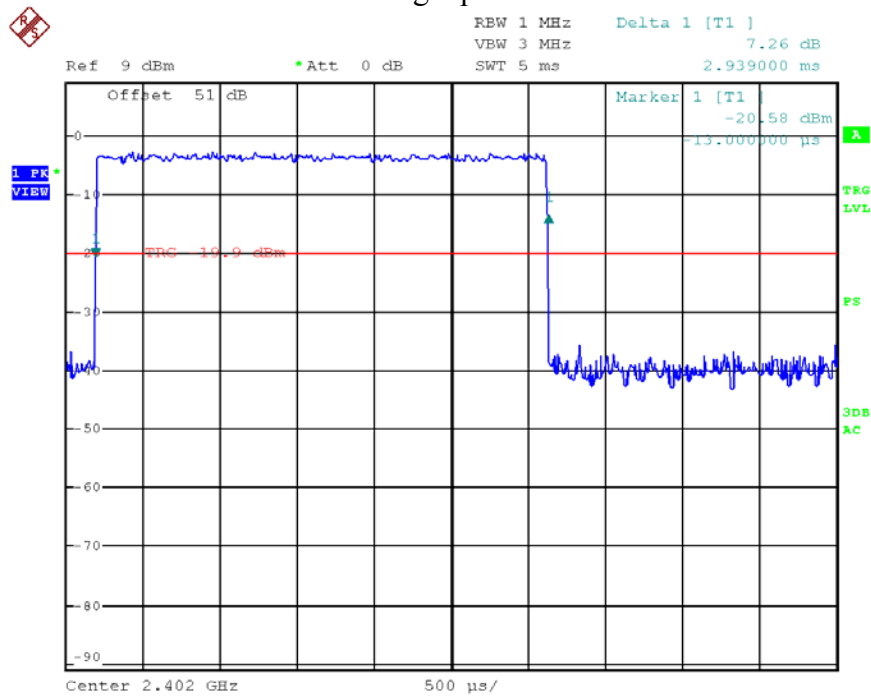

Date: 17.APR.2013 16:26:40


11. Occupied Bandwidth

Test Status: Tested

11.1 Test limit

None

11.2 Test Configuration

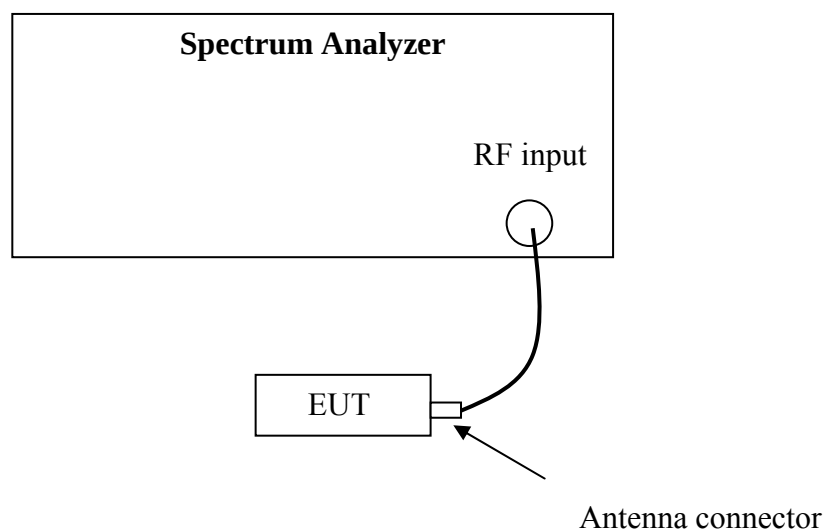


11.3 Test procedure and test setup

The occupied bandwidth per RSS-Gen Issue 3 Clause 4.6.1 was measured using the Spectrum Analyzer with the RBW close to 1% of the selected span, VBW = 3 * RBW Detector = Sample, Sweep = Auto.

11.4 Test protocol


Temperature : 25°C
Relative Humidity : 55 %

Model	Channel	Occupied Bandwidth (kHz)
GFSK	L	840.00
	M	834.00
	H	828.00

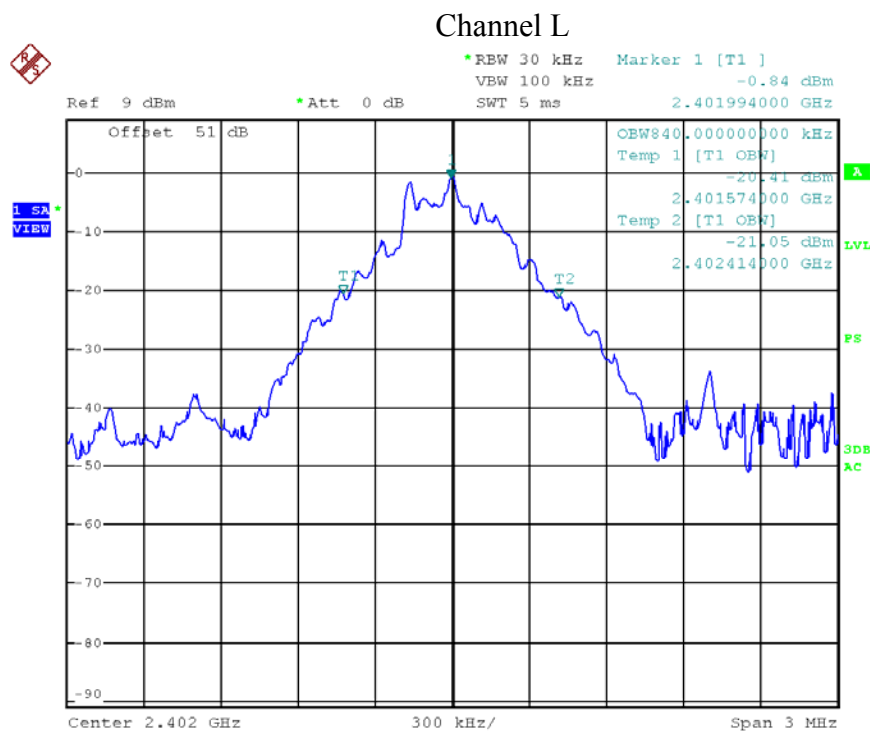


Date: 17.APR.2013 16:15:04

Channel M

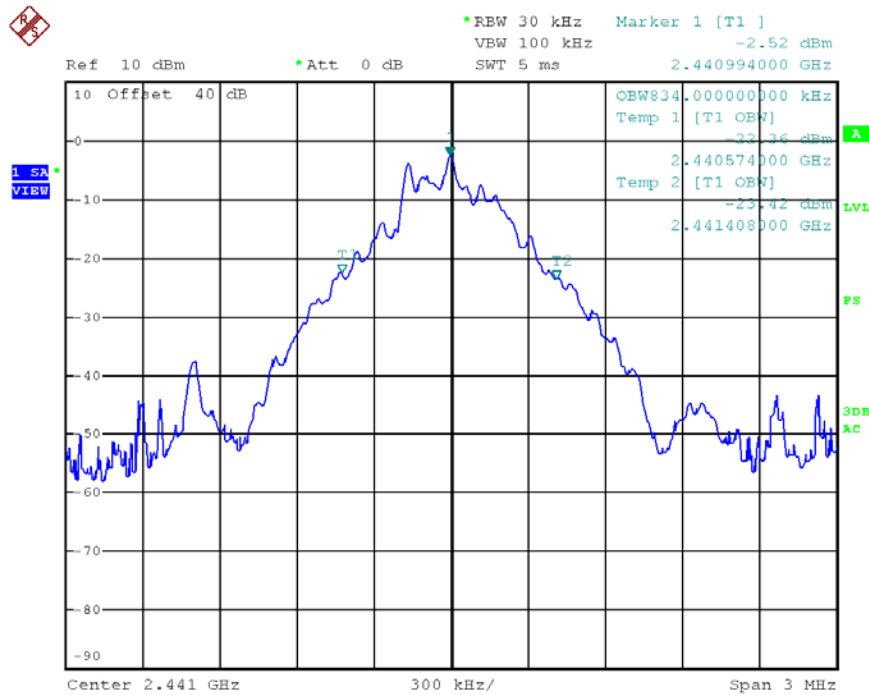


Date: 17.APR.2013 16:33:46

Channel H

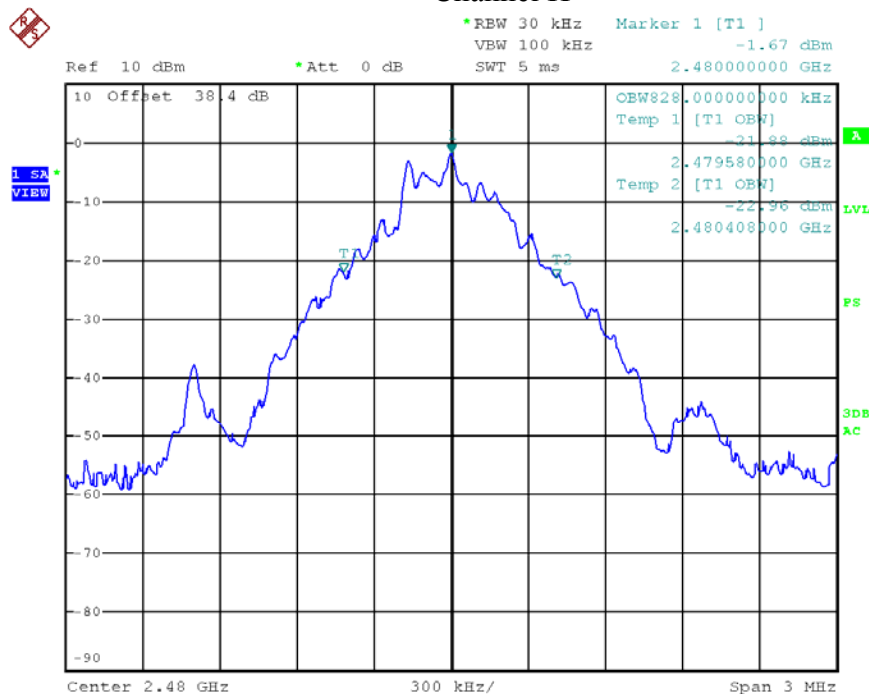


Date: 17.APR.2013 16:49:46

Model	Channel	Occupied Bandwidth (kHz)
8DQPSK	L	1176.00
	M	1176.00
	H	1188.00

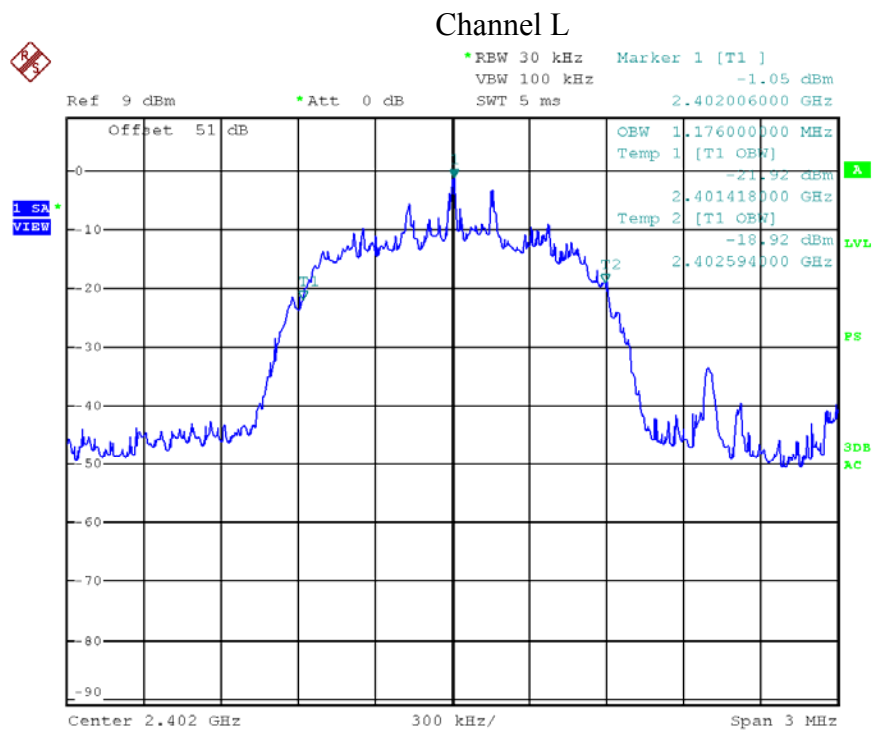


Date: 17.APR.2013 16:16:56

Channel M

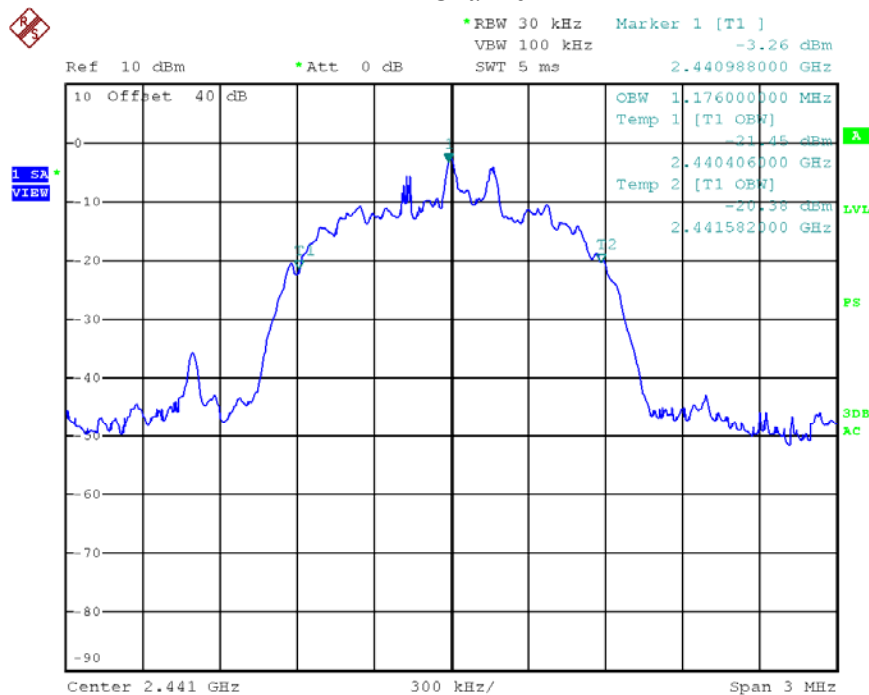

Date: 17.APR.2013 16:34:42

Channel H

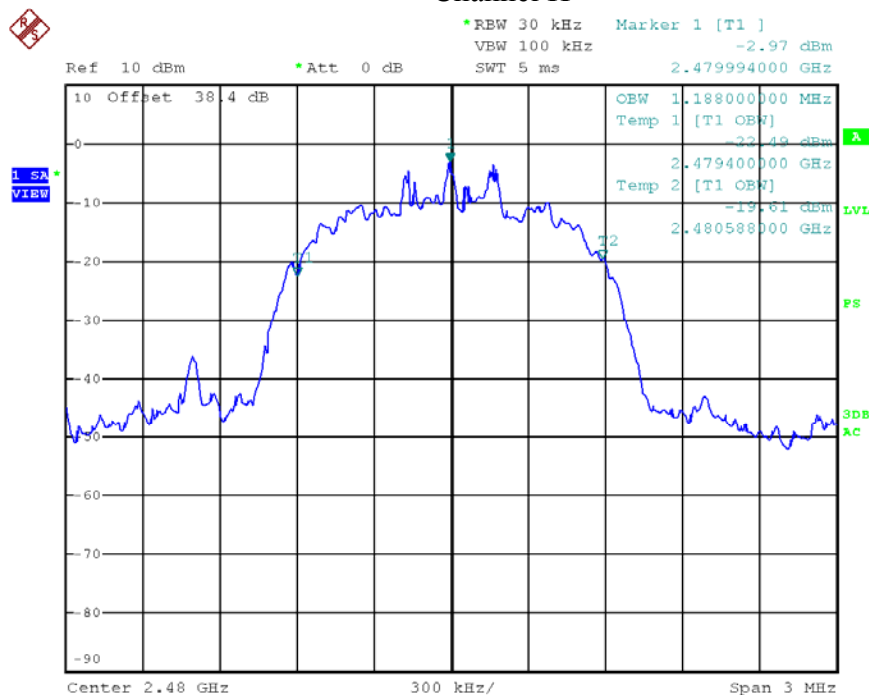

Date: 17.APR.2013 16:49:10

12. Spurious emission for receiver

Test result: NA

12.1 Test limit

The spurious emission shall test through 3 times tuneable or local oscillator frequency whichever is the higher, without exceeding 40 GHz.

☐ If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2nW per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5nW above 1 GHz.

☐ If a radiated measurement is made, all spurious emissions shall comply with the limits of Table below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

12.2 Test Configuration

Please refer to clause 6.2

12.3 Test procedure and test setup

Please refer to clause 6.3.

12.4 Test protocol

Polarization	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed)
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = limit – Corrected Reading

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Original Receiver Reading = 10dBuV.
 Then Correct Factor = 30.20 + 2.00 = 32.20dB/m; Corrected Reading = 10dBuV + 32.20dB/m = 42.20dBuV/m
 Assuming limit = 54dBuV/m, Corrected Reading = 42.20dBuV/m, then Margin = 54 - 42.20 = 11.80dBuV/m