

Coolpad watch CP303C UMTS Band2 _CH9262_front of face 10mm

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band: Band 2; Frequency: 1852.4 MHz;

Medium parameters used: $f = 1852$ MHz; $\sigma = 1.516$ S/m; $\epsilon_r = 40.081$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(8.38, 8.38, 8.38); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.49 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.63 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.686 W/kg

Maximum value of SAR (measured) = 1.69 W/kg

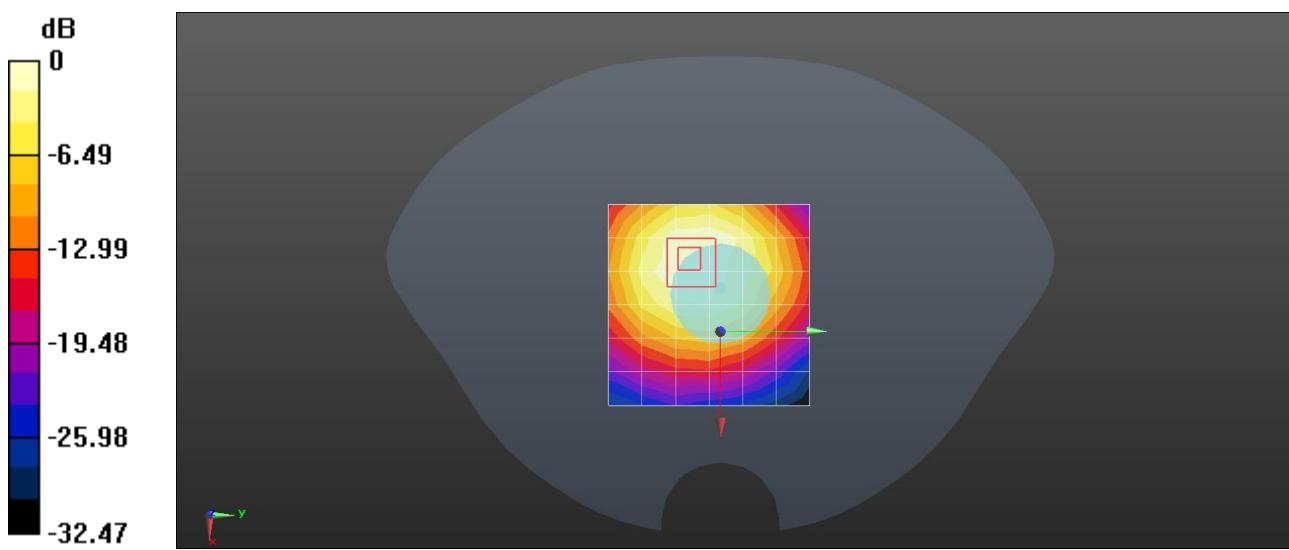

Coolpad watch CP303C UMTS Band5 _CH4183_front of face 10mm

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band: Band 5; Frequency: 836.6 MHz;

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.478$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(10.19, 10.19, 10.19); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.281 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.786 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.389 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.296 W/kg

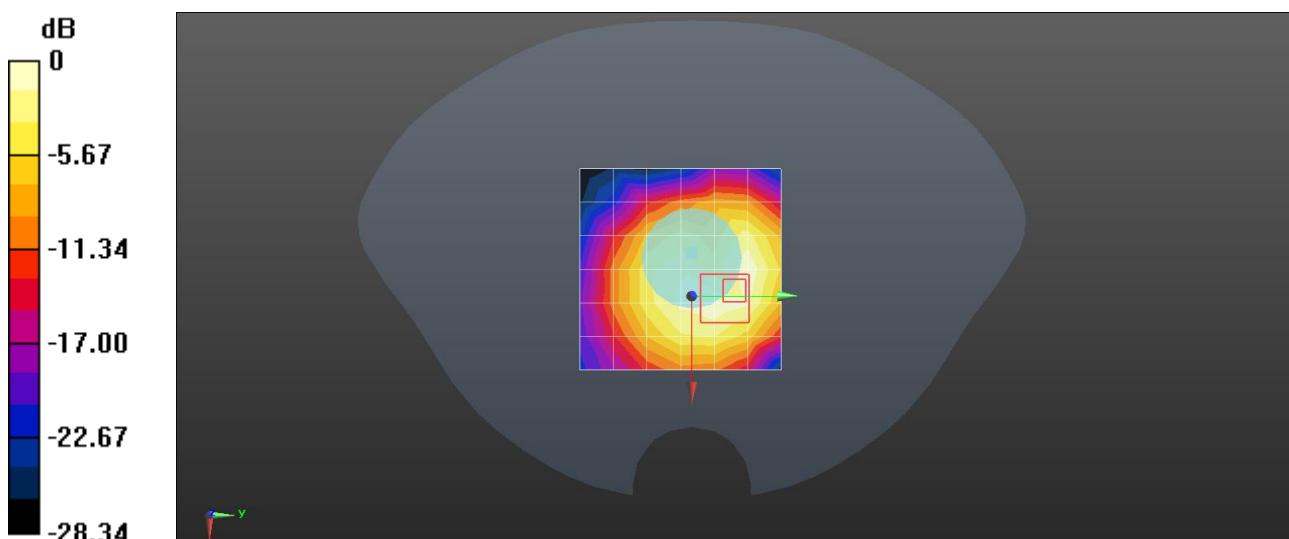

Coolpad watch CP303C LTE B25 20M 1RB_0 Offset _CH26590_Front of face 10mm

Communication System: UID 0, LTE (0); Communication System Band: Band 25; Frequency: 1905 MHz;

Medium parameters used: $f = 1905$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 41.317$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(8.38, 8.38, 8.38); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.45 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.74 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 3.49 W/kg

SAR(1 g) = 1.26 W/kg; SAR(10 g) = 0.610 W/kg

Maximum value of SAR (measured) = 1.69 W/kg

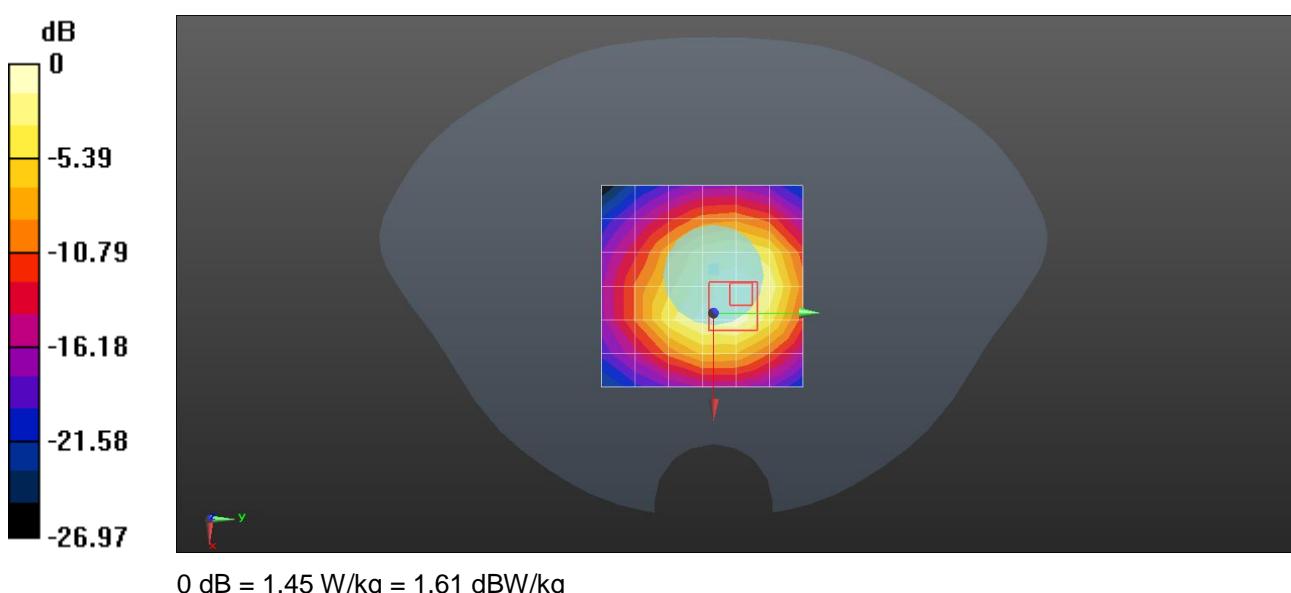

Coolpad watch CP303C LTE B66 20M 1RB_49 Offset _CH132572_front of face 10mm

Communication System: UID 0, LTE (0); Communication System Band: Band 66; Frequency: 1770 MHz;

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 40.248$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(8.34, 8.34, 8.34); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.48 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 20.18 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.703 W/kg

Maximum value of SAR (measured) = 1.65 W/kg

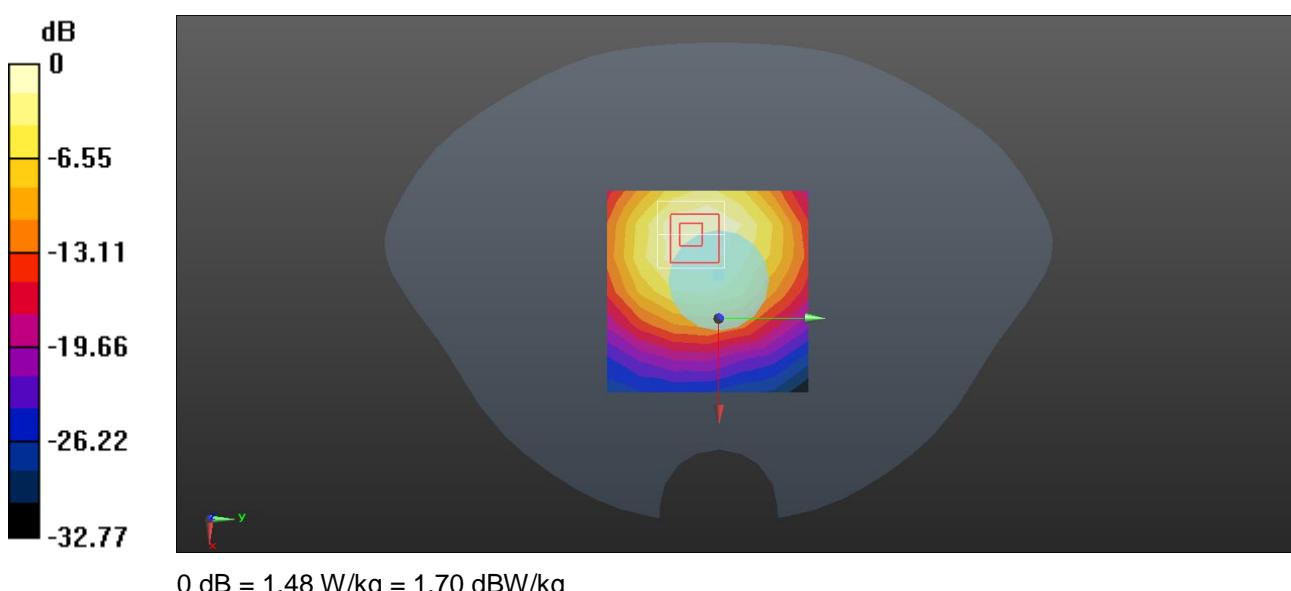

Coolpad watch CP303C LTE B5 10M 1RB_24 Offset _CH20525 _Front Surface 10mm

Communication System: UID 0, LTE (0); Communication System Band: Band 5; Frequency: 836.5 MHz;

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.479$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(10.19, 10.19, 10.19); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.198 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.823 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.301 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.235 W/kg

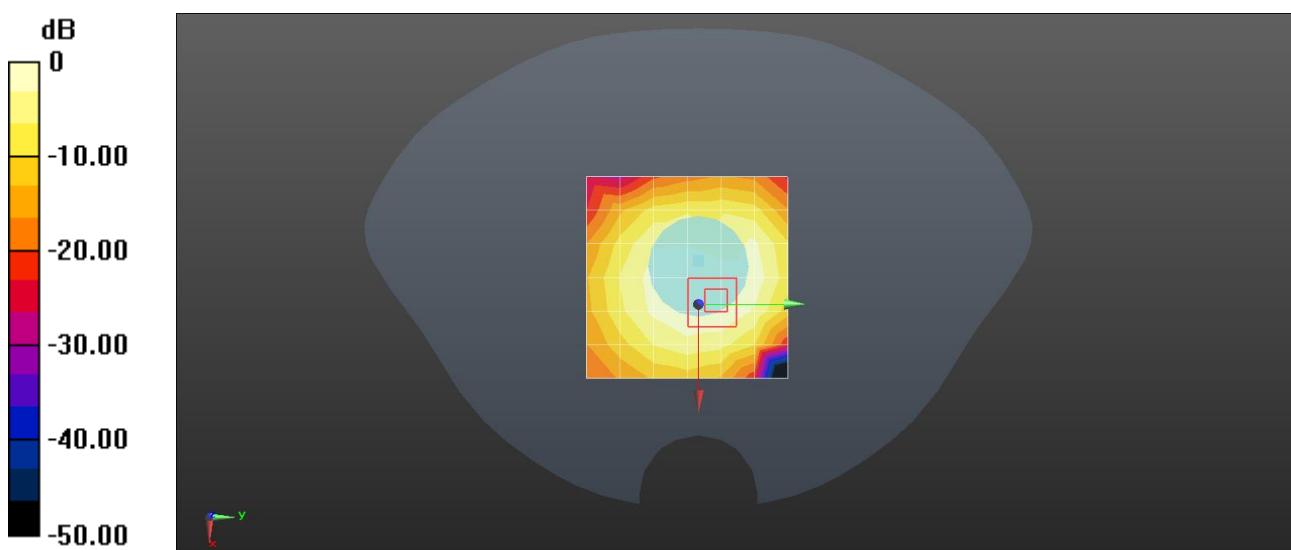

Coolpad watch CP303C LTE B12 10M 1RB_24 Offset _CH23130 _Front of face 10mm

Communication System: UID 0, LTE (0); Communication System Band: Band 12; Frequency: 711 MHz;

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.861$ S/m; $\epsilon_r = 42.398$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(10.65, 10.65, 10.65); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.205 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.075 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.271 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.213 W/kg

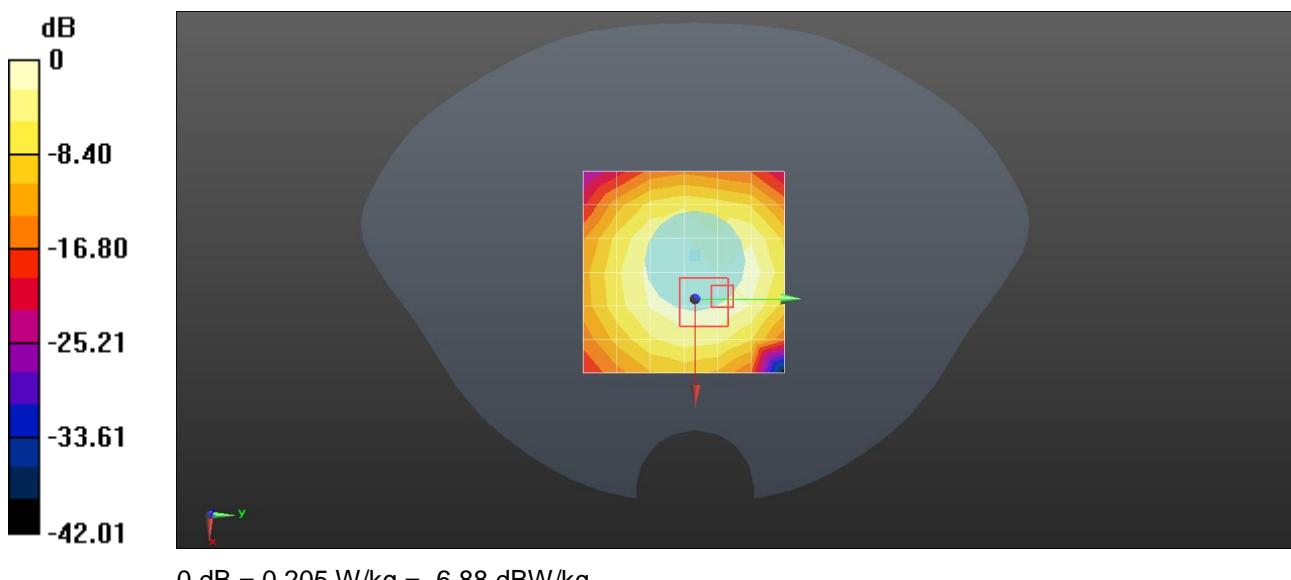

Coolpad watch CP303C LTE B13 10M 1RB_24 Offset _CH23230 _Front Surface 10mm

Communication System: UID 0, LTE (0); Communication System Band: Band 13; Frequency: 782 MHz;

Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.412$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(10.65, 10.65, 10.65); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.132 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.017 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.176 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.138 W/kg

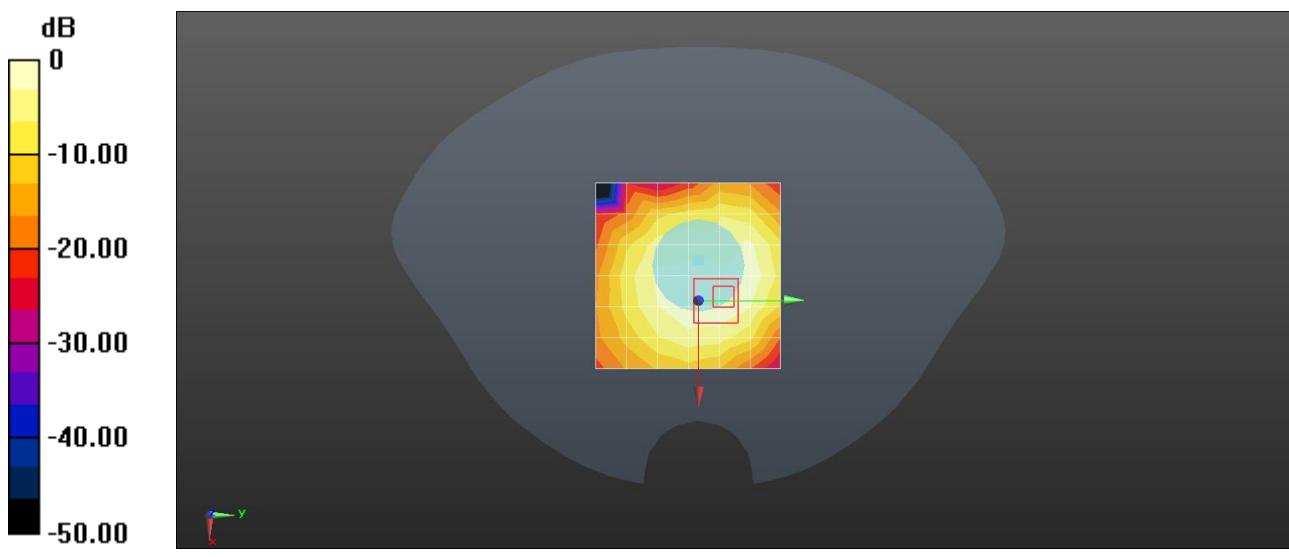

Coolpad watch CP303C LTE Band 26 15M 36RB_35Offset _CH26765 _front of face 10mm

Communication System: UID 0, LTE (0); Communication System Band: LTE Band 26; Frequency: 821.5 MHz;

Medium parameters used (extrapolated): $f = 821.5$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 41.661$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(10.19, 10.19, 10.19); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.346 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.03 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.435 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.354 W/kg

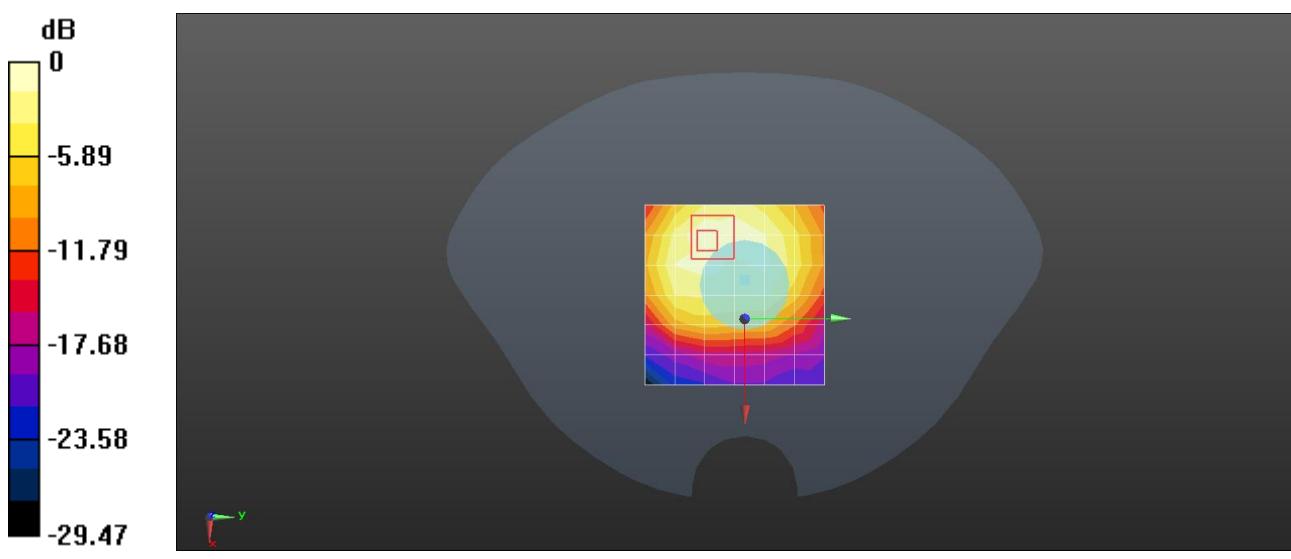

Coolpad watch CP303C LTE B41 20M 1RB_49 Offset _CH41490 _front of face 10mm

Communication System: UID 0, TDD-LTE (0); Communication System Band: Band 41; Frequency: 2679.9 MHz;

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.094$ S/m; $\epsilon_r = 37.546$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.66, 7.66, 7.66); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x8x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.35 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.96 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.708 W/kg; SAR(10 g) = 0.319 W/kg

Maximum value of SAR (measured) = 1.39 W/kg

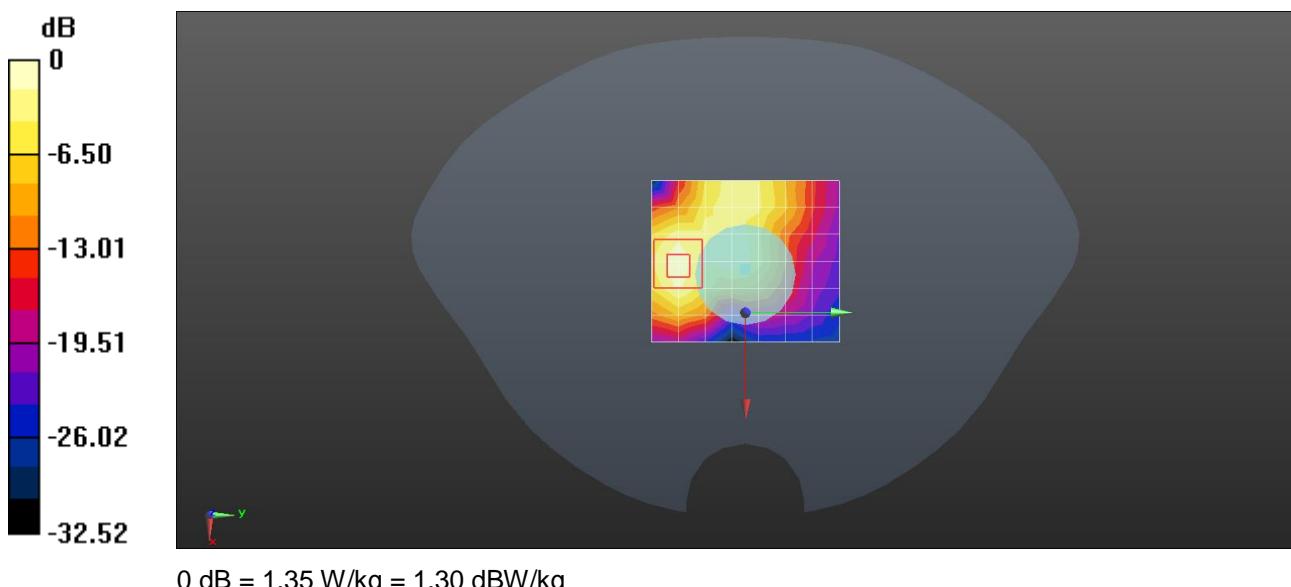

Coolpad watch CP303C LTE B71 20M 1RB_49 Offset _CH 133297 _Front Surface 10mm

Communication System: UID 0, LTE (0); Communication System Band: Band 71; Frequency: 680.5 MHz;

Medium parameters used (extrapolated): $f = 680.5$ MHz; $\sigma = 0.83$ S/m; $\epsilon_r = 42.819$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(10.65, 10.65, 10.65); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.124 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.201 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.133 W/kg

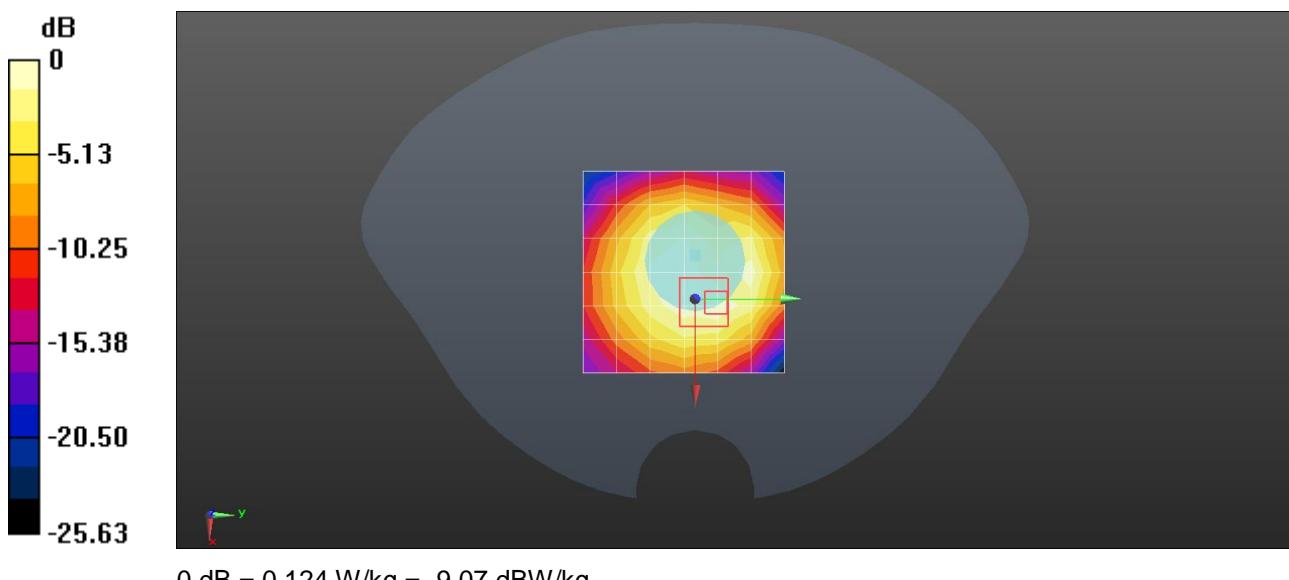

Coolpad watch CP303C wifi 802.11b CH6 _Front of face 10mm

Communication System: UID 0, 2.45GHz Wi-Fi (0); Communication System Band: ISM 2.4GHz; Frequency: 2437 MHz;

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.805$ S/m; $\epsilon_r = 39.915$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.9, 7.9, 7.9); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x6x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.224 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.739 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.248 W/kg

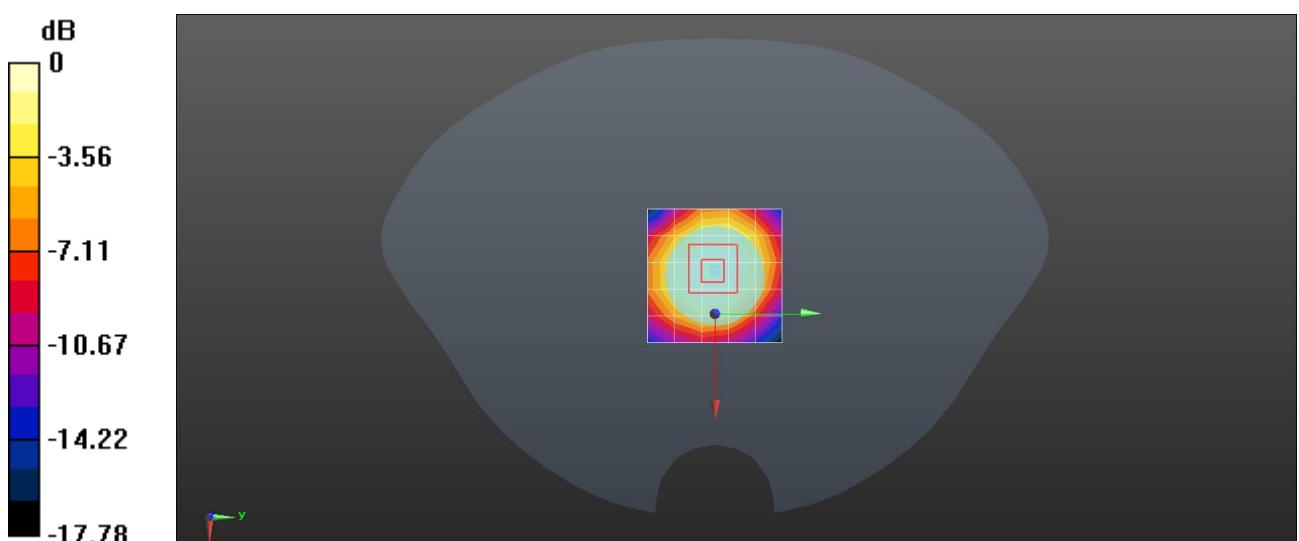

Coolpad watch CP303C UMTS Band2 _CH9262 _back surface 0mm

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band: Band 2; Frequency: 1880 MHz;

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.526$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(8.38, 8.38, 8.38); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.51 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 37.27 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 5.88 W/kg

SAR(1 g) = 2.43 W/kg; SAR(10 g) = 1.34 W/kg

Maximum value of SAR (measured) = 4.11 W/kg

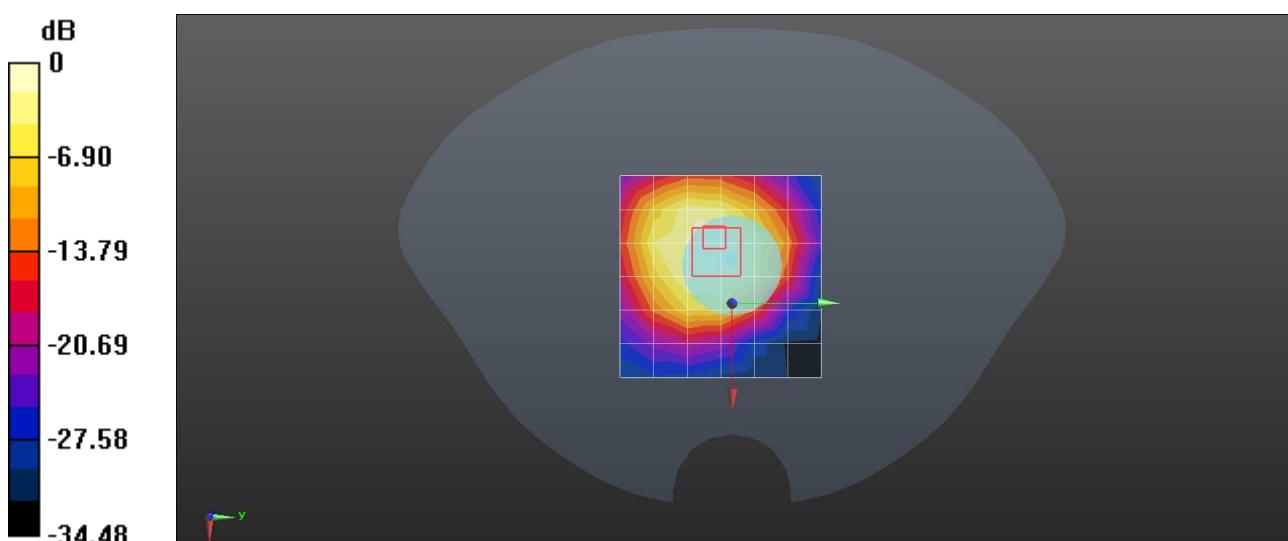

Coolpad watch CP303C UMTS Band5 _CH4183_Back surface 0mm

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Communication System Band: Band 5; Frequency: 836.4 MHz;

Medium parameters used: $f = 836.41$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.48$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(10.19, 10.19, 10.19); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.50 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.21 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 2.61 W/kg

SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.657 W/kg

Maximum value of SAR (measured) = 1.96 W/kg

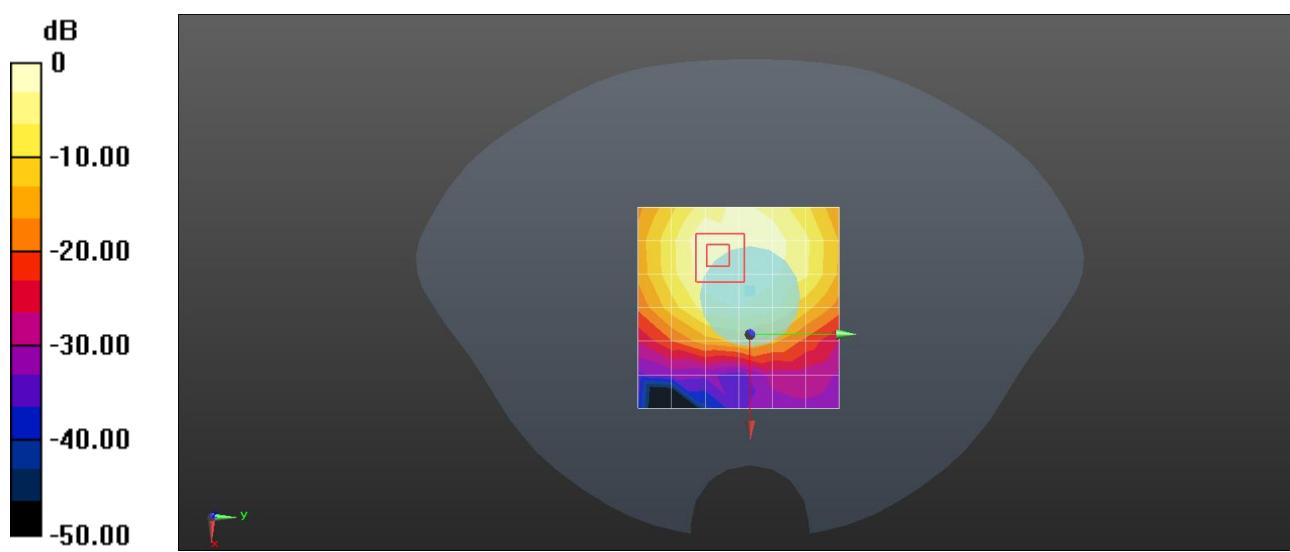

Coolpad watch CP303C LTE B25 20M 1RB_49 Offset _CH26140 _back surface 0mm

Communication System: UID 0, LTE (0); Communication System Band: Band 25; Frequency: 1860 MHz;

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 40.044$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(8.38, 8.38, 8.38); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 3.96 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 39.77 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 7.03 W/kg

SAR(1 g) = 2.84 W/kg; SAR(10 g) = 1.53 W/kg

Maximum value of SAR (measured) = 4.99 W/kg

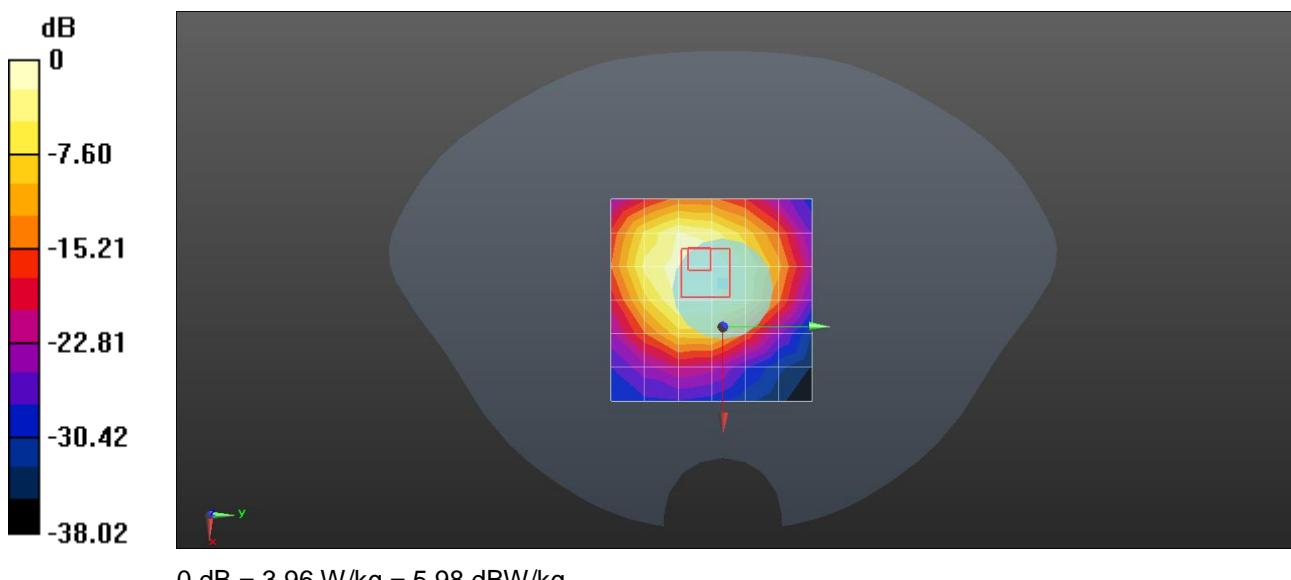

Coolpad watch CP303C LTE B66 20M 1RB_49 Offset _CH132572_back surface 0mm

Communication System: UID 0, LTE (0); Communication System Band: Band 66; Frequency: 1770 MHz;

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 40.248$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(8.34, 8.34, 8.34); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.82 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 40.64 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 6.64 W/kg

SAR(1 g) = 2.77 W/kg; SAR(10 g) = 1.54 W/kg

Maximum value of SAR (measured) = 4.87 W/kg

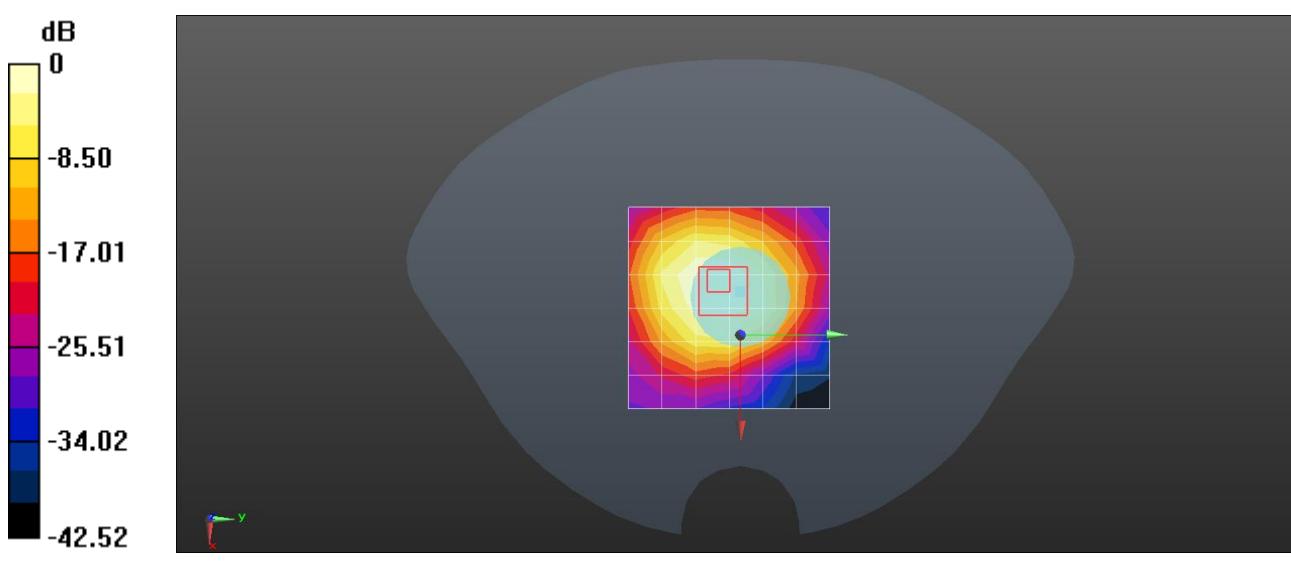

Coolpad watch CP303C LTE B5 10M 1RB_24 Offset _CH20525 _Back Surface 0mm

Communication System: UID 0, LTE (0); Communication System Band: Band 5; Frequency: 836.5 MHz;

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.479$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(10.19, 10.19, 10.19); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.707 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.80 V/m; Power Drift = 0.23 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.210 W/kg

Maximum value of SAR (measured) = 0.737 W/kg

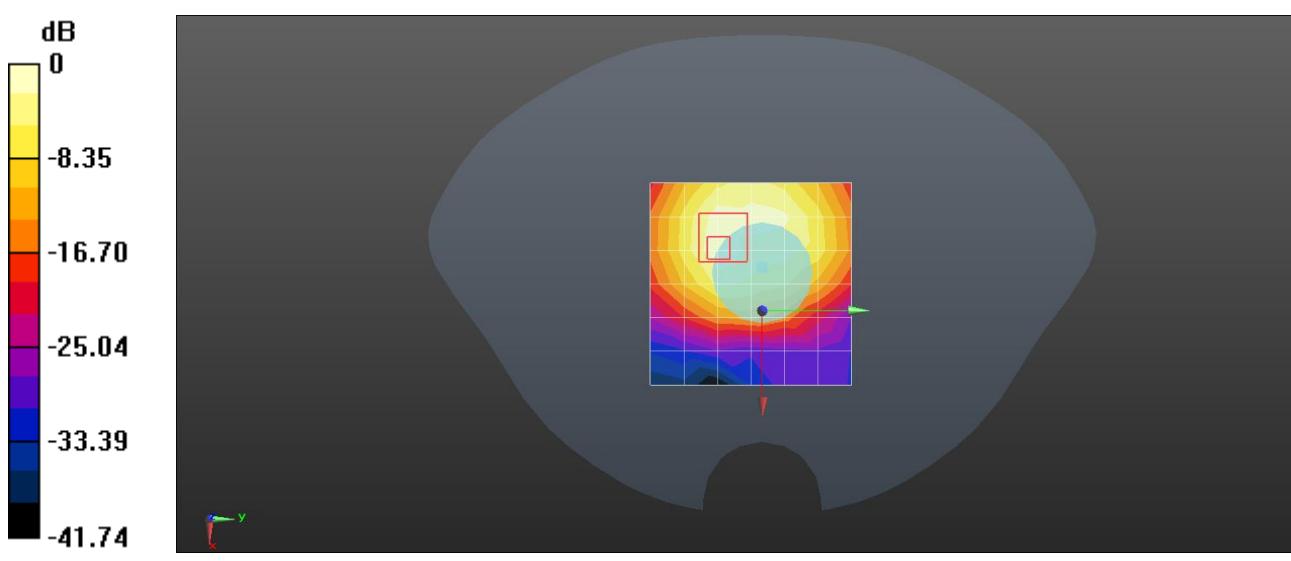

Coolpad watch CP303C LTE B12 10M 1RB_24 Offset _CH23130 _back surface 0mm

Communication System: UID 0, LTE (0); Communication System Band: Band 12; Frequency: 711 MHz;

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.861$ S/m; $\epsilon_r = 42.398$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(10.65, 10.65, 10.65); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.731 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.07 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.250 W/kg

Maximum value of SAR (measured) = 0.779 W/kg

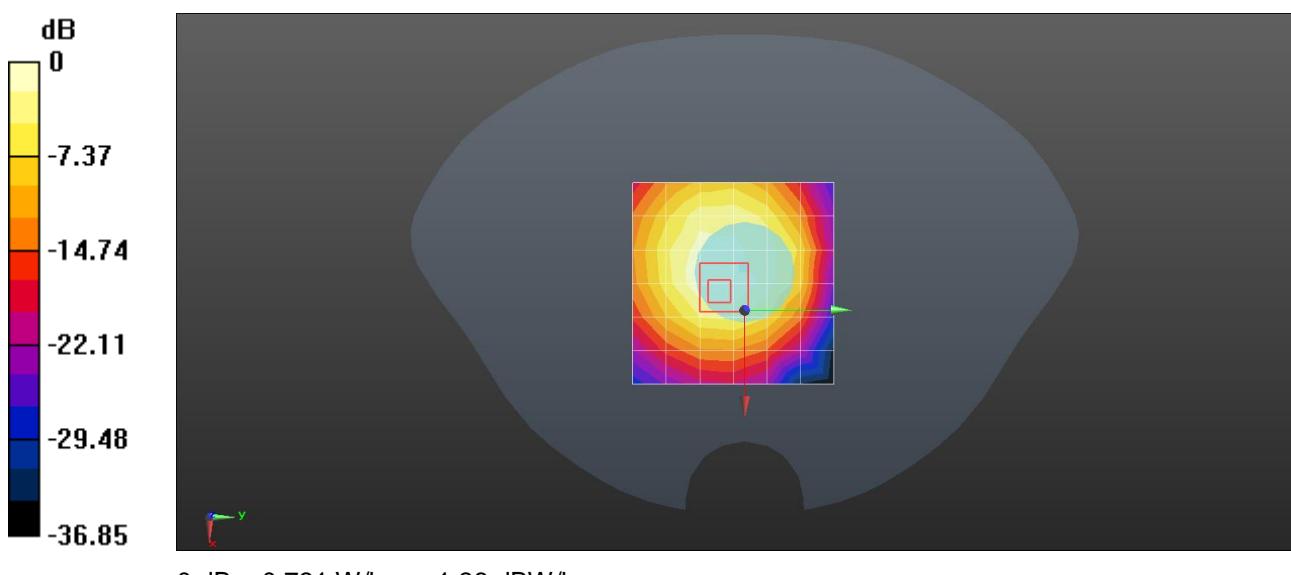

Coolpad watch CP303C LTE B13 10M 1RB_24 Offset _CH23230 _Back Surface 0mm

Communication System: UID 0, LTE (0); Communication System Band: Band 13; Frequency: 782 MHz;

Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.412$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(10.65, 10.65, 10.65); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.348 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.27 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.390 W/kg

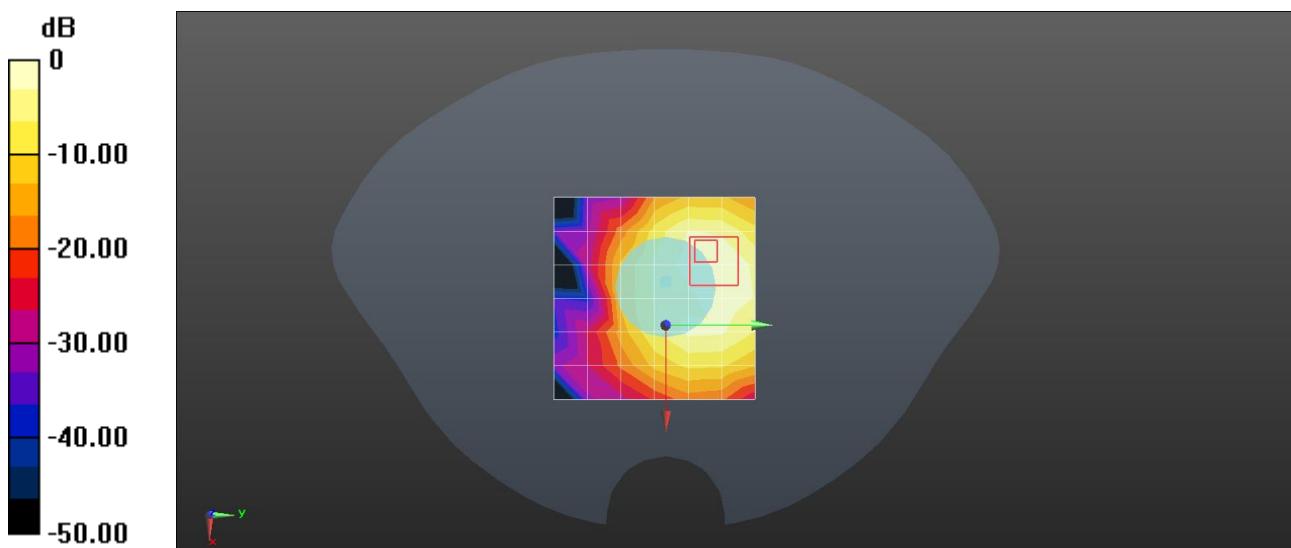

Coolpad watch CP303C LTE Band 26 15M 1RB_37 Offset _CH26865 _back surface 0mm

Communication System: UID 0, LTE (0); Communication System Band: LTE Band 26; Frequency: 831 MHz;

Medium parameters used (interpolated): $f = 831$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 41.547$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(10.19, 10.19, 10.19); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.534 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.55 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.913 W/kg

SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.678 W/kg

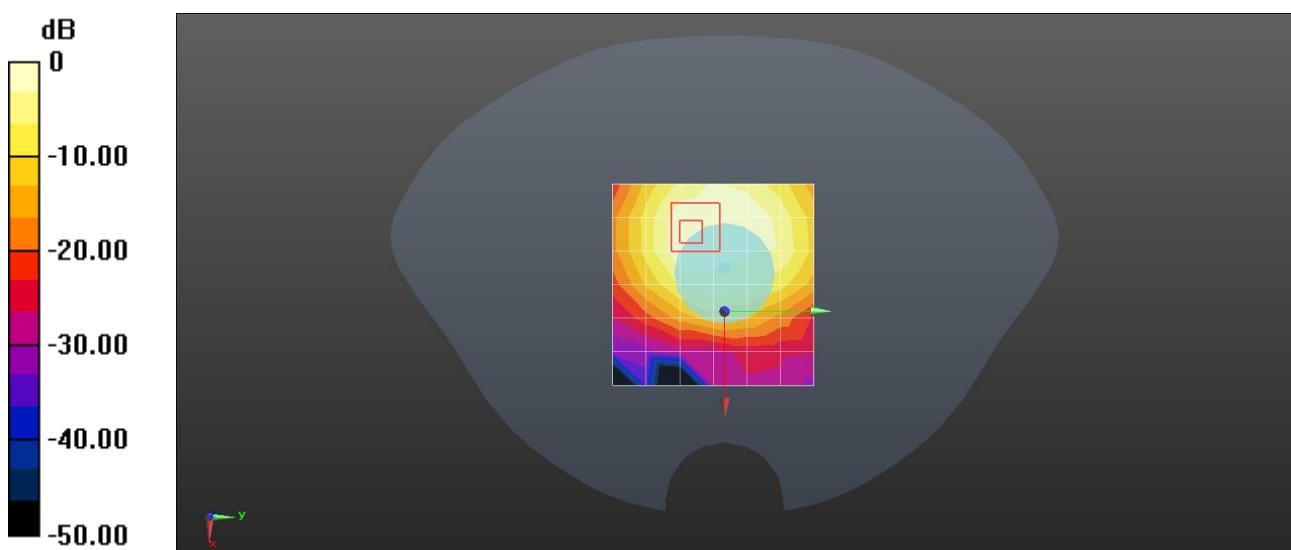

Coolpad watch CP303C LTE B71 20M 1RB_49 Offset _CH 133297 _Back Surface 0mm

Communication System: UID 0, LTE (0); Communication System Band: Band 71; Frequency: 680.5 MHz;

Medium parameters used (extrapolated): $f = 680.5$ MHz; $\sigma = 0.83$ S/m; $\epsilon_r = 42.819$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(10.65, 10.65, 10.65); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.430 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.82 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.757 W/kg

SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 0.563 W/kg

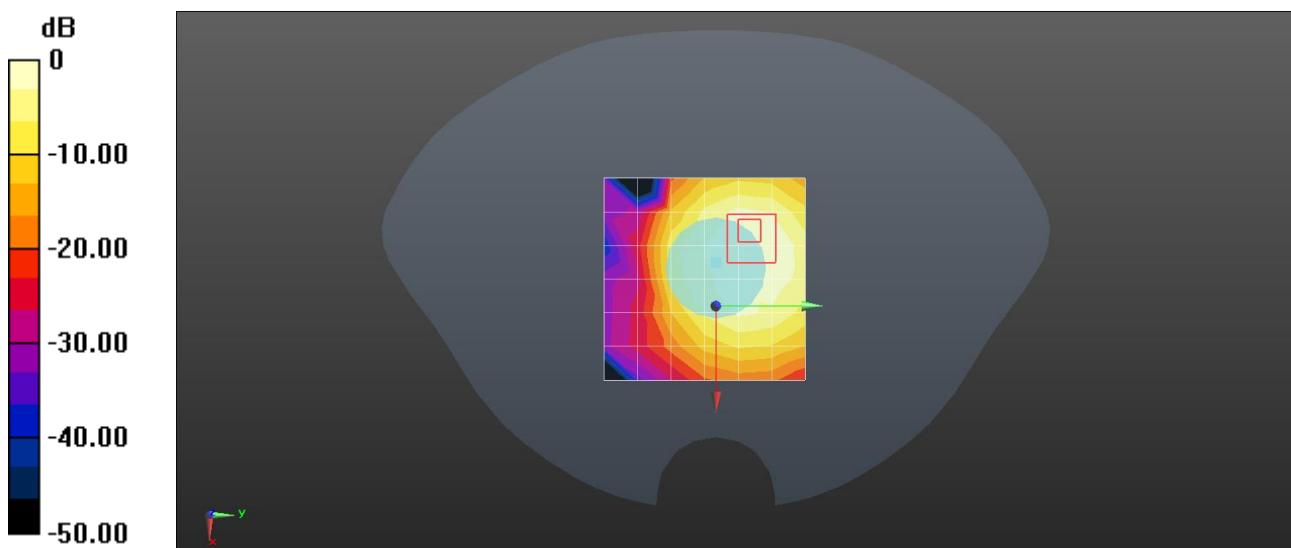

Coolpad watch CP303C wifi 802.11b CH6 _Back Surface 0mm

Communication System: UID 0, 2.45GHz Wi-Fi (0); Communication System Band: ISM 2.4GHz; Frequency: 2437 MHz;

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.805$ S/m; $\epsilon_r = 39.915$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.9, 7.9, 7.9); Calibrated: 2020/1/3;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2020/3/31
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x6x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 3.28 W/kg

Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.72 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 5.47 W/kg

SAR(1 g) = 1.99 W/kg; SAR(10 g) = 0.786 W/kg

Maximum value of SAR (measured) = 4.23 W/kg

