



# RF TEST REPORT

**Report No.:** SET2018-05642

**Product Name:** Smartphone

**FCC ID:** R38YL3310A

**Model No. :** Coolpad 3310A

**Applicant:** Yulong Computer Telecommunication Scientific (Shenzhen)  
Co., Ltd.

**Address:** Coolpad Information Harbor, 2nd Mengxi Road, Northern Part of  
Science&Technology Park, Nanshan, Shenzhen, China.

**Dates of Testing:** 05/7/2018 — 07/25/2018

**Issued by:** CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

**Lab Location:** Building 28/29, East of Shigu Xili Industrial Zone, Nanshan District  
Shenzhen, Guangdong 518055, China

**Tel:** 86 755 26627338    **Fax:** 86 755 26627238

This test report consists of 69 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 20 days since the date when the report is received. It will not be taken into consideration beyond this limit.



## Test Report

**Product Name** .....: Smartphone

**Brand Name** .....: N.A

**Trade Name** .....: Coolpad

**Applicant**.....: Yulong Computer Telecommunication Scientific  
(Shenzhen) Co., Ltd.

**Applicant Address**.....: Coolpad Information Harbor, 2nd Mengxi Road, Northern  
Part of Science&Technology Park, Nanshan, Shenzhen,  
China.

**Manufacturer** .....: Yulong Computer Telecommunication Scientific  
(Shenzhen) Co., Ltd.

**Manufacturer Address** .....: Coolpad Information Harbor, 2nd Mengxi Road, Northern  
Part of Science&Technology Park, Nanshan, Shenzhen,  
China.

**Test Standards**.....: 47 CFR Part 15 Subpart C 2017: Radio Frequency Devices  
ANSI C63.10:2013: American National Standard for  
Testing Unlicensed Wireless Devices  
DA 00-705: Filing and Measurement Guidelines  
for Frequency Hopping Spread Spectrum Systems

**Test Result** .....: PASS

**Tested by** .....:   
2018.07.25

Shallwe Yang, Test Engineer

**Reviewed by** .....:   
2018.07.25

Zhu Qi, Senior Engineer

**Approved by** .....:   
2018.07.25

Smart Li, Manager

## Table of contents

|   |           |
|---|-----------|
| <b>RF TEST REPORT .....</b>                           | <b>1</b>  |
| <b>1. GENERAL INFORMATION .....</b>                   | <b>4</b>  |
| 1.1. EUT Description .....                            | 4         |
| 1.2. Test Standards and Results.....                  | 5         |
| 1.3. Frequency Hopping System Requirements.....       | 6         |
| 1.4. Facilities and Accreditations .....              | 8         |
| <b>2. 47 CFR PART 15C REQUIREMENTS.....</b>           | <b>9</b>  |
| 2.1. Antenna requirement.....                         | 9         |
| 2.2. Number of Hopping Frequency .....                | 10        |
| 2.3. Peak Output Power.....                           | 12        |
| 2.4. 20dB Bandwidth .....                             | 14        |
| 2.5. Carried Frequency Separation.....                | 16        |
| 2.6. Dwell time.....                                  | 18        |
| 2.7. Conducted Spurious Emissions.....                | 20        |
| 2.8. Conducted Band Edge.....                         | 22        |
| 2.9. Conducted Emission .....                         | 24        |
| 2.10. Radiated Band Edges and Spurious Emission ..... | 28        |
| <b>3. LIST OF MEASURING EQUIPMENT .....</b>           | <b>42</b> |
| <b>APPENDIX A .....</b>                               | <b>43</b> |

| Change History |            |                   |
|----------------|------------|-------------------|
| Issue          | Date       | Reason for change |
| 1.0            | 2018.07.25 | First edition     |
|                |            |                   |
|                |            |                   |

## 1. General Information

### 1.1. EUT Description

|                                 |   |                        |
|---------------------------------|---|------------------------|
| EUT Type                        | Smartphone  |                        |
| Hardware Version                | P0  |                        |
| Software Version                | 3310A.SPRINT.180608.00  |                        |
| EUT supports Radios application | CDMA2000 BC0/BC1/BC10<br>WLAN2.4GHz 802.11b/g/n (HT20/HT40)<br>Bluetooth V3.0+EDR / Bluetooth V4.0LE<br>LTE Band 2/4/5/12/13/25/26/41 |                        |
| Frequency Range                 | Bluetooth EDR   | 2402MHz~2480MHz        |
| Channel Number                  | Bluetooth EDR   | 79                     |
| Bit Rate of Transmitter         | Bluetooth EDR   | 1/2/3Mbps              |
| Modulation Type                 | Bluetooth EDR   | GFSK, PI/4DQPSK, 8DPSK |
| Antenna Type                    | FPC antenna   |                        |
| Antenna Gain                    | 1.8dBi  |                        |
| Power supply                    | Battery 1   |                        |
|                                 | Model No.:  | CPLD-189               |
|                                 | Capacitance:  | 2150mAh                |
|                                 | Rated Voltage:  | 3.8V                   |
|                                 | Charge Limit:   | 4.35V                  |
|                                 | Battery 2   |                        |
|                                 | Model No.:  | CPLD-189               |
|                                 | Capacitance:  | 2150mAh                |
|                                 | Rated Voltage:  | 3.8V                   |
|                                 | Charge Limit:   | 4.35V                  |

Note 1: The EUT is a Smartphone, it contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is  $F(\text{MHz})=2402+1*n$  ( $0 \leq n \leq 78$ ). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 2: a. When power on, the EUT will scan the whole frequency until a Connection command from the other BT devices.

b. When receiving the signal from the other BT devices, The EUT transmit are sponse signal.

c. The other devices receive the response signal and recognize it, then send a connection command to establish the connection.

d. After the connection establish successfully, the data transmission is beginning. At the same time, the both devices will shift frequencies in synchronization per a same pseudo randomly ordered list of hopping frequencies, the hopping rate is 1600 times per second. This device conforms to the criteria in FCC Public Notice DA 00-705.

e. The bandwidth of the receiver, which is set to a fixed width by the software.

Note 3: Bluetooth signal has 9 packages 1DH1, 1DH3, 1DH5, 2DH1, 2DH3, 2DH5, 3DH1, 3DH3, 3DH5, DH5 package is largest, we are testing DH5 in the document.

## 1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

| No. | Identity                         | Document Title  |
|-----|----------------------------------|---|
| 1   | 47 CFR Part 15<br>Subpart C 2017 | Radio Frequency Devices   |
| 2   | ANSI C63.10 2013                 | American National Standard for Testing<br>Unlicensed Wireless Devices |

Test detailed items/section required by FCC rules and results are as below:

| No. | Section in CFR 47   | Description                                  | Result |
|-----|---------------------|--|--------|
| 1   | 15.203              | Antenna Requirement                          | PASS   |
| 2   | 15.247(a)           | Number of Hopping Frequency                  | PASS   |
| 3   | 15.247(b)           | Peak Output Power                            | PASS   |
| 4   | 15.247(a)           | 20dB Bandwidth                               | PASS   |
| 5   | 15.247(a)           | Carrier Frequency Separation                 | PASS   |
| 6   | 15.247(a)           | Time of Occupancy (Dwell time)               | PASS   |
| 7   | 15.247(d)           | Conducted Spurious Emission                  | PASS   |
| 8   | 15.247(d)           | Conducted Band Edge                          | PASS   |
| 9   | 15.207              | Conducted Emission                           | PASS   |
| 10  | 15.209<br>15.247(c) | Radiated Band Edges and Spurious<br>Emission | PASS   |

Note 1: The tests were performed according to the method of measurements prescribed in DA-00-705.

Note 2: The test of Radiated Emission was performed according to the method of measurements prescribed in ANSI C63.10 2013.

### **1.3. Frequency Hopping System Requirements**

#### **1.3.1. Standard Applicable**

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

#### **1.3.2. Frequency Hopping System**

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no



impact on the bandwidth used.

This device was tested with a bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for DA 00-705 and FCC Part 15.247 rule.

Carrier Frequency and channel List:

| Channel | Frequency(MHz) |
|---------|----------------|
| 0       | 2402           |
| 1       | 2403           |
| ...     | ...            |
| 39      | 2441           |
| 40      | 2442           |
| ...     | ...            |
| 77      | 2479           |
| 78      | 2480           |

Note:  $F(\text{MHz})=2402+1*n$  ( $0 \leq n \leq 78$ )

## 1.4. Facilities and Accreditations

### 1.4.1. Facilities

#### **CNAS-Lab Code: L1659**

CCIC-SET is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

#### **FCC-Registration No.: CN5031**

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN5031, valid time is until December 31, 2018.

#### **ISED Registration: 11185A-1**

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Aug. 03, 2019.

#### **NVLAP Lab Code: 201008-0**

CCIC-SET is a third party testing organization accredited by NVLAP according to ISO/IEC 17025. The accreditation certificate number is 201008-0.

### 1.4.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

|                             |              |
|-----------------------------|--------------|
| Temperature (°C):           | 15 - 35      |
| Relative Humidity (%):      | 30 -60       |
| Atmospheric Pressure (kPa): | 86KPa-106KPa |



## 2. 47 CFR Part 15C Requirements

### 2.1. Antenna requirement

#### 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

And according to FCC 47 CFR Section 15.247(c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### 2.1.2. Antenna Information

**Antenna Category:** FPC antenna

An Internal antenna was soldered to the antenna port of EUT via an adaptor cable, can't be removed.

**Antenna General Information:**

| No. | EUT        | Ant. Type | Gain(dBi) |
|-----|------------|-----------|-----------|
| 1   | Smartphone | FPC       | 1.8       |

#### 2.1.3. Result: comply

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

## 2.2. Number of Hopping Frequency


### 2.2.1. Limit of Number of Hopping Frequency

Frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

### 2.2.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.2.3. Test Setup

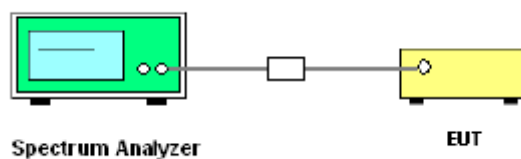

### 2.2.4. Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;  
RBW  $\geq$  100KHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.



### **2.2.5. Test Results of Number of Hopping Frequency**

Please refer to Appendix A for detail

## 2.3. Peak Output Power

### 2.3.1. Limit of Peak Output Power


Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

### 2.3.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.3.3. Test Setup



### 2.3.4. Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.



### **2.3.5. Test Result of Output Power**

Please refer to Appendix A for detail

## 2.4. 20dB Bandwidth


### 2.4.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ( $10 \cdot \log 1\% = 20\text{dB}$ ) taking the total RF output power.

### 2.4.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.4.3. Test Setup

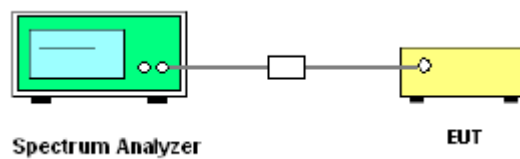

### 2.4.4. Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;  
  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
  
Trace = max hold.
5. Measure and record the results in the test report.



### **2.4.5. Test Results of 20dB Bandwidth**

Please refer to Appendix A for detail

## 2.5. Carried Frequency Separation


### 2.5.1. Limit of Carried Frequency Separation

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

### 2.5.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.5.3. Test Setup

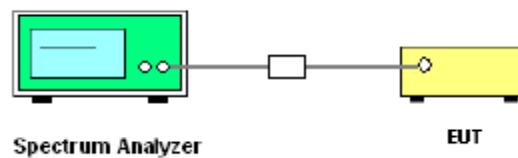

### 2.5.4. Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
  
Span = wide enough to capture the peaks of two adjacent channels;  $RBW \geq 1\%$  of the span;  
  
 $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.





### **2.5.5. Test Results of Carried Frequency Separation**

Please refer to Appendix A for detail

## 2.6. Dwell time


### 2.6.1. Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 2.6.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.6.3. Test Setup

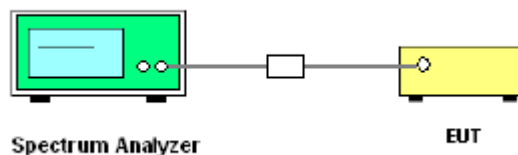

### 2.6.4. Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.  
The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.



### **2.6.5. Test Results of Dwell Time**

Please refer to Appendix A for detail

## 2.7. Conducted Spurious Emissions


### 2.7.1. Limit of Spurious Emission

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 2.7.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.7.3. Test Setup

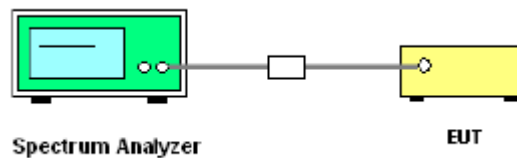

### 2.7.4. Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



### **2.7.5. Test Results of Conducted Spurious Emissions**

Please refer to Appendix A for detail

## 2.8. Conducted Band Edge


### 2.8.1. Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 2.8.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.8.3. Test Setup

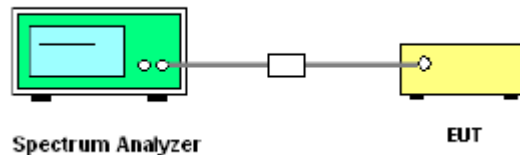

### 2.8.1. Test Procedure

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set  $RBW = 100\text{kHz}$  ( $\geq 1\%$  span=10MHz ),  $VBW = 300\text{kHz}$  ( $\geq RBW$ ). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.



## **2.8.2. Test Results of Conducted Band Edge**

Please refer to Appendix A for detail

## 2.9. Conducted Emission

### 2.9.1. Limit of Conducted Emission


For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency range (MHz) | Conducted Limit (dB $\mu$ V) |          |
|-----------------------|------------------------------|----------|
|                       | Quai-peak                    | Average  |
| 0.15 - 0.50           | 66 to 56                     | 56 to 46 |
| 0.50 - 5              | 56                           | 46       |
| 0.50 - 30             | 60                           | 50       |

### 2.9.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.9.3. Test Setup

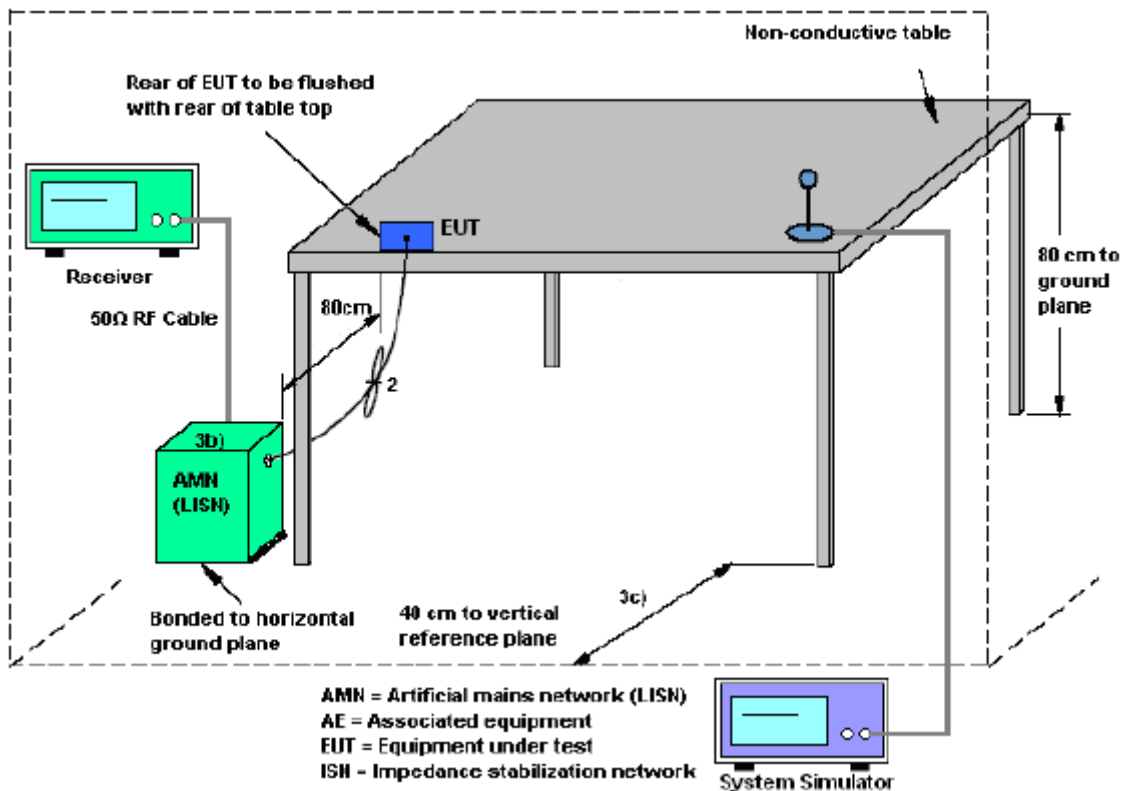




#### **2.9.4. Test Procedures**

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 micrometry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


#### **2.9.3. Test Results of Conducted Emission**

The EUT configuration of the emission tests is Bluetooth Link + USB Cable (Charging from Adapter) + Earphone.

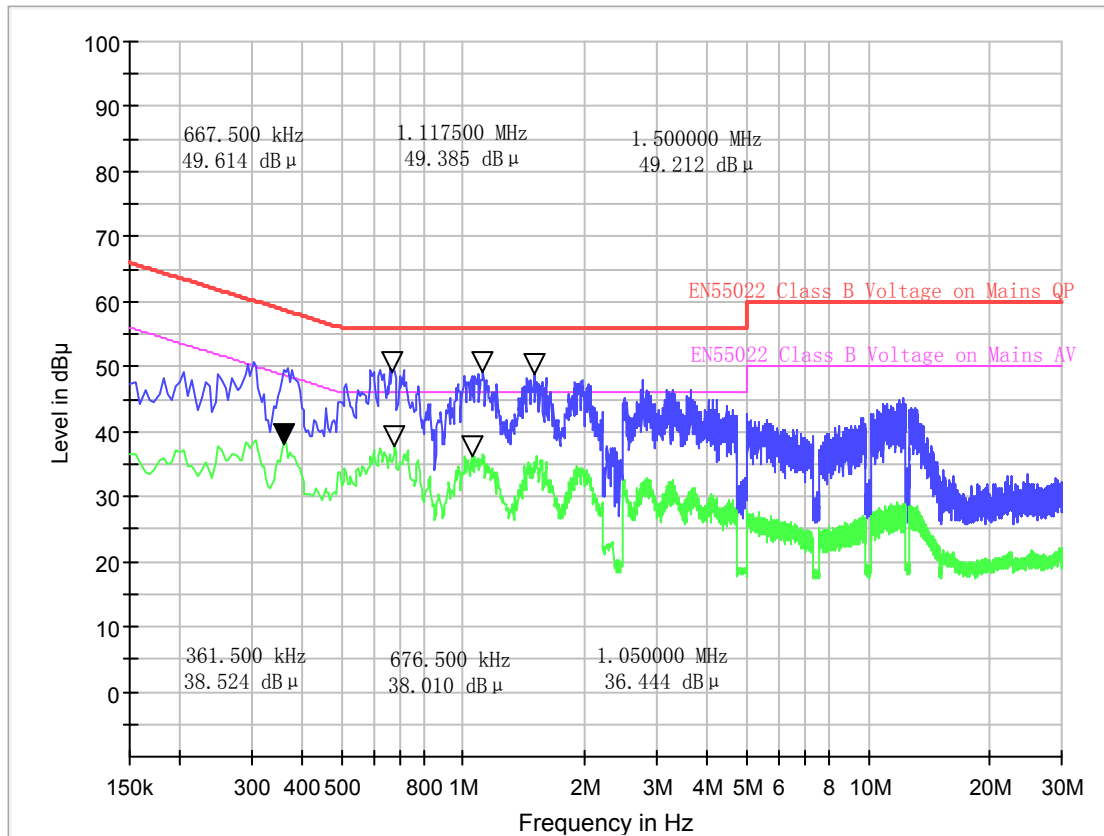

(Plot A: L Phase)

| Conducted Disturbance at Mains Terminals |               |                          |                 |               |                          |
|--|---------------|--------------------------|-----------------|---------------|--------------------------|
| L Test Data                              |               |                          |                 |               |                          |
| QP                                       |               |                          | AV              |               |                          |
| Frequency (MHz)                          | Limits (dBµV) | Measurement Value (dBµV) | Frequency (MHz) | Limits (dBµV) | Measurement Value (dBµV) |
| 0.668                                    | 56.0          | 49.614                   | 0.362           | 48.7          | 38.524                   |
| 1.118                                    | 56.0          | 49.385                   | 0.677           | 46.0          | 38.010                   |
| 1.500                                    | 56.0          | 49.212                   | 1.050           | 46.0          | 36.444                   |

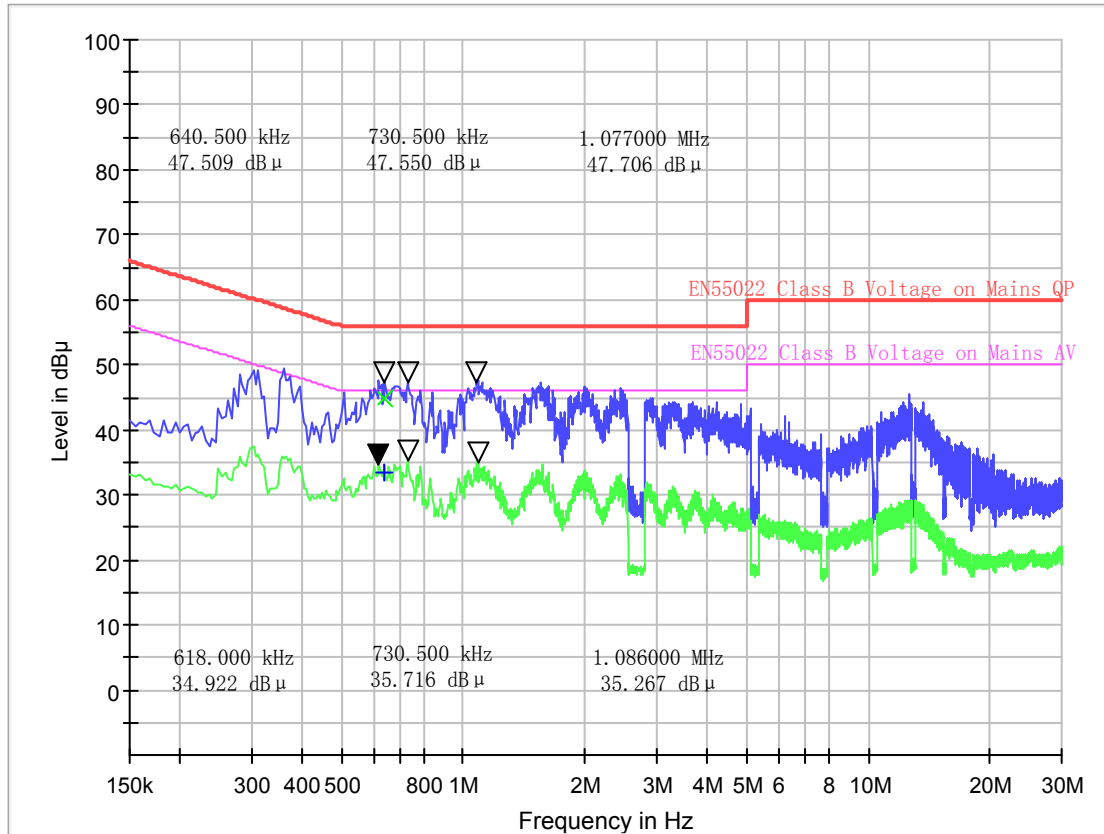

(Plot B: N Phase)

| Conducted Disturbance at Mains Terminals |               |                          |                 |               |                          |
|--|---------------|--------------------------|-----------------|---------------|--------------------------|
| N Test Data                              |               |                          |                 |               |                          |
| QP                                       |               |                          | AV              |               |                          |
| Frequency (MHz)                          | Limits (dBµV) | Measurement Value (dBµV) | Frequency (MHz) | Limits (dBµV) | Measurement Value (dBµV) |
| 0.641                                    | 56.0          | 47.509                   | 0.618           | 46.0          | 34.922                   |
| 0.731                                    | 56.0          | 47.550                   | 0.731           | 46.0          | 35.716                   |
| 1.077                                    | 56.0          | 47.706                   | 1.086           | 46.0          | 35.267                   |

**Test Result: PASS**

## 2.10. Radiated Band Edges and Spurious Emission

### 2.10.1. Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.


| Frequency (MHz) | Field Strength ( $\mu\text{V}/\text{m}$ ) | Measurement Distance (m) |
|-----------------|---|--------------------------|
| 0.009 - 0.490   | $2400/F(\text{kHz})$                      | 300                      |
| 0.490 - 1.705   | $24000/F(\text{kHz})$                     | 30                       |
| 1.705 - 30.0    | 30  | 30                       |
| 30 - 88         | 100                                       | 3                        |
| 88 - 216        | 150                                       | 3                        |
| 216 - 960       | 200                                       | 3                        |
| Above 960       | 500                                       | 3                        |

### 2.10.2. Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

### 2.10.3. Test Setup


- 1) For radiated emissions from 9kHz to 30MHz

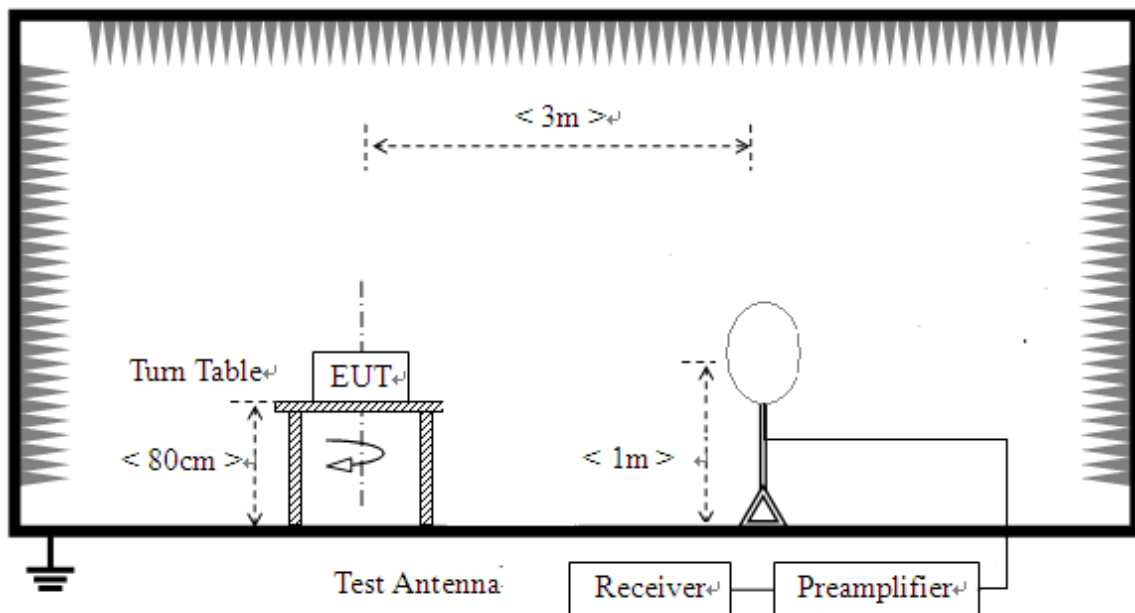

- 2) For radiated emissions from 30MHz to 1GHz

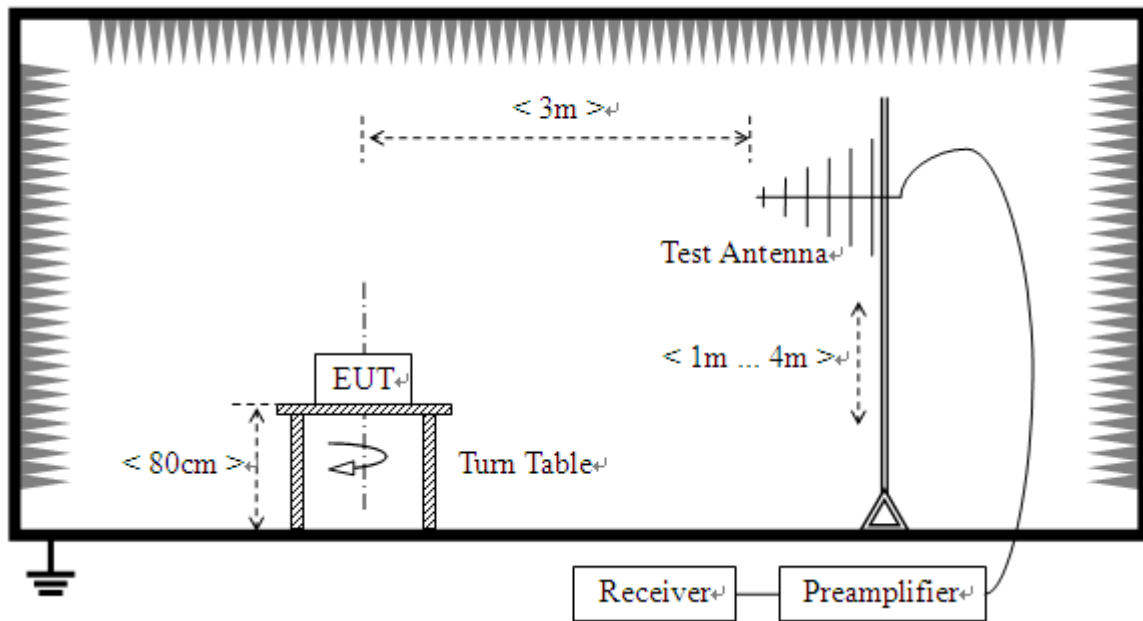

- 3) For radiated emissions above 1GHz

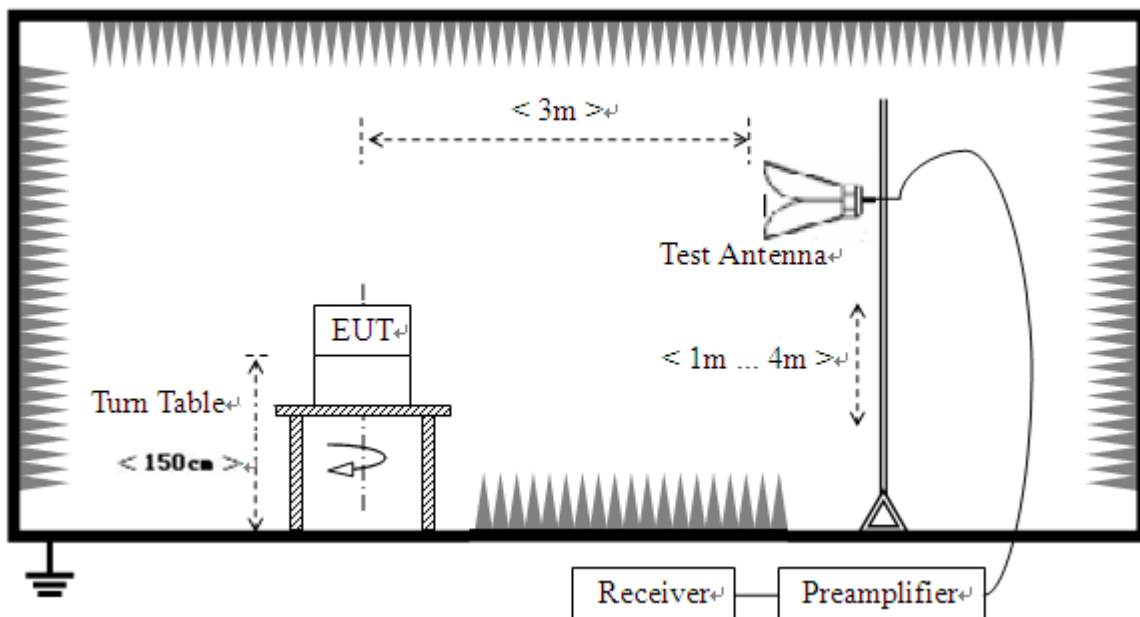

#### 2.10.4. Test Procedure


1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. The EUT was placed on a turntable 0.8m below 1GHz and 1.5m above 1GHz above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$ GHz ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{N_{n-1}} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level + 20\*log(Duty cycle)
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 2.10.5. Test Results of Radiated Band Edge and Spurious Emission

#### For 9 KHz to 30MHz


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

#### For 30MHz to 1000MHz

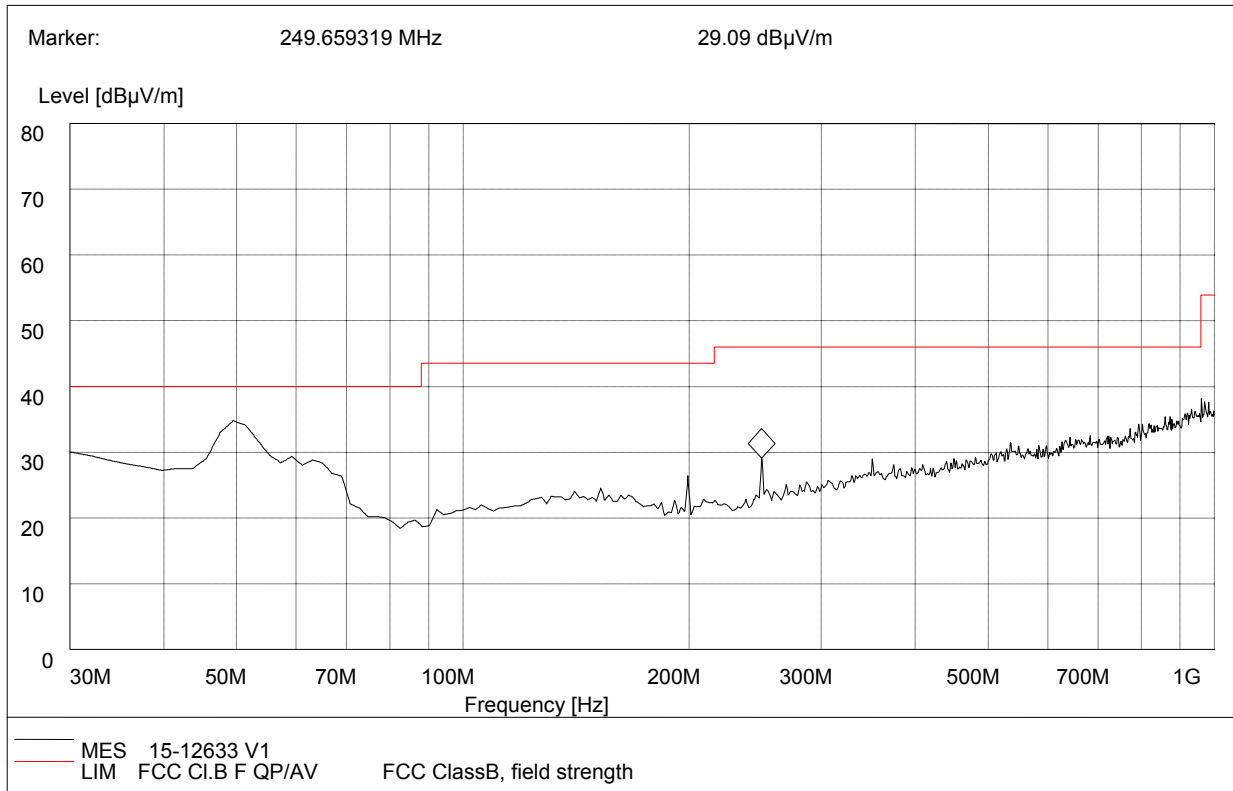

| Frequency (MHz) | QuasiPeak (dB µ V/m) | Bandwidth (kHz) | Antenna height (cm) | Limit (dB µ V/m) | Antenna  | Verdict |
|-----------------|----------------------|-----------------|---------------------|------------------|----------|---------|
| 49.260          | 34.92                | 120.000         | 100.0               | 40.00            | Vertical | Pass    |
| 249.659         | 29.09                | 120.000         | 100.0               | 46.00            | Vertical | Pass    |

(Plot A: 30MHz to 1GHz, Antenna Vertical)

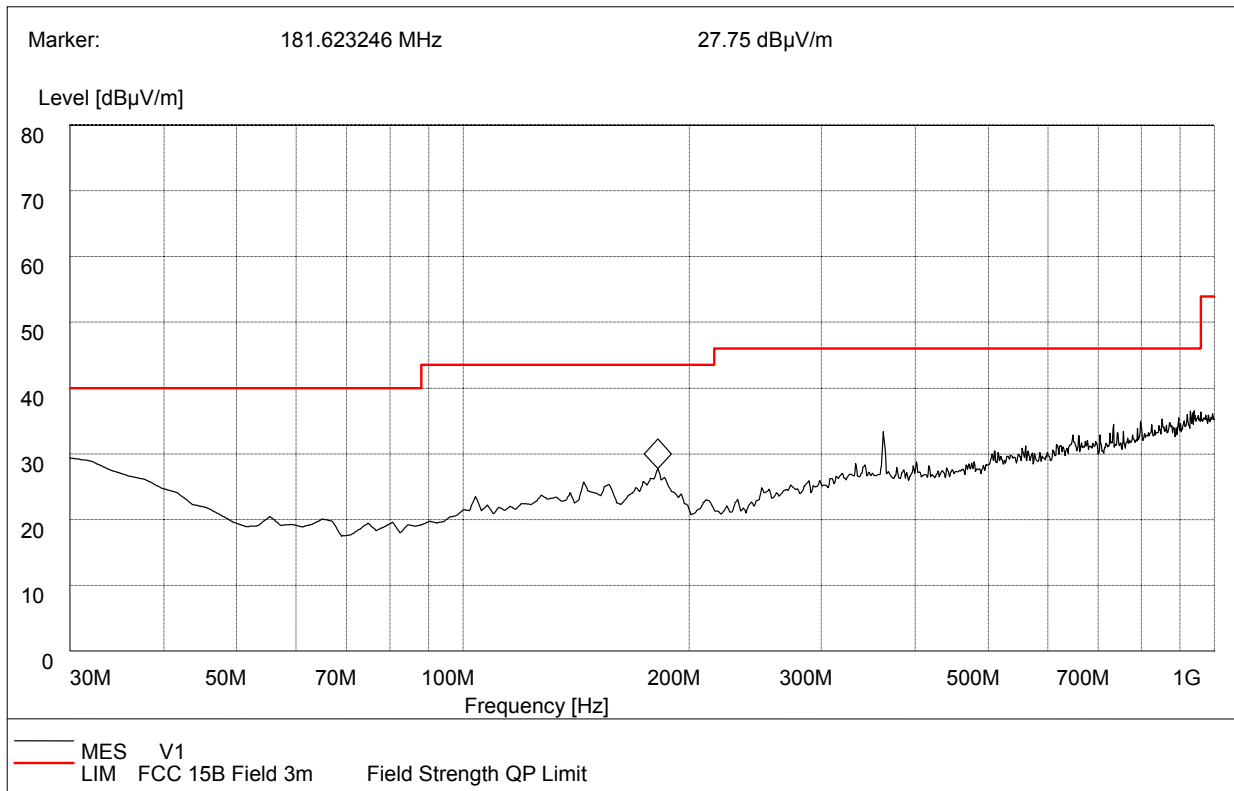

| Frequency (MHz) | QuasiPeak (dB $\mu$ V/m) | Bandwidth (kHz) | Antenna height (cm) | Limit (dB $\mu$ V/m) | Antenna    | Verdict |
|-----------------|--------------------------|-----------------|---------------------|----------------------|------------|---------|
| 181.623         | 27.75                    | 120.000         | 100.0               | 43.5                 | Horizontal | Pass    |
| 362.659         | 33.79                    | 120.000         | 100.0               | 46.0                 | Horizontal | Pass    |

(Plot B: 30MHz to 1GHz, Antenna Horizontal)



**For 1GHz to 25GHz****ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (GFSK\_2402MHz)**

| No. | Fre.<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV/m) | Cab.<br>Loss<br>(dB) | Ant.<br>Factor<br>(dB) | Pre.<br>Amp.<br>(dB) | Cor.<br>Factor<br>(dB/m) |
|-----|---------------|-------------------------------|----|-------------------|----------------|--------------------------|----------------------------|--------------------------|----------------------|------------------------|----------------------|--------------------------|
| 1   | 2390          | 50.25                         | PK | 74                | -23.75         | 1.17 H                   | 180                        | 48.95                    | 5.2                  | 28.6                   | 32.5                 | 1.3                      |
| 2   | 2390          | 41.9                          | AV | 54                | -12.1          | 1.17 H                   | 180                        | 40.6                     | 5.2                  | 28.6                   | 32.5                 | 1.3                      |
| 3   | 4804          | 49.36                         | PK | 74                | -24.64         | 1.50 H                   | 100                        | 42.96                    | 7.4                  | 30.4                   | 31.4                 | 6.4                      |
| 4   | 4804          | 40.3                          | AV | 54                | -13.7          | 1.50 H                   | 100                        | 33.9                     | 7.4                  | 30.4                   | 31.4                 | 6.4                      |
| 5   | 9608          | 48.82                         | PK | 74                | -25.18         | 1.00 H                   | 90                         | 39.52                    | 9.9                  | 31.5                   | 32.1                 | 9.3                      |
| 6   | 9608          | 39.93                         | AV | 54                | -14.07         | 1.00 H                   | 90                         | 30.63                    | 9.9                  | 31.5                   | 32.1                 | 9.3                      |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (GFSK\_2402MHz)**

| No. | Frequency<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV/m) | Cab.<br>Loss<br>(dB) | Ant.<br>Factor<br>(dB) | Pre.<br>Amp.<br>(dB) | Cor.<br>Factor<br>(dB/m) |
|-----|--------------------|-------------------------------|----|-------------------|----------------|--------------------------|----------------------------|--------------------------|----------------------|------------------------|----------------------|--------------------------|
| 1   | 2390               | 51.74                         | PK | 74                | -22.26         | 1.17V                    | 200                        | 50.44                    | 5.2                  | 28.6                   | 32.5                 | 1.3                      |
| 2   | 2390               | 43.17                         | AV | 54                | -10.83         | 1.17V                    | 200                        | 41.87                    | 5.2                  | 28.6                   | 32.5                 | 1.3                      |
| 3   | 4804               | 50.21                         | PK | 74                | -23.79         | 1.20 V                   | 90                         | 43.81                    | 7.4                  | 30.4                   | 31.4                 | 6.4                      |
| 4   | 4804               | 41.26                         | AV | 54                | -12.74         | 1.20 V                   | 90                         | 34.86                    | 7.4                  | 30.4                   | 31.4                 | 6.4                      |
| 5   | 9608               | 50.34                         | PK | 74                | -23.66         | 1.30 V                   | 270                        | 41.04                    | 9.9                  | 31.5                   | 32.1                 | 9.3                      |
| 6   | 9608               | 41.3                          | AV | 54                | -12.7          | 1.30 V                   | 270                        | 32                       | 9.9                  | 31.5                   | 32.1                 | 9.3                      |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (GFSK\_2441MHz)**

| No. | Fre.<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV/m) | Cab.<br>Loss<br>(dB) | Ant.<br>Factor<br>(dB) | Pre.<br>Amp.<br>(dB) | Cor.<br>Factor<br>(dB/m) |
|-----|---------------|-------------------------------|----|-------------------|----------------|--------------------------|----------------------------|--------------------------|----------------------|------------------------|----------------------|--------------------------|
| 1   | 1305.65       | 48.35                         | PK | 74                | -25.65         | 1.00 H                   | 155                        | 48.95                    | 1.8                  | 29.5                   | 31.9                 | -0.6                     |
| 2   | 1305.65       | 40.21                         | AV | 54                | -13.79         | 1.00 H                   | 155                        | 40.81                    | 1.8                  | 29.5                   | 31.9                 | -0.6                     |
| 3   | 2010.58       | 51.17                         | PK | 74                | -22.83         | 1.50 H                   | 60                         | 51.77                    | 2.8                  | 28.7                   | 32.1                 | -0.6                     |
| 4   | 2010.58       | 43.13                         | AV | 54                | -10.87         | 1.50 H                   | 60                         | 43.73                    | 2.8                  | 28.7                   | 32.1                 | -0.6                     |
| 5   | 4882          | 50.63                         | PK | 74                | -23.37         | 1.50 H                   | 62                         | 44.23                    | 6.7                  | 31.2                   | 31.5                 | 6.4                      |
| 6   | 4882          | 42.89                         | AV | 54                | -11.11         | 1.50 H                   | 62                         | 36.49                    | 6.7                  | 31.2                   | 31.5                 | 6.4                      |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (GFSK 2441MHz)**

| No. | Frequency<br>(MHz) | Emission<br>Level<br>(dBuV/m) |    | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV/m) | Cab.<br>Loss<br>(dB) | Ant.<br>Factor<br>(dB) | Pre.<br>Amp.<br>(dB) | Cor.<br>Factor<br>(dB/m) |
|-----|--------------------|-------------------------------|----|-------------------|----------------|--------------------------|----------------------------|--------------------------|----------------------|------------------------|----------------------|--------------------------|
| 1   | 1200.05            | 49.39                         | PK | 74                | -24.61         | 1.00 V                   | 46                         | 49.99                    | 1.8                  | 29.5                   | 31.9                 | -0.6                     |
| 2   | 1200.05            | 40.65                         | AV | 54                | -13.35         | 1.00 V                   | 46                         | 41.25                    | 1.8                  | 29.5                   | 31.9                 | -0.6                     |
| 3   | 2010.58            | 51.06                         | PK | 74                | -22.94         | 1.00 V                   | 50                         | 51.66                    | 2.8                  | 28.7                   | 32.1                 | -0.6                     |
| 4   | 2010.58            | 43.30                         | AV | 54                | -10.7          | 1.00 V                   | 50                         | 43.9                     | 2.8                  | 28.7                   | 32.1                 | -0.6                     |
| 5   | 4882               | 52.34                         | PK | 74                | -21.66         | 1.50 V                   | 56                         | 45.94                    | 6.7                  | 31.2                   | 31.5                 | 6.4                      |
| 6   | 4882               | 44.28                         | AV | 54                | -9.72          | 1.50 V                   | 56                         | 37.88                    | 6.7                  | 31.2                   | 31.5                 | 6.4                      |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (GFSK\_2480MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Cab. Loss (dB) | Ant. Factor (dB) | Pre. Amp. (dB) | Cor. Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|----------------|------------------|----------------|--------------------|
| 1   | 1001.85         | 47.25                   | PK | 74             | -26.75      | 1.00 H             | 36                   | 48.05              | 1.5            | 29.6             | 31.9           | -0.8               |
| 2   | 1001.85         | 39.11                   | AV | 54             | -14.89      | 1.00 H             | 36                   | 39.91              | 1.5            | 29.6             | 31.9           | -0.8               |
| 3   | 2483.5          | 51.24                   | PK | 74             | -22.76      | 1.50 H             | 42                   | 48.64              | 5.7            | 28.7             | 31.8           | 2.6                |
| 4   | 2483.5          | 42.40                   | AV | 54             | -11.6       | 1.50 H             | 42                   | 39.8               | 5.7            | 28.7             | 31.8           | 2.6                |
| 5   | 4960            | 49.98                   | PK | 74             | -24.02      | 1.50 H             | 30                   | 43.28              | 7              | 31.2             | 31.5           | 6.7                |
| 6   | 4960            | 41.85                   | AV | 54             | -12.15      | 1.50 H             | 30                   | 35.15              | 7              | 31.2             | 31.5           | 6.7                |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (GFSK\_2480MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Cab. Loss (dB) | Ant. Factor (dB) | Pre. Amp. (dB) | Cor. Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|----------------|------------------|----------------|--------------------|
| 1   | 1001.85         | 46.63                   | PK | 74             | -27.37      | 1.50 V             | 130                  | 47.43              | 1.5            | 29.6             | 31.9           | -0.8               |
| 2   | 1001.85         | 38.49                   | AV | 54             | -15.51      | 1.50 V             | 230                  | 39.29              | 1.5            | 29.6             | 31.9           | -0.8               |
| 3   | 2483.5          | 52.34                   | PK | 74             | -21.66      | 1.00 V             | 130                  | 49.74              | 5.7            | 28.7             | 31.8           | 2.6                |
| 4   | 2483.5          | 43.33                   | AV | 54             | -10.67      | 1.00 V             | 130                  | 40.73              | 5.7            | 28.7             | 31.8           | 2.6                |
| 5   | 4960            | 51.97                   | PK | 74             | -22.03      | 1.00 V             | 180                  | 45.27              | 7              | 31.2             | 31.5           | 6.7                |
| 6   | 4960            | 43.50                   | AV | 54             | -10.5       | 1.00 V             | 90                   | 36.8               | 7              | 31.2             | 31.5           | 6.7                |



**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (PI/4DQPSK\_2402MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Cab. Loss (dB) | Ant. Factor (dB) | Pre. Amp. (dB) | Cor. Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|----------------|------------------|----------------|--------------------|
| 1   | 2390            | 46.69                   | PK | 74             | -27.31      | 1.20 H             | 360                  | 45.39              | 5.2            | 28.6             | 32.5           | 1.3                |
| 2   | 2390            | 38.63                   | AV | 54             | -15.37      | 1.20 H             | 360                  | 37.33              | 5.2            | 28.6             | 32.5           | 1.3                |
| 3   | 4804            | 50.17                   | PK | 74             | -23.83      | 1.50 H             | 120                  | 43.77              | 6.7            | 31.2             | 31.5           | 6.4                |
| 4   | 4804            | 41.07                   | AV | 54             | -12.93      | 1.50 H             | 120                  | 34.67              | 6.7            | 31.2             | 31.5           | 6.4                |
| 5   | 9608            | 51.97                   | PK | 74             | -22.03      | 1.00 H             | 180                  | 37.07              | 16             | 30.9             | 32             | 14.9               |
| 6   | 9608            | 40.09                   | AV | 54             | -13.91      | 1.00 H             | 180                  | 25.19              | 16             | 30.9             | 32             | 14.9               |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (PI/4DQPSK\_2402MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Cab. Loss (dB) | Ant. Factor (dB) | Pre. Amp. (dB) | Cor. Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|----------------|------------------|----------------|--------------------|
| 1   | 2390            | 49.95                   | PK | 74             | -24.05      | 1.50 V             | 50                   | 48.65              | 5.2            | 28.6             | 32.5           | 1.3                |
| 2   | 2390            | 41.90                   | AV | 54             | -12.1       | 1.50 V             | 50                   | 40.6               | 5.2            | 28.6             | 32.5           | 1.3                |
| 3   | 4804            | 52.14                   | PK | 74             | -21.86      | 1.20 V             | 150                  | 45.74              | 6.7            | 31.2             | 31.5           | 6.4                |
| 4   | 4804            | 44.16                   | AV | 54             | -9.84       | 1.20 V             | 150                  | 37.76              | 6.7            | 31.2             | 31.5           | 6.4                |
| 5   | 9608            | 50.78                   | PK | 74             | -23.22      | 1.00 V             | 64                   | 35.88              | 16             | 30.9             | 32             | 14.9               |
| 6   | 9608            | 41.97                   | AV | 54             | -12.03      | 1.00 V             | 64                   | 27.07              | 16             | 30.9             | 32             | 14.9               |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (PI/4DQPSK\_2441MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Cab. Loss (dB) | Ant. Factor (dB) | Pre. Amp. (dB) | Cor. Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|----------------|------------------|----------------|--------------------|
| 1   | 1500.98         | 47.68                   | PK | 74             | -26.32      | 1.10 H             | 64                   | 49.18              | 2              | 29               | 32.5           | -1.5               |
| 2   | 1500.98         | 39.53                   | AV | 54             | -14.47      | 1.10 H             | 64                   | 41.03              | 2              | 29               | 32.5           | -1.5               |
| 3   | 3000.68         | 49.24                   | PK | 74             | -24.76      | 1.20 H             | 135                  | 44.49              | 6.2            | 30.05            | 31.5           | 4.75               |
| 4   | 3000.68         | 40.9                    | AV | 54             | -13.1       | 1.20 H             | 135                  | 36.15              | 6.2            | 30.05            | 31.5           | 4.75               |
| 5   | 4882            | 49.17                   | PK | 74             | -24.83      | 1.50 H             | 45                   | 42.47              | 7              | 31.2             | 31.5           | 6.7                |
| 6   | 4882            | 40.76                   | AV | 54             | -13.24      | 1.50 H             | 45                   | 34.06              | 7              | 31.2             | 31.5           | 6.7                |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (PI/4DQPSK\_2441MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Cab. Loss (dB) | Ant. Factor (dB) | Pre. Amp. (dB) | Cor. Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|----------------|------------------|----------------|--------------------|
| 1   | 1605.58         | 48.25                   | PK | 74             | -25.75      | 1.50 V             | 130                  | 49.75              | 2              | 29               | 32.5           | -1.5               |
| 2   | 1605.58         | 40.2                    | AV | 54             | -13.8       | 1.50 V             | 130                  | 41.7               | 2              | 29               | 32.5           | -1.5               |
| 3   | 3000.55         | 49.97                   | PK | 74             | -24.03      | 1.50 V             | 120                  | 45.22              | 6.2            | 30.05            | 31.5           | 4.75               |
| 4   | 3000.55         | 42.12                   | AV | 54             | -11.88      | 1.50 V             | 120                  | 37.37              | 6.2            | 30.05            | 31.5           | 4.75               |
| 5   | 4882            | 49.65                   | PK | 74             | -24.35      | 1.50 V             | 115                  | 42.95              | 7              | 31.2             | 31.5           | 6.7                |
| 6   | 4882            | 41.69                   | AV | 54             | -12.31      | 1.50 V             | 115                  | 34.99              | 7              | 31.2             | 31.5           | 6.7                |



**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (PI/4DQPSK\_2480MHz)**

| No. | Frequency (MHz) | Emssion Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Cab. Loss (dB) | Ant. Factor (dB) | Pre. Amp. (dB) | Cor. Factor (dB/m) |
|-----|-----------------|------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|----------------|------------------|----------------|--------------------|
| 1   | 1500.85         | 50.36                  | PK | 74             | -23.64      | 1.20 H             | 66                   | 51.86              | 2              | 29               | 32.5           | -1.5               |
| 2   | 1500.85         | 42.61                  | AV | 54             | -11.39      | 1.20 H             | 66                   | 44.11              | 2              | 29               | 32.5           | -1.5               |
| 3   | 2483.5          | 52.14                  | PK | 74             | -21.86      | 1.30 H             | 60                   | 49.54              | 5.7            | 28.7             | 31.8           | 2.6                |
| 4   | 2483.5          | 43.91                  | AV | 54             | -10.09      | 1.30 H             | 60                   | 41.31              | 5.7            | 28.7             | 31.8           | 2.6                |
| 5   | 4960            | 50.09                  | PK | 74             | -23.91      | 1.50 H             | 58                   | 43.39              | 7              | 31.2             | 31.5           | 6.7                |
| 6   | 4960            | 41.73                  | AV | 54             | -12.27      | 1.50 H             | 58                   | 35.03              | 7              | 31.2             | 31.5           | 6.7                |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (PI/4DQPSK\_2480MHz)**

| No. | Frequency (MHz) | Emssion Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Cab. Loss (dB) | Ant. Factor (dB) | Pre. Amp. (dB) | Cor. Factor (dB/m) |
|-----|-----------------|------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|----------------|------------------|----------------|--------------------|
| 1   | 1625.32         | 46.62                  | PK | 74             | -27.38      | 1.00 V             | 60                   | 48.12              | 2              | 29               | 32.5           | -1.5               |
| 2   | 1625.32         | 38.88                  | AV | 54             | -15.12      | 1.00 V             | 60                   | 40.38              | 2              | 29               | 32.5           | -1.5               |
| 3   | 2483.5          | 51.10                  | PK | 74             | -22.9       | 1.40 V             | 155                  | 48.5               | 5.7            | 28.7             | 31.8           | 2.6                |
| 4   | 2483.5          | 42.76                  | AV | 54             | -11.24      | 1.40 V             | 155                  | 40.16              | 5.7            | 28.7             | 31.8           | 2.6                |
| 5   | 4960            | 49.36                  | PK | 74             | -24.64      | 1.50 V             | 55                   | 42.66              | 7              | 31.2             | 31.5           | 6.7                |
| 6   | 4960            | 41.40                  | AV | 54             | -12.6       | 1.50 V             | 55                   | 34.7               | 7              | 31.2             | 31.5           | 6.7                |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (8DPSK\_2402MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Cab. Loss (dB) | Ant. Factor (dB) | Pre. Amp. (dB) | Cor. Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|----------------|------------------|----------------|--------------------|
| 1   | 1300.85         | 48.36                   | PK | 74             | -25.64      | 1.10 H             | 100                  | 48.96              | 1.8            | 29.5             | 31.9           | -0.6               |
| 2   | 1300.85         | 39.01                   | AV | 54             | -14.99      | 1.10 H             | 100                  | 39.61              | 1.8            | 29.5             | 31.9           | -0.6               |
| 3   | 2390            | 53.00                   | PK | 74             | -21         | 1.20 H             | 150                  | 51.7               | 5.2            | 28.6             | 32.5           | 1.3                |
| 4   | 2390            | 44.36                   | AV | 54             | -9.64       | 1.20 H             | 150                  | 43.06              | 5.2            | 28.6             | 32.5           | 1.3                |
| 5   | 4804            | 51.98                   | PK | 74             | -22.02      | 1.80 H             | 180                  | 45.58              | 7.4            | 30.4             | 31.4           | 6.4                |
| 6   | 4804            | 43.13                   | AV | 54             | -10.87      | 1.80 H             | 180                  | 36.73              | 7.4            | 30.4             | 31.4           | 6.4                |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (8DPSK\_2402MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Cab. Loss (dB) | Ant. Factor (dB) | Pre. Amp. (dB) | Cor. Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|----------------|------------------|----------------|--------------------|
| 1   | 1300.25         | 49.35                   | PK | 74             | -24.65      | 1.10 V             | 230                  | 49.95              | 1.8            | 29.5             | 31.9           | -0.6               |
| 2   | 1300.25         | 41.26                   | AV | 54             | -12.74      | 1.10 V             | 230                  | 41.86              | 1.8            | 29.5             | 31.9           | -0.6               |
| 3   | 2390            | 52.06                   | PK | 74             | -21.94      | 1.50 V             | 70                   | 50.76              | 5.2            | 28.6             | 32.5           | 1.3                |
| 4   | 2390            | 43.67                   | AV | 54             | -10.33      | 1.50 V             | 70                   | 42.37              | 5.2            | 28.6             | 32.5           | 1.3                |
| 5   | 4804            | 50.05                   | PK | 74             | -23.95      | 1.00 V             | 150                  | 43.65              | 7.4            | 30.4             | 31.4           | 6.4                |
| 6   | 4804            | 41.4                    | AV | 54             | -12.6       | 1.00 V             | 150                  | 35                 | 7.4            | 30.4             | 31.4           | 6.4                |



**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (8DPSK\_2441MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Cab. Loss (dB) | Ant. Factor (dB) | Pre. Amp. (dB) | Cor. Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|----------------|------------------|----------------|--------------------|
| 1   | 1700.65         | 49.95                   | PK | 74             | -24.05      | 1.50 H             | 52                   | 50.45              | 2.5            | 29.4             | 32.4           | -0.5               |
| 2   | 1700.65         | 41.81                   | AV | 54             | -12.19      | 1.50 H             | 52                   | 42.31              | 2.5            | 29.4             | 32.4           | -0.5               |
| 3   | 4882            | 50.24                   | PK | 74             | -23.76      | 1.50 H             | 62                   | 43.84              | 6.7            | 31.2             | 31.5           | 6.4                |
| 4   | 4882            | 41.21                   | AV | 54             | -12.79      | 1.50 H             | 62                   | 34.81              | 6.7            | 31.2             | 31.5           | 6.4                |
| 5   | 9764            | 50.19                   | PK | 74             | -23.81      | 1.50 H             | 74                   | 41.39              | 9.9            | 31               | 32.1           | 8.8                |
| 6   | 9764            | 41.85                   | AV | 54             | -12.15      | 1.50 H             | 74                   | 33.05              | 9.9            | 31               | 32.1           | 8.8                |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (8DPSK\_2441MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Cab. Loss (dB) | Ant. Factor (dB) | Pre. Amp. (dB) | Cor. Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|----------------|------------------|----------------|--------------------|
| 1   | 1700.15         | 50.18                   | PK | 74             | -23.82      | 1.10 V             | 55                   | 50.68              | 2.5            | 29.4             | 32.4           | -0.5               |
| 2   | 1700.15         | 41.91                   | AV | 54             | -12.09      | 1.10 V             | 55                   | 42.41              | 2.5            | 29.4             | 32.4           | -0.5               |
| 3   | 4882            | 50.23                   | PK | 74             | -23.77      | 1.20 V             | 73                   | 43.83              | 6.7            | 31.2             | 31.5           | 6.4                |
| 4   | 4882            | 41.96                   | AV | 54             | -12.04      | 1.20 V             | 73                   | 35.56              | 6.7            | 31.2             | 31.5           | 6.4                |
| 5   | 9764            | 51.09                   | PK | 74             | -22.91      | 1.10 V             | 120                  | 42.29              | 9.9            | 31               | 32.1           | 8.8                |
| 6   | 9764            | 42.93                   | AV | 54             | -11.07      | 1.10 V             | 120                  | 34.13              | 9.9            | 31               | 32.1           | 8.8                |



**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (8DPSK\_2480MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Cab. Loss (dB) | Ant. Factor (dB) | Pre. Amp. (dB) | Cor. Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|----------------|------------------|----------------|--------------------|
| 1   | 2483.5          | 47.95                   | PK | 74             | -26.05      | 1.00 H             | 156                  | 45.35              | 5.7            | 28.7             | 31.8           | 2.6                |
| 2   | 2483.5          | 39.6                    | AV | 54             | -14.4       | 1.00 H             | 156                  | 37                 | 5.7            | 28.7             | 31.8           | 2.6                |
| 3   | 4960            | 48.39                   | PK | 74             | -25.61      | 1.20 H             | 52                   | 41.99              | 6.7            | 31.2             | 31.5           | 6.4                |
| 4   | 4960            | 40.25                   | AV | 54             | -13.75      | 1.20 H             | 52                   | 33.85              | 6.7            | 31.2             | 31.5           | 6.4                |
| 5   | 9900            | 50.26                   | PK | 74             | -23.74      | 1.50 H             | 100                  | 35.36              | 16             | 30.9             | 32             | 14.9               |
| 6   | 9900            | 42.2                    | AV | 54             | -11.8       | 1.50 H             | 100                  | 27.3               | 16             | 30.9             | 32             | 14.9               |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (8DPSK\_2480MHz)**

| No. | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV/m) | Cab. Loss (dB) | Ant. Factor (dB) | Pre. Amp. (dB) | Cor. Factor (dB/m) |
|-----|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|--------------------|----------------|------------------|----------------|--------------------|
| 1   | 2483.5          | 48.88                   | PK | 74             | -25.12      | 1.50 V             | 36                   | 46.28              | 5.7            | 28.7             | 31.8           | 2.6                |
| 2   | 2483.5          | 40.55                   | AV | 54             | -13.45      | 1.50 V             | 36                   | 37.95              | 5.7            | 28.7             | 31.8           | 2.6                |
| 3   | 4960            | 51.29                   | PK | 74             | -22.71      | 1.10V              | 150                  | 44.89              | 6.7            | 31.2             | 31.5           | 6.4                |
| 4   | 4960            | 42.82                   | AV | 54             | -11.18      | 1.10V              | 150                  | 36.42              | 6.7            | 31.2             | 31.5           | 6.4                |
| 5   | 9900            | 50.09                   | PK | 74             | -23.91      | 1.50 V             | 120                  | 35.19              | 16             | 30.9             | 32             | 14.9               |
| 6   | 9900            | 42.02                   | AV | 54             | -11.98      | 1.50 V             | 120                  | 27.12              | 16             | 30.9             | 32             | 14.9               |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
- Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level - Limit value
5. " \* ": Fundamental frequency.

**3. List of measuring equipment**

| Radiated Emission |                         |                              |                        |              |            |
|-------------------|-------------------------|------------------------------|------------------------|--------------|------------|
| Item              | Test Equipment          | Manufacturer                 | Model No.              | Serial No.   | Last Cal   |
| 1                 | Ultra-Broadband Antenna | ShwarzBeck                   | VULB9163               | 538          | 11/12/2017 |
| 2                 | EMI TEST RECEIVER       | Rohde&Schwarz                | ESI 26                 | 100009       | 11/12/2017 |
| 3                 | EMI TEST Software       | Audix                        | E3                     | N/A          | N/A        |
| 4                 | TURNTABLE               | ETS                          | 2088                   | 2149         | N/A        |
| 5                 | ANTENNA MAST            | ETS                          | 2075                   | 2346         | N/A        |
| 6                 | EMI TEST Software       | Rohde&Schwarz                | ESK1                   | N/A          | N/A        |
| 7                 | HORNANTENNA             | ShwarzBeck                   | 9120D                  | 1011         | 11/12/2017 |
| 8                 | Amplifer                | Sonoma                       | 310N                   | E009-13      | 11/12/2017 |
| 9                 | JS amplifer             | Rohde&Schwarz                | JS4-00101800-28<br>-5A | F201504      | 11/12/2017 |
| 10                | High pass filter        | Compliance Direction systems | BSU-6                  | 34202        | 11/12/2017 |
| 11                | HORNANTENNA             | ShwarzBeck                   | 9120D                  | 1012         | 11/12/2017 |
| 12                | Amplifer                | Compliance Direction systems | PAP1-4060              | 120          | 11/12/2017 |
| 13                | Loop Antenna            | Rohde&Schwarz                | HFH2-Z2                | 100020       | 11/12/2017 |
| 14                | TURNTABLE               | MATURO                       | TT2.0                  | ----         | N/A        |
| 15                | ANTENNA MAST            | MATURO                       | TAM-4.0-P              | ----         | N/A        |
| 16                | Horn Antenna            | SCHWARZBECK                  | BBHA9170               | 25841        | 11/12/2017 |
| 17                | ULTRA-BROADBAND ANTENNA | Rohde&Schwarz                | HL562                  | 100015       | 11/12/2017 |
| 18                | Test Equipment          | Manufacturer                 | Model No.              | Serial No.   | Last Cal   |
| 19                | Spectrum Analyzer       | Rohde&Schwarz                | FSP                    | 1164.4391.40 | 11/12/2017 |
| 20                | Spectrum Analyzer       | Keysight                     | N9030A                 | ATO-67098    | 10/09/2017 |
| 21                | Power Meter             | Anritsu                      | ML2480B                | 100798       | 11/12/2017 |
| 22                | Power Sensor            | Anritsu                      | MA2411B                | 100258       | 11/12/2017 |




## Appendix A

### RF Output Power Test Result and Data


| BT Maximum Output Power |                |             |            |            |        |
|-------------------------|----------------|-------------|------------|------------|--------|
| Mode                    | Test Frequency | Packet Type | Power(dBm) | Limit(dBm) | Result |
| GFSK                    | 2402           | DH5         | 0.76       | 21         | Pass   |
| GFSK                    | 2441           | DH5         | 0.74       | 21         | Pass   |
| GFSK                    | 2480           | DH5         | 0.88       | 21         | Pass   |
| PI/4DQPSK               | 2402           | 2DH5        | 1.77       | 21         | Pass   |
| PI/4DQPSK               | 2441           | 2DH5        | 1.85       | 21         | Pass   |
| PI/4DQPSK               | 2480           | 2DH5        | 1.85       | 21         | Pass   |
| 8DPSK                   | 2402           | 3DH5        | 2.04       | 21         | Pass   |
| 8DPSK                   | 2441           | 3DH5        | 2.05       | 21         | Pass   |
| 8DPSK                   | 2480           | 3DH5        | 2.00       | 21         | Pass   |




Output Power: 8DPSK,2402MHz,3DH5

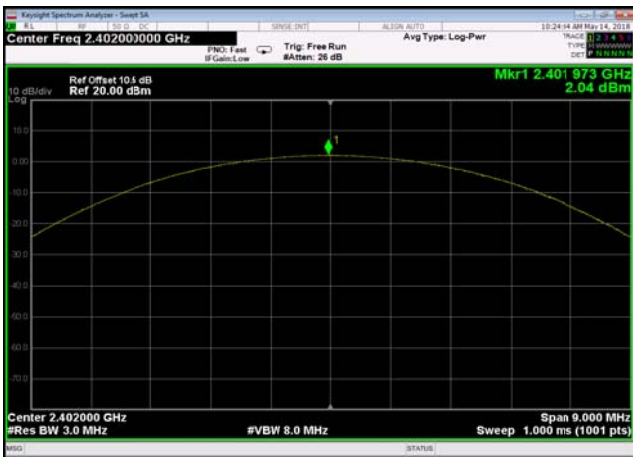


Output Power: 8DPSK,2441MHz,3DH5

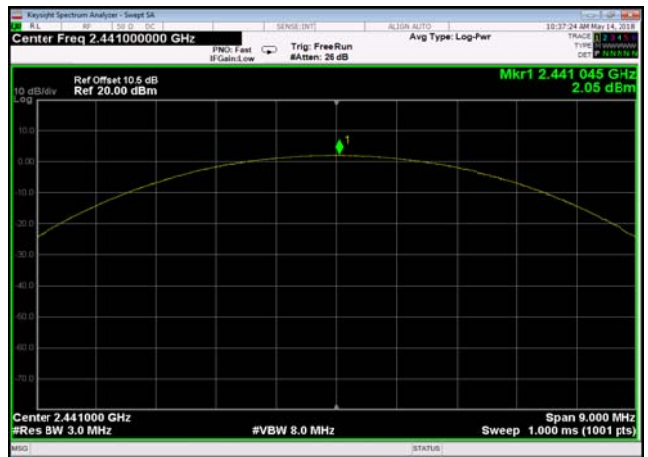


Output Power: 8DPSK,2480MHz,3DH5

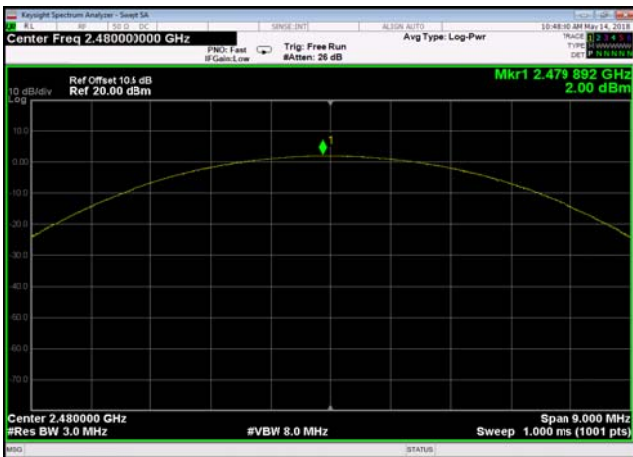


Output Power: PI/4DQPSK,2402MHz,2DH5

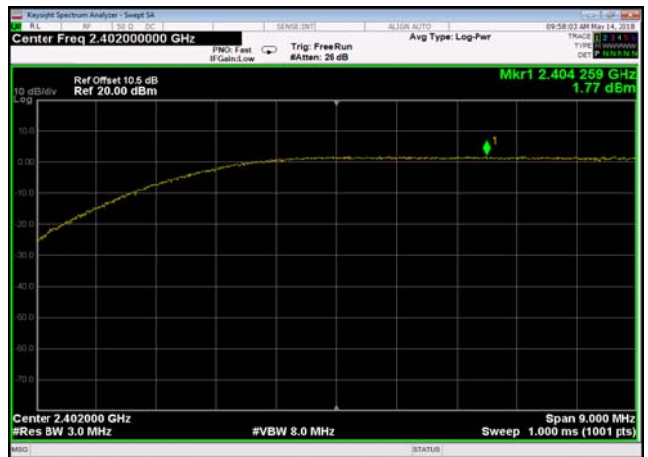

Output Power: PI/4DQPSK,2441MHz,2DH5


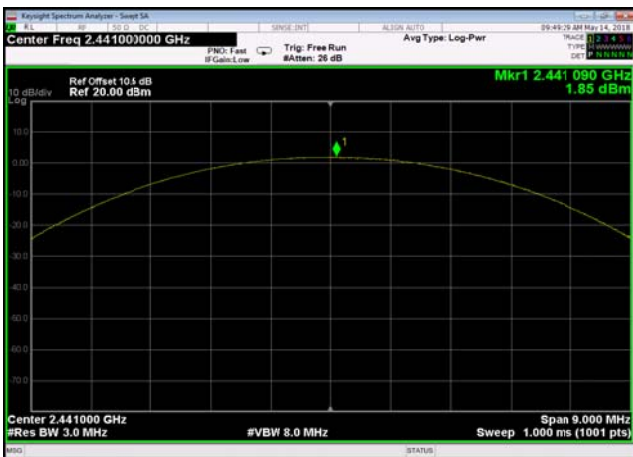


Output Power: PI/4DQPSK,2480MHz,2DH5

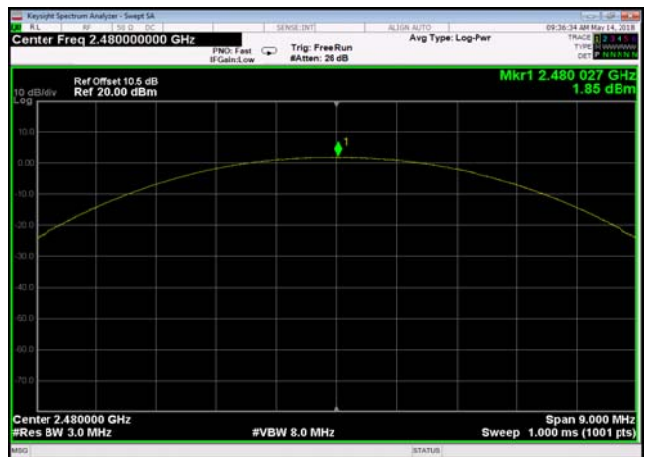

Output Power: GFSK,2402MHz,DH5

Output Power: GFSK,2441MHz,DH5

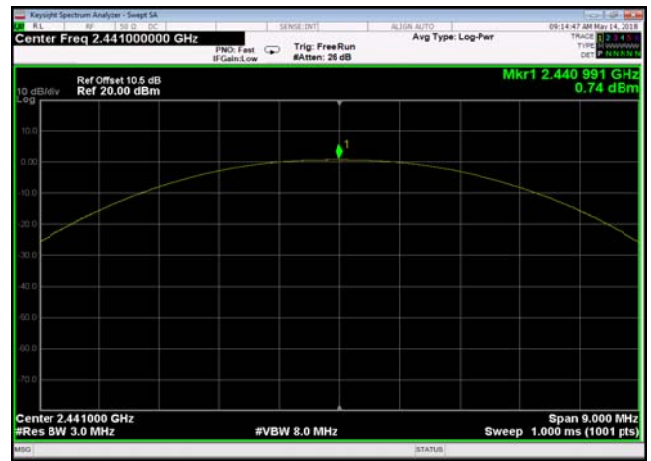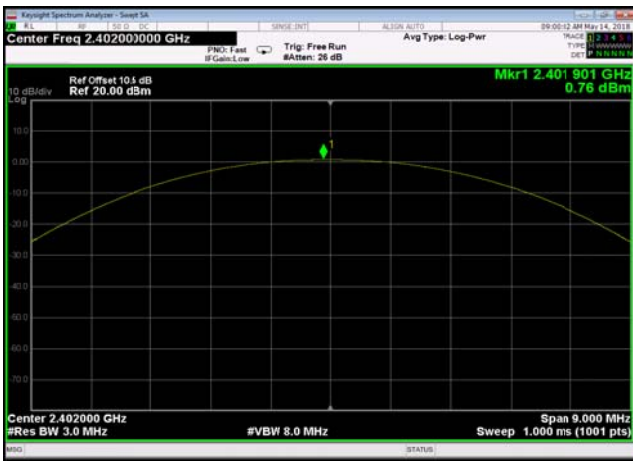

Output Power: GFSK,2480MHz,DH5




**20dB Bandwidth  
Test Result and Data**


| BT Occupied 20dB Bandwidth |                |             |                             |        |
|----------------------------|----------------|-------------|-----------------------------|--------|
| Mode                       | Test Frequency | Packet Type | -20db Occupy Bandwidth(KHz) | Result |
| GFSK                       | 2402           | DH5         | 952.123                     | Pass   |
| GFSK                       | 2441           | DH5         | 953.396                     | Pass   |
| GFSK                       | 2480           | DH5         | 952.215                     | Pass   |
| PI/4DQPSK                  | 2402           | 2DH5        | 1282.127                    | Pass   |
| PI/4DQPSK                  | 2441           | 2DH5        | 1282.141                    | Pass   |
| PI/4DQPSK                  | 2480           | 2DH5        | 1282.556                    | Pass   |
| 8DPSK                      | 2402           | 3DH5        | 1283.936                    | Pass   |
| 8DPSK                      | 2441           | 3DH5        | 1285.813                    | Pass   |
| 8DPSK                      | 2480           | 3DH5        | 1286.048                    | Pass   |




20dB Bandwidth: 8DPSK,2402Mhz,3DH5

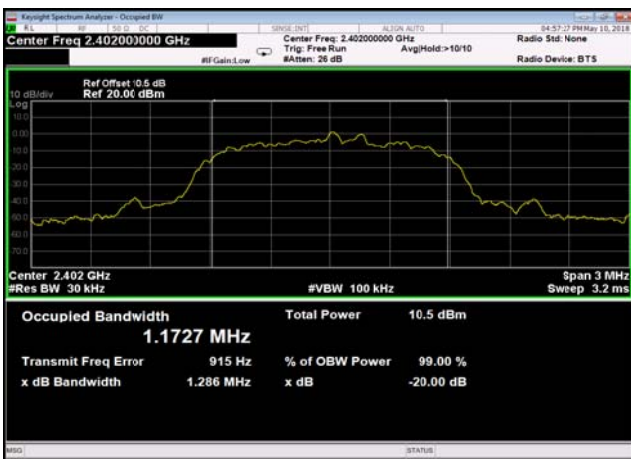


20dB Bandwidth: 8DPSK,2441Mhz,3DH5

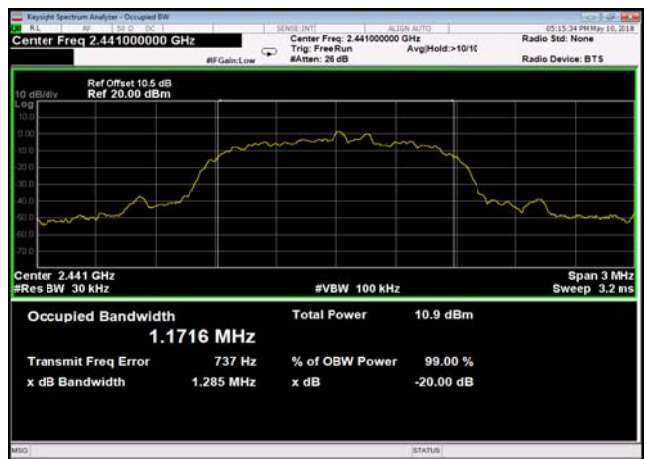


20dB Bandwidth: 8DPSK,2480Mhz,3DH5

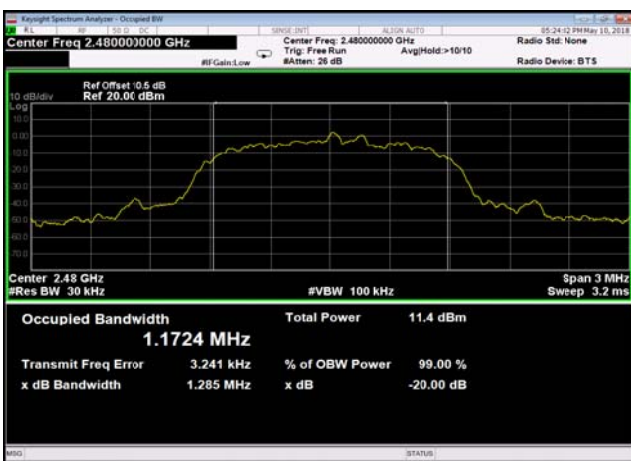


20dB Bandwidth: PI/4DQPSK,2402Mhz,2DH5

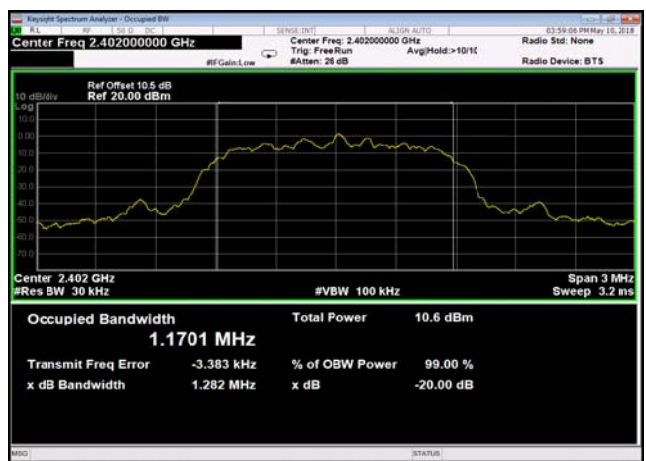

20dB Bandwidth: PI/4DQPSK,2441Mhz,2DH5

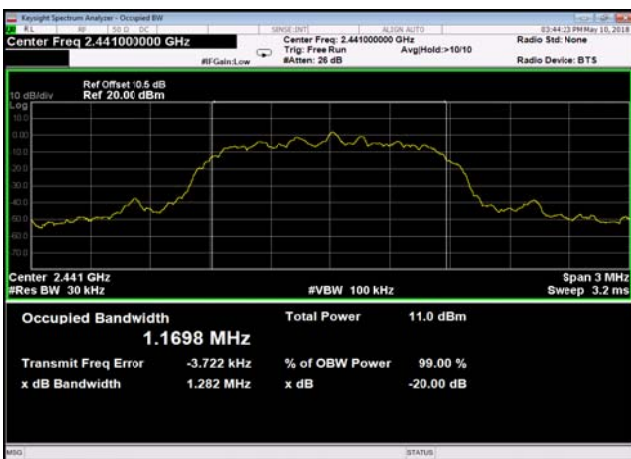



20dB Bandwidth: PI/4DQPSK,2480Mhz,2DH5

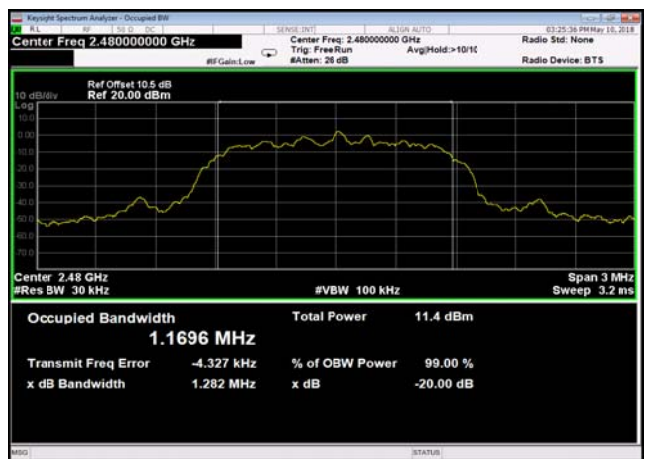


20dB Bandwidth: GFSK,2402Mhz,DH5

20dB Bandwidth: GFSK,2441Mhz,DH5



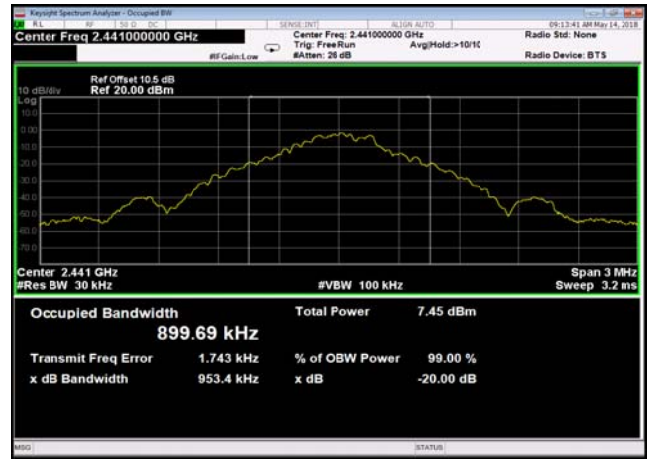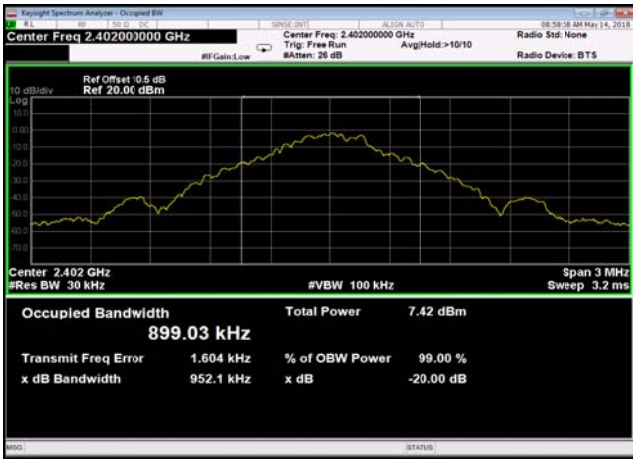

20dB Bandwidth: GFSK,2480Mhz,DH5

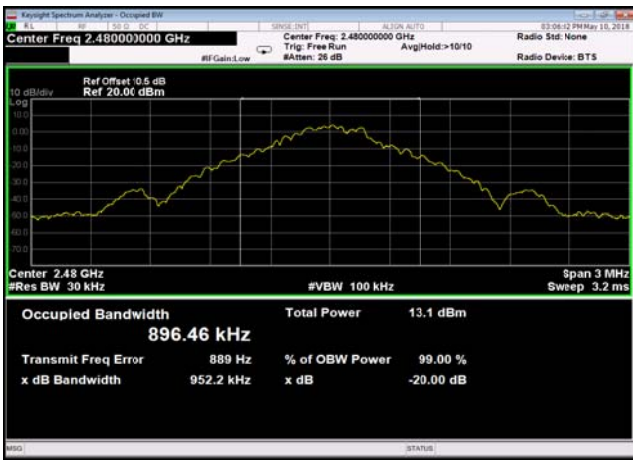




**Transmitter Spurious Emission  
Test Result and Data**

## BT Transmitter Spurious Emission


| Mode  | Test Frequency | Packet Type | Frequency Range | Power(dBm) | Result |
|-------|----------------|-------------|-----------------|------------|--------|
| GFSK  | 2402           | DH5         | Reference Level | -19.58     | Pass   |
| GFSK  | 2441           | DH5         | Reference Level | -19.55     | Pass   |
| GFSK  | 2480           | DH5         | Reference Level | -19.94     | Pass   |
| DQPSK | 2402           | 2DH5        | Reference Level | -20.44     | Pass   |
| DQPSK | 2441           | 2DH5        | Reference Level | -20.33     | Pass   |
| DQPSK | 2480           | 2DH5        | Reference Level | -20.26     | Pass   |
| 8DPSK | 2402           | 3DH5        | Reference Level | -20.43     | Pass   |
| 8DPSK | 2441           | 3DH5        | Reference Level | -20.33     | Pass   |
| 8DPSK | 2480           | 3DH5        | Reference Level | -20.28     | Pass   |




Conducted Emission: 8DPSK,2402,3DH5,10  
000Mhz~25000Mhz

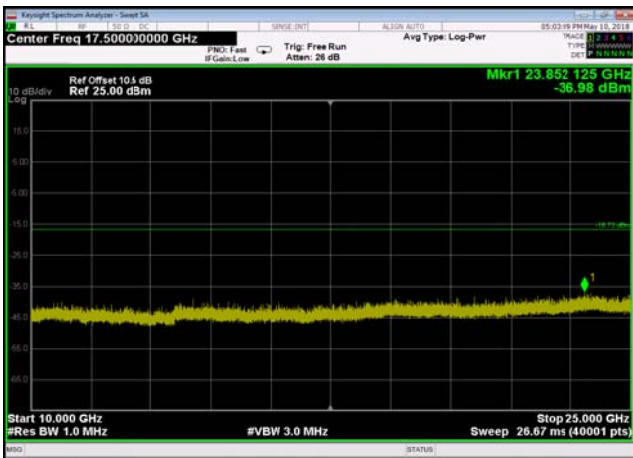


Conducted Emission: 8DPSK,2402,3DH5,25  
00Mhz~10000Mhz

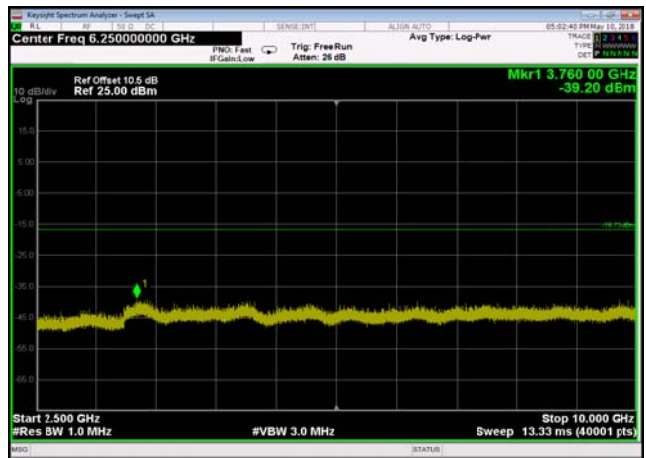


Conducted Emission: 8DPSK,2402,3DH5,30  
Mhz~2310Mhz

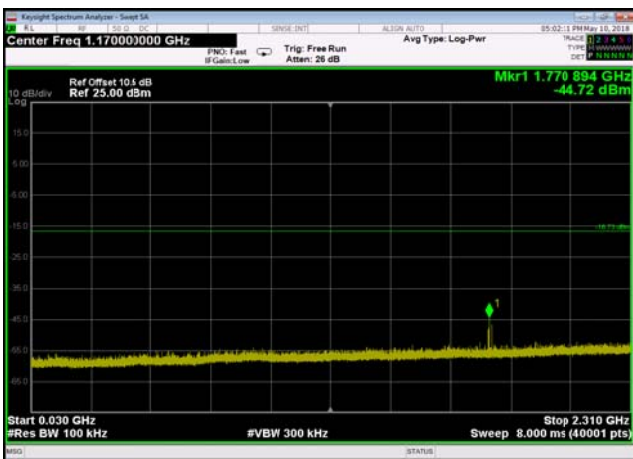


Conducted Emission: 8DPSK,2402,3DH5,Ba  
nd Edge HoppingOFF

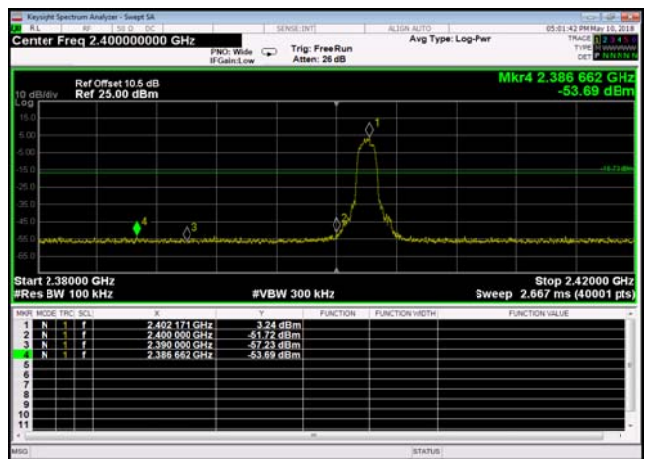

Conducted Emission: 8DPSK,2402,3DH5,Re  
ference Level

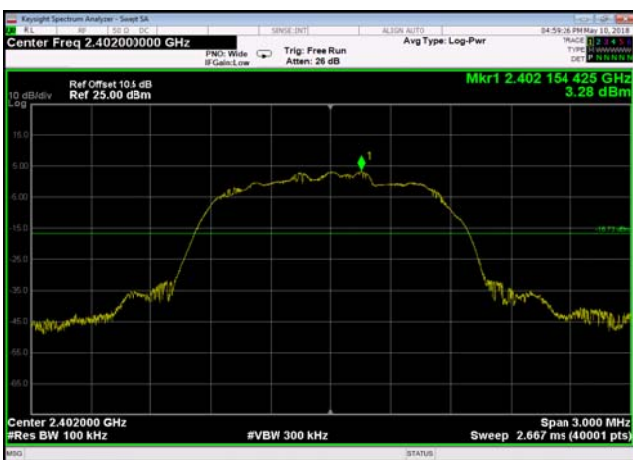


Conducted Emission: 8DPSK,2441,3DH5,10  
000Mhz~25000Mhz

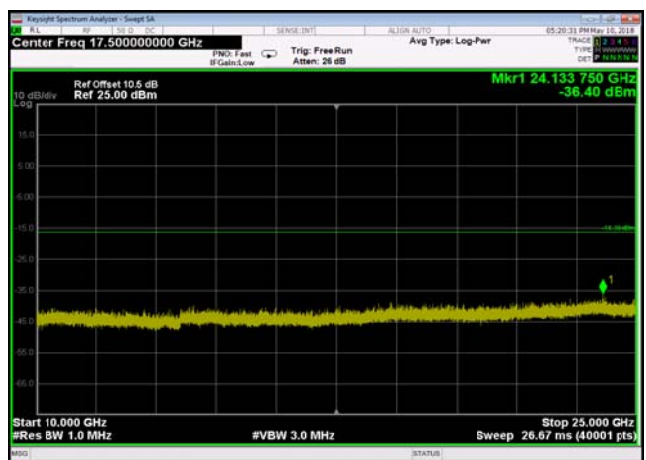


Conducted Emission: 8DPSK,2441,3DH5,25  
00Mhz~10000Mhz


Conducted Emission: 8DPSK,2441,3DH5,30  
Mhz~2310Mhz

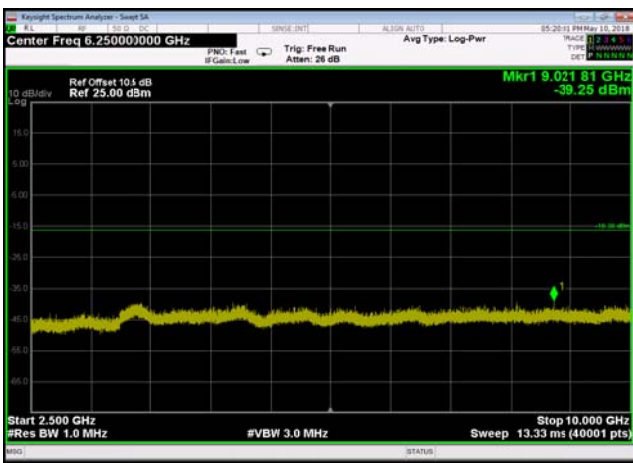

Conducted Emission: 8DPSK,2441,3DH5,  
Band Edge Hopping OFF

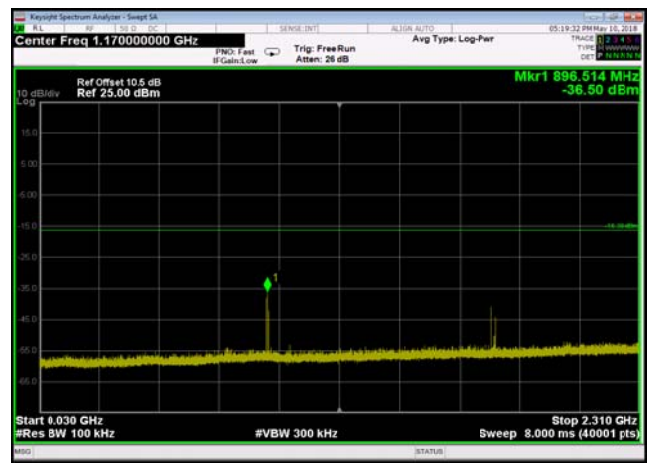


Conducted Emission: 8DPSK,2441,3DH5,  
Reference Level

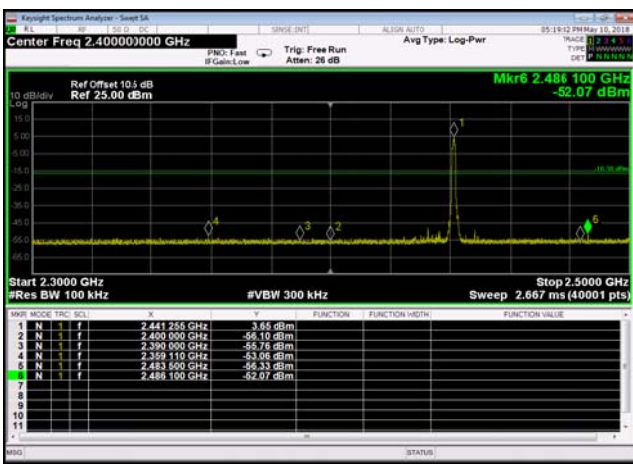


Conducted Emission: 8DPSK,2480,3DH5,10  
000Mhz~25000Mhz




Conducted Emission: 8DPSK,2480,3DH5,25  
00Mhz~10000Mhz

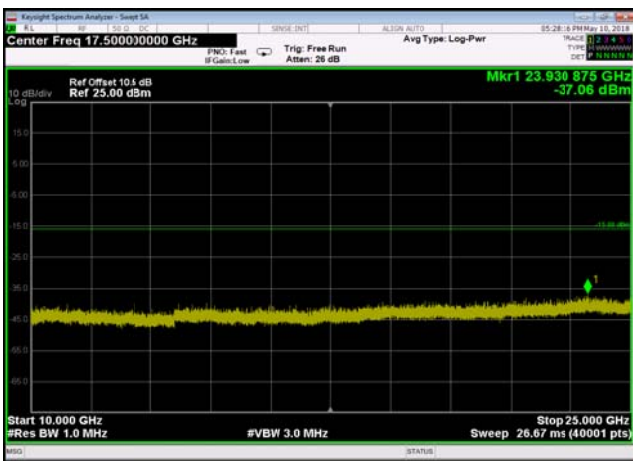


Conducted Emission: 8DPSK,2480,3DH5,30  
Mhz~2310Mhz

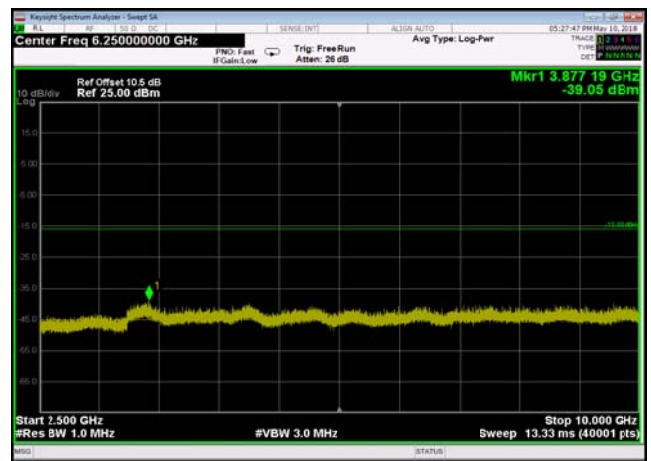

Conducted Emission: 8DPSK,2480,3DH5, Ba  
nd Edge HoppingOFF

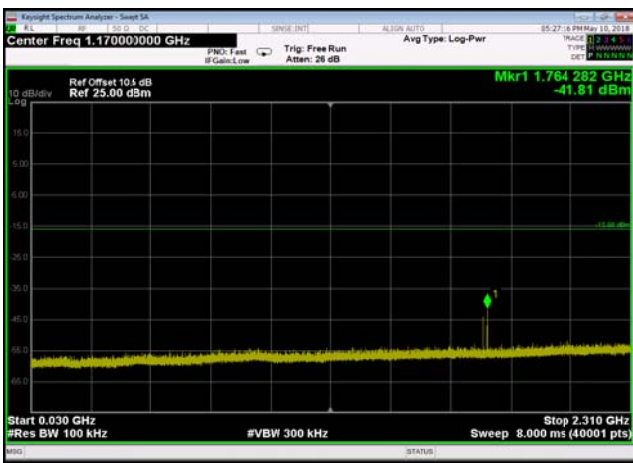


Conducted Emission: 8DPSK,2480,3DH5,  
Reference Level

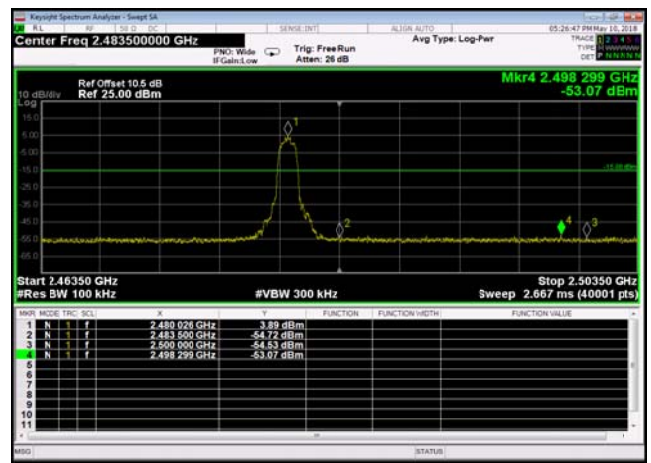

Conducted Emission: PI/4DQPSK,2402,2DH5,10  
000Mhz~25000Mhz




Conducted Emission: PI/4DQPSK,2402,2DH5,25  
00Mhz~10000Mhz

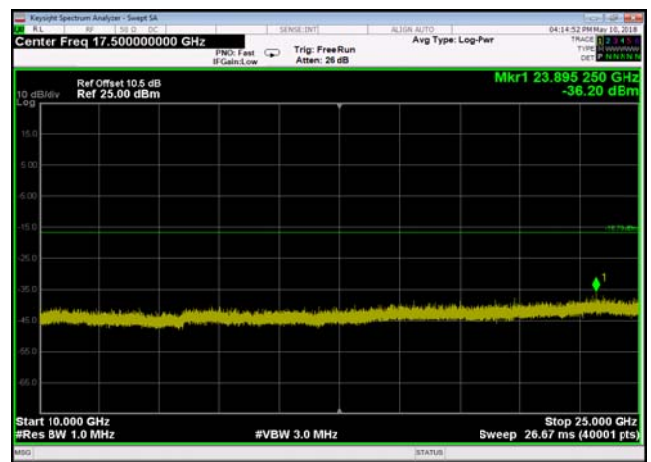

Conducted Emission: PI/4DQPSK,2402,2DH5,30  
Mhz~2310Mhz




Conducted Emission: PI/4DQPSK,2402,2DH5,  
Band Edge HoppingOFF

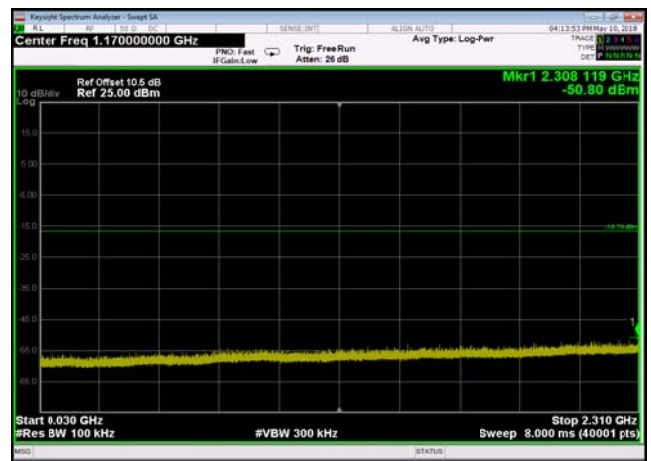


Conducted Emission: PI/4DQPSK,2402,2DH5,  
Reference Level




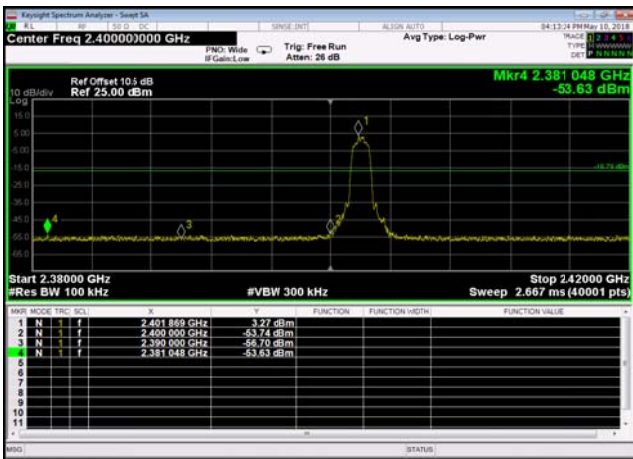


Conducted Emission: PI/4DQPSK,2441,2DH5,10 000Mhz~25000Mhz

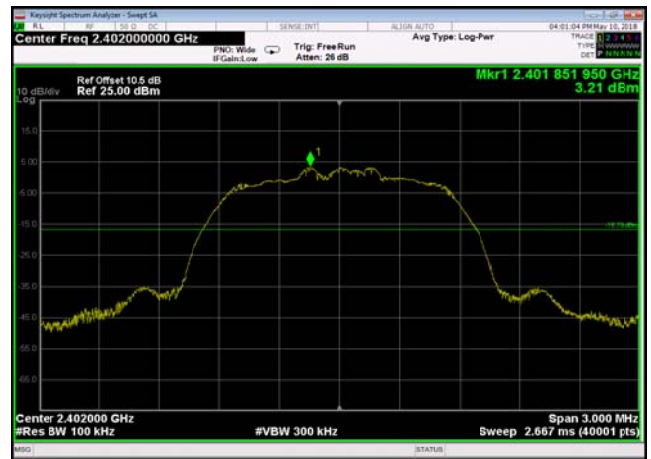


Conducted Emission: PI/4DQPSK,2441,2DH5,25 00Mhz~10000Mhz

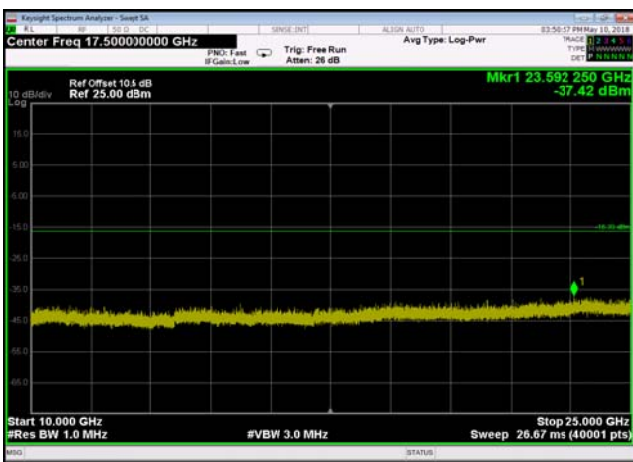


Conducted Emission: PI/4DQPSK,2441,2DH5,30 Mhz~2310Mhz

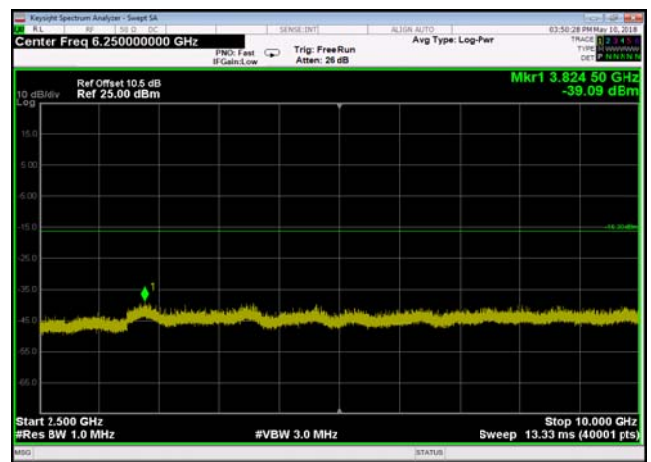

Conducted Emission: PI/4DQPSK,2441,2DH5,Ba nd Edge HoppingOFF

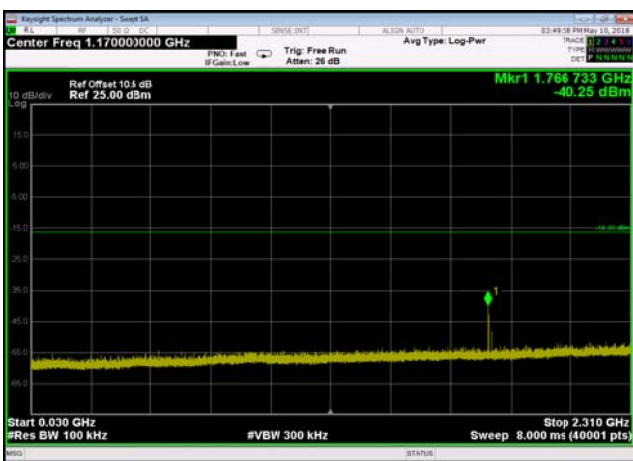


Conducted Emission: PI/4DQPSK,2441,2DH5,Re ference Level

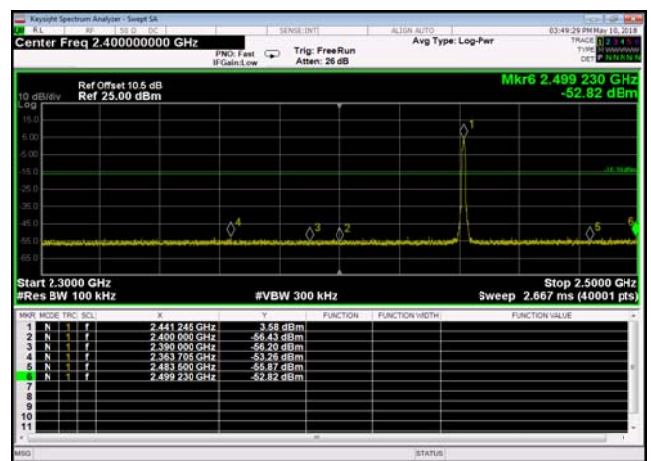


Conducted Emission: PI/4DQPSK,2480,2DH5,10 000Mhz~25000Mhz




Conducted Emission: PI/4DQPSK,2480,2DH5,2500MHz~10000MHz

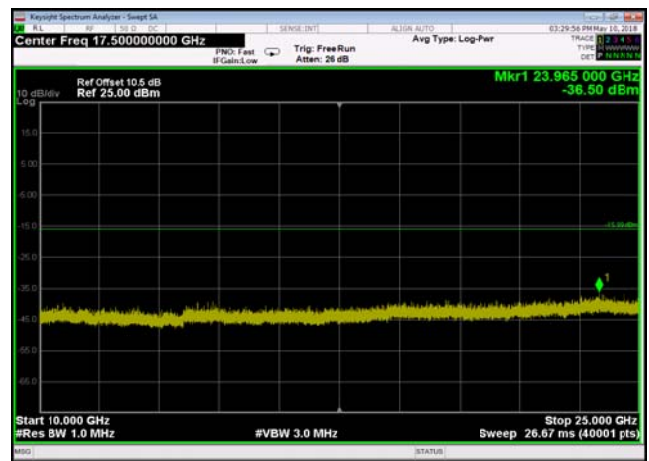


Conducted Emission: PI/4DQPSK,2480,2DH5,30 Mhz~2310MHz

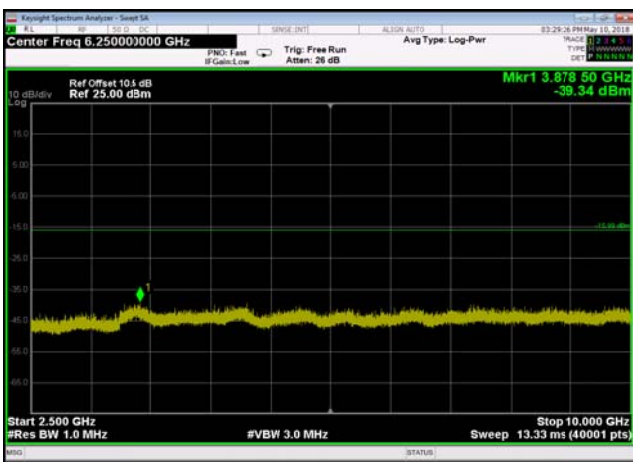


Conducted Emission: PI/4DQPSK,2480,2DH5,Band Edge Hopping OFF

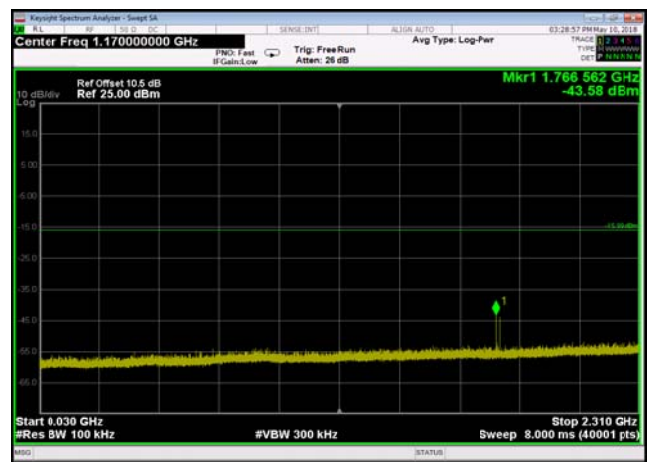


Conducted Emission: PI/4DQPSK,2480,2DH5,Reference Level

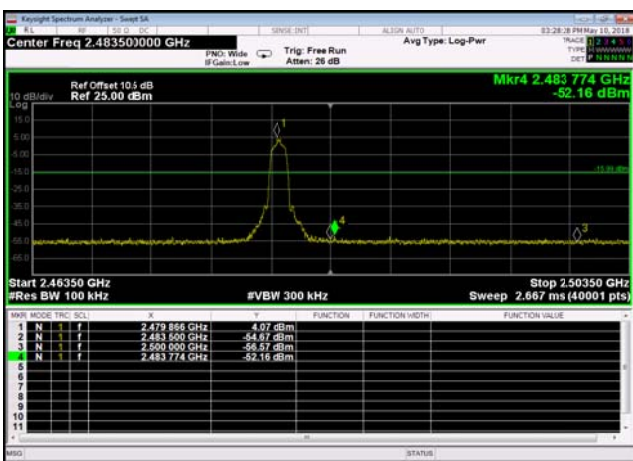


Conducted Emission: GFSK,2402,DH5,10000MHz~25000MHz

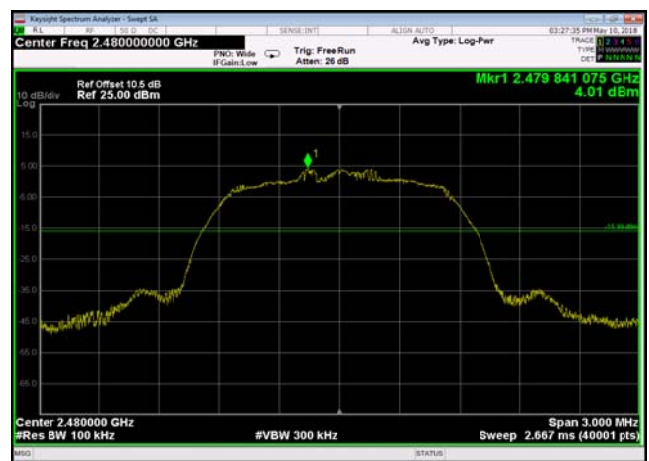


Conducted Emission: GFSK,2402,DH5,2500 Mhz~10000MHz

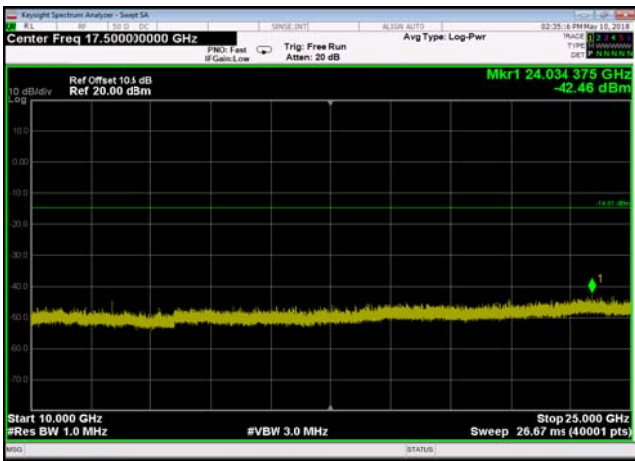


Conducted Emission: GFSK,2402,DH5,30Mh z~2310Mhz

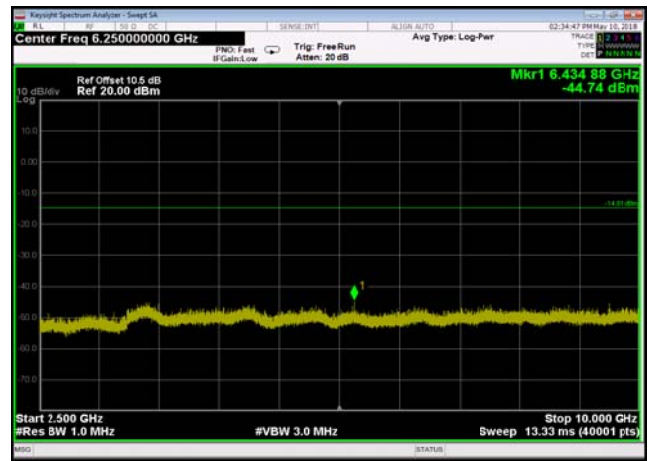

Conducted Emission: GFSK,2402,DH5,Band Edge Hopping OFF

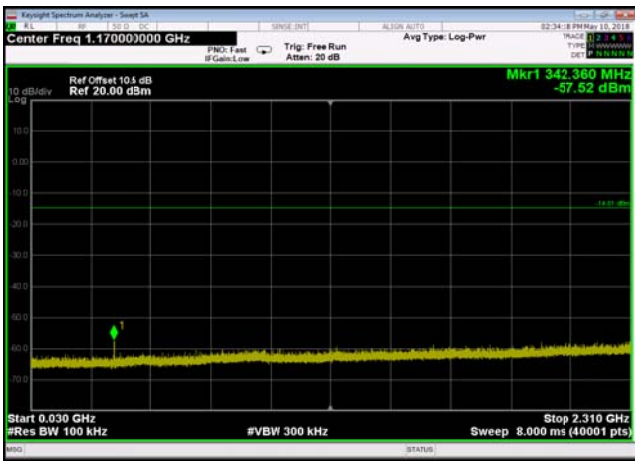


Conducted Emission: GFSK,2402,DH5,Reference Level

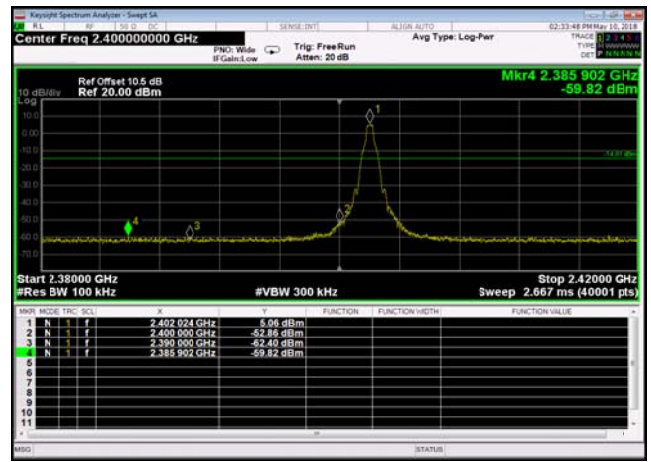

Conducted Emission: GFSK,2441,DH5,1000 0Mhz~25000Mhz




Conducted Emission: GFSK,2441,DH5,2500 Mhz~10000Mhz

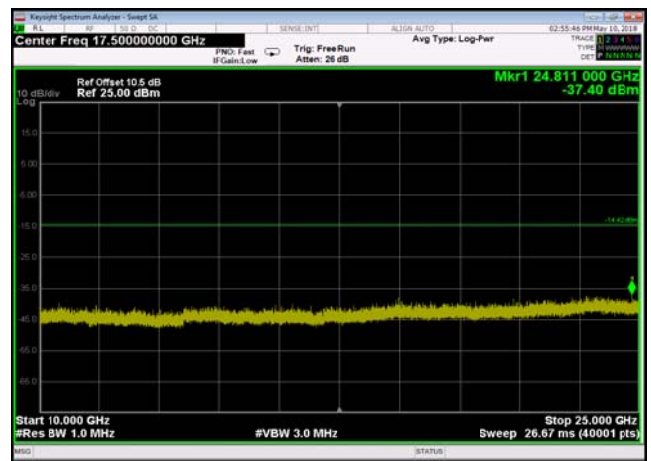


Conducted Emission: GFSK,2441,DH5,30Mh z~2310Mhz




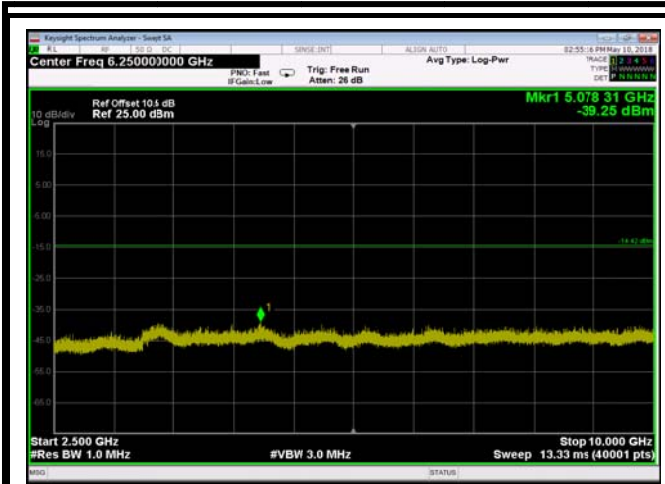

Conducted Emission: GFSK,2441,DH5,Band Edge HoppingOFF

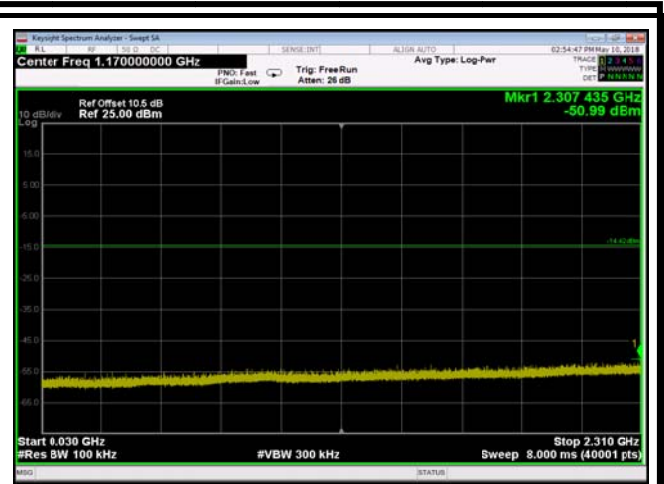


Conducted Emission: GFSK,2441,DH5,Reference Level

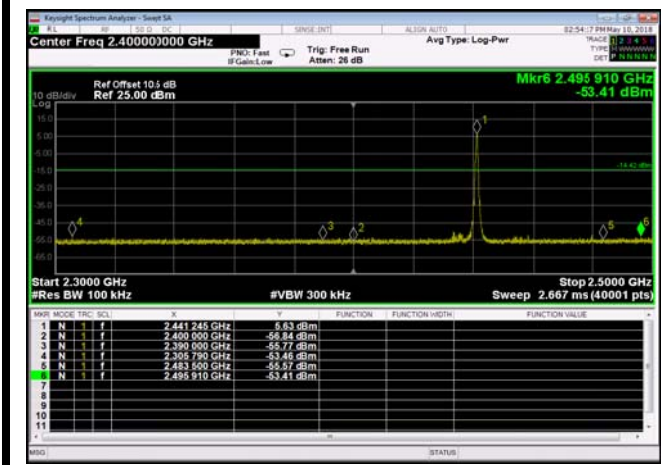


Conducted Emission: GFSK,2480,DH5,1000 0Mhz~25000Mhz



Conducted Emission: GFSK,2480,DH5,2500 Mhz~10000Mhz


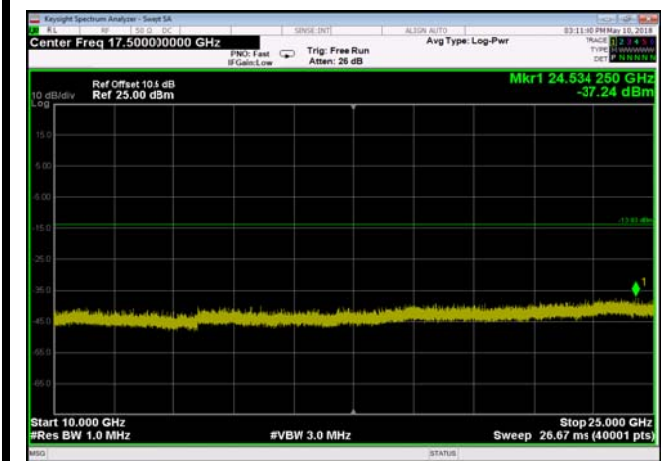


Conducted Emission: GFSK,2480,DH5,30Mhz z~2310Mhz

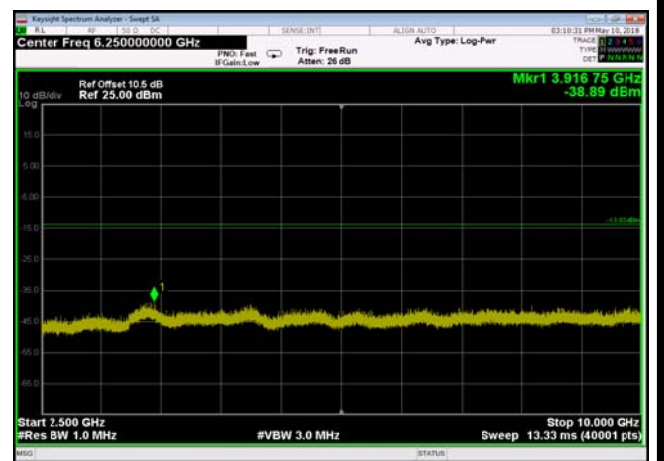

Conducted Emission: GFSK,2480,DH5,Band Edge HoppingOFF



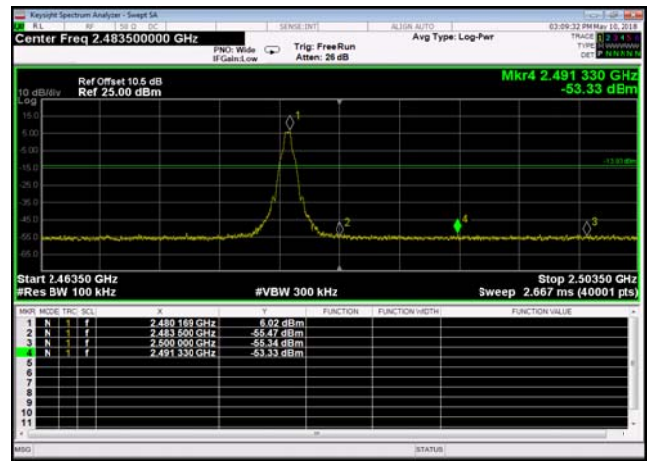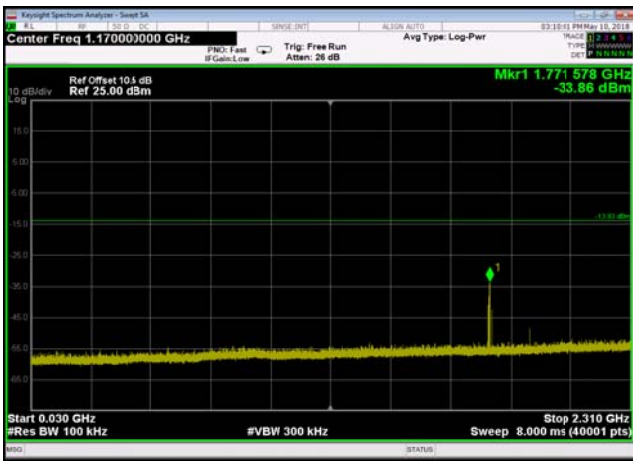

Conducted Emission: GFSK,2480,DH5,  
Reference Level







## BT Frequency Band Edges-Conducted

| Mode      | Test Frequency | Packet Type | Hopping Mode | Band Edge(dBm) | Limit (dBm) | Result |
|-----------|----------------|-------------|--------------|----------------|-------------|--------|
| GFSK      | 2402           | DH5         | Hopping Off  | -54.59         | -20.088     | Pass   |
| GFSK      | 2480           | DH5         | Hopping Off  | -58.55         | -19.916     | Pass   |
| PI/4DQPSK | 2402           | 2DH5        | Hopping Off  | -56.61         | -20.407     | Pass   |
| PI/4DQPSK | 2480           | 2DH5        | Hopping Off  | -59.28         | -20.193     | Pass   |
| 8DPSK     | 2402           | 3DH5        | Hopping Off  | -55.57         | -20.929     | Pass   |
| 8DPSK     | 2480           | 3DH5        | Hopping Off  | -59.11         | -21.173     | Pass   |


Conducted Emission: 8DPSK,2402,3DH5,Ba  
nd Edge Hopping On

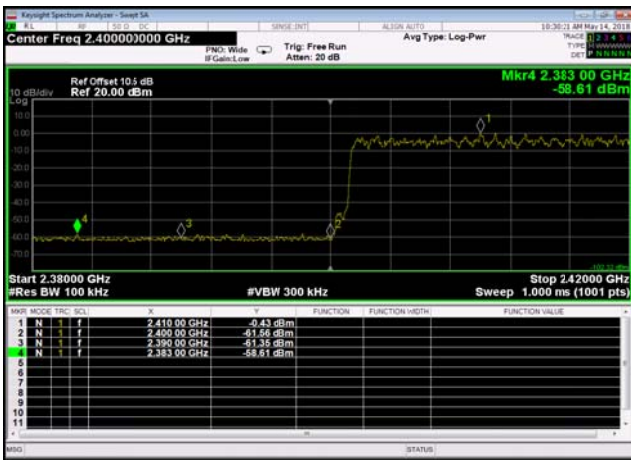


Conducted Emission: 8DPSK,2402,3DH5,Ba  
nd Edge Hopping Off

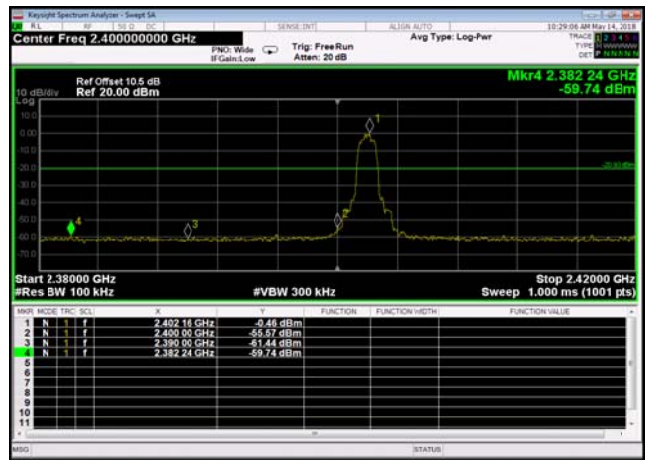


Conducted Emission: 8DPSK,2480,3DH5,Ba  
nd Edge Hopping On

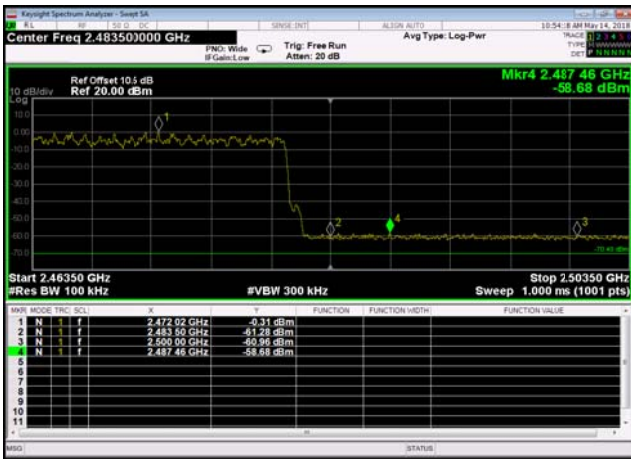

Conducted Emission: 8DPSK,2480,3DH5,Ba  
nd Edge Hopping Off

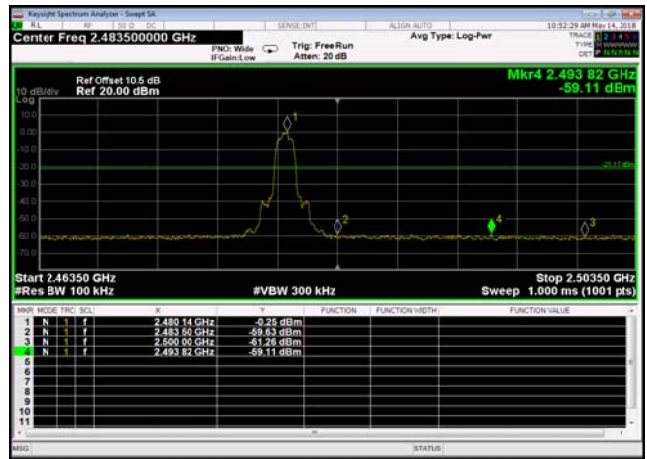

Conducted Emission: PI/4DQPSK,2402,2DH5,Ba  
nd Edge Hopping On

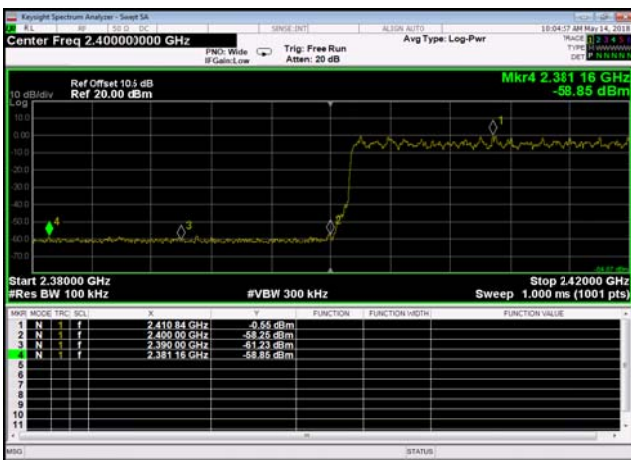

Conducted Emission: PI/4DQPSK,2402,2DH5,Ba  
nd Edge Hopping Off




Conducted Emission: PI/4DQPSK,2480,2DH5,Ba  
nd Edge Hopping On




Conducted Emission: PI/4DQPSK,2480,2DH5,Ba  
nd Edge Hopping Off




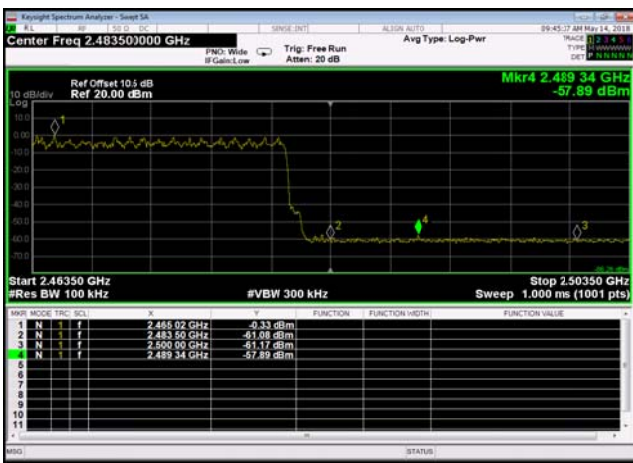


Conducted Emission: GFSK,2402,DH5,Band Edge Hopping On

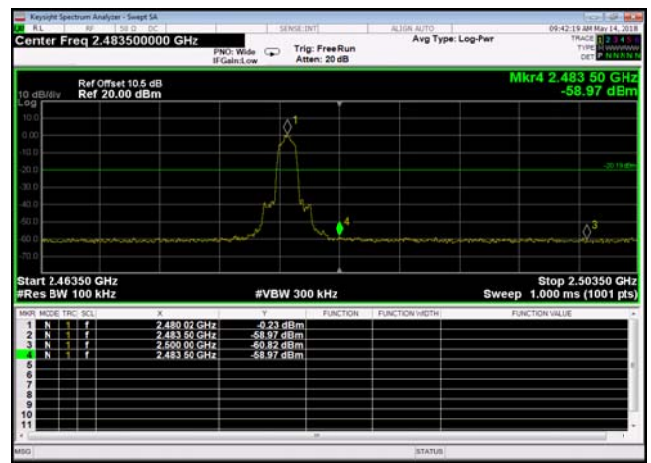



Conducted Emission: GFSK,2402,DH5,Band Edge Hopping Off

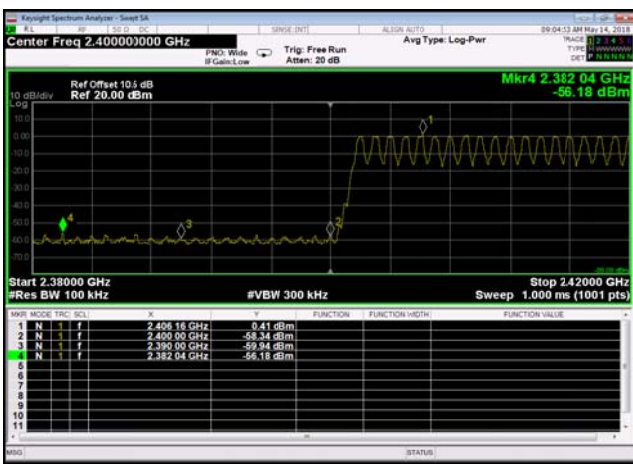

Conducted Emission: GFSK,2480,DH5,Band Edge Hopping On

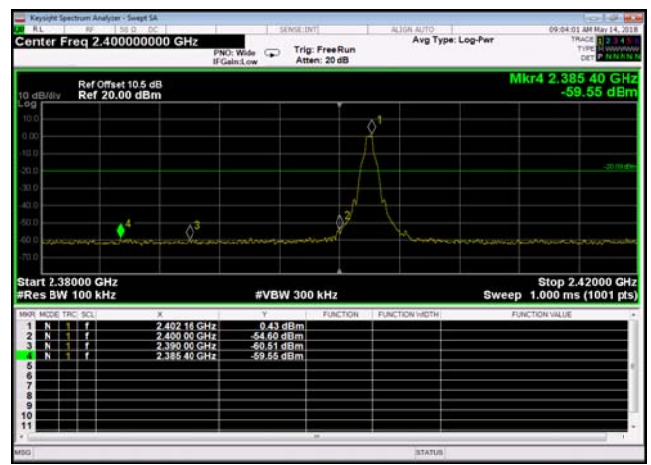

Conducted Emission: GFSK,2480,DH5,Band Edge Hopping Off

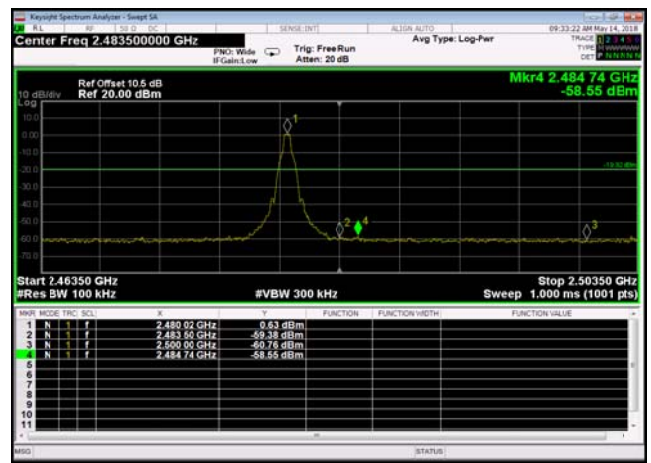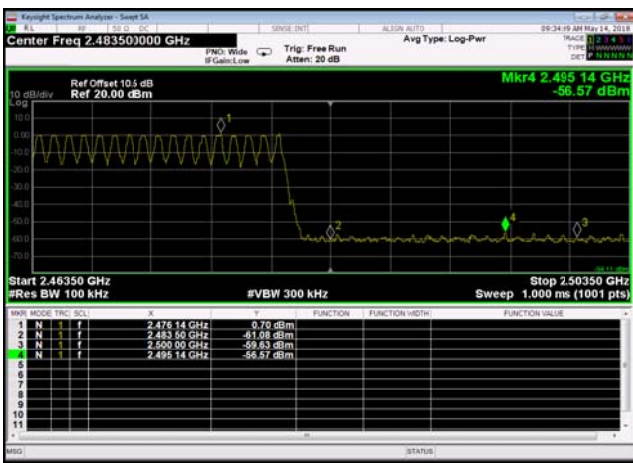

**Dwell Time  
Test Result and Data**


## BT Dwell Time

| Mode      | Test Frequency | Packet Type | Transmission Time(ms) | Number | Dwell Time(ms) | Result |
|-----------|----------------|-------------|-----------------------|--------|----------------|--------|
| GFSK      | 2402           | DH5         | 2.90                  | 89     | 257.66         | Pass   |
| GFSK      | 2441           | DH5         | 2.90                  | 81     | 235.23         | Pass   |
| GFSK      | 2480           | DH5         | 2.90                  | 94     | 272.14         | Pass   |
| PI/4DQPSK | 2402           | 2DH5        | 2.90                  | 107    | 310.74         | Pass   |
| PI/4DQPSK | 2441           | 2DH5        | 2.90                  | 83     | 241.04         | Pass   |
| PI/4DQPSK | 2480           | 2DH5        | 2.90                  | 93     | 270.08         | Pass   |
| 8DPSK     | 2402           | 3DH5        | 2.90                  | 89     | 257.66         | Pass   |
| 8DPSK     | 2441           | 3DH5        | 2.90                  | 93     | 270.08         | Pass   |
| 8DPSK     | 2480           | 3DH5        | 2.90                  | 88     | 255.56         | Pass   |






Dwell Time: 8DPSK,2402,3DH5,Transmissi  
on Number

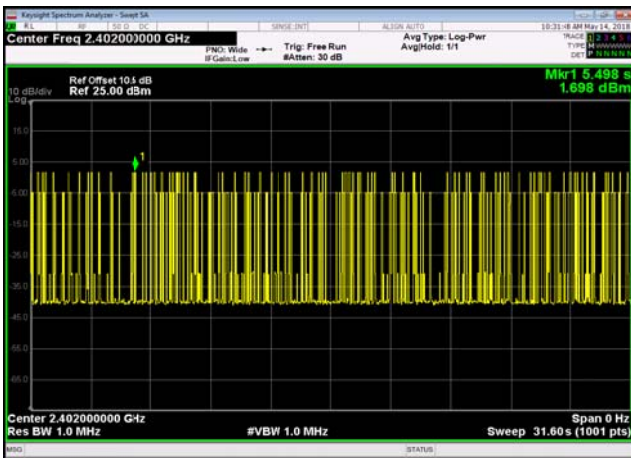


Dwell Time: 8DPSK,2402,3DH5,Transmissi  
on Time

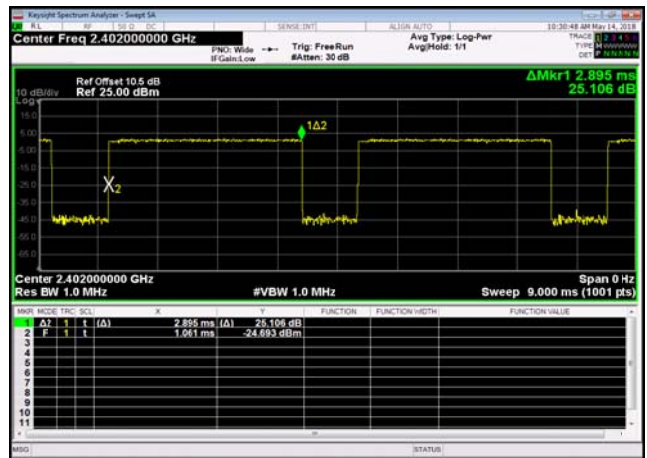

Dwell Time: 8DPSK,2441,3DH5,Transmissi  
on Number



Dwell Time: 8DPSK,2441,3DH5,Transmissi  
on Time

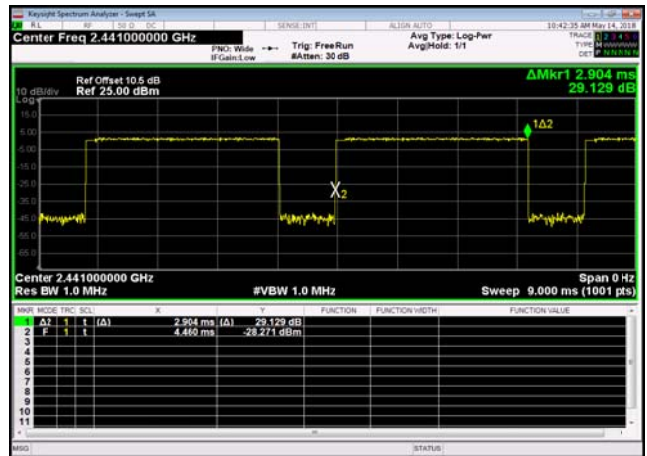

Dwell Time: 8DPSK,2480,3DH5,Transmissi  
on Number



Dwell Time: 8DPSK,2480,3DH5,Transmissi  
on Time




Dwell Time: PI/4DQPSK,2402,2DH5,Transmissi  
on Number




Dwell Time: PI/4DQPSK,2402,2DH5,Transmissi  
on Time



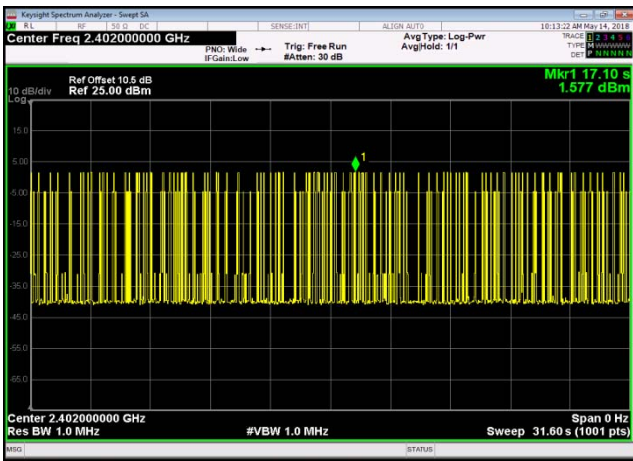


Dwell Time: PI/4DQPSK,2441,2DH5,Transmissi on Number

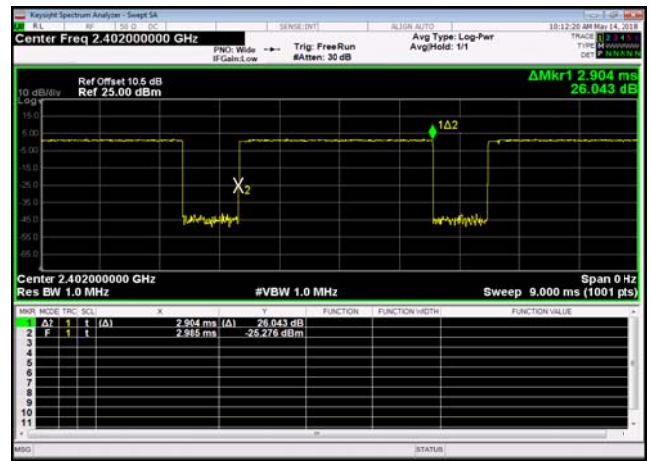

Dwell Time: PI/4DQPSK,2441,2DH5,Transmissi on Time




Dwell Time: PI/4DQPSK,2480,2DH5,Transmissi on Number

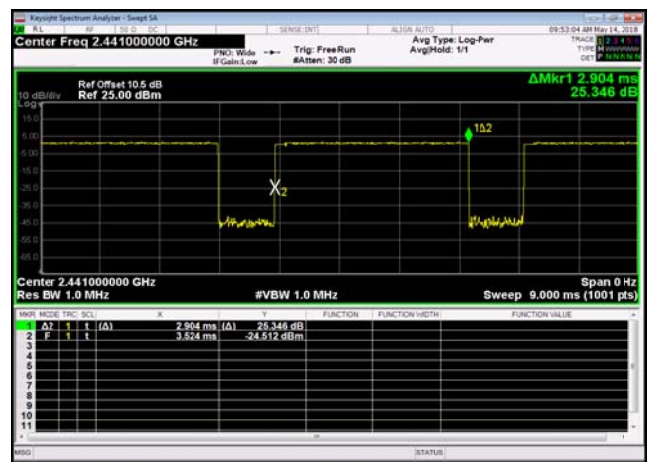


Dwell Time: PI/4DQPSK,2480,2DH5,Transmissi on Time




Dwell Time: GFSK,2402,DH5,Transmission Number

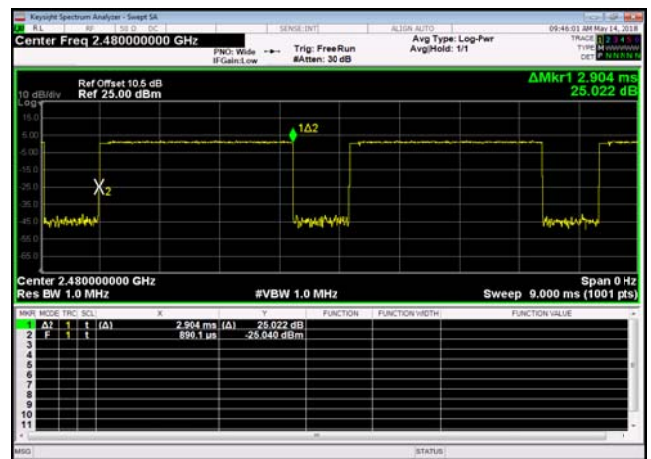


Dwell Time: GFSK,2402,DH5,Transmission Time

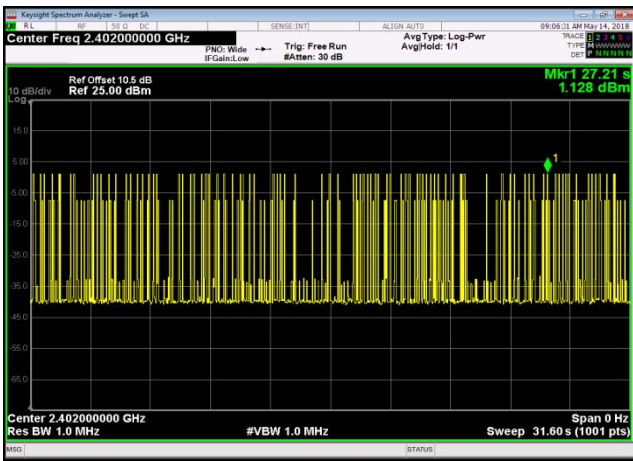


Dwell Time: GFSK,2441,DH5,Transmission Number

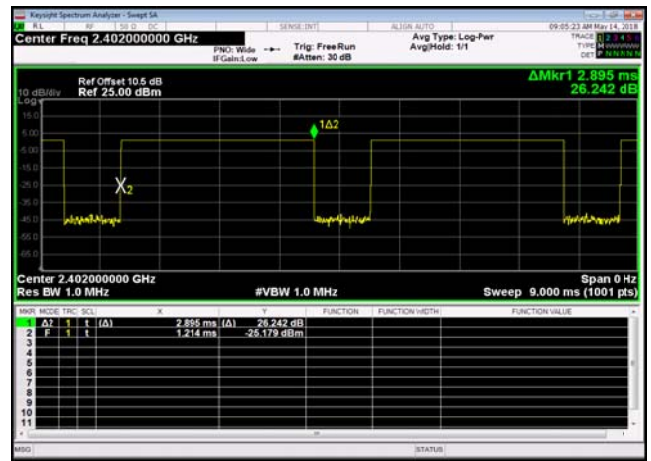


Dwell Time: GFSK,2441,DH5,Transmission Time

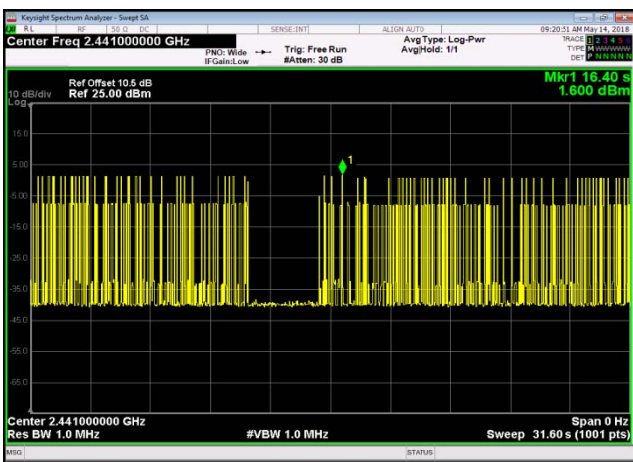

Dwell Time: GFSK,2480,DH5,Transmission Number

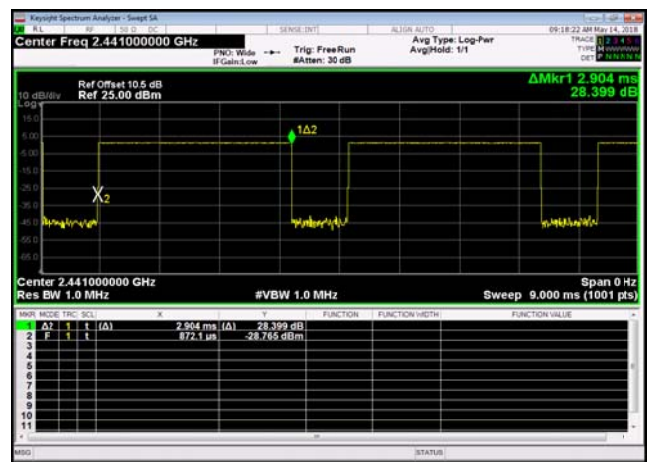

Dwell Time: GFSK,2480,DH5,Transmission Time

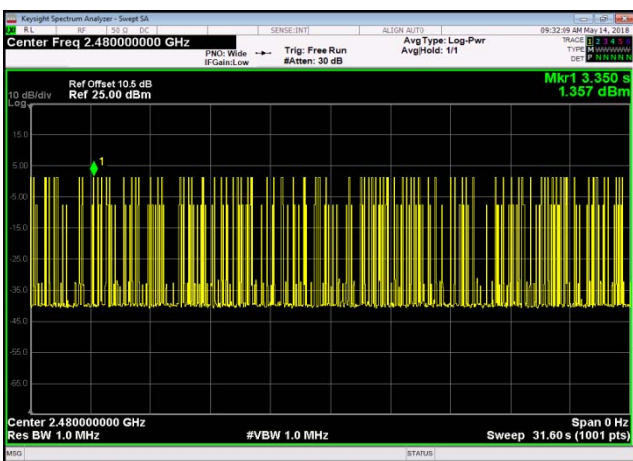

Dwell Time: GFSK,2480,DH5,Transmission Number



Dwell Time: GFSK,2480,DH5,Transmission Time






**Carrier Frequency Separation  
Test Result and Data**

| BT Carrier Frequency Separation |                |             |                     |                |        |
|---------------------------------|----------------|-------------|---------------------|----------------|--------|
| Mode                            | Test Frequency | Packet Type | Range(MHz~MHz)      | Sepration(kHz) | Result |
| GFSK                            | Hopping        | DH5         | 2401.5Mhz~2403.5Mhz | 1040.96        | Pass   |
| PI/4DQPSK                       | Hopping        | 2DH5        | 2401.5Mhz~2403.5Mhz | 813.19         | Pass   |
| 8DPSK                           | Hopping        | 3DH5        | 2401.5Mhz~2403.5Mhz | 985.01         | Pass   |




Carrier Frequency Separation: 8DPSK,Ho  
pping3DH52401.5~2403.5

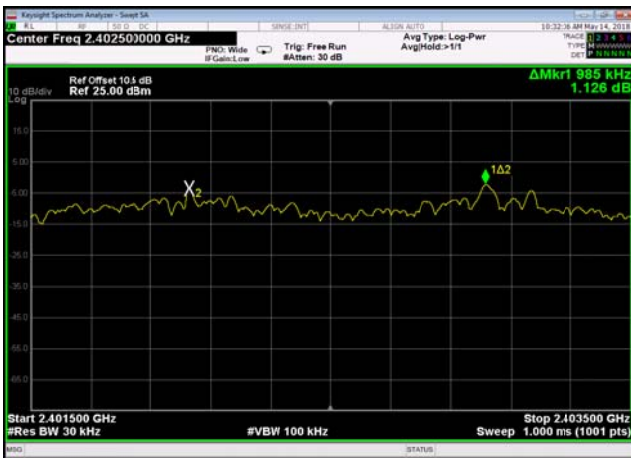

Carrier Frequency Separation: 8DPSK,Ho  
pping3DH52440.5~2442.5




Carrier Frequency Separation: 8DPSK,Ho  
pping3DH52478.5~2480.5

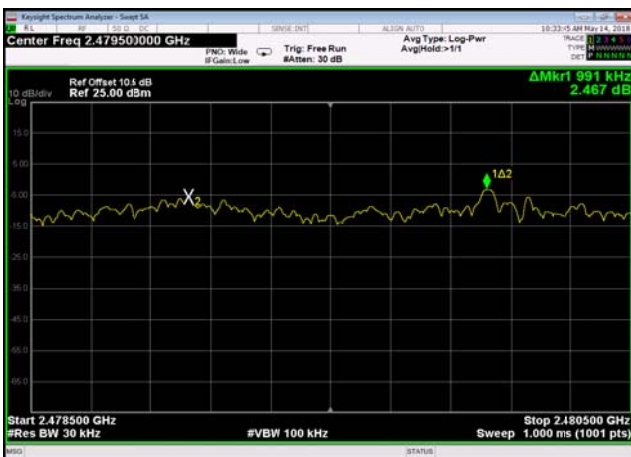


Carrier Frequency Separation: PI/4DQPSK,Ho  
pping2DH52401.5~2403.5



Carrier Frequency Separation: PI/4DQPSK,Ho  
pping2DH52440.5~2442.5

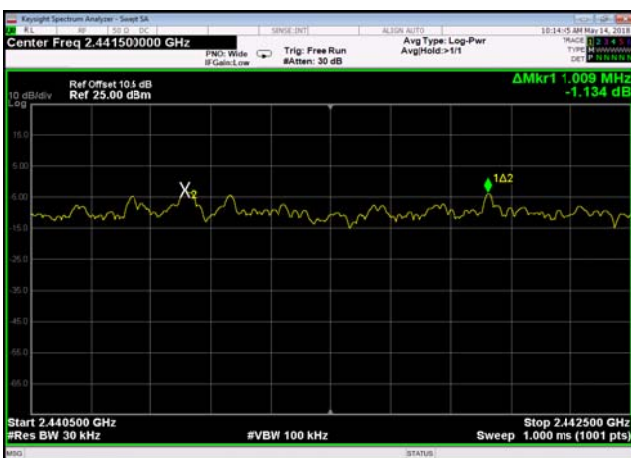

Carrier Frequency Separation: PI/4DQPSK,Ho  
pping2DH52478.5~2480.5

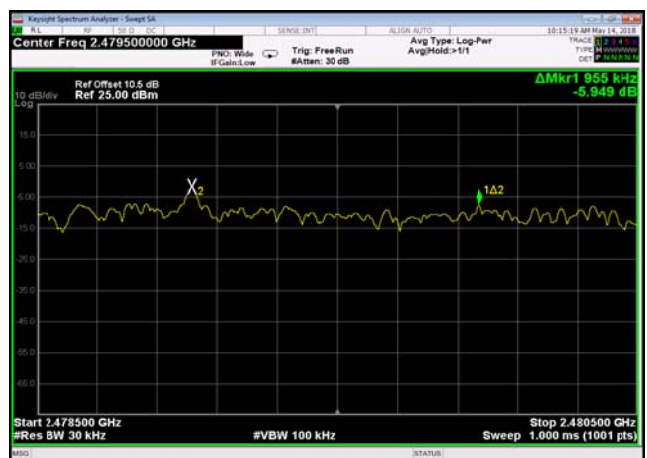

Carrier Frequency Separation: GFSK,Hop  
pingDH52401.5~2403.5



Carrier Frequency Separation: GFSK,Hop  
pingDH52440.5~2442.5





Carrier Frequency Separation: GFSK, Hop pingDH52478.5~2480.5





### Hopping Channel Numbers Test Result and Data



BT Number Of Hopping Channels

| Mode      | Test Frequency | Packet Type | Test Range(MHz~MHz) | Result |
|-----------|----------------|-------------|---------------------|--------|
| GFSK      | Hopping        | DH5         | 2400~2483.5         | Pass   |
| PI/4DQPSK | Hopping        | 2DH5        | 2400~2483.5         | Pass   |
| 8DPSK     | Hopping        | 3DH5        | 2400~2483.5         | Pass   |




Number Of Hopping Channels: 8DPSK,HoppingMhz,3DH5\_\_2400~2483.5

Number Of Hopping Channels: PI/4DQPSK,HoppingMhz,2DH5\_\_2400~2483.5

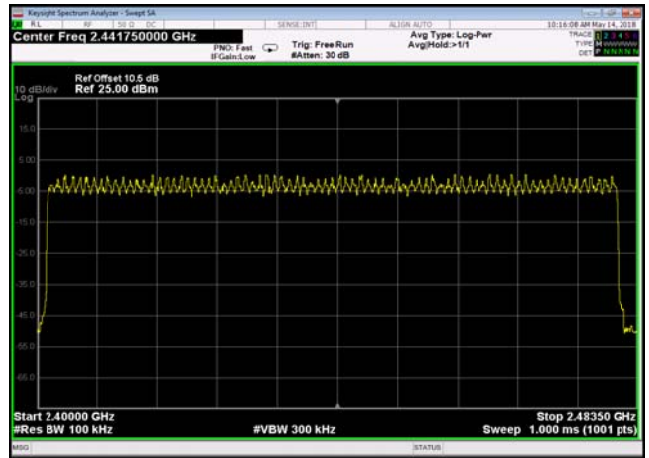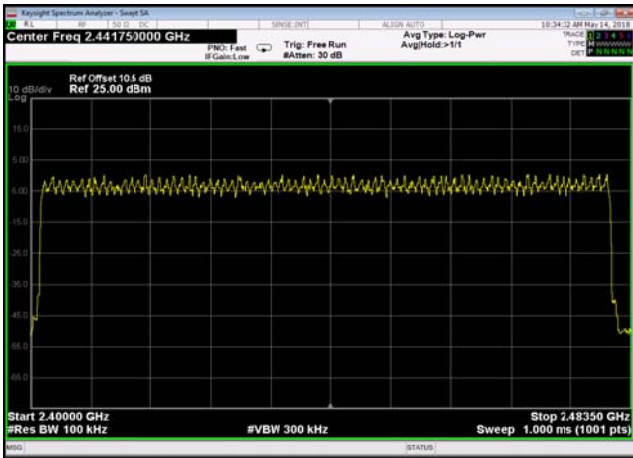

Number Of Hopping Channels: GFSK,HoppingMhz,DH5\_\_2400~2483.5

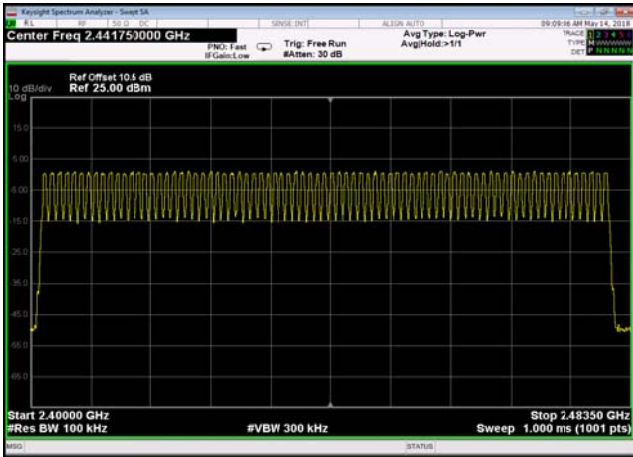

\*\* END OF REPORT \*\*