



RF TEST REPORT

Report No.: SET2018-05640

Product Name: Smartphone

FCC ID: R38YL3310A

Model No. : Coolpad 3310A

Applicant: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd.

Address: Coolpad Information Harbor, 2nd Mengxi Road, Northern Part of
Science&Technology Park, Nanshan, Shenzhen, China.

Dates of Testing: 05/8/2018 — 07/25/2018

Issued by: CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

Lab Location: Building 28/29, East of Shigu, Xili Industrial Zone, Xili Road,
Nanshan District, Shenzhen, Guangdong, China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 57 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 20 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name: Smartphone

Brand Name: Coolpad

Trade Name: Coolpad

Applicant: Yulong Computer Telecommunication Scientific
(Shenzhen) Co., Ltd.

Applicant Address: Coolpad Information Harbor, 2nd Mengxi Road, Northern
Part of Science&Technology Park, Nanshan, Shenzhen,
China.

Manufacturer: Yulong Computer Telecommunication Scientific
(Shenzhen) Co., Ltd.

Manufacturer Address: Coolpad Information Harbor, 2nd Mengxi Road, Northern
Part of Science&Technology Park, Nanshan, Shenzhen,
China.

Test Standards: 47 CFR Part 15 Subpart C 2017: Radio Frequency Devices
ANSI C63.10:2013: American National Standard for
Testing Unlicensed Wireless Devices
KDB 558074 D01 DTS Meas Guidance v04

Test Result: PASS

Tested by: Shallwe Yang
2018.07.25
Shallwe Yang, Test Engineer

Reviewed by: Zhu Qi
2018.07.25
Zhu Qi, Senior Engineer

Approved by: Smartli
2018.07.25
Smart Li, Manager



TABLE OF CONTENTS

RF TEST REPORT	1
1. GENERAL INFORMATION	4
1.1. EUT Description	4
1.2. Test Standards and Results.....	5
1.3. Table for Supporting Units.....	6
1.4. Facilities and Accreditations	6
2. 47 CFR PART 15C REQUIREMENTS.....	7
2.1. Antenna requirement.....	7
2.2. Maximum Conducted Output Power	8
2.3. 6dB Bandwidth	10
2.4. Conducted Band Edges and Spurious Emissions.....	12
2.5. Power spectral density (PSD)	14
2.6. Radiated Band Edge and Spurious Emission.....	16
2.7. Conducted Emission	34
3. LIST OF MEASURING EQUIPMENT	38
APPENDIX A	39

Change History		
Issue	Date	Reason for change
1.0	2018.07.25	First edition



1. General Information

1.1. EUT Description

EUT Type	Smartphone
Hardware Version	P0
Software Version	3310A.SPRINT.180608.00
EUT supports Radios application	CDMA2000 BC0/BC1/BC10 WLAN2.4GHz 802.11b/g/n (HT20/HT40) Bluetooth V3.0+EDR / Bluetooth V4.2 LTE Band 2/4/5/12/13/25/26/41
Frequency Range	802.11b/g/n-20MHz: 2.412GHz - 2.462GHz 802.11n-40MHz: 2.422GHz - 2.452GHz
Channel Number	802.11b/g/n-20MHz: 11 802.11n-40MHz: 7
Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n : up to 135 Mbps
Modulation Type	DSSS (802.11b), OFDM (802.11g/n)
MIMO	Not support
Antenna Type	FPC Antenna
Antenna Gain	1.8dBi
Power supply	Battery 1 Model No.: CPLD-189 Capacitance: 2150mAh Rated Voltage: 3.8V Charge Limit: 4.35V
	Battery 2 Model No.: CPLD-189 Capacitance: 2150mAh Rated Voltage: 3.8V Charge Limit: 4.35V

Note 1: The EUT is a Smartphone, it contain WIFI operating at 2.4GHz ISM band; it supports 802.11b, 802.11g, 802.11n and they are all tested in this report.

Note 2: The frequencies allocated is $F \text{ (MHz)} = 2412 + 5 * (n - 1)$ ($1 \leq n \leq 11$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1ch (2412MHz), 6ch(2437MHz), 11ch(2462MHz) for 802.11b/g/n-20MHz., and 3ch(2422MHz), 6ch(2437MHz), 9ch(2452MHz) for 802.11n-40MHz.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 4: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.



1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (WiFi, 2.4GHz ISM band radiators) for the EUT FCC Certification:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart C 2017	Radio Frequency Devices
2	ANSI C63.10 2013	American National Standard for Testing Unlicensed Wireless Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Result
1	15.203	Antenna Requirement	PASS
2	15.247(b)	Peak Output Power	PASS
3	15.247(a)	6dB Bandwidth	PASS
4	15.247(d)	Conducted Band Edges and Spurious Emission	PASS
5	15.247(e)	Power spectral density (PSD)	PASS
6	15.207	Conducted Emission	PASS
7	15.209 15.247(d)	Radiated Band Edges and Spurious Emission	PASS

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10-2013.

These RF tests were performed according to the method of measurements prescribed in KDB 558074 D01 DTS Meas Guidance v04.

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

There are two bandwidth systems:

For 20MHz bandwidth systems, use Channel 1~ Channel 11

For 40MHz bandwidth systems, use Channel 3~ Channel 9

Channel No.	Frequency	Channel No.	Frequency	Channel No.	Frequency
1	2412MHz	5	2432MHz	9	2452MHz
2	2417MHz	6	2437MHz	10	2457MHz
3	2422MHz	7	2442MHz	11	2462MHz
4	2427MHz	8	2447MHz		



Test Items	Mode	Data Rate	Channel
Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Conducted and Spurious Emission Radiated and Spurious Emission	11b/DSSS	1 Mbps	1/6/11
	11g/OFDM	6 Mbps	1/6/11
	11n(20MHz)/OFDM	MCS 0	1/6/11
	11n(40MHz)/OFDM	MCS 0	3/6/9
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n(20MHz)/OFDM	MCS 0	1/11
	11n(40MHz)/OFDM	MCS 0	3/9

1.3. Table for Supporting Units

No.	Equipment	Brand Name	Model Name	Manufacturer	Serial No.	Note
1	Notebook	DELL	PP11L	DELL	H5914A03	FCC DOC

1.4. Facilities and Accreditations

1.4.1. Facilities

FCC-Registration No.: CN5031

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN5031, valid time is until December 31, 2018.

ISED Registration: 11185A-1

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Aug. 03, 2019.

NVLAP Lab Code: 201008-0

CCIC-SET is a third party testing organization accredited by NVLAP according to ISO/IEC 17025. The accreditation certificate number is 201008-0.

1.4.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	30% -60%
Atmospheric Pressure (kPa):	86KPa-106KPa



2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

And according to FCC 47 CFR Section 15.247(c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

2.1.2. Antenna Information

Antenna Category: FPC Antenna

A internal Antenna was soldered to the antenna port of EUT via an adaptor cable, can't be removed.

Antenna General Information:

No.	EUT	Ant. Type	Gain(dBi)
1	Smartphone	FPC	1.8

2.1.3. Result: comply

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Maximum Conducted Output Power


2.2.1. Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

2.2.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.2.3. Test Setup

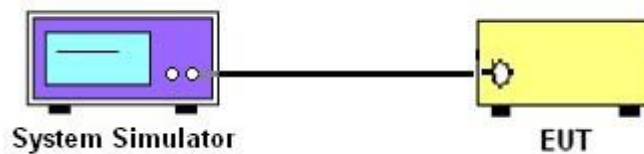

2.2.4. Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10:2013.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.



2.2.5. Test Result

Please refer to Appendix A for detail

2.3. 6dB Bandwidth


2.3.1. Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.3.3. Test Setup

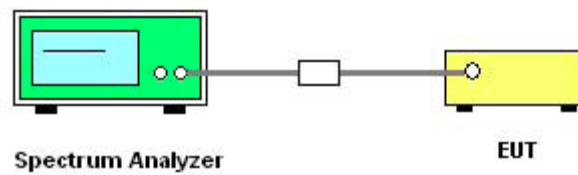

2.3.4. Test Procedures

1. The testing follows FCC KDB 558074 D01 DTS Meas Guidance v04.

2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

3. Set to the maximum power setting and enable the EUT transmit continuously.

4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz.

Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.

5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30 kHz and set the Video bandwidth (VBW) = 100 kHz.

6. Measure and record the results in the test report.



2.3.5. Test Results of 6dB Bandwidth

Please refer to Appendix A for detail

2.4. Conducted Band Edges and Spurious Emissions


2.4.1. Limit of Conducted Band Edges and Spurious Emissions

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.

2.4.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.4.3. Test Setup

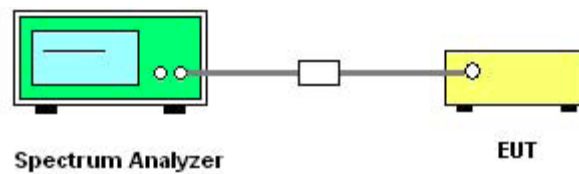

2.4.4. Test Procedure

1. The testing follows FCC KDB 558074 D01 DTS Meas Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



2.4.5. Test Results of Conducted Band Edges

Please refer to Appendix A for detail

2.5. Power spectral density (PSD)


2.5.1. Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

2.5.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.5.3. Test Setup

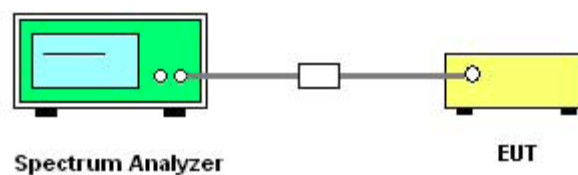

2.5.4. Test Procedures

1. The testing follows Measurement Procedure 10.3 Method AVGPSD-1 of FCC KDB 558074 D01 DTS Meas Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$. Video bandwidth $\text{VBW} \geq 3\text{RBW}$. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = RMS, Sweep time = auto couple, Trace average, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.



2.5.5. Test Results of Power spectral density

Please refer to Appendix A for detail

2.6. Radiated Band Edge and Spurious Emission

2.6.1. Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Note: Wireless charger configuration was evaluated.


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

2.6.2. Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

2.6.3. Test Setup


For radiated emissions from 9 KHz to 30 MHz

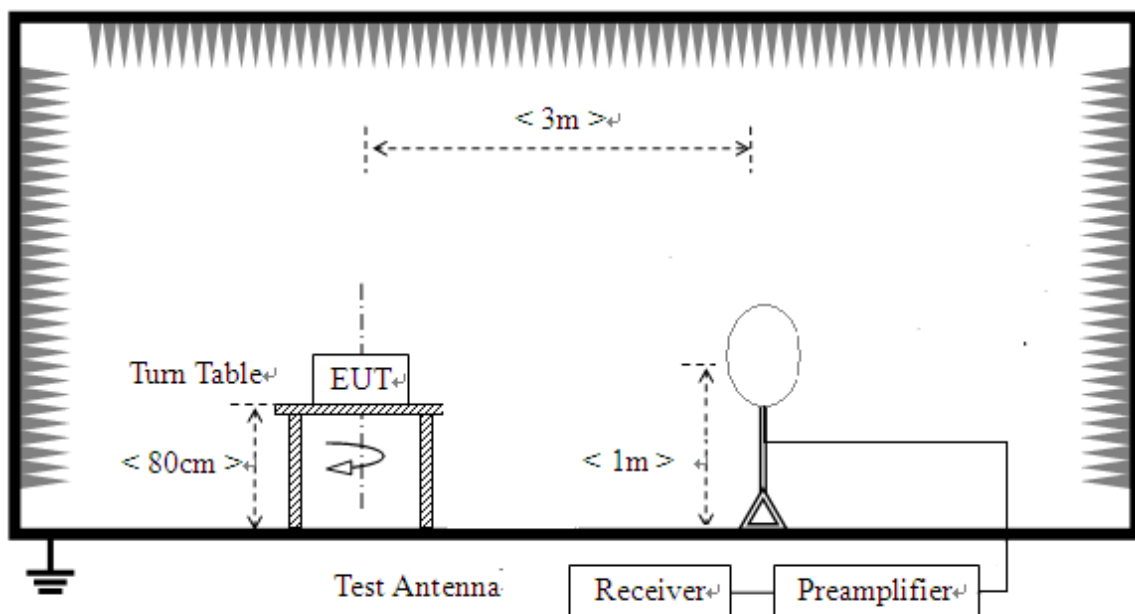

For radiated emissions from 30MHz to 1GHz

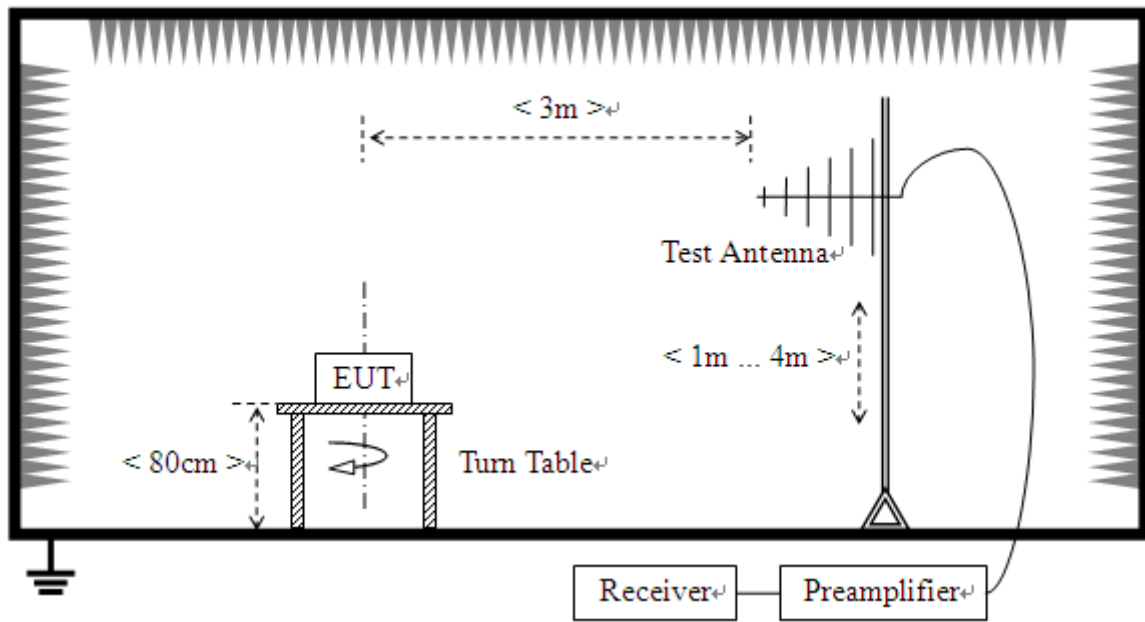

For radiated emissions above 1GHz

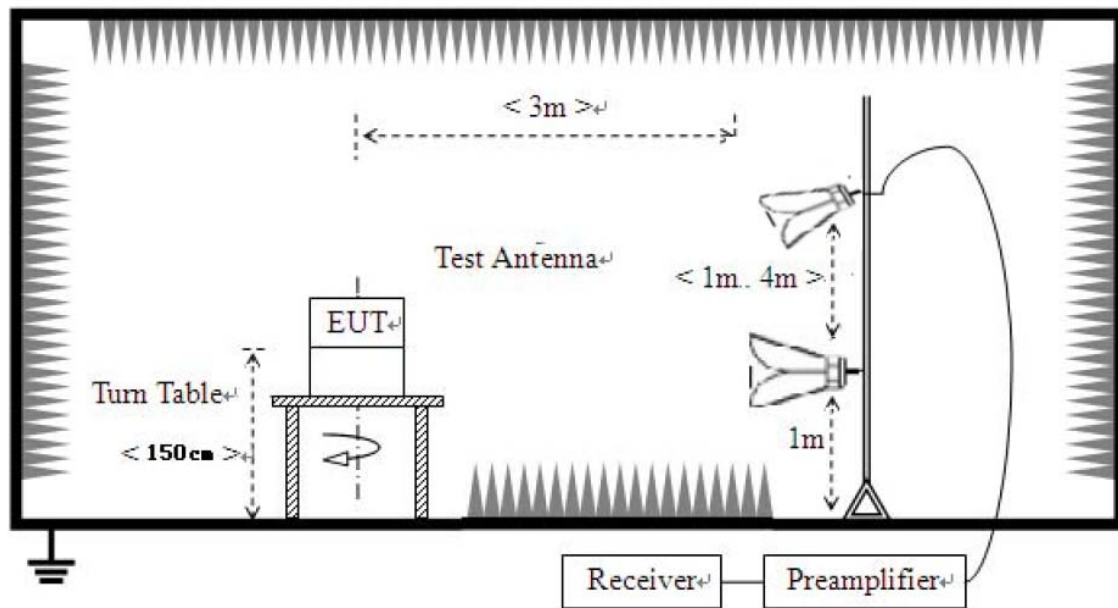



2.6.4. Test Procedures

1. The EUT was placed on the top of a rotating table 0.8m below 1GHz/1.5m above 1GHz above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported.

Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
7. For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.



NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.




2.6.5. Test Results of Radiated Band Edge and Spurious Emission

For 9 kHz to 30MHz


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

For 30MHz to 1000 MHz

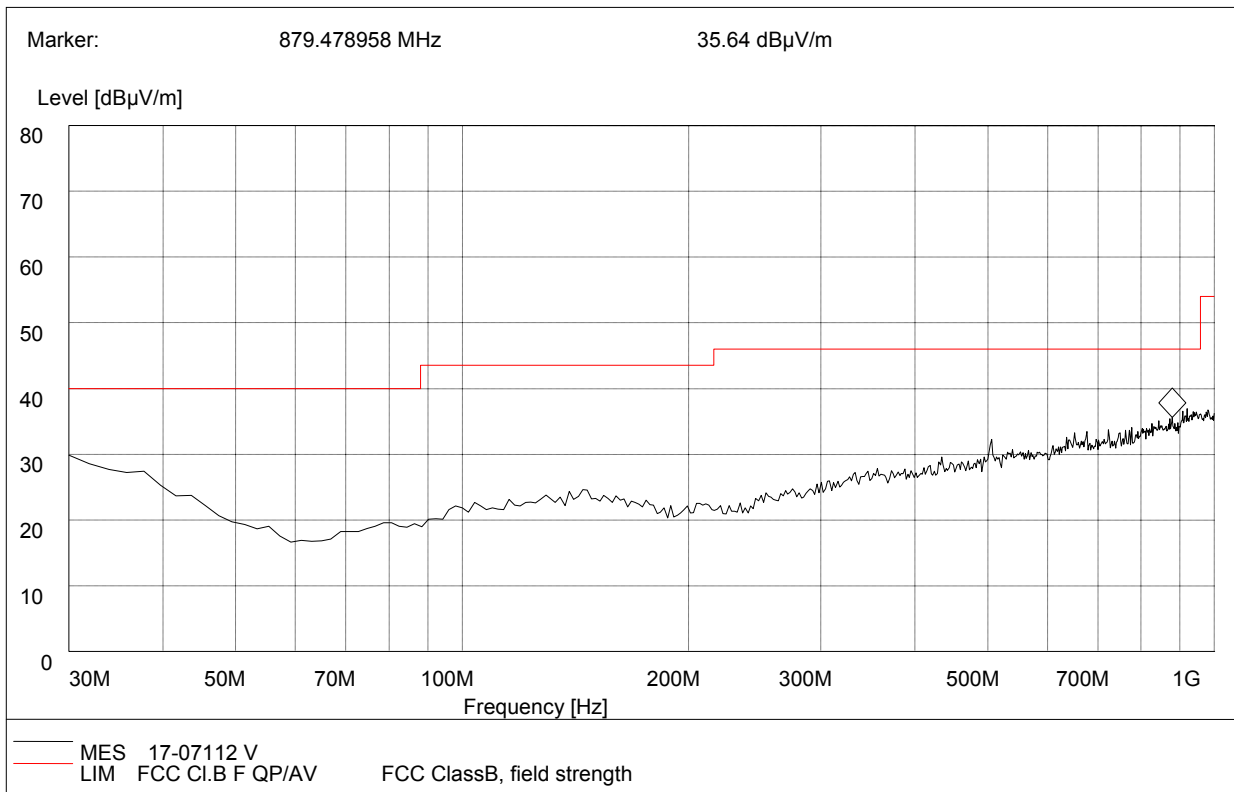

30MHz to 1GHz, Antenna Vertical

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Antenna	Verdict
30.380000	28.15	120.000	100.0	40.0	Vertical	Pass
36.570000	25.46	120.000	100.0	40.0	Vertical	Pass
147.850000	22.52	120.000	100.0	43.5	Vertical	Pass
357.340000	25.85	120.000	100.0	46.0	Vertical	Pass
506.890000	30.56	120.000	100.0	46.0	Vertical	Pass
880.270000	33.54	120.000	100.0	46.0	Vertical	Pass

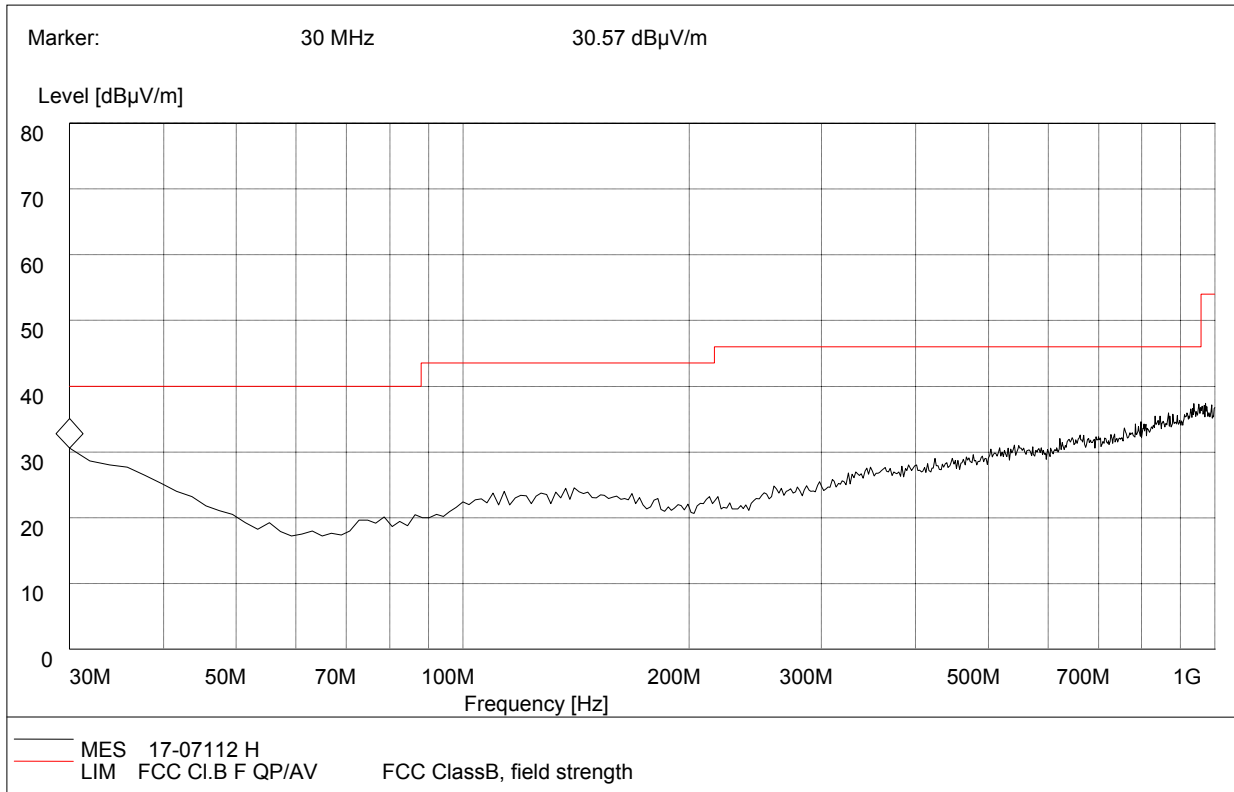

30MHz to 1GHz, Antenna Horizontal

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Antenna	Verdict
30.150000	28.55	120.000	100.0	40.0	Horizontal	Pass
36.540000	24.69	120.000	100.0	40.0	Horizontal	Pass
115.530000	21.54	120.000	100.0	43.5	Horizontal	Pass
141.580000	23.55	120.000	100.0	43.5	Horizontal	Pass
833.910000	33.85	120.000	100.0	46.0	Horizontal	Pass
938.660000	35.49	120.000	100.0	46.0	Horizontal	Pass



For 1GHz to 25 GHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b_2412MHz)

No.	Fre. (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2390.18	52.94	PK	74.00	-21.06	1.20 H	320	51.64	5.2	28.6	32.5	1.3
2	2390.18	40.58	AV	54.00	-13.42	1.20 H	320	39.28	5.2	28.6	32.5	1.3
3	4823.65	49.16	PK	74.00	-24.84	1.00 H	180	42.76	7.4	30.4	31.4	6.4
4	4823.65	36.83	AV	54.00	-17.17	1.00 H	180	30.43	7.4	30.4	31.4	6.4
5	5851.92	52.14	PK	74.00	-21.86	1.20 H	250	43.34	9.9	31	32.1	8.8
6	5851.92	40.31	AV	54.00	-13.69	1.20 H	250	31.51	9.9	31	32.1	8.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b_2412MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2390.18	50.54	PK	74.00	-23.46	1.50 V	250	49.24	5.2	28.6	32.5	1.3
2	2390.18	37.06	AV	54.00	-16.94	1.50 V	250	35.76	5.2	28.6	32.5	1.3
3	4823.65	54.64	PK	74.00	-19.36	1.20 V	270	48.24	7.4	30.4	31.4	6.4
4	4823.65	39.52	AV	54.00	-14.48	1.20 V	270	33.12	7.4	30.4	31.4	6.4
5	5851.92	52.36	PK	74.00	-21.64	1.50 V	320	43.56	9.9	31	32.1	8.8
6	5851.92	40.53	AV	54.00	-13.47	1.50 V	320	31.73	9.9	31	32.1	8.8



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b_2437MHz)

No.	Fre. (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	4874	51.23	PK	74	-22.77	1.50 H	120	44.83	6.7	31.2	31.3	6.4
2	4874	41.18	AV	54	-12.82	1.50 H	120	34.78	6.7	31.2	31.3	6.4
3	7311	49.25	PK	74	-24.75	1.60 H	230	42.85	7.4	30.4	31.4	6.4
4	7311	39.08	AV	54	-14.92	1.60 H	230	32.68	7.4	30.4	31.4	6.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b_2437MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	4874	52.14	PK	74	-21.86	1.50 V	40	45.74	6.7	31.2	31.3	6.4
2	4874	41.78	AV	54	-12.22	1.50 V	40	35.38	6.7	31.2	31.3	6.4
3	7311	49.65	PK	74	-24.35	1.00 V	50	43.25	7.4	30.4	31.4	6.4
4	7311	39.51	AV	54	-14.49	1.00 V	50	33.11	7.4	30.4	31.4	6.4



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b_2462MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1002.65	47.23	PK	74.00	-26.77	2.00 H	120	48.03	1.5	29.6	31.9	-0.8
2	1002.65	34.87	AV	54.00	-19.13	2.00 H	120	35.67	1.5	29.6	31.9	-0.8
3	2483.37	50.67	PK	74.00	-23.33	1.80 H	250	48.07	5.7	28.7	31.8	2.6
4	2483.37	38.31	AV	54.00	-15.69	1.80 H	250	35.71	5.7	28.7	31.8	2.6
5	4919.84	50.70	PK	74.00	-23.30	1.60 H	72	44.30	6.7	31.2	31.5	6.4
6	4919.84	37.04	AV	54.00	-16.96	1.60 H	72	30.64	6.7	31.2	31.5	6.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b_2462MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1002.65	47.44	PK	74.00	-26.56	1.50 V	49	48.24	1.5	29.6	31.9	-0.8
2	1002.65	35.12	AV	54.00	-18.88	1.50 V	49	35.92	1.5	29.6	31.9	-0.8
3	2483.37	53.50	PK	74.00	-20.50	1.20 V	34	50.90	5.7	28.7	31.8	2.6
4	2483.37	42.11	AV	54.00	-11.89	1.20 V	34	39.51	5.7	28.7	31.8	2.6
5	4919.84	52.99	PK	74.00	-21.01	1.50 V	55	46.59	6.7	31.2	31.5	6.4
6	4919.84	38.15	AV	54.00	-15.85	1.50 V	55	31.75	6.7	31.2	31.5	6.4



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g_2412MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1001.83	46.87	PK	74.00	-27.13	1.50 H	44	47.67	1.5	29.6	31.9	-0.8
2	1001.83	34.52	AV	54.00	-19.48	1.50 H	44	35.32	1.5	29.6	31.9	-0.8
3	2390.18	59.15	PK	74.00	-14.85	1.00 H	53	57.85	5.2	28.6	32.5	1.3
4	2390.18	40.90	AV	54.00	-13.10	1.00 H	53	39.60	5.2	28.6	32.5	1.3
5	4823.65	48.57	PK	74.00	-25.43	2.50 H	162	42.17	7.4	30.4	31.4	6.4
6	4823.65	36.43	AV	54.00	-17.57	2.50 H	162	30.03	7.4	30.4	31.4	6.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g_2412MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1001.83	46.78	PK	74.00	-27.22	1.00 V	35	47.58	1.5	29.6	31.9	-0.8
2	1001.83	34.61	AV	54.00	-19.39	1.00 V	35	35.41	1.5	29.6	31.9	-0.8
3	2390.18	71.48	PK	74.00	-2.52	1.20 V	150	70.18	5.2	28.6	32.5	1.3
4	2390.18	51.60	AV	54.00	-2.40	1.20 V	150	50.30	5.2	28.6	32.5	1.3
5	4823.65	51.36	PK	74.00	-22.64	1.50 V	160	44.96	7.4	30.4	31.4	6.4
6	4823.65	37.16	AV	54.00	-16.84	1.50 V	160	30.76	7.4	30.4	31.4	6.4



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g_2437MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1503.50	46.11	PK	74.00	-27.89	1.50 H	33	47.61	2	29	32.5	-1.5
2	1503.50	34.58	AV	54.00	-19.42	1.50 H	33	36.08	2	29	32.5	-1.5
3	4871.74	49.14	PK	74.00	-24.86	2.00 H	141	42.74	6.7	31.2	31.5	6.4
4	4871.74	37.29	AV	54.00	-16.71	2.00 H	141	30.89	6.7	31.2	31.5	6.4
5	11149.16	52.86	PK	74.00	-21.14	1.50 H	50	37.96	16	30.9	32	14.9
6	11149.16	40.17	AV	54.00	-13.83	1.50 H	50	25.27	16	30.9	32	14.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g_2437MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1503.50	46.34	PK	74.00	-27.66	1.30 V	120	47.84	2	29	32.5	-1.5
2	1503.50	34.92	AV	54.00	-19.08	1.30 V	120	36.42	2	29	32.5	-1.5
3	4871.74	53.04	PK	74.00	-20.96	1.40 V	52	46.64	6.7	31.2	31.5	6.4
4	4871.74	39.60	AV	54.00	-14.40	1.40 V	52	33.20	6.7	31.2	31.5	6.4
5	11149.16	52.73	PK	74.00	-21.27	1.50 V	56	37.83	16	30.9	32	14.9
6	11149.16	40.28	AV	54.00	-13.72	1.50 V	56	25.38	16	30.9	32	14.9



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g_2462MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2483.37	63.86	PK	74.00	-10.14	1.80 H	120	61.26	5.7	28.7	31.8	2.6
2	2483.37	44.11	AV	54.00	-9.89	1.80 H	120	41.51	5.7	28.7	31.8	2.6
3	4919.84	49.56	PK	74.00	-24.44	1.50 H	52	43.16	6.7	31.2	31.5	6.4
4	4919.84	37.42	AV	54.00	-16.58	1.50 H	52	31.02	6.7	31.2	31.5	6.4
5	5852.95	52.71	PK	74.00	-21.29	1.50 H	30	43.91	9.9	31	32.1	8.8
6	5852.95	40.33	AV	54.00	-13.67	1.50 H	30	31.53	9.9	31	32.1	8.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g_2462MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2483.37	69.65	PK	74.00	-4.35	1.50 V	52	67.05	5.7	28.7	31.8	2.6
2	2483.37	49.91	AV	54.00	-4.09	1.50 V	52	47.31	5.7	28.7	31.8	2.6
3	4919.84	50.86	PK	74.00	-23.14	1.40 V	250	44.46	6.7	31.2	31.5	6.4
4	4919.84	38.15	AV	54.00	-15.85	1.40 V	250	31.75	6.7	31.2	31.5	6.4
5	5852.95	52.94	PK	74.00	-21.06	1.50 V	33	44.14	9.9	31	32.1	8.8
6	5852.95	40.62	AV	54.00	-13.38	1.50 V	33	31.82	9.9	31	32.1	8.8



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n20_2412MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1203.50	45.86	PK	74.00	-28.14	1.50 H	65	46.46	1.8	29.5	31.9	-0.6
2	1203.50	34.51	AV	54.00	-19.49	1.50 H	65	35.11	1.8	29.5	31.9	-0.6
3	2390.78	61.49	PK	74.00	-12.51	1.60 H	78	60.19	5.2	28.6	32.5	1.3
4	2390.78	41.77	AV	54.00	-12.23	1.60 H	78	40.47	5.2	28.6	32.5	1.3
5	4823.65	51.05	PK	74.00	-22.95	1.80 H	260	44.65	7.4	30.4	31.4	6.4
6	4823.65	38.29	AV	54.00	-15.71	1.80 H	260	31.89	7.4	30.4	31.4	6.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n20_2412MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1203.50	46.13	PK	74.00	-27.87	1.50 V	58	46.73	1.8	29.5	31.9	-0.6
2	1203.50	34.87	AV	54.00	-19.13	1.50 V	58	35.47	1.8	29.5	31.9	-0.6
3	2390.78	71.26	PK	74.00	-2.74	2.00 V	62	69.96	5.2	28.6	32.5	1.3
4	2390.78	50.85	AV	54.00	-3.15	2.00 V	62	49.55	5.2	28.6	32.5	1.3
5	4823.65	51.35	PK	74.00	-22.65	1.50 V	50	44.95	7.4	30.4	31.4	6.4
6	4823.65	38.93	AV	54.00	-15.07	1.50 V	50	32.53	7.4	30.4	31.4	6.4



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n20_2437MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2002.37	47.53	PK	74.00	-26.47	1.50 H	54	48.13	2.8	28.7	32.1	-0.6
2	2002.37	34.82	AV	54.00	-19.18	1.50 H	54	35.42	2.8	28.7	32.1	-0.6
3	4871.74	51.78	PK	74.00	-22.22	1.50 H	70	45.38	6.7	31.2	31.5	6.4
4	4871.74	39.60	AV	54.00	-14.40	1.50 H	70	33.20	6.7	31.2	31.5	6.4
5	11148.56	53.14	PK	74.00	-20.86	2.00 H	62	38.24	16	30.9	32	14.9
6	11148.56	40.23	AV	54.00	-13.77	2.00 H	62	25.33	16	30.9	32	14.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n20_2437MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2002.37	47.28	PK	74.00	-26.72	1.00 V	56	47.88	2.8	28.7	32.1	-0.6
2	2002.37	34.61	AV	54.00	-19.39	1.00 V	56	35.21	2.8	28.7	32.1	-0.6
3	4871.74	48.84	PK	74.00	-25.16	2.00 V	152	42.44	6.7	31.2	31.5	6.4
4	4871.74	36.80	AV	54.00	-17.20	2.00 V	152	30.40	6.7	31.2	31.5	6.4
5	11148.56	52.89	PK	74.00	-21.11	1.50 V	60	37.99	16	30.9	32	14.9
6	11148.56	40.08	AV	54.00	-13.92	1.50 V	60	25.18	16	30.9	32	14.9



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n20_2462MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1201.12	45.28	PK	74.00	-28.72	1.50 H	230	45.88	1.8	29.5	31.9	-0.6
2	1201.12	34.33	AV	54.00	-19.67	1.50 H	230	34.93	1.8	29.5	31.9	-0.6
3	2483.37	70.12	PK	74.00	-3.88	2.50 H	142	67.52	5.7	28.7	31.8	2.6
4	2483.37	47.71	AV	54.00	-6.29	2.50 H	142	45.11	5.7	28.7	31.8	2.6
5	4907.82	48.98	PK	74.00	-25.02	1.80 H	240	42.58	6.7	31.2	31.5	6.4
6	4907.82	37.04	AV	54.00	-16.96	1.80 H	240	30.64	6.7	31.2	31.5	6.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n20_2462MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1201.12	45.38	PK	74.00	-28.62	1.20 V	40	45.98	1.8	29.5	31.9	-0.6
2	1201.12	34.52	AV	54.00	-19.48	1.20 V	40	35.12	1.8	29.5	31.9	-0.6
3	2483.37	70.76	PK	74.00	-3.24	1.00 V	40	68.16	5.7	28.7	31.8	2.6
4	2483.37	49.55	AV	54.00	-4.45	1.00 V	40	46.95	5.7	28.7	31.8	2.6
5	4907.82	49.37	PK	74.00	-24.63	1.75 V	136	42.97	6.7	31.2	31.5	6.4
6	4907.82	37.04	AV	54.00	-16.96	1.75 V	136	30.64	6.7	31.2	31.5	6.4



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n40_2422MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1198.56	45.37	PK	74.00	-28.63	1.50 H	144	45.97	1.8	29.5	31.9	-0.6
2	1198.56	34.16	AV	54.00	-19.84	1.50 H	144	34.76	1.8	29.5	31.9	-0.6
3	2390.18	71.52	PK	74.00	-2.48	2.00 H	158	70.22	5.2	28.6	32.5	1.3
4	2390.18	51.95	AV	54.00	-2.05	2.00 H	158	50.65	5.2	28.6	32.5	1.3
5	4859.72	49.14	PK	74.00	-24.86	1.60 H	74	42.74	6.7	31.2	31.5	6.4
6	4859.72	36.81	AV	54.00	-17.19	1.60 H	74	30.41	6.7	31.2	31.5	6.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n40_2422MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1198.56	45.61	PK	74.00	-28.39	1.40 V	140	46.21	1.8	29.5	31.9	-0.6
2	1198.56	34.47	AV	54.00	-19.53	1.40 V	140	35.07	1.8	29.5	31.9	-0.6
3	2390.18	71.64	PK	74.00	-2.36	1.60 V	136	70.34	5.2	28.6	32.5	1.3
4	2390.18	52.54	AV	54.00	-1.46	1.60 V	136	51.24	5.2	28.6	32.5	1.3
5	4859.72	49.87	PK	74.00	-24.13	1.50 V	65	43.47	6.7	31.2	31.5	6.4
6	4859.72	37.92	AV	54.00	-16.08	1.50 V	65	31.52	6.7	31.2	31.5	6.4



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n40_2437MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1802.41	47.24	PK	74.00	-26.76	1.50 H	128	47.74	2.5	29.4	32.4	-0.5
2	1802.41	35.31	AV	54.00	-18.69	1.50 H	128	35.81	2.5	29.4	32.4	-0.5
3	3598.23	48.17	PK	74.00	-25.83	1.00 H	162	43.32	6.3	30.05	31.5	4.85
4	3598.23	35.92	AV	54.00	-18.08	1.00 H	162	31.07	6.3	30.05	31.5	4.85
5	4859.72	49.04	PK	74.00	-24.96	1.80 H	240	42.64	6.7	31.2	31.5	6.4
6	4859.72	36.80	AV	54.00	-17.20	1.80 H	240	30.40	6.7	31.2	31.5	6.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n40_2437MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1802.41	47.53	PK	74.00	-26.47	1.70 V	153	48.03	2.5	29.4	32.4	-0.5
2	1802.41	35.47	AV	54.00	-18.53	1.70 V	153	35.97	2.5	29.4	32.4	-0.5
3	3598.23	48.34	PK	74.00	-25.66	1.20 V	238	43.49	6.3	30.05	31.5	4.85
4	3598.23	36.29	AV	54.00	-17.71	1.20 V	238	31.44	6.3	30.05	31.5	4.85
5	4859.72	49.95	PK	74.00	-24.05	1.50 V	142	43.55	6.7	31.2	31.5	6.4
6	4859.72	37.91	AV	54.00	-16.09	1.50 V	142	31.51	6.7	31.2	31.5	6.4



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n40_2452MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2483.37	61.39	PK	74.00	-12.61	1.20 H	60	58.79	5.7	28.7	31.8	2.6
2	2483.37	44.76	AV	54.00	-9.24	1.20 H	60	42.16	5.7	28.7	31.8	2.6
3	4907.82	49.37	PK	74.00	-24.63	1.40 H	55	42.97	6.7	31.2	31.5	6.4
4	4907.82	37.42	AV	54.00	-16.58	1.40 H	55	31.02	6.7	31.2	31.5	6.4
5	5786.56	51.77	PK	74.00	-22.23	2.70 H	290	42.47	9.9	31.5	32.1	9.3
6	5786.56	39.74	AV	54.00	-14.26	2.70 H	290	30.44	9.9	31.5	32.1	9.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n40_2452MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2483.37	70.06	PK	74.00	-3.94	1.50 V	158	67.46	5.7	28.7	31.8	2.6
2	2483.37	51.27	AV	54.00	-2.73	1.50 V	158	48.67	5.7	28.7	31.8	2.6
3	4907.82	48.88	PK	74.00	-25.12	2.00 V	65	42.48	6.7	31.2	31.5	6.4
4	4907.82	37.42	AV	54.00	-16.58	2.00 V	65	31.02	6.7	31.2	31.5	6.4
5	5786.56	51.89	PK	74.00	-22.11	1.80 V	120	42.59	9.9	31.5	32.1	9.3
6	5786.56	39.94	AV	54.00	-14.06	1.80 V	120	30.64	9.9	31.5	32.1	9.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level - Limit value
5. " * ": Fundamental frequency.

2.7. Conducted Emission

2.7.1. Limit of Conducted Emission


For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

2.7.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.7.3. Test Setup

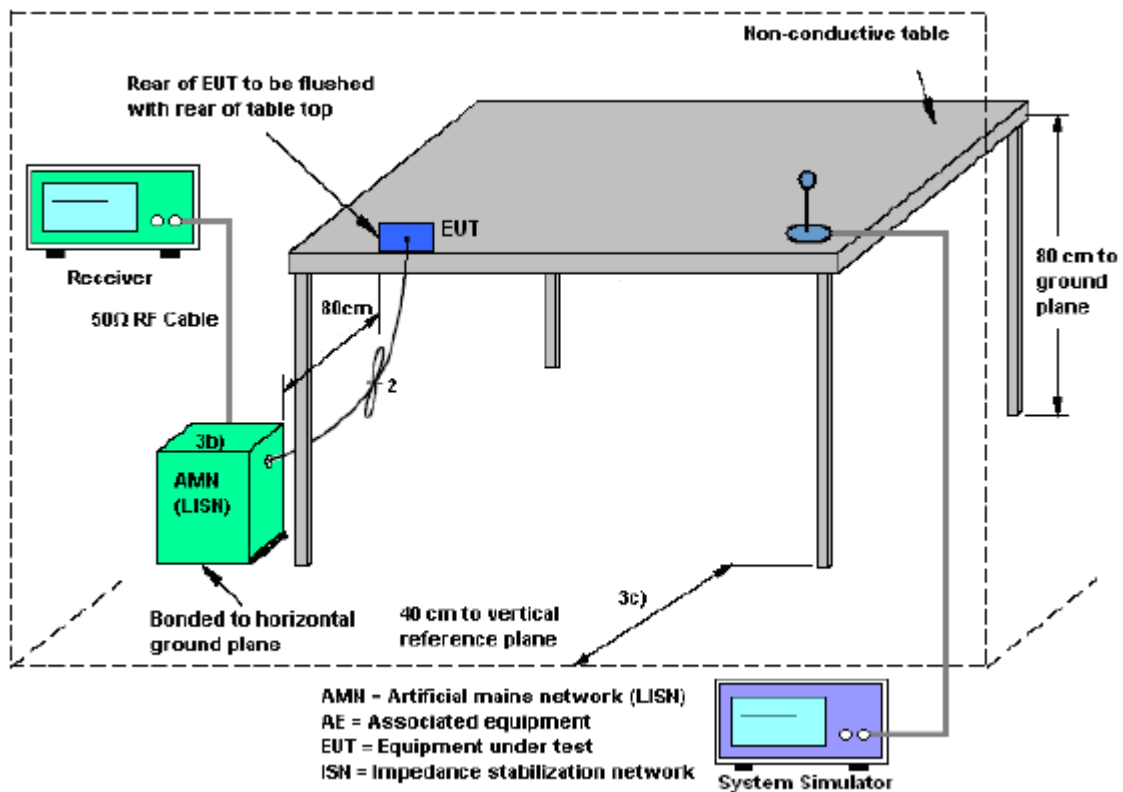



2.7.4. Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 micrometry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

2.7.5. Test Results of Conducted Emission

1. The EUT configuration of the emission tests is WLAN Link + USB Cable (Charging from Adapter) + Earphone.



FCC Part 15 Class B Voltage Test

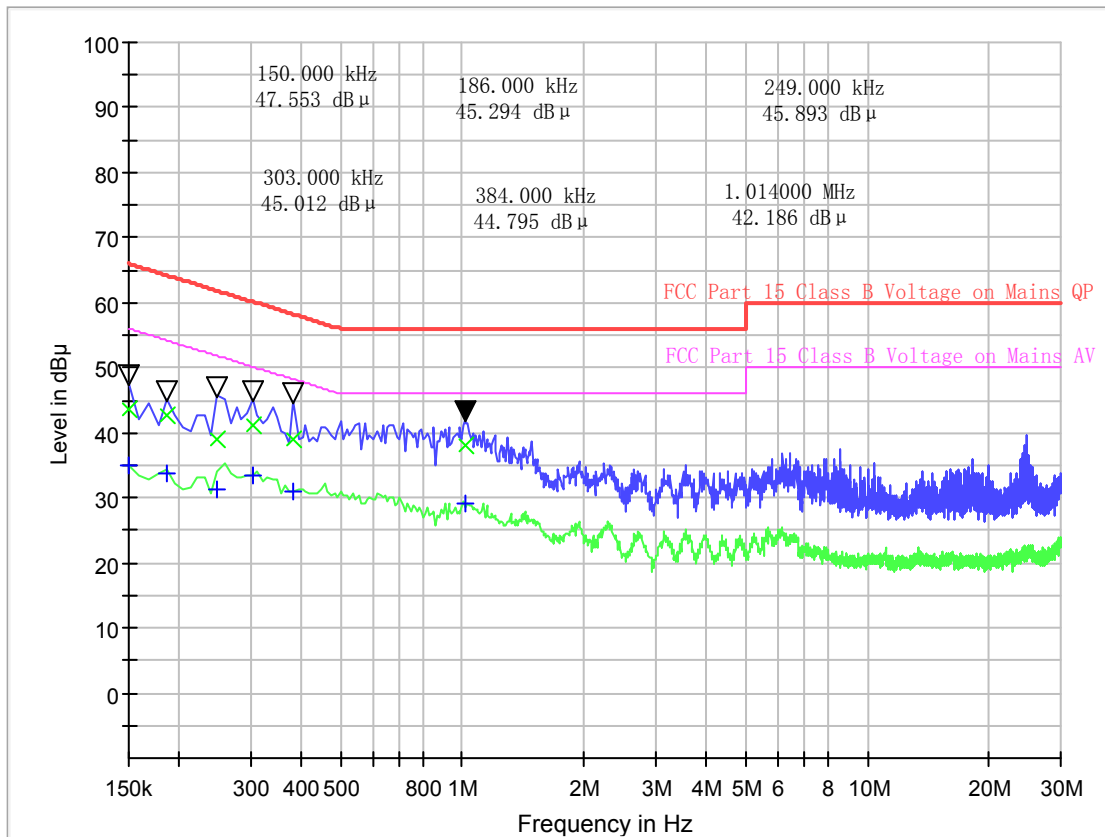


(Plot A: L Phase)

Conducted Disturbance at Mains Terminals					
L Test Data					
QP			AV		
Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)
0.150000	66.0	43.70	0.150000	56.0	35.04
0.186000	64.2	42.80	0.186000	54.2	33.88
0.249000	61.8	38.99	0.249000	51.8	31.27
0.303000	60.2	41.00	0.303000	50.2	33.37
0.384000	58.2	38.85	0.384000	48.2	31.04
1.014000	56.0	38.00	1.014000	46.0	29.14



FCC Part 15 Class B Voltage Test

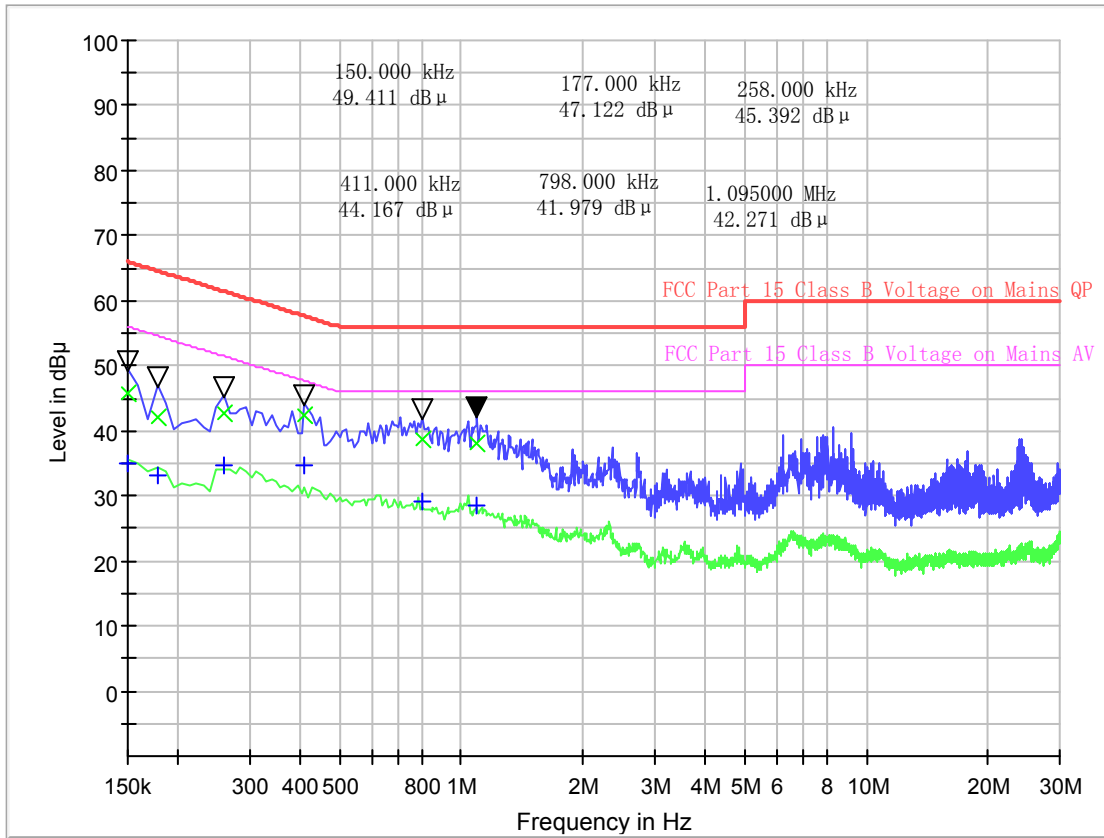

(Plot B: N Phase)

Conducted Disturbance at Mains Terminals

N Test Data

QP			AV		
Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)
0.150000	66.0	45.73	0.150000	56.0	34.99
0.177000	64.6	42.14	0.177000	54.6	33.18
0.258000	61.5	42.73	0.258000	51.5	34.72
0.411000	57.6	42.42	0.411000	47.6	34.68
0.798000	56.0	38.53	0.798000	46.0	29.08
1.095000	56.0	38.21	1.095000	46.0	28.45



3. List of measuring equipment

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	11/12/2017
2	EMI TEST RECEIVER	Rohde&Schwarz	ESI 26	100009	11/12/2017
3	EMI TEST Software	Audix	E3	N/A	N/A
4	TURNTABLE	ETS	2088	2149	N/A
5	ANTENNA MAST	ETS	2075	2346	N/A
6	EMI TEST Software	Rohde&Schwarz	ESK1	N/A	N/A
7	HORNANTENNA	ShwarzBeck	9120D	1011	11/12/2017
8	Amplifer	Sonoma	310N	E009-13	11/12/2017
9	JS amplifer	Rohde&Schwarz	JS4-00101800-28 -5A	F201504	11/12/2017
10	High pass filter	Compliance Direction systems	BSU-6	34202	11/12/2017
11	HORNANTENNA	ShwarzBeck	9120D	1012	11/12/2017
12	Amplifer	Compliance Direction systems	PAP1-4060	120	11/12/2017
13	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	11/12/2017
14	TURNTABLE	MATURO	TT2.0	----	N/A
15	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A
16	Horn Antenna	SCHWARZBECK	BBHA9170	25841	11/12/2017
17	ULTRA-BROADBAND ANTENNA	Rohde&Schwarz	HL562	100015	11/12/2017

Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	11/12/2017
2	Spectrum Analyzer	Keysight	N9030A	ATO-67098	10/09/2017
3	Power Meter	Anritsu	ML2480B	100798	11/12/2017
4	Power Sensor	Anritsu	MA2411B	100258	11/12/2017

The calibration interval was one year.



Appendix A

RF Output Power

Test Result and Data

WLAN AVGSA Output Power				
Mode	Test Frequency(MHz)	Max Power (dBm)	Limit (dBm)	Result
802.11b	2412	17.08	30	Pass
802.11b	2437	17.45	30	Pass
802.11b	2462	17.54	30	Pass
802.11g	2412	17.78	30	Pass
802.11g	2437	17.57	30	Pass
802.11g	2462	17.66	30	Pass
802.11n(HT20)	2412	17.75	30	Pass
802.11n(HT20)	2437	17.48	30	Pass
802.11n(HT20)	2462	17.95	30	Pass
802.11n(HT40)	2422	15.82	30	Pass
802.11n(HT40)	2437	15.53	30	Pass
802.11n(HT40)	2452	15.54	30	Pass



6dB Bandwidth

Test Result and Data

WLAN Occupied 6dB Bandwidth

Mode	Test Frequency(MHz)	Occupied Bandwidth(MHz)	Limit	Result
802.11b	2412	8.57	$\geq 500\text{KHz}$	Pass
802.11b	2437	8.57	$\geq 500\text{KHz}$	Pass
802.11b	2462	8.09	$\geq 500\text{KHz}$	Pass
802.11g	2412	16.36	$\geq 500\text{KHz}$	Pass
802.11g	2437	16.37	$\geq 500\text{KHz}$	Pass
802.11g	2462	16.37	$\geq 500\text{KHz}$	Pass
802.11n(HT20)	2412	17.59	$\geq 500\text{KHz}$	Pass
802.11n(HT20)	2437	16.37	$\geq 500\text{KHz}$	Pass
802.11n(HT20)	2462	17.60	$\geq 500\text{KHz}$	Pass
802.11n(HT40)	2422	35.37	$\geq 500\text{KHz}$	Pass
802.11n(HT40)	2437	35.50	$\geq 500\text{KHz}$	Pass
802.11n(HT40)	2452	35.45	$\geq 500\text{KHz}$	Pass



802.11b,2412MHz,Ant0




802.11b,2437MHz,Ant0




802.11b,2462MHz,Ant0




802.11g,2412MHz,Ant0

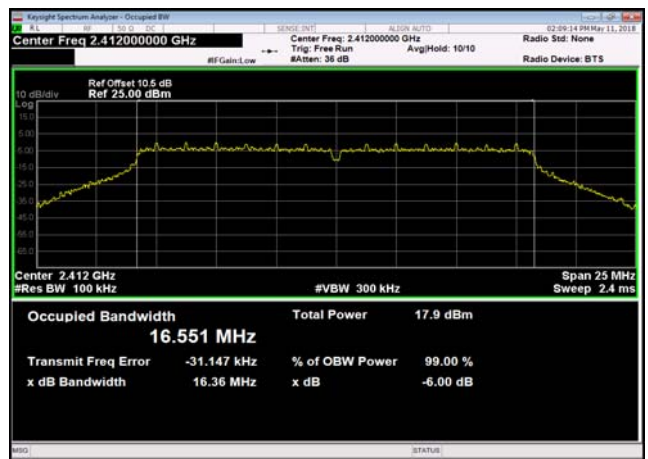

802.11g,2437MHz,Ant0

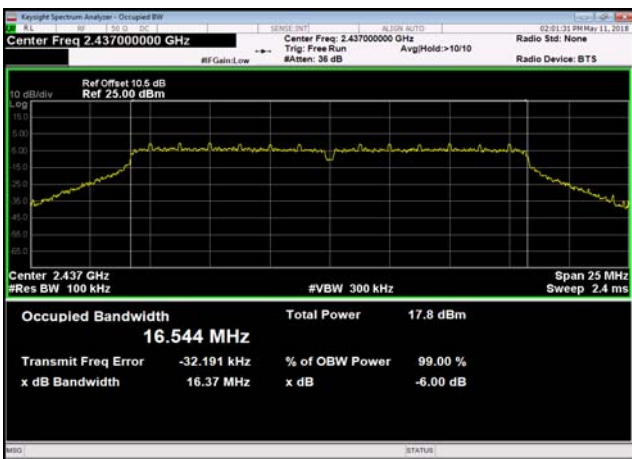


802.11g,2462MHz,Ant0

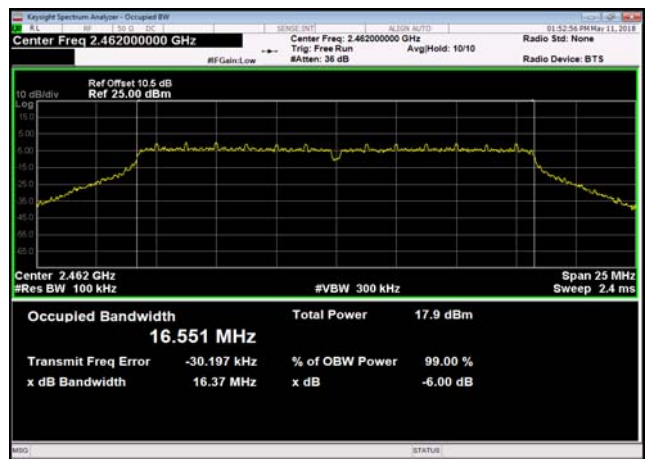





802.11n(HT20),2412MHz,Ant0

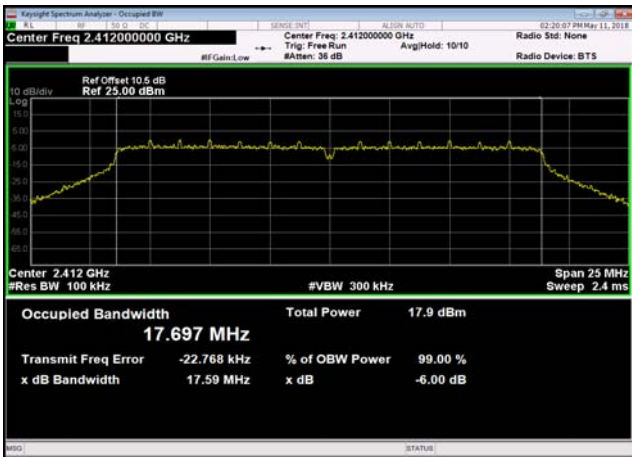


802.11n(HT20),2437MHz,Ant0

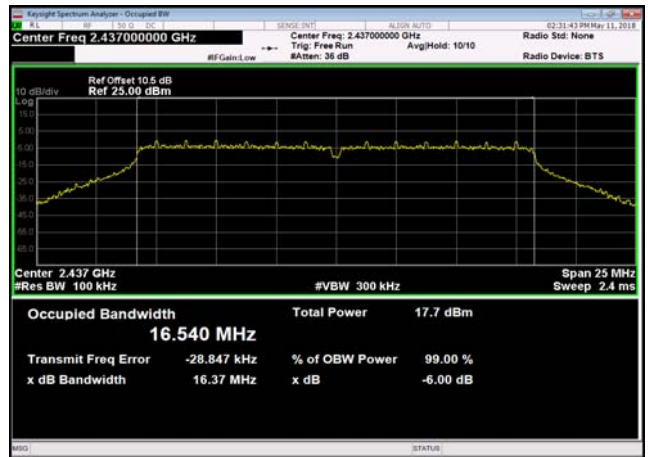


802.11n(HT20),2462MHz,Ant0

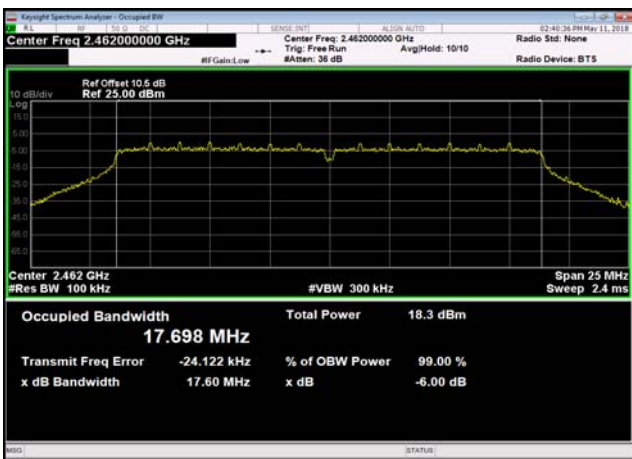


802.11n(HT40),2422MHz,Ant0

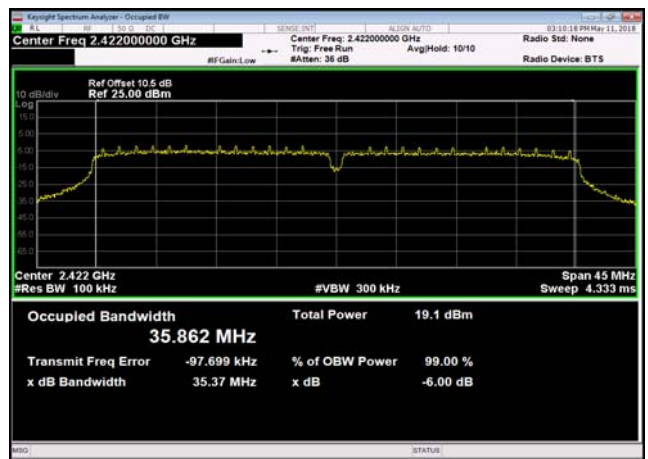

802.11n(HT40),2437MHz,Ant0

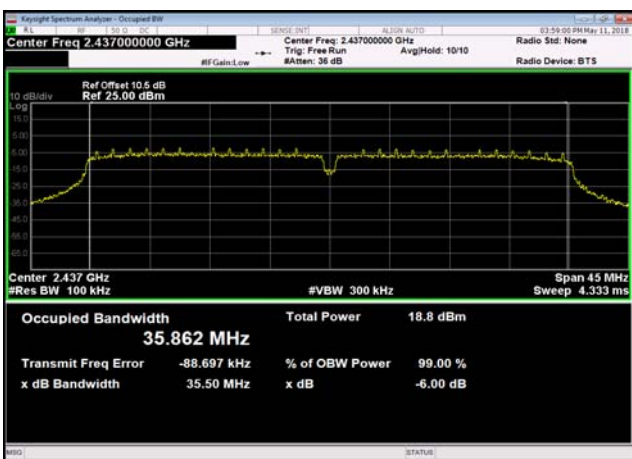

802.11n(HT40),2452MHz,Ant0

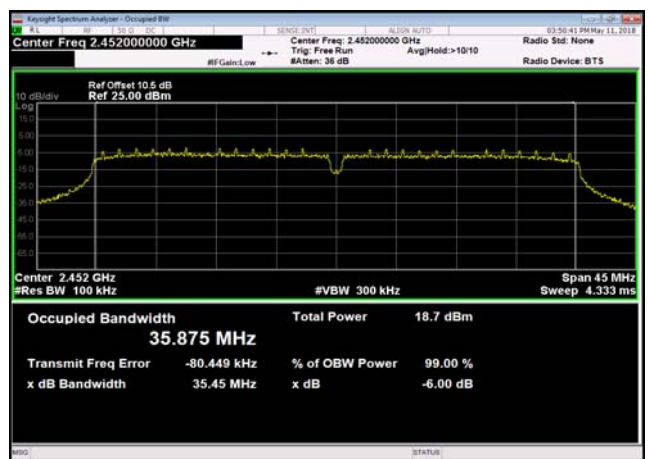



Power Spectral Density

Test Result and Data

WLAN AVGSA Power Spectral Density

Mode	Test Frequency(MHz)	PSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	2412	-17.125	8	Pass
802.11b	2437	-17.295	8	Pass
802.11b	2462	-16.629	8	Pass
802.11g	2412	-21.998	8	Pass
802.11g	2437	-21.380	8	Pass
802.11g	2462	-22.802	8	Pass
802.11n(HT20)	2412	-22.582	8	Pass
802.11n(HT20)	2437	-21.554	8	Pass
802.11n(HT20)	2462	-22.836	8	Pass
802.11n(HT40)	2422	-30.115	8	Pass
802.11n(HT40)	2437	-26.786	8	Pass
802.11n(HT40)	2452	-29.030	8	Pass



802.11b,2412MHz,Ant0




802.11b,2437MHz,Ant0




802.11b,2462MHz,Ant0




802.11g,2412MHz,Ant0

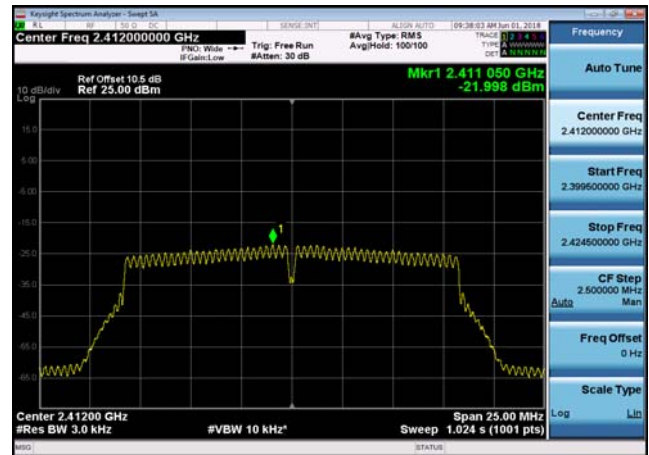

802.11g,2437MHz,Ant0

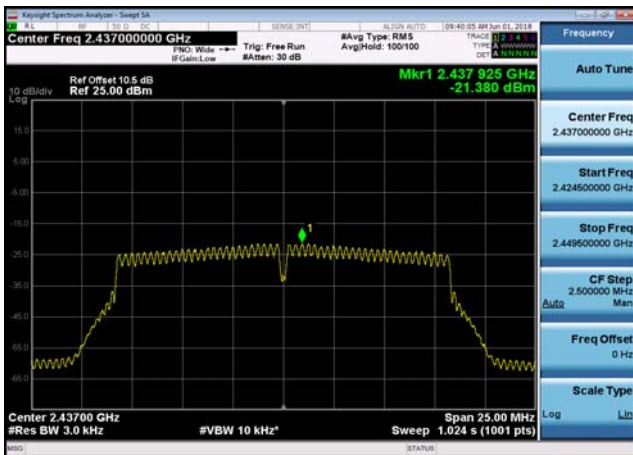


802.11g,2462MHz,Ant0

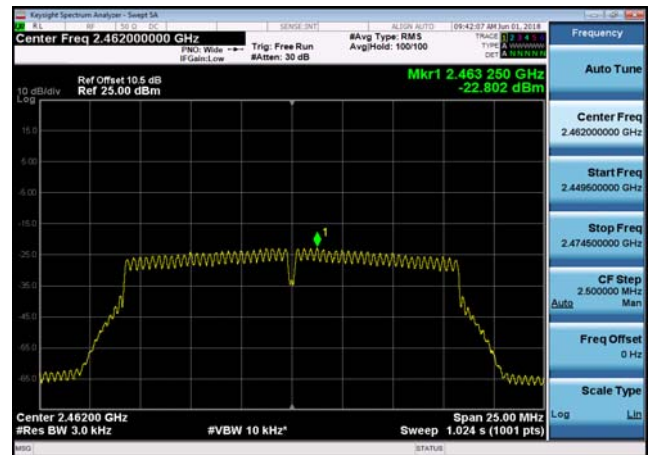





802.11n(HT20),2412MHz,Ant0

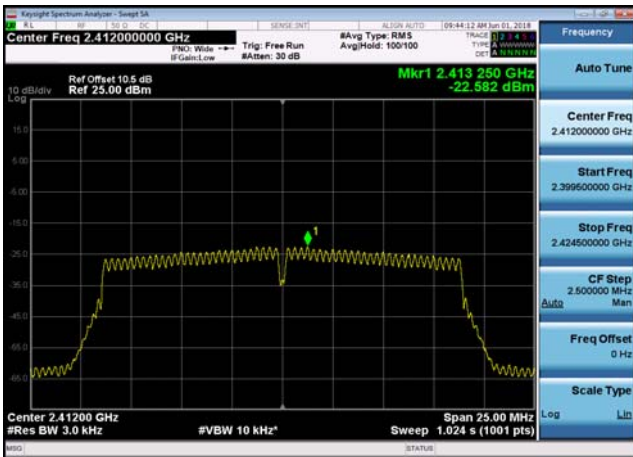


802.11n(HT20),2437MHz,Ant0

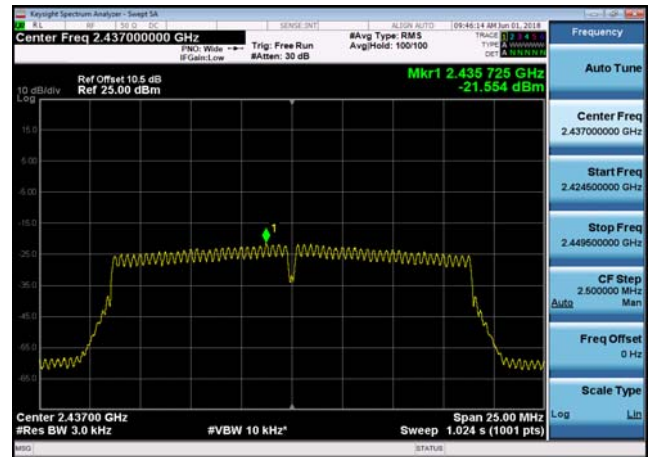


802.11n(HT20),2462MHz,Ant0

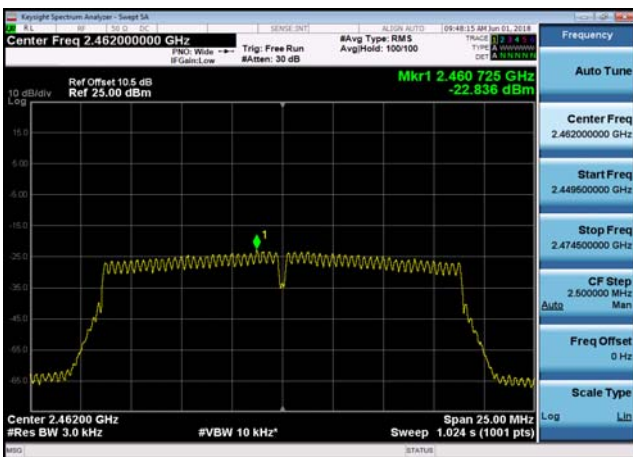


802.11n(HT40),2422MHz,Ant0

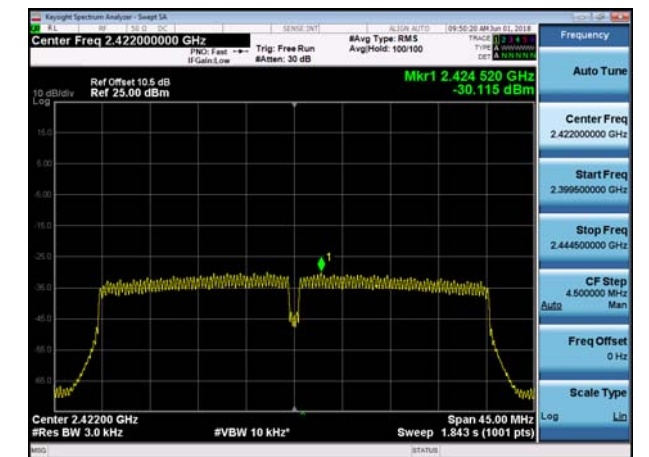

802.11n(HT40),2437MHz,Ant0

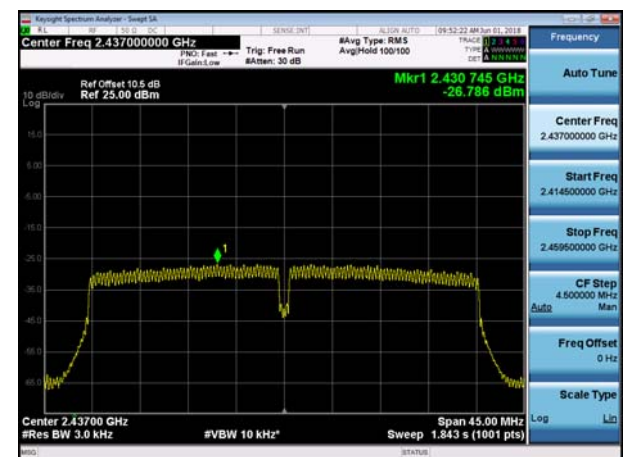

802.11n(HT40),2452MHz,Ant0

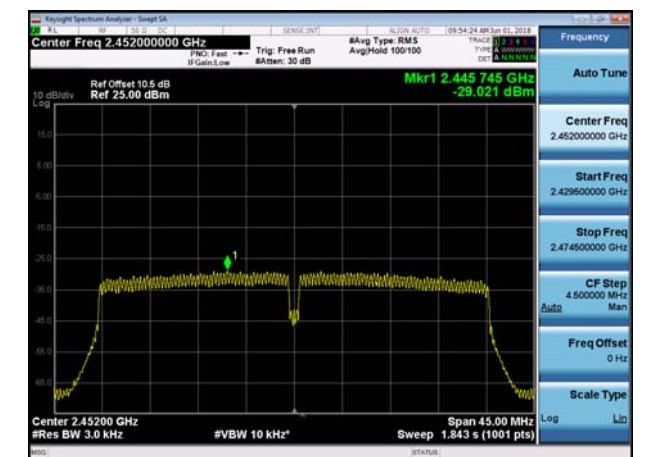



Conducted Band Edges and Spurious Emissions

Test Result and Data


Mode	Test Frequency (MHz)	Test No.	Frequency Range	Emission(dBm)	Result
802.11b	2412	1	Reference Level	1.83	Pass
802.11b	2412	2	Band Edge	-44.23	Pass
802.11b	2412	3	30MHz~2310MHz	-46.56	Pass
802.11b	2412	4	2500MHz~10000MHz	-30.77	Pass
802.11b	2412	5	10000MHz~25000MHz	-42.18	Pass
802.11b	2437	1	Reference Level	2.51	Pass
802.11b	2437	2	Band Edge	-47.70	Pass
802.11b	2437	3	30MHz~2310MHz	-47.13	Pass
802.11b	2437	4	2500MHz~10000MHz	-30.06	Pass
802.11b	2437	5	10000MHz~25000MHz	-41.44	Pass
802.11b	2462	1	Reference Level	2.45	Pass
802.11b	2462	2	Band Edge	-47.31	Pass
802.11b	2462	3	30MHz~2310MHz	-46.32	Pass
802.11b	2462	4	2500MHz~10000MHz	-30.37	Pass
802.11b	2462	5	10000MHz~25000MHz	-41.37	Pass
802.11g	2412	1	Reference Level	-0.21	Pass
802.11g	2412	2	Band Edge	-36.39	Pass
802.11g	2412	3	30MHz~2310MHz	-46.28	Pass
802.11g	2412	4	2500MHz~10000MHz	-37.91	Pass
802.11g	2412	5	10000MHz~25000MHz	-41.89	Pass
802.11g	2437	1	Reference Level	-0.32	Pass
802.11g	2437	2	Band Edge	-46.94	Pass
802.11g	2437	3	30MHz~2310MHz	-46.76	Pass
802.11g	2437	4	2500MHz~10000MHz	-38.74	Pass
802.11g	2437	5	10000MHz~25000MHz	-41.88	Pass
802.11g	2462	1	Reference Level	-0.39	Pass
802.11g	2462	2	Band Edge	-47.41	Pass
802.11g	2462	3	30MHz~2310MHz	-46.91	Pass
802.11g	2462	4	2500MHz~10000MHz	-38.88	Pass




802.11g	2462	5	10000MHz~25000MHz	-41.62	Pass
802.11n(HT20)	2412	1	Reference Level	-0.121	Pass
802.11n(HT20)	2412	2	Band Edge	-35.59	Pass
802.11n(HT20)	2412	3	30MHz~2310MHz	-46.77	Pass
802.11n(HT20)	2412	4	2500MHz~10000MHz	-37.38	Pass
802.11n(HT20)	2412	5	10000MHz~25000MHz	-41.88	Pass
802.11n(HT20)	2437	1	Reference Level	-0.379	Pass
802.11n(HT20)	2437	2	Band Edge	-46.97	Pass
802.11n(HT20)	2437	3	30MHz~2310MHz	-46.48	Pass
802.11n(HT20)	2437	4	2500MHz~10000MHz	-38.72	Pass
802.11n(HT20)	2437	5	10000MHz~25000MHz	-41.53	Pass
802.11n(HT20)	2462	1	Reference Level	0.079	Pass
802.11n(HT20)	2462	2	Band Edge	-46.76	Pass
802.11n(HT20)	2462	3	30MHz~2310MHz	-46.78	Pass
802.11n(HT20)	2462	4	2500MHz~10000MHz	-38.69	Pass
802.11n(HT20)	2462	5	10000MHz~25000MHz	-41.78	Pass
802.11n(HT40)	2422	1	Reference Level	-1.94	Pass
802.11n(HT40)	2422	2	Band Edge	-34.30	Pass
802.11n(HT40)	2422	3	30MHz~2310MHz	-46.91	Pass
802.11n(HT40)	2422	4	2500MHz~10000MHz	-39.01	Pass
802.11n(HT40)	2422	5	10000MHz~25000MHz	-42.20	Pass
802.11n(HT40)	2437	1	Reference Level	-2.19	Pass
802.11n(HT40)	2437	2	Band Edge	-42.17	Pass
802.11n(HT40)	2437	3	30MHz~2310MHz	-46.89	Pass
802.11n(HT40)	2437	4	2500MHz~10000MHz	-37.56	Pass
802.11n(HT40)	2437	5	10000MHz~25000MHz	-41.87	Pass
802.11n(HT40)	2452	1	Reference Level	-2.43	Pass
802.11n(HT40)	2452	2	Band Edge	-42.60	Pass
802.11n(HT40)	2452	3	30MHz~2310MHz	-46.69	Pass
802.11n(HT40)	2452	4	2500MHz~10000MHz	-37.82	Pass
802.11n(HT40)	2452	5	10000MHz~25000MHz	-41.68	Pass




802.11b,2412MHz,Ant0,Plot 1,Reference Level

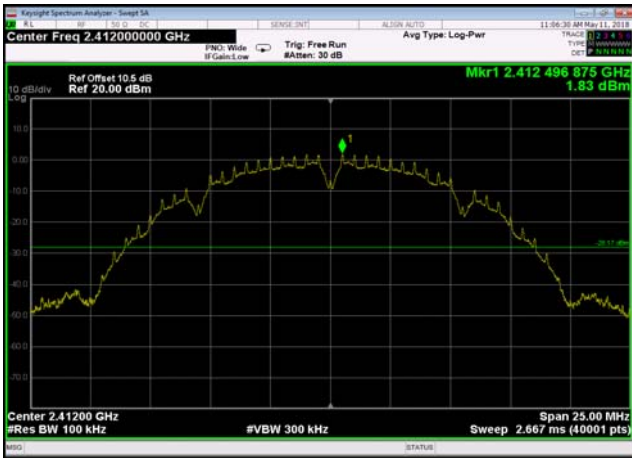


802.11b,2412MHz,Ant0,Plot 2,Band Edge

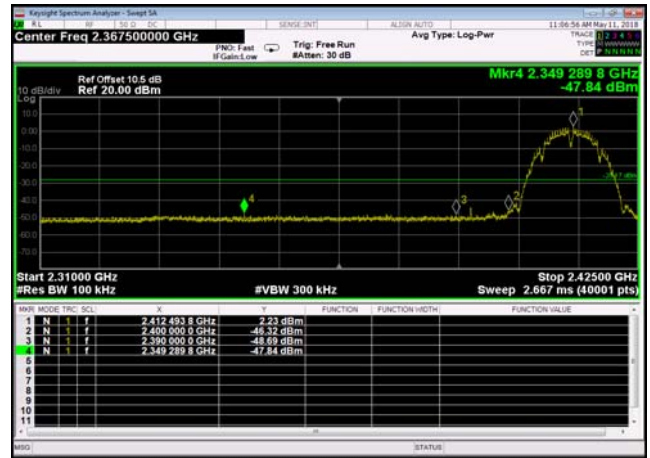


802.11b,2412MHz,Ant0,Plot 3,30MHz~2310MHz

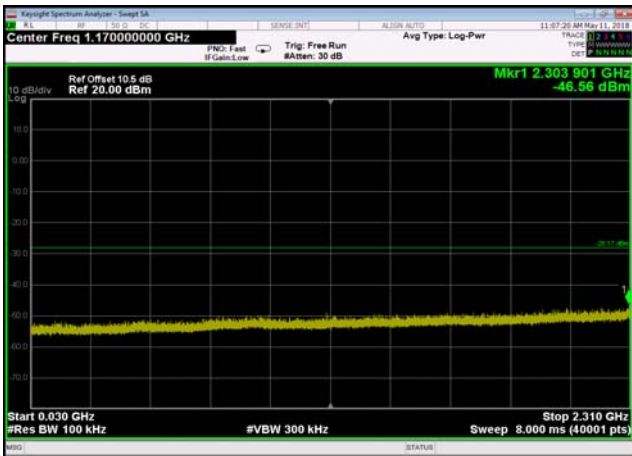

802.11b,2412MHz,Ant0,Plot 4,2500MHz~10000MHz

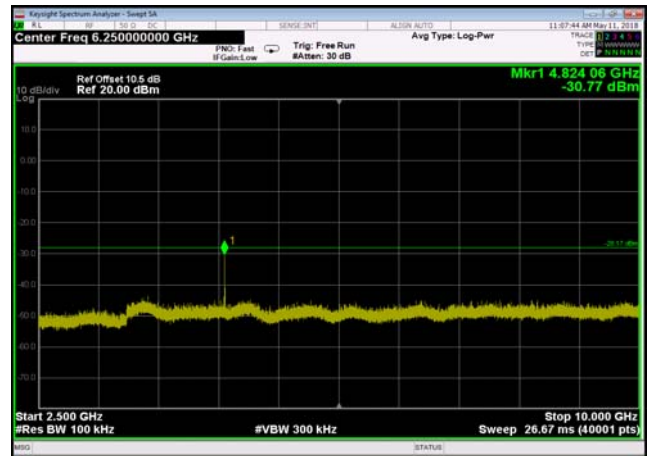

802.11b,2412MHz,Ant0,Plot 5,10000MHz~25000MHz

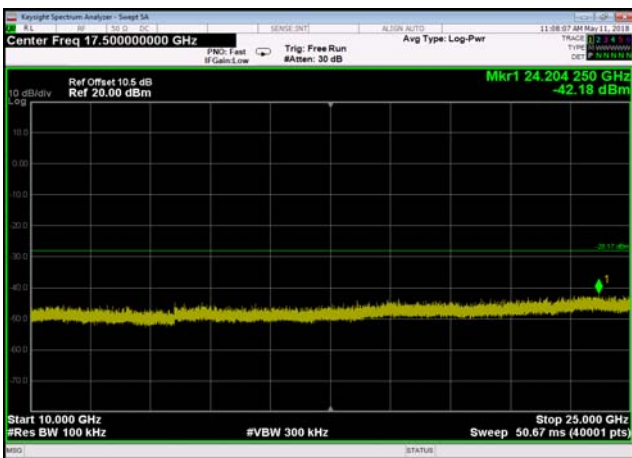


802.11b,2437MHz,Ant0,Plot 1,Reference Level







802.11b,2437MHz,Ant0,Plot 2,Band Edge

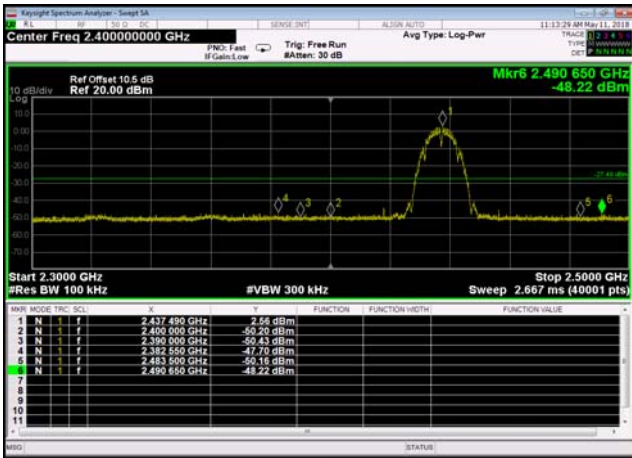


802.11b,2437MHz,Ant0,Plot 3,30MHz~2310MHz

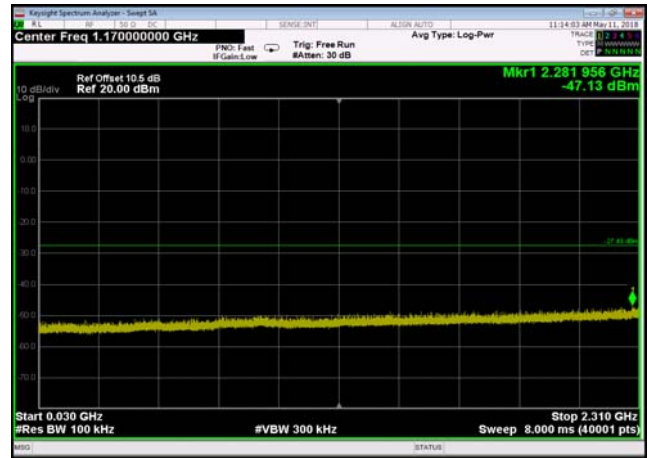

802.11b,2437MHz,Ant0,Plot 4,2500MHz~10000MHz

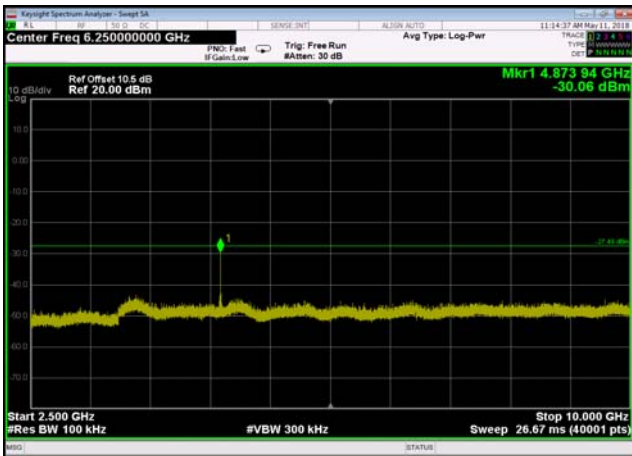


802.11b,2437MHz,Ant0,Plot 5,10000MHz~25000MHz

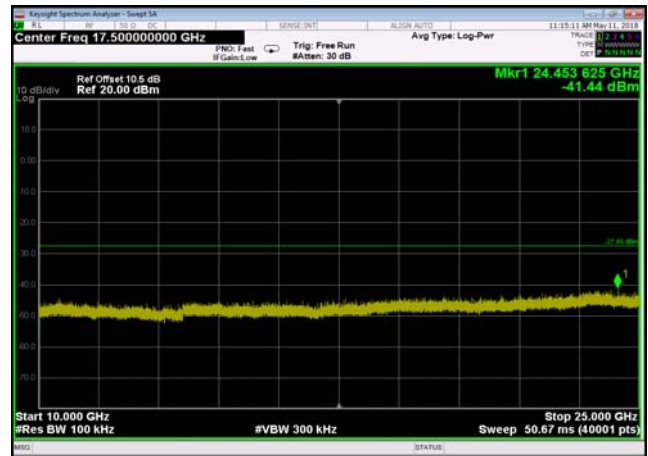

802.11b,2462MHz,Ant0,Plot 1,Reference Level




802.11b,2462MHz,Ant0,Plot 2,Band Edge

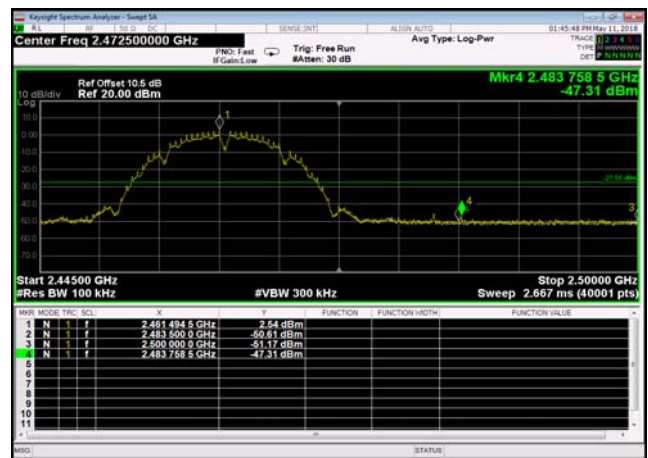





802.11b,2462MHz,Ant0,Plot 3,30MHz~2310MHz

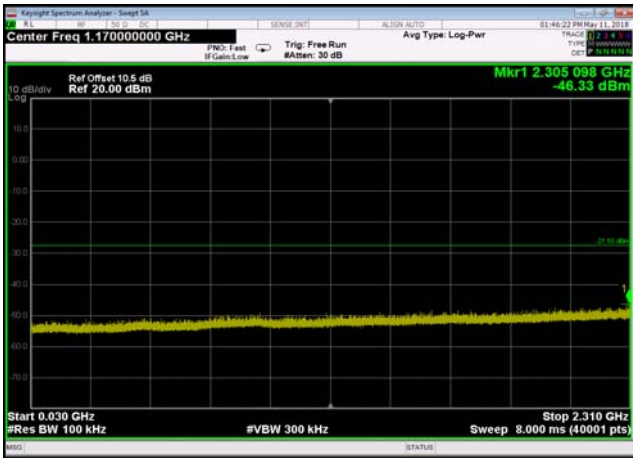


802.11b,2462MHz,Ant0,Plot 4,2500MHz~10000MHz

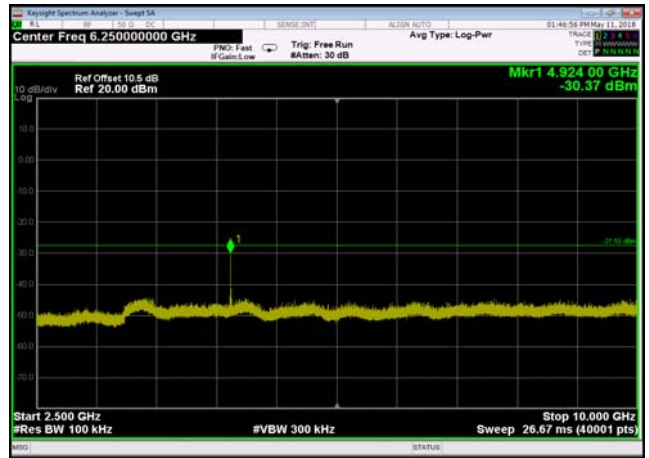


802.11b,2462MHz,Ant0,Plot 5,10000MHz~25000MHz

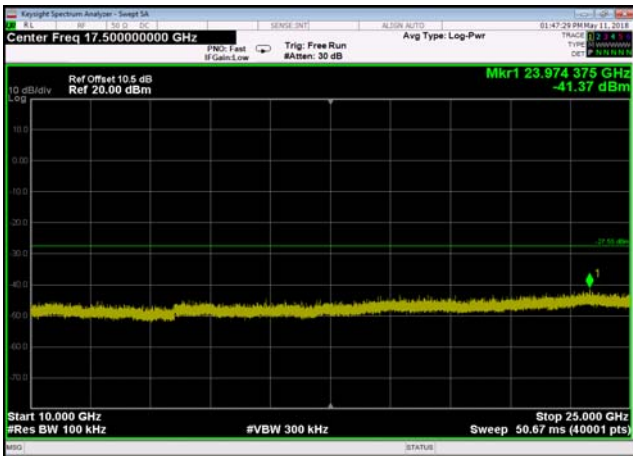


802.11g,2412MHz,Ant0,Plot 1,Reference Level

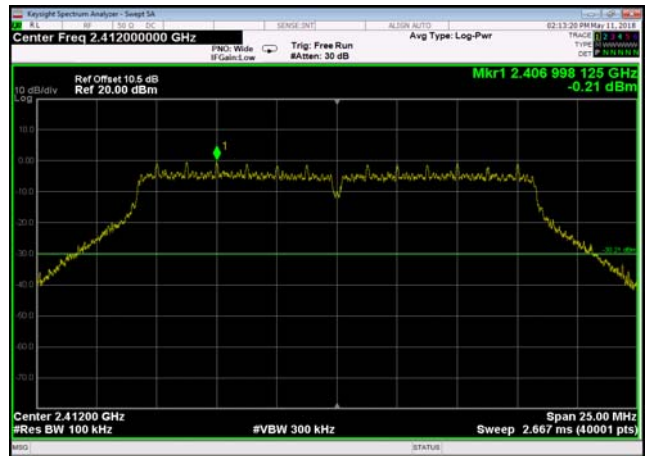

802.11g,2412MHz,Ant0,Plot 2,Band Edge

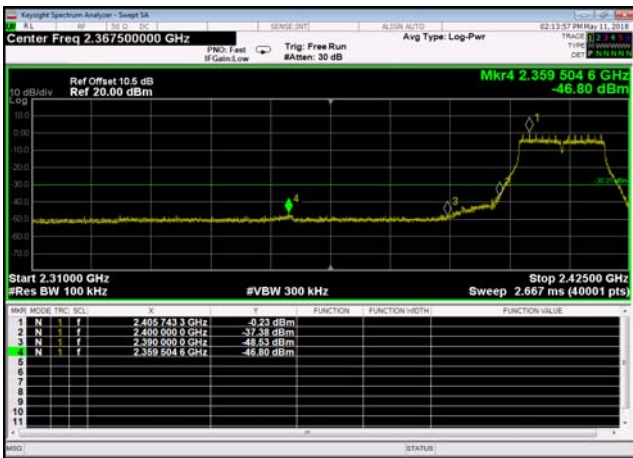


802.11g,2412MHz,Ant0,Plot 3,30MHz~2310MHz

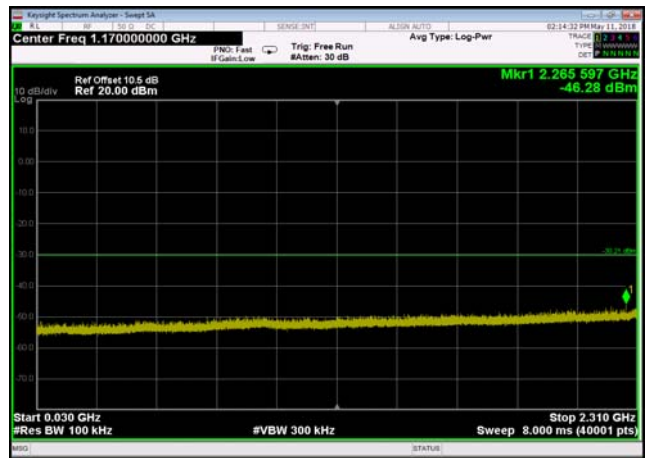





802.11g,2412MHz,Ant0,Plot 4,2500MHz~10000MHz

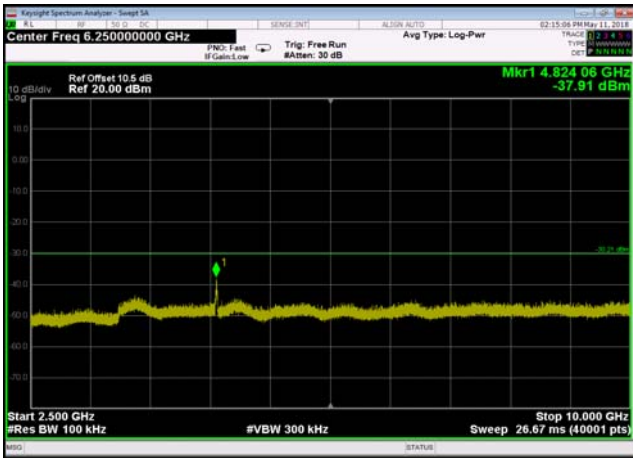


802.11g,2412MHz,Ant0,Plot 5,10000MHz~25000MHz

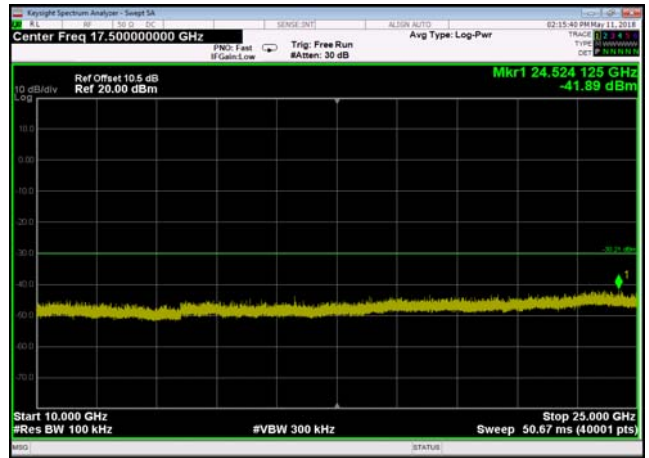


802.11g,2437MHz,Ant0,Plot 1,Reference Level

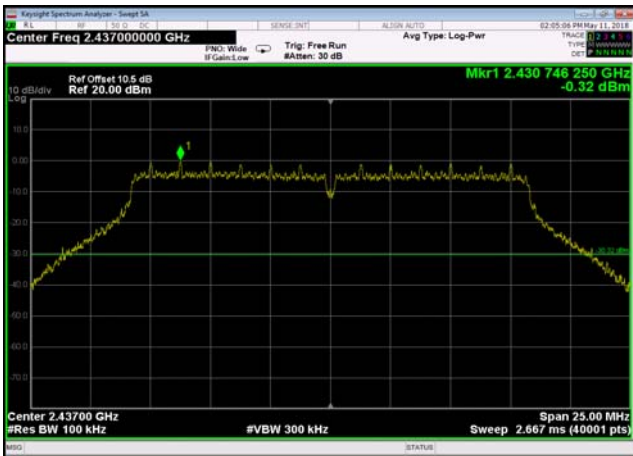


802.11g,2437MHz,Ant0,Plot 2,Band Edge

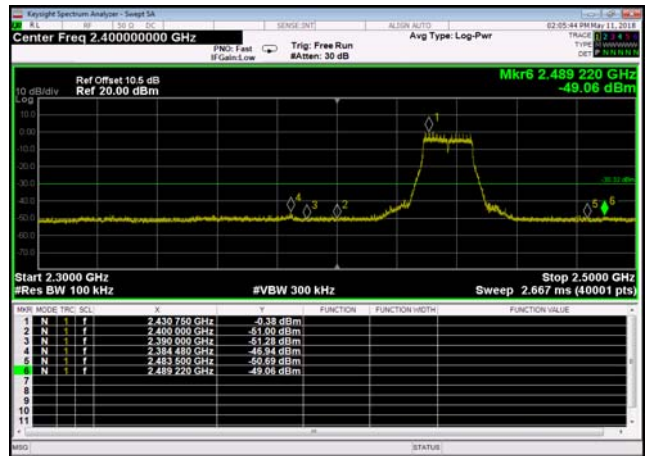

802.11g,2437MHz,Ant0,Plot 3,30MHz~2310MHz

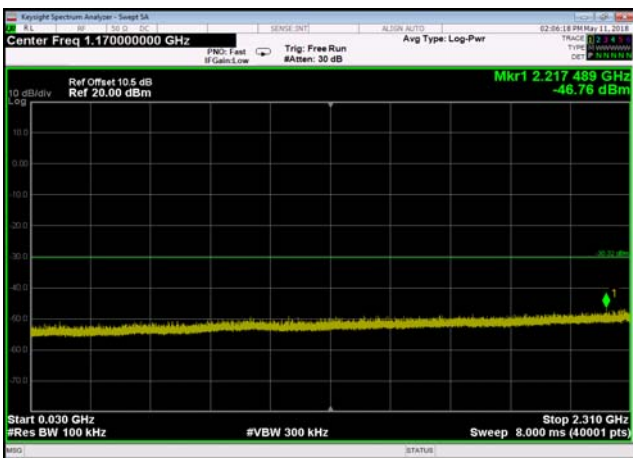


802.11g,2437MHz,Ant0,Plot 4,2500MHz~10000MHz

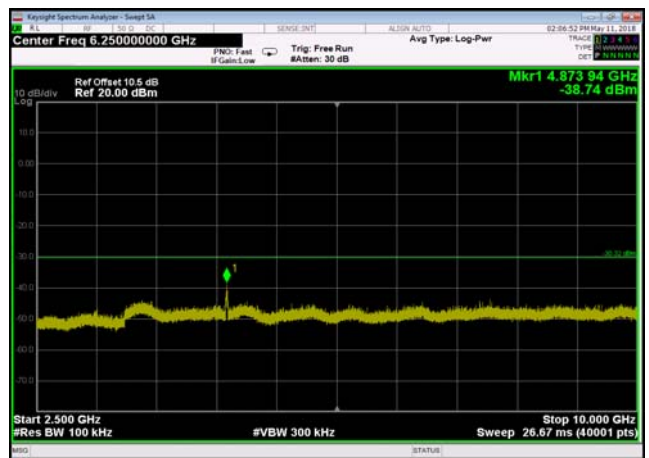




802.11g,2437MHz,Ant0,Plot 5,10000MHz~25000MHz

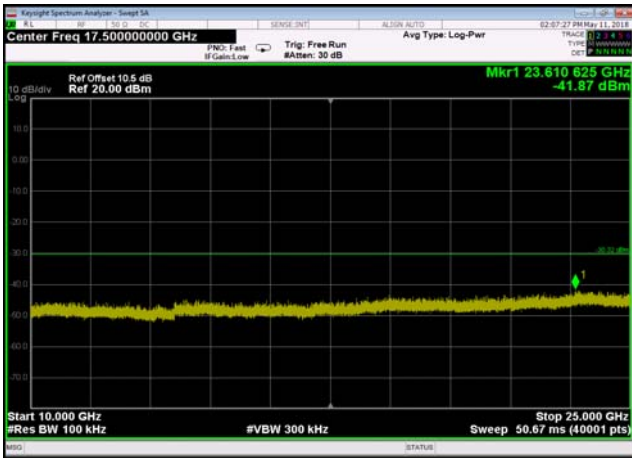


802.11g,2462MHz,Ant0,Plot 1,Reference Level

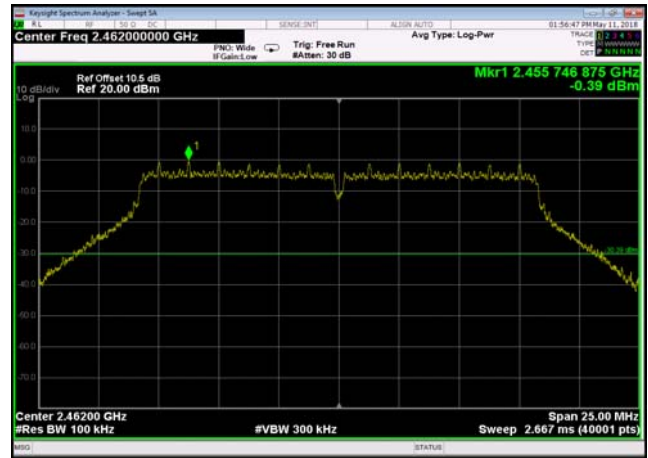


802.11g,2462MHz,Ant0,Plot 2,Band Edge




802.11g,2462MHz,Ant0,Plot 3,30MHz~2310MHz

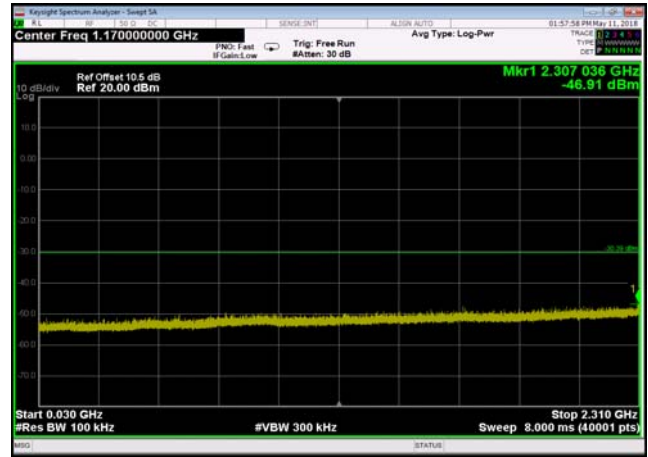

802.11g,2462MHz,Ant0,Plot 4,2500MHz~10000MHz

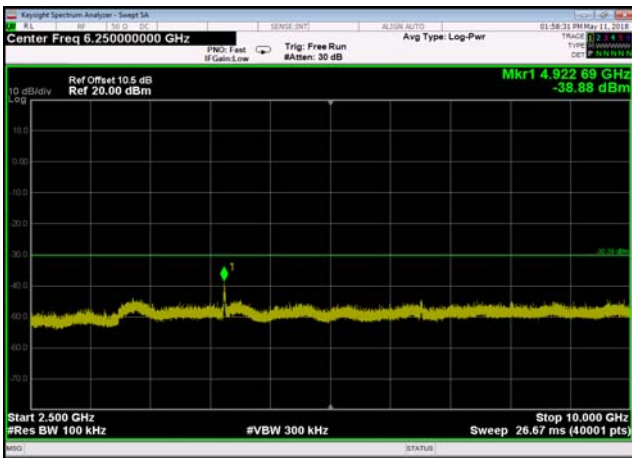


802.11g,2462MHz,Ant0,Plot 5,10000MHz~25000MHz

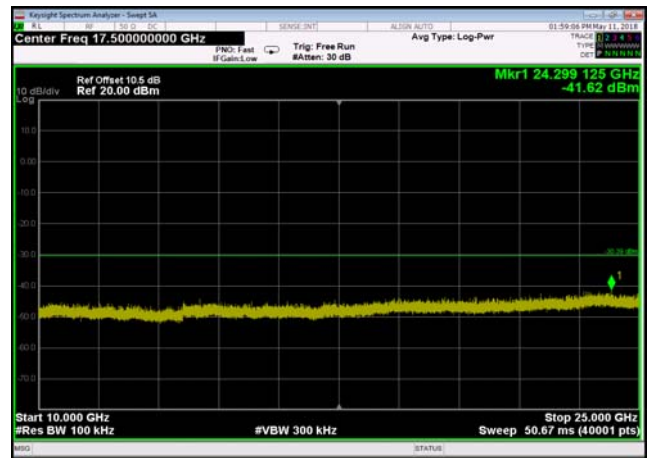





802.11n(HT20),2412MHz,Ant0,Plot
1,Reference Level

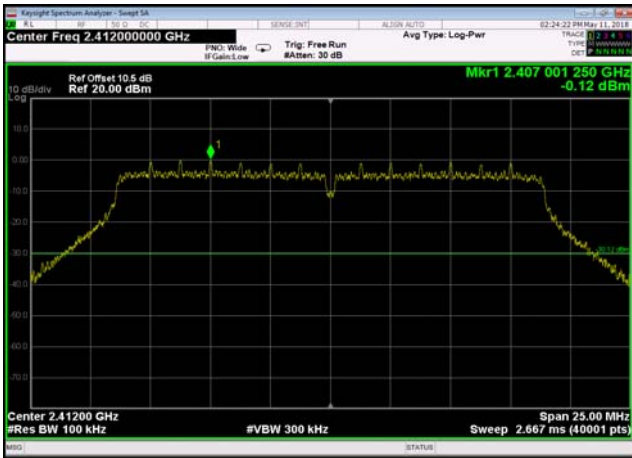


802.11n(HT20),2412MHz,Ant0,Plot
2,Band Edge

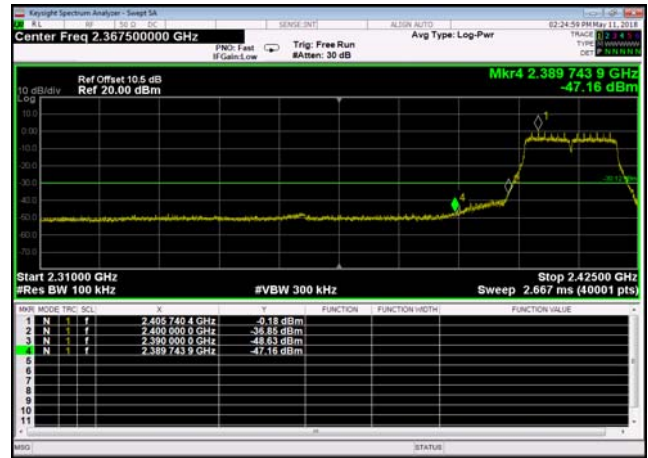


802.11n(HT20),2412MHz,Ant0,Plot
3,30MHz~2310MHz

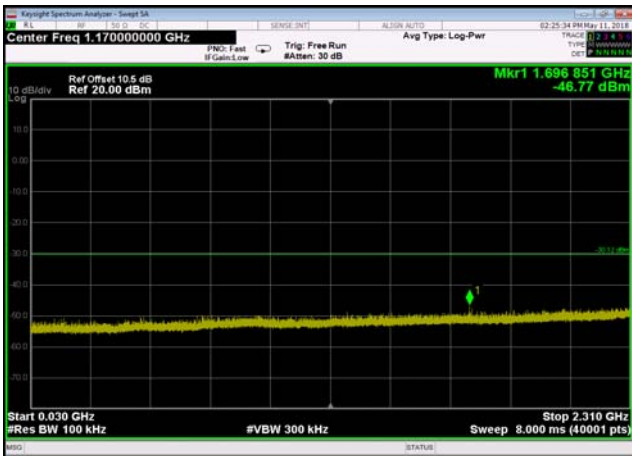


802.11n(HT20),2412MHz,Ant0,Plot
4,2500MHz~10000MHz

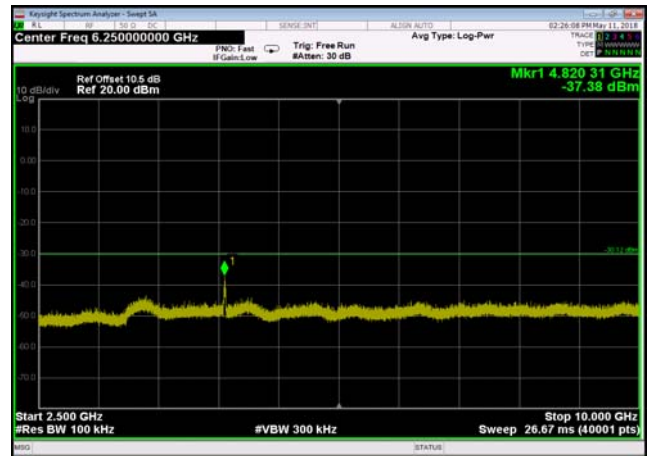

802.11n(HT20),2412MHz,Ant0,Plot
5,10000MHz~25000MHz

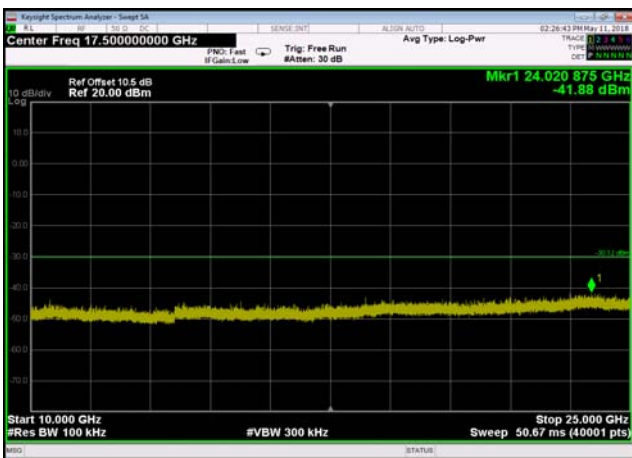


802.11n(HT20),2437MHz,Ant0,Plot
1,Reference Level

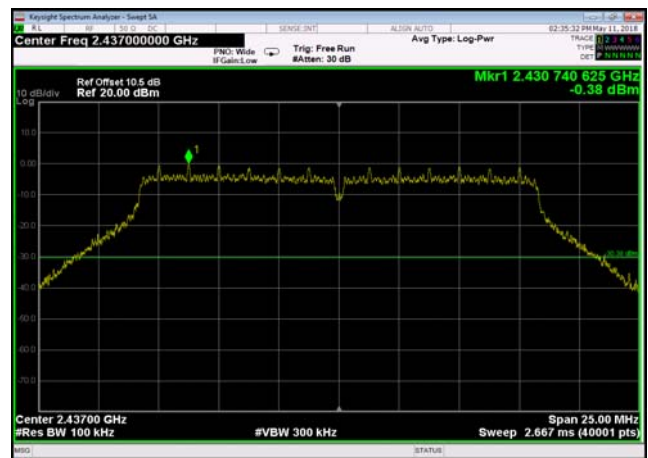





802.11n(HT20),2437MHz,Ant0,Plot
2,Band Edge

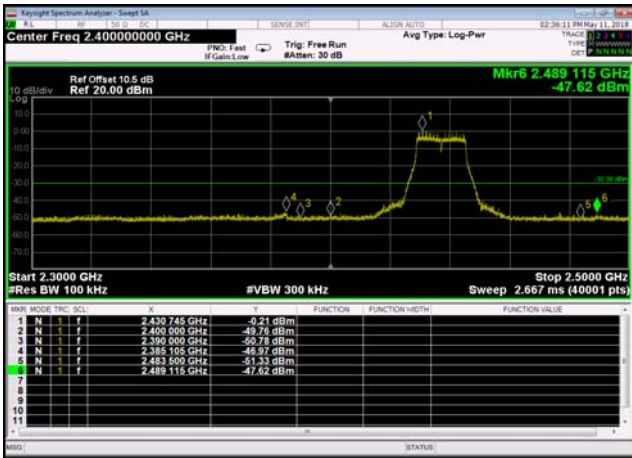


802.11n(HT20),2437MHz,Ant0,Plot
3,30MHz~2310MHz

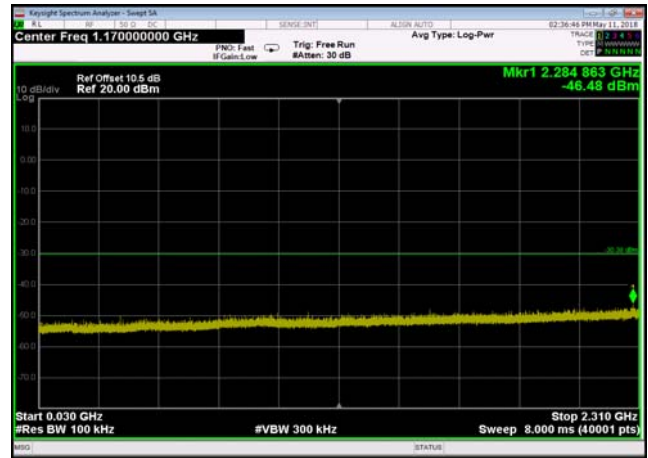


802.11n(HT20),2437MHz,Ant0,Plot
4,2500MHz~10000MHz

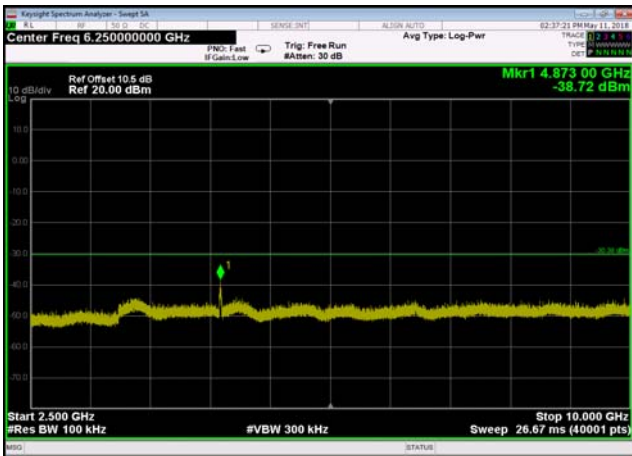

802.11n(HT20),2437MHz,Ant0,Plot
5,10000MHz~25000MHz

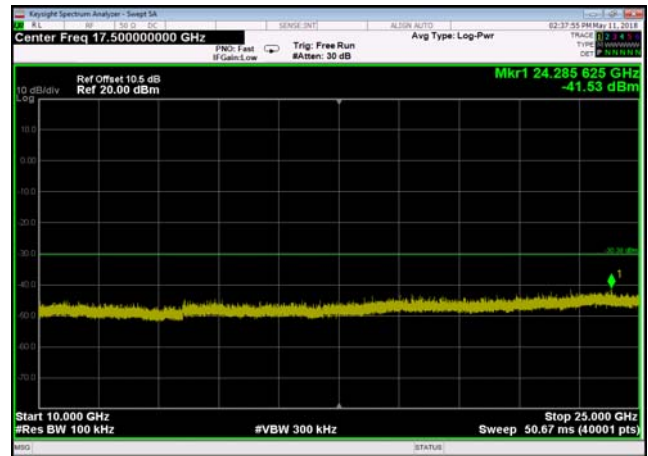

802.11n(HT20),2462MHz,Ant0,Plot
1,Reference Level

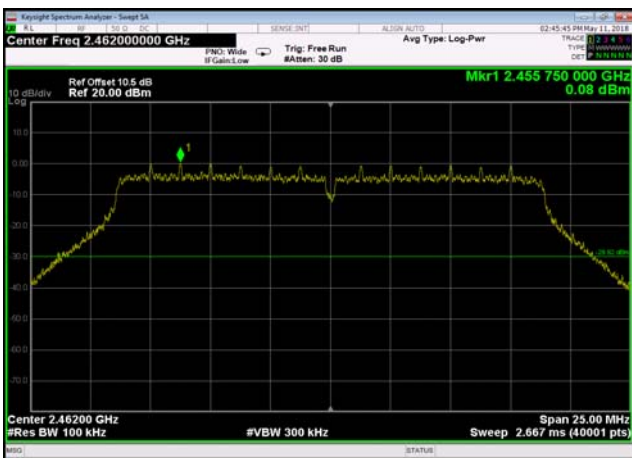


802.11n(HT20),2462MHz,Ant0,Plot
2,Band Edge







802.11n(HT20),2462MHz,Ant0,Plot
3,30MHz~2310MHz

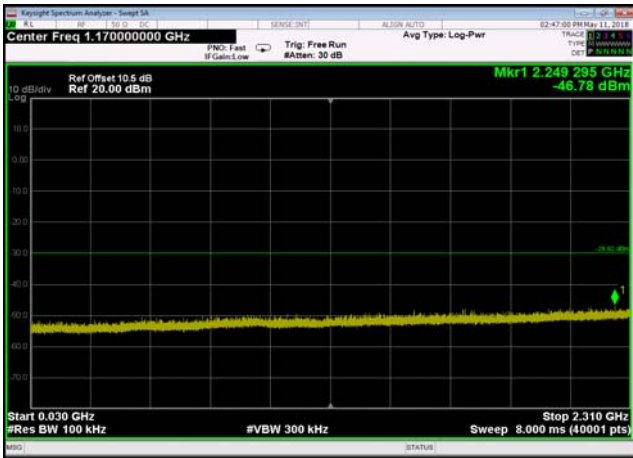


802.11n(HT20),2462MHz,Ant0,Plot
4,2500MHz~10000MHz

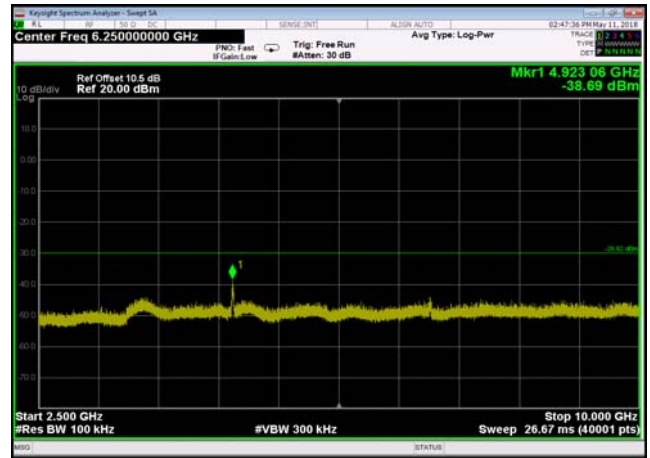


802.11n(HT20),2462MHz,Ant0,Plot
5,10000MHz~25000MHz

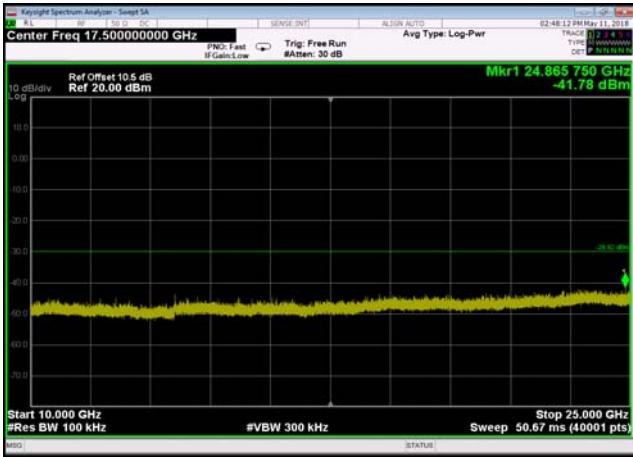


802.11n(HT40),2422MHz,Ant0,Plot
1,Reference Level

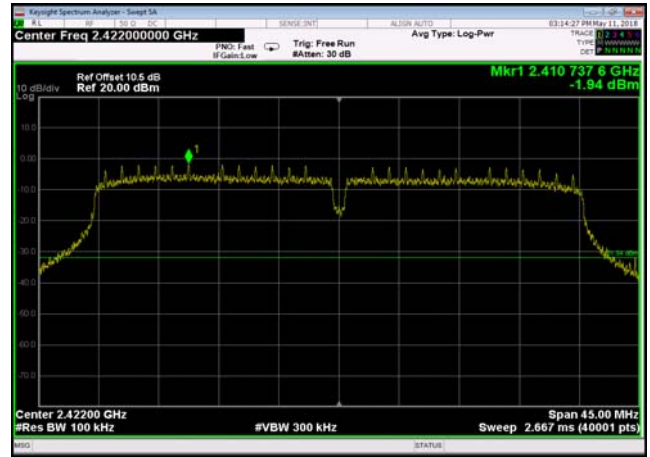

802.11n(HT40),2422MHz,Ant0,Plot
2,Band Edge

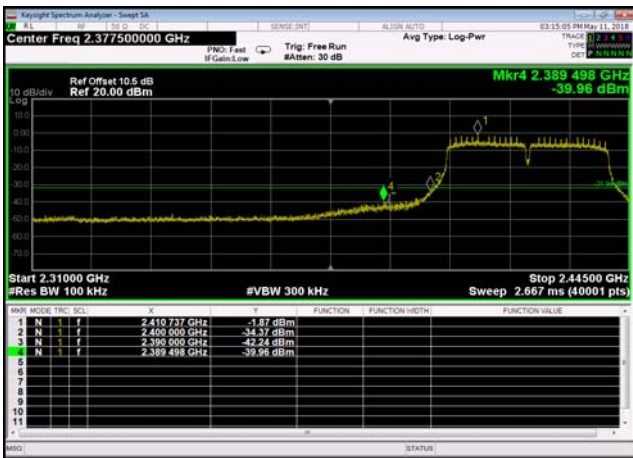


802.11n(HT40),2422MHz,Ant0,Plot
3,30MHz~2310MHz

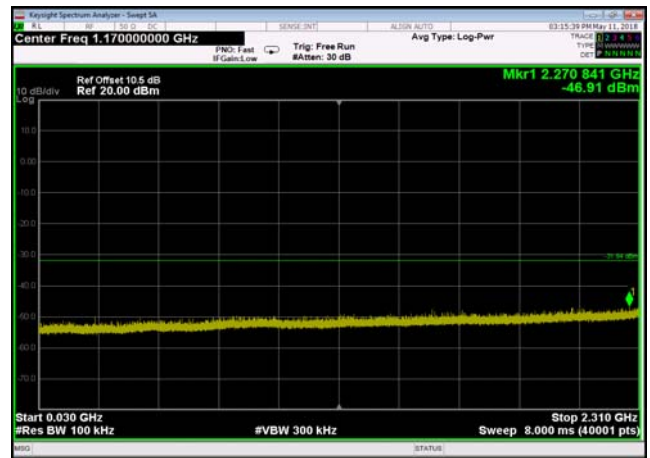





802.11n(HT40),2422MHz,Ant0,Plot
4,2500MHz~10000MHz

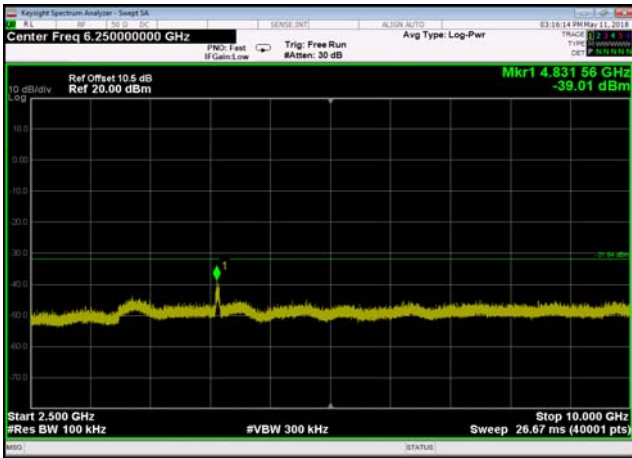


802.11n(HT40),2422MHz,Ant0,Plot
5,10000MHz~25000MHz

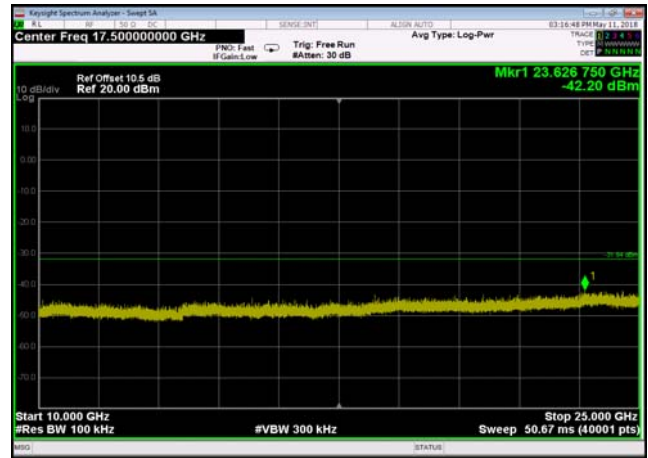


802.11n(HT40),2437MHz,Ant0,Plot
1,Reference Level

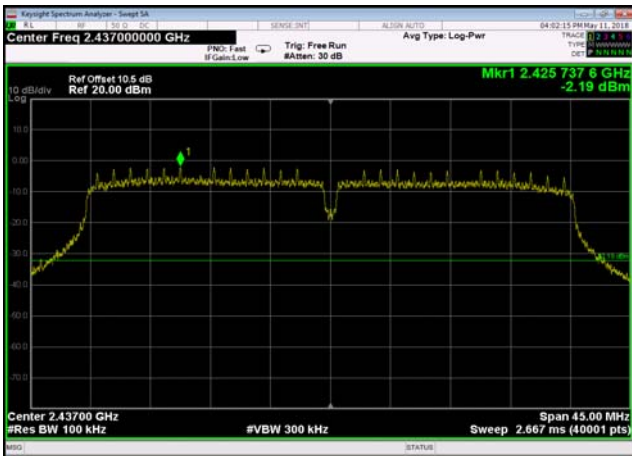


802.11n(HT40),2437MHz,Ant0,Plot
2,Band Edge

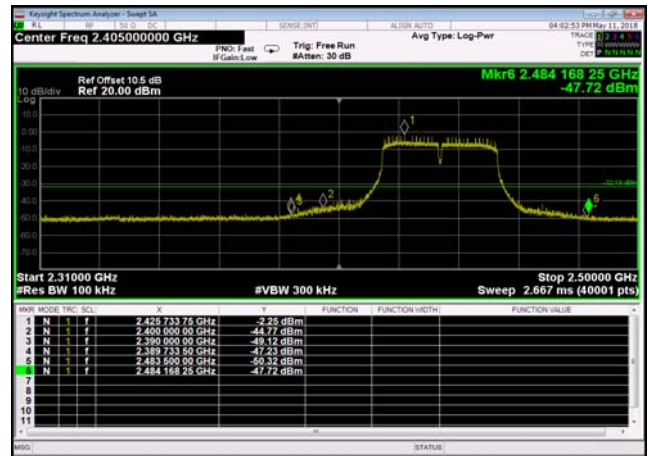

802.11n(HT40),2437MHz,Ant0,Plot
3,30MHz~2310MHz

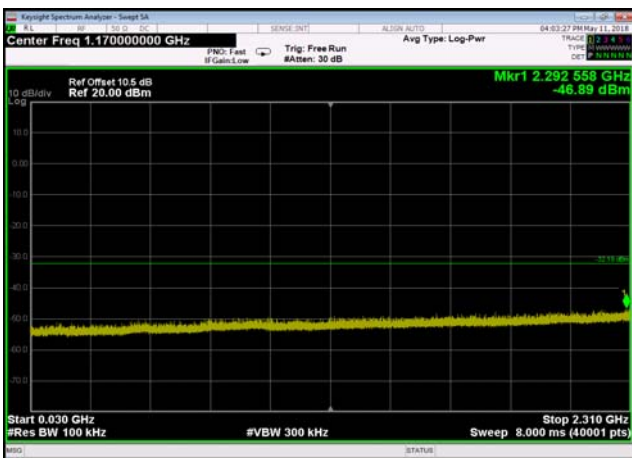


802.11n(HT40),2437MHz,Ant0,Plot
4,2500MHz~10000MHz

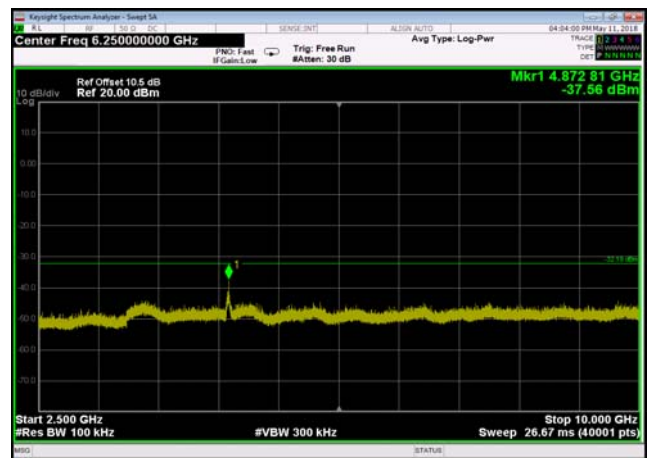




802.11n(HT40),2437MHz,Ant0,Plot
5,10000MHz~25000MHz

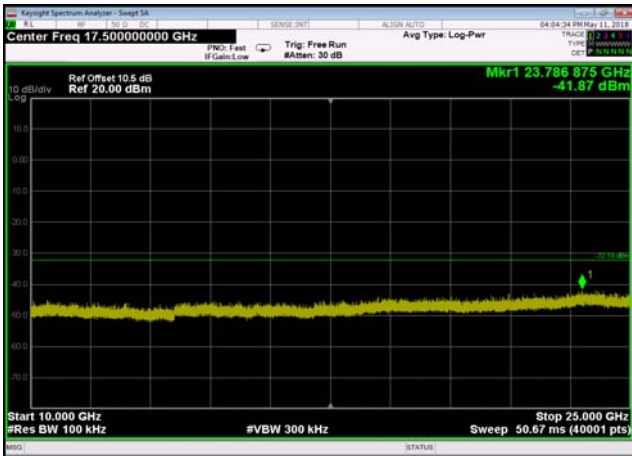


802.11n(HT40),2452MHz,Ant0,Plot
1,Reference Level

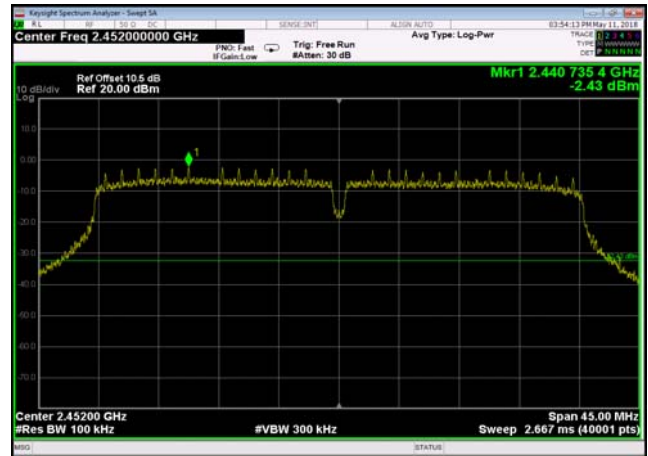


802.11n(HT40),2452MHz,Ant0,Plot
2,Band Edge




802.11n(HT40),2452MHz,Ant0,Plot
3,30MHz~2310MHz

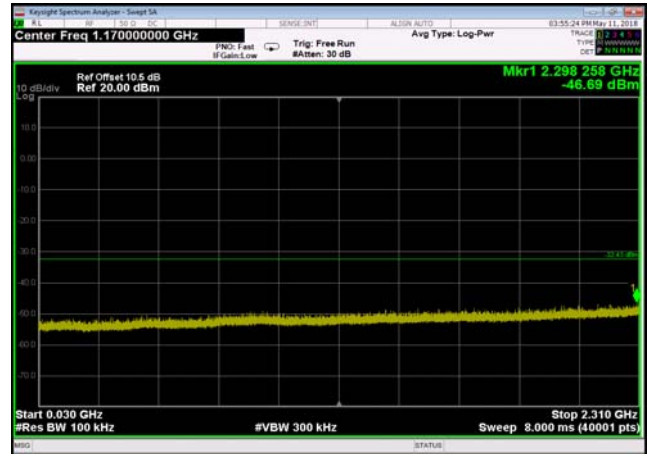

802.11n(HT40),2452MHz,Ant0,Plot
4,2500MHz~10000MHz

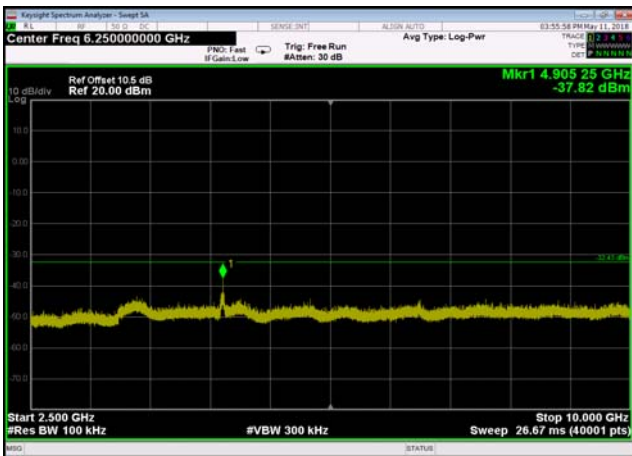

802.11n(HT40),2452MHz,Ant0,Plot
5,10000MHz~25000MHz

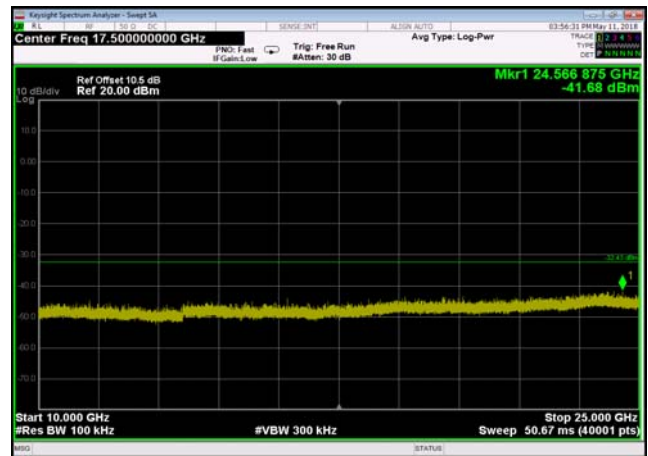

** END OF REPORT **