



SAR TEST REPORT

No. I16N01168-SAR

For

Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd

Smartphone

Model Name: Coolpad 3622A

Marketing Name: Coolpad Catalyst

With

Hardware Version: P2

Software Version: 091.00.160130

FCC ID:R38YL3622A

Issued Date:2016-11-11

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email:ctl_terminals@catr.cn, website:www.chinattl.com



REPORT HISTORY

Report Number	Revision	Issue Date	Description
I16N01168-SAR	Rev.0	2016-11-11	Initial creation of test report

TABLE OF CONTENT

1 TEST LABORATORY	6
1.1 TESTING LOCATION	6
1.2 TESTING ENVIRONMENT.....	6
1.3 PROJECT DATA	6
1.4 SIGNATURE.....	6
2 STATEMENT OF COMPLIANCE	7
3 CLIENT INFORMATION	9
3.1 APPLICANT INFORMATION	9
3.2 MANUFACTURER INFORMATION	9
4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	10
4.1 ABOUT EUT	10
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	11
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	11
5 TEST METHODOLOGY	12
5.1 APPLICABLE LIMIT REGULATIONS	12
5.2 APPLICABLE MEASUREMENT STANDARDS.....	12
6 SPECIFIC ABSORPTION RATE (SAR).....	13
6.1 INTRODUCTION.....	13
6.2 SAR DEFINITION.....	13
7 TISSUE SIMULATING LIQUIDS	14
7.1 TARGETS FOR TISSUE SIMULATING LIQUID	14
7.2 DIELECTRIC PERFORMANCE	15
8 SYSTEM VERIFICATION	21
8.1 SYSTEM SETUP.....	21
8.2 SYSTEM VERIFICATION.....	22
9 MEASUREMENT PROCEDURES	23
9.1 TESTS TO BE PERFORMED	23
9.2 GENERAL MEASUREMENT PROCEDURE.....	24
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR	25
9.4 BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR.....	26
9.5 SAR MEASUREMENT FOR LTE.....	26
9.6 POWER DRIFT.....	27
10 AREA SCAN BASED 1-G SAR.....	28
10.1 REQUIREMENT OF KDB.....	28
10.2 FAST SAR ALGORITHMS	28
11 CONDUCTED OUTPUT POWER.....	29



11.1 MANUFACTURING TOLERANCE	29
11.2 GSM MEASUREMENT RESULT	33
11.3 WCDMA MEASUREMENT RESULT	34
11.4 LTE_FDD MEASUREMENT RESULT	36
11.5 WI-FI AND BT MEASUREMENT RESULT	44
12 SIMULTANEOUS TX SAR CONSIDERATIONS	45
12.1 INTRODUCTION	45
12.2 TRANSMIT ANTENNA SEPARATION DISTANCES	45
12.3 SAR MEASUREMENT POSITIONS	45
12.4 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	46
13 EVALUATION OF SIMULTANEOUS	47
14 SAR TEST RESULT	48
14.1 SAR RESULTS FOR FAST SAR	49
14.2 SAR RESULTS FOR STANDARD PROCEDURE	63
15 SAR MEASUREMENT VARIABILITY	68
16 MEASUREMENT UNCERTAINTY	69
16.1 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHZ~3GHZ)	69
16.2 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (300MHZ~3GHZ)	70
17 MAIN TEST INSTRUMENTS	71
ANNEX A GRAPH RESULTS	72
ANNEX B SYSTEM VERIFICATION RESULTS	108
ANNEX C SAR MEASUREMENT SETUP	130
C.1 MEASUREMENT SET-UP	130
C.2 DASY5 E-FIELD PROBE SYSTEM	131
C.3 E-FIELD PROBE CALIBRATION	131
C.4 OTHER TEST EQUIPMENT	132
C.4.1 DATA ACQUISITION ELECTRONICS (DAE)	132
C.4.2 ROBOT	133
C.4.3 MEASUREMENT SERVER	133
C.4.4 DEVICE HOLDER FOR PHANTOM	134
C.4.5 PHANTOM	134
ANNEX D POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM	136
D.1 GENERAL CONSIDERATIONS	136
D.2 BODY-WORN DEVICE	137
D.3 DESKTOP DEVICE	137
D.4 DUT SETUP PHOTOS	138
ANNEX E EQUIVALENT MEDIA RECIPES	139
ANNEX F SYSTEM VALIDATION	140



ANNEX G DAE CALIBRATION CERTIFICATE.....	141
ANNEX H PROBE CALIBRATION CERTIFICATE.....	144
ANNEX I DIPOLE CALIBRATION CERTIFICATE.....	155
ANNEX J SPOT CHECK TEST.....	196
J.1 INTERNAL IDENTIFICATION OF EUT USED DURING THE SPOT CHECK TEST	196
J.2 MEASUREMENT RESULTS	196



1 Test Laboratory

1.1 Testing Location

Company Name:	CTTL(Shenzhen)
Address:	TCL International E City No.1001 Zhongshanyuan Road, Nanshan District, Shenzhen, Guangdong Province P.R.China

1.2 Testing Environment

Temperature:	18°C~25 °C,
Relative humidity:	30%~ 70%
Ground system resistance:	<4Ω
Ambient noise & Reflection:	< 0.012 W/kg

1.3 Project Data

Project Leader:	Cao Junfei
Test Engineer:	Zhang Yunzhuan
Testing Start Date:	January5, 2016
Testing End Date:	November9, 2016

1.4 Signature

Zhang Yunzhuan

(Prepared this test report)

Cao Junfei

(Reviewed this test report)

Zhang Bojun

Director of the laboratory

(Approved this test report)

2 Statement of Compliance

This EUT is a variant product and the report of original sample is No.I15N01419-SAR. According to the client request, we perform the spot check for head and body of each band respectively. The results of spot check are presented in annex J.

The maximum results of Specific Absorption Rate (SAR) found during testing for Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd Smartphone Coolpad 3622A are as follows:

Table 2.1: Highest Reported SAR (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g(W/Kg)	Equipment Class
Head (Separation Distance 0mm)	GSM850	0.13	PCE
	PCS1900	0.34	
	UMTSFDD 5	0.12	
	UMTSFDD 2	0.45	
	UMTSFDD 4	0.58	
	LTEBand2	0.45	
	LTEBand4	0.42	
	LTEBand12	0.28	
	WLAN2.4GHz	0.83	DTS
Hotspot (Separation Distance 10mm)	GSM850	0.29	PCE
	PCS1900	1.03	
	UMTSFDD 5	0.18	
	UMTSFDD 2	1.10	
	UMTSFDD 4	1.00	
	LTEBand2	1.10	
	LTEBand4	0.64	
	LTEBand12	0.77	
	WLAN2.4GHz	0.29	DTS

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1999.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm for hotspot on and 10mm for hotspot off between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The highest reported SAR value is obtained at the case of **(Table 2.1)**, and the values are: **1.10W/kg(1g)**.

Table 2.2: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Head	LeftCheek	0.58	0.83	1.41
Highest reported SAR value for Body	Rear	0.77	0.29	1.06
	Bottom	1.10	/	1.10

Table 2.3: The sum of reported SAR values for main antenna and BT

	Position	Main antenna	BT*	Sum
Highest reported SAR value for Head	LeftCheek	0.58	0.06	0.64
Highest reported SAR value for Body	Rear	0.77	0.03	0.80
	Bottom	1.10	/	1.10

BT*-Estimated SAR for Bluetooth (see the table 13.3)

According to the above tables, the highest sum of reported SAR values is **1.41 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.



3 Client Information

3.1 Applicant Information

Company Name:	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address /Post:	Coolpad Information Harbor, 2nd Mengxi Road, Hi-Tech Industrial Park(North), Nanshan district, Shenzhen, P.R.C
Contact:	Li Amei
Email:	liamei@yulong.com
Telephone:	+86 13410415799
Fax:	/

3.2 Manufacturer Information

Company Name:	Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address /Post:	Coolpad Information Harbor, 2nd Mengxi Road, Hi-Tech Industrial Park(North), Nanshan district, Shenzhen, P.R.C
Contact:	Li Amei
Email:	liamei@yulong.com
Telephone:	+86 13410415799
Fax:	/

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	Smartphone
Model Name:	Coolpad 3622A
Operating mode(s):	GSM 850/900/1800/1900, WCDMA 850/1700/1900, LTE_FDD Band 2/4/12, BT, Wi-Fi
Tested Tx Frequency:	825 – 848.8 MHz (GSM 850)
	1850.2 – 1910 MHz (GSM 1900)
	826.4–846.6 MHz (WCDMA850 Band V)
	1712.4–1752.6 MHz (WCDMA1700 Band IV)
	1852.4–1907.6 MHz (WCDMA1900 Band II)
	1860–1900 MHz (LTE_FDD Band II)
	1720–1745 MHz (LTE_FDD Band IV)
	704–711MHz (LTE_FDD Band XII)
	2412 – 2462 MHz (Wi-Fi 2.4G)
GPRS&EGPRSMultislot Class:	12
GPRS capability Class:	B
WCDMA Category:	USAT: 6
	HSDPA: 10
	HSUPA: 6
	HSPA: 14
	DC-HSDPA: 24
Release Version:	GSM: Rel8
	GPRS: Rel8
	UMTS: Rel8
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Accessories/Body-worn configurations:	/
Hotspot mode:	Support simultaneous transmission of hotspot and voice(or data)
Form factor:	144mm × 71 mm

4.2 Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	IMEI: 008600250911822	P2	091.00.160130
EUT2	IMEI:869630020000893	P2	091.00.160130
EUT3	IMEI:861325036797859	P2	091.00.160130

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT1& EUT3 and conducted power with the EUT 2

4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	CPLD-390	/	ZHUHAI COSLIGHT BATTERY CO., LTD.

*AE ID: is used to identify the test sample in the lab internally.

5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1–1999:IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528–2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Experimental Techniques.

KDB 447498 D01 General RF Exposure Guidance v06: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB648474 D04 Handset SAR v01r03: SAR Evaluation Considerations for Wireless Handsets.

KDB941225 D01 SAR test for 3G devices v03r01:SAR MeasurementProceduresfor3GDevices

KDB941225D05SAR forLTEDevicesv02r05:SAR EvaluationConsiderationsforLTEDevices

KDB 941225 D06 Hot Spot SAR v02r01: SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

KDB 248227 D01 802.11 Wi-Fi SAR v02r02: SAR Guidancefor IEEE 802.11 (Wi-Fi) Transmitters.

KDB 865664 D01SAR measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz.

KDB 865664 D02 RF Exposure Reporting v01r02:RF Exposure Compliance Reporting and Documentation Considerations

6 Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 Tissue Simulating Liquids

7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid


Frequency (MHz)	Liquid Type	Conductivity (σ)	$\pm 5\%$ Range	Permittivity (ϵ)	$\pm 5\%$ Range
750	Head	0.89	0.85~0.93	41.94	39.84~44.04
750	Body	0.96	0.91~1.01	55.5	52.73~58.28
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1800	Head	1.4	1.33~1.47	40.00	38.0~42.0
1800	Body	1.52	1.40~1.60	53.50	50.8~56.2
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3

7.2 Dielectric Performance


Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date (yyyy-mm-dd)	Type	Frequency	Permittivity ϵ	Drift (%)	Conductivity σ (S/m)	Drift (%)
2016-1-6	Head	750 MHz	42.20	0.62	0.88	-1.12
2016-1-6	Body	750 MHz	56.68	2.13	0.94	-2.08
2016-1-5	Head	835 MHz	40.18	-3.18	0.92	2.22
2016-1-6	Body	835 MHz	53.49	-3.10	0.97	0.00
2016-1-6	Head	1800 MHz	38.36	-4.10	1.43	2.14
2016-1-7	Body	1800 MHz	51.02	-4.64	1.47	-3.29
2016-1-12	Head	1900 MHz	41.07	2.68	1.44	2.86
2016-1-31	Body	1900 MHz	50.79	-4.71	1.54	1.32
2016-1-31	Head	2450 MHz	37.71	-3.80	1.83	1.67
2016-1-31	Body	2450 MHz	50.22	-4.71	1.98	1.54
2016-11-08	Head	750 MHz	40.64	-3.10	0.873	-1.91
2016-11-08	Body	750 MHz	53.80	-3.06	0.929	-3.23
2016-11-08	Head	835 MHz	40.95	-1.33	0.906	0.67
2016-11-08	Body	835 MHz	53.67	-2.77	0.962	-0.82
2016-11-06	Head	1800 MHz	38.96	-2.60	1.371	-2.07
2016-11-06	Body	1800 MHz	52.58	-1.72	1.496	-1.58
2016-11-07	Head	1900 MHz	38.55	-3.63	1.431	2.21
2016-11-07	Body	1900 MHz	52.24	-1.99	1.562	2.76
2016-11-09	Head	2450 MHz	38.22	-2.50	1.841	2.28
2016-11-09	Body	2450 MHz	53.15	0.85	1.972	1.13


Note: The liquid temperature is 22.0°C

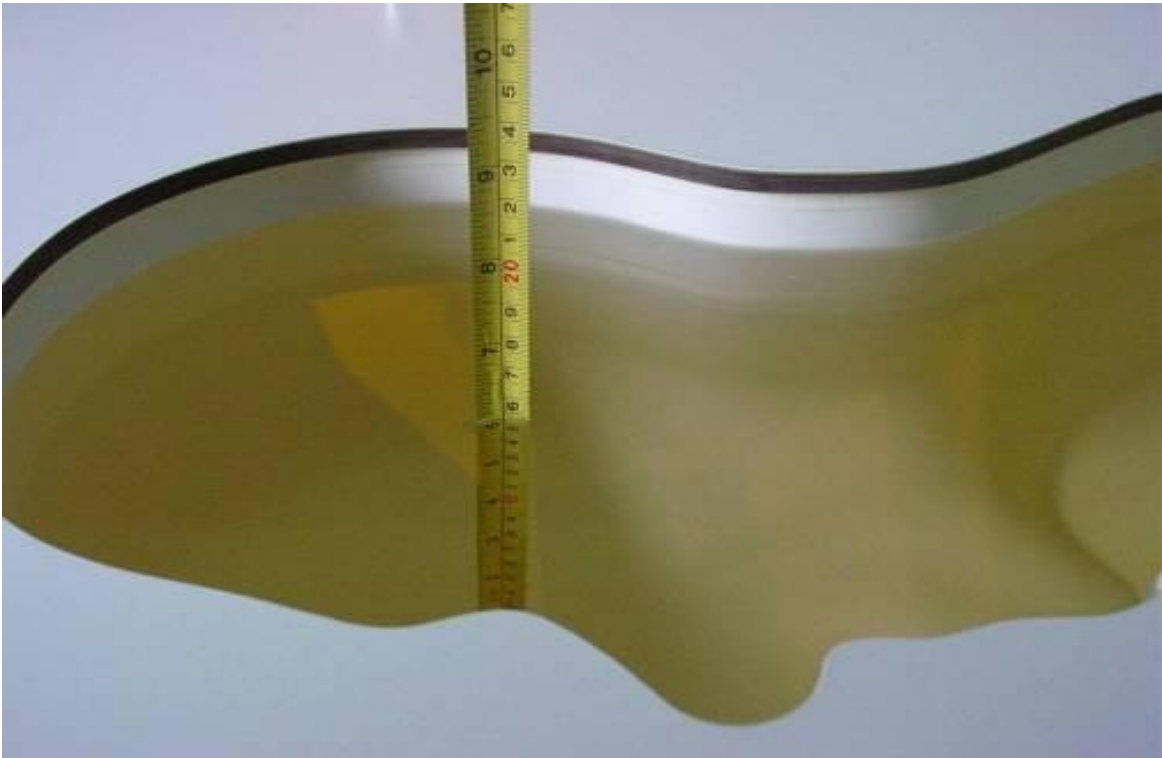


Picture 7-1: Liquid depth in the Head Phantom (750 MHz)

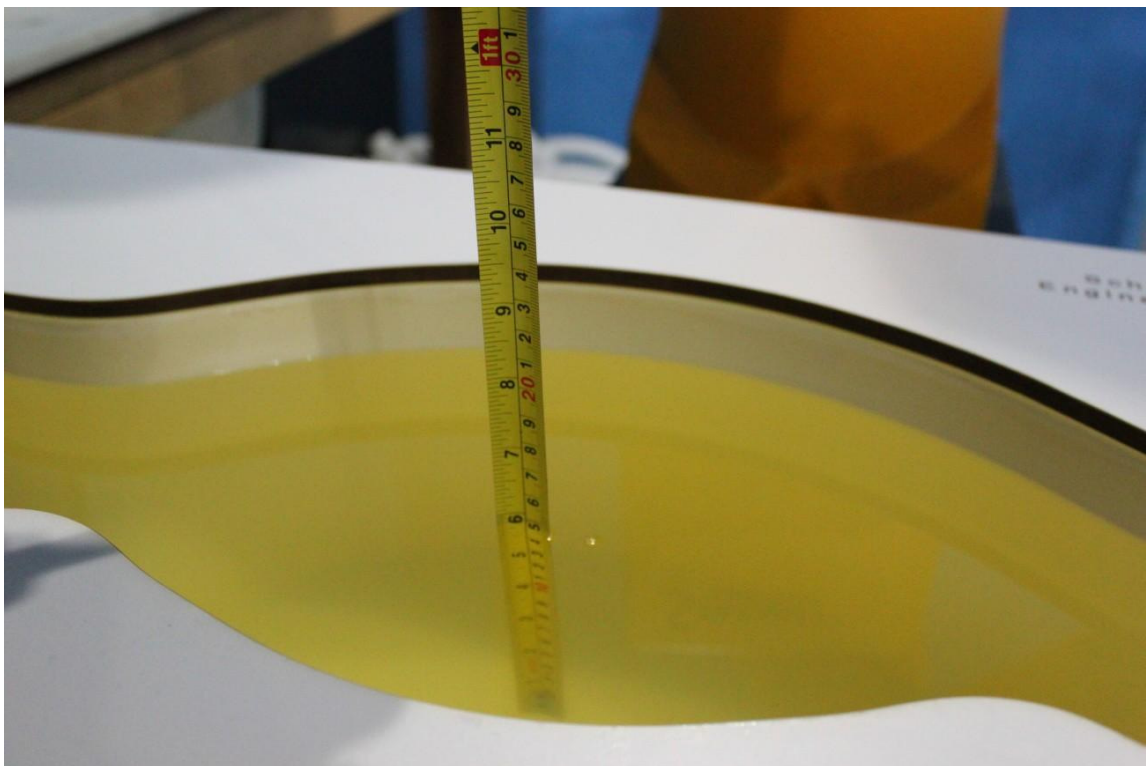


Picture 7-2: Liquid depth in the Flat Phantom (750 MHz)

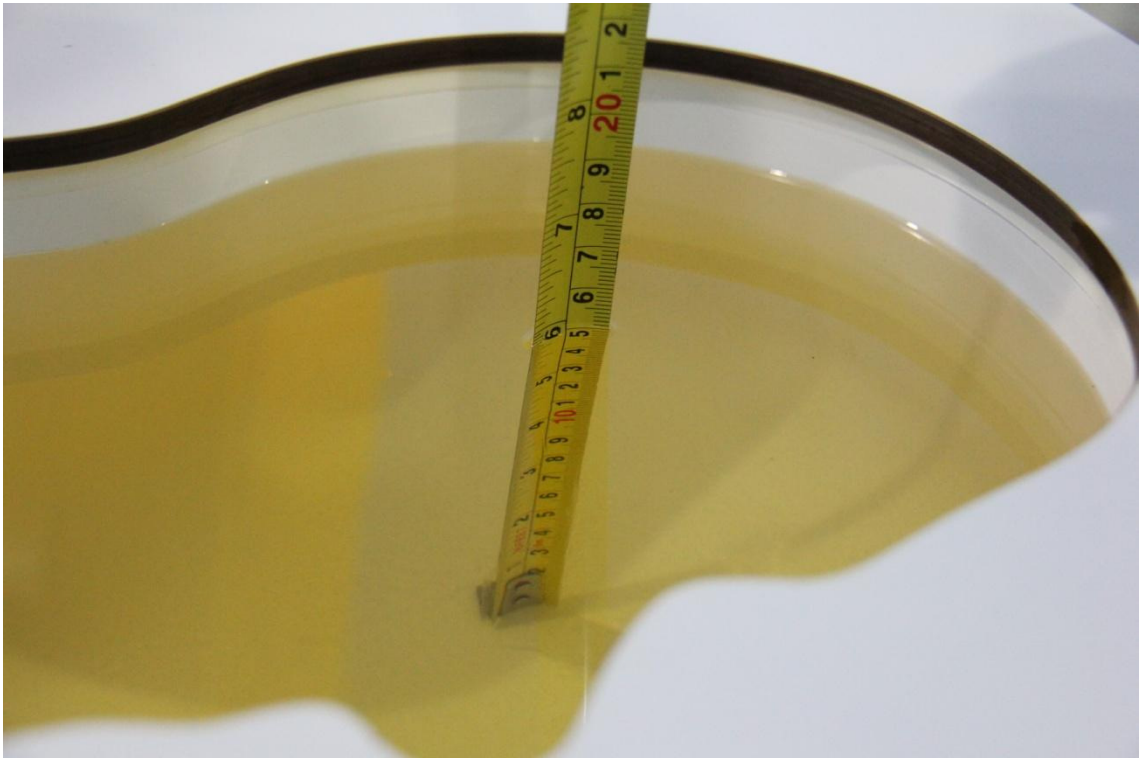

Picture 7-3: Liquid depth in the Head Phantom (835 MHz)

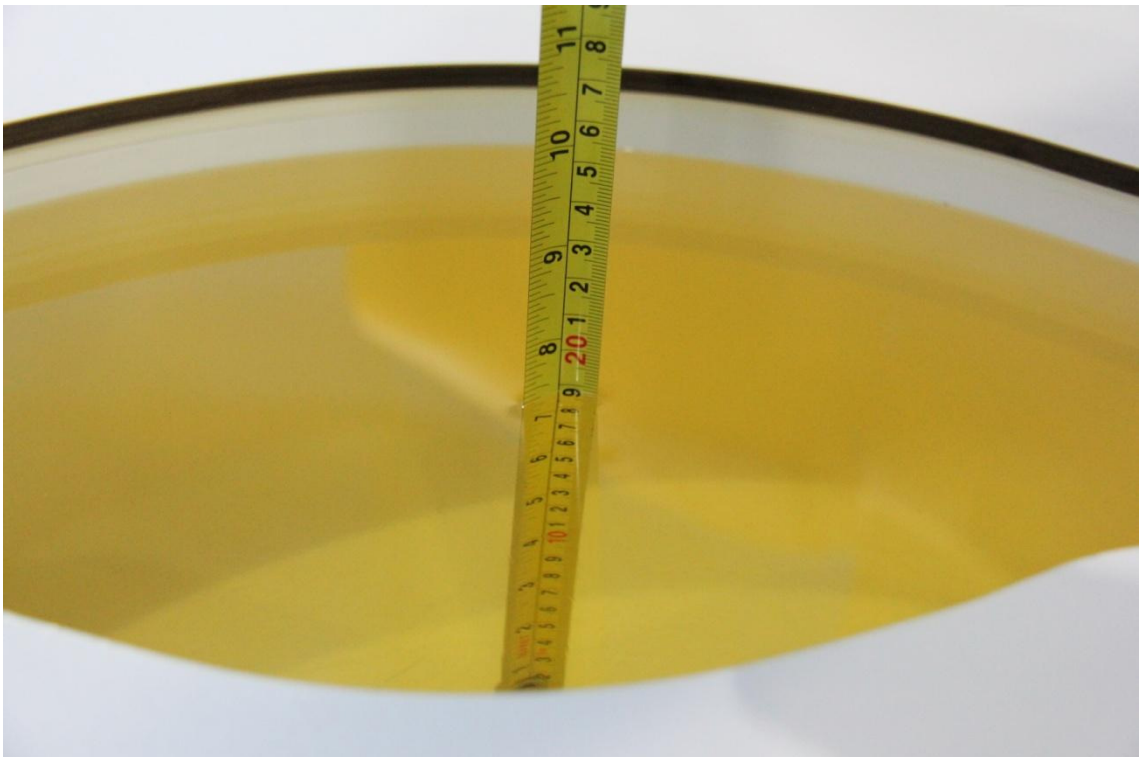


Picture 7-4: Liquid depth in the Flat Phantom (835 MHz)

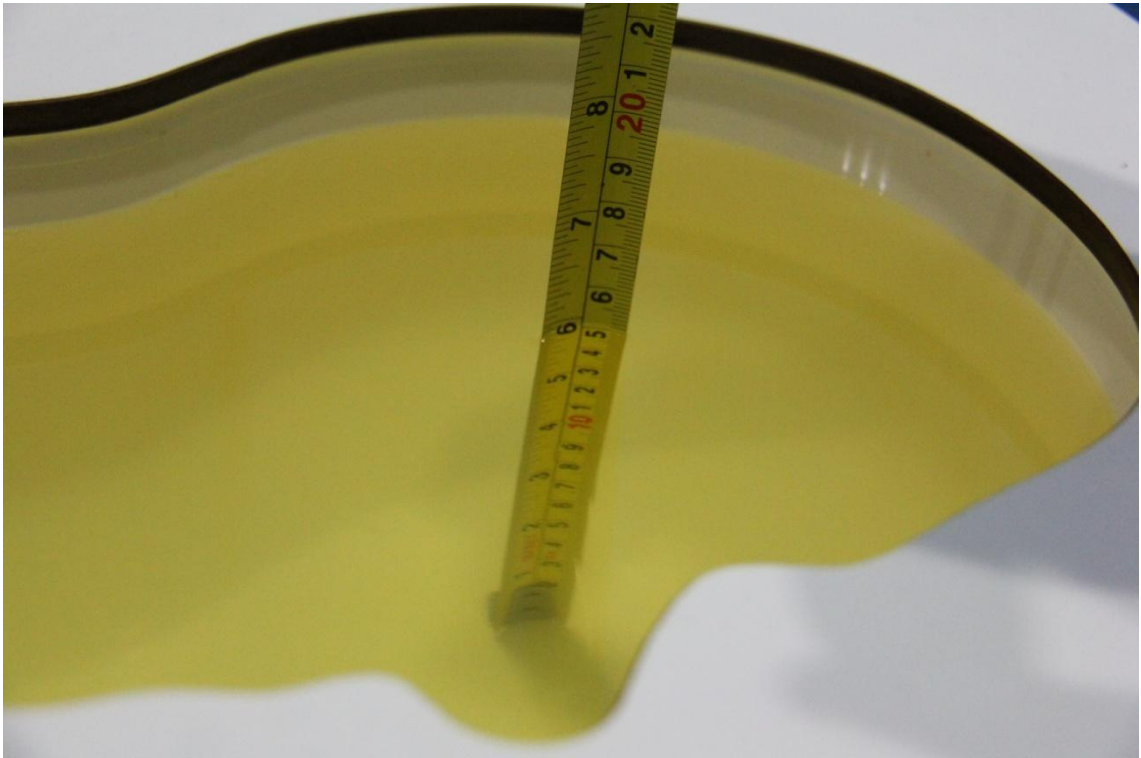


Picture 7-5: Liquid depth in the Head Phantom (1800 MHz)




Picture 7-6: Liquid depth in the Flat Phantom (1800MHz)

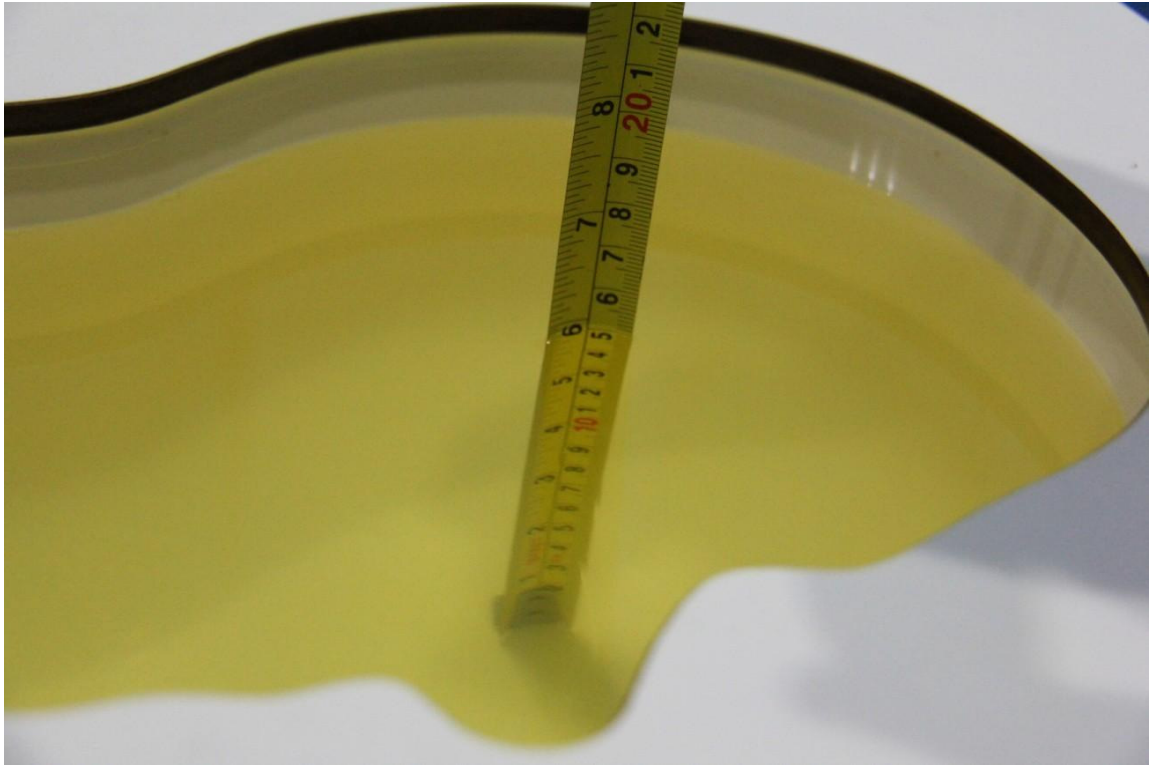


Picture 7-7: Liquid depth in the Head Phantom (1900 MHz)

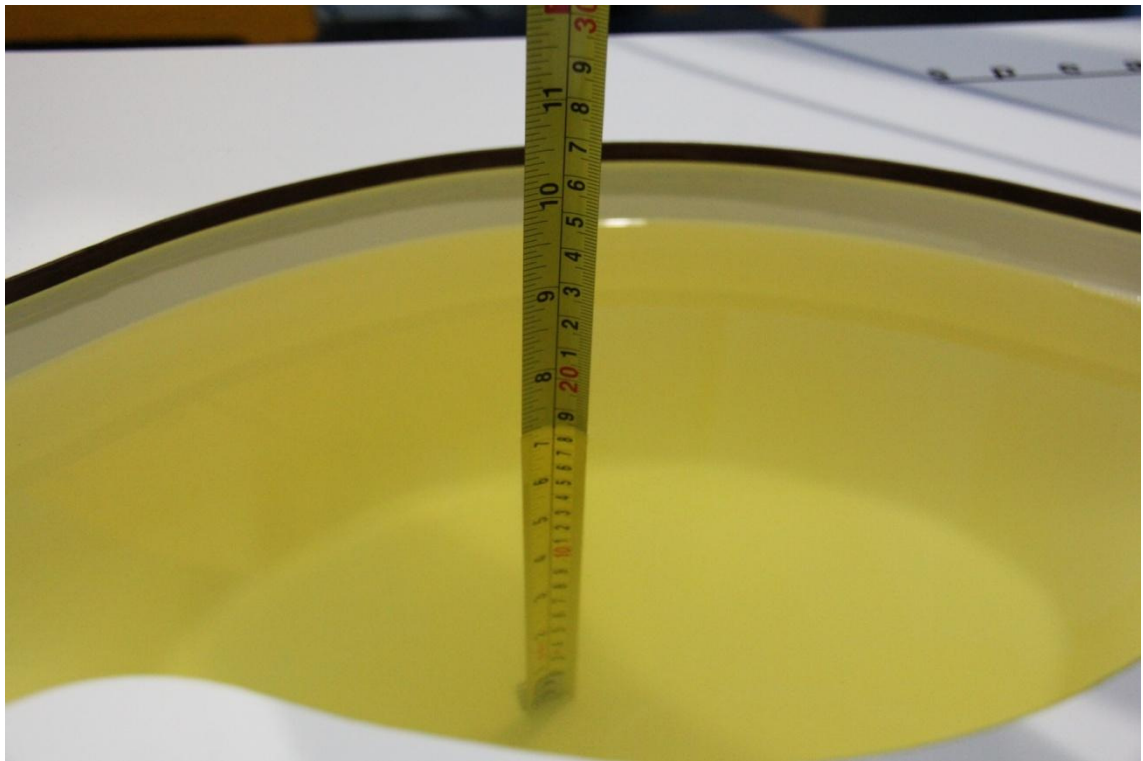

Picture 7-8: Liquid depth in the Flat Phantom (1900MHz)

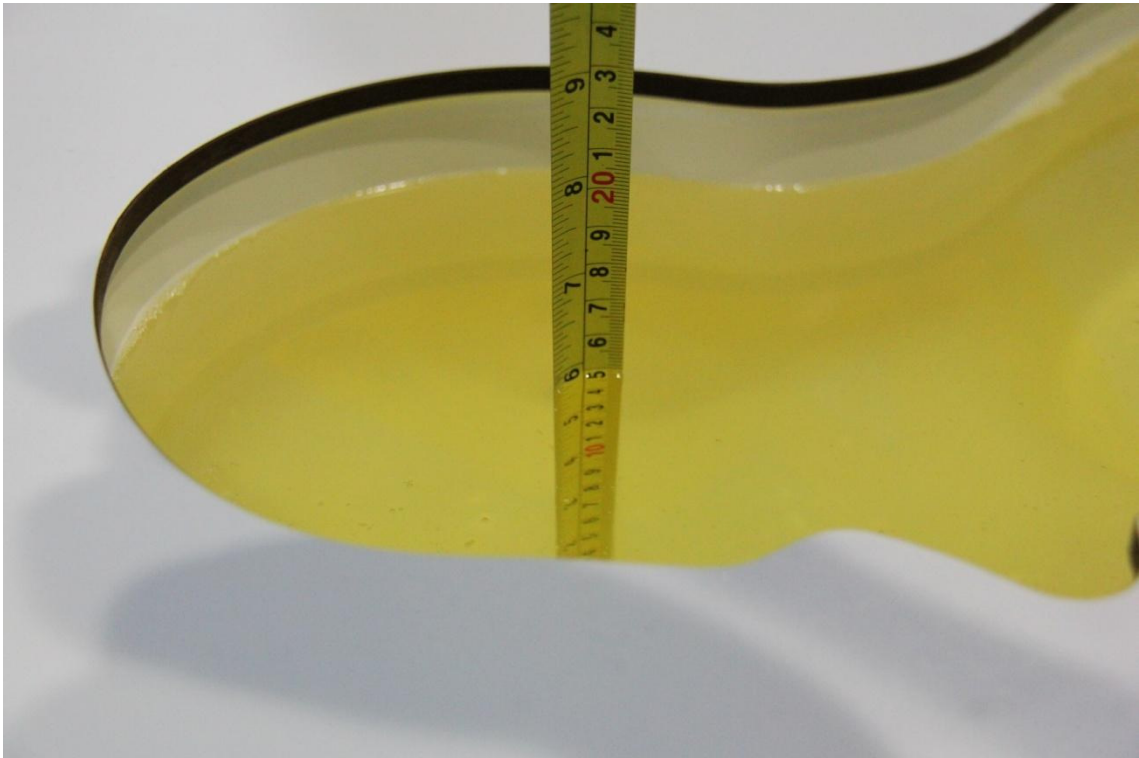

Picture 7-9: Liquid depth in the Head Phantom (2450MHz)

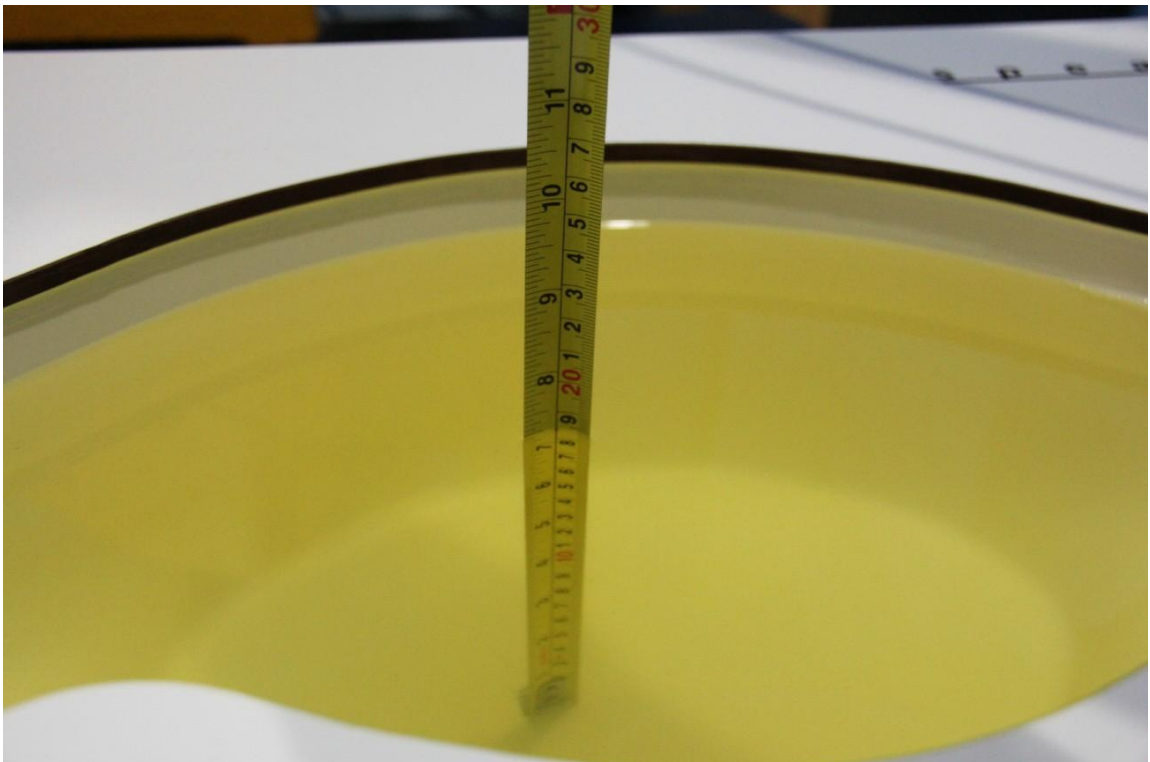


Picture 7-10: Liquid depth in the Head Phantom (2450MHz)


8 System verification

8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

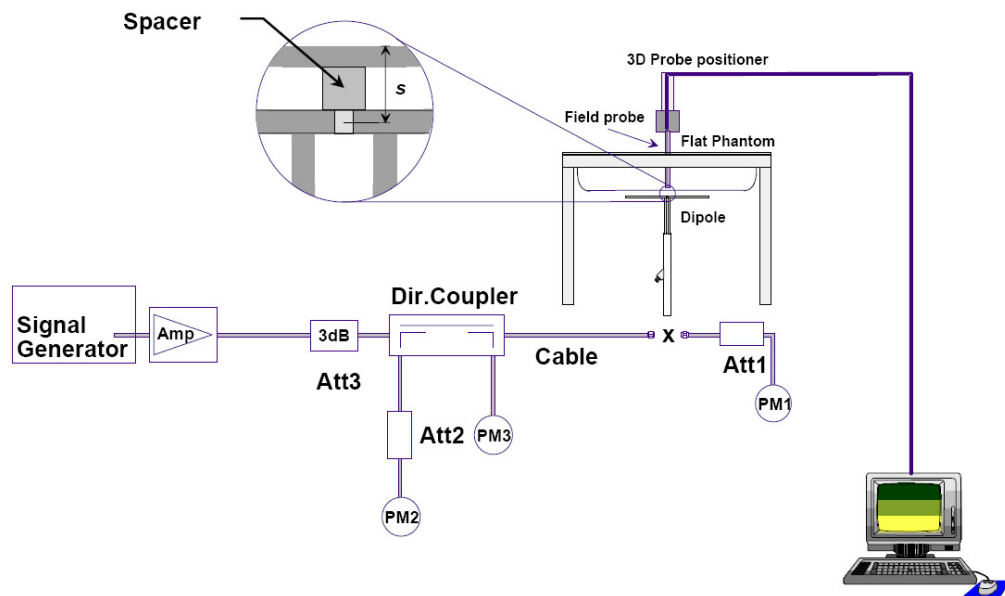

Picture 8.1 System Setup for System Evaluation

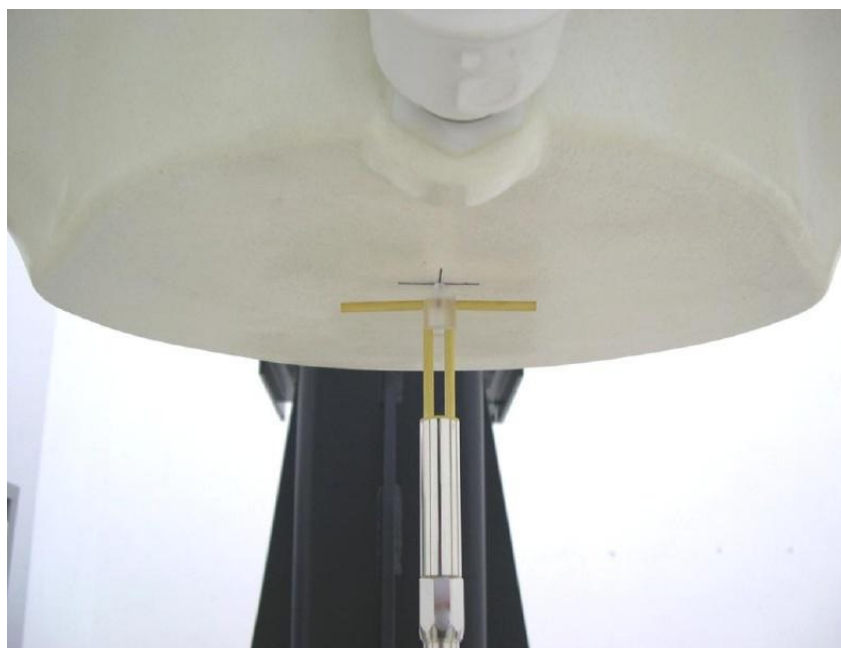

Picture 8.2 Photo of Dipole Setup

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Head

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation (%)	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2016-1-6	750 MHz	5.49	8.31	5.52	8.48	0.55	2.05
2016-1-5	835 MHz	6.03	9.22	6.00	9.44	-0.50	2.39
2016-1-6	1800 MHz	20.6	38.8	20.20	39.08	-1.94	0.72
2016-1-12	1900 MHz	21.0	40.8	21.00	40.80	0.00	0.00
2016-1-31	2450 MHz	24.1	52.5	24.12	52.40	0.08	-0.19
2016-11-08	750 MHz	5.46	8.33	5.60	8.56	2.56	2.76
2016-11-08	835 MHz	6.03	9.22	5.84	9.00	-3.15	-2.39
2016-11-06	1800 MHz	20.6	38.8	20.28	37.44	-1.55	-3.51
2016-11-07	1900 MHz	21.0	40.8	21.40	41.60	1.90	1.96
2016-11-09	2450 MHz	24.1	52.5	23.72	51.60	-1.58	-1.71

Table 8.2: System Verification of Body

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation(%)	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2016-1-6	750 MHz	5.85	8.75	5.96	9.00	1.88	2.86
2016-1-6	835 MHz	6.20	9.44	6.36	9.68	2.58	2.54
2016-1-7	1800 MHz	21.1	39.6	21.08	39.68	-0.09	0.20
2016-1-31	1900 MHz	21.3	41.1	20.88	40.0	-1.97	-2.68
2016-1-31	2450 MHz	24.4	52.3	25.16	53.68	3.11	2.64
2016-11-08	750 MHz	5.76	8.78	5.64	8.60	-2.08	-2.05
2016-11-08	835 MHz	6.20	9.44	6.04	9.08	-2.58	-3.81
2016-11-06	1800 MHz	21.1	39.6	21.16	39.72	0.28	0.30
2016-11-07	1900 MHz	21.3	41.1	21.80	42.00	2.35	2.19
2016-11-09	2450 MHz	24.4	52.3	23.52	50.40	-3.61	-3.63

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

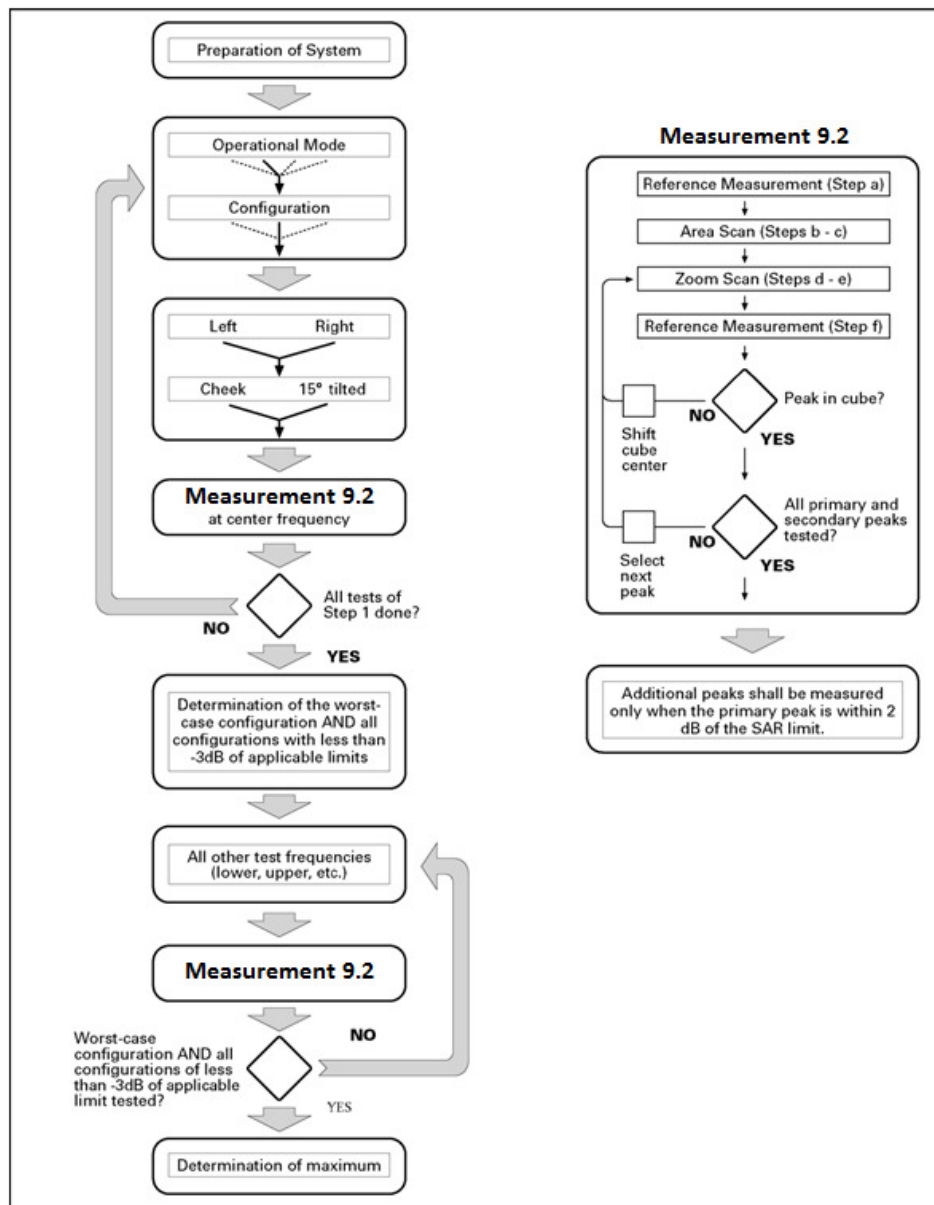

Picture 9.1 Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013. The results should be documented as part of the system validation records and may be requested to support test results

when all the measurement parameters in the following table are not satisfied.

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid $\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
	$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>I-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.0	0.0	21	81

9.4 Bluetooth & WI-FI Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.5 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Anristu MT8820C. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the Anristu MT8820C. It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The

procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

9.6 Power Drift

To control the output power stability during the SAR test, DASY5 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bio electromagnetics Society meeting (2007) and the estimated 1-gSAR is ≤ 1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASYS software.

11 Conducted Output Power

11.1 Manufacturing tolerance

Table 11.1: GSM Speech

GSM 850			
Channel	Channel 251	Channel 190	Channel 128
Target (dBm)	32.5	32.5	32.5
Tolerance \pm (dB)	1	1	1
GSM 1900			
Channel	Channel 810	Channel 661	Channel 512
Target (dBm)	29	29	29
Tolerance \pm (dB)	1	1	1

Table 11.2: GPRS & EGPRS & 8PSK

GSM 850 GPRS&EGPRS (GMSK)				
Channel		251	190	128
1 Txslot	Target (dBm)	32.5	32.5	32.5
	Tolerance \pm (dB)	1	1	1
2 Txslots	Target (dBm)	31	31	31
	Tolerance \pm (dB)	1	1	1
3Txslots	Target (dBm)	29	29	29
	Tolerance \pm (dB)	1	1	1
4 Txslots	Target (dBm)	28	28	28
	Tolerance \pm (dB)	1	1	1
GSM 1900 GPRS&EGPRS (GMSK)				
Channel		810	661	512
1 Txslot	Target (dBm)	29	29	29
	Tolerance \pm (dB)	1	1	1
2 Txslots	Target (dBm)	28	28	28
	Tolerance \pm (dB)	1	1	1
3Txslots	Target (dBm)	26	26	26
	Tolerance \pm (dB)	1	1	1
4 Txslots	Target (dBm)	25	25	25
	Tolerance \pm (dB)	1	1	1

Table 11.3: WCDMA

UMTS Band V		Conducted Power (dBm)		
		Channel 4233	Channel 4183	Channel 4132
CS	Target (dBm)	23	23	23
	Tolerance \pm (dB)	1	1	1
HSUPA sub-test 1	Target (dBm)	22	22	22
	Tolerance \pm (dB)	1	1	1
HSUPA sub-test 2	Target (dBm)	21	21	21
	Tolerance \pm (dB)	1	1	1
HSUPA sub-test 3	Target (dBm)	21	21	21
	Tolerance \pm (dB)	1	1	1
HSUPA sub-test 4	Target (dBm)	21	21	21
	Tolerance \pm (dB)	1	1	1
HSUPA sub-test 5	Target (dBm)	22	22	22
	Tolerance \pm (dB)	1	1	1
HSDPA sub-test 1-4	Target (dBm)	22	22	22
	Tolerance \pm (dB)	1	1	1
DC-HSDPA sub-test 1-4	Target (dBm)	22	22	22
	Tolerance \pm (dB)	1	1	1
UMTS Band IV		Conducted Power(dBm)		
		Channel 1513	Channel 1413	Channel 1312
CS	Target (dBm)	22	22	22
	Tolerance \pm (dB)	1	1	1
HSUPA sub-test 1	Target (dBm)	21	21	21
	Tolerance \pm (dB)	1	1	1
HSUPA sub-test 2	Target (dBm)	21	21	21
	Tolerance \pm (dB)	1	1	1
HSUPA sub-test 3	Target (dBm)	20	20	20
	Tolerance \pm (dB)	1	1	1
HSUPA sub-test 4	Target (dBm)	21	21	21
	Tolerance \pm (dB)	1	1	1
HSUPA sub-test 5	Target (dBm)	21	21	21
	Tolerance \pm (dB)	1	1	1
HSDPA sub-test 1-2	Target (dBm)	22	22	22
	Tolerance \pm (dB)	1	1	1
HSDPA sub-test 3-4	Target (dBm)	21	21	21
	Tolerance \pm (dB)	1	1	1
DC-HSDPA sub-test 1-4	Target (dBm)	21	21	21
	Tolerance \pm (dB)	1	1	1

UMTS Band II		Conducted Power(dBm)		
		Channel 9538	Channel 9400	Channel 9262
CS	Target (dBm)	22	22	22
	Tolerance \pm (dB)	1	1	1
HSUPA sub-test 1	Target (dBm)	21	21	21
	Tolerance \pm (dB)	1	1	1
HSUPA sub-test 2	Target (dBm)	21	21	21
	Tolerance \pm (dB)	1	1	1
HSUPA sub-test 3	Target (dBm)	21	21	21
	Tolerance \pm (dB)	1	1	1
HSUPA sub-test 4	Target (dBm)	21	21	21
	Tolerance \pm (dB)	1	1	1
HSUPA sub-test 5	Target (dBm)	22	22	22
	Tolerance \pm (dB)	1	1	1
HSDPA sub-test 1-2	Target (dBm)	22	22	22
	Tolerance \pm (dB)	1	1	1
HSDPA sub-test 3-4	Target (dBm)	21	21	21
	Tolerance \pm (dB)	1	1	1
DC-HSDPA sub-test 1-4	Target (dBm)	22	22	22
	Tolerance \pm (dB)	1	1	1

Table 11.4: LTE

LTE Band 2			
Channel	Channel 19100	Channel 18900	Channel 18700
Target (dBm)	23	23	23
Tolerance ±(dB)	1	1	1
LTE Band 4			
Channel	Channel 20300	Channel 20175	Channel 20050
Target (dBm)	23	23	23
Tolerance ±(dB)	1	1	1
LTE Band 17			
Channel	Channel 23800	Channel 23790	Channel 23780
Target (dBm)	23.5	23.5	23.5
Tolerance ±(dB)	1	1	1

LTE MPR will follow up 3GPP settings as below:

Modulation	Channel bandwidth / Transmission bandwidth (NRB)						MPR (dB)
	1.4MHz	3.0MHz	5MHz	10MHz	15MHz	20MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2

Table 11.5: Bluetooth

Mode		Channel 1	Channel 39	Channel 78
GFSK	Target (dBm)	0.5	0.5	0.5
	Tolerance ±(dB)	1	1	1

Table 11.6: WiFi

Mode	Channel/Data rate	Target (dBm)	Tolerance ±(dB)
802.11 b (2.4GHz)	1Mbps	17	1
	2Mbps	17	1
	5.5Mbps	17	1
	11Mbps	17	1
802.11 g (2.4GHz)	6-18Mbps	17	1
	24-36Mbps	17	1
	48-54Mbps	17	1
802.11 n (2.4GHz HT20)	MCS0-7	17	1

11.2 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 11.7: The conducted power measurement results for GSM850/1900

GSM 850MHz	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	32.76	32.97	32.78
GSM 1900MHz	Conducted Power(dBm)		
	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
	29.82	29.67	29.66

Table 11.8: The conducted power measurement results for GPRS and EGPRS

GSM 850		Measured Power (dBm)			calculation	Average Power (dBm)		
		251	190	128		251	190	128
GPRS	1Txslots	32.76	32.97	32.78	-9.03dB	23.73	23.94	23.75
	2Txslots	30.51	30.70	30.69	-6.02dB	24.49	24.68	24.67
	3Txslots	28.96	29.06	28.96	-4.26dB	24.70	24.80	24.70
	4Txslots	27.80	28.05	27.84	-3.01dB	24.79	25.04	24.83
EGPRS (GMSK)	1Txslots	32.73	32.95	32.77	-9.03dB	23.70	23.92	23.74
	2Txslots	30.51	30.68	30.67	-6.02dB	24.49	24.66	24.65
	3Txslots	28.94	29.05	28.95	-4.26dB	24.68	24.79	24.69
	4Txslots	27.80	28.03	27.83	-3.01dB	24.79	25.02	24.82
GSM 1900		Measured Power (dBm)			calculation	Average Power (dBm)		
		810	661	512		810	661	512
GPRS	1Txslots	29.82	29.67	29.66	-9.03dB	20.79	20.64	20.63
	2Txslots	27.86	27.86	27.90	-6.02dB	21.84	21.84	21.88
	3Txslots	26.65	26.58	26.70	-4.26dB	22.39	22.32	22.44
	4Txslots	25.42	25.41	25.52	-3.01dB	22.41	22.40	22.51
EGPRS (GMSK)	1Txslots	29.81	29.66	29.64	-9.03dB	20.78	20.63	20.61
	2Txslots	27.83	27.85	27.90	-6.02dB	21.81	21.83	21.88
	3Txslots	26.64	26.56	26.70	-4.26dB	22.38	22.30	22.44
	4Txslots	25.41	25.41	25.51	-3.01dB	22.40	22.40	22.50

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 4Txslots for GSM 850andGSM 1900.

11.3 WCDMA Measurement result

Table 11.9: The conducted Power for WCDMA850/1700/1900

Item	band	FDDV result		
	ARFCN	4233 (846.6MHz)	4182(836.4MHz)	4133 (826.4MHz)
WCDMA	\	23.5	23.5	23.5
HSUPA	1	22.4	21.9	22.5
	2	21.5	21.5	21.6
	3	21.5	21.6	21.7
	4	21.8	21.9	21.9
	5	22.5	22.5	22.6
HSDPA	1	22.4	22.6	22.5
	2	22.5	22.4	22.5
	3	22.1	22	22.1
	4	22.1	22	22.1
DC-HSDPA	1	22.69	22.51	22.63
	2	22.65	22.62	22.61
	3	22.61	22.61	22.55
	4	22.68	22.57	22.57
Item	band	FDDIV result		
	ARFCN	1513 (1752.6MHz)	1413(1732.6MHz)	1312 (1712.4MHz)
WCDMA	\	22.2	22.1	22.2
HSUPA	1	20.7	20.5	21.4
	2	20.3	20.1	20
	3	20.1	19.9	19.7
	4	20.2	20.7	20.8
	5	21.4	21.2	21.3
HSDPA	1	21.3	21.1	21.2
	2	21.4	21.2	21.4
	3	20.9	20.6	20.9
	4	20.9	20.6	20.8
DC-HSDPA	1	21.76	21.66	21.63
	2	21.72	21.64	21.65
	3	21.7	21.61	21.61
	4	21.75	21.67	21.58

Item	band	FDDII result		
	ARFCN	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)
WCDMA	\	22.3	22.2	22.4
HSUPA	1	21.3	20.8	21.5
	2	20.3	20.2	20.4
	3	20	20	20.1
	4	20.2	20.9	20.9
	5	21.3	21.4	21.5
HSDPA	1	21.3	21.3	21.5
	2	21.3	21.4	21.5
	3	20.8	20.9	21
	4	20.8	20.8	21.1
DC-HSDPA	1	22.14	22.01	21.96
	2	22.1	22.07	21.92
	3	22.09	22.05	21.95
	4	22.12	22.08	21.97

11.4LTE_FDD Measurement result

Table 11.10: The conducted Power for LTE-FDD

LTE-FDD Band 2				Actual output Power (dBm)		
Bandwidth	RAllocation	ROffset	Modulation	High	Middle	Low
1.4 MHz	1RB	High	QPSK	23.22	23.22	23.26
			16QAM	22.27	22.31	22.30
		Middle	QPSK	23.20	23.23	23.28
			16QAM	22.23	22.24	22.28
		Low	QPSK	23.23	23.24	23.27
			16QAM	22.28	22.31	22.34
	3RB	High	QPSK	23.18	23.19	23.21
			16QAM	22.13	22.28	22.17
		Middle	QPSK	23.18	23.20	23.23
			16QAM	22.13	22.31	22.19
	Low	QPSK	23.20	23.20	23.22	
		16QAM	22.21	22.20	22.24	
	6RB	/	QPSK	22.04	22.06	22.08
			16QAM	21.16	21.17	21.16
3 MHz	1RB	High	QPSK	23.18	23.18	23.21
			16QAM	22.30	22.29	22.31
		Middle	QPSK	23.20	23.25	23.26
			16QAM	22.29	22.30	22.30
		Low	QPSK	23.20	23.21	23.26
			16QAM	22.29	22.31	22.34
	8RB	High	QPSK	22.19	22.18	22.16
			16QAM	21.23	21.23	21.24
		Middle	QPSK	22.15	22.24	22.22
			16QAM	21.27	21.25	21.24
	Low	QPSK	22.19	22.21	22.23	
		16QAM	21.30	21.29	21.30	
	15RB	/	QPSK	22.09	22.11	22.13
			16QAM	21.16	21.17	21.16

				1907.5MHz	1880MHz	1852.5MHz
5 MHz	1RB	High	QPSK	23.23	23.22	23.24
			16QAM	22.28	22.31	22.31
		Middle	QPSK	23.20	23.20	23.24
			16QAM	22.29	22.29	22.31
		Low	QPSK	23.24	23.22	23.27
			16QAM	22.31	22.31	22.34
	12RB	High	QPSK	22.14	22.18	22.21
			16QAM	21.25	21.24	21.27
		Middle	QPSK	22.19	22.18	22.17
			16QAM	21.32	21.23	21.32
		Low	QPSK	22.18	22.20	22.22
			16QAM	21.26	21.25	21.29
	25RB		QPSK	22.11	22.13	22.15
			16QAM	21.16	21.15	21.19
10 MHz				1905MHz	1880MHz	1855MHz
	1RB	High	QPSK	23.23	23.22	23.24
			16QAM	22.31	22.30	22.31
		Middle	QPSK	23.24	23.20	23.25
			16QAM	22.28	22.27	22.27
		Low	QPSK	23.23	23.23	23.27
			16QAM	22.30	22.30	22.33
	25RB	High	QPSK	22.18	22.20	22.22
			16QAM	21.28	21.33	21.30
		Middle	QPSK	22.18	22.19	22.21
			16QAM	21.28	21.34	21.34
		Low	QPSK	22.18	22.20	22.22
			16QAM	21.26	21.26	21.30
	50RB	/	QPSK	22.09	22.11	22.13
			16QAM	21.17	21.20	21.22

				1902.5MHz	1880MHz	1857.5MHz
15 MHz	1RB	High	QPSK	23.21	23.22	23.24
			16QAM	22.30	22.27	22.30
		Middle	QPSK	23.21	23.23	23.24
			16QAM	22.32	22.26	22.29
		Low	QPSK	23.22	23.24	23.28
			16QAM	22.29	22.30	22.34
	36RB	High	QPSK	22.19	22.20	22.22
			16QAM	21.25	21.33	21.30
		Middle	QPSK	22.21	22.20	22.25
			16QAM	21.28	21.24	21.24
		Low	QPSK	22.18	22.20	22.23
			16QAM	21.25	21.29	21.27
	75RB	/	QPSK	22.13	22.14	22.16
			16QAM	21.16	21.17	21.22
20 MHz				1900MHz	1880MHz	1860MHz
	1RB	High	QPSK	23.24	23.25	23.28
			16QAM	22.29	22.28	22.31
		Middle	QPSK	23.24	23.26	23.29
			16QAM	22.32	22.29	22.33
		Low	QPSK	23.25	23.28	23.30
			16QAM	22.31	22.32	22.36
	50RB	High	QPSK	22.18	22.20	22.22
			16QAM	21.26	21.25	21.27
		Middle	QPSK	22.18	22.20	22.19
			16QAM	21.25	21.27	21.30
		Low	QPSK	22.20	22.22	22.23
			16QAM	21.28	21.27	21.30
	100RB	/	QPSK	22.14	22.15	22.18
			16QAM	21.18	21.19	21.22

LTE-FDD Band 4				Actual output Power (dBm)			
Bandwidth	RAllocation	ROffset	Modulation	High	Middle	Low	
1.4 MHz	1RB	High	QPSK	23.87	23.86	23.85	
			16QAM	22.95	22.92	22.94	
		Middle	QPSK	23.87	23.85	23.81	
			16QAM	22.98	22.96	22.97	
		Low	QPSK	23.85	23.82	23.83	
			16QAM	22.98	22.94	22.94	
	3RB	High	QPSK	23.85	23.84	23.83	
			16QAM	22.78	22.81	22.77	
		Middle	QPSK	23.85	23.83	23.85	
			16QAM	22.76	22.78	22.79	
		Low	QPSK	23.88	23.84	23.87	
			16QAM	22.85	22.76	22.86	
	6RB	/	QPSK	22.70	22.68	22.67	
			16QAM	21.77	21.71	21.72	
	3 MHz	1RB	High	QPSK	23.84	23.83	23.84
				16QAM	22.99	22.96	22.93
			Middle	QPSK	23.88	23.84	23.83
				16QAM	22.97	22.96	22.95
Low			QPSK	23.81	23.82	23.83	
			16QAM	22.96	22.97	22.96	
8RB		High	QPSK	22.75	22.76	22.77	
			16QAM	21.76	21.74	21.74	
		Middle	QPSK	22.75	22.73	22.70	
			16QAM	21.69	21.68	21.68	
		Low	QPSK	22.71	22.79	22.76	
			16QAM	21.77	21.76	21.74	
15RB		/	QPSK	22.73	22.73	22.66	
			16QAM	21.78	21.78	21.75	

				1752.5MHz	1732.5MHz	1712.5MHz
5 MHz	1RB	High	QPSK	23.89	23.82	23.85
			16QAM	22.99	22.94	22.95
		Middle	QPSK	23.86	23.84	23.83
			16QAM	22.98	22.99	22.96
		Low	QPSK	23.86	23.87	23.83
			16QAM	22.96	22.95	22.98
	12RB	High	QPSK	22.75	22.74	22.76
			16QAM	21.70	21.72	21.73
		Middle	QPSK	22.73	22.70	22.75
			16QAM	21.73	21.71	21.69
		Low	QPSK	22.71	22.75	22.73
			16QAM	21.79	21.78	21.68
	25RB	/	QPSK	22.69	22.68	22.66
			16QAM	21.71	21.73	21.72
10 MHz				1750MHz	1732.5MHz	1715MHz
	1RB	High	QPSK	23.85	23.83	23.84
			16QAM	22.96	22.90	22.93
		Middle	QPSK	23.88	23.87	23.83
			16QAM	22.95	22.92	22.94
		Low	QPSK	23.89	23.86	23.85
			16QAM	22.98	22.96	22.97
	25RB	High	QPSK	22.76	22.75	22.74
			16QAM	21.74	21.71	21.72
		Middle	QPSK	22.76	22.75	22.74
			16QAM	21.74	21.78	21.74
		Low	QPSK	22.75	22.74	22.74
			16QAM	21.78	21.79	21.74
	50RB	/	QPSK	22.74	22.72	22.71
16QAM			21.78	21.75	21.74	

				1747.5MHz	1732.5MHz	1717.5MHz
15 MHz	1RB	High	QPSK	23.83	23.89	23.87
			16QAM	22.97	22.96	22.96
		Middle	QPSK	23.85	23.86	23.86
			16QAM	22.99	22.94	22.93
		Low	QPSK	23.87	23.82	23.85
			16QAM	22.97	22.95	22.94
	36RB	High	QPSK	22.75	22.77	22.74
			16QAM	21.74	21.71	21.71
		Middle	QPSK	22.75	22.76	22.75
			16QAM	21.78	21.74	21.71
		Low	QPSK	22.75	22.79	22.77
			16QAM	21.69	21.68	21.74
	75RB	/	QPSK	22.69	22.68	22.66
			16QAM	21.77	21.76	21.73
20 MHz				1745MHz	1732.5MHz	1720MHz
	1RB	High	QPSK	23.95	23.91	23.92
			16QAM	22.98	22.96	22.93
		Middle	QPSK	23.89	23.92	23.83
			16QAM	22.95	22.92	22.92
		Low	QPSK	23.91	23.90	23.88
			16QAM	22.97	22.96	22.96
	50RB	High	QPSK	22.79	22.77	22.76
			16QAM	21.74	21.72	21.74
		Middle	QPSK	22.74	22.75	22.77
			16QAM	21.72	21.69	21.74
		Low	QPSK	22.74	22.73	22.71
			16QAM	21.74	21.72	21.68
	100RB	/	QPSK	22.72	22.70	22.71
			16QAM	21.77	21.72	21.73

LTE-FDD Band 12				Actual output Power (dBm)		
Bandwidth	RAllocation	ROffset	Modulation	High	Middle	Low
1.4 MHz	1RB	High	QPSK	24.09	24.05	24.01
			16QAM	23.01	22.99	22.93
		Middle	QPSK	24.11	24.06	24.04
			16QAM	23.01	23.01	22.97
		Low	QPSK	24.08	24.06	24.05
			16QAM	23.00	22.97	22.96
	3RB	High	QPSK	23.92	23.84	23.83
			16QAM	22.70	22.68	22.70
		Middle	QPSK	23.92	23.84	23.83
			16QAM	22.70	22.68	22.70
		Low	QPSK	23.89	23.84	23.84
			16QAM	22.76	22.73	22.69
	6RB	/	QPSK	23.01	23.01	23.00
			16QAM	22.04	22.02	22.00
3 MHz	1RB	High	QPSK	24.08	24.05	24.01
			16QAM	23.01	22.97	22.97
		Middle	QPSK	24.11	24.08	24.04
			16QAM	23.00	22.98	22.98
		Low	QPSK	24.07	24.07	24.04
			16QAM	23.00	23.00	22.95
	8RB	High	QPSK	23.03	22.99	23.01
			16QAM	22.00	21.98	22.04
		Middle	QPSK	23.01	23.00	23.01
			16QAM	22.04	22.00	22.03
		Low	QPSK	23.00	23.02	22.99
			16QAM	21.98	22.02	21.97
	15RB	/	QPSK	23.02	22.98	22.99
			16QAM	22.00	21.99	21.98

				713.5MHz	707.5MHz	701.5MHz
5 MHz	1RB	High	QPSK	24.04	23.99	24.00
			16QAM	22.99	22.95	22.95
		Middle	QPSK	24.10	24.05	24.01
			16QAM	22.99	22.97	22.99
		Low	QPSK	24.10	24.06	24.05
			16QAM	23.02	22.97	22.98
	12RB	High	QPSK	23.07	23.02	23.06
			16QAM	22.06	22.00	22.07
		Middle	QPSK	23.08	23.07	23.05
			16QAM	22.01	22.02	22.06
		Low	QPSK	23.11	23.10	23.08
			16QAM	22.05	22.03	22.00
	25RB	/	QPSK	23.07	23.03	23.01
			16QAM	22.06	22.04	22.03
10 MHz				711MHz	707.5MHz	704MHz
	1RB	High	QPSK	24.14	24.06	24.02
			16QAM	23.04	23.01	22.99
		Middle	QPSK	24.12	24.09	24.06
			16QAM	23.01	22.99	22.96
		Low	QPSK	24.11	24.06	24.04
			16QAM	23.01	23.01	22.97
	25RB	High	QPSK	23.10	23.08	23.06
			16QAM	22.00	21.99	21.98
		Middle	QPSK	23.08	23.07	23.06
			16QAM	22.04	22.06	22.04
		Low	QPSK	23.07	23.08	23.07
			16QAM	22.07	22.01	22.02
	50RB	/	QPSK	23.12	23.05	23.01
16QAM			22.07	22.06	22.04	

11.5 Wi-Fi and BT Measurement result

The output power of BT antenna is as following:

Mode	Conducted Power (dBm)		
	Channel 0 (2402MHz)	Channel 39 (2441MHz)	Channel 78 (2480MHz)
GFSK	0.28	1.45	0.06

The average conducted power for Wi-Fi is as following:

802.11b (dBm)

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
1(2412MHz)	17.77	17.5	17.57	17.64
6(2437MHz)	17.61	17.4	17.42	17.46
11(2462MHz)	17.36	17.57	17.64	17.66

802.11g (dBm)

Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
1(2412MHz)	17.44	17.35	17.38	17.47	17.5	17.63	17.72	17.74
6(2437MHz)	17.39	17.49	17.54	17.63	17.67	17.56	17.57	17.62
11(2462MHz)	17.24	17.22	17.27	17.37	17.39	17.52	17.6	17.63

802.11n (dBm) - HT20 (2.4G)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
1(2412MHz)	16.83	16.74	16.8	16.92	17.05	17.13	17.19	17.21
6(2437MHz)	16.75	16.69	16.77	16.82	16.78	16.9	17.00	17.03
11(2462MHz)	16.61	16.45	16.54	16.55	16.64	16.73	16.76	16.81


12 Simultaneous TX SAR Considerations

12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

12.2 Transmit Antenna Separation Distances

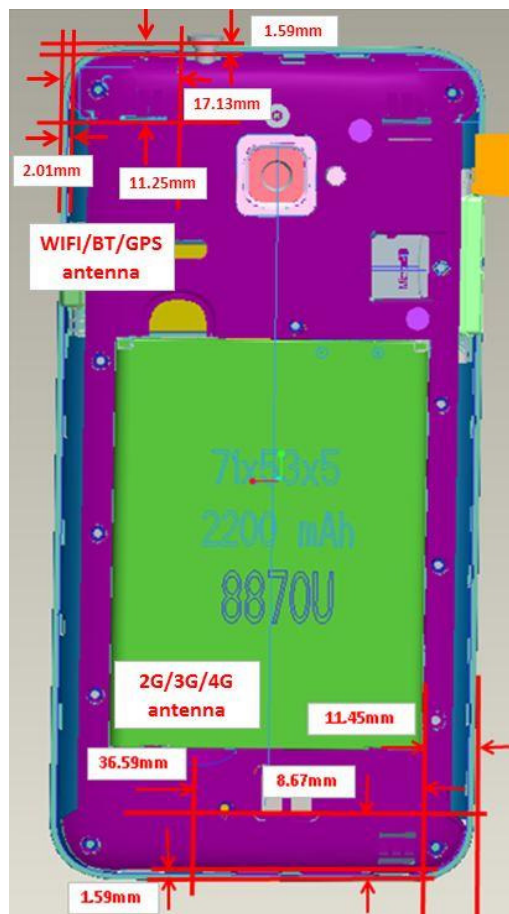

Picture 12.1 Antenna Locations

12.3 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR measurement positions						
Mode	Front	Rear	Left edge	Right edge	Top edge	Bottom edge
Main antenna	Yes	Yes	Yes	Yes	No	Yes
WLAN	Yes	Yes	No	Yes	Yes	No

12.4 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Table 12.1: Standalone SAR test exclusion considerations

Band/Mode	F(GHz)	Position	SAR test exclusion threshold (mW)	RF output power		SAR test exclusion
				dBm	mW	
Bluetooth	2.441	Head	9.60	1.5	1.41	Yes
		Body	19.20	1.5	1.41	Yes
2.4GHz WLAN 802.11 b	2.45	Head	9.58	18	63.10	No
		Body	19.17	18	63.10	No

13 Evaluation of Simultaneous

Table 13.1: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Head	LeftCheek	0.58	0.83	1.41
Highest reported SAR value for Body	Rear	0.77	0.29	1.06
	Bottom	1.10	/	1.10

Table 13.2: The sum of reported SAR values for main antenna and Bluetooth

	Position	Main antenna	BT*	Sum
Highest reported SAR value for Head	LeftCheek	0.58	0.06	0.64
Highest reported SAR value for Body	Rear	0.77	0.03	0.80
	Bottom	1.10	/	1.10

BT* - Estimated SAR for Bluetooth (see the table 13.3)

Table 13.3: Estimated SAR for Bluetooth

Position	F (GHz)	Distance (mm)	Upper limit of power *		Estimated _{1g} (W/kg)
			dBm	mW	
Head	2.441	5	1.5	1.41	0.06
Body	2.441	10	1.5	1.41	0.03

* - Maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$;

where $x = 7.5$ for 1-g SAR.

When the minimum test separation distance is $< 5 \text{ mm}$, a distance of 5 mm is applied to determine SAR test exclusion

Conclusion:

According to the above tables, the sum of reported SAR values is $< 1.6 \text{ W/kg}$. So the simultaneous transmission SAR with volume scans is not required.

14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom.

The distance is 10mm and just applied to the condition of body worn accessory.

It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-g SAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or >1.2W/kg.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where P_{Target} is the power of manufacturing upper limit;

P_{Measured} is the measured power in chapter 11.

Table 14.1: Duty Cycle

Mode	Duty Cycle
Speech for GSM850/1900	1:8.3
GPRS&EGPRS for GSM850/GSM1900	1:2
WCDMA850/1700/1900	1:1
FDD_LTE Band 2/4/12	1:1

14.1 SAR results for Fast SAR

According to the client request, we perform the spot check for head and body of each band respectively. If the spot check value is larger than the original value and does not exceed half of the SAR limit, the same configuration is tested to replace the original values and others are quoted. Otherwise, all the original values are quoted directly. The original values are marked with “Original” in the right column of below tables and the new tested values are marked with “New”.

Table 14.2: SAR Values (GSM 850 MHz Band - Head)

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	Note
MHz	Ch.											
Ambient Temperature: 23.7°C Liquid Temperature: 23.2°C												
836.6	190	Left	Touch	/	32.97	33.5	0.048	0.05	0.069	0.08	0.10	original
836.6	190	Left	Tilt	/	32.97	33.5	0.033	0.04	0.047	0.05	0.18	original
836.6	190	Right	Touch	/	32.97	33.5	0.054	0.06	0.079	0.09	0.09	original
836.6	190	Right	Tilt	/	32.97	33.5	0.034	0.04	0.049	0.06	0.12	original
848.8	251	Right	Touch	/	32.76	33.5	0.041	0.05	0.06	0.07	0.11	original
824.2	128	Right	Touch	Fig.1	32.78	33.5	0.085	0.10	0.112	0.13	0.06	original
824.2	128	Right	Touch		32.78	33.5	0.035	0.04	0.045	0.05	-0.12	new

Table 14.3: SAR Values (GSM 850 MHz Band-Body) -AP OFF

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	Note
MHz	Ch.										
Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C											
836.6	190	Front	/	28.05	29	0.046	0.06	0.086	0.11	0.12	original
848.8	251	Rear	/	27.80	29	0.073	0.10	0.103	0.14	0.13	original
836.6	190	Rear	/	28.05	29	0.105	0.13	0.149	0.19	0.02	original
824.2	128	Rear	/	27.84	29	0.169	0.22	0.221	0.29	0.06	original
824.2	128	Rear EGPRS	/	27.83	29	0.153	0.20	0.213	0.28	0.08	original
824.2	128	Rear	/	27.84	29	0.054	0.07	0.114	0.15	-0.13	new

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.4: SAR Values (GSM 850 MHz Band-Body) -AP ON

Frequency		Test Position	Figure No.	Ambient Temperature: 23.0°C			Liquid Temperature: 22.5°C			Power Drift (dB)	Note
MHz	Ch.			Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g)(W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)		
836.6	190	Front	/	28.05	29	0.046	0.06	0.086	0.11	0.12	original
848.8	251	Rear	/	27.80	29	0.073	0.10	0.103	0.14	0.13	original
836.6	190	Rear	/	28.05	29	0.105	0.13	0.149	0.19	0.02	original
824.2	128	Rear	Fig.2	27.84	29	0.169	0.22	0.221	0.29	0.06	original
836.6	190	Left	/	28.05	29	0.027	0.03	0.041	0.05	0.12	original
836.6	190	Right	/	28.05	29	0.033	0.04	0.049	0.06	0.15	original
836.6	190	Bottom	/	28.05	29	0.023	0.03	0.036	0.04	0.10	original
824.2	128	Rear EGPRS	/	27.83	29	0.153	0.20	0.213	0.28	0.08	original
824.2	128	Rear	/	27.84	29	0.054	0.07	0.114	0.15	-0.13	new

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.5: SAR Values (GSM 1900 MHz Band - Head)

Frequency		Side	Test Position	Figure No.	Ambient Temperature: 23.3°C			Liquid Temperature: 22.8°C			Power Drift (dB)	Note
MHz	Ch.				Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)		
1880	661	Left	Touch	Fig.3	29.67	30	0.187	0.20	0.311	0.34	0.05	original
1880	661	Left	Tilt	/	29.67	30	0.077	0.08	0.143	0.15	0.17	original
1880	661	Right	Touch	/	29.67	30	0.115	0.12	0.195	0.21	-0.14	original
1880	661	Right	Tilt	/	29.67	30	0.057	0.06	0.101	0.11	0.15	original
1909.8	810	Left	Touch	/	29.82	30	0.166	0.17	0.293	0.31	-0.10	original
1850.2	512	Left	Touch	/	29.66	30	0.136	0.15	0.237	0.26	0.13	original
1880	661	Left	Touch	/	29.67	30	0.094	0.10	0.149	0.16	-0.06	new

Table 14.6: SAR Values (GSM 1900 MHz Band-Body) -AP OFF

Frequency		Test Position	Figure No.	Ambient Temperature: 23.0°C		Liquid Temperature: 22.5°C		Reported SAR(1g)(W/kg)	Measured SAR(1g)(W/kg)	Power Drift (dB)	Note
MHz	Ch.			Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g)(W/kg)	Reported SAR(10g)(W/kg)				
1880	661	Front	/	25.41	26	0.396	0.45	0.697	0.80	-0.10	origina
1909.8	810	Rear	/	25.42	26	0.364	0.42	0.735	0.84	0.10	origina
1880	661	Rear	/	25.41	26	0.382	0.44	0.748	0.86	0.07	origina
1850.2	512	Rear	/	25.52	26	0.360	0.40	0.719	0.80	0.11	origina
1880	661	RearEGPRS	/	25.41	26	0.348	0.40	0.686	0.79	0.06	origina

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.7: SAR Values (GSM 1900 MHz Band-Body) -AP ON

Frequency		Test Position	Figure No.	Ambient Temperature: 23.0°C		Liquid Temperature: 22.5°C		Reported SAR(1g)(W/kg)	Measured SAR(1g)(W/kg)	Power Drift (dB)	Note
MHz	Ch.			Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g)(W/kg)	Reported SAR(10g)(W/kg)				
1880	661	Front	/	25.41	26	0.396	0.45	0.697	0.80	-0.10	origina
1909.8	810	Rear	/	25.42	26	0.364	0.42	0.735	0.84	0.10	origina
1880	661	Rear	/	25.41	26	0.382	0.44	0.748	0.86	0.07	origina
1850.2	512	Rear	/	25.52	26	0.360	0.40	0.719	0.80	0.11	origina
1880	661	Left	/	25.41	26	0.116	0.13	0.209	0.24	0.02	origina
1880	661	Right	/	25.41	26	0.062	0.07	0.106	0.12	0.17	origina
1909.8	810	Bottom	/	25.42	26	0.453	0.52	0.88	1.01	0.09	origina
1880	661	Bottom	Fig.4	25.41	26	0.476	0.55	0.895	1.03	0.07	origina
1850.2	512	Bottom	/	25.52	26	0.449	0.50	0.86	0.96	0.02	origina
1880	661	Bottom EGPRS	/	25.41	26	0.444	0.51	0.88	1.01	0.06	origina
1880	661	Bottom	/	25.41	26	0.134	0.15	0.246	0.28	-0.11	new

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.8: SAR Values (WCDMA 850 MHz Band - Head)

Ambient Temperature: 23.7°C												Liquid Temperature: 23.2°C	
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	Note	
MHz	Ch.												
836.4	4182	Left	Touch	/	23.5	24	0.052	0.06	0.075	0.08	0.11	original	
836.4	4182	Left	Tilt	/	23.5	24	0.038	0.04	0.054	0.06	0.14	original	
836.4	4182	Right	Touch	/	23.5	24	0.066	0.07	0.096	0.11	-0.07	original	
836.4	4182	Right	Tilt	/	23.5	24	0.042	0.05	0.06	0.07	0.10	original	
846.6	4233	Right	Touch	/	23.5	24	0.056	0.06	0.082	0.09	-0.16	original	
826.4	4132	Right	Touch	Fig.5	23.5	24	0.078	0.09	0.103	0.12	0.05	original	
826.4	4132	Right	Touch	/	23.5	24	0.018	0.02	0.024	0.03	0.17	new	

Table 14.9: SAR Values (WCDMA 850 MHz Band-Body) -AP OFF

Ambient Temperature: 23.0°C												Liquid Temperature: 22.5°C	
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	Note		
MHz	Ch.												
836.4	4182	Front	/	23.5	24	0.061	0.07	0.086	0.10	0.13	original		
846.6	4233	Rear	/	23.5	24	0.079	0.09	0.113	0.13	0.05	original		
836.4	4182	Rear	/	23.5	24	0.094	0.11	0.134	0.15	0.02	original		
826.4	4132	Rear	/	23.5	24	0.122	0.14	0.159	0.18	0.06	original		
826.4	4132	Rear	/	23.5	24	0.043	0.05	0.056	0.06	0.06	new		

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.10: SAR Values (WCDMA 850 MHz Band-Body) -AP ON

Frequency		Test Position	Figure No.	Ambient Temperature: 23.0°C		Liquid Temperature: 22.5°C		Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)	Note
MHz	Ch.			Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g)(W/kg)				
836.4	4182	Front	/	23.5	24	0.061	0.07	0.086	0.10	0.13	original
846.6	4233	Rear	/	23.5	24	0.079	0.09	0.113	0.13	0.05	original
836.4	4182	Rear	/	23.5	24	0.094	0.11	0.134	0.15	0.02	original
826.4	4132	Rear	Fig.6	23.5	24	0.122	0.14	0.159	0.18	0.06	original
836.4	4182	Left	/	23.5	24	0.038	0.04	0.055	0.06	0.13	original
836.4	4182	Right	/	23.5	24	0.045	0.05	0.066	0.07	0.15	original
836.4	4182	Bottom	/	23.5	24	0.020	0.02	0.031	0.03	0.14	original
826.4	4132	Rear	/	23.5	24	0.043	0.05	0.056	0.06	0.06	new

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.11: SAR Values (WCDMA1900 MHz Band - Head)

Frequency		Side	Test Position	Figure No.	Ambient Temperature: 23.3°C		Liquid Temperature: 22.8°C		Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	Note
MHz	Ch.				Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)				
1880	9400	Left	Touch	/	22.2	23	0.218	0.26	0.369	0.44	0.08	original
1880	9400	Left	Tilt	/	22.2	23	0.060	0.07	0.108	0.13	0.13	original
1880	9400	Right	Touch	/	22.2	23	0.190	0.23	0.325	0.39	0.17	original
1880	9400	Right	Tilt	/	22.2	23	0.117	0.14	0.200	0.24	0.17	original
1907.6	9538	Left	Touch	Fig.7	22.3	23	0.228	0.27	0.379	0.45	-0.19	original
1852.4	9262	Left	Touch	/	22.4	23	0.195	0.22	0.337	0.39	0.05	original
1907.6	9538	Left	Touch	/	22.3	23	0.171	0.20	0.269	0.32	-0.09	new

Table 14.12: SAR Values (WCDMA1900 MHz Band-Body)–APOFF

Frequency		Test Position	Figure No.	Ambient Temperature: 23.0°C		Liquid Temperature: 22.5°C		Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)	Note
MHz	Ch.			Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g)(W/kg)				
1880	9400	Front	/	22.2	23	0.329	0.40	0.612	0.74	0.04	origin
1907.6	9538	Rear	/	22.3	23	0.454	0.53	0.857	1.01	0.02	origin
1880	9400	Rear	/	22.2	23	0.388	0.47	0.729	0.88	0.07	origin
1852.4	9262	Rear	/	22.4	23	0.367	0.42	0.708	0.81	0.09	origin

Note1: The distance between the EUT and the phantom bottom is 10 mm.

Table 14.13: SAR Values (WCDMA1900 MHz Band-Body) –APON

Frequency		Test Position	Figure No.	Ambient Temperature: 22.5°C		Liquid Temperature: 22.0°C		Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)	Note
MHz	Ch.			Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g)(W/kg)				
1880	9400	Front	/	22.2	23	0.329	0.40	0.612	0.74	0.04	origin
1907.6	9538	Rear	/	22.3	23	0.454	0.53	0.857	1.01	0.02	origin
1880	9400	Rear	/	22.2	23	0.388	0.47	0.729	0.88	0.07	origin
1852.4	9262	Rear	/	22.4	23	0.367	0.42	0.708	0.81	0.09	origin
1880	9400	Left	/	22.2	23	0.190	0.23	0.34	0.41	0.10	origin
1880	9400	Right	/	22.2	23	0.122	0.15	0.204	0.25	0.11	origin
1907.6	9538	Bottom	Fig.8	22.3	23	0.492	0.58	0.935	1.10	-0.09	origin
1880	9400	Bottom	/	22.2	23	0.387	0.47	0.736	0.88	-0.02	origin
1852.4	9262	Bottom	/	22.4	23	0.378	0.43	0.724	0.83	-0.01	origin
1907.6	9538	Bottom	/	22.3	23	0.359	0.42	0.672	0.79	-0.14	new

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.14: SAR Values (WCDMA1700 MHz Band - Head)

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	Note	
MHz	Ch.												
		Ambient Temperature: 23.3°C						Liquid Temperature: 22.8°C					
1752.6	1513	Left	Touch	Fig.9	22.2	23	0.301	0.36	0.483	0.58	0.06	original	
1732.6	1413	Left	Touch	/	22.1	23	0.284	0.35	0.462	0.57	0.08	original	
1712.4	1312	Left	Touch	/	22.2	23	0.225	0.27	0.379	0.46	0.06	original	
1732.6	1413	Left	Tilt	/	22.1	23	0.066	0.08	0.115	0.14	0.13	original	
1732.6	1413	Right	Touch	/	22.1	23	0.200	0.25	0.329	0.40	-0.03	original	
1732.6	1413	Right	Tilt	/	22.1	23	0.084	0.10	0.144	0.18	0.02	original	
1752.6	1513	Left	Touch	/	22.2	23	0.249	0.30	0.378	0.45	0.04	new	

Table 14.15: SAR Values (WCDMA1700 MHz Band-Body)-APOFF

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	Note		
MHz	Ch.												
		Ambient Temperature: 22.5°C						Liquid Temperature: 22.0°C					
1732.6	1413	Front	/	22.1	23	0.335	0.41	0.541	0.67	0.04	original		
1752.6	1513	Rear	/	22.2	23	0.443	0.53	0.819	0.98	0.03	original		
1732.6	1413	Rear	/	22.1	23	0.359	0.44	0.639	0.79	-0.01	original		
1712.4	1312	Rear	/	22.2	23	0.326	0.39	0.569	0.68	0.08	original		

Note1: The distance between the EUT and the phantom bottom is 10 mm.

Table 14.16: SAR Values (WCDMA1700 MHz Band-Body) –APON

Ambient Temperature: 22.5°C Liquid Temperature: 22.0°C

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g)(W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)	Note
MHz	Ch.										
1732.6	1413	Front	/	22.1	23	0.335	0.41	0.541	0.67	0.04	original
1752.6	1513	Rear	/	22.2	23	0.443	0.53	0.819	0.98	0.03	original
1732.6	1413	Rear	/	22.1	23	0.359	0.44	0.639	0.79	-0.01	original
1712.4	1312	Rear	/	22.2	23	0.326	0.39	0.569	0.68	0.08	original
1732.6	1413	Left	/	22.1	23	0.153	0.19	0.268	0.33	0.10	original
1732.6	1413	Right	/	22.1	23	0.078	0.10	0.134	0.16	0.11	original
1752.6	1513	Bottom	Fig.10	22.2	23	0.456	0.55	0.833	1.00	0.13	original
1732.6	1413	Bottom	/	22.1	23	0.339	0.42	0.65	0.80	-0.02	original
1712.4	1312	Bottom	/	22.2	23	0.308	0.37	0.579	0.70	0.08	original
1752.6	1513	Bottom	/	22.2	23	0.372	0.45	0.665	0.80	0.13	new

Table 14.17: SAR Values (LTE Band 2-Head)

Frequency		Ambient Temperature: 23.3°C					Liquid Temperature: 22.8°C					
MHz	Ch.	Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	Note
1860	18700	QPSK_20MHz_1RB_Low	Left Touch	23.30	24	Fig.11	0.225	0.26	0.383	0.45	0.04	original
1860	18700	QPSK_20MHz_1RB_Low	Left Tilt	23.30	24	/	0.103	0.12	0.19	0.22	0.11	original
1860	18700	QPSK_20MHz_50RB_Low	Left Touch	22.23	23	/	0.205	0.24	0.358	0.43	0.10	original
1860	18700	QPSK_20MHz_50RB_Low	Left Tilt	22.23	23	/	0.091	0.11	0.17	0.20	-0.07	original
1860	18700	QPSK_20MHz_1RB_Low	Right Touch	23.30	24	/	0.186	0.22	0.31	0.36	0.13	original
1860	18700	QPSK_20MHz_1RB_Low	Right Tilt	23.30	24	/	.0120	0.01	0.212	0.25	0.18	original
1860	18700	QPSK_20MHz_50RB_Low	Right Touch	22.23	23	/	0.152	0.18	0.255	0.30	0.08	original
1860	18700	QPSK_20MHz_50RB_Low	Right Tilt	22.23	23	/	0.099	0.12	0.175	0.21	0.17	original
1860	18700	QPSK_20MHz_1RB_Low	Left Touch	23.30	24	/	0.227	0.27	0.350	0.41	0.07	new

Table 14.18: SAR Values (LTE Band 2-Body) –APOFF

Frequency		Ambient Temperature: 23.4°C					Liquid Temperature: 22.9°C					
MHz	Ch.	Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	Note
1860	18700	QPSK_20MHz_1RB_Low	Front	23.30	24	/	0.301	0.35	0.513	0.60	0.05	original
1860	18700	QPSK_20MHz_50RB_Low	Front	22.23	23	/	0.229	0.27	0.407	0.49	0.10	original
1860	18700	QPSK_20MHz_1RB_Low	Rear	23.30	24	/	0.373	0.44	0.699	0.82	0.11	original
1860	18700	QPSK_20MHz_50RB_Low	Rear	22.23	23	/	0.300	0.36	0.589	0.70	0.14	original

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.19: SAR Values (LTE Band 2-Body)–APON

Frequency		Configuration	Test Position	Conduct ed Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Ambient Temperature: 23.4°C		Liquid Temperature: 22.9°C		Power Drift (dB)	Note
MHz	Ch.						Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)		
1860	18700	QPSK_20MHz_1RB_Low	Front	23.30	24	/	0.301	0.35	0.513	0.60	0.05	original
1860	18700	QPSK_20MHz_50RB_Low	Front	22.23	23	/	0.229	0.27	0.407	0.49	0.10	original
1860	18700	QPSK_20MHz_1RB_Low	Rear	23.30	24	/	0.373	0.44	0.699	0.82	0.11	original
1860	18700	QPSK_20MHz_50RB_Low	Rear	22.23	23	/	0.300	0.36	0.589	0.70	0.14	original
1860	18700	QPSK_20MHz_1RB_Low	Right	23.30	24	/	0.139	0.16	0.244	0.29	0.15	original
1860	18700	QPSK_20MHz_50RB_Low	Right	22.23	23	/	0.110	0.13	0.184	0.22	0.19	original
1860	18700	QPSK_20MHz_1RB_Low	Left	23.30	24	/	0.168	0.20	0.332	0.39	-0.12	original
1860	18700	QPSK_20MHz_50RB_Low	Left	22.23	23	/	0.142	0.17	0.295	0.35	-0.08	original
1900	19100	QPSK_20MHz_1RB_Low	Bottom	23.25	24	/	0.444	0.53	0.855	1.02	0.04	original
1880	18900	QPSK_20MHz_1RB_Low	Bottom	23.28	24	/	0.483	0.57	0.899	1.06	0.02	original
1860	18700	QPSK_20MHz_1RB_Low	Bottom	23.30	24	Fig.12	0.497	0.58	0.933	1.10	0.07	original
1860	18700	QPSK_20MHz_50RB_Low	Bottom	22.23	23	/	0.360	0.43	0.676	0.81	-0.06	original
1860	18700	QPSK_20MHz_100RB_Low	Bottom	22.18	23	/	0.360	0.43	0.691	0.83	0.10	original
1860	18700	QPSK_20MHz_1RB_Low	Bottom	23.30	24	/	0.332	0.39	0.622	0.73	-0.12	new

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.20: SAR Values (LTE Band 4-Head)

Ambient Temperature: 23.3°C						Liquid Temperature: 22.8°C						
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	Note
MHz	Ch.											
1745	20300	QPSK_20MHz_1RB_High	Left Touch	23.95	24	Fig.13	0.260	0.26	0.418	0.42	0.08	original
1745	20300	QPSK_20MHz_1RB_High	Left Tilt	23.95	24	/	0.049	0.05	0.094	0.10	0.12	original
1745	20300	QPSK_20MHz_1RB_High	Right Touch	23.95	24	/	0.183	0.19	0.299	0.30	0.07	original
1745	20300	QPSK_20MHz_1RB_High	Right Tilt	23.95	24	/	0.039	0.04	0.074	0.07	0.13	original
1745	20300	QPSK_20MHz_1RB_High	Left Touch	22.79	23	/	0.191	0.20	0.32	0.34	0.08	original
1745	20300	QPSK_20MHz_1RB_High	Left Tilt	22.79	23	/	0.080	0.08	0.136	0.14	0.15	original
1745	20300	QPSK_20MHz_1RB_High	Right Touch	22.79	23	/	0.143	0.15	0.24	0.25	0.09	original
1745	20300	QPSK_20MHz_1RB_High	Right Tilt	22.79	23	/	0.061	0.06	0.105	0.11	0.18	original
1745	20300	QPSK_20MHz_1RB_High	Left Touch	23.95	24	/	0.238	0.24	0.355	0.36	-0.08	new

Table 14.21: SAR Values (LTE Band 4-Body) –APOFF

Ambient Temperature: 23.4°C						Liquid Temperature: 22.9°C						
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	Note
MHz	Ch.											
1745	20300	QPSK_20MHz_1RB_High	Front	23.95	24	/	0.311	0.31	0.426	0.43	0.06	original
1745	20300	QPSK_20MHz_50RB_High	Front	22.79	23	/	0.166	0.17	0.239	0.25	0.05	original
1745	20300	QPSK_20MHz_1RB_High	Rear	23.95	24	/	0.276	0.28	0.511	0.52	0.01	original
1745	20300	QPSK_20MHz_50RB_High	Rear	22.79	23	/	0.215	0.23	0.400	0.42	0.07	original

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.22: SAR Values (LTE Band 4-Body)–APON

Ambient Temperature: 23.4°C Liquid Temperature: 22.9°C

Frequency		Configuration	Test Position	Conduct ed Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	Note
MHz	Ch.											
1745	20300	QPSK_20MHz_1RB_High	Front	23.95	24	/	0.311	0.31	0.426	0.43	0.06	original
1745	20300	QPSK_20MHz_50RB_High	Front	22.79	23	/	0.166	0.17	0.239	0.25	0.05	original
1745	20300	QPSK_20MHz_1RB_High	Rear	23.95	24	/	0.276	0.28	0.511	0.52	0.01	original
1745	20300	QPSK_20MHz_50RB_High	Rear	22.79	23	/	0.215	0.23	0.400	0.42	0.07	original
1745	20300	QPSK_20MHz_1RB_High	Bottom	23.95	24	Fig.14	0.354	0.36	0.628	0.64	0.01	original
1745	20300	QPSK_20MHz_50RB_High	Bottom	22.79	23	/	0.257	0.27	0.469	0.49	0.13	original
1745	20300	QPSK_20MHz_1RB_High	Right	23.95	24	/	0.086	0.09	0.195	0.20	-0.16	original
1745	20300	QPSK_20MHz_50RB_High	Right	22.79	23	/	0.044	0.05	0.09	0.09	-0.18	original
1745	20300	QPSK_20MHz_1RB_High	Left	23.95	24	/	0.143	0.14	0.255	0.26	0.19	original
1745	20300	QPSK_20MHz_50RB_High	Left	22.79	23	/	0.114	0.12	0.204	0.21	0.12	original
1745	20300	QPSK_20MHz_1RB_High	Bottom	23.95	24	/	0.311	0.31	0.555	0.56	0.13	new

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.23: SAR Values (LTE Band 12-Head)

Ambient Temperature: 23.3°C						Liquid Temperature: 22.8°C						
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	Note
MHz	Ch.											
711	23130	QPSK_10MHz_1RB_High	Left Touch	24.14	24.5	/	0.178	0.19	0.253	0.27	-0.06	original
711	23130	QPSK_10MHz_25RB_High	Left Touch	23.10	23.5	/	0.164	0.18	0.233	0.26	0.03	original
711	23130	QPSK_10MHz_1RB_High	Left Tilt	24.14	24.5	/	0.048	0.05	0.068	0.07	0.12	original
711	23130	QPSK_10MHz_25RB_High	Left Tilt	23.10	23.5	/	0.041	0.04	0.058	0.06	0.10	original
711	23130	QPSK_10MHz_1RB_High	Right Touch	24.14	24.5	Fig.15	0.204	0.22	0.261	0.28	0.07	original
711	23130	QPSK_10MHz_25RB_High	Right Touch	23.10	23.5	/	0.169	0.19	0.243	0.27	0.10	original
711	23130	QPSK_10MHz_1RB_High	Right Tilt	24.14	24.5	/	0.049	0.05	0.07	0.08	0.17	original
711	23130	QPSK_10MHz_25RB_High	Right Tilt	23.10	23.5	/	0.043	0.05	0.061	0.07	0.13	original
711	23130	QPSK_10MHz_1RB_High	Right Touch	24.14	24.5	/	0.186	0.20	0.229	0.25	-0.04	new

Table 14.24: SAR Values (LTE Band 12-Body) –APOFF

Ambient Temperature: 23.4°C						Liquid Temperature: 22.9°C						
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	Note
MHz	Ch.											
711	23130	QPSK_10MHz_1RB_High	Front	24.14	24.5	/	0.344	0.37	0.493	0.54	-0.04	original
711	23130	QPSK_10MHz_25RB_High	Front	23.10	23.5	/	0.257	0.28	0.369	0.40	0.01	original
711	23130	QPSK_10MHz_1RB_High	Rear	24.14	24.5	Fig.16	0.432	0.47	0.706	0.77	0.09	original
711	23130	QPSK_10MHz_25RB_High	Rear	23.10	23.5	/	0.328	0.36	0.527	0.58	0.00	original
711	23130	QPSK_10MHz_1RB_High	Rear	24.14	24.5	/	0.221	0.24	0.404	0.44	0.11	new

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.25: SAR Values (LTE Band 12-Body) –APON

Frequency		Configuration	Test Position	Conduct ed Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Ambient Temperature: 23.4°C		Liquid Temperature: 22.9°C		Power Drift (dB)	Note
MHz	Ch.						Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)		
711	2313 0	QPSK_10MHz _1RB_High	Front	24.14	24.5	/	0.344	0.37	0.493	0.54	-0.04	original
711	2313 0	QPSK_10MHz _25RB_High	Front	23.10	23.5	/	0.257	0.28	0.369	0.40	0.01	original
711	2313 0	QPSK_10MHz _1RB_High	Rear	24.14	24.5	Fig.17	0.432	0.47	0.706	0.77	0.09	original
711	2313 0	QPSK_10MHz _25RB_High	Rear	23.10	23.5	/	0.328	0.36	0.527	0.58	0.00	original
711	2313 0	QPSK_10MHz _1RB_High	Bottom	24.14	24.5	/	0.133	0.14	0.204	0.22	0.02	original
711	2313 0	QPSK_10MHz _25RB_High	Bottom	23.10	23.5	/	0.108	0.12	0.167	0.18	-0.12	original
711	2313 0	QPSK_10MHz _1RB_High	Right	24.14	24.5	/	0.136	0.15	0.201	0.22	-0.02	original
711	2313 0	QPSK_10MHz _25RB_High	Right	23.10	23.5	/	0.110	0.12	0.161	0.18	0.00	original
711	2313 0	QPSK_10MHz _1RB_High	Left	24.14	24.5	/	0.144	0.16	0.263	0.29	0.07	original
711	2313 0	QPSK_10MHz _25RB_High	Left	23.10	23.5	/	0.120	0.13	0.202	0.22	-0.01	original
711	2313 0	QPSK_10MHz _1RB_High	Rear	24.14	24.5	/	0.221	0.24	0.404	0.44	0.11	new

Note: The distance between the EUT and the phantom bottom is 10mm.

14.2 SAR results for Standard procedure

There is zoom scan measurement to be added for the highest measured SAR in each exposure configuration/band.

Table 14.26: SAR Values (GSM 850 MHz Band - Head)

Frequency		Side	Test Position	Figure No.	Ambient Temperature: 23.7°C		Liquid Temperature: 23.2°C		Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.				Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)			
824.2	128	Right	Touch	Fig.1	32.78	33.5	0.085	0.10	0.112	0.13	0.06

Table 14.27: SAR Values (GSM 850 MHz Band-Body) –APON

Frequency		Test Position	Figure No.	Ambient Temperature: 23.0°C		Liquid Temperature: 22.5°C		Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.			Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)			
824.2	128	Rear	Fig.2	27.84	29	0.169	0.22	0.221	0.29	0.06

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.28: SAR Values (GSM 1900 MHz Band - Head)

Frequency		Side	Test Position	Figure No.	Ambient Temperature: 23.3°C		Liquid Temperature: 22.8°C		Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.				Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)			
1880	661	Left	Touch	Fig.3	29.67	30	0.187	0.20	0.311	0.34	0.05

Table 14.29: SAR Values (GSM 1900 MHz Band-Body) –APON

Frequency		Test Position	Figure No.	Ambient Temperature: 22.5°C		Liquid Temperature: 22.0°C		Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.			Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)			
1880	661	Bottom	Fig.4	25.41	26	0.476	0.55	0.895	1.03	0.07

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.30: SAR Values (WCDMA 850 MHz Band - Head)

Frequency		Side	Test Position	Figure No.	Ambient Temperature: 23.7°C		Liquid Temperature: 23.2°C		Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.				Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)			
826.4	4132	Right	826.4	Fig.5	23.5	24	0.078	0.09	0.103	0.12	0.05

Table 14.31: SAR Values (WCDMA 850 MHz Band-Body) –APON

Frequency		Test Position	Figure No.	Ambient Temperature: 23.0°C		Liquid Temperature: 22.5°C		Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.			Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)			
826.4	4132	Rear	Fig.6	23.5	24	0.122	0.14	0.159	0.18	0.06

Note1: The distance between the EUT and the phantom bottom is 10mm

Table 14.32: SAR Values (WCDMA1900 MHz Band - Head)

Frequency		Side	Test Position	Figure No.	Ambient Temperature: 23.3°C		Liquid Temperature: 22.8°C		Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.				Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)			
1907.6	9538	Left	Touch	Fig.7	22.3	23	0.228	0.27	0.379	0.45	-0.19

Table 14.33: SAR Values (WCDMA1900 MHz Band-Body) –APON

Frequency		Test Position	Figure No.	Ambient Temperature: 22.5°C		Liquid Temperature: 22.0°C		Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.			Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)			
1907.6	9538	Bottom	Fig.8	22.3	23	0.492	0.58	0.935	1.10	-0.09

Note1: The distance between the EUT and the phantom bottom is 10mm

Table 14.34: SAR Values (WCDMA1700 MHz Band - Head)

Frequency		Side	Test Position	Figure No.	Ambient Temperature: 23.3°C		Liquid Temperature: 22.8°C		Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.				Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)			
1752.6	1513	Left	Touch	Fig.9	22.2	23	0.301	0.36	0.483	0.58	0.06

Table 14.35: SAR Values (WCDMA1700 MHz Band-Body)–APON

Frequency		Test Position	Figure No.	Ambient Temperature: 22.5°C		Liquid Temperature: 22.0°C		Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.			Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)			
1752.6	1513	Bottom	Fig.10	22.2	23	0.456	0.55	0.833	1.00	0.13

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.36: SAR Values (LTE Band 2-Head)

Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Ambient Temperature: 23.3°C		Liquid Temperature: 22.8°C		Power Drift (dB)
MHz	Ch.						Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	
1860	18700	QPSK_20MHz_1RB_Low	Left Touch	23.30	24	Fig.11	0.225	0.26	0.383	0.45	0.04

Table 14.37: SAR Values (LTE Band 2-Body) –APON

Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Ambient Temperature: 23.4°C		Liquid Temperature: 22.9°C		Power Drift (dB)
MHz	Ch.						Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	
1860	18700	QPSK_20MHz_1RB_Low	Bottom	23.30	24	Fig.12	0.497	0.58	0.933	1.10	0.07

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.38: SAR Values (LTE Band 4-Head)

Ambient Temperature: 23.3°C						Liquid Temperature: 22.8°C					
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1745	20300	QPSK_20MHz_1RB_High	Left Touch	23.95	24	Fig.13	0.260	0.26	0.418	0.42	0.08

Table 14.39: SAR Values (LTE Band 4-Body)–APON

Ambient Temperature: 23.4°C						Liquid Temperature: 22.9°C					
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1745	20300	QPSK_20MHz_1RB_High	Bottom	23.95	24	Fig.14	0.354	0.36	0.628	0.64	0.01

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.44: SAR Values (LTE Band 12-Head)

Ambient Temperature: 23.7°C						Liquid Temperature: 23.2°C					
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
711	23130	QPSK_10MHz_1RB_High	Right Touch	24.14	24.5	Fig.15	0.204	0.22	0.261	0.28	0.07

Table 14.45: SAR Values (LTE Band 12-Body)–APON

Ambient Temperature: 24.8°C						Liquid Temperature: 24.3°C					
Frequency		Configuration	Test Position	Conducted Power (dBm)	Max. tune-up Power (dBm)	Figure No.	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
711	23130	QPSK_10MHz_1RB_High	Rear	24.14	24.5	Fig.16	0.432	0.47	0.706	0.77	0.09

Note: The distance between the EUT and the phantom bottom is 10mm

14.3 WLAN Evaluation

According to the KDB248227 D01, SAR is measured for 2.4GHz 802.11b DSSS using the initial test position procedure.

Head Evaluation

Table 14.46: SAR Values (Wi-Fi 802.11b - Head)

Frequency		Side	Test Position	Figure No.	Ambient Temperature: 23.0°C		Liquid Temperature: 22.5°C				Power Drift (dB)
MHz	Ch.				Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	
2412	1	Left	Touch	/	17.77	18	0.351	0.37	0.765	0.81	0.13
2412	1	Left	Tilt	/	17.77	18	0.212	0.22	0.421	0.44	0.12
2412	1	Right	Touch	/	17.77	18	0.193	0.20	0.353	0.37	0.13
2412	1	Right	Tilt	/	17.77	18	0.130	0.14	0.243	0.26	0.18

As shown above table, the initial test position for head is “Left Touch”. So the head SAR of WLAN is presented as below:

Table 14.47: SAR Values (WLAN - Head) – 802.11b 1Mbps (Full SAR)

Frequency		Side	Test Position	Figure No.	Ambient Temperature: 22.5°C		Liquid Temperature: 22.0°C				Power Drift (dB)	Note
MHz	Ch.				Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)		
2412	1	Left	Touch	Fig.17	17.77	18	0.354	0.37	0.768	0.81	0.13	original
2412	1	Right	Touch	/	17.77	18	0.190	0.20	0.349	0.37	0.13	original
2437	6	Left	Touch	/	17.61	18	0.328	0.36	0.735	0.80	0.07	original
2412	1	Left	Touch	/	17.77	18	0.282	0.30	0.587	0.62	0.06	new

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. A maximum transmission duty factor of 97.7% is achievable for WLAN in this project and the scaled reported SAR is presented as below.

Table 14.48: SAR Values (WLAN - Head) – 802.11b 1Mbps (Scaled Reported SAR)

Frequency		Side	Test Position	Ambient Temperature: 22.5°C		Liquid Temperature: 22.0°C	
MHz	Ch.			Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)
2412	1	Left	Touch	97.7%	100%	0.81	0.83
2412	1	Right	Touch	97.7%	100%	0.37	0.38

SAR is not required for OFDM because the 802.11b adjusted SAR ≤ 1.2 W/kg.

Body Evaluation

Table 14.49: SAR Values (WLAN - Body)– 802.11b 1Mbps (Fast SAR)

Frequency		Test Position	Figure No.	Ambient Temperature: 23.0°C		Liquid Temperature: 22.5°C		Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.			Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)			
2412	1	Front	/	17.77	18	0.104	0.11	0.193	0.20	0.07
2412	1	Rear	/	17.77	18	0.133	0.14	0.270	0.28	0.04
2412	1	Right	/	17.77	18	0.083	0.09	0.160	0.17	0.02
2412	1	Top	/	17.77	18	0.069	0.07	0.132	0.14	0.15

Note1: The distance between the EUT and the phantom bottom is 10mm.

As shown above table, the initial test position for body is “Rear”. So the body SAR of WLAN is presented as below:

Table 14.50: SAR Values (WLAN - Body) – 802.11b 1Mbps (Full SAR)

Frequency		Test Position	Figure No.	Ambient Temperature: 23.0°C		Liquid Temperature: 22.5°C		Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)	Note
MHz	Ch.			Conducted Power (dBm)	Max. tune-upPower (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)				
2412	1	Rear	Fig.18	17.77	18	0.129	0.14	0.266	0.28	0.04	original
2412	1	Rear	/	17.77	18	0.056	0.06	0.117	0.12	0.13	new

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. A maximum transmission duty factor of 97.7% is achievable for WLAN in this project and the scaled reported SAR is presented as below.

Table 14.51: SAR Values (WLAN - Body) – 802.11b 1Mbps (Scaled Reported SAR)

Frequency		Test Position	Ambient Temperature: 22.5°C		Liquid Temperature: 22.0°C	
MHz	Ch.		Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)
2437	6	Rear	97.7%	100%	0.28	0.29

SAR is not required for OFDM because the 802.11b adjusted SAR \leq 1.2 W/kg.

15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Table 15.1: SAR Measurement Variability for Body GSM 1900 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1880	661	Bottom	10	0.895	0.887	1.01	/

Table 15.2: SAR Measurement Variability for Body WCDMA 1900 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1907.6	9538	Bottom	10	0.935	0.921	1.02	/

Table 15.3: SAR Measurement Variability for Body WCDMA 1700 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1752.6	1513	Bottom	10	0.833	0.819	1.02	/

Table 15.4: SAR Measurement Variability for Body LTE Band 2 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1860	18700	Bottom	10	0.933	0.927	1.01	/

16 Measurement Uncertainty

16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6	N	1	1	1	6	6	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	1	1	1.6	1.6	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	6.4	6.4	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	0.5	0.5	∞
5	Detection limit	B	1.0	N	1	1	1	1	1	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.6	0.6	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.0	0.0	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.0	1.0	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	5
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1	0.28	9
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	0.31	0.25	9
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						11.5	11.4	95.5
Expanded uncertainty (Confidence interval of 95 %)		$u_e = 2u_c$						22.9	22.7	

16.2 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6	N	1	1	1	6	6	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	1	1	1.6	1.6	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	6.4	6.4	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	0.5	0.5	∞
5	Detection limit	B	1.0	R	1	1	1	1	1	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.6	0.6	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.0	0.0	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.0	1.0	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
11	Probe positioned mech. Restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
14	Fast SAR z-Approximation	B	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	5
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1	0.28	9
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	0.31	0.25	9
Combined standard uncertainty			$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$					12.1	12.0	95.5
Expanded uncertainty (Confidence interval of 95 %)			$u_e = 2u_c$					24.3	24.1	

17MAIN TEST INSTRUMENTS

Table 17.1: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent E5071C	MY46103759	November20,2015	One year
02	Dielectricprobe	85070E	MY44300317	/	
03	Power meter	NRVD	101253	March 5,2015	One year
04	Power sensor	NRV-Z5	100333		
05	Signal Generator	E8257D	MY47461211	June15, 2016	One year
06	Amplifier	VTL5400	0404	/	
07	BTS	E5515C	GB46110723	May19, 2016	One year
08	Radio Communication Analyzer	Anristu MT8820C	6201341853	March27, 2015	One year
09	E-field Probe	SPEAG ES3DV3	3151	October30, 2015	One year
10	DAE	SPEAG DAE4	786	November 16, 2015	One year
11	Dipole Validation Kit	SPEAG D750V3	1017	July 20, 2016	One year
12	Dipole Validation Kit	SPEAG D835V2	4d057	October22, 2015	Three year
13	Dipole Validation Kit	SPEAG D1800V2	2d147	November 3, 2015	Three year
14	Dipole Validation Kit	SPEAG D1900V2	5d088	November 4, 2015	Three year
15	Dipole Validation Kit	SPEAG D2450V2	873	October 30, 2015	Three year
16	E-field Probe	SPEAG EX3DV4	3633	June21, 2016	One year
17	Power meter	NRP	102603	January 10,2016	One year
18	Power sensor	NRP-Z51	102211		
19	Radio Communication Analyzer	Anristu MT8820C	6201563767	February3, 2016	One year

END OF REPORT BODY

ANNEX A Graph Results

GSM 850 Right Cheek Low

Date/Time: 2016-1-5

Electronics: DAE4 Sn786

Medium: Head 900 MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 40.162$; $\rho = 1000$ kg/m³

Ambient Temperature:22.0°C Liquid Temperature:21.5°C

Communication System: GSM Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3151 ConvF(6, 6, 6);

Right Cheek Low/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.118 W/kg

Right Cheek Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.296 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

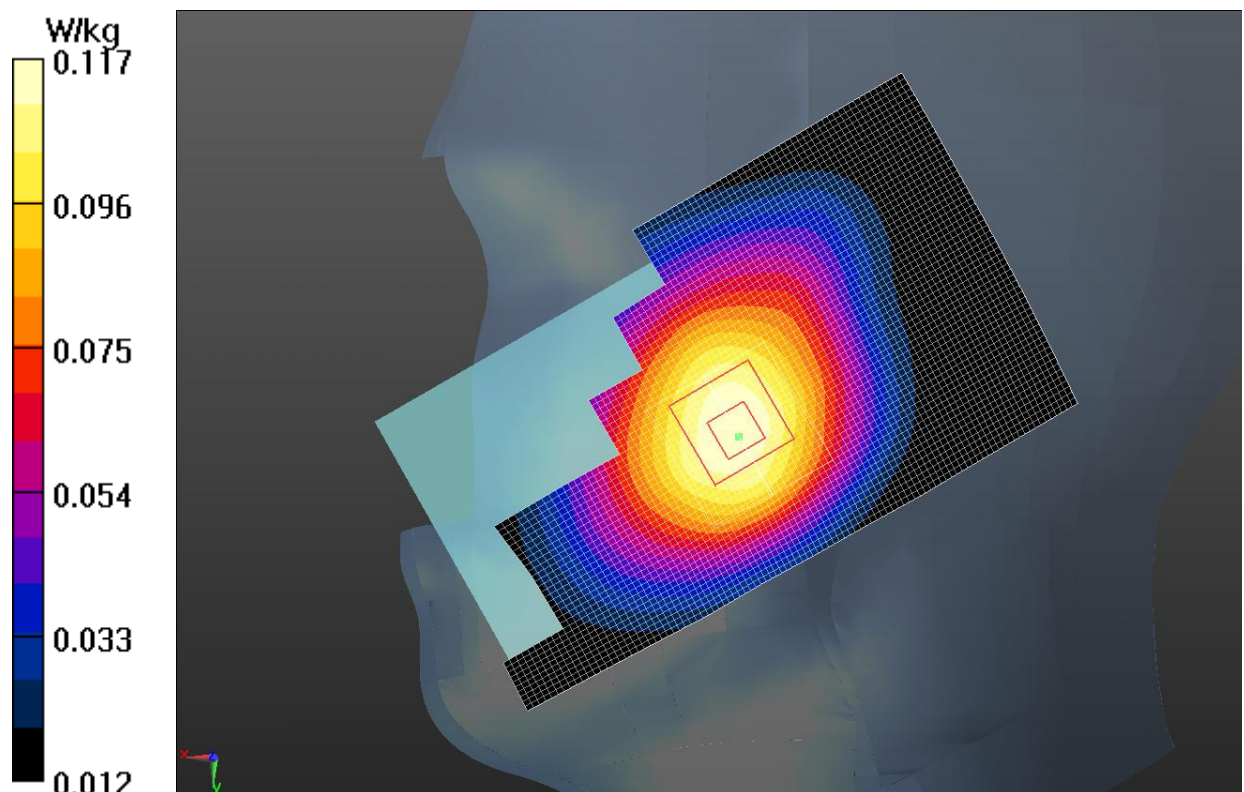


Fig.1 GSM 850MHz CH128

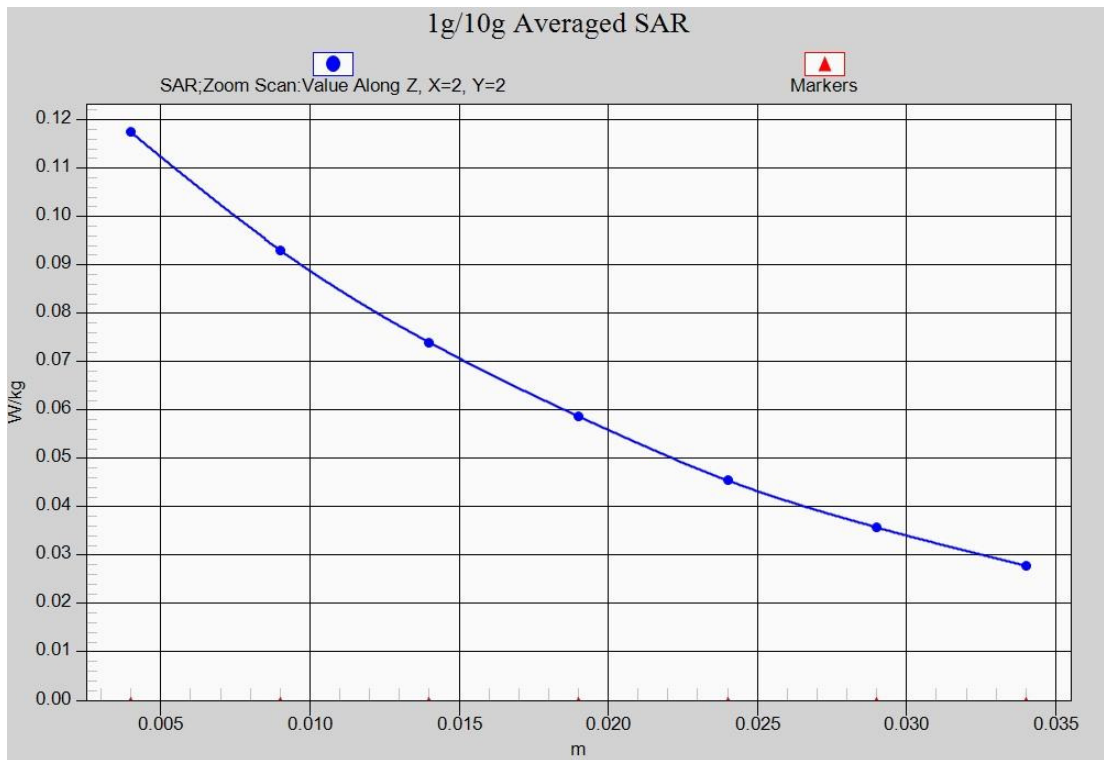


Fig.1-1 Z-Scan at power reference point (GSM 850 MHz CH128)

GSM 850 Body RearLow

Date/Time: 2016-1-6

Electronics: DAE4 Sn786

Medium: 850Body MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.959$ S/m; $\epsilon_r = 53.571$; $\rho = 1000$ kg/m³

Ambient Temperature:22.0°C Liquid Temperature:21.5°C

Communication System: 4 slot GPRS Frequency: 824.2 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3151 ConvF(6.13, 6.13, 6.13);

Rear side Low/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.234 W/kg

Rear side Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.609 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.231 W/kg

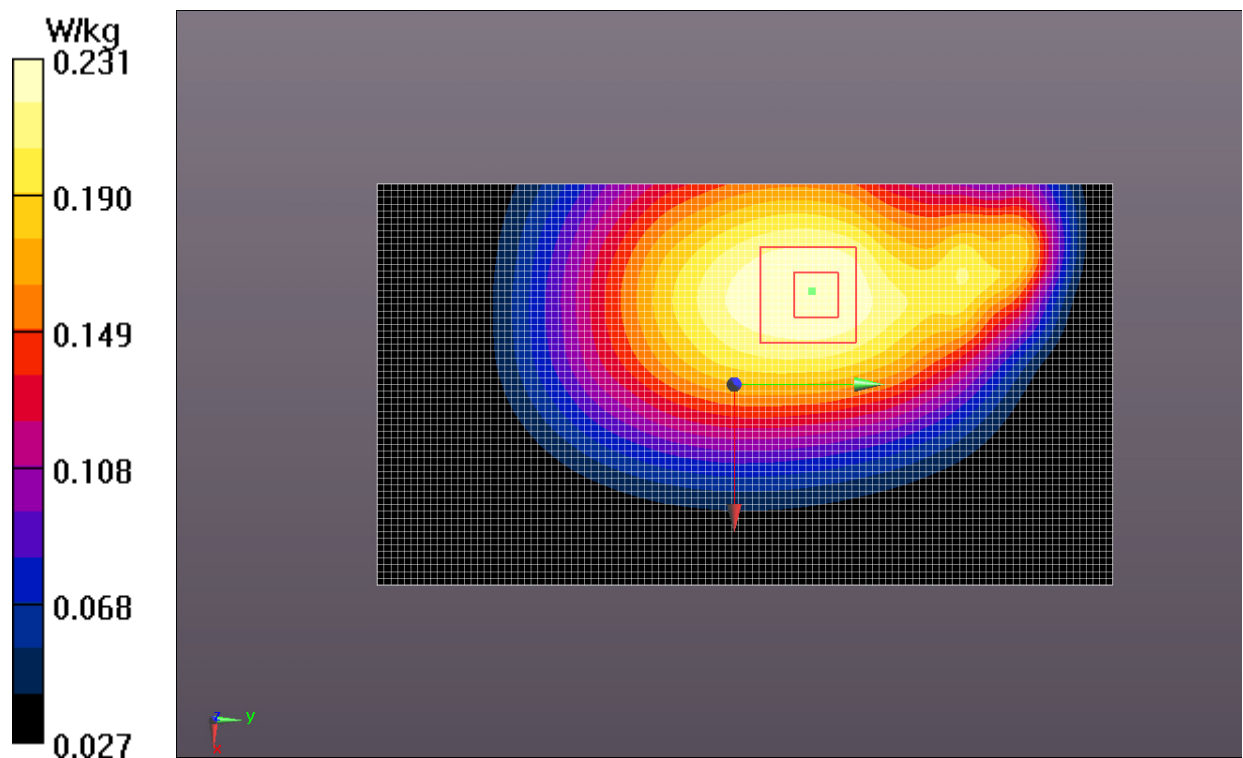


Fig.2 GSM 850 MHz CH128

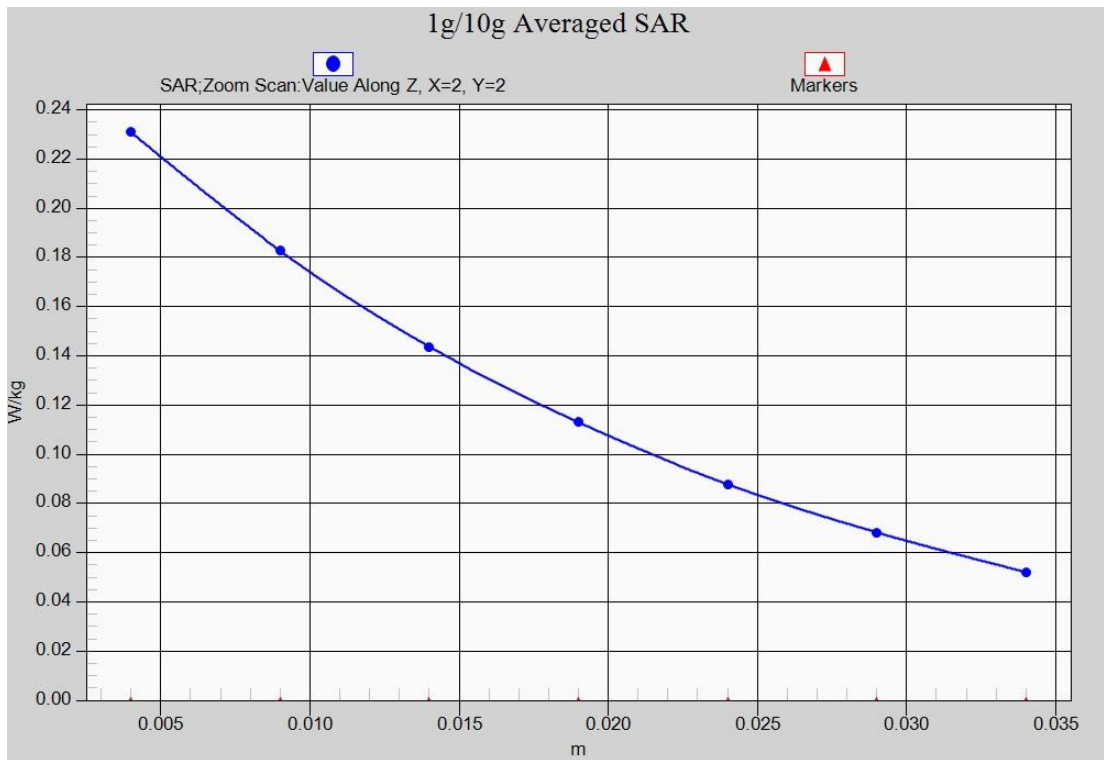


Fig.2-1 Z-Scan at power reference point (GSM 850 MHz CH128)

GSM1900 Left Cheek Middle

Date/Time: 2016-1-12

Electronics: DAE4 Sn786

Medium: 1900 Head

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.394$ S/m; $\epsilon_r = 38.388$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: GSM Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3151 ConvF(4.96, 4.96, 4.96);

Left Cheek Middle/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.339 W/kg

Left Cheek Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.326 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.484 W/kg

SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.314 W/kg

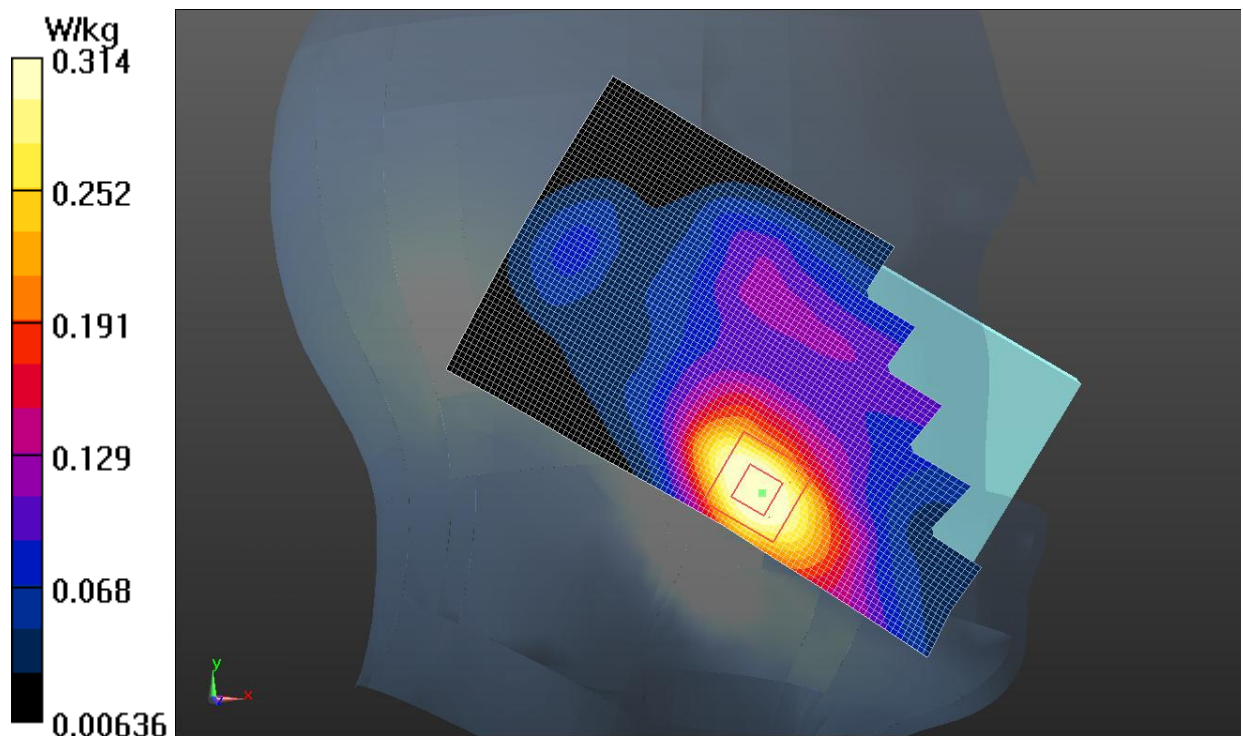


Fig.3 GSM 1900 MHz CH661

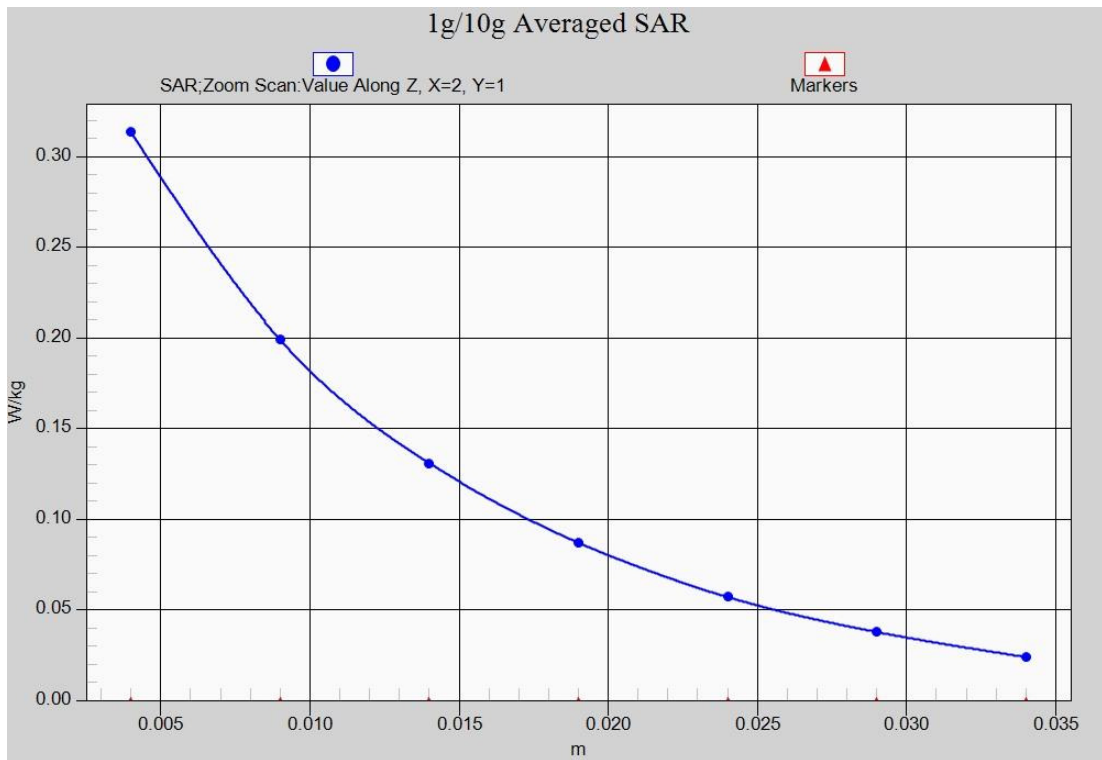


Fig.3-1 Z-Scan at power reference point (GSM 1900 MHz CH661)

GSM1900 Body BottomMiddle

Date/Time: 2016-1-31

Electronics: DAE4 Sn786

Medium: 1900Body MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 50.91$; $\rho = 1000$ kg/m³

Ambient Temperature:22.0°C Liquid Temperature:21.5°C

Communication System: 4 slot GPRS Frequency: 1880 MHz Duty Cycle: 1:2.0

Probe: ES3DV3 - SN3151 ConvF(4.5, 4.5, 4.5);

Bottom side Middle/Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.04 W/kg

Bottom side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.230 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.895 W/kg; SAR(10 g) = 0.476 W/kg

Maximum value of SAR (measured) = 1.00 W/kg

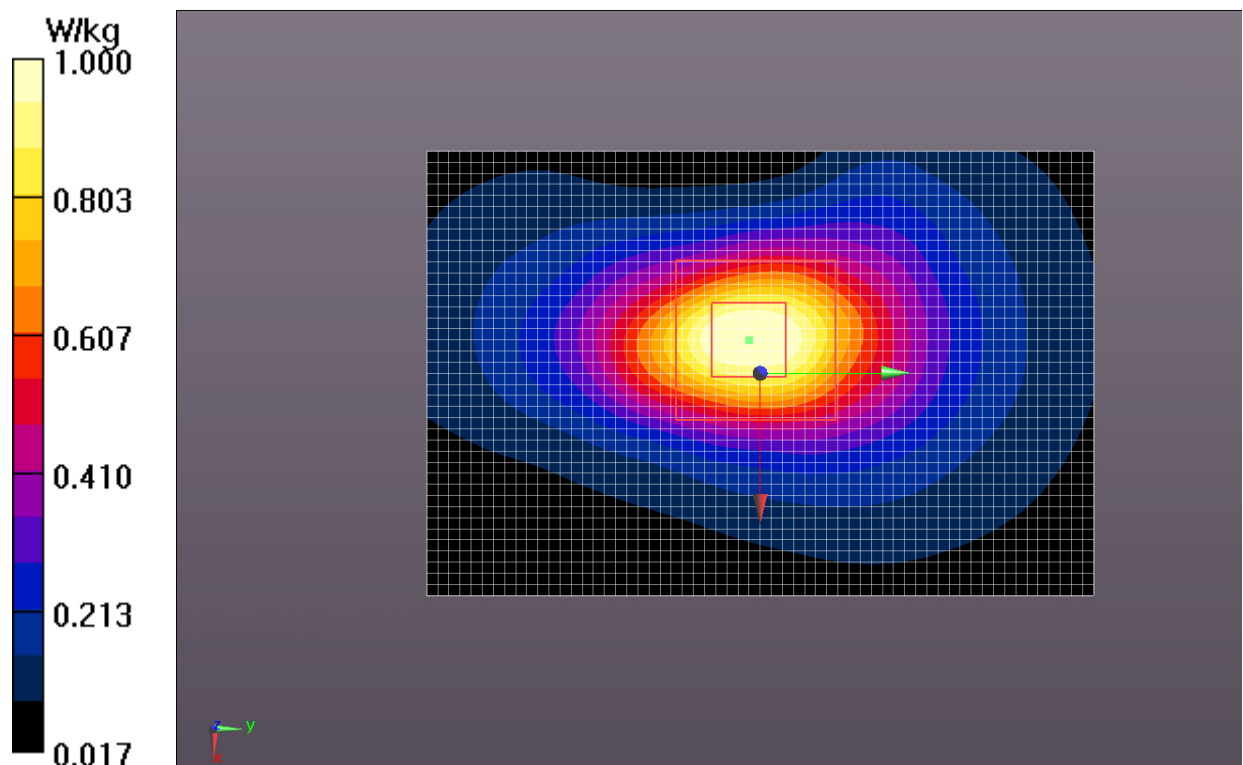


Fig.4 GSM 1900 MHz CH661

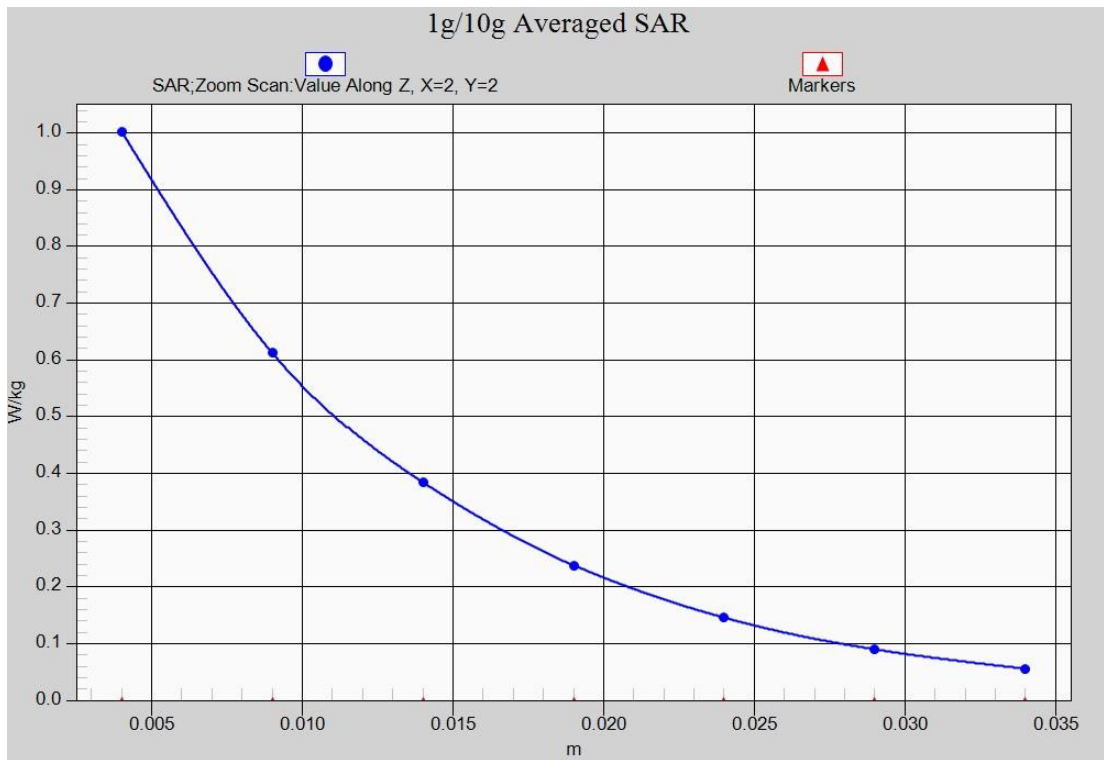


Fig.4-1 Z-Scan at power reference point (GSM 1900 MHz CH661)

WCDMA 850 Right Cheek Low

Date/Time: 2016-1-5

Electronics: DAE4 Sn786

Medium: Head 900 MHz

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 40.166$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: WCDMA Frequency: 826.4 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3151 ConvF(6, 6, 6);

Right Cheek Low/Area Scan (61x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.109 W/kg

Right Cheek Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.126 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.109 W/kg

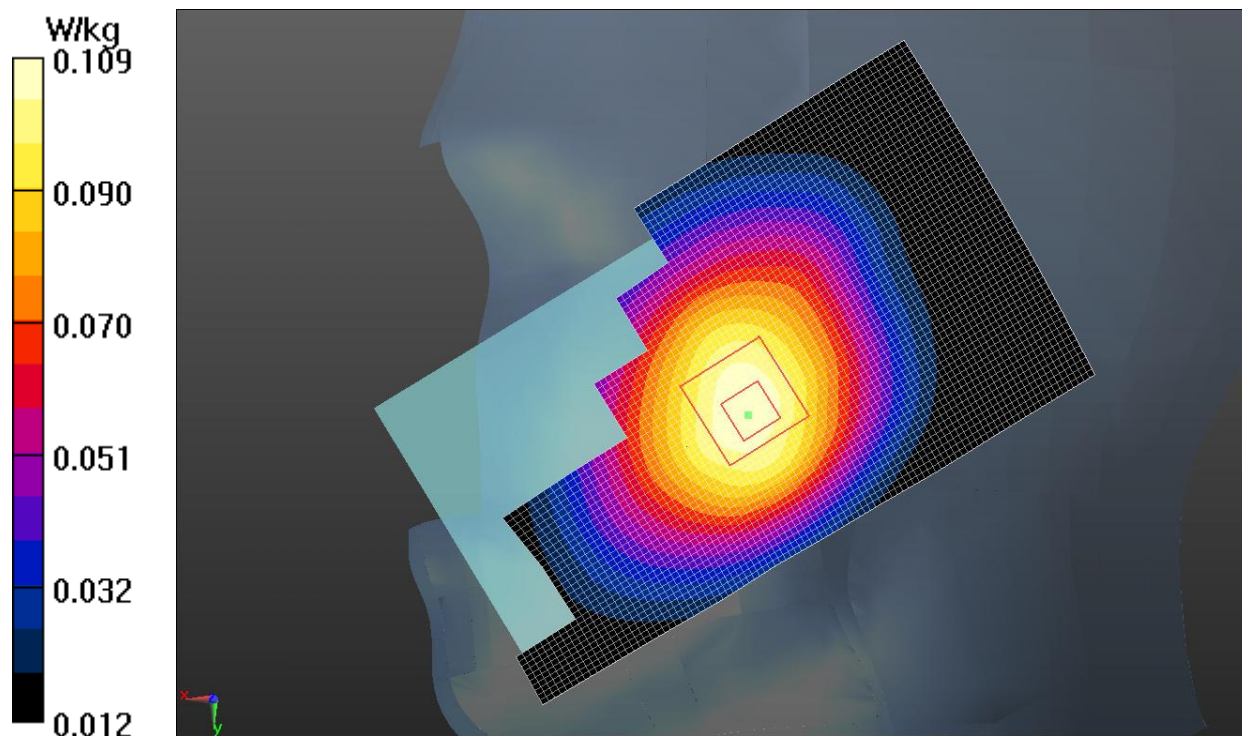


Fig.5 WCDMA 850 CH4132

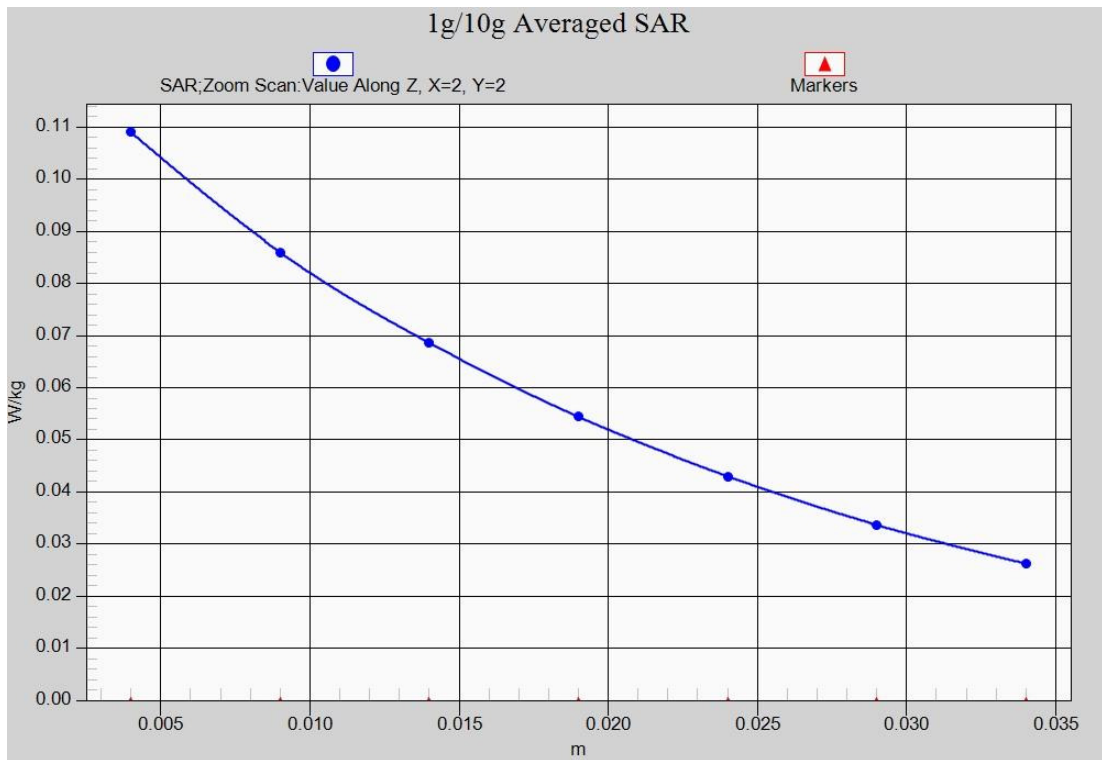


Fig.5-1 Z-Scan at power reference point (WCDMA 850 CH4132)

WCDMA 850 Body RearLow

Date/Time: 2016-1-6

Electronics: DAE4 Sn786

Medium: 850Body MHz

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.961$ S/m; $\epsilon_r = 53.553$; $\rho = 1000$ kg/m³

Ambient Temperature:22.0°C Liquid Temperature:21.5°C

Communication System: WCDMA Frequency: 826.4 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3151 ConvF(6.13, 6.13, 6.13);

Rear side Low/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.171 W/kg

Rear side Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.988 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.167 W/kg

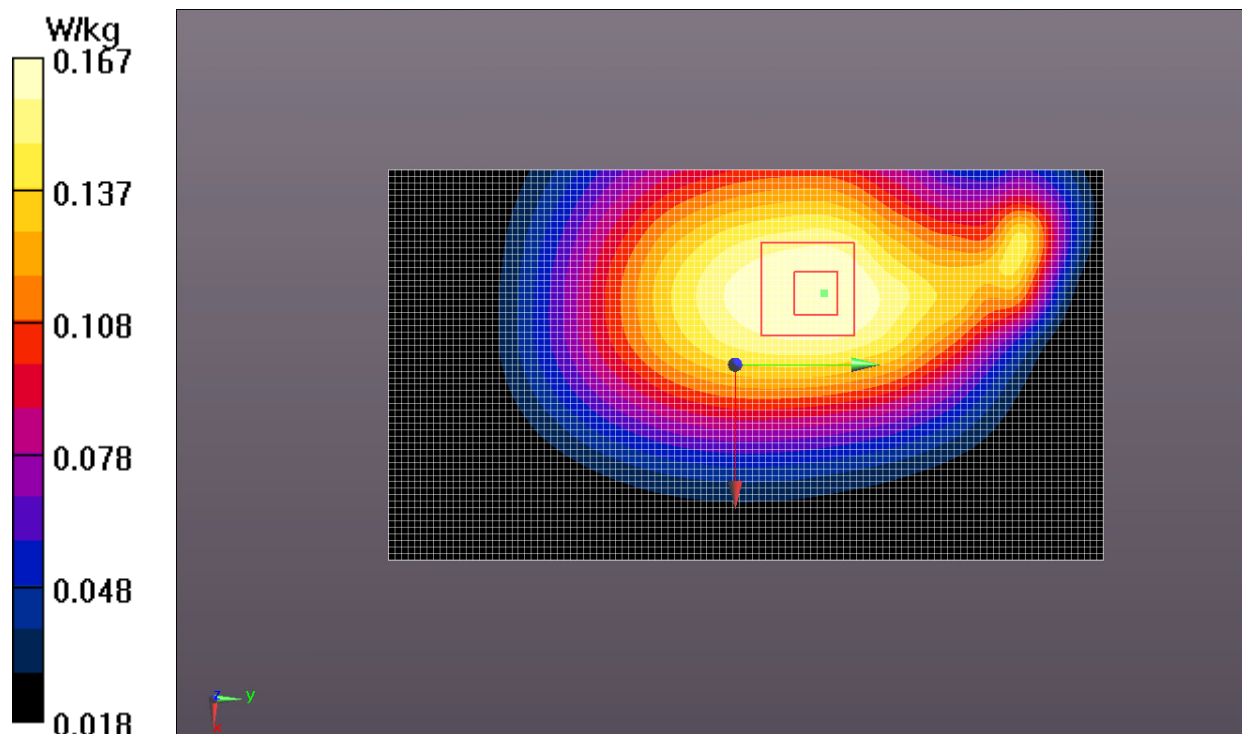


Fig.6 WCDMA 850 CH4128

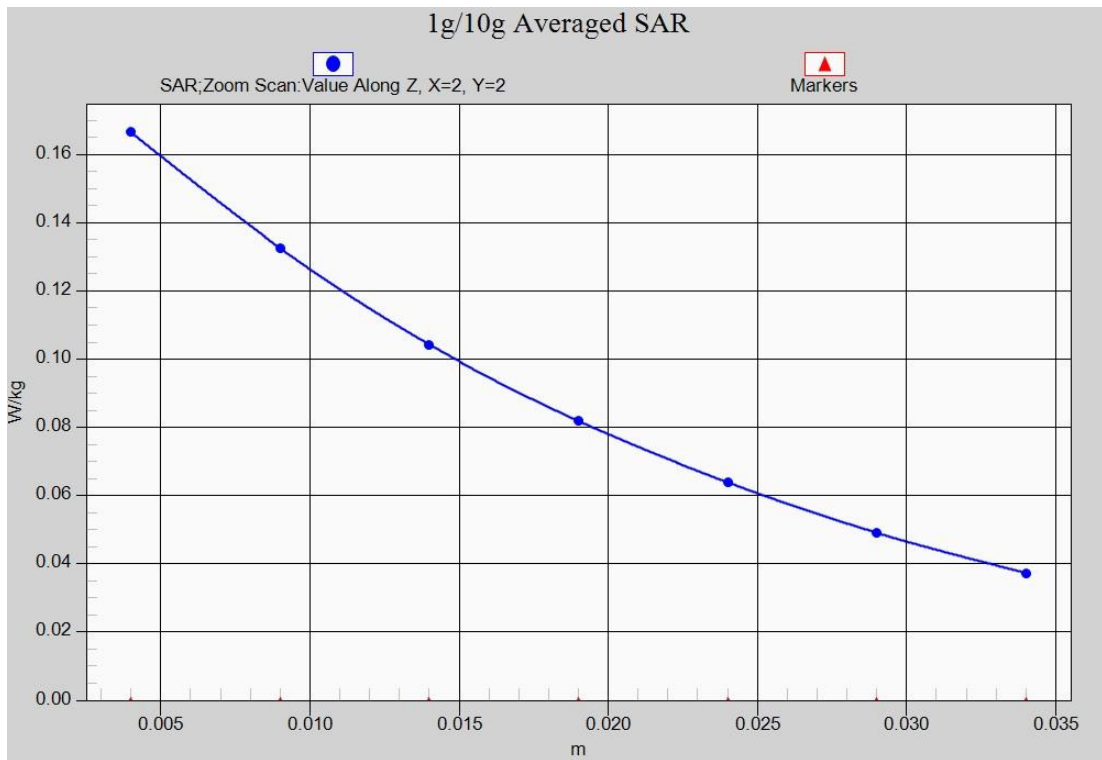


Fig.6-1 Z-Scan at power reference point (WCDMA850 CH4132)

WCDMA 1900 Left Cheek High

Date/Time: 2016-1-12

Electronics: DAE4 Sn786

Medium: 1900 Head

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 38.304$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C

Communication System: WCDMA Frequency: 1908 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3151 ConvF(4.96, 4.96, 4.96); Calibrated: 2015-10-30

Left Cheek High/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.425 W/kg

Left Cheek High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.336 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.600 W/kg

SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 0.411 W/kg

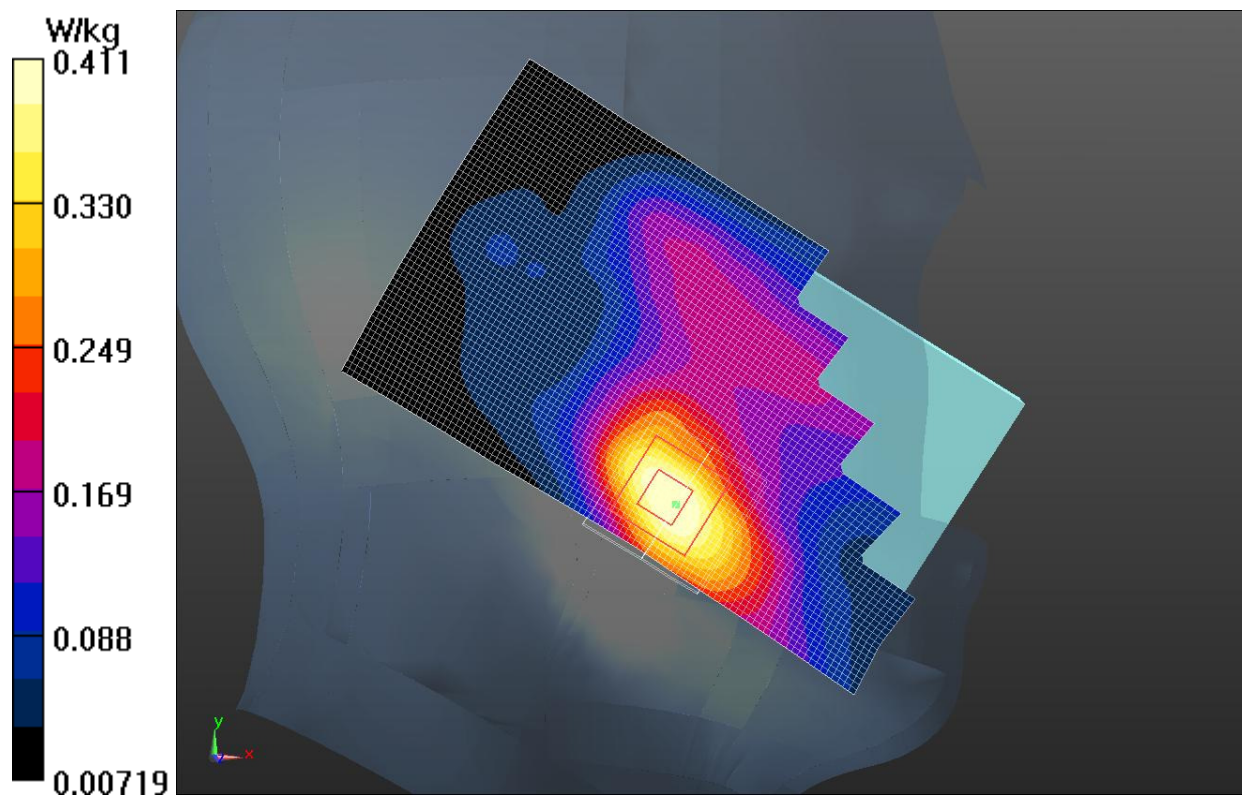


Fig.7 WCDMA1900 CH9538

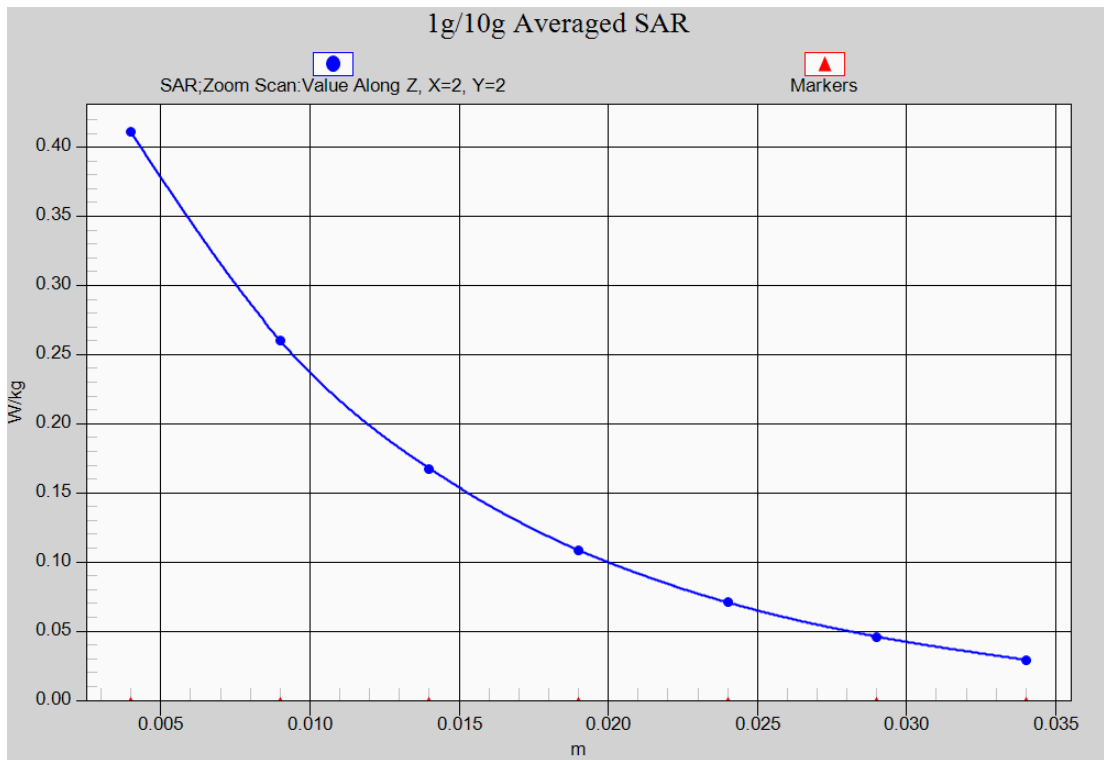


Fig.7-1 Z-Scan at power reference point (WCDMA1900 CH9538)

WCDMA 1900 Body BottomHigh

Date/Time: 2016-1-31

Electronics: DAE4 Sn786

Medium: 1900Body MHz

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.593$ S/m; $\epsilon_r = 52.14$; $\rho = 1000$ kg/m³

Ambient Temperature:22.0°C Liquid Temperature:21.5°C

Communication System: WCDMA Frequency: 1908 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3151 ConvF(4.5, 4.5, 4.5);

Bottom side High/Area Scan (51x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.03 W/kg

Bottom side High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.599 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.935 W/kg; SAR(10 g) = 0.492 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

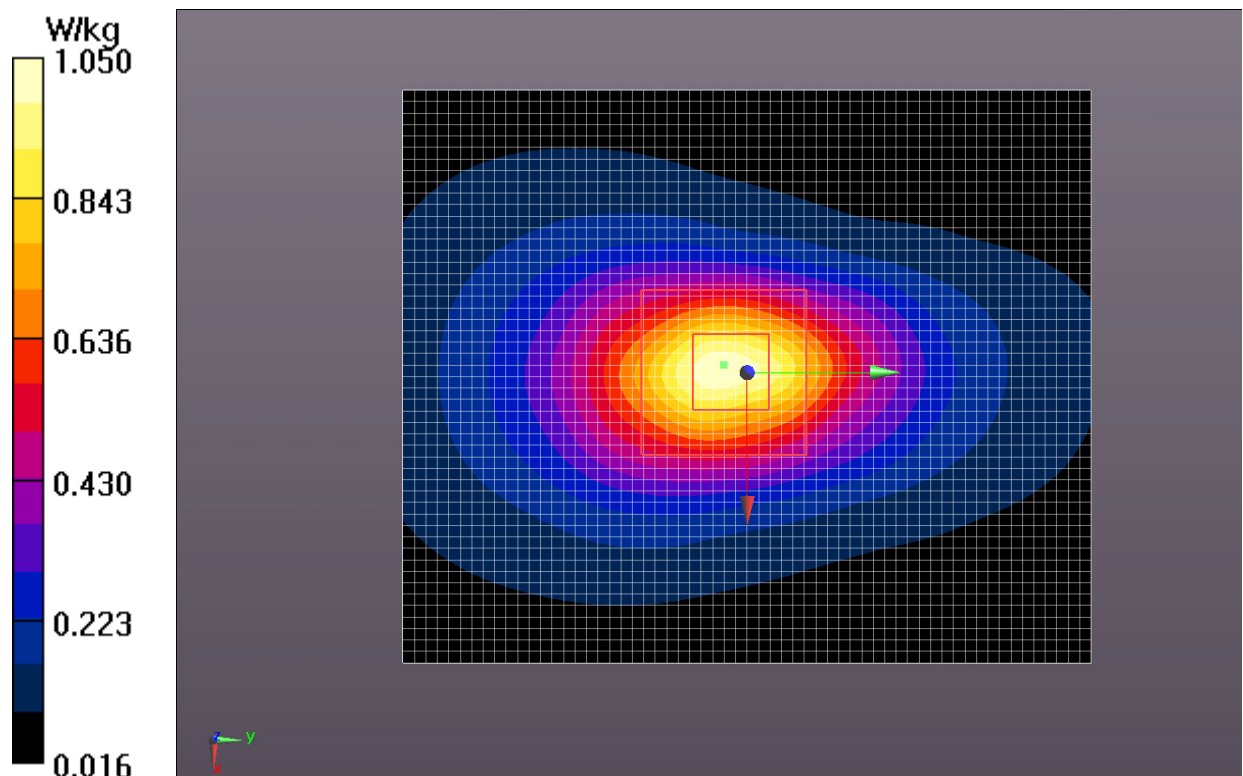


Fig.8 WCDMA1900 CH9538

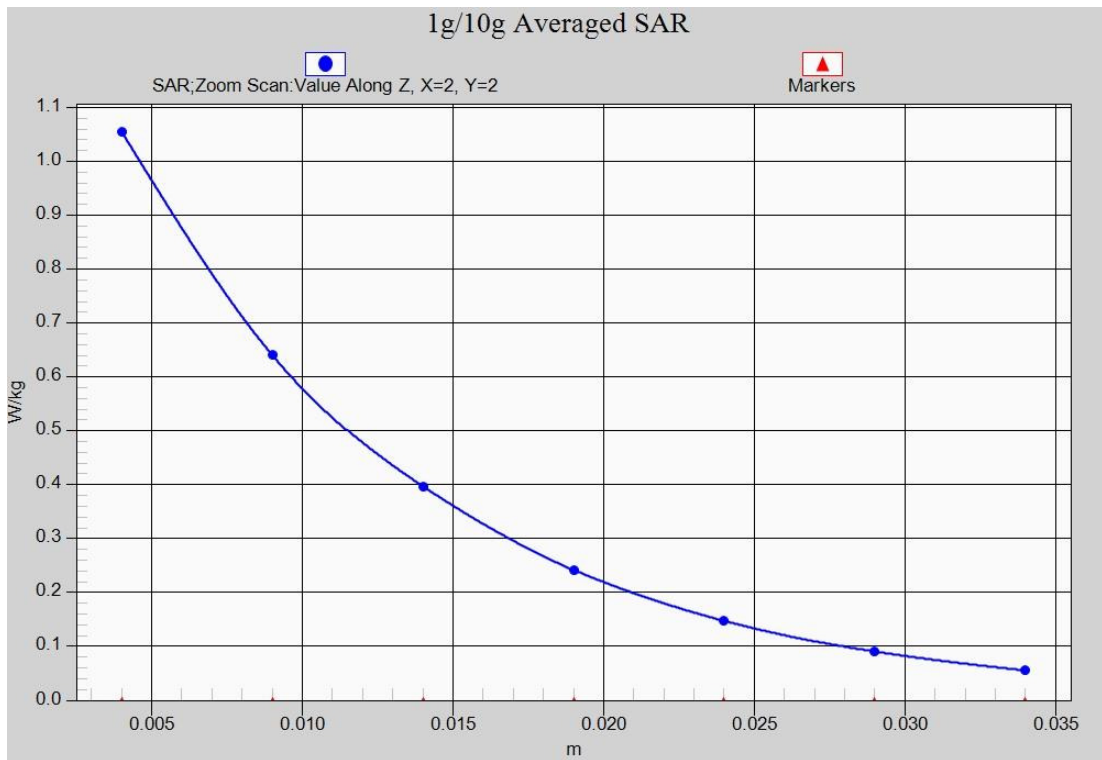


Fig.8-1 Z-Scan at power reference point (WCDMA1900 CH9538)

WCDMA 1700 Left Cheek High

Date/Time: 2016-1-6

Electronics: DAE4 Sn786

Medium: Head 1800 MHz

Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.348$ S/m; $\epsilon_r = 37.485$; $\rho = 1000$ kg/m³

Ambient Temperature:22.0°C Liquid Temperature:21.5°C

Communication System: WCDMA Frequency: 1752.6 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3151 ConvF(5.06, 5.06, 5.06);

Left Cheek High/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.540 W/kg

Left Cheek High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.614 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.726 W/kg

SAR(1 g) = 0.483 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.529 W/kg

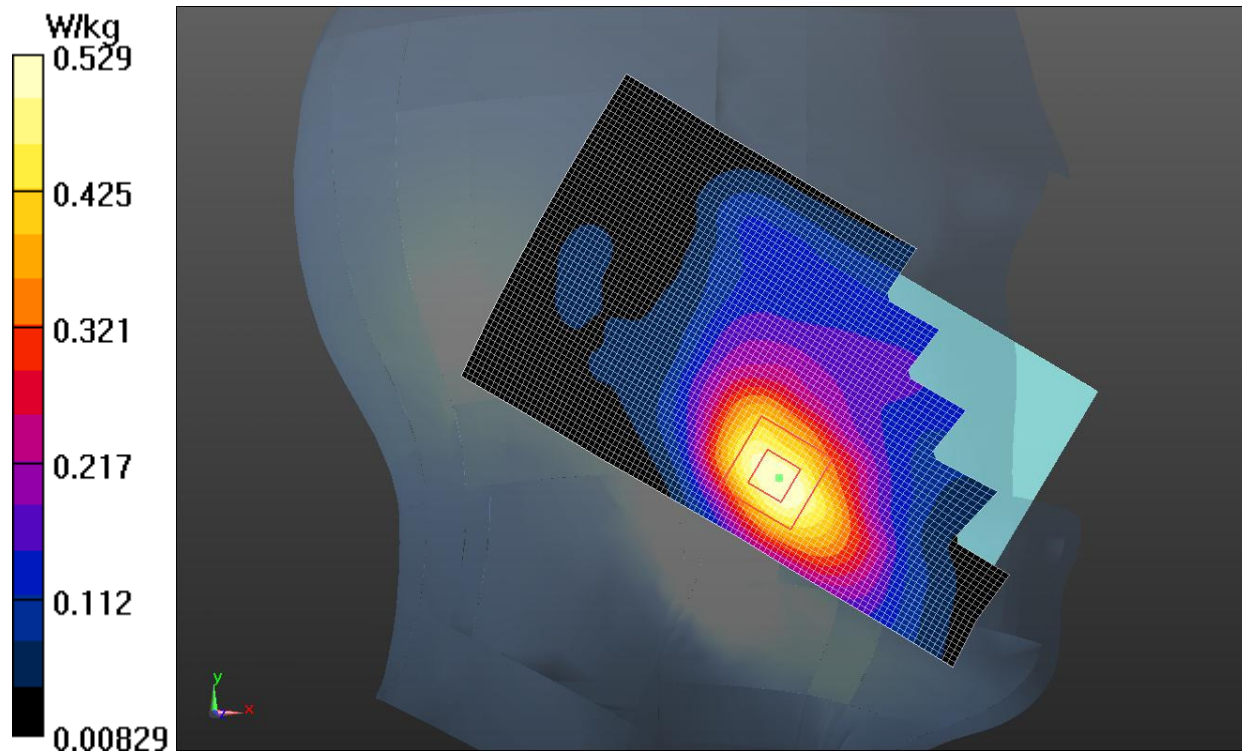


Fig.9 WCDMA1700

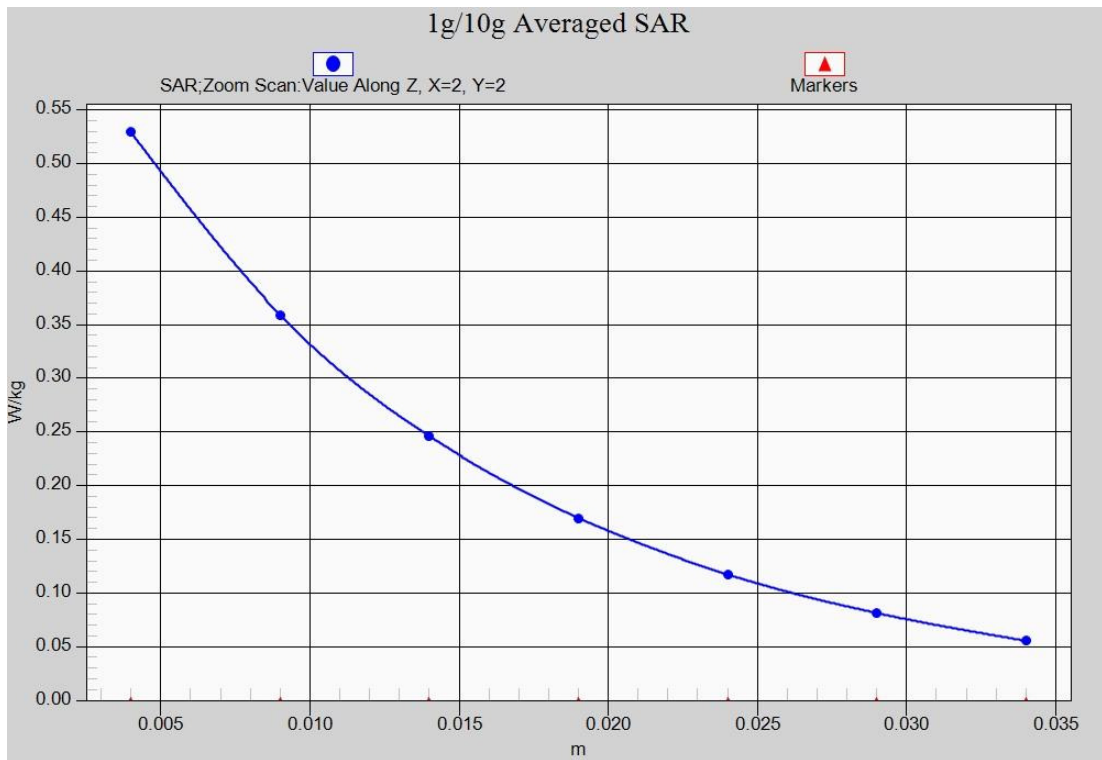


Fig.9-1 Z-Scan at power reference point (WCDMA1700)

WCDMA 1700 Body BottomHigh

Date/Time: 2016-1-7

Electronics: DAE4 Sn786

Medium: 1800Body

Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 52.405$; $\rho = 1000$ kg/m³

Ambient Temperature:22.0°C Liquid Temperature:21.5°C

Communication System: WCDMA Frequency: 1752.6 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3151 ConvF(4.75, 4.75, 4.75);

Bottom side High/Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.905 W/kg

Bottom side High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.437 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.833 W/kg; SAR(10 g) = 0.456 W/kg

Maximum value of SAR (measured) = 0.948 W/kg

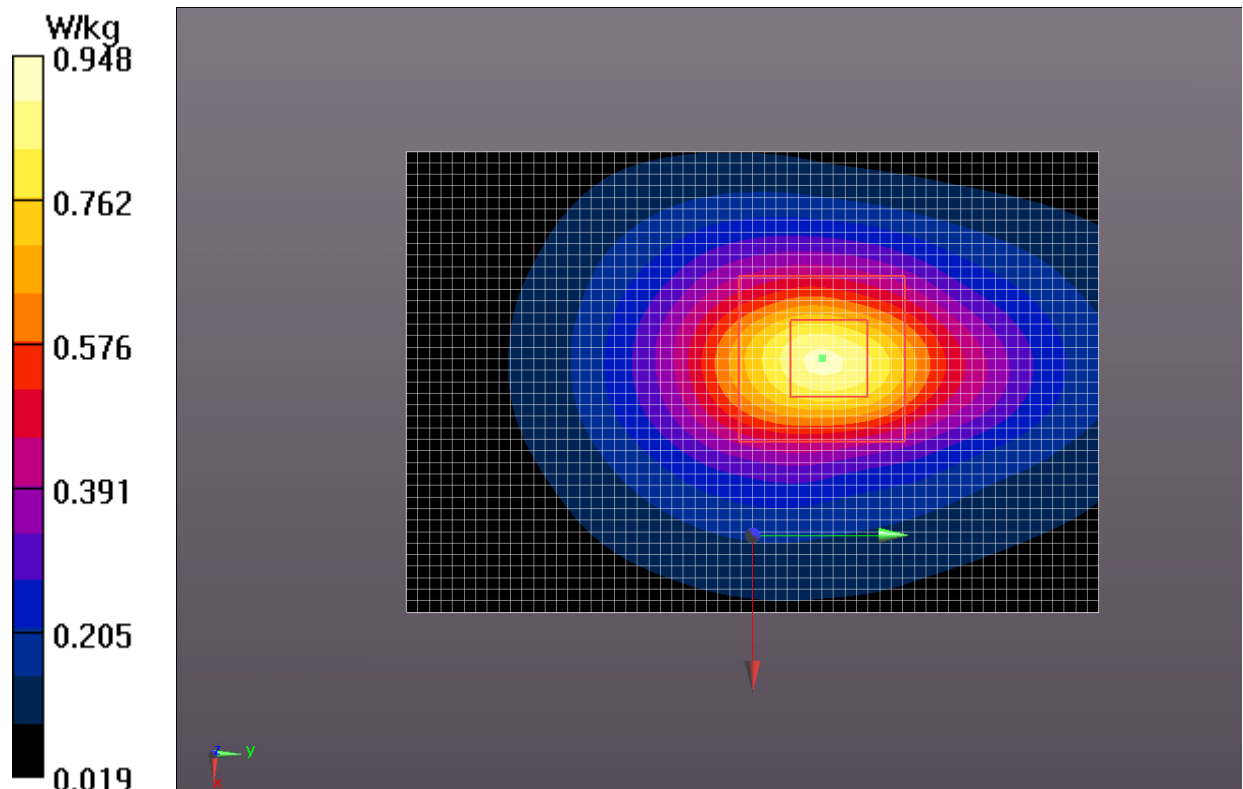


Fig.10 WCDMA1700

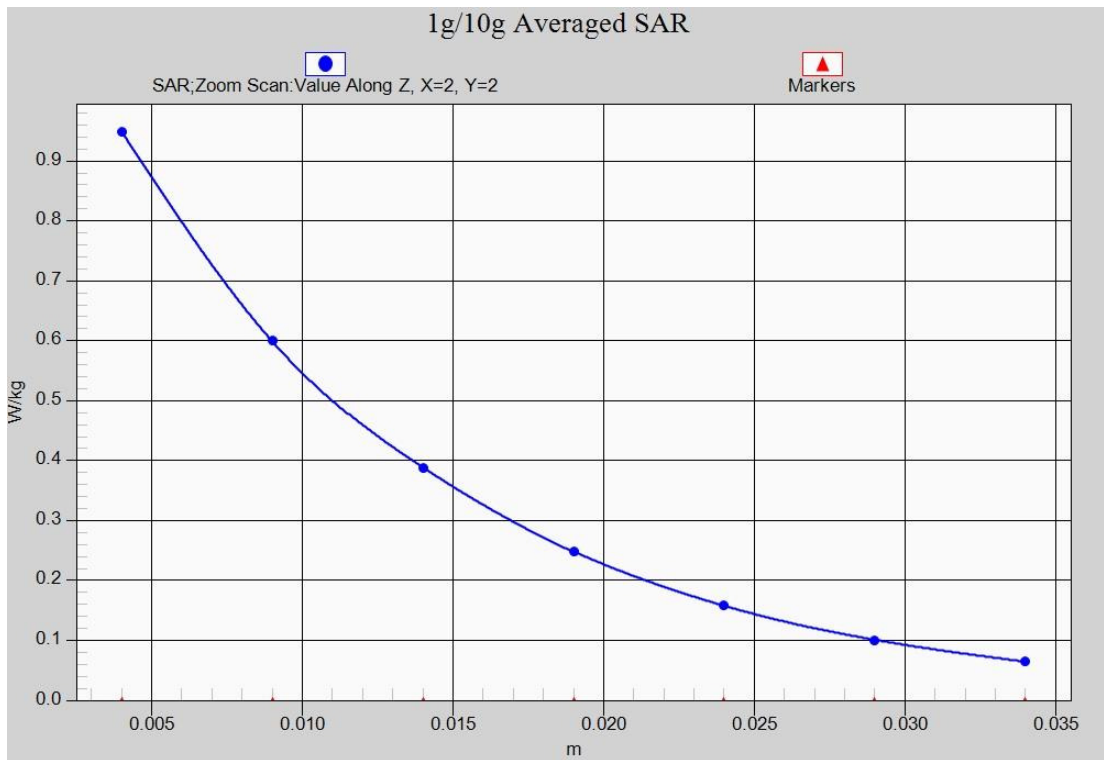


Fig.10-1 Z-Scan at power reference point (WCDMA1700)

LTE Band 2Left Cheek Low with QPSK_20MHz_1RB_Low

Date/Time: 2016-1-12

Electronics: DAE4 Sn786

Medium: 1900 Head

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.425$ S/m; $\epsilon_r = 40.861$; $\rho = 1000$ kg/m³

Ambient Temperature:22.0°C Liquid Temperature:21.5°C

Communication System: LTE_FDD Frequency: 1860 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3151 ConvF(4.96, 4.96, 4.96);

Left Cheek Low_1RB_Low/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.448 W/kg

Left Cheek Low_1RB_Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.885 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.643 W/kg

SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.225 W/kg

Maximum value of SAR (measured) = 0.480 W/kg

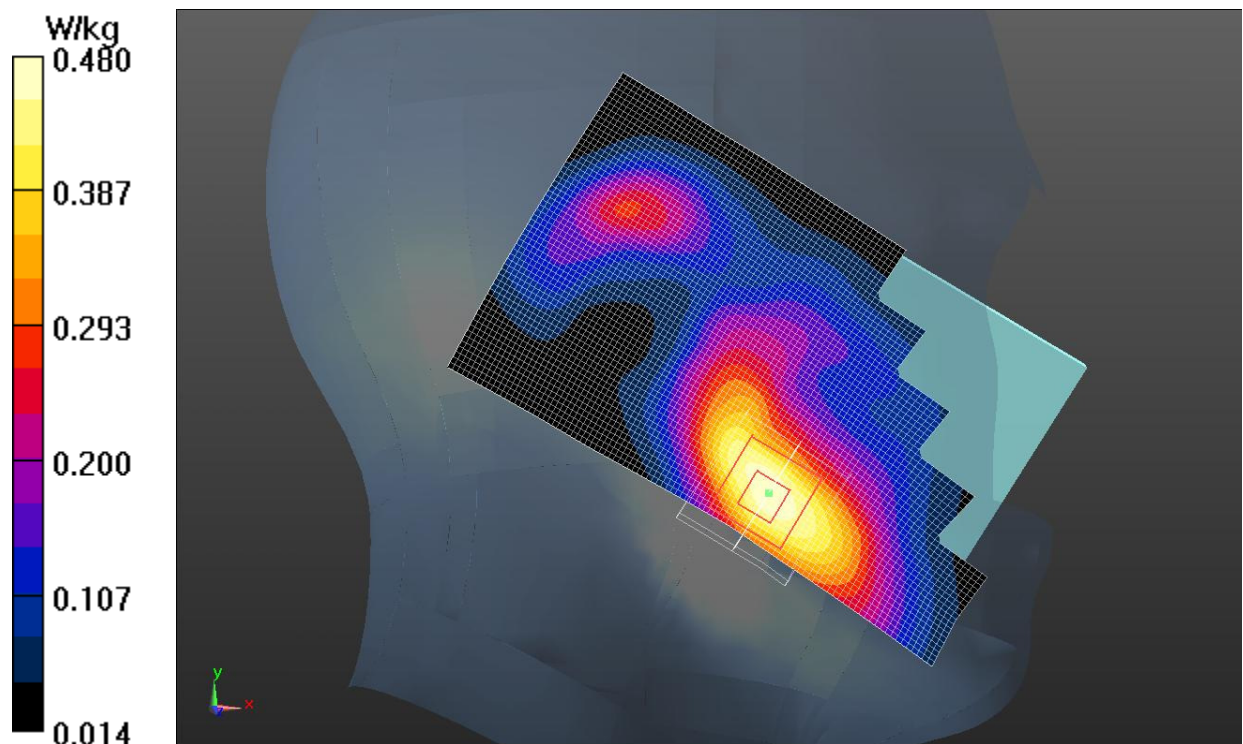


Fig.11 LTE Band 2 CH18700

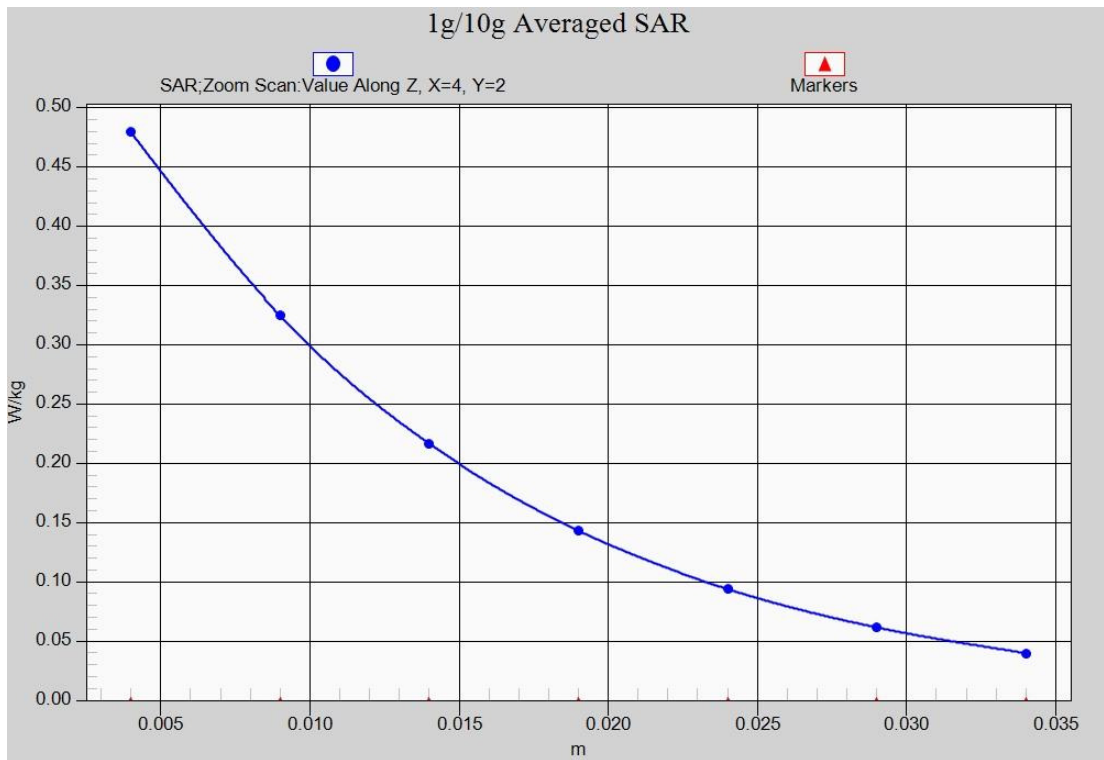


Fig.11-1 Z-Scan at power reference point (Band 2CH18700)