



**FCC PART 15C
TEST REPORT
No. I17N00032-WLAN**

for

Yulong Computer Telecommunication Scientific (Shenzhen) Co.,Ltd.

Smart phone

Model Name: Coolpad 3632A

With

Hardware Version: P2

Software Version: 7.0.013.00.P0.161201.3632A.tmo

FCC ID: R38YL3632A

Issued Date: 2017-02-20

Test Laboratory:

FCC 2.948 Listed: No.342690

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT.

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

[Tel:+86\(0\)10-62304633-2512](tel:+86(0)10-62304633-2512), [Fax:+86\(0\)10-62304633-2504](tel:+86(0)10-62304633-2504)

Email: cttl_terminals@catr.cn, website: www.chinattl.com

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I17N00032-WLAN	Rev.0	1st edition	2017-02-15
I17N00032-WLAN	Rev.1	2nd edition	2017-02-20

CONTENTS

1. TEST LABORATORY	8
1.1. TESTING LOCATION	8
1.2. TESTING ENVIRONMENT	8
1.3. PROJECT DATA	8
1.4. SIGNATURE	8
2. CLIENT INFORMATION	9
2.1. APPLICANT INFORMATION	9
2.2. MANUFACTURER INFORMATION	9
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	10
3.1. ABOUT EUT	10
3.2. INTERNAL IDENTIFICATION OF EUT	10
3.3. INTERNAL IDENTIFICATION OF AE	10
4. REFERENCE DOCUMENTS	11
4.1. DOCUMENTS SUPPLIED BY APPLICANT	11
4.2. REFERENCE DOCUMENTS FOR TESTING	11
5. TEST RESULTS	12
5.1. SUMMARY OF TEST RESULTS	12
5.2. STATEMENTS	12
5.3. TERMS USED IN THE RESULT TABLE	12
5.4. LABORATORY ENVIRONMENT	13
6. TEST FACILITIES UTILIZED	14
ANNEX A: MEASUREMENT RESULTS FOR RECEIVER	15
A.0 ANTENNA REQUIREMENT	15
A.1 MAXIMUM AVERAGE OUTPUT POWER	16
A.2 PEAK POWER SPECTRAL DENSITY	17
A.3 OCCUPIED 6DB BANDWIDTH	18
A.4 BAND EDGES COMPLIANCE	19
A.5 TRANSMITTER SPURIOUS EMISSION	20
A.5.1 TRANSMITTER SPURIOUS EMISSION - CONDUCTED	20
A.5.2 TRANSMITTER SPURIOUS EMISSION - RADIATED	22
A.6 AC POWERLINE CONDUCTED EMISSION	29
ANNEX B: TEST LAYOUTS	31
FIG.1 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,1MBPS)	31
FIG.2 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,1MBPS)	31
FIG.3 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,1MBPS)	32
FIG.4 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,2MBPS)	32
FIG.5 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,2MBPS)	33

FIG.6	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,2MBPS)	33
FIG.7	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,5.5MBPS)	34
FIG.8	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,5.5MBPS)	34
FIG.9	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,5.5MBPS)	35
FIG.10	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,11MBPS)	35
FIG.11	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,11MBPS)	36
FIG.12	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,11MBPS)	36
FIG.13	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,6MBPS)	37
FIG.14	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,6MBPS)	37
FIG.15	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,6MBPS)	38
FIG.16	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,9MBPS)	38
FIG.17	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,9MBPS)	39
FIG.18	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,9MBPS)	39
FIG.19	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,12MBPS)	40
FIG.20	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,12MBPS)	40
FIG.21	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,12MBPS)	41
FIG.22	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,18MBPS)	41
FIG.23	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,18MBPS)	42
FIG.24	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,18MBPS)	42
FIG.25	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,24MBPS)	43
FIG.26	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,24MBPS)	43
FIG.27	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,24MBPS)	44
FIG.28	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,36MBPS)	44
FIG.29	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,36MBPS)	45
FIG.30	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,36MBPS)	45
FIG.31	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,48MBPS)	46
FIG.32	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,48MBPS)	46
FIG.33	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,48MBPS)	47
FIG.34	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,54MBPS)	47
FIG.35	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,54MBPS)	48
FIG.36	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,54MBPS)	48
FIG.37	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS0)	49
FIG.38	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS0)	49
FIG.39	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS0)	50
FIG.40	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS1)	50
FIG.41	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS1)	51
FIG.42	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS1)	51
FIG.43	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS2)	52
FIG.44	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS2))	52
FIG.45	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS2)	53
FIG.46	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS3)	53
FIG.47	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS3)	54
FIG.48	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS3)	54
FIG.49	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS4)	55

FIG.50	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS4)	55
FIG.51	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS4)	56
FIG.52	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS5)	56
FIG.53	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS5)	57
FIG.54	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS5)	57
FIG.55	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS6)	58
FIG.56	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS6)	58
FIG.57	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS6)	59
FIG.58	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS7)	59
FIG.59	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS7)	60
FIG.60	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS7)	60
FIG.61	POWER SPECTRAL DENSITY (802.11B, CH 1)	61
FIG.62	POWER SPECTRAL DENSITY (802.11B, CH 6)	61
FIG.63	POWER SPECTRAL DENSITY (802.11B, CH 11)	62
FIG.64	POWER SPECTRAL DENSITY (802.11G, CH 1)	62
FIG.65	POWER SPECTRAL DENSITY (802.11G, CH 6)	63
FIG.66	POWER SPECTRAL DENSITY (802.11G, CH 11)	63
FIG.67	POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 1)	64
FIG.68	POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 6)	64
FIG.69	POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 11)	65
FIG.70	OCCUPIED 6DB BANDWIDTH (802.11B, CH 1)	65
FIG.71	OCCUPIED 6DB BANDWIDTH (802.11B, CH 6)	66
FIG.72	OCCUPIED 6DB BANDWIDTH (802.11B, CH 11)	66
FIG.73	OCCUPIED 6DB BANDWIDTH (802.11G, CH 1)	67
FIG.74	OCCUPIED 6DB BANDWIDTH (802.11G, CH 6)	67
FIG.75	OCCUPIED 6DB BANDWIDTH (802.11G, CH 11)	68
FIG.76	OCCUPIED 6DB BANDWIDTH (802.11 N-20MHZ, CH 1)	68
FIG.77	OCCUPIED 6DB BANDWIDTH (802.11 N-20MHZ, CH 6)	69
FIG.78	OCCUPIED 6DB BANDWIDTH (802.11 N-20MHZ, CH 11)	69
FIG.79	BAND EDGES (802.11B, CH 1)	70
FIG.80	BAND EDGES (802.11B, CH 11)	70
FIG.81	BAND EDGES (802.11G, CH 1)	71
FIG.82	BAND EDGES (802.11G, CH 11)	71
FIG.83	BAND EDGES (802.11 N-20MHZ, CH 1)	72
FIG.84	BAND EDGES (802.11 N-20MHZ, CH 11)	72
FIG.85	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, CENTER FREQUENCY)	73
FIG.86	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 30 MHZ-1 GHZ)	73
FIG.87	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 1 GHZ-10 GHZ)	74
FIG.88	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 10 GHZ-26 GHZ)	74
FIG.89	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, CENTER FREQUENCY)	75
FIG.90	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 30 MHZ-1 GHZ)	75
FIG.91	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 1 GHZ-10 GHZ)	76
FIG.92	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 10 GHZ-26 GHZ)	76
FIG.93	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, CENTER FREQUENCY)	77

FIG.94	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 30 MHz-1 GHz)	77
FIG.95	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 1 GHz-10 GHz)	78
FIG.96	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 10 GHz-26 GHz)	78
FIG.97	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, CENTER FREQUENCY)	79
FIG.98	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 30 MHz-1 GHz)	79
FIG.99	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 1 GHz-10 GHz)	80
FIG.100	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 10 GHz-26 GHz)	80
FIG.101	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, CENTER FREQUENCY)	81
FIG.102	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 30 MHz-1 GHz)	81
FIG.103	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 1 GHz-10 GHz)	82
FIG.104	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 10 GHz-26 GHz)	82
FIG.105	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, CENTER FREQUENCY)	83
FIG.106	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 30 MHz-1 GHz)	83
FIG.107	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 1 GHz-10 GHz)	84
FIG.108	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 10 GHz-26 GHz)	84
FIG.109	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH1, CENTER FREQUENCY)	85
FIG.110	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH1, 30 MHz-1 GHz)	85
FIG.111	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH1, 1 GHz-10 GHz)	86
FIG.112	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH1, 10 GHz-26 GHz)	86
FIG.113	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH6, CENTER FREQUENCY)	87
FIG.114	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH6, 30 MHz-1 GHz)	87
FIG.115	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH6, 1 GHz-10 GHz)	88
FIG.116	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH6, 10 GHz-26 GHz)	88
FIG.117	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH11, CENTER FREQUENCY)	89
FIG.118	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH11, 30 MHz-1 GHz)	89
FIG.119	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH11, 1 GHz-10 GHz)	90
FIG.120	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH11, 10 GHz-26 GHz)	90
FIG.121	RADIATED SPURIOUS EMISSION (802.11B, CH1, 1 GHz-18 GHz)	91
FIG.122	RADIATED SPURIOUS EMISSION (802.11B, CH6, 9kHz-30MHz)	91
FIG.123	RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz)	92
FIG.124	RADIATED SPURIOUS EMISSION (802.11B, CH6, 1 GHz-18GHz)	92
FIG.125	RADIATED SPURIOUS EMISSION (802.11B, CH6, 18 GHz-26.5GHz)	93
FIG.126	RADIATED SPURIOUS EMISSION (802.11B, CH11, 1 GHz-18GHz)	93
FIG.127	RADIATED EMISSION POWER (802.11B, CH1, 2380GHz~2450GHz)	94
FIG.128	RADIATED EMISSION POWER (802.11B, CH11, 2450GHz~2500GHz)	94
FIG.129	RADIATED SPURIOUS EMISSION (802.11G, CH1, 1 GHz-18 GHz)	95
FIG.130	RADIATED SPURIOUS EMISSION (802.11G, CH6, 9kHz-30MHz)	95
FIG.131	RADIATED SPURIOUS EMISSION (802.11G, CH6, 30MHz-1 GHz)	96
FIG.132	RADIATED SPURIOUS EMISSION (802.11G, CH6, 1 GHz-18 GHz)	96
FIG.133	RADIATED SPURIOUS EMISSION (802.11G, CH6, 18 GHz-26.5 GHz)	97
FIG.134	RADIATED SPURIOUS EMISSION (802.11G, CH11, 1 GHz-18 GHz)	97
FIG.135	RADIATED EMISSION POWER (802.11G, CH1, 2380GHz~2450GHz)	98
FIG.136	RADIATED EMISSION POWER (802.11G, CH11, 2450GHz~2500GHz)	98
FIG.137	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH1, 1 GHz-18 GHz)	99



FIG.138	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH6, 9KHz-30MHZ).....	99
FIG.139	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH6, 30MHZ-1 GHZ).....	100
FIG.140	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH6, 1 GHZ-18 GHZ)	100
FIG.141	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH6, 18 GHZ-26.5 GHZ)	101
FIG.142	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH11, 1 GHZ-18 GHZ).....	101
FIG.143	RADIATED EMISSION POWER (802.11N-20MHZ, CH1, 2380GHZ~2450GHZ).....	102
FIG.144	RADIATED EMISSION POWER (802.11N-20MHZ, CH11, 2450GHZ~2500GHZ).....	102
FIG.145	AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE1)	103
FIG.146	AC POWER LINE CONDUCTED EMISSION (IDLE, AE1).....	104
FIG.147	AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE1)	105
FIG.148	AC POWER LINE CONDUCTED EMISSION (IDLE, AE1).....	106
ANNEX C: PERSONS INVOLVED IN THIS TESTING		107



1. Test Laboratory

1.1. Testing Location

Location1: CTTL(South Branch)

Address: TCL International E city No. 1001 Zhongshanyuan Road, Nanshan
District, Shenzhen, Guangdong, China 518000

1.2. Testing Environment

Normal Temperature: 15-35°C

Extreme Temperature: -15/+55°C

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2017-01-12

Testing End Date: 2017-02-15

1.4. Signature

Wang Haili

(Prepared this test report)

Tang Weisheng

(Reviewed this test report)

Zhang Bojun

(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd.
Address: Coolpad Information Harbor, High-tech Industrial Park (North),
Nanshan District, Shenzhen, P.R.C.
City: Shenzhen
Postal Code: /
Country: China
Telephone: 0755-83301199-83335
Fax: /

2.2. Manufacturer Information

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd.
Address: Coolpad Information Harbor, High-tech Industrial Park (North),
Nanshan District, Shenzhen, P.R.C.
City: Shenzhen
Postal Code: /
Country: China
Telephone: 0755-83301199-83335
Fax: /



3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Smart phone
Model Name	Coolpad 3632A
Market Name	/
RF Protocol	IEEE 802.11b/g/n20
Operating Frequency	2412MHz~2462MHz
FCC ID	R38YL3632A

3.2. Internal Identification of EUT

EUT ID*	IMEI	HW Version	SW Version	Receive Date
EUT1	862006030002251	P2	7.0.013.00.P0.161201.3632A.tmo	2017-01-12

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description	Type	SN
AE1	Charger	CYSN05-050100	/
AE2	Data Cable	SYL-A126A	/

*AE ID: is used to identify the test sample in the lab internally.



4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	Nov,2015
ANSI C63.10	American National Standard for Testing Unlicensed Wireless Devices	Jun,2013

5. Test Results

5.1. Summary of Test Results

No	Test cases	Sub-clause of Part15C	Verdict
0.	Antenna Requirement	15.203	P
1.	Maximum Peak Output Power	15.247 (b)	P
2.	Peak Power Spectral Density	15.247 (e)	P
3.	Occupied 6dB Bandwidth	15.247 (a)	P
4.	Band Edges Compliance	15.247 (d)	P
5.	Transmitter Spurious Emission - Conducted	15.247 (d)	P
6.	Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	P
7.	AC Powerline Conducted Emission	15.107, 15.207	P

See **ANNEX B** and **ANNEX C** for details.

5.2. Statements

CTTL has evaluated the test cases requested by the applicant/matrix manufacturer as listed in section 5.1 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2

5.3. Terms used in the result table

Terms used in Verdict column

P	Pass
NA	Not Available
F	Fail

Abbreviations

AC	Alternating Current
AFH	Adaptive Frequency Hopping
BW	Band Width
E.I.R.P.	equivalent isotropical radiated power
ISM	Industrial, Scientific and Medical
R&TTE	Radio and Telecommunications Terminal Equipment
RF	Radio Frequency
Tx	Transmitter

5.4. Laboratory Environment

Semi-anechoic chamber did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ±4dB, 3m/10m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

Fully-anechoic chamber did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Voltage Standing Wave Ratio (VSWR)	≤6dB, from 1 to 18 GHz, 3m distance

6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2017-03-21	1 year

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Chamber	FACT5-2.0	4166	ETS-Lindgren	2018-05-13	3 years
2	Test Receiver	ESCI	100701	Rohde & Schwarz	2017-08-09	1 year
3	BiLog Antenna	VULB9163	9163 330	Schwarzbeck	2017-04-22	3 years
4	Horn Antenna	3117	00066585	ETS-Lindgren	2019-03-05	3 years
5	Spectrum Analyser	FSP40	100378	Rohde & Schwarz	2017-12-15	1 year
6	Loop Antenna	HLA6120	35779	TESEQ	2019-05-02	3 years
7	Test Receiver	ESR7	101675	Rohde & Schwarz	2017-07-21	1 year
8	LISN	ESH2-Z5	100196	Rohde & Schwarz	2018-01-05	1 year

Anechoic chamber

Fully anechoic chamber by ETS-Lindgren.

ANNEX A: MEASUREMENT RESULTS FOR RECEIVER

A.0 Antenna requirement

Measurement Limit:

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, § 15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

**Conclusion: The Directional gains of antenna used for transmitting is 2.1 dBi.
The RF transmitter uses an integrate antenna without connector.**

A.1 Maximum Average Output Power

Measurement Limit:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)(1)	< 30

Measurement Results:

802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)					
		2412MHz (Ch1)		2437MHz (Ch6)		2462 MHz (Ch11)	
802.11b	1	Fig.1	17.03	Fig.2	17.14	Fig.3	17.49
	2	Fig.4	16.33	Fig.5	17.07	Fig.6	16.93
	5.5	Fig.7	16.06	Fig.8	16.38	Fig.9	17.06
	11	Fig.10	16.29	Fig.11	17.02	Fig.12	17.16
802.11g	6	Fig.13	17.00	Fig.14	16.75	Fig.15	16.76
	9	Fig.16	17.12	Fig.17	16.82	Fig.18	16.69
	12	Fig.19	16.78	Fig.20	16.45	Fig.21	16.31
	18	Fig.22	16.86	Fig.23	16.54	Fig.24	16.41
	24	Fig.25	16.91	Fig.26	16.58	Fig.27	16.47
	36	Fig.28	16.17	Fig.29	15.78	Fig.30	15.67
	48	Fig.31	16.24	Fig.32	15.88	Fig.33	15.77
	54	Fig.34	15.38	Fig.35	14.93	Fig.36	14.86

802.11n-20MHz mode

Mode	Data Rate (MCS Index)	Test Result (dBm)					
		2412MHz (Ch1)		2437MHz (Ch6)		2462 MHz (Ch11)	
802.11n (20MHz)	MCS0	Fig.37	16.65	Fig.38	16.38	Fig.39	16.42
	MCS1	Fig.40	16.32	Fig.41	15.98	Fig.42	16.08
	MCS2	Fig.43	15.51	Fig.44	15.14	Fig.45	15.21
	MCS3	Fig.46	15.08	Fig.47	14.68	Fig.48	14.77
	MCS4	Fig.49	15.22	Fig.50	15.14	Fig.51	14.89
	MCS5	Fig.52	15.31	Fig.53	15.15	Fig.54	14.96
	MCS6	Fig.55	14.92	Fig.56	14.68	Fig.57	14.48
	MCS7	Fig.58	14.49	Fig.59	14.17	Fig.60	14.04

See ANNEX C for test graphs.

Conclusion: PASS

A.2 Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC CRF Part 15.247(d)	< 8 dBm/3 kHz

Measurement Results:

802.11b/g mode

Mode	Channel	Peak Power Spectral Density (dBm)		Conclusion
802.11b	1	Fig.61	-1.08	P
	6	Fig.62	-2.09	P
	11	Fig.63	-2.15	P
802.11g	1	Fig.64	-5.84	P
	6	Fig.65	-5.85	P
	11	Fig.66	-5.08	P

802.11n-20MHz mode

Mode	Channel	Peak Power Spectral Density(dBm)		Conclusion
802.11n (20MHz)	1	Fig.67	-6.46	P
	6	Fig.68	-6.32	P
	11	Fig.69	-7.04	P

See ANNEX C for test graphs.

Conclusion: PASS

A.3 Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

Measurement Result:

802.11b/g mode

Mode	Channel	Test Results (kHz)		conclusion
802.11b	1	Fig.70	7100	P
	6	Fig.71	7550	P
	11	Fig.72	7500	P
802.11g	1	Fig.73	16300	P
	6	Fig.74	16350	P
	11	Fig.75	16300	P

802.11n-20MHz mode

Mode	Channel	Test Results (kHz)		conclusion
802.11n (20MHz)	1	Fig.76	17550	P
	6	Fig.77	17600	P
	11	Fig.78	16950	P

See ANNEX C for test graphs.

Conclusion: PASS

A.4 Band Edges Compliance

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

Measurement Result:

802.11b/g mode

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.79	P
	11	Fig.80	P
802.11g	1	Fig.81	P
	11	Fig.82	P

802.11n-20MHz mode

Mode	Channel	Test Results	Conclusion
802.11n (20MHz)	1	Fig.83	P
	11	Fig.84	P

See ANNEX C for test graphs.

Conclusion: PASS

A.5 Transmitter Spurious Emission

A.5.1 Transmitter Spurious Emission - Conducted

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:

802.11b/g mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412 GHz	Fig.85	P
		30 MHz-1 GHz	Fig.86	P
		1 GHz-10 GHz	Fig.87	
		10 GHz-26 GHz	Fig.88	P
	6	2.437 GHz	Fig.89	P
		30 MHz-1 GHz	Fig.90	P
		1 GHz-10 GHz	Fig.91	
		10 GHz-26 GHz	Fig.92	P
	11	2.462 GHz	Fig.93	P
		30 MHz-1 GHz	Fig.94	
		1 GHz-10 GHz	Fig.95	P
		10 GHz-26 GHz	Fig.96	P
802.11g	1	2.412 GHz	Fig.97	P
		30 MHz-1 GHz	Fig.98	P
		1 GHz-10 GHz	Fig.99	
		10 GHz-26 GHz	Fig.100	P
	6	2.437 GHz	Fig.101	P
		30 MHz-1 GHz	Fig.102	P
		1 GHz-10 GHz	Fig.103	
		10 GHz-26 GHz	Fig.104	P
	11	2.462 GHz	Fig.105	P
		30 MHz-1 GHz	Fig.106	P
		1 GHz-10 GHz	Fig.107	
		10 GHz-26 GHz	Fig.108	P

802.11n-20MHz mode

802.11n (20MHz)	1	2.412 GHz	Fig.109	P
		30 MHz-1 GHz	Fig.110	P
		1 GHz-10 GHz	Fig.111	
		10 GHz-26 GHz	Fig.112	P
	6	2.437 GHz	Fig.113	P
		30 MHz-1 GHz	Fig.114	P
		1 GHz-10 GHz	Fig.115	
		10 GHz-26 GHz	Fig.116	P
	11	2.462 GHz	Fig.117	P
		30 MHz-1 GHz	Fig.118	P
		1 GHz-10 GHz	Fig.119	
		10 GHz-26 GHz	Fig.120	P

See ANNEX C for test graphs.

Conclusion: PASS

A.5.2 Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(μ V/m)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Note:

According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band below 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.

Measurement Results:

802.11b/g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	1 GHz ~18 GHz	Fig.121	P
	6	9 kHz ~30 MHz	Fig.122	P
		30 MHz ~1 GHz	Fig.123	P
		1 GHz ~18 GHz	Fig.124	P
		18 GHz ~26.5 GHz	Fig.125	P
	11	1 GHz ~18 GHz	Fig.126	P
	Power(CH1)	2.38 GHz ~ 2.45 GHz	Fig.127	P
	Power(CH11)	2.45 GHz ~ 2.5 GHz	Fig.128	P
802.11g	1	1 GHz ~18 GHz	Fig.129	P
	6	9 kHz ~30 MHz	Fig.130	P
		30 MHz ~1 GHz	Fig.131	P
		1 GHz ~18 GHz	Fig.132	P
		18 GHz ~26.5 GHz	Fig.133	P
	11	1 GHz ~18 GHz	Fig.134	P
	Power(CH1)	2.38 GHz ~ 2.45 GHz	Fig.135	P
	Power(CH11)	2.45 GHz ~ 2.5 GHz	Fig.136	P

802.11n-20MHz mode

802.11n-20 MHz	1	1 GHz ~18 GHz	Fig.137	P
	6	9 kHz ~30 MHz	Fig.138	P
		30 MHz ~1 GHz	Fig.139	P
		1 GHz ~18 GHz	Fig.140	P
		18 GHz ~26.5 GHz	Fig.141	P
	11	1 GHz ~18 GHz	Fig.142	P
	Power(CH1)	2.38 GHz ~ 2.45 GHz	Fig.143	P
	Power(CH11)	2.45 GHz ~ 2.5 GHz	Fig.144	P

802.11b CH1 (1-18 GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
14109.500000	54.48	74.00	19.52	V	11.1
15149.500000	54.94	74.00	19.06	V	12.1
15702.500000	57.09	74.00	16.91	V	12.7
16195.000000	57.39	74.00	16.61	V	13.1
16775.000000	57.30	74.00	16.70	V	13.9
17448.500000	57.00	74.00	17.00	V	14.0



Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
14534.500000	42.81	54.00	11.19	V	11.9
15173.500000	44.00	54.00	10.00	V	12.1
15746.000000	45.23	54.00	8.77	V	12.8
16233.500000	45.64	54.00	8.36	V	13.1
16786.000000	46.19	54.00	7.81	V	13.9
17363.000000	45.85	54.00	8.15	V	14.0

802.11b CH 6(1-18 GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
14106.000000	53.81	74.00	20.19	V	11.1
15167.500000	54.88	74.00	19.12	V	12.1
15760.000000	57.35	74.00	16.65	V	12.8
16270.500000	56.81	74.00	17.19	V	13.2
16749.500000	58.66	74.00	15.34	V	13.9
17748.500000	58.00	74.00	16.00	V	13.9

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
14161.000000	42.57	54.00	11.43	V	11.2
15169.500000	43.95	54.00	10.05	V	12.1
15684.000000	45.37	54.00	8.63	V	12.6
16192.000000	45.76	54.00	8.24	V	13.1
16750.000000	46.22	54.00	7.78	V	13.9
17307.500000	45.73	54.00	8.27	V	13.9

802.11b CH 11(1GHz-18 GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
14450.500000	54.10	74.00	19.90	V	11.7
15095.000000	54.55	74.00	19.45	V	12.1
15760.000000	56.76	74.00	17.24	V	12.8
16243.000000	56.53	74.00	17.47	V	13.2
16756.500000	57.41	74.00	16.59	V	13.9
17478.000000	57.30	74.00	16.70	V	14.0



Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
14181.000000	42.40	54.00	11.60	V	11.2
15160.000000	42.96	54.00	11.04	V	12.1
15702.000000	45.06	54.00	8.94	V	12.7
16211.500000	45.23	54.00	8.77	V	13.1
16821.500000	46.33	54.00	7.67	V	13.9
17419.000000	45.60	54.00	8.40	V	14.0

802.11g CH1 (1G-18 GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
14534.000000	55.15	74.00	18.85	V	11.9
15083.000000	55.19	74.00	18.81	V	12.1
15676.500000	56.21	74.00	17.79	V	12.6
16261.500000	56.58	74.00	17.42	V	13.2
16809.000000	57.46	74.00	16.54	V	13.9
17364.500000	57.62	74.00	16.38	V	14.0

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
14539.500000	42.79	54.00	11.21	V	11.9
15143.500000	43.79	54.00	10.21	V	12.1
15679.000000	45.13	54.00	8.87	V	12.6
16207.500000	45.54	54.00	8.46	V	13.1
16773.000000	46.20	54.00	7.80	V	13.9
17296.000000	45.52	54.00	8.48	V	13.9

802.11g CH6 (1GHz-18 GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
14194.500000	53.84	74.00	20.16	V	11.3
14920.000000	55.58	74.00	18.42	V	12.0
15787.500000	56.53	74.00	17.47	V	12.8
16263.000000	56.69	74.00	17.31	V	13.2
16703.500000	57.39	74.00	16.61	V	13.8
17338.000000	56.95	74.00	17.05	V	14.0



Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
13999.500000	42.18	54.00	11.82	V	10.8
15157.500000	43.13	54.00	10.87	V	12.1
15773.000000	44.95	54.00	9.06	V	12.8
16247.000000	45.24	54.00	8.76	V	13.2
16829.000000	45.96	54.00	8.04	V	13.9
17413.500000	45.54	54.00	8.46	V	14.0

802.11g CH11 (1GHz-18 GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
14145.000000	54.52	74.00	19.48	V	11.2
14687.500000	55.00	74.00	19.00	V	12.0
15721.000000	56.86	74.00	17.14	V	12.7
16271.500000	58.10	74.00	15.90	V	13.2
16690.500000	57.48	74.00	16.52	V	13.8
17290.500000	57.42	74.00	16.58	V	13.9

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
14150.000000	42.80	54.00	11.20	V	11.2
15170.500000	43.81	54.00	10.19	V	12.1
15686.500000	45.29	54.00	8.71	V	12.6
16224.000000	45.52	54.00	8.48	V	13.1
16775.000000	46.17	54.00	7.83	V	13.9
17303.500000	45.76	54.00	8.24	V	13.9

802.11n-20MHz CH1 (1GHz-18 GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
14221.500000	53.82	74.00	20.18	V	11.3
14860.500000	54.31	74.00	19.69	V	11.9
15751.500000	57.12	74.00	16.88	V	12.8
16234.500000	56.67	74.00	17.33	V	13.1
16836.500000	57.63	74.00	16.37	V	13.9
17368.000000	56.76	74.00	17.24	V	14.0



Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
14173.500000	42.31	54.00	11.69	V	11.2
15168.000000	43.03	54.00	10.97	V	12.1
15745.500000	44.91	54.00	9.09	V	12.8
16235.000000	45.32	54.00	8.68	V	13.1
16810.000000	46.00	54.00	8.00	V	13.9
17346.000000	45.34	54.00	8.66	V	14.0

802.11n-20MHz CH6 (1GHz-18 GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
14471.000000	54.31	74.00	19.69	V	11.7
15175.500000	54.96	74.00	19.04	V	12.1
15683.000000	56.44	74.00	17.56	V	12.6
16231.500000	56.92	74.00	17.08	V	13.1
16838.000000	57.53	74.00	16.47	V	13.9
17399.000000	57.21	74.00	16.79	V	14.0

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
14205.500000	42.32	54.00	11.68	V	11.3
15181.000000	42.98	54.00	11.02	V	12.2
15690.500000	45.09	54.00	8.91	V	12.7
16268.000000	45.34	54.00	8.66	V	13.2
16793.000000	46.06	54.00	7.94	V	13.9
17383.000000	45.58	54.00	8.42	V	14.0

802.11n-20MHz CH11 (1GHz-18 GHz)

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
14113.000000	54.05	74.00	19.95	V	11.1
15095.500000	55.70	74.00	18.30	V	12.1
15788.000000	57.26	74.00	16.74	V	12.8
16204.500000	57.06	74.00	16.94	V	13.1
16714.000000	58.89	74.00	15.11	V	13.8
17833.500000	58.01	74.00	15.99	V	13.8

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
14141.000000	42.61	54.00	11.39	V	11.2
15182.500000	43.69	54.00	10.31	V	12.2
15679.500000	45.22	54.00	8.78	V	12.6
16219.000000	45.83	54.00	8.17	V	13.1
16795.500000	46.46	54.00	7.54	V	13.9
17357.000000	45.91	54.00	8.09	V	14.0

See ANNEX C for test graphs.

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

A.6 AC Powerline Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)-AE1

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	66 to 56	Fig.145	P
0.5 to 5	56		
5 to 30	60		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE1

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	56 to 46	Fig.145	P
0.5 to 5	46		
5 to 30	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE1

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Idle	
0.15 to 0.5	66 to 56	Fig.146	P
0.5 to 5	56		
5 to 30	60		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE1

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Idle	
0.15 to 0.5	56 to 46	Fig.146	P
0.5 to 5	46		
5 to 30	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Test Condition:

Voltage (V)	Frequency (Hz)
240	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)-AE1

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.16 to 0.5	66 to 56	Fig.147	P
0.5 to 5	56		
5 to 30	60		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE1

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	56 to 46	Fig.147	P
0.5 to 5	46		
5 to 30	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE1

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Idle	
0.16 to 0.5	66 to 56	Fig.148	P
0.5 to 5	56		
5 to 30	60		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE1

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Idle	
0.15 to 0.5	56 to 46	Fig.148	P
0.5 to 5	46		
5 to 30	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

See ANNEX C for test graphs.

Conclusion: PASS

ANNEX B: TEST LAYOUTS

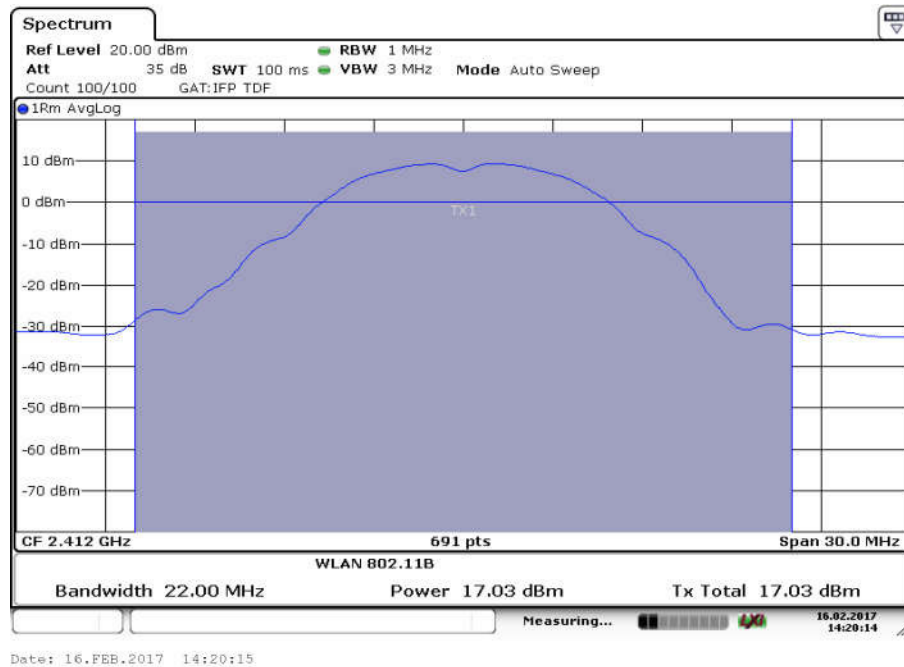


Fig.1 Maximum Average Output Power (802.11b, Ch 1,1Mbps)

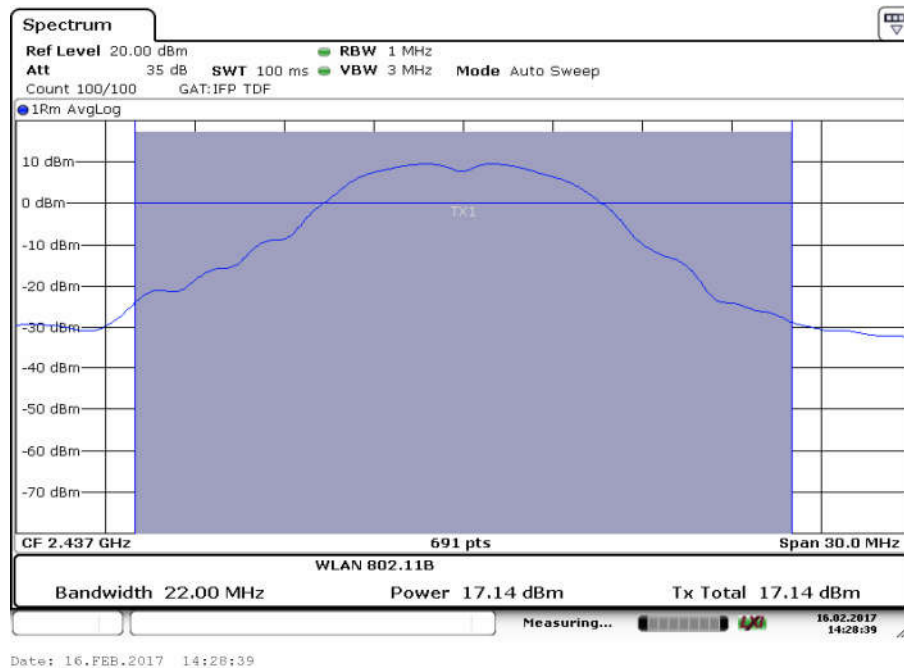


Fig.2 Maximum Average Output Power (802.11b, Ch 6,1Mbps)

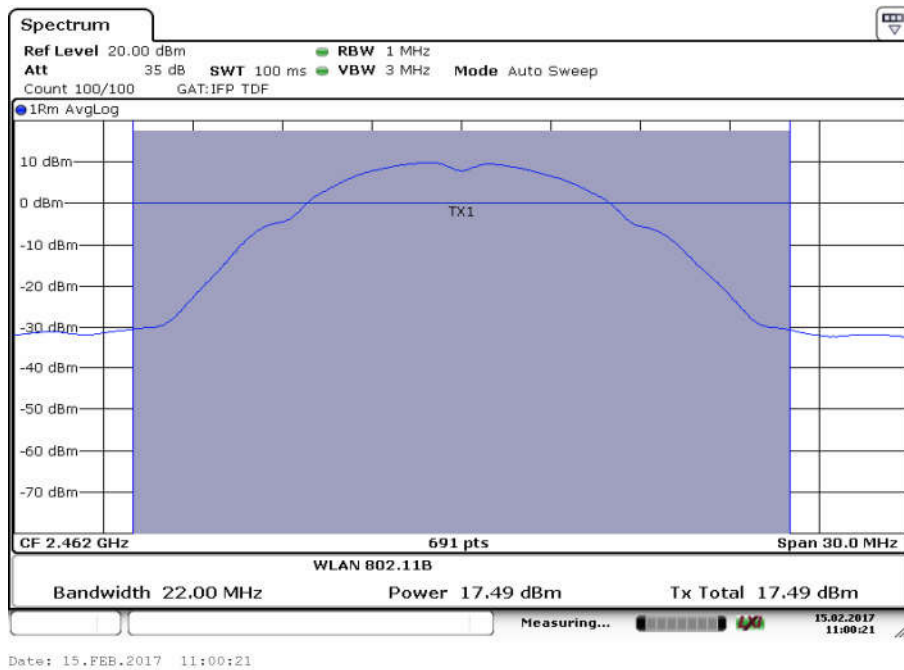


Fig.3 Maximum Average Output Power (802.11b, Ch 11,1Mbps)

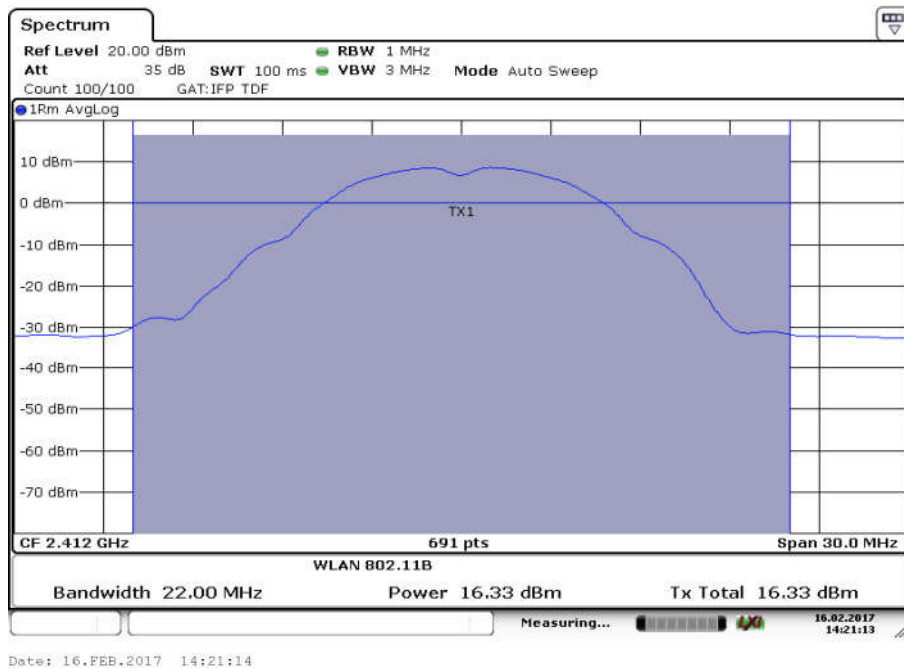


Fig.4 Maximum Average Output Power (802.11b, Ch 1,2Mbps)

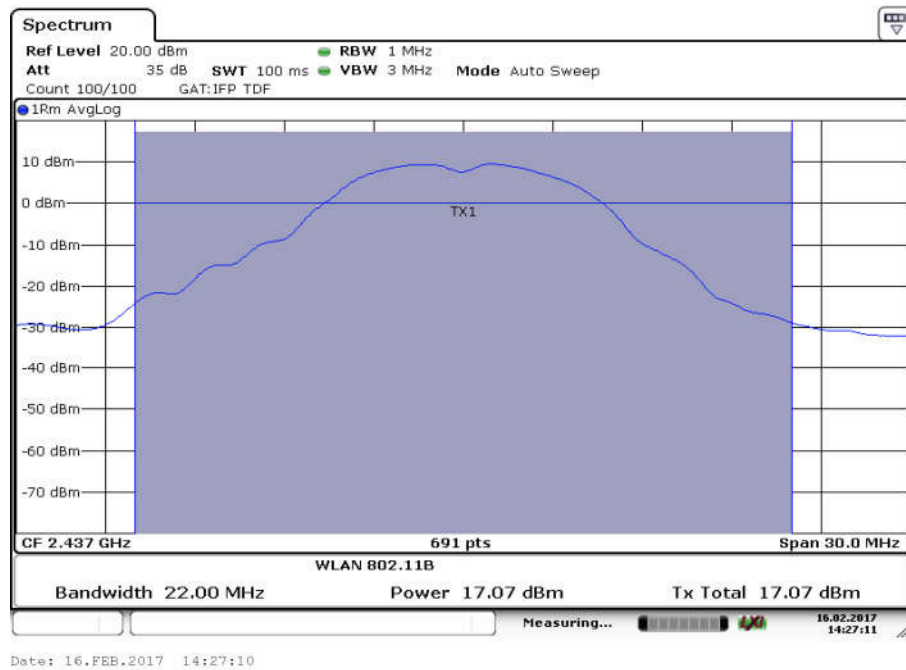


Fig.5 Maximum Average Output Power (802.11b, Ch 6,2Mbps)

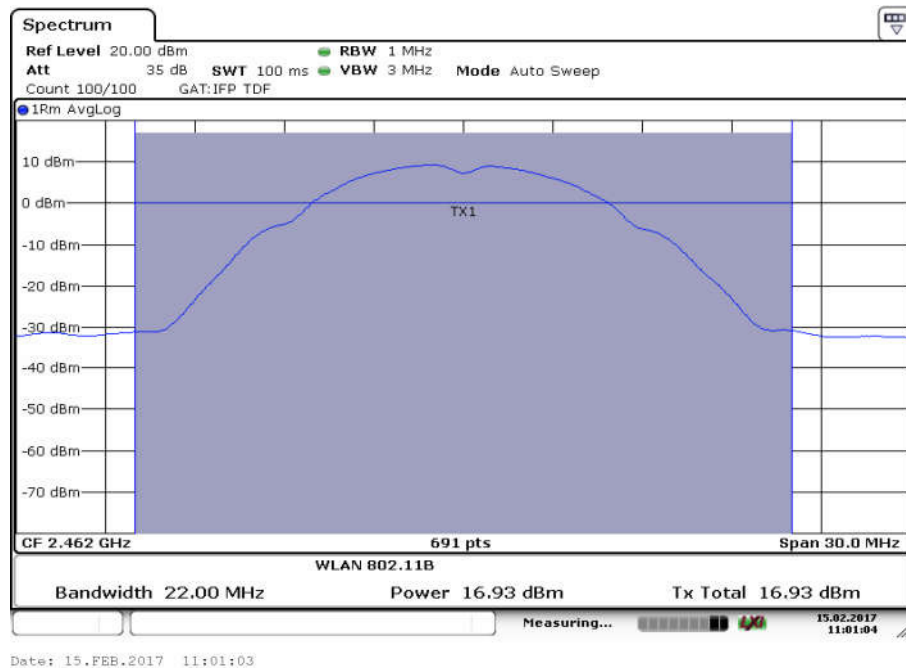


Fig.6 Maximum Average Output Power (802.11b, Ch 11,2Mbps)

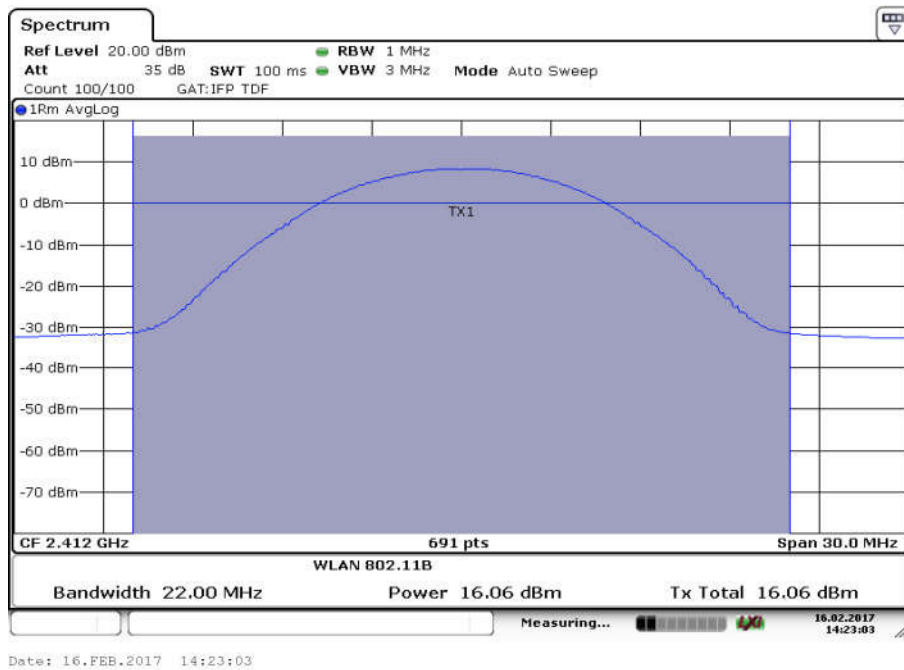


Fig.7 Maximum Average Output Power (802.11b, Ch 1,5Mbps)

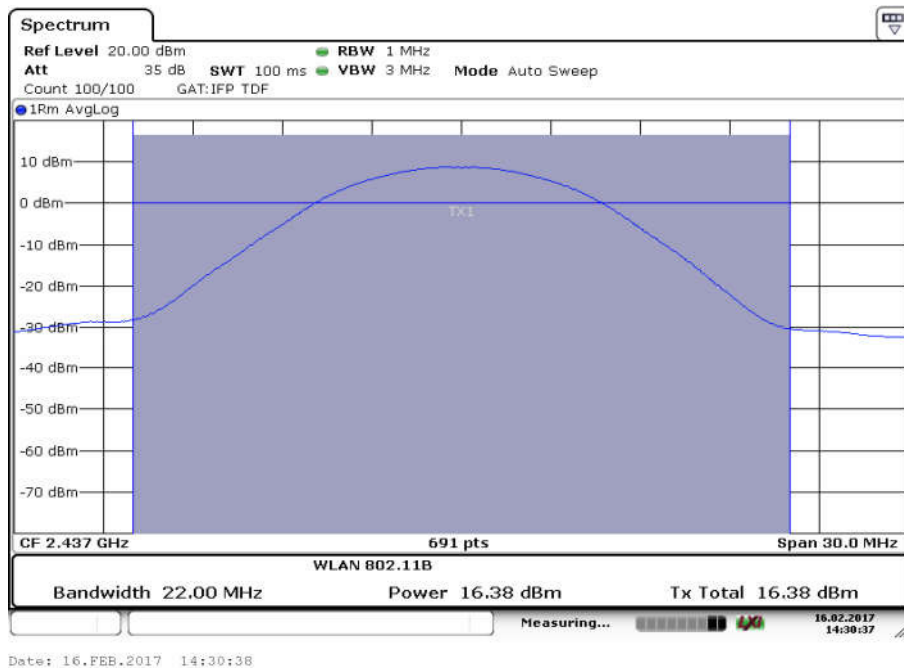


Fig.8 Maximum Average Output Power (802.11b, Ch 6,5Mbps)

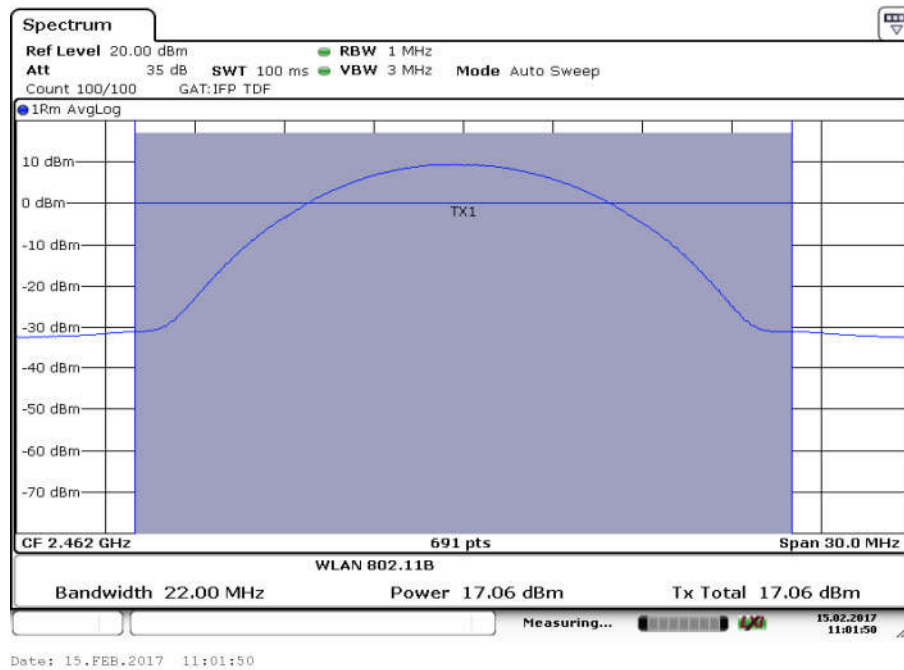


Fig.9 Maximum Average Output Power (802.11b, Ch 11,5.5Mbps)

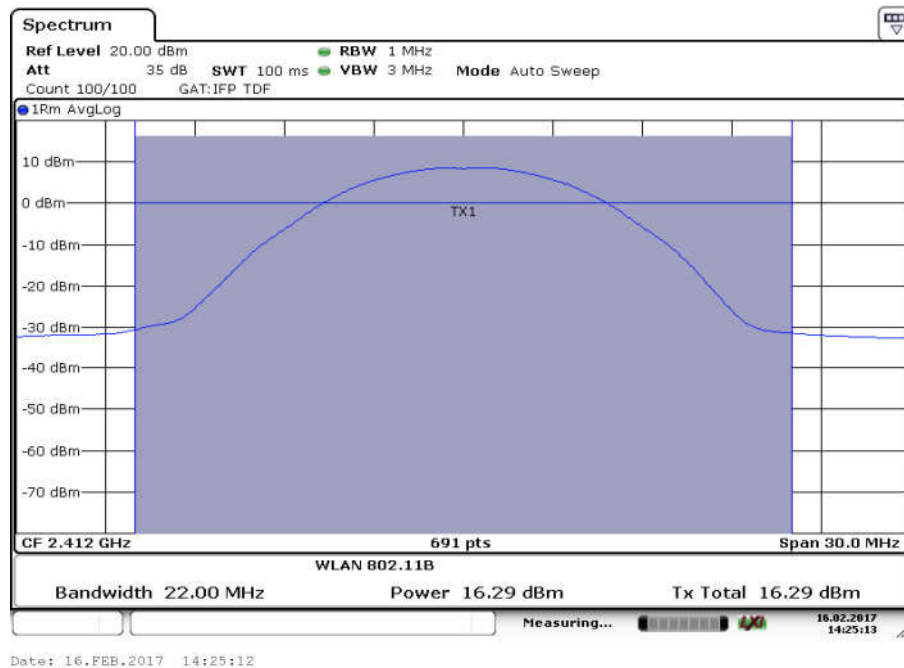


Fig.10 Maximum Average Output Power (802.11b, Ch 1,11Mbps)

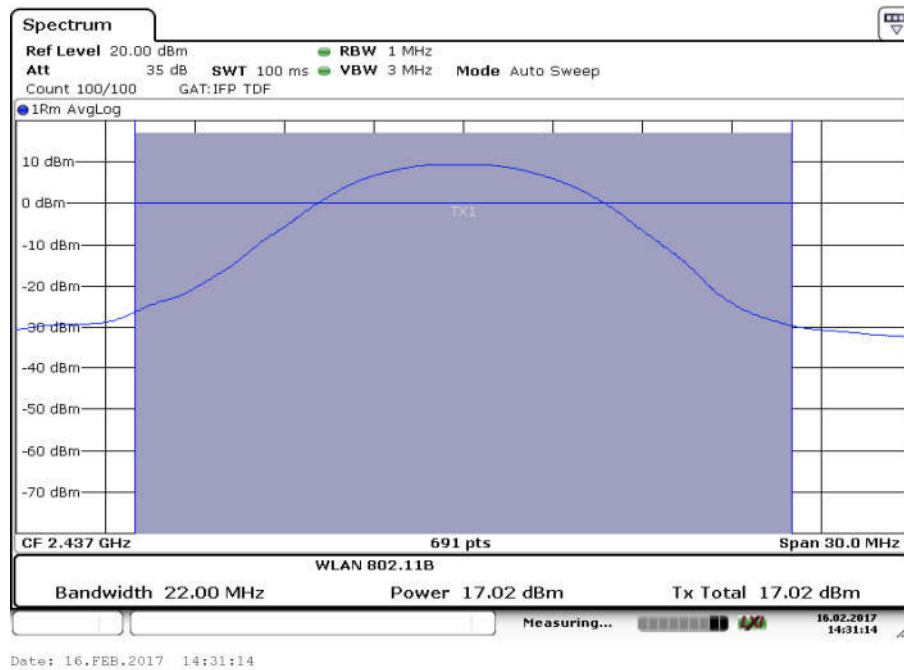


Fig.11 Maximum Average Output Power (802.11b, Ch 6,11Mbps)

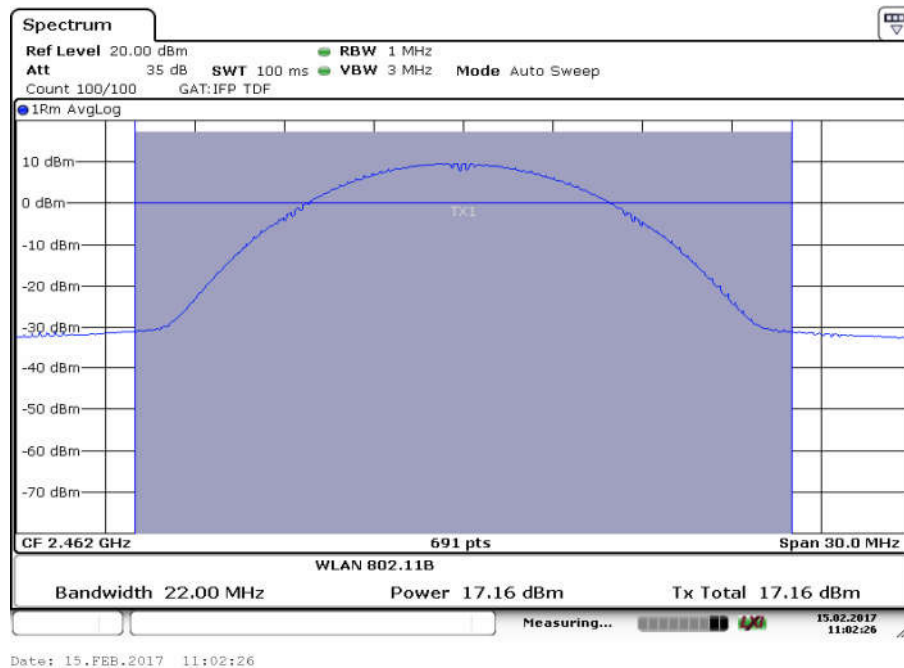


Fig.12 Maximum Average Output Power (802.11b, Ch 11,11Mbps)

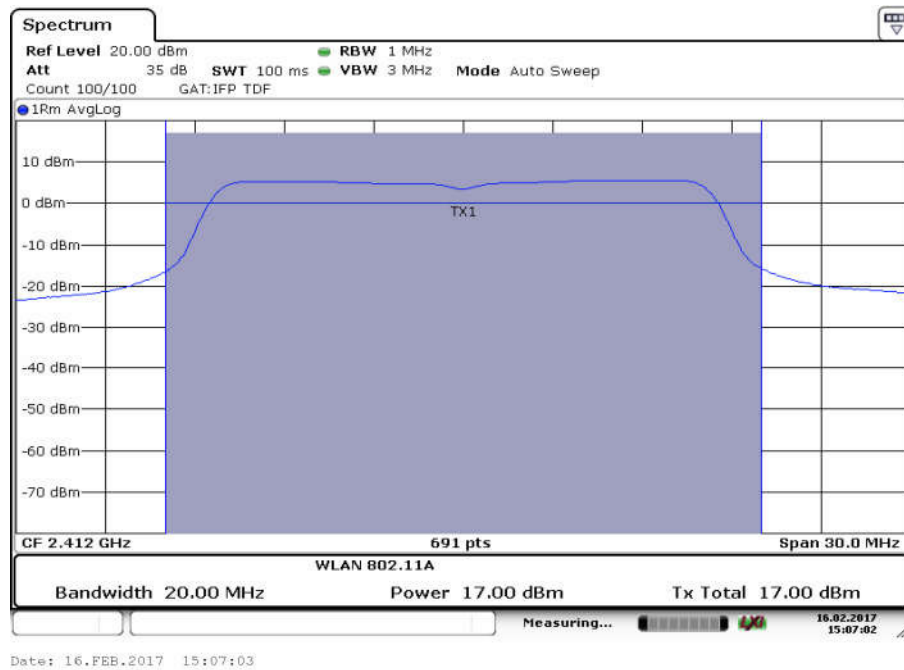


Fig.13 Maximum Average Output Power (802.11g, Ch 1,6Mbps)



Fig.14 Maximum Average Output Power (802.11g, Ch 6,6Mbps)

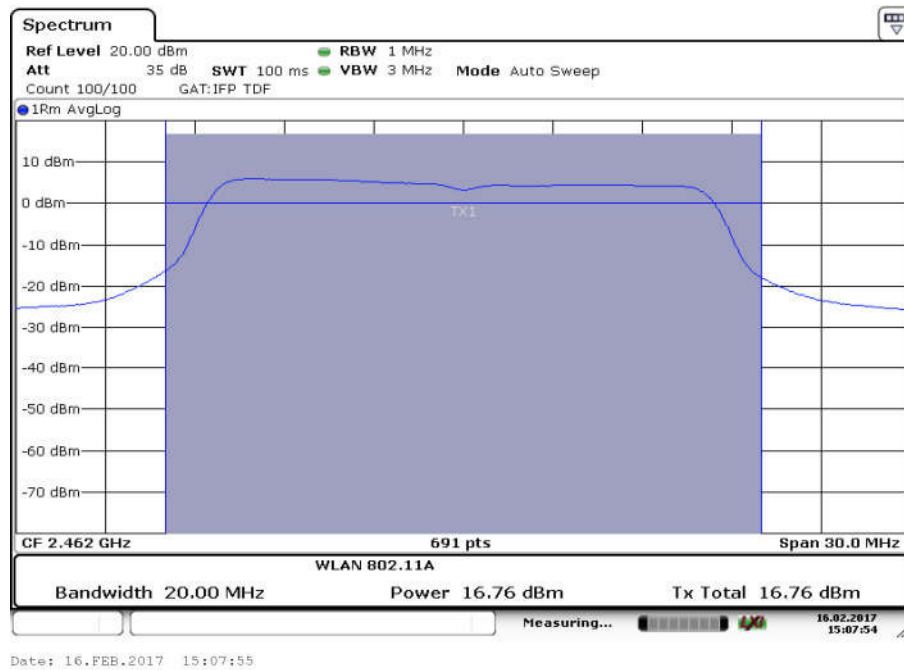


Fig.15 Maximum Average Output Power (802.11g, Ch 11,6Mbps)

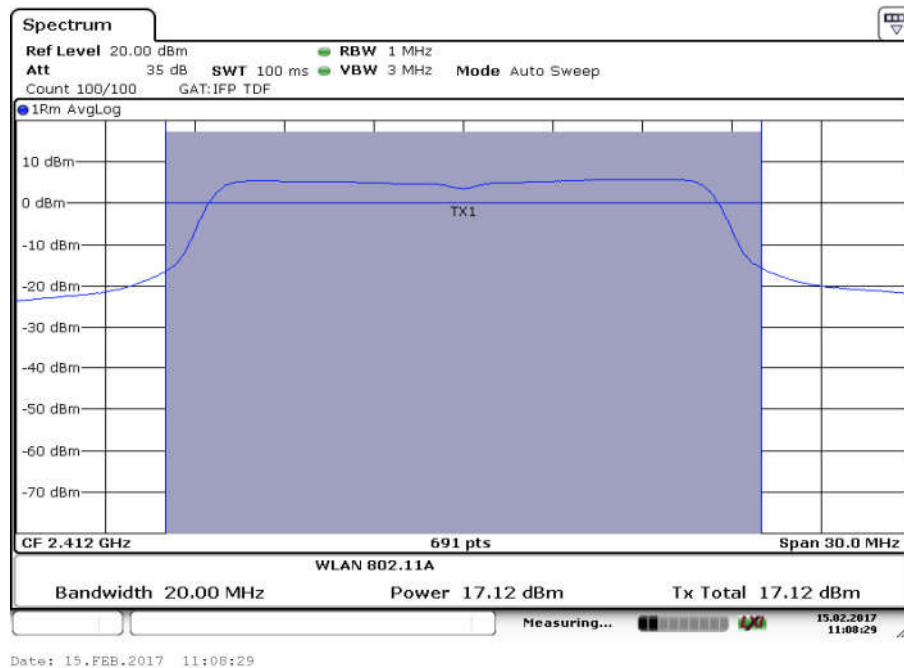


Fig.16 Maximum Average Output Power (802.11g, Ch 1,9Mbps)

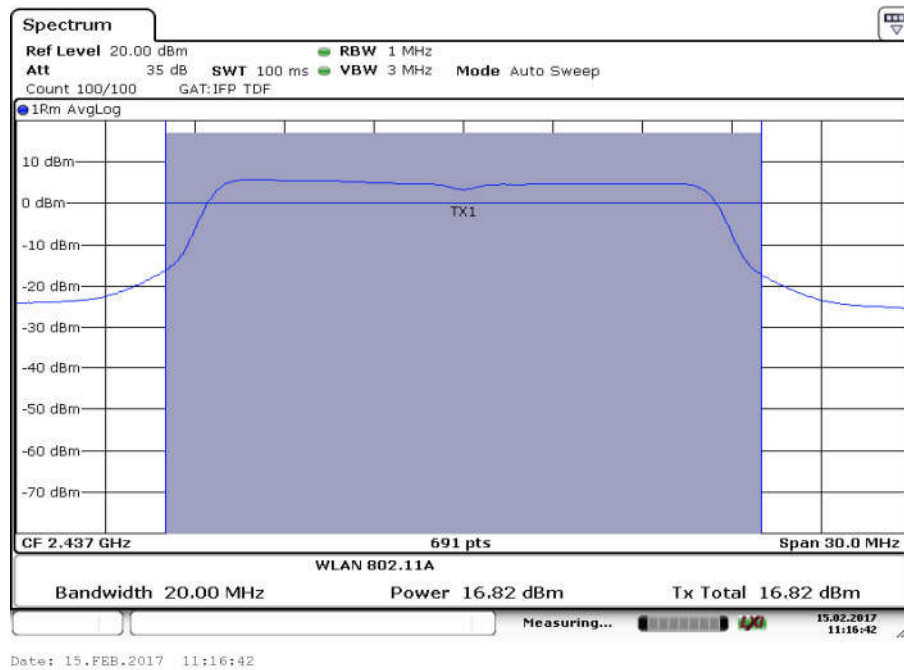


Fig.17 Maximum Average Output Power (802.11g, Ch 6,9Mbps)

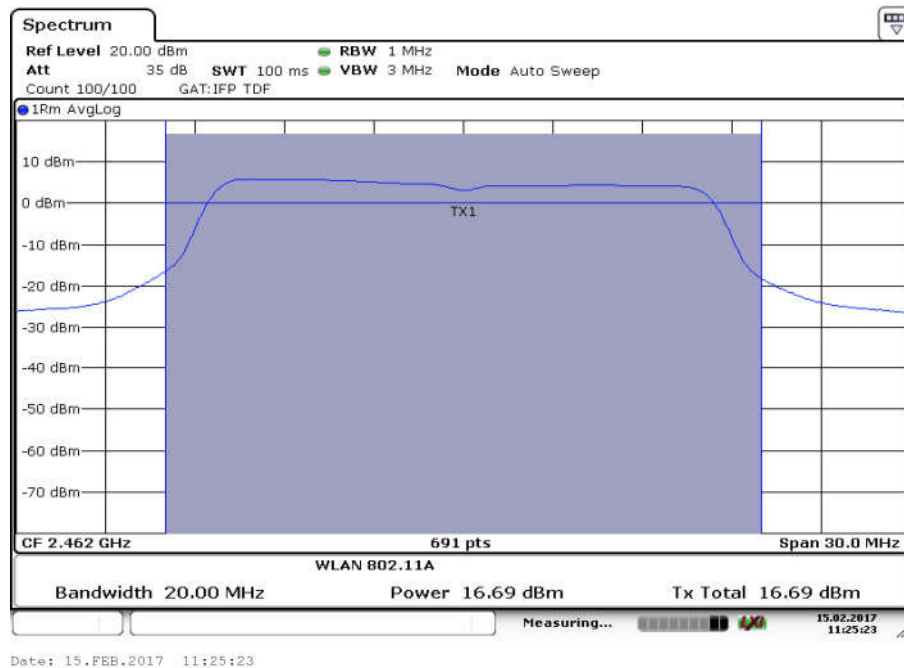


Fig.18 Maximum Average Output Power (802.11g, Ch 11,9Mbps)

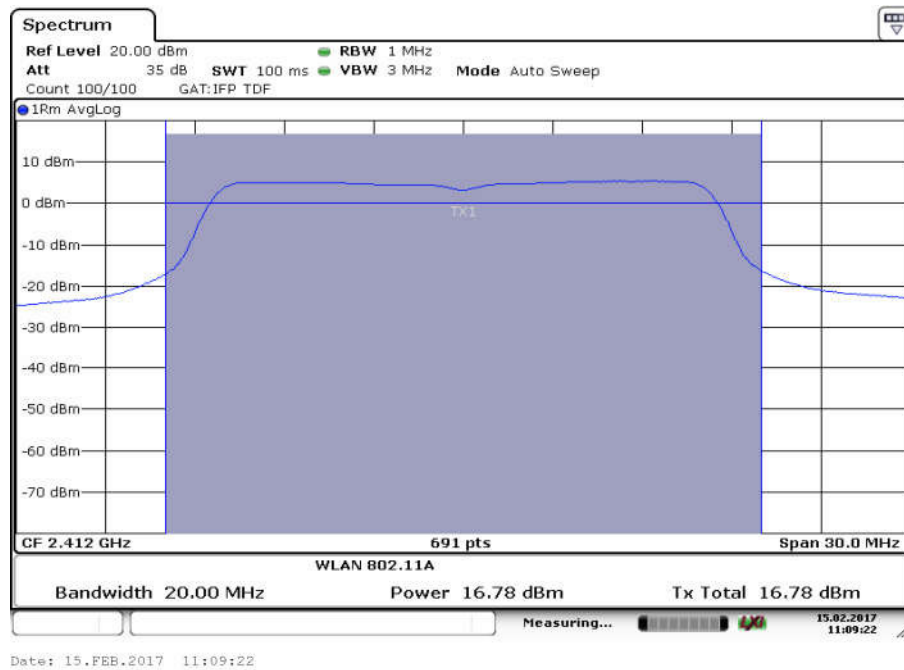


Fig.19 Maximum Average Output Power (802.11g, Ch 1,12Mbps)

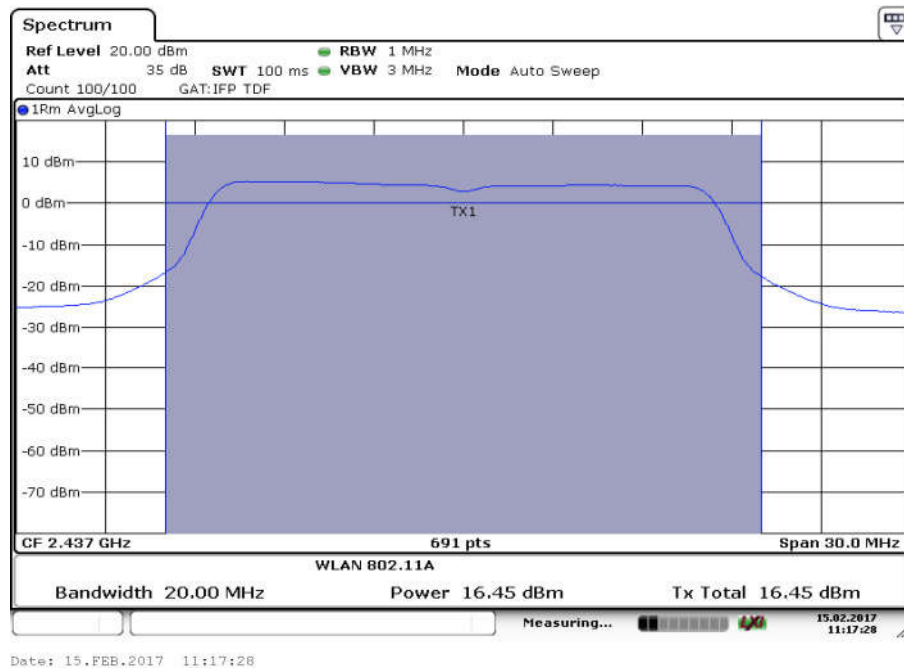


Fig.20 Maximum Average Output Power (802.11g, Ch 6,12Mbps)

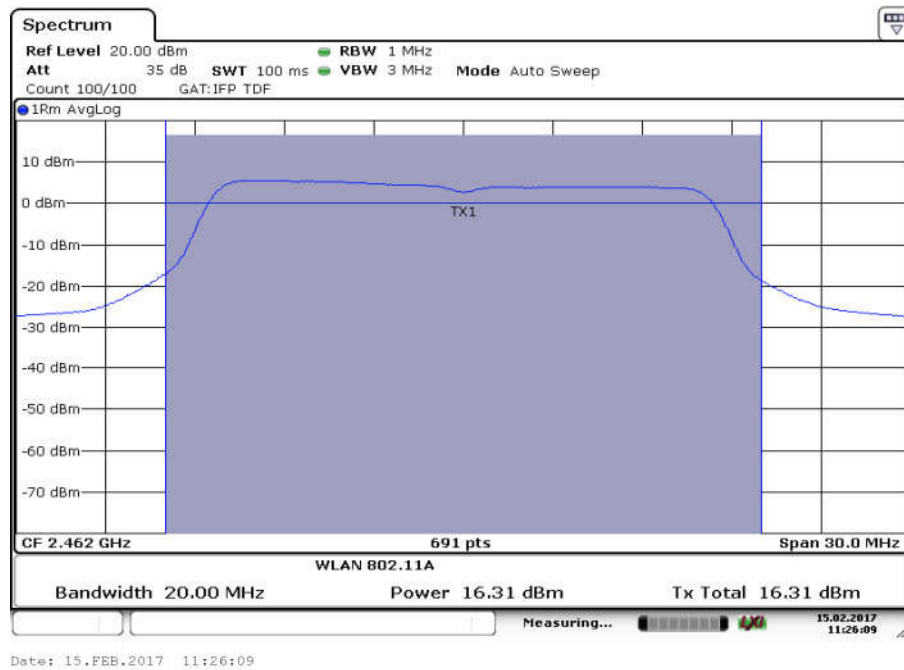


Fig.21 Maximum Average Output Power (802.11g, Ch 11,12Mbps)

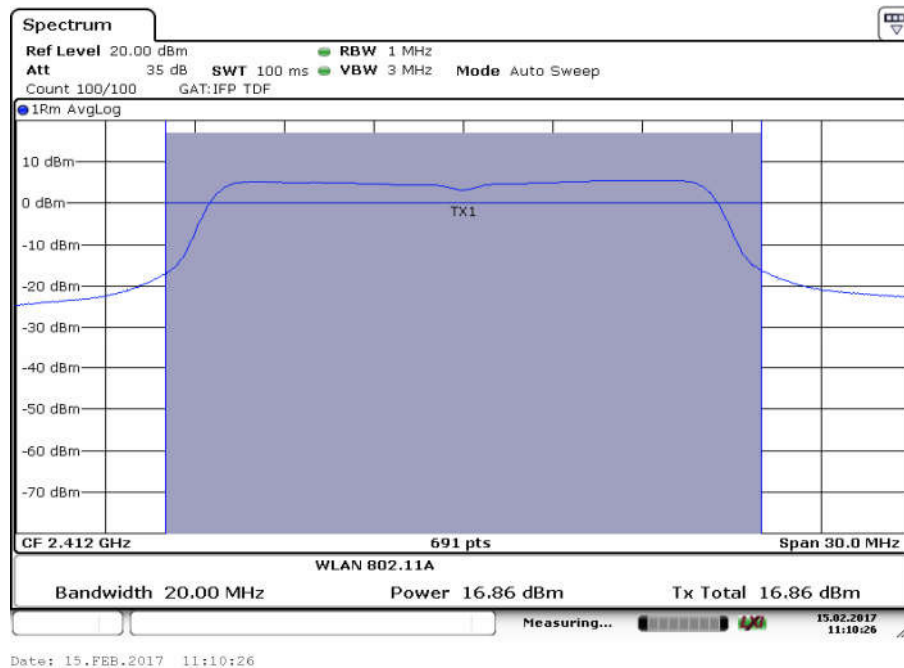


Fig.22 Maximum Average Output Power (802.11g, Ch 1,18Mbps)

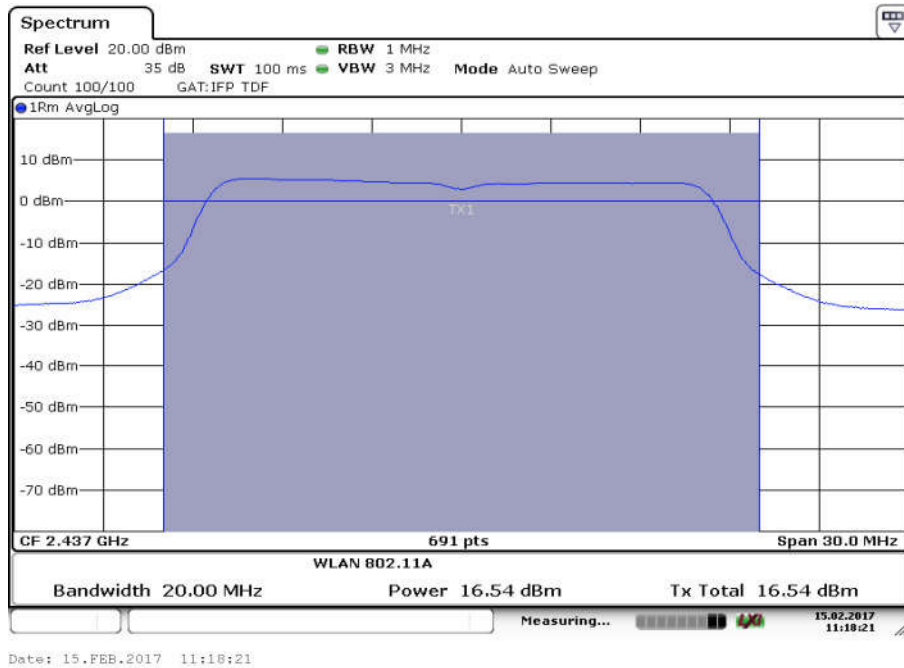


Fig.23 Maximum Average Output Power (802.11g, Ch 6,18Mbps)

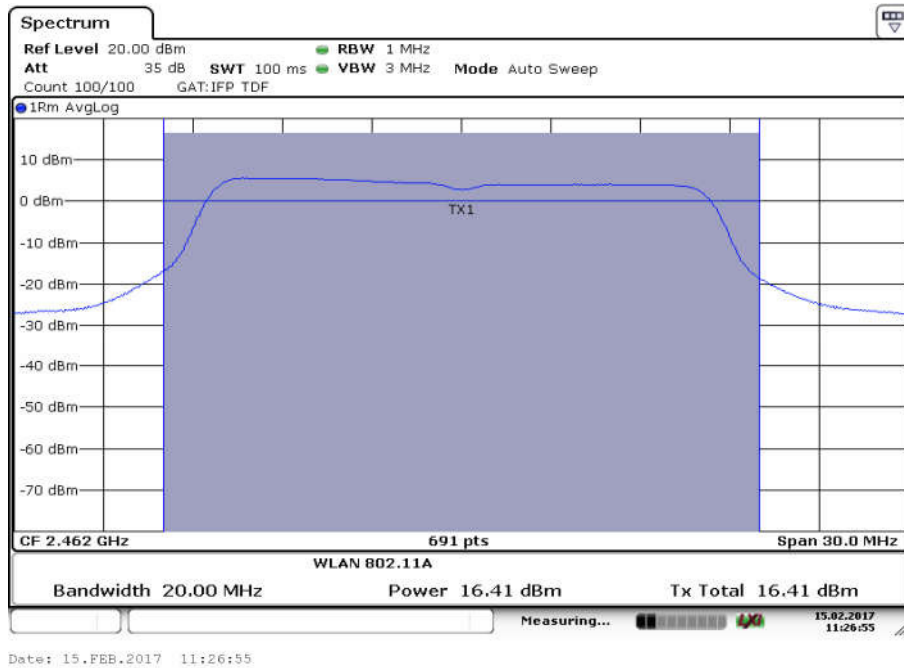


Fig.24 Maximum Average Output Power (802.11g, Ch 11,18Mbps)

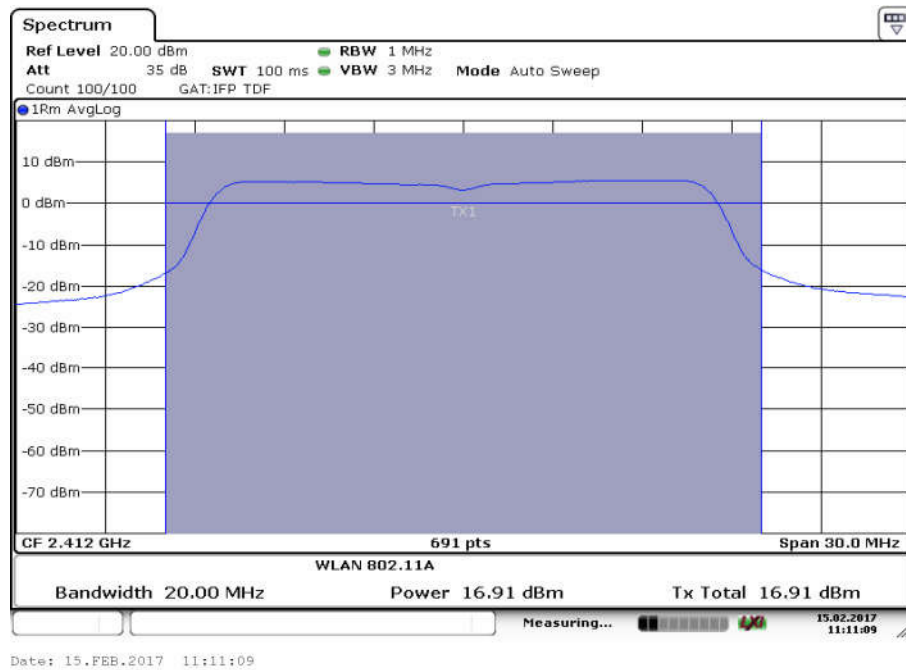


Fig.25 Maximum Average Output Power (802.11g, Ch 1,24Mbps)

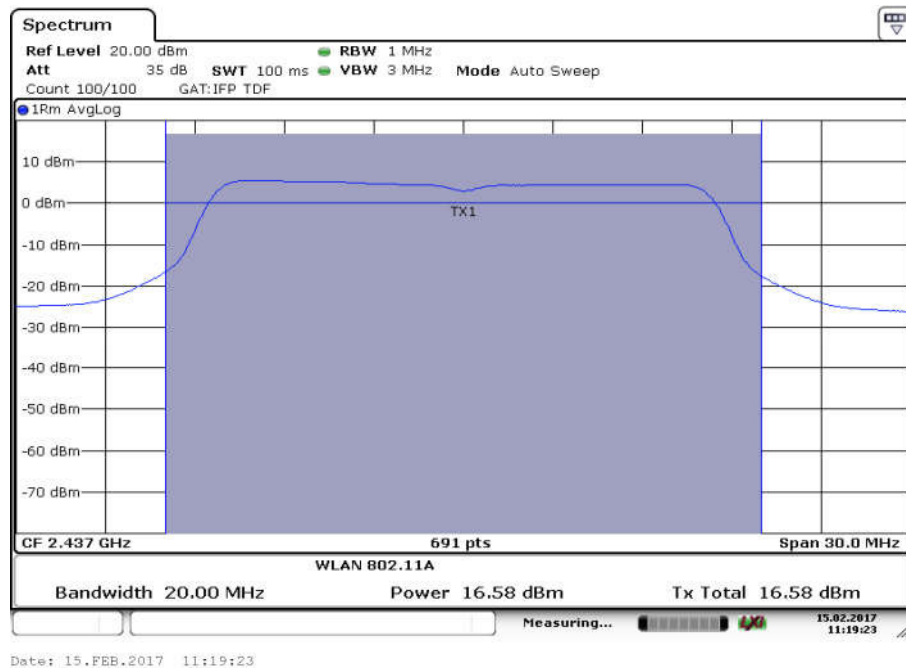


Fig.26 Maximum Average Output Power (802.11g, Ch 6,24Mbps)

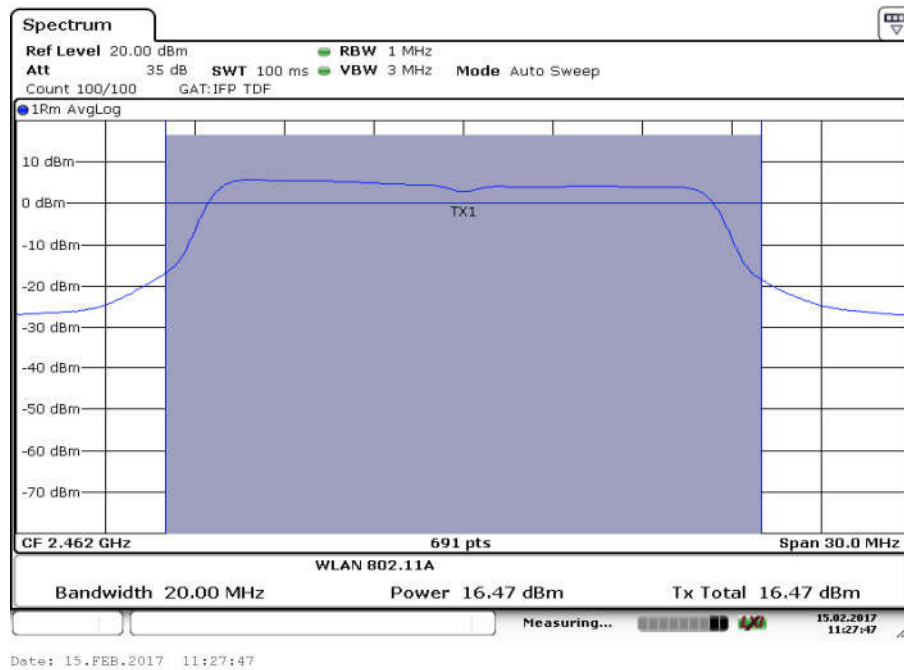


Fig.27 Maximum Average Output Power (802.11g, Ch 11,24Mbps)

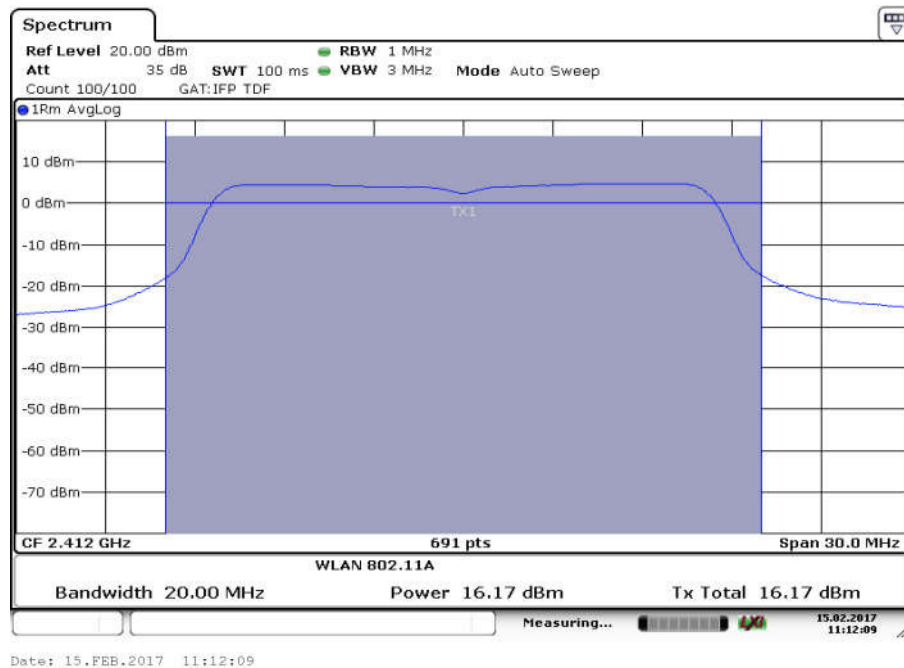


Fig.28 Maximum Average Output Power (802.11g, Ch 1,36Mbps)



Fig.29 Maximum Average Output Power (802.11g, Ch 6,36Mbps)

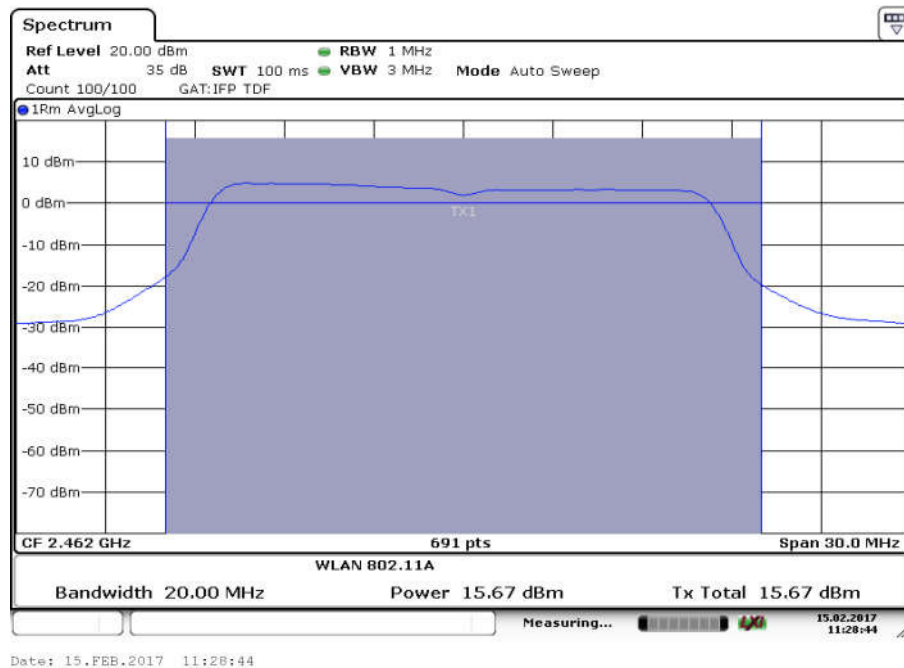


Fig.30 Maximum Average Output Power (802.11g, Ch 11,36Mbps)

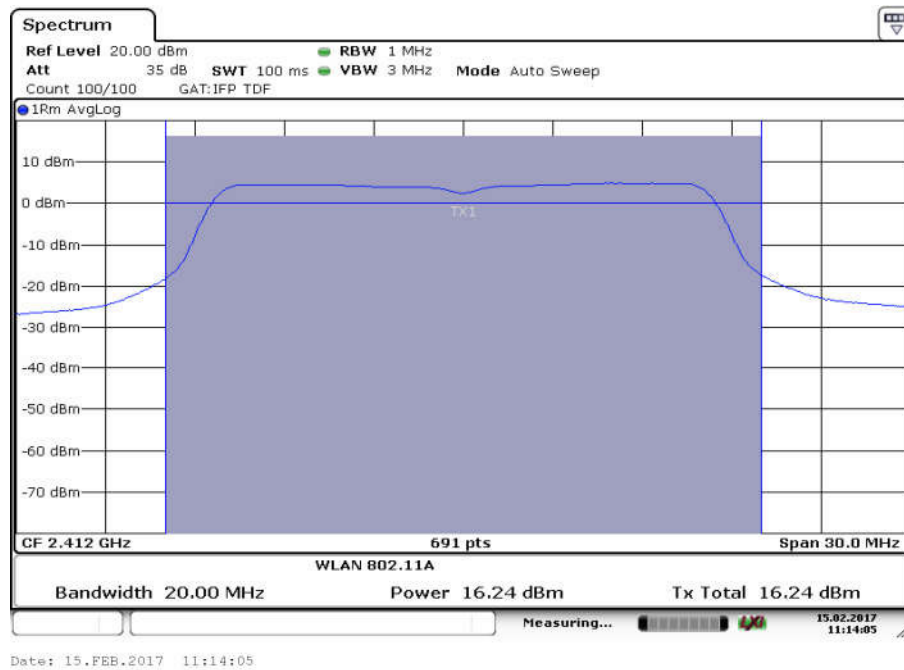


Fig.31 Maximum Average Output Power (802.11g, Ch 1,48Mbps)

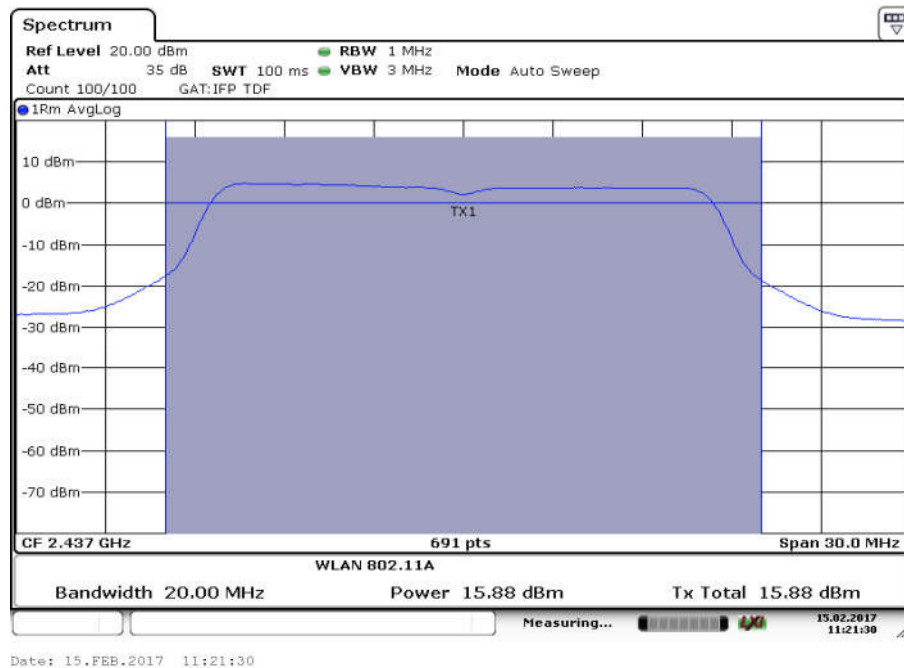


Fig.32 Maximum Average Output Power (802.11g, Ch 6,48Mbps)

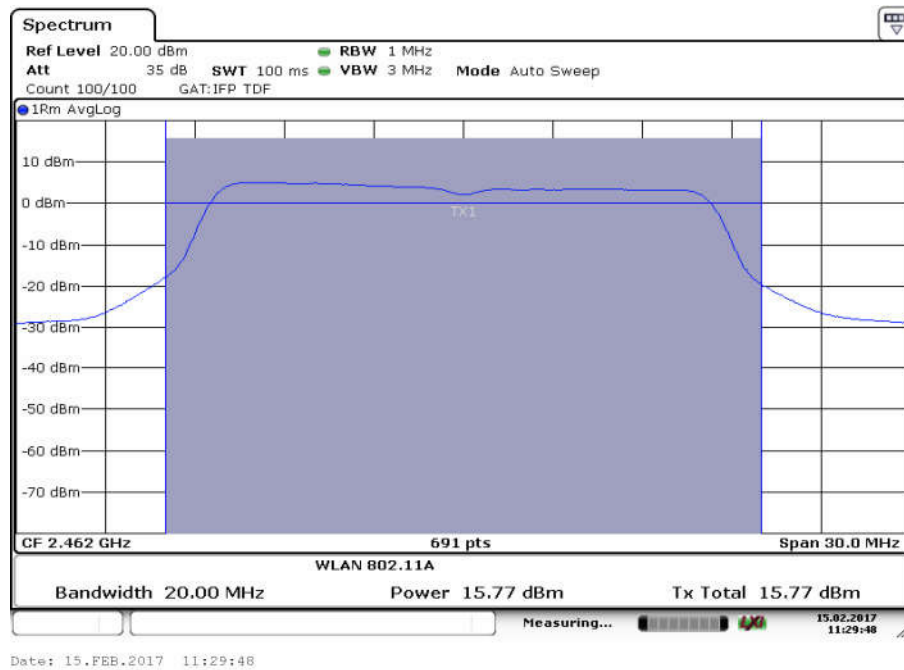


Fig.33 Maximum Average Output Power (802.11g, Ch 11,48Mbps)

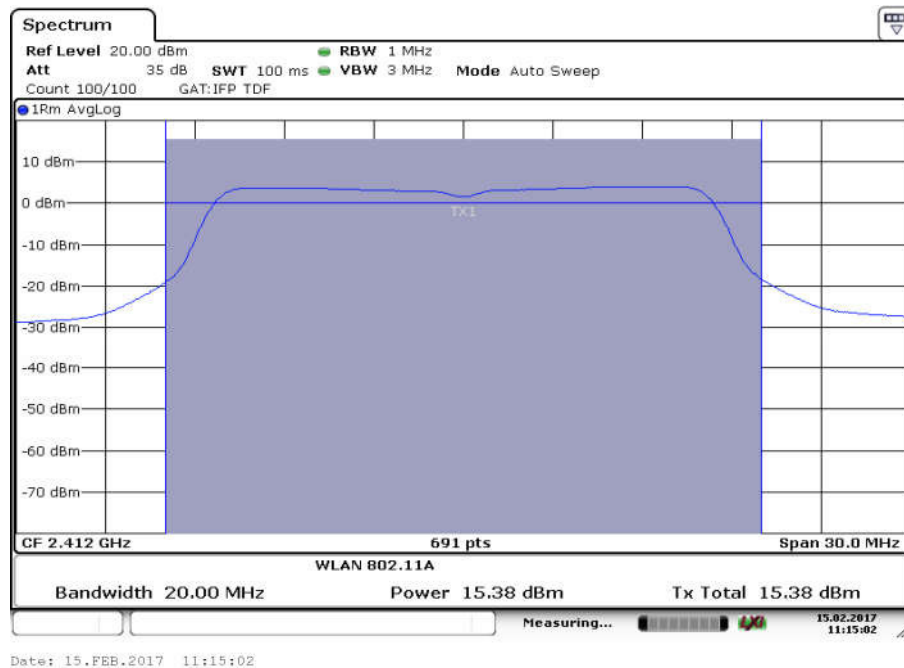


Fig.34 Maximum Average Output Power (802.11g, Ch 1,54Mbps)

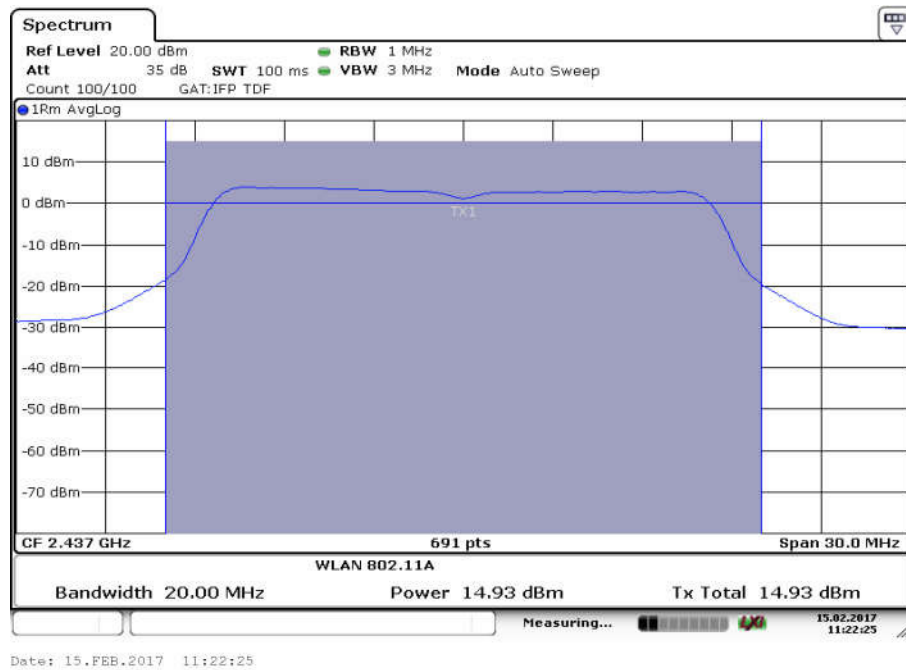


Fig.35 Maximum Average Output Power (802.11g, Ch 6,54Mbps)

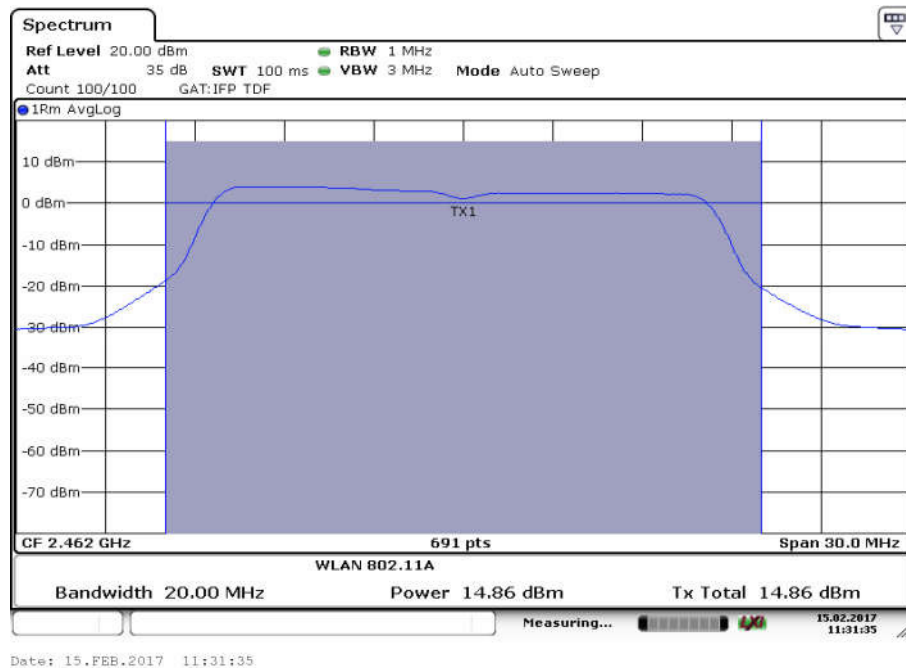


Fig.36 Maximum Average Output Power (802.11g, Ch 11,54Mbps)

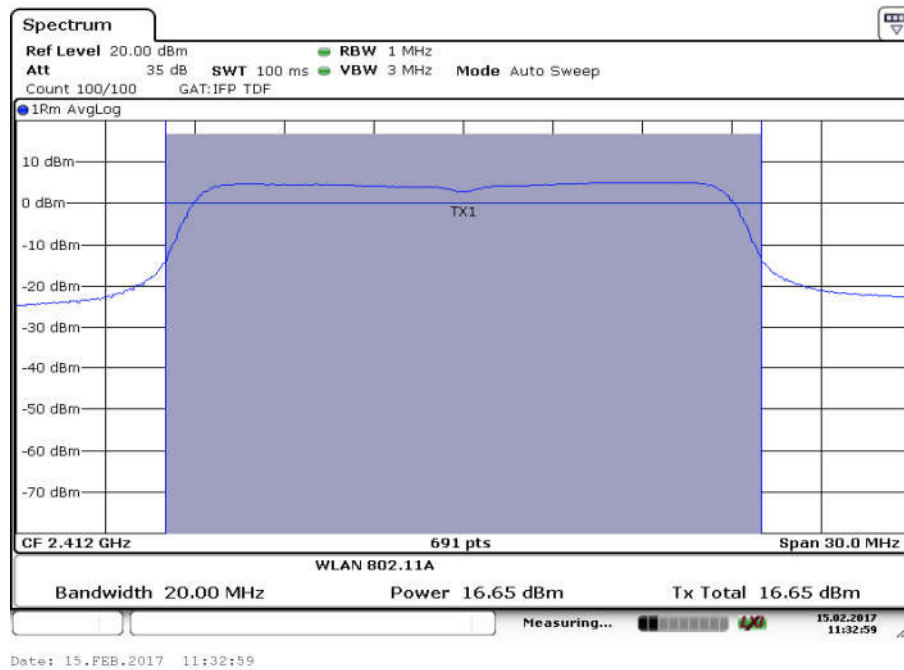


Fig.37 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS0)

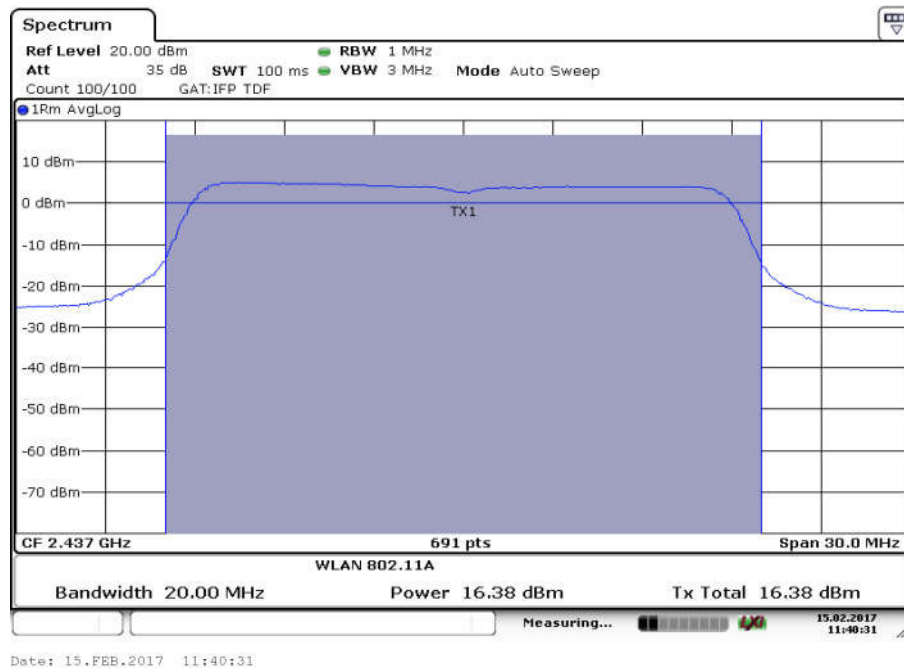


Fig.38 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS0)

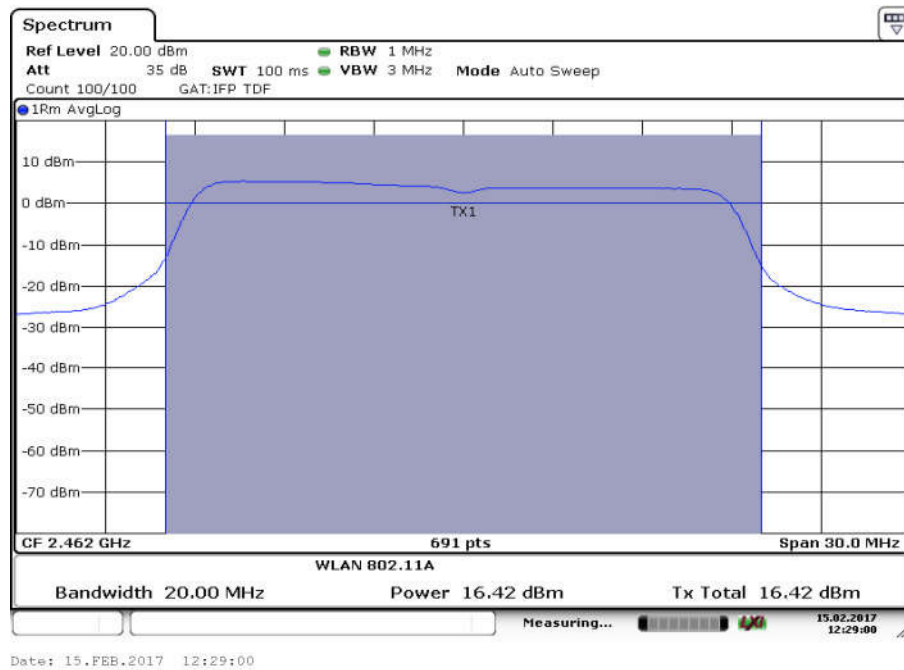


Fig.39 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS0)

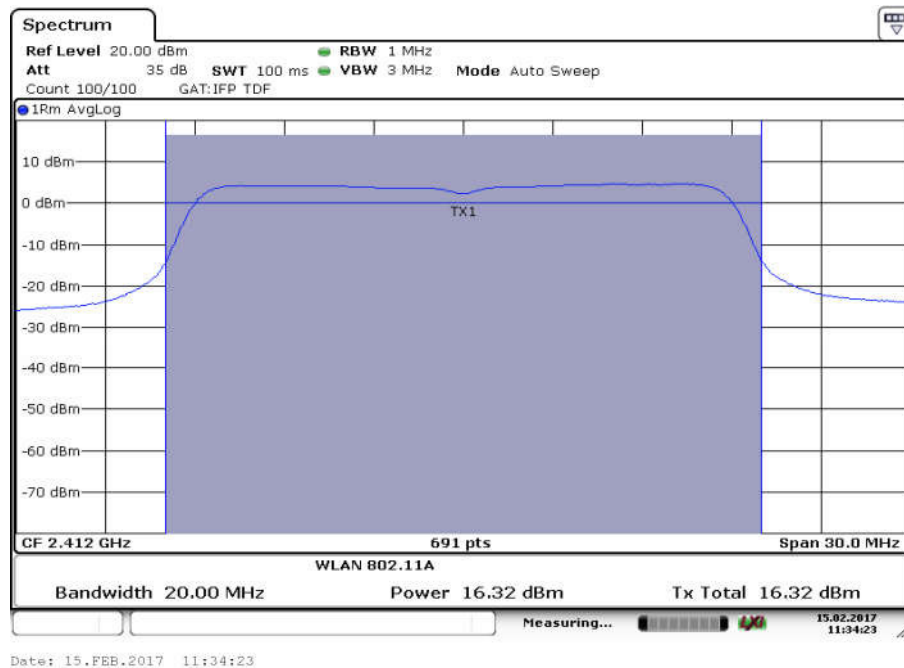


Fig.40 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS1)

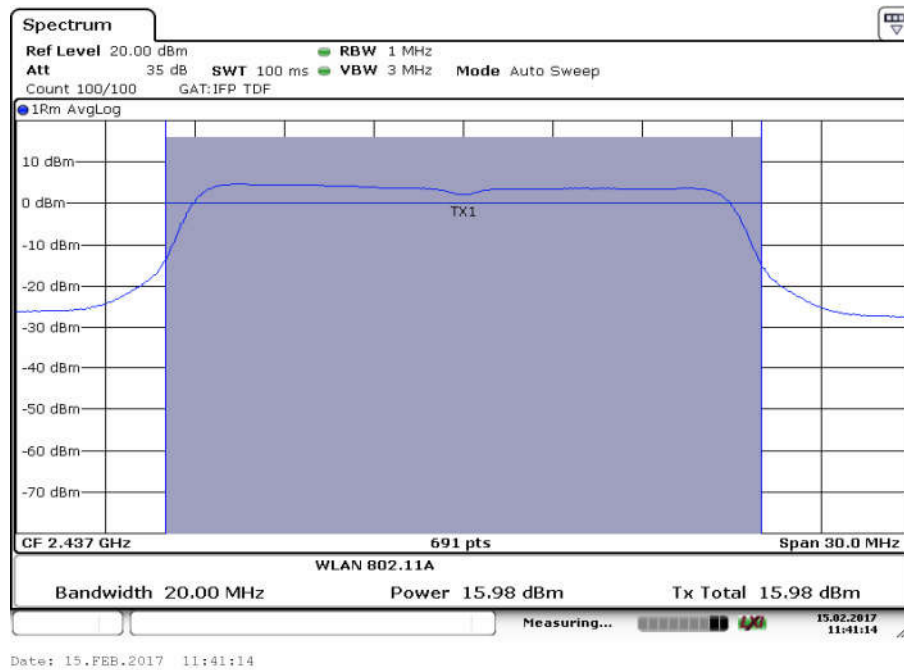


Fig.41 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS1)

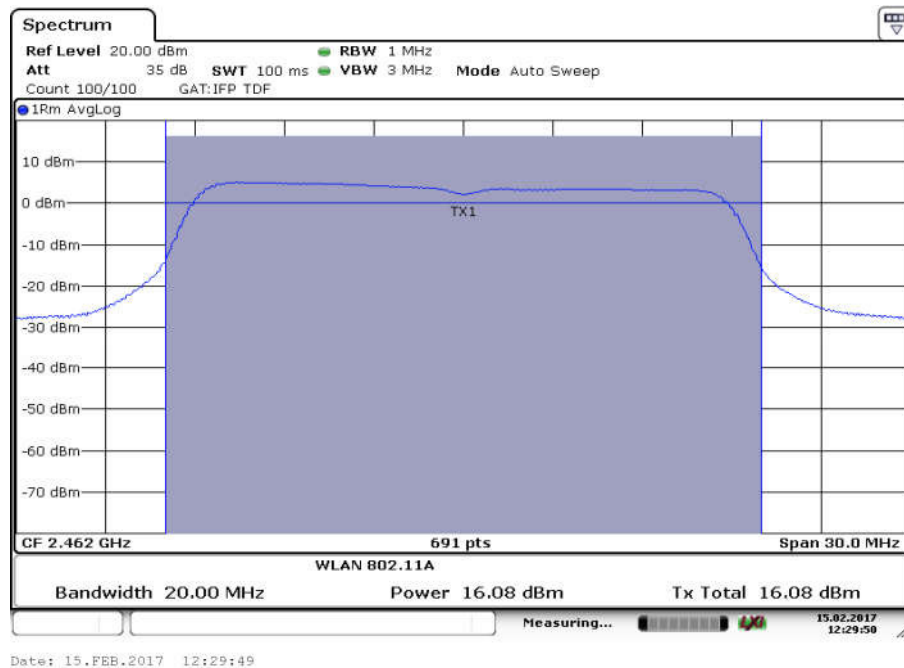


Fig.42 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS1)

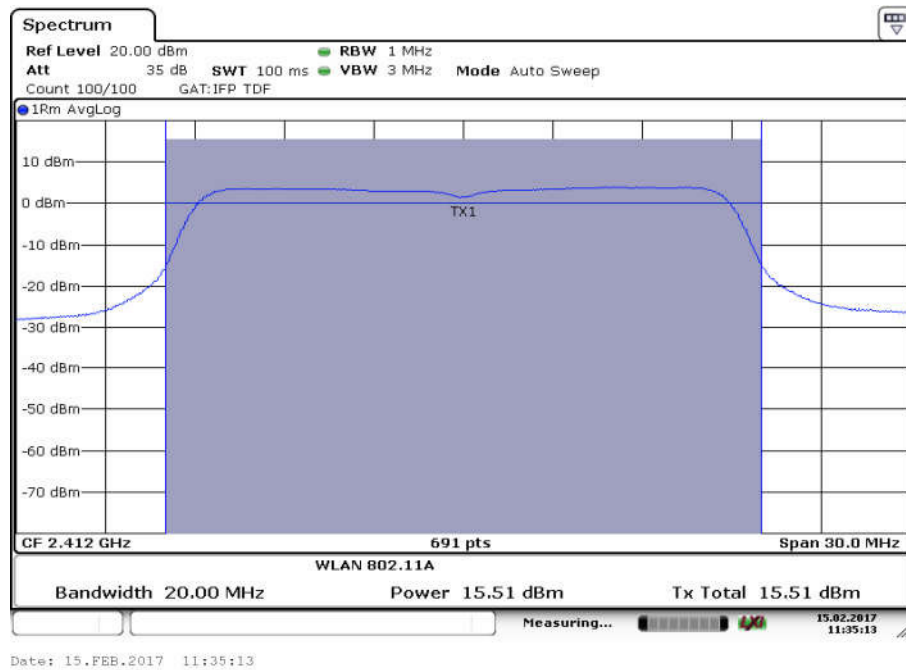


Fig.43 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS2)

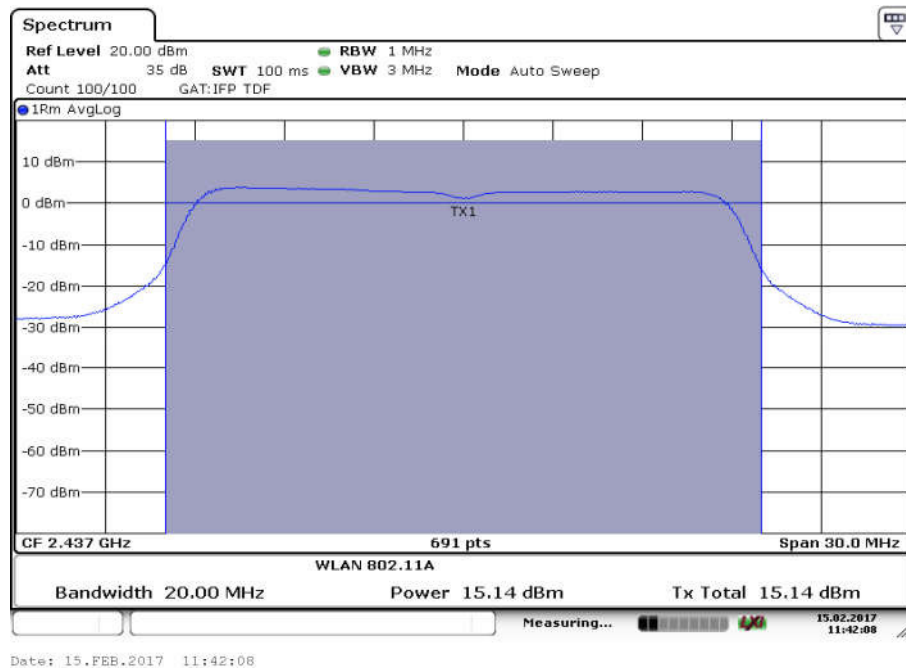


Fig.44 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS2)

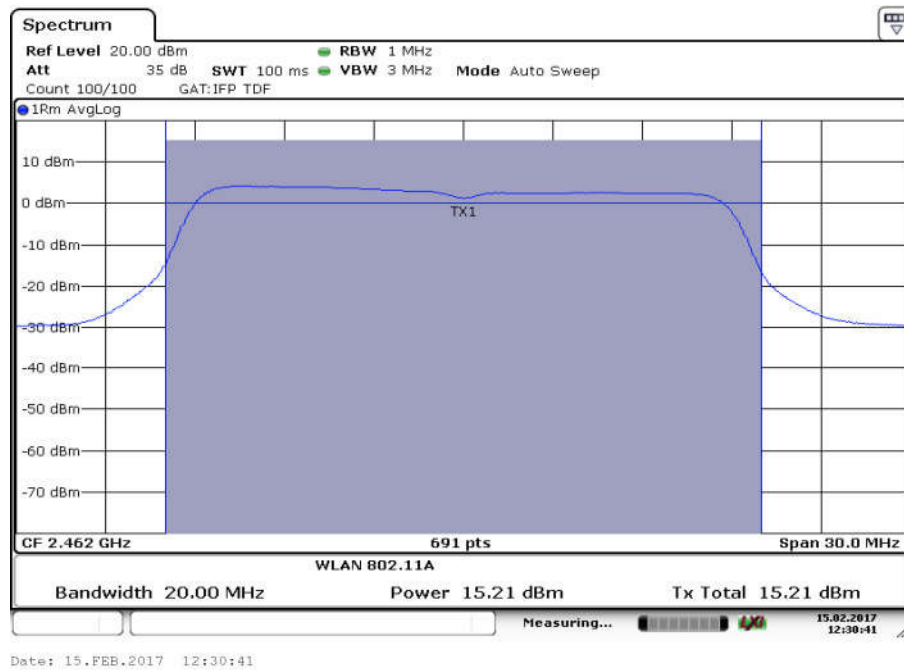


Fig.45 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS2)

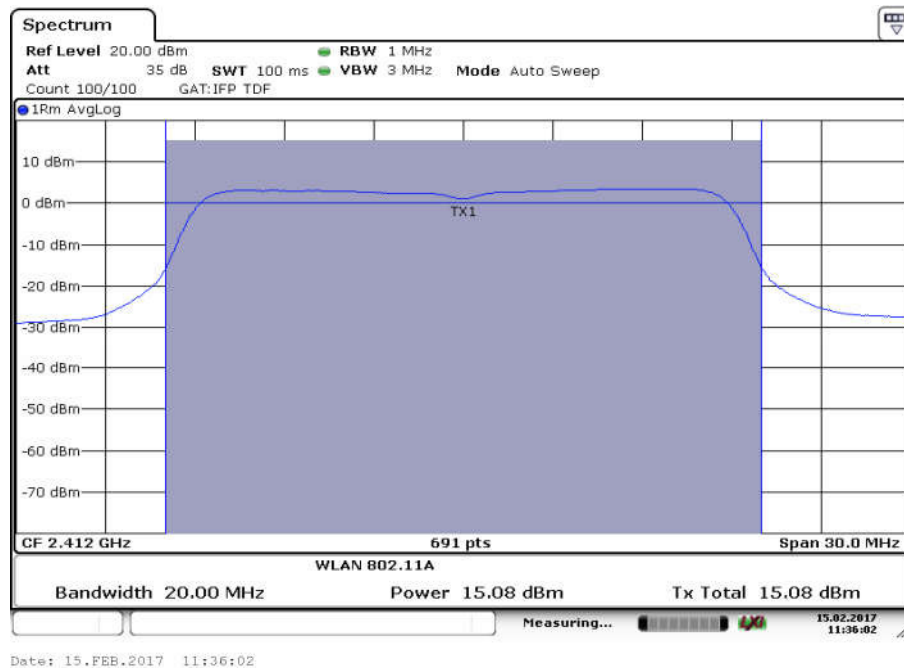


Fig.46 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS3)

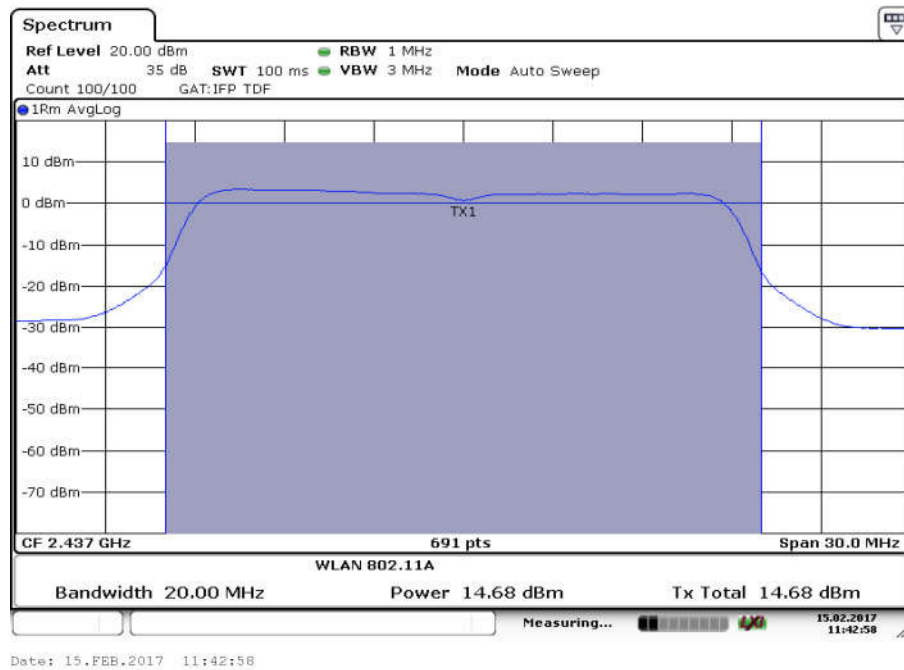


Fig.47 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS3)

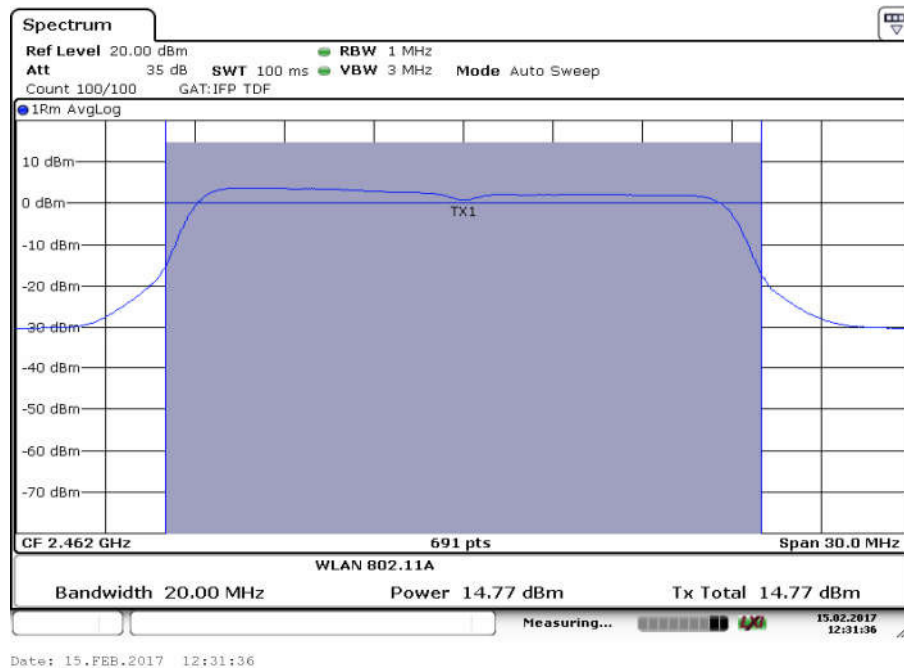


Fig.48 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS3)

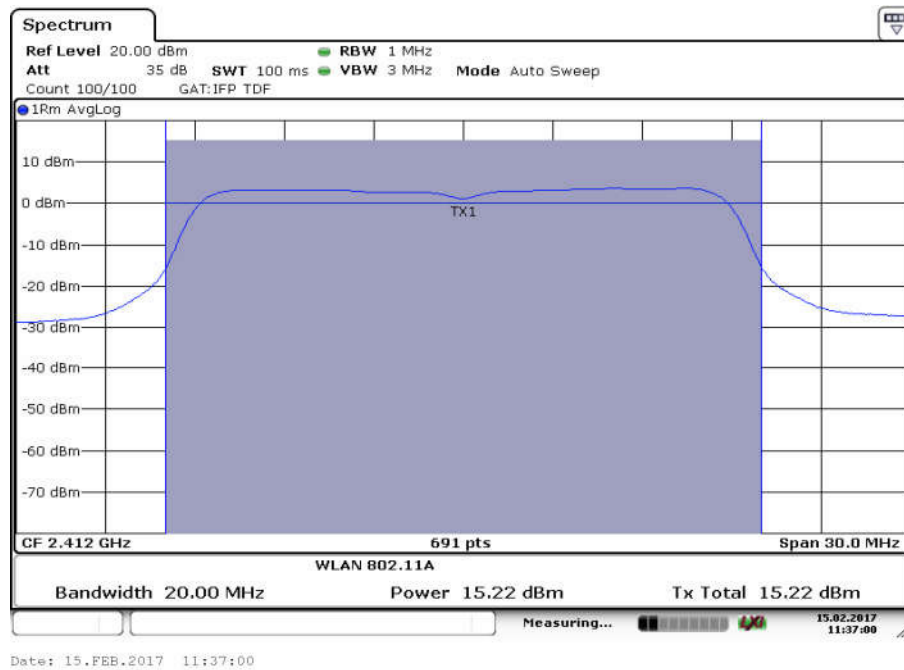


Fig.49 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS4)

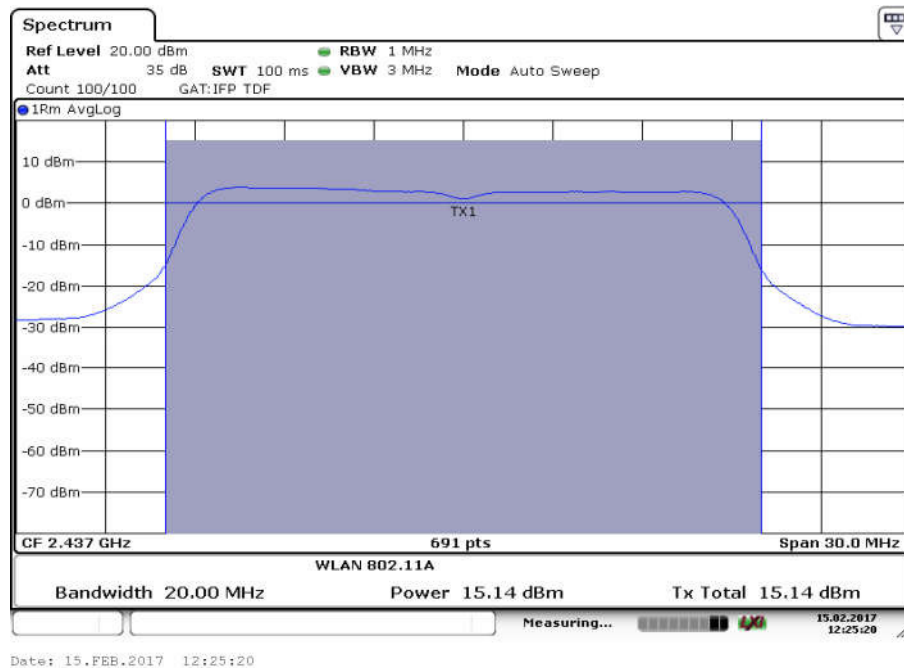


Fig.50 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS4)

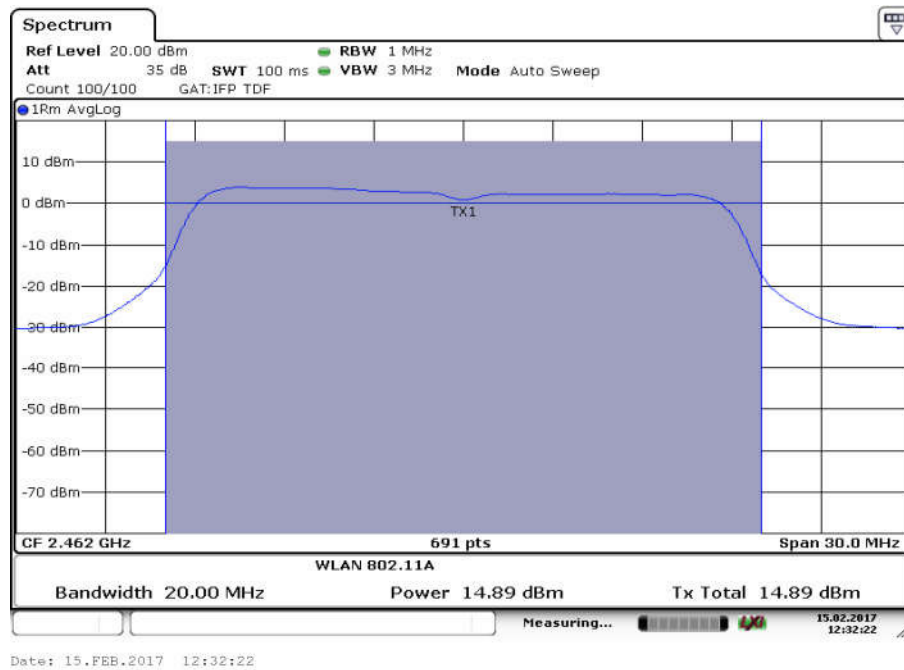


Fig.51 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS4)

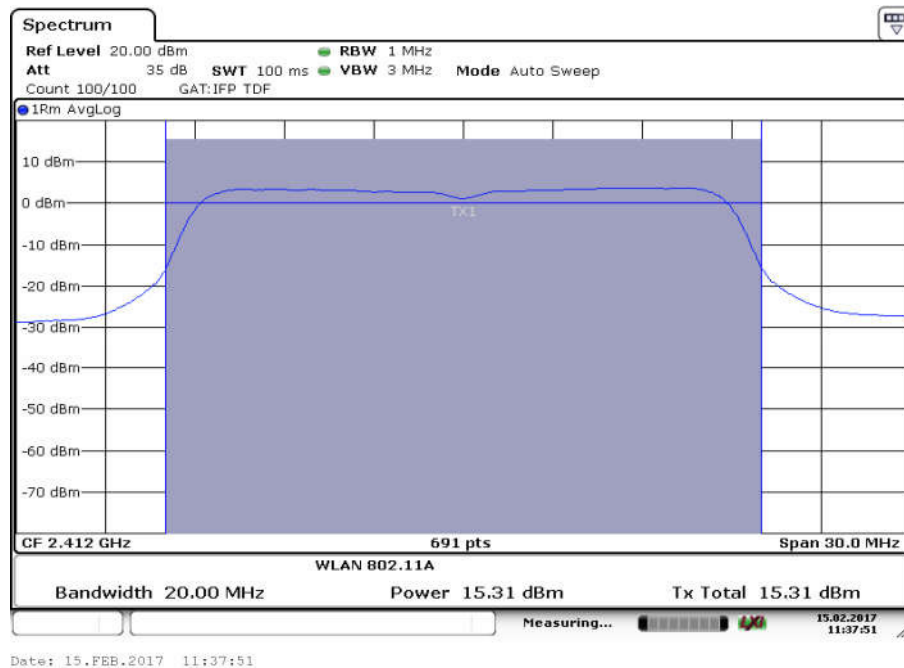


Fig.52 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS5)

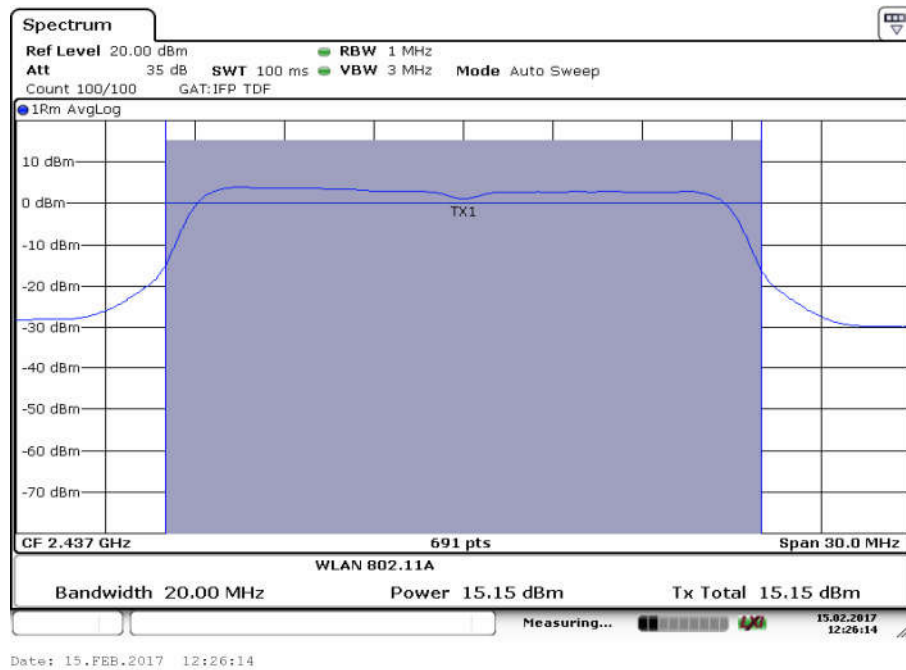


Fig.53 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS5)

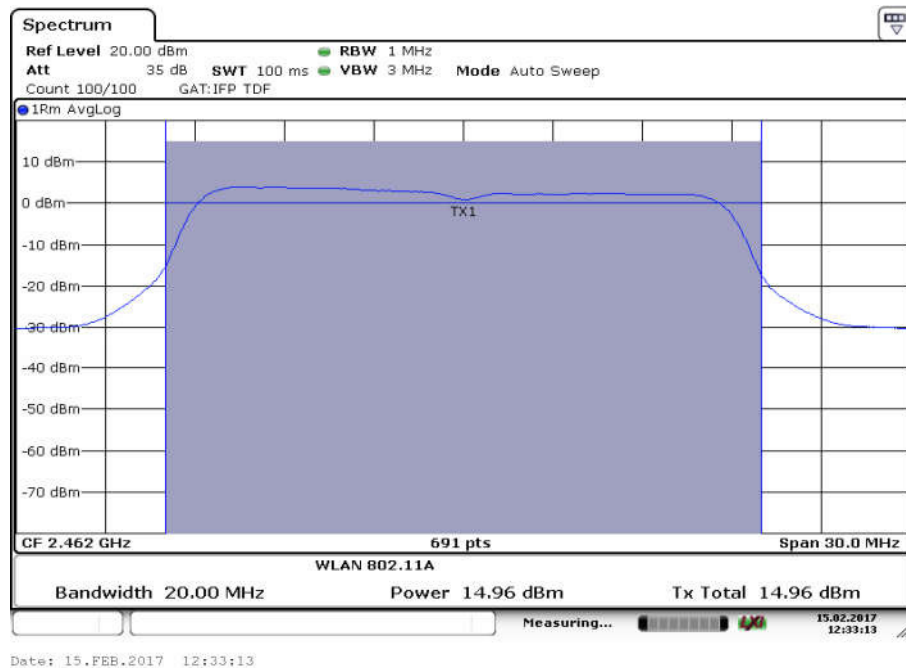


Fig.54 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS5)

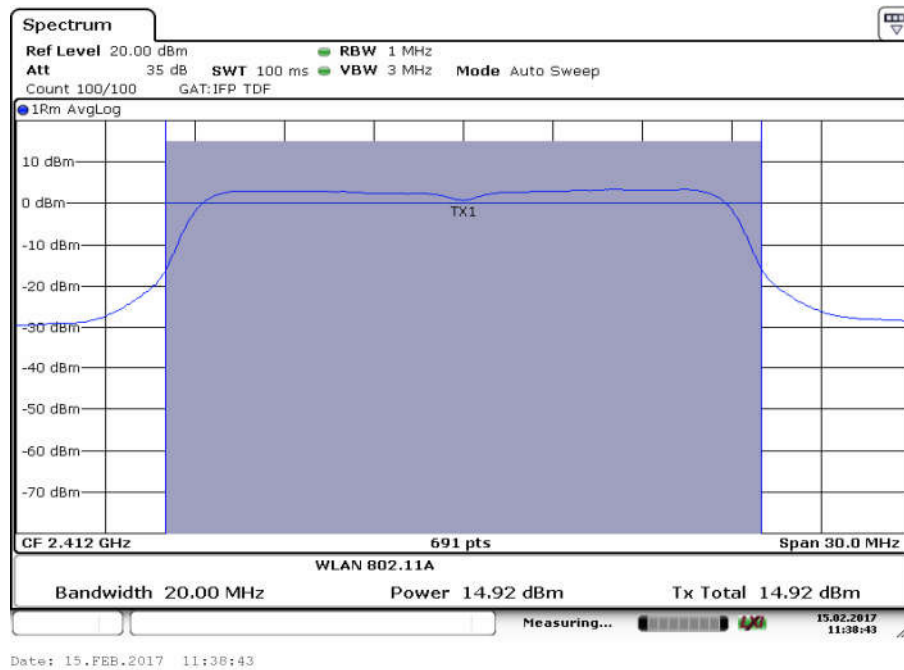


Fig.55 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS6)

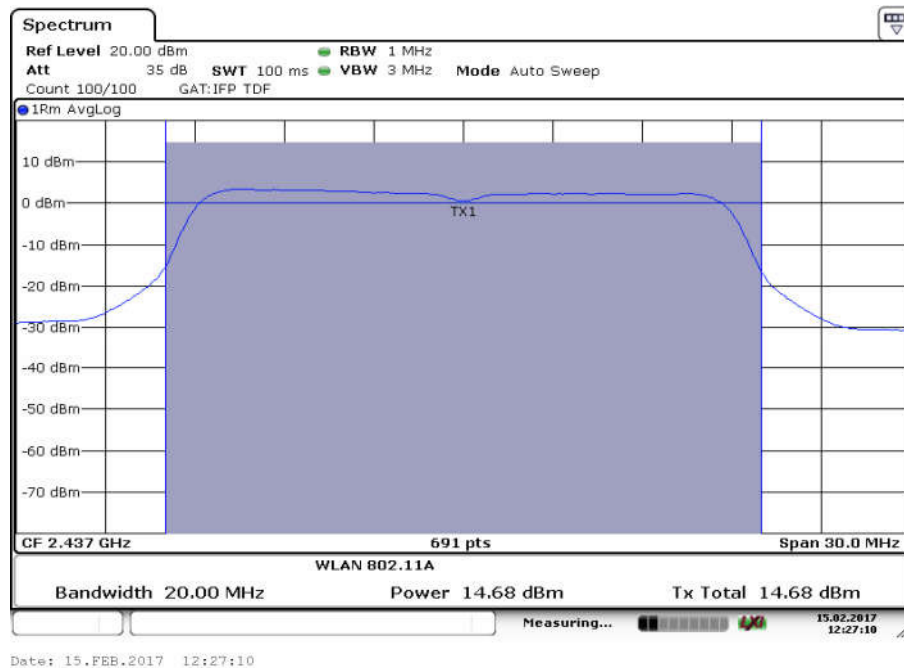


Fig.56 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS6)

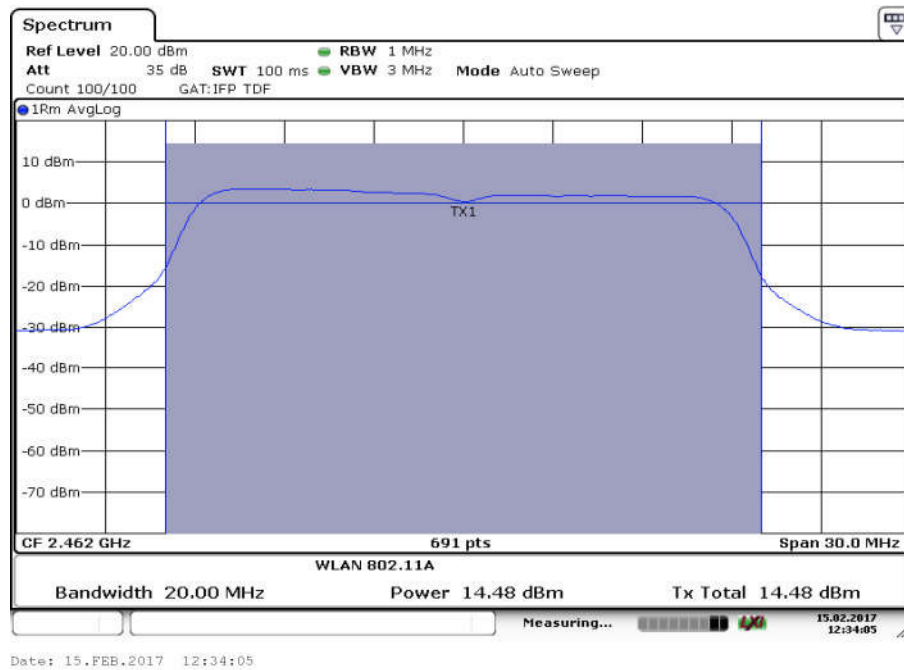


Fig.57 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS6)

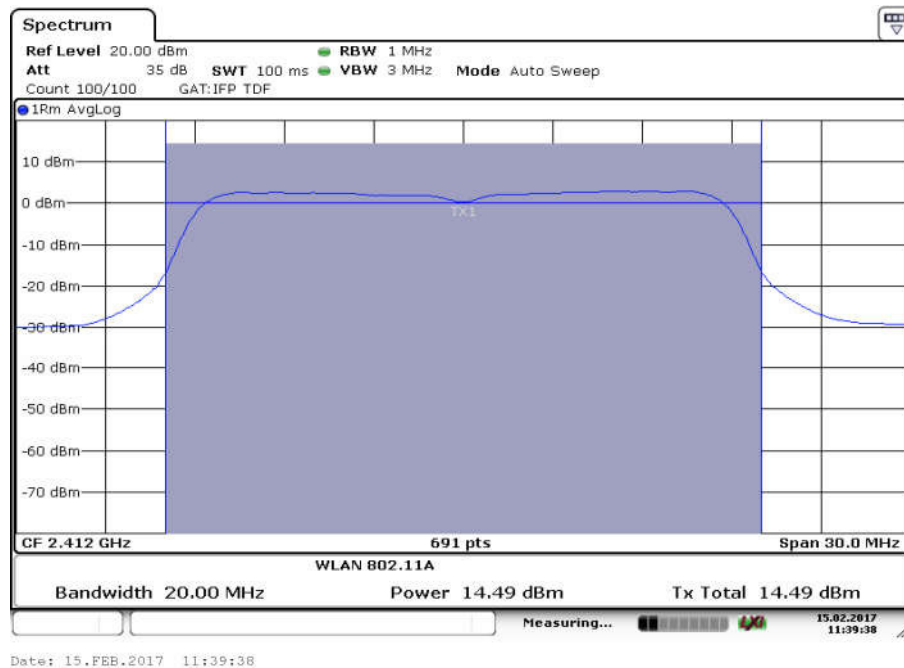


Fig.58 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS7)

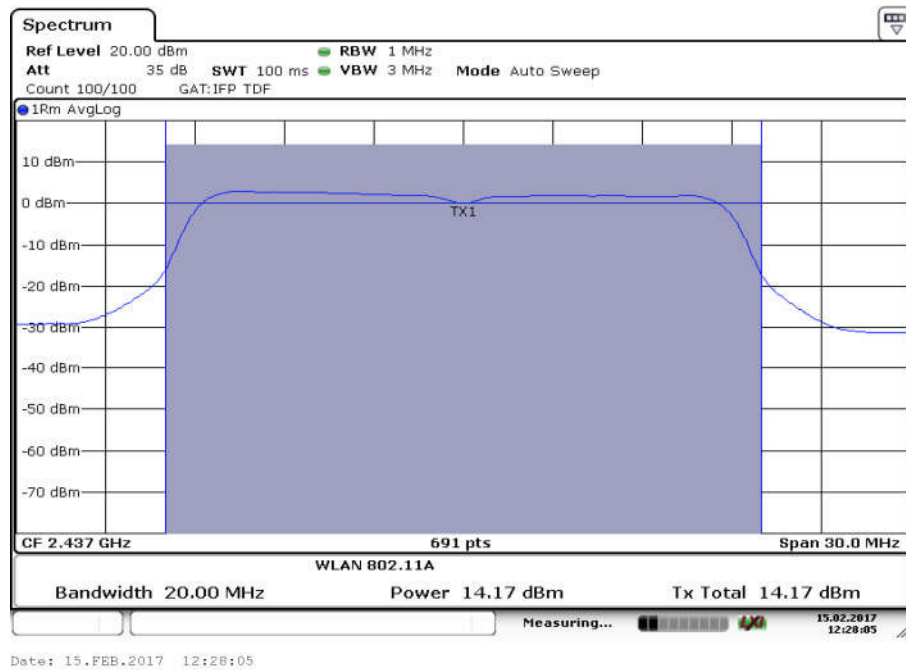


Fig.59 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS7)

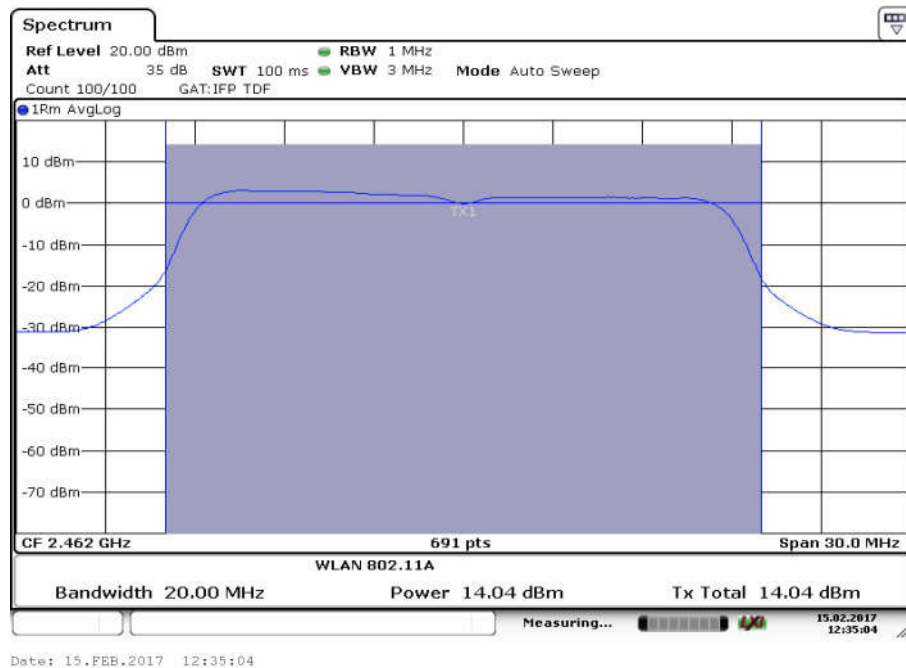


Fig.60 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS7)

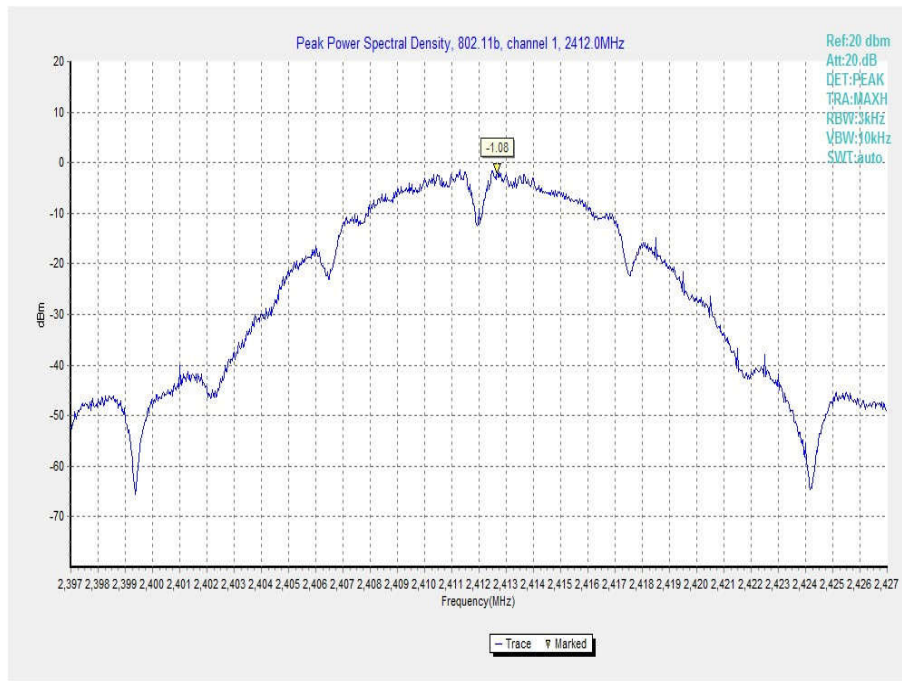


Fig.61 Power Spectral Density (802.11b, Ch 1)

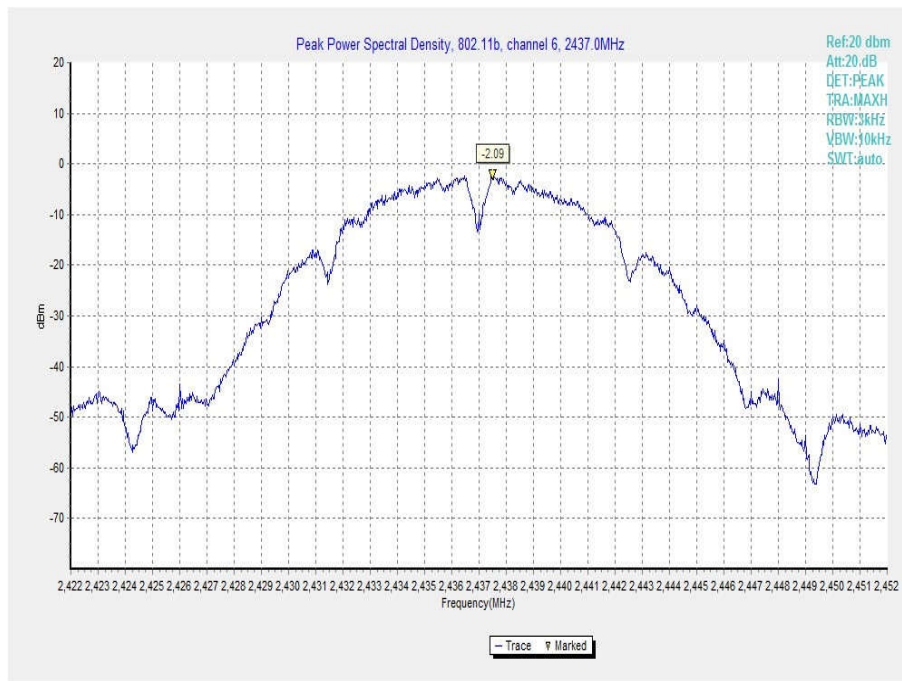


Fig.62 Power Spectral Density (802.11b, Ch 6)

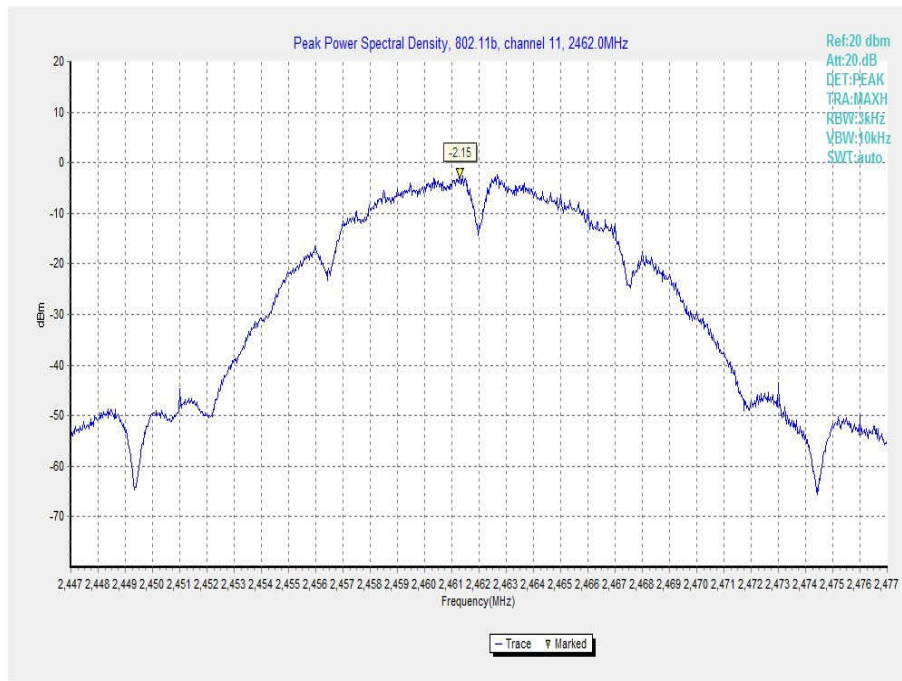


Fig.63 Power Spectral Density (802.11b, Ch 11)

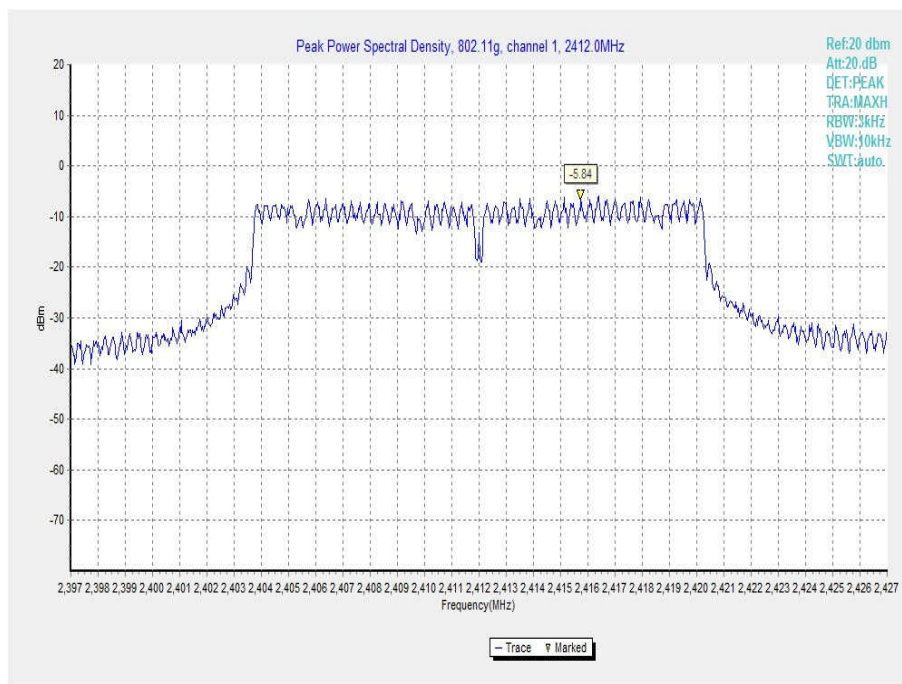


Fig.64 Power Spectral Density (802.11g, Ch 1)

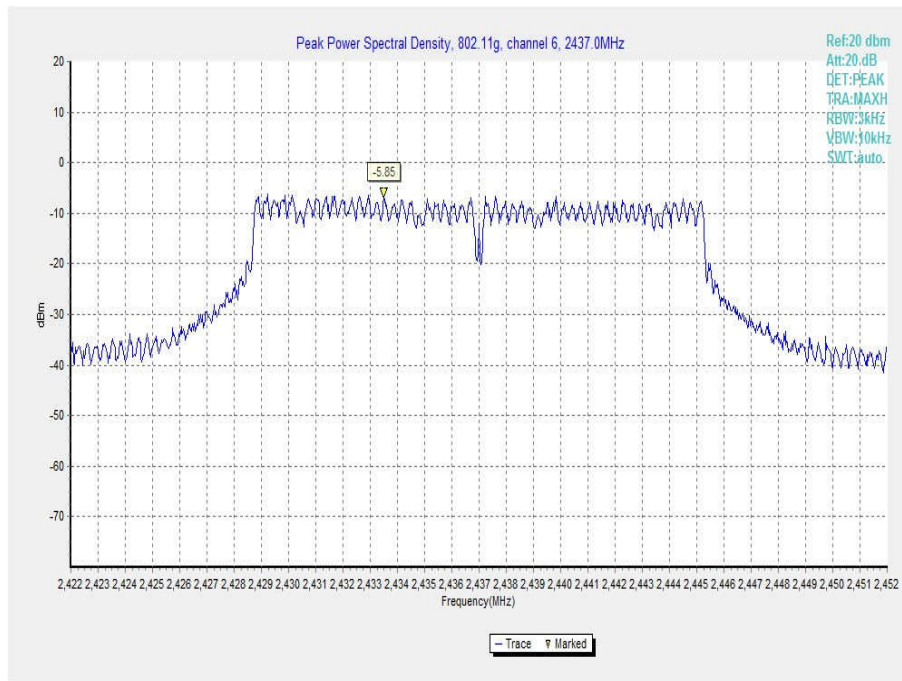


Fig.65 Power Spectral Density (802.11g, Ch 6)

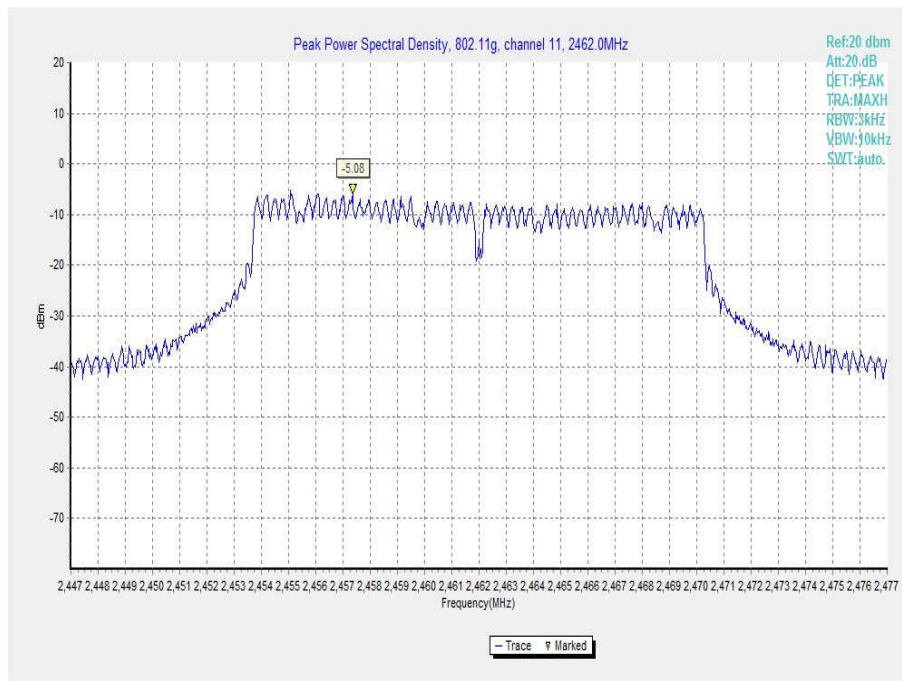


Fig.66 Power Spectral Density (802.11g, Ch 11)

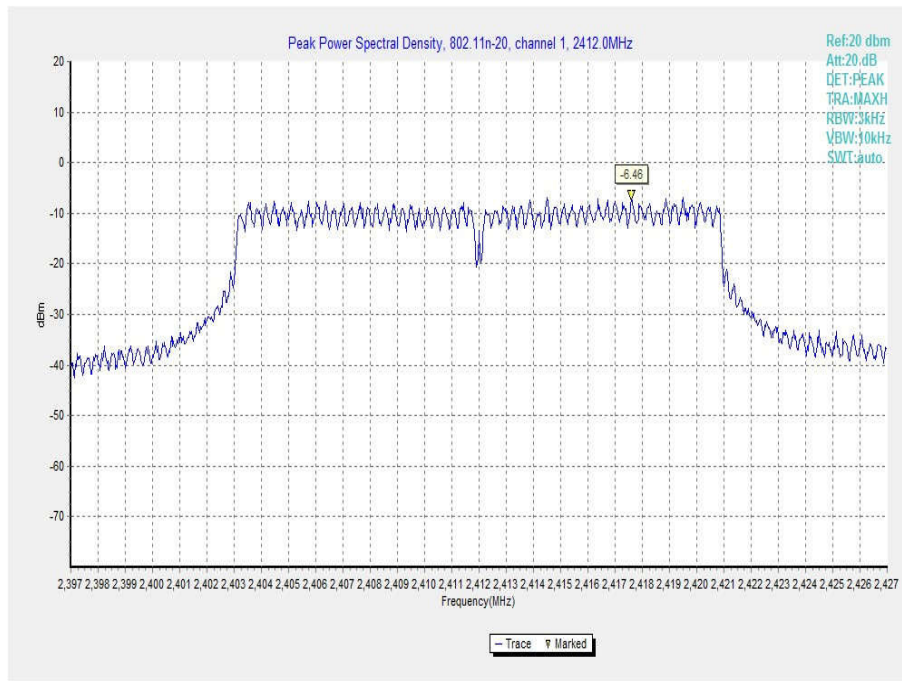


Fig.67 Power Spectral Density (802.11n-20MHz, Ch 1)

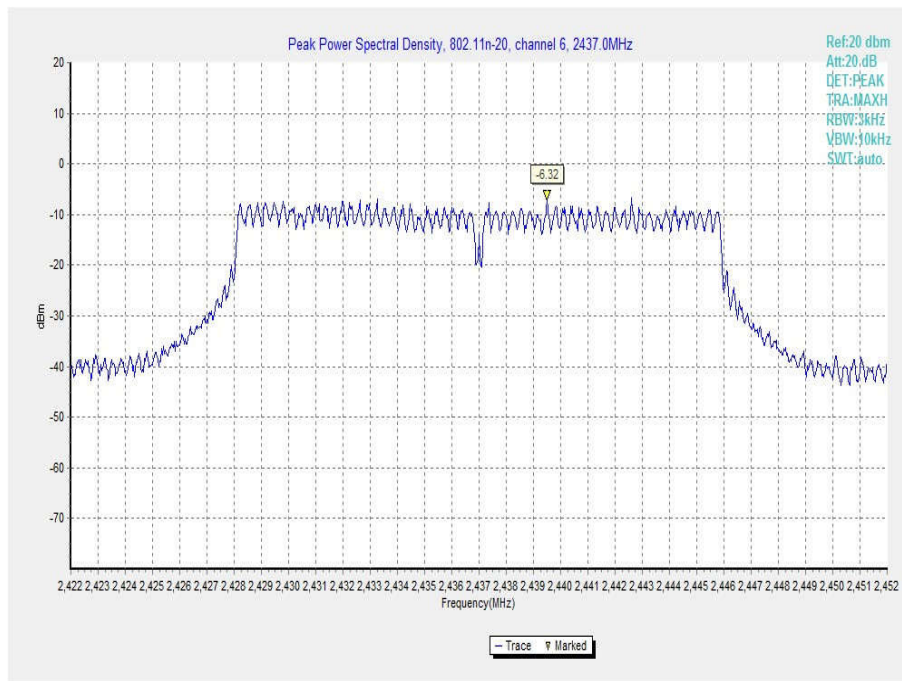


Fig.68 Power Spectral Density (802.11n-20MHz, Ch 6)

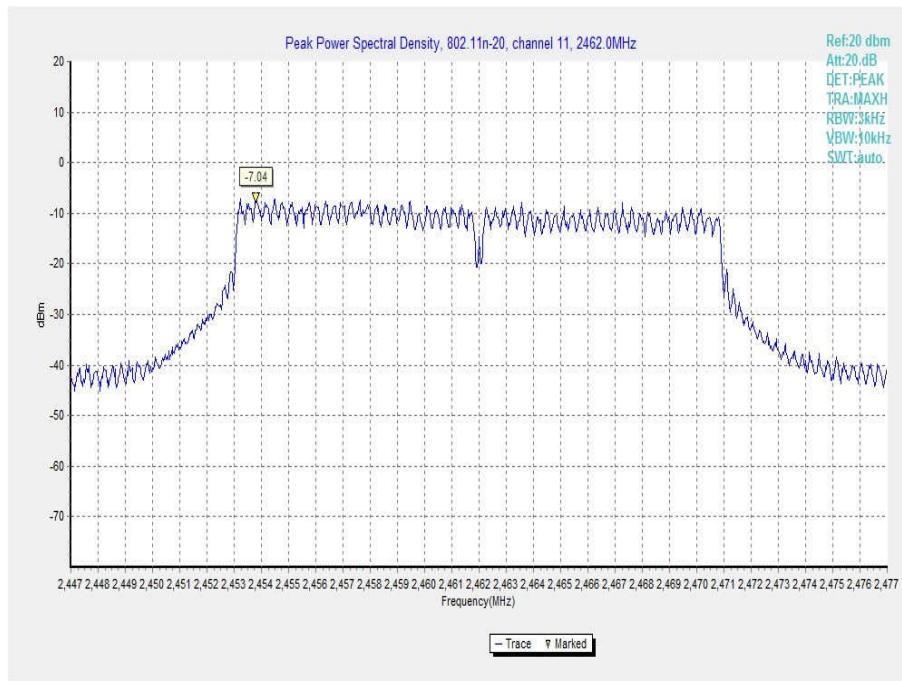


Fig.69 Power Spectral Density (802.11n-20MHz, Ch 11)

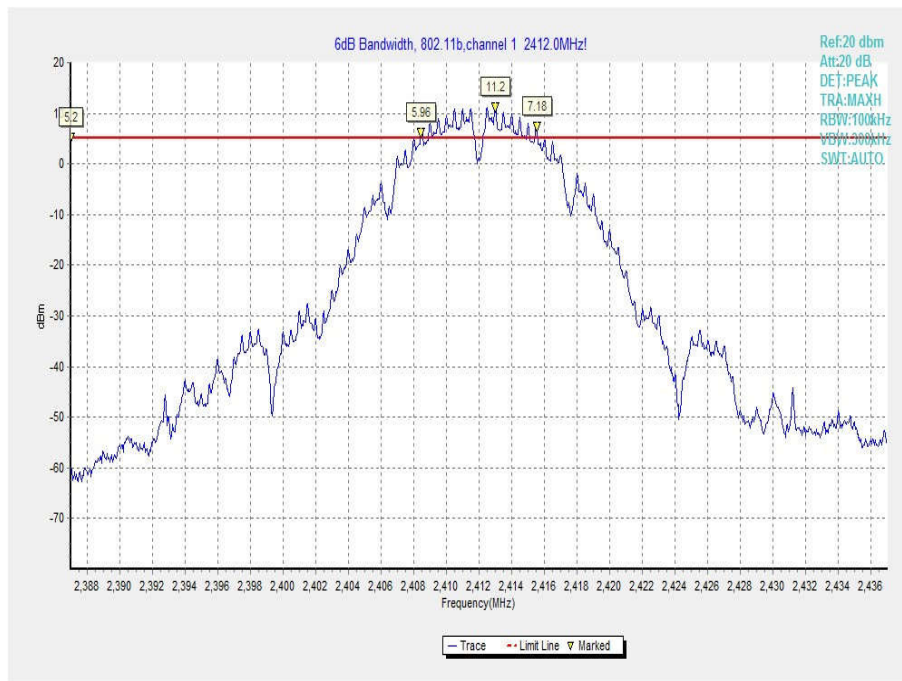


Fig.70 Occupied 6dB Bandwidth (802.11b, Ch 1)

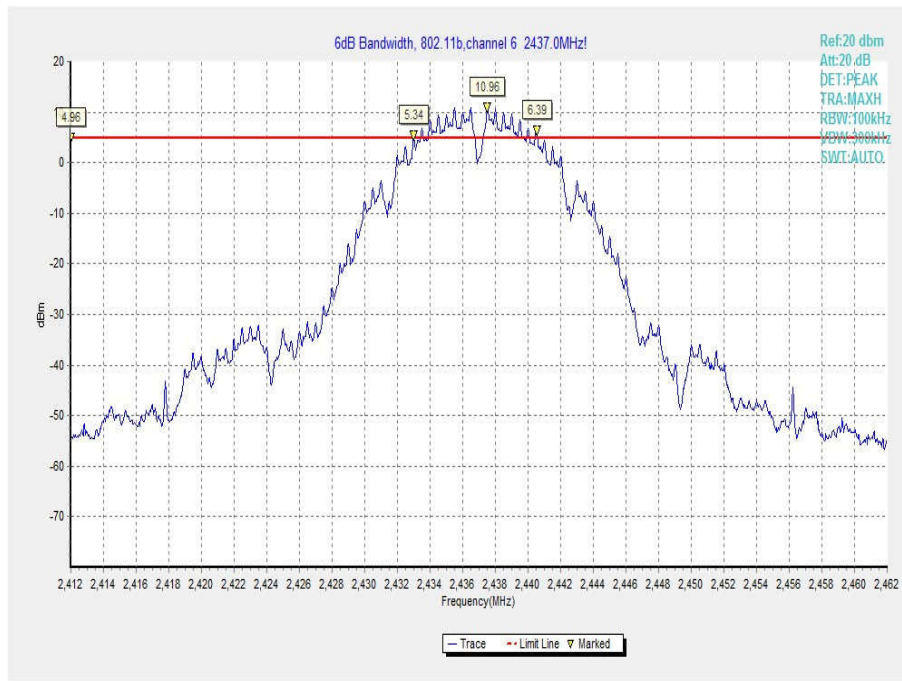


Fig.71 Occupied 6dB Bandwidth (802.11b, Ch 6)

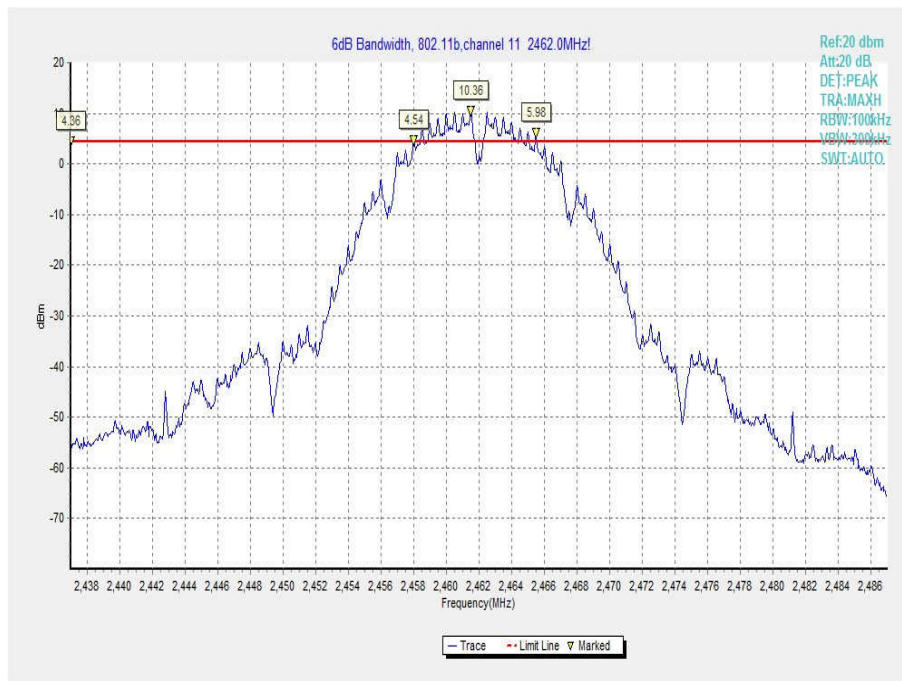


Fig.72 Occupied 6dB Bandwidth (802.11b, Ch 11)

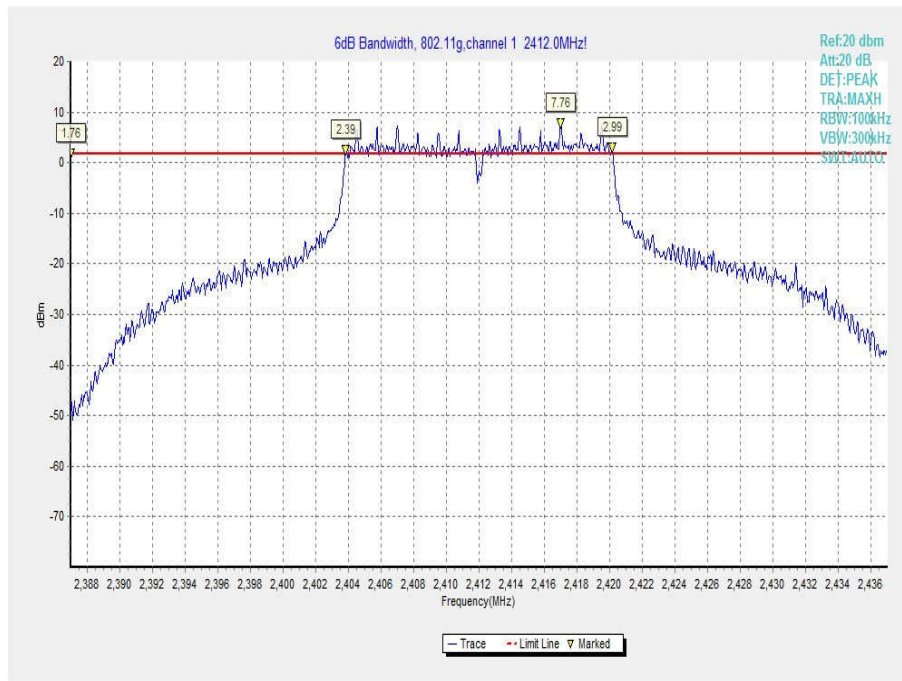


Fig.73 Occupied 6dB Bandwidth (802.11g, Ch 1)

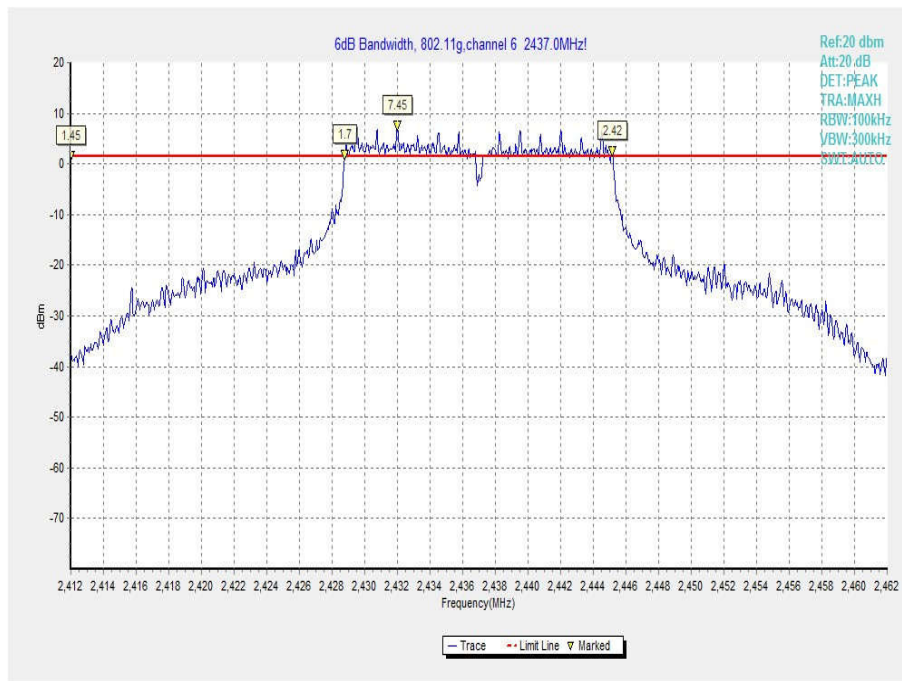


Fig.74 Occupied 6dB Bandwidth (802.11g, Ch 6)

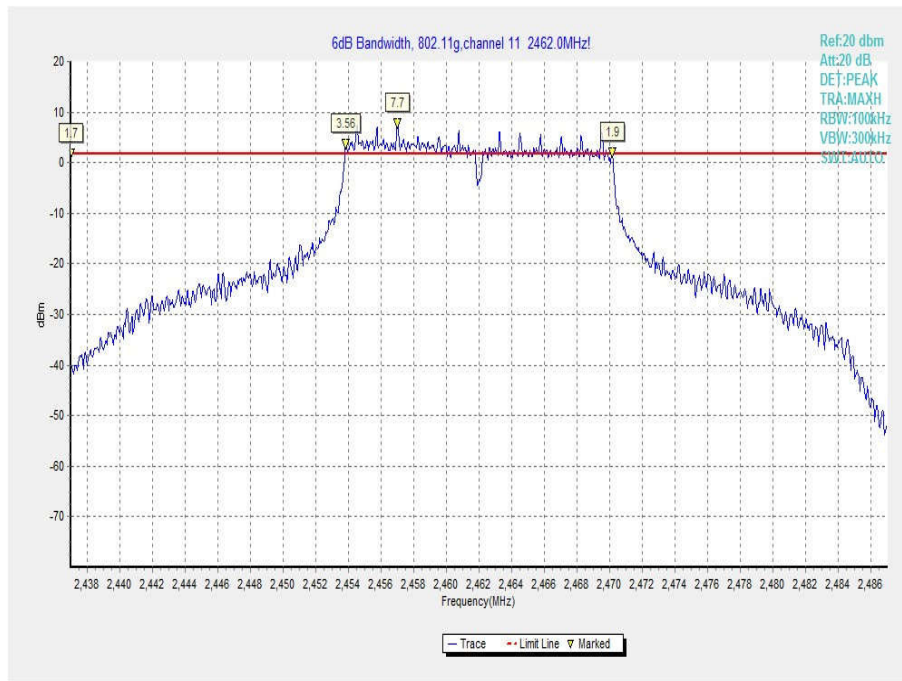


Fig.75 Occupied 6dB Bandwidth (802.11g, Ch 11)

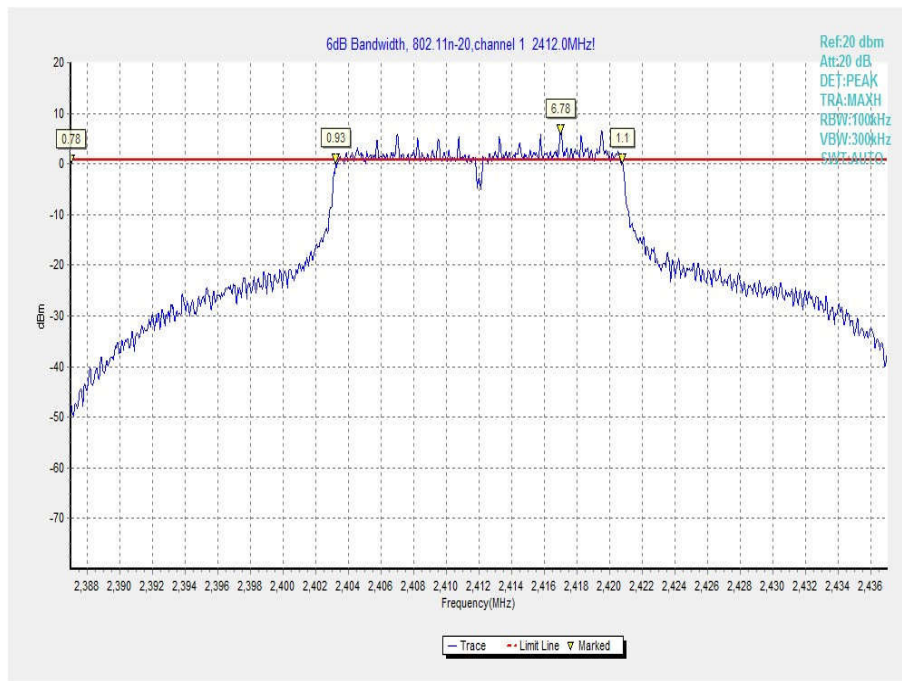


Fig.76 Occupied 6dB Bandwidth (802.11 n-20MHz, Ch 1)

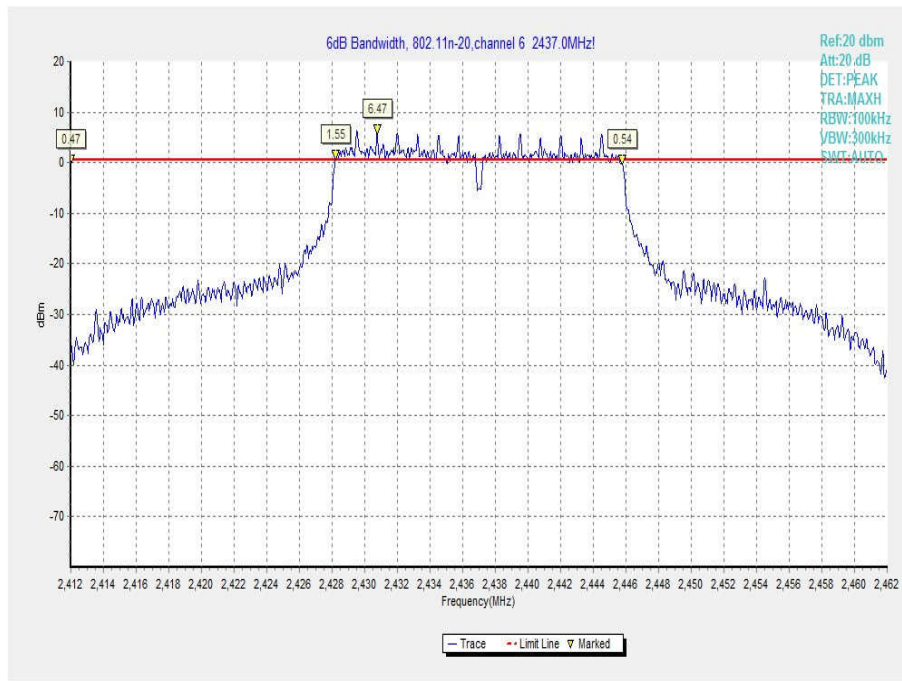


Fig.77 Occupied 6dB Bandwidth (802.11 n-20MHz, Ch 6)

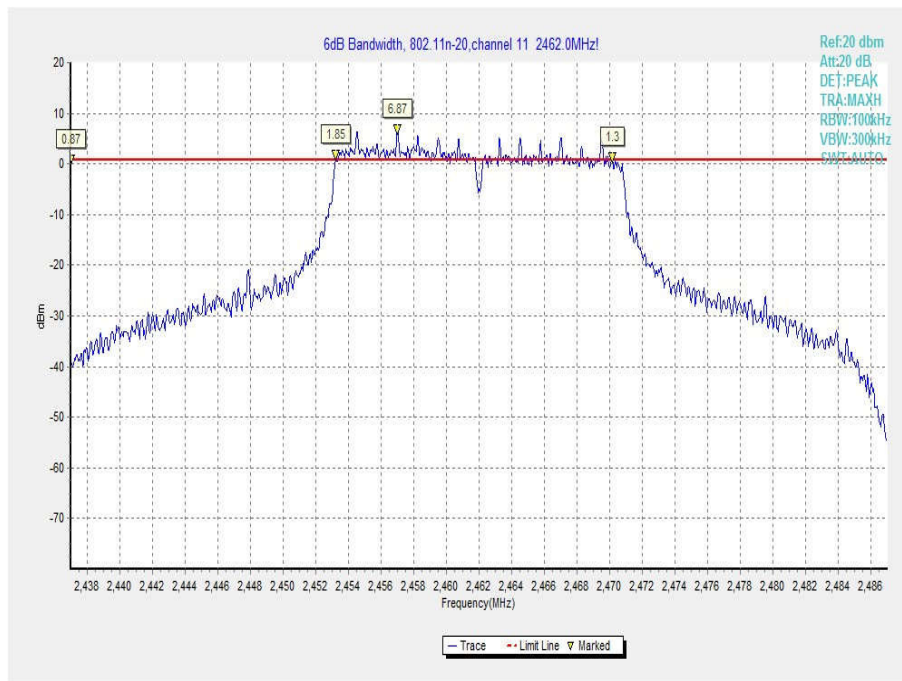


Fig.78 Occupied 6dB Bandwidth (802.11 n-20MHz, Ch 11)