



Project: LGT23B071	Test Engineer: Dylan.shi
EUT: Smart Phone	Temperature: 26.7°C
M/N: CP12t	Humidity: 52%RH
Test Voltage: Battery	Test Data: 2023-03-12
Test Mode: WCDMA Band 5 Lowest	
Note:	

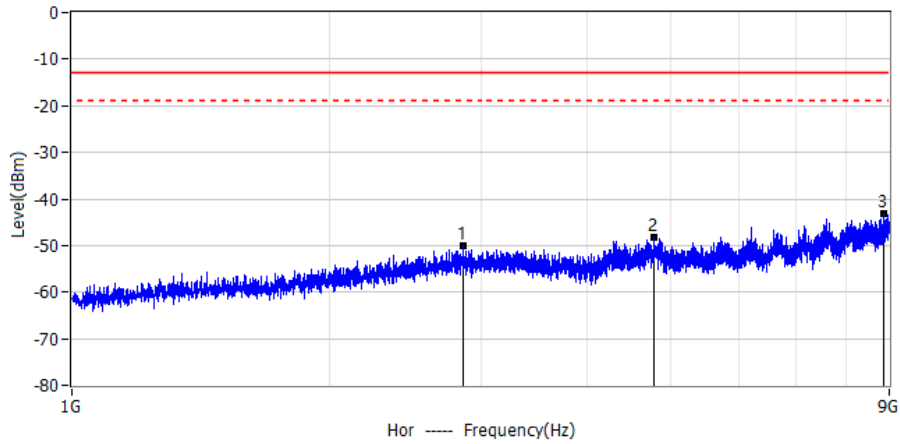


No.	Frequency	Level dBm	Limit dBm	Margin dB	Detector	Polar
1*	2.863GHz	-50.03	-13.00	-37.03	PK	Hor
2*	4.785GHz	-48.36	-13.00	-35.36	PK	Hor
3*	8.866GHz	-43.09	-13.00	-30.09	PK	Hor

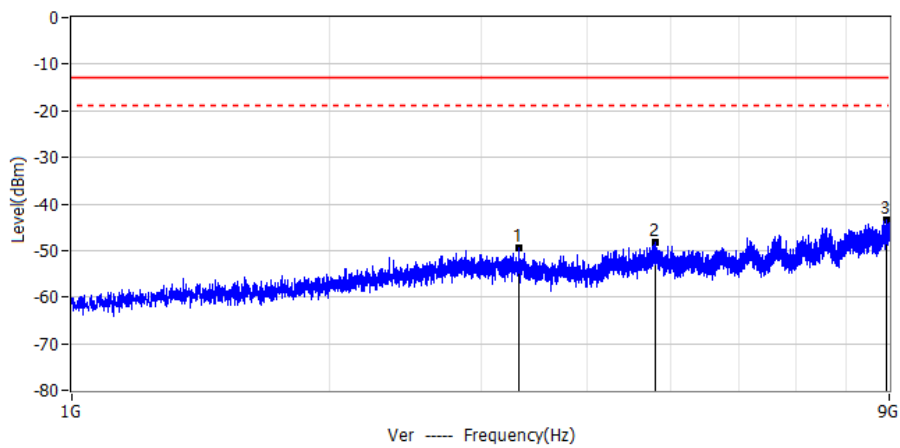


No.	Frequency	Level dBm	Limit dBm	Margin dB	Detector	Polar
1*	3.324GHz	-49.35	-13.00	-36.35	PK	Ver
2*	4.791GHz	-48.33	-13.00	-35.33	PK	Ver
3*	8.930GHz	-43.38	-13.00	-30.38	PK	Ver

Project: LGT23B071	Test Engineer: Dylan.shi
EUT: Smart Phone	Temperature: 26.7°C
M/N: CP12t	Humidity: 52%RH
Test Voltage: Battery	Test Data: 2023-03-12
Test Mode: WCDMA Band 5 Middle	
Note:	

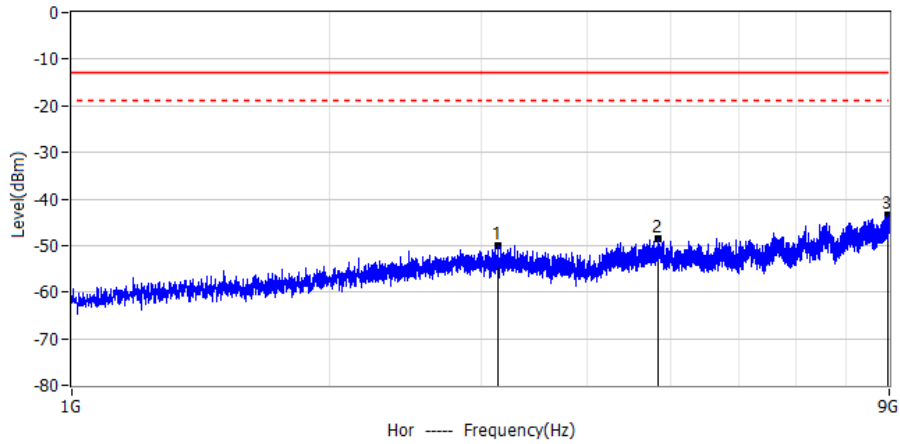

No.	Frequency	Level dBm	Limit dBm	Margin dB	Detector	Polar
1*	3.144GHz	-50.05	-13.00	-37.05	PK	Hor
2*	4.833GHz	-48.53	-13.00	-35.53	PK	Hor
3*	8.976GHz	-43.39	-13.00	-30.39	PK	Hor

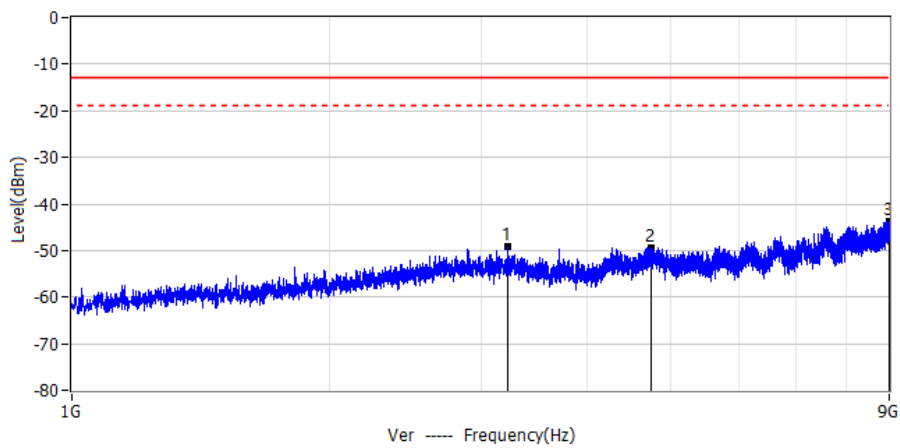

No.	Frequency	Level dBm	Limit dBm	Margin dB	Detector	Polar
1*	3.225GHz	-49.15	-13.00	-36.15	PK	Ver
2*	4.749GHz	-49.30	-13.00	-36.30	PK	Ver
3*	8.999GHz	-43.72	-13.00	-30.72	PK	Ver

APPENDIX II- PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※END OF THE REPORT※※※※