



**FCC PART 15C  
TEST REPORT  
No. I18N00930-WLAN**

**for**

**Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd**

**Mobile Hotspot**

**cp331A**

**with**

**Hardware Version: P1**

**Software Version: 2.0.158.P0.180824.cp331A**

**FCC ID: R38YLCP331A**

**Issued Date: 2018-09-07**

**Designation Number: CN1210**

**ISED Assigned Code: 23289**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

**Test Laboratory:**

Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen,

Guangdong, P. R. China 518026.

Tel: +86(0)755-33322000, Fax: +86(0)755-33322001, Email: [yewu@caict.ac.cn](mailto:yewu@caict.ac.cn), [www.cszit.com](http://www.cszit.com)

## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I18N00930-WLAN	Rev.0	1st edition	2018-09-07

## **CONTENTS**

<b>CONTENTS .....</b>	<b>3</b>
<b>1. TEST LABORATORY .....</b>	<b>4</b>
1.1. TESTING LOCATION .....	4
1.2. TESTING ENVIRONMENT.....	4
1.3. PROJECT DATA .....	4
1.4. SIGNATURE .....	4
<b>2. CLIENT INFORMATION.....</b>	<b>5</b>
2.1. APPLICANT INFORMATION .....	5
2.2. MANUFACTURER INFORMATION.....	5
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
3.1. ABOUT EUT .....	6
3.2. INTERNAL IDENTIFICATION OF EUT .....	6
3.3. INTERNAL IDENTIFICATION OF AE.....	6
3.4. GENERAL DESCRIPTION.....	6
<b>4. REFERENCE DOCUMENTS .....</b>	<b>7</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	7
4.2. REFERENCE DOCUMENTS FOR TESTING.....	7
<b>5. TEST RESULTS .....</b>	<b>8</b>
5.1. SUMMARY OF TEST RESULTS .....	8
5.2. STATEMENTS.....	8
5.3. TERMS USED IN THE RESULT TABLE .....	8
5.4. LABORATORY ENVIRONMENT.....	9
<b>6. TEST FACILITIES UTILIZED .....</b>	<b>10</b>
<b>7. MEASUREMENT UNCERTAINTY .....</b>	<b>11</b>
<b>ANNEX A: DETAILED TEST RESULTS.....</b>	<b>12</b>
A.0 ANTENNA REQUIREMENT .....	12
A.1 MAXIMUM OUTPUT POWER - CONDUCTED .....	13
A.2 PEAK POWER SPECTRAL DENSITY .....	14
A.3 6DB BANDWIDTH.....	21
A.4 BAND EDGES COMPLIANCE .....	28
A.5 CONDUCTED EMISSION .....	33

## 1. Test Laboratory

### 1.1. Testing Location

Location: Shenzhen Academy of Information and Communications Technology  
Address: Building G, Shenzhen International Innovation Center, No.1006  
Shennan Road, Futian District, Shenzhen, Guangdong  
Province ,China  
Postal Code: 518026  
Telephone: +86(0)755-33322000  
Fax: +86(0)755-33322001

### 1.2. Testing Environment

Normal Temperature: 15-30℃  
Relative Humidity: 35-60%

### 1.3. Project data

Testing Start Date: 2018-08-13  
Testing End Date: 2018-09-03

### 1.4. Signature



---

An Ran

(Prepared this test report)



---

Tang Weisheng

(Reviewed this test report)



---

Zhang Bojun

(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd  
Address: Coolpad Information Harbor, High-tech Industrial Park (North),  
Nanshan District, Shenzhen, P.R.C.  
Contact Person: Chen yanting  
E-Mail: Chenyanting@yulong.com  
Telephone: +86 15927320221  
Fax: /

### **2.2. Manufacturer Information**

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd  
Address: Coolpad Information Harbor, High-tech Industrial Park (North),  
Nanshan District, Shenzhen, P.R.C.  
Contact Person: Chen yanting  
E-Mail: Chenyanting@yulong.com  
Telephone: +86 15927320221  
Fax: /

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Mobile Hotspot
Model Name	cp331A
Market Name	/
RF Protocol	IEEE 802.11 b/g/n-HT20/n-HT40
Operating Frequency	2412MHz~2462MHz
Number of Channels	11
Antenna Type	Integrated
Antenna Gain	1.0dBi
Power Supply	3.85V DC by Battery
FCC ID	R38YLCP331A
Condition of EUT as received	No abnormality in appearance

Note: Components list, please refer to documents of the manufacturer.

#### **3.2. Internal Identification of EUT**

<b>EUT ID*</b>	<b>IMEI</b>	<b>HW Version</b>	<b>SW Version</b>	<b>Receive Date</b>
EUT1	/	P1	2.0.158.P0.180824.cp331A	2018-08-13

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE**

<b>AE ID*</b>	<b>Description</b>	<b>Mode</b>	<b>Manufacturer</b>
AE1	Switching Adapter	RD0501000-USBA-18MG	Shenzhen Ruide Electronic Industrial Co.,Ltd

\*AE ID: is used to identify the test sample in the lab internally.

#### **3.4. General Description**

The Equipment Under Test (EUT) are a model of Mobile Phone with integrated antenna. It consists of normal options: travel Charger, USB cable. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the client.

## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz	2017
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013

## 5. Test Results

### 5.1. Summary of Test Results

No	Test cases	Sub-clause of Part 15C	Sub-clause of IC	Verdict
0	Antenna Requirement	15.203	/	<b>P</b>
1	Maximum Output Power	15.247 (b)	RSS-247 section 5.4	<b>P</b>
2	Peak Power Spectral Density	15.247 (e)	RSS-247 section 5.2	<b>P</b>
3	6dB Bandwidth	15.247 (a)	RSS-247 section 5.2	<b>P</b>
4	Band Edges Compliance	15.247 (d)	RSS-247 section 5.5	<b>P</b>
5	Conducted Emission	15.247 (d)	RSS-247 section 5.5/ RSS-Gen section 6.13	<b>P</b>
*6	Radiated Emission	15.247, 15.205, 15.209	RSS-247 section 5.5/ RSS-Gen section 6.13	<b>P</b>
*7	AC Power line Conducted	15.207	RSS-Gen section 8.8	<b>P</b>

See ANNEX A for details.

“\*” means radiated data refer to report No.BL-SZ1880381-601.

The radiated results are tested by Shenzhen BALUN Technology Co., Ltd. Address Block B, 1st F L, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen Guangdong g Province, P.R.C. The results of radiated please see Annex B, that the partial report issued by Shenzhen BALUN Technology Co., Ltd and report No. BL-SZ1880381-601.

### 5.2. Statements

SAICT has evaluated the test cases requested by the applicant/matrixufacturer as listed in section 5.1 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

### 5.3. Terms used in the result table

Terms used in Verdict column

P	Pass
NA	Not Available
F	Fail

Abbreviations

AC	Alternating Current
AFH	Adaptive Frequency Hopping
BW	Band Width
E.I.R.P.	equivalent isotropic radiated power
ISM	Industrial, Scientific and Medical
R&TTE	Radio and Telecommunications Terminal Equipment
RF	Radio Frequency
Tx	Transmitter



## 5.4. Laboratory Environment

**Semi-anechoic Chamber** did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3 m distance, from 30 to 1000 MHz

**Shielded room** did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. =20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-10000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω

**Fully-anechoic Chamber** did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

## 6. Test Facilities Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2019.01.17	1 year
2	Power Sensor	U2021XA	MY55430013	Agilent	2019.02.01	1 year

### Test software

No.	Equipment	Manufacturer	Version
1	TechMgr Software	CAICT	2.1.1

EUT is Qualcomm software provided by the customer to control the transmitting signal. The EUT was programmed to be in continuously transmitting mode.

## 7. Measurement Uncertainty

Test Name	Uncertainty	
1. RF Output Power - Conducted	±1.32dB	
2. Power Spectral Density - Conducted	±2.32dB	
3. Occupied channel bandwidth - Conducted	±66Hz	
4 Transmitter Spurious Emission - Conducted	30MHz ≤ f ≤ 1GHz	±1.41dB
	1GHz ≤ f ≤ 7GHz	±1.92dB
	7GHz ≤ f ≤ 13GHz	±2.31dB
	13GHz ≤ f ≤ 26GHz	±2.61dB

## **ANNEX A: Detailed Test Results**

### **A.0 Antenna requirement**

#### **Measurement Limit:**

<b>Standard</b>	<b>Requirement</b>
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

**Conclusion: The Directional gains of antenna used for transmitting is 1.0 dBi.  
The RF transmitter uses an integrate antenna without connector.**

## A.1 Maximum Output Power - Conduced

### Measurement of method :See ANSI C63.10-2013-Clause 11.9.2.3.2

Method AVGP-M-G is a measurement using a gated RF average power meter.

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### Measurement Limit:

Standard	Limit (dBm)
FCC CRF Part 15.247(b) & RSS-247 Section 5.4	< 30

### Measurement Results:

Mode	Channel	Frequency (MHz)	Average Conducted Power (dBm)	Conclusion
802.11b	CH 1	2412	17.90	<b>P</b>
	CH 6	2437	17.64	<b>P</b>
	CH 11	2462	17.66	<b>P</b>
802.11g	CH 1	2412	17.49	<b>P</b>
	CH 6	2437	17.19	<b>P</b>
	CH 11	2462	17.20	<b>P</b>
802.11n HT20	CH 1	2412	17.85	<b>P</b>
	CH 6	2437	17.61	<b>P</b>
	CH 11	2462	17.53	<b>P</b>
802.11n HT40	CH 3	2422	16.34	<b>P</b>
	CH 6	2437	16.74	<b>P</b>
	CH 9	2452	16.63	<b>P</b>

### Note:

Worst-case data rates as provided by the client were: 1Mbps (802.11b), 6Mbps (802.11g), MCS0 (802.11n). is selected as the worst condition.

The following cases and test graphs are performed with this condition.

The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

## A.2 Peak Power Spectral Density

### Measurement Limit:

Standard	Limit
FCC CRF Part 15.247(e) & RSS-247 Section 5.2	< 8 dBm/3 kHz

### Measurement Results:

Mode	Channel	Frequency (MHz)	Test Results (dBm)		Conclusion
			Fig.	Value	
802.11b	CH 1	2412	Fig.1	-3.75	P
	CH 6	2437	Fig.2	-5.37	P
	CH 11	2462	Fig.3	-4.21	P
802.11g	CH 1	2412	Fig.4	-6.53	P
	CH 6	2437	Fig.5	-7.48	P
	CH 11	2462	Fig.6	-8.33	P
802.11n HT20	CH 1	2412	Fig.7	-6.68	P
	CH 6	2437	Fig.8	-7.91	P
	CH 11	2462	Fig.9	-7.96	P
802.11n HT40	CH 3	2422	Fig.10	-10.48	P
	CH 6	2437	Fig.11	-10.11	P
	CH 9	2452	Fig.12	-12.38	P

See below for test graphs.

**Conclusion: PASS**

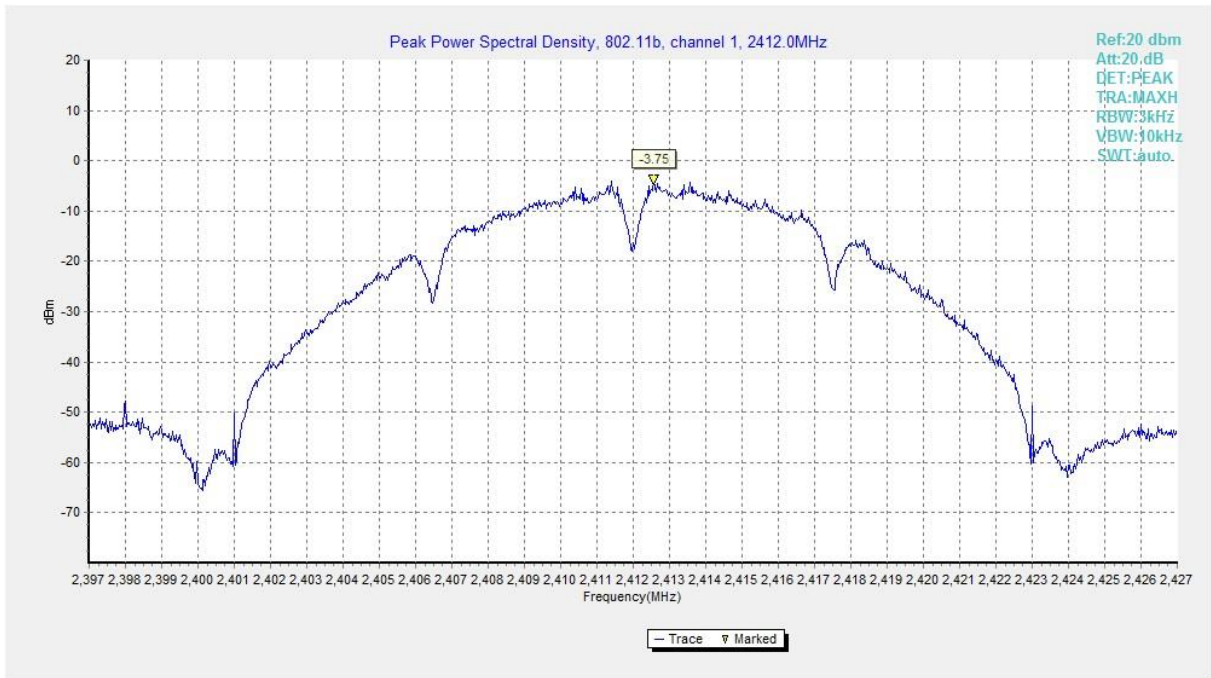


Fig.1 Power Spectral Density (802.11b, CH 1)

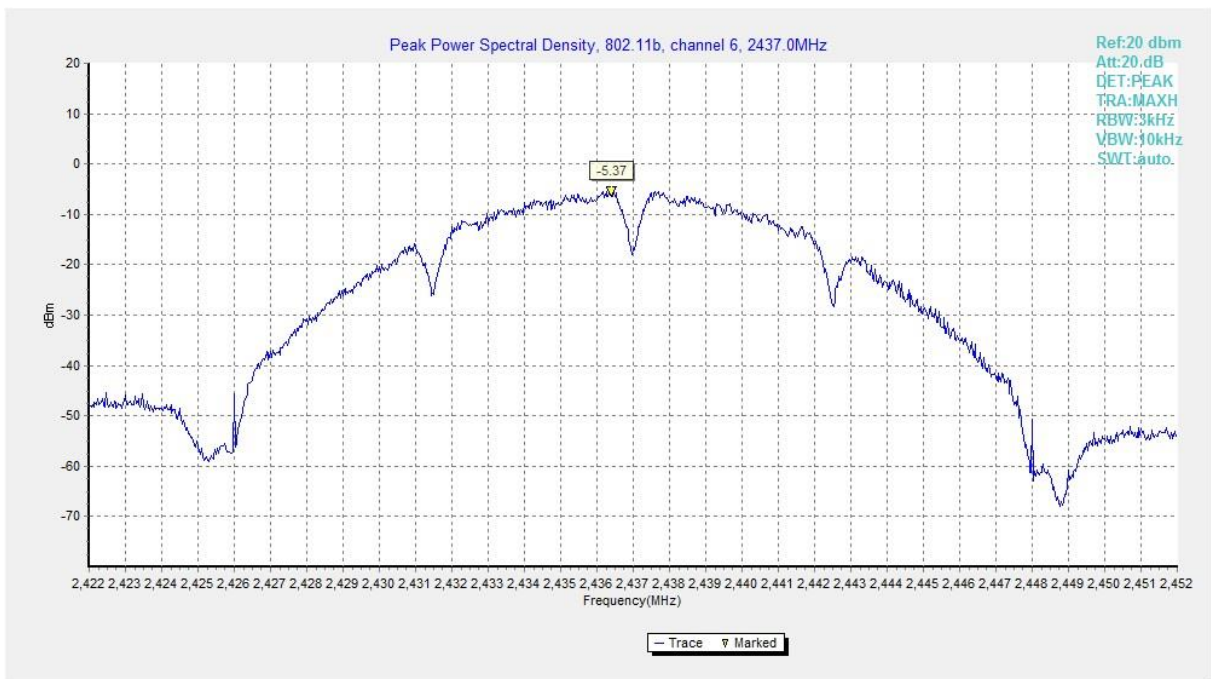


Fig.2 Power Spectral Density (802.11b, CH 6)

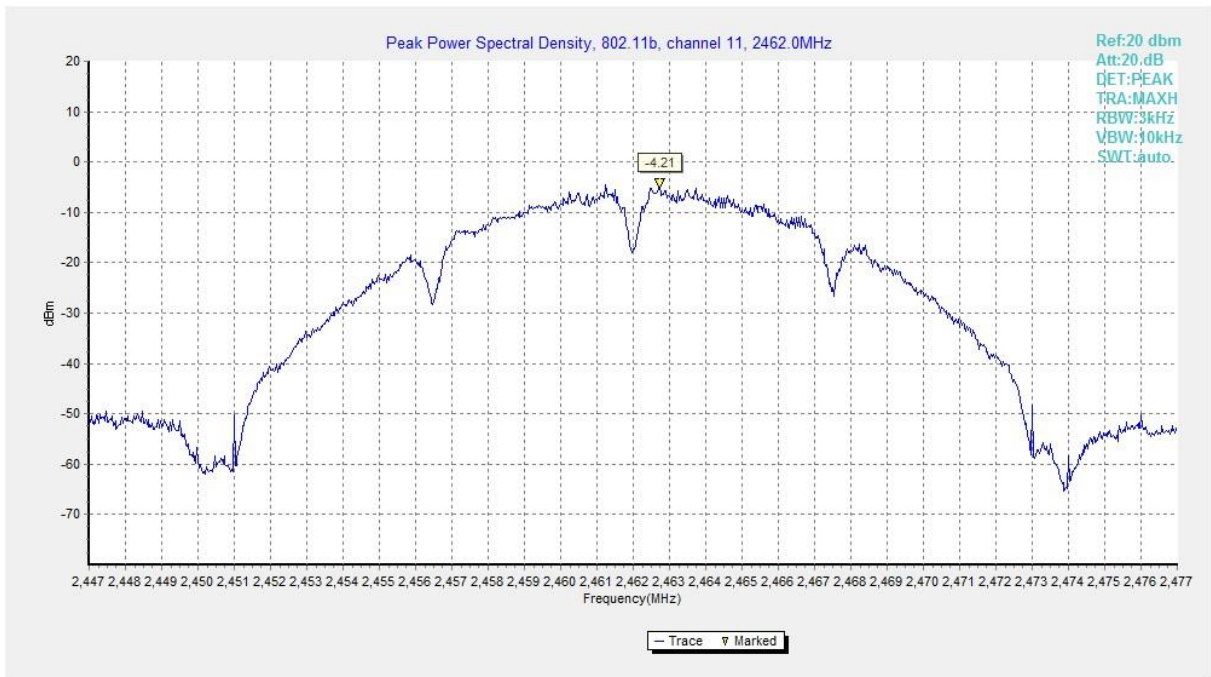


Fig.3 Power Spectral Density (802.11b, CH 11)

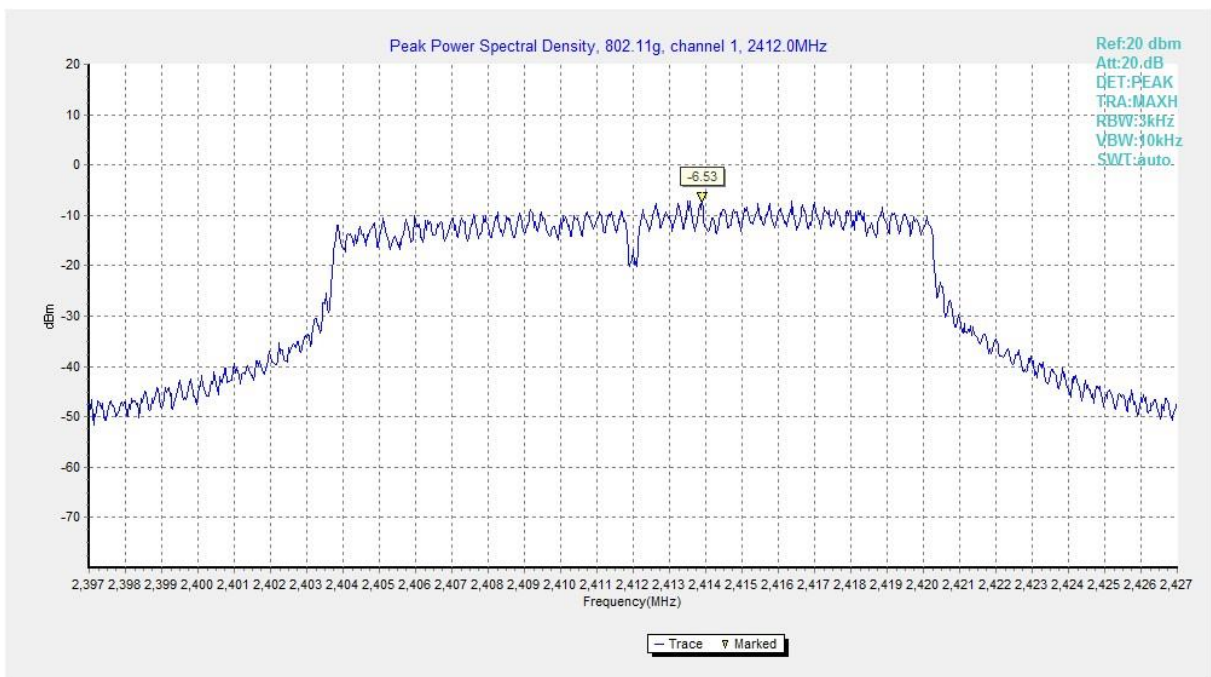


Fig.4 Power Spectral Density (802.11g, CH 1)



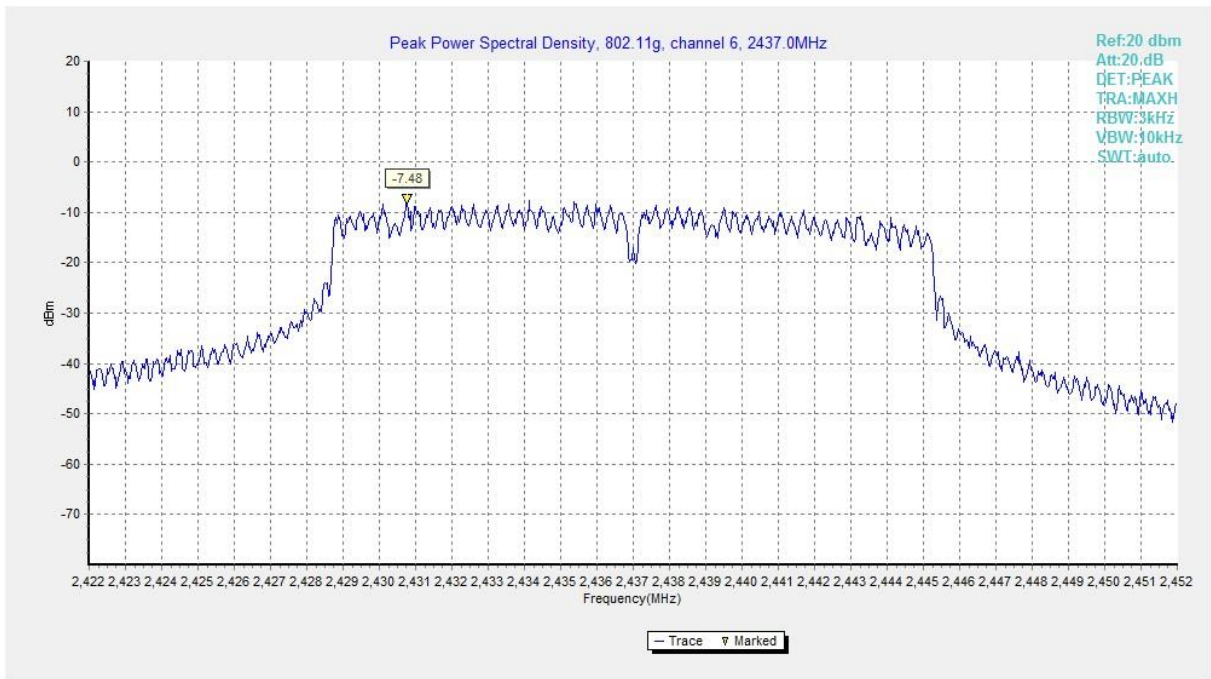


Fig.5 Power Spectral Density (802.11g, CH 6)

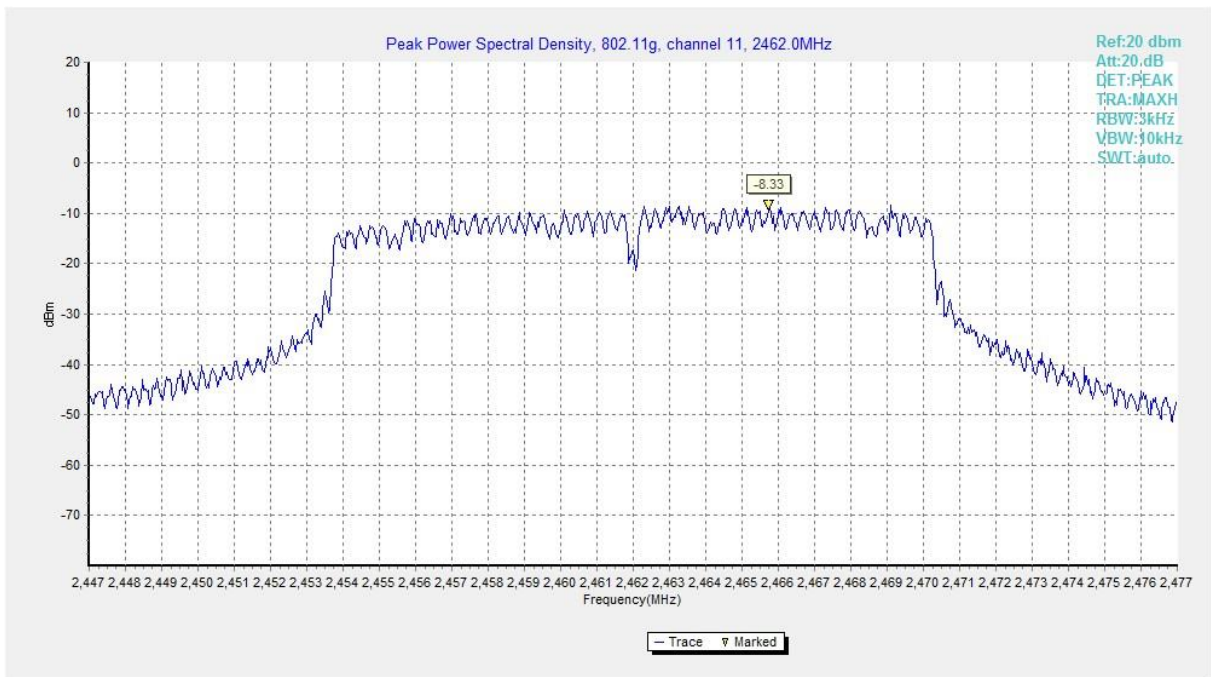


Fig.6 Power Spectral Density (802.11g, CH 11)

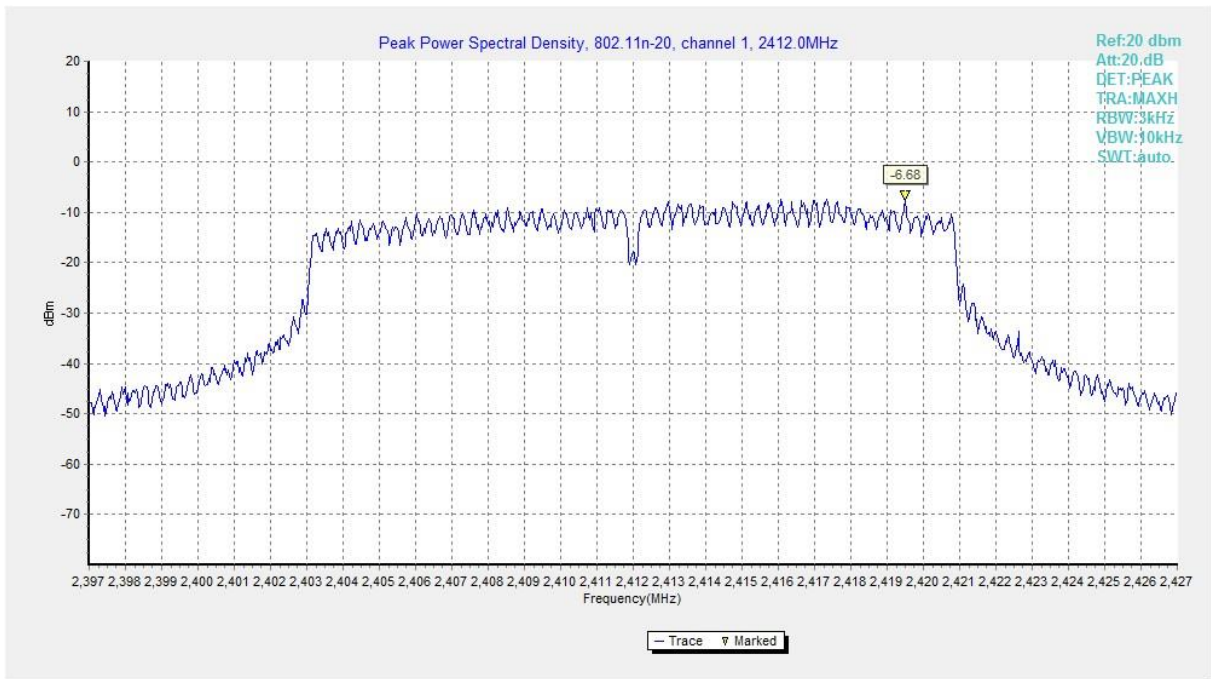


Fig.7 Power Spectral Density (802.11n HT20, CH 1)

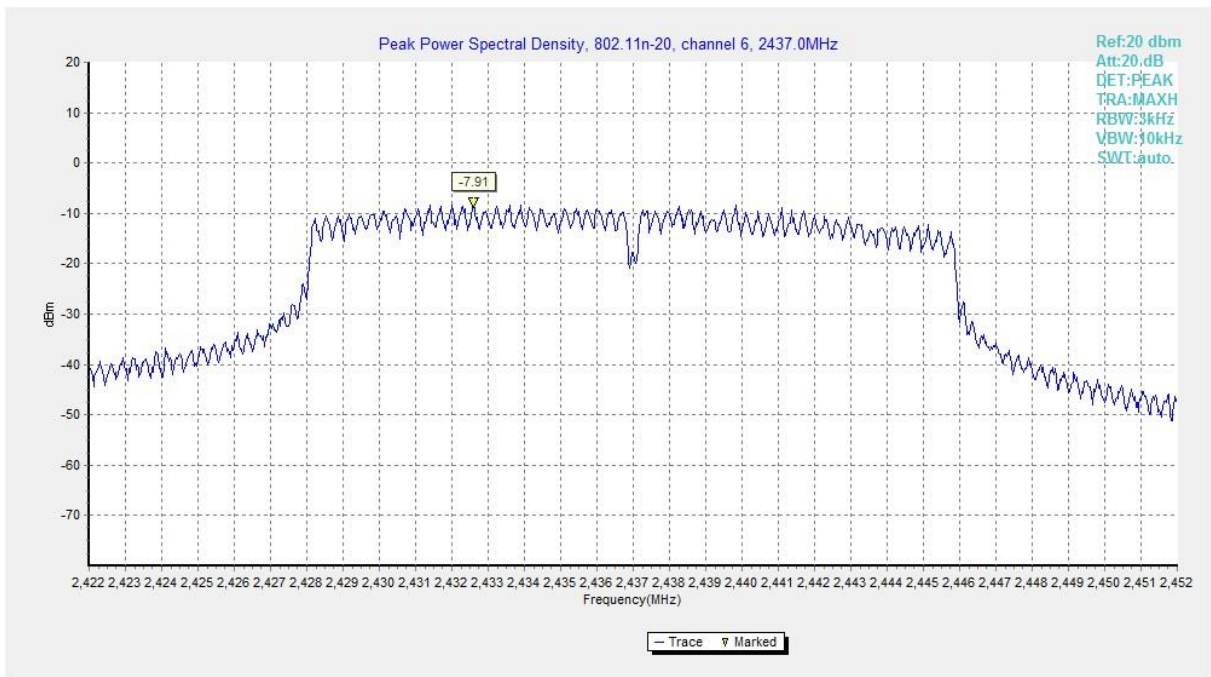


Fig.8 Power Spectral Density (802.11n HT20, CH 6)

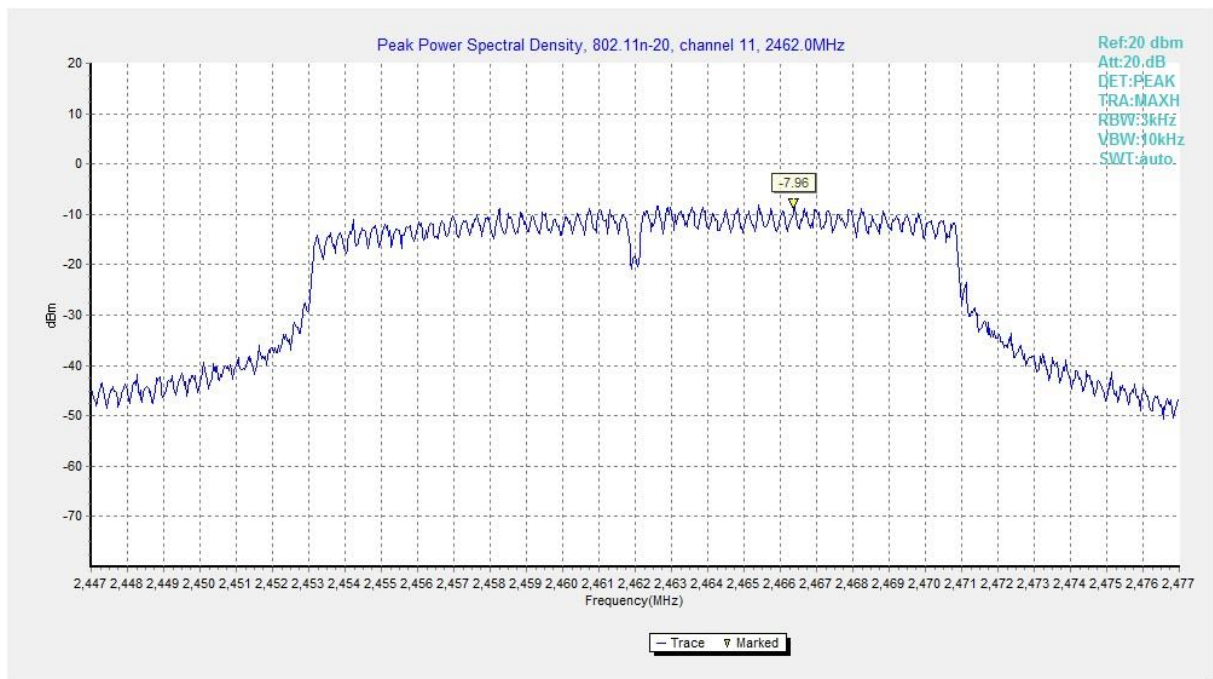


Fig.9 Power Spectral Density (802.11n HT20, CH 11)

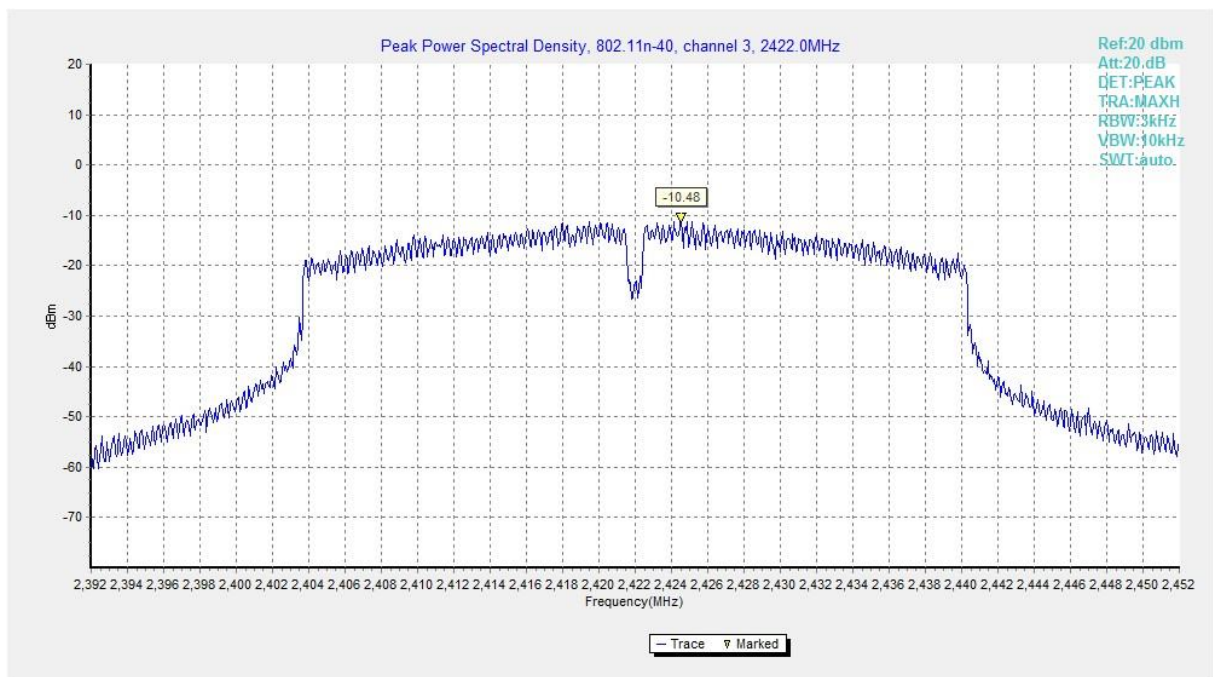


Fig.10 Power Spectral Density (802.11n HT40, CH 3)

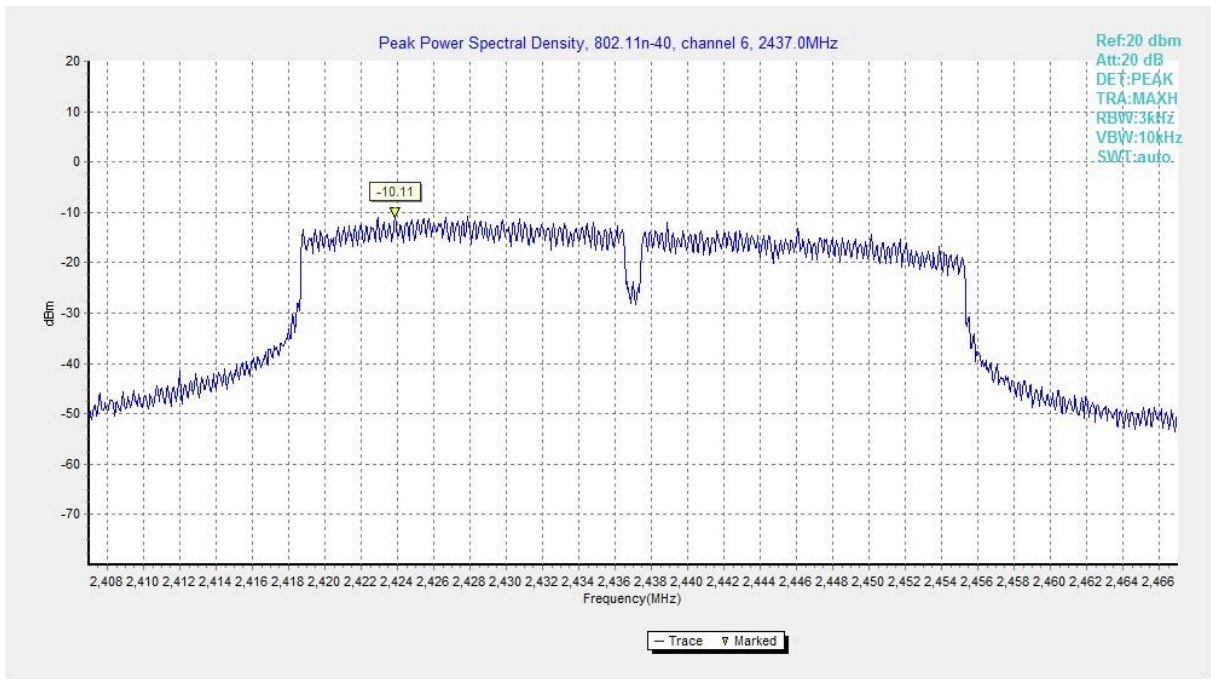


Fig.11 Power Spectral Density (802.11n HT40, CH 6)

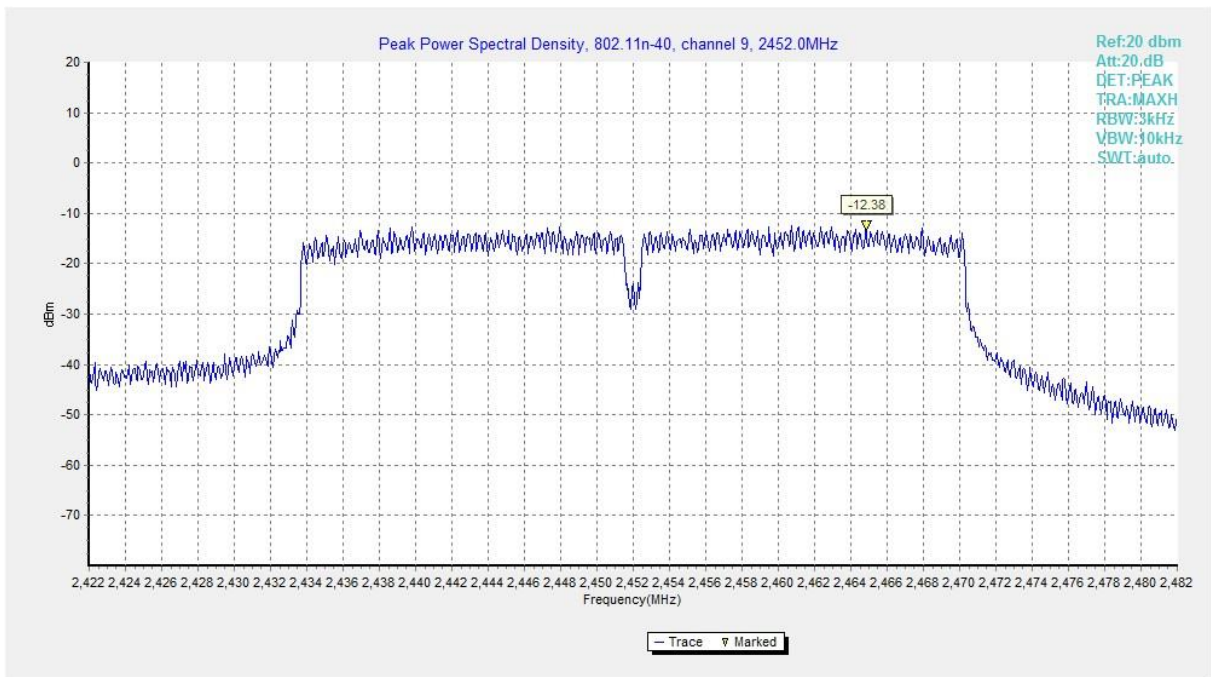


Fig.12 Power Spectral Density (802.11n HT40, CH 9)

### A.3 6dB Bandwidth

#### Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a) & RSS-247 Section 5.2	≥ 500

#### Measurement Result:

Mode	Channel	Frequency (MHz)	Test Results ( kHz)		Conclusion
			Fig.	Value	
802.11b	CH 1	2412	Fig.13	8550	P
	CH 6	2437	Fig.14	8050	P
	CH 11	2462	Fig.15	8000	P
802.11g	CH 1	2412	Fig.16	15150	P
	CH 6	2437	Fig.17	15350	P
	CH 11	2462	Fig.18	15450	P
802.11n HT20	CH 1	2412	Fig.19	15350	P
	CH 6	2437	Fig.20	15100	P
	CH 11	2462	Fig.21	15700	P
802.11n HT40	CH 3	2422	Fig.22	31280	P
	CH 6	2437	Fig.23	32560	P
	CH 9	2452	Fig.24	35680	P

See below for test graphs.

**Conclusion: PASS**

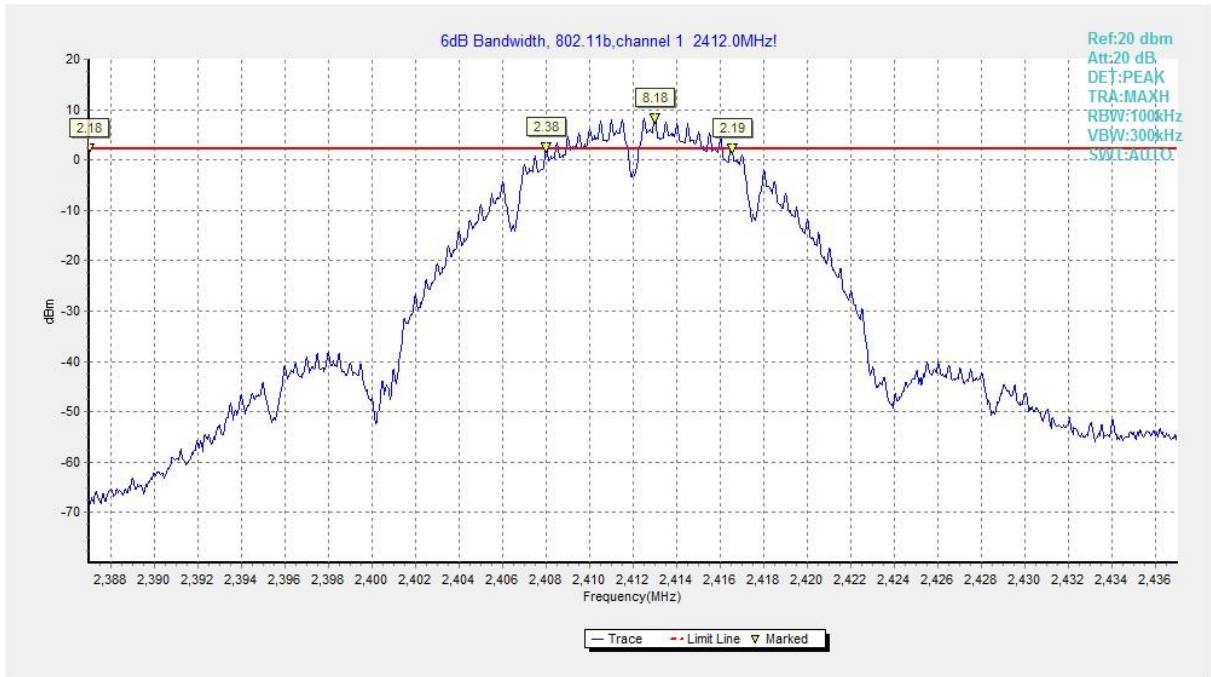


Fig.13 6dB Bandwidth (802.11b, CH 1)

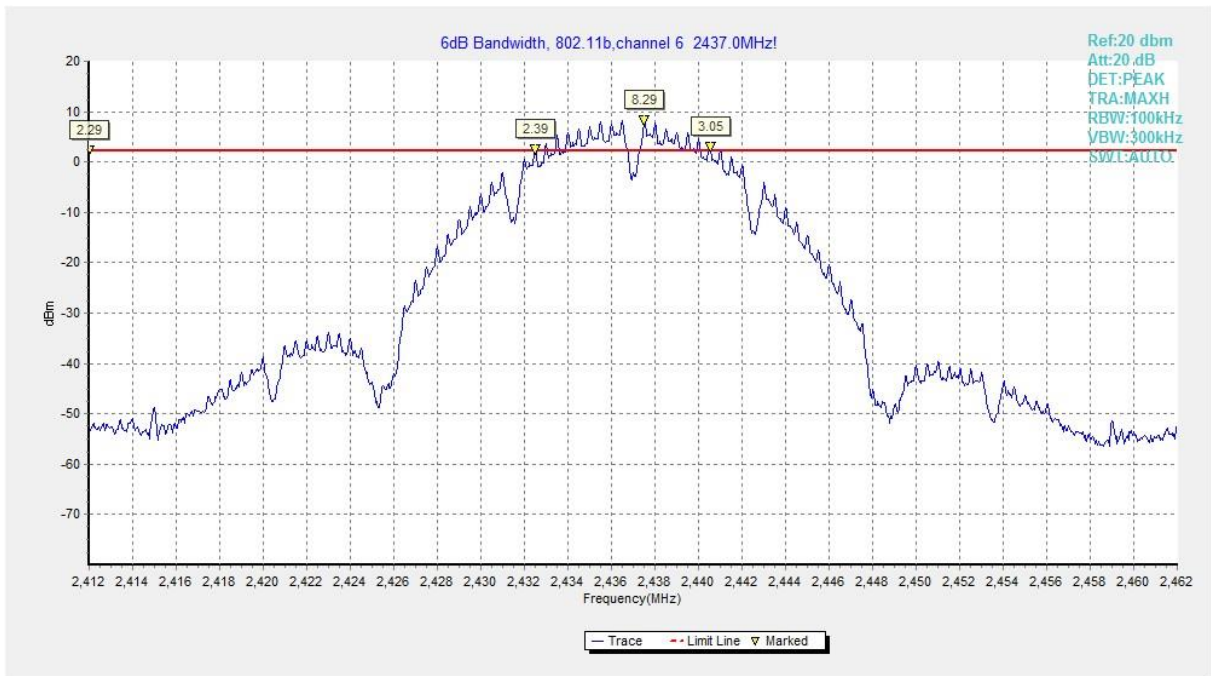


Fig.14 6dB Bandwidth (802.11b, CH 6)

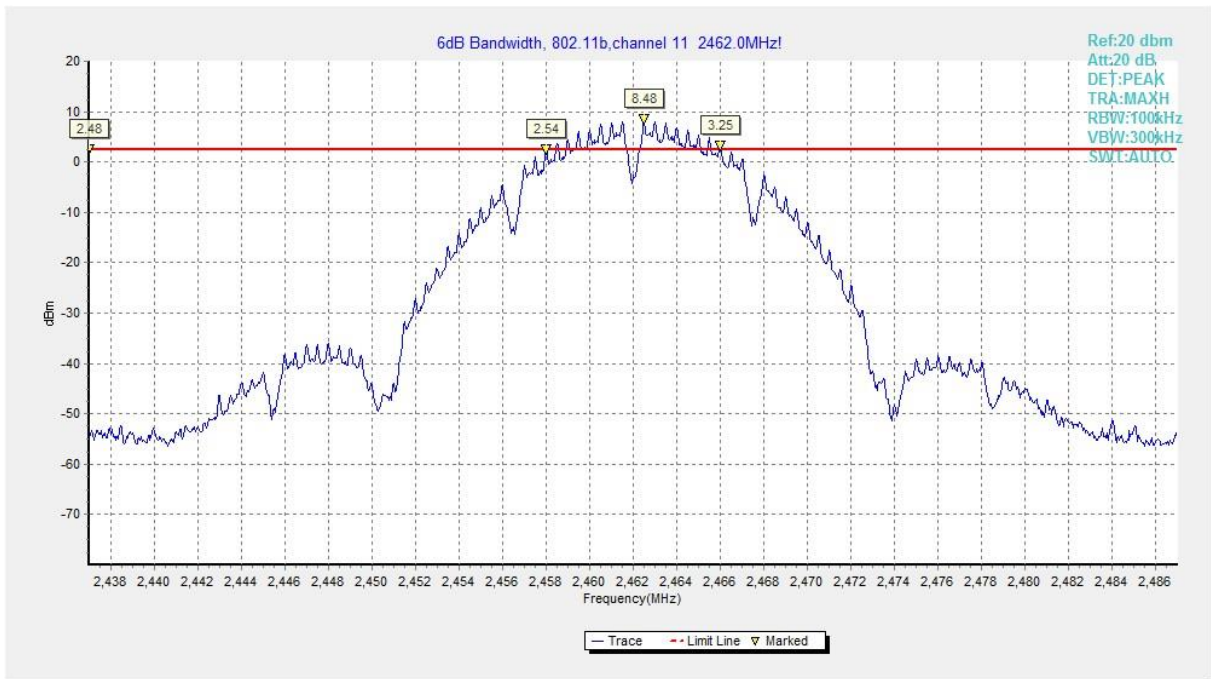


Fig.15 6dB Bandwidth (802.11b, CH 11)

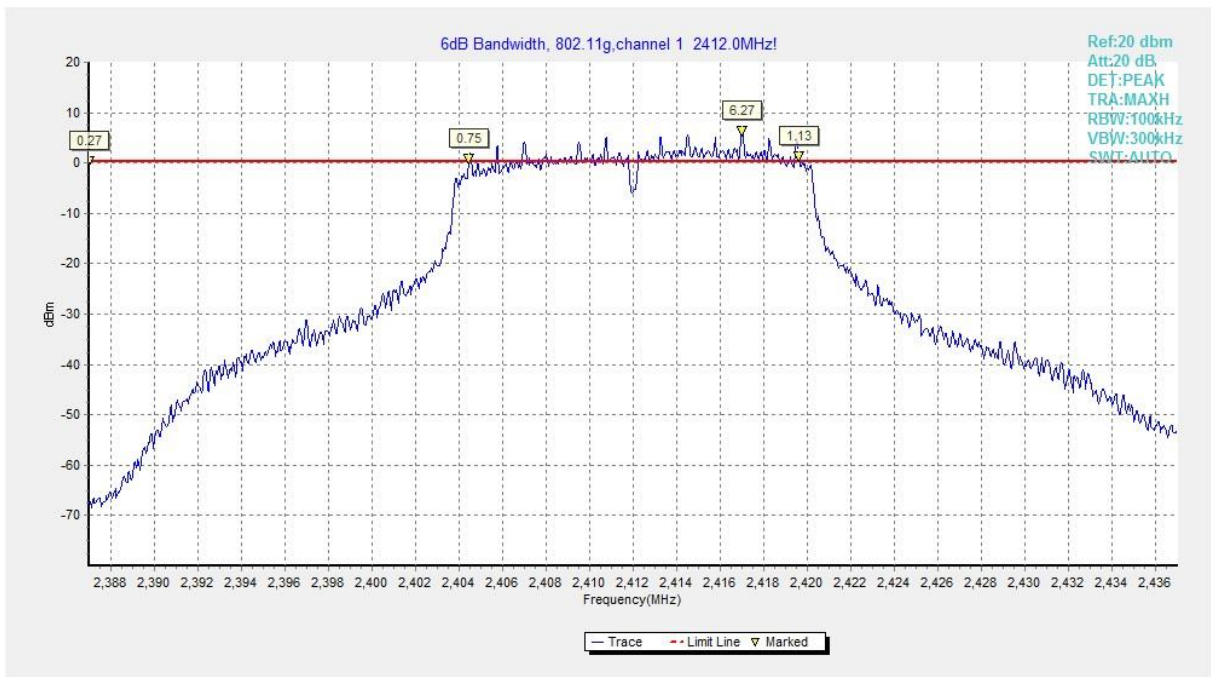


Fig.16 6dB Bandwidth (802.11g, CH 1)

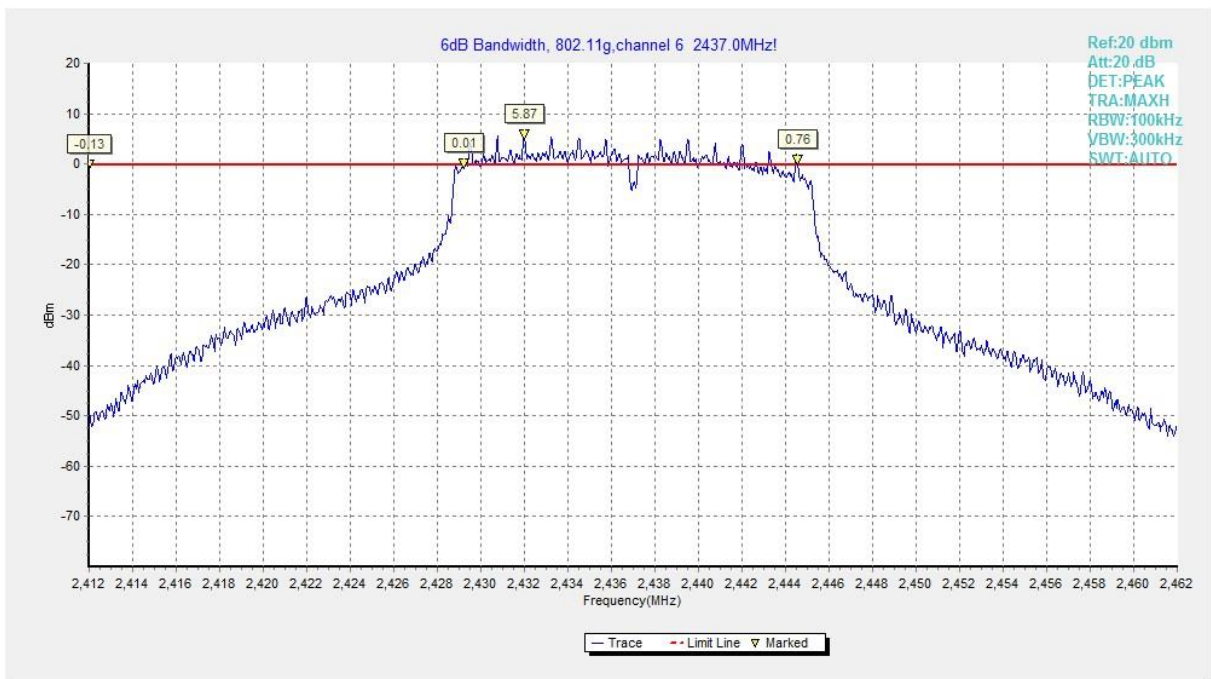


Fig.17 6dB Bandwidth (802.11g, CH 6)

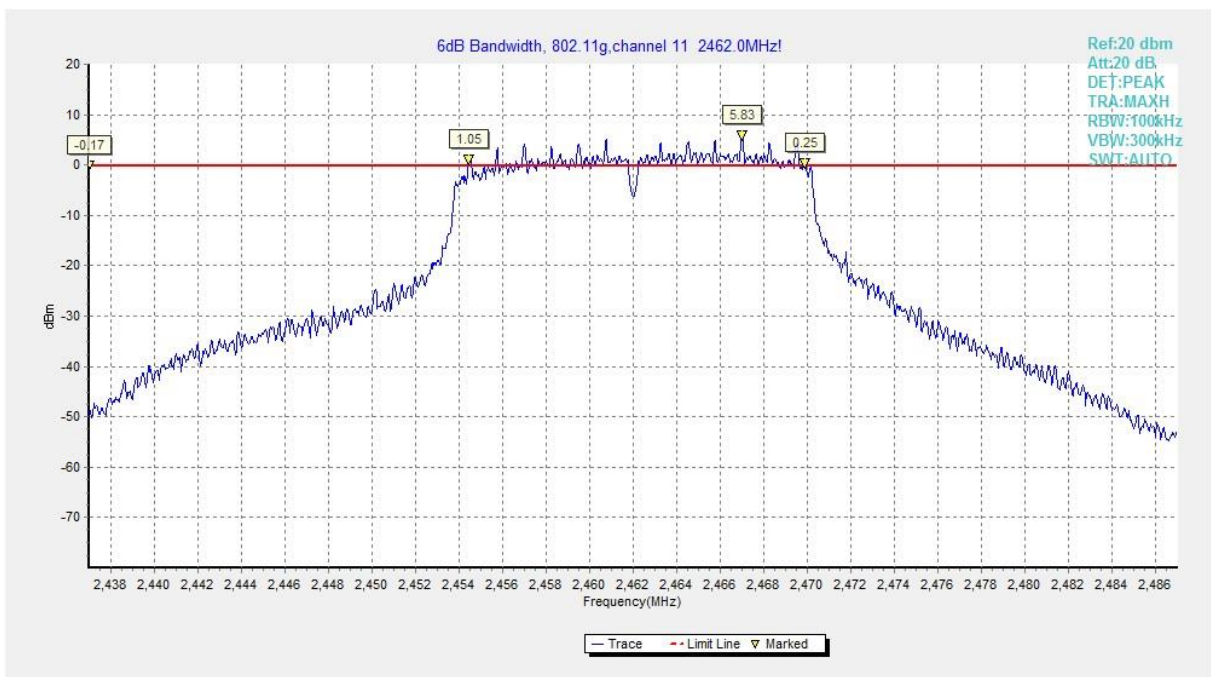


Fig.18 6dB Bandwidth (802.11g, CH 11)



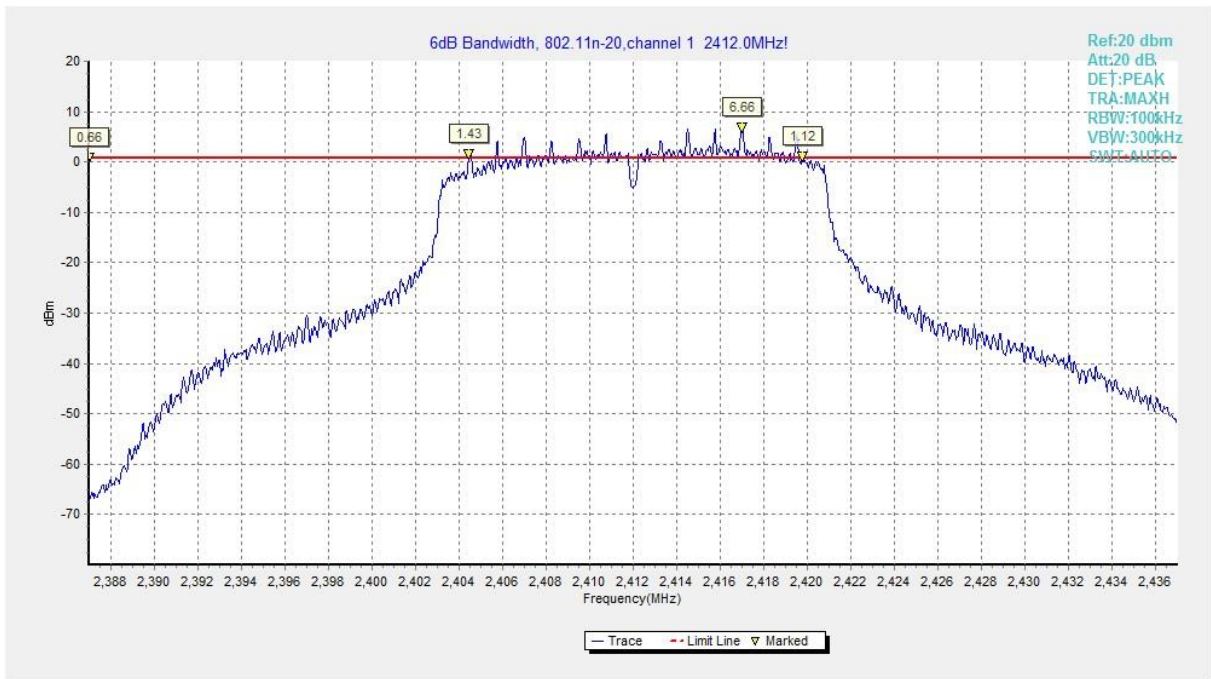


Fig.19 6dB Bandwidth (802.11n HT20, CH 1)

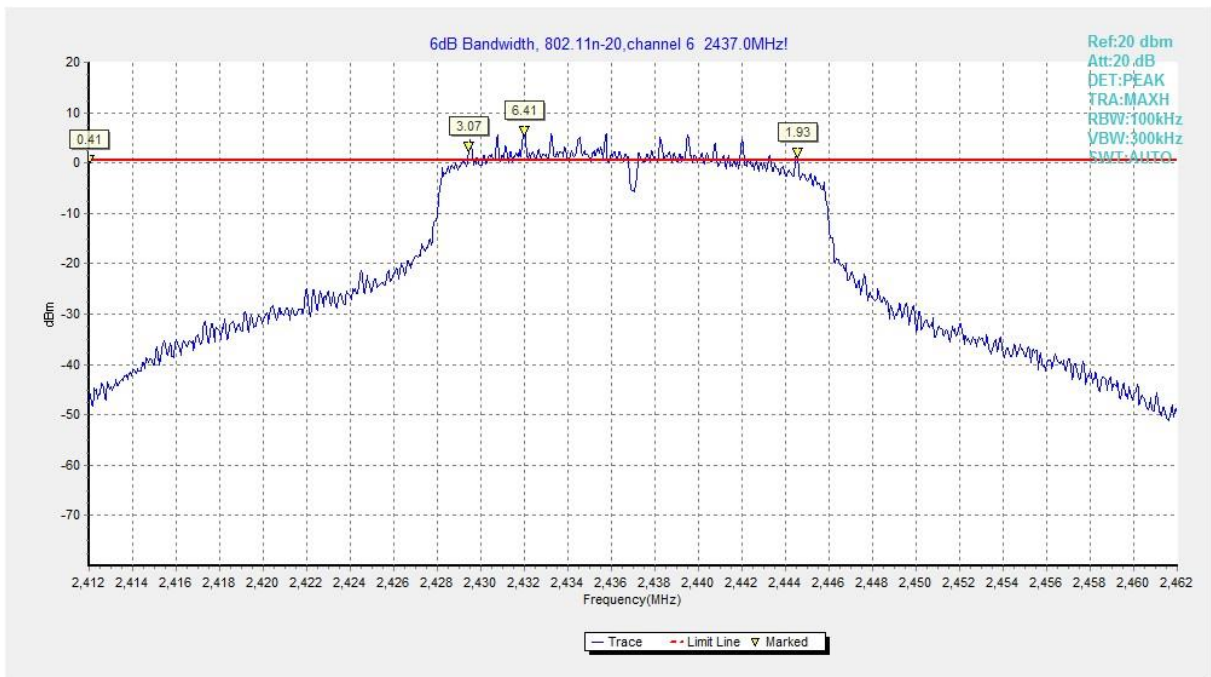


Fig.20 6dB Bandwidth (802.11n HT20, CH 6)

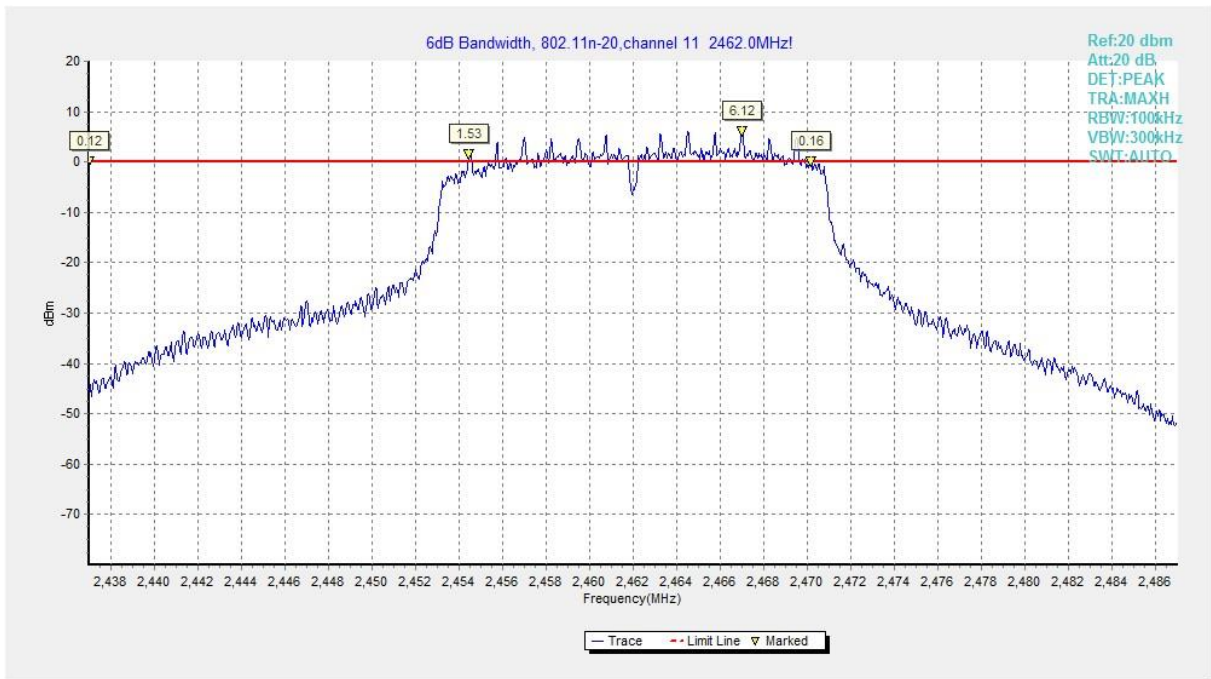


Fig.21 6dB Bandwidth (802.11n HT20, CH 11)

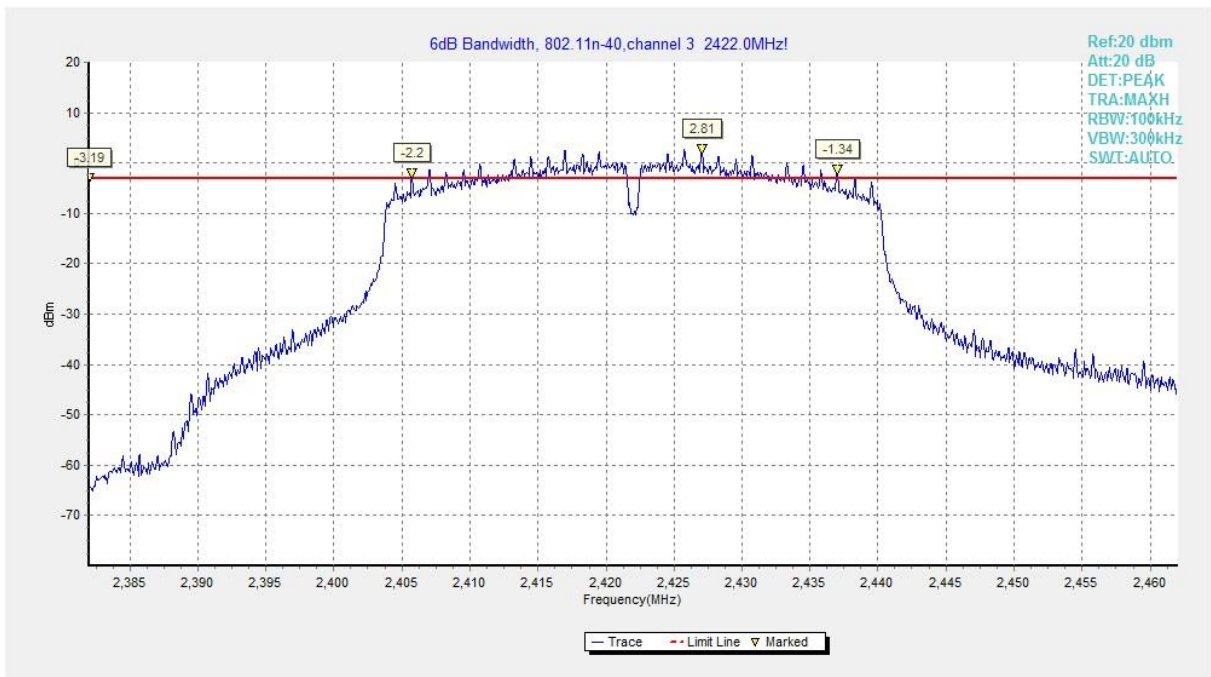


Fig.22 6dB Bandwidth (802.11n HT40, CH 3)

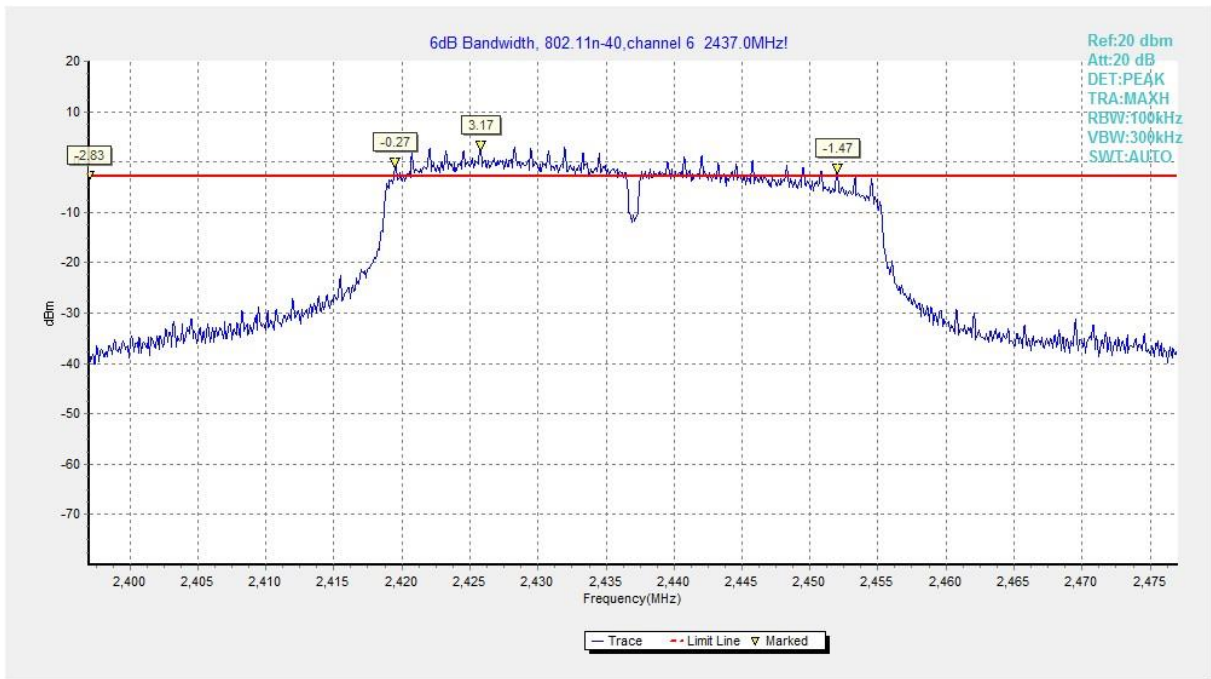


Fig.23 6dB Bandwidth (802.11n HT40, CH 6)

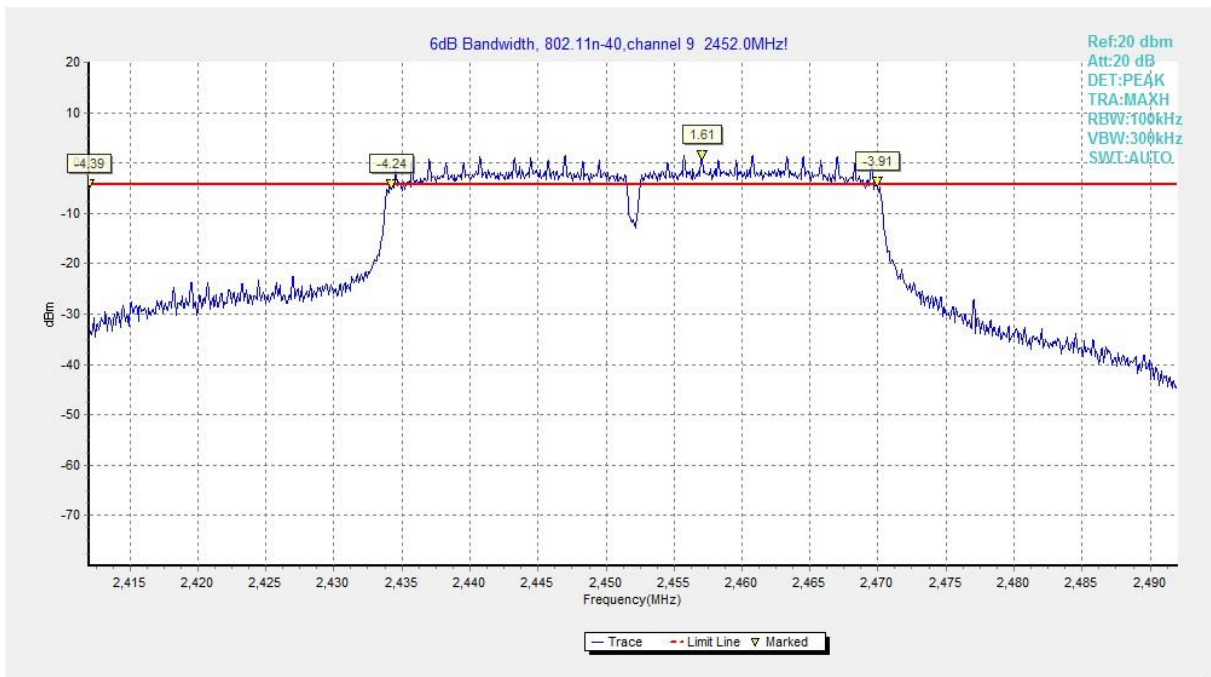


Fig.24 6dB Bandwidth (802.11n HT40, CH 9)

## A.4 Band Edges Compliance

### Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d) & RSS-247 Section 5.5	> 20

### Measurement Result:

Mode	Channel	Frequency (MHz)	Test Results (dBc)		Conclusion
			Fig.	Value	
802.11b	CH1	2412	Fig.25	55.92	<b>P</b>
	CH11	2462	Fig.26	60.69	<b>P</b>
802.11g	CH1	2412	Fig.27	36.64	<b>P</b>
	CH11	2462	Fig.28	50.60	<b>P</b>
802.11n HT20	CH1	2412	Fig.29	34.84	<b>P</b>
	CH11	2462	Fig.30	50.12	<b>P</b>
802.11n HT40	CH3	2422	Fig.31	35.35	<b>P</b>
	CH9	2452	Fig.32	38.54	<b>P</b>

See below for test graphs.

**Conclusion: PASS**

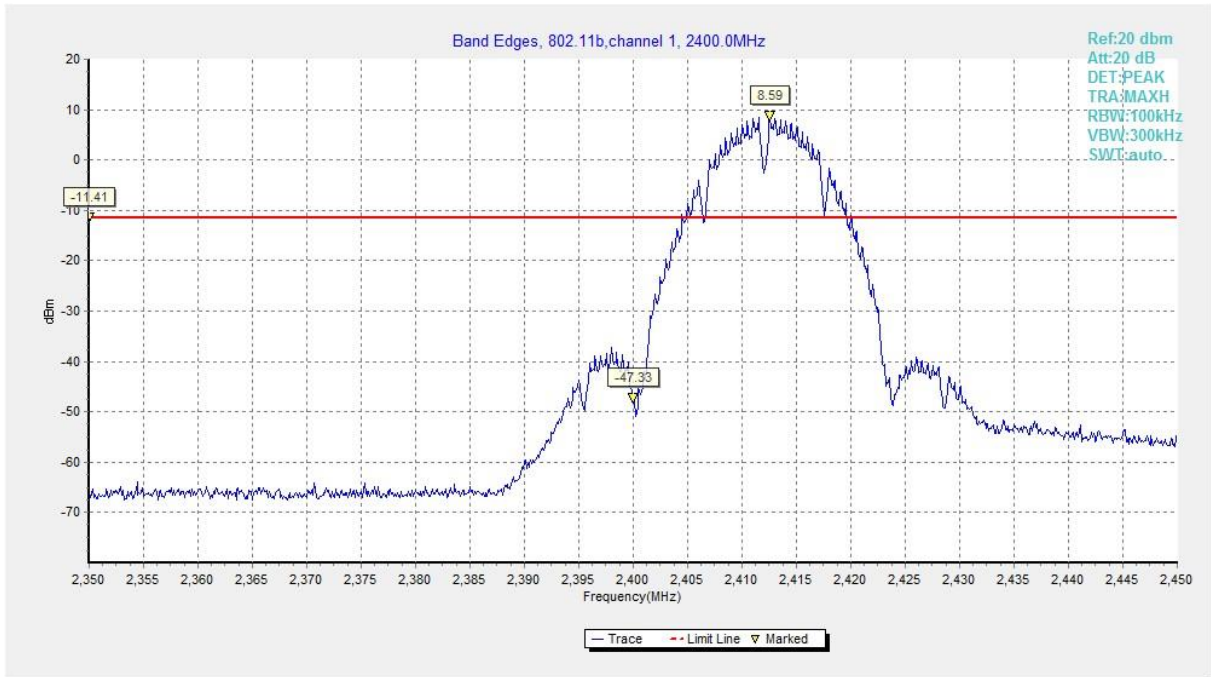


Fig.25 Band Edges (802.11b, CH 1)

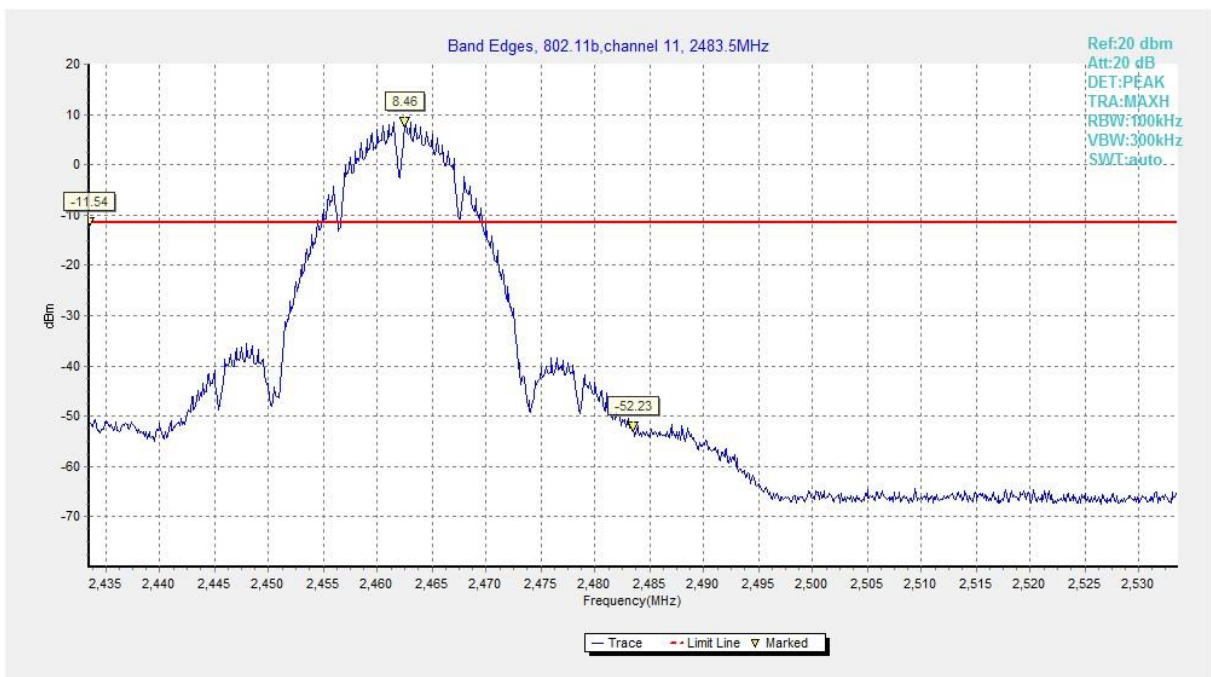


Fig.26 Band Edges (802.11b, CH 11)

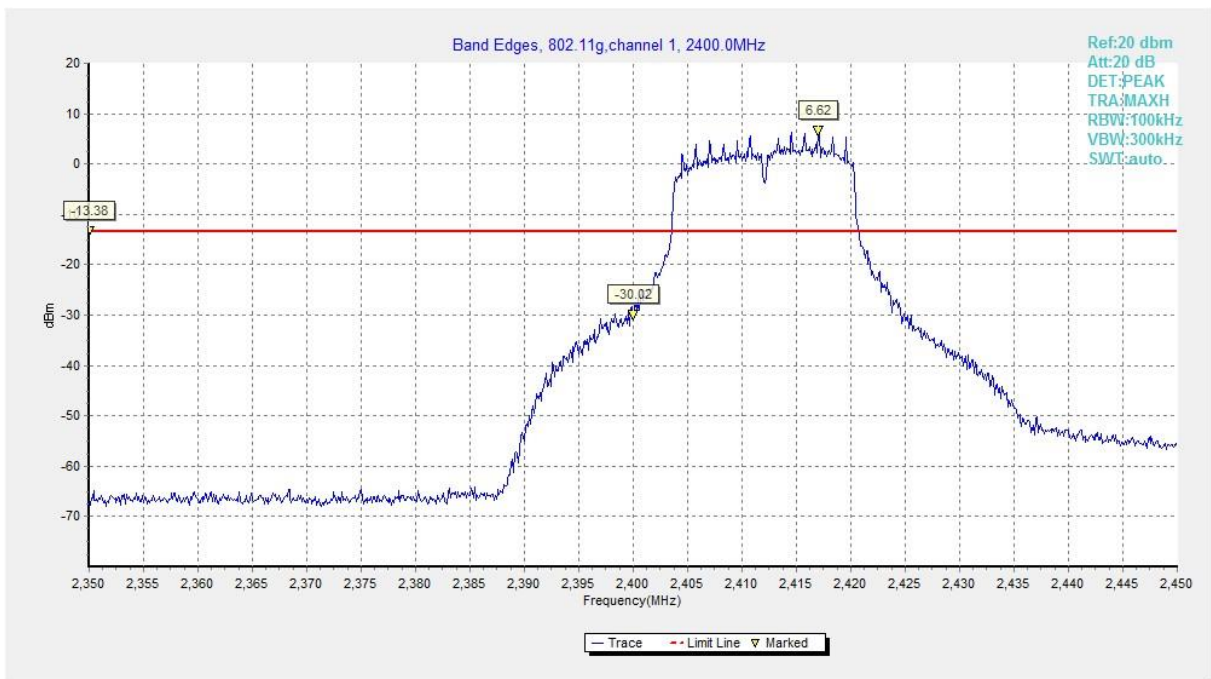


Fig.27 Band Edges (802.11g, CH 1)

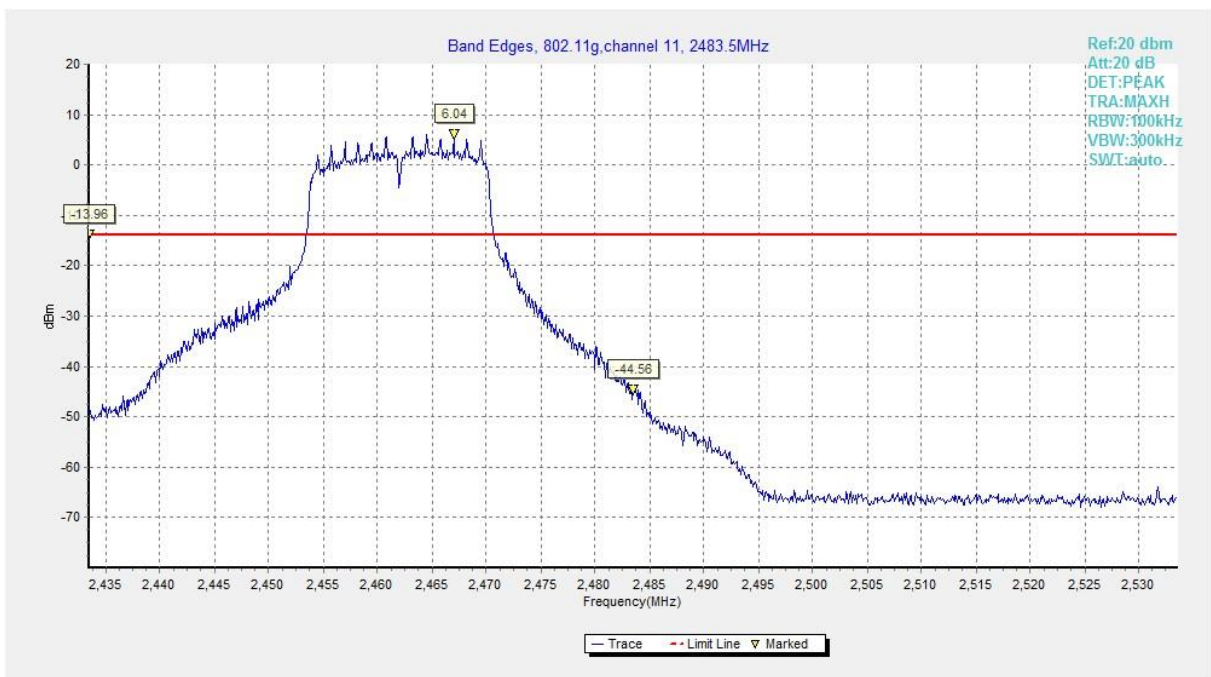


Fig.28 Band Edges (802.11g, CH 11)

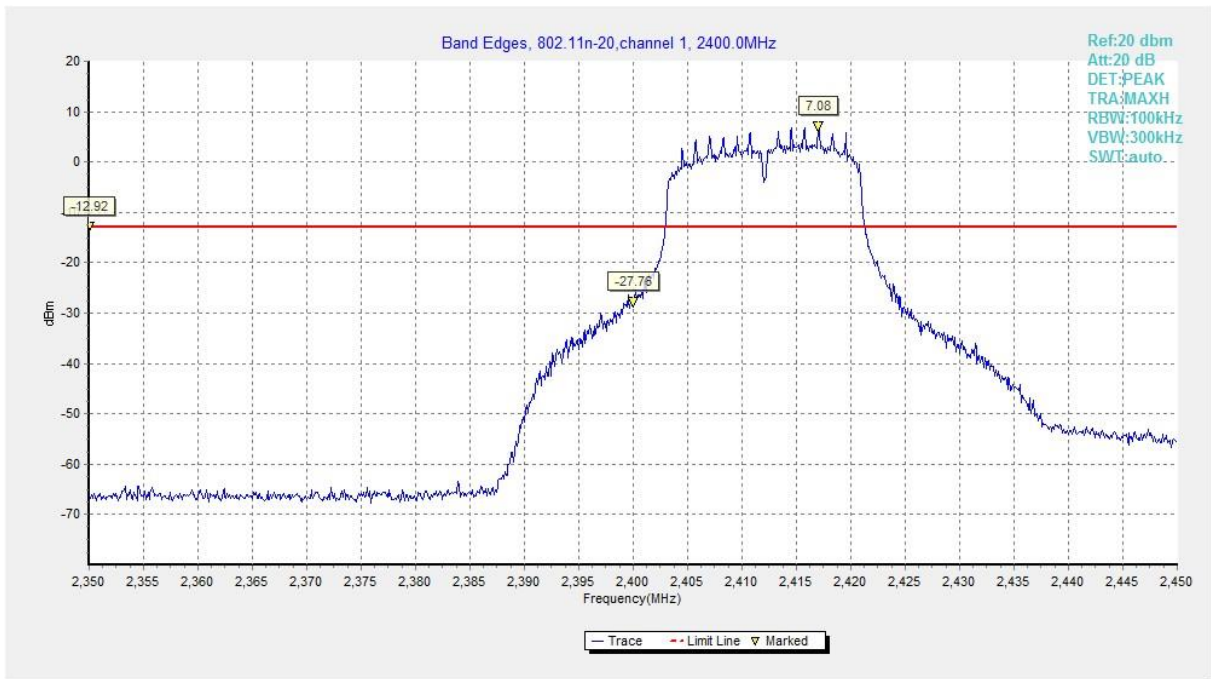


Fig.29 Band Edges (802.11n HT20, CH 1)



Fig.30 Band Edges (802.11n HT20, CH 11)



Fig.31 Band Edges (802.11n HT40, CH 3)

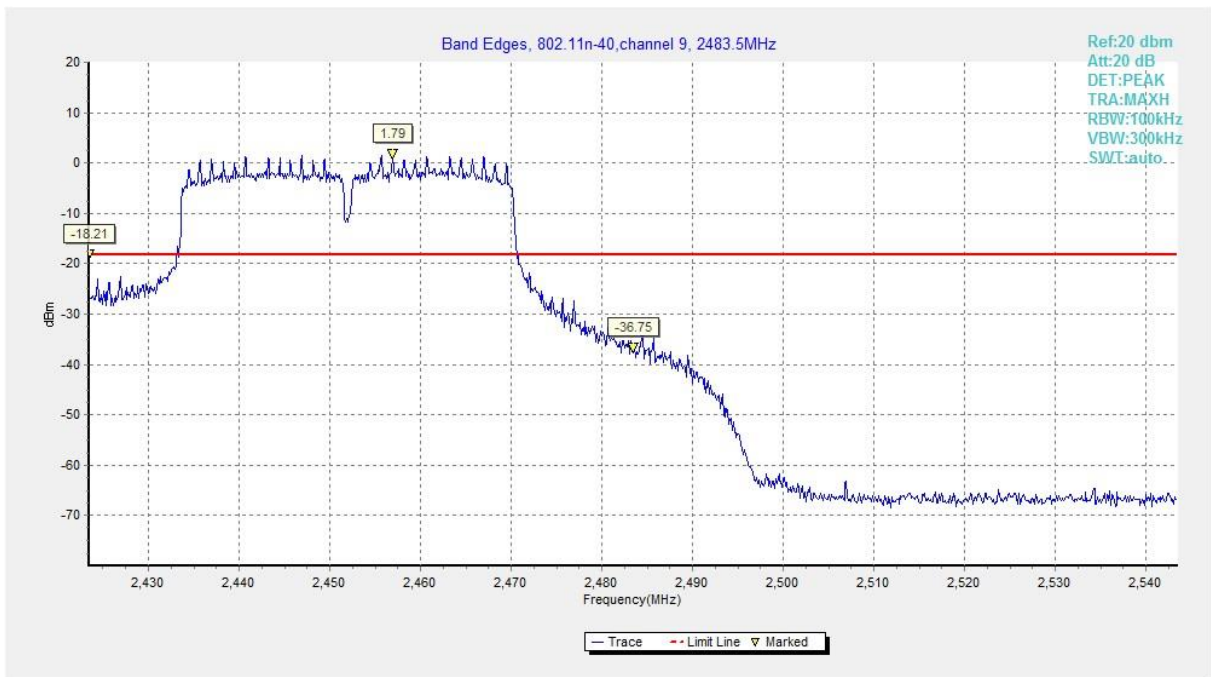


Fig.32 Band Edges (802.11n HT40, CH 9)



## A.5 Conducted Emission

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d) & RSS-247 Section 5.5/RSS-Gen 6.13	20dB below peak output power in 100 kHz bandwidth

### Measurement Results:

Mode	Channel	Frequency (MHz)	Frequency Range	Test Results	Conclusion
802.11b	CH 1	2412	30MHz-26GHz	Fig.33	<b>P</b>
	CH 6	2437	30MHz-26GHz	Fig.34	<b>P</b>
	CH 11	2462	30MHz-26GHz	Fig.35	<b>P</b>
802.11g	CH 1	2412	30MHz-26GHz	Fig.36	<b>P</b>
	CH 6	2437	30MHz-26GHz	Fig.37	<b>P</b>
	CH 11	2462	30MHz-26GHz	Fig.38	<b>P</b>
802.11n HT20	CH 1	2412	30MHz-26GHz	Fig.39	<b>P</b>
	CH 6	2437	30MHz-26GHz	Fig.40	<b>P</b>
	CH 11	2462	30MHz-26GHz	Fig.41	<b>P</b>
802.11n HT40	CH 3	2422	30MHz-26GHz	Fig.42	<b>P</b>
	CH 6	2437	30MHz-26GHz	Fig.43	<b>P</b>
	CH 9	2452	30MHz-26GHz	Fig.44	<b>P</b>

See below for test graphs.

**Conclusion: PASS**

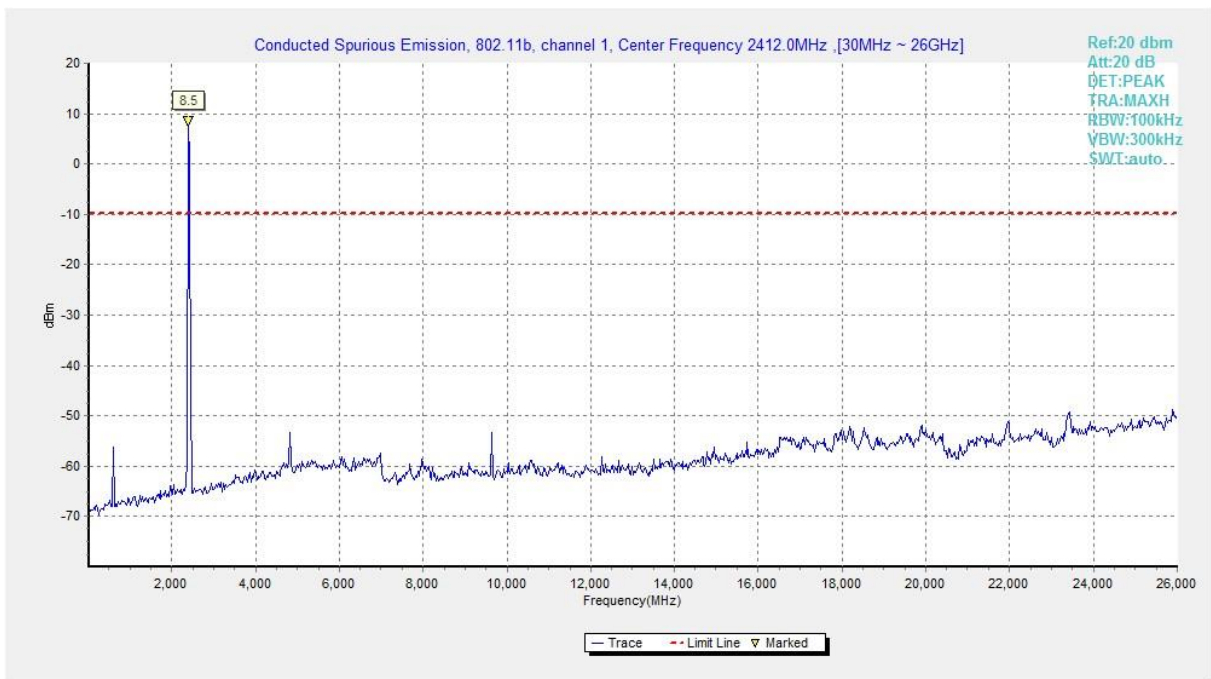


Fig.33 Conducted Spurious Emission (802.11b, CH1)

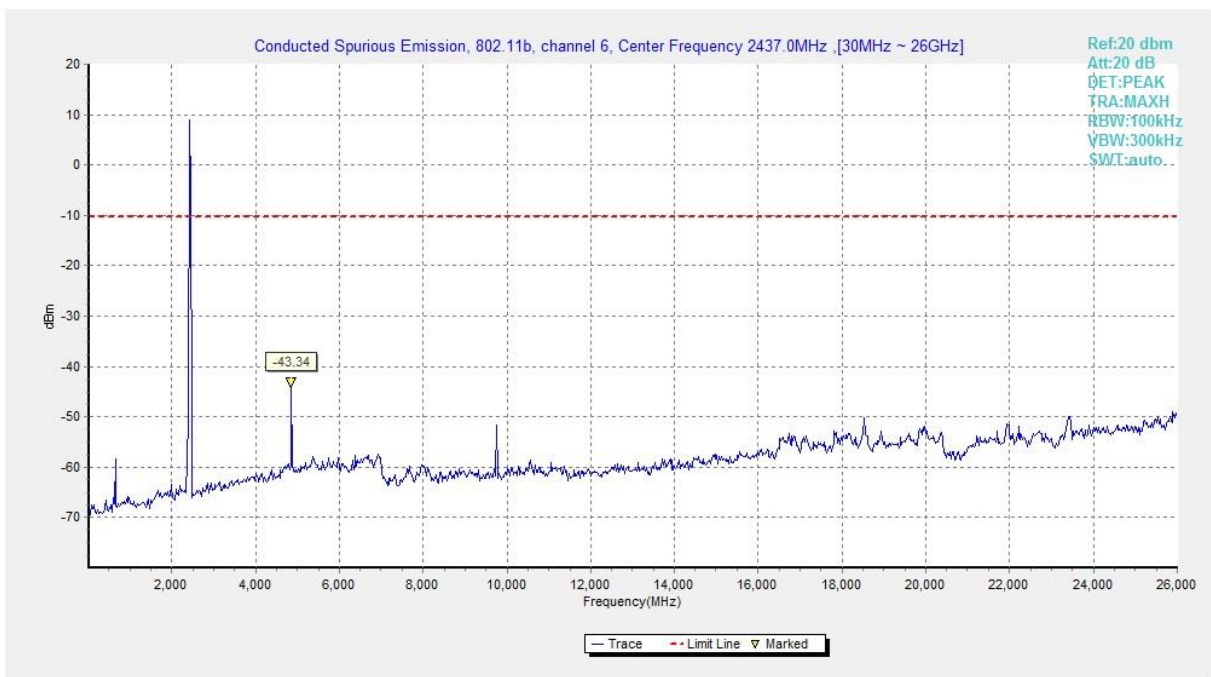


Fig.34 Conducted Spurious Emission (802.11b, CH6)

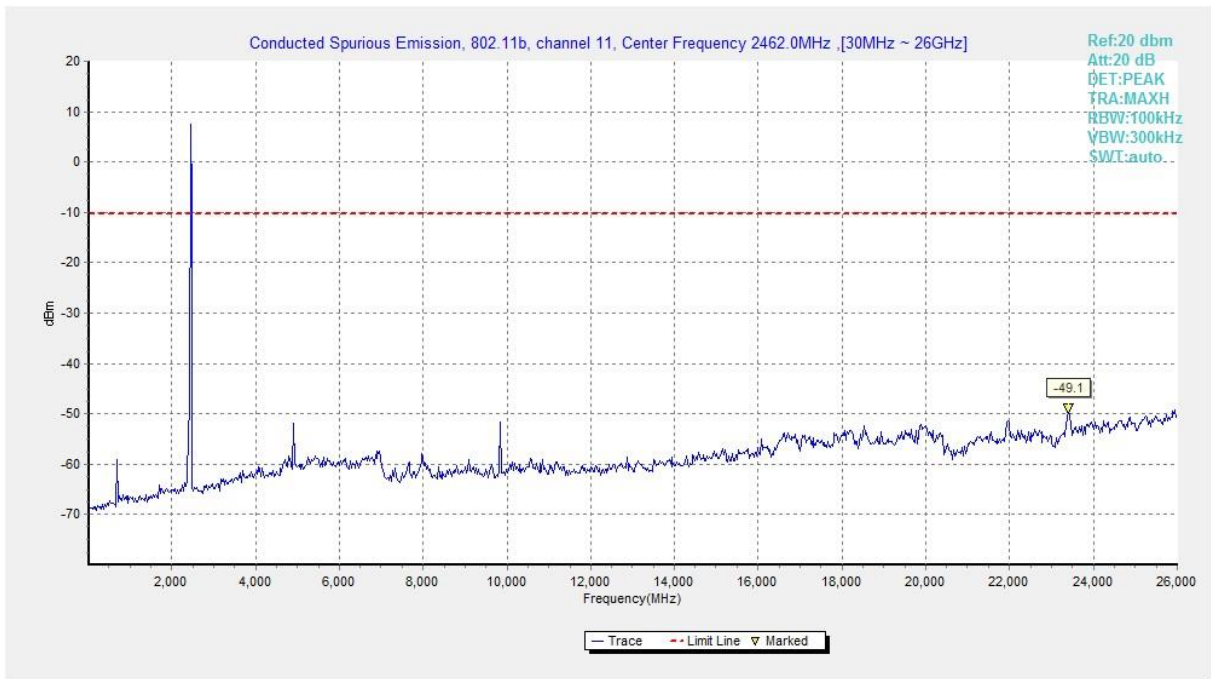


Fig.35 Conducted Spurious Emission (802.11b, CH11)

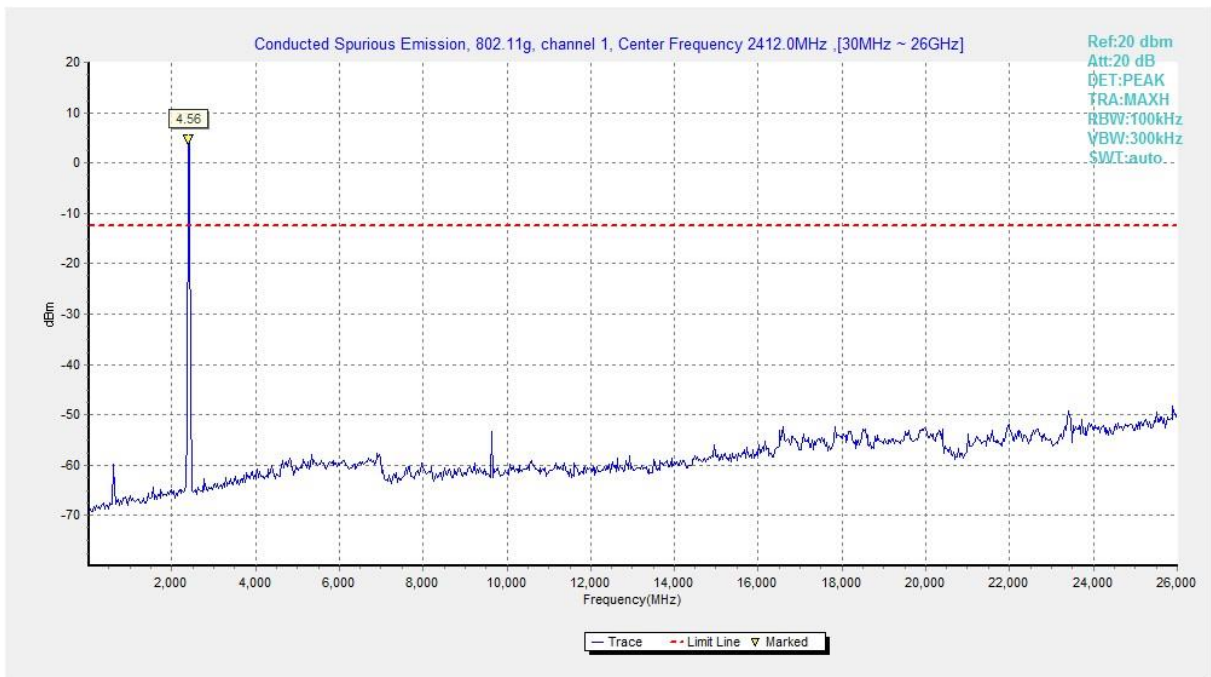


Fig.36 Conducted Spurious Emission (802.11g, CH1)

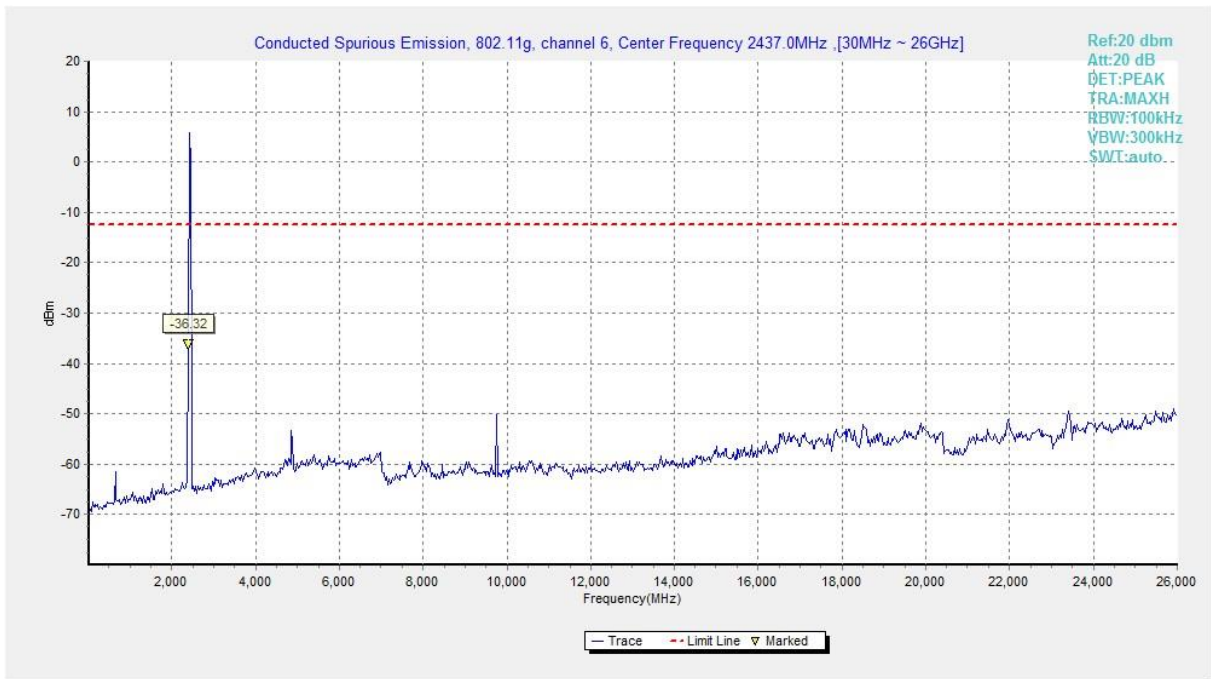


Fig.37 Conducted Spurious Emission (802.11g, CH6)

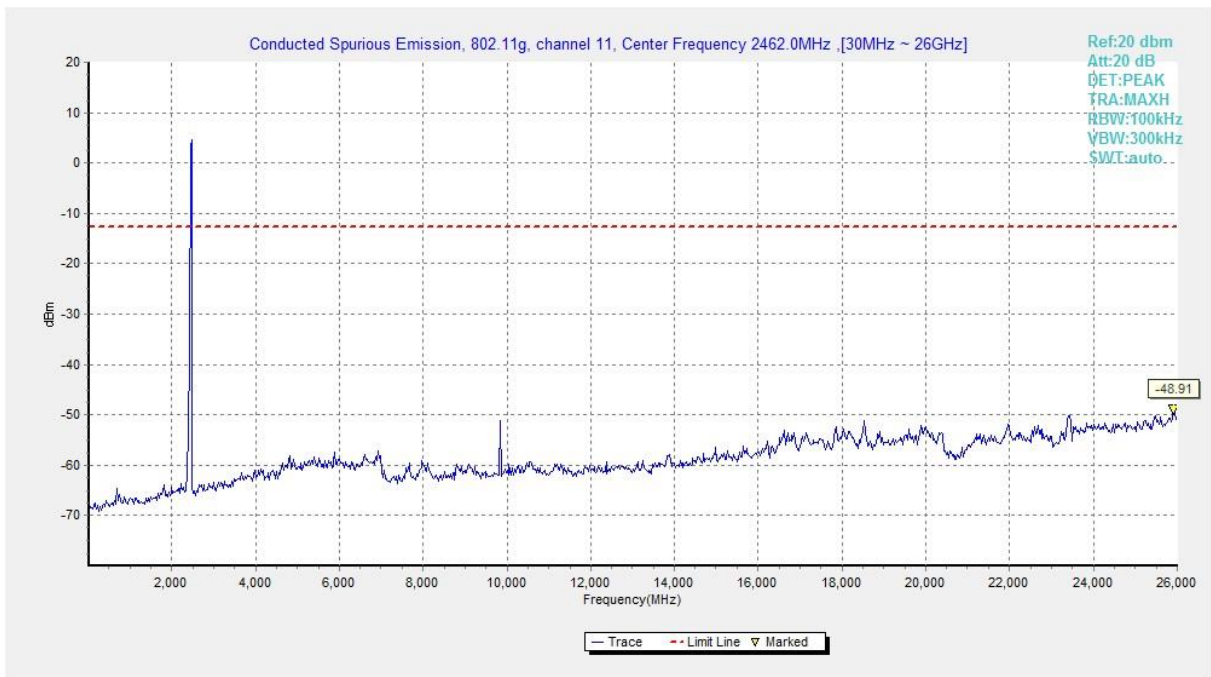


Fig.38 Conducted Spurious Emission (802.11g, CH11)

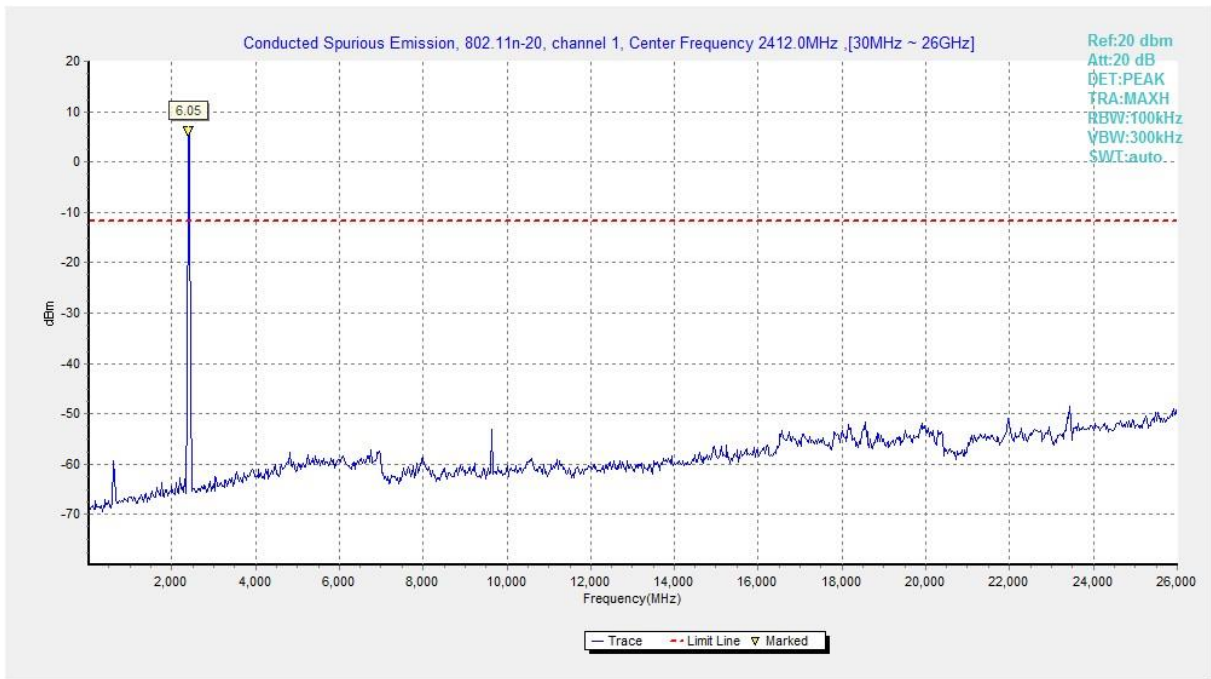


Fig.39 Conducted Spurious Emission (802.11n HT20, CH1)

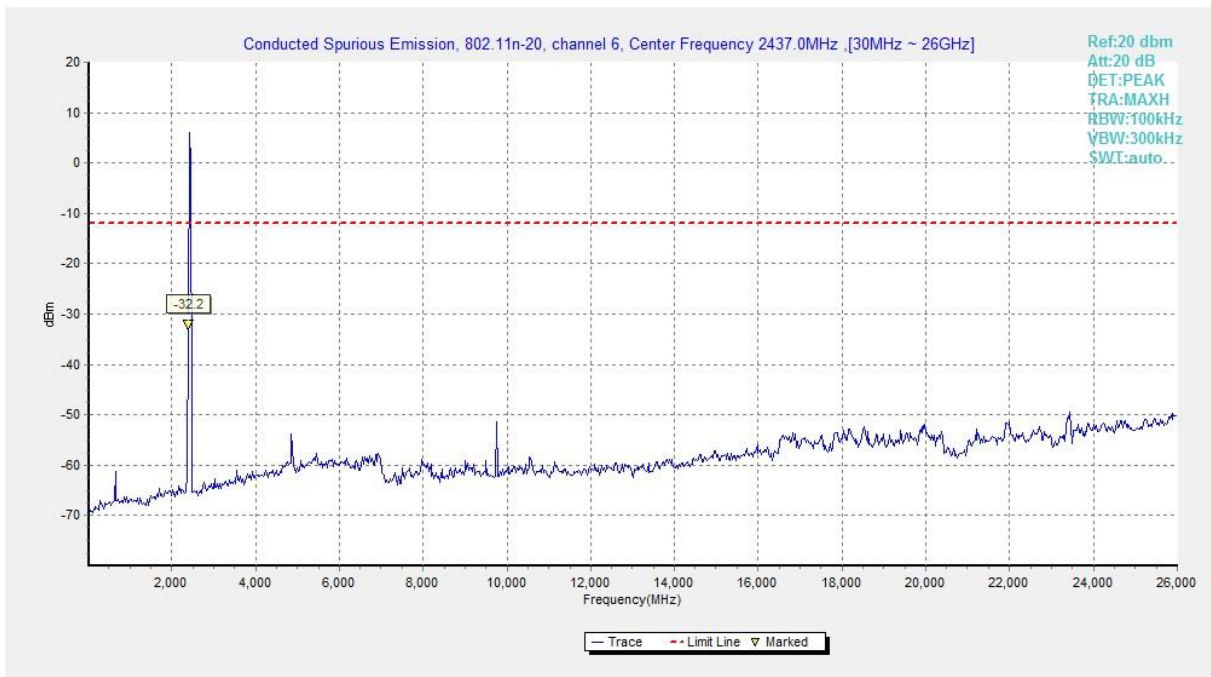


Fig.40 Conducted Spurious Emission (802.11n HT20, CH6)

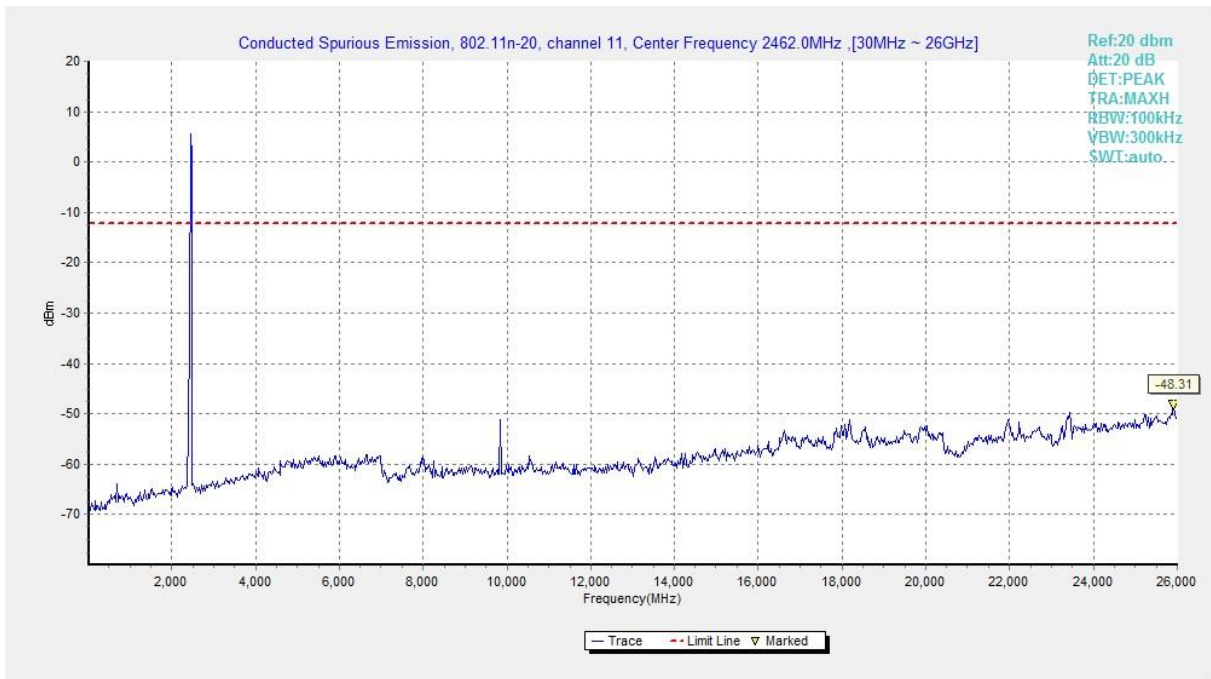


Fig.41 Conducted Spurious Emission (802.11n HT20, CH11)

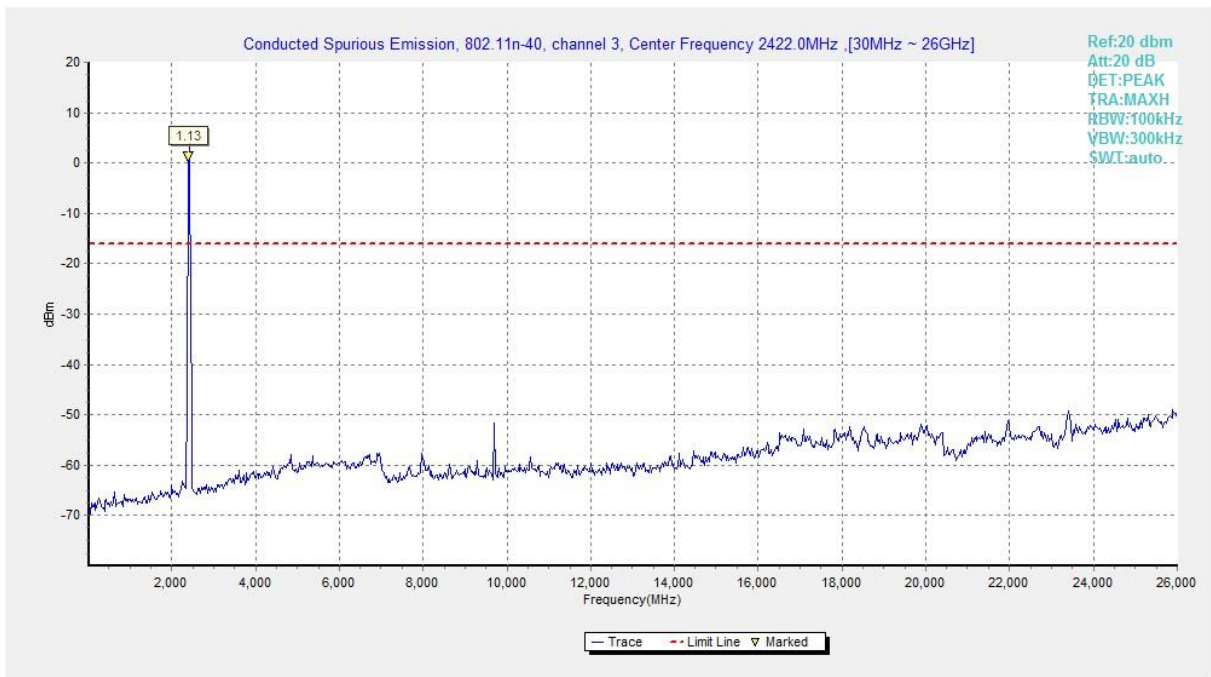


Fig.42 Conducted Spurious Emission (802.11n HT40, CH3)

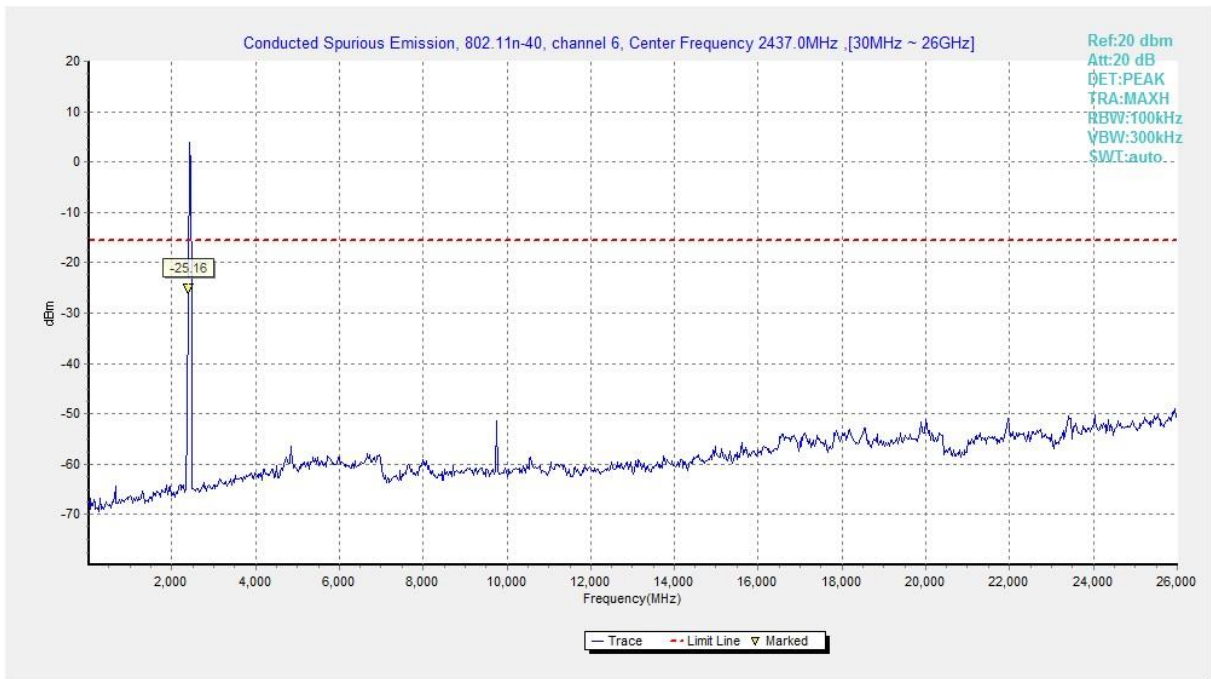


Fig.43 Conducted Spurious Emission (802.11n HT40, CH6)

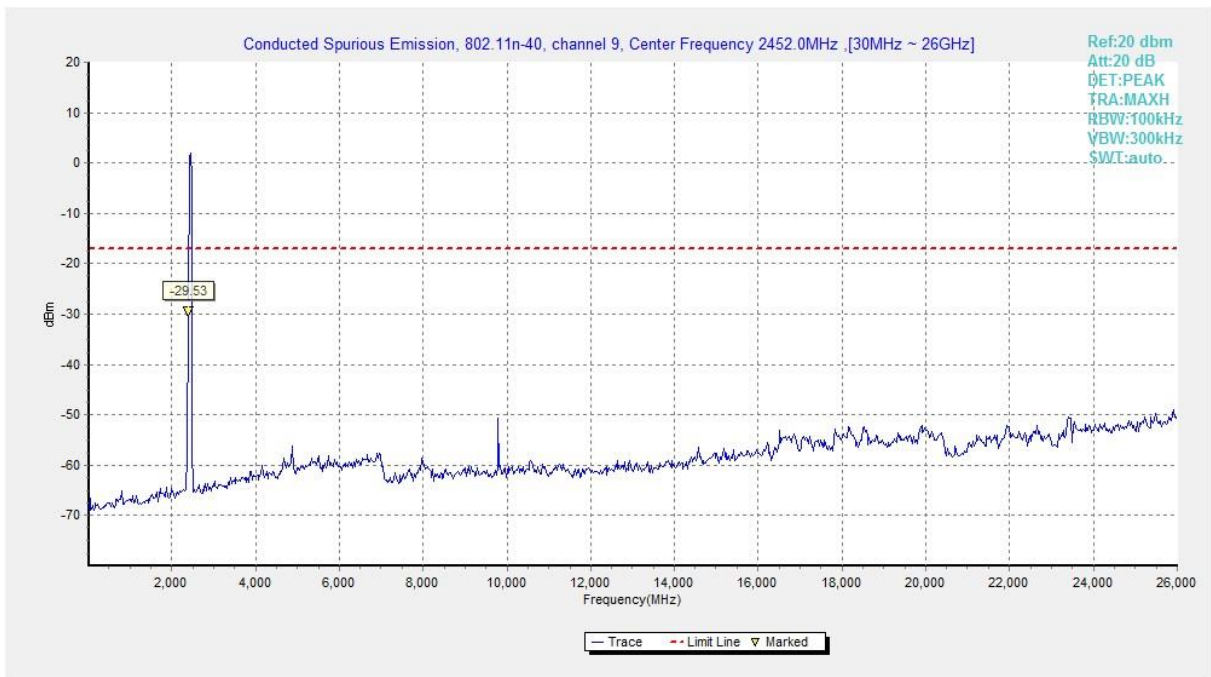


Fig.44 Conducted Spurious Emission (802.11n HT40, CH9)

\*\*\*END OF REPORT\*\*\*