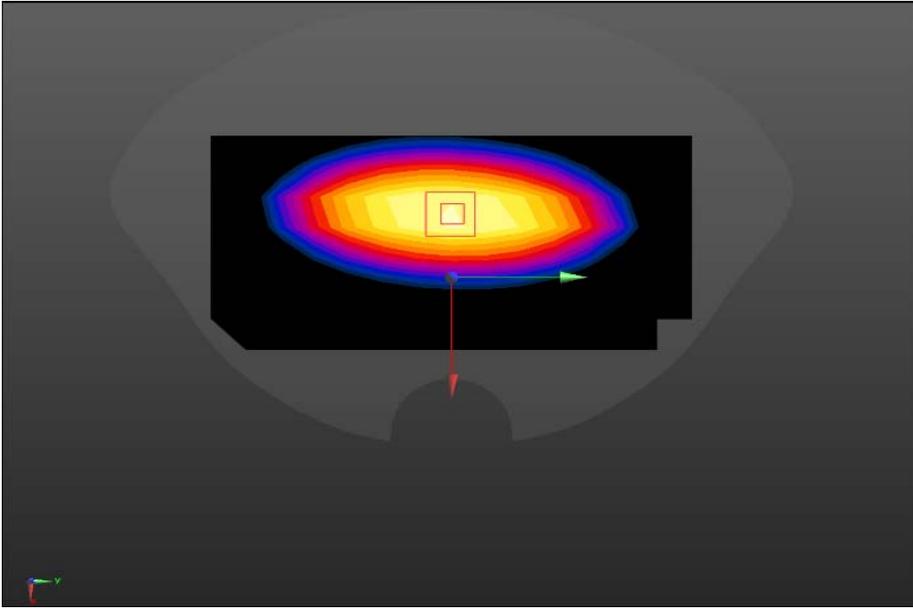
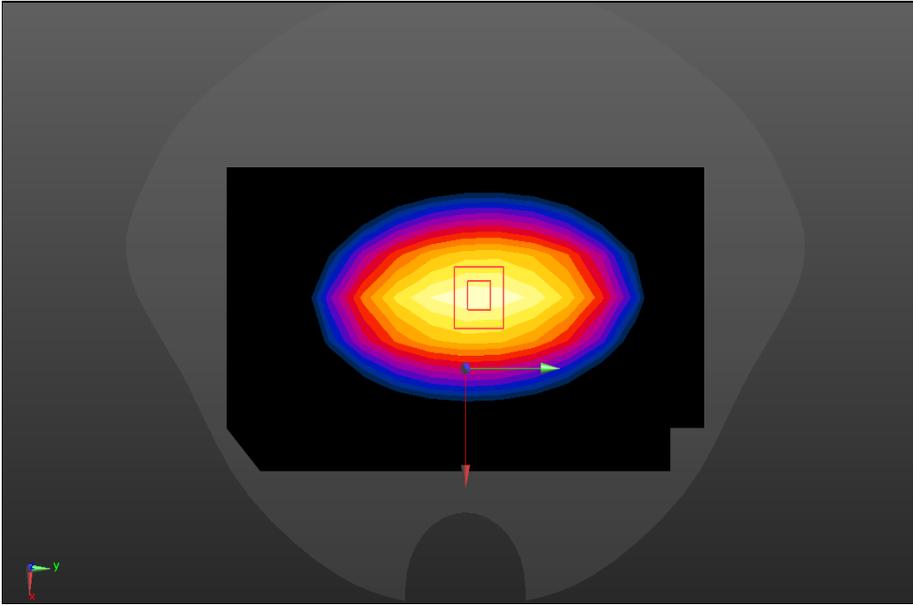


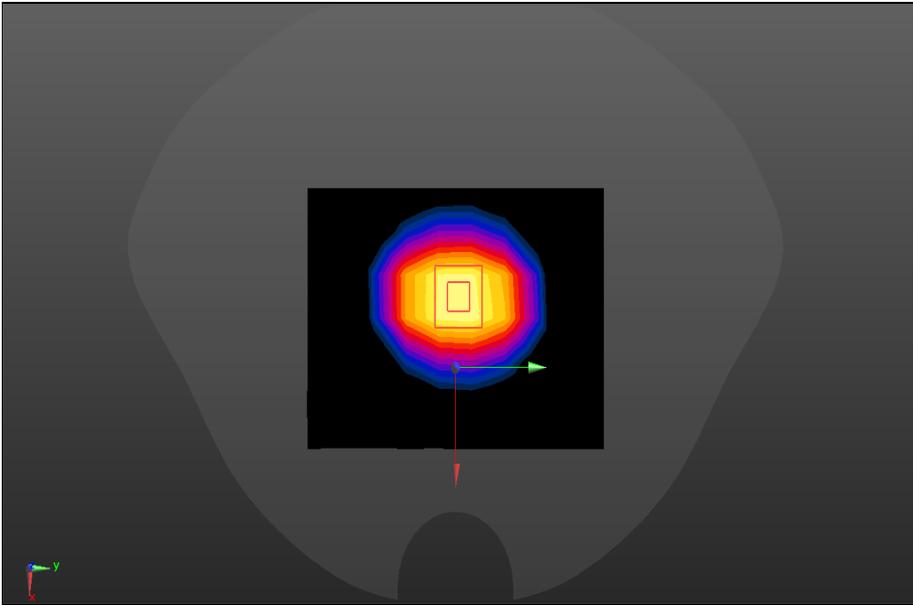
**ANNEX A – TEST PLOTS**

System check	750MHz
<p>Communication System: UID 0, CW (0) Frequency: 750 MHz; Duty cycle:1:1            Medium parameters used: <math>f = 750 \text{ MHz}</math>; <math>\sigma = 0.93 \text{ S/m}</math>; <math>\epsilon_r = 42.11</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75); Calibrated: 2020/10/30</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>System Performance Check at Frequencies 750MHz/Area Scan (8x15x1):</b>            Measurement grid: <math>dx=15\text{mm}</math>, <math>dy=15\text{mm}</math>            Maximum value of SAR (measured) = 2.16 W/kg</p> <p><b>System Performance Check at Frequencies 750MHz/Zoom Scan (7x7x7)/Cube 0:</b>            Measurement grid: <math>dx=5\text{mm}</math>, <math>dy=5\text{mm}</math>, <math>dz=5\text{mm}</math>            Reference Value = 41.00 V/m; Power Drift = 0.11 dB            Peak SAR (extrapolated) = 3.23 W/kg  <b>SAR(1 g) = 2.05 W/kg; SAR(10 g) = 1.38 W/kg</b>            Maximum value of SAR (measured) = 2.48 W/kg</p> 	

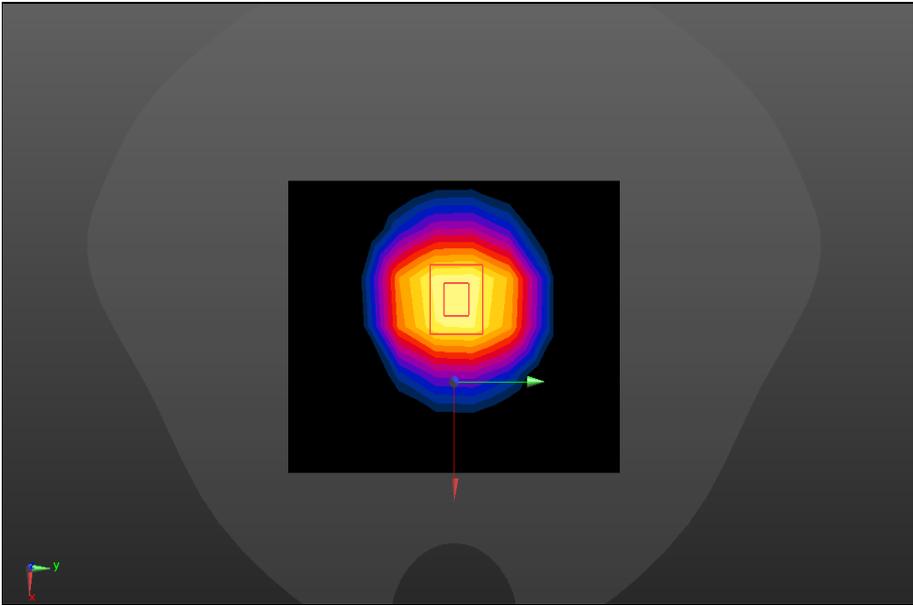
SRTC performed system check by using 250mw at antenna port

System check	835MHz
<p>Communication System: UID 0, CW (0); Frequency: 835 MHz Duty cycle:1:1            Medium parameters used (interpolated): <math>f = 835 \text{ MHz}</math>; <math>\sigma = 0.89 \text{ S/m}</math>; <math>\epsilon_r = 40.56</math> <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39); Calibrated: 2020/10/30</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Configuration 835/835/Area Scan (8x15x1):</b> Measurement grid: <math>dx=15\text{mm}</math>, <math>dy=15\text{mm}</math>            Maximum value of SAR (measured) = 2.72 W/kg</p> <p><b>Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5\text{mm}</math>, <math>dy=5\text{mm}</math>, <math>dz=5\text{mm}</math>            Reference Value = 51.67 V/m; Power Drift = 0.02 dB            Peak SAR (extrapolated) = 3.56 W/kg  <b>SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.60 W/kg</b>            Maximum value of SAR (measured) = 2.76 W/kg</p> 	

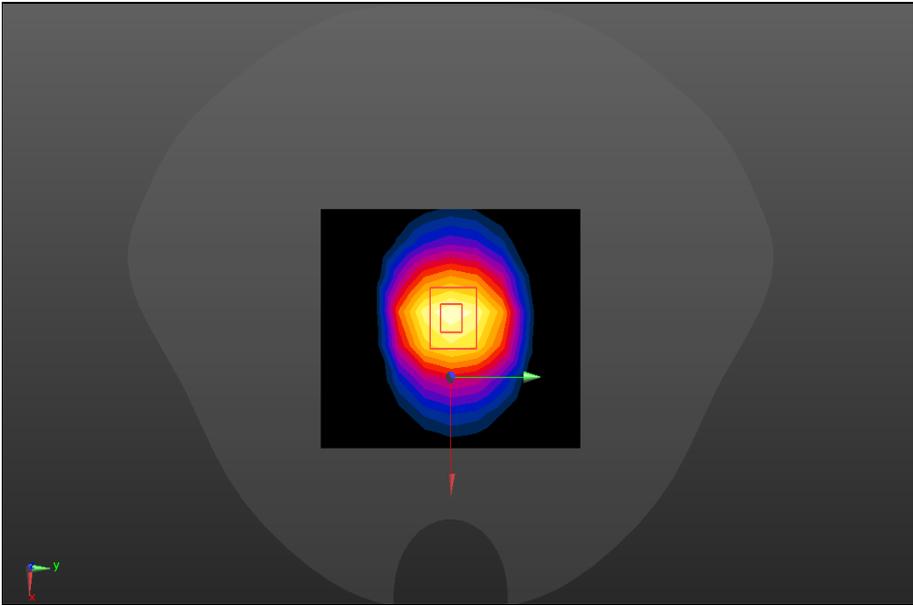
SRTC performed system check by using 250mw at antenna port

System check	1800MHz
<p>Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty cycle:1:1            Medium parameters used: <math>f = 1800 \text{ MHz}</math>; <math>\sigma = 1.45 \text{ S/m}</math>; <math>\epsilon_r = 41.15</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27); Calibrated: 2020/10/30</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Configuration 1800/1800/Area Scan (7x10x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 13.31 W/kg</p> <p><b>Configuration 1800/1800/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 76.76 V/m; Power Drift = 0.02 dB            Peak SAR (extrapolated) = 17.5 W/kg  <b>SAR(1 g) = 9.47 W/kg; SAR(10 g) = 4.95 W/kg</b>            Maximum value of SAR (measured) = 12.1 W/kg</p> 	

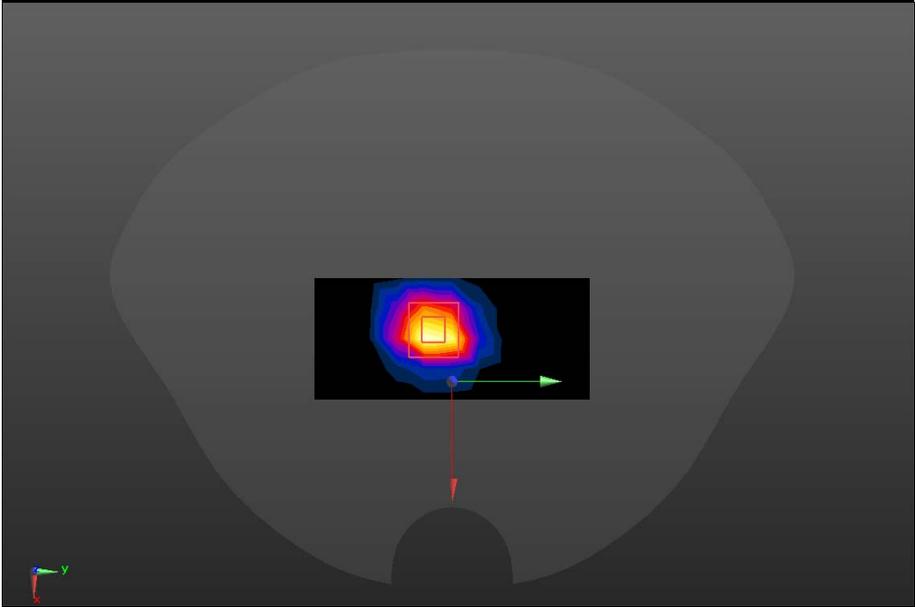
SRTC performed system check by using 250mw at antenna port

System check	2000MHz
<p>Communication System: UID 0, CW (0); Frequency: 2000 MHz; Duty cycle:1:1            Medium parameters used: <math>f = 2000 \text{ MHz}</math>; <math>\sigma = 1.44 \text{ S/m}</math>; <math>\epsilon_r = 40.68</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.94, 7.94, 7.94); Calibrated: 2020/10/30</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Configuration 2000/2000/Area Scan (7x10x1):</b> Measurement grid: dx=10mm, dy=10mm            Maximum value of SAR (measured) = 13.40 W/kg</p> <p><b>Configuration 2000/2000/Zoom Scan (7x7x7) (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 76.22 V/m; Power Drift = 0.04 dB            Peak SAR (extrapolated) = 18.7 W/kg  <b>SAR(1 g) = 9.81 W/kg; SAR(10 g) = 4.97 W/kg</b>            Maximum value of SAR (measured) = 12.9 W/kg</p> 	

SRTC performed system check by using 250mw at antenna port

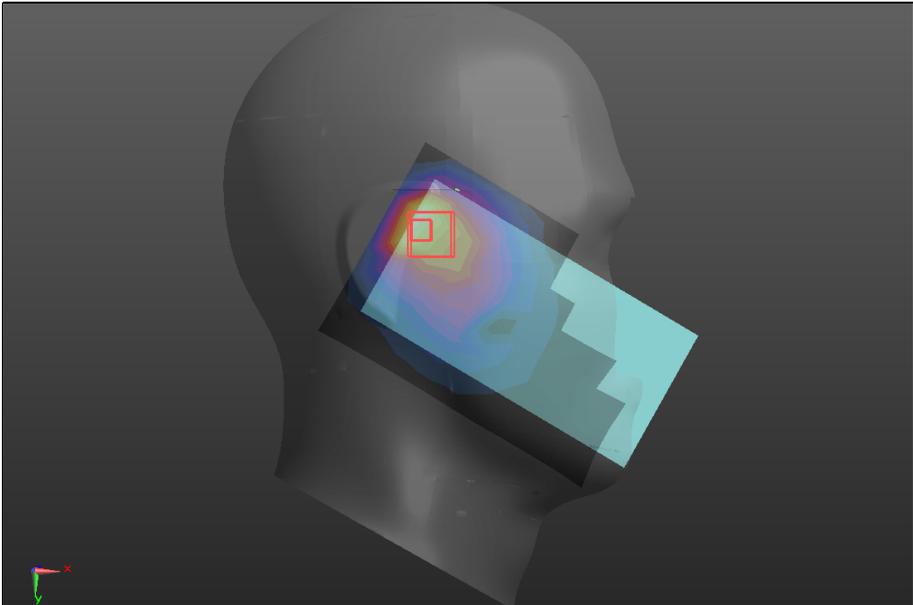
System check	2450MHz
<p>Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty cycle:1:1            Medium parameters used: <math>f = 2450</math> MHz; <math>\sigma = 1.77</math> S/m; <math>\epsilon_r = 39.11</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.48, 7.48, 7.48); Calibrated: 2020/10/30</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>System Performance Check at Frequencies 2450 MHz/2450/Area Scan (8x11x1):</b>            Measurement grid: dx=12mm, dy=12mm            Maximum value of SAR (measured) = 21.2 W/kg</p> <p><b>System Performance Check at Frequencies 2450 MHz/2450/Zoom Scan (7x7x7) (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm            Reference Value = 108.3 V/m; Power Drift = 0.18 dB            Peak SAR (extrapolated) = 28.2 W/kg  <b>SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.17 W/kg</b>            Maximum value of SAR (measured) = 22.6 W/kg</p> 	

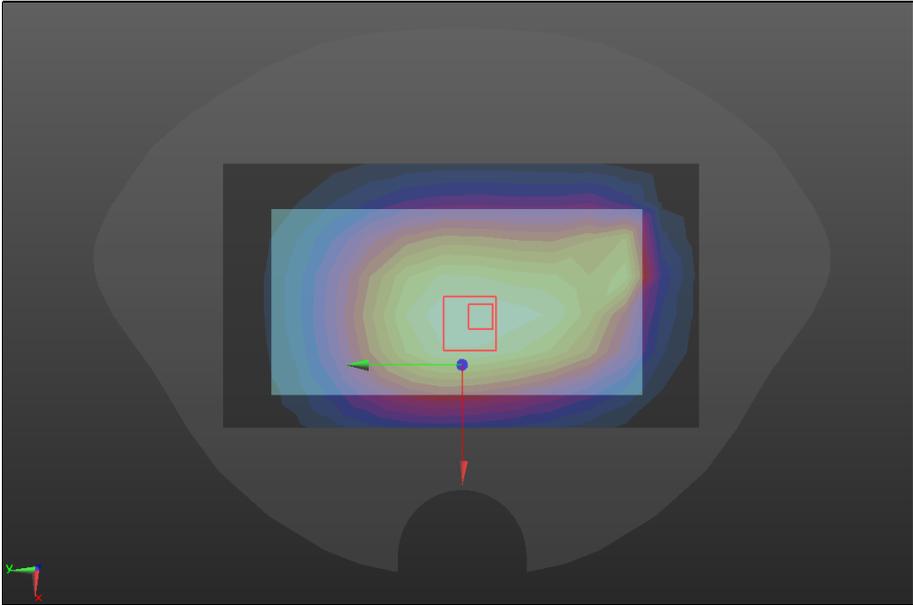
SRTC performed system check by using 250mw at antenna port

System check	2600MHz
<p>Communication System: UID 0, CW (0); Frequency: 2600 MHz;Duty Cycle: 1:1 Medium parameters used: <math>f = 2600</math> MHz; <math>\sigma = 1.94</math> S/m; <math>\epsilon_r = 38.40</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.37, 7.37, 7.37); Calibrated: 2020/10/30</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>SYSTEM CHECK 2600/Area Scan (5x11x1):</b> Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 22.7 W/kg</p> <p><b>SYSTEM CHECK 2600/Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 102.2 V/m; Power Drift = 0.11 dB Peak SAR (extrapolated) = 33.6 W/kg <b>SAR(1 g) = 14.18 W/kg; SAR(10 g) = 6.45 W/kg</b> Maximum value of SAR (measured) = 26.6 W/kg</p> 	

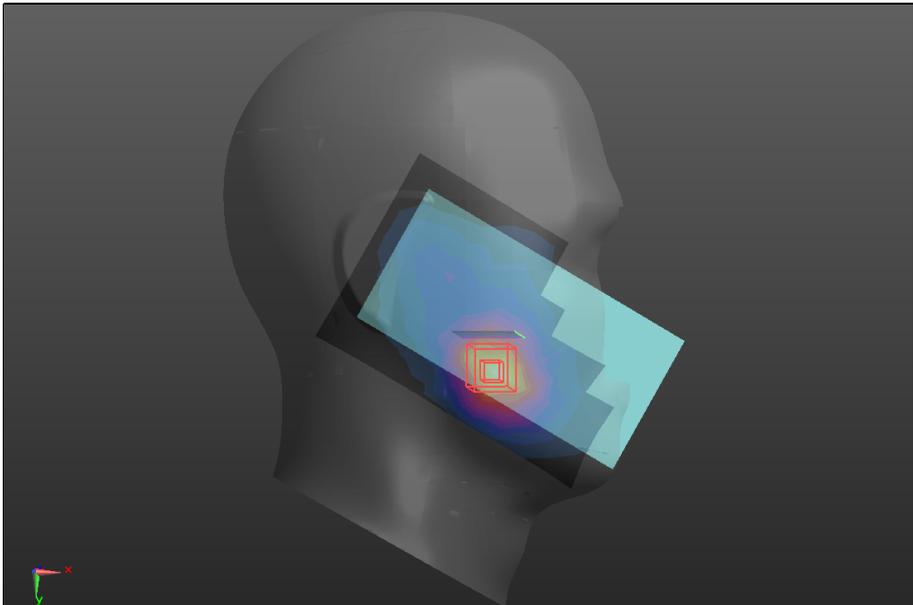
SRTC performed system check by using 250mw at antenna port

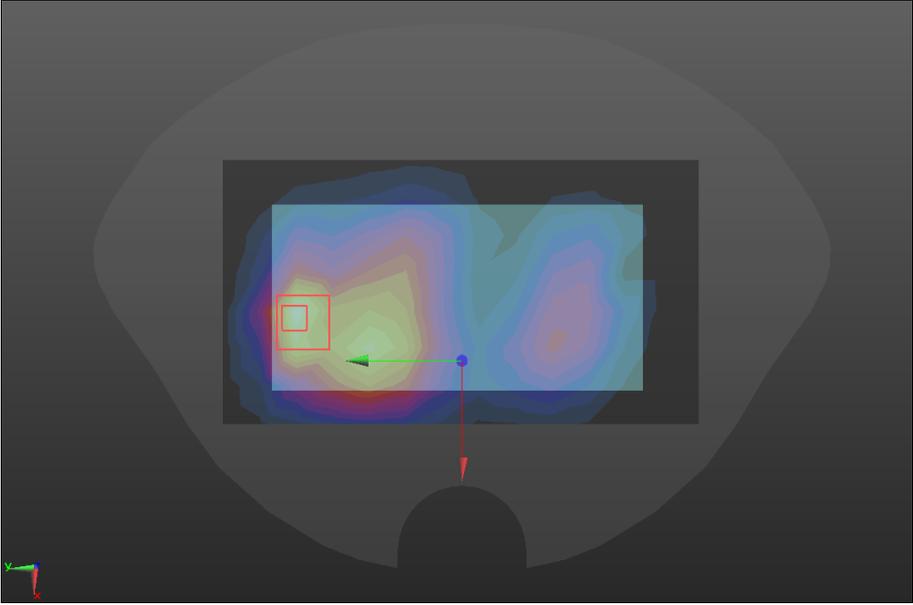
**GSM850**

Head	Right cheek
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 2:8            Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.89</math> S/m; <math>\epsilon_r = 40.56</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39); Calibrated: 2020/10/30</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>• Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>• Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>RIGHT/RC GSM850/Area Scan (7x13x1):</b> Measurement grid: dx=15mm, dy=15mm.            Maximum value of SAR (measured) = 1.29 W/kg</p> <p><b>RIGHT/RC GSM850/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 38 V/m; Power Drift = -0.12 dB            Peak SAR (extrapolated) = 2.00 W/kg  <b>SAR(1 g) = 1.26 W/kg; SAR(10 g) = 0.547W/kg</b>            Maximum value of SAR (measured) = 1.312 W/kg</p> 	

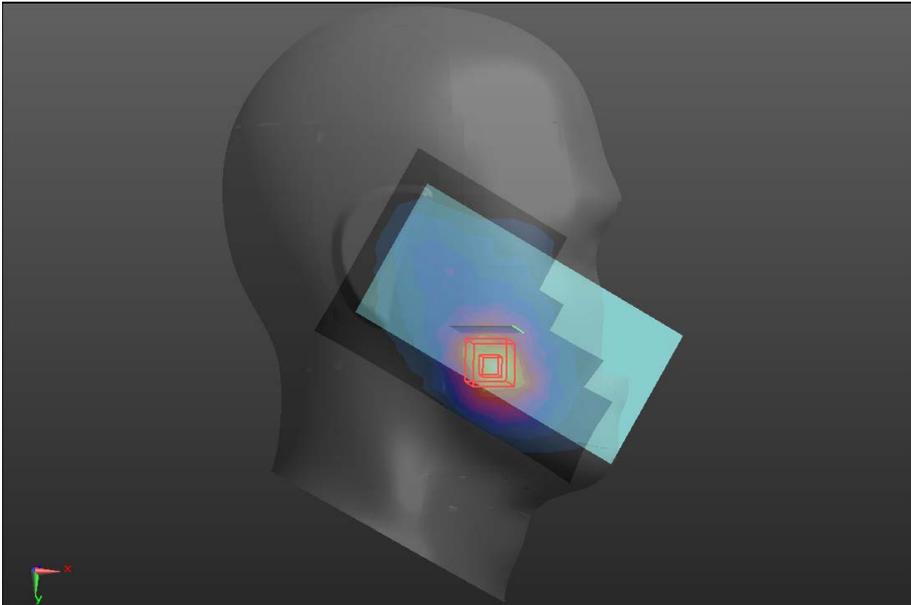
Body-worn	Back
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 2:8 Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.89</math> S/m; <math>\epsilon_r = 40.56</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39); Calibrated: 2020/10/30</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>15_15/BACK GSM850 2TX/Area Scan (7x12x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.569 W/kg</p> <p><b>15_15/BACK GSM850 2TX/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 26.19 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.708 W/kg <b>SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.214 W/kg</b> Maximum value of SAR (measured) = 0.573 W/kg</p> 	

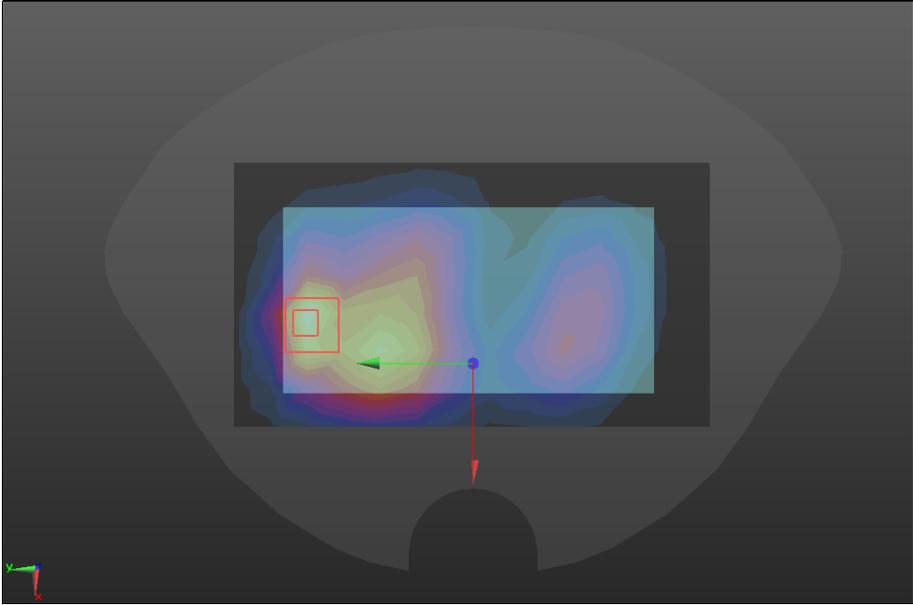
**GSM1900**

Head	Right cheek
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 3:8                      Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.419</math> S/m; <math>\epsilon_r = 40.663</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.99, 7.99, 7.99); Calibrated: 2020/10/30;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>• Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>GRPS1900 3Slots/Area Scan (8x14x1):</b> Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 0.763 W/kg</p> <p><b>GRPS1900 3Slots/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm                      Reference Value = 8.575 V/m; Power Drift = -0.14 dB                      Peak SAR (extrapolated) = 0.875 W/kg  <b>SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.214 W/kg</b>                      Maximum value of SAR (measured) = 0.600 W/kg</p>	
	

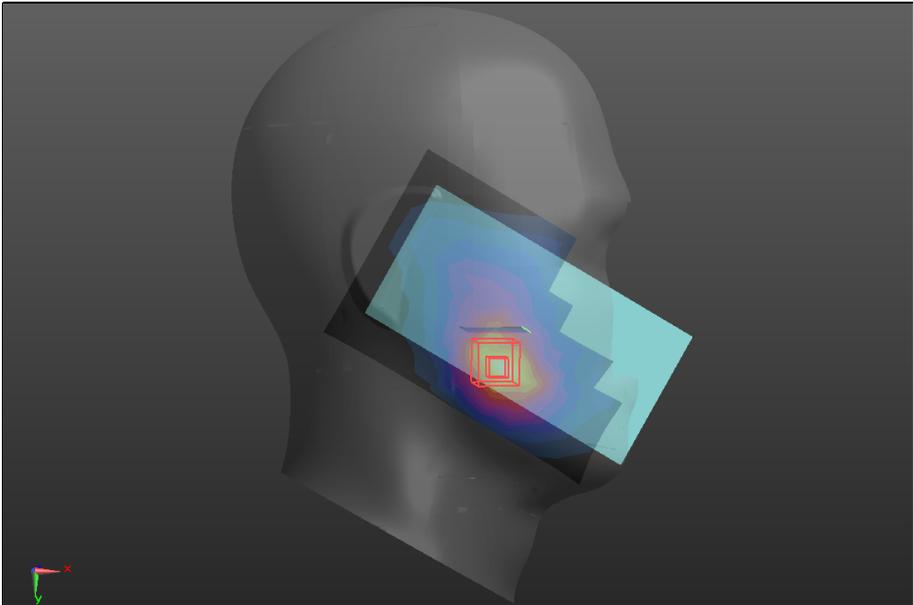
Body-worn	Back
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 3:8 Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.419</math> S/m; <math>\epsilon_r = 40.663</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.99, 7.99, 7.99); Calibrated: 2020/10/30;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/GPRS1900 3Slots/Area Scan (9x15x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.926 W/kg</p> <p><b>Back/GPRS1900 3Slots/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 10.91 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 2.35 W/kg <b>SAR(1 g) = 0.704 W/kg; SAR(10 g) = 0.338 W/kg</b> Maximum value of SAR (measured) = 0.922 W/kg</p> 	

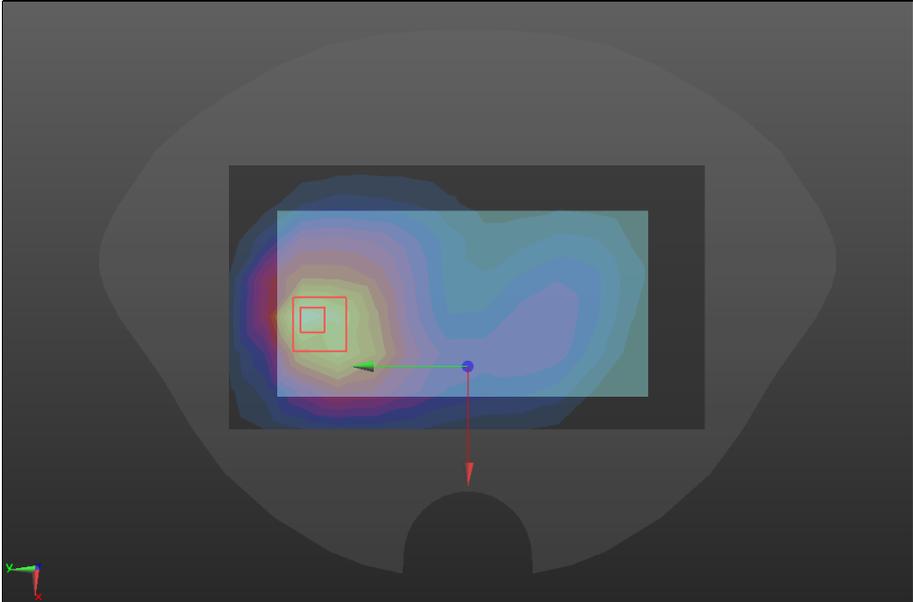
**WCDMA Band II**

Head	Right cheek
<p>Communication System: UID 0, wcdma BANDII (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.419</math> S/m; <math>\epsilon_r = 40.663</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.99, 7.99, 7.99); Calibrated: 2020/10/30;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>• Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>RIGHT/RC WCDMA B2/Area Scan (9x14x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.738 W/kg</p> <p><b>RIGHT/RC WCDMA B2/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 8.803 V/m; Power Drift = -0.10 dB Peak SAR (extrapolated) = 0.848 W/kg <b>SAR(1 g) = 0.537 W/kg; SAR(10 g) = 0.321 W/kg</b> Maximum value of SAR (measured) = 0.583 W/kg</p> 	

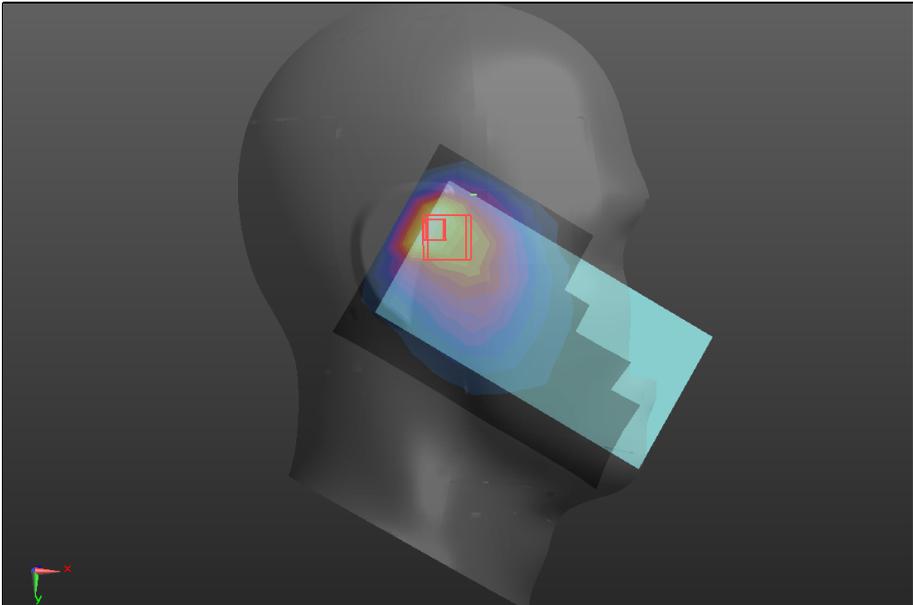
Body-worn	Back
<p>Communication System: UID 0, wcdma BANDII (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.419</math> S/m; <math>\epsilon_r = 40.663</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.99, 7.99, 7.99); Calibrated: 2020/10/30;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>15_15/BACK WCDMA B2/Area Scan (7x13x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.912 W/kg</p> <p><b>15_15/BACK WCDMA B2/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 10.68 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 1.08 W/kg <b>SAR(1 g) = 0.645 W/kg; SAR(10 g) = 0.318 W/kg</b> Maximum value of SAR (measured) = 0.877 W/kg</p> 	

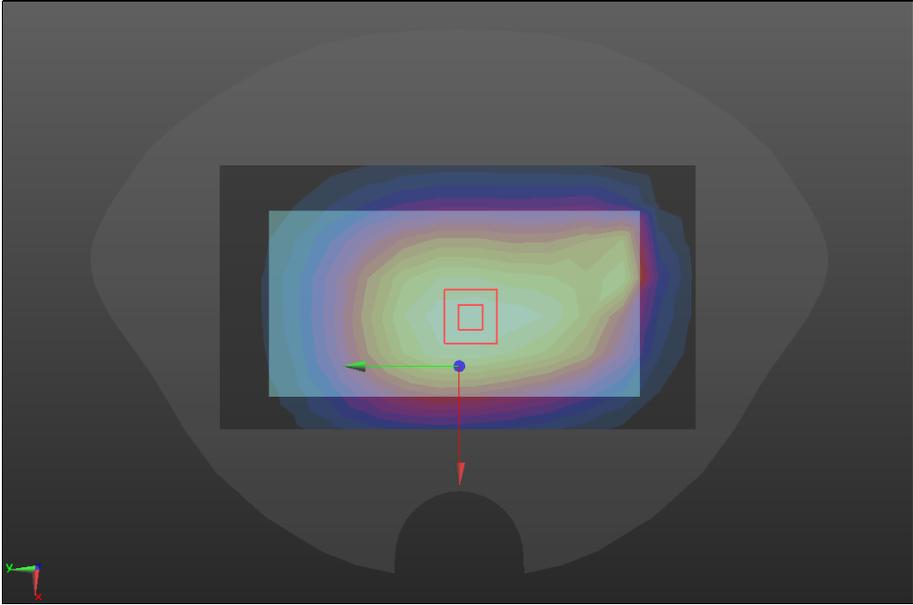
**WCDMA Band IV**

Head	Right cheek
<p>Communication System: UID 0, wcdma bandIV (0); Frequency: 1732.4 MHz;Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 1732.4</math> MHz; <math>\sigma = 1.375</math> S/m; <math>\epsilon_r = 40.07</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27); Calibrated: 2020/10/30;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 9/30/2020</li> <li>• Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>RIGHT/RC WCDMA B4/Area Scan (9x14x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.436 W/kg</p> <p><b>RIGHT/RC WCDMA B4/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 6.067 V/m; Power Drift = -0.09 dB            Peak SAR (extrapolated) = 0.494 W/kg  <b>SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.201 W/kg</b>            Maximum value of SAR (measured) = 0.348 W/kg</p> 	

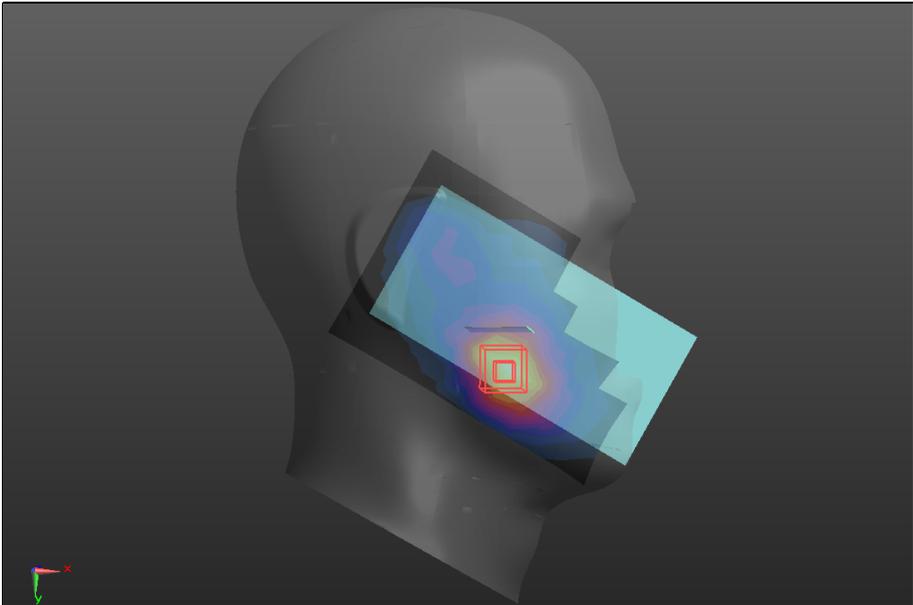
Body-worn	Back
<p>Communication System: UID 0, wcdma bandIV (0); Frequency: 1732.4 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): <math>f = 1732.4</math> MHz; <math>\sigma = 1.375</math> S/m; <math>\epsilon_r = 40.07</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27); Calibrated: 2020/10/30;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 9/30/2020</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>15_15/BACK WCDMA B4/Area Scan (7x13x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.696 W/kg</p> <p><b>15_15/BACK WCDMA B4/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 9.892 V/m; Power Drift = -0.12 dB Peak SAR (extrapolated) = 0.813 W/kg <b>SAR(1 g) = 0.622 W/kg; SAR(10 g) = 0.298 W/kg</b> Maximum value of SAR (measured) = 0.714 W/kg</p> 	

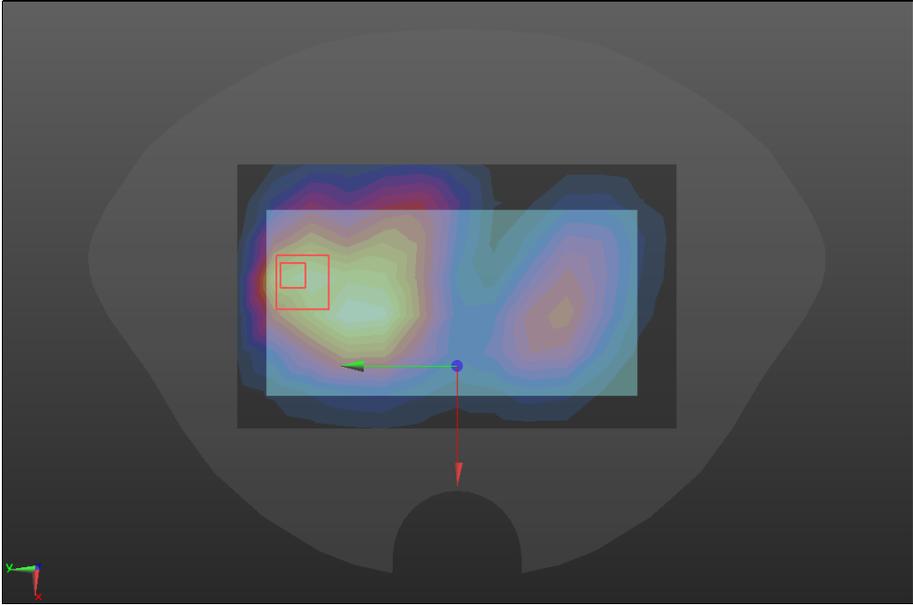
**WCDMA Band V**

Head	Right cheek
<p>Communication System: UID 0, WCDMA 5 (0); Frequency: 836.6 MHz;Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.89</math> S/m; <math>\epsilon_r = 40.56</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39); Calibrated: 2020/10/30;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 9/30/2020</li> <li>• Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>RIGHT/RC WCDMA B5/Area Scan (7x13x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.775 W/kg</p> <p><b>RIGHT/RC WCDMA B5/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 27.39 V/m; Power Drift = 0.09 dB            Peak SAR (extrapolated) = 1.11 W/kg  <b>SAR(1 g) = 0.586 W/kg; SAR(10 g) = 0.358 W/kg</b>            Maximum value of SAR (measured) = 0.619 W/kg</p> 	

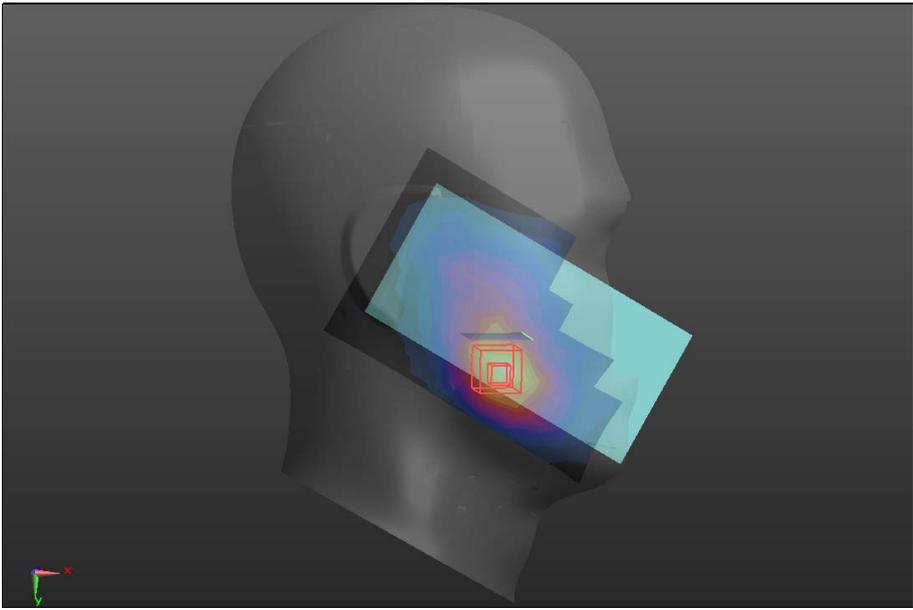
Body-worn	Back
<p>Communication System: UID 0, WCDMA 5 (0); Frequency: 836.6 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.89</math> S/m; <math>\epsilon_r = 40.56</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39); Calibrated: 2020/10/30;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 9/30/2020</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>15_15/BACK WCDMA B5/Area Scan (7x12x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.360 W/kg</p> <p><b>15_15/BACK WCDMA B5/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 16.23 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 0.382 W/kg <b>SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.151 W/kg</b> Maximum value of SAR (measured) = 0.356 W/kg</p> 	

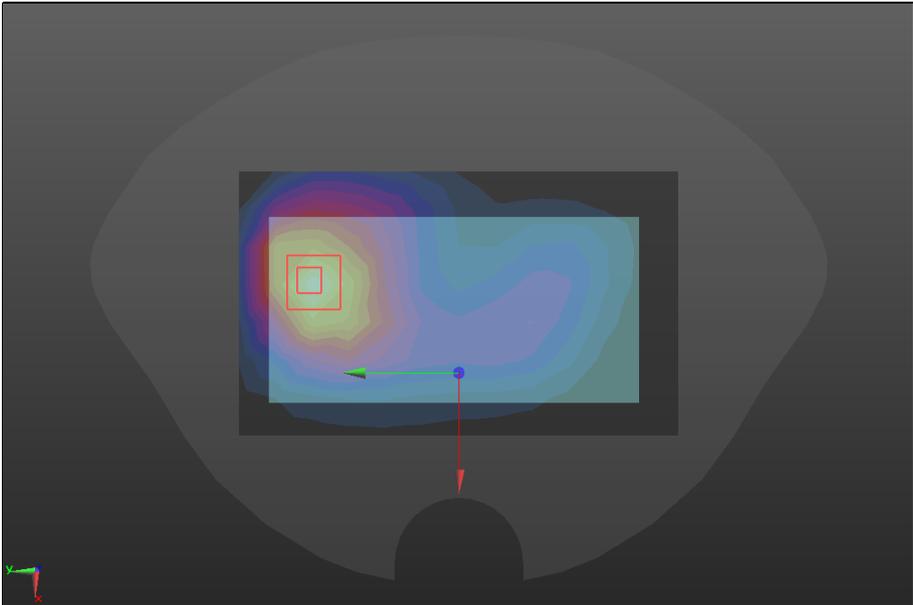
**LTE Band 2**

Head	Right cheek
<p>Communication System: UID 0,LTE band 02 (0); Frequency: 1880 MHz;Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.419</math> S/m; <math>\epsilon_r = 40.663</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.99, 7.99, 7.99); Calibrated: 2020/10/30;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>• Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>RIGHT/RC LTE B2/Area Scan (9x14x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.663 W/kg</p> <p><b>RIGHT/RC LTE B2/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 10.59 V/m; Power Drift = 0.03 dB            Peak SAR (extrapolated) = 0.727 W/kg  <b>SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.219 W/kg</b>            Maximum value of SAR (measured) = 0.620 W/kg</p> 	

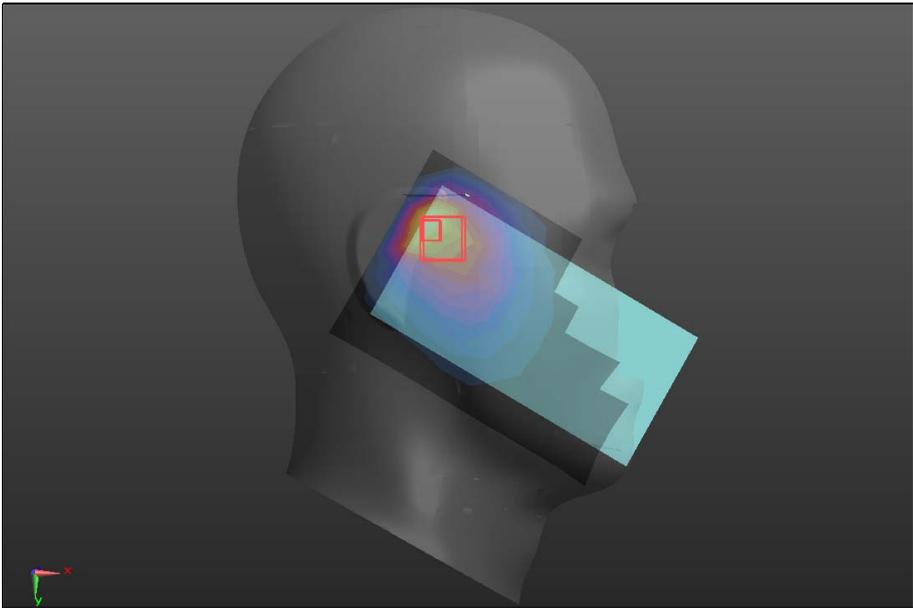
Body-worn	Back
<p>Communication System: UID 0,LTE band 02 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.419</math> S/m; <math>\epsilon_r = 40.663</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.99, 7.99, 7.99); Calibrated: 2020/10/30;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>15_15/BACK LTE B2 1RB/Area Scan (7x13x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.794 W/kg</p> <p><b>15_15/BACK LTE B2 1RB/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 11.95 V/m; Power Drift = -0.09 dB Peak SAR (extrapolated) = 1.02 W/kg <b>SAR(1 g) = 0.605 W/kg; SAR(10 g) = 0.288 W/kg</b> Maximum value of SAR (measured) = 0.870 W/kg</p> 	

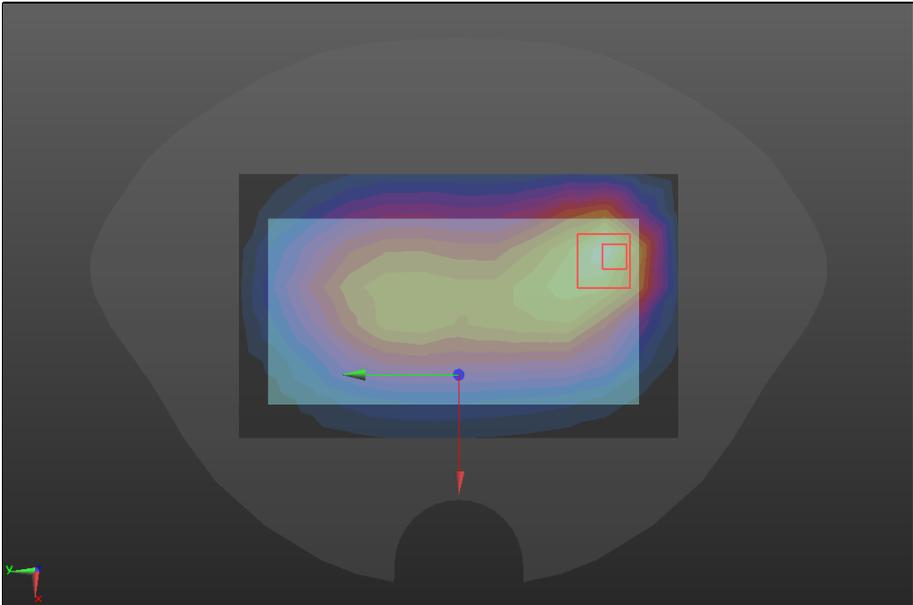
**LTE Band 4**

Head	Right cheek
<p>Communication System: UID 0, LTE BAND4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): <math>f = 1732.5</math> MHz; <math>\sigma = 1.375</math> S/m; <math>\epsilon_r = 40.07</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27); Calibrated: 2020/10/30;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>RIGHT/RC LTE B4/Area Scan (7x13x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.341 W/kg</p> <p><b>RIGHT/RC LTE B4/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 5.171 V/m; Power Drift = 0.16 dB Peak SAR (extrapolated) = 0.406 W/kg <b>SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.125 W/kg</b> Maximum value of SAR (measured) = 0.349 W/kg</p> 	

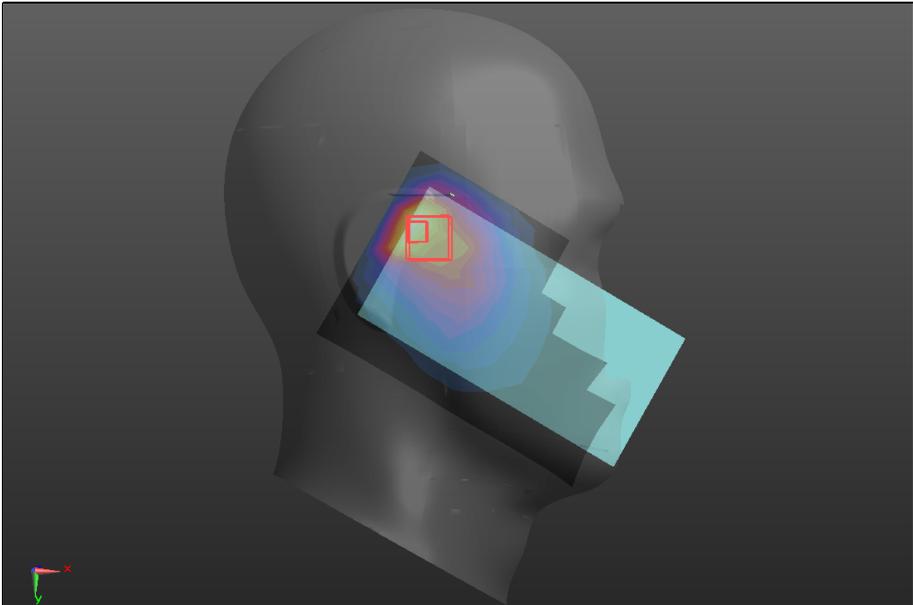
Body-worn	Back
<p>Communication System: UID 0, LTE BAND4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): <math>f = 1732.5</math> MHz; <math>\sigma = 1.375</math> S/m; <math>\epsilon_r = 40.07</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27); Calibrated: 2020/10/30;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>• Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>15_15/BACK LTE B4 1RB/Area Scan (7x12x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.689 W/kg</p> <p><b>15_15/BACK LTE B4 1RB/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 11.85 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.845 W/kg <b>SAR(1 g) = 0.539 W/kg; SAR(10 g) = 0.233 W/kg</b> Maximum value of SAR (measured) = 0.724 W/kg</p> 	

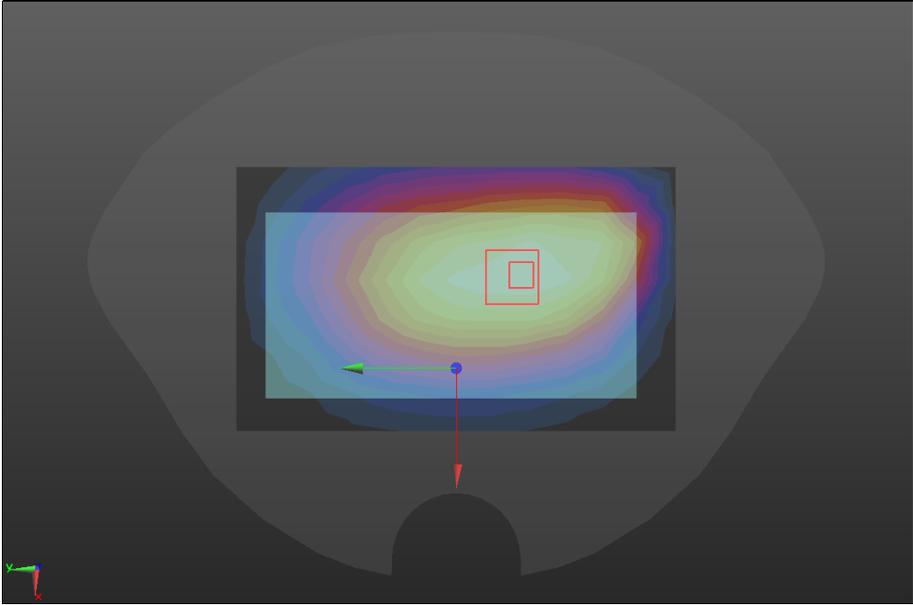
**LTE Band 5**

Head	Right cheek
<p>Communication System: UID 0, LTE BAND05 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 836.5</math> MHz; <math>\sigma = 0.89</math> S/m; <math>\epsilon_r = 40.56</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27); Calibrated: 2020/10/30;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>RIGHT/RC LTE B5/Area Scan (7x13x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.946 W/kg</p> <p><b>RIGHT/RC LTE B5/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 25.89 V/m; Power Drift = 0.04 dB            Peak SAR (extrapolated) = 1.28 W/kg  <b>SAR(1 g) = 0.623 W/kg; SAR(10 g) = 0.288 W/kg</b>            Maximum value of SAR (measured) = 0.927 W/kg</p> 	

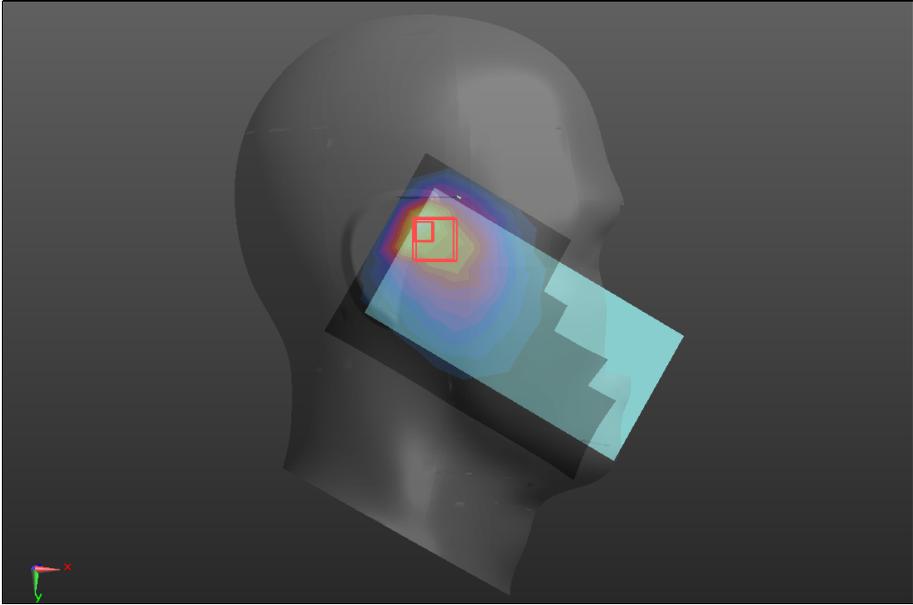
Body-worn	Back
<p>Communication System: UID 0, LTE BAND05 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): <math>f = 836.5</math> MHz; <math>\sigma = 0.89</math> S/m; <math>\epsilon_r = 40.56</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27); Calibrated: 2020/10/30;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>15_15/BACK LTE B5 RB/Area Scan (7x12x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.322 W/kg</p> <p><b>15_15/BACK LTE B5 RB/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 16.86 V/m; Power Drift = -0.10 dB Peak SAR (extrapolated) = 0.417 W/kg <b>SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.114 W/kg</b> Maximum value of SAR (measured) = 0.353 W/kg</p> 	

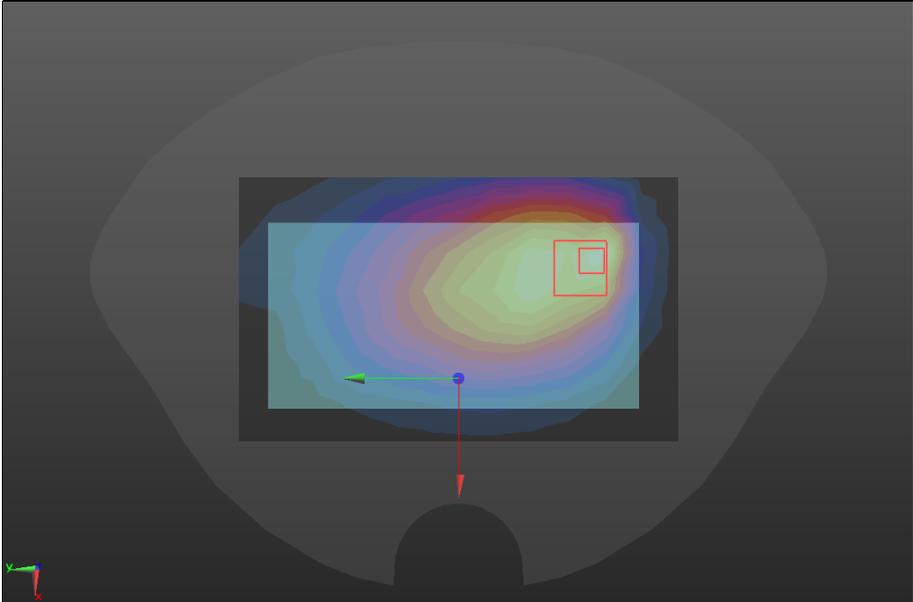
**LTE Band 12**

Head	Right cheek
<p>Communication System: UID 0, LTE BAND12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1                      Medium parameters used (interpolated): <math>f = 707.5</math> MHz; <math>\sigma = 0.887</math> S/m; <math>\epsilon_r = 42.115</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75); Calibrated: 2020/10/30</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>• Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>• Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>RIGHT/RC LTE B12/Area Scan (7x13x1):</b> Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 0.858 W/kg</p> <p><b>RIGHT/RC LTE B12/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm                      Reference Value = 26.06 V/m; Power Drift = 0.07 dB                      Peak SAR (extrapolated) = 1.20 W/kg  <b>SAR(1 g) = 0.594W/kg; SAR(10 g) = 0.259 W/kg</b>                      Maximum value of SAR (measured) = 0.917 W/kg</p> 	

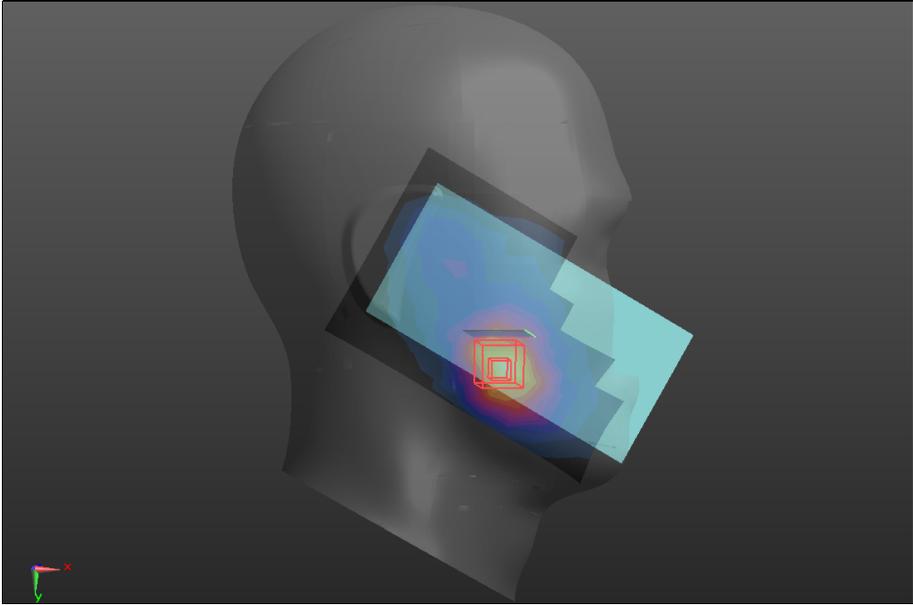
Body-worn	Back
<p>Communication System: UID 0, LTE BAND12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): <math>f = 707.5</math> MHz; <math>\sigma = 0.887</math> S/m; <math>\epsilon_r = 42.115</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75); Calibrated: 2020/10/30</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>15_15/BACK LTE B12 1RB/Area Scan (7x12x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.282 W/kg</p> <p><b>15_15/BACK LTE B12 1RB/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 17.20 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.306 W/kg <b>SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.118 W/kg</b> Maximum value of SAR (measured) = 0.279 W/kg</p> 	

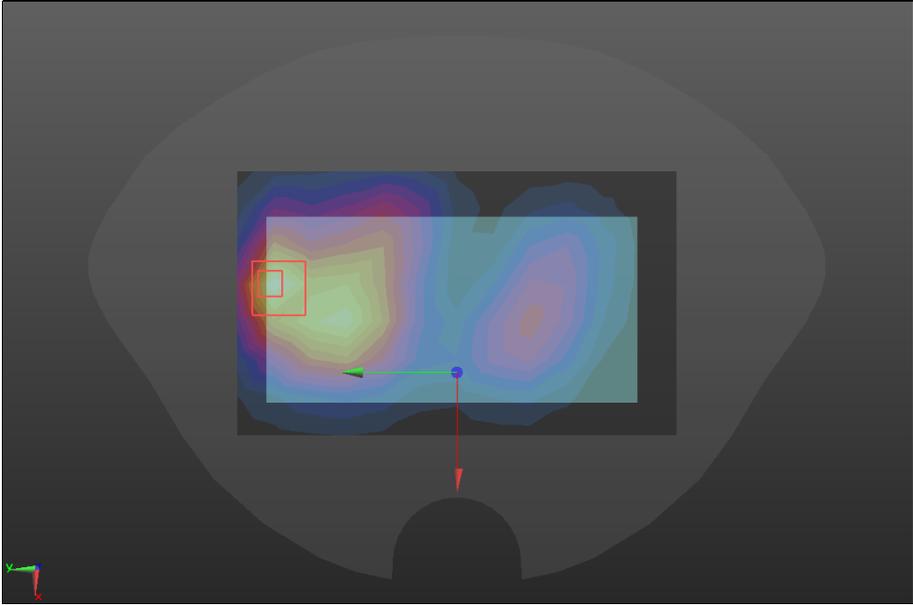
**LTE Band 13**

Head	Right cheek
<p>Communication System: UID 0, LTE BAND13 (0); Frequency: 782 MHz;Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 782 \text{ MHz}</math>; <math>\sigma = 0.893 \text{ S/m}</math>; <math>\epsilon_r = 41.712</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75); Calibrated: 2020/10/30</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>LTE B13 1RB/Area Scan (7x12x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.296 W/kg</p> <p><b>LTE B13 1RB/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 15.34 V/m; Power Drift = 0.03 dB            Peak SAR (extrapolated) = 0.412 W/kg  <b>SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.098 W/kg</b>            Maximum value of SAR (measured) = 0.299 W/kg</p> 	

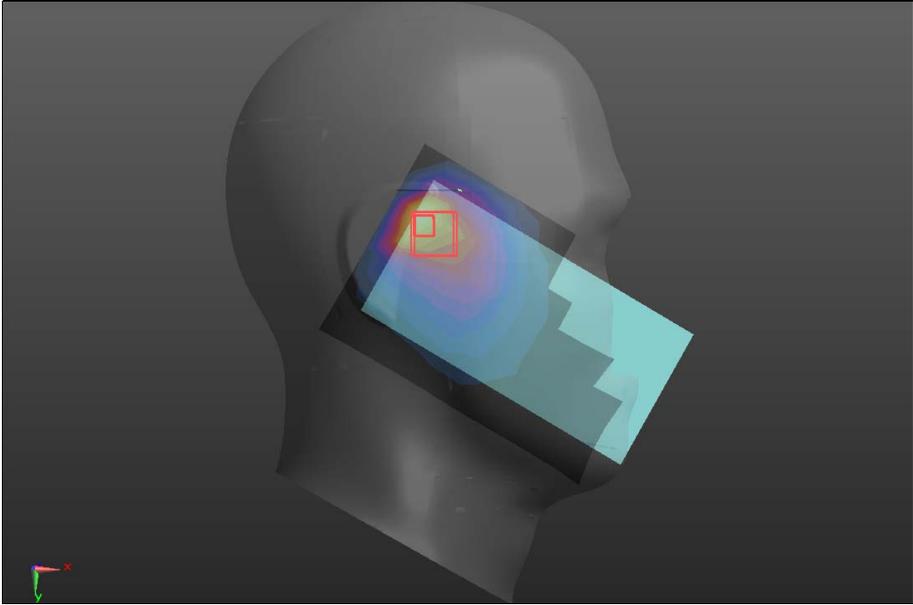
Body-worn	Back
<p>Communication System: UID 0, LTE BAND17 (0); Frequency: 710 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): <math>f = 710 \text{ MHz}</math>; <math>\sigma = 0.887 \text{ S/m}</math>; <math>\epsilon_r = 42.102</math>; <math>\rho = 1000 \text{ kg/m}^3</math> Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75); Calibrated: 2020/10/30</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>15_15/BACK LTE B17 1RB/Area Scan (7x12x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.103 W/kg</p> <p><b>15_15/BACK LTE B17 1RB/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 18.64 V/m; Power Drift = 0.16 dB Peak SAR (extrapolated) = 0.118 W/kg <b>SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.038 W/kg</b> Maximum value of SAR (measured) = 0.100 W/kg</p> 	

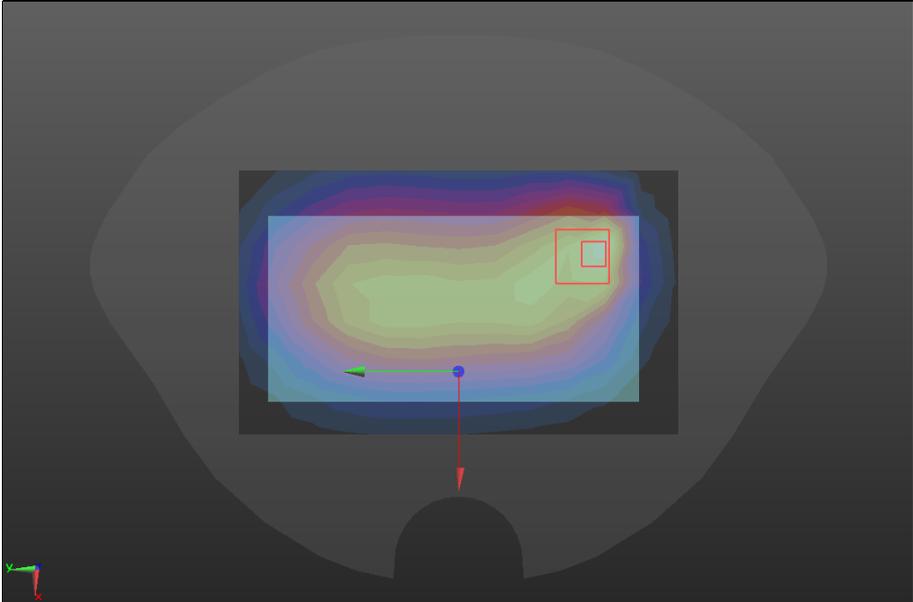
**LTE Band 25**

Head	Right cheek
<p>Communication System: UID 0, LTE BAND25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 1882.5 \text{ MHz}</math>; <math>\sigma = 1.4 \text{ S/m}</math>; <math>\epsilon_r = 40</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.99, 7.99, 7.99); Calibrated: 2020/10/30</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>• Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>• Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>LTE B26/Area Scan (7x13x1):</b> Measurement grid: <math>dx=15\text{mm}</math>, <math>dy=15\text{mm}</math>            Maximum value of SAR (measured) = 0.780 W/kg</p> <p><b>LTE B26/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: <math>dx=8\text{mm}</math>, <math>dy=8\text{mm}</math>, <math>dz=5\text{mm}</math>            Reference Value = 9.686 V/m; Power Drift = -0.04 dB            Peak SAR (extrapolated) = 0.896 W/kg  <b>SAR(1 g) = 0.575 W/kg; SAR(10 g) = 0.248 W/kg</b>            75Maximum value of SAR (measured) = 0.758 W/kg</p> 	

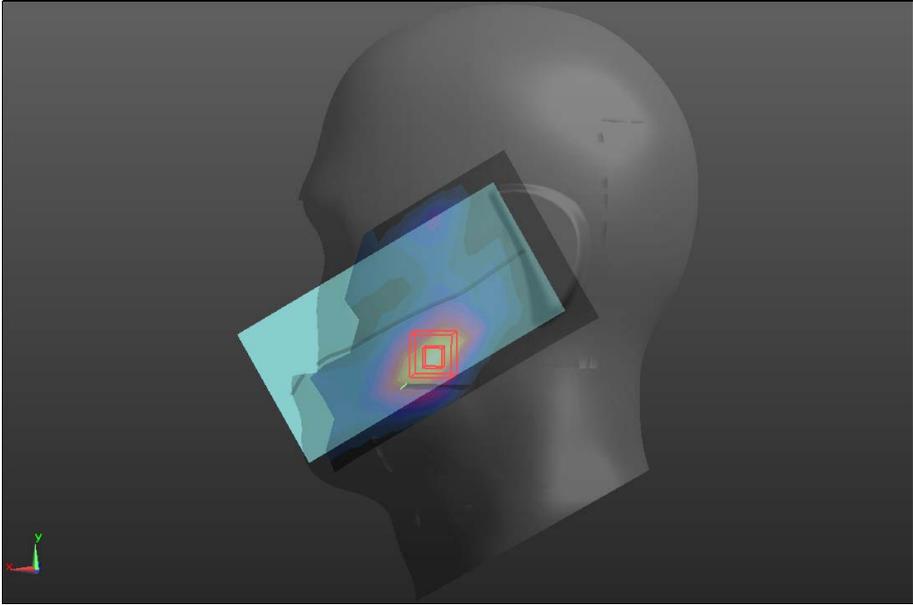
Body-worn	Back
<p>Communication System: UID 0, LTE BAND25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): <math>f = 1882.5</math> MHz; <math>\sigma = 1.4</math> S/m; <math>\epsilon_r = 40</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.99, 7.99, 7.99); Calibrated: 2020/10/30</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>15_15/BACK LTE B26 1RB/Area Scan (7x12x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.907 W/kg</p> <p><b>15_15/BACK LTE B26 1RB/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 9.90 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 1.07 W/kg <b>SAR(1 g) = 0.632 W/kg; SAR(10 g) = 0.282 W/kg</b> Maximum value of SAR (measured) = 0.891 W/kg</p> 	

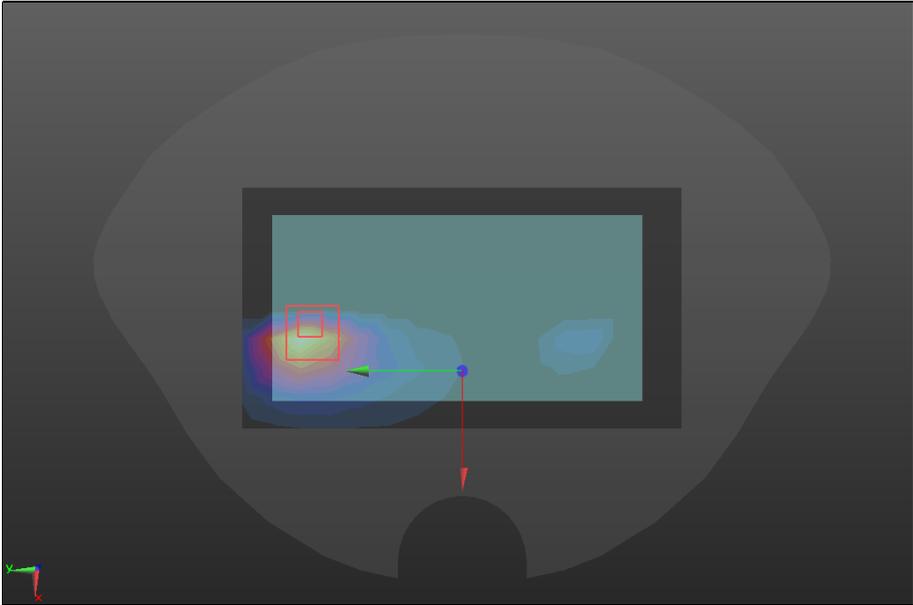
**LTE Band 26**

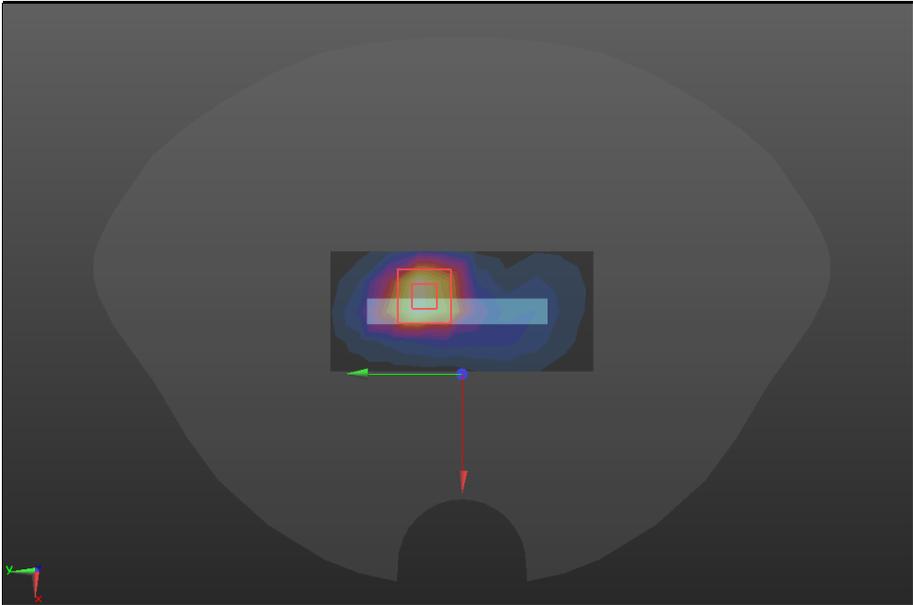
Head	Right cheek
<p>Communication System: UID 0, LTE BAND26 (0); Frequency: 831.5 MHz;Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 831.5</math> MHz; <math>\sigma = 0.89</math> S/m; <math>\epsilon_r = 40.56</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39); Calibrated: 2020/10/30</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>• Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>• Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>LTE B26/Area Scan (7x13x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 1.09 W/kg</p> <p><b>LTE B26/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 28.36 V/m; Power Drift = -0.03 dB            Peak SAR (extrapolated) = 1.46 W/kg  <b>SAR(1 g) = 0.722 W/kg; SAR(10 g) = 0.329 W/kg</b>            Maximum value of SAR (measured) = 1.08 W/kg</p> 	

Body-worn	Back
<p>Communication System: UID 0, LTE BAND26 (0); Frequency: 831.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): <math>f = 831.5</math> MHz; <math>\sigma = 0.89</math> S/m; <math>\epsilon_r = 40.56</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39); Calibrated: 2020/10/30</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>15_15/BACK LTE B26 1RB/Area Scan (7x12x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.372 W/kg</p> <p><b>15_15/BACK LTE B26 1RB/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 18.49 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.447 W/kg <b>SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.144 W/kg</b> Maximum value of SAR (measured) = 0.387 W/kg</p> 	

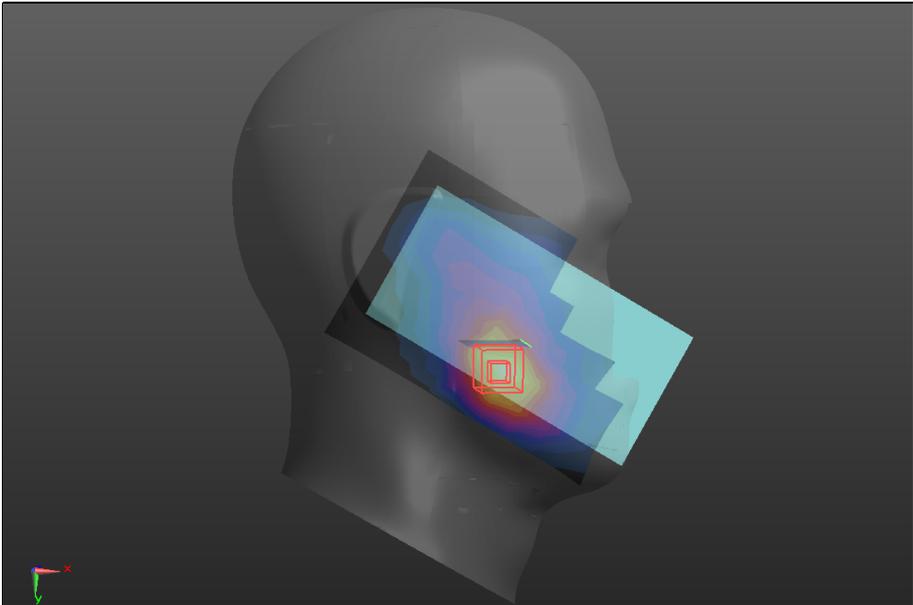
**LTE Band 41**

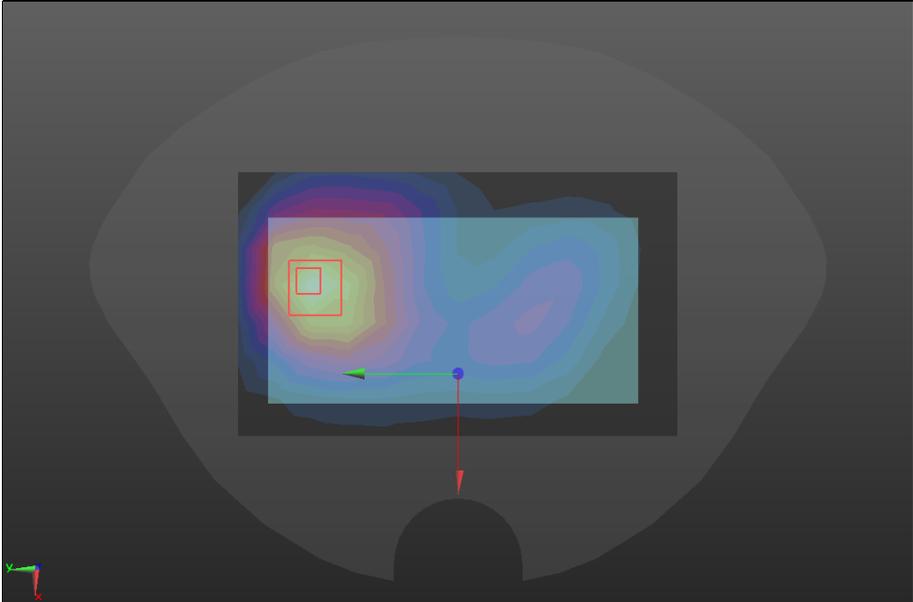
Head	Left cheek
<p>Communication System: UID 0, LTE BAND41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58                      Medium parameters used (interpolated): f = 2593 MHz; <math>\sigma = 1.952</math> S/m; <math>\epsilon_r = 39.009</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.37, 7.37, 7.37); Calibrated: 2020/10/30</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 9/30/2020</li> <li>• Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>LTE B41/Area Scan (9x16x1):</b> Measurement grid: dx=12mm, dy=12mm                      Maximum value of SAR (measured) = 0.176 W/kg</p> <p><b>LTE B41/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm                      Reference Value = 1.549 V/m; Power Drift = 0.01 dB                      Peak SAR (extrapolated) = 0.220 W/kg  <b>SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.068 W/kg</b>                      Maximum value of SAR (measured) = 0.167 W/kg</p> 	

Body-worn	Back
<p>Communication System: UID 0, LTE BAND41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58 Medium parameters used (interpolated): <math>f = 2593</math> MHz; <math>\sigma = 1.952</math> S/m; <math>\epsilon_r = 39.009</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.37, 7.37, 7.37); Calibrated: 2020/10/30</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 9/30/2020</li> <li>• Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>12_12/BACK LTE B41 1RB/Area Scan (7x13x1):</b> Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.525 W/kg</p> <p><b>12_12/BACK LTE B41 1RB/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 0.471 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 0.538 W/kg <b>SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.231 W/kg</b> Maximum value of SAR (measured) = 0.513 W/kg</p> 	

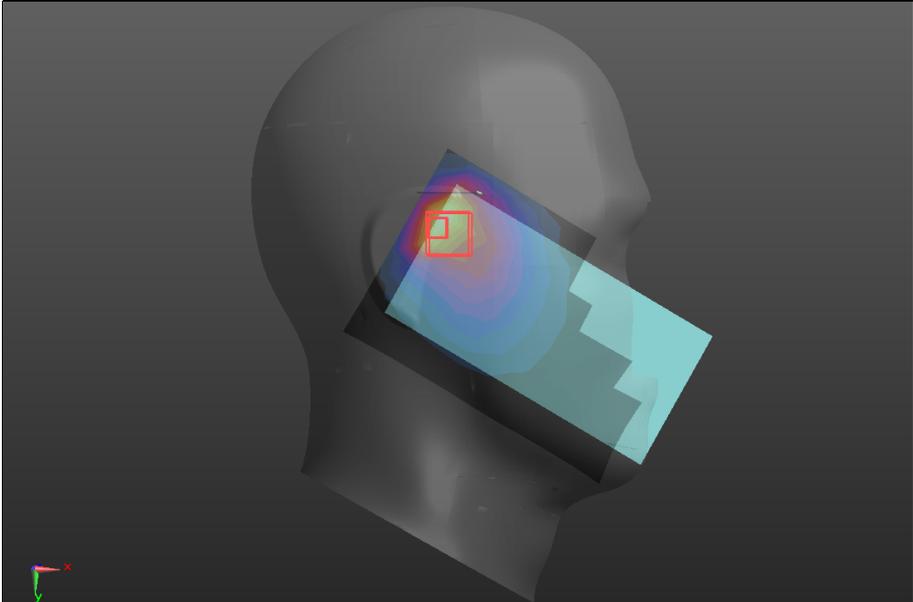
Hotspot	Bottom
<p>Communication System: UID 0, LTE BAND41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58 Medium parameters used (interpolated): <math>f = 2593</math> MHz; <math>\sigma = 1.952</math> S/m; <math>\epsilon_r = 39.009</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.37, 7.37, 7.37); Calibrated: 2020/10/30</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 9/30/2020</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>LTE B41 1RB/Area Scan (7x13x1):</b> Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.613 W/kg</p> <p><b>LTE B41 1RB/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 12.25 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 0.755 W/kg <b>SAR(1 g) = 0.497 W/kg; SAR(10 g) = 0.231 W/kg</b> Maximum value of SAR (measured) = 0.605 W/kg</p> 	

**LTE Band 66**

Head	Right cheek
<p>Communication System: UID 0, LTE BAND66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): <math>f = 1745</math> MHz; <math>\sigma = 1.383</math> S/m; <math>\epsilon_r = 40.047</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27); Calibrated: 2020/10/30</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>• Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>• Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>RIGHT/RC LTE B66/Area Scan (7x13x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.381 W/kg</p> <p><b>RIGHT/RC LTE B66/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 6.133 V/m; Power Drift = 0.19 dB Peak SAR (extrapolated) = 0.429 W/kg <b>SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.135 W/kg</b> Maximum value of SAR (measured) = 0.375 W/kg</p> 	

Body-worn	Back
<p>Communication System: UID 0, LTE BAND66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): <math>f = 1745</math> MHz; <math>\sigma = 1.383</math> S/m; <math>\epsilon_r = 40.047</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27); Calibrated: 2020/10/30</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>15_15/BACK LTE B66 1RB/Area Scan (7x12x1):</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.750 W/kg</p> <p><b>15_15/BACK LTE B66 1RB/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 11.16 V/m; Power Drift = -0.10 dB Peak SAR (extrapolated) = 0.870 W/kg <b>SAR(1 g) = 0.698 W/kg; SAR(10 g) = 0.339 W/kg</b> Maximum value of SAR (measured) = 0.740 W/kg</p> 	

**LTE Band 71**

Head	Right cheek
<p>Communication System: UID 0, LTE BAND71 (0); Frequency: 680.5 MHz;Duty Cycle: 1:1                      Medium parameters used (interpolated): <math>f = 680.5</math> MHz; <math>\sigma = 0.885</math> S/m; <math>\epsilon_r = 42.255</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75); Calibrated: 2020/10/30</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>• Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>• Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>LTE B71 1RB/Area Scan (7x12x1):</b> Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 0.636 W/kg</p> <p><b>LTE B71 1RB/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm                      Reference Value = 21.82 V/m; Power Drift = 0.05 dB                      Peak SAR (extrapolated) = 0.992 W/kg  <b>SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.212 W/kg</b>                      Maximum value of SAR (measured) = 0.748 W/kg</p> 	

Body-worn	Back
-----------	------

Communication System: UID 0, LTE BAND71 (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 680.5$  MHz;  $\sigma = 0.885$  S/m;  $\epsilon_r = 42.255$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75); Calibrated: 2020/10/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),
- Electronics: DAE4 Sn720; Calibrated: 2020/9/30
- Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

**LTE B71 1RB/Area Scan (7x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.220 W/kg

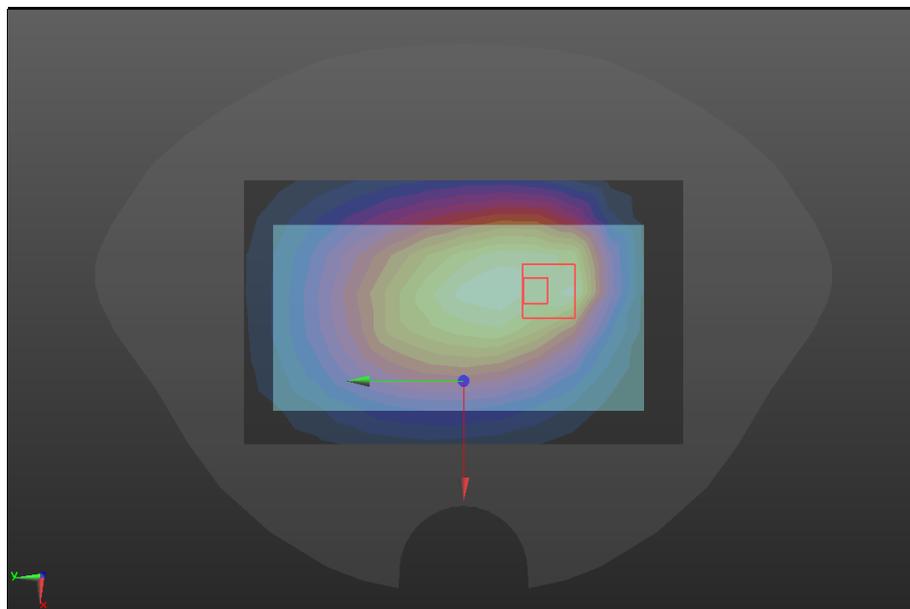
**LTE B71 1RB/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.68 V/m; Power Drift = 0.08 dB

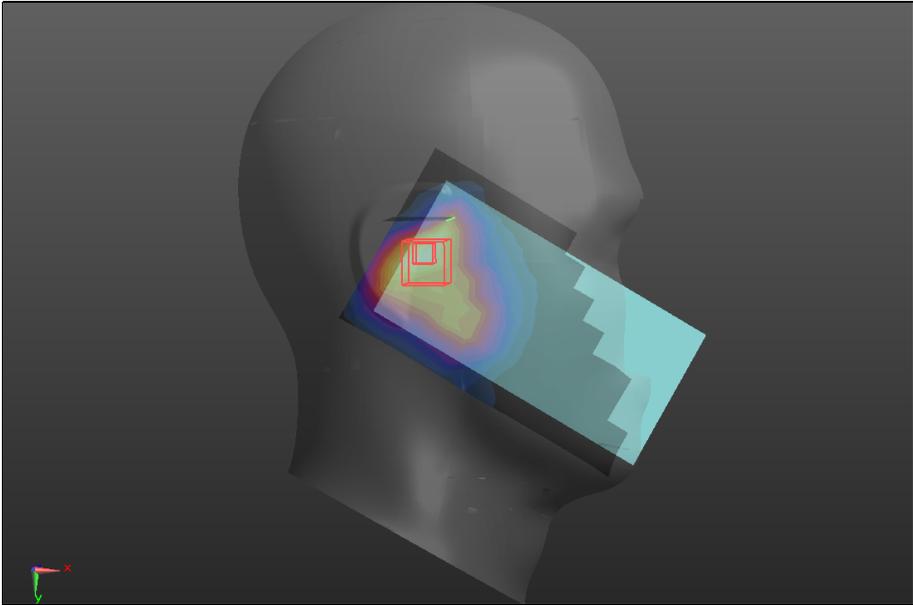
Peak SAR (extrapolated) = 0.256 W/kg

**SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.088 W/kg**

Maximum value of SAR (measured) = 0.211 W/kg



**WIFI 2.4GHz**

Head	Right cheek
<p>Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz;Duty Cycle: 1:1.00            Medium parameters used (interpolated): <math>f = 2437</math> MHz; <math>\sigma = 1.788</math> S/m; <math>\epsilon_r = 39.219</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.48, 7.48, 7.48); Calibrated: 2020/10/30</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection),</li> <li>Electronics: DAE4 Sn720; Calibrated: 2020/9/30</li> <li>Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>WIFI2.4G 11b/Area Scan (8x16x1):</b> Measurement grid: dx=12mm, dy=12mm            Maximum value of SAR (measured) = 0.434 W/kg  <b>WIFI2.4G 11b/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 8.47 V/m; Power Drift = 0.03 dB            Peak SAR (extrapolated) = 0.451 W/kg  <b>SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.139 W/kg</b>            Maximum value of SAR (measured) = 0.355 W/kg</p> 	

Body-worn	Back
-----------	------

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz; Duty Cycle: 1:1.00  
Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.788$  S/m;  $\epsilon_r = 39.219$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3708; ConvF(7.48, 7.48, 7.48); Calibrated: 2020/10/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),
- Electronics: DAE4 Sn720; Calibrated: 2020/9/30
- Phantom: Twin-SAM 1659; Type: QD 000 P40 CD; Serial: 1659
- Measurement SW: DASY52, Version 52.8 ( 8); SEMCAD X Version 14.6.10 (7373)

**12\_12/WIFI2.4/Area Scan (6x10x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.170 W/kg

**12\_12/WIFI2.4/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.243 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.251 W/kg

**SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.059 W/kg**

Maximum value of SAR (measured) = 0.193 W/kg

