



**CFR 47 FCC PART 15 SUBPART C**

**TEST REPORT**

*For*

**Tablet**

**MODEL NUMBER: CP3667AT**

**FCC ID: R38YLCP3667AT**

**REPORT NUMBER: 4789517523-3**

**ISSUE DATE: June 29, 2020**

*Prepared for*

**Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd  
Building B, Boton Science Park, Chaguang Road, Xili Town, Nanshan District,  
Shenzhen**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch  
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake  
Hi-Tech Development Zone Dongguan, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V0	06/29/2020	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	6dB Bandwidth and 99% Occupied Bandwidth	FCC Part 15.247 (a) (2)	Pass
2	Peak Conducted Output Power	FCC Part 15.247 (b) (3)	Pass
3	Power Spectral Density	FCC Part 15.247 (e)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d)	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205	Pass
6	Conducted Emission Test For AC Power Port	FCC Part 15.207	Pass
7	Antenna Requirement	FCC Part 15.203	Pass

Note:  
1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.  
2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C >when <Accuracy Method> decision rule is applied.



## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>6</b>
<b>2. TEST METHODOLOGY</b> .....	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	8
4.2. <i>MEASUREMENT UNCERTAINTY</i> .....	8
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>9</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	9
5.2. <i>MAXIMUM OUTPUT POWER</i> .....	9
5.3. <i>CHANNEL LIST</i> .....	9
5.4. <i>TEST CHANNEL CONFIGURATION</i> .....	10
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i> .....	10
5.6. <i>THE WORSE CASE CONFIGURATIONS</i> .....	10
5.7. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	11
5.8. <i>TEST ENVIRONMENT</i> .....	11
5.9. <i>DESCRIPTION OF TEST SETUP</i> .....	12
<b>6. MEASURING INSTRUMENT AND SOFTWARE USED</b> .....	<b>13</b>
<b>7. ANTENNA PORT TEST RESULTS</b> .....	<b>14</b>
7.1. <i>ON TIME AND DUTY CYCLE</i> .....	14
7.2. <i>6 dB DTS BANDWIDTH AND 99% OCCUPIED BANDWIDTH</i> .....	15
7.3. <i>CONDUCTED OUTPUT POWER</i> .....	17
7.4. <i>POWER SPECTRAL DENSITY</i> .....	19
7.5. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS</i> .....	21
<b>8. RADIATED TEST RESULTS</b> .....	<b>23</b>
8.1. <i>RESTRICTED BANDEDGE</i> .....	29
8.1.1. 802.11b MODE.....	29
8.1.2. 802.11g MODE.....	33
8.1.3. 802.11n HT20 MODE .....	41
8.1.4. 802.11n HT40 MODE .....	49
8.2. <i>SPURIOUS EMISSIONS (3~18GHz)</i> .....	57
8.2.1. 802.11b MODE.....	57
8.2.2. 802.11g MODE.....	63
8.2.3. 802.11n HT20 MODE .....	69
8.2.4. 802.11n HT40 MODE .....	75



8.3.	SPURIOUS EMISSIONS (1~3GHz)	81
8.3.1.	802.11b MODE	81
8.3.2.	802.11g MODE	87
8.3.3.	802.11n HT20 MODE	93
8.3.4.	802.11n HT40 MODE	99
8.4.	SPURIOUS EMISSIONS (18~26GHz)	105
8.4.1.	802.11b MODE	105
8.5.	SPURIOUS EMISSIONS (0.03 ~ 1 GHz)	107
8.5.1.	802.11b MODE	107
8.6.	SPURIOUS EMISSIONS BELOW 30M	109
8.6.1.	802.11b MODE	109
<b>9.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS</b>	<b>112</b>
9.1.	802.11b MODE	113
<b>10.</b>	<b>ANTENNA REQUIREMENTS</b>	<b>115</b>
10.1.	Appendix A: DTS Bandwidth	116
10.1.1.	Test Result	116
10.1.2.	Test Graphs	117
10.2.	Appendix B: Occupied Channel Bandwidth	123
10.2.1.	Test Result	123
10.2.2.	Test Graphs	124
10.3.	Appendix C: Maximum conducted output power	130
10.3.1.	Test Result	130
10.4.	Appendix D: Maximum power spectral density	131
10.4.1.	Test Result	131
10.4.2.	Test Graphs	132
10.5.	Appendix E: Band edge measurements	138
10.5.1.	Test Result	138
10.5.2.	Test Graphs	139
10.6.	Appendix F: Conducted Spurious Emission	143
10.6.1.	Test Result	143
10.6.2.	Test Graphs	144
10.7.	Appendix G: Duty Cycle	162
10.7.1.	Test Result	162
10.7.2.	Test Graphs	163



# 1. ATTESTATION OF TEST RESULTS

## Applicant Information

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd  
Address: Building B, Boton Science Park, Chaguang Road, Xili Town, Nanshan District, Shenzhen

## Manufacturer Information

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd  
Address: Building B, Boton Science Park, Chaguang Road, Xili Town, Nanshan District, Shenzhen

## EUT Information

EUT Name: Tablet  
Model: CP3667AT  
Sample Received Date: June 12, 2020  
Sample Status: Normal  
Sample ID: 3120775  
Date of Tested: June 12, 2020 ~ June 29, 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS

Prepared By:

Kebo Zhang  
Project Engineer

Checked By:

Shawn Wen  
Laboratory Leader

Approved By:

Stephen Guo  
Laboratory Manager



## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15 and ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED(Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	---

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.



## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognize national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62dB
Radiation Emission test(include Fundamental emission) (9KHz-30MHz)	2.2dB
Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.00dB
Radiation Emission test (1GHz to 26GHz)( include Fundamental emission)	5.78dB (1GHz-18GHz)
	5.23dB (18GHz-26GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	





## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

Equipment	Tablet	
Model Name	CP3667AT	
Radio Technology	IEEE802.11b/g/n HT20/n HT40	
Operation frequency	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40: 2422MHz—2452MHz	
Modulation	IEEE 802.11b: DSSS(CCK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)	
Power Supply	Power Adapter	AC100-240V, 50/60Hz, 0.5A Max 5Vdc--- 3A, 9Vdc--- 2A, 12Vdc--- 1.5A
	Battery	3.82Vdc

### 5.2. MAXIMUM OUTPUT POWER

Number of Transmit Chains (NTX)	IEE Std. 802.11	Frequency (MHz)	Channel Number	Max AV Conducted Power (dBm)
1	IEEE 802.11b	2412-2462	1-11[11]	18.33
1	IEEE 802.11g	2412-2462	1-11[11]	16.31
1	IEEE 802.11nHT20	2412-2462	1-11[11]	16.50
1	IEEE 802.11nHT40	2422-2452	3-9[7]	16.45

### 5.3. CHANNEL LIST

Channel List for 802.11b/g/n (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List for 802.11n (40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/



### 5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
WiFi TX(802.11b)	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11g)	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11n HT20)	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11n HT40)	CH 3, CH 6, CH 9/ Low, Middle, High	2422MHz, 2437MHz, 2452MHz

### 5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		QRCT					
Modulation Mode	Transmit Antenna Number	Test Software setting value					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	1	16	16	16	/		
802.11g	1	14	14	14			
802.11n HT20	1	14	14	14			
802.11n HT40	1	/			13	13	13

### 5.6. THE WORSE CASE CONFIGURATIONS

Worst-case data rates as provided by the client were:

- 802.11b mode: 1 Mbps
- 802.11b mode: 6 Mbps
- 802.11n HT20 mode: MCS0
- 802.11n HT40 mode: MCS0



### 5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	PIFA	0.8

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11g	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	<input checked="" type="checkbox"/> 1TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
Note: 1. BT&WLAN 2.4G & WLAN 5G cannot transmit simultaneously. (declared by client)		

Note:

1. The value of the antenna gain was declared by customer.
2. The EUT have two antenna, antenna 1 only support BT and WIFI2.4G, antenna 2 only support WIFI5G.

### 5.8. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	45 ~ 70%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	22 ~ 28°C
Voltage :	VL	N/A
	VN	DC 3.82V
	VH	N/A

Note: VL= Lower Extreme Test Voltage

VN= Nominal Voltage

VH= Upper Extreme Test Voltage

TN= Normal Temperature

## 5.9. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	ThinkPad	E42-80	/

### I/O CABLES

Item	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	Type-C	NA	0.6	/


### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	TRAVEL CHARGER	N/A	Q3W18-1U-A	Input: AC 100~240V, 50/60Hz, 0.5A Max Output: 5Vdc--- 3A, 9Vdc--- 2A, 12Vdc--- 1.5A,

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

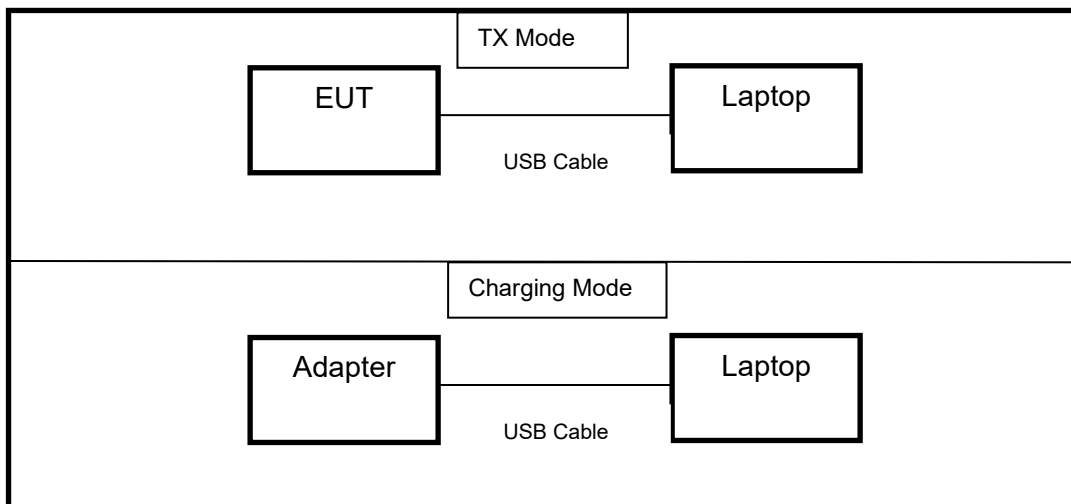



## 6. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESR3	101961	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Two-Line V- Network	R&S	ENV216	101983	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Dec.05,2019	Dec.05,2020
Software						
Used	Description			Manufacturer	Name	Version
<input checked="" type="checkbox"/>	Test Software for Conducted disturbance			Farad	EZ-EMC	Ver. UL-3A1
Radiated Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Dec.06,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Sep.17,2018	Sep.17,2021
<input checked="" type="checkbox"/>	Preamplifier	HP	8447D	2944A09099	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	EMI Measurement Receiver	R&S	ESR26	101377	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Horn Antenna	TDK	HRN-0118	130939	Sep.17,2018	Sep.17,2021
<input checked="" type="checkbox"/>	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Aug.11,2018	Aug.11,2021
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-0118	TRS-305- 00067	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-2	TRS-307- 00003	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Loop antenna	Schwarzbeck	1519B	00008	Jan.07,2019	Jan.07,2022
<input checked="" type="checkbox"/>	Band Reject Filter	Wainwright	WRCJV8-2350-2400- 2483.5-2533.5-40SS	4	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	High Pass Filter	Wi	WHKX10-2700-3000- 18000-40SS	23	Dec.05,2019	Dec.05,2020
Software						
Used	Description			Manufacturer	Name	Version
<input checked="" type="checkbox"/>	Test Software for Radiated disturbance			Farad	EZ-EMC	Ver. UL-3A1
Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec.06,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Power sensor, Power Meter	R&S	OSP120	100921	Dec.06,2019	Dec.06,2020



## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE


#### LIMITS

None; for reporting purposes only

#### PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	25.5°C	Relative Humidity	61.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.82V

#### RESULTS

Please refer to appendix G.

## 7.2. 6 dB DTS BANDWIDTH AND 99% OCCUPIED BANDWIDTH

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2)	6 dB Bandwidth	≥ 500KHz	2400-2483.5
ANSI C63.10 Section 6.9.3	99% Occupied Bandwidth	For reporting purposes only.	2400-2483.5


### TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6dB Bandwidth :100kHz For 99% Occupied Bandwidth :1% to 5% of the occupied bandwidth
VBW	For 6dB Bandwidth : ≥3 × RBW For 99% Occupied Bandwidth : ≥3×RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 99% relative to the maximum level measured in the fundamental emission.

### TEST SETUP





**TEST ENVIRONMENT**

Temperature	25.5°C	Relative Humidity	61.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.82V

**RESULTS**

Please refer to appendix A and B.





### 7.3. CONDUCTED OUTPUT POWER


#### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5

#### TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.  
Measure peak power each channel.  
Peak Detector use for Peak result.  
AVG Detector use for AVG result.

#### TEST SETUP

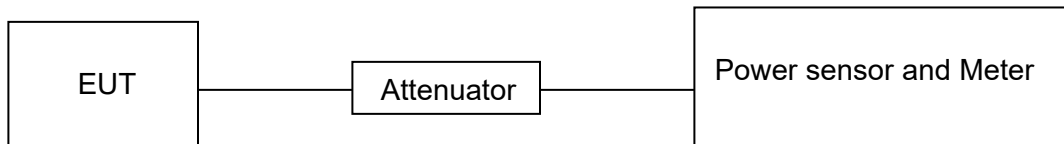

#### TEST ENVIRONMENT

Temperature	25.5°C	Relative Humidity	61.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.82V



## **RESULTS**

Please refer to appendix C.



## 7.4. POWER SPECTRAL DENSITY

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm/3 kHz	2400-2483.5

### TEST PROCEDURE


Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### TEST SETUP



### TEST ENVIRONMENT

Temperature	25.5°C	Relative Humidity	61.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.82V

### RESULTS



Please refer to appendix D.



## 7.5. CONDUCTED BANDEGE AND SPURIOUS EMISSIONS

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


Use the peak marker function to determine the maximum PSD level.

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.



**TEST SETUP**

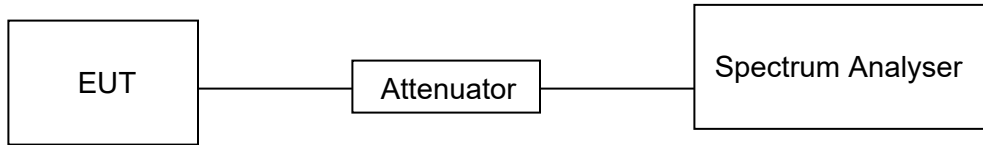

**TEST ENVIRONMENT**

Temperature	25.5°C	Relative Humidity	61.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.82V

**RESULTS**

Please refer to appendix E and F.



## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209

Radiation Disturbance Test Limit for FCC (Class B)(9kHz-1GHz)

Emissions radiated outside of the specified frequency bands above 30MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30



FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			


Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c



**TEST SETUP AND PROCEDURE**

Below 30MHz

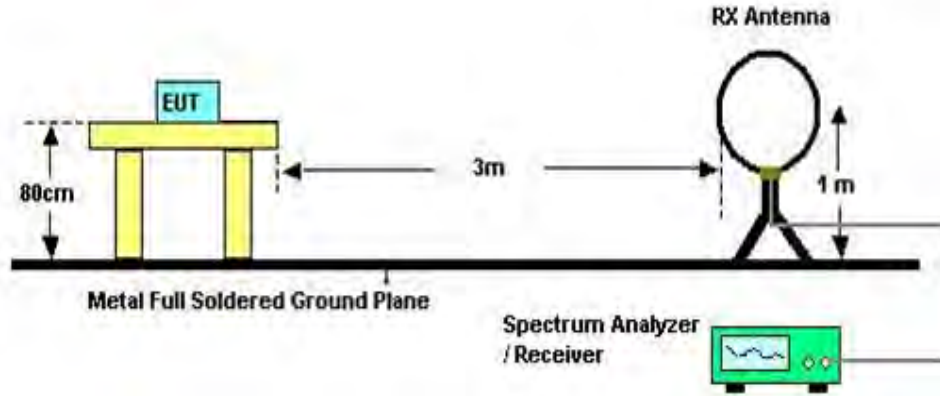


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9kHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9kHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of 1 meter height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1G

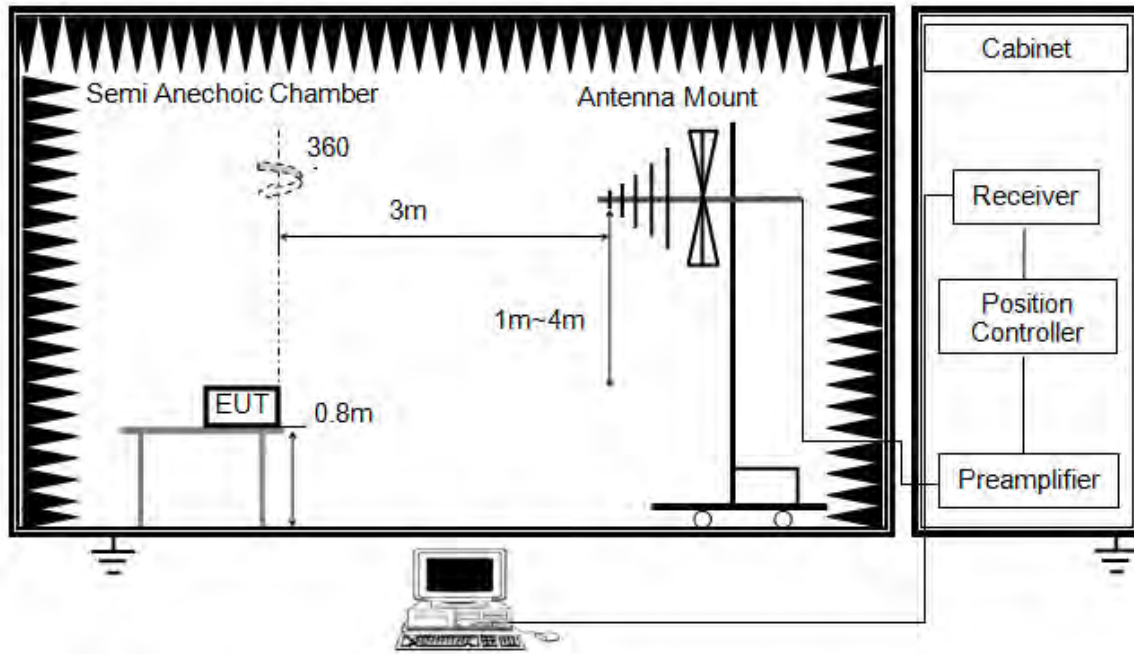


The setting of the spectrum analyser

RBW	120kHz
VBW	300kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

ABOVE 1G

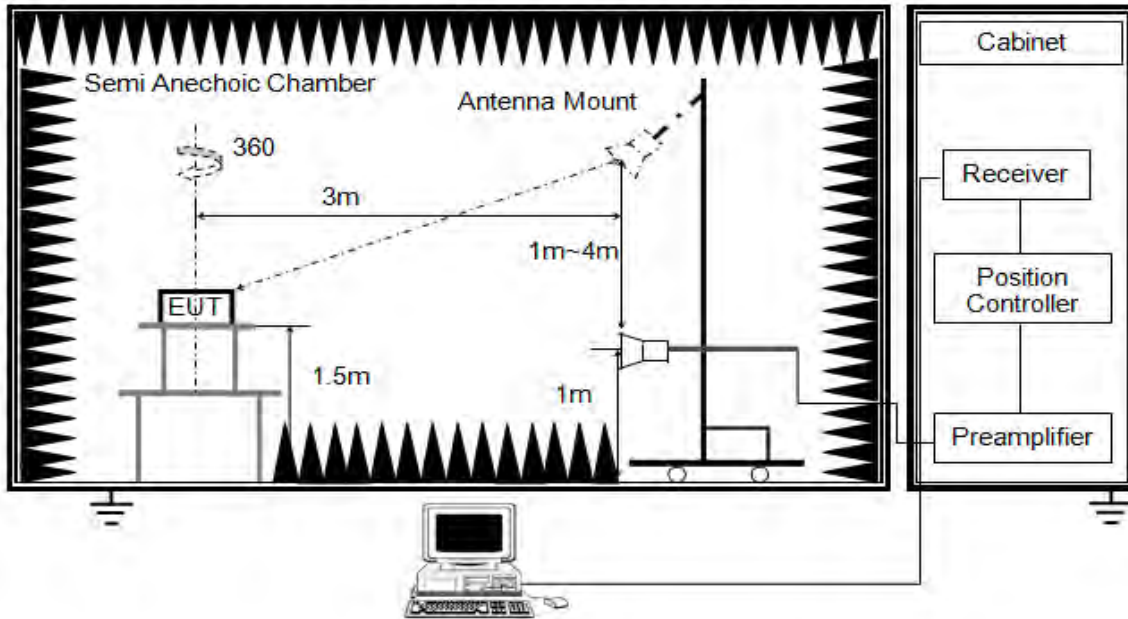


The setting of the spectrum analyser

RBW	1MHz
VBW	PEAK: 3MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

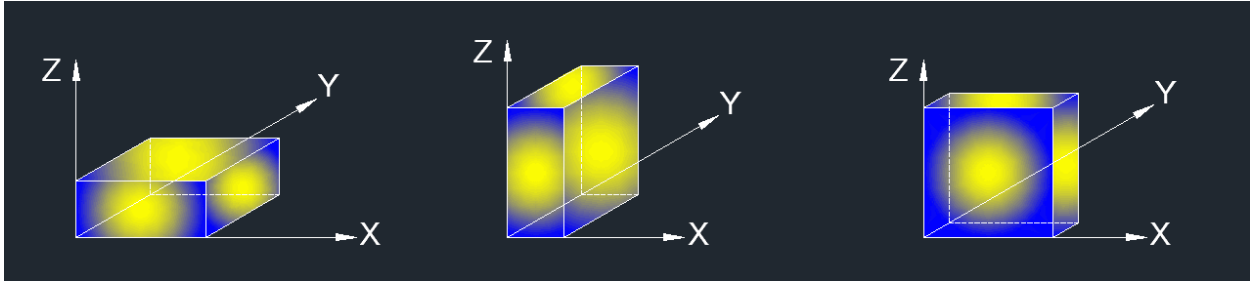

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

### **TEST ENVIRONMENT**

Temperature	23.2°C	Relative Humidity	58%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.82V




## 8.1. RESTRICTED BANDEDGE

### 8.1.1. 802.11b MODE

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

#### PEAK

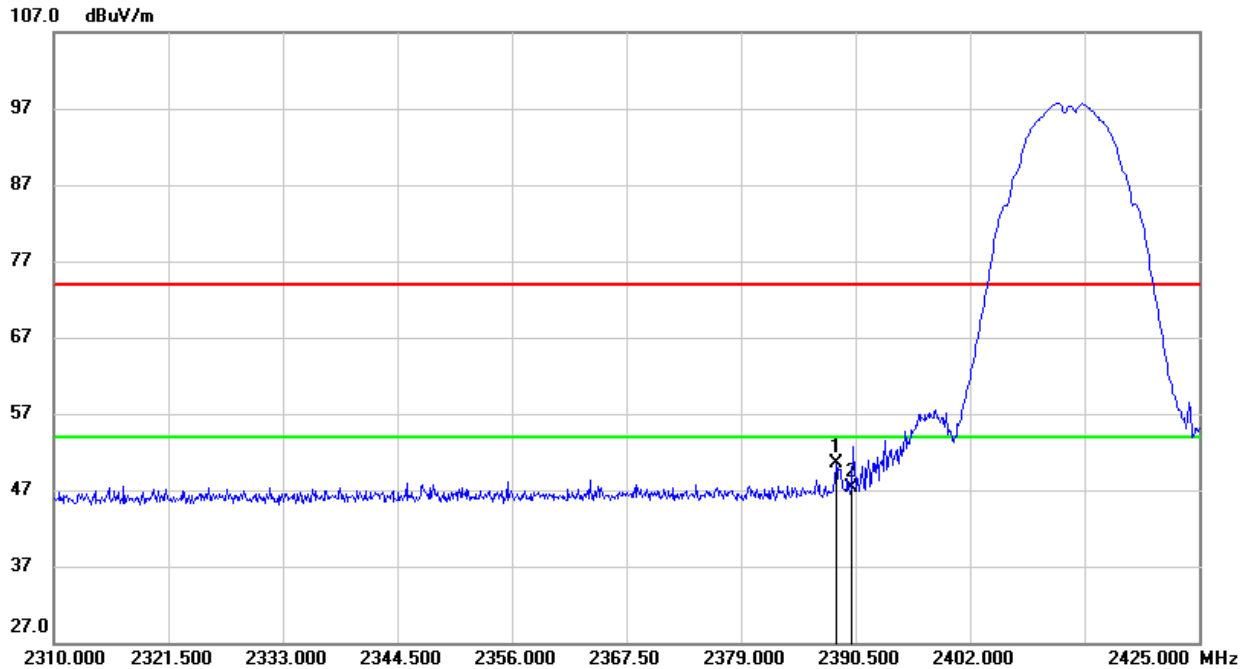


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.545	17.52	32.94	50.46	74.00	-23.54	peak
2	2390.000	14.31	32.94	47.25	74.00	-26.75	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

**PEAK**

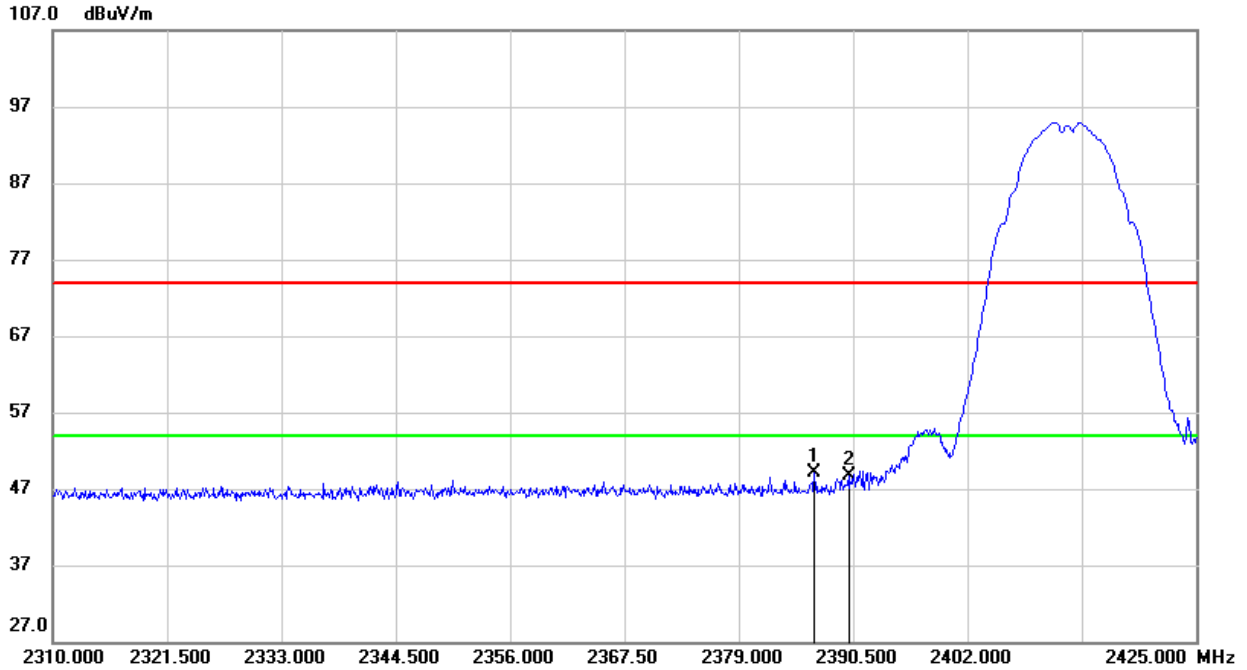


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.590	16.08	32.94	49.02	74.00	-24.98	peak
2	2390.000	15.81	32.94	48.75	74.00	-25.25	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

**PEAK**

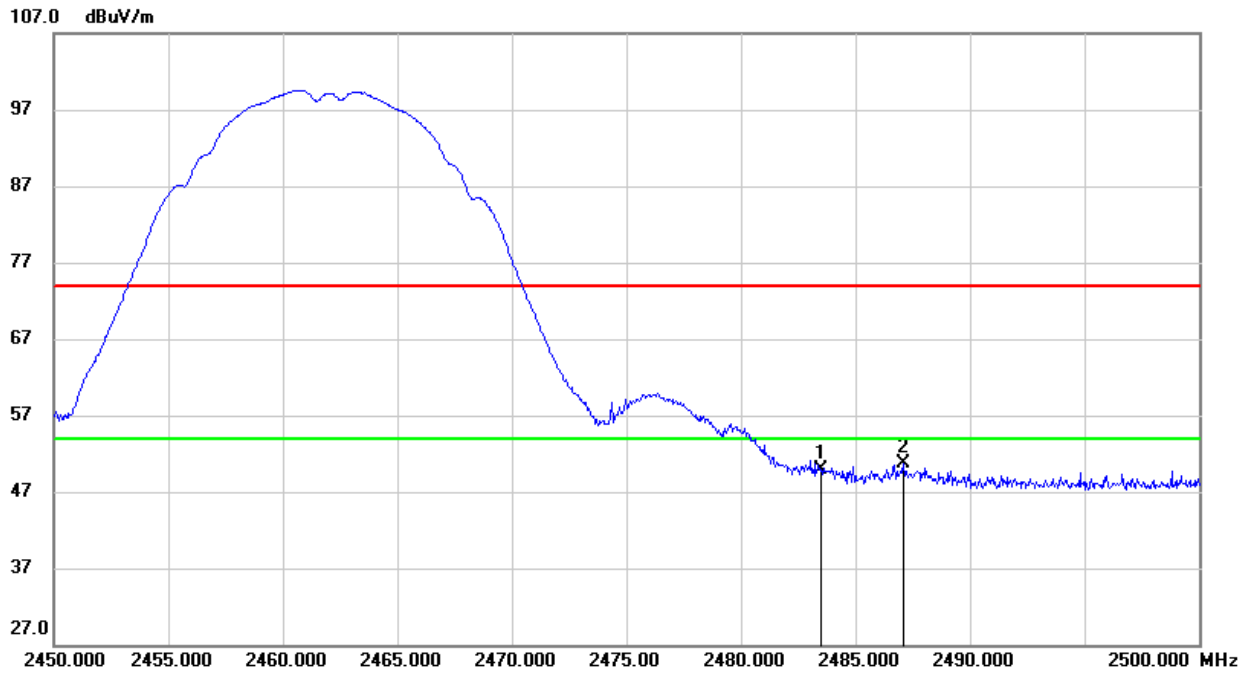


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	16.30	33.58	49.88	74.00	-24.12	peak
2	2487.100	17.05	33.61	50.66	74.00	-23.34	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

**PEAK**

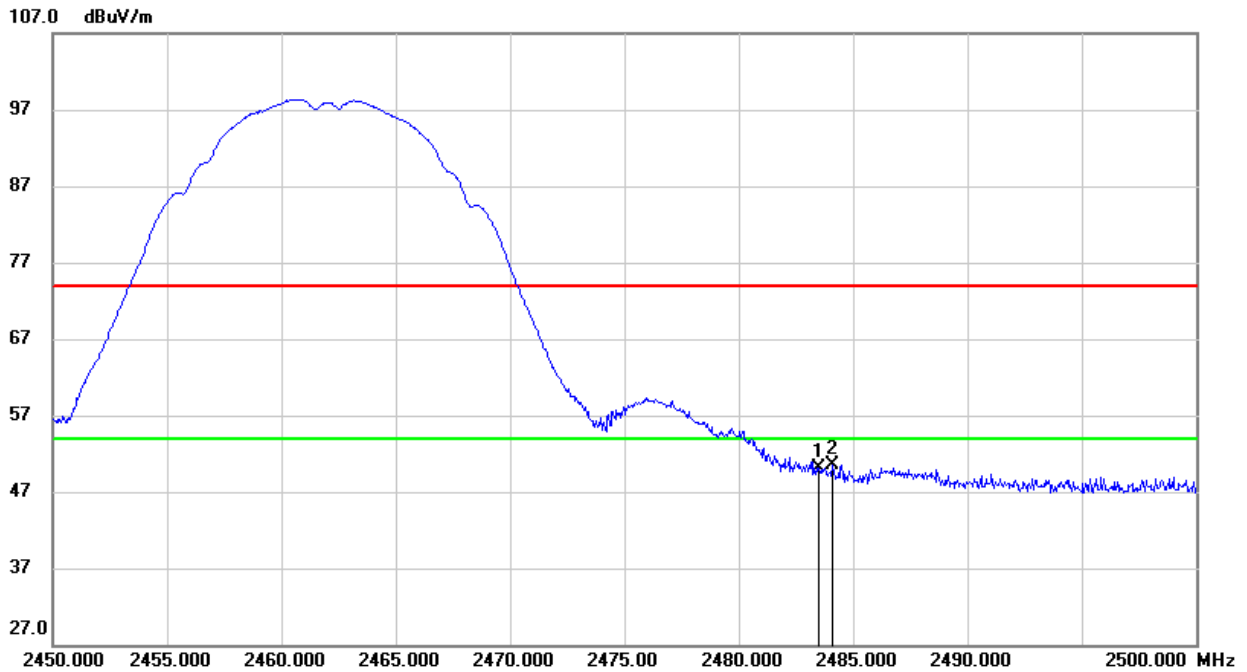

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	16.54	33.58	50.12	74.00	-23.88	peak
2	2484.100	16.94	33.58	50.52	74.00	-23.48	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.






### 8.1.2. 802.11g MODE

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

#### PEAK

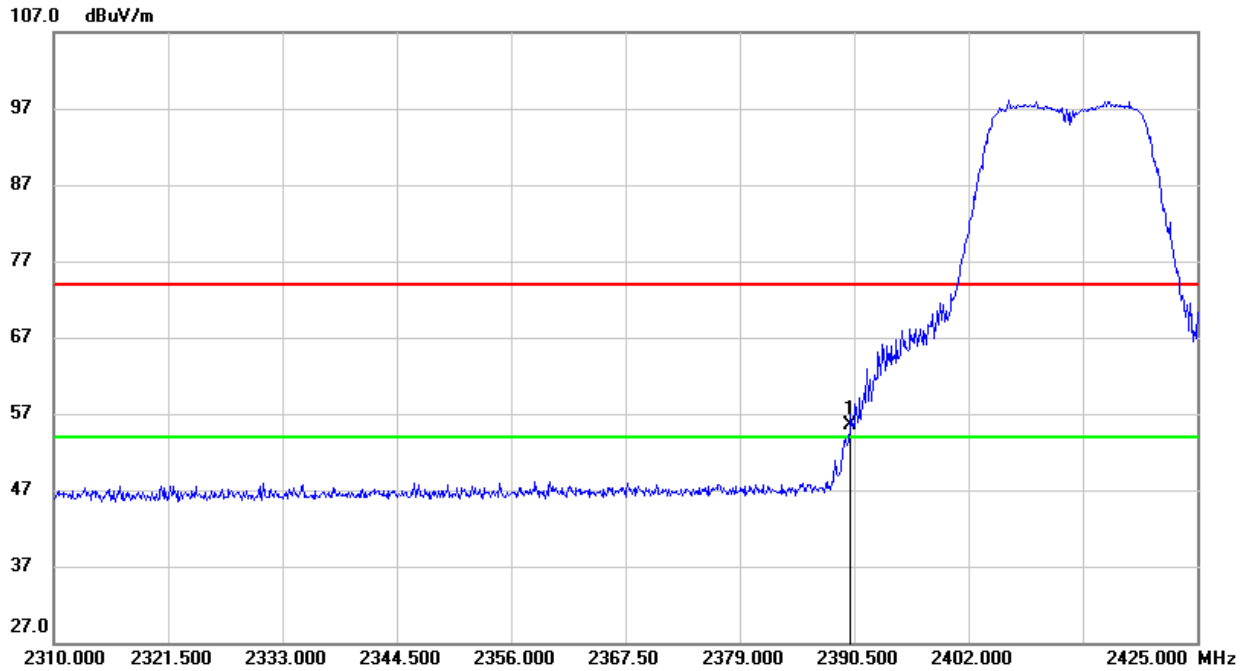


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	22.66	32.94	55.60	74.00	-18.40	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**AVG**

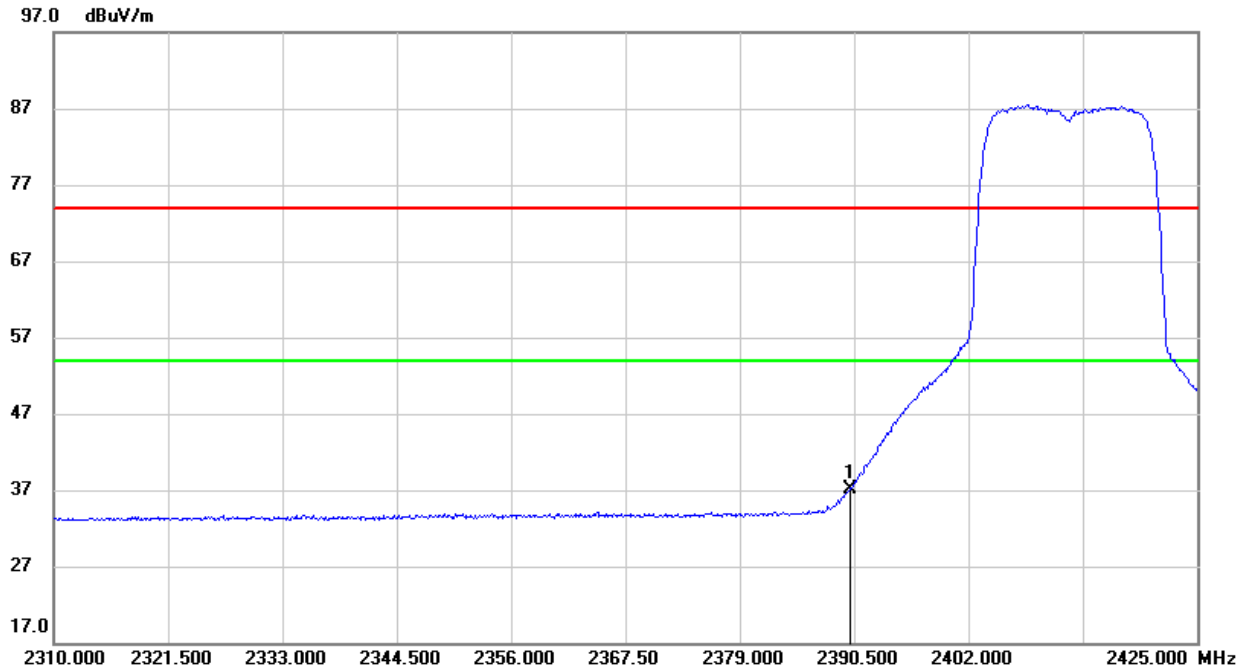


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	4.15	32.94	37.09	54.00	-16.91	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

**PEAK**

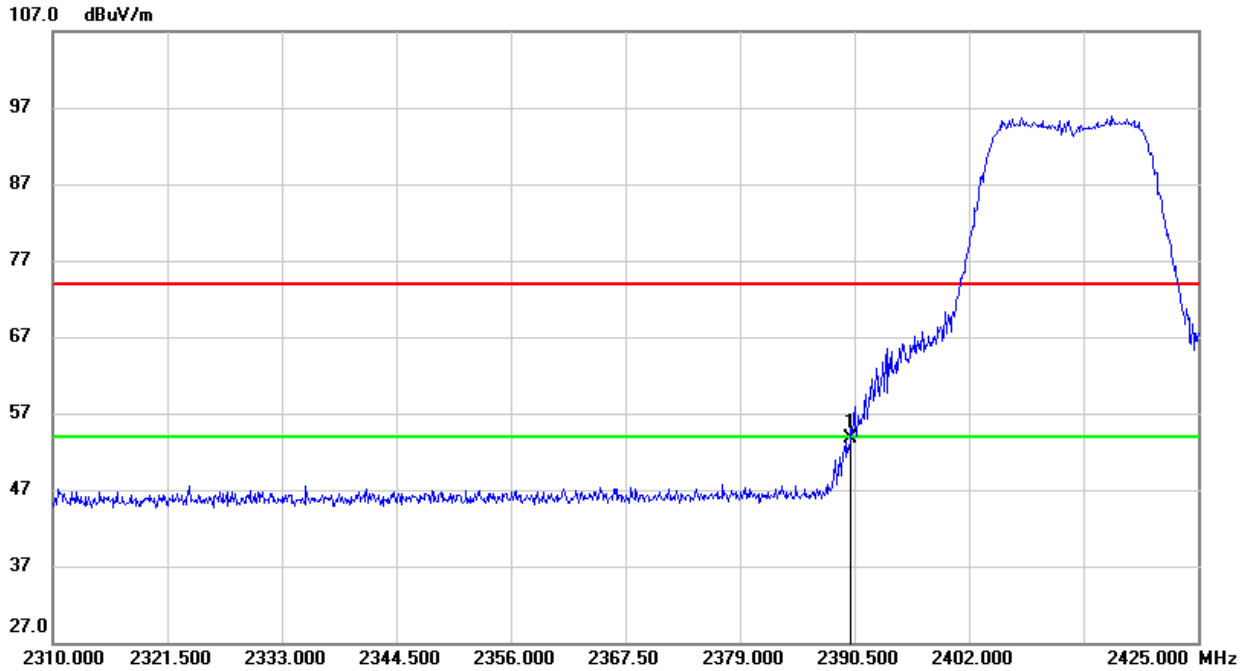


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	20.81	32.94	53.75	74.00	-20.25	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**AVG**

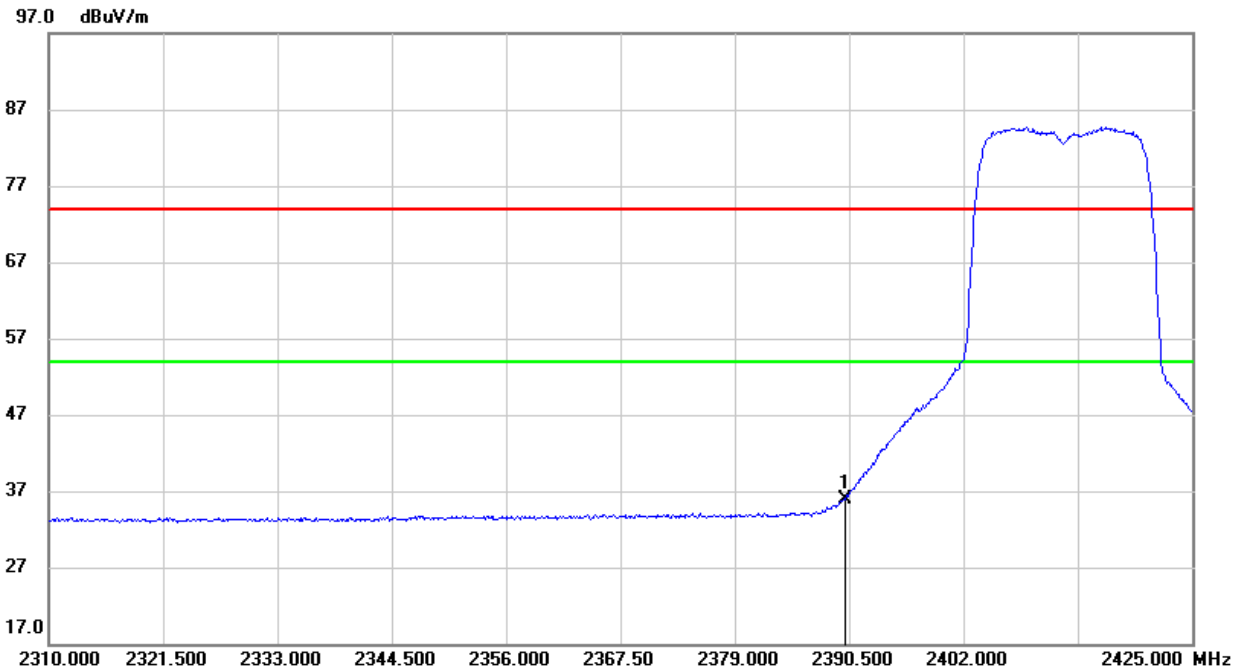


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	3.02	32.94	35.96	54.00	-18.04	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

**PEAK**

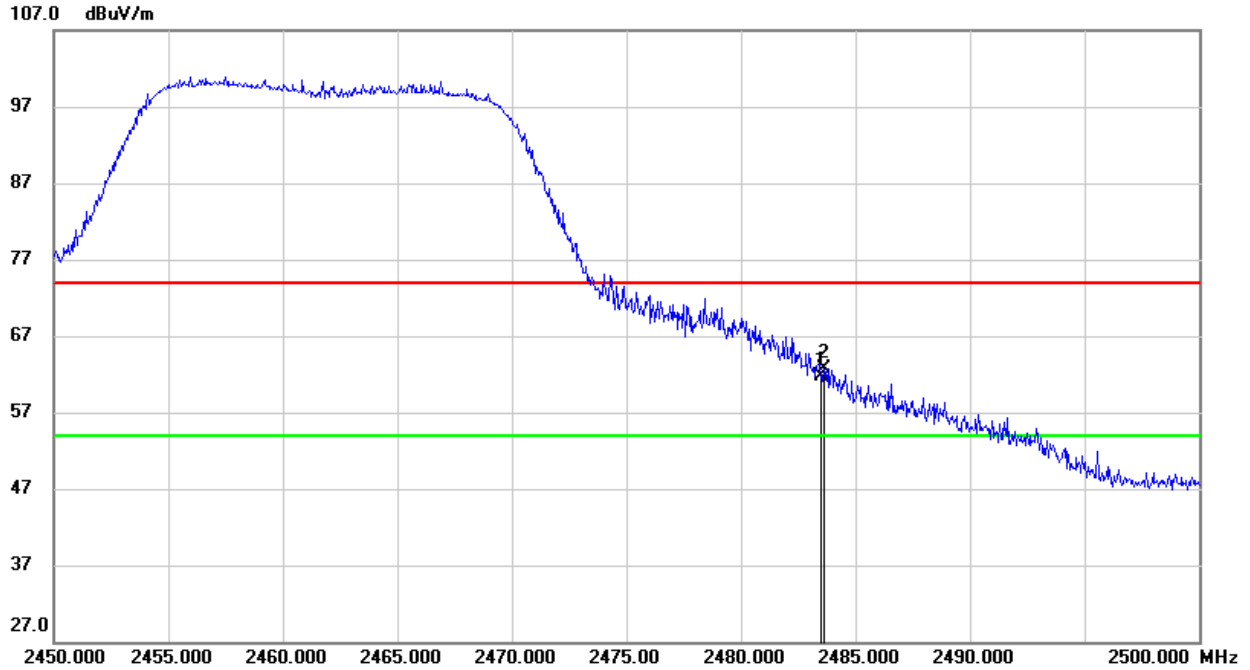


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	28.15	33.58	61.73	74.00	-12.27	peak
2	2483.650	29.05	33.58	62.63	74.00	-11.37	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**AVG**

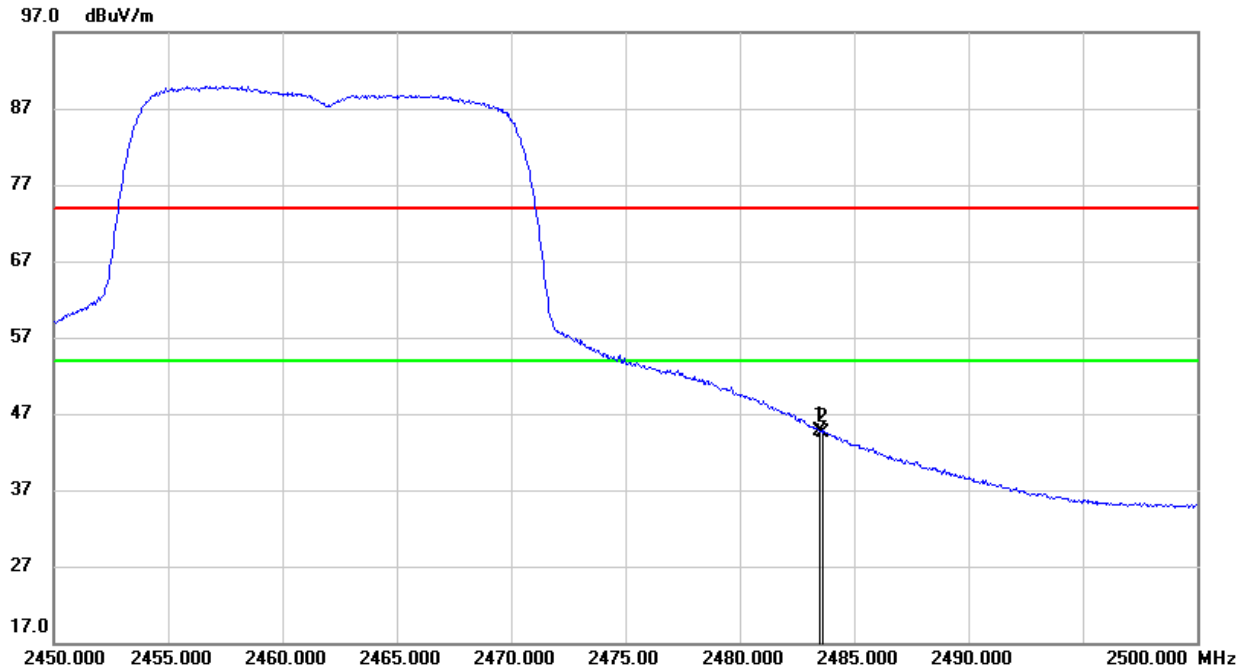


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	11.17	33.58	44.75	54.00	-9.25	AVG
2	2483.650	11.01	33.58	44.59	54.00	-9.41	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

**PEAK**

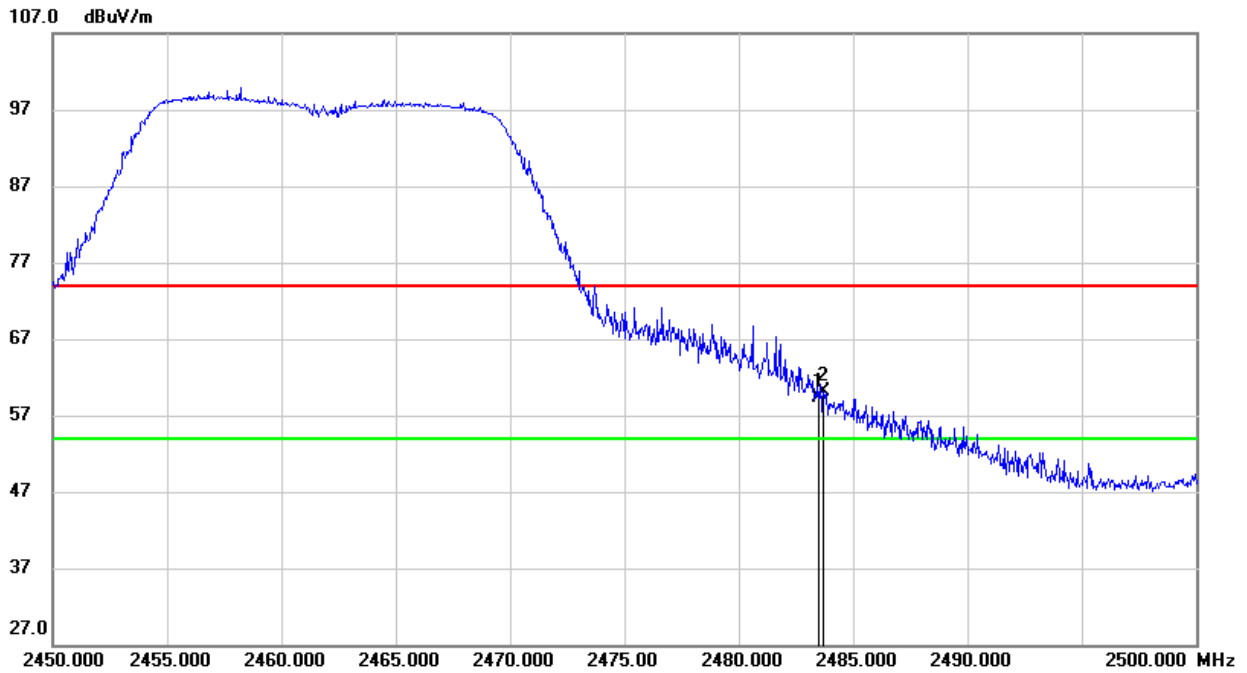


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	25.64	33.58	59.22	74.00	-14.78	peak
2	2483.700	26.57	33.58	60.15	74.00	-13.85	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**AVG**

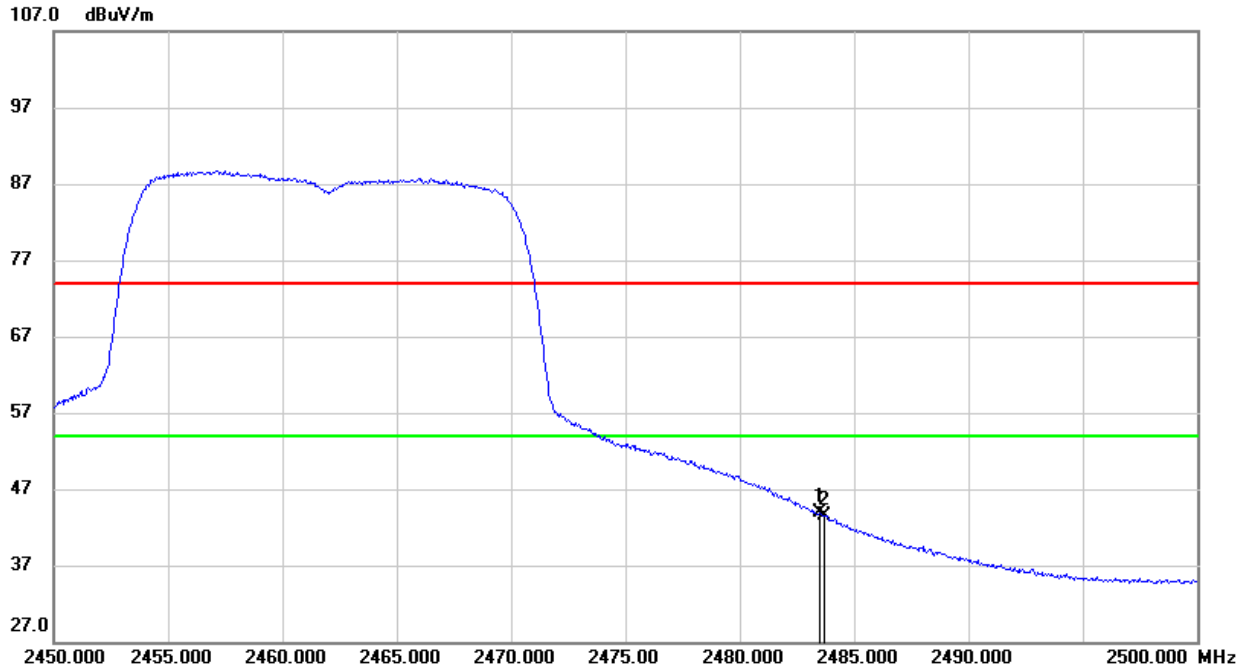

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	10.41	33.58	43.99	54.00	-10.01	AVG
2	2483.700	9.89	33.58	43.47	54.00	-10.53	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.






8.1.3. 802.11n HT20 MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

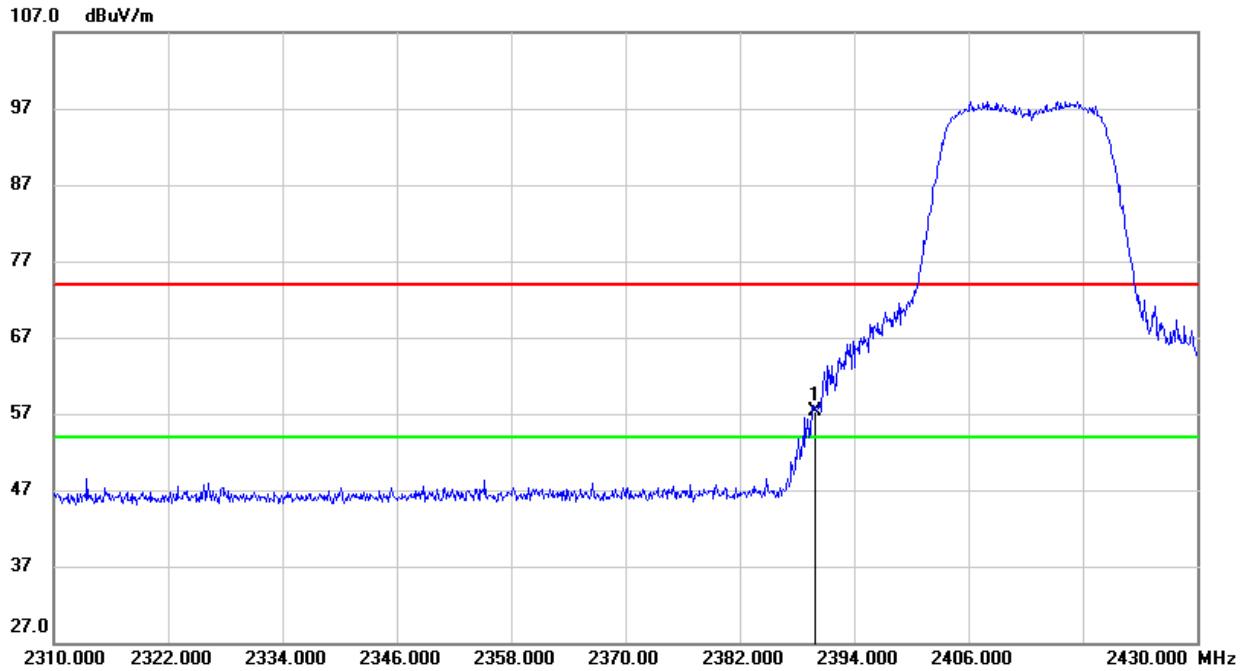


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	24.42	32.94	57.36	74.00	-16.64	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**AVG**

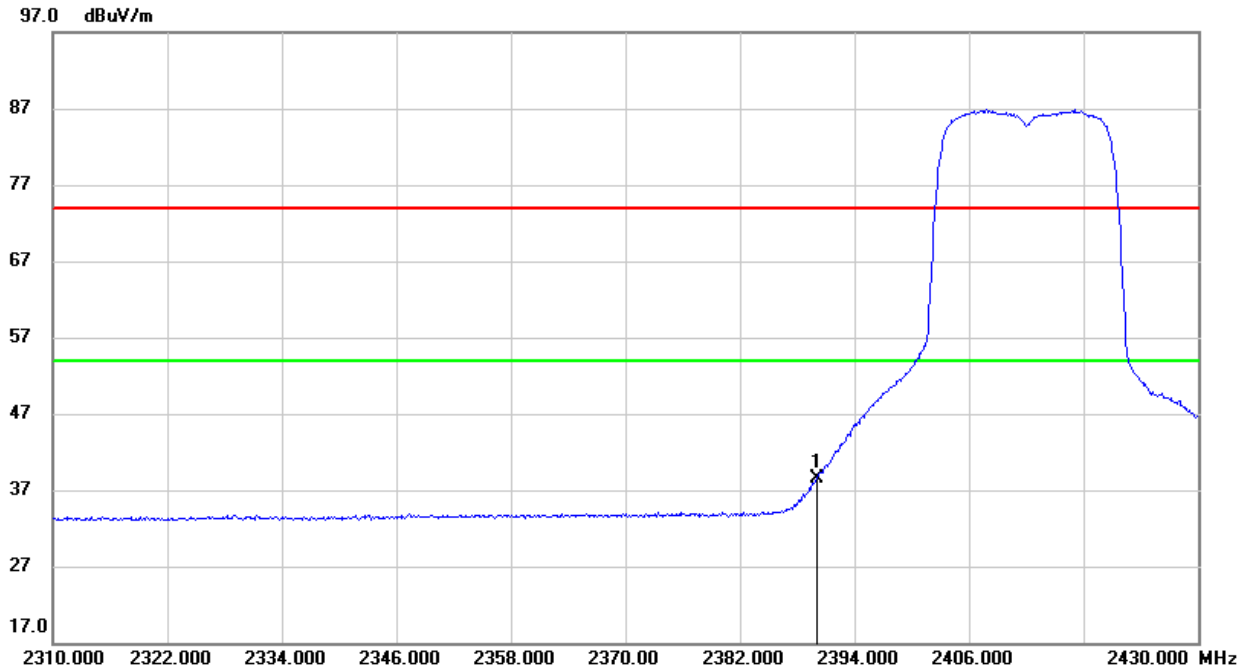


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	5.53	32.94	38.47	54.00	-15.53	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

**PEAK**

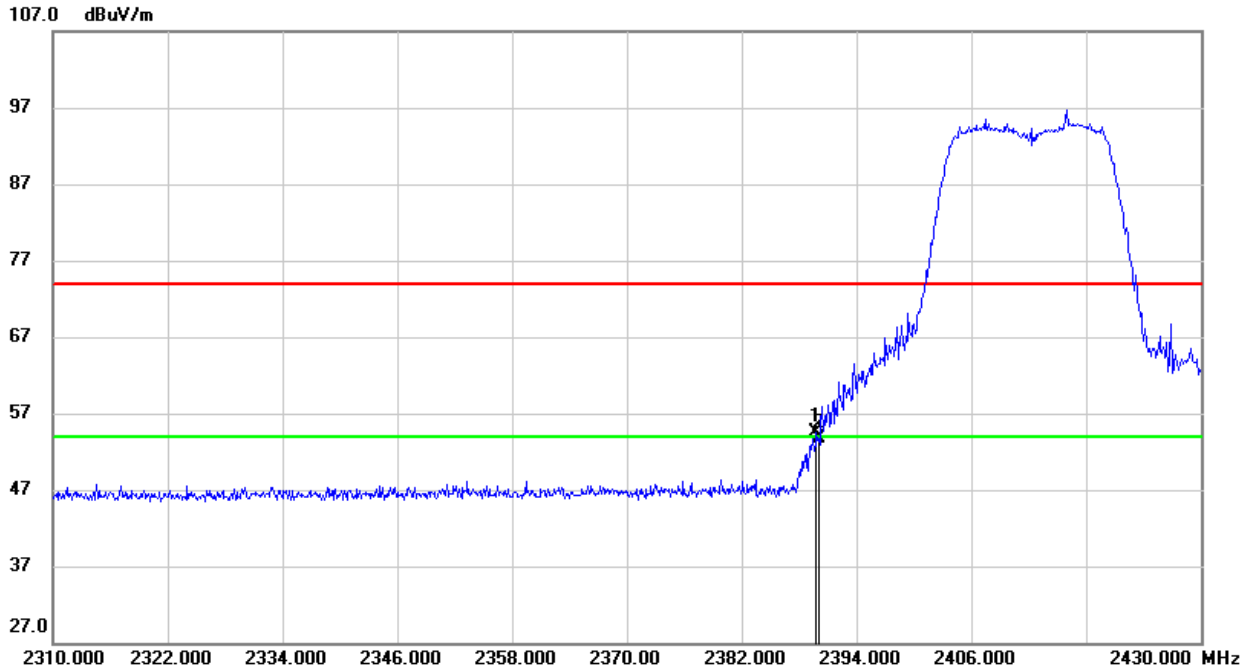


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.800	21.61	32.94	54.55	74.00	-19.45	peak
2	2390.000	20.75	32.94	53.69	74.00	-20.31	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**AVG**

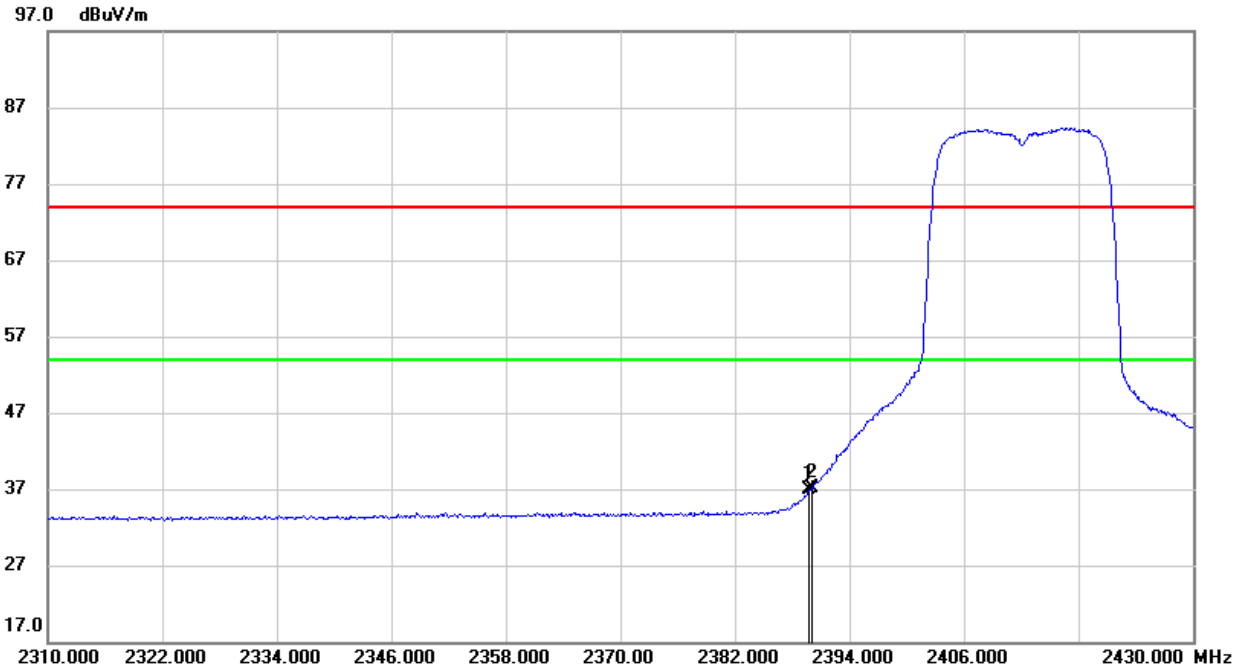


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.800	3.90	32.94	36.84	54.00	-17.16	AVG
2	2390.000	4.12	32.94	37.06	54.00	-16.94	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

**PEAK**

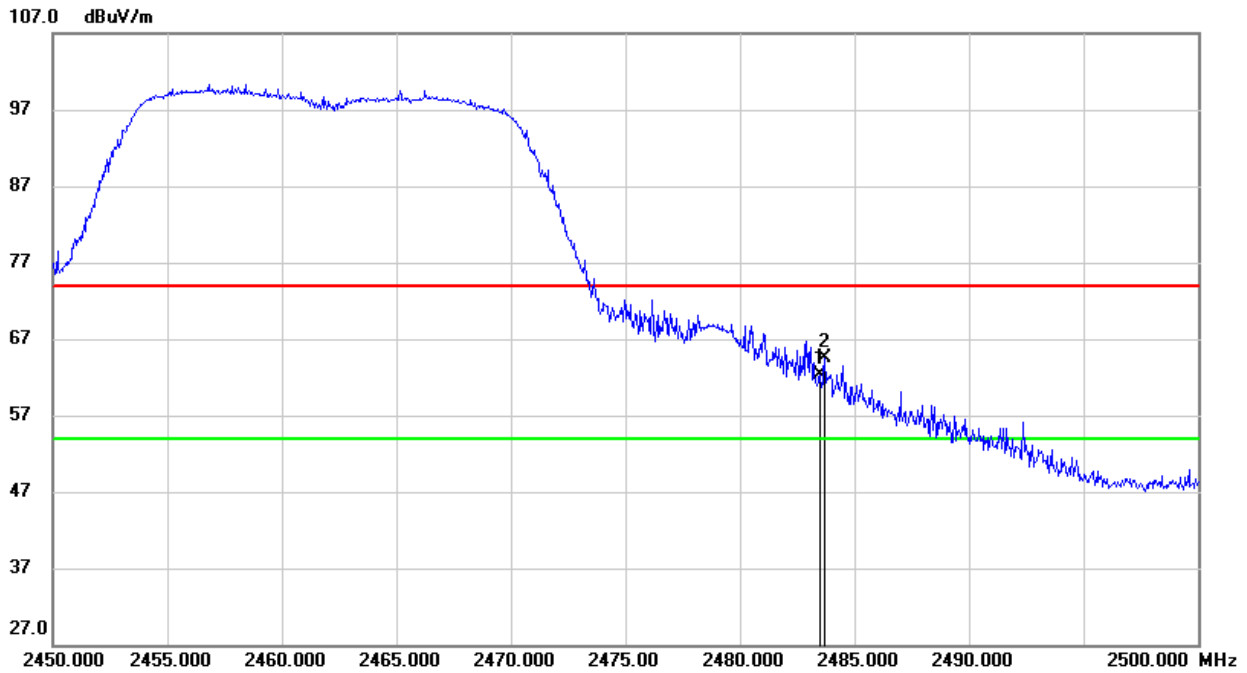


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	28.75	33.58	62.33	74.00	-11.67	peak
2	2483.700	30.83	33.58	64.41	74.00	-9.59	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**AVG**

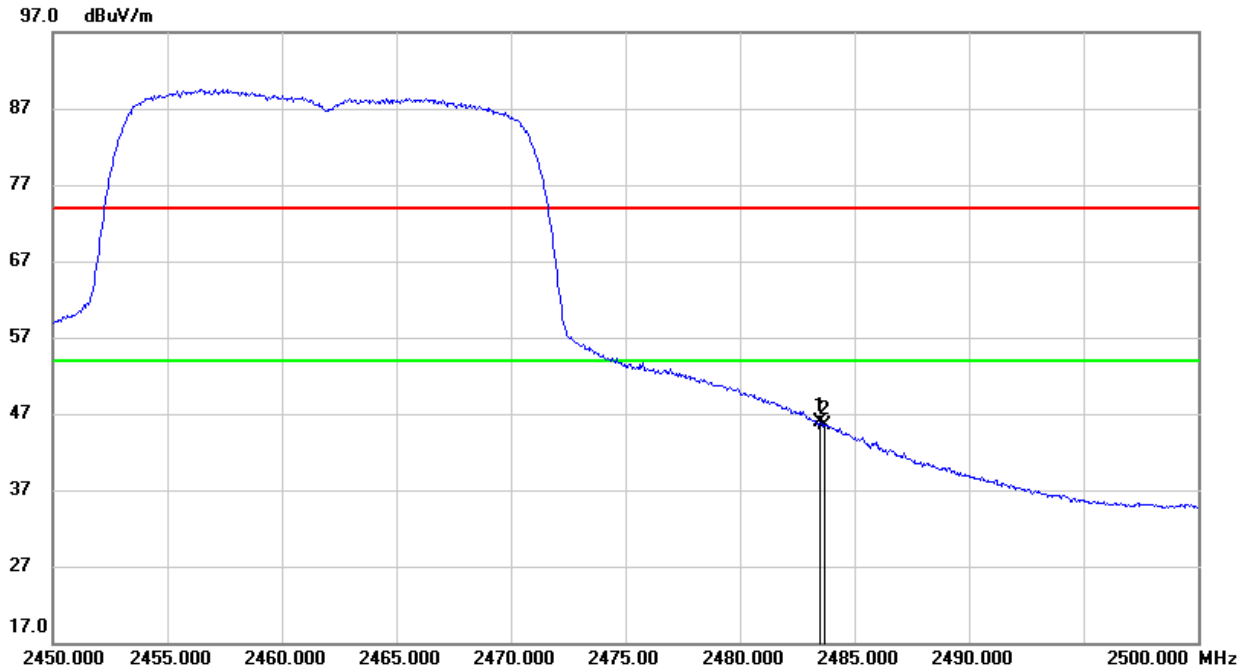


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	12.32	33.58	45.90	54.00	-8.10	AVG
2	2483.700	11.88	33.58	45.46	54.00	-8.54	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

**PEAK**

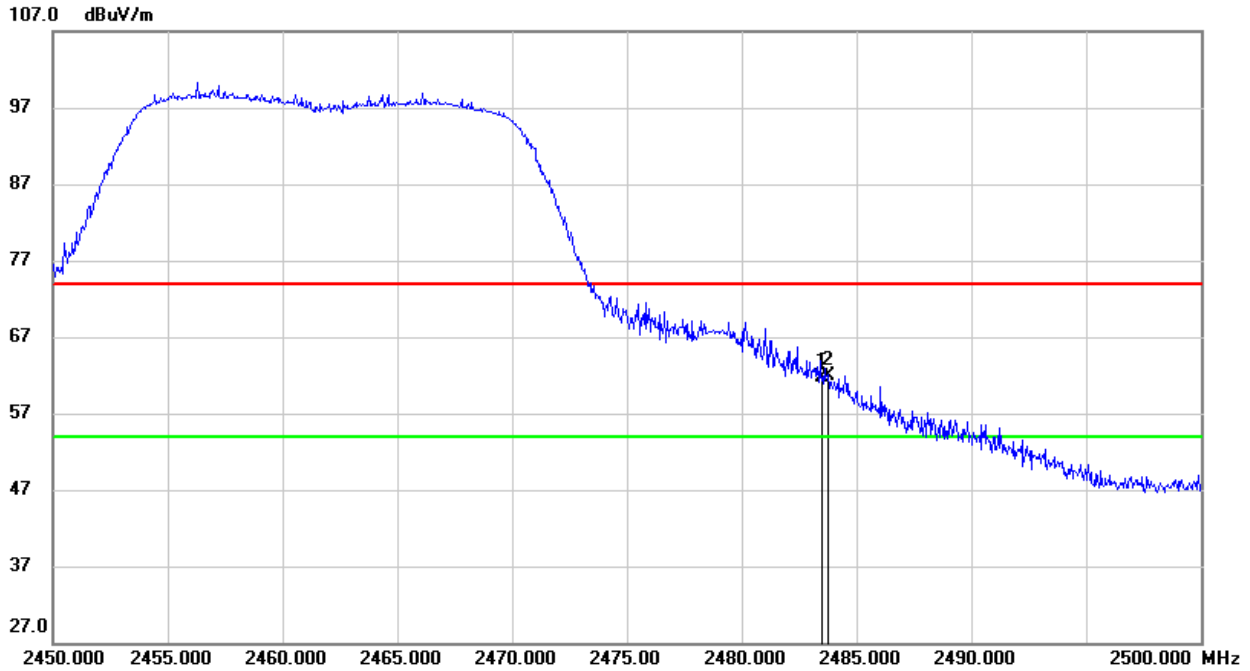


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	28.22	33.58	61.80	74.00	-12.20	peak
2	2483.750	28.42	33.58	62.00	74.00	-12.00	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**AVG**

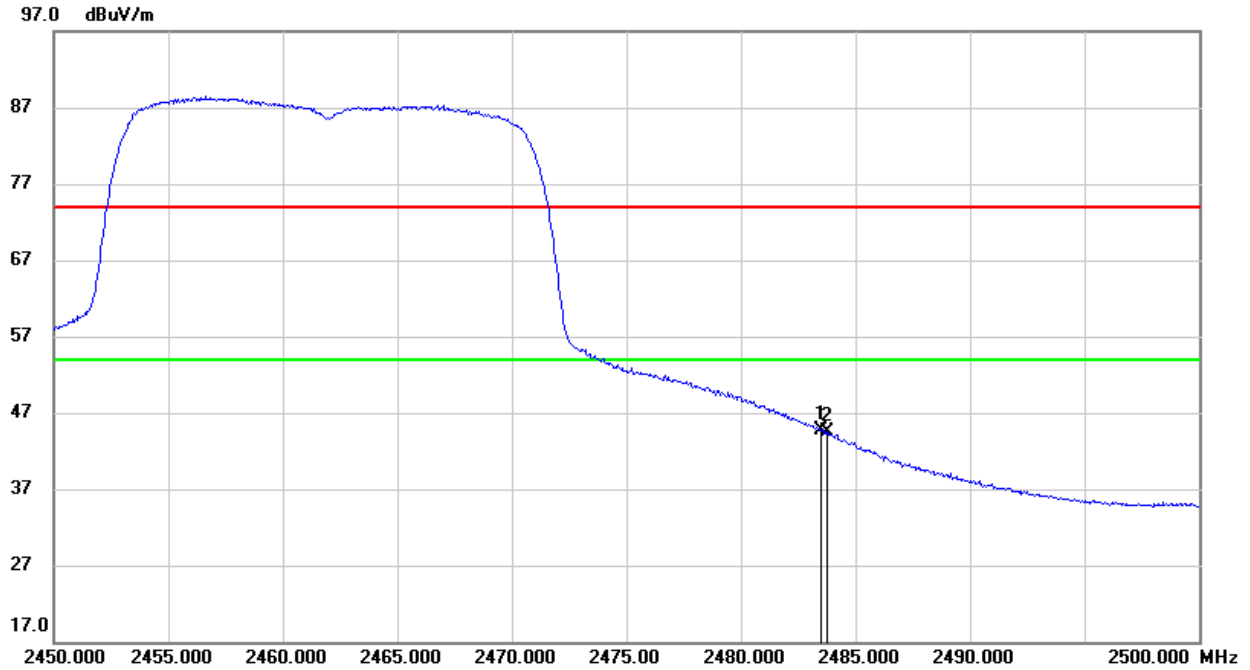

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	11.08	33.58	44.66	54.00	-9.34	AVG
2	2483.750	10.92	33.58	44.50	54.00	-9.50	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.






### 8.1.4. 802.11n HT40 MODE

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

#### PEAK

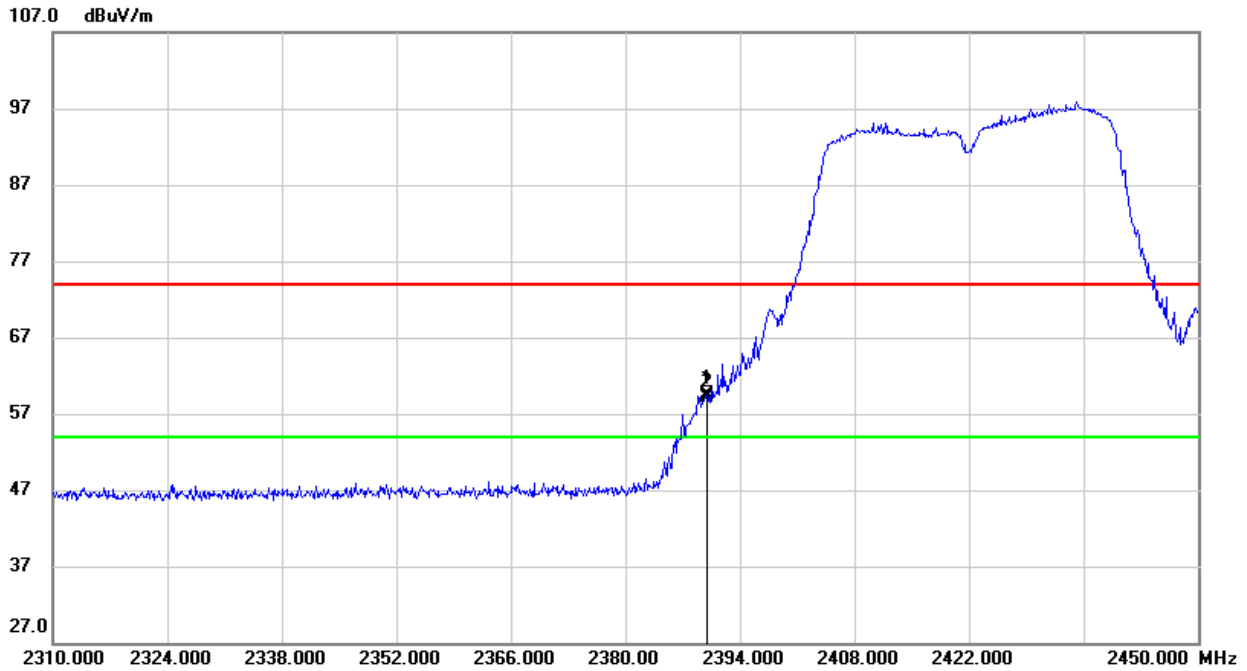


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.940	26.54	32.94	59.48	74.00	-14.52	peak
2	2390.000	26.08	32.94	59.02	74.00	-14.98	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**AVG**

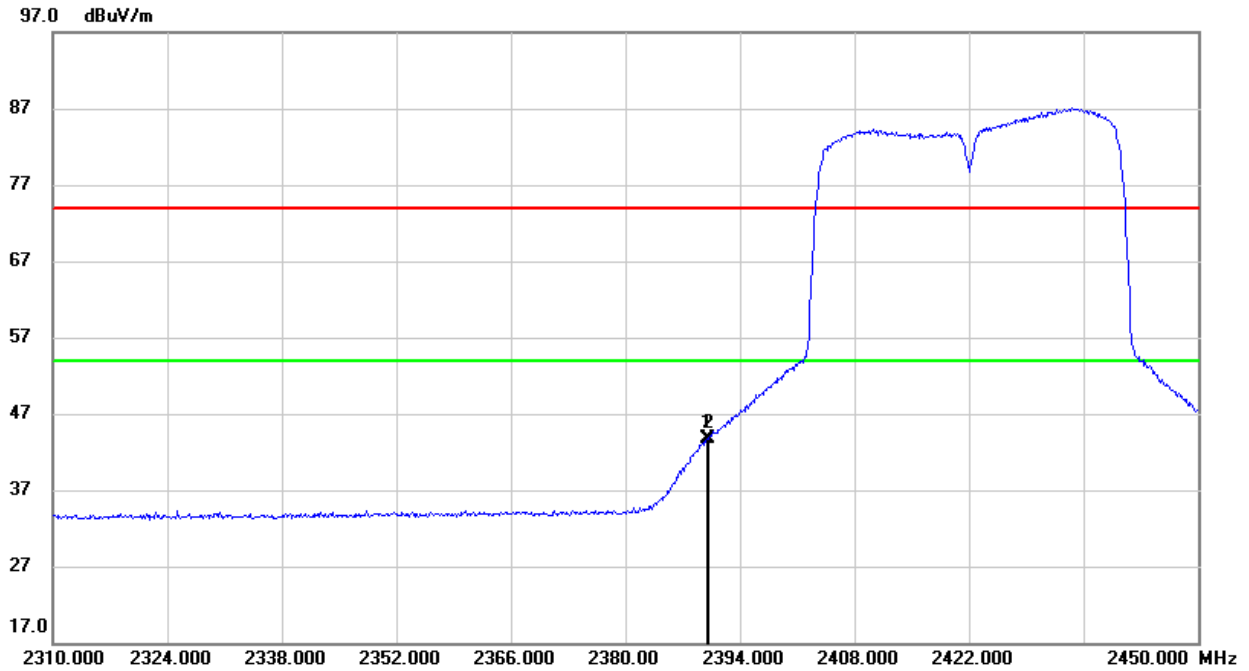


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.940	10.81	32.94	43.75	54.00	-10.25	AVG
2	2390.000	10.85	32.94	43.79	54.00	-10.21	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

**PEAK**

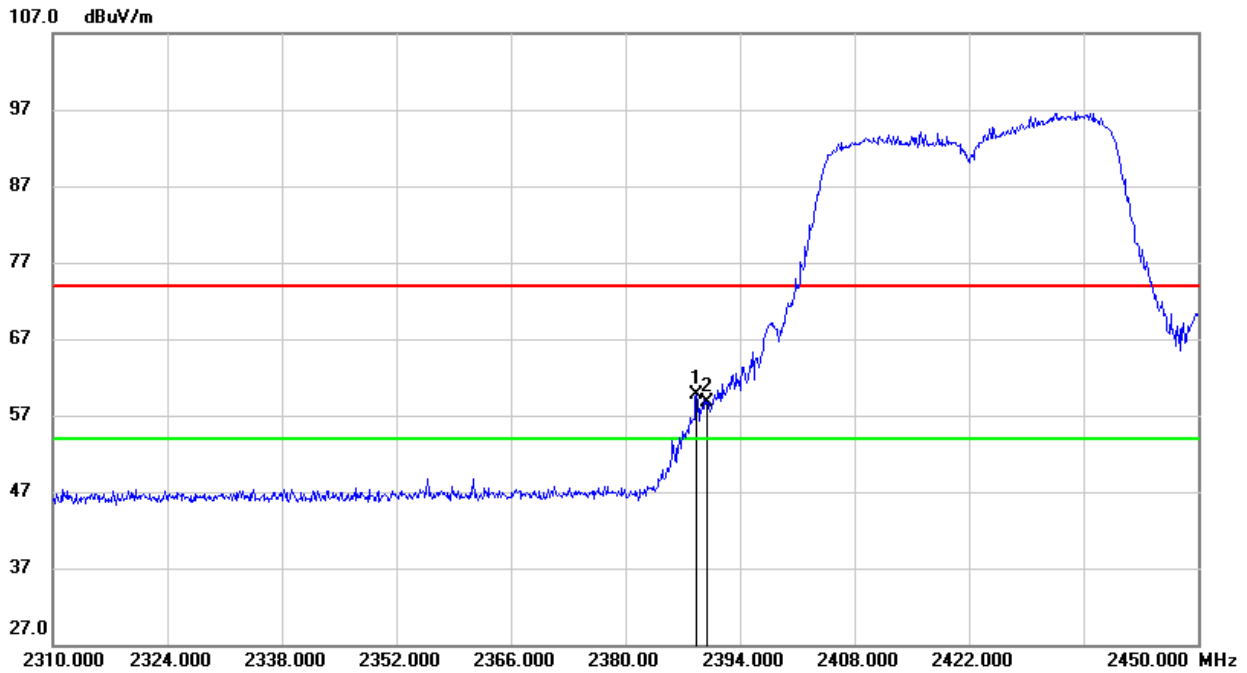


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.680	26.84	32.94	59.78	74.00	-14.22	peak
2	2390.000	25.75	32.94	58.69	74.00	-15.31	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**AVG**

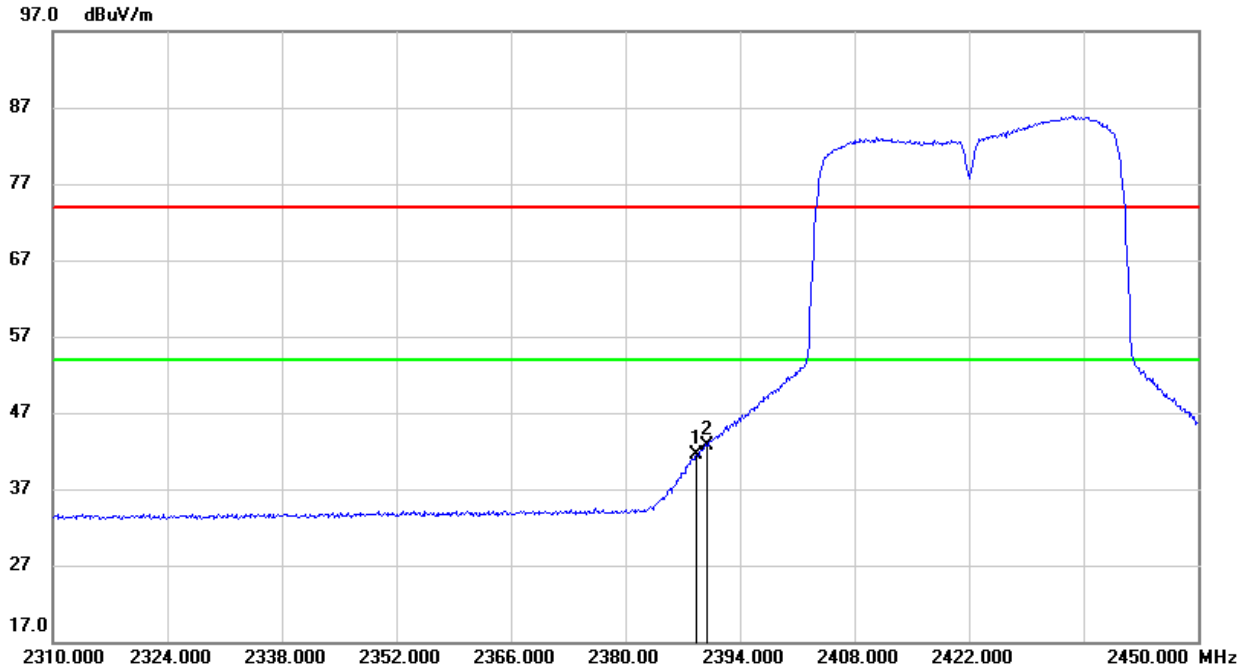


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.680	8.63	32.94	41.57	54.00	-12.43	AVG
2	2390.000	9.68	32.94	42.62	54.00	-11.38	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

**PEAK**

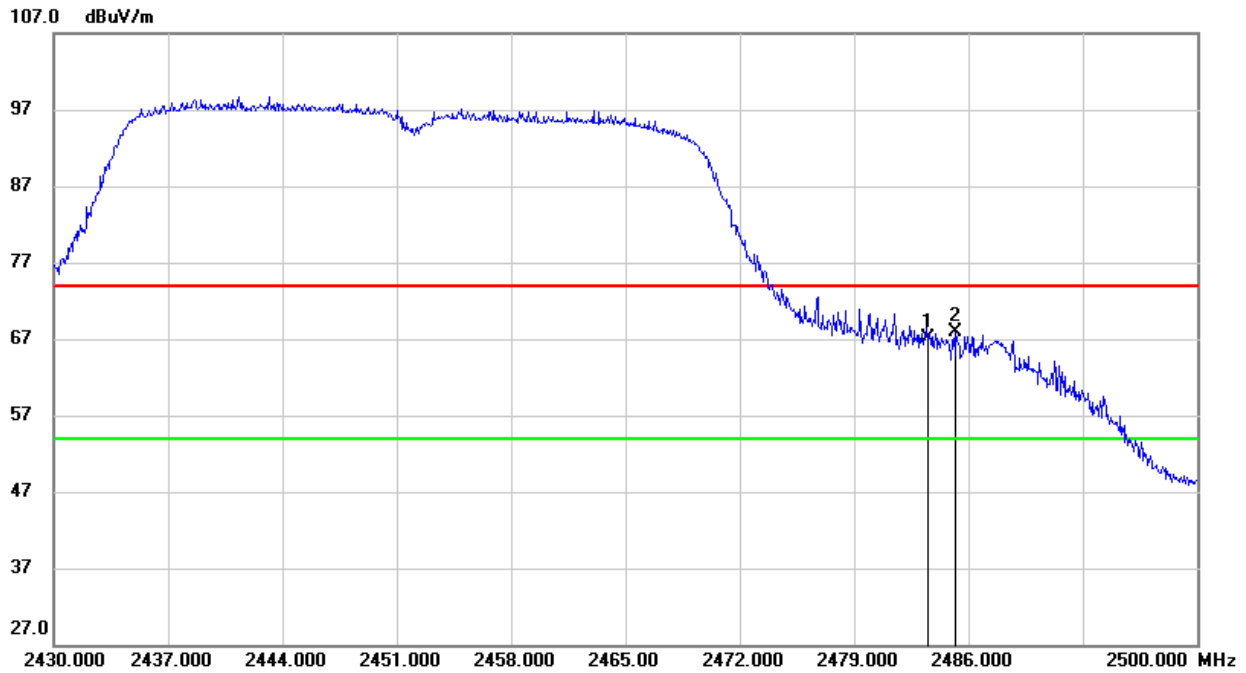


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	33.46	33.58	67.04	74.00	-6.96	peak
2	2485.230	34.31	33.59	67.90	74.00	-6.10	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**AVG**

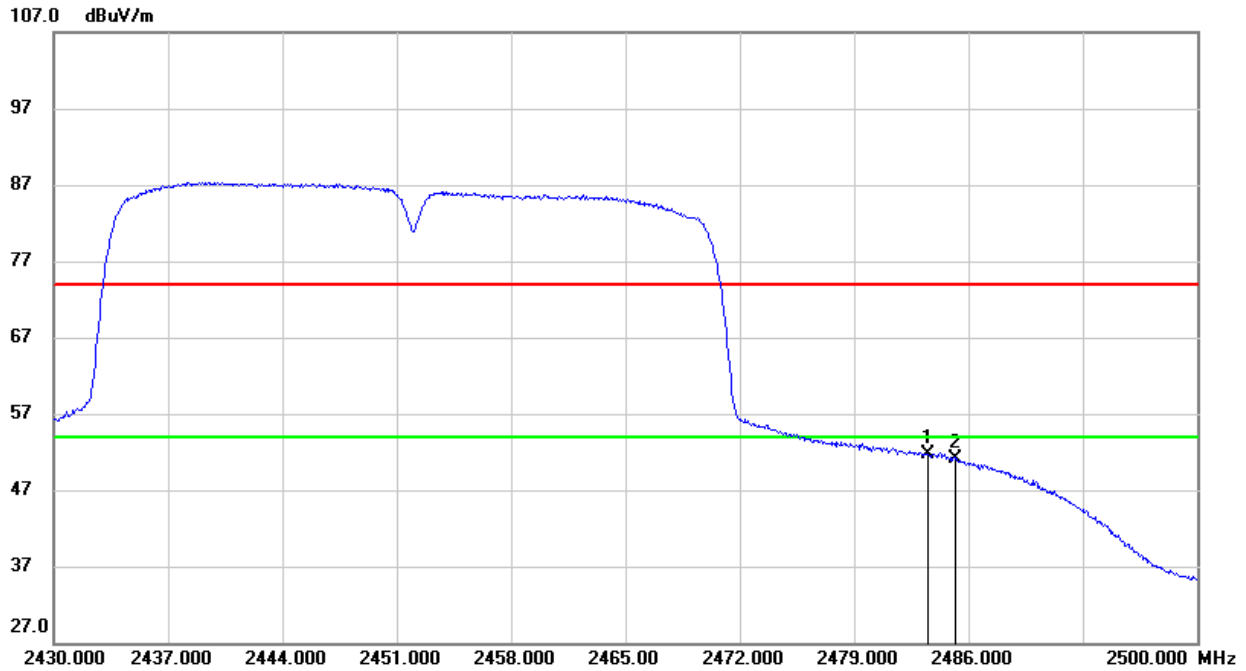


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.17	33.58	51.75	54.00	-2.25	AVG
2	2485.230	17.54	33.59	51.13	54.00	-2.87	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

**PEAK**

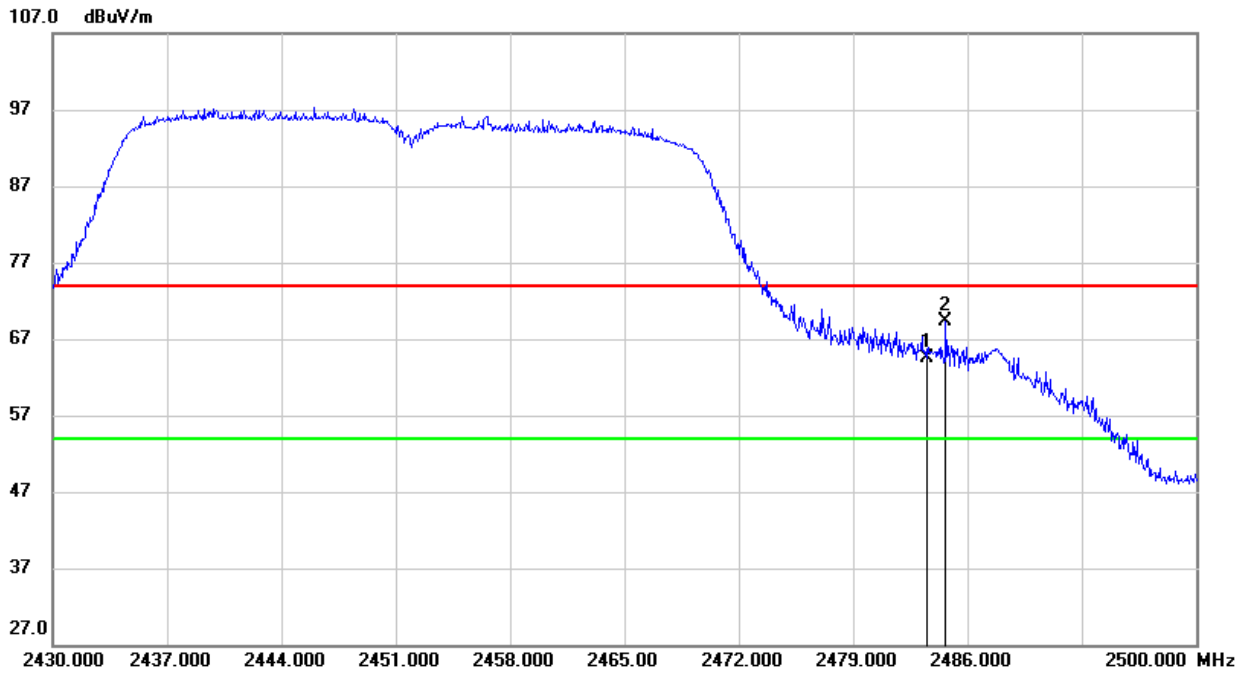


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	30.92	33.58	64.50	74.00	-9.50	peak
2	2484.670	35.70	33.59	69.29	74.00	-4.71	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**AVG**

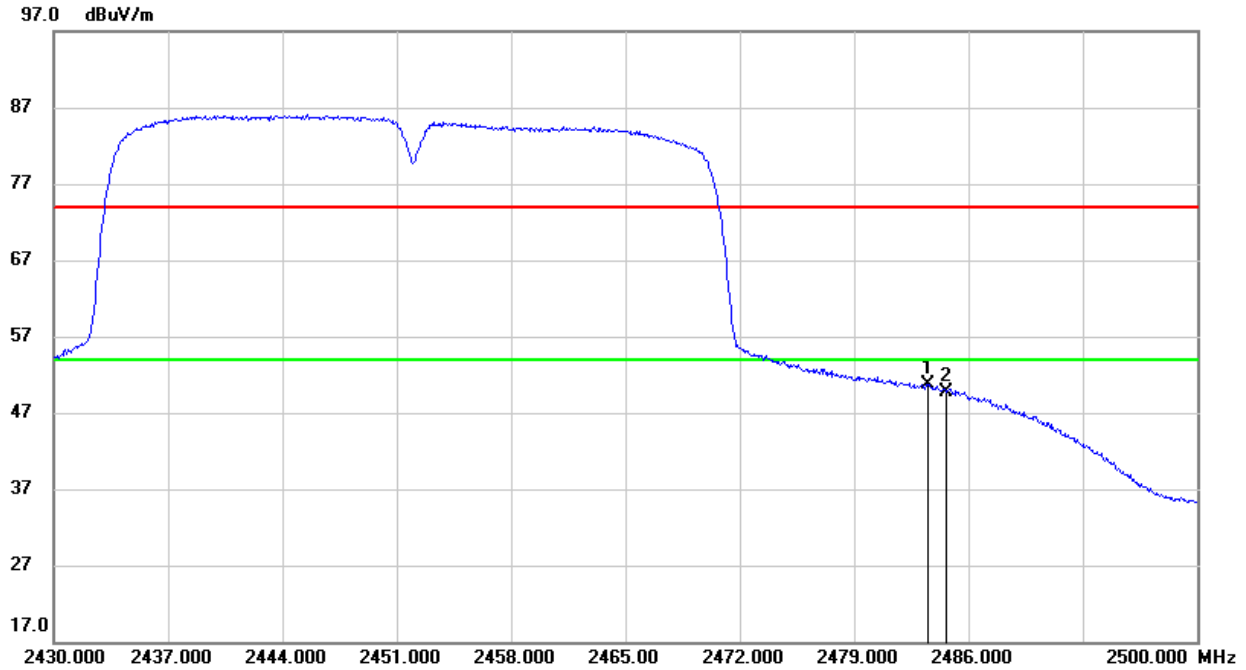

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.03	33.58	50.61	54.00	-3.39	AVG
2	2484.670	16.15	33.59	49.74	54.00	-4.26	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.






## 8.2. SPURIOUS EMISSIONS (3~18GHz)

### 8.2.1. 802.11b MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

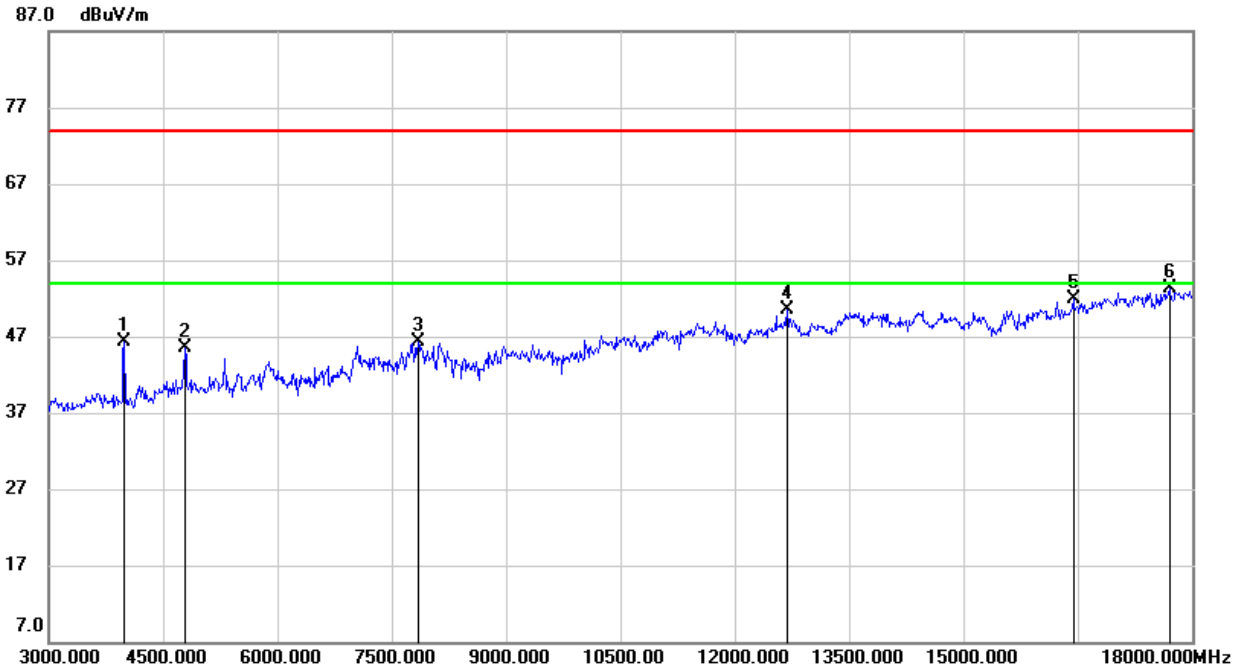

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	49.29	-2.89	46.40	74.00	-27.60	peak
2	4785.000	45.18	0.42	45.60	74.00	-28.40	peak
3	7845.000	38.64	7.62	46.26	74.00	-27.74	peak
4	12690.000	36.19	14.25	50.44	74.00	-23.56	peak
5	16440.000	32.89	18.94	51.83	74.00	-22.17	peak
6	17700.000	30.91	22.43	53.34	74.00	-20.66	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

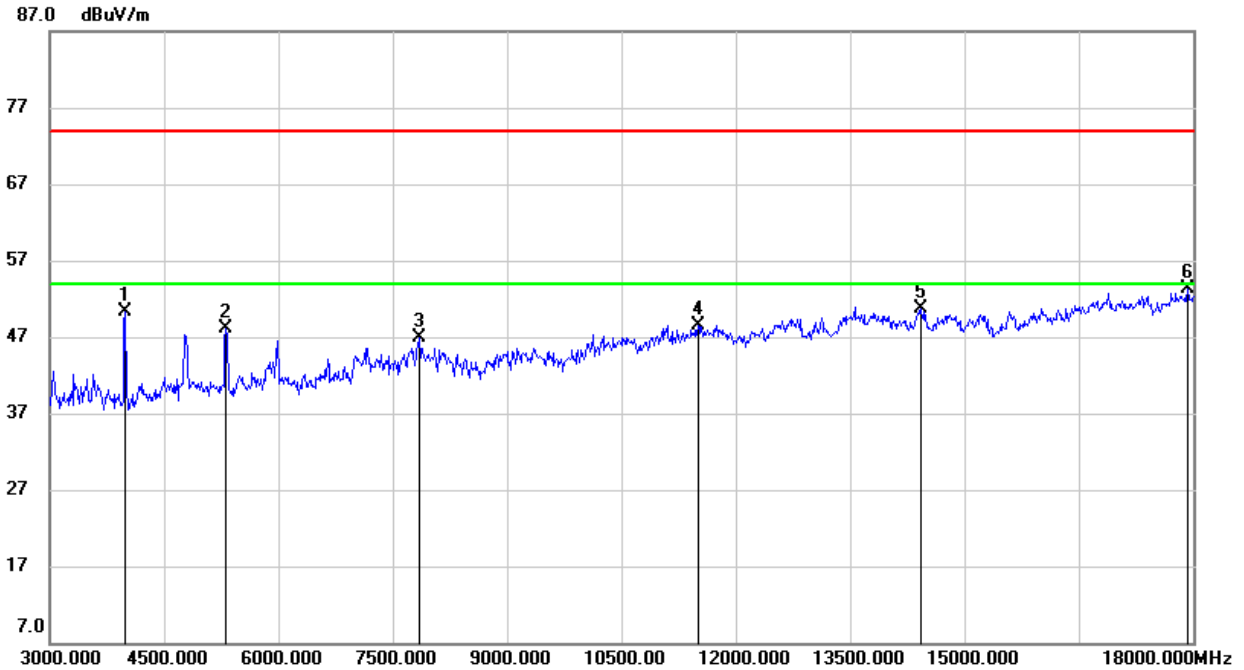


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	53.25	-2.89	50.36	74.00	-23.64	peak
2	5310.000	46.07	2.02	48.09	74.00	-25.91	peak
3	7845.000	39.24	7.62	46.86	74.00	-27.14	peak
4	11505.000	35.14	13.42	48.56	74.00	-25.44	peak
5	14430.000	34.31	16.35	50.66	74.00	-23.34	peak
6	17925.000	29.91	23.37	53.28	74.00	-20.72	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

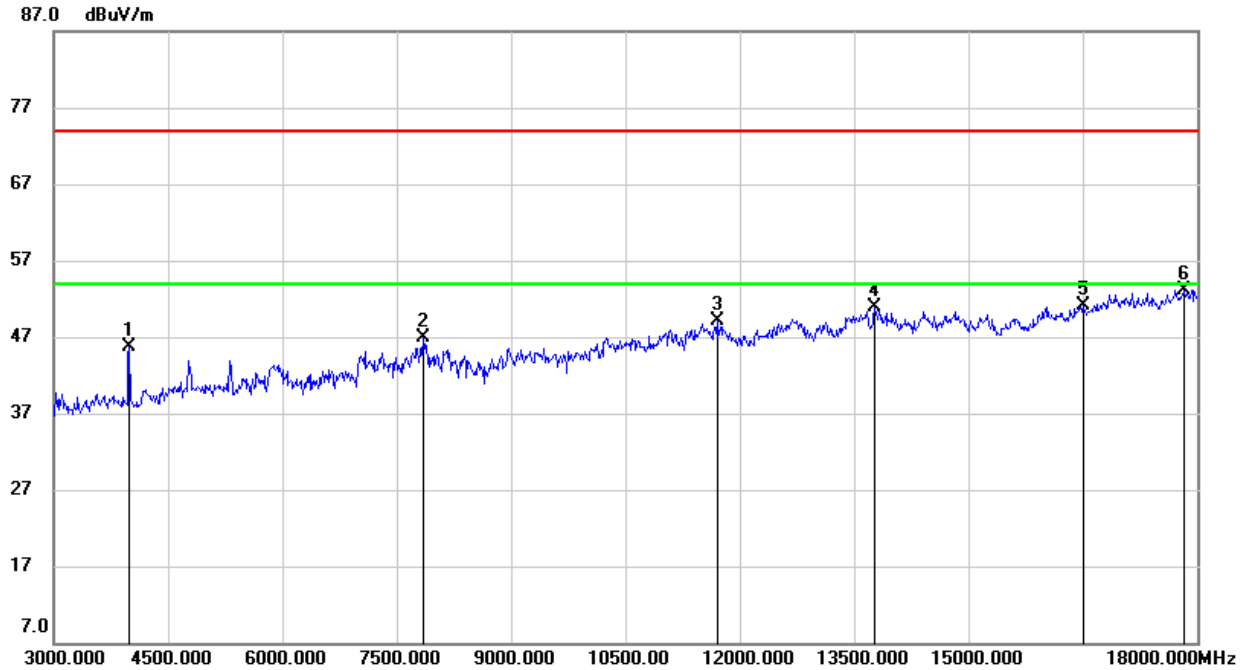


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	48.51	-2.89	45.62	74.00	-28.38	peak
2	7845.000	39.26	7.62	46.88	74.00	-27.12	peak
3	11700.000	36.13	12.95	49.08	74.00	-24.92	peak
4	13770.000	34.13	16.72	50.85	74.00	-23.15	peak
5	16500.000	31.90	19.19	51.09	74.00	-22.91	peak
6	17835.000	29.81	23.31	53.12	74.00	-20.88	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

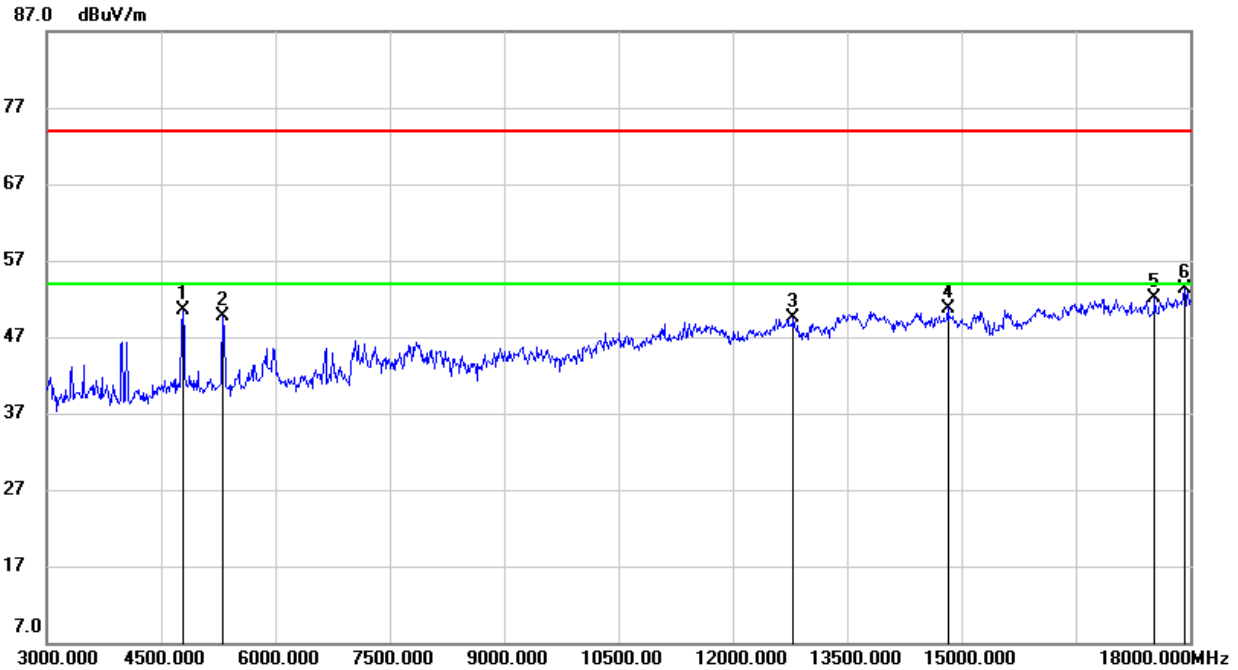


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4785.000	50.16	0.42	50.58	74.00	-23.42	peak
2	5310.000	47.62	2.02	49.64	74.00	-24.36	peak
3	12795.000	33.99	15.60	49.59	74.00	-24.41	peak
4	14820.000	34.86	15.94	50.80	74.00	-23.20	peak
5	17535.000	30.65	21.51	52.16	74.00	-21.84	peak
6	17925.000	29.88	23.37	53.25	74.00	-20.75	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

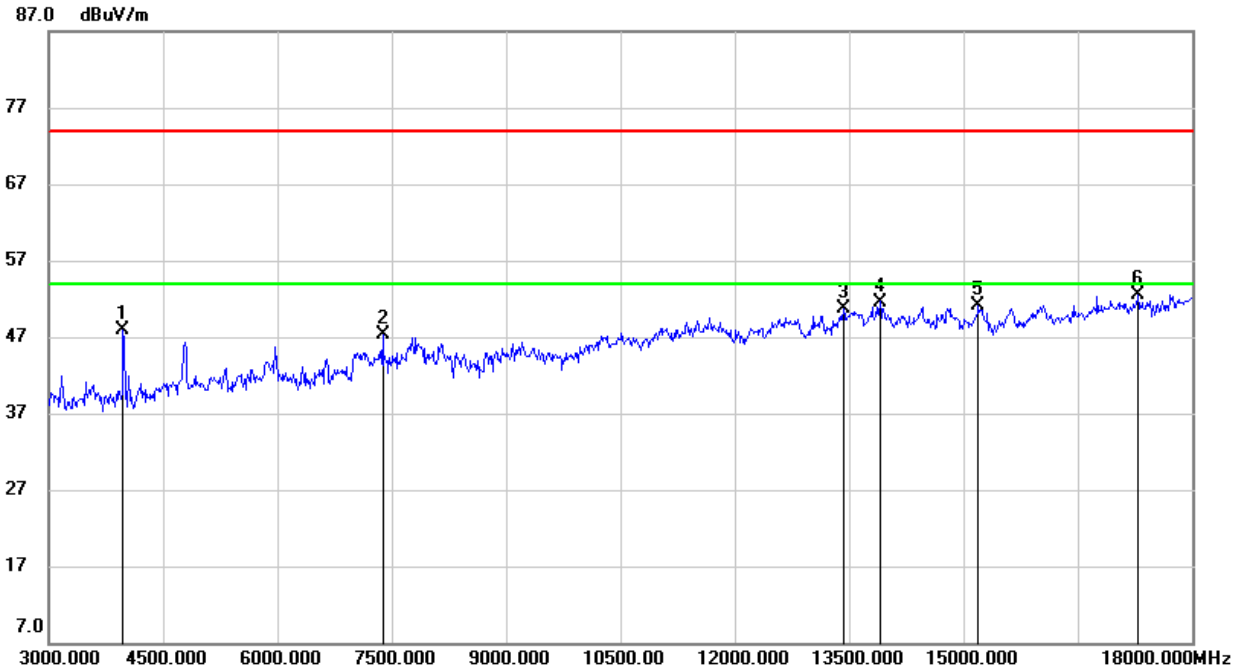


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3975.000	50.78	-2.90	47.88	74.00	-26.12	peak
2	7380.000	40.80	6.41	47.21	74.00	-26.79	peak
3	13425.000	34.74	16.02	50.76	74.00	-23.24	peak
4	13905.000	35.40	16.20	51.60	74.00	-22.40	peak
5	15195.000	35.10	16.09	51.19	74.00	-22.81	peak
6	17295.000	30.86	21.71	52.57	74.00	-21.43	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

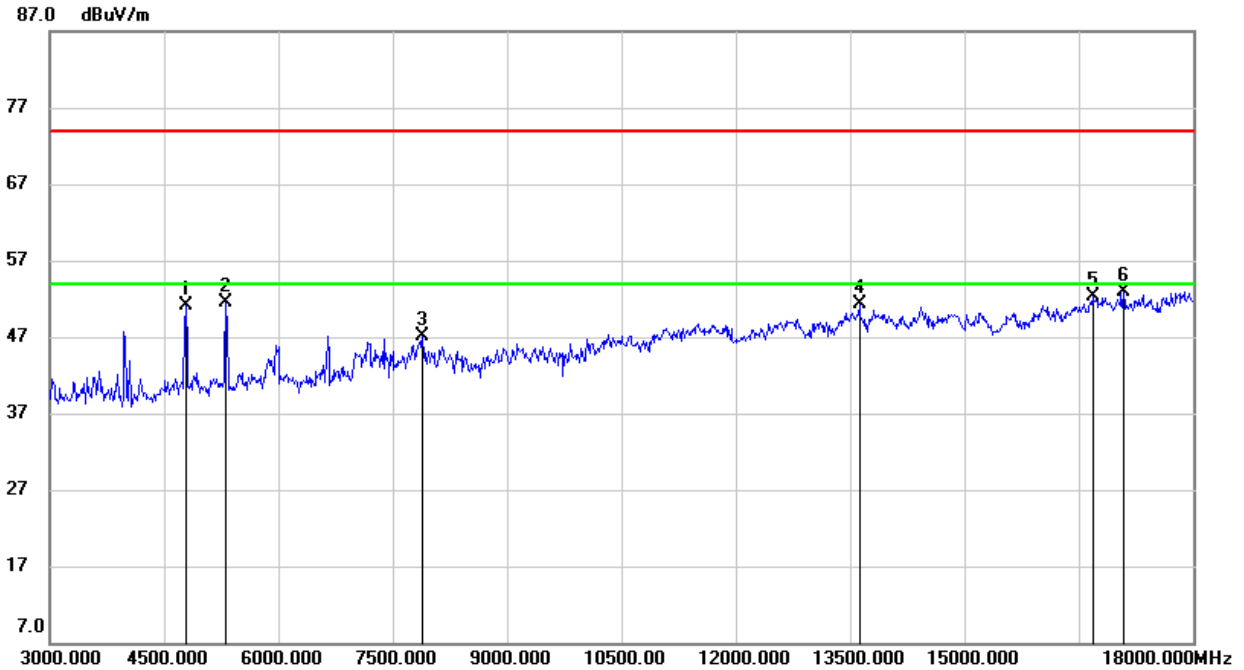


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4785.000	50.63	0.42	51.05	74.00	-22.95	peak
2	5310.000	49.50	2.02	51.52	74.00	-22.48	peak
3	7890.000	39.81	7.30	47.11	74.00	-26.89	peak
4	13620.000	35.39	15.99	51.38	74.00	-22.62	peak
5	16680.000	32.40	19.84	52.24	74.00	-21.76	peak
6	17085.000	32.25	20.60	52.85	74.00	-21.15	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### 8.2.2. 802.11g MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

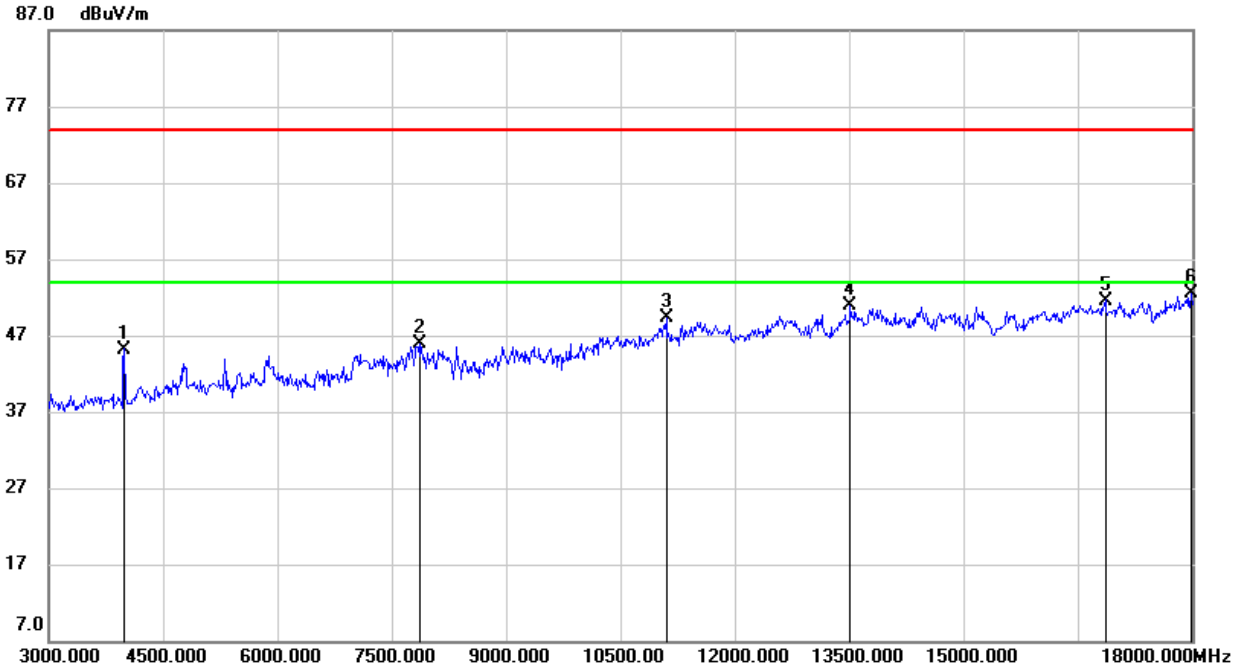


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	48.09	-2.89	45.20	74.00	-28.80	peak
2	7875.000	38.60	7.40	46.00	74.00	-28.00	peak
3	11100.000	36.66	12.56	49.22	74.00	-24.78	peak
4	13515.000	35.04	15.81	50.85	74.00	-23.15	peak
5	16860.000	31.65	19.95	51.60	74.00	-22.40	peak
6	17985.000	29.16	23.44	52.60	74.00	-21.40	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

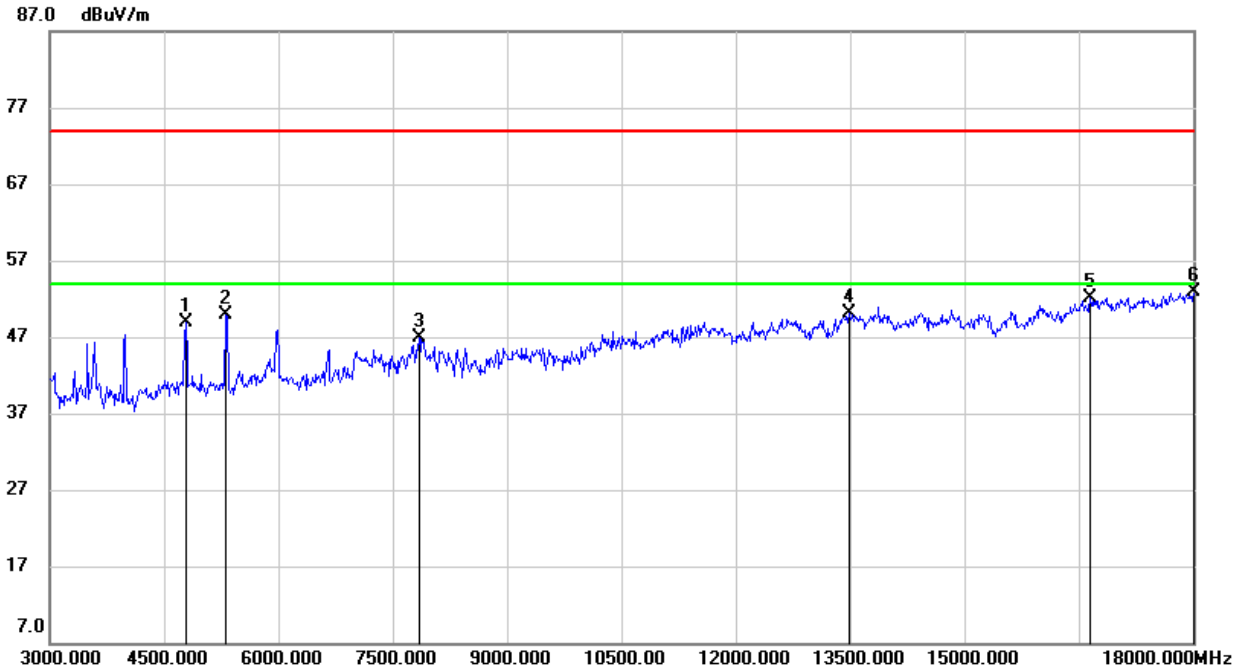


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4785.000	48.39	0.42	48.81	74.00	-25.19	peak
2	5310.000	47.89	2.02	49.91	74.00	-24.09	peak
3	7845.000	39.28	7.62	46.90	74.00	-27.10	peak
4	13485.000	34.22	15.82	50.04	74.00	-23.96	peak
5	16650.000	32.34	19.70	52.04	74.00	-21.96	peak
6	18000.000	29.44	23.46	52.90	74.00	-21.10	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.





**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

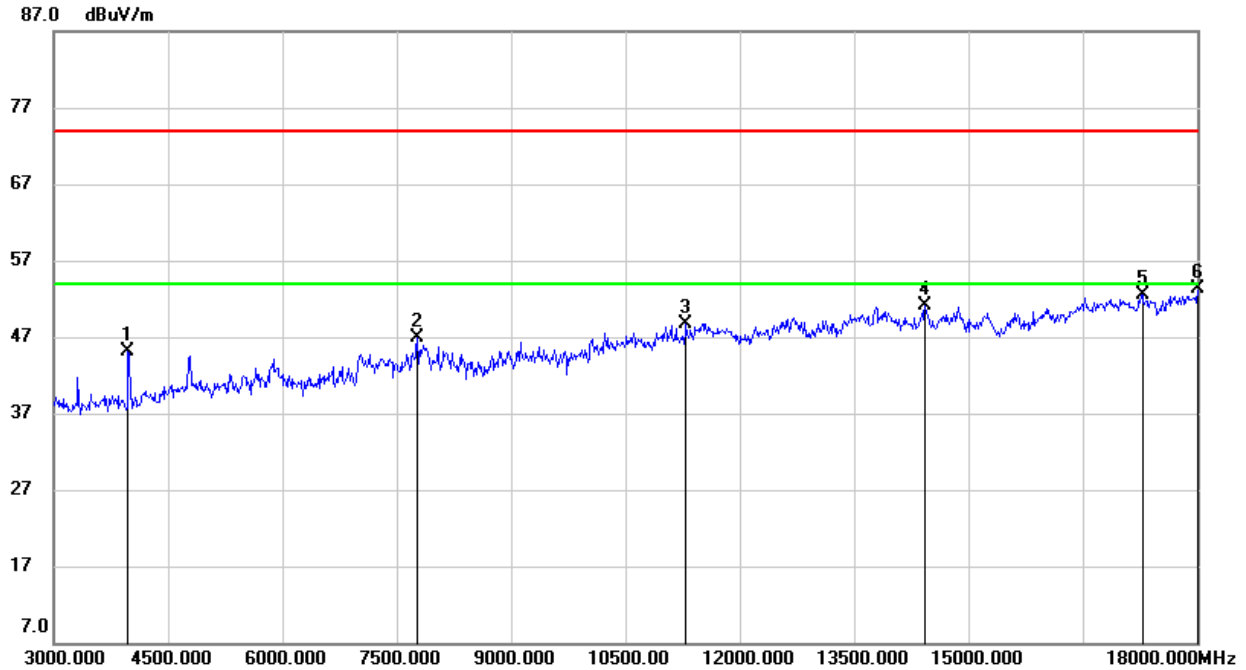


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3975.000	48.04	-2.90	45.14	74.00	-28.86	peak
2	7770.000	39.38	7.50	46.88	74.00	-27.12	peak
3	11295.000	36.39	12.34	48.73	74.00	-25.27	peak
4	14430.000	34.70	16.35	51.05	74.00	-22.95	peak
5	17280.000	30.88	21.59	52.47	74.00	-21.53	peak
6	18000.000	29.80	23.46	53.26	74.00	-20.74	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

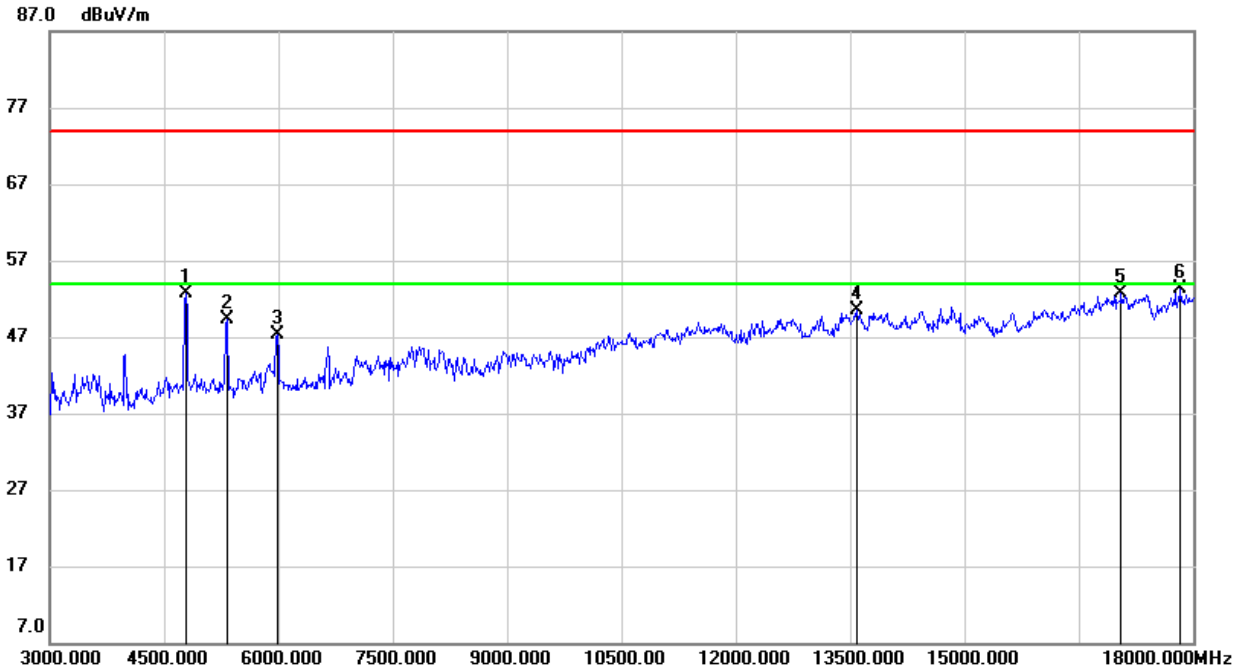


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4785.000	52.37	0.42	52.79	74.00	-21.21	peak
2	5325.000	47.28	1.99	49.27	74.00	-24.73	peak
3	5985.000	43.70	3.54	47.24	74.00	-26.76	peak
4	13590.000	34.43	16.00	50.43	74.00	-23.57	peak
5	17055.000	32.10	20.53	52.63	74.00	-21.37	peak
6	17835.000	30.03	23.31	53.34	74.00	-20.66	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

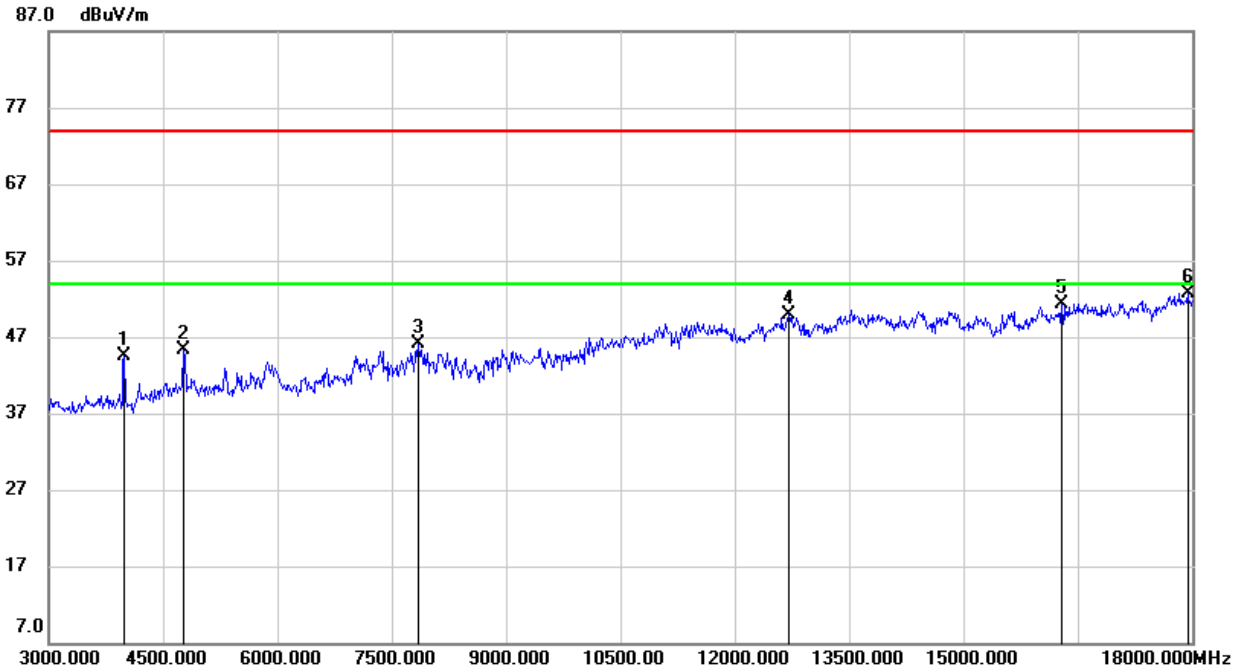


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	47.36	-2.89	44.47	74.00	-29.53	peak
2	4770.000	45.03	0.37	45.40	74.00	-28.60	peak
3	7845.000	38.56	7.62	46.18	74.00	-27.82	peak
4	12705.000	35.52	14.35	49.87	74.00	-24.13	peak
5	16290.000	32.94	18.36	51.30	74.00	-22.70	peak
6	17940.000	29.35	23.39	52.74	74.00	-21.26	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

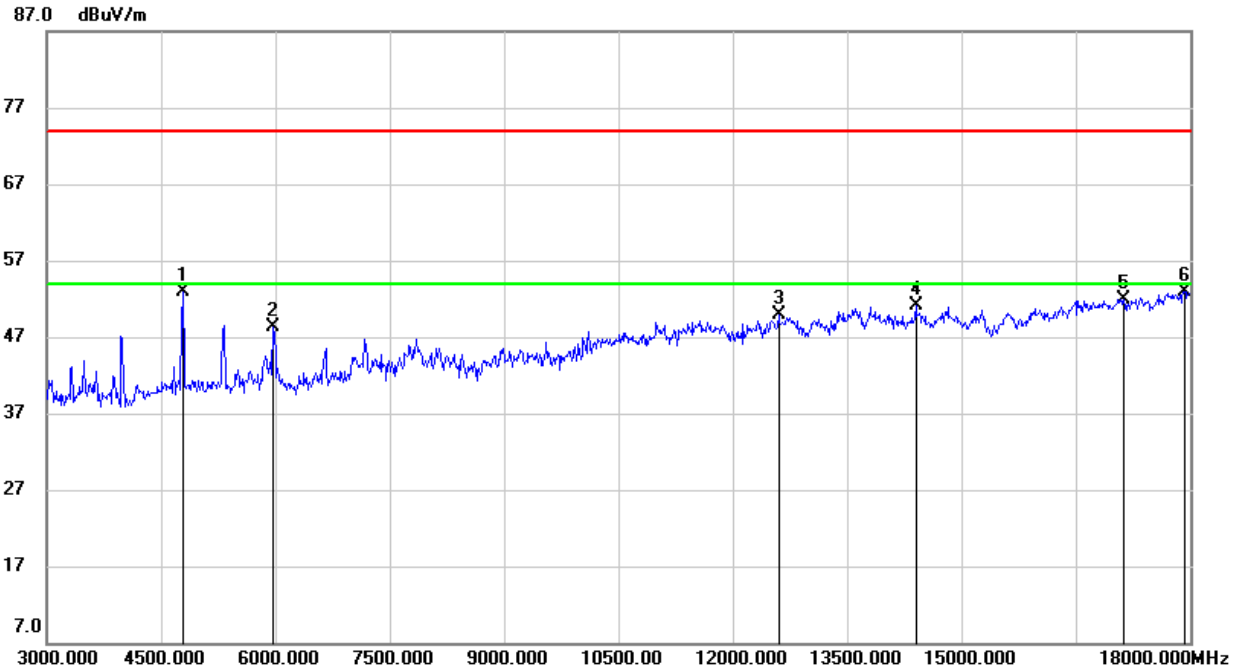


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4785.000	52.42	0.42	52.84	74.00	-21.16	peak
2	5970.000	44.50	3.79	48.29	74.00	-25.71	peak
3	12600.000	35.87	13.99	49.86	74.00	-24.14	peak
4	14400.000	34.73	16.35	51.08	74.00	-22.92	peak
5	17130.000	31.25	20.72	51.97	74.00	-22.03	peak
6	17925.000	29.59	23.37	52.96	74.00	-21.04	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### 8.2.3. 802.11n HT20 MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

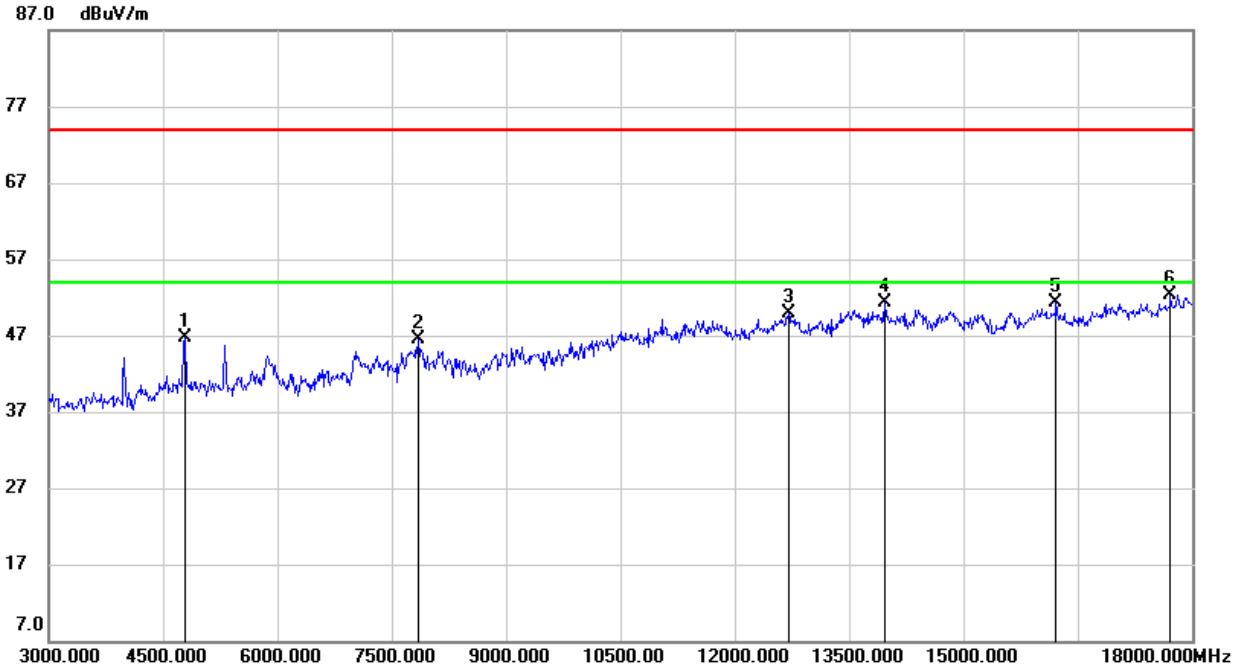


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4785.000	46.37	0.42	46.79	74.00	-27.21	peak
2	7845.000	38.82	7.62	46.44	74.00	-27.56	peak
3	12705.000	35.46	14.35	49.81	74.00	-24.19	peak
4	13965.000	35.18	16.09	51.27	74.00	-22.73	peak
5	16215.000	32.73	18.48	51.21	74.00	-22.79	peak
6	17715.000	29.72	22.56	52.28	74.00	-21.72	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

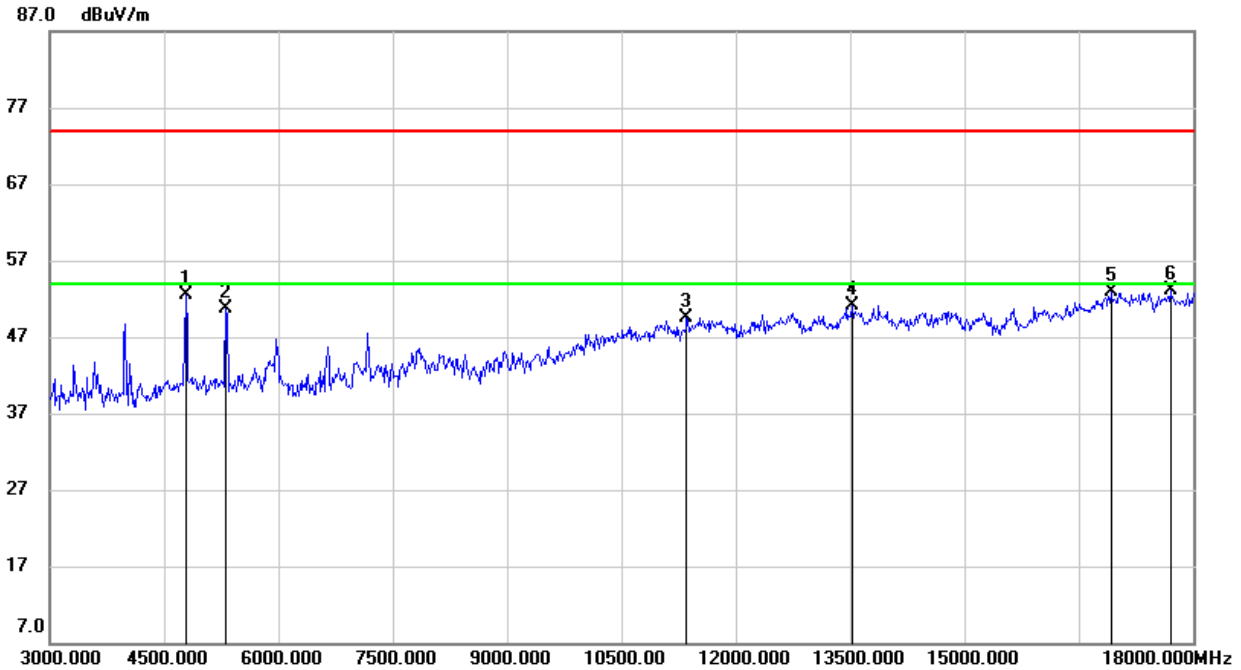


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4785.000	52.02	0.42	52.44	74.00	-21.56	peak
2	5310.000	48.71	2.02	50.73	74.00	-23.27	peak
3	11355.000	36.94	12.48	49.42	74.00	-24.58	peak
4	13530.000	35.30	15.86	51.16	74.00	-22.84	peak
5	16920.000	32.81	20.06	52.87	74.00	-21.13	peak
6	17700.000	30.59	22.43	53.02	74.00	-20.98	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

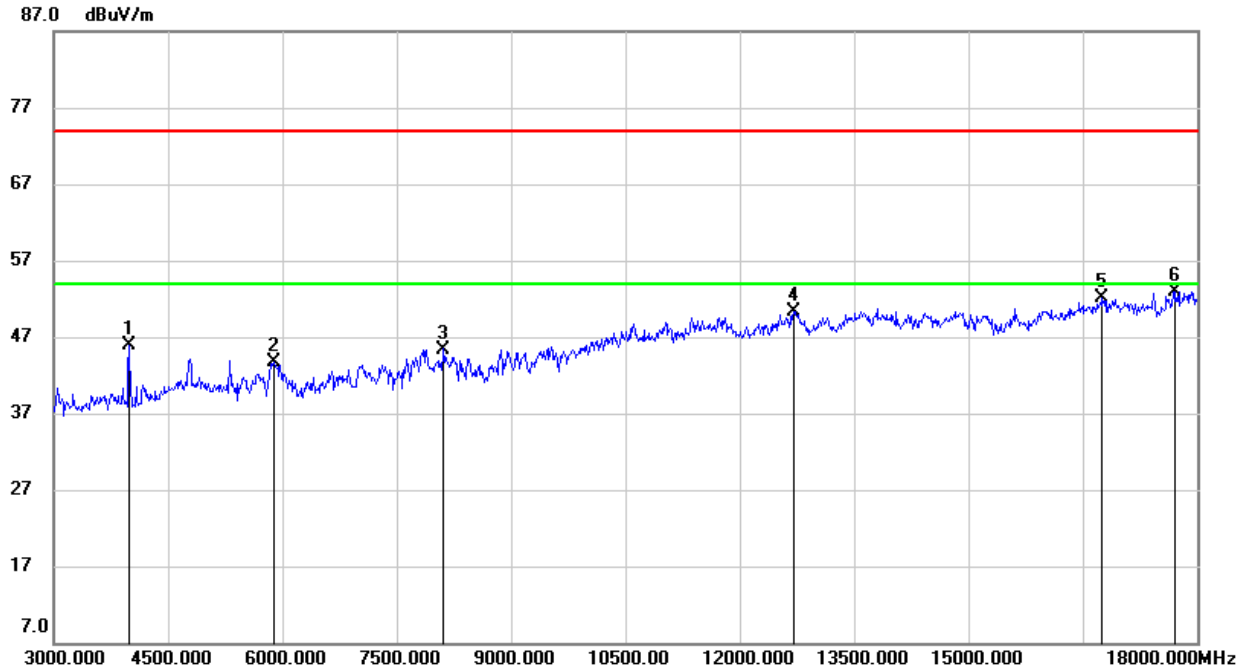


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	48.73	-2.89	45.84	74.00	-28.16	peak
2	5880.000	39.07	4.59	43.66	74.00	-30.34	peak
3	8115.000	37.50	7.90	45.40	74.00	-28.60	peak
4	12705.000	36.00	14.35	50.35	74.00	-23.65	peak
5	16755.000	32.13	19.94	52.07	74.00	-21.93	peak
6	17715.000	30.38	22.56	52.94	74.00	-21.06	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

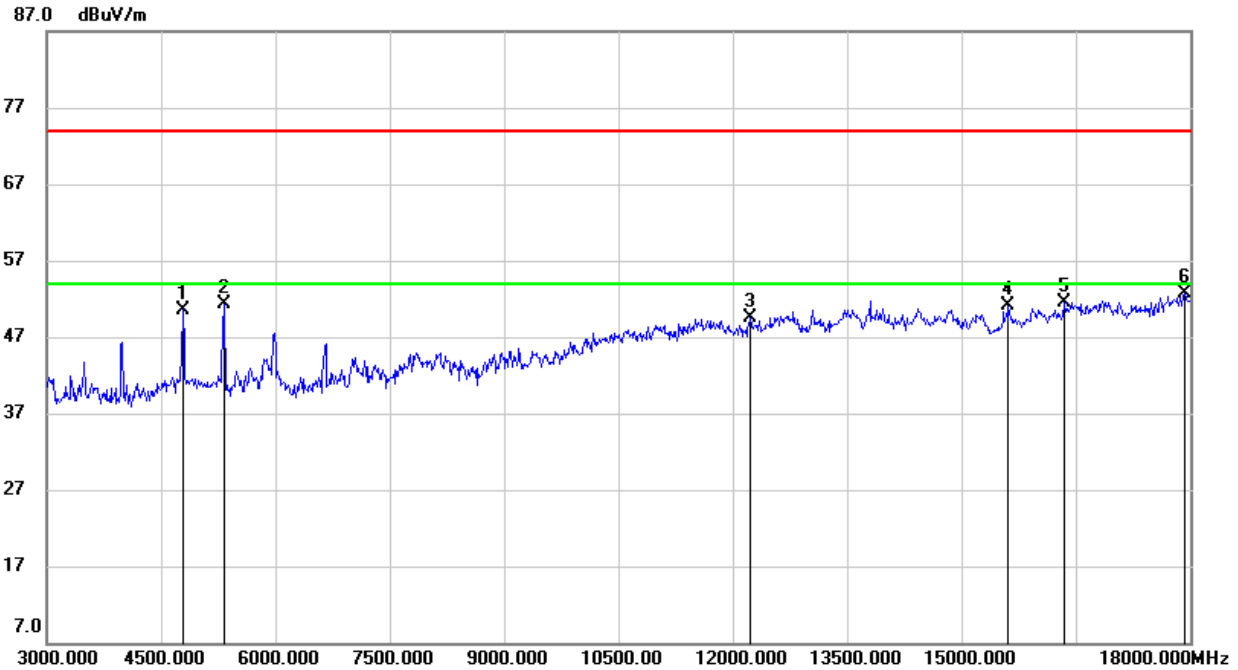


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4785.000	50.18	0.42	50.60	74.00	-23.40	peak
2	5325.000	49.31	1.99	51.30	74.00	-22.70	peak
3	12225.000	35.67	13.81	49.48	74.00	-24.52	peak
4	15615.000	34.16	16.94	51.10	74.00	-22.90	peak
5	16350.000	32.97	18.57	51.54	74.00	-22.46	peak
6	17925.000	29.28	23.37	52.65	74.00	-21.35	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.





**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

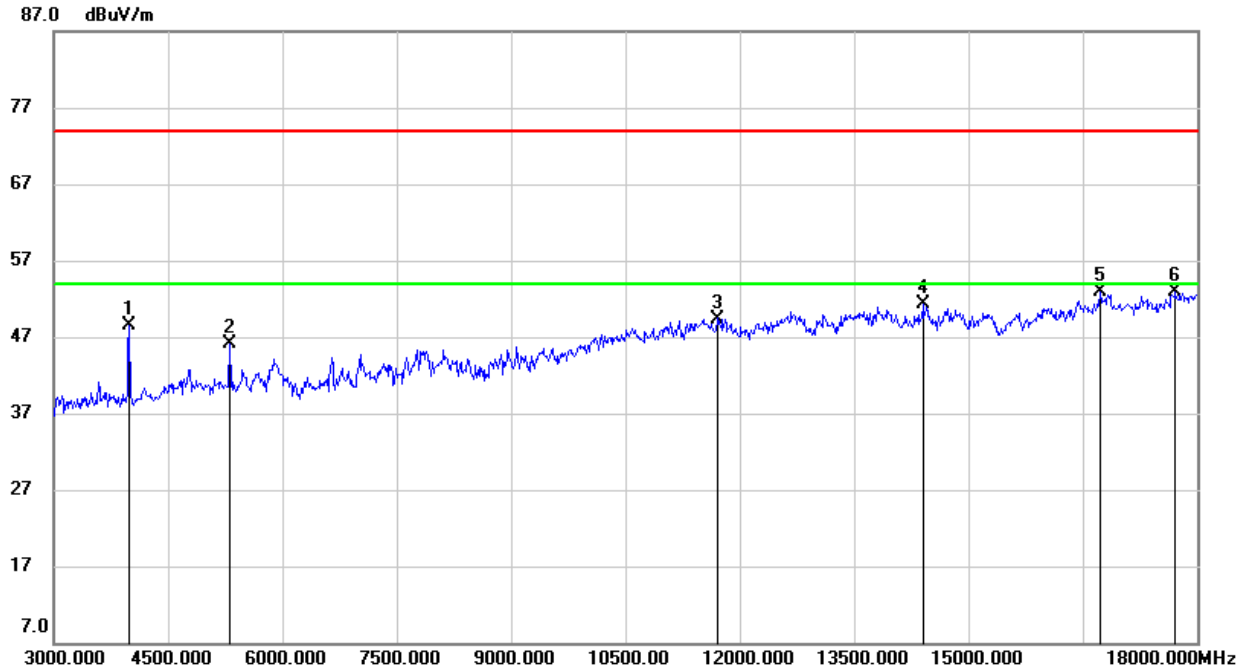


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	51.37	-2.89	48.48	74.00	-25.52	peak
2	5310.000	44.11	2.02	46.13	74.00	-27.87	peak
3	11715.000	36.41	12.99	49.40	74.00	-24.60	peak
4	14400.000	34.95	16.35	51.30	74.00	-22.70	peak
5	16725.000	33.05	19.93	52.98	74.00	-21.02	peak
6	17715.000	30.44	22.56	53.00	74.00	-21.00	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

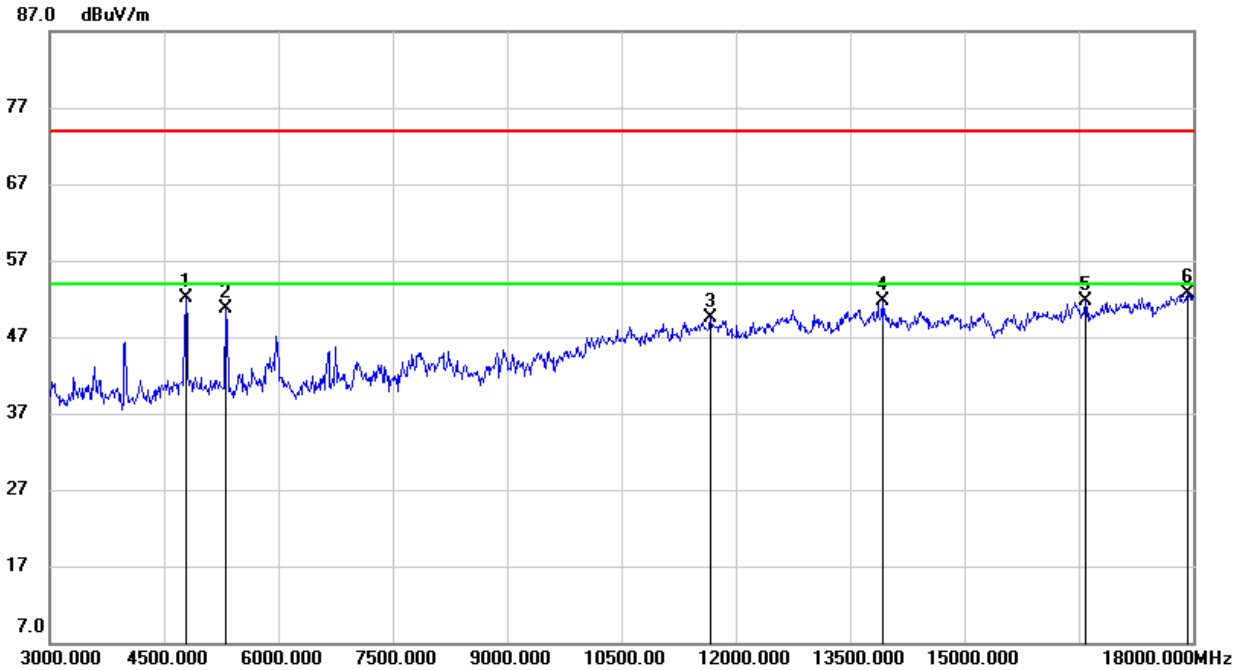


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4785.000	51.68	0.42	52.10	74.00	-21.90	peak
2	5310.000	48.72	2.02	50.74	74.00	-23.26	peak
3	11670.000	36.45	13.01	49.46	74.00	-24.54	peak
4	13920.000	35.46	16.17	51.63	74.00	-22.37	peak
5	16590.000	32.22	19.44	51.66	74.00	-22.34	peak
6	17925.000	29.39	23.37	52.76	74.00	-21.24	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### 8.2.4. 802.11n HT40 MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

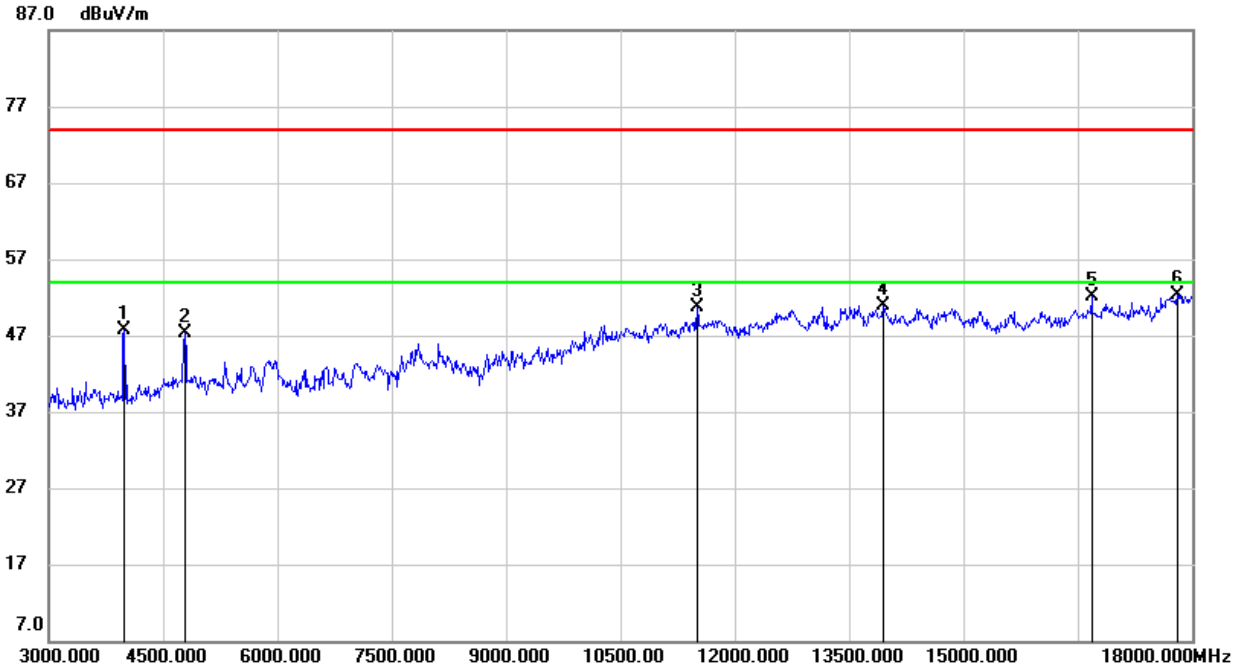


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	50.65	-2.89	47.76	74.00	-26.24	peak
2	4785.000	46.87	0.42	47.29	74.00	-26.71	peak
3	11505.000	37.24	13.42	50.66	74.00	-23.34	peak
4	13950.000	34.88	16.11	50.99	74.00	-23.01	peak
5	16680.000	32.24	19.84	52.08	74.00	-21.92	peak
6	17805.000	29.08	23.31	52.39	74.00	-21.61	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

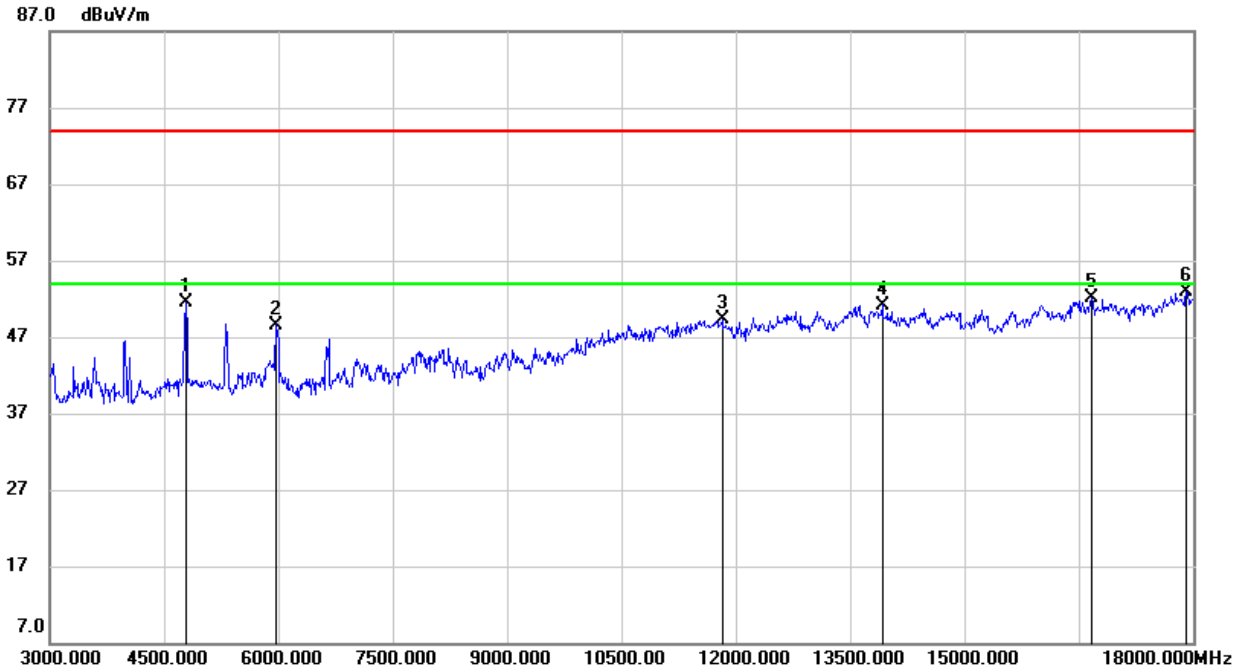


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4785.000	51.09	0.42	51.51	74.00	-22.49	peak
2	5970.000	44.81	3.79	48.60	74.00	-25.40	peak
3	11820.000	36.04	13.19	49.23	74.00	-24.77	peak
4	13920.000	35.03	16.17	51.20	74.00	-22.80	peak
5	16665.000	32.23	19.78	52.01	74.00	-21.99	peak
6	17910.000	29.60	23.35	52.95	74.00	-21.05	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

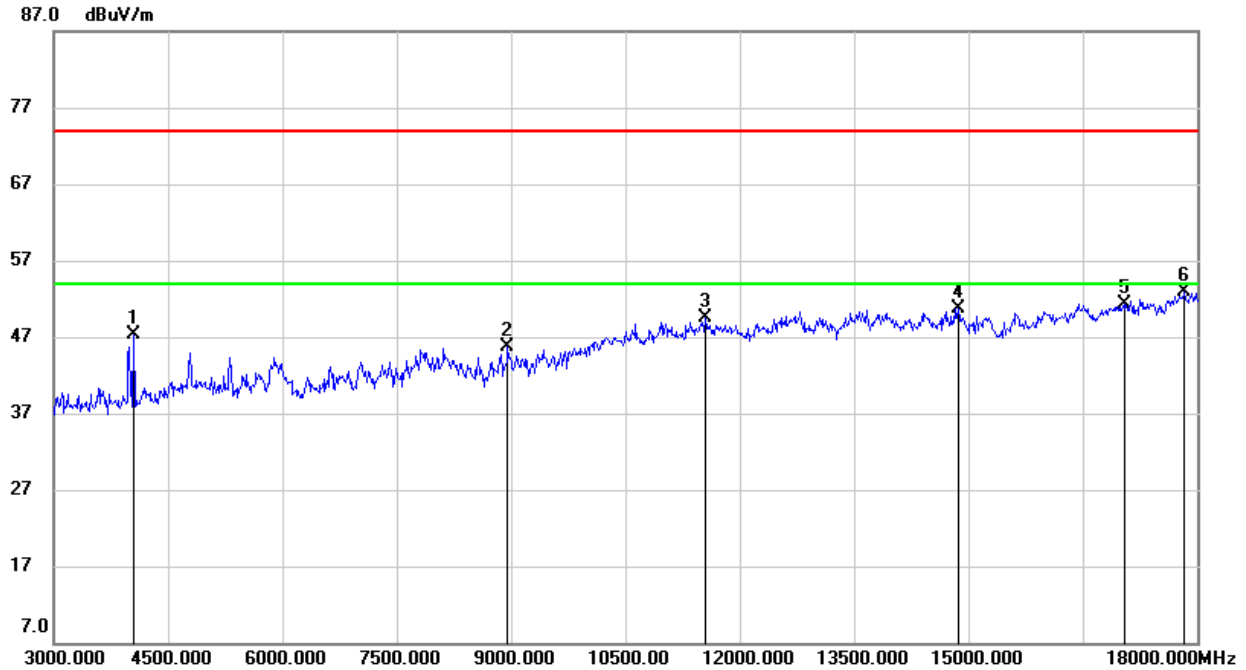


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4050.000	50.28	-2.89	47.39	74.00	-26.61	peak
2	8955.000	36.78	8.84	45.62	74.00	-28.38	peak
3	11550.000	36.26	13.30	49.56	74.00	-24.44	peak
4	14865.000	34.82	15.98	50.80	74.00	-23.20	peak
5	17040.000	30.91	20.49	51.40	74.00	-22.60	peak
6	17835.000	29.52	23.31	52.83	74.00	-21.17	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

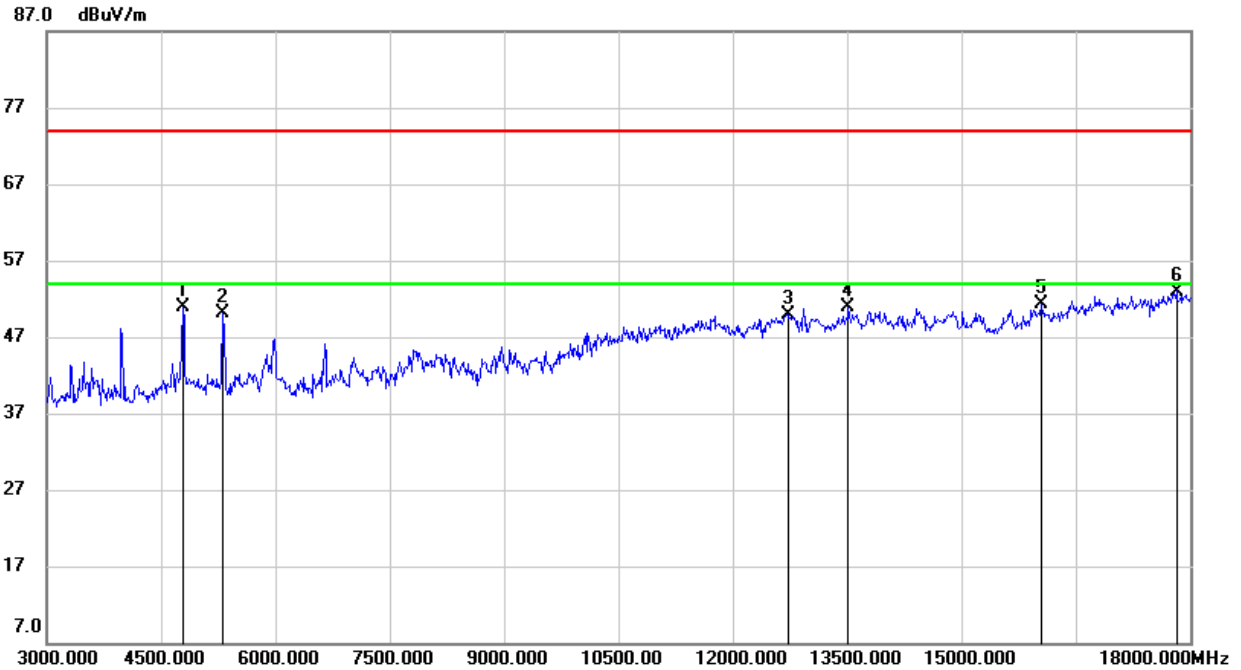


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4785.000	50.42	0.42	50.84	74.00	-23.16	peak
2	5310.000	48.08	2.02	50.10	74.00	-23.90	peak
3	12720.000	35.38	14.57	49.95	74.00	-24.05	peak
4	13515.000	35.09	15.81	50.90	74.00	-23.10	peak
5	16050.000	33.43	17.91	51.34	74.00	-22.66	peak
6	17820.000	29.70	23.30	53.00	74.00	-21.00	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

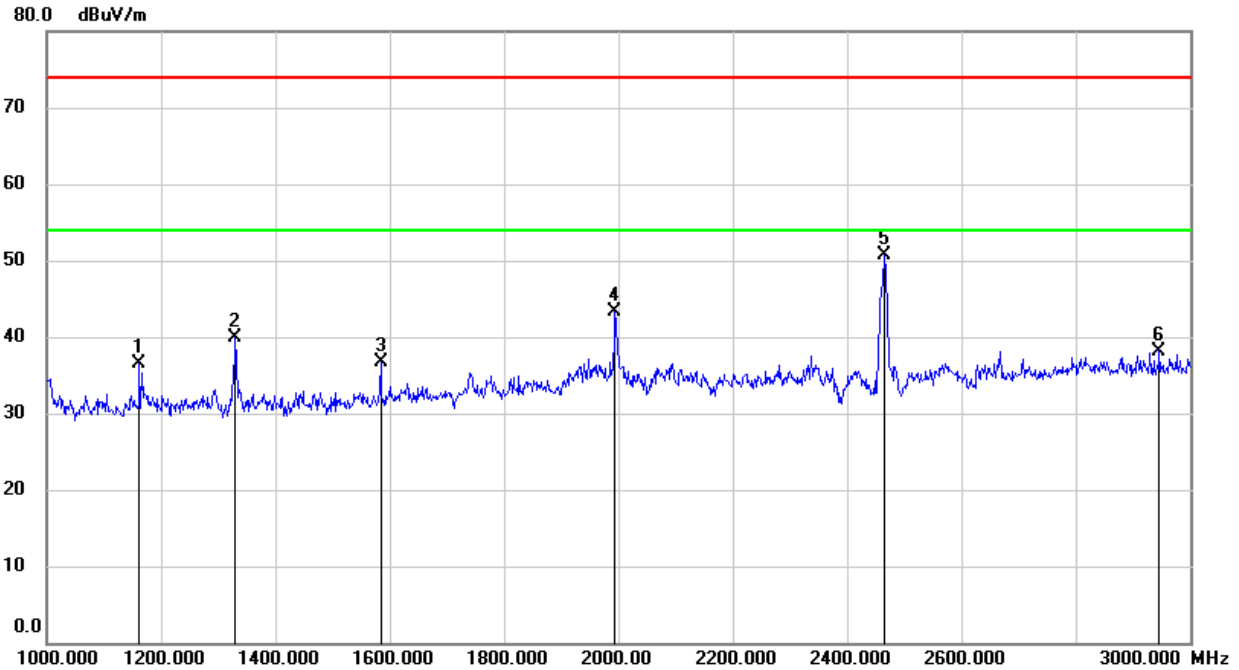


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1162.000	49.54	-13.00	36.54	74.00	-37.46	peak
2	1330.000	52.26	-12.36	39.90	74.00	-34.10	peak
3	1584.000	48.29	-11.53	36.76	74.00	-37.24	peak
4	1994.000	53.16	-9.83	43.33	74.00	-30.67	peak
5	2466.000	58.16	-7.40	50.76	74.00	-23.24	peak
6	2946.000	43.62	-5.42	38.20	74.00	-35.80	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

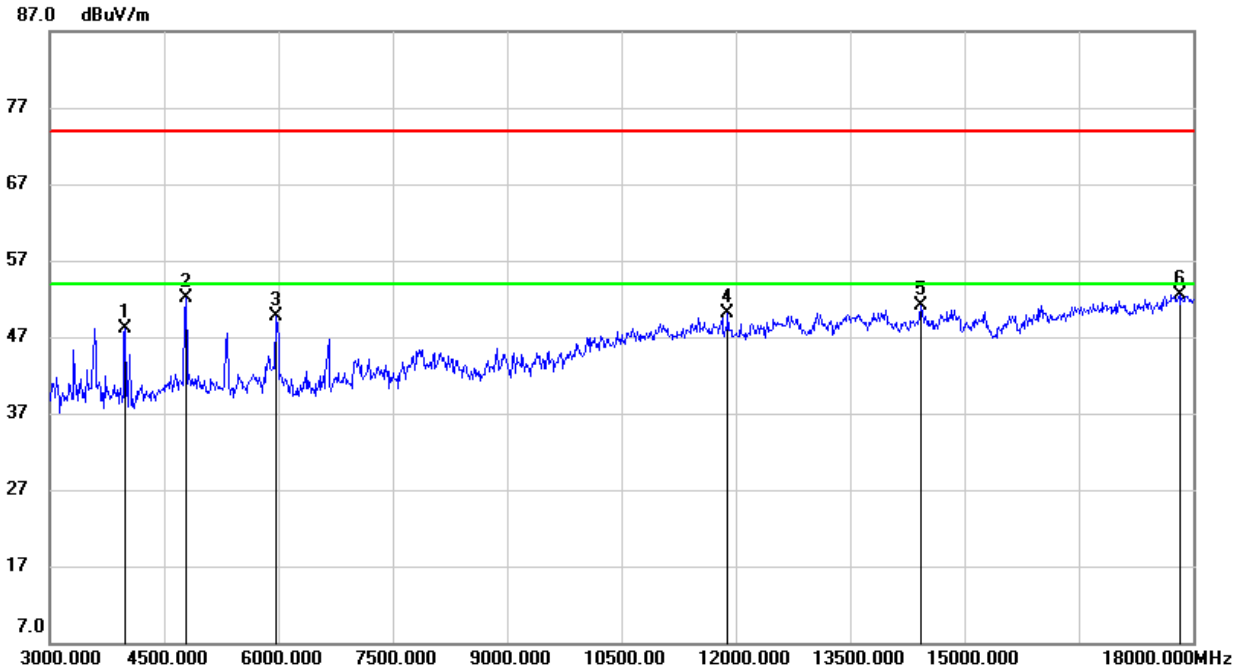

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	51.03	-2.89	48.14	74.00	-25.86	peak
2	4785.000	51.70	0.42	52.12	74.00	-21.88	peak
3	5970.000	45.97	3.79	49.76	74.00	-24.24	peak
4	11895.000	36.90	13.21	50.11	74.00	-23.89	peak
5	14430.000	34.78	16.35	51.13	74.00	-22.87	peak
6	17820.000	29.27	23.30	52.57	74.00	-21.43	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.






### 8.3. SPURIOUS EMISSIONS (1~3GHz)

#### 8.3.1. 802.11b MODE

##### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

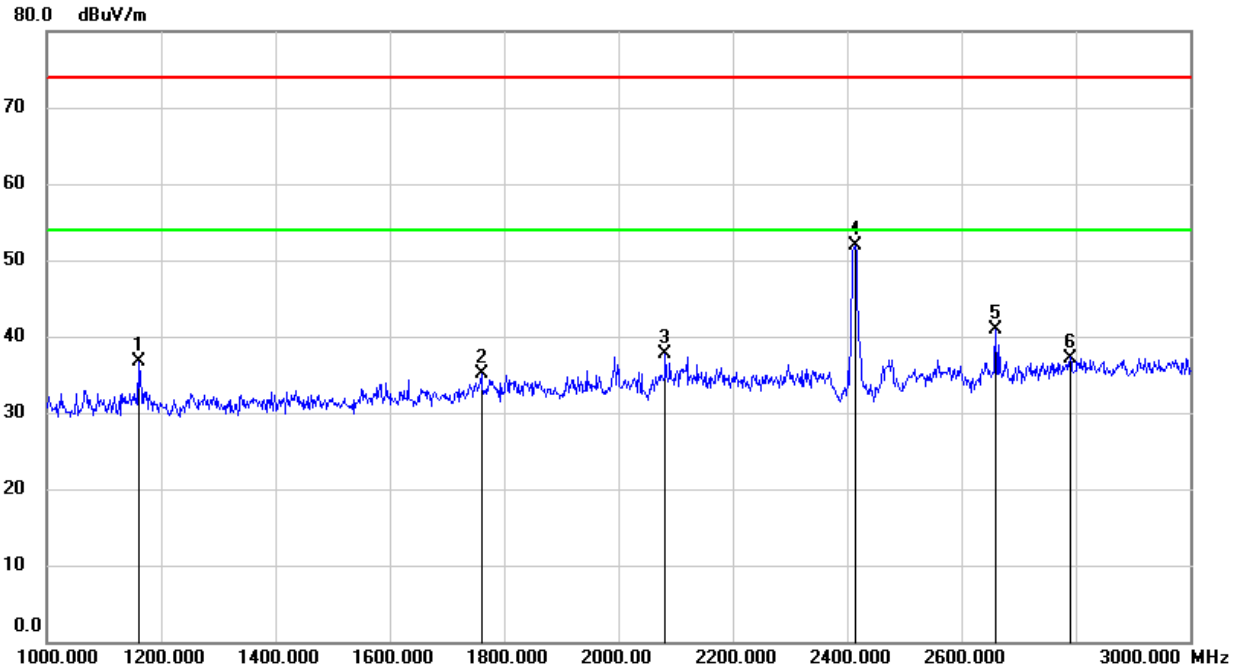


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1160.000	49.69	-13.01	36.68	74.00	-37.32	peak
2	1760.000	45.39	-10.31	35.08	74.00	-38.92	peak
3	2082.000	46.90	-9.28	37.62	74.00	-36.38	peak
4	2412.000	59.65	-7.76	51.89	/	/	fundamental
5	2660.000	48.32	-7.35	40.97	74.00	-33.03	peak
6	2790.000	43.37	-6.17	37.20	74.00	-36.80	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

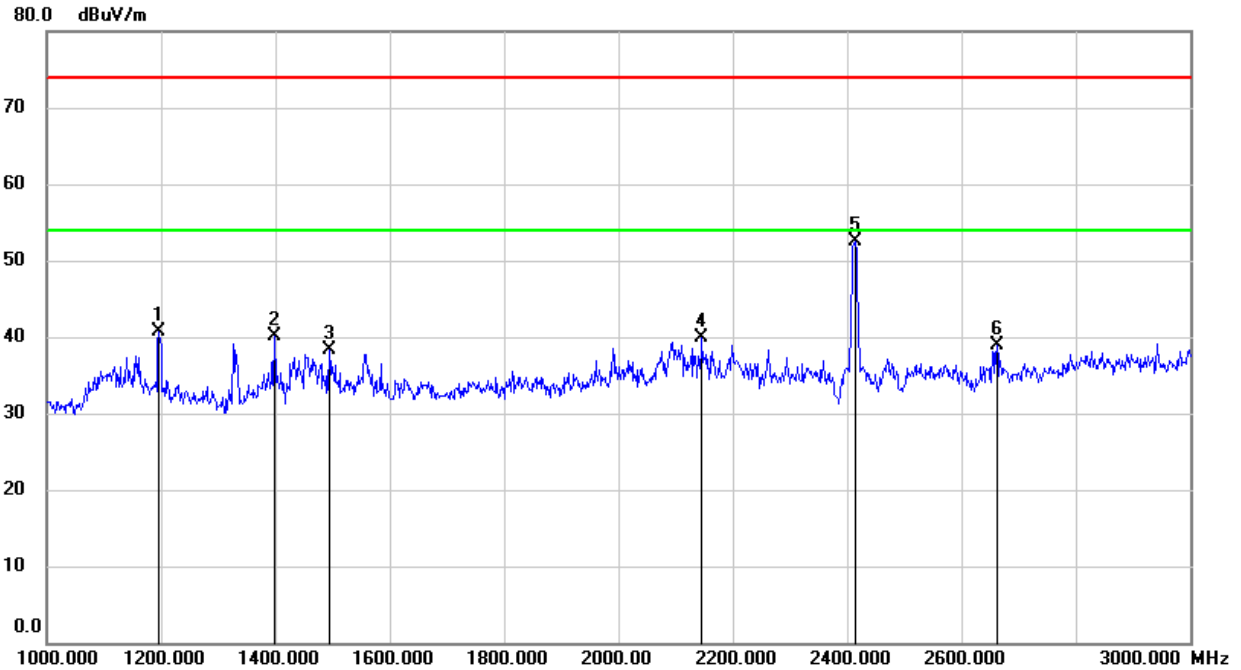


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1196.000	53.38	-12.72	40.66	74.00	-33.34	peak
2	1398.000	52.51	-12.38	40.13	74.00	-33.87	peak
3	1494.000	50.48	-12.22	38.26	74.00	-35.74	peak
4	2146.000	48.90	-8.93	39.97	74.00	-34.03	peak
5	2412.000	60.21	-7.76	52.45	/	/	fundamental
6	2662.000	46.18	-7.35	38.83	74.00	-35.17	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

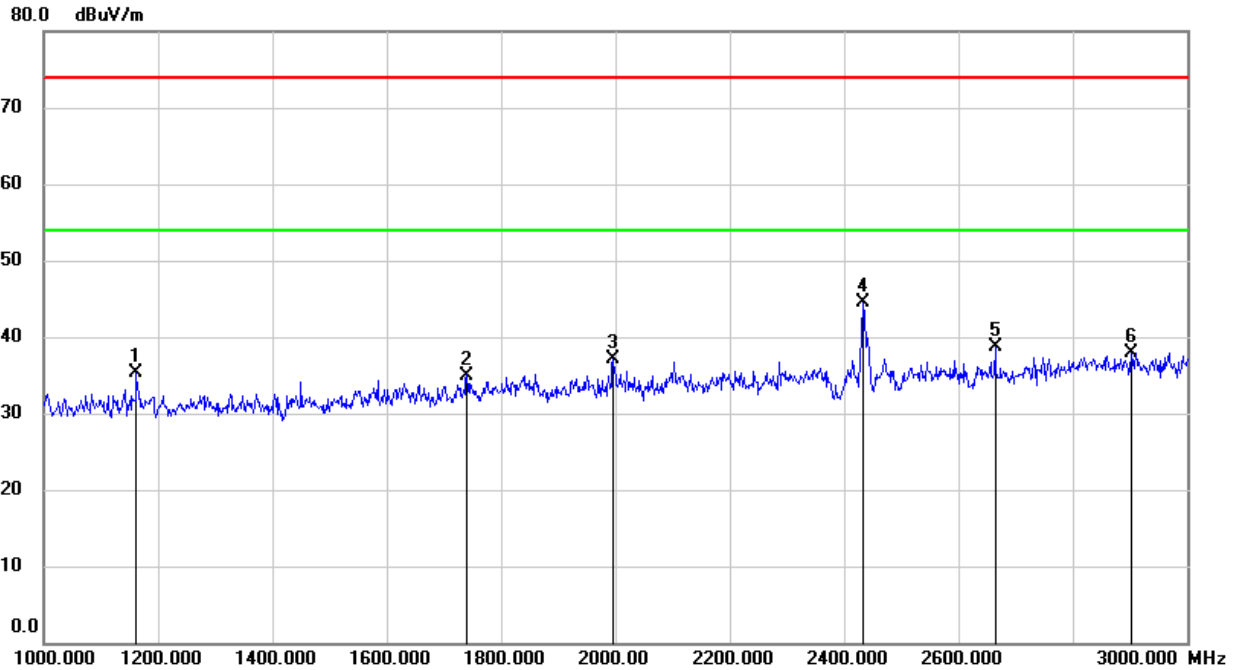


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1162.000	48.37	-13.00	35.37	74.00	-38.63	peak
2	1740.000	45.51	-10.51	35.00	74.00	-39.00	peak
3	1996.000	46.98	-9.83	37.15	74.00	-36.85	peak
4	2437.000	52.19	-7.62	44.57	/	/	fundamental
5	2664.000	46.11	-7.34	38.77	74.00	-35.23	peak
6	2902.000	43.49	-5.51	37.98	74.00	-36.02	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

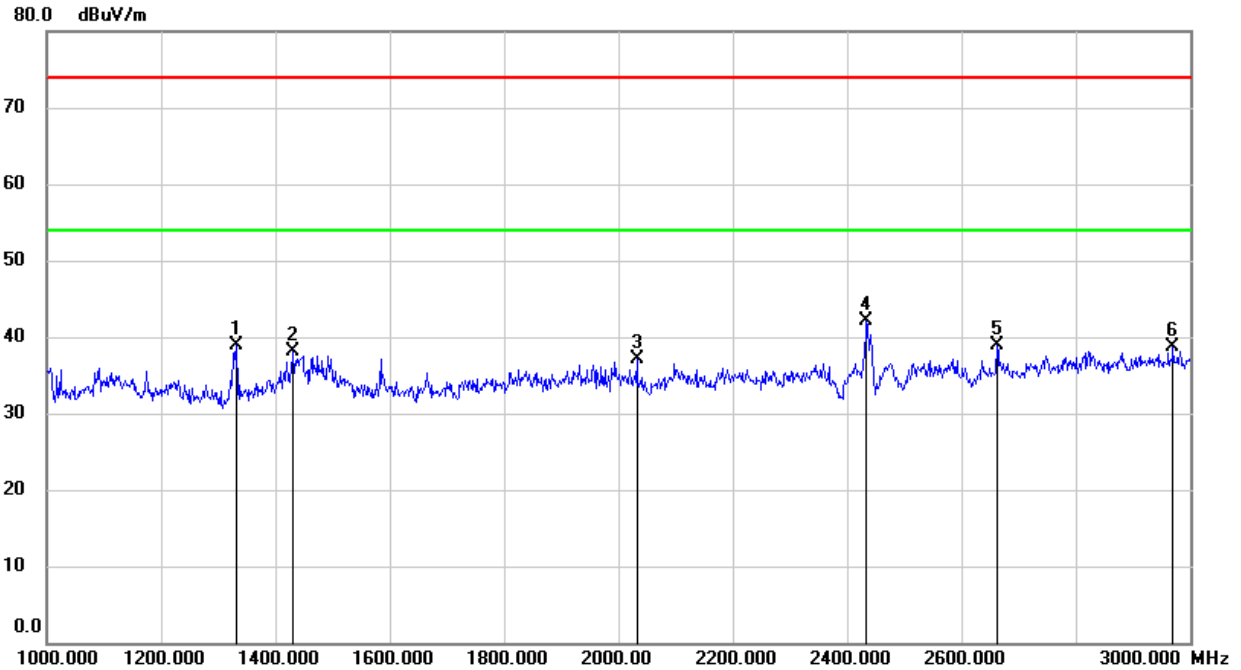


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1332.000	51.28	-12.35	38.93	74.00	-35.07	peak
2	1430.000	50.46	-12.34	38.12	74.00	-35.88	peak
3	2032.000	46.77	-9.60	37.17	74.00	-36.83	peak
4	2437.000	49.80	-7.62	42.18	/	/	fundamental
5	2662.000	46.30	-7.35	38.95	74.00	-35.05	peak
6	2970.000	44.00	-5.37	38.63	74.00	-35.37	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

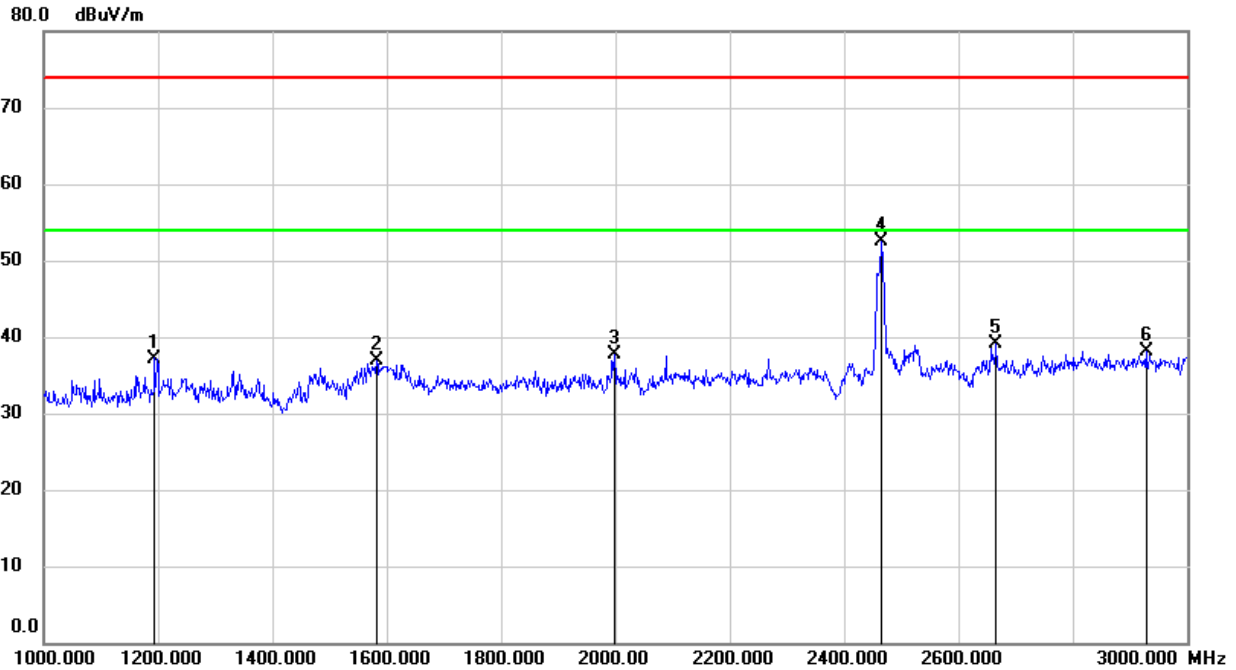


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1194.000	49.92	-12.72	37.20	74.00	-36.80	peak
2	1582.000	48.46	-11.54	36.92	74.00	-37.08	peak
3	1998.000	47.59	-9.83	37.76	74.00	-36.24	peak
4	2462.000	59.90	-7.40	52.50	/	/	fundamental
5	2666.000	46.50	-7.32	39.18	74.00	-34.82	peak
6	2928.000	43.53	-5.46	38.07	74.00	-35.93	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

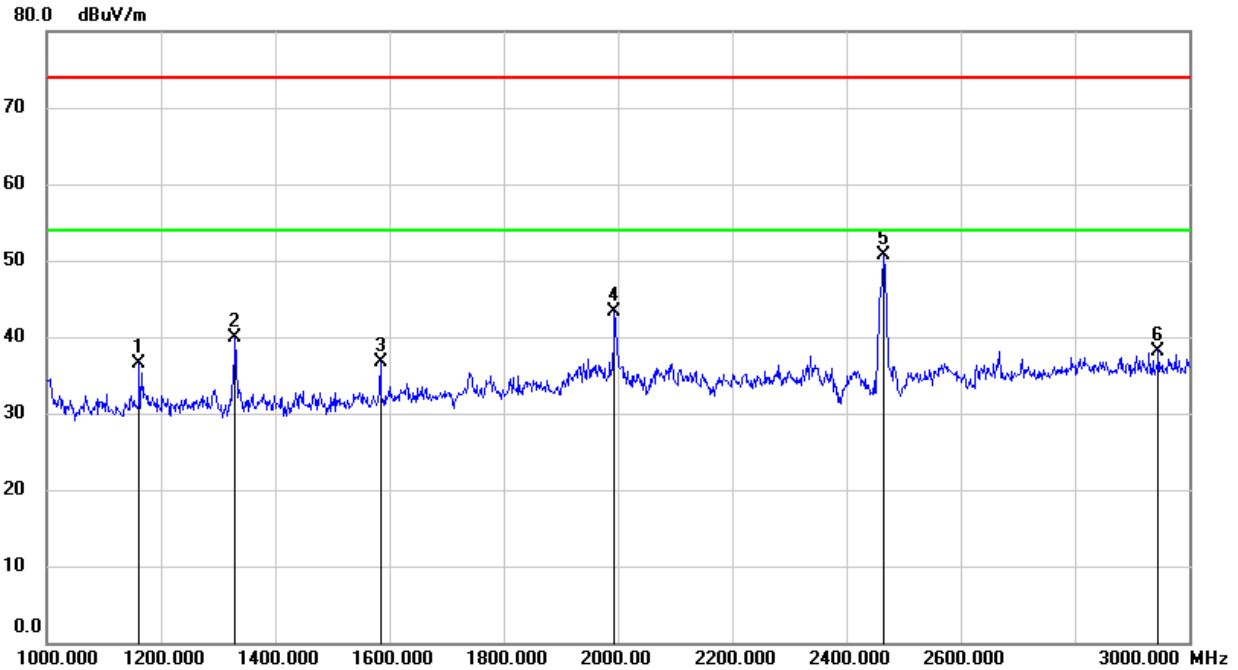


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1162.000	49.54	-13.00	36.54	74.00	-37.46	peak
2	1330.000	52.26	-12.36	39.90	74.00	-34.10	peak
3	1584.000	48.29	-11.53	36.76	74.00	-37.24	peak
4	1994.000	53.16	-9.83	43.33	74.00	-30.67	peak
5	2462.000	58.16	-7.40	50.76	/	/	fundamental
6	2946.000	43.62	-5.42	38.20	74.00	-35.80	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### 8.3.2. 802.11g MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

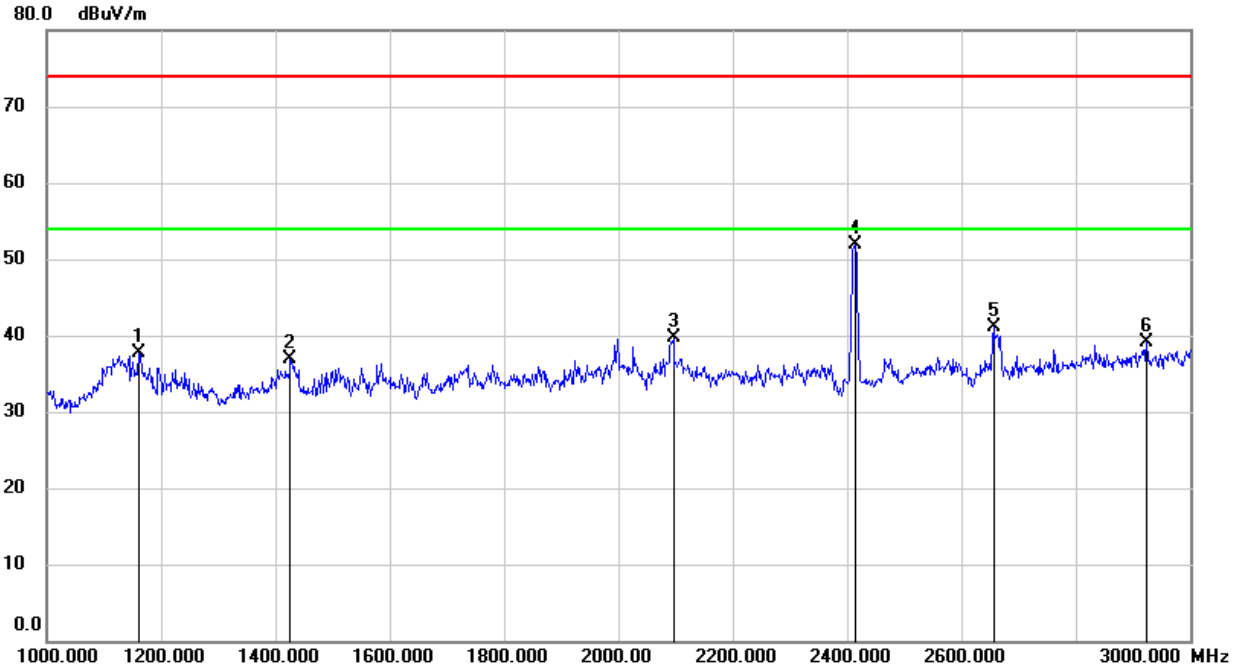


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1160.000	50.79	-13.01	37.78	74.00	-36.22	peak
2	1426.000	49.26	-12.34	36.92	74.00	-37.08	peak
3	2096.000	48.81	-9.19	39.62	74.00	-34.38	peak
4	2412.000	59.58	-7.76	51.82	/	/	fundamental
5	2656.000	48.55	-7.38	41.17	74.00	-32.83	peak
6	2924.000	44.55	-5.47	39.08	74.00	-34.92	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

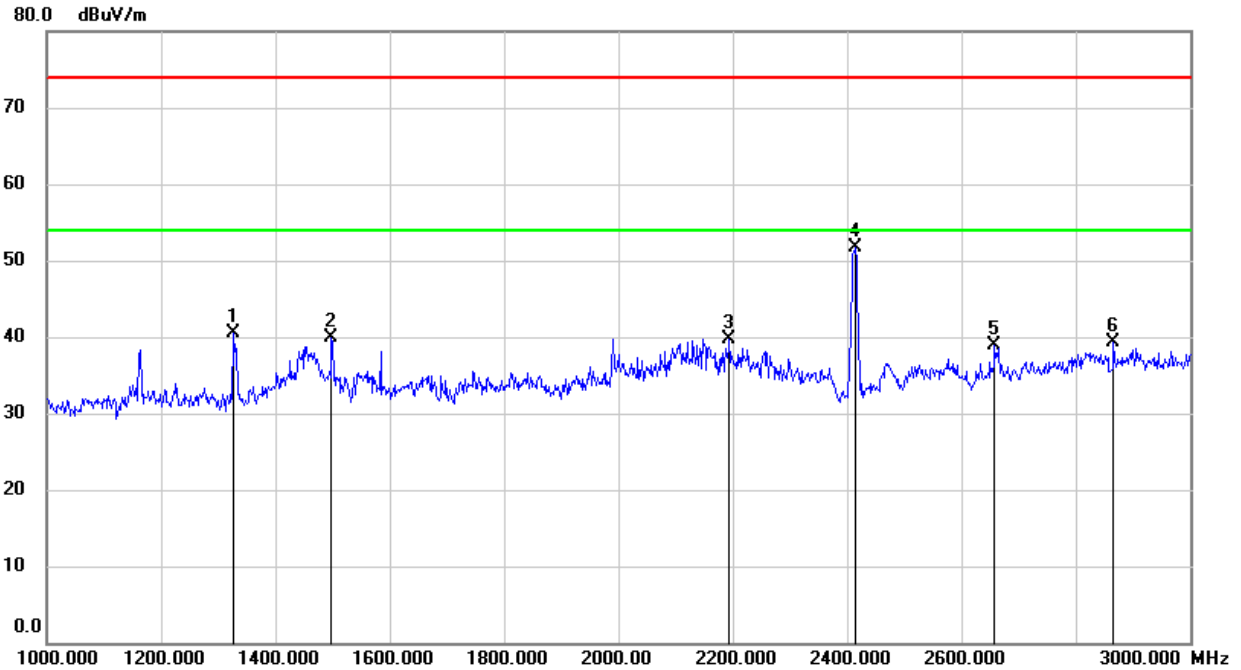


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1326.000	52.84	-12.35	40.49	74.00	-33.51	peak
2	1498.000	52.20	-12.21	39.99	74.00	-34.01	peak
3	2194.000	48.35	-8.70	39.65	74.00	-34.35	peak
4	2412.000	59.40	-7.76	51.64	/	/	fundamental
5	2658.000	46.21	-7.37	38.84	74.00	-35.16	peak
6	2866.000	44.91	-5.70	39.21	74.00	-34.79	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.





**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

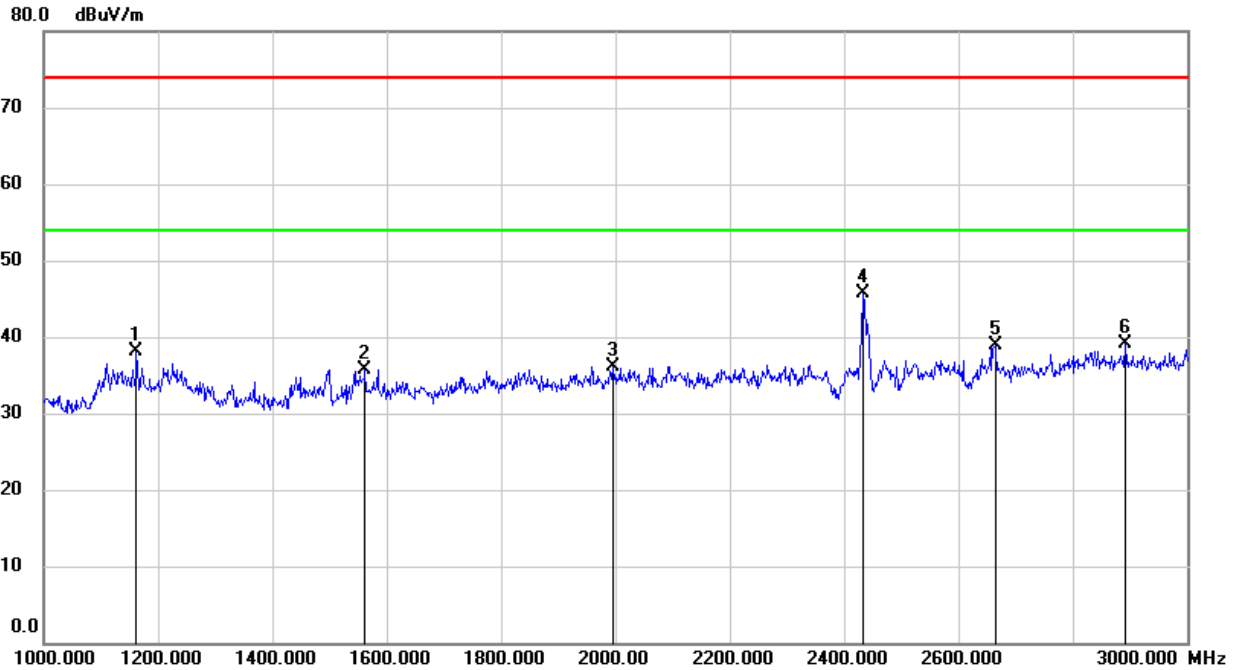


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1162.000	51.19	-13.00	38.19	74.00	-35.81	peak
2	1562.000	47.34	-11.70	35.64	74.00	-38.36	peak
3	1996.000	45.95	-9.83	36.12	74.00	-37.88	peak
4	2437.000	53.29	-7.62	45.67	/	/	fundamental
5	2664.000	46.15	-7.34	38.81	74.00	-35.19	peak
6	2892.000	44.71	-5.57	39.14	74.00	-34.86	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

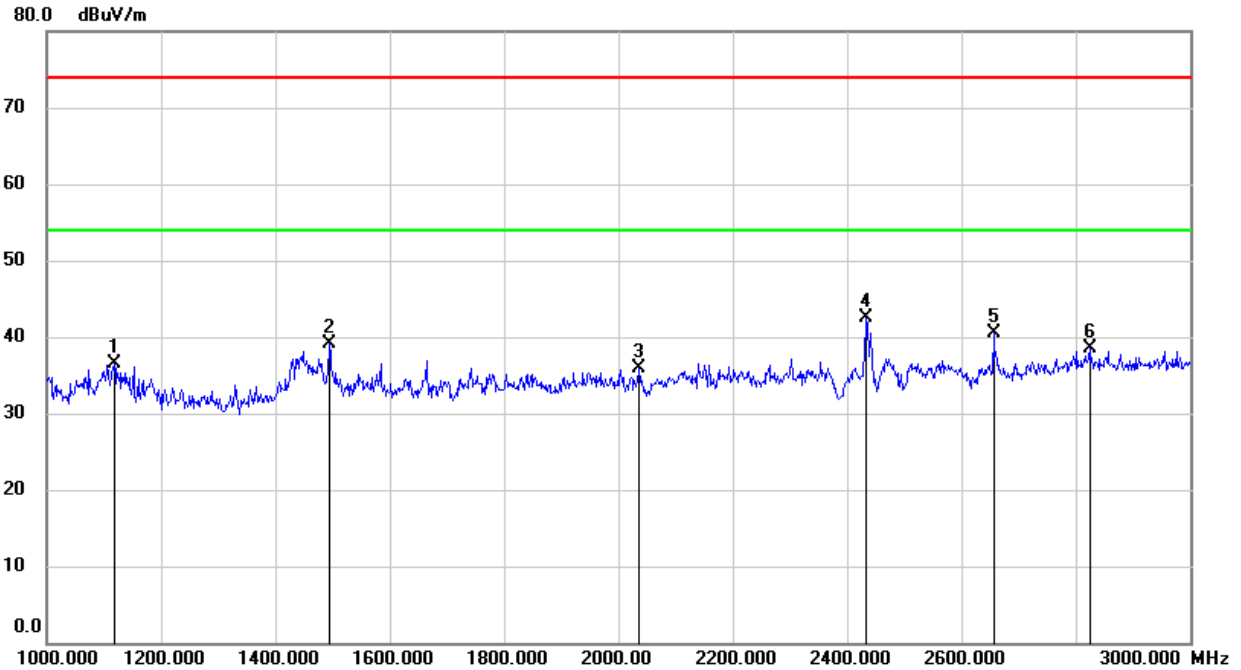


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1118.000	49.83	-13.37	36.46	74.00	-37.54	peak
2	1494.000	51.36	-12.22	39.14	74.00	-34.86	peak
3	2036.000	45.40	-9.59	35.81	74.00	-38.19	peak
4	2437.000	50.15	-7.62	42.53	/	/	fundamental
5	2656.000	47.86	-7.38	40.48	74.00	-33.52	peak
6	2824.000	44.36	-5.92	38.44	74.00	-35.56	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

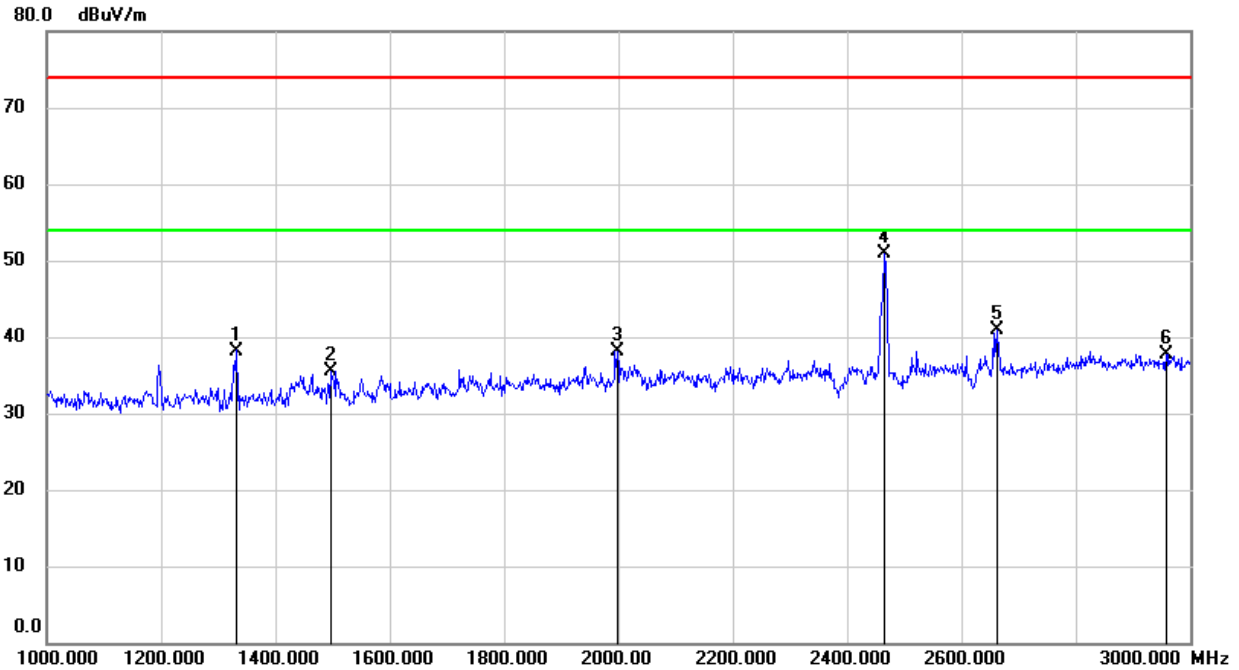


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1332.000	50.55	-12.35	38.20	74.00	-35.80	peak
2	1496.000	47.72	-12.22	35.50	74.00	-38.50	peak
3	1998.000	47.91	-9.83	38.08	74.00	-35.92	peak
4	2462.000	58.28	-7.40	50.88	/	/	fundamental
5	2662.000	48.17	-7.35	40.82	74.00	-33.18	peak
6	2958.000	43.07	-5.39	37.68	74.00	-36.32	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

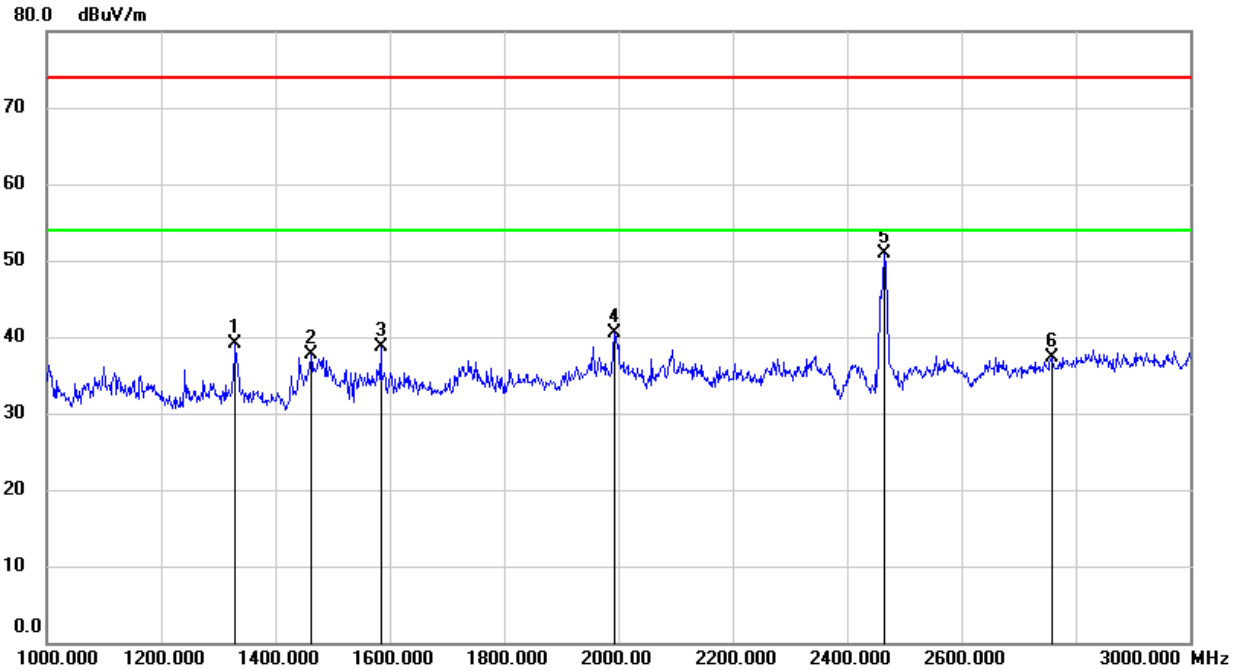


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1330.000	51.47	-12.36	39.11	74.00	-34.89	peak
2	1462.000	49.99	-12.27	37.72	74.00	-36.28	peak
3	1584.000	50.21	-11.53	38.68	74.00	-35.32	peak
4	1992.000	50.31	-9.83	40.48	74.00	-33.52	peak
5	2462.000	58.35	-7.40	50.95	/	/	fundamental
6	2758.000	43.86	-6.51	37.35	74.00	-36.65	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### 8.3.3. 802.11n HT20 MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

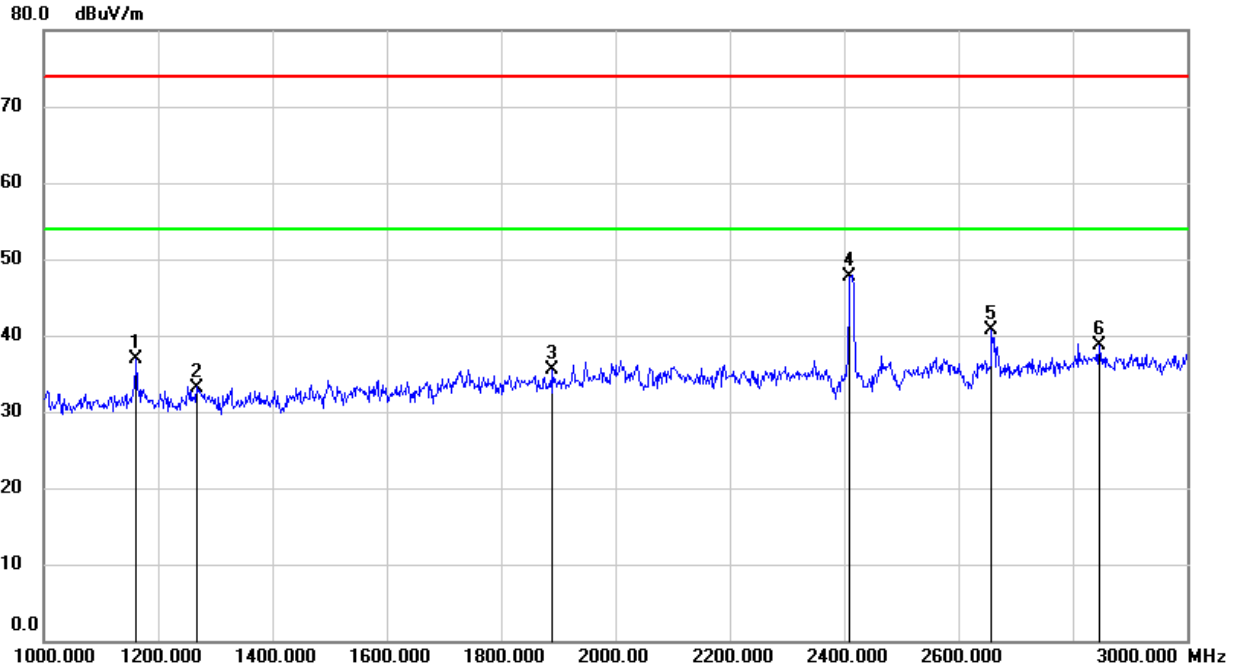


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1162.000	49.95	-13.00	36.95	74.00	-37.05	peak
2	1268.000	45.65	-12.45	33.20	74.00	-40.80	peak
3	1890.000	45.47	-9.95	35.52	74.00	-38.48	peak
4	2412.000	55.44	-7.78	47.66	/	/	fundamental
5	2658.000	48.11	-7.37	40.74	74.00	-33.26	peak
6	2846.000	44.57	-5.80	38.77	74.00	-35.23	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

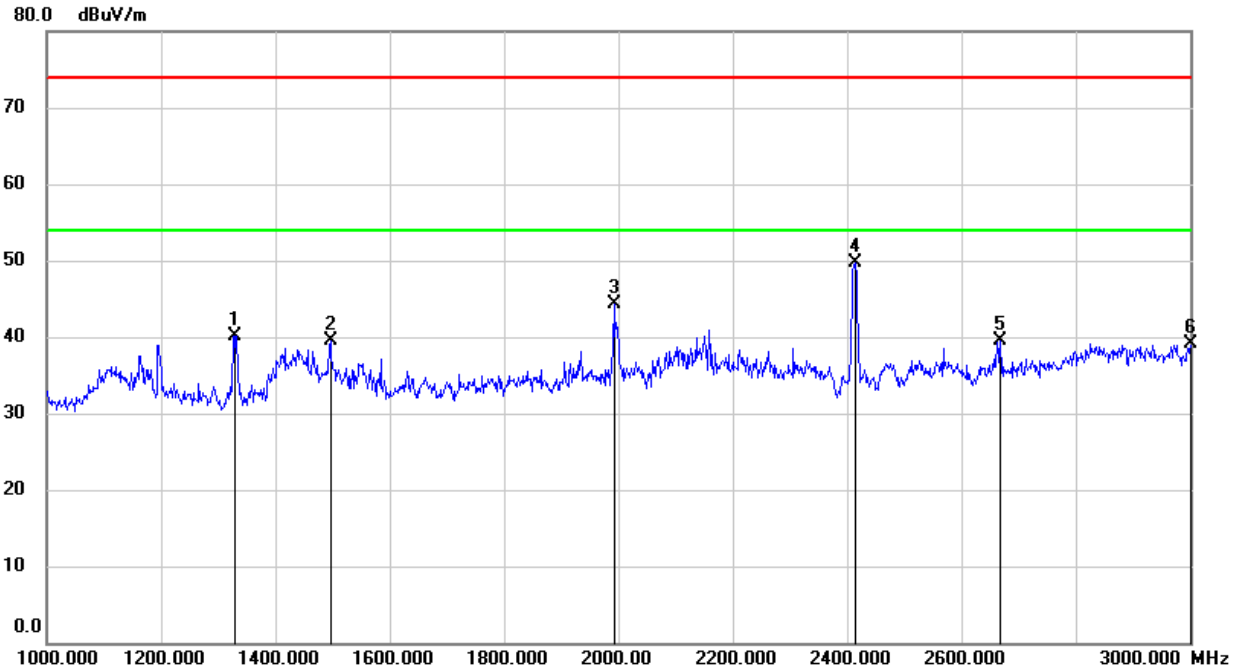


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1330.000	52.47	-12.36	40.11	74.00	-33.89	peak
2	1496.000	51.66	-12.22	39.44	74.00	-34.56	peak
3	1992.000	54.14	-9.83	44.31	74.00	-29.69	peak
4	2412.000	57.45	-7.76	49.69	/	/	fundamental
5	2668.000	46.81	-7.32	39.49	74.00	-34.51	peak
6	3000.000	44.38	-5.30	39.08	74.00	-34.92	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

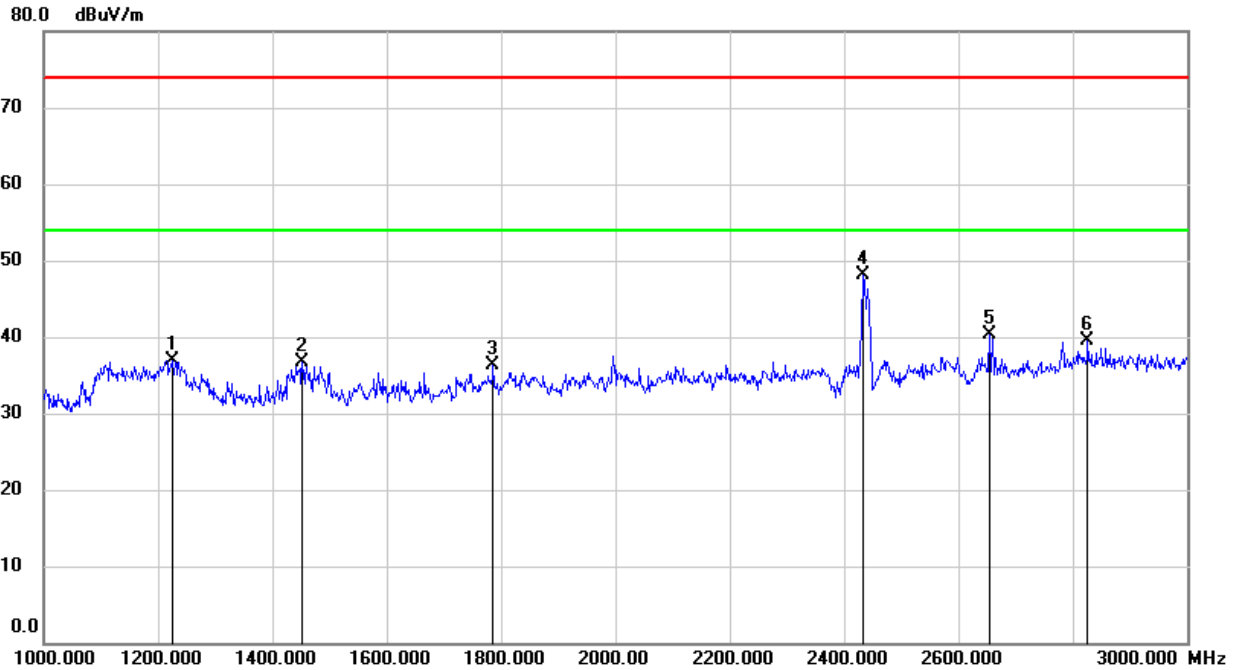


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1226.000	49.59	-12.59	37.00	74.00	-37.00	peak
2	1452.000	49.02	-12.29	36.73	74.00	-37.27	peak
3	1786.000	46.38	-10.05	36.33	74.00	-37.67	peak
4	2437.000	55.74	-7.62	48.12	/	/	fundamental
5	2654.000	47.60	-7.39	40.21	74.00	-33.79	peak
6	2826.000	45.36	-5.92	39.44	74.00	-34.56	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.  
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

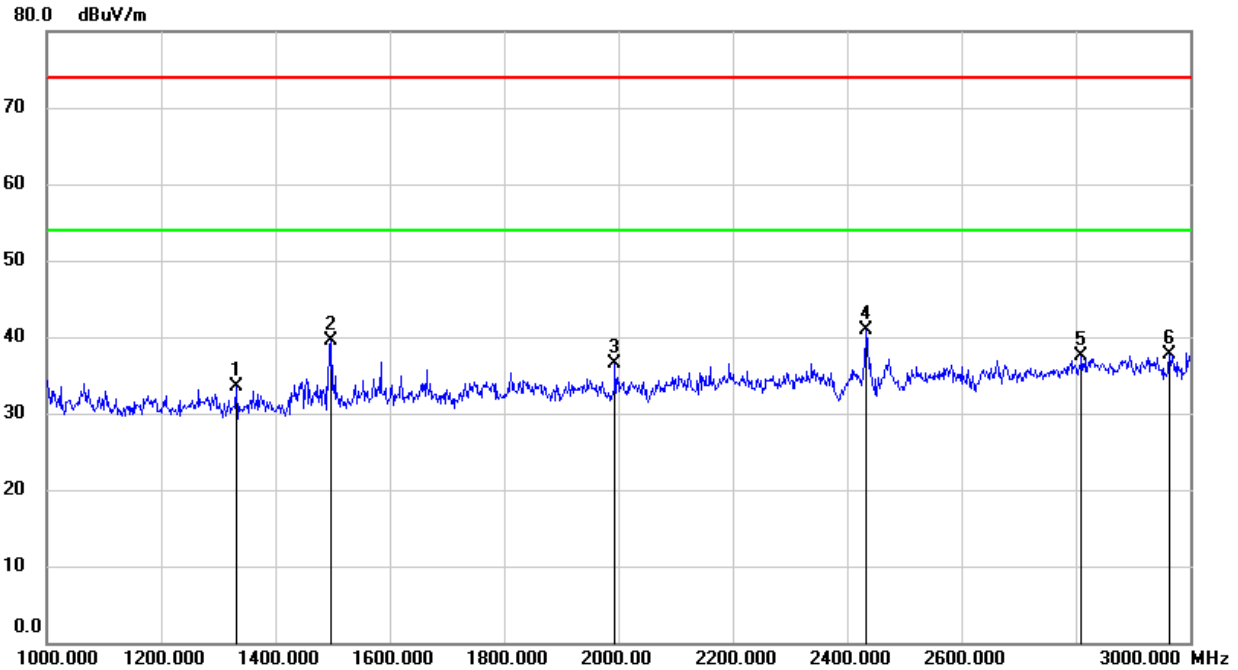


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1332.000	45.91	-12.35	33.56	74.00	-40.44	peak
2	1498.000	51.69	-12.21	39.48	74.00	-34.52	peak
3	1994.000	46.35	-9.83	36.52	74.00	-37.48	peak
4	2437.000	48.46	-7.62	40.84	/	/	fundamental
5	2810.000	43.53	-6.00	37.53	74.00	-36.47	peak
6	2964.000	43.08	-5.38	37.70	74.00	-36.30	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.





**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

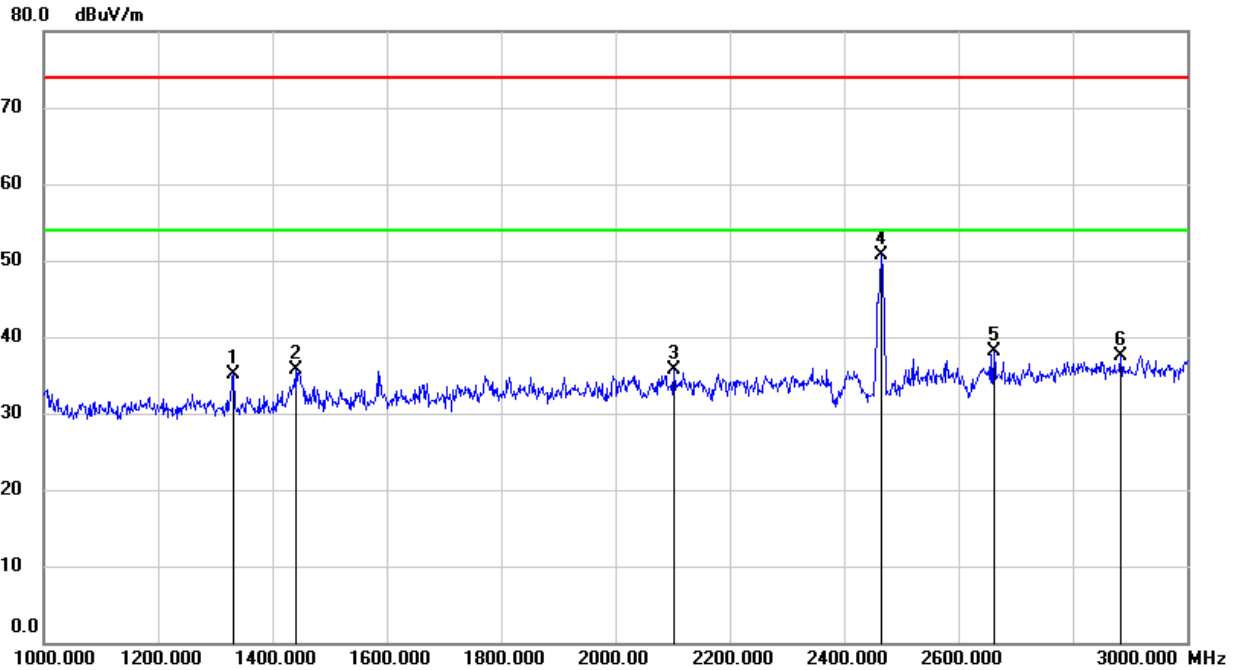


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1332.000	47.49	-12.35	35.14	74.00	-38.86	peak
2	1440.000	48.00	-12.32	35.68	74.00	-38.32	peak
3	2102.000	44.81	-9.15	35.66	74.00	-38.34	peak
4	2462.000	58.18	-7.40	50.78	/	/	fundamental
5	2662.000	45.44	-7.35	38.09	74.00	-35.91	peak
6	2884.000	43.20	-5.61	37.59	74.00	-36.41	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

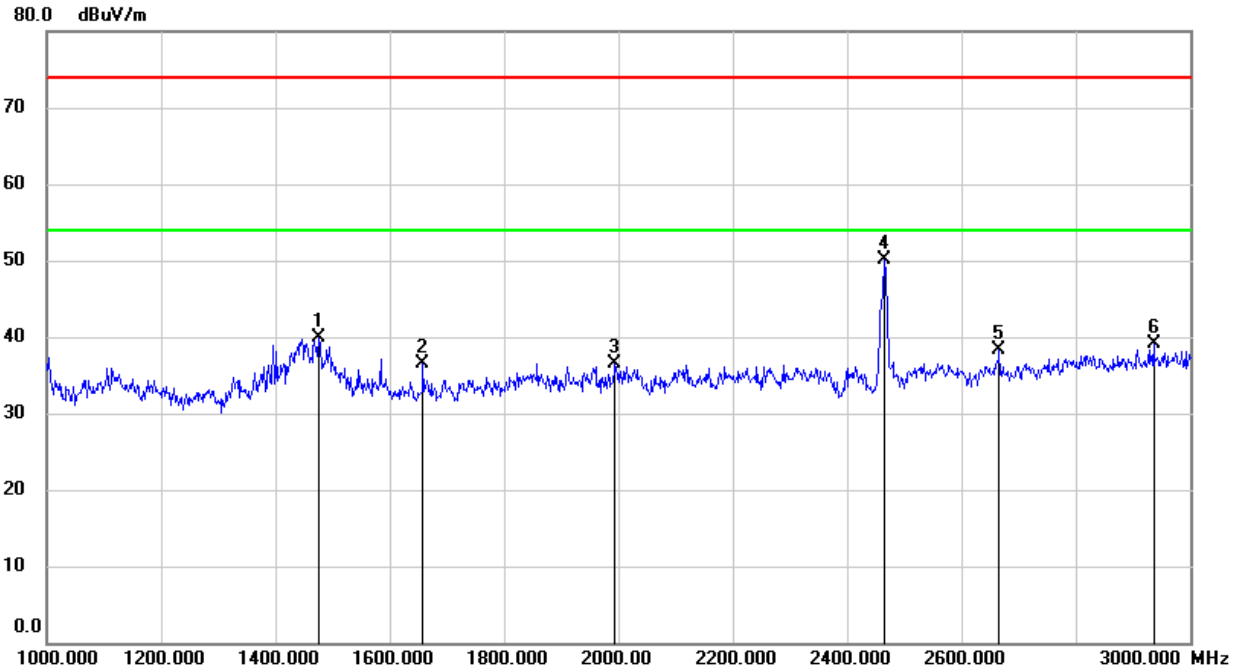


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1476.000	52.08	-12.25	39.83	74.00	-34.17	peak
2	1658.000	47.53	-11.11	36.42	74.00	-37.58	peak
3	1994.000	46.35	-9.83	36.52	74.00	-37.48	peak
4	2462.000	57.46	-7.40	50.06	/	/	fundamental
5	2666.000	45.69	-7.32	38.37	74.00	-35.63	peak
6	2936.000	44.54	-5.44	39.10	74.00	-34.90	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



### 8.3.4. 802.11n HT40 MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

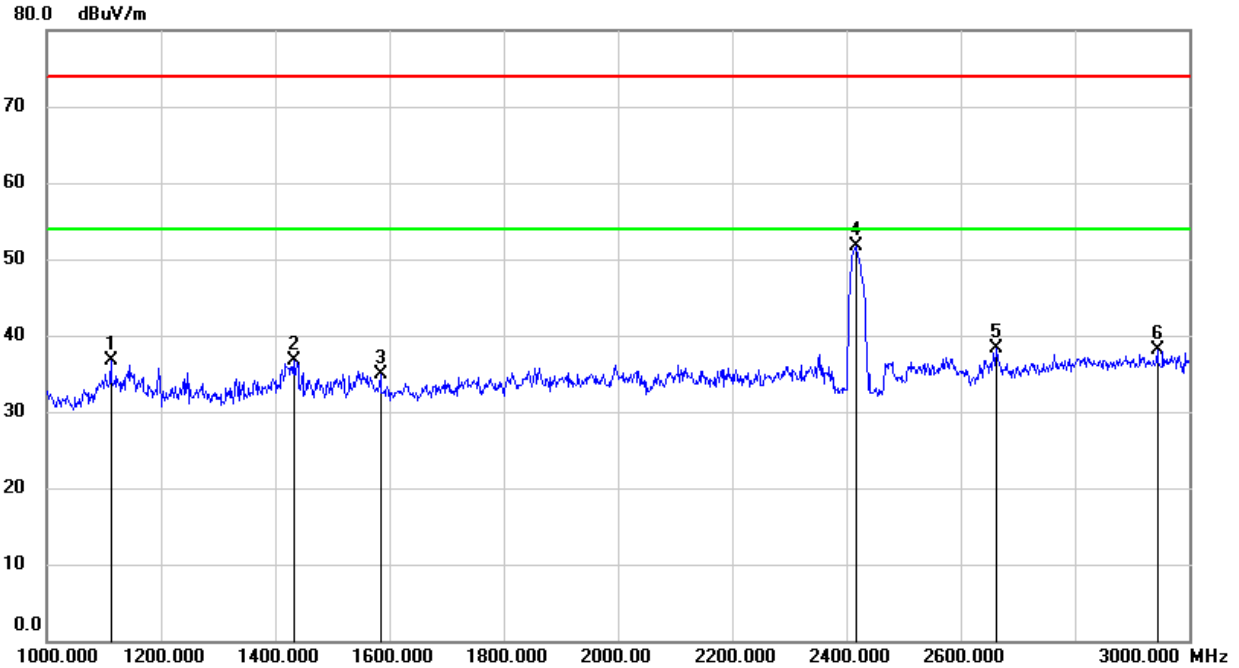


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1112.000	50.10	-13.42	36.68	74.00	-37.32	peak
2	1432.000	49.07	-12.33	36.74	74.00	-37.26	peak
3	1584.000	46.44	-11.53	34.91	74.00	-39.09	peak
4	2412.000	59.42	-7.75	51.67	/	/	fundamental
5	2662.000	45.67	-7.35	38.32	74.00	-35.68	peak
6	2944.000	43.47	-5.42	38.05	74.00	-35.95	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
  5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

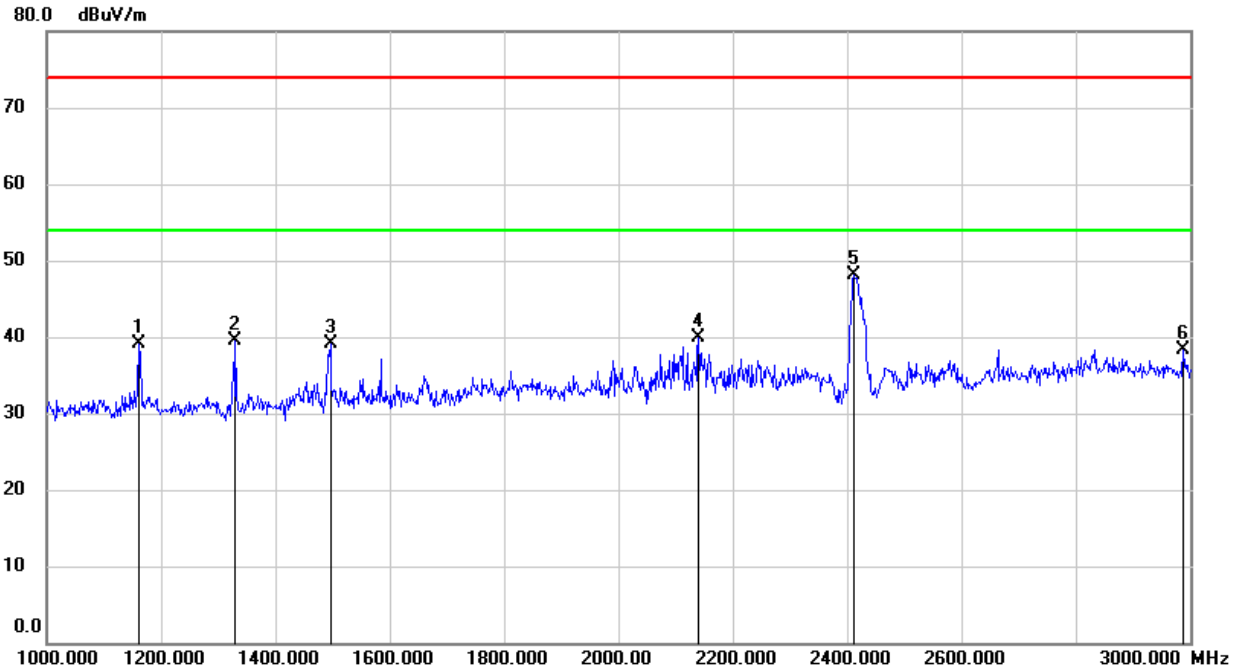


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1160.000	52.18	-13.01	39.17	74.00	-34.83	peak
2	1330.000	51.93	-12.36	39.57	74.00	-34.43	peak
3	1496.000	51.37	-12.22	39.15	74.00	-34.85	peak
4	2140.000	48.92	-8.97	39.95	74.00	-34.05	peak
5	2412.000	55.96	-7.77	48.19	/	/	fundamental
6	2988.000	43.63	-5.33	38.30	74.00	-35.70	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

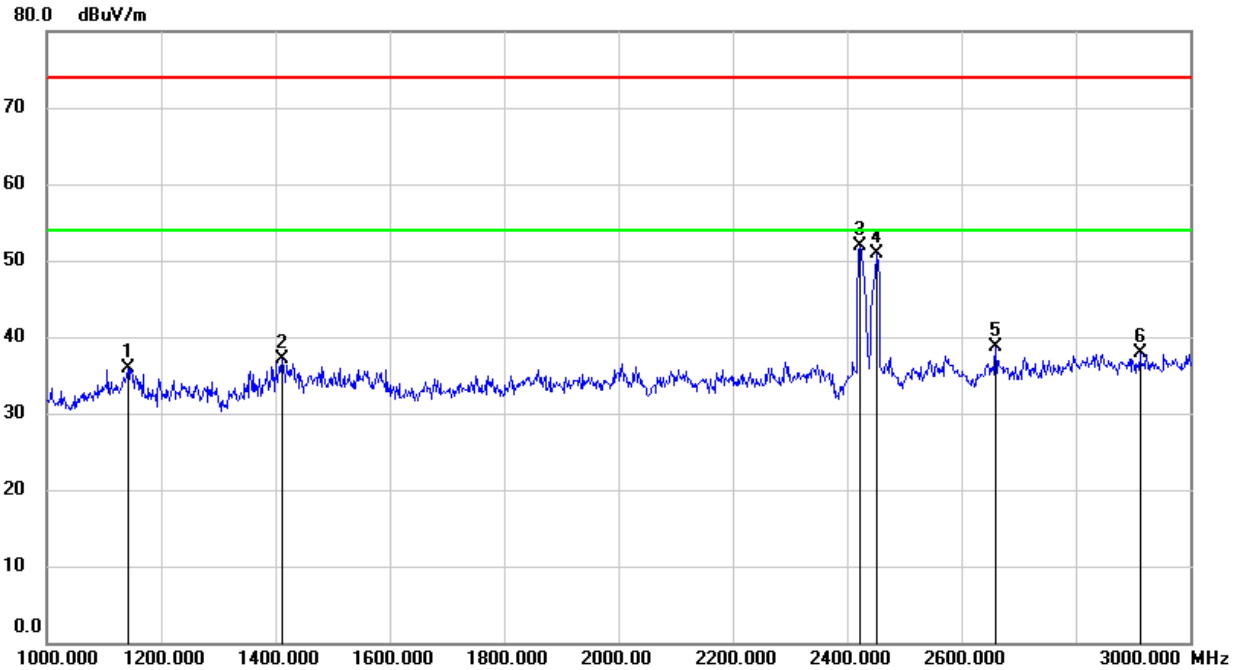


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1142.000	49.04	-13.16	35.88	74.00	-38.12	peak
2	1412.000	49.43	-12.36	37.07	74.00	-36.93	peak
3	2422.000	59.52	-7.71	51.81	/	/	fundamental
4	2452.000	58.39	-7.50	50.89	/	/	fundamental
5	2660.000	46.06	-7.35	38.71	74.00	-35.29	peak
6	2912.000	43.49	-5.50	37.99	74.00	-36.01	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

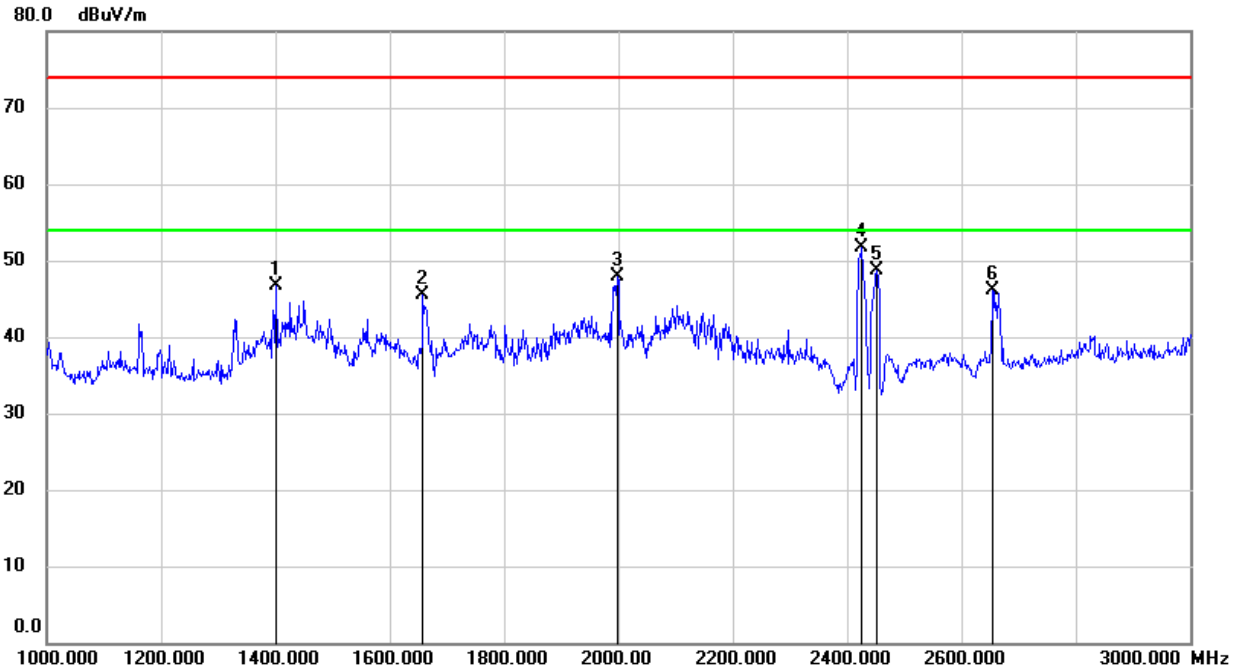


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1400.000	59.12	-12.38	46.74	74.00	-27.26	peak
2	1658.000	56.52	-11.11	45.41	74.00	-28.59	peak
3	1998.000	57.66	-9.83	47.83	74.00	-26.17	peak
4	2422.000	59.39	-7.67	51.72	/	/	fundamental
5	2452.000	56.16	-7.50	48.66	/	/	fundamental
6	2654.000	53.41	-7.39	46.02	74.00	-27.98	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

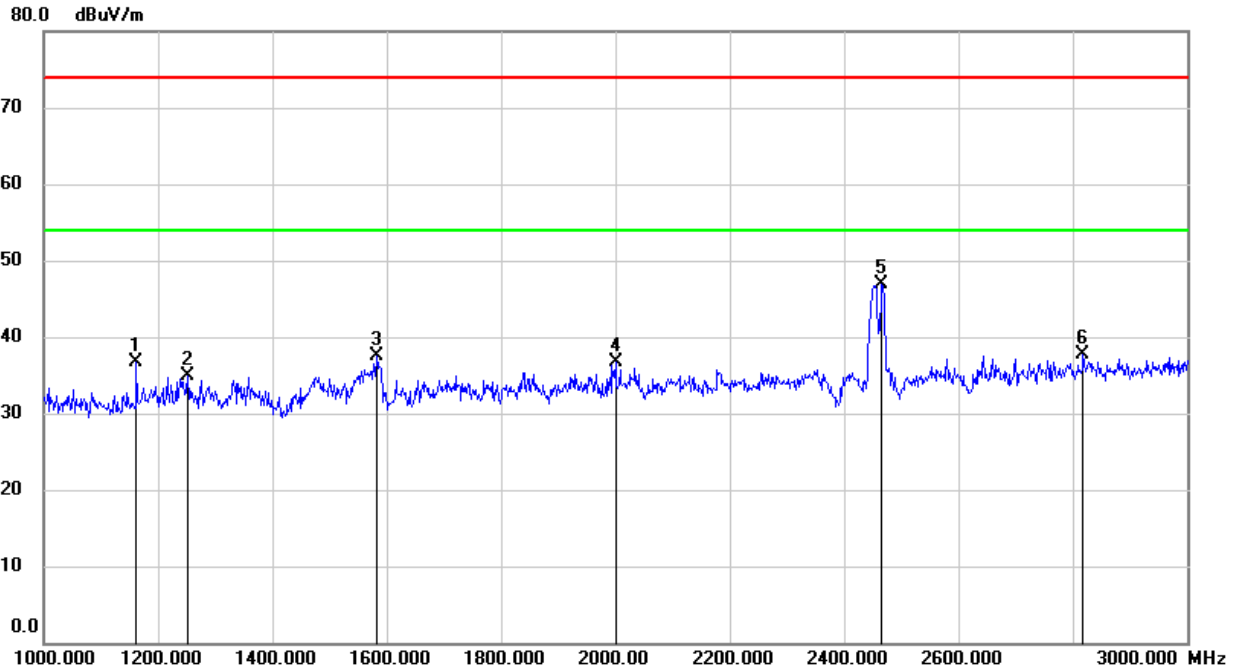


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1162.000	49.61	-13.00	36.61	74.00	-37.39	peak
2	1252.000	47.48	-12.51	34.97	74.00	-39.03	peak
3	1582.000	48.95	-11.54	37.41	74.00	-36.59	peak
4	2000.000	46.50	-9.82	36.68	74.00	-37.32	peak
5	2462.000	54.34	-7.40	46.94	/	/	fundamental
6	2818.000	43.58	-5.97	37.61	74.00	-36.39	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

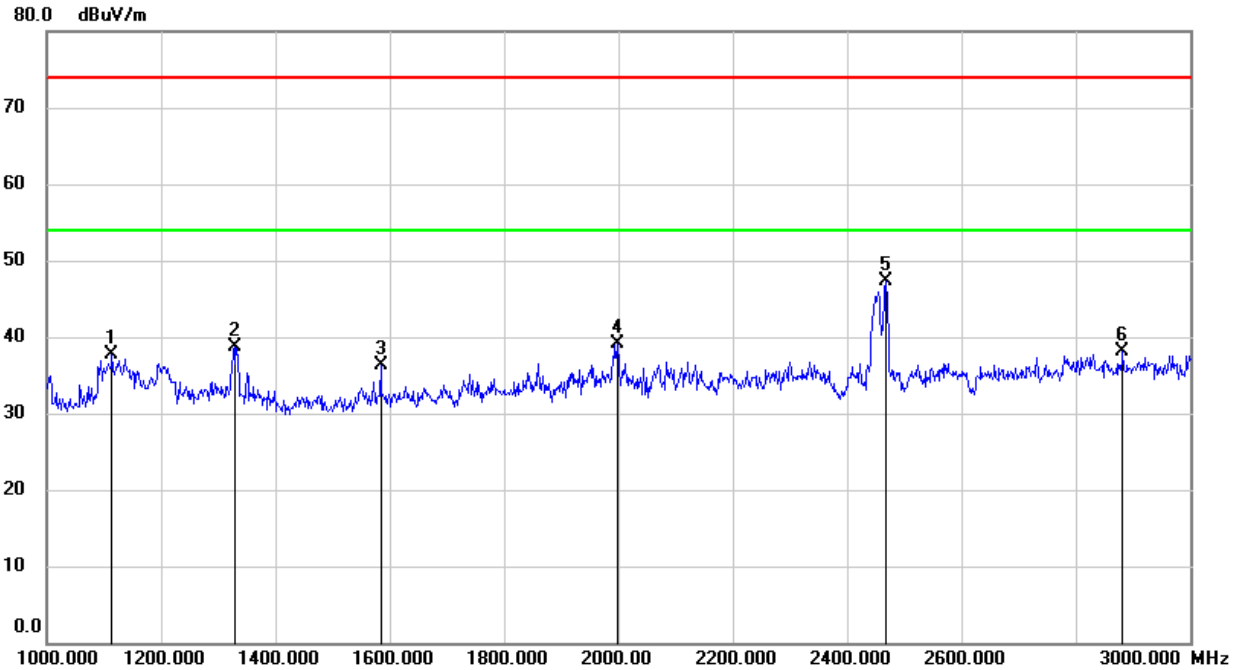

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1114.000	51.00	-13.39	37.61	74.00	-36.39	peak
2	1328.000	51.15	-12.36	38.79	74.00	-35.21	peak
3	1584.000	47.80	-11.53	36.27	74.00	-37.73	peak
4	1998.000	48.95	-9.83	39.12	74.00	-34.88	peak
5	2462.000	54.62	-7.39	47.23	/	/	fundamental
6	2882.000	43.75	-5.61	38.14	74.00	-35.86	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.






## 8.4. SPURIOUS EMISSIONS (18~26GHz)

### 8.4.1. 802.11b MODE

#### SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

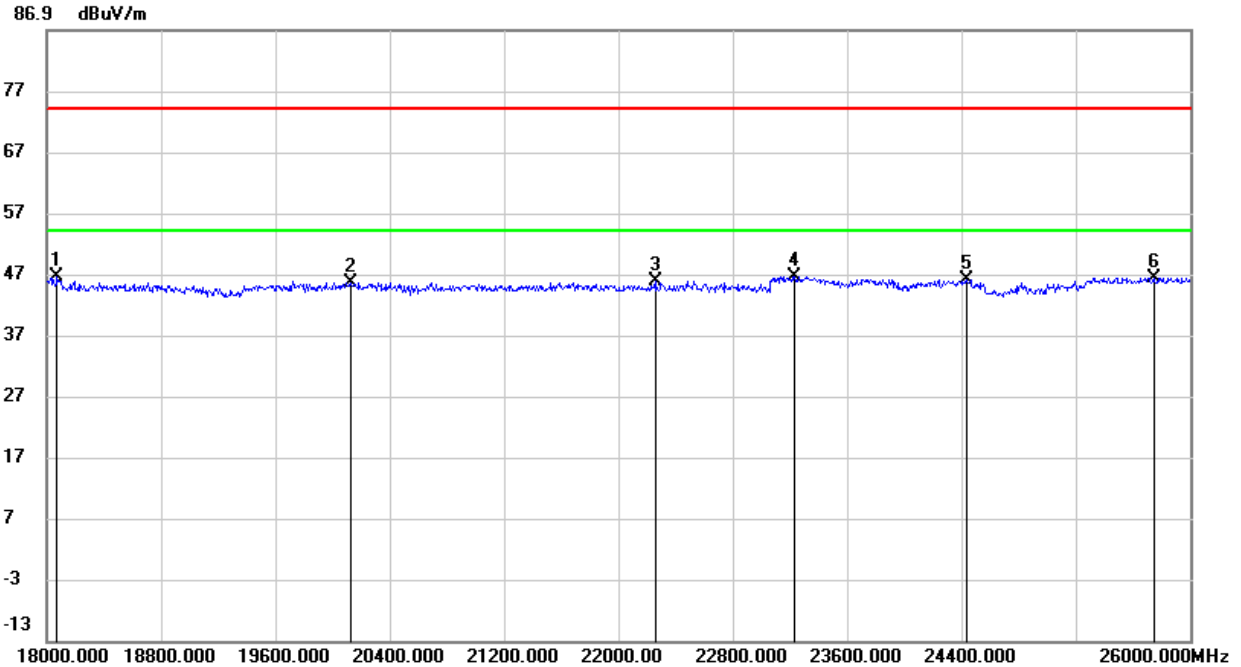

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18072.000	50.55	-4.02	46.53	74.00	-27.47	peak
2	20128.000	50.26	-4.64	45.62	74.00	-28.38	peak
3	22256.000	51.95	-6.06	45.89	74.00	-28.11	peak
4	23232.000	51.88	-5.28	46.60	74.00	-27.40	peak
5	24432.000	48.97	-2.86	46.11	74.00	-27.89	peak
6	25744.000	47.68	-1.34	46.34	74.00	-27.66	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. The preamplifier only effect to the above 18GHz signal and no filter added to the measurement chain.



**SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

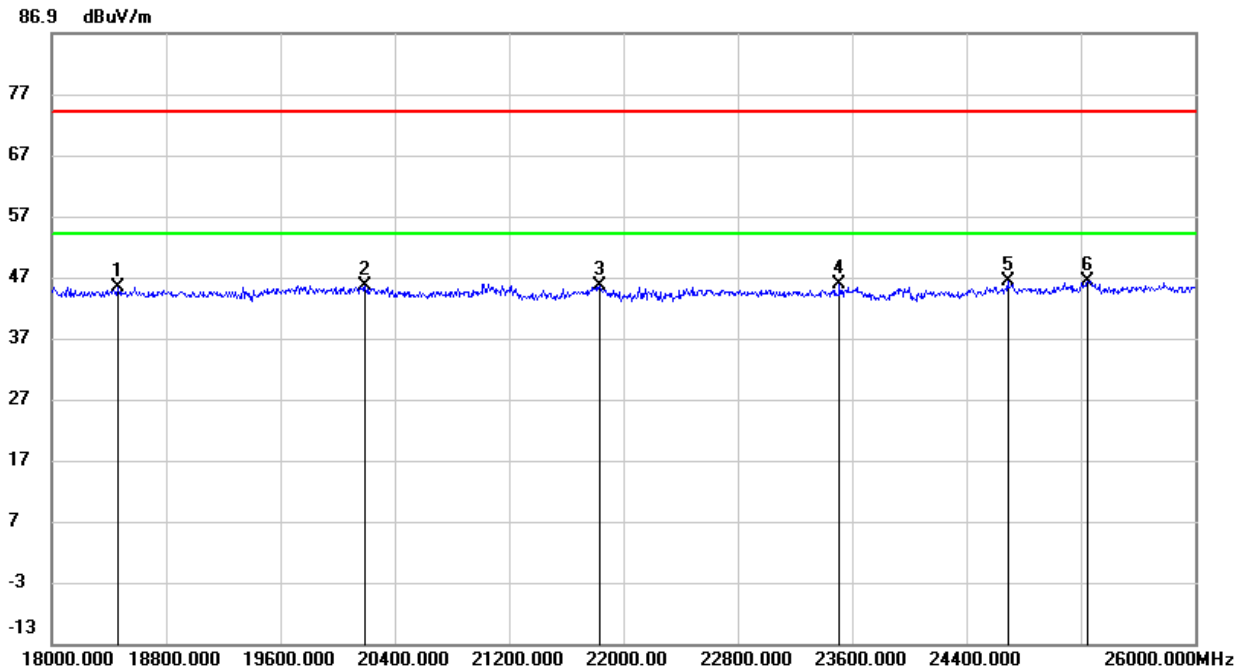

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18464.000	49.70	-4.39	45.31	74.00	-28.69	peak
2	20192.000	50.37	-4.76	45.61	74.00	-28.39	peak
3	21832.000	51.53	-5.92	45.61	74.00	-28.39	peak
4	23512.000	50.51	-4.76	45.75	74.00	-28.25	peak
5	24688.000	48.39	-2.11	46.28	74.00	-27.72	peak
6	25248.000	47.55	-1.17	46.38	74.00	-27.62	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. The preamplifier only effect to the above 18GHz signal and no filter added to the measurement chain.


Note: All the test modes have been tested, only the worst data record in the report.



### 8.5. SPURIOUS EMISSIONS (0.03 ~ 1 GHz)

#### 8.5.1. 802.11b MODE

##### SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

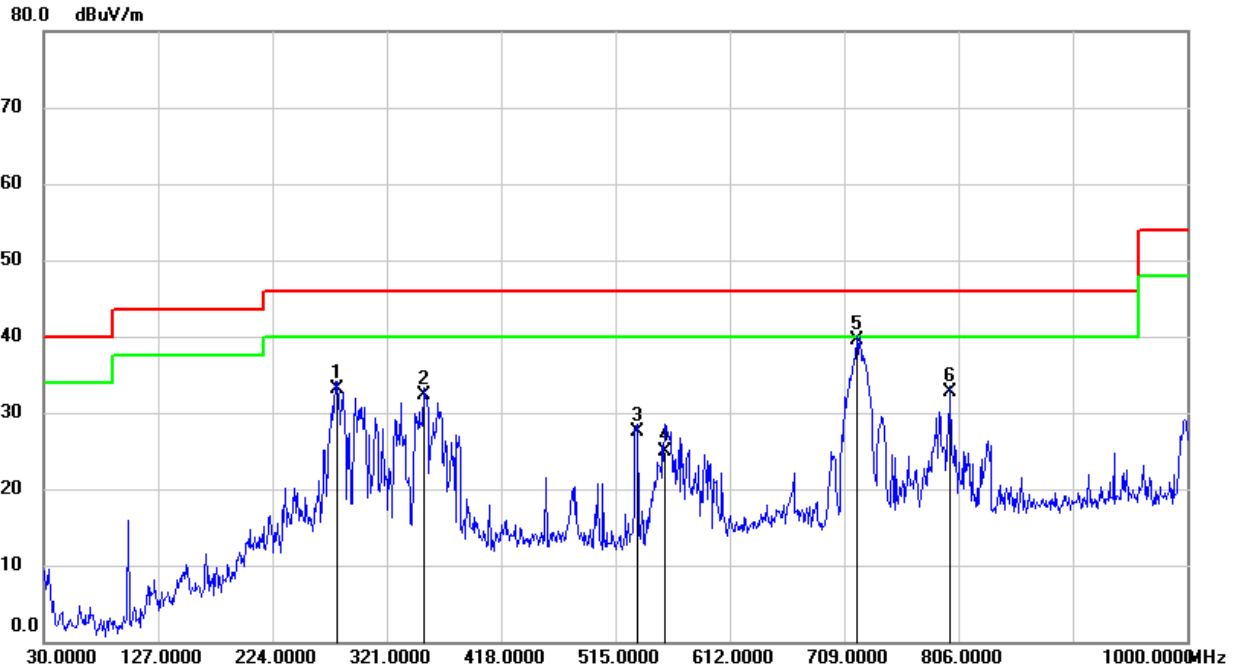


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	278.3200	50.37	-17.28	33.09	46.00	-12.91	QP
2	352.0400	46.74	-14.51	32.23	46.00	-13.77	QP
3	533.4300	38.60	-11.06	27.54	46.00	-18.46	QP
4	556.7100	35.65	-10.69	24.96	46.00	-21.04	QP
5	719.6700	48.01	-8.52	39.49	46.00	-6.51	QP
6	799.2100	40.52	-7.73	32.79	46.00	-13.21	QP

Note: 1. Result Level = Read Level + Correct Factor.  
 2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



**SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

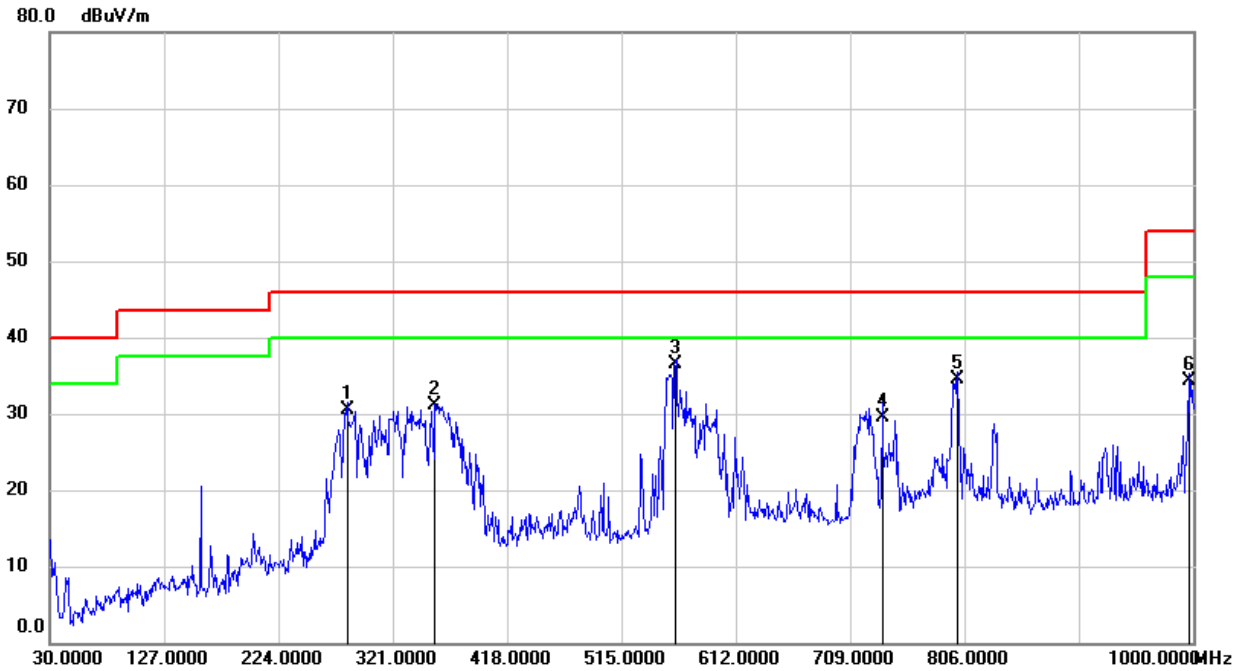

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	282.2000	47.55	-16.96	30.59	46.00	-15.41	QP
2	356.8900	45.51	-14.40	31.11	46.00	-14.89	QP
3	560.5900	47.19	-10.63	36.56	46.00	-9.44	QP
4	736.1599	37.95	-8.49	29.46	46.00	-16.54	QP
5	800.1800	42.17	-7.71	34.46	46.00	-11.54	QP
6	996.1200	38.99	-4.77	34.22	54.00	-19.78	QP

Note: 1. Result Level = Read Level + Correct Factor.  
2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Note: All the test modes have been tested, only the worst data record in the report.




## 8.6. SPURIOUS EMISSIONS BELOW 30M

### 8.6.1. 802.11b MODE

#### SPURIOUS EMISSIONS (MID CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9kHz~ 150kHz

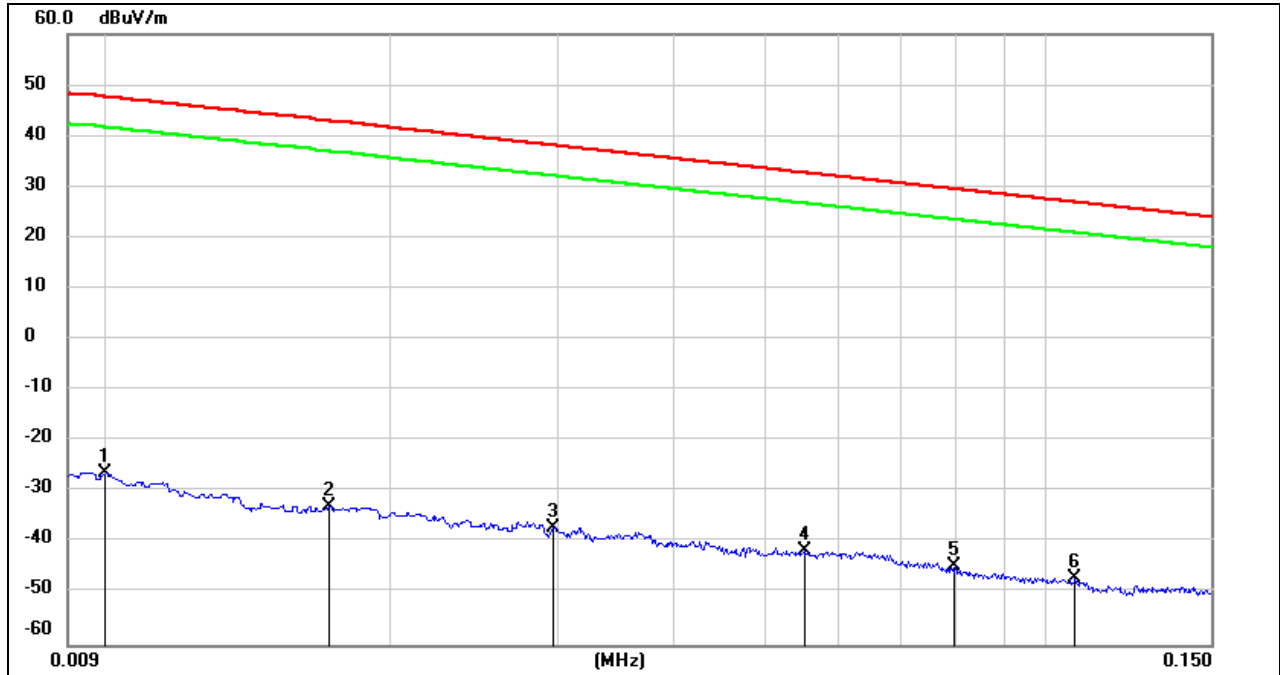

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	75.22	-101.40	-26.18	47.60	-73.78	peak
2	0.0171	68.38	-101.36	-32.98	42.94	-75.92	peak
3	0.0298	64.24	-101.39	-37.15	38.12	-75.27	peak
4	0.0551	59.95	-101.50	-41.55	32.78	-74.33	peak
5	0.0796	57.03	-101.63	-44.60	29.58	-74.18	peak
6	0.1073	54.80	-101.77	-46.97	26.99	-73.96	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



**150kHz ~ 490kHz**

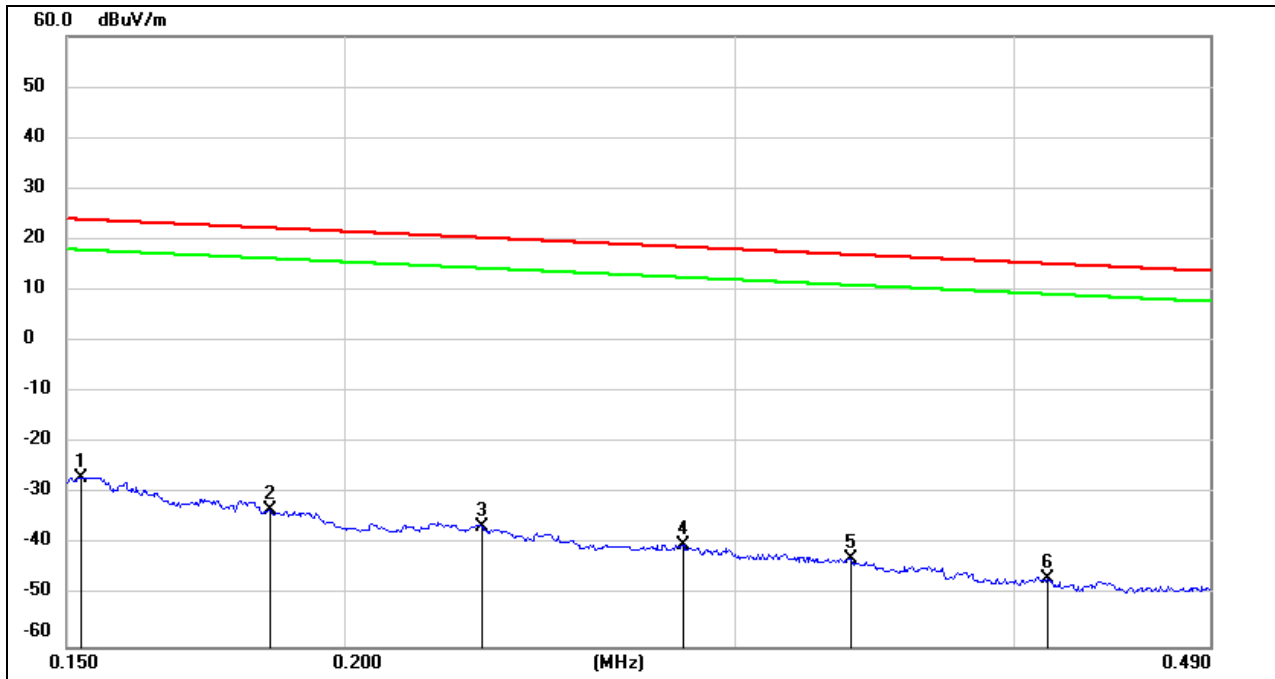


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)	Remark
1	0.1524	74.80	-101.63	-26.83	23.94	-50.77	peak
2	0.1852	68.47	-101.70	-33.23	22.25	-55.48	peak
3	0.2305	65.44	-101.77	-36.33	20.35	-56.68	peak
4	0.2837	61.72	-101.83	-40.11	18.54	-58.65	peak
5	0.3379	59.19	-101.90	-42.71	17.03	-59.74	peak
6	0.4142	55.23	-101.98	-46.75	15.26	-62.01	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.  
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



**490kHz ~ 30MHz**

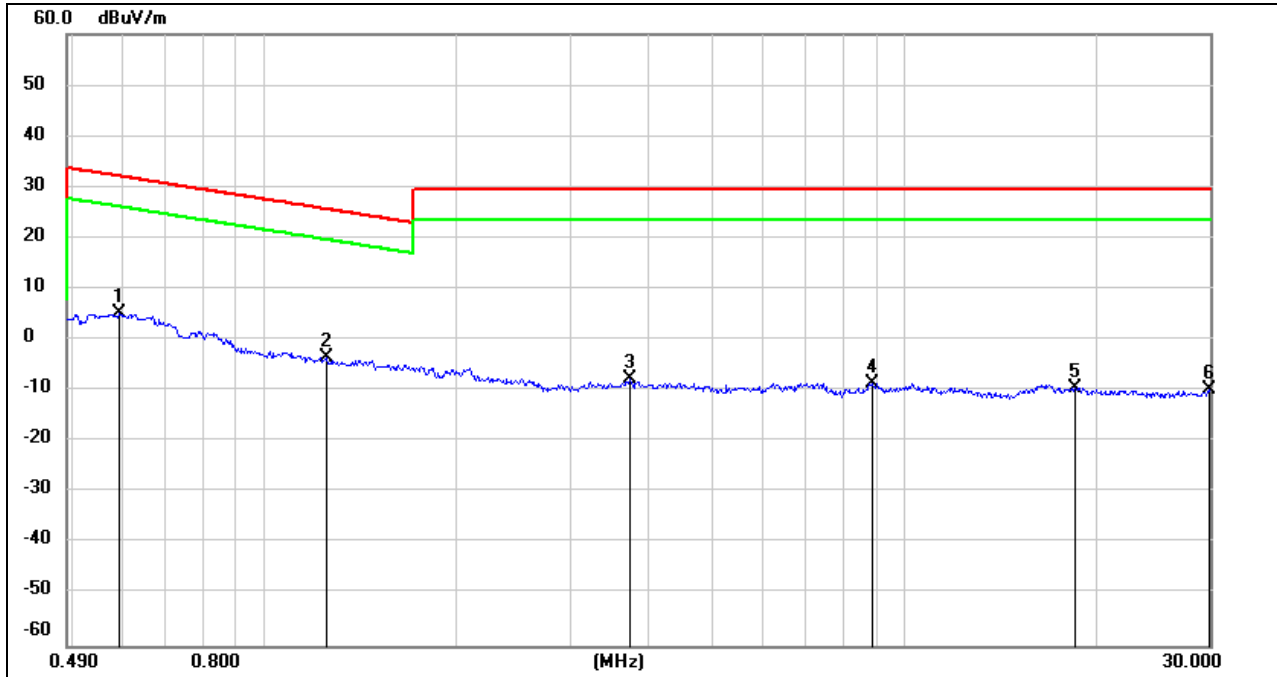

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)	Remark
1	0.5917	67.24	-62.08	5.16	32.16	-27.00	peak
2	1.2460	58.75	-62.16	-3.41	25.70	-29.11	peak
3	3.7100	53.70	-61.41	-7.71	29.54	-37.25	peak
4	8.9001	52.41	-60.95	-8.54	29.54	-38.08	peak
5	18.4908	51.55	-60.89	-9.34	29.54	-38.88	peak
6	29.9115	50.13	-59.98	-9.85	29.54	-39.39	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.  
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the test modes have been tested, only the worst data record in the report.


## 9. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

Please refer to CFR 47 FCC §15.207 (a).

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST SETUP AND PROCEDURE

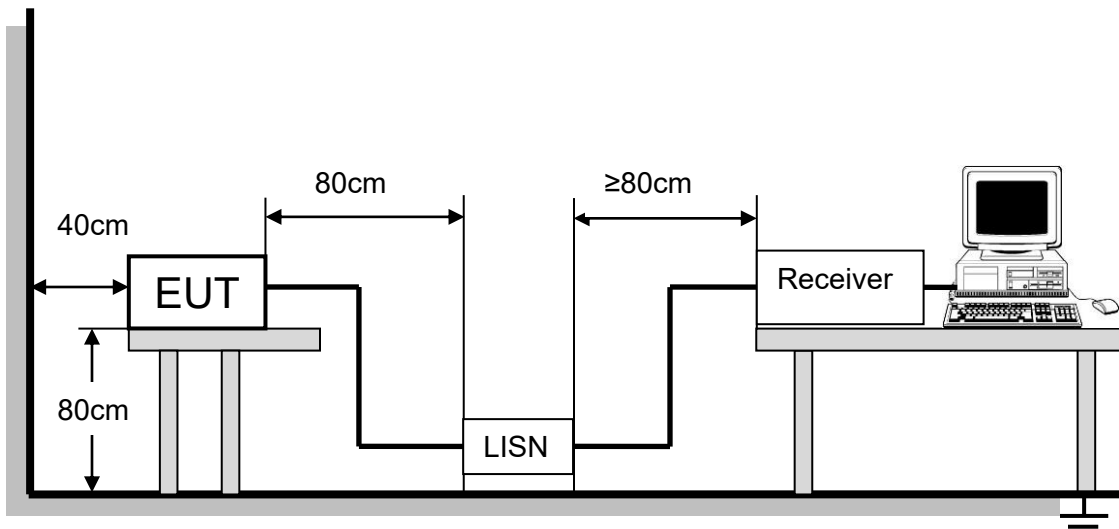

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST ENVIRONMENT

Temperature	23.5°C	Relative Humidity	65.7%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.82V






**TEST RESULTS**

**9.1. 802.11b MODE**

**LINE N RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)**

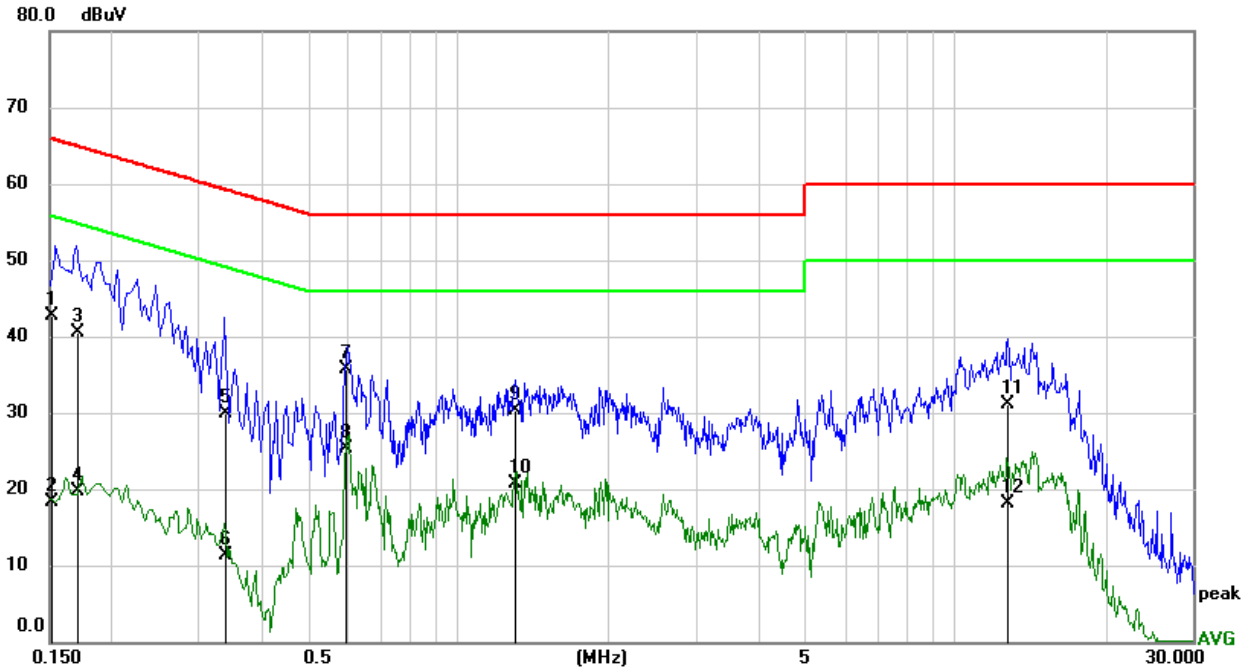


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1514	42.77	0.01	42.78	65.92	-23.14	QP
2	0.1514	18.29	0.01	18.30	55.92	-37.62	AVG
3	0.1709	40.56	0.01	40.57	64.92	-24.35	QP
4	0.1709	19.67	0.01	19.68	54.92	-35.24	AVG
5	0.3412	29.93	0.01	29.94	59.17	-29.23	QP
6	0.3412	11.25	0.01	11.26	49.17	-37.91	AVG
7	0.5923	35.60	0.01	35.61	56.00	-20.39	QP
8	0.5923	25.23	0.01	25.24	46.00	-20.76	AVG
9	1.3037	30.39	0.01	30.40	56.00	-25.60	QP
10	1.3037	20.65	0.01	20.66	46.00	-25.34	AVG
11	12.6840	31.10	0.05	31.15	60.00	-28.85	QP
12	12.6840	18.02	0.05	18.07	50.00	-31.93	AVG

- Note: 1. Result = Reading +Correct Factor.  
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 200 Hz (9 kHz-150 kHz), 9 kHz (150 kHz-30 MHz).  
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.



**LINE L RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)**

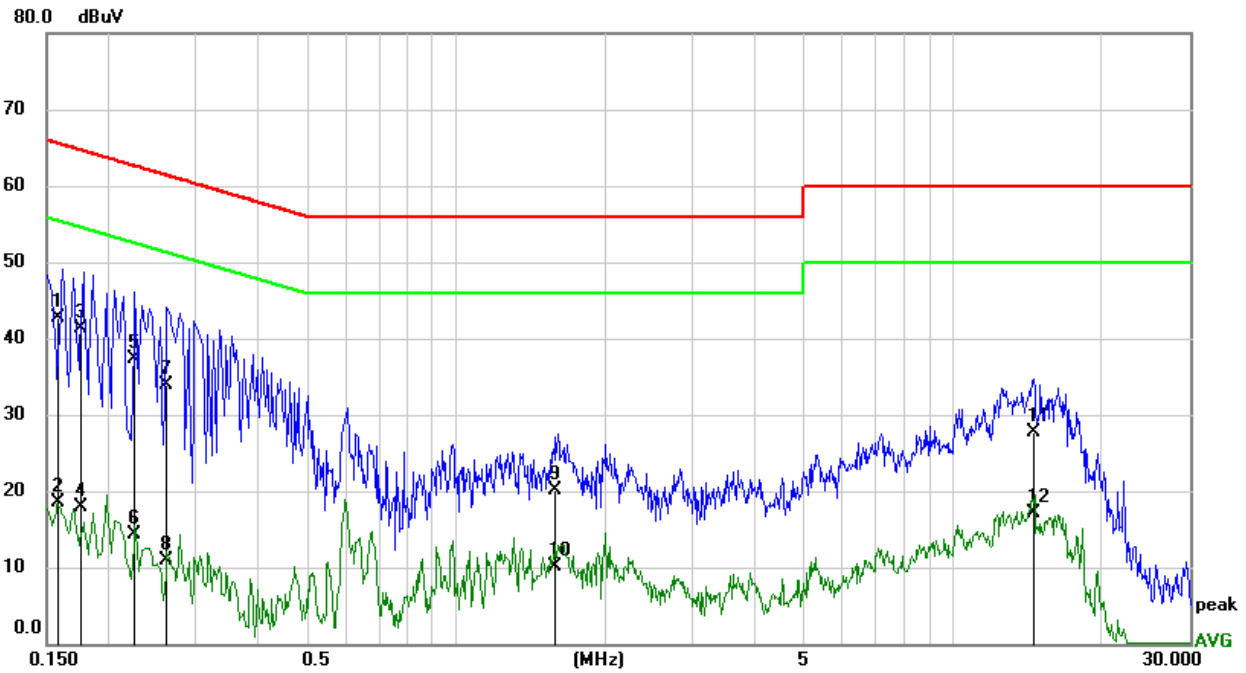

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1582	42.61	0.01	42.62	65.56	-22.94	QP
2	0.1582	18.44	0.01	18.45	55.56	-37.11	AVG
3	0.1758	41.39	0.01	41.40	64.68	-23.28	QP
4	0.1758	17.90	0.01	17.91	54.68	-36.77	AVG
5	0.2256	37.25	0.01	37.26	62.61	-25.35	QP
6	0.2256	14.21	0.01	14.22	52.61	-38.39	AVG
7	0.2590	33.95	0.01	33.96	61.46	-27.50	QP
8	0.2590	10.93	0.01	10.94	51.46	-40.52	AVG
9	1.5940	20.17	0.02	20.19	56.00	-35.81	QP
10	1.5940	10.17	0.02	10.19	46.00	-35.81	AVG
11	14.4841	27.70	0.06	27.76	60.00	-32.24	QP
12	14.4841	17.02	0.06	17.08	50.00	-32.92	AVG

- Note: 1. Result = Reading +Correct Factor.  
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 200 Hz (9 kHz-150 kHz), 9 kHz (150 kHz-30 MHz).  
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Note: All the test modes have been tested, only the worst data record in the report.



## 10. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### RESULTS

Complies



**10.1. Appendix A: DTS Bandwidth**  
**10.1.1. Test Result**

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.640	2407.920	2416.560	0.5	PASS
		2437	8.640	2432.920	2441.560	0.5	PASS
		2462	7.680	2457.960	2465.640	0.5	PASS
11G	Ant1	2412	16.400	2403.840	2420.240	0.5	PASS
		2437	16.400	2428.840	2445.240	0.5	PASS
		2462	16.360	2453.840	2470.200	0.5	PASS
11N20SISO	Ant1	2412	17.640	2403.240	2420.880	0.5	PASS
		2437	17.680	2428.200	2445.880	0.5	PASS
		2462	16.960	2453.240	2470.200	0.5	PASS
11N40SISO	Ant1	2422	35.280	2404.400	2439.680	0.5	PASS
		2437	35.280	2419.400	2454.680	0.5	PASS
		2452	35.200	2434.400	2469.600	0.5	PASS



### 10.1.2. Test Graphs







11G Ant1 2412




11G Ant1 2437

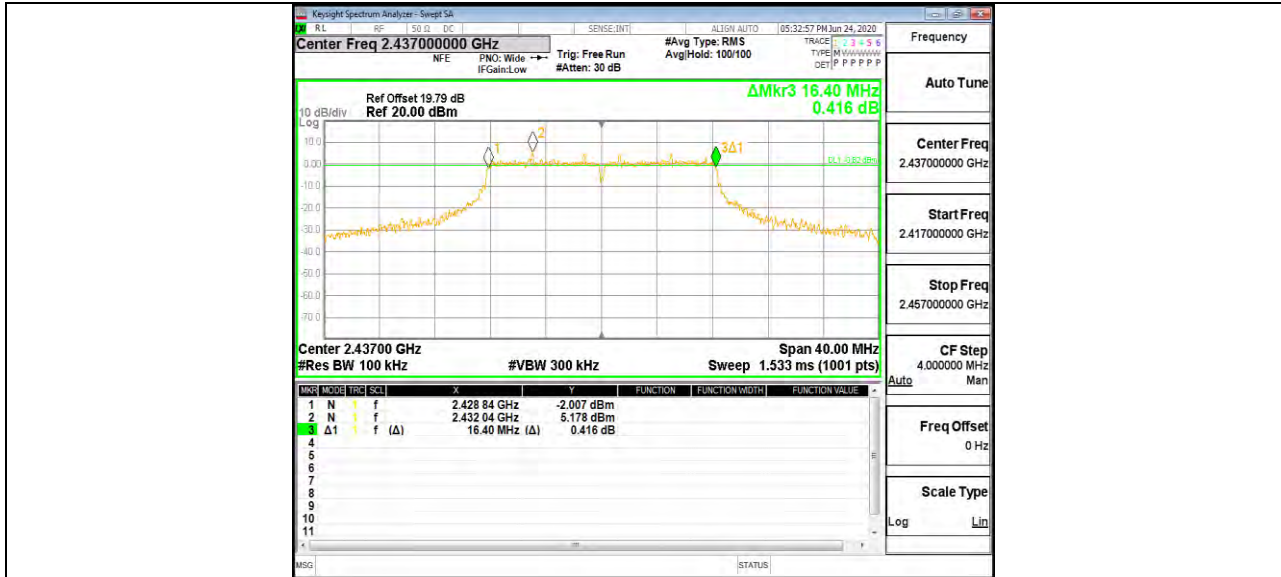

11G Ant1 2462

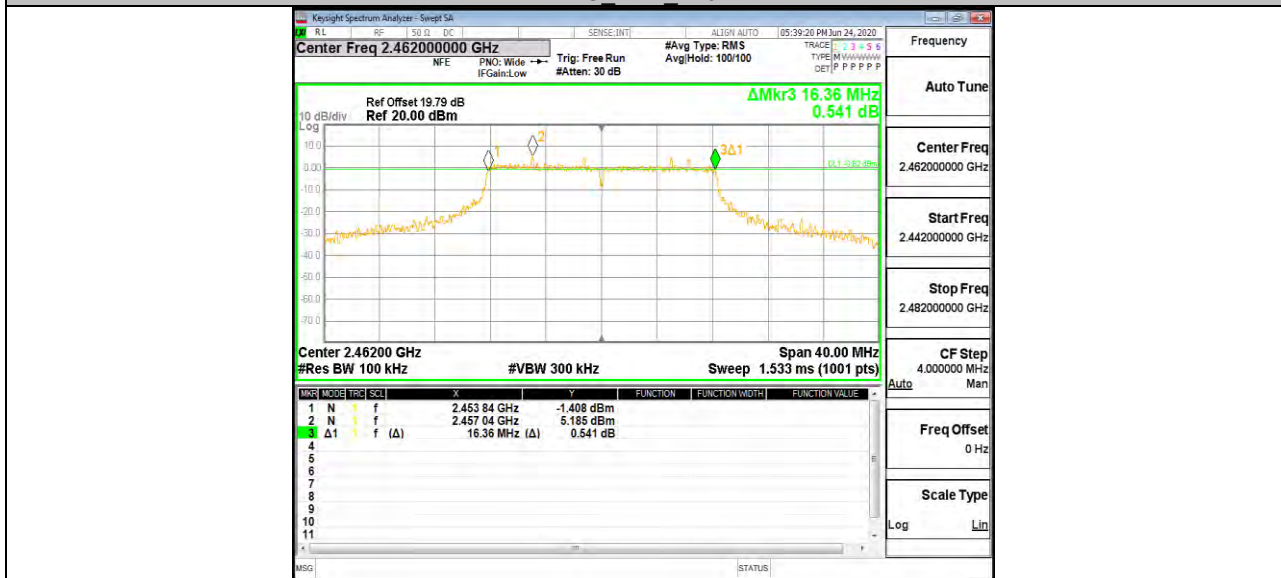

11N20SISO Ant1 2412

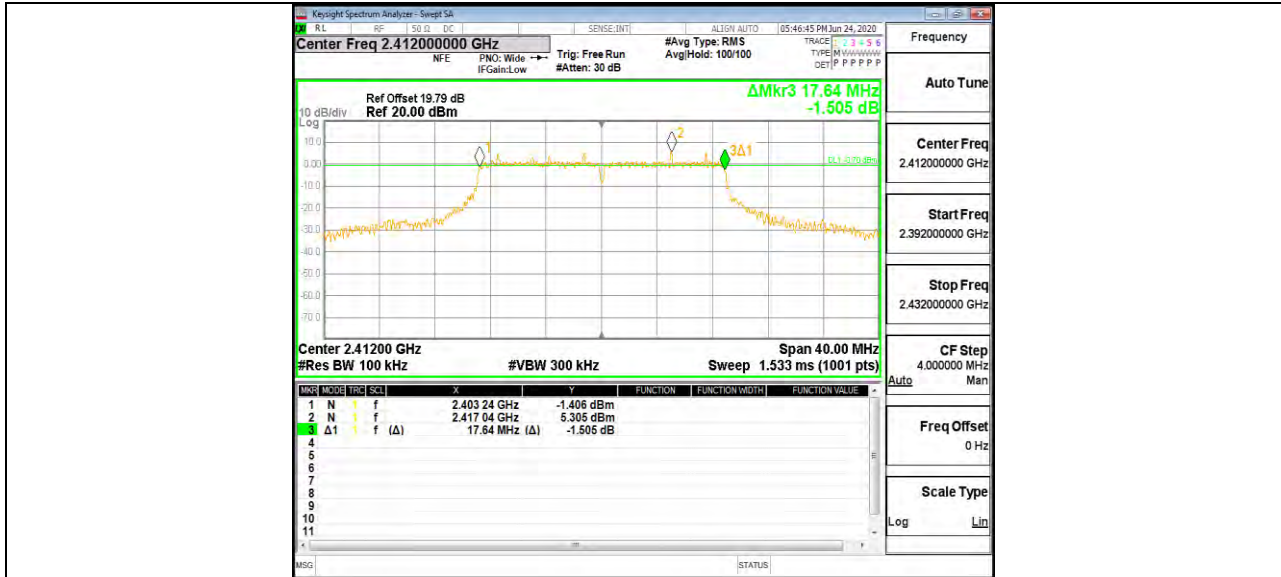

11N20SISO Ant1 2437




11N20SISO Ant1 2462





11N40SISO Ant1 2422

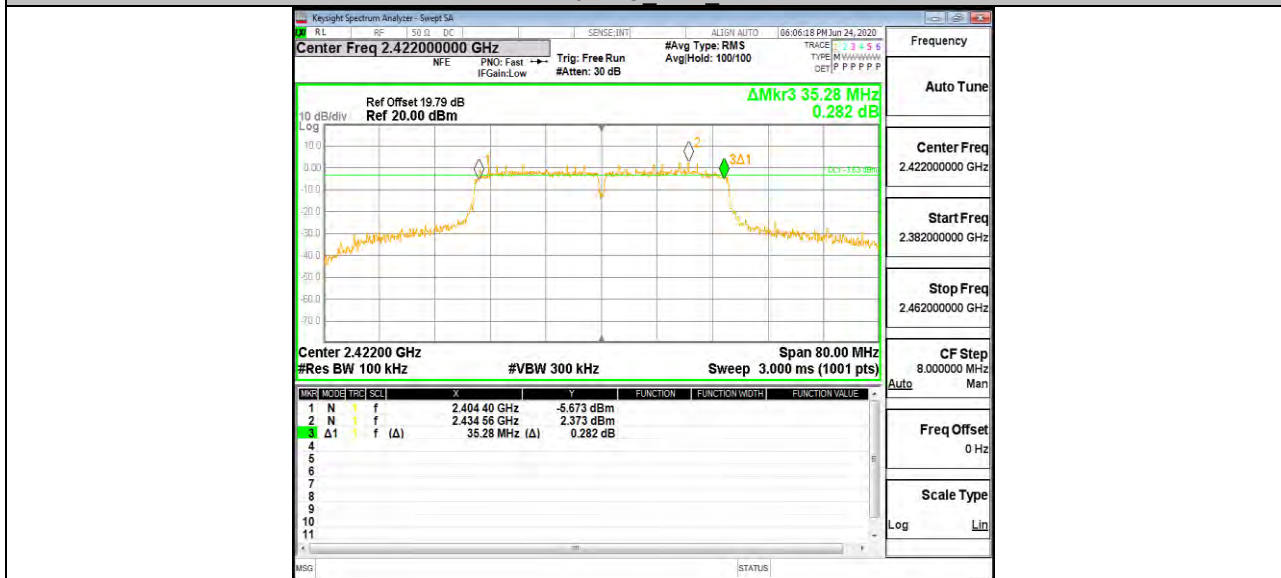

11N40SISO Ant1 2437



11N40SISO Ant1 2452






**10.2. Appendix B: Occupied Channel Bandwidth**  
**10.2.1. Test Result**

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.629	2405.212	2418.841	---	PASS
		2437	13.614	2430.246	2443.860	---	PASS
		2462	13.752	2455.101	2468.853	---	PASS
11G	Ant1	2412	17.567	2403.281	2420.848	---	PASS
		2437	17.586	2428.249	2445.835	---	PASS
		2462	17.594	2453.188	2470.782	---	PASS
11N20SISO	Ant1	2412	18.382	2402.906	2421.288	---	PASS
		2437	18.495	2427.806	2446.301	---	PASS
		2462	18.505	2452.737	2471.242	---	PASS
11N40SISO	Ant1	2422	36.479	2403.856	2440.335	---	PASS
		2437	36.613	2418.819	2455.432	---	PASS
		2452	36.429	2433.769	2470.198	---	PASS




### 10.2.2. Test Graphs




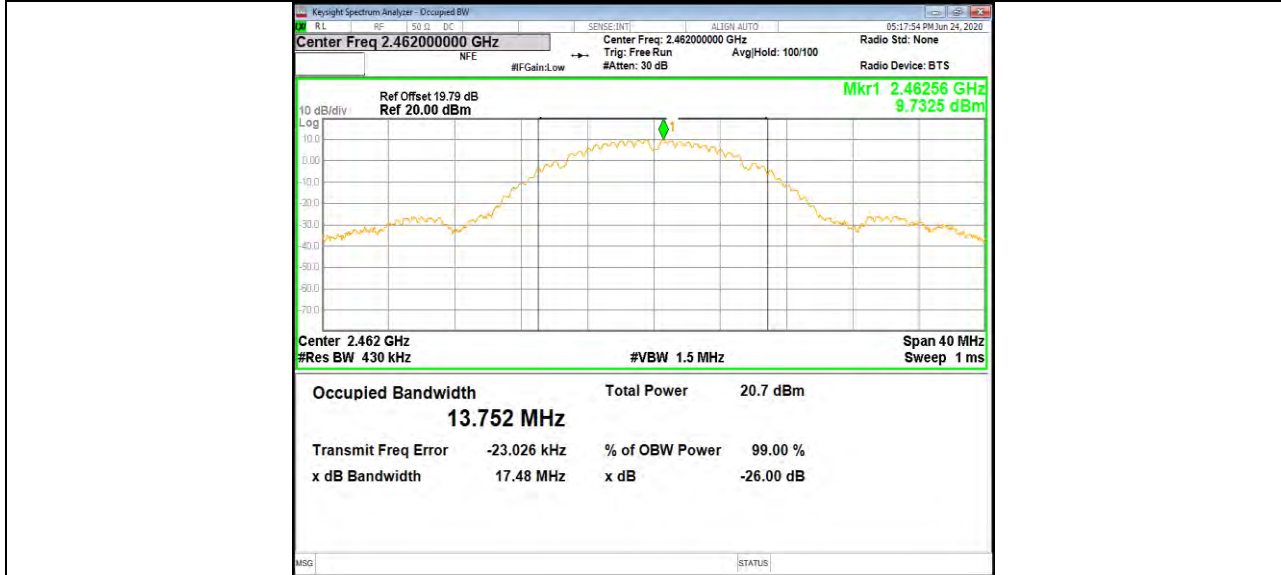


11G Ant1 2412

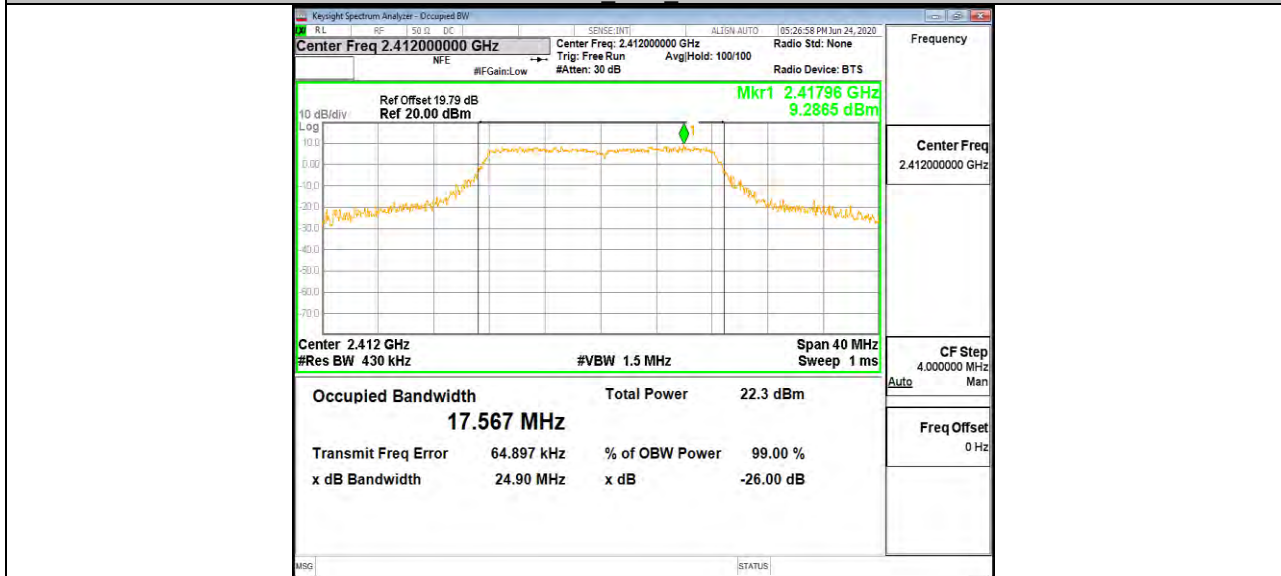


11G Ant1 2437

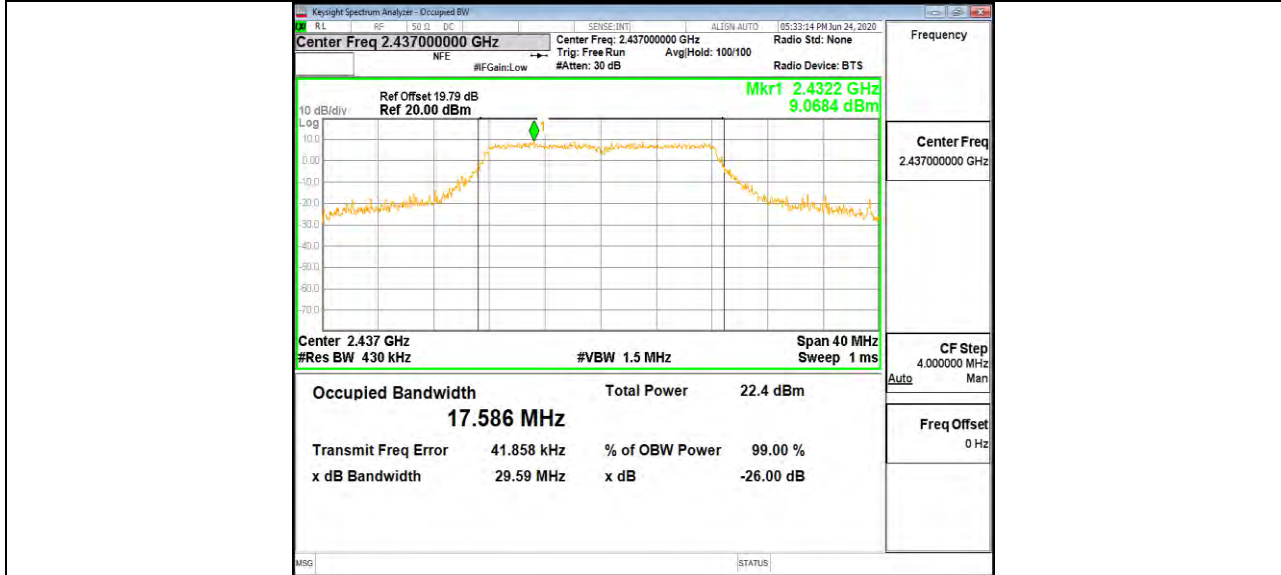


11G Ant1 2462

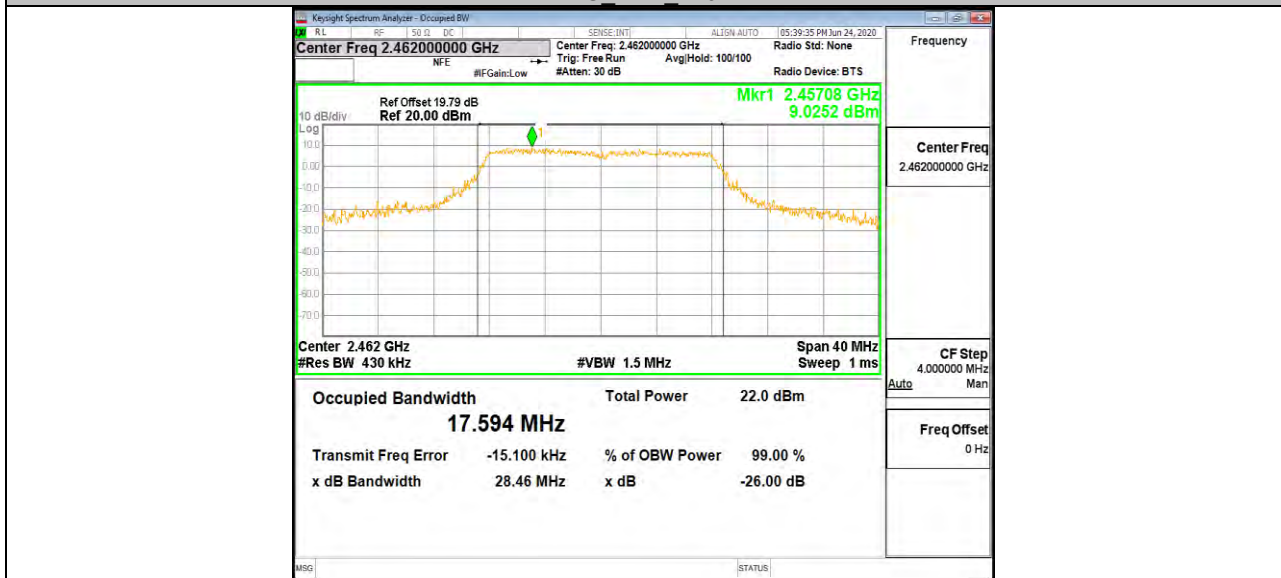


11N20SISO Ant1 2412

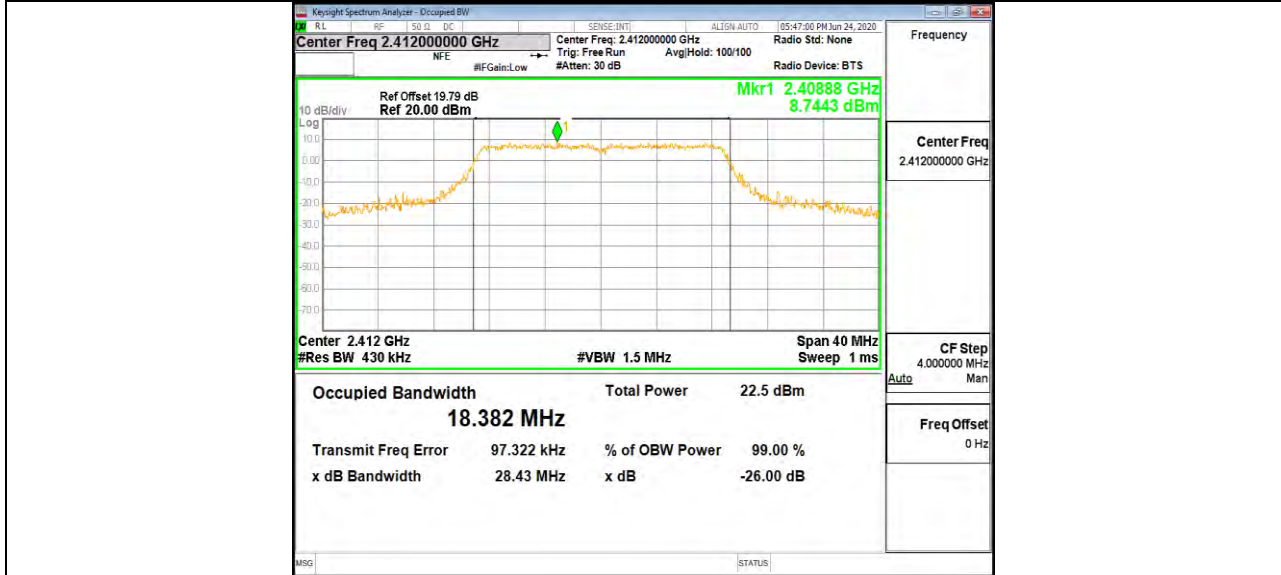


11N20SISO Ant1 2437

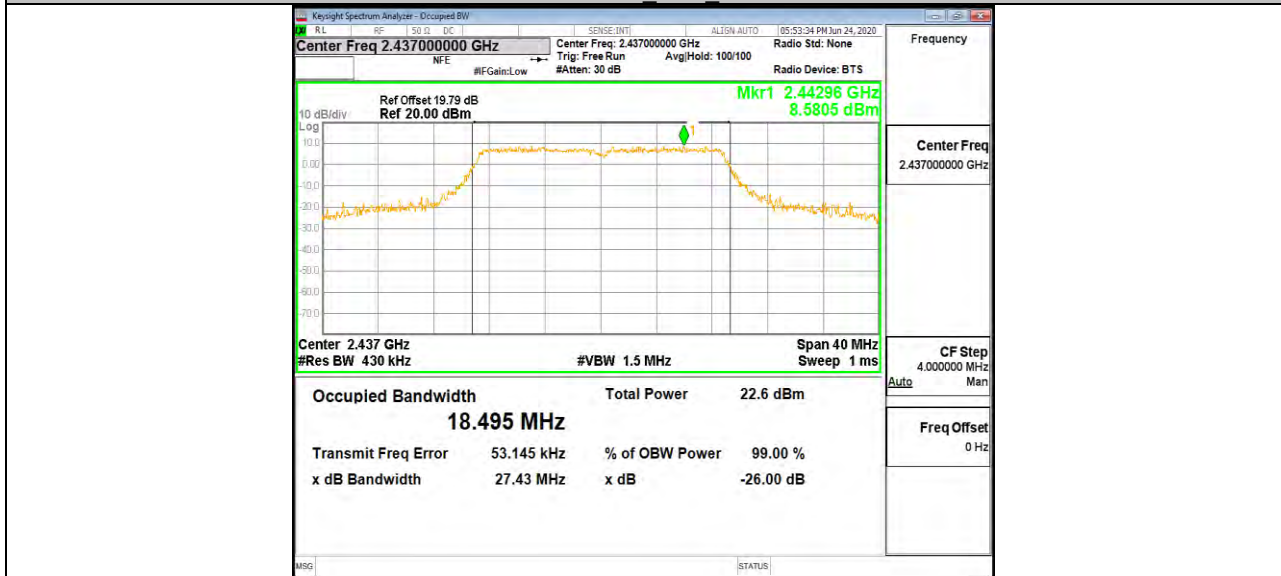

11N20SISO Ant1 2462

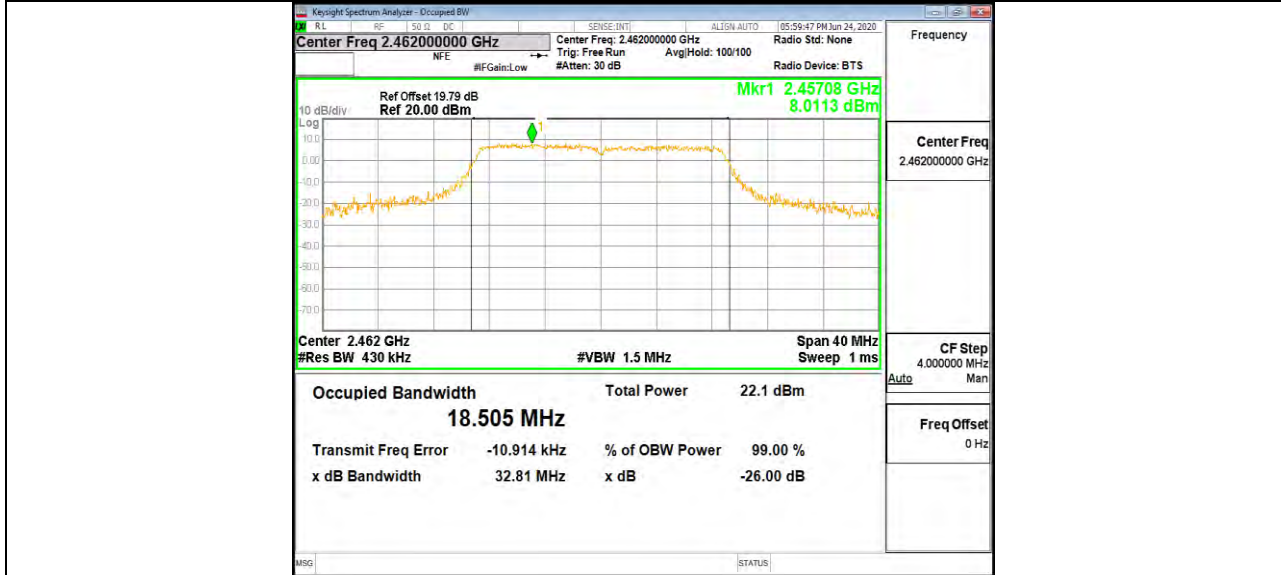


11N40SISO Ant1 2422

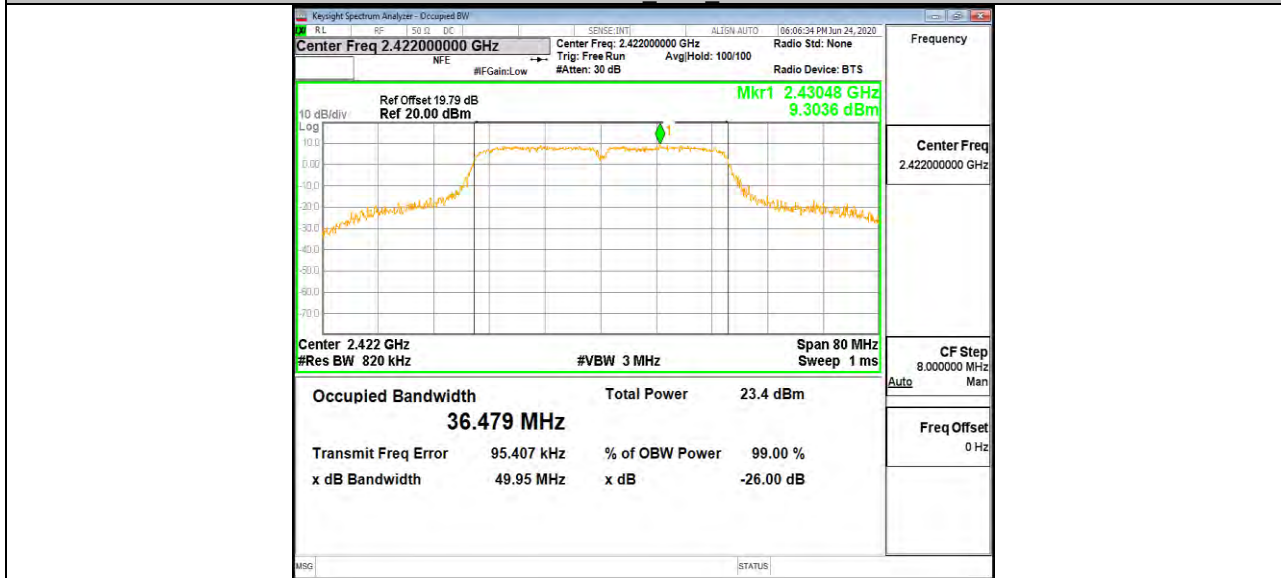


11N40SISO Ant1 2437



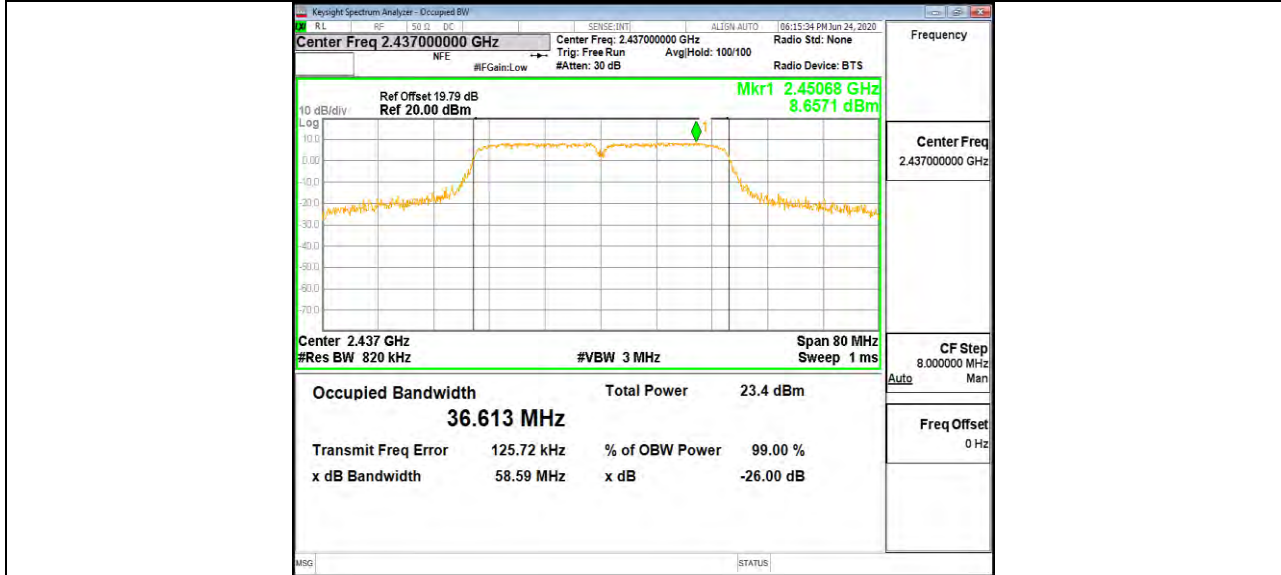

11N40SISO Ant1 2452

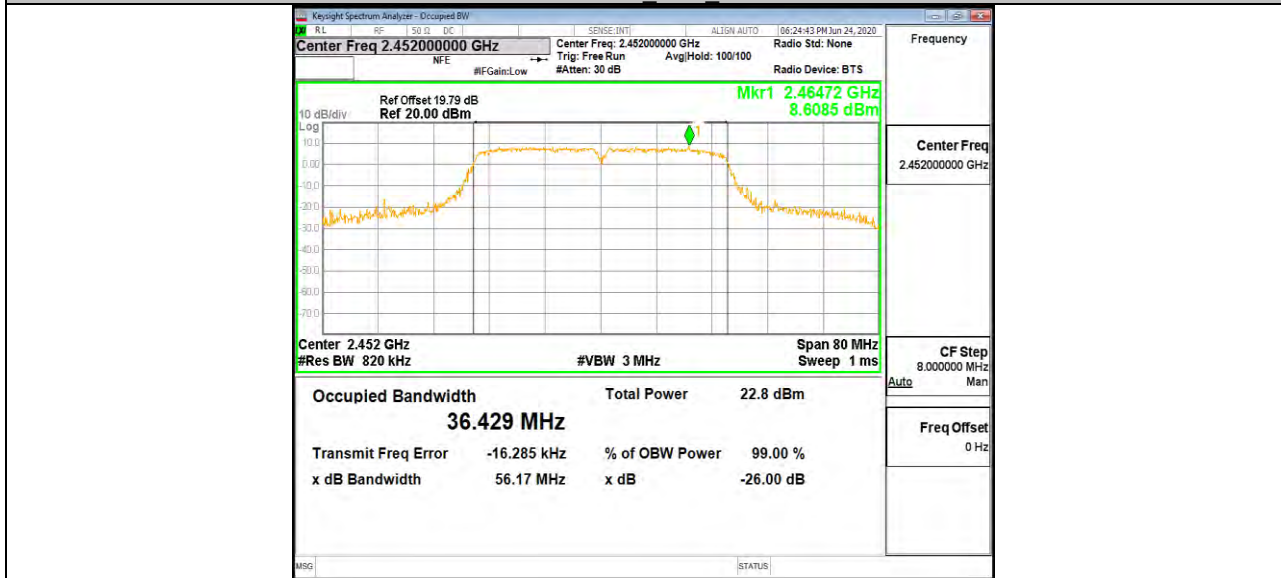



**10.3. Appendix C: Maximum conducted output power**  
**10.3.1. Test Result**

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	18.18	<=30	PASS
		2437	18.33	<=30	PASS
		2462	17.78	<=30	PASS
11G	Ant1	2412	16.28	<=30	PASS
		2437	16.31	<=30	PASS
		2462	16.06	<=30	PASS
11N20SISO	Ant1	2412	16.43	<=30	PASS
		2437	16.50	<=30	PASS
		2462	16.05	<=30	PASS
11N40SISO	Ant1	2422	16.33	<=30	PASS
		2437	16.45	<=30	PASS
		2452	16.15	<=30	PASS




## 10.4. Appendix D: Maximum power spectral density


### 10.4.1. Test Result

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-3.96	<=8	PASS
		2437	-3.34	<=8	PASS
		2462	-3.5	<=8	PASS
11G	Ant1	2412	-7.69	<=8	PASS
		2437	-8.63	<=8	PASS
		2462	-8.89	<=8	PASS
11N20SISO	Ant1	2412	-8.68	<=8	PASS
		2437	-8.42	<=8	PASS
		2462	-8.44	<=8	PASS
11N40SISO	Ant1	2422	-11.02	<=8	PASS
		2437	-11.21	<=8	PASS
		2452	-11.81	<=8	PASS




### 10.4.2. Test Graphs

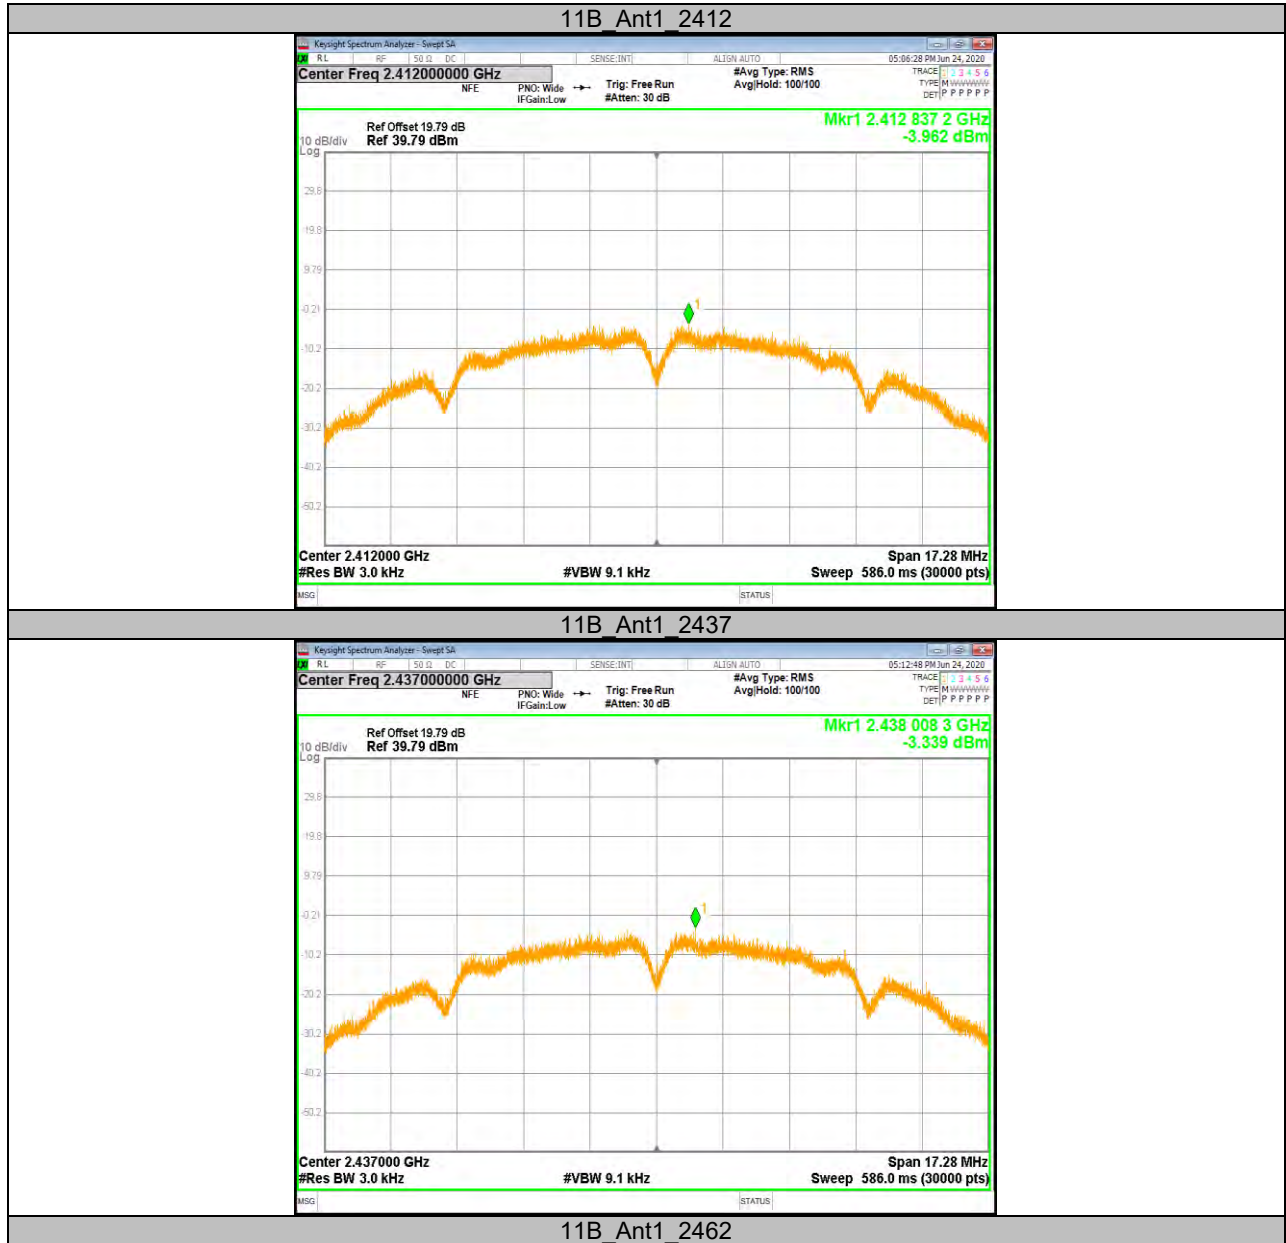


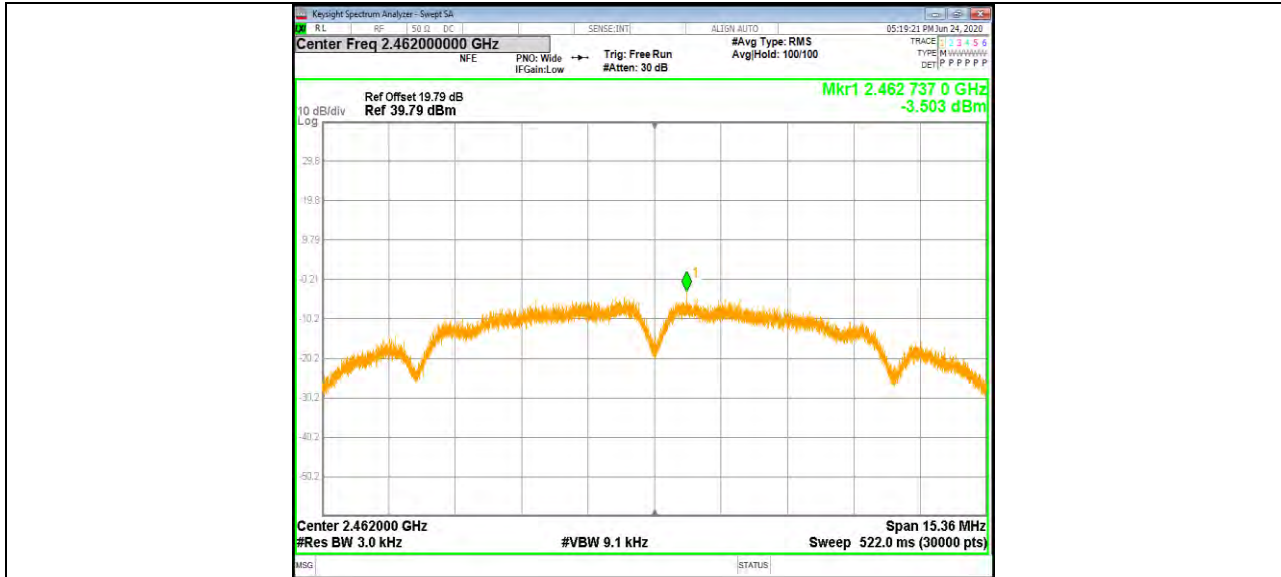


11G Ant1 2412

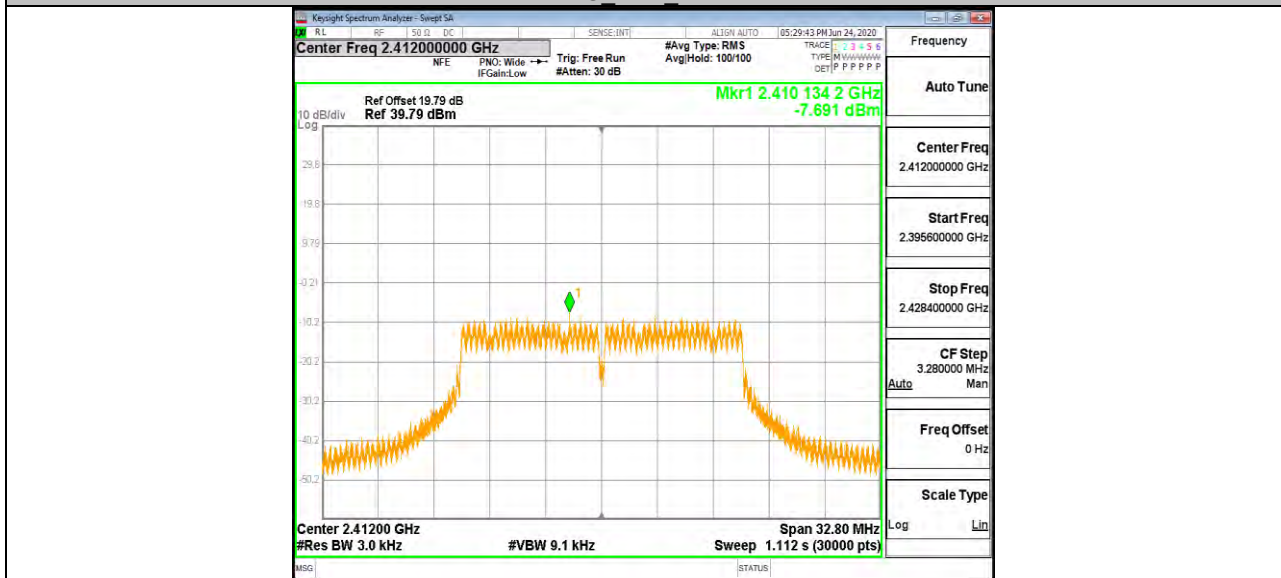


11G Ant1 2437

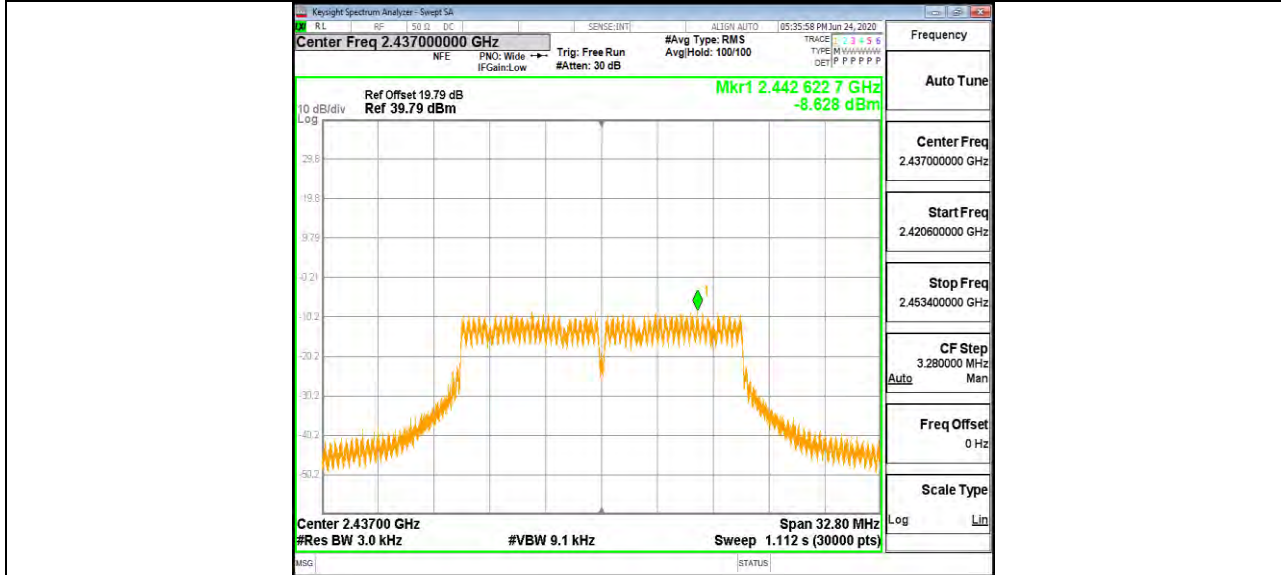


11G Ant1 2462

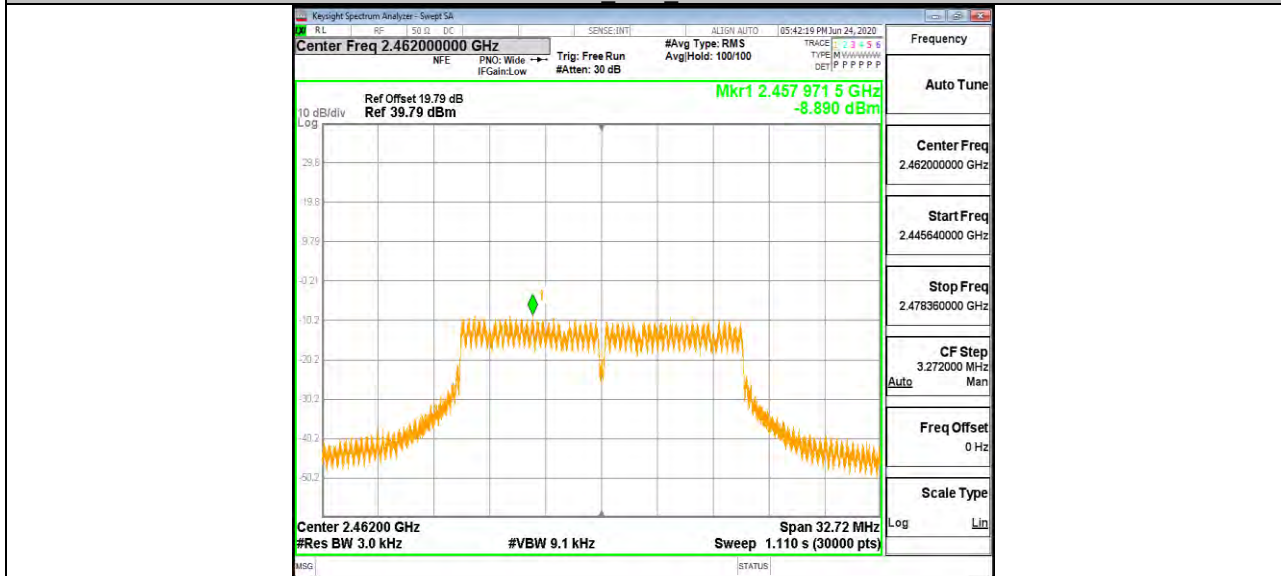


11N20SISO Ant1 2412

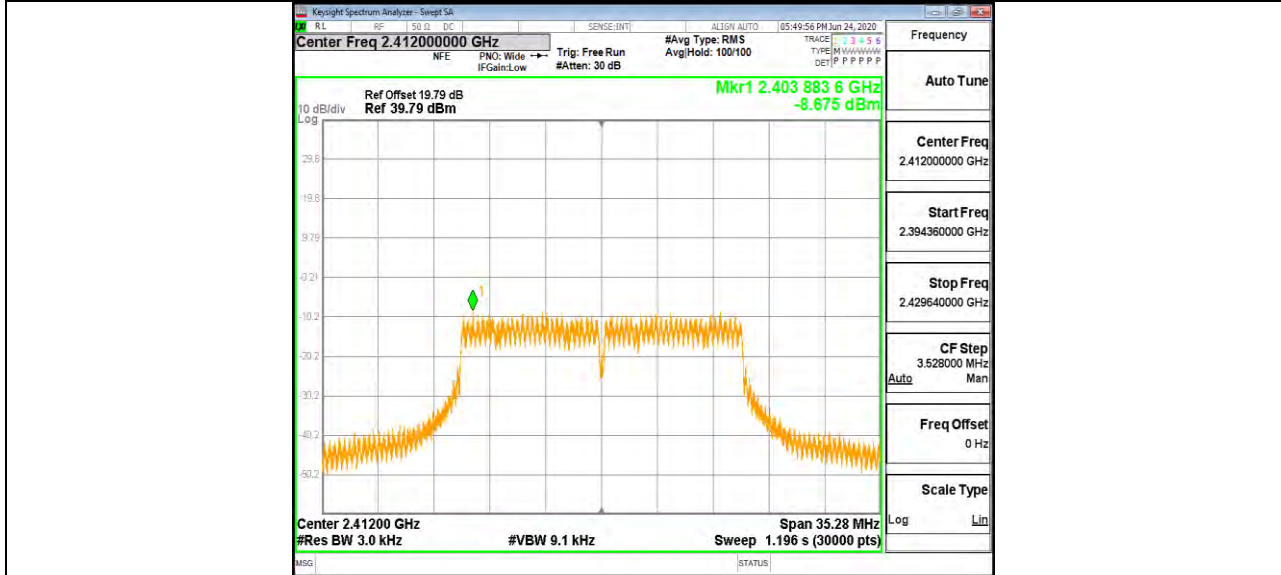


11N20SISO Ant1 2437

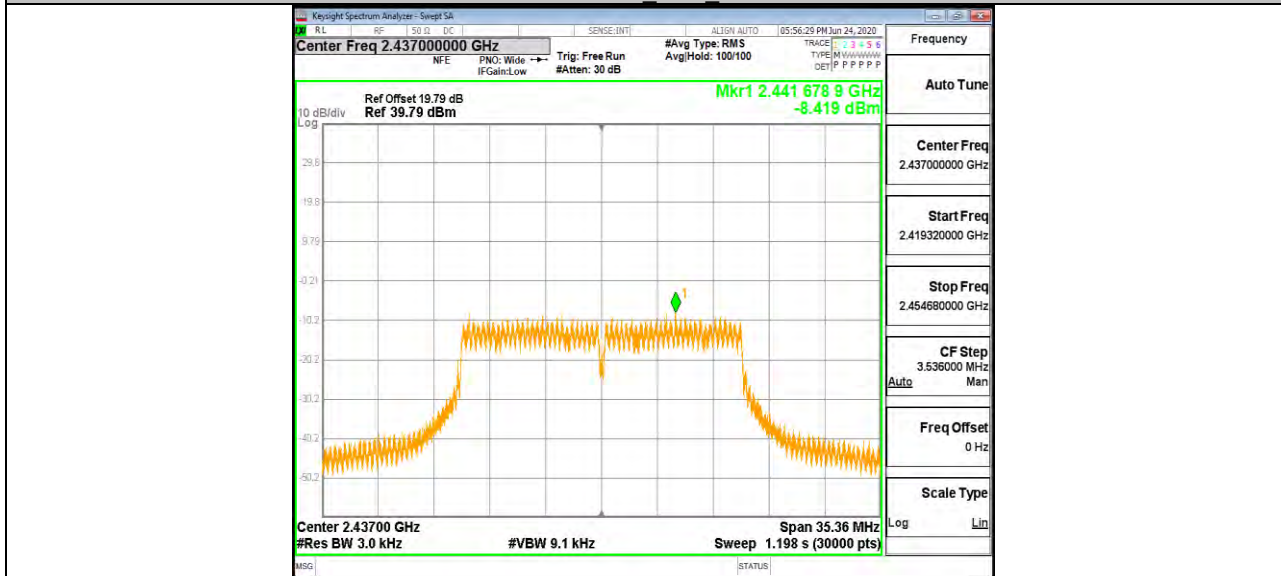

11N20SISO Ant1 2462

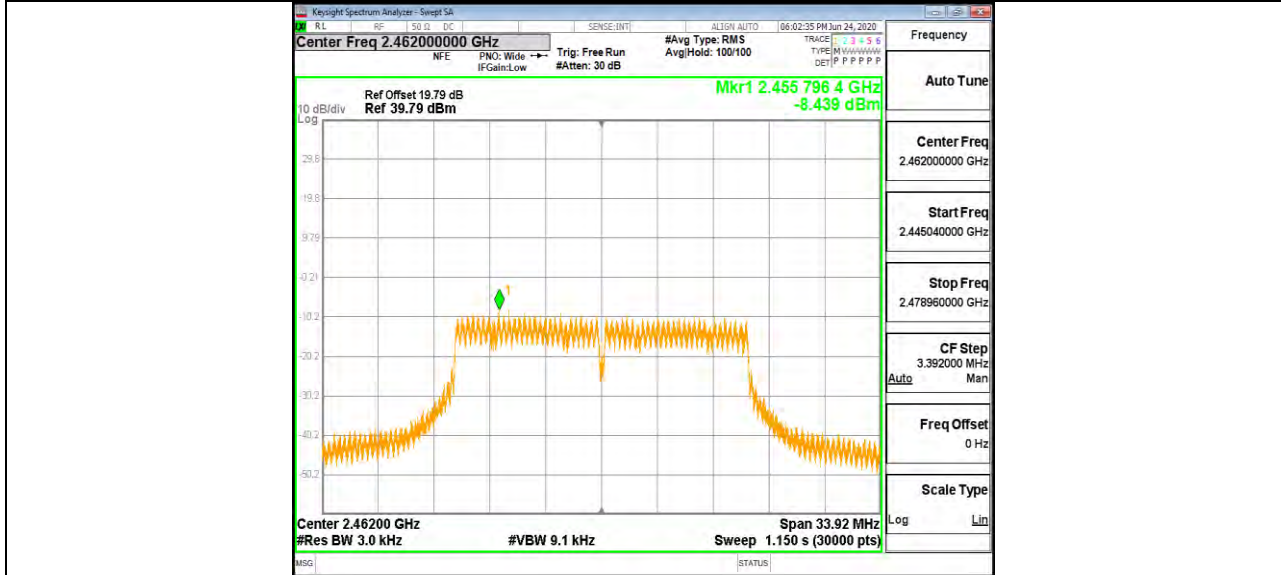


11N40SISO Ant1 2422

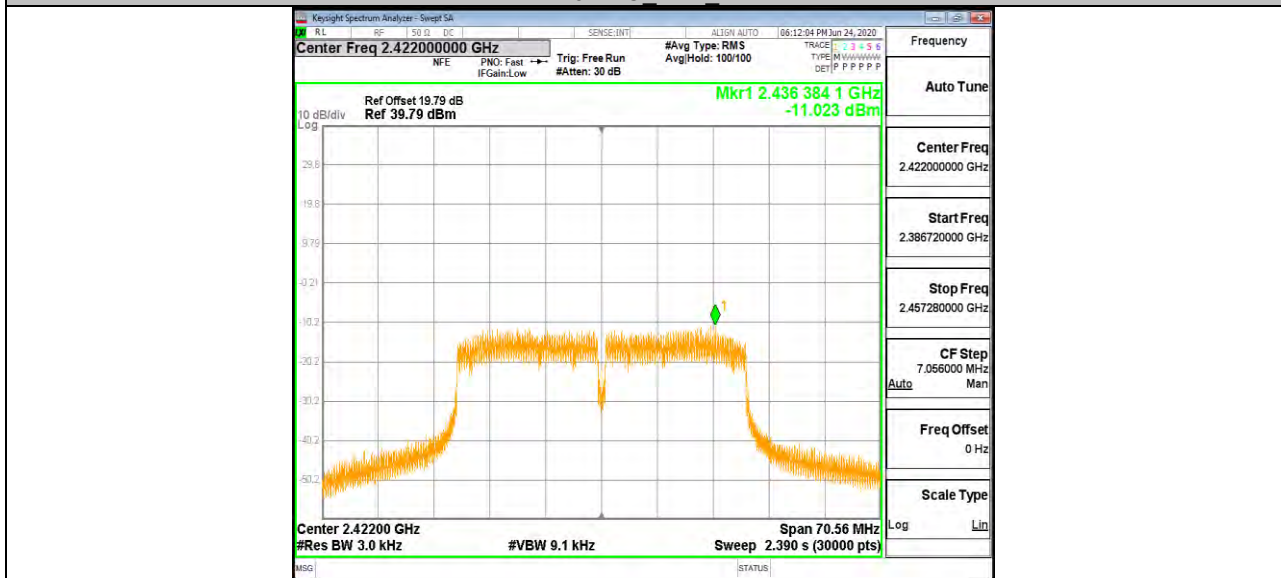

11N40SISO Ant1 2437



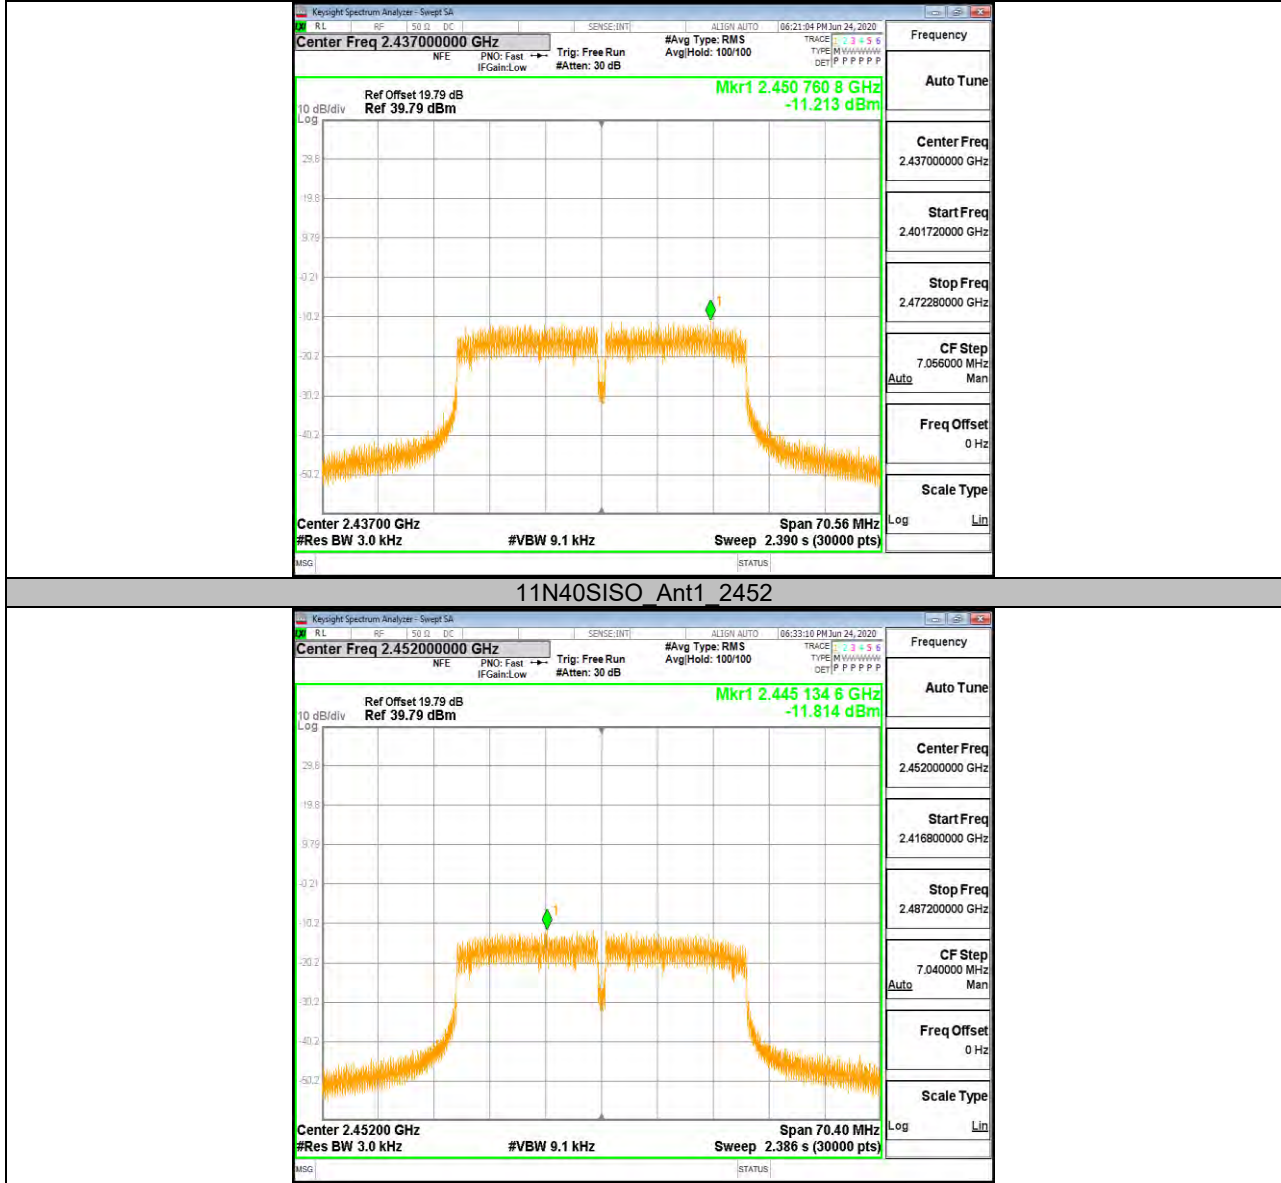



## 10.5. Appendix E: Band edge measurements


### 10.5.1. Test Result

TestMode	Antenna	ChName	Channel	Verdict
11B	Ant1	Low	2412	PASS
		High	2462	PASS
11G	Ant1	Low	2412	PASS
		High	2462	PASS
11N20SISO	Ant1	Low	2412	PASS
		High	2462	PASS
11N40SISO	Ant1	Low	2422	PASS
		High	2452	PASS



### 10.5.2. Test Graphs




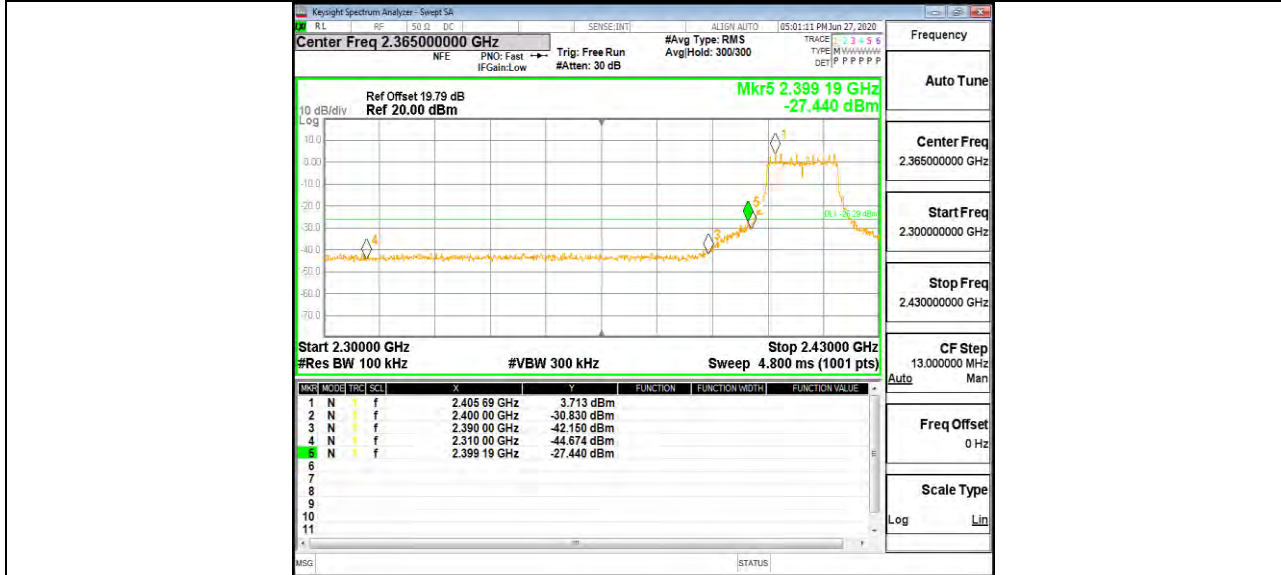


11G Ant1 High 2462




11N20SISO Ant1 Low 2412

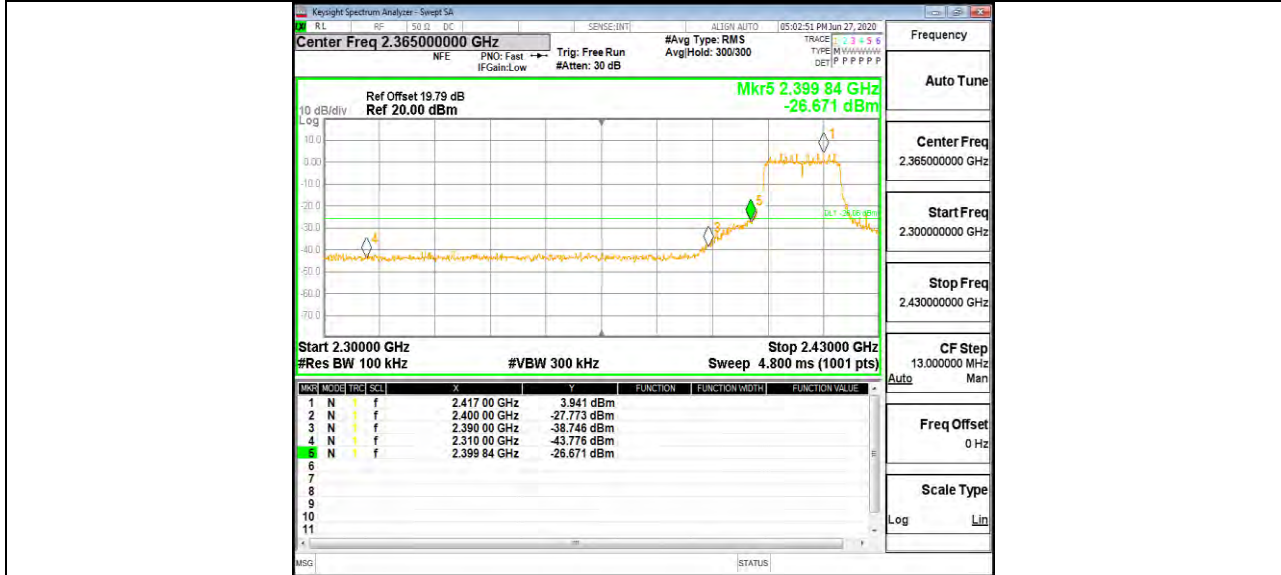


11N20SISO Ant1 High 2462

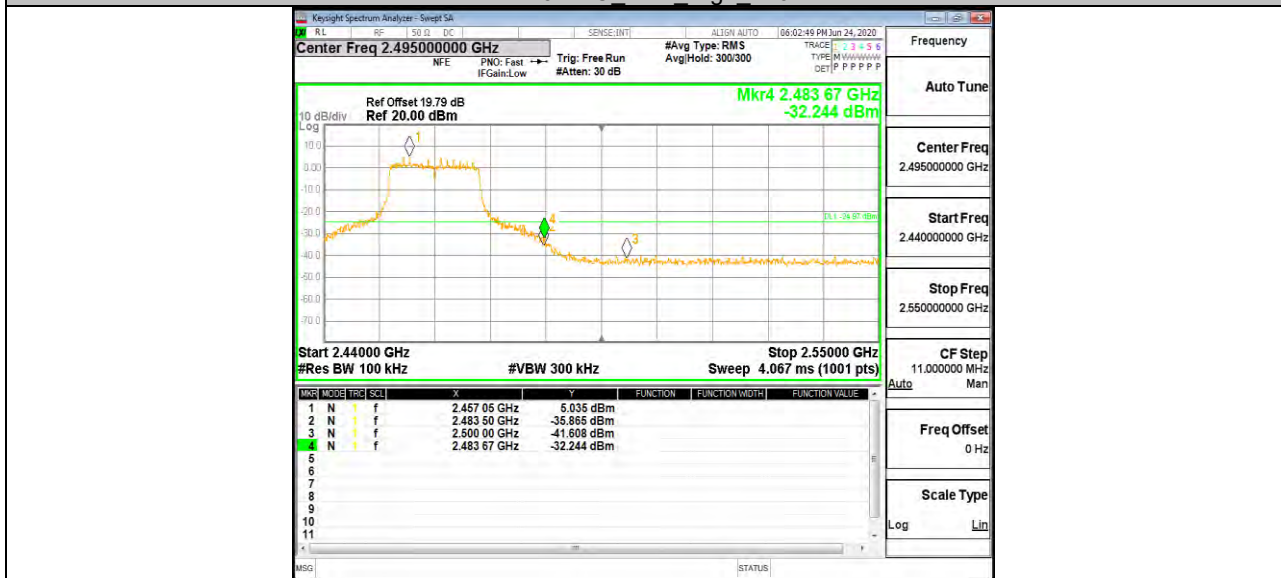

11N40SISO Ant1 Low 2422

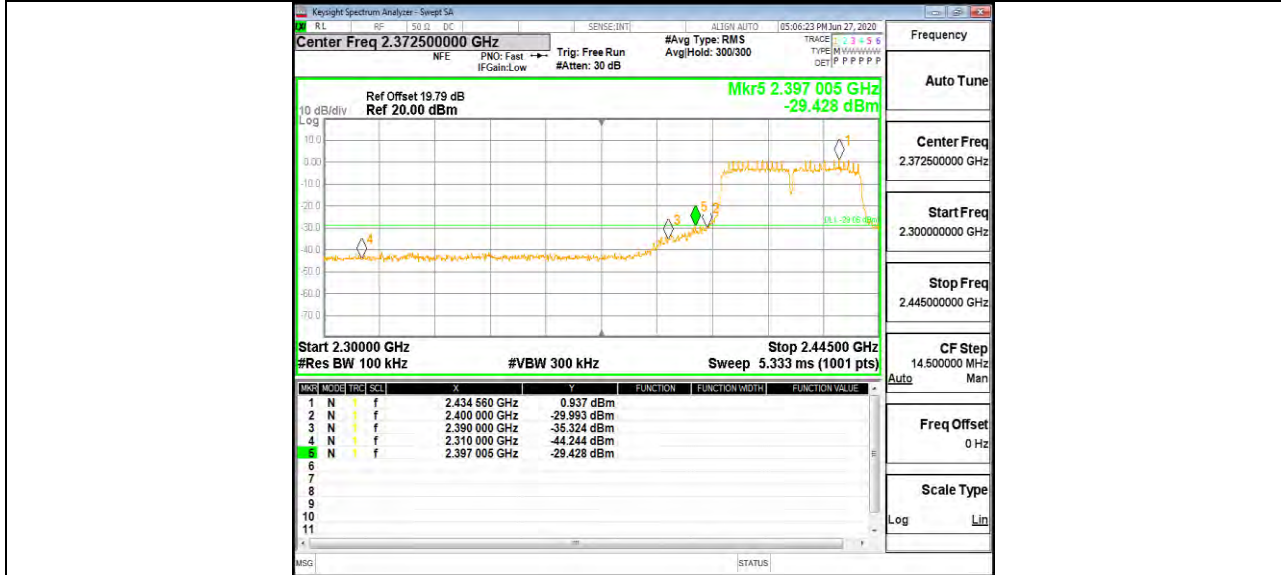

11N40SISO Ant1 High 2452

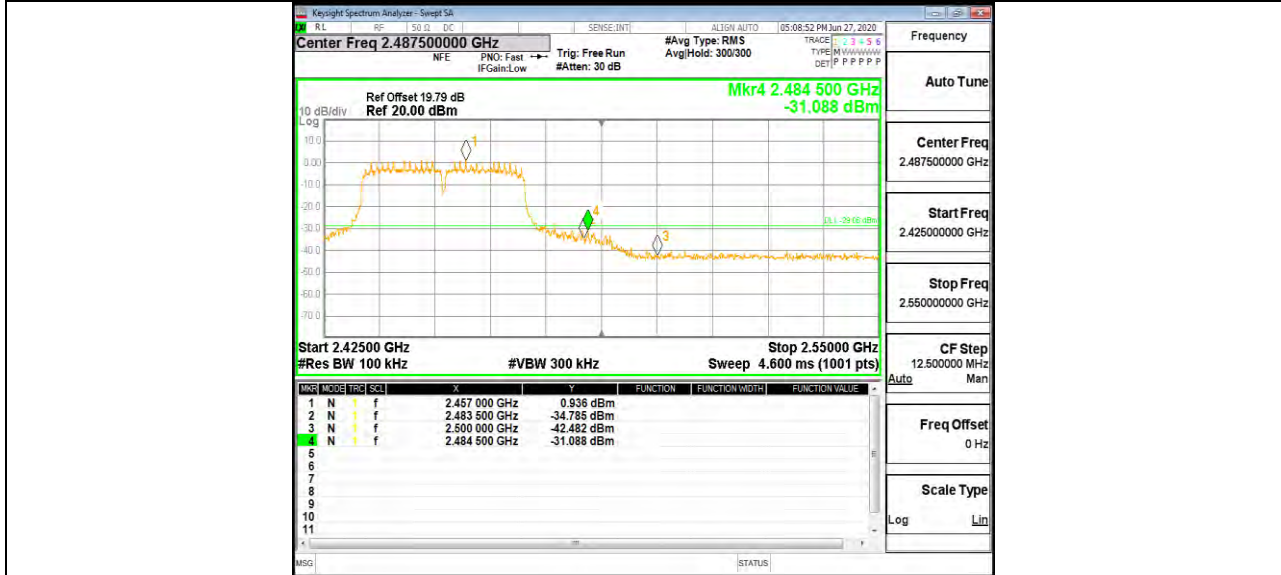




**10.6. Appendix F: Conducted Spurious Emission**  
**10.6.1. Test Result**


TestMode	Antenna	Channel	FreqRange [Mhz]	Verdict
11B	Ant1	2412	Reference	PASS
			30~1000	PASS
			1000~26500	PASS
		2437	Reference	PASS
			30~1000	PASS
			1000~26500	PASS
		2462	Reference	PASS
			30~1000	PASS
			1000~26500	PASS
11G	Ant1	2412	Reference	PASS
			30~1000	PASS
			1000~26500	PASS
		2437	Reference	PASS
			30~1000	PASS
			1000~26500	PASS
		2462	Reference	PASS
			30~1000	PASS
			1000~26500	PASS
11N20SISO	Ant1	2412	Reference	PASS
			30~1000	PASS
			1000~26500	PASS
		2437	Reference	PASS
			30~1000	PASS
			1000~26500	PASS
		2462	Reference	PASS
			30~1000	PASS
			1000~26500	PASS
11N40SISO	Ant1	2422	Reference	PASS
			30~1000	PASS
			1000~26500	PASS
		2437	Reference	PASS
			30~1000	PASS
			1000~26500	PASS
		2452	Reference	PASS
			30~1000	PASS
			1000~26500	PASS




### 10.6.2. Test Graphs

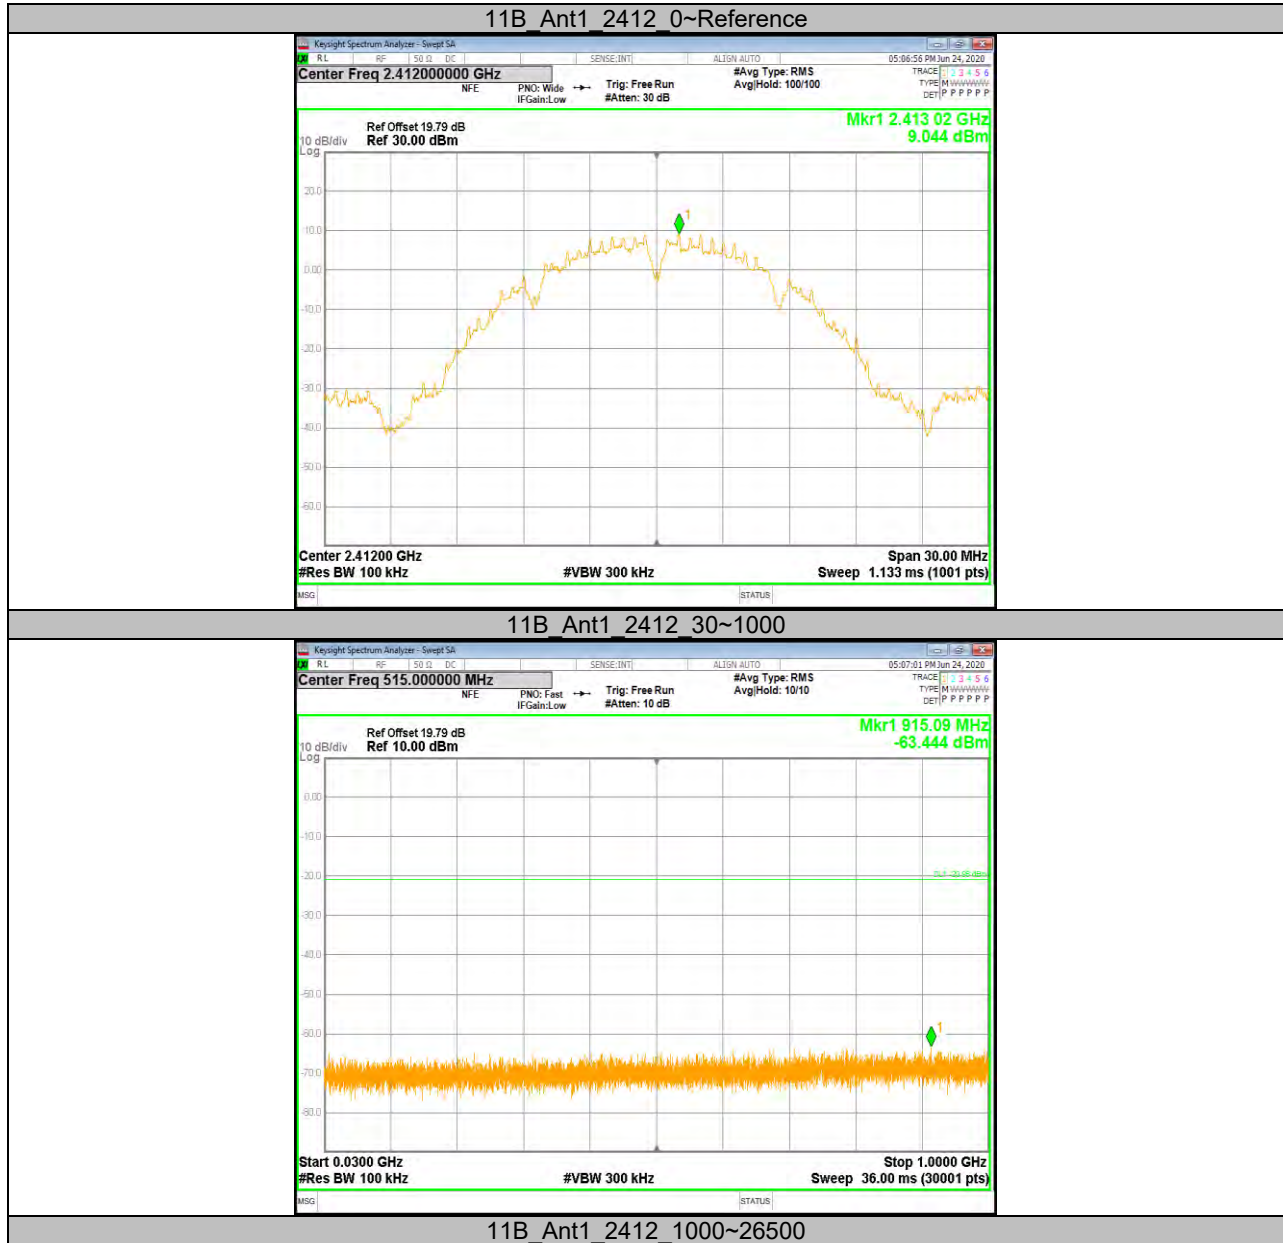




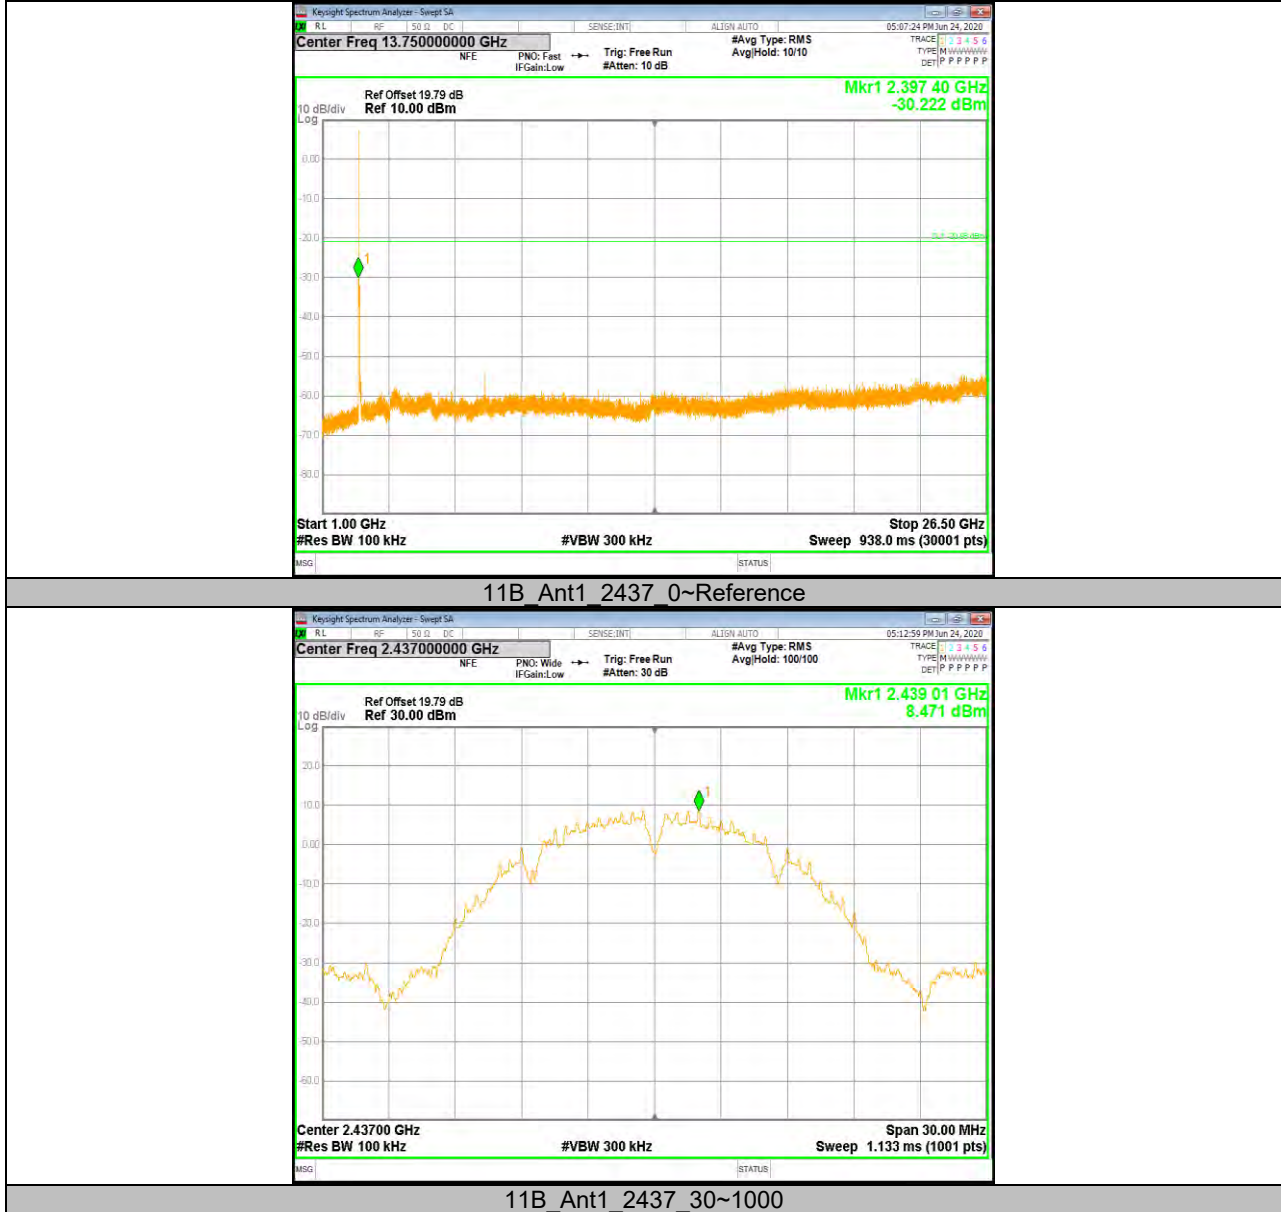


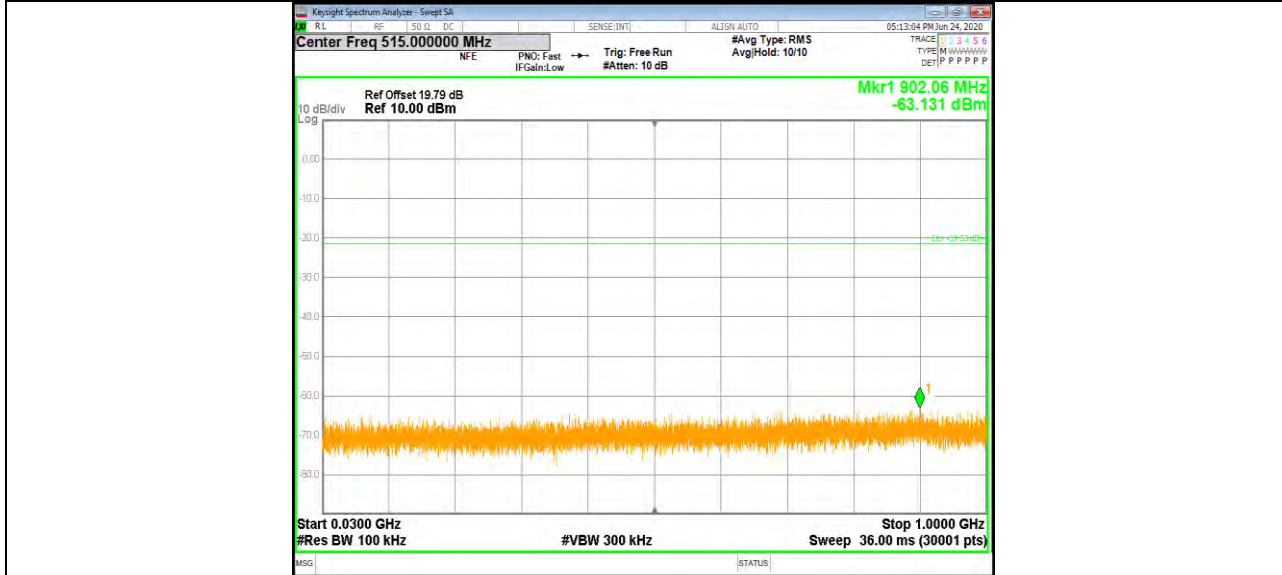


11B\_Ant1\_2437\_1000~26500

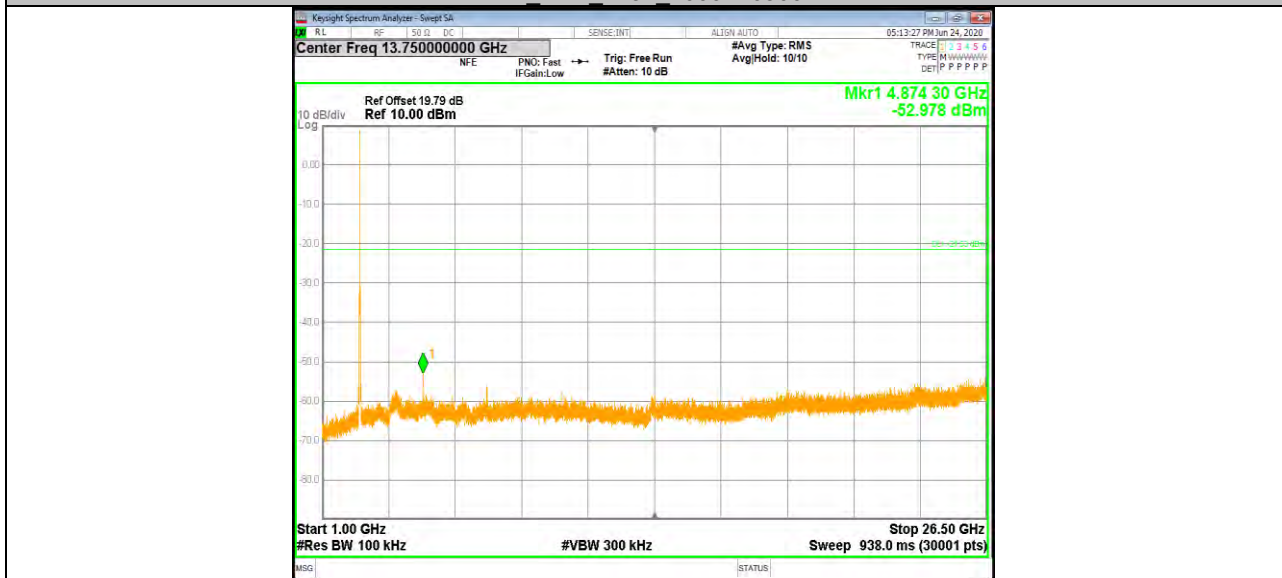


11B\_Ant1\_2462\_0~Reference

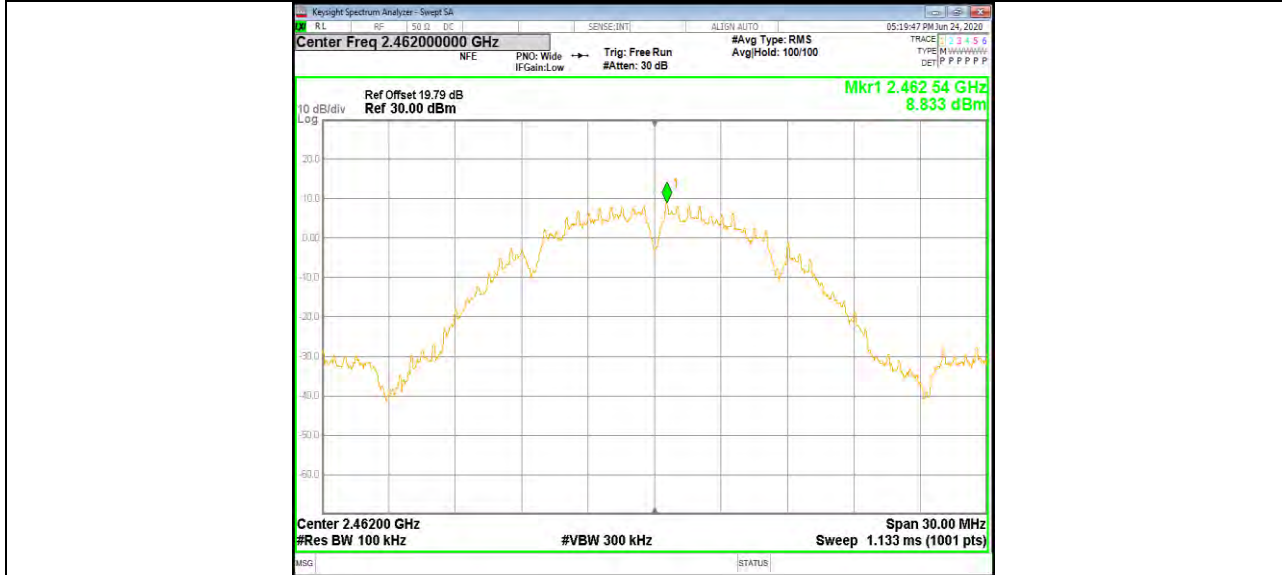


11B\_Ant1\_2462\_30~1000

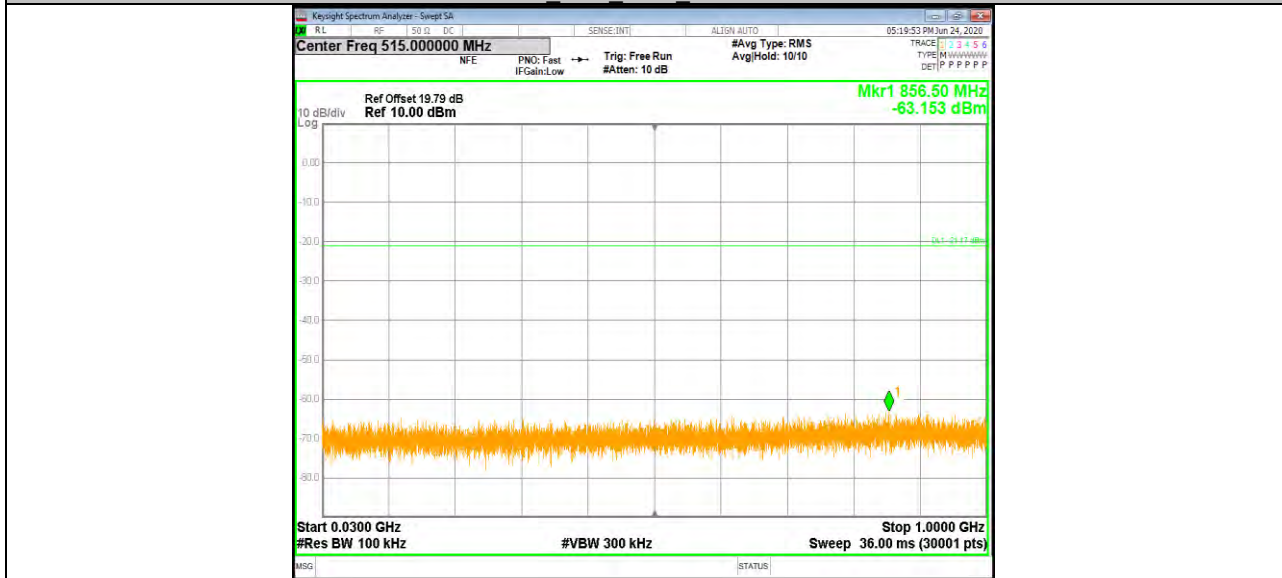


11B\_Ant1\_2462\_1000~26500

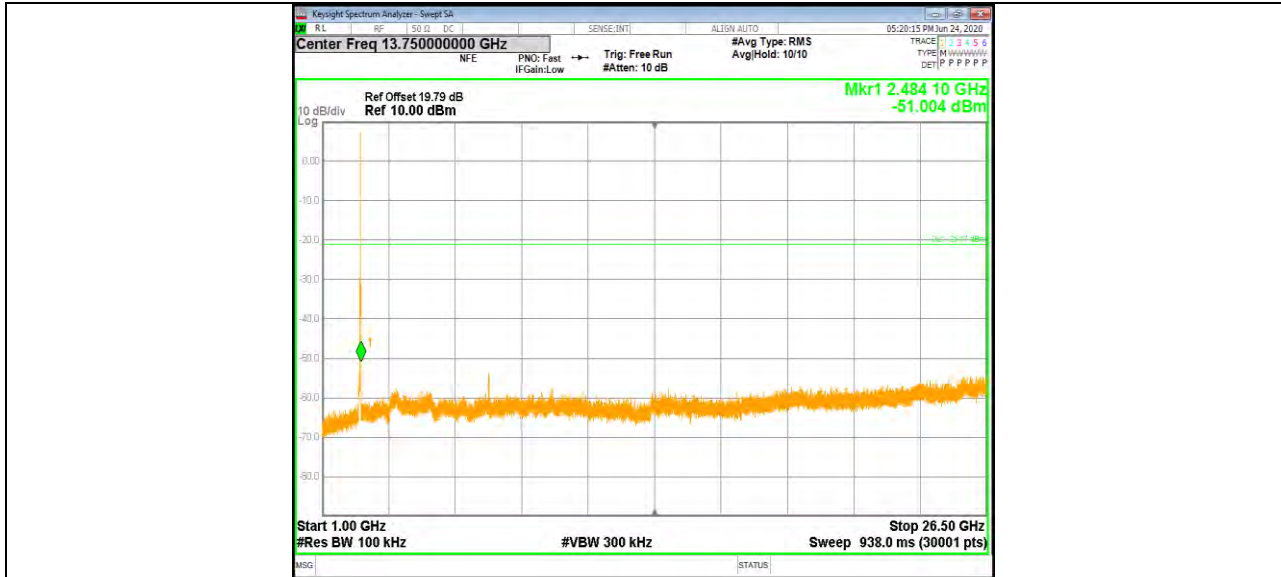


11G Ant1 2412 0~Reference

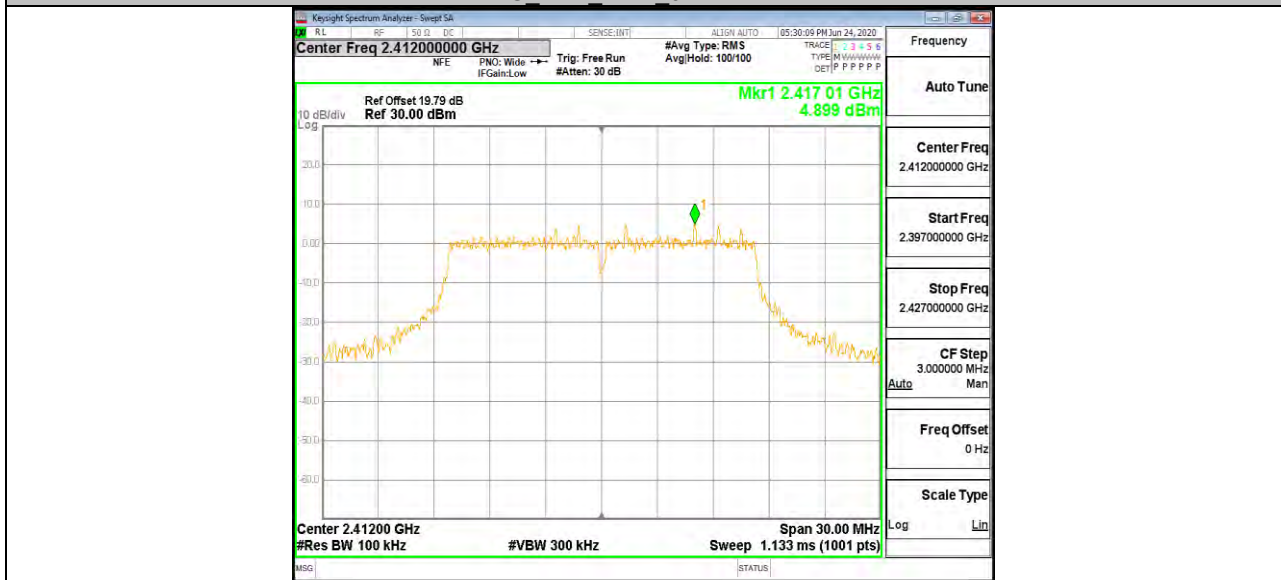

11G Ant1 2412 30~1000

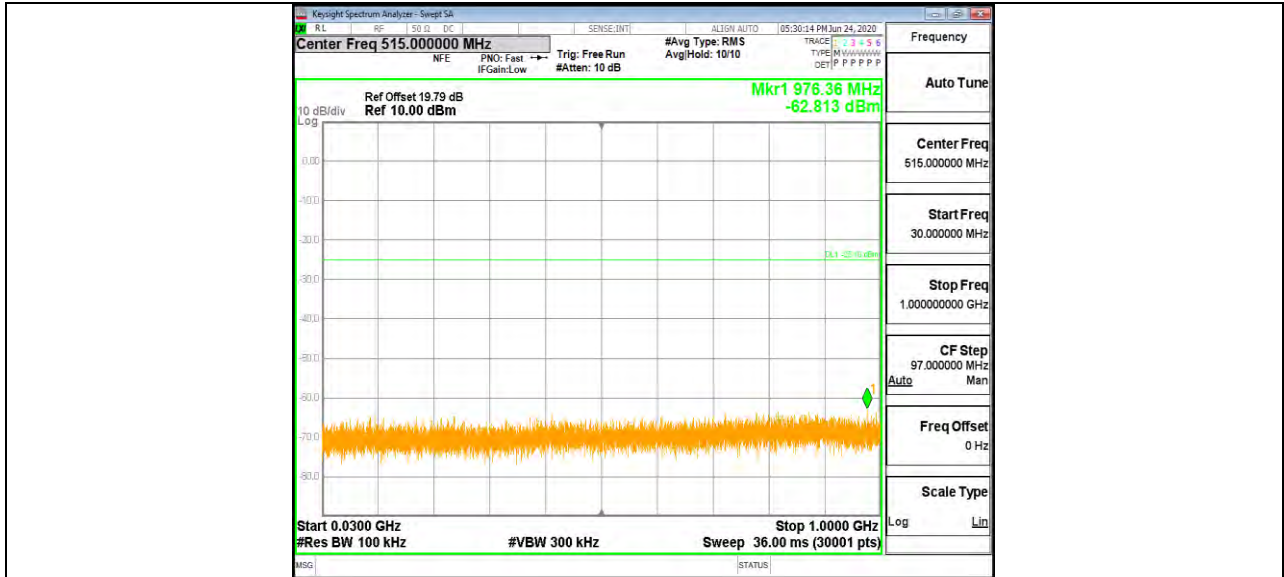


11G Ant1\_2412\_1000~26500

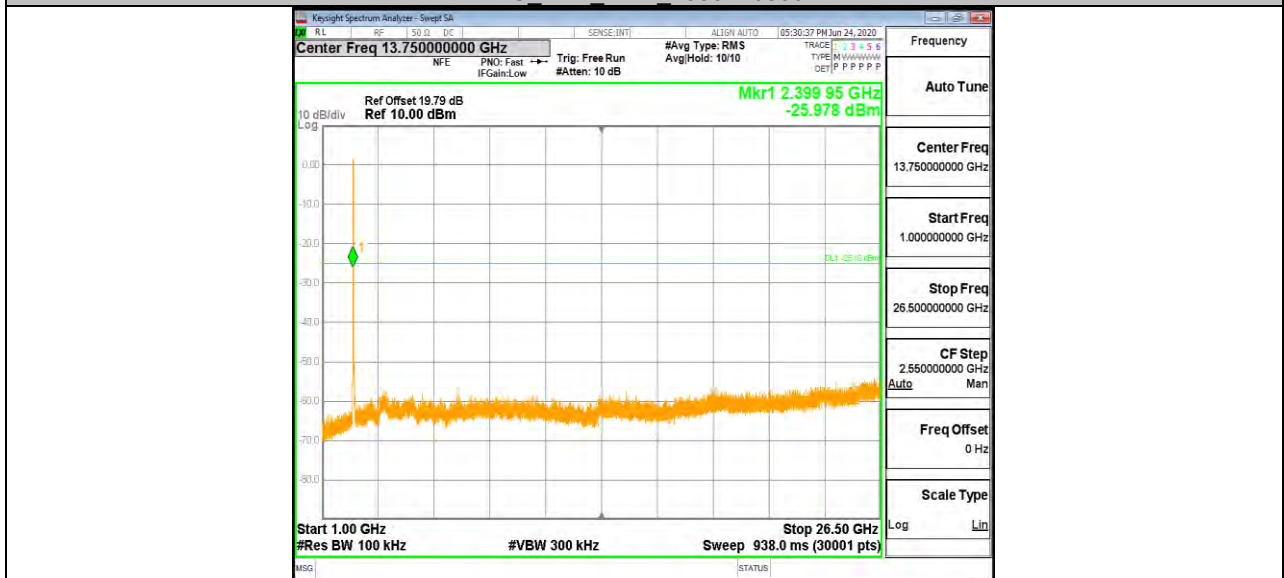


11G Ant1\_2437\_0~Reference




11G Ant1 2437 30~1000

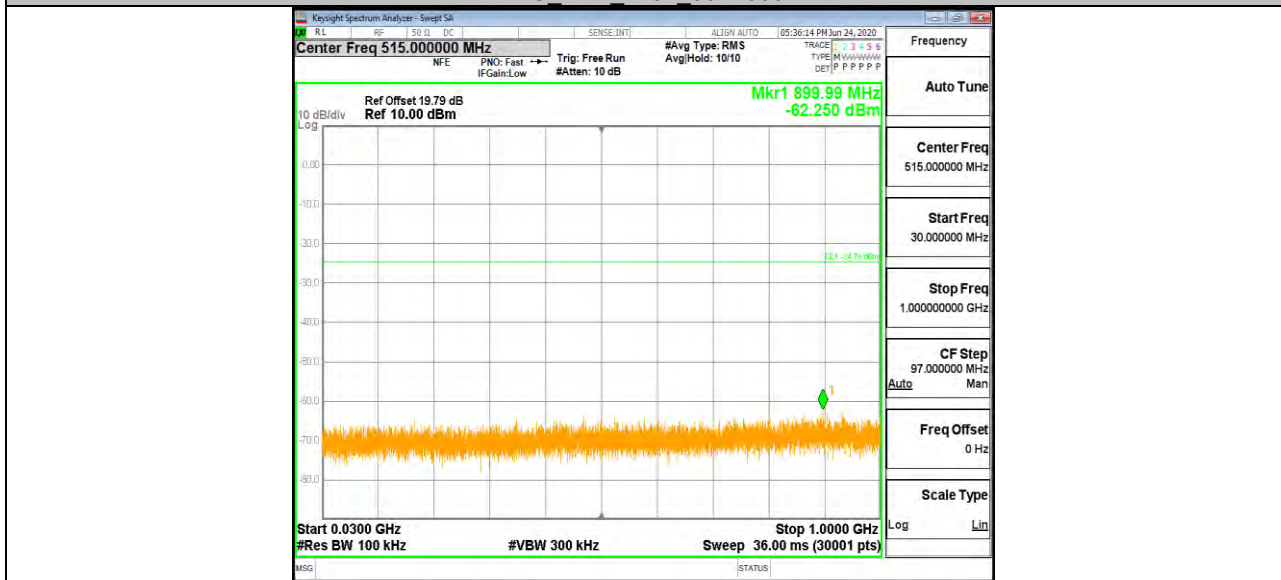



11G Ant1 2437 1000~26500

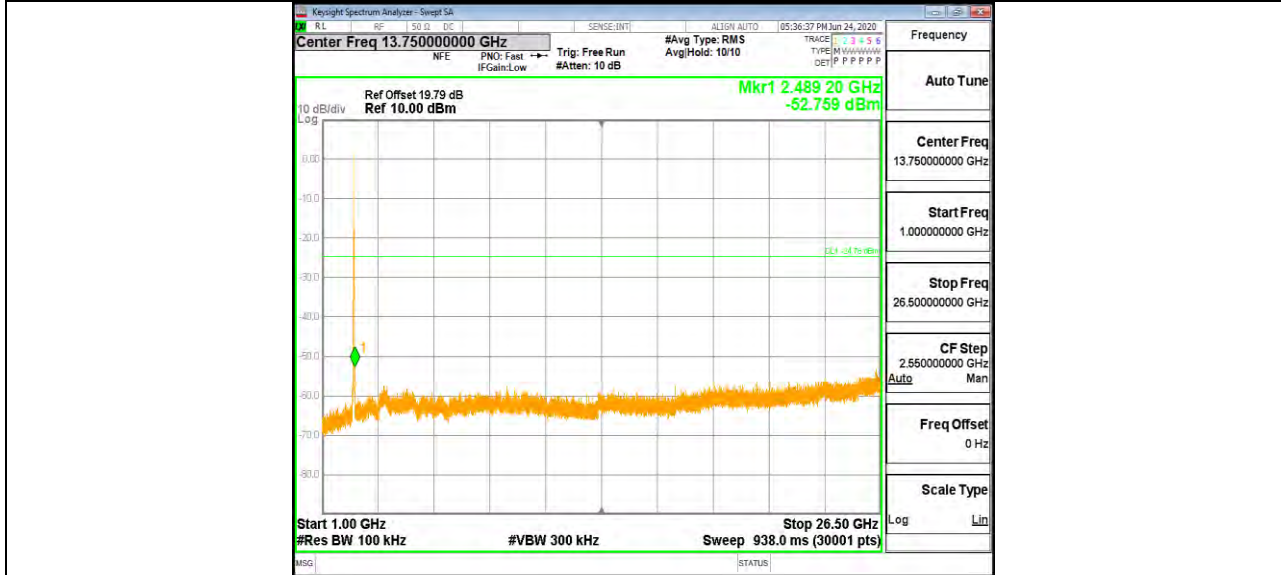


11G Ant1 2462 0~Reference

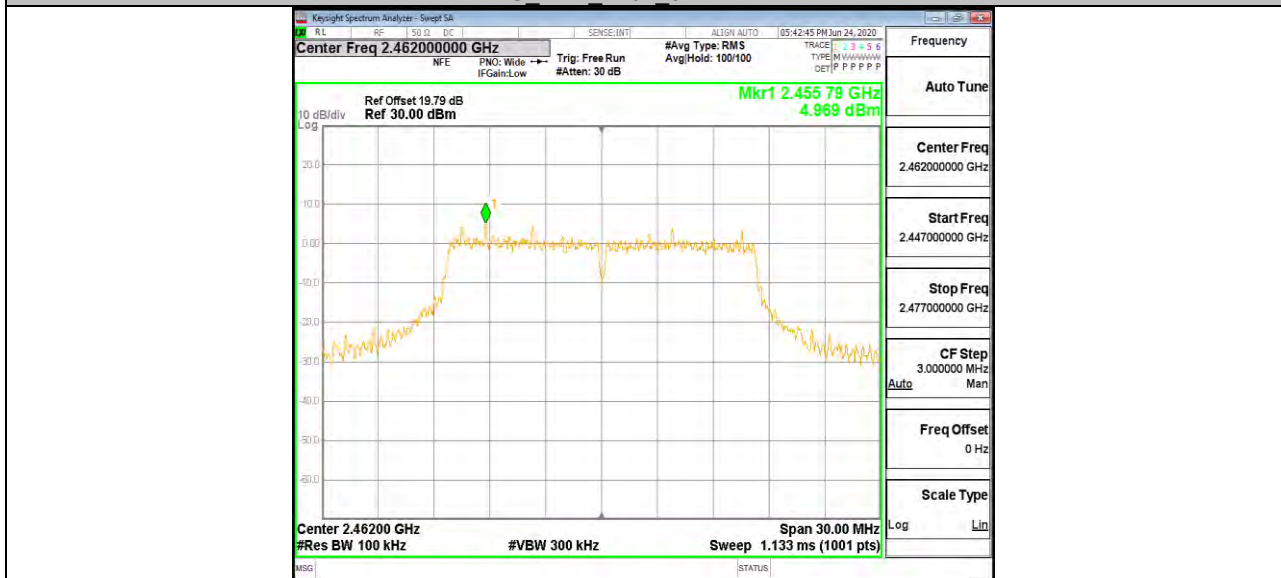


11G Ant1 2462 30~1000

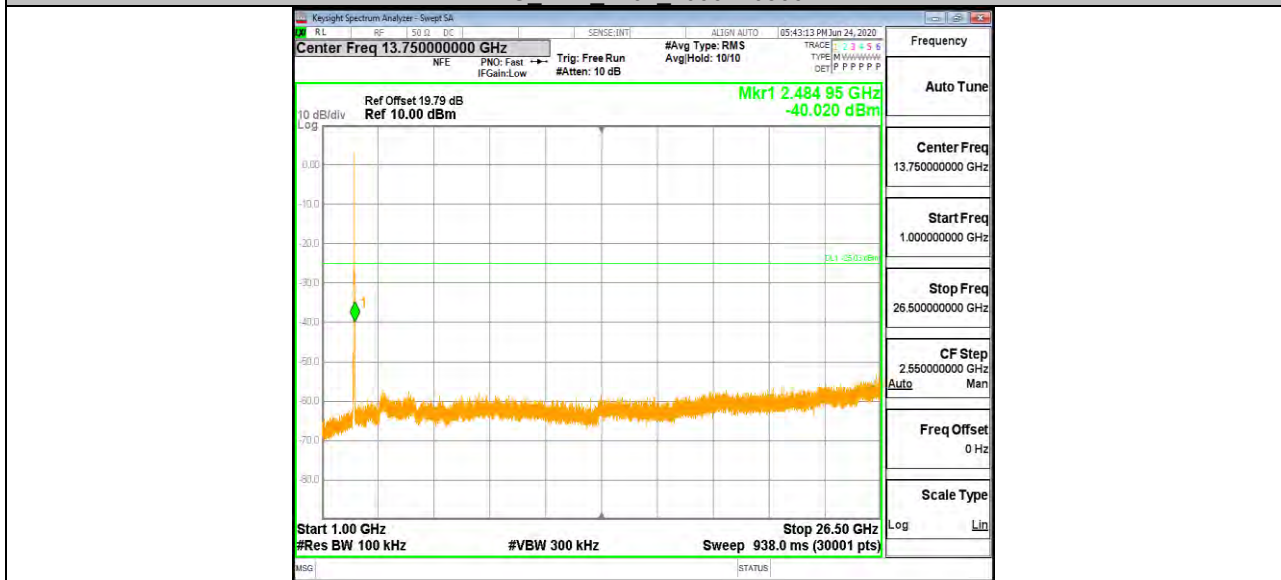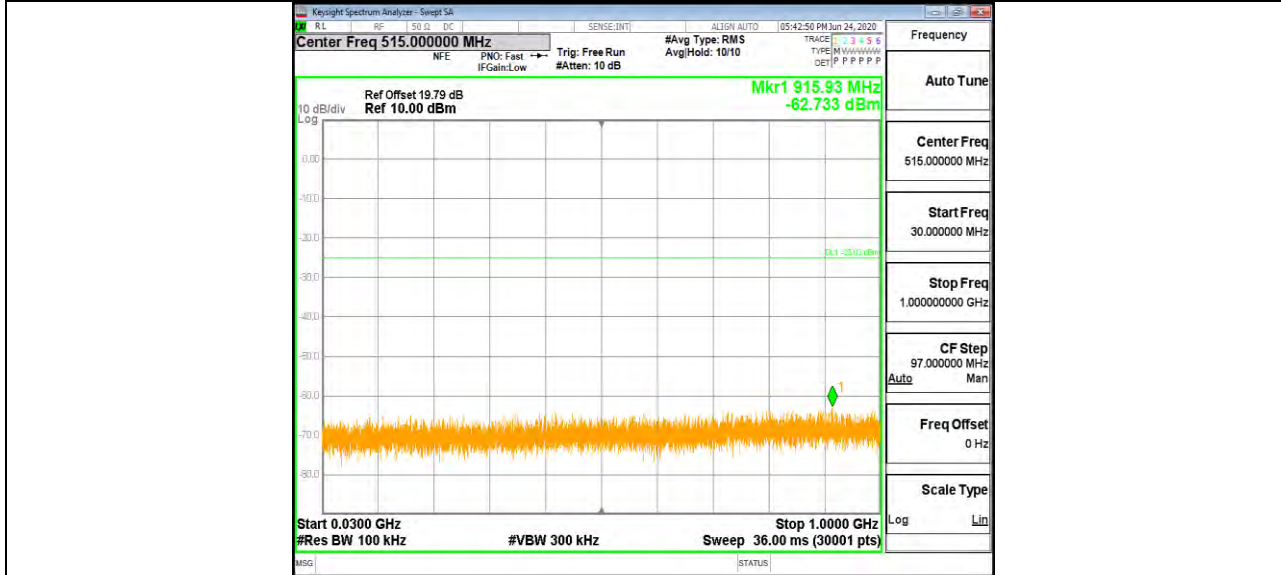




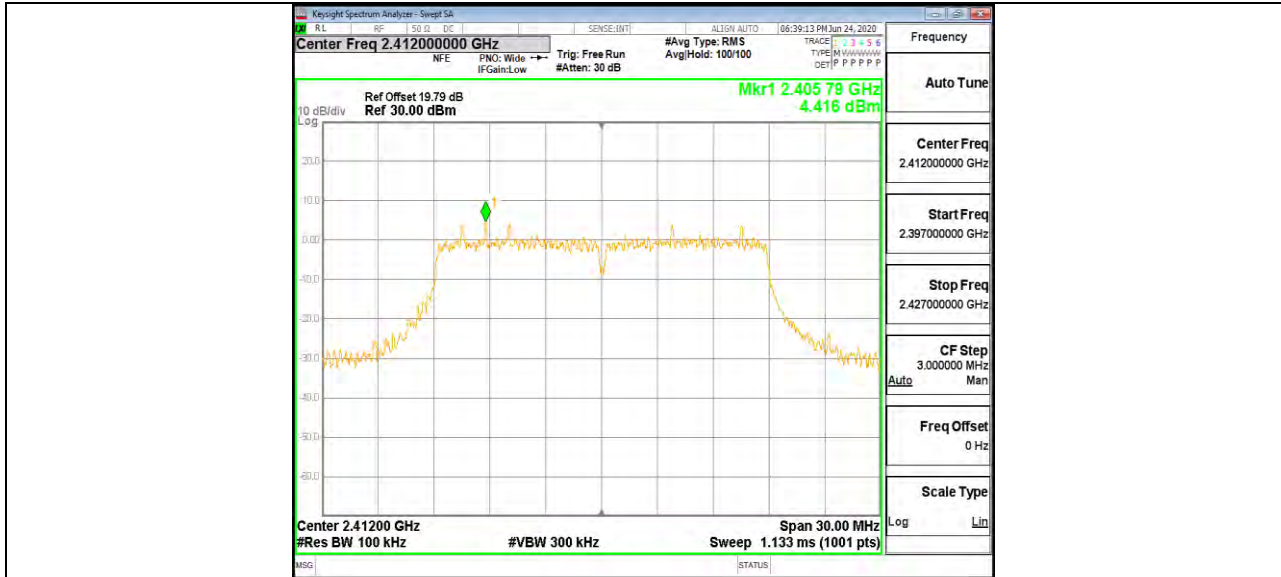


11N20SISO Ant1 2412 30~1000

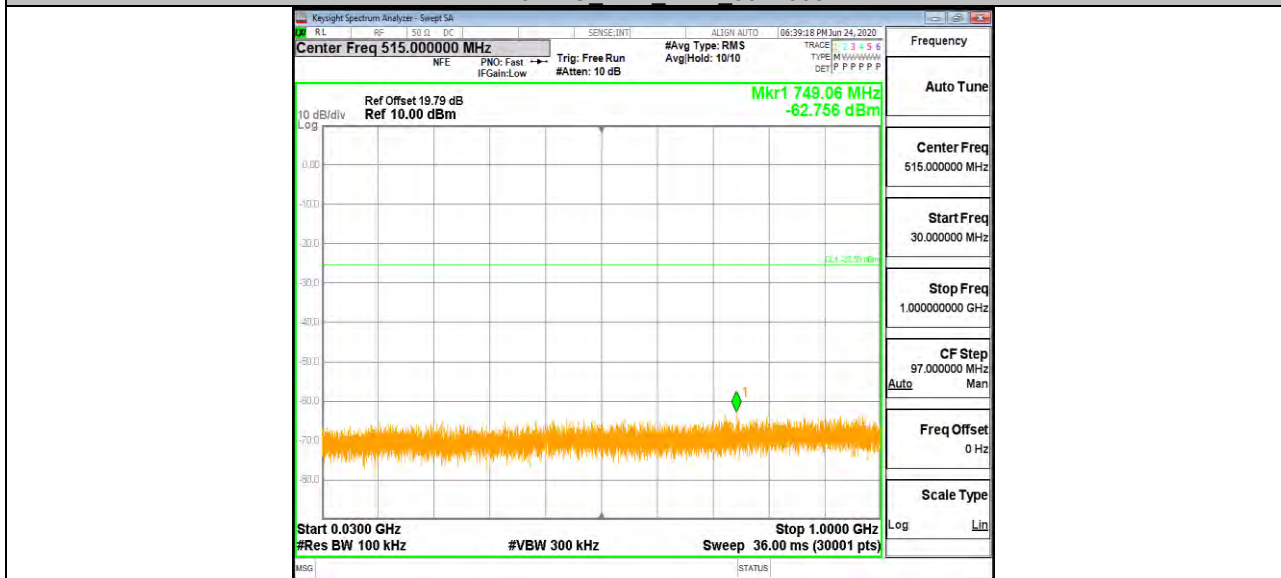


11N20SISO Ant1 2412 1000~26500

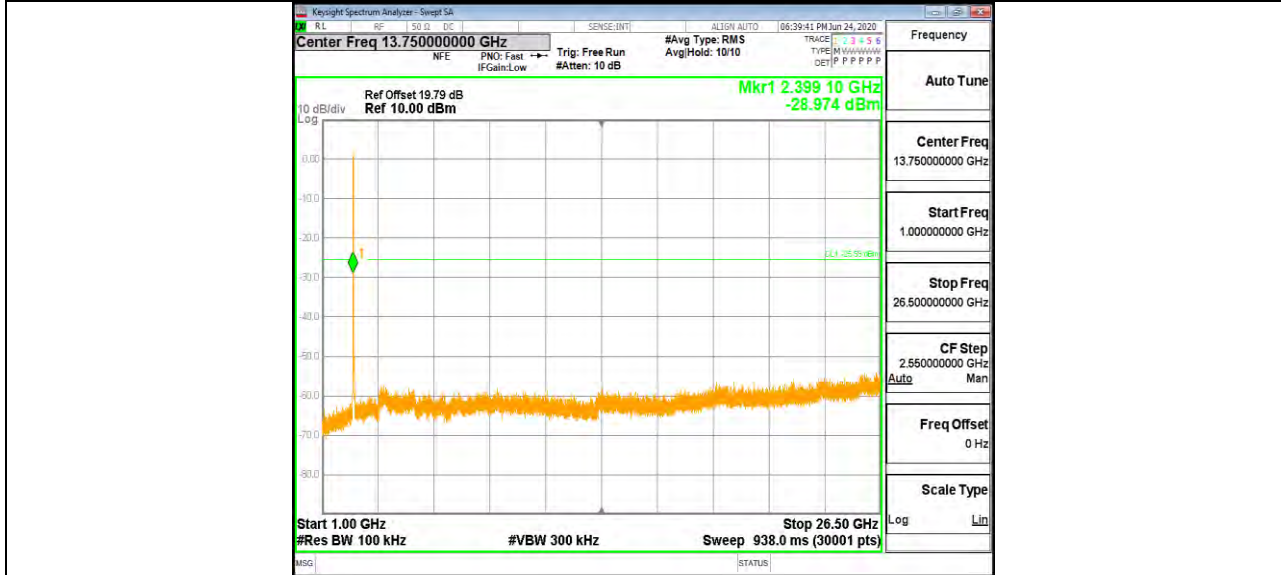


11N20SISO Ant1 2437 0~Reference

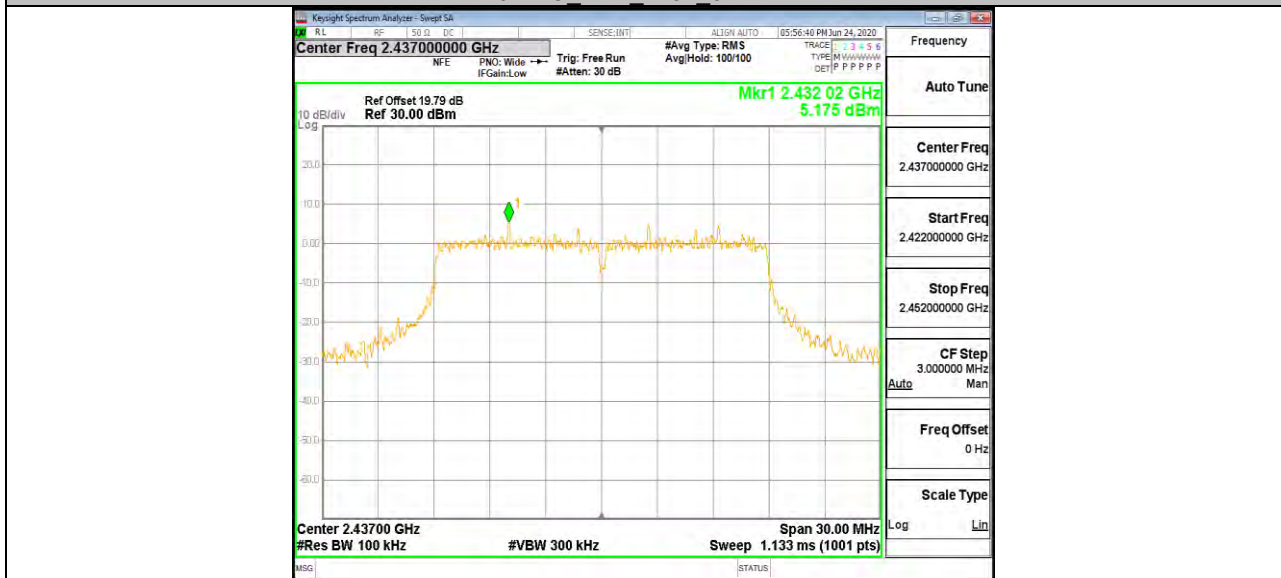


11N20SISO Ant1 2437 30~1000

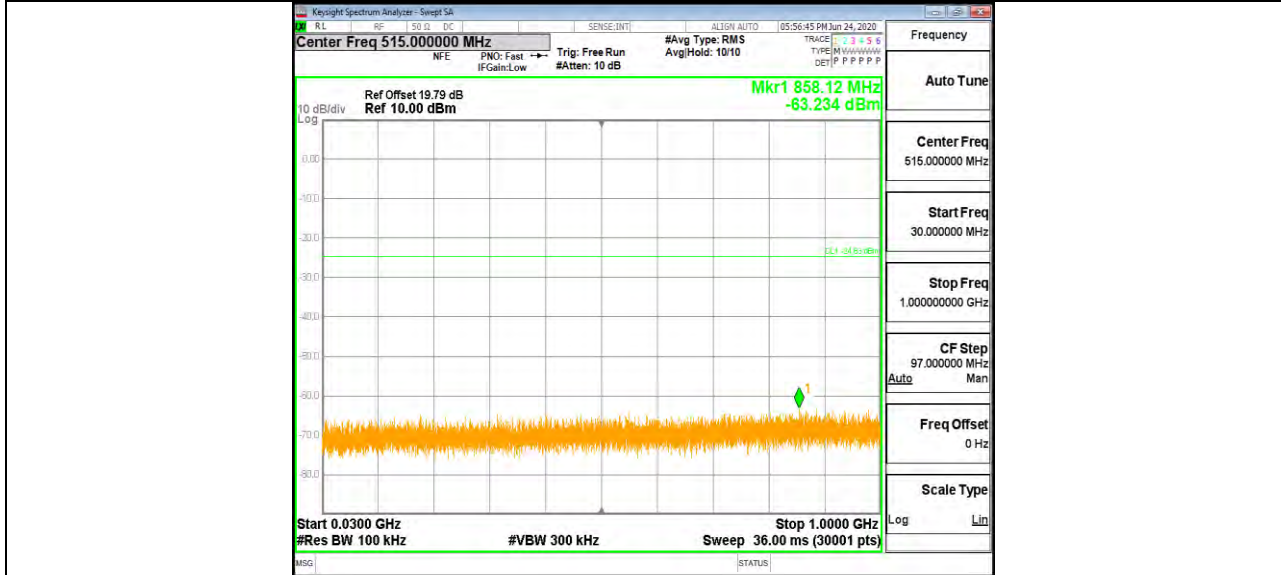


11N20SISO Ant1 2437 1000~26500

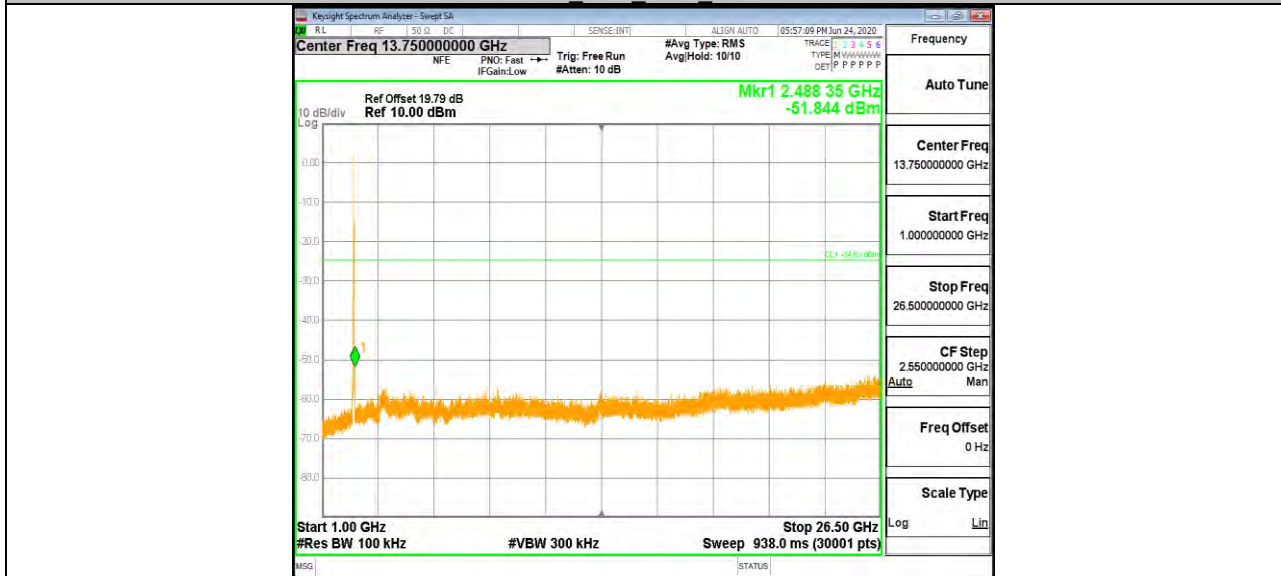


11N20SISO Ant1 2462 0~Reference

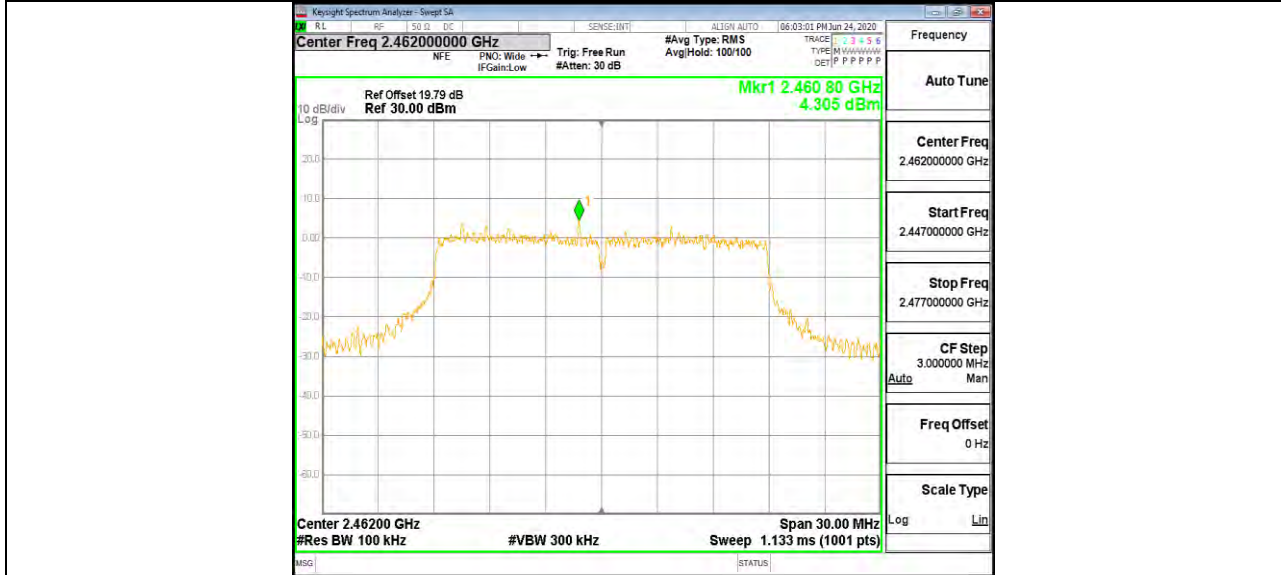


11N20SISO Ant1 2462 30~1000

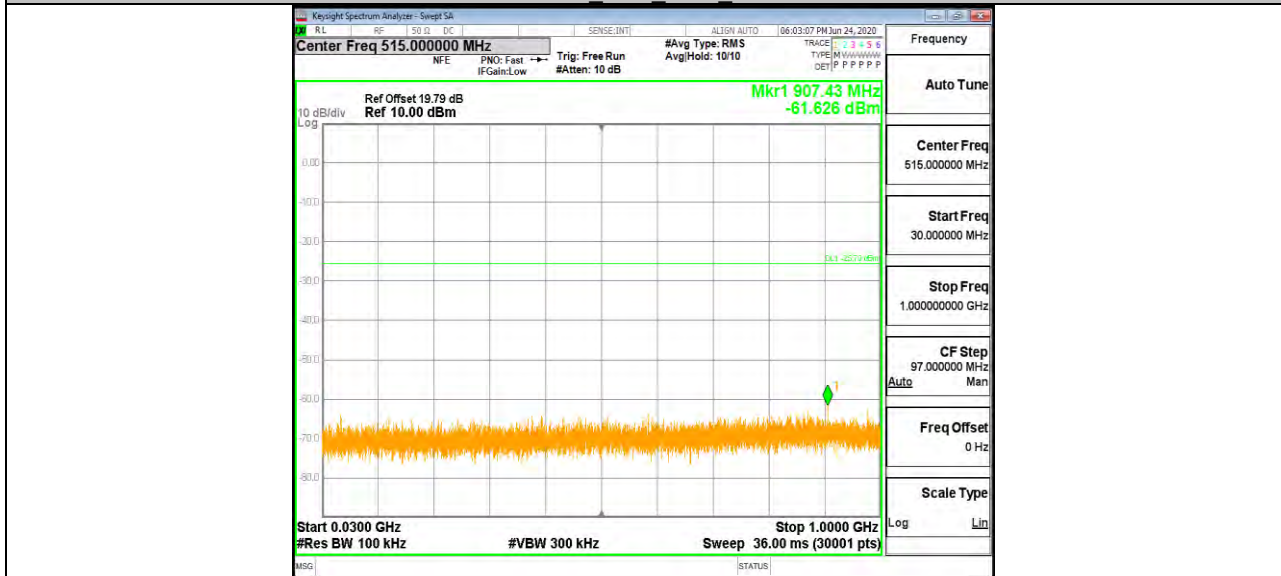


11N20SISO Ant1 2462 1000~26500

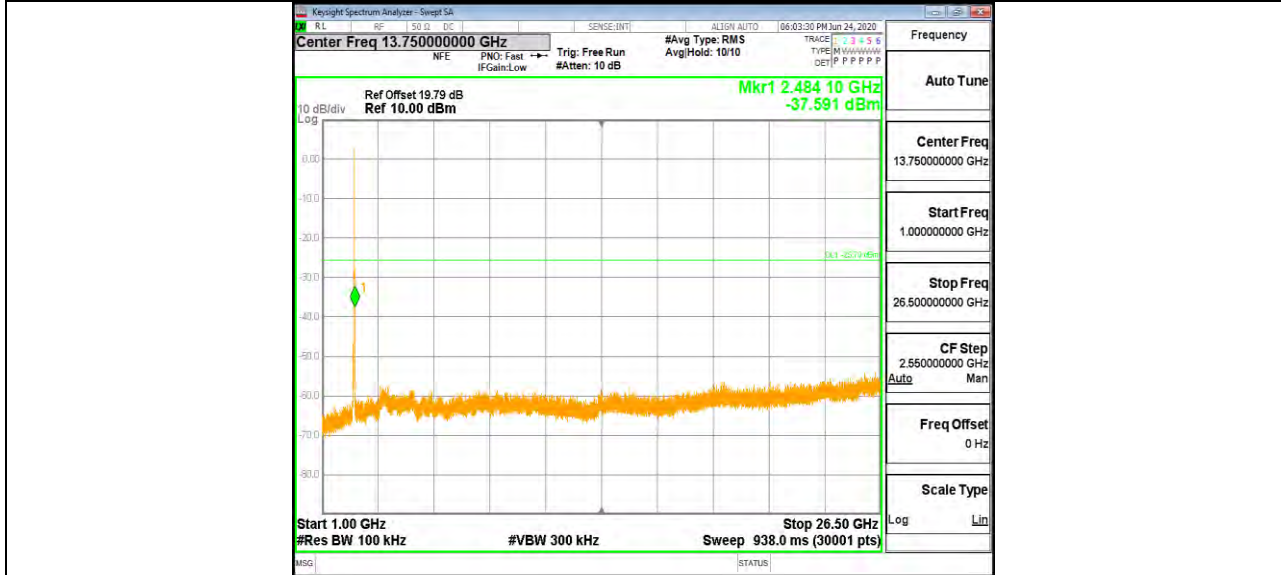


11N40SISO Ant1 2422 0~Reference

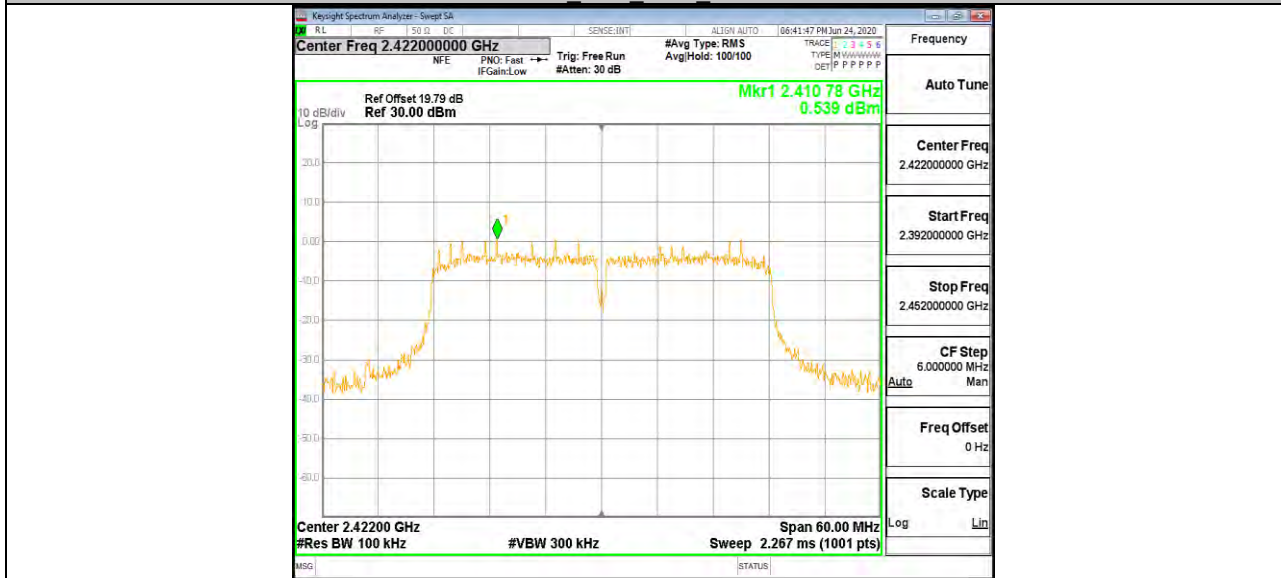


11N40SISO Ant1 2422 30~1000

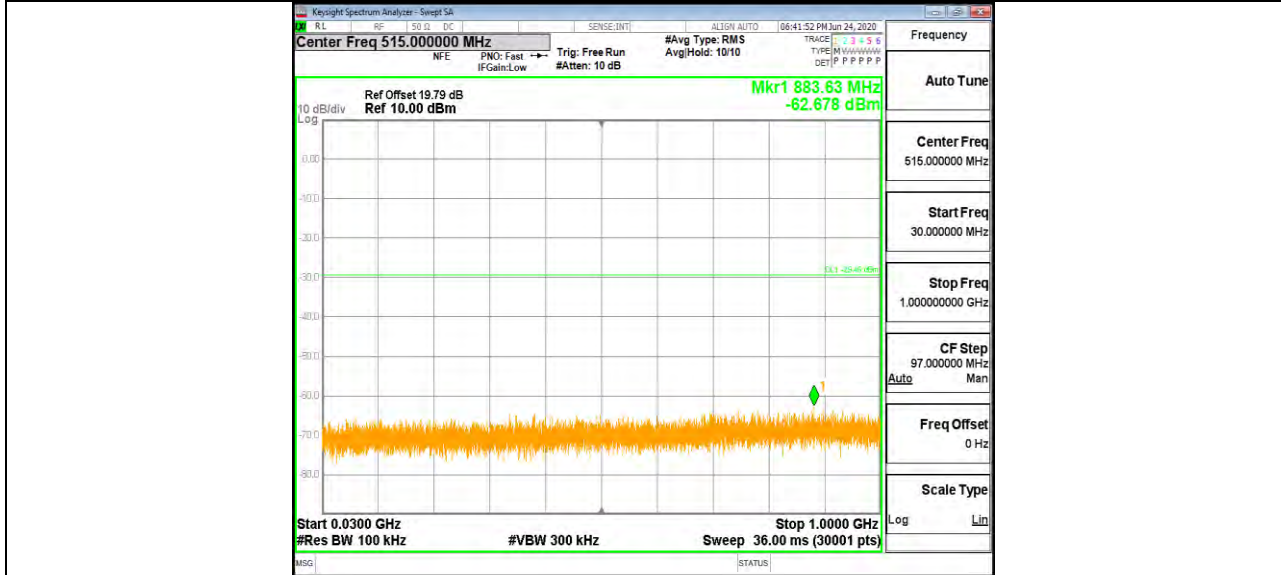


11N40SISO Ant1 2422 1000~26500

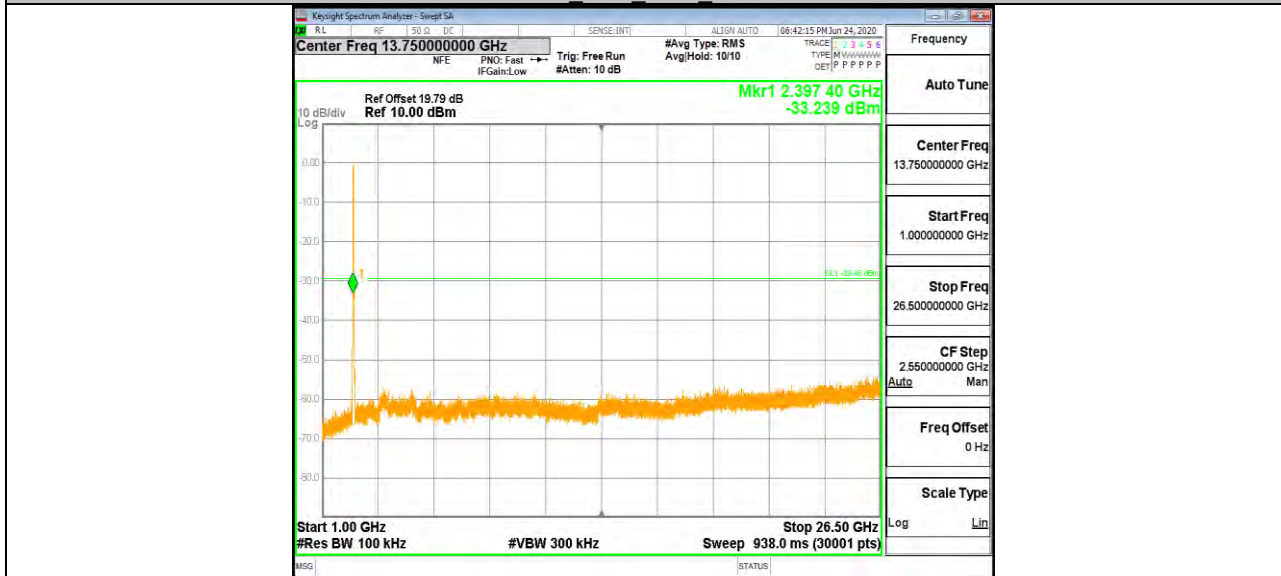


11N40SISO Ant1 2437 0~Reference

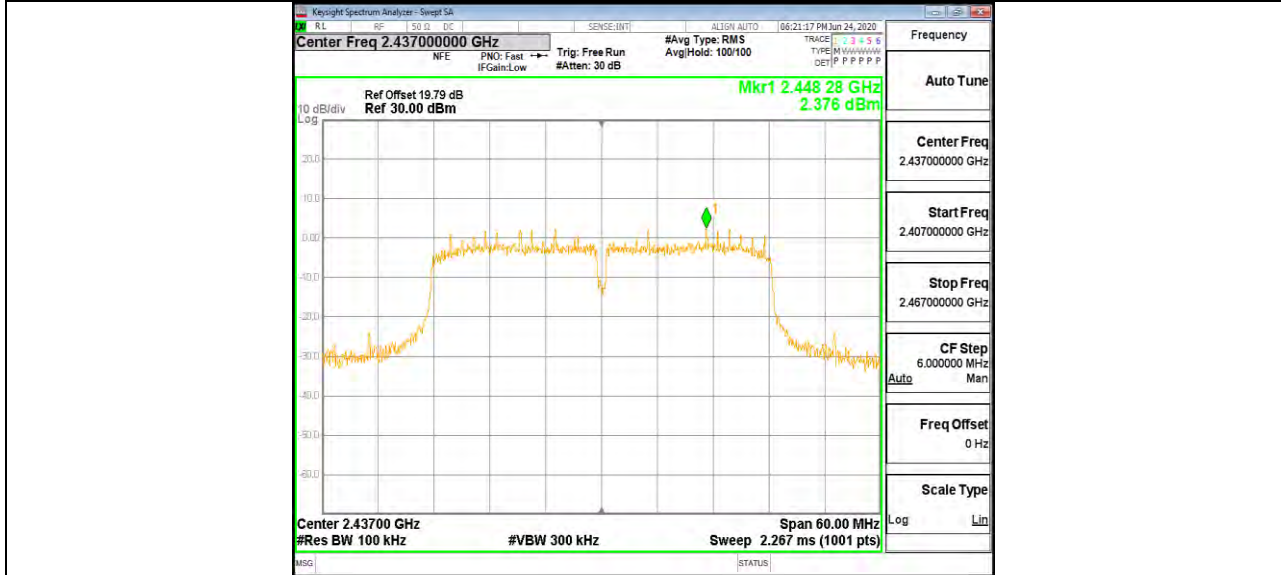


11N40SISO Ant1 2437 30~1000

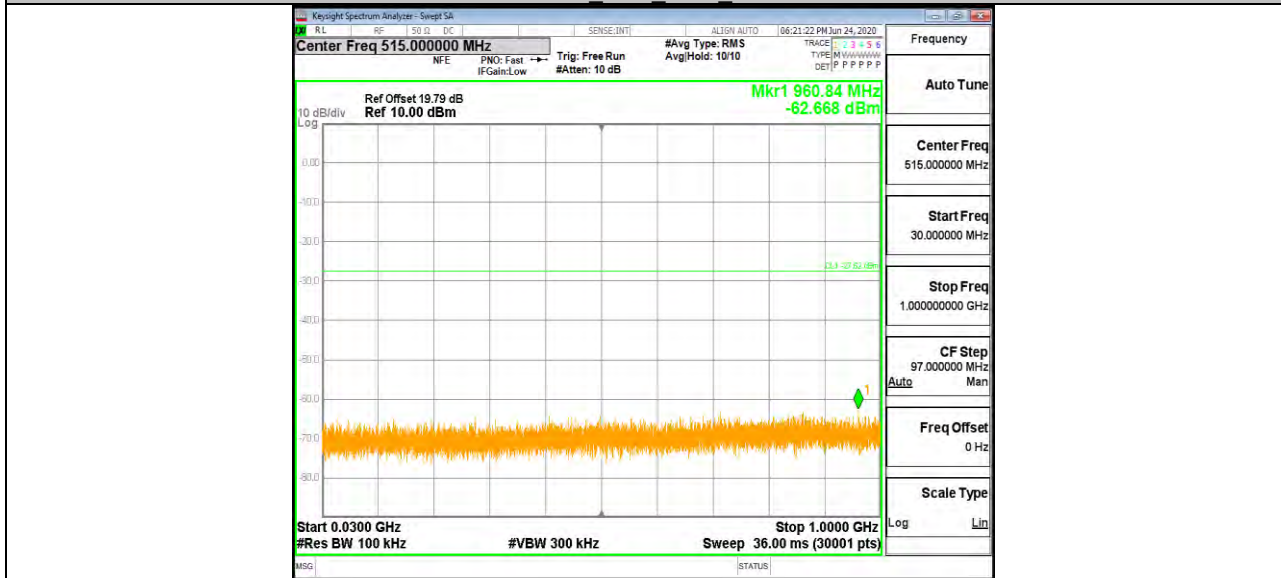

11N40SISO Ant1 2437 1000~26500

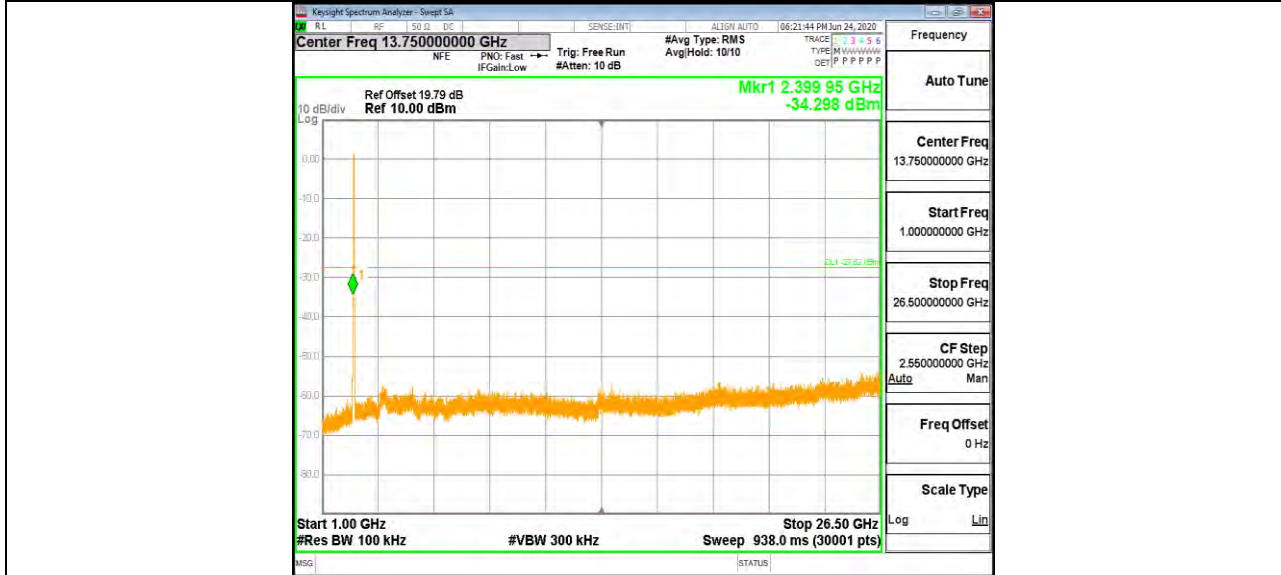


11N40SISO Ant1 2452 0~Reference

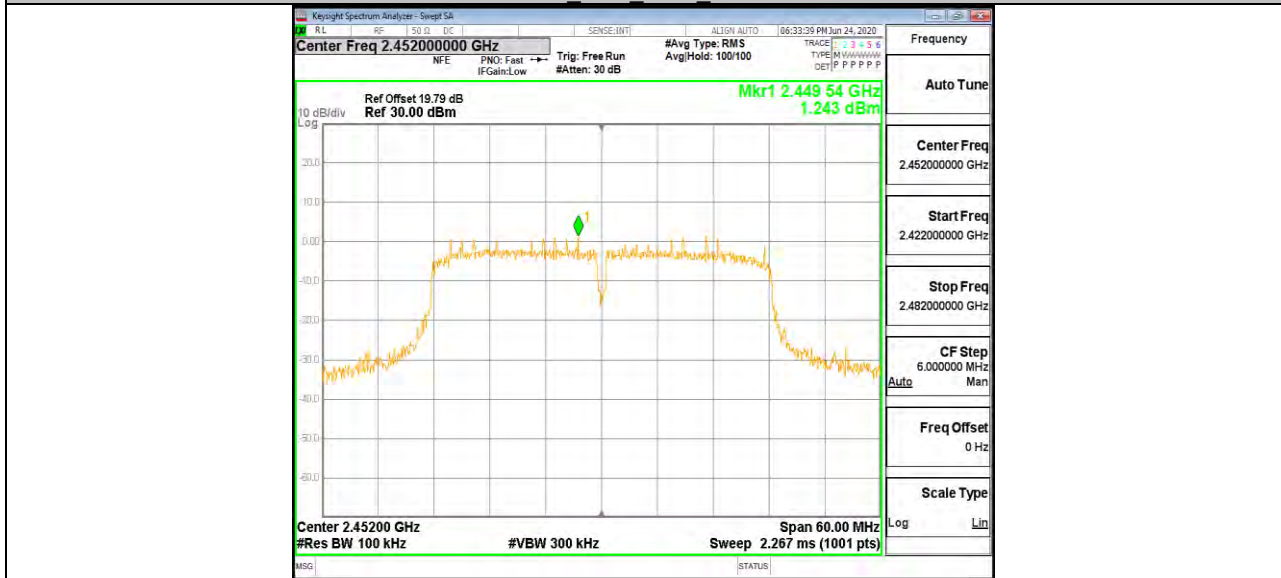

11N40SISO Ant1 2452 30~1000



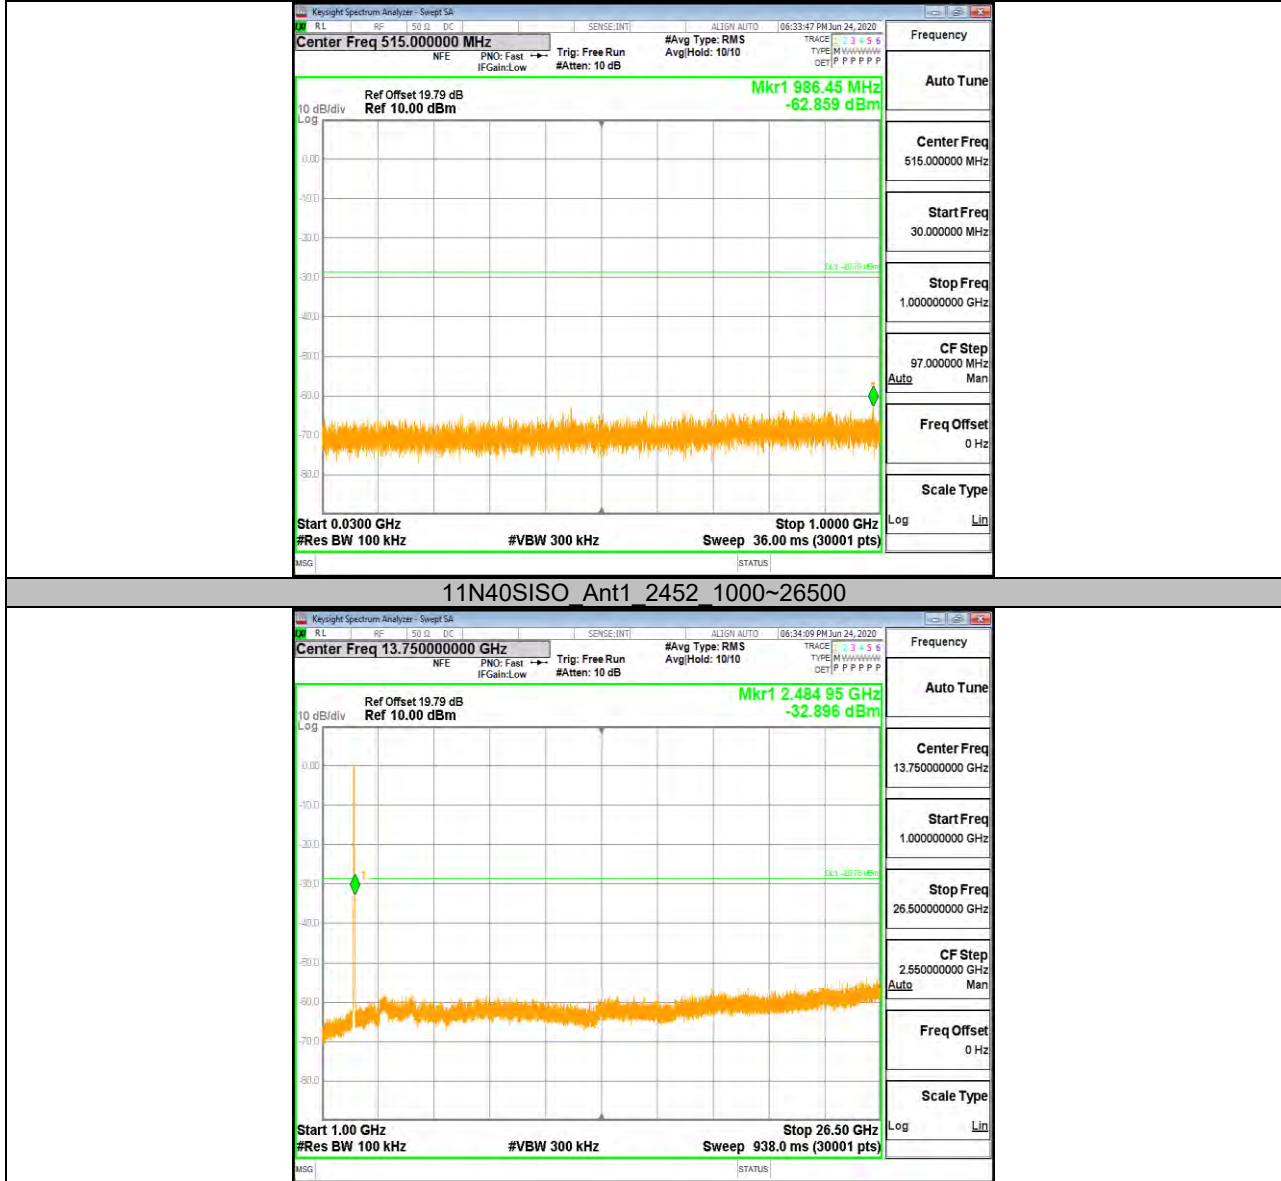



**10.7. Appendix G: Duty Cycle**  
**10.7.1. Test Result**

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (KHz)	Final setting For VBW (KHz)
11b	8.218	8.421	0.976	97.6	0.11	0.12	0.5
11g	1.362	1.562	0.872	87.2	0.27	0.59	1
11n HT20	1.273	1.473	0.864	86.4	0.63	0.79	1
11n HT40	0.633	0.835	0.758	75.8	1.20	1.58	2

Note:

Duty Cycle Correction Factor= $10\log(1/x)$ .


Where: x is Duty Cycle (Linear)

Where: T is On Time (transmit duration)

If that calculated VBW is not available on the analyzer then the next higher value should be used.




### 10.7.2. Test Graphs

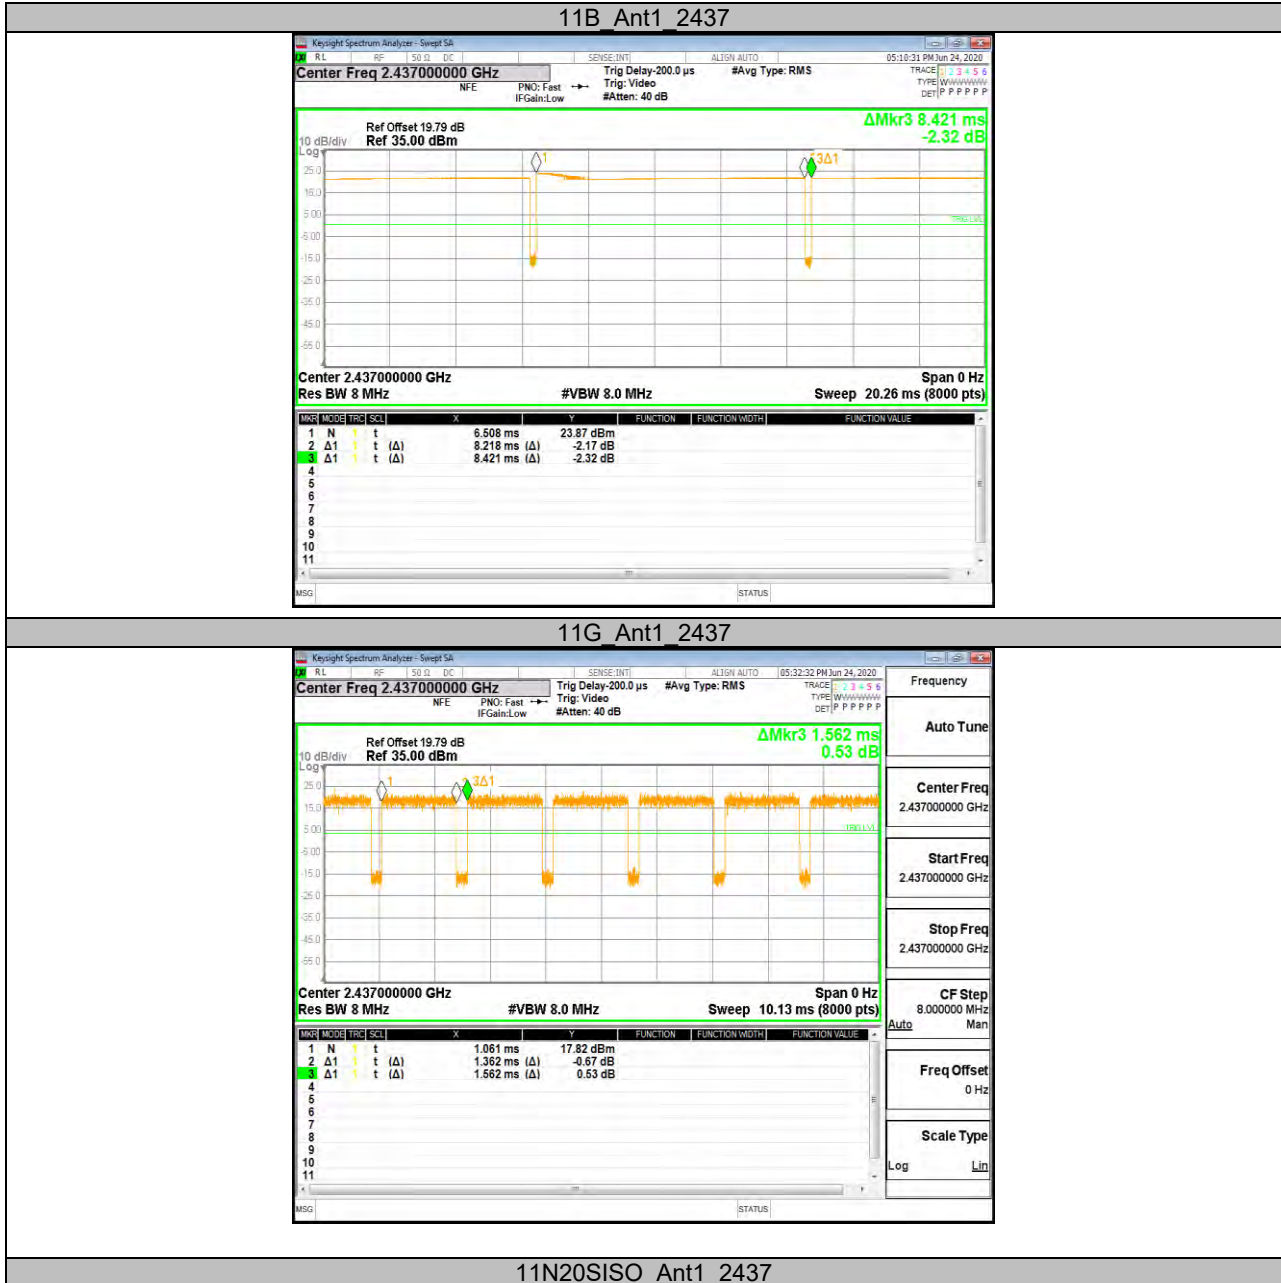



11N40SISO Ant1 2437

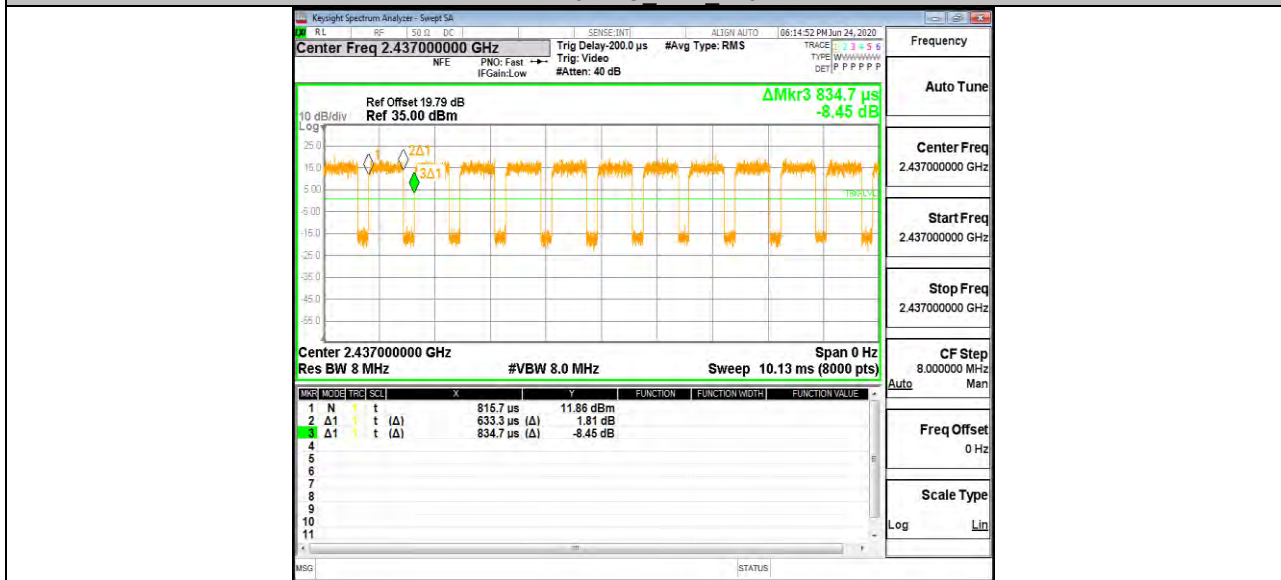

END OF REPORT