



**FCC PART 15C
TEST REPORT
No. I19N00570-BLE**

for

Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd

smartphone

cp3705AS

with

Hardware Version: P0

Software Version: 9.0.3705AS.SPRINT.190408.1D

FCC ID: R38YLCP3705AS

Issued Date: 2019-04-28

Designation Number: CN1210

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District,
Shenzhen, Guangdong, P. R. China 518026.

Tel: +86(0)755-33322000, Fax: +86(0)755-33322001, Email:yewu@caict.ac.cn www.cszit.com

REPORT HISTORY

| Report Number | Revision | Description | Issue Date |
|----------------------|-----------------|--------------------|-------------------|
| I19N00570-BLE | Rev.0 | 1st edition | 2019-04-28 |

CONTENTS

| | |
|---|-----------|
| CONTENTS | 3 |
| 1. TEST LABORATORY | 4 |
| 1.1. TESTING LOCATION | 4 |
| 1.2. TESTING ENVIRONMENT..... | 4 |
| 1.3. PROJECT DATA | 4 |
| 1.4. SIGNATURE | 4 |
| 2. CLIENT INFORMATION..... | 5 |
| 2.1. APPLICANT INFORMATION | 5 |
| 2.2. MANUFACTURER INFORMATION..... | 5 |
| 3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) | 6 |
| 3.1. ABOUT EUT | 6 |
| 3.2. INTERNAL IDENTIFICATION OF EUT | 6 |
| 3.3. INTERNAL IDENTIFICATION OF AE..... | 6 |
| 3.4. GENERAL DESCRIPTION..... | 6 |
| 4. REFERENCE DOCUMENTS | 7 |
| 4.1. DOCUMENTS SUPPLIED BY APPLICANT | 7 |
| 4.2. REFERENCE DOCUMENTS FOR TESTING..... | 7 |
| 5. TEST RESULTS | 8 |
| 5.1. SUMMARY OF TEST RESULTS | 8 |
| 5.2. STATEMENTS..... | 8 |
| 5.3. TERMS USED IN THE RESULT TABLE | 8 |
| 5.4. LABORATORY ENVIRONMENT..... | 9 |
| 6. TEST FACILITIES UTILIZED | 10 |
| 7. MEASUREMENT UNCERTAINTY | 11 |
| ANNEX A: DETAILED TEST RESULTS..... | 12 |
| A.0 ANTENNA REQUIREMENT | 12 |
| A.1 MAXIMUM PEAK OUTPUT POWER | 13 |
| A.2 PEAK POWER SPECTRAL DENSITY | 14 |
| A.3 6DB BANDWIDTH..... | 16 |
| A.4 BAND EDGES COMPLIANCE | 18 |
| A.5 TRANSMITTER SPURIOUS EMISSION - CONDUCTED | 20 |
| A.6 TRANSMITTER SPURIOUS EMISSION - RADIATED | 26 |
| A.7 AC POWER LINE CONDUCTED EMISSION | 35 |

1. Test Laboratory

1.1. Testing Location

Location: Shenzhen Academy of Information and Communications Technology
Address: Building G, Shenzhen International Innovation Center, No.1006
Shennan Road, Futian District, Shenzhen, Guangdong Province ,China
Postal Code: 518026
Telephone: +86(0)755-33322000
Fax: +86(0)755-33322001

1.2. Testing Environment

Normal Temperature: 15-30℃
Relative Humidity: 35-60%

1.3. Project data

Testing Start Date: 2019-03-29
Testing End Date: 2019-04-28

1.4. Signature



An Ran

(Prepared this test report)



Tang Weisheng

(Reviewed this test report)



Zhang Bojun

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address: Building B, Boton Science Park, Chaguang Road, Xili Town, Nanshan
District, Shenzhen
Contact Person Yentl Chen
E-Mail Chenyanting@yulong.com
Telephone: +86 15927320221
Fax: /

2.2. Manufacturer Information

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address: Building B, Boton Science Park, Chaguang Road, Xili Town, Nanshan
District, Shenzhen
Contact Person Yentl Chen
E-Mail Chenyanting@yulong.com
Telephone: +86 15927320221
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

| | |
|------------------------------|------------------------------|
| Description | smartphone |
| Model Name | cp3705AS |
| Market Name | / |
| Frequency Range | 2400MHz~2483.5MHz |
| Type of Modulation | GFSK |
| Number of Channels | 40 |
| Antenna Type | Integrated |
| Antenna Gain | -0.52dBi |
| Power Supply | 3.85V DC by Battery |
| FCC ID | R38YLCP3705AS |
| Condition of EUT as received | No abnormality in appearance |

Note: Components list, please refer to documents of the manufacturer.

3.2. Internal Identification of EUT

| EUT ID* | IMEI | HW Version | SW Version | Receive Date |
|----------------|-----------------|-------------------|---------------------------------|---------------------|
| EUT1 | 990013490001984 | P0 | 9.0.3705AS.SPRINT.1904 08.1D | 2019-03-27 |

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

| AE ID* | Description | Mode | Manufacturer |
|---------------|--------------------|----------------|---------------------|
| AE1 | Quick Charger 3.0 | Q3W18-1U-A | Shenzhen Ruide |
| AE2 | Battery | Li-ion Polymer | Tianjin Lishen |
| AE3 | Battery | Li-ion Polymer | Zhuhai Coslight |

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of Mobile Phone with integrated antenna.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

| Reference | Title | Version |
|------------------|---|----------------|
| FCC Part15 | FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz | 2017 |
| ANSI C63.10 | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices | 2013 |

5. Test Results

5.1. Summary of Test Results

| No | Test cases | Sub-clause of Part 15C | Verdict |
|----|--|------------------------|----------|
| 0 | Antenna Requirement | 15.203 | P |
| 1 | Maximum Peak Output Power | 15.247 (b) | P |
| 2 | Peak Power Spectral Density | 15.247 (e) | P |
| 3 | Occupied 6dB Bandwidth | 15.247 (a) | P |
| 4 | Band Edges Compliance | 15.247 (d) | P |
| 5 | Transmitter Spurious Emission - Conducted | 15.247 (d) | P |
| 6 | Transmitter Spurious Emission - Radiated | 15.247, 15.205, 15.209 | P |
| 7 | AC Power line Conducted Emission | 15.107, 15.207 | P |

See **ANNEX A** for details.

5.2. Statements

SAICT has evaluated the test cases requested by the applicant/manufacture as listed in section 5.1 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

5.3. Terms used in the result table

Terms used in Verdict column

| | |
|----|---------------|
| P | Pass |
| NA | Not Available |
| F | Fail |

Abbreviations

| | |
|----------|---|
| AC | Alternating Current |
| AFH | Adaptive Frequency Hopping |
| BW | Band Width |
| E.I.R.P. | equivalent isotropic radiated power |
| ISM | Industrial, Scientific and Medical |
| R&TTE | Radio and Telecommunications Terminal Equipment |
| RF | Radio Frequency |
| Tx | Transmitter |

5.4. Laboratory Environment

Semi-anechoic chamber did not exceed following limits along the EMC testing

| | |
|-----------------------------------|---|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. = 15 %, Max. = 75 % |
| Shielding effectiveness | 0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB |
| Electrical insulation | > 2MΩ |
| Ground system resistance | < 4 Ω |
| Normalised site attenuation (NSA) | < ± 4 dB, 3 m distance, from 30 to 1000 MHz |

Shielded room did not exceed following limits along the EMC testing

| | |
|--------------------------|---|
| Temperature | Min. = 15 °C, Max. = 30 °C |
| Relative humidity | Min. =20 %, Max. = 75 % |
| Shielding effectiveness | 0.014MHz-1MHz> 60 dB; 1MHz-10000MHz>90 dB |
| Electrical insulation | > 2MΩ |
| Ground system resistance | < 4 Ω |

Fully-anechoic chamber did not exceed following limits along the EMC testing

| | |
|------------------------------------|---|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. = 15 %, Max. = 75 % |
| Shielding effectiveness | 0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB |
| Electrical insulation | > 2MΩ |
| Ground system resistance | < 4 Ω |
| Voltage Standing Wave Ratio (VSWR) | ≤ 6 dB, from 1 to 18 GHz, 3 m distance |
| Uniformity of field strength | Between 0 and 6 dB, from 80 to 6000 MHz |

6. Test Facilities Utilized

Conducted test system

| No. | Equipment | Model | Serial Number | Manufacturer | Calibration Due date | Calibration Period |
|-----|------------------------|--------|---------------|-----------------|----------------------|--------------------|
| 1 | Vector Signal Analyzer | FSV40 | 100903 | Rohde & Schwarz | 2020-01-16 | 1 year |
| 2 | Test Receiver | ESCI | 100702 | Rohde & Schwarz | 2019-06-20 | 1 year |
| 3 | LISN | ENV216 | 102067 | Rohde & Schwarz | 2019-07-18 | 1 year |

Radiated emission test system

| NO. | Equipment | Model | Serial Number | Manufacturer | Calibration Due date | Calibration Period |
|-----|-------------------|-------------------|---------------|-----------------|----------------------|--------------------|
| 1 | Loop Antenna | HLA6120 | 35779 | TESEQ | 2019-05-02 | 3 years |
| 2 | BiLog Antenna | 3142E | 00224831 | ETS-Lindgren | 2021-05-17 | 3 years |
| 3 | Horn Antenna | 3117 | 00066577 | ETS-Lindgren | 2022-04-02 | 3 years |
| 4 | Test Receiver | ESR7 | 101676 | Rohde & Schwarz | 2019-11-28 | 1 year |
| 5 | Spectrum Analyser | FSV40 | 101192 | Rohde & Schwarz | 2019-05-21 | 1 year |
| 6 | Chamber | FACT3-2.0 | 1285 | ETS-Lindgren | 2020-07-20 | 3 years |
| 7 | Antenna | QSH-SL-18-26-S-20 | 17013 | Q-par | 2020-01-15 | 3 years |
| 8 | Antenna | QSH-SL-26-40-K-20 | 17014 | Q-par | 2020-01-11 | 3 years |

Test software

| No. | Equipment | Manufacturer | Version |
|-----|------------------|-----------------|----------|
| 1 | TechMgr Software | CAICT | 2.1.1 |
| 2 | EMC32 | Rohde & Schwarz | 8.53.0 |
| 3 | EMC32 | Rohde & Schwarz | 10.01.00 |

EUT is engineering software provided by the customer to control the transmitting signal. The EUT was programmed to be in continuously transmitting mode.

Anechoic chamber

Fully anechoic chamber by ETS-Lindgren

7. Measurement Uncertainty

| Test Name | Uncertainty | |
|---|--------------------|---------|
| 1. RF Output Power - Conducted | ±1.32dB | |
| 2. Power Spectral Density - Conducted | ±2.32dB | |
| 3. Occupied channel bandwidth - Conducted | ±66Hz | |
| 4 Transmitter Spurious Emission - Conducted | 30MHz ≤ f ≤ 1GHz | ±1.41dB |
| | 1GHz ≤ f ≤ 7GHz | ±1.92dB |
| | 7GHz ≤ f ≤ 13GHz | ±2.31dB |
| | 13GHz ≤ f ≤ 26GHz | ±2.61dB |
| 5. Transmitter Spurious Emission - Radiated | 9kHz ≤ f ≤ 30MHz | ±1.94dB |
| | 30MHz ≤ f ≤ 1GHz | ±5.12dB |
| | 1GHz ≤ f ≤ 18GHz | ±5.05dB |
| | 18GHz ≤ f ≤ 40GHz | ±4.68dB |
| 6. AC Power line Conducted Emission | 150kHz ≤ f ≤ 30MHz | ±3.00dB |

ANNEX A: Detailed Test Results

A.0 Antenna requirement

Measurement Limit:

| Standard | Requirement |
|------------------------|--|
| FCC CRF Part 15.203 | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded. |

**Conclusion: The Directional gains of antenna used for transmitting is -0.52 dBi.
The RF transmitter uses an integrate antenna without connector.**

A.1 Maximum Peak Output Power

Method of Measurement: See ANSI C63.10-clause 11.9.1.1

Use the following spectrum analyzer settings:

- a) Set the RBW = 1 MHz.
- b) Set VBW = 3 MHz.
- c) Set span = 3 MHz.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

Measurement Limit:

| Standard | Limit (dBm) |
|---------------------------|-------------|
| FCC 47 CRF Part 15.247(b) | < 30 |

Measurement Results:

| Mode | Frequency (MHz) | Peak Conducted Output Power (dBm) | Conclusion |
|------|-----------------|-----------------------------------|------------|
| GFSK | 2402(CH0) | -2.09 | P |
| | 2440(CH19) | -2.15 | P |
| | 2480(CH39) | -2.45 | P |

Conclusion: Pass

A.2 Peak Power Spectral Density

Method of Measurement: See ANSI C63.10-clause 11.10.2

Measurement Limit:

| Standard | Limit |
|---------------------------|---------------|
| FCC 47 CRF Part 15.247(e) | < 8 dBm/3 kHz |

Measurement Results:

| Mode | Frequency (MHz) | Peak Power Spectral Density (dBm) | Conclusion |
|------|-----------------|-----------------------------------|------------|
| GFSK | 2402(CH0) | Fig.1 | P |
| | 2440(CH19) | Fig.2 | P |
| | 2480(CH39) | Fig.3 | P |

See below for test graphs.

Conclusion: PASS

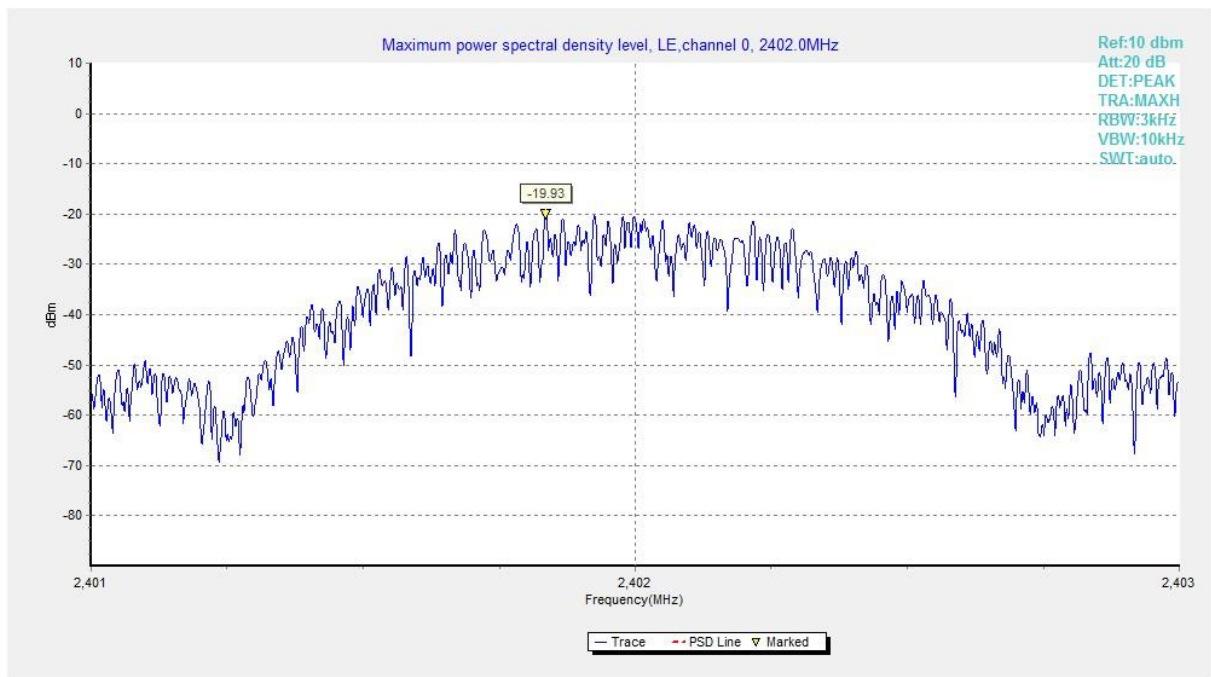


Fig.1 Power Spectral Density (Ch 0)

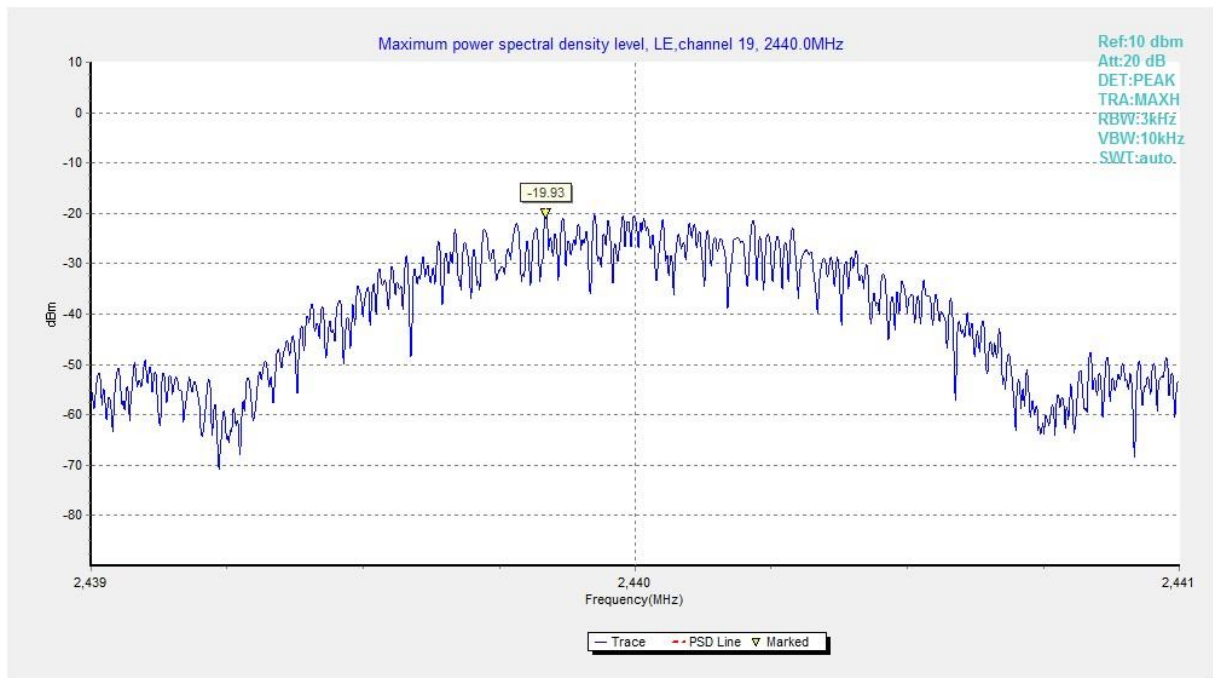


Fig.2 Power Spectral Density (Ch 19)

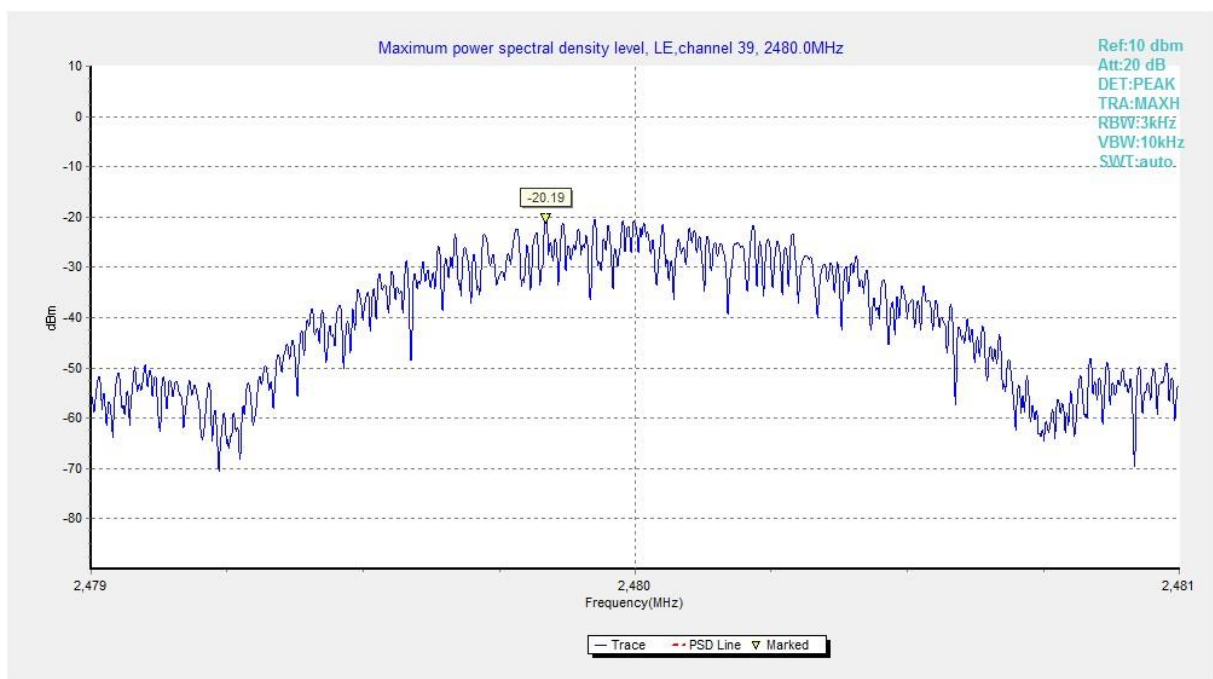


Fig.3 Power Spectral Density (Ch 39)

A.3 6dB Bandwidth

Measurement Limit:

| Standard | Limit (kHz) |
|----------------------------|-------------|
| FCC 47 CFR Part 15.247 (a) | ≥ 500 |

Measurement Result:

| Mode | Frequency (MHz) | Test Results (kHz) | | Conclusion |
|------|-----------------|---------------------|--------|------------|
| GFSK | 2402(CH0) | Fig.4 | 672.00 | P |
| | 2440(CH19) | Fig.5 | 668.50 | P |
| | 2480(CH39) | Fig.6 | 672.50 | P |

See below for test graphs.

Conclusion: PASS



Fig.4 6dB Bandwidth (Ch 0)

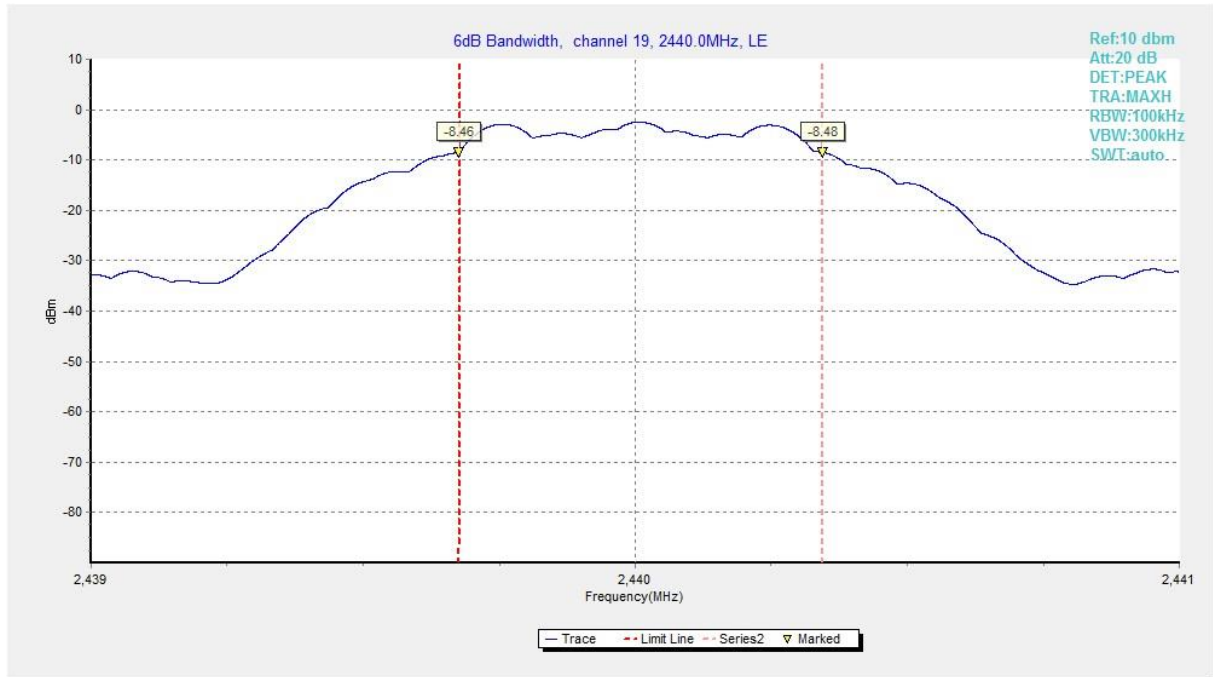


Fig.5 6dB Bandwidth (Ch 19)

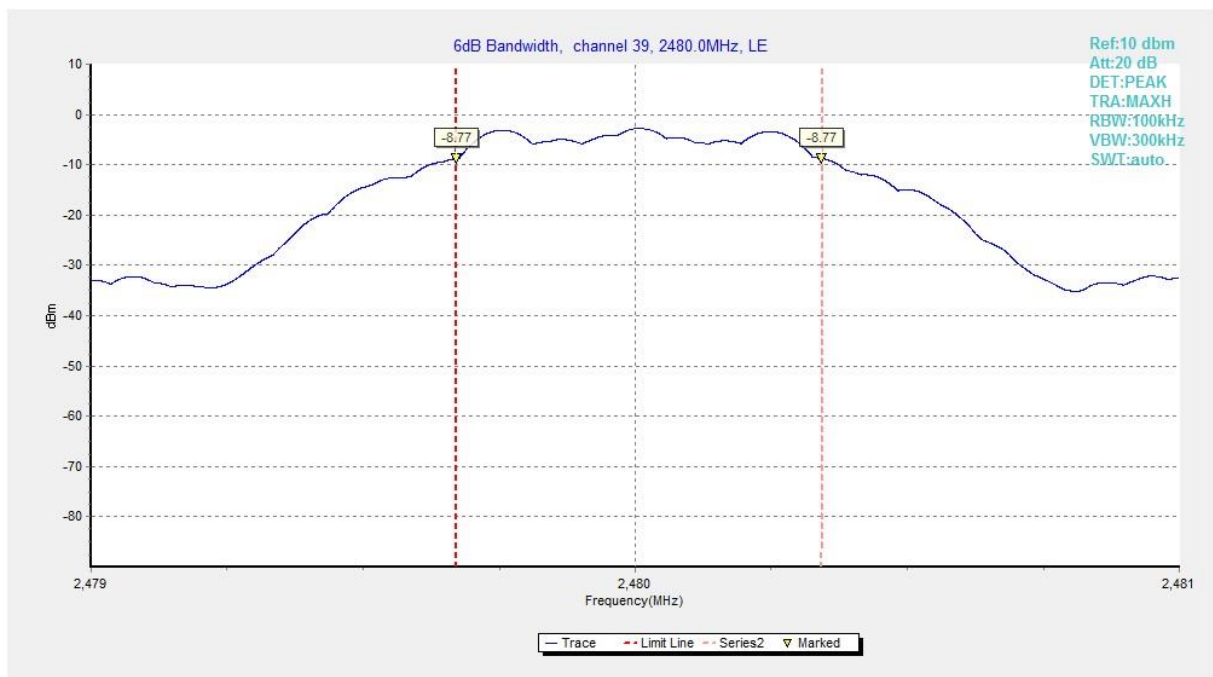


Fig.6 6dB Bandwidth (Ch 39)

A.4 Band Edges Compliance

Measurement Limit:

| Standard | Limit (dBc) |
|----------------------------|-------------|
| FCC 47 CFR Part 15.247 (d) | ≤ -20 |

Measurement Result:

| Mode | Frequency (MHz) | Test Results | | Conclusion |
|------|-----------------|--------------|--------|------------|
| GFSK | 2402(CH0) | Fig.7 | -55.75 | P |
| | 2480(CH39) | Fig.8 | -59.97 | P |

See below for test graphs.

Conclusion: Pass

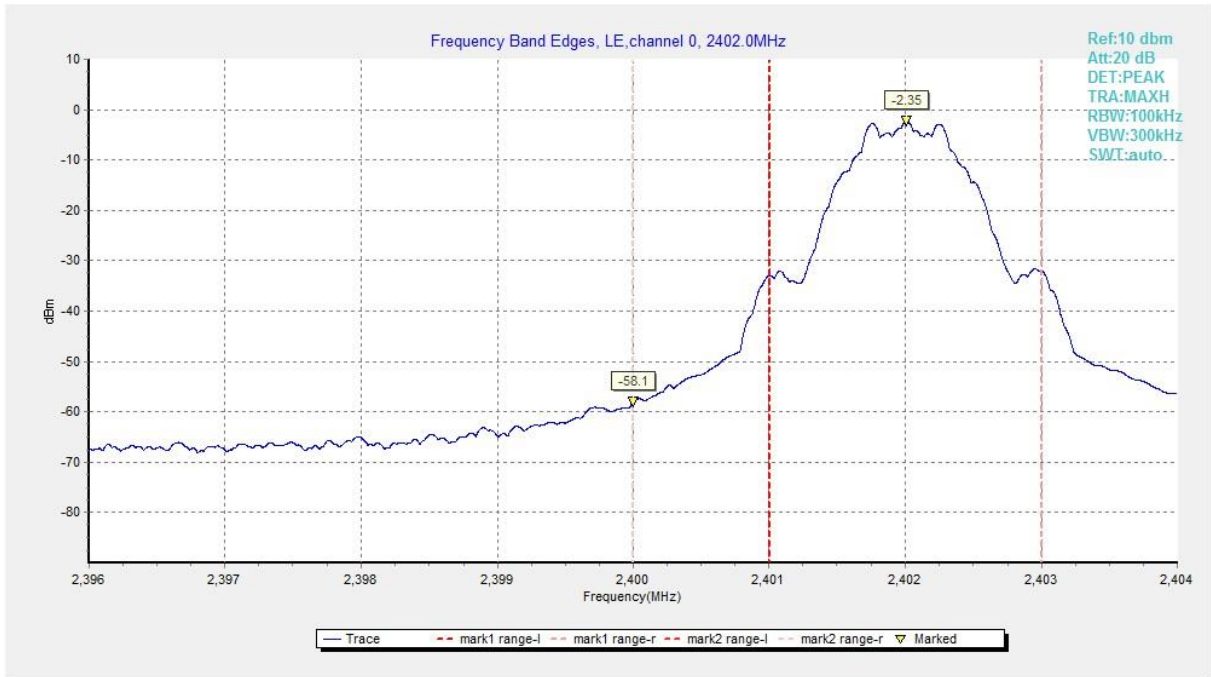


Fig.7 Band Edges (Ch 0)

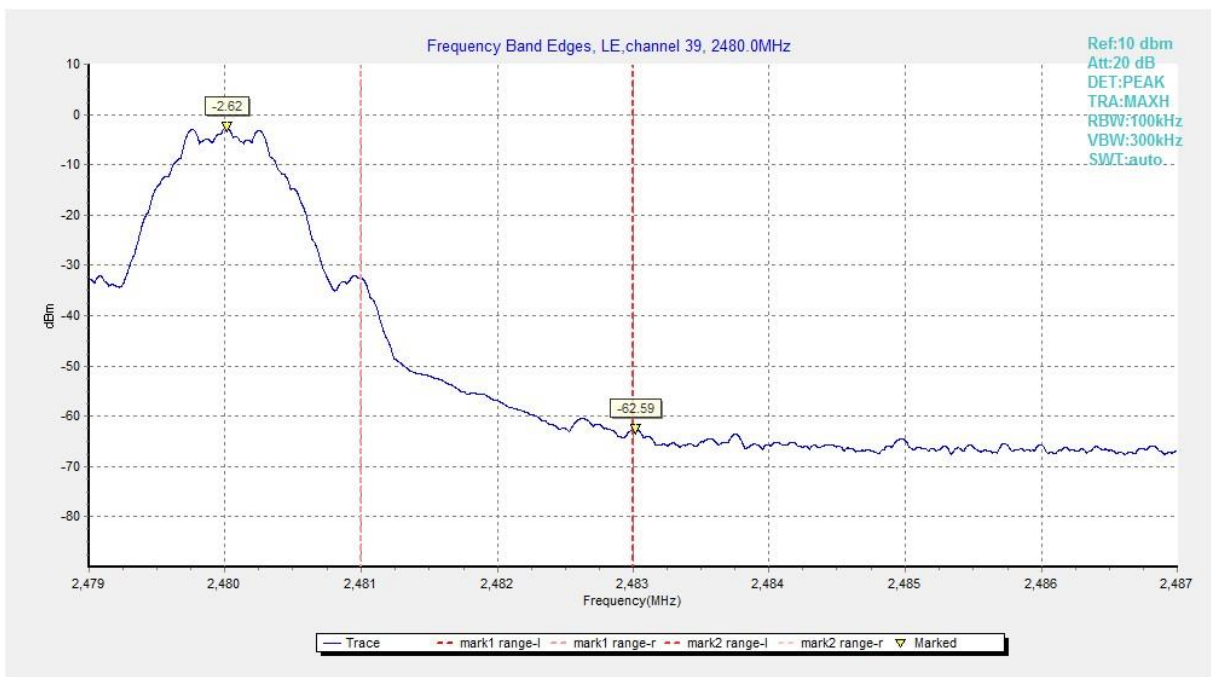


Fig.8 Band Edges (Ch 39)

A.5 Transmitter Spurious Emission - Conducted

Measurement Limit:

| Standard | Limit |
|----------------------------|---|
| FCC 47 CFR Part 15.247 (d) | 20dB below peak output power in 100 kHz bandwidth |

Measurement Results:

| MODE | Channel | Frequency Range | Test Results | Conclusion |
|------|--------------|-----------------|--------------|------------|
| GFSK | 0 | 2.402 GHz | Fig.9 | P |
| | | 1GHz -3GHz | Fig.10 | P |
| | | 3GHz-10GHz | Fig.11 | P |
| | 19 | 2.440 GHz | Fig.12 | P |
| | | 1GHz -3GHz | Fig.13 | P |
| | | 3GHz-10GHz | Fig.14 | P |
| | 39 | 2.480 GHz | Fig.15 | P |
| | | 1GHz -3GHz | Fig.16 | P |
| | | 3GHz-10GHz | Fig.17 | P |
| | All channels | 30MHz-1GHz | Fig.18 | P |
| | | 10GHz-26GHz | Fig.19 | P |

See below for test graphs.

Conclusion: Pass

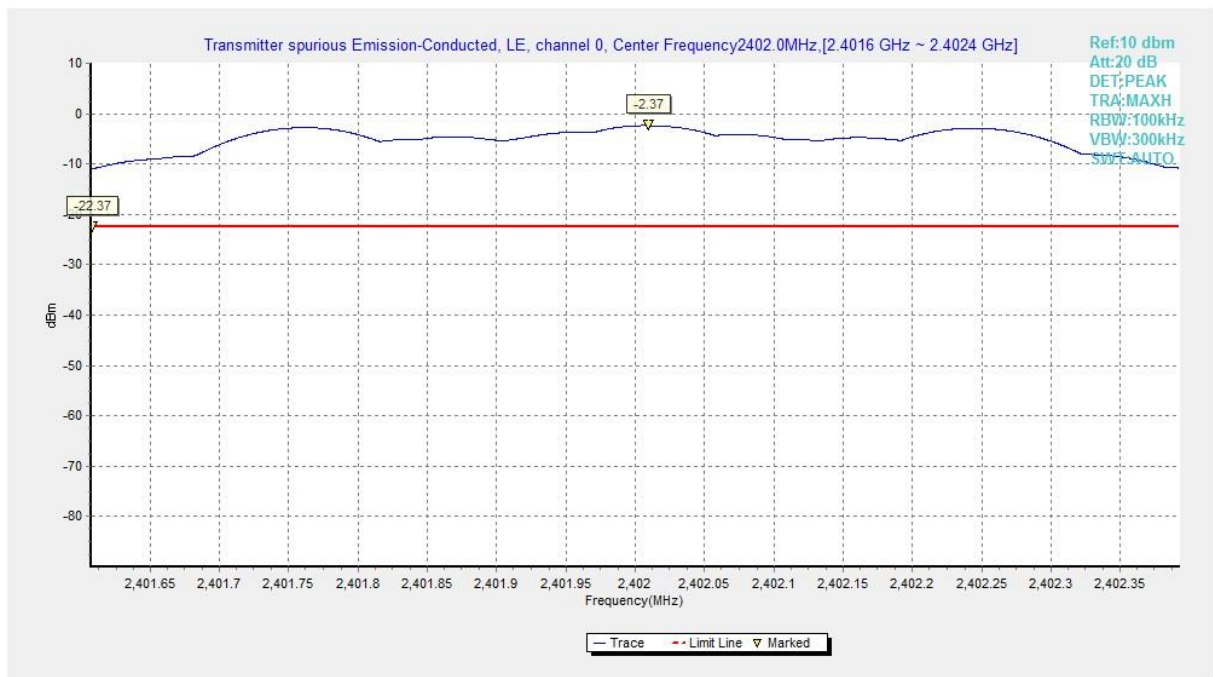


Fig.9 Conducted Spurious Emission (Ch0, Center Frequency)

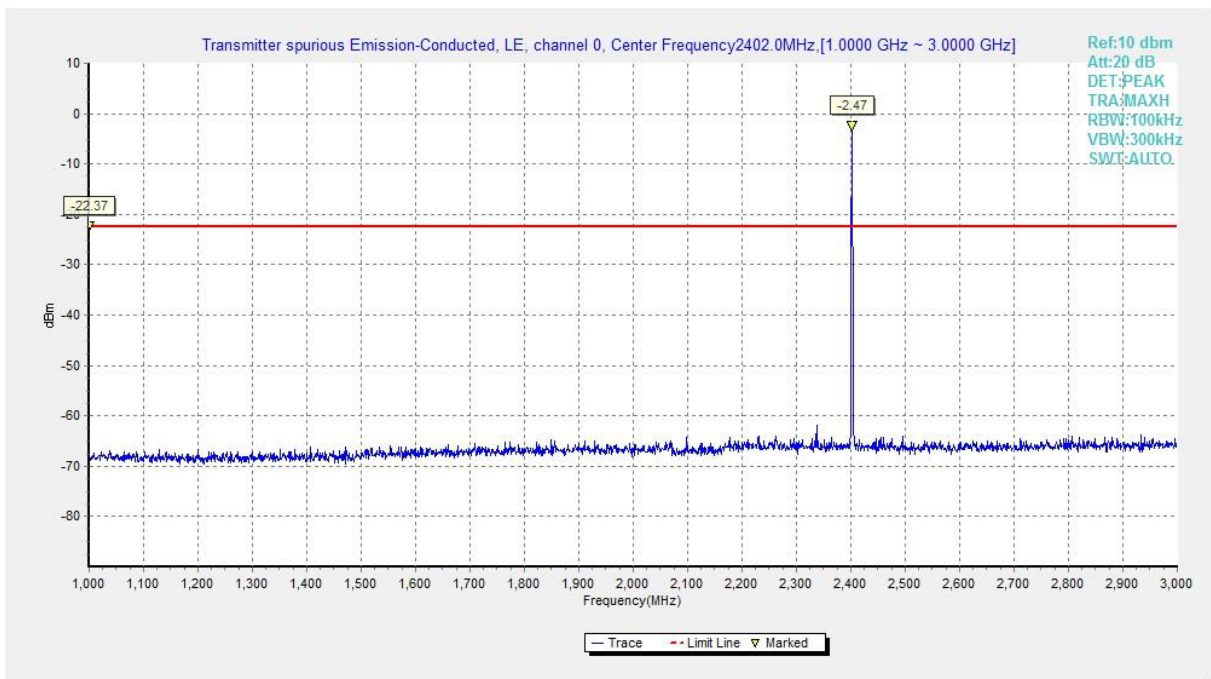


Fig.10 Conducted Spurious Emission (Ch0, 1 GHz-3 GHz)

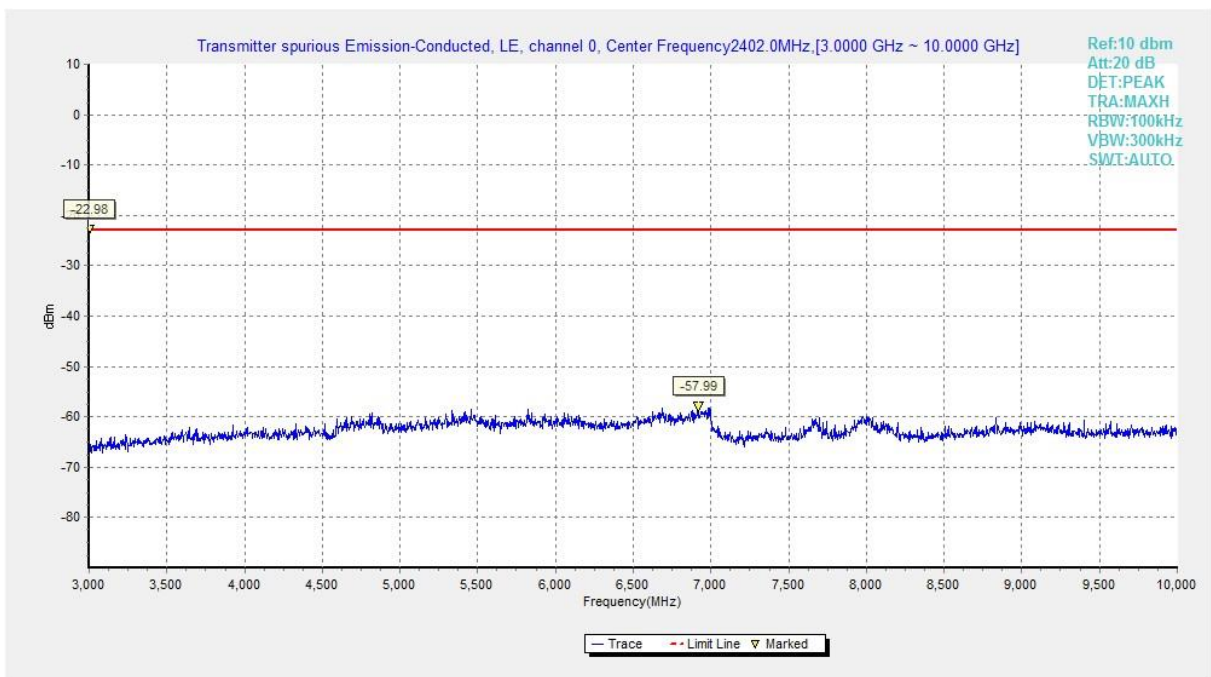


Fig.11 Conducted Spurious Emission (Ch0, 3 GHz-10 GHz)

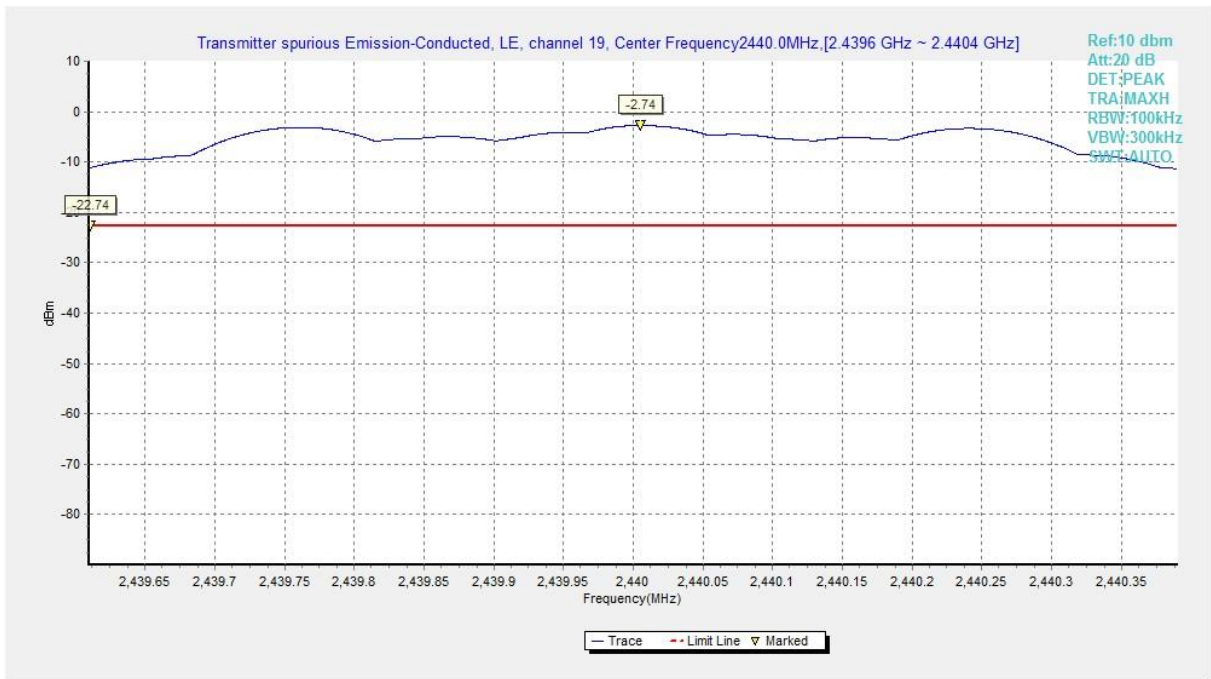


Fig.12 Conducted Spurious Emission (Ch19, Center Frequency)

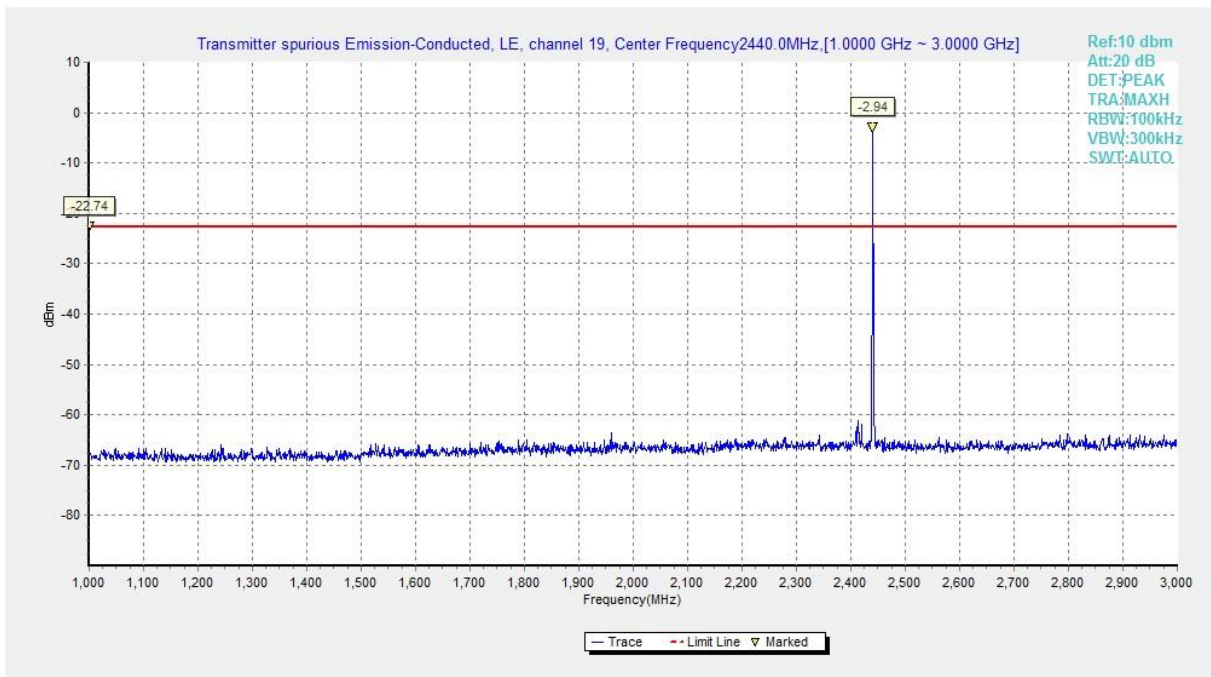


Fig.13 Conducted Spurious Emission (Ch19, 1 GHz-3 GHz)

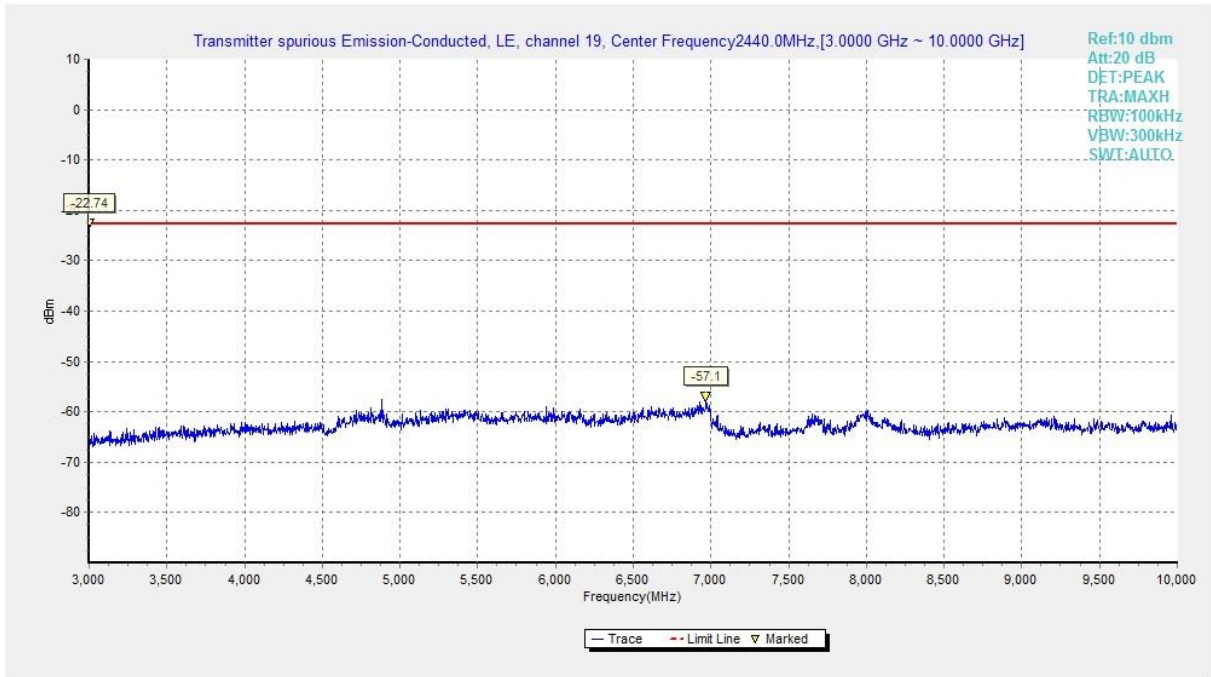


Fig.14 Conducted Spurious Emission (Ch19, 3 GHz-10 GHz)

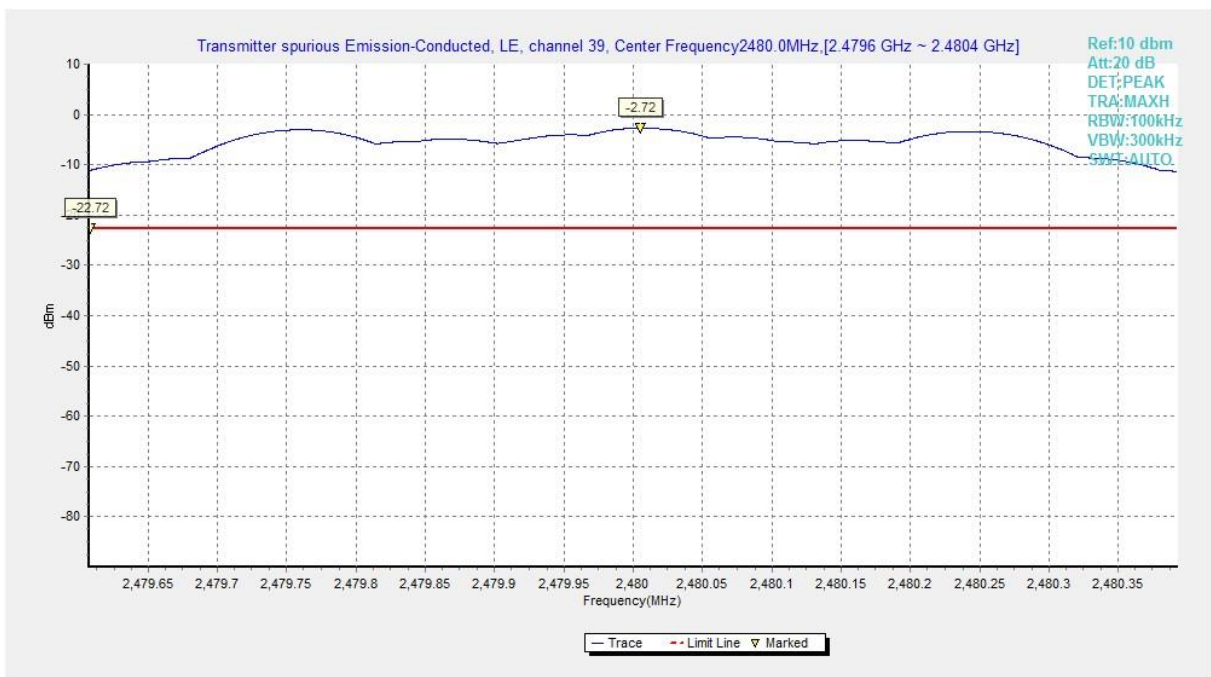


Fig.15 Conducted Spurious Emission (Ch39, Center Frequency)

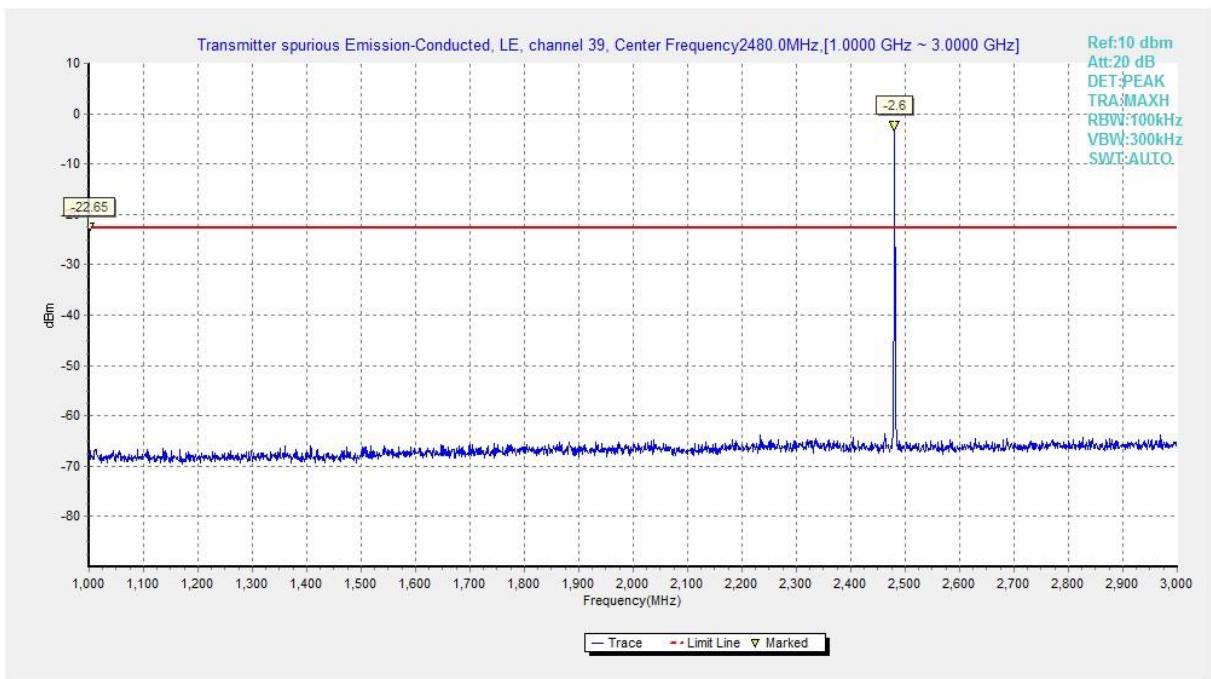


Fig.16 Conducted Spurious Emission (Ch39, 1 GHz-3 GHz)

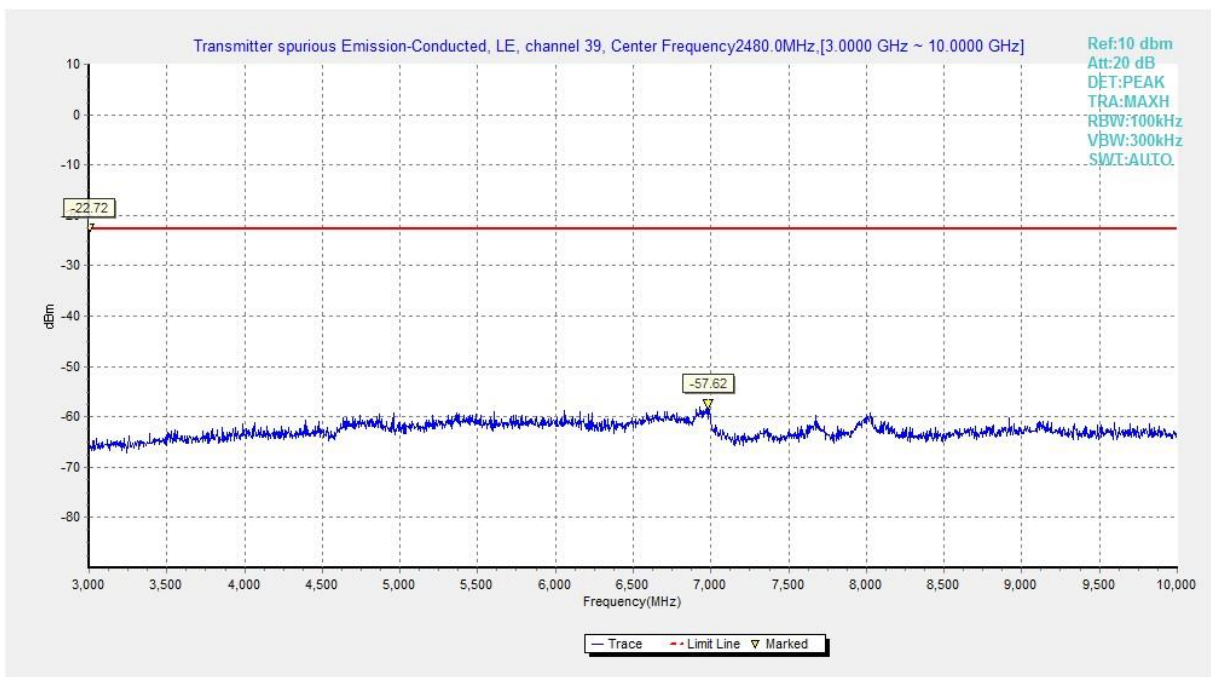


Fig.17 Conducted Spurious Emission (Ch39, 3 GHz-10 GHz)

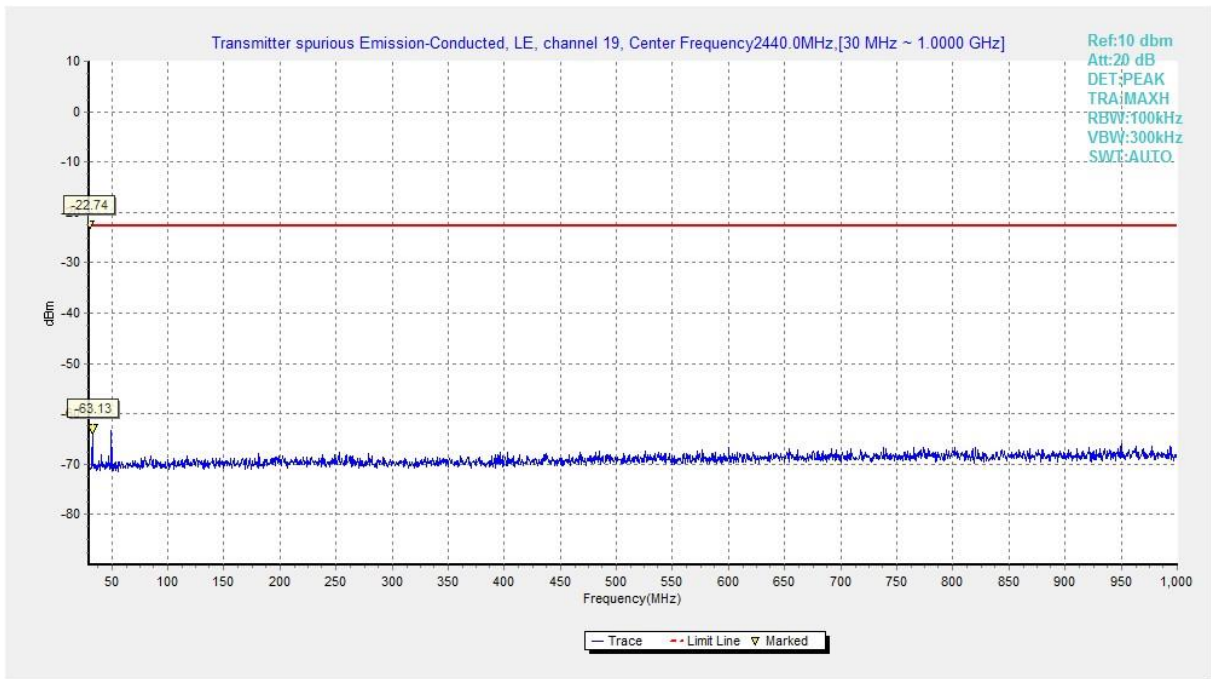


Fig.18 Conducted Spurious Emission (All channels, 30 MHz-1 GHz)

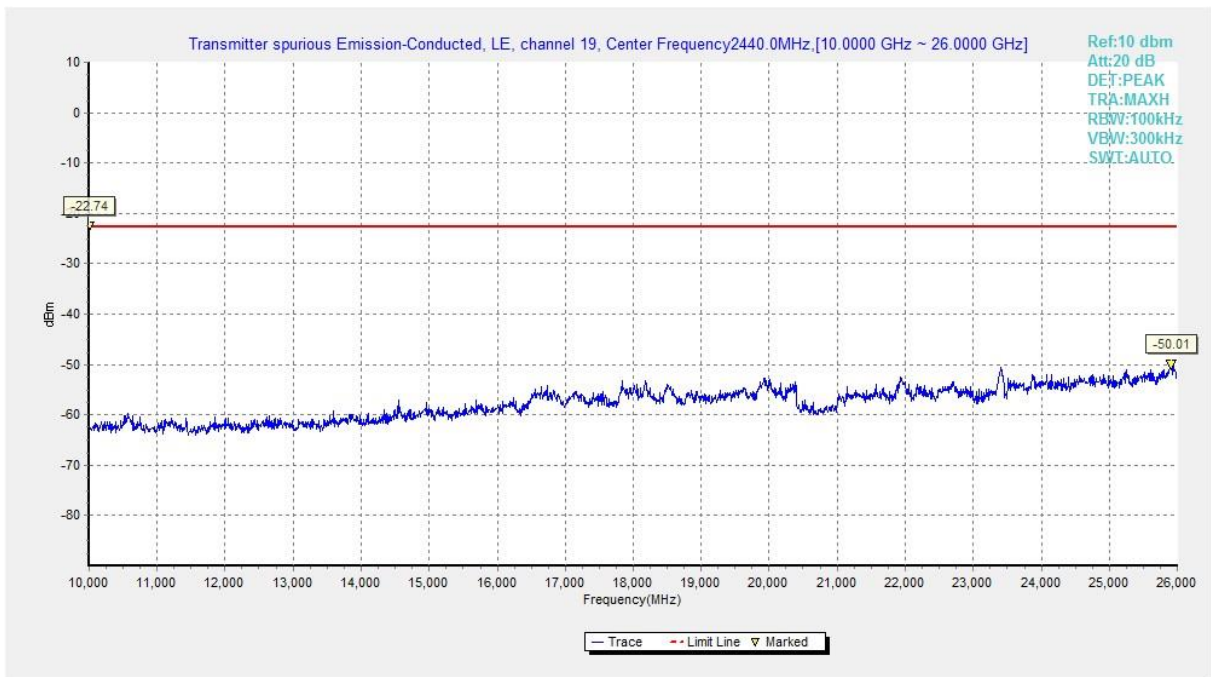


Fig.19 Conducted Spurious Emission (All channels, 10 GHz-26 GHz)

A.6 Transmitter Spurious Emission - Radiated

Measurement Limit:

| Standard | Limit |
|--|------------------------------|
| FCC 47 CFR Part 15.247, 15.205, 15.209 | 20dB below peak output power |

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

| Frequency of emission (MHz) | Field strength(μ V/m) | Measurement distance(meters) |
|-----------------------------|----------------------------|------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Test Condition:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

| Frequency of emission (MHz) | RBW/VBW | Sweep Time(s) |
|-----------------------------|---------------|---------------|
| 30-1000 | 120kHz/300kHz | 5 |
| 1000-4000 | 1MHz/3MHz | 15 |
| 4000-18000 | 1MHz/3MHz | 40 |
| 18000-26500 | 1MHz/3MHz | 20 |

Note: According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band from 9kHz to 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic. The measurement results include the horizontal polarization and vertical polarization measurements.

Measurement Results:

| Mode | Channel | Frequency Range | Test Results | Conclusion |
|---------------|-----------------------|---------------------|--------------|------------|
| GFSK | 0 | 1 GHz ~3 GHz | Fig.20 | P |
| | | 3 GHz ~18 GHz | Fig.21 | P |
| | 19 | 1 GHz ~3 GHz | Fig.22 | P |
| | | 3 GHz ~18 GHz | Fig.23 | P |
| | 39 | 1 GHz ~3 GHz | Fig.24 | P |
| | | 3 GHz ~18 GHz | Fig.25 | P |
| | Restricted Band(CH0) | 2.38 GHz ~ 2.45 GHz | Fig.26 | P |
| | Restricted Band(CH39) | 2.45 GHz ~ 2.5 GHz | Fig.27 | P |
| | All channels | 9 kHz ~30 MHz | Fig.28 | P |
| | | 30 MHz ~1 GHz | Fig.29 | P |
| 1 GHz ~18 GHz | | Fig.30 | P | |

Worst Case Result

GFSK CH0 (1-18GHz)

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----|------------|
| 9648.50000 | --- | 37.08 | 54.00 | 16.92 | H | 5.7 |
| 10001.0000 | 43.90 | --- | 74.00 | 30.10 | H | 6.7 |
| 10396.0000 | --- | 31.95 | 54.00 | 22.05 | V | 6.7 |
| 10857.0000 | 44.97 | --- | 74.00 | 29.03 | V | 7.4 |
| 11657.5000 | --- | 33.20 | 54.00 | 20.80 | V | 8.5 |
| 11953.5000 | 46.70 | --- | 74.00 | 27.31 | V | 9.1 |
| 12530.5000 | --- | 33.75 | 54.00 | 20.25 | V | 9.7 |
| 13725.0000 | 46.35 | --- | 74.00 | 27.65 | V | 10.3 |
| 14501.5000 | --- | 35.67 | 54.00 | 18.33 | V | 12.8 |
| 14769.0000 | 47.81 | --- | 74.00 | 26.19 | H | 12.6 |
| 15918.5000 | 49.27 | --- | 74.00 | 24.73 | V | 14.9 |
| 16640.0000 | --- | 37.64 | 54.00 | 16.36 | V | 16.3 |

GFSK CH19 (1-18GHz)

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----|------------|
| 9648.50000 | --- | 37.05 | 54.00 | 16.95 | H | 5.7 |
| 10170.0000 | 44.31 | --- | 74.00 | 29.69 | V | 6.8 |
| 10660.0000 | --- | 32.23 | 54.00 | 21.77 | V | 7.0 |
| 11262.5000 | 44.42 | --- | 74.00 | 29.58 | H | 7.3 |
| 12089.0000 | --- | 33.72 | 54.00 | 20.28 | V | 9.4 |
| 12680.0000 | 46.14 | --- | 74.00 | 27.86 | V | 9.9 |
| 13701.0000 | --- | 33.44 | 54.00 | 20.56 | H | 10.3 |
| 14003.0000 | 46.67 | --- | 74.00 | 27.33 | V | 11.4 |
| 14890.5000 | --- | 35.35 | 54.00 | 18.65 | H | 12.7 |
| 16023.0000 | 49.21 | --- | 74.00 | 24.79 | H | 15.3 |
| 16738.5000 | --- | 37.70 | 54.00 | 16.30 | V | 16.3 |
| 17124.0000 | 50.19 | --- | 74.00 | 23.81 | V | 16.3 |

GFSK CH39 (1-18GHz)

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----|------------|
| 9648.50000 | --- | 31.48 | 54.00 | 22.52 | H | 5.7 |
| 10199.5000 | 45.06 | --- | 74.00 | 28.94 | H | 6.6 |
| 10843.5000 | --- | 32.08 | 54.00 | 21.92 | V | 7.3 |
| 11581.0000 | 45.50 | --- | 74.00 | 28.50 | H | 8.1 |
| 12538.0000 | --- | 33.63 | 54.00 | 20.37 | V | 9.7 |
| 12928.0000 | 46.54 | --- | 74.00 | 27.46 | V | 10.0 |
| 14410.5000 | --- | 35.21 | 54.00 | 18.79 | H | 12.6 |
| 14534.5000 | 47.36 | --- | 74.00 | 26.64 | H | 12.6 |
| 16190.5000 | --- | 36.70 | 54.00 | 17.30 | V | 15.4 |
| 16308.0000 | 49.32 | --- | 74.00 | 24.68 | H | 15.3 |
| 17577.5000 | --- | 37.93 | 54.00 | 16.07 | V | 17.0 |
| 17916.0000 | 50.68 | --- | 74.00 | 23.32 | H | 17.5 |

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and Antenna Factor, the gain of the preamplifier, the cable loss. P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= P_{Mea} +Cable Loss +Antenna Factor-Gain of the preamplifier.

See below for test graphs.

Conclusion: Pass

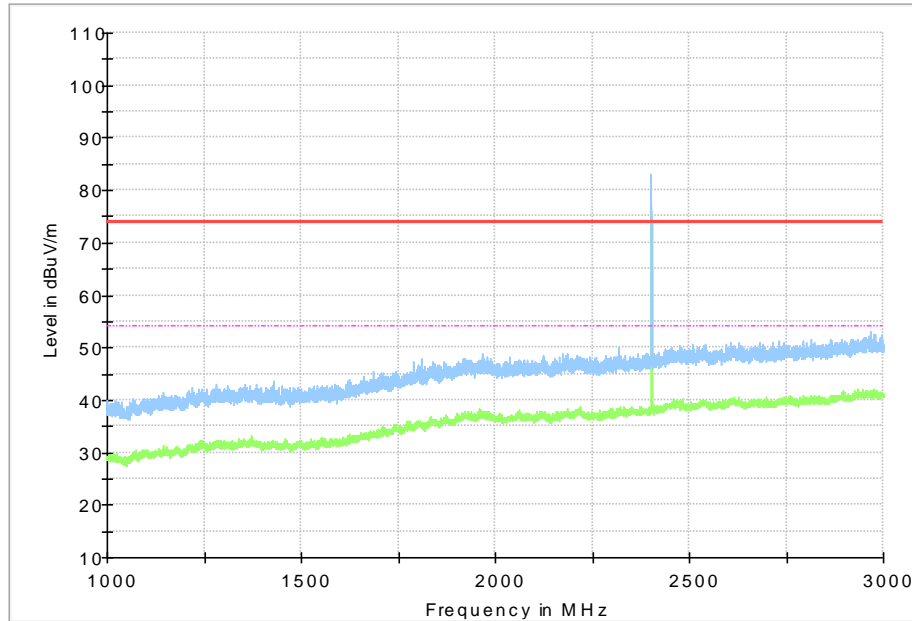


Fig.20 Radiated Spurious Emission (GFSK, Ch0, 1 GHz ~3 GHz)

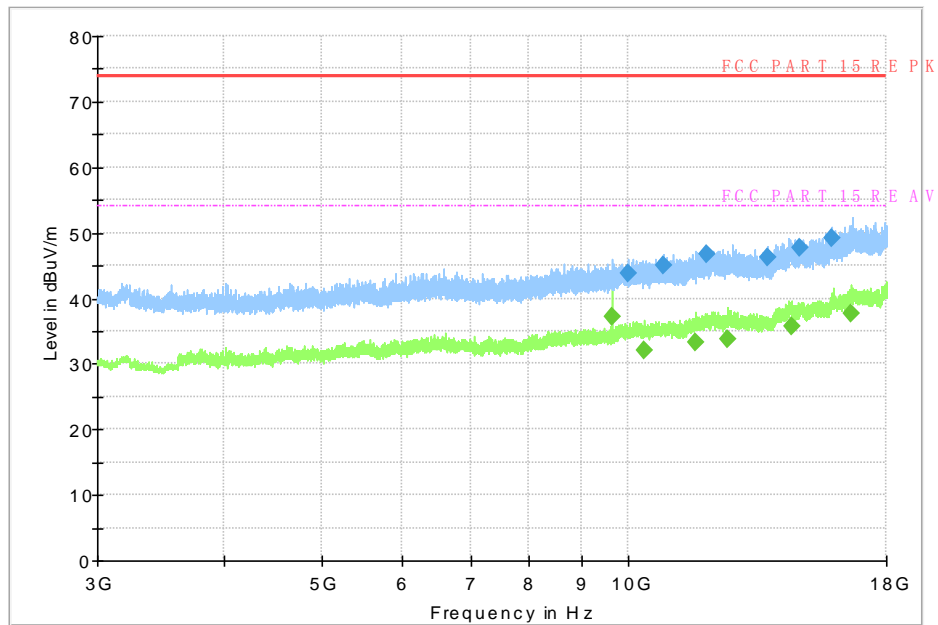


Fig.21 Radiated Spurious Emission (GFSK, Ch0, 3 GHz ~18 GHz)

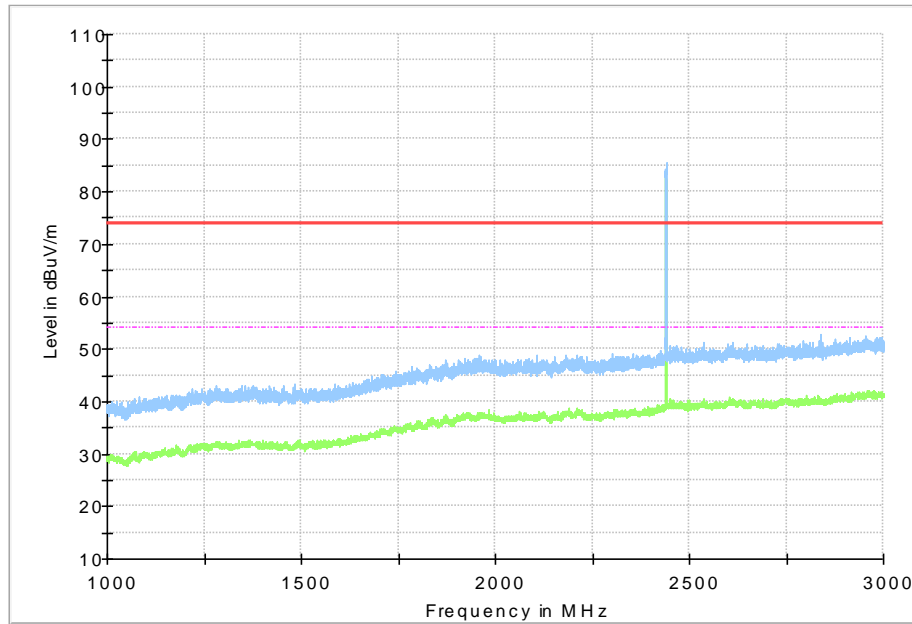


Fig.22 Radiated Spurious Emission (GFSK, Ch19, 1 GHz ~3 GHz)

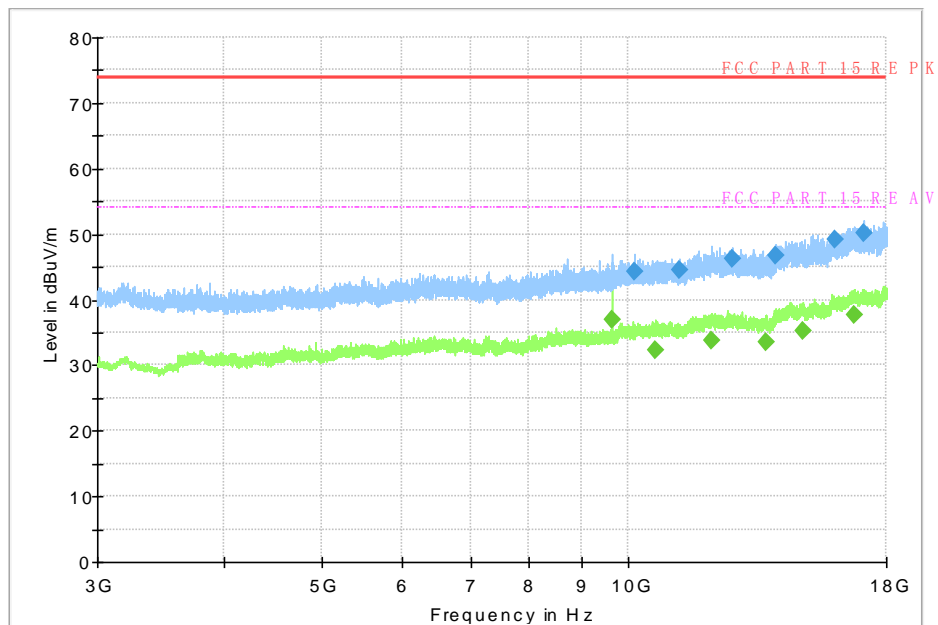


Fig.23 Radiated Spurious Emission (GFSK, Ch19, 3 GHz ~18 GHz)

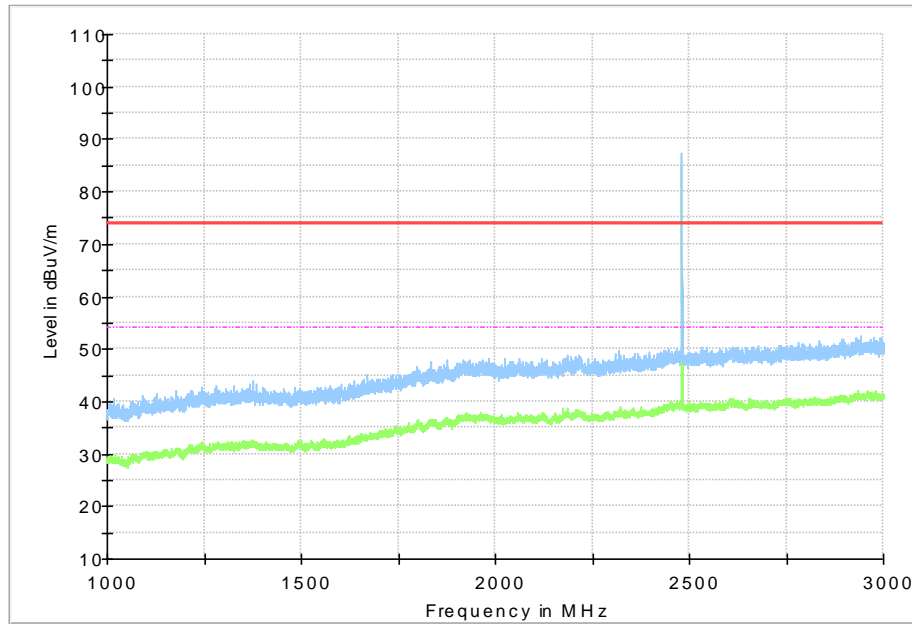


Fig.24 Radiated Spurious Emission (GFSK, Ch39, 1 GHz ~3 GHz)

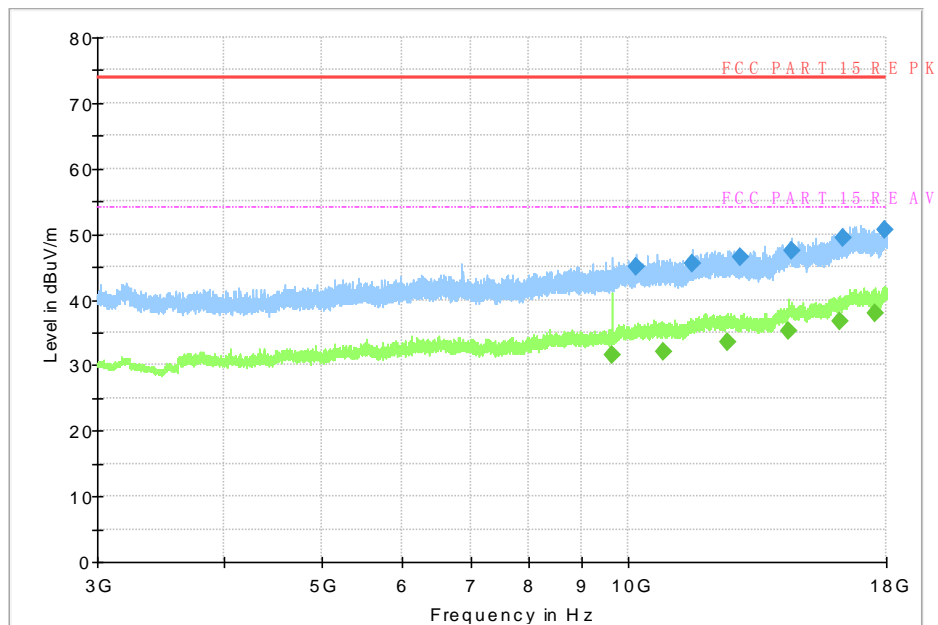


Fig.25 Radiated Spurious Emission (GFSK, Ch39, 3 GHz ~18 GHz)

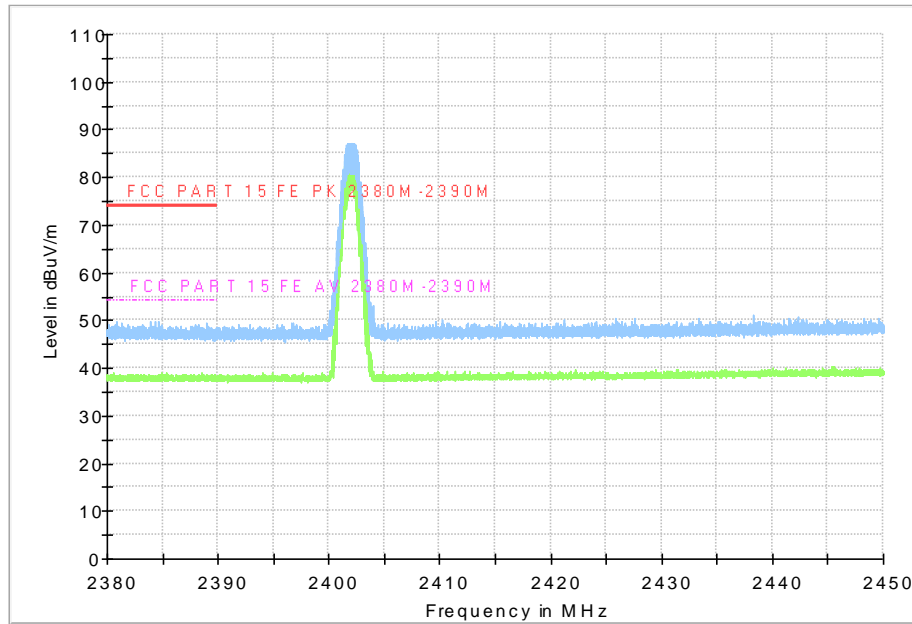


Fig.26 Radiated Band Edges (GFSK, Ch0, 2380GHz~2450GHz)

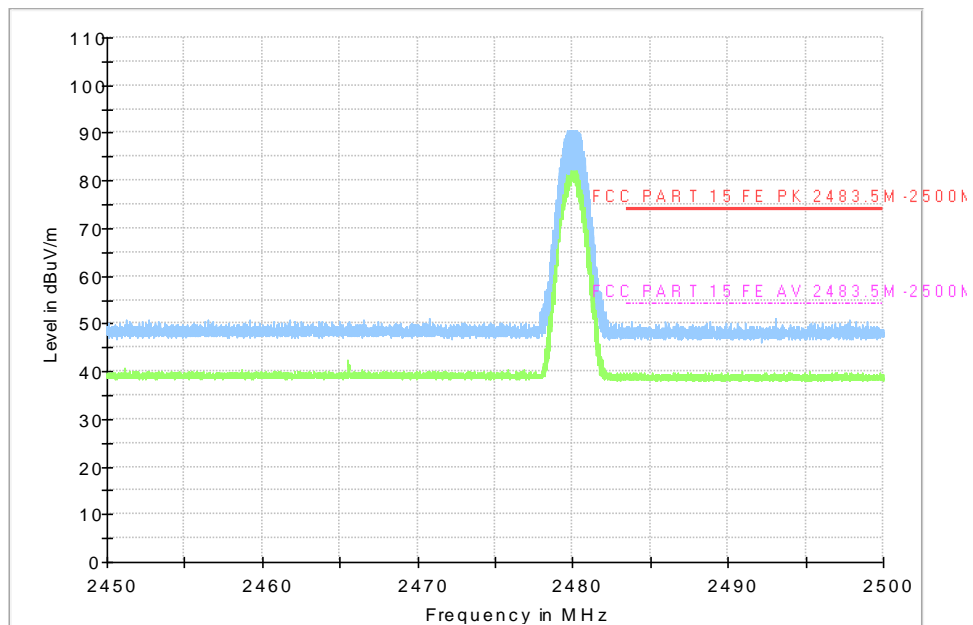


Fig.27 Radiated Band Edges (GFSK, Ch39, 2450GHz~2500GHz)

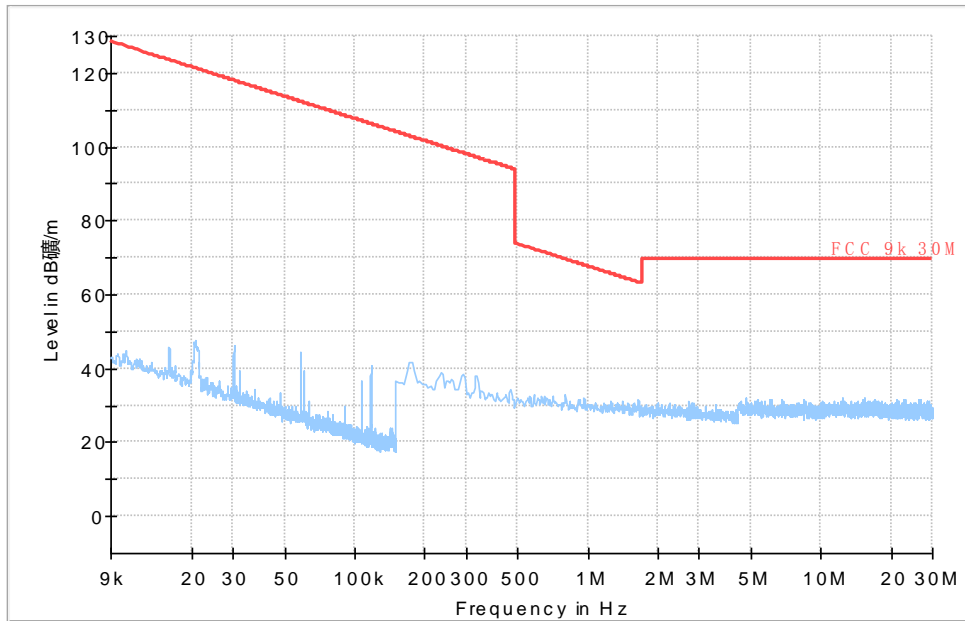


Fig.28 Radiated Spurious Emission (All Channels, 9 kHz-30 MHz)

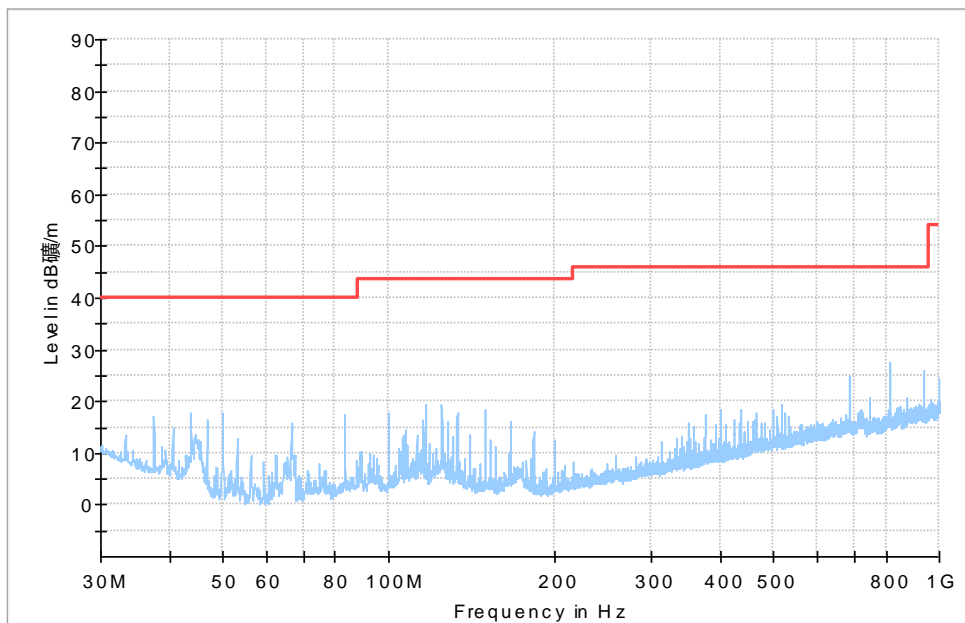


Fig.29 Radiated Spurious Emission (All Channels, 30 MHz-1 GHz)

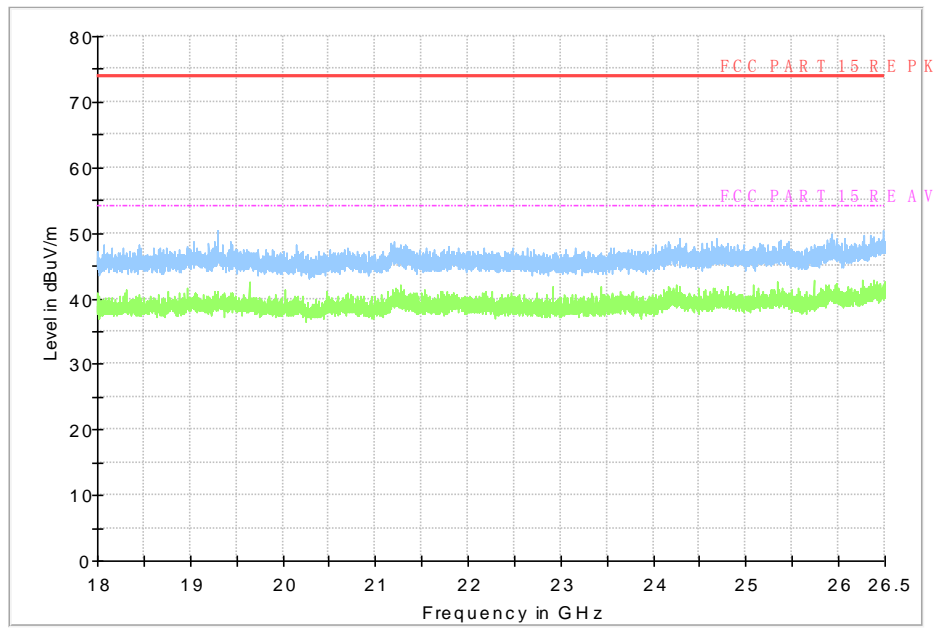


Fig.30 Radiated Spurious Emission (All Channels, 18 GHz-26.5 GHz)

A.7 AC Power line Conducted Emission

Test Condition:

| Voltage (V) | Frequency (Hz) |
|-------------|----------------|
| 120 | 60 |

Measurement Result and limit:

BLE (Quasi-peak Limit)

| Frequency range (MHz) | Quasi-peak Limit (dB μ V) | Result (dB μ V) | | Conclusion |
|-----------------------|-------------------------------|---------------------|--------|------------|
| | | Traffic | Idle | |
| 0.15 to 0.5 | 66 to 56 | Fig.31 | Fig.32 | P |
| 0.5 to 5 | 56 | | | |
| 5 to 30 | 60 | | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

BLE (Average Limit)

| Frequency range (MHz) | Average-peak Limit (dB μ V) | Result (dB μ V) | | Conclusion |
|-----------------------|---------------------------------|---------------------|--------|------------|
| | | Traffic | Idle | |
| 0.15 to 0.5 | 56 to 46 | Fig 31 | Fig 32 | P |
| 0.5 to 5 | 46 | | | |
| 5 to 30 | 50 | | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note: The measurement results include the L1 and N measurements.

See below for test graphs.

Conclusion: Pass

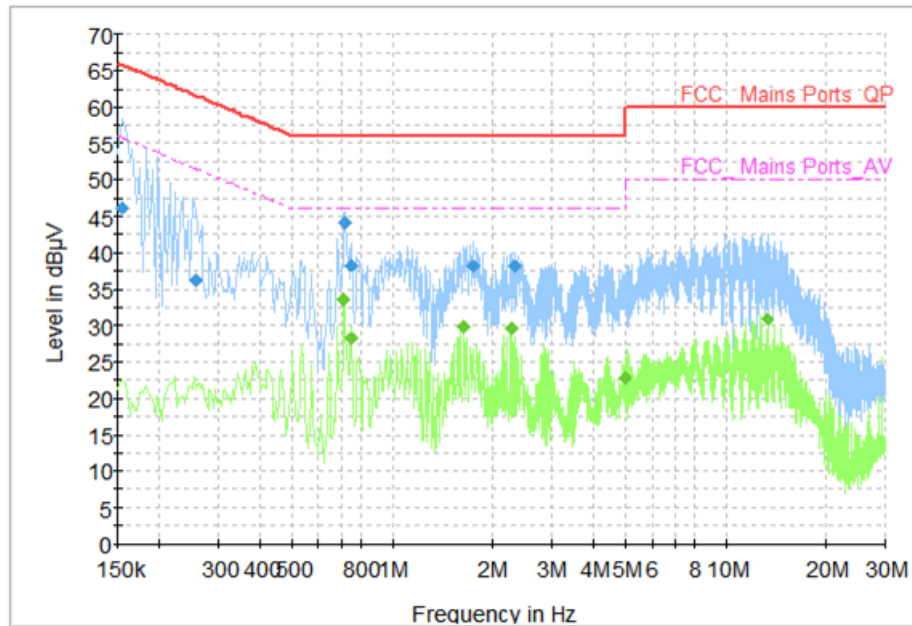


Fig.31 AC Power line Conducted Emission (Traffic)

Measurement Results: Quasi Peak

| Frequency (MHz) | Quasi Peak (dBµV) | Limit (dBµV) | Margin (dB) | Line | Filter | Corr. (dB) |
|-----------------|-------------------|--------------|-------------|------|--------|------------|
| 0.154000 | 46.22 | 65.78 | 19.56 | L1 | ON | 9.7 |
| 0.258000 | 36.11 | 61.50 | 25.38 | N | ON | 9.6 |
| 0.718000 | 44.04 | 56.00 | 11.96 | N | ON | 9.7 |
| 0.750000 | 38.33 | 56.00 | 17.67 | N | ON | 9.7 |
| 1.746000 | 38.07 | 56.00 | 17.93 | N | ON | 9.7 |
| 2.310000 | 38.07 | 56.00 | 17.93 | N | ON | 9.7 |

Measurement Results : Average

| Frequency (MHz) | Average (dBµV) | Limit (dBµV) | Margin (dB) | Line | Filter | Corr. (dB) |
|-----------------|----------------|--------------|-------------|------|--------|------------|
| 0.714000 | 33.55 | 46.00 | 12.45 | N | ON | 9.7 |
| 0.750000 | 28.29 | 46.00 | 17.71 | N | ON | 9.7 |
| 1.630000 | 29.73 | 46.00 | 16.27 | N | ON | 9.7 |
| 2.274000 | 29.70 | 46.00 | 16.30 | N | ON | 9.7 |
| 4.966000 | 22.68 | 46.00 | 23.32 | N | ON | 9.7 |
| 13.278000 | 30.90 | 50.00 | 19.10 | N | ON | 9.9 |

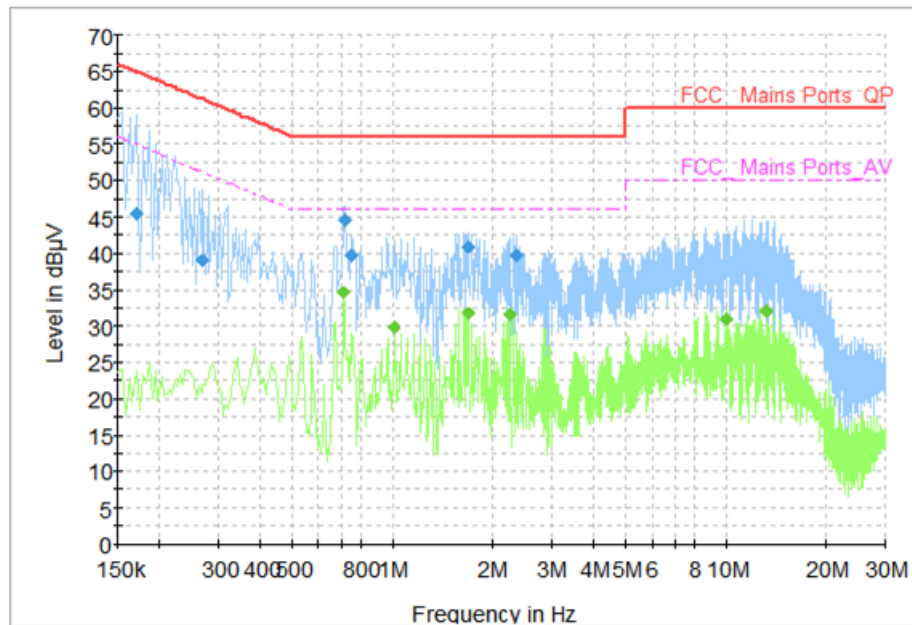


Fig.32 AC Power line Conducted Emission (Idle)

Measurement Results: Quasi Peak

| Frequency (MHz) | Quasi Peak (dBµV) | Limit (dBµV) | Margin (dB) | Line | Filter | Corr. (dB) |
|-----------------|-------------------|--------------|-------------|------|--------|------------|
| 0.170000 | 45.42 | 64.96 | 19.54 | L1 | ON | 9.7 |
| 0.270000 | 39.05 | 61.12 | 22.07 | N | ON | 9.6 |
| 0.718000 | 44.53 | 56.00 | 11.47 | N | ON | 9.7 |
| 0.754000 | 39.68 | 56.00 | 16.32 | N | ON | 9.7 |
| 1.678000 | 40.94 | 56.00 | 15.06 | N | ON | 9.7 |
| 2.350000 | 39.63 | 56.00 | 16.37 | N | ON | 9.7 |

Measurement Results : Average

| Frequency (MHz) | Average (dBµV) | Limit (dBµV) | Margin (dB) | Line | Filter | Corr. (dB) |
|-----------------|----------------|--------------|-------------|------|--------|------------|
| 0.714000 | 34.63 | 46.00 | 11.37 | N | ON | 9.7 |
| 1.010000 | 29.81 | 46.00 | 16.19 | N | ON | 9.7 |
| 1.678000 | 31.74 | 46.00 | 14.26 | N | ON | 9.7 |
| 2.254000 | 31.54 | 46.00 | 14.46 | N | ON | 9.7 |
| 9.994000 | 31.02 | 50.00 | 18.98 | N | ON | 9.8 |
| 13.214000 | 32.05 | 50.00 | 17.95 | N | ON | 9.9 |

*****END OF REPORT*****