



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

IEEE802.11 b/g AP

Trade Name / Model:

**Cipherium Systems Co., Ltd. / W1310R,
Cipherium Systems Co., Ltd. / Universal Service Controller USC13XX,
PheeNet Technology Corp. / WAS-102R,
Micronet Communications Inc. / SP-913V3,
Ovislink Corp. / WIAS-1000GV2,
Digital Data Communications Asia. / WSG-1000,
Planet Technology Corp. / WSG-404,
4IPNET. / WHG101,
4IPNET. / ISR101**

Issued to

**Cipherium Systems Co., Ltd.
3F, No. 369, Fusing N. Rd., Taipei 105, Taiwan, R.O.C.**

Issued by

**Compliance Certification Services Inc.
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.
<http://www.ccsemc.com.tw>
service@tw.ccsemc.com**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

- 1. TEST RESULT CERTIFICATION.....3**
- 2. EUT DESCRIPTION4**
- 3. TEST METHODOLOGY5**
 - 3.1 EUT CONFIGURATION5
 - 3.2 EUT EXERCISE.....5
 - 3.3 GENERAL TEST PROCEDURES.....5
 - 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....6
 - 3.5 DESCRIPTION OF TEST MODES7
- 4. INSTRUMENT CALIBRATION.....8**
 - 4.1 MEASURING INSTRUMENT CALIBRATION.....8
 - 4.2 MEASUREMENT EQUIPMENT USED.....8
- 5. FACILITIES AND ACCREDITATIONS9**
 - 5.1 FACILITIES9
 - 5.2 EQUIPMENT.....9
 - 5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....10
- 6. SETUP OF EQUIPMENT UNDER TEST11**
 - 6.1 SETUP CONFIGURATION OF EUT.....11
 - 6.2 SUPPORT EQUIPMENT.....11
- 7. FCC PART 15.247 REQUIREMENTS.....12**
 - 7.1 6DB BANDWIDTH.....12
 - 7.2 PEAK POWER.....16
 - 7.3 AVERAGE POWER.....20
 - 7.4 BAND EDGES MEASUREMENT.....24
 - 7.5 PEAK POWER SPECTRAL DENSITY.....33
 - 7.6 SPURIOUS EMISSIONS38
 - 7.7 POWERLINE CONDUCTED EMISSIONS.....52
- APPENDIX I RADIO FREQUENCY EXPOSURE.....55**
- APPENDIX II PHOTOGRAPHS OF TEST SETUP57**



1. TEST RESULT CERTIFICATION

Applicant: CIPHERIUM SYSTEMS CO., LTD.
3F, No. 369, Fusing N. Rd., Taipei 105, Taiwan, R.O.C.

Equipment Under Test: IEEE802.11 b/g AP

Trade Name / Model Number: CIPHERIUM SYSTEMS CO., LTD. / W1310R,
CIPHERIUM SYSTEMS CO., LTD. / UNIVERSAL SERVICE CONTROLLER
USC13XX,
PHEENET TECHNOLOGY CORP. / WAS-102R,
MICRONET COMMUNICATIONS INC. / SP-913V3,
OVISLINK CORP. / WIAS-1000GV2,
DIGITAL DATA COMMUNICATIONS ASIA. / WSG-1000,
PLANET TECHNOLOGY CORP. / WSG-404,
4IPNET. / WHG101,
4IPNET. / ISR101

Date of Test: December 26, 2006 ~ January 10, 2007

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Gavin Lim
Section Manager
Compliance Certification Services Inc.

Amanda Wu
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	IEEE802.11 b/g AP
Trade Name / Model Number	Cipherium Systems Co., Ltd. / W1310R, Cipherium Systems Co., Ltd. / Universal Service Controller USC13XX, PheeNet Technology Corp. / WAS-102R, Micronet Communications Inc. / SP-913V3, Ovislink Corp. / WIAS-1000GV2, Digital Data Communications Asia. / WSG-1000, Planet Technology Corp. / WSG-404, 4IPNET. / WHG101, 4IPNET. / ISR101
Model Discrepancy	All the above models are identical except for the designation of model numbers and trade name and the difference of color for its external appearance. Please refer to the external photos for reference.
Power Supply	Power Adaptor Model: SW1201500-W01 I/P: 100-240Vac, 50-60Hz, 0.5A MAX O/P: 12Vdc, 1.5A
Frequency Range	2412 ~ 2462 MHz
Transmit Power	IEEE 802.11b: 16.34 dBm IEEE 802.11g: 15.55 dBm
Modulation Technique	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: DSSS (CCK, DQPSK, DBPSK) + OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
Transmit Data Rate	IEEE 802.11b: 11, 5.5, 2, 1 Mbps IEEE 802.11g: 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 Mbps
Number of Channels	11 Channels
Antenna Specification	2 dBi
Antenna Designation	Omni Antenna

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **R3MW1310RV01** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: W1310R) comes with plastic housing with metallic coating and metal housing for sale. After the preliminary test, the EUT with plastic housing with metallic coating was found to emit the worst emissions and therefore had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

The worst case data rate is determined as the data rate with highest output power.

IEEE802.11b mode:

Channel Low(2412MHz), Channel Mid(2437MHz) and Channel High(2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE802.11g mode:

Channel Low(2412MHz), Channel Mid(2437MHz) and Channel High(2462MHz) with 6Mbps data rate were chosen for full testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/18/2007
Spectrum Analyzer	R&S	FSEK30	10026	03/22/2007

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	08/02/2007
Test Receiver	Rohde&Schwarz	ESCI	100064	11/05/2007
Switch Controller	TRC	Switch Controller	SC94050010	05/05/2007
4 Port Switch	TRC	4 Port Switch	SC94050020	05/05/2007
Horn-Antenna	TRC	HA-0502	06	06/06/2007
Horn-Antenna	TRC	HA-0801	04	05/05/2007
Horn-Antenna	TRC	HA-1201A	01	07/10/2007
Horn-Antenna	TRC	HA-1301A	01	07/18/2007
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/09/2007
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.
Site NSA	CCS	N/A	FCC: 965860 IC: IC 6106	09/25/2008
Test S/W	LABVIEW (V 6.1)			

Remark: The measurement uncertainty is less than +/-2.0065dB (30MHz ~ 1GHz), +/-3.0958dB (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI TEST RECEIVER 9kHz-30MHz	ROHDE & SCHWARZ	ESHS30	828144/003	10/31/2007
TWO-LINE V-NETWORK 9kHz-30MHz	SCHAFFNER	NNB41	03/10013	06/14/2007
LISN 10kHz-100MHz	EMCO	3825/2	9106-1809	03/20/2007
Test S/W	LABVIEW (V 6.1)			

Remark: The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT








Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	EN 55011, EN 55014-1/2, CISPR 11, CISPR 14-1/2, EN 55022, EN 55015, CISPR 22, CISPR 15, AS/NZS 3548, VCCI V3 (2001), CFR 47, FCC Part 15/18, CNS 13783-1, CNS 13439, CNS 13438, CNS 13803, CNS 14115, EN 55024, IEC 801-2, IEC 801-3, IEC 801-4, IEC/EN 61000-3-2, EIC/EN 61000-3-3, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 50081-1/ EN 61000-6-3, EN 50081-2/EN 61000-6-4, EN 50081-2/EN 61000-6-1: 2001	 0824-01
USA	FCC	3/10 meter Open Area Test Sites (93105, 90471) / 3M Semi Anechoic Chamber (965860) to perform FCC Part 15/18 measurements	 93105, 90471 965860
Japan	VCCI	3/10 meter Open Area Test Sites to perform conducted/radiated measurements	 R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	TAF	EN 300 328, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS CISPR 22, CNS 13022-1, IEC 61000-4-2/3/4/5/6/8/11, CNS 13022-2/3	
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	3/10 meter Open Area Test Sites (IC 3991-3, IC 3991-4) / 3M Semi Anechoic Chamber (IC 6106) to perform RSS 212 Issue 1	 IC 3991-3 IC 3991-4 IC 6106

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	IBM	2672 (X31)	9985H9M	WLAN: ANO20030400LEG Bluetooth: ANO20020100MTN	LAN Cable: Unshielded, 10m Line Cable: Unshielded, 10m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	Notebook PC (Remote)	IBM	2672 (X31)	99PBTB	WLAN: ANO20030400LEG Bluetooth: ANO20020100MTN	LAN Cable: Unshielded, 10m Line Cable: Unshielded, 10m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	11080	>500	PASS
Mid	2437	10000		PASS
High	2462	9670		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	16500	>500	PASS
Mid	2437	16500		PASS
High	2462	16580		PASS



Test Plot

IEEE 802.11b

6dB Bandwidth (CH Low)

Agilent 11:42:09 Jan 10, 2007

R L


6dB BW, b Mode Low Ch.

Δ Mkr1 11.08 MHz

Ref 30 dBm

Atten 30 dB

0.80 dB

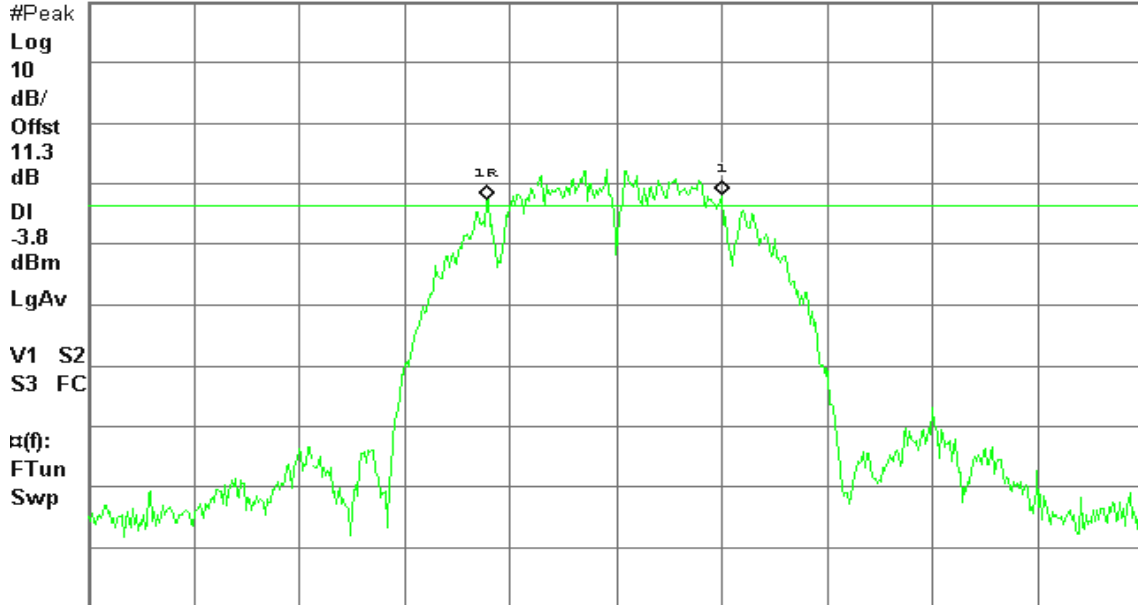

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH Mid)

Agilent 12:56:51 Jan 10, 2007

R L


6dB BW, b Mode Mid Ch.

Δ Mkr1 10.00 MHz

Ref 30 dBm

Atten 30 dB

1.22 dB

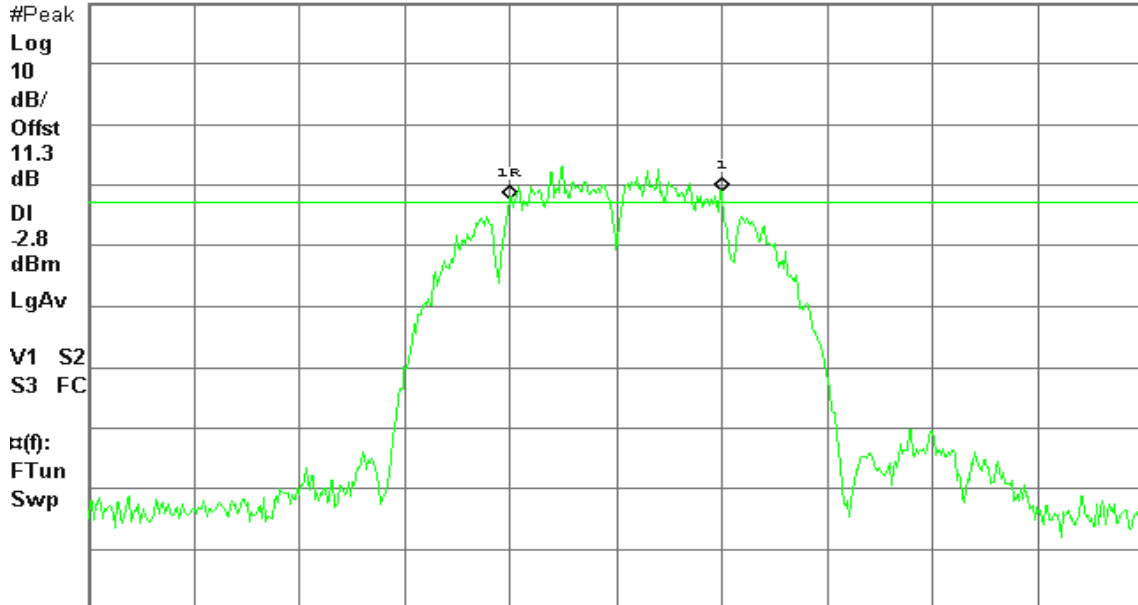

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH High)

Agilent 13:10:03 Jan 10, 2007

R L


6dB BW, b Mode High Ch.

Δ Mkr1 9.67 MHz

Ref 30 dBm

Atten 30 dB

1.18 dB

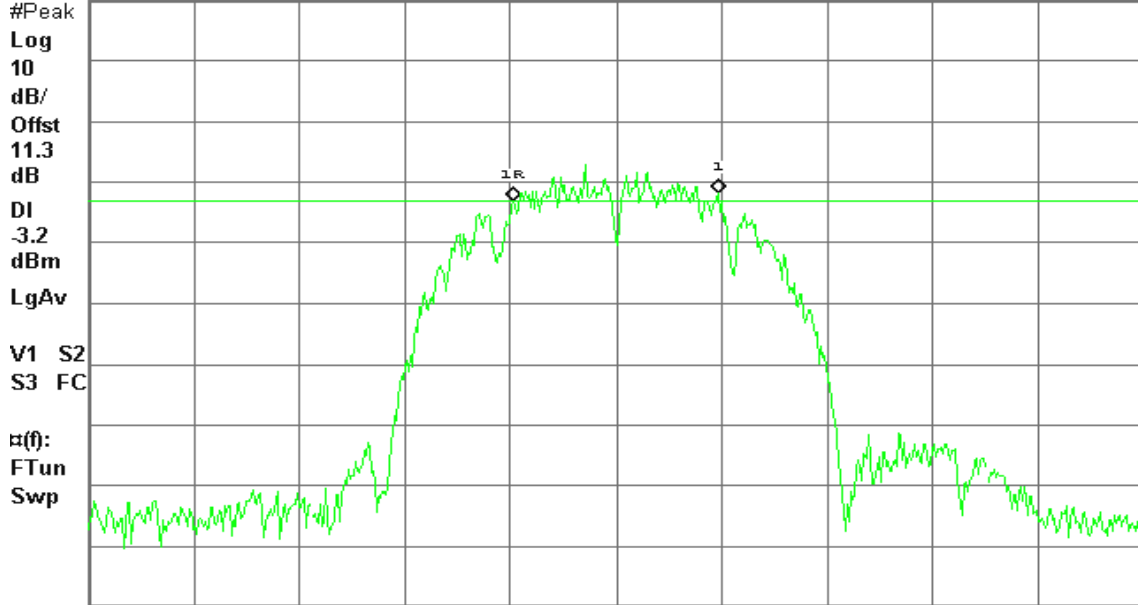

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

IEEE 802.11g

6dB Bandwidth (CH Low)

Agilent 13:22:52 Jan 10, 2007

R T


6dB BW, g Mode Low Ch.

Δ Mkr1 16.50 MHz

Ref 30 dBm

Atten 30 dB

-0.31 dB

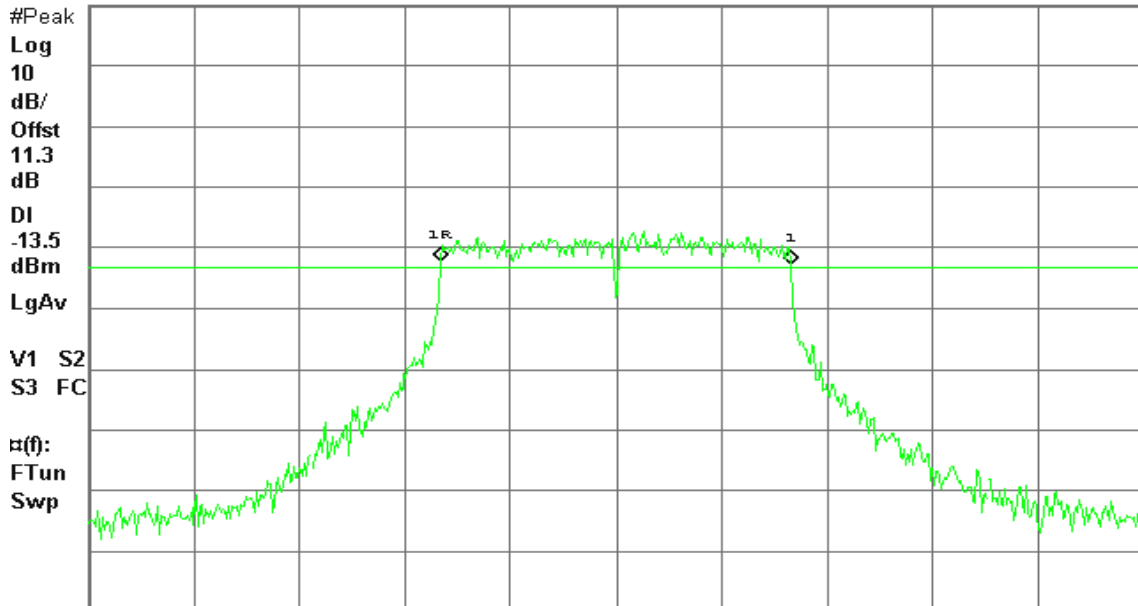

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH Mid)

Agilent 13:33:00 Jan 10, 2007

R T


6dB BW, g Mode Mid Ch.

Δ Mkr1 16.50 MHz

Ref 30 dBm

Atten 30 dB

-1.83 dB

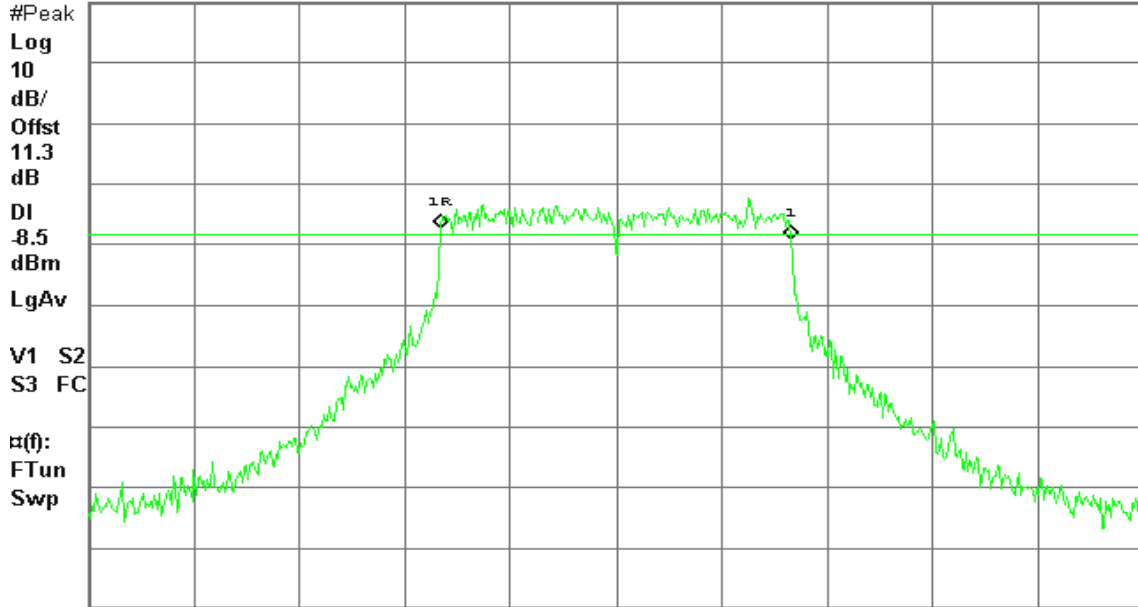

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 13:42:13 Jan 10, 2007

R T


6dB BW, g Mode High Ch.

Δ Mkr1 16.58 MHz

Ref 30 dBm

Atten 30 dB

-0.41 dB

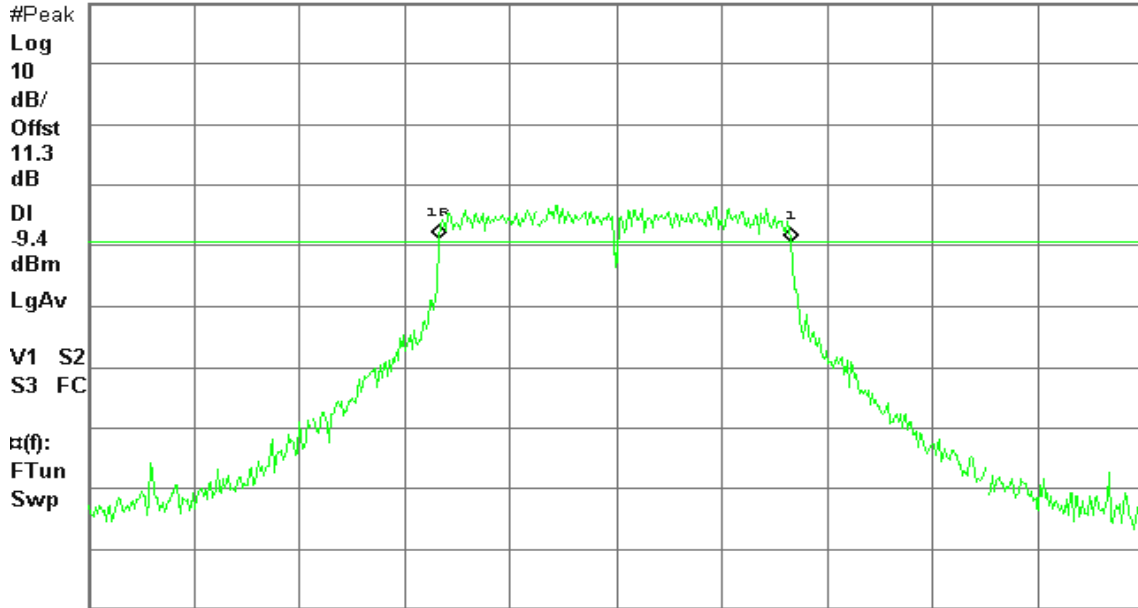

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	16.15	0.04121	1.00	PASS
Mid	2437	16.04	0.04018		PASS
High	2462	16.34	0.04305		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	12.59	0.01816	1.00	PASS
Mid	2437	15.55	0.03589		PASS
High	2462	15.47	0.03524		PASS



Test Plot

IEEE 802.11b

Peak Power (CH Low)


Agilent 11:43:13 Jan 10, 2007

R T

Peak Output Power , b Mode Low Ch.

Ref 30 dBm

Atten 30 dB

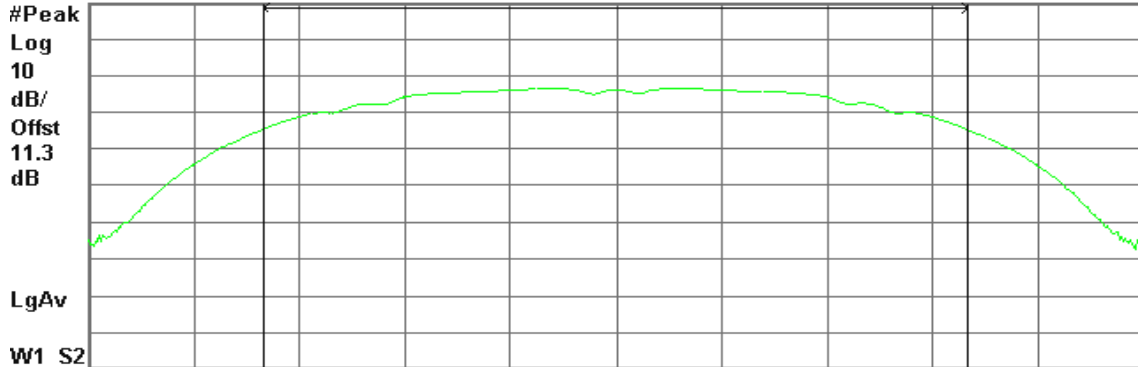

Center 2.412 00 GHz

Span 23.08 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

16.15 dBm / 15.3870 MHz

-55.73 dBm/Hz

Peak Power (CH Mid)


Agilent 12:58:01 Jan 10, 2007

R T

Peak Output Power , b Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

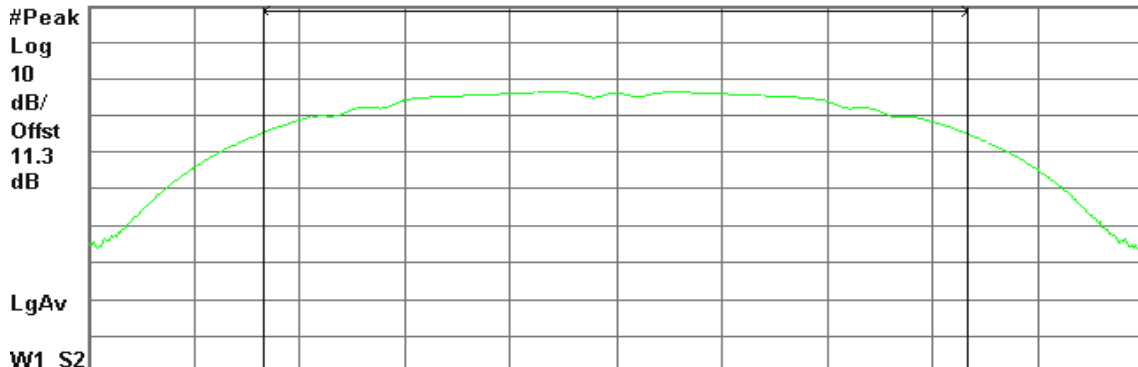

Center 2.437 00 GHz

Span 23.09 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

16.04 dBm / 15.3930 MHz

-55.83 dBm/Hz



Peak Power (CH High)


Agilent 13:10:59 Jan 10, 2007

R T

Peak Output Power , b Mode High Ch.

Ref 30 dBm

Atten 30 dB

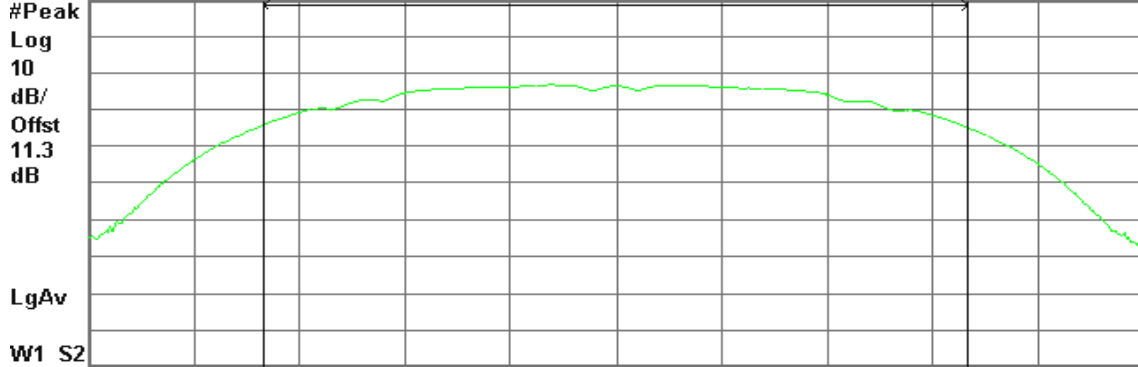

Center 2.462 00 GHz

Span 23.13 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

16.34 dBm / 15.4220 MHz

-55.54 dBm/Hz

IEEE 802.11g


Peak Power (CH Low)

Agilent 00:13:55 Jan 10, 2007

T

Ref 30 dBm

Atten 30 dB

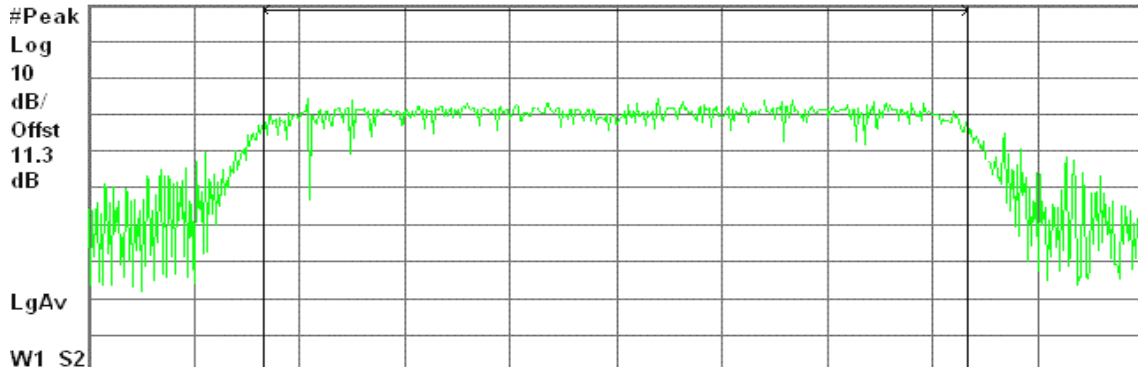

Center 2.412 00 GHz

Span 25.01 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

12.59 dBm / 16.6720 MHz


-59.63 dBm/Hz



Peak Power (CH Mid)

Agilent 00:13:52 Jan 10, 2007

T

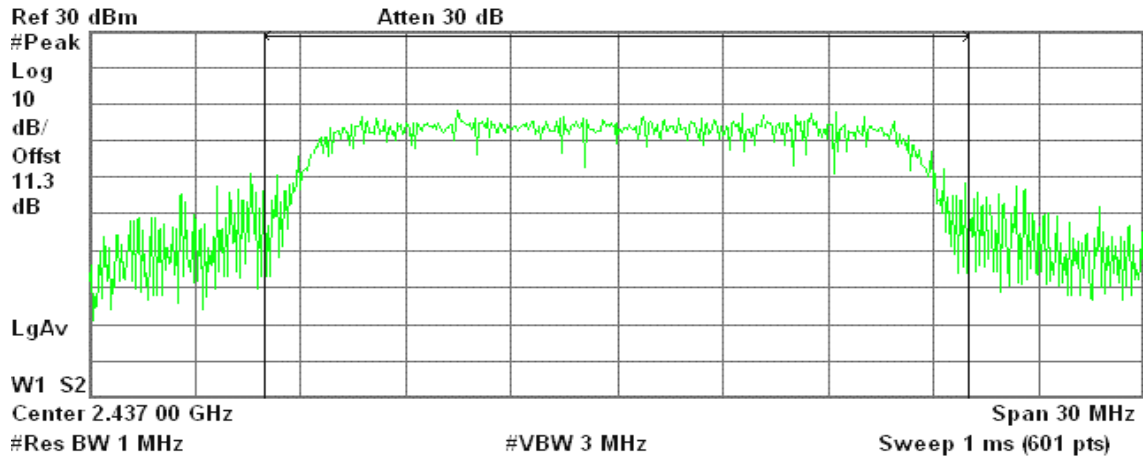

Channel Power

15.55 dBm / 20.0000 MHz


Power Spectral Density

-57.46 dBm/Hz

Peak Power (CH High)

Agilent 00:14:13 Jan 10, 2007

T

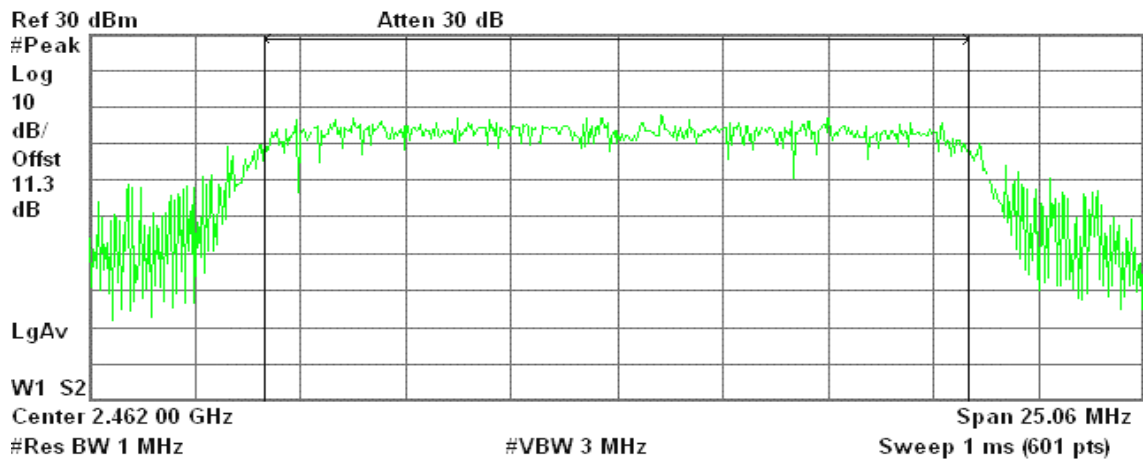

Channel Power

15.47 dBm / 16.7030 MHz

Power Spectral Density

-56.76 dBm/Hz




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration

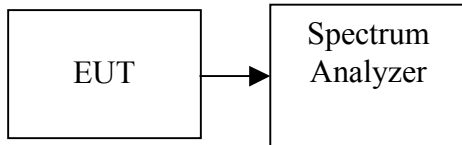

TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted.

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)
Low	2412	13.14
Mid	2437	13.09
High	2462	13.22

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)
Low	2412	7.17
Mid	2437	11.01
High	2462	11.07



Test Plot

IEEE 802.11b

CH Low


Agilent 11:44:10 Jan 10, 2007

R L

AVG Output Power , b Mode Low Ch.

Ref 30 dBm

Atten 30 dB

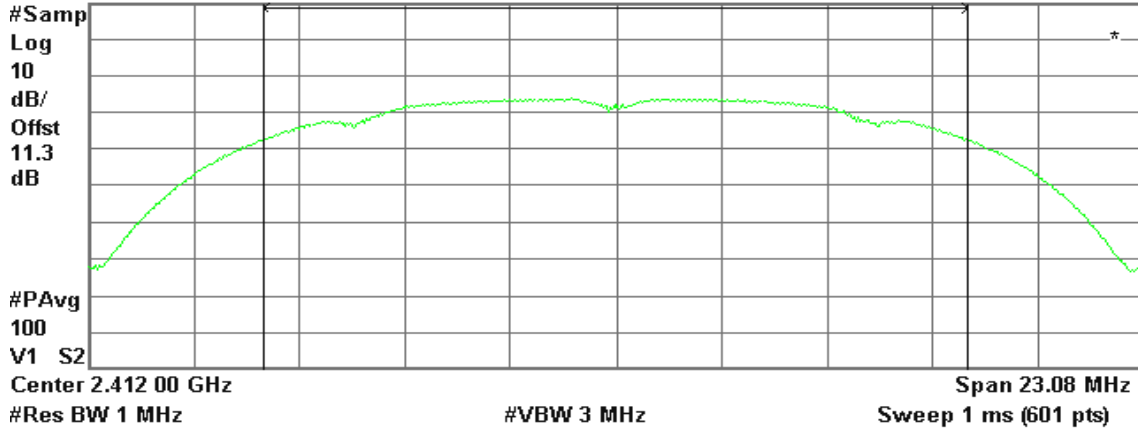

Channel Power

13.14 dBm / 15.3870 MHz

Power Spectral Density

-58.73 dBm/Hz

CH Mid


Agilent 12:59:34 Jan 10, 2007

R T

AVG Output Power , b Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

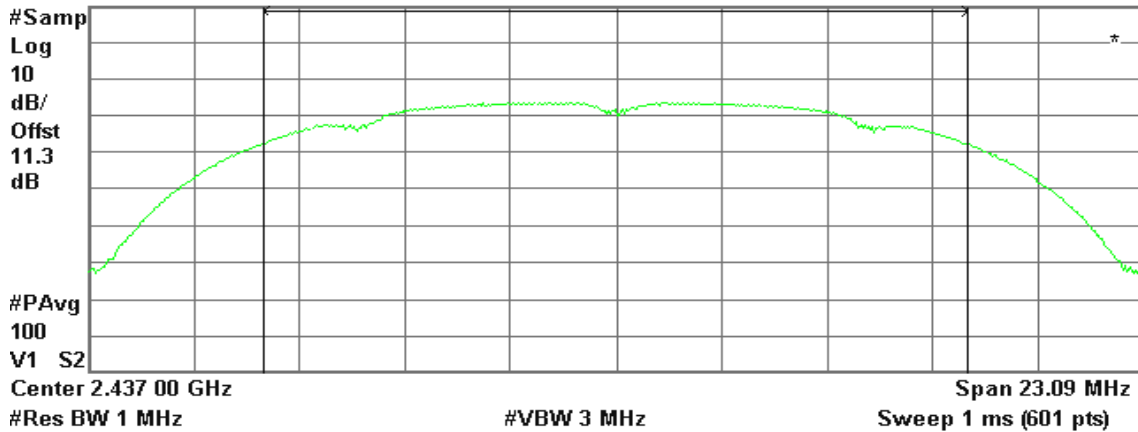

Channel Power

13.09 dBm / 15.3930 MHz

Power Spectral Density

-58.78 dBm/Hz



CH High


Agilent 13:12:09 Jan 10, 2007

R L

AVG Output Power , b Mode High Ch.

Ref 30 dBm

Atten 30 dB

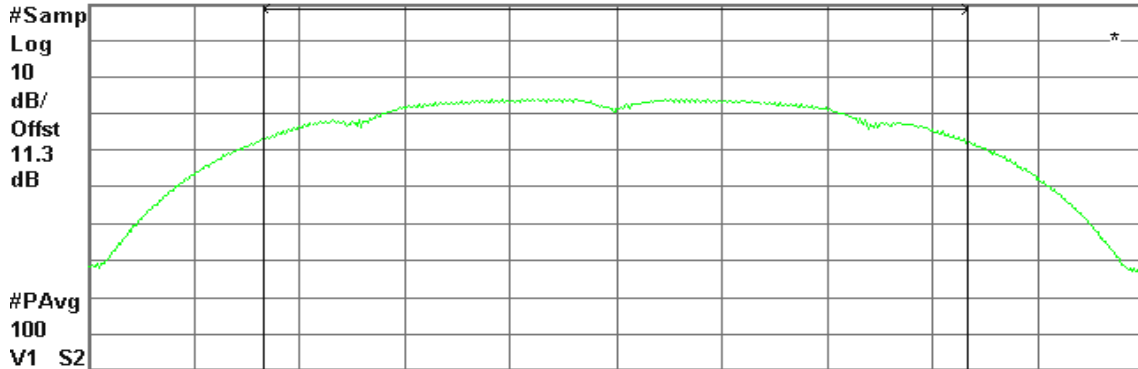

Center 2.462 00 GHz

Span 23.13 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

13.22 dBm / 15.4220 MHz

-58.66 dBm/Hz

IEEE 802.11g


CH Low

Agilent 13:26:07 Jan 10, 2007

R T

Ref 30 dBm

Atten 30 dB

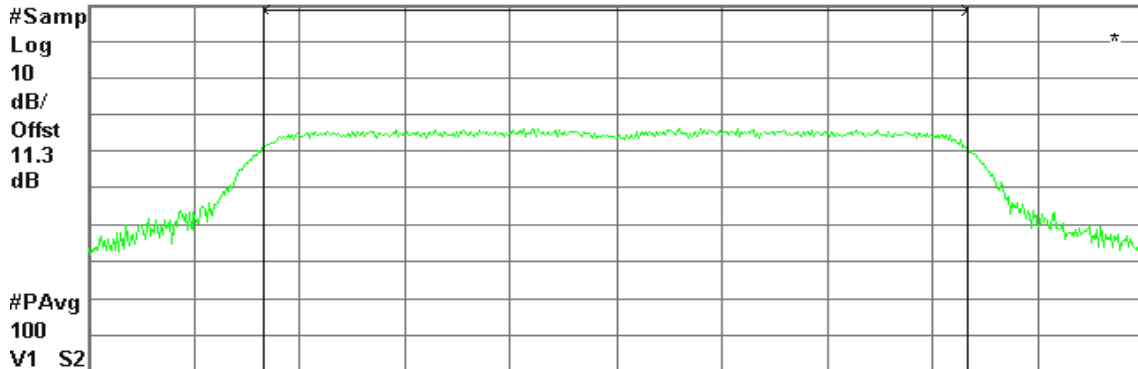

Center 2.412 00 GHz

Span 25.01 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

7.17 dBm / 16.6720 MHz

-65.05 dBm/Hz



CH Mid


Agilent 13:37:05 Jan 10, 2007

R L

AVG Output Power , g Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

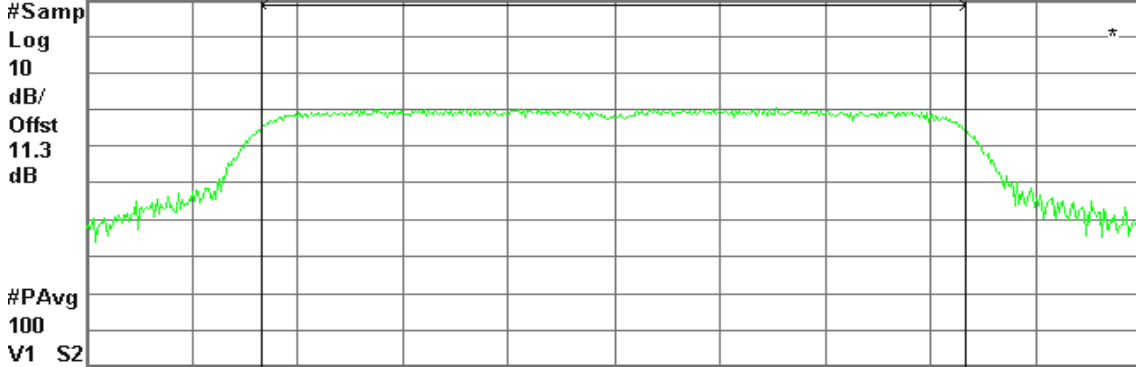

Center 2.437 00 GHz

Span 25.12 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

11.01 dBm / 16.7500 MHz

-61.23 dBm/Hz

CH High


Agilent 13:44:28 Jan 10, 2007

R L

AVG Output Power , g Mode High Ch.

Ref 30 dBm

Atten 30 dB

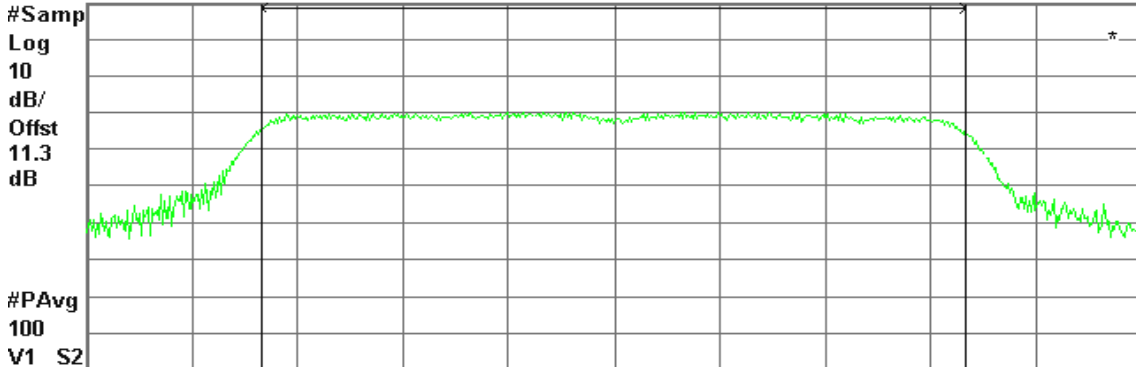

Center 2.462 00 GHz

Span 25.05 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

11.07 dBm / 16.7030 MHz


-61.16 dBm/Hz

7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

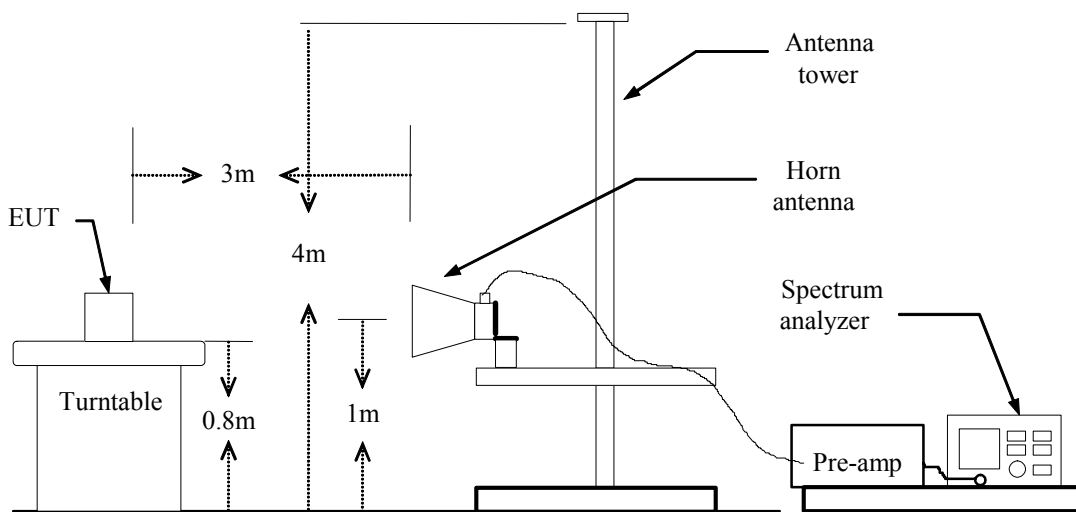

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.




Band Edges (IEEE 802.11b / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 09:54:57 Dec 26, 2006

R T

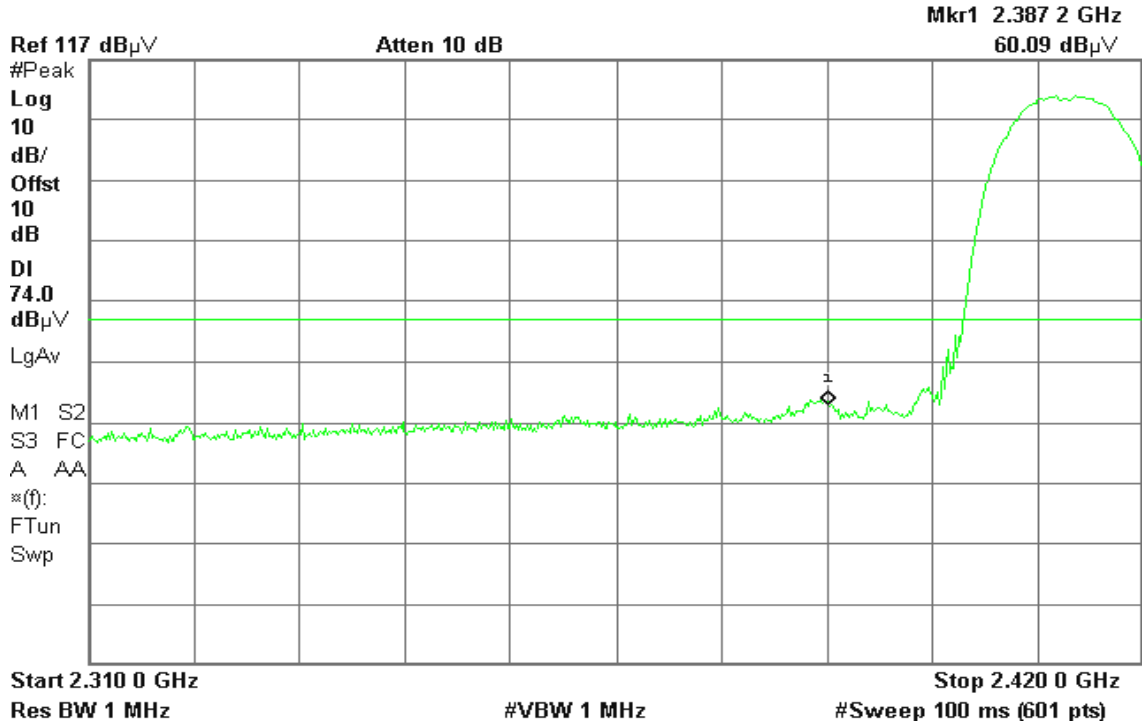


Detector mode: Average

Polarity: Vertical

Agilent 09:54:31 Dec 26, 2006

R T

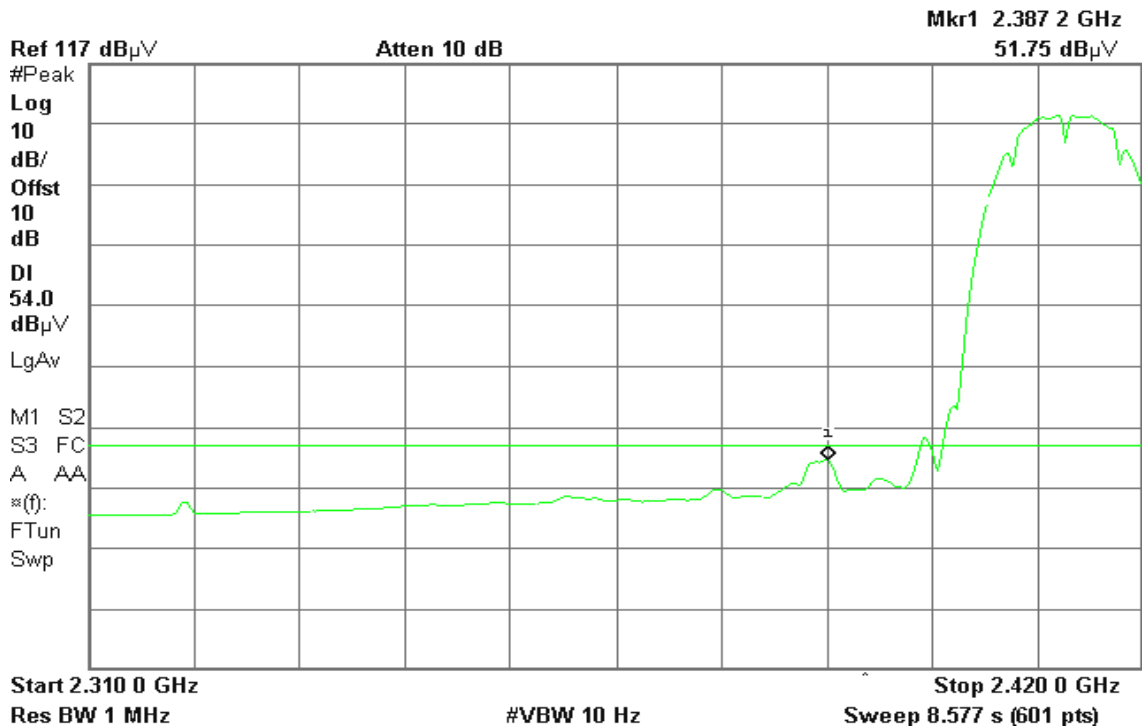




Detector mode: Peak

Polarity: Horizontal

Agilent 10:00:32 Dec 26, 2006

R T

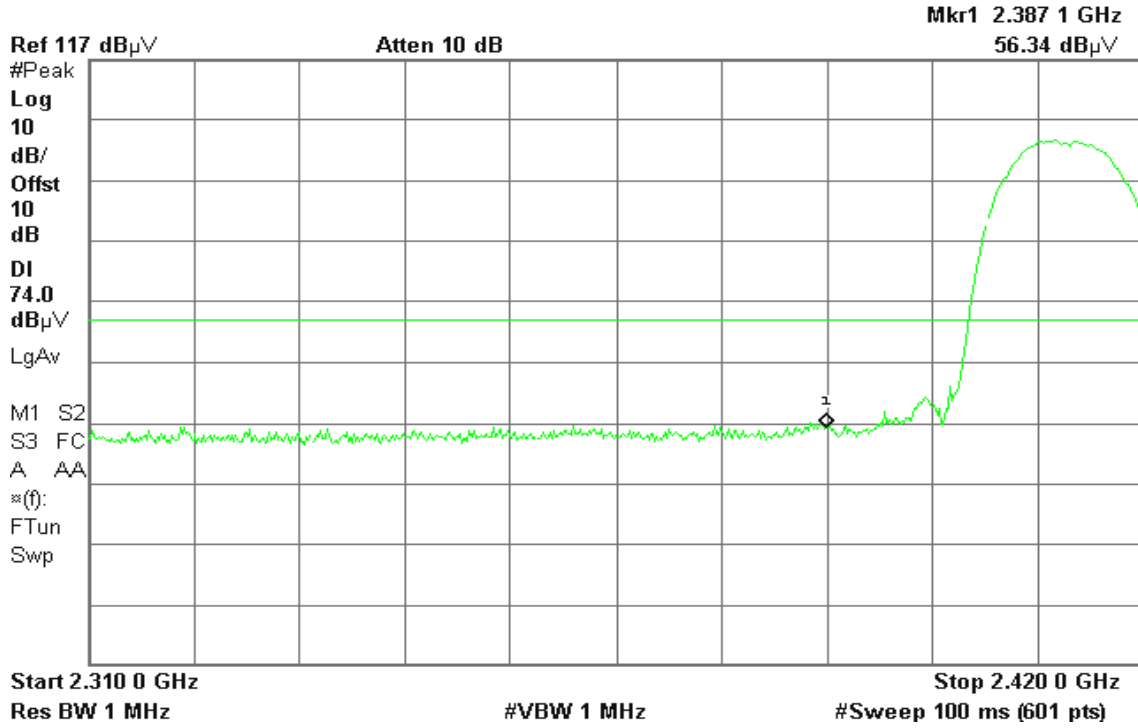


Detector mode: Average

Polarity: Horizontal

Agilent 10:00:13 Dec 26, 2006

R T

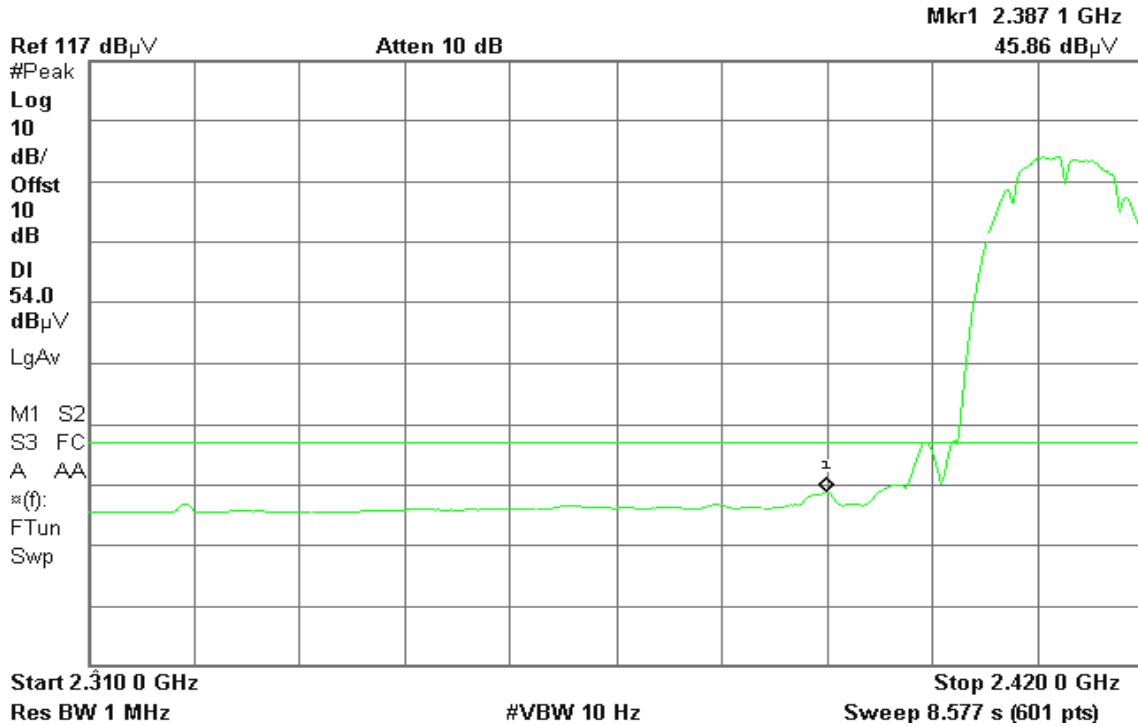




Band Edges (IEEE 802.11b / CH High)

Detector mode: Peak

Polarity: Vertical

Agilent 10:06:59 Dec 26, 2006

R T

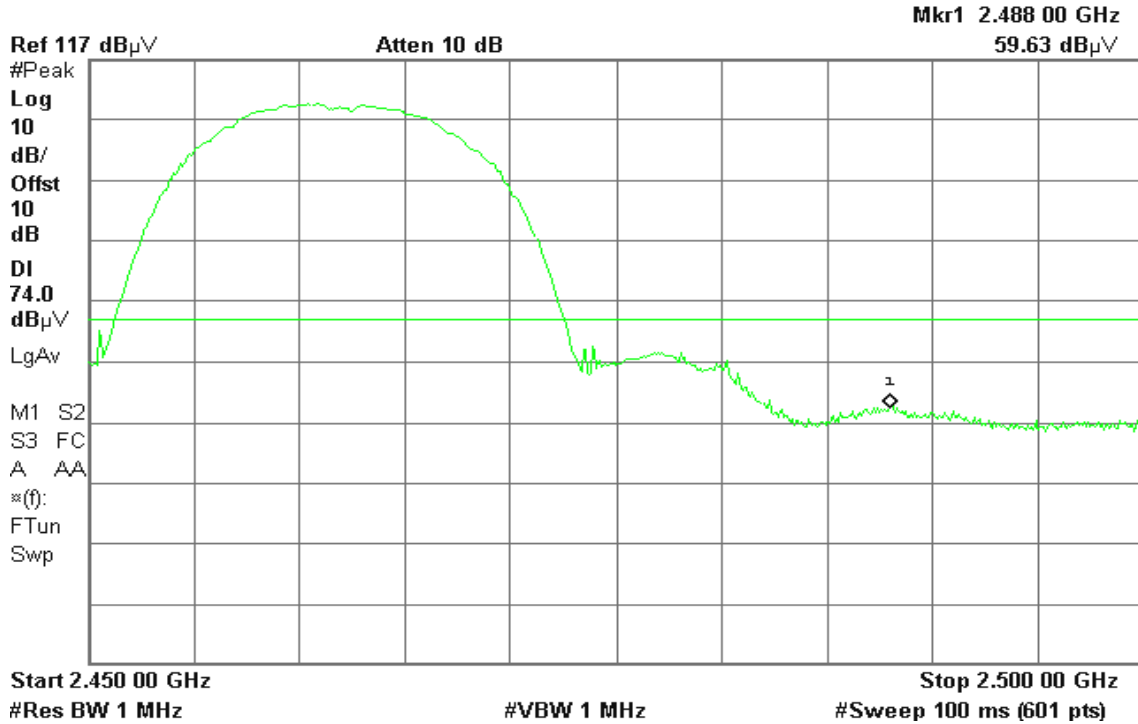


Detector mode: Average

Polarity: Vertical

Agilent 10:06:39 Dec 26, 2006

R T

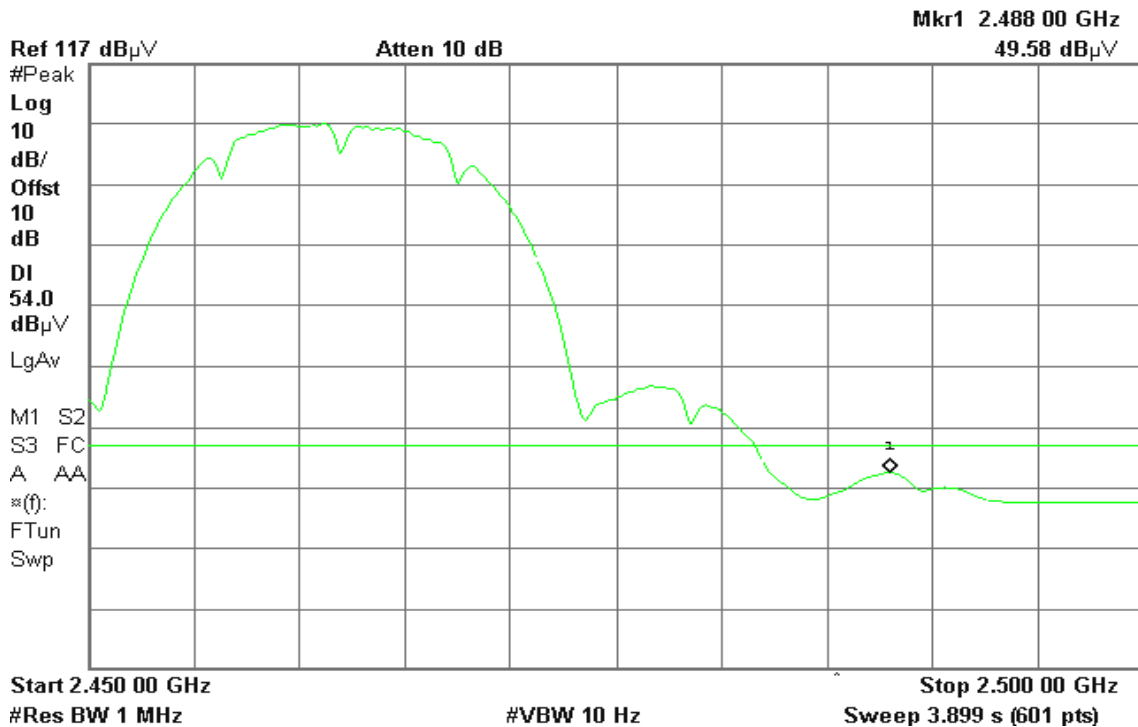




Detector mode: Peak

Polarity: Horizontal

Agilent 10:19:41 Dec 26, 2006

R T

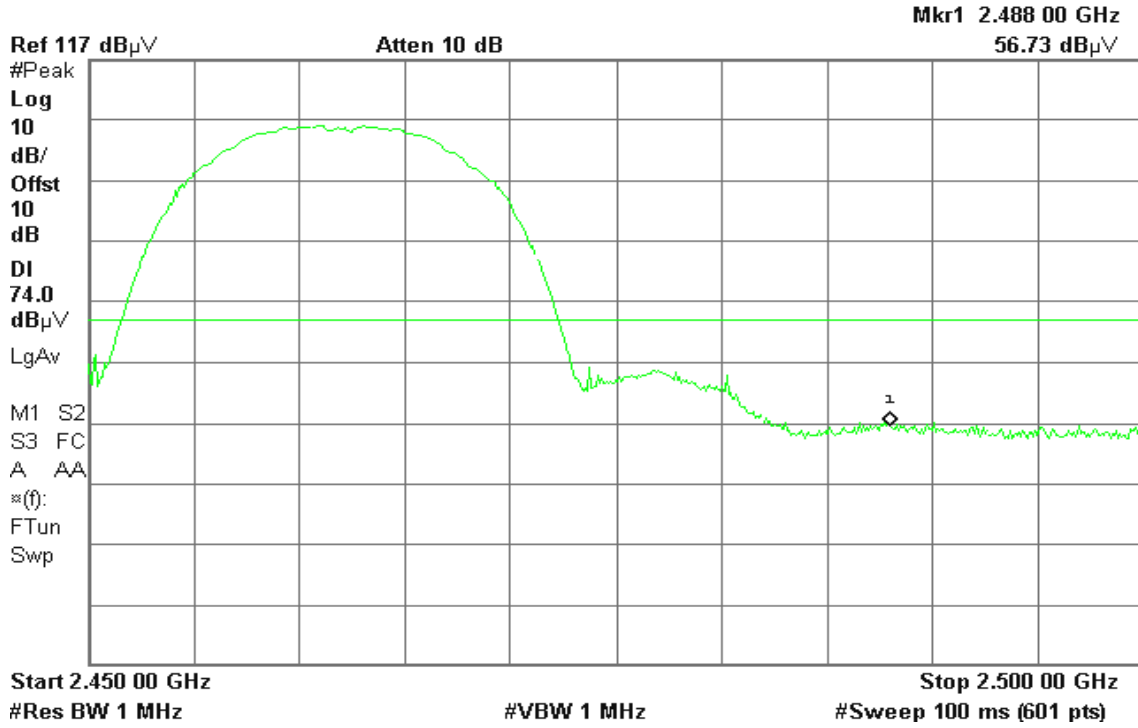


Detector mode: Average

Polarity: Horizontal

Agilent 10:19:20 Dec 26, 2006

R T

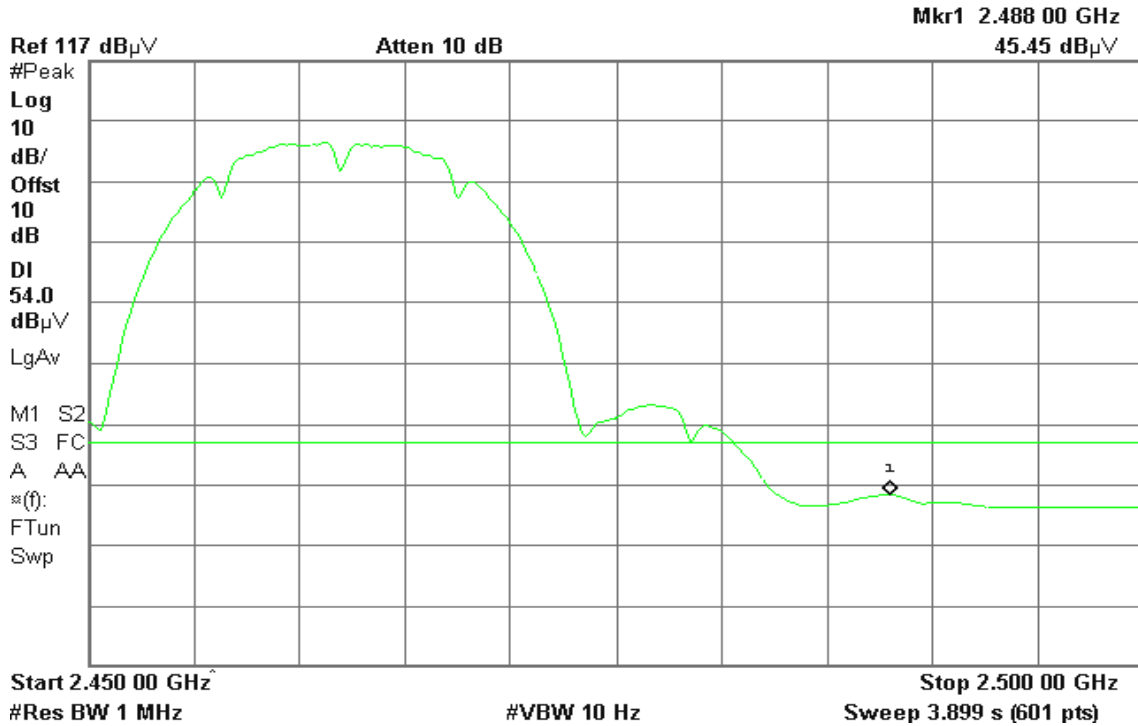




Band Edges (IEEE 802.11g / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 11:09:48 Dec 26, 2006

R T

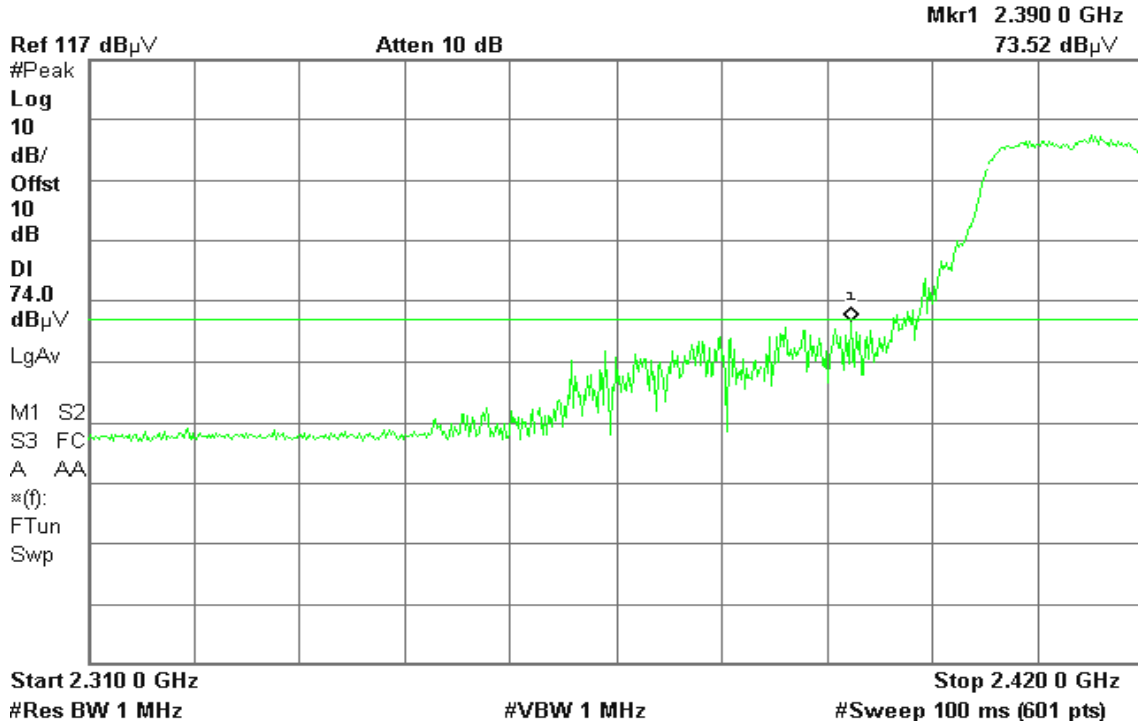


Detector mode: Average

Polarity: Vertical

Agilent 11:10:52 Dec 26, 2006

R T

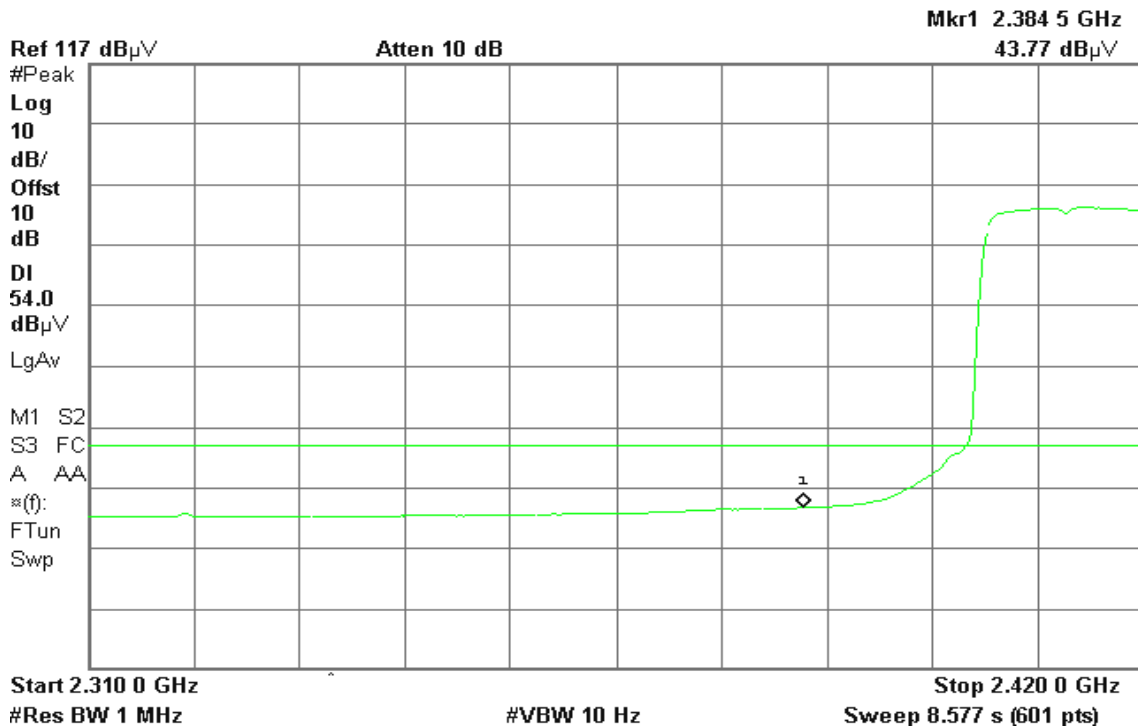




Detector mode: Peak

Polarity: Horizontal

Agilent 11:15:47 Dec 26, 2006

R T

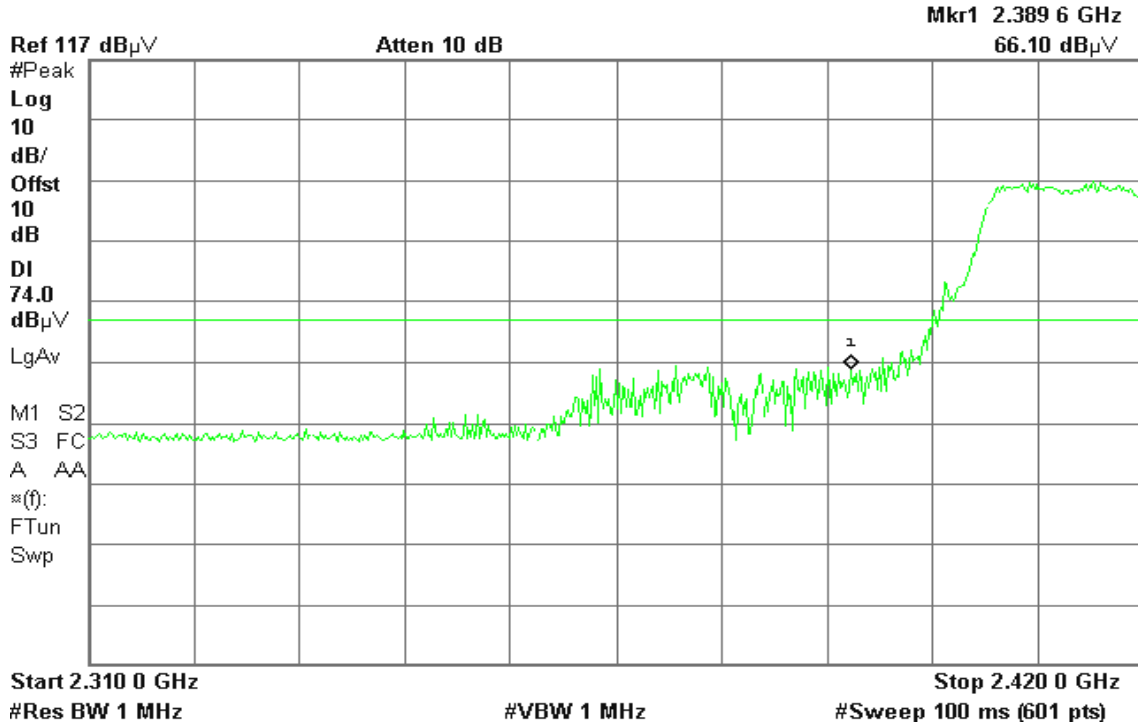


Detector mode: Average

Polarity: Horizontal

Agilent 11:14:41 Dec 26, 2006

R T

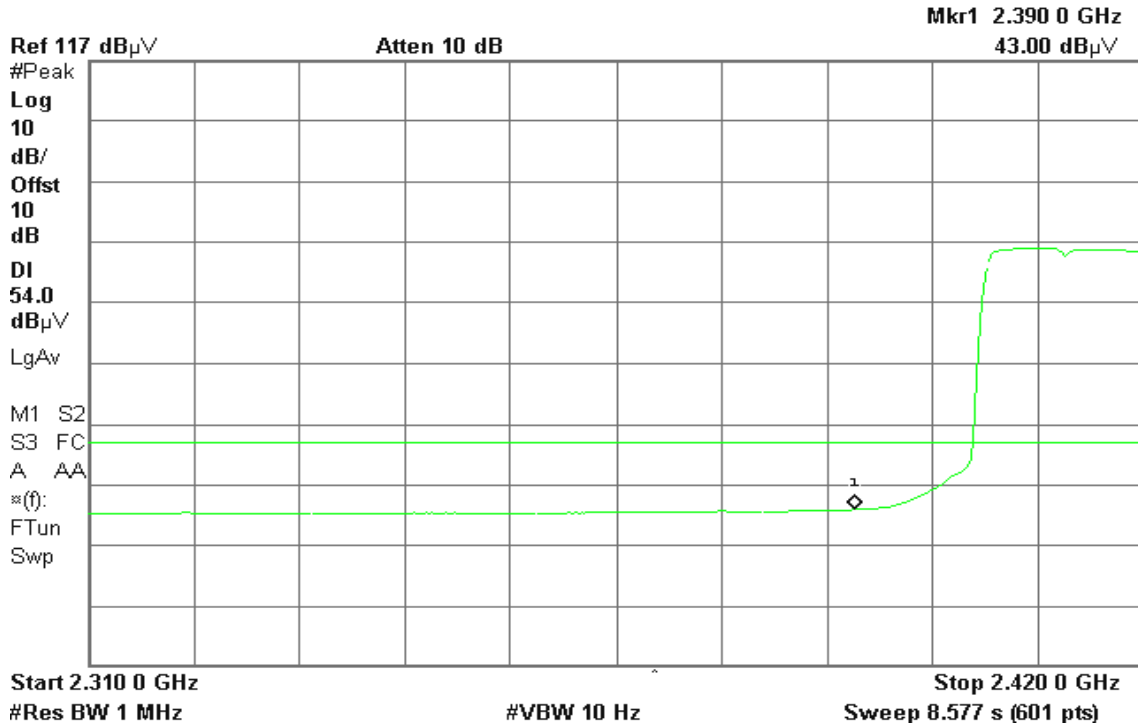



Band Edges (IEEE 802.11g / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 10:53:18 Dec 26, 2006

R T

Mkr1 2.483 50 GHz
73.67 dB μ V

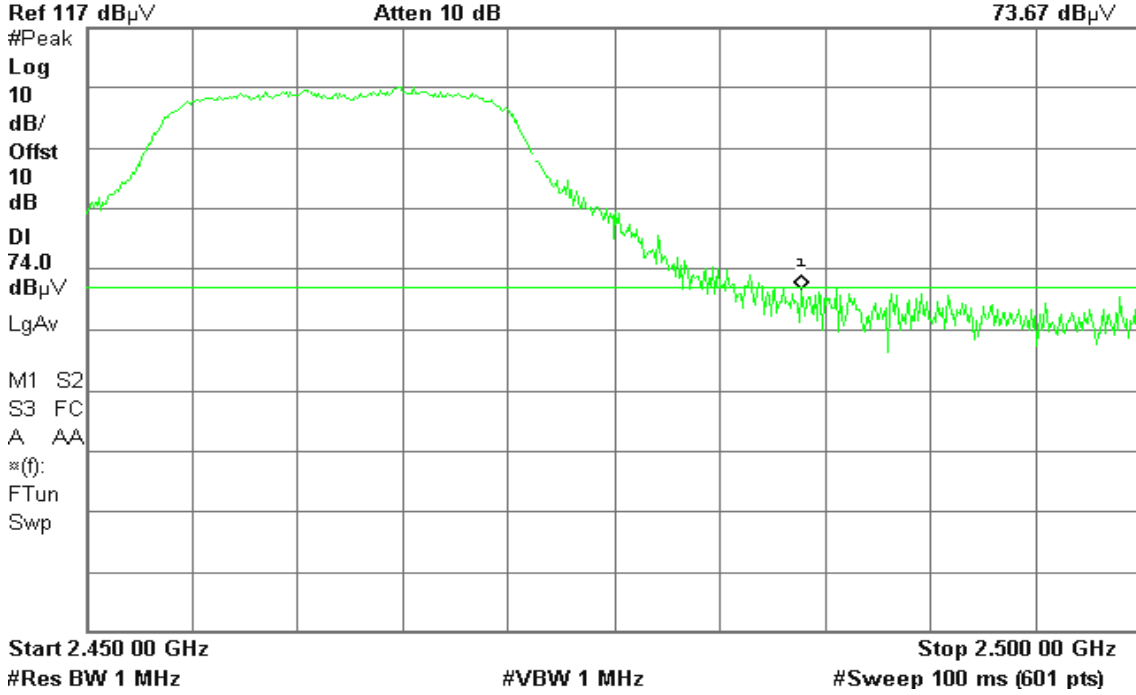


Detector mode: Average

Polarity: Vertical

Agilent 10:54:05 Dec 26, 2006

R T

Mkr1 2.484 67 GHz
44.09 dB μ V

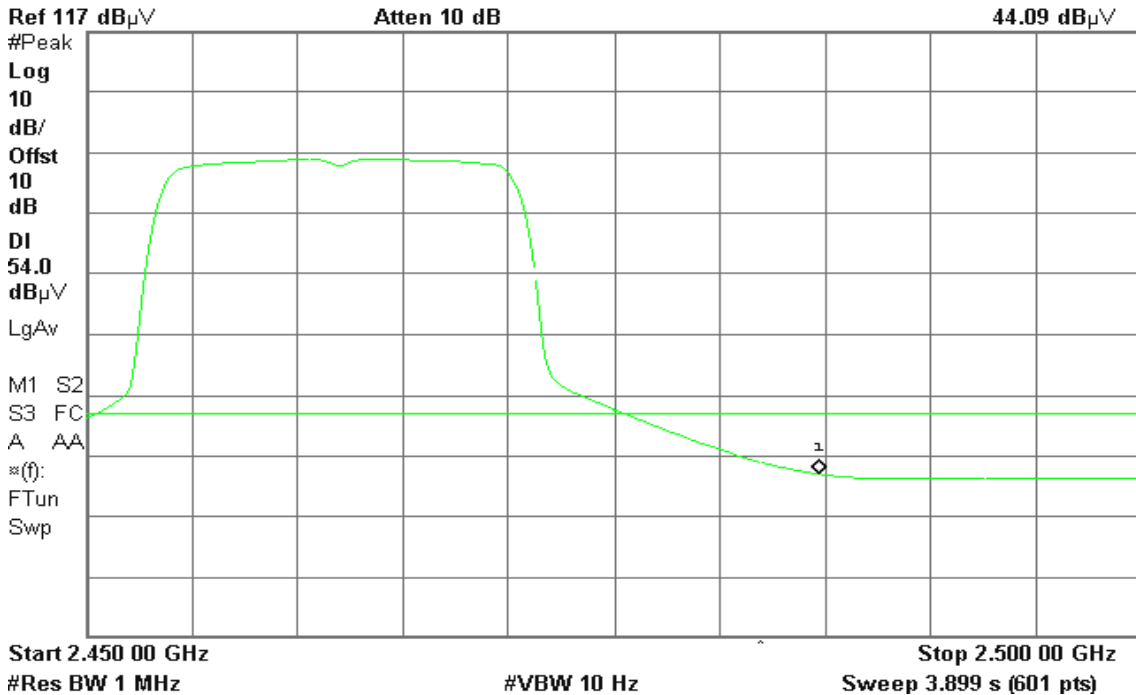




Detector mode: Peak

Polarity: Horizontal

Agilent 10:58:52 Dec 26, 2006

R T

Mkr1 2.483 58 GHz
66.30 dB μ V

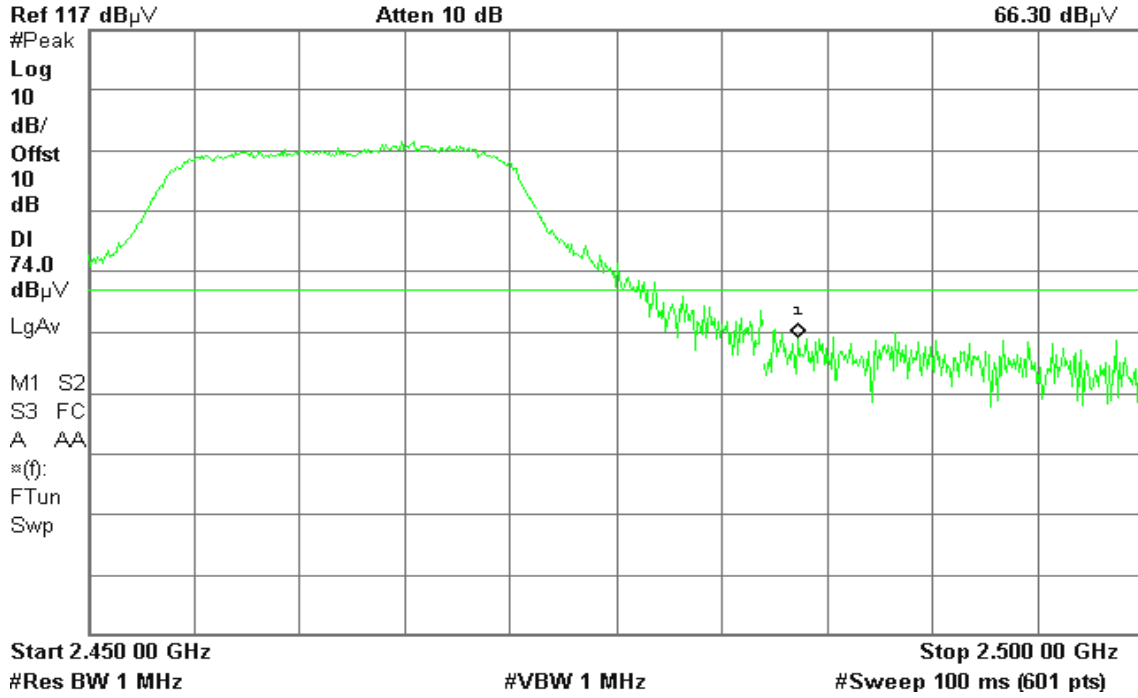


Detector mode: Average

Polarity: Horizontal

Agilent 10:57:49 Dec 26, 2006

R T

Mkr1 2.483 50 GHz
43.18 dB μ V

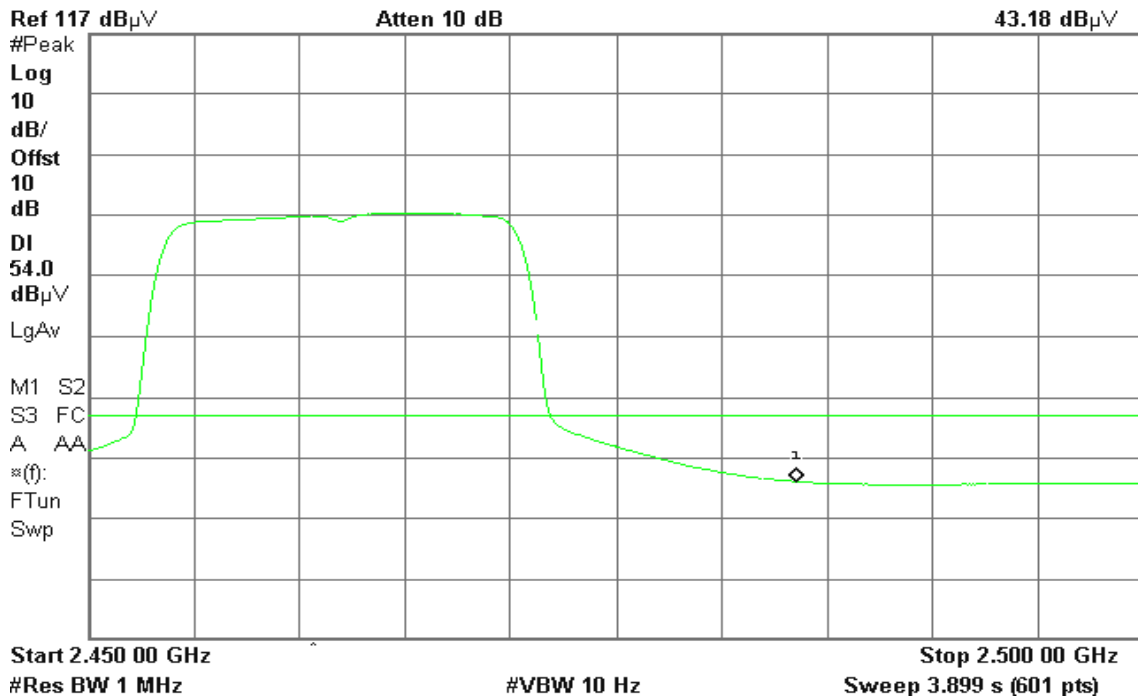


7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-9.91	8.00	PASS
Mid	2437	-11.10		PASS
High	2462	-10.41		PASS

Test mode: IEEE 802.11g


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-18.46	8.00	PASS
Mid	2437	-13.42		PASS
High	2462	-14.20		PASS




Test Plot

IEEE 802.11b

PPSD (CH Low)

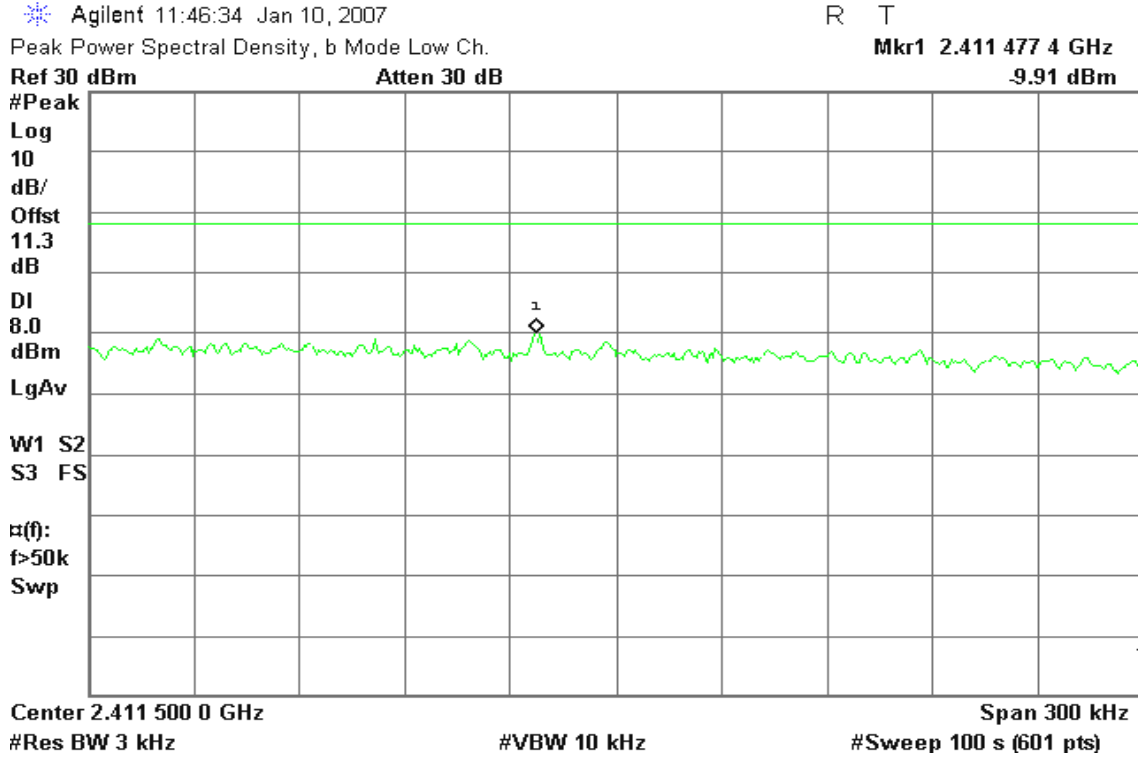

PPSD (CH Mid)

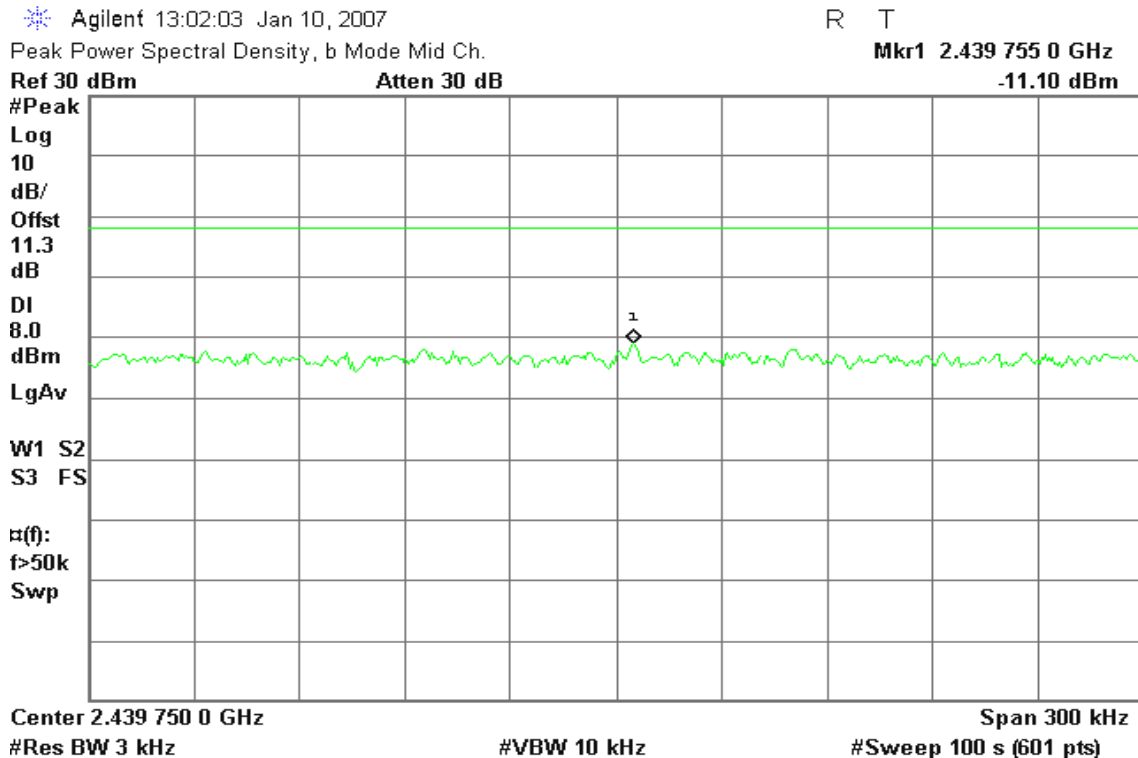



PPSD (CH High)

Agilent 13:15:32 Jan 10, 2007

R T

Peak Power Spectral Density, b Mode High Ch.

Mkr1 2.463 754 5 GHz

Ref 30 dBm

Atten 30 dB

-10.41 dBm

#Peak

Log

10

dB/

Offst

11.3

dB

DI

8.0

dBm

LgAv


W1 S2

S3 FS

$\alpha(f)$:

f>50k

Swp

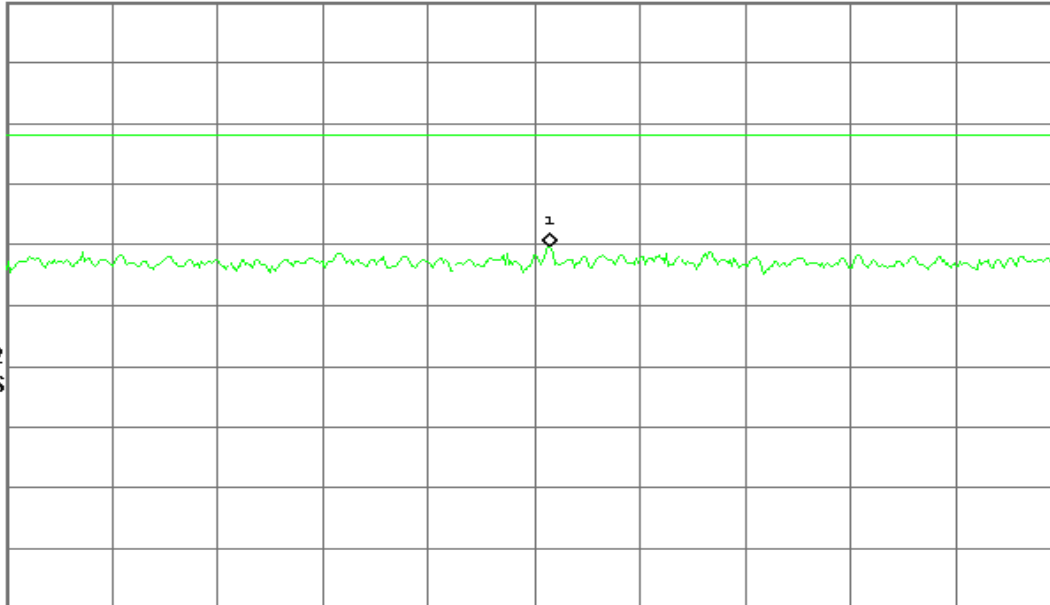

Center 2.463 750 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

IEEE 802.11g

PPSD (CH Low)

Agilent 13:29:18 Jan 10, 2007

R T

Peak Power Spectral Density, g Mode Low Ch.

Mkr1 2.414 745 3 GHz

Ref 30 dBm

Atten 30 dB

-18.46 dBm

#Peak

Log

10

dB/

Offst

11.3

dB

DI

8.0

dBm

LgAv


W1 S2

S3 FS

$\alpha(f)$:

f>50k

Swp

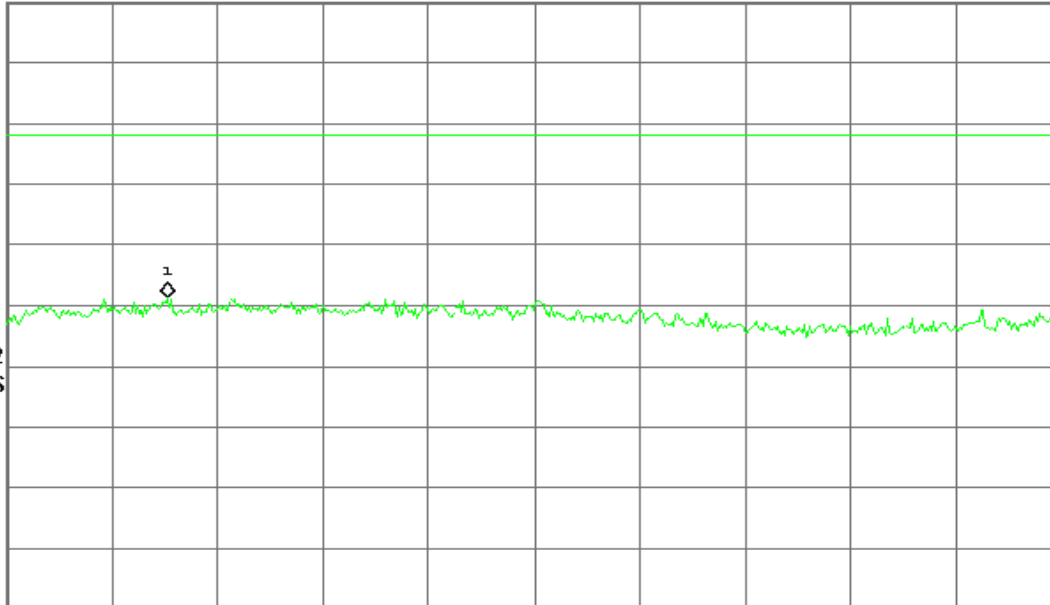

Center 2.414 850 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



PPSD (CH Mid)

Agilent 13:39:27 Jan 10, 2007

R T

Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.435 099 5 GHz

Ref 30 dBm

Atten 30 dB

-13.42 dBm

#Peak

Log

10

dB/

Offst

11.3

dB

DI

8.0

dBm

LgAv


W1 S2

S3 FS

$\alpha(f)$:

f>50k

Swp

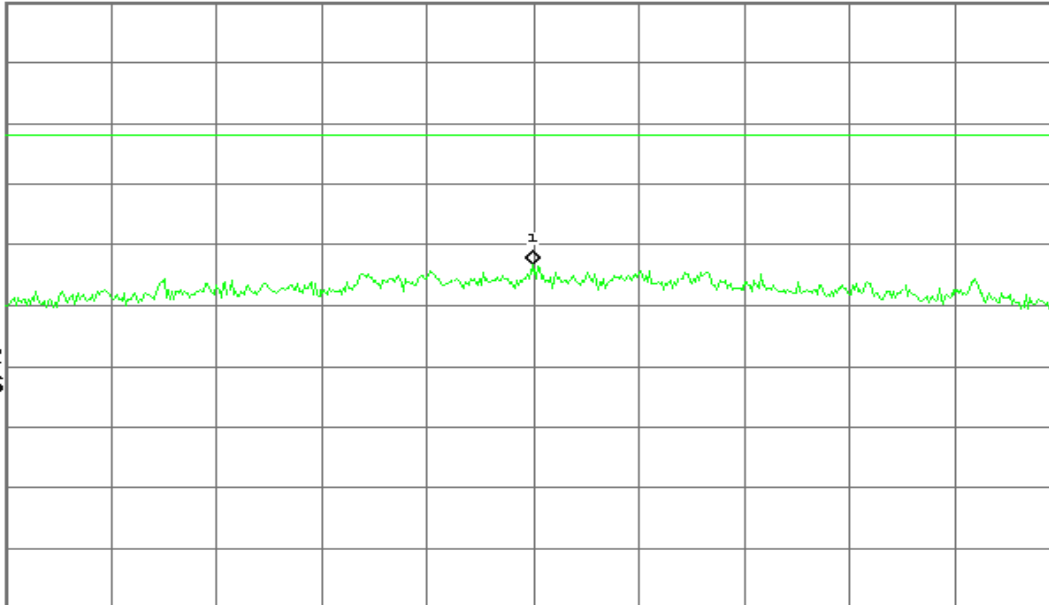

Center 2.435 100 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (CH High)

Agilent 13:47:03 Jan 10, 2007

R L

Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.456 629 4 GHz

Ref 30 dBm

Atten 30 dB

-14.20 dBm

#Peak

Log

10

dB/

Offst

11.3

dB

DI

8.0

dBm

LgAv


W1 S2

S3 FS

$\alpha(f)$:

f>50k

Swp

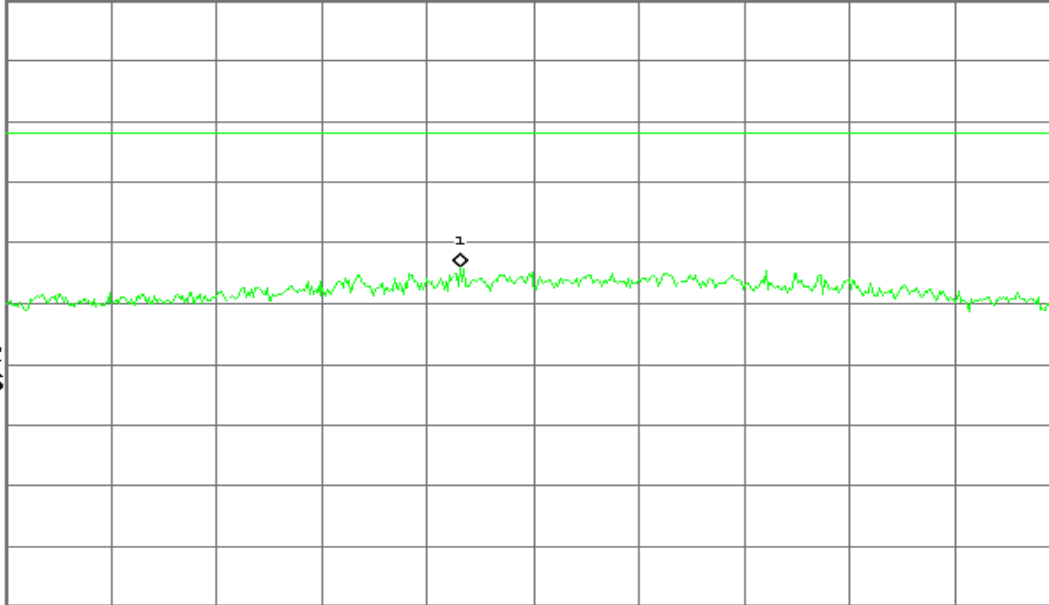

Center 2.456 650 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)




7.6 SPURIOUS EMISSIONS

7.6.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

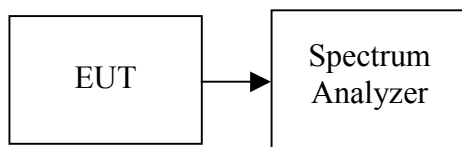

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS


No non-compliance noted



Test Plot

IEEE 802.11b

CH Low

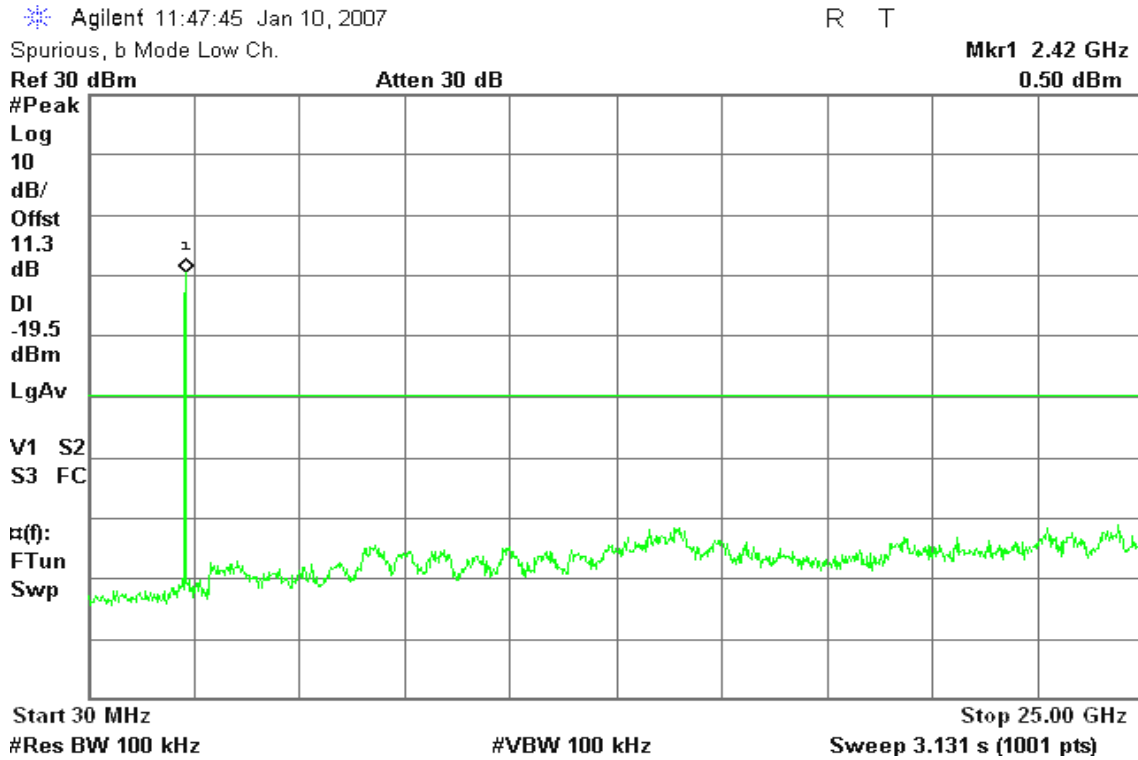

CH Mid





CH High

Agilent 13:16:41 Jan 10, 2007

R L

Spurious, b Mode High Ch.

Mkr1 2.47 GHz
1.13 dBm

Ref 30 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

11.3

dB

DI

-18.9

dBm

LgAv


V1 S2

S3 FC

⌘(f):

FTun

Swp

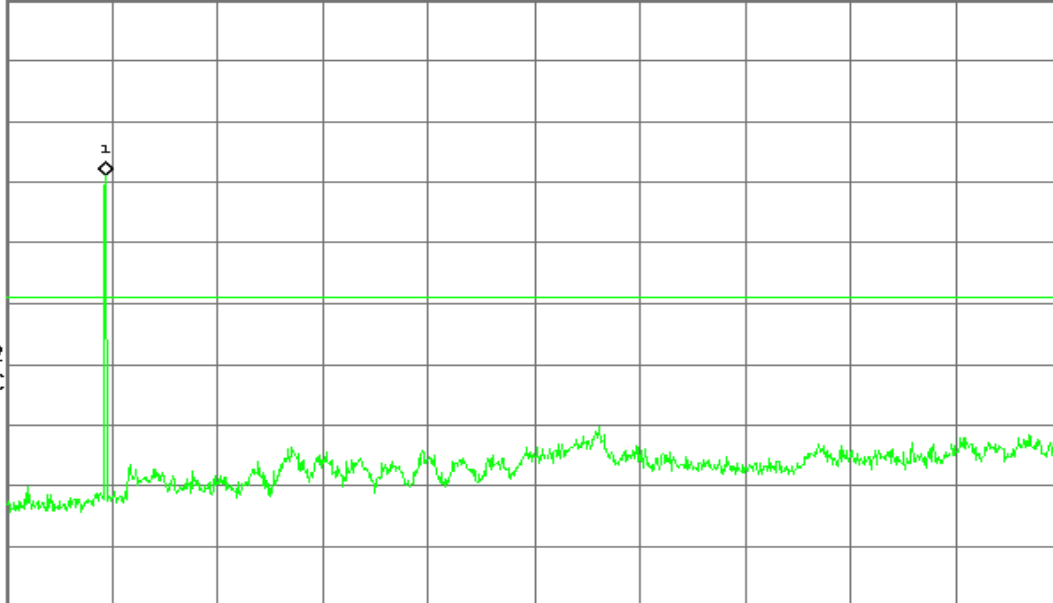

Start 30 MHz

Stop 25.00 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

IEEE 802.11g

CH Low

Agilent 13:30:36 Jan 10, 2007

R T

Spurious, g Mode Low Ch.

Mkr1 2.42 GHz
-8.45 dBm

Ref 30 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

11.3

dB

DI

-28.5

dBm

LgAv


V1 S2

S3 FC

⌘(f):

FTun

Swp

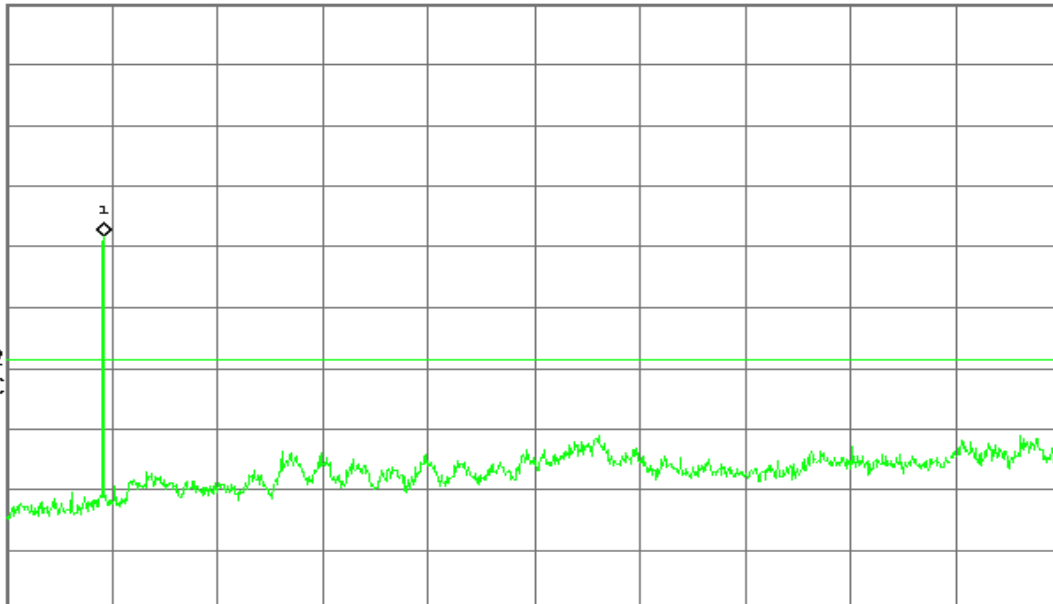

Start 30 MHz

Stop 25.00 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH Mid

Agilent 13:40:28 Jan 10, 2007

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 30 dBm

Atten 30 dB

-4.14 dBm

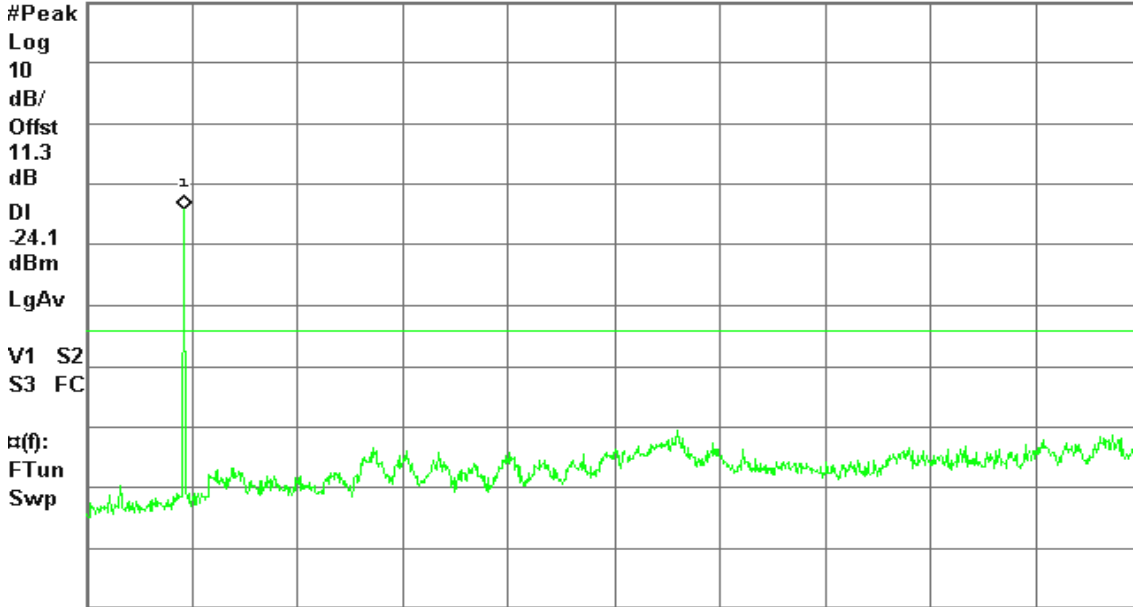

Start 30 MHz

Stop 25.00 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH High

Agilent 13:47:58 Jan 10, 2007

R T


Spurious, g Mode High Ch.

Mkr1 2.47 GHz

Ref 30 dBm

Atten 30 dB

-3.24 dBm

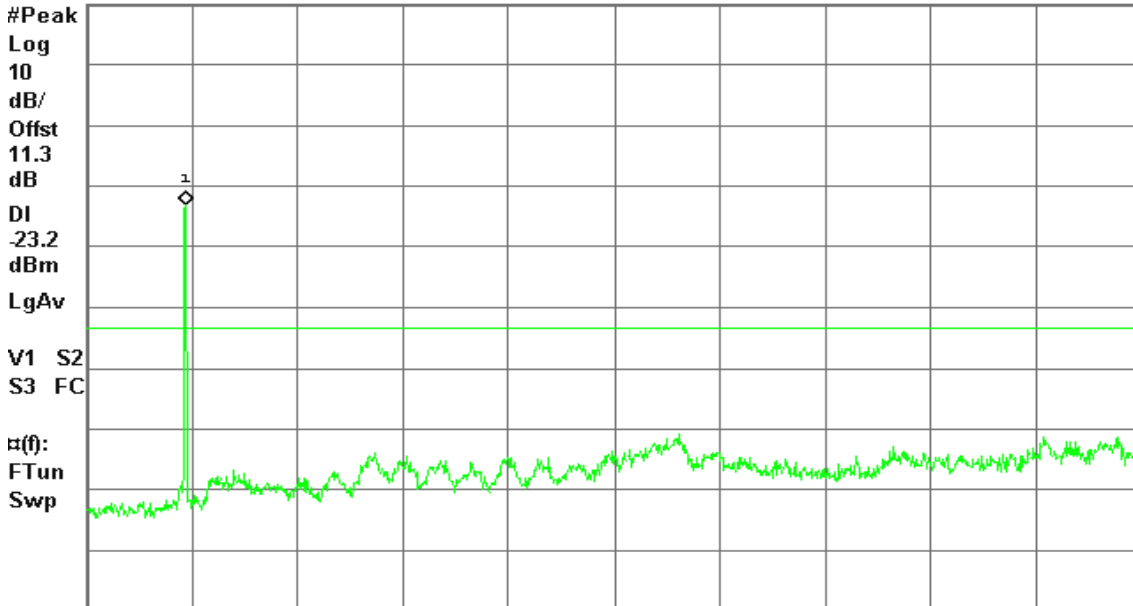

Start 30 MHz

Stop 25.00 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



7.6.2 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

Below 1 GHz

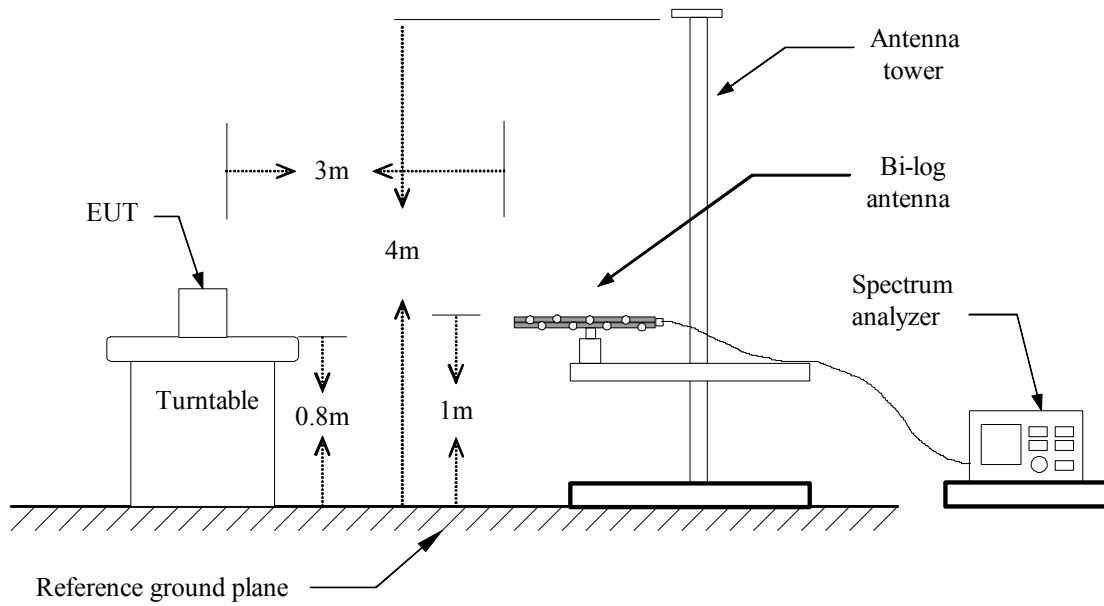

Above 1 GHz

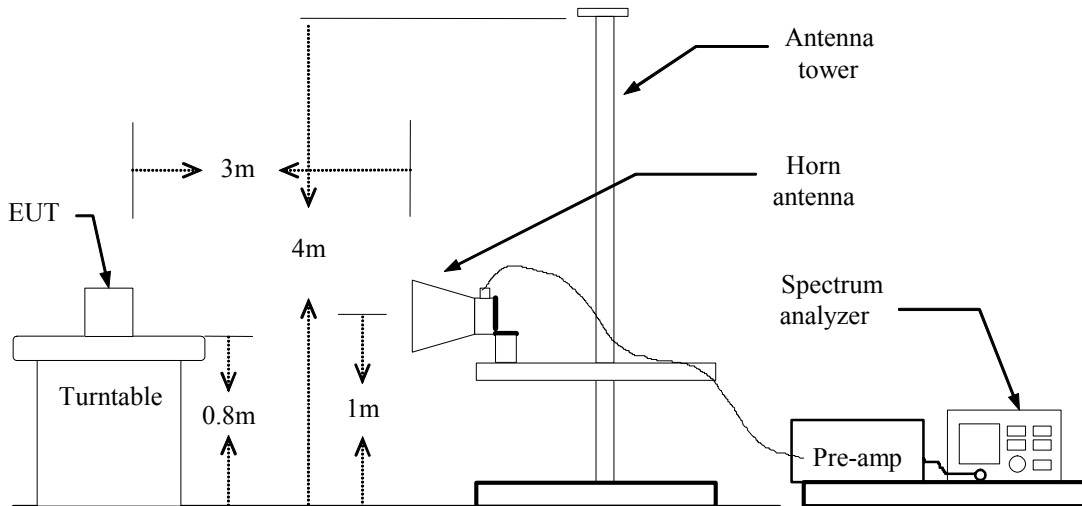



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS****Below 1GHz****Operation Mode:** Normal Link**Test Date:** January 10, 2007**Temperature:** 22°C**Tested by:** Skyman Tsai**Humidity:** 49% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
81.73	V	68.93	-32.45	36.48	40.00	-3.52	QP
439.02	V	65.23	-21.80	43.43	46.00	-2.57	Peak
500.45	V	64.58	-20.41	44.17	46.00	-1.83	QP
573.20	V	42.98	-18.91	24.07	46.00	-21.93	QP
825.40	V	56.15	-14.75	41.40	46.00	-4.60	Peak
1000.00	V	57.47	-11.99	45.48	54.00	-8.52	Peak
196.52	H	60.60	-27.02	33.58	43.50	-9.92	Peak
311.30	H	62.78	-25.02	37.77	46.00	-8.23	Peak
440.63	H	59.86	-21.76	38.10	46.00	-7.90	Peak
500.45	H	62.88	-20.41	42.47	46.00	-3.53	Peak
749.42	H	55.68	-16.06	39.62	46.00	-6.38	Peak
1000.00	H	60.18	-11.99	48.19	54.00	-5.81	Peak

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).



Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: January 9, 2007

Temperature: 22°C

Tested by: Skyman Tsai

Humidity: 54 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1053.33	V	54.30	---	-2.55	51.75	---	74.00	54.00	-2.25	Peak
4825.00	V	44.81	38.48	10.78	55.59	49.26	74.00	54.00	-4.74	AVG
7233.33	V	43.79	34.14	15.03	58.82	49.17	74.00	54.00	-4.83	AVG
N/A										
1866.67	H	51.97	38.50	1.87	53.84	40.37	74.00	54.00	-13.63	AVG
4825.00	H	45.21	39.69	10.78	55.99	50.47	74.00	54.00	-3.53	AVG
7241.67	H	43.12	31.85	15.05	58.17	46.90	74.00	54.00	-7.10	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: January 9, 2007

Temperature: 22°C

Tested by: Skyman Tsai

Humidity: 54 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1736.67	V	51.84	38.60	0.88	52.72	39.48	74.00	54.00	-14.52	AVG
7308.33	V	44.40	37.51	15.16	59.56	52.67	74.00	54.00	-1.33	AVG
N/A										
2020.00	H	52.13	38.44	2.95	55.08	41.39	74.00	54.00	-12.61	AVG
7316.67	H	44.32	36.02	15.18	59.50	51.20	74.00	54.00	-2.80	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH High

Test Date: January 9, 2007

Temperature: 22°C

Tested by: Skyman Tsai

Humidity: 54 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2046.67	V	52.02	38.47	3.04	55.06	41.51	74.00	54.00	-12.49	AVG
6408.33	V	41.54	27.37	13.64	55.18	41.01	74.00	54.00	-12.99	AVG
7383.33	V	41.68	30.51	15.29	56.97	45.80	74.00	54.00	-8.20	AVG
N/A										
1646.67	H	51.73	38.61	0.19	51.92	38.80	74.00	54.00	-15.20	AVG
7400.00	H	40.12	27.28	15.32	55.44	42.60	74.00	54.00	-11.40	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: January 9, 2007

Temperature: 22°C

Tested by: Skyman Tsai

Humidity: 54 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
3216.67	V	43.24	36.56	6.51	49.75	43.07	74.00	54.00	-10.93	AVG
7233.33	V	40.91	27.67	15.03	55.94	42.70	74.00	54.00	-11.30	AVG
N/A										
5675.00	H	40.22	27.48	12.39	52.61	39.87	74.00	54.00	-14.13	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: January 9, 2007

Temperature: 22°C

Tested by: Skyman Tsai

Humidity: 54 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
3250.00	V	42.20	32.98	6.61	48.81	39.59	74.00	54.00	-14.41	AVG
7308.33	V	47.61	32.59	15.16	62.77	47.75	74.00	54.00	-6.25	AVG
N/A										
1686.67	H	52.27	38.62	0.50	52.77	39.12	74.00	54.00	-14.88	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: January 9, 2007

Temperature: 22°C

Tested by: Skyman Tsai

Humidity: 54 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2510.00	V	65.83	39.33	4.49	70.32	43.82	74.00	54.00	-10.18	AVG
3283.33	V	44.20	37.72	6.70	50.90	44.42	74.00	54.00	-9.58	AVG
N/A										
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

**TEST RESULTS**

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** January 10, 2007
Temperature: 20°C **Tested by:** Rex Lai
Humidity: 55% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.177	50.140	44.230	0.146	50.286	44.376	64.625	54.625	-14.339	-10.249	L1
0.271	37.660	33.820	0.100	37.760	33.920	61.087	51.087	-23.327	-17.167	L1
0.447	27.820	25.140	0.100	27.920	25.240	56.931	46.931	-29.011	-21.691	L1
1.074	26.340	19.480	0.100	26.440	19.580	56.000	46.000	-29.560	-26.420	L1
2.064	29.070	20.850	0.100	29.170	20.950	56.000	46.000	-26.830	-25.050	L1
22.710	15.090	12.850	1.200	16.290	14.050	60.000	50.000	-43.710	-35.950	L1
0.179	46.070	40.560	0.142	46.212	40.702	64.532	54.532	-18.320	-13.830	L2
0.273	33.930	30.800	0.100	34.030	30.900	61.026	51.026	-26.996	-20.126	L2
0.550	26.100	20.860	0.100	26.200	20.960	56.000	46.000	-29.800	-25.040	L2
1.181	27.130	22.350	0.100	27.230	22.450	56.000	46.000	-28.770	-23.550	L2
2.064	24.390	11.600	0.100	24.490	11.700	56.000	46.000	-31.510	-34.300	L2
3.436	26.500	17.070	0.100	26.600	17.170	56.000	46.000	-29.400	-28.830	L2


Remark:

- 1. Measuring frequencies from 0.15 MHz to 30MHz.*
- 2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.*
- 3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;*
- 4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)*



Test Plots

Conducted emissions (Line 1)

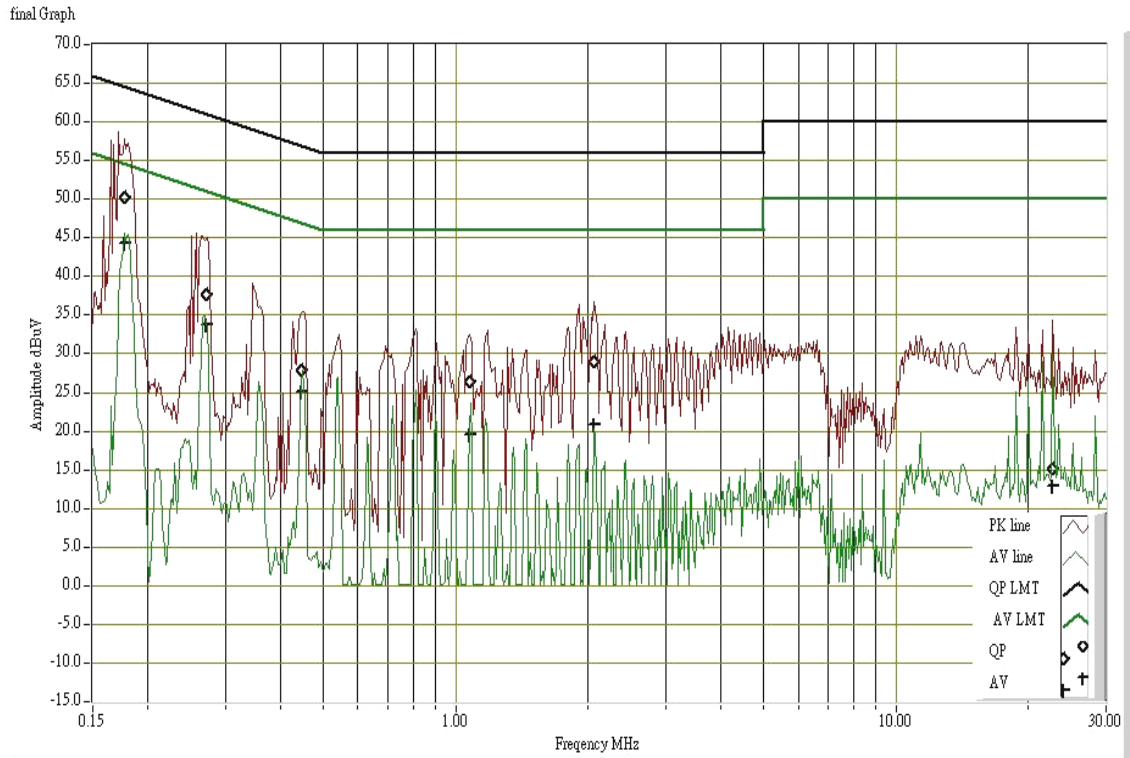

Conducted emissions (Line 2)

