




Appendix B

Peak Output Power




Ref Lvl	22.42 dBm	RBW	1 MHz	RF Att	60 dB
30 dBm	2.40107704 GHz	VBW	1 MHz	Unit	dBm
		SWT	5 ms		

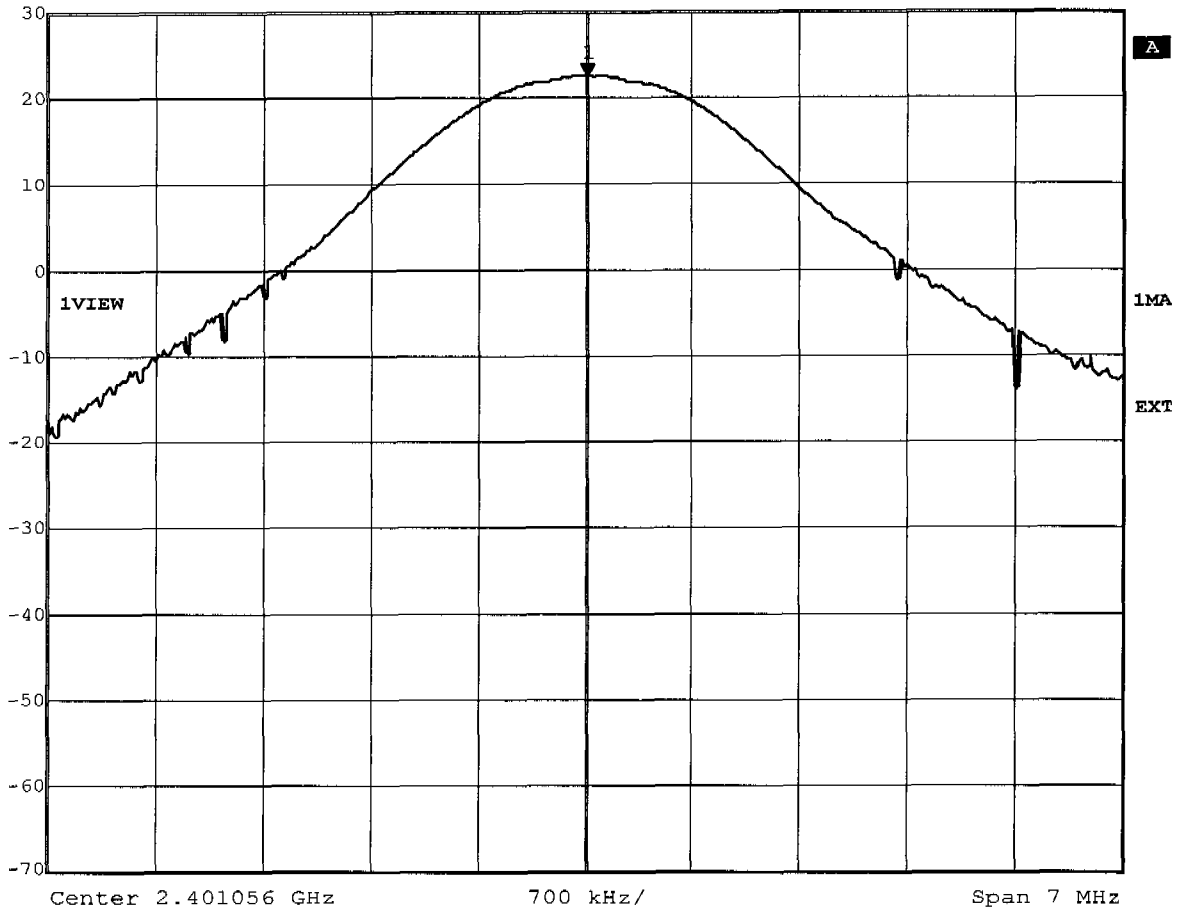

Title: Peak Output Power conducted Ch.: 0
Comment A: DW800 wireless system
Date: 14.JAN.2004 09:00:58




Marker 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 22.33 dBm VBW 1 MHz
30 dBm 2.44161490 GHz SWT 5 ms Unit dBm

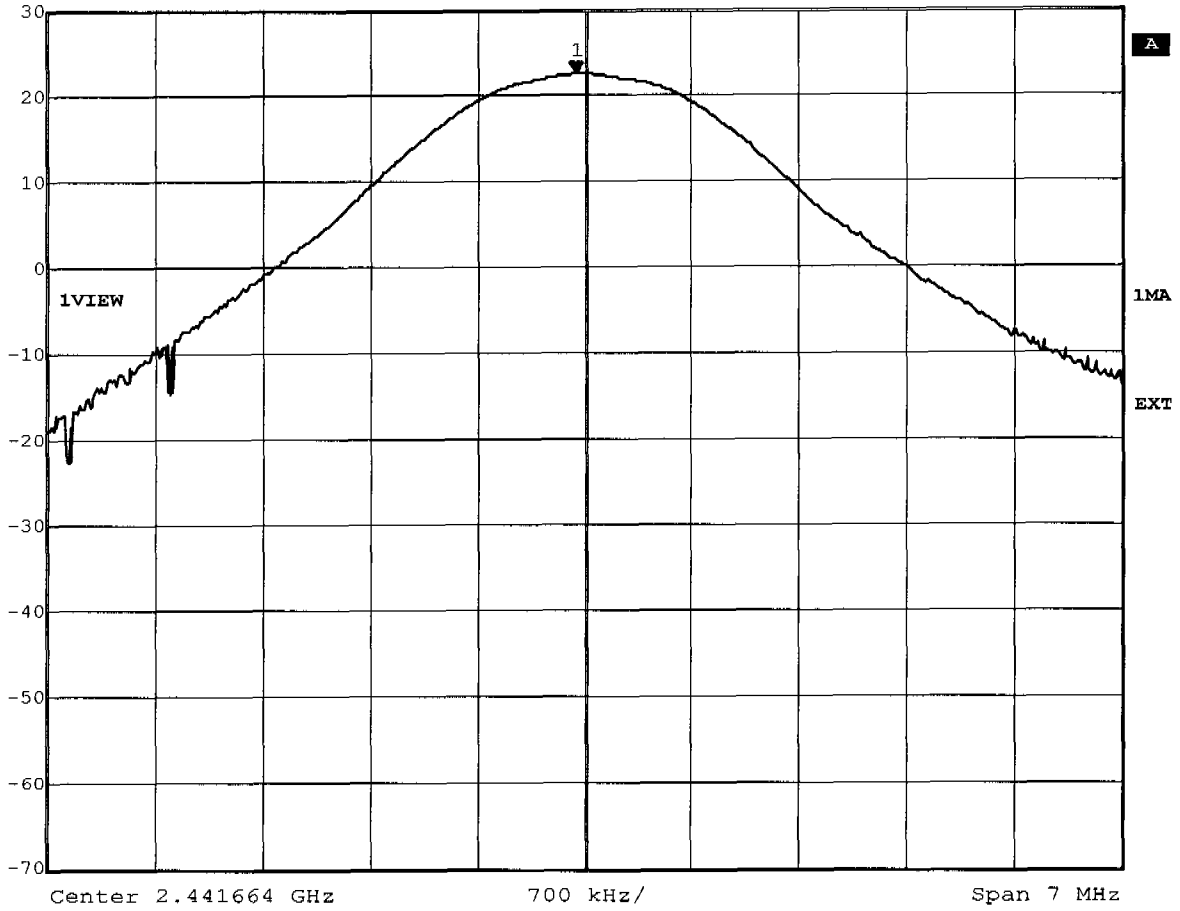

Title: Peak Output Power conducted Ch.: 47
Comment A: DW800 wireless system
Date: 14.JAN.2004 08:57:11




Marker 1 [T1]	RBW	1 MHz	RF Att	60 dB
Ref Lvl	22.14 dBm	VBW	1 MHz	
30 dBm	2.48226499 GHz	SWT	5 ms	Unit
				dBm

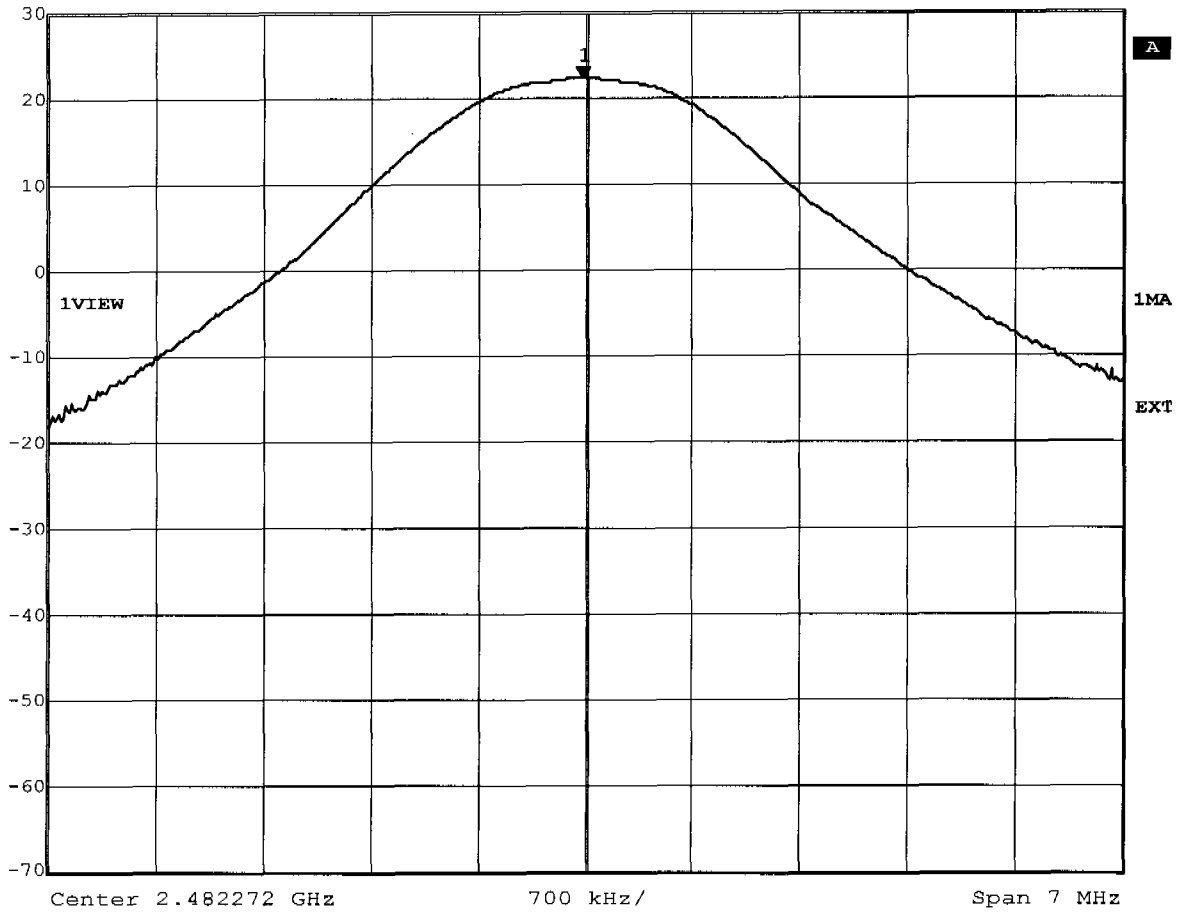

Title: Peak Output Power conducted Ch.: 94
Comment A: DW800 wireless system
Date: 14.JAN.2004 09:22:43


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 17.89dBm, RBW: 5MHz

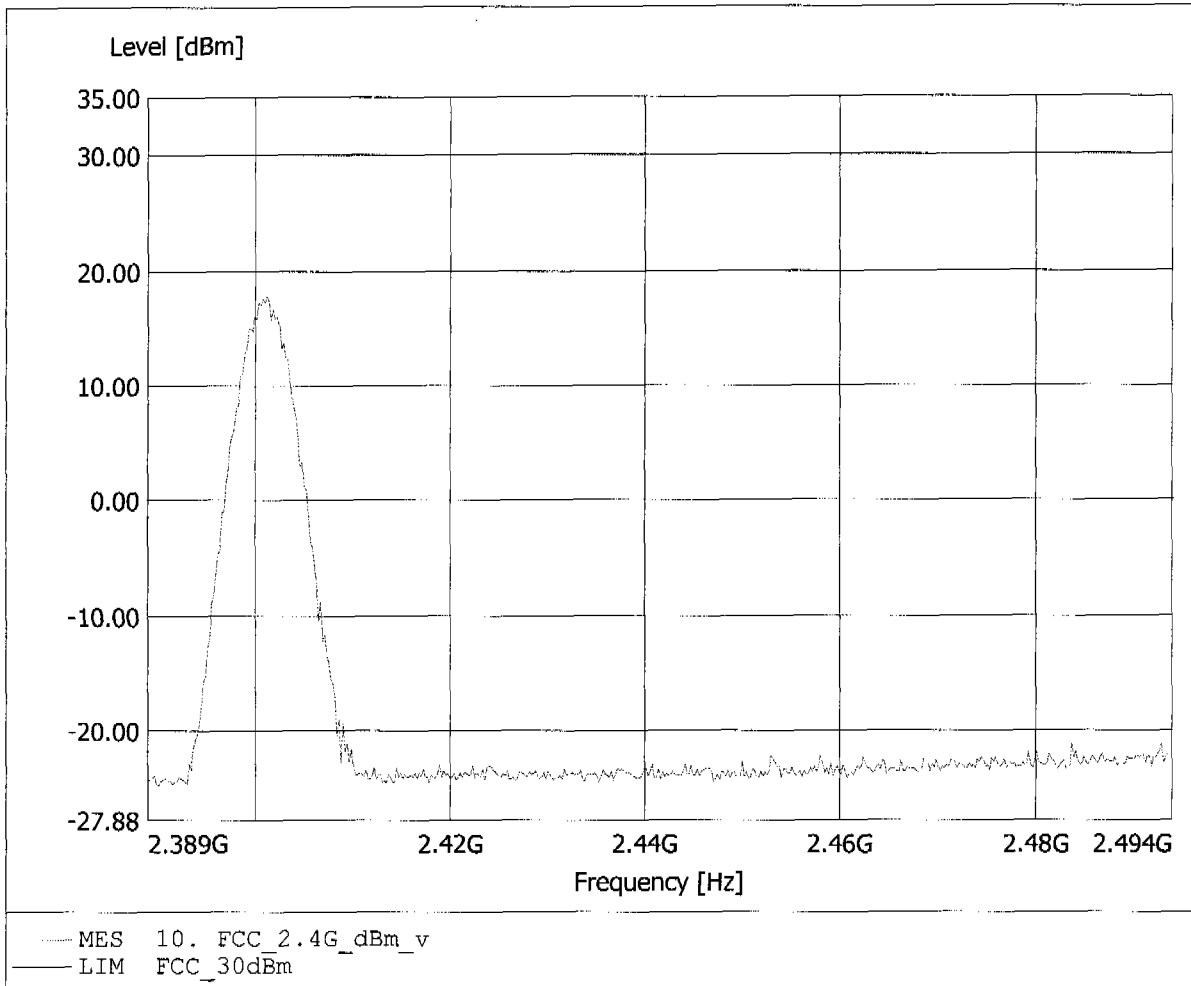


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 23.95dBm, RBW: 5MHz

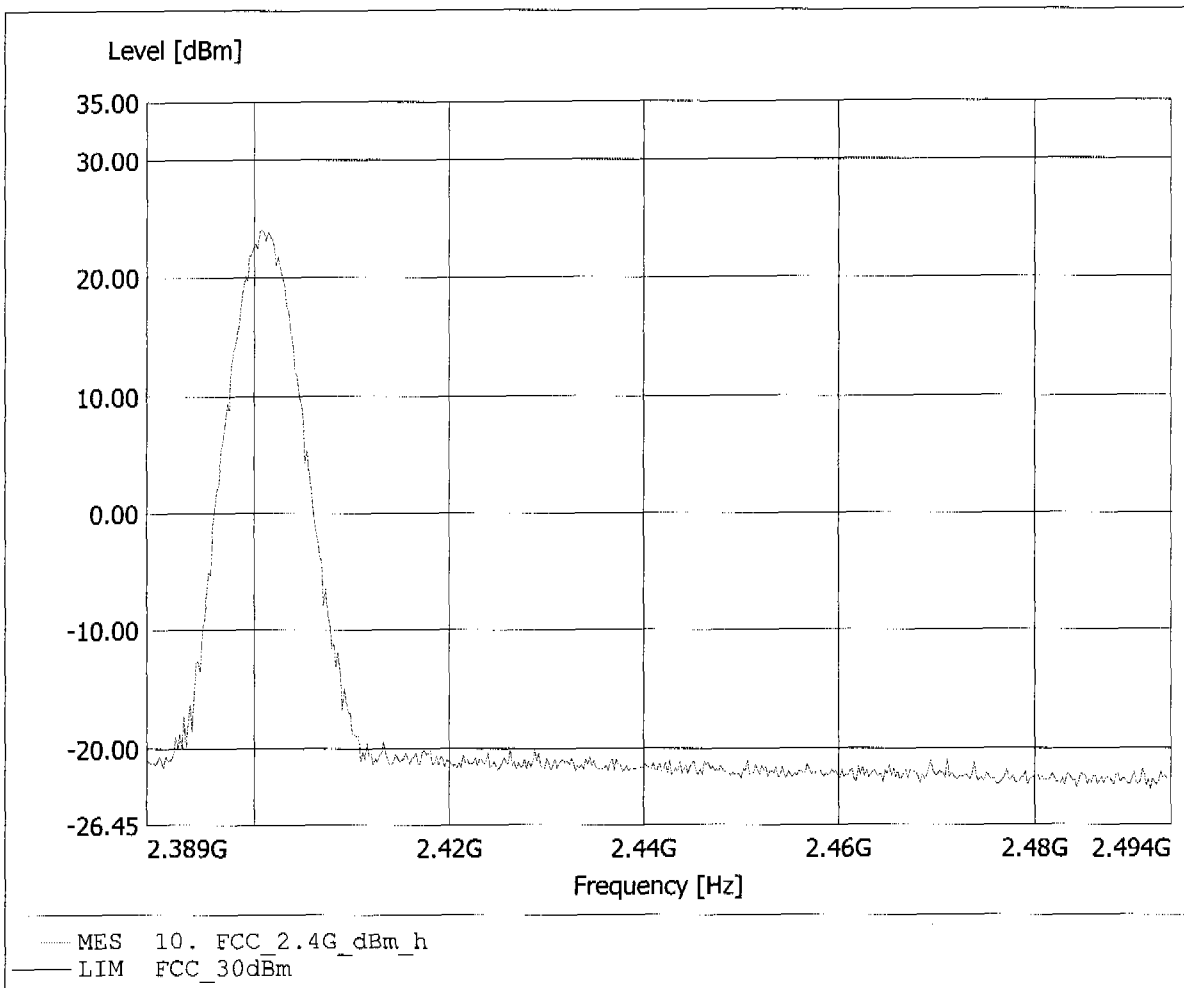


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 16.67dBm, RBW: 5MHz

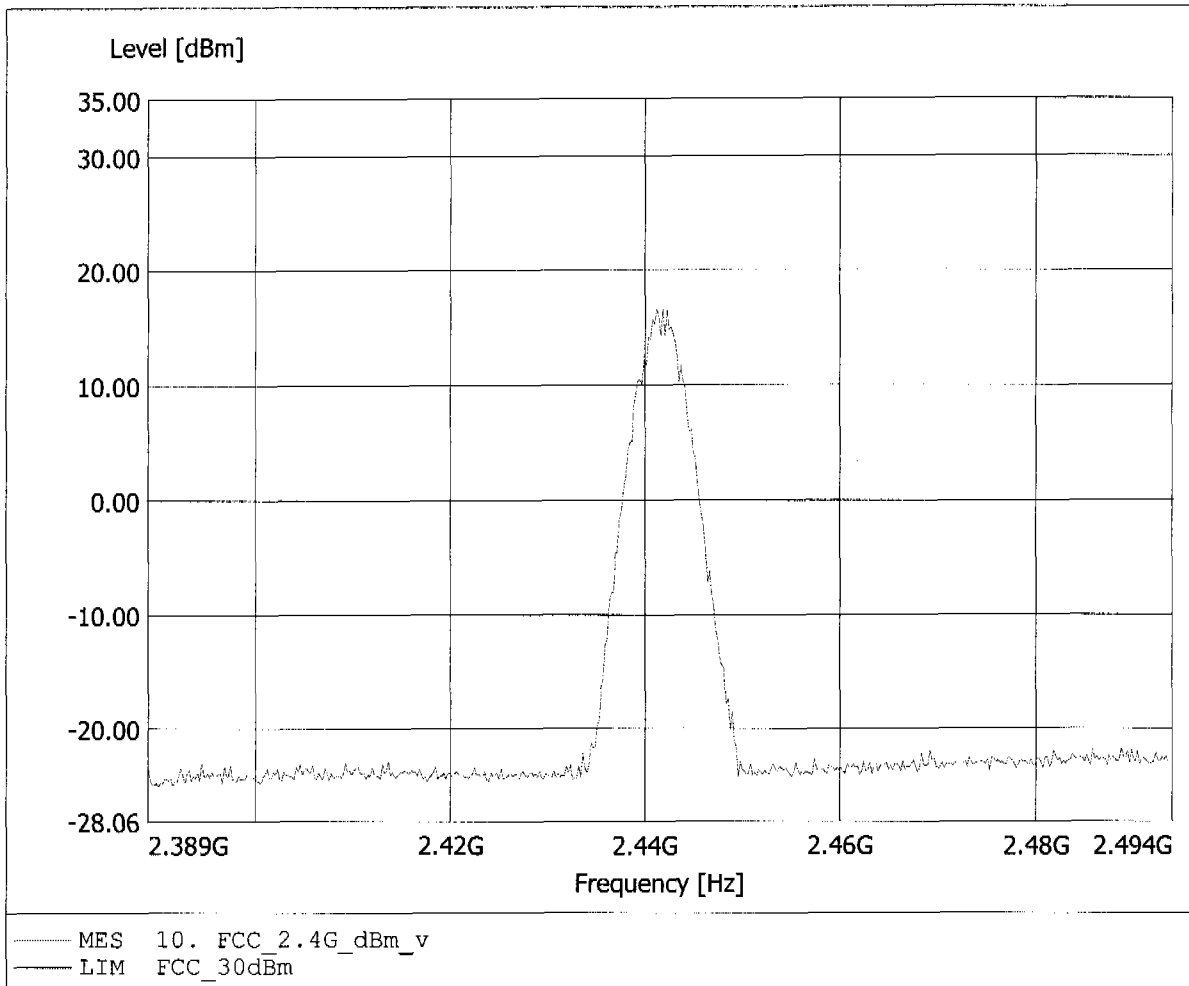


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 21.21dBm, RBW: 5MHz

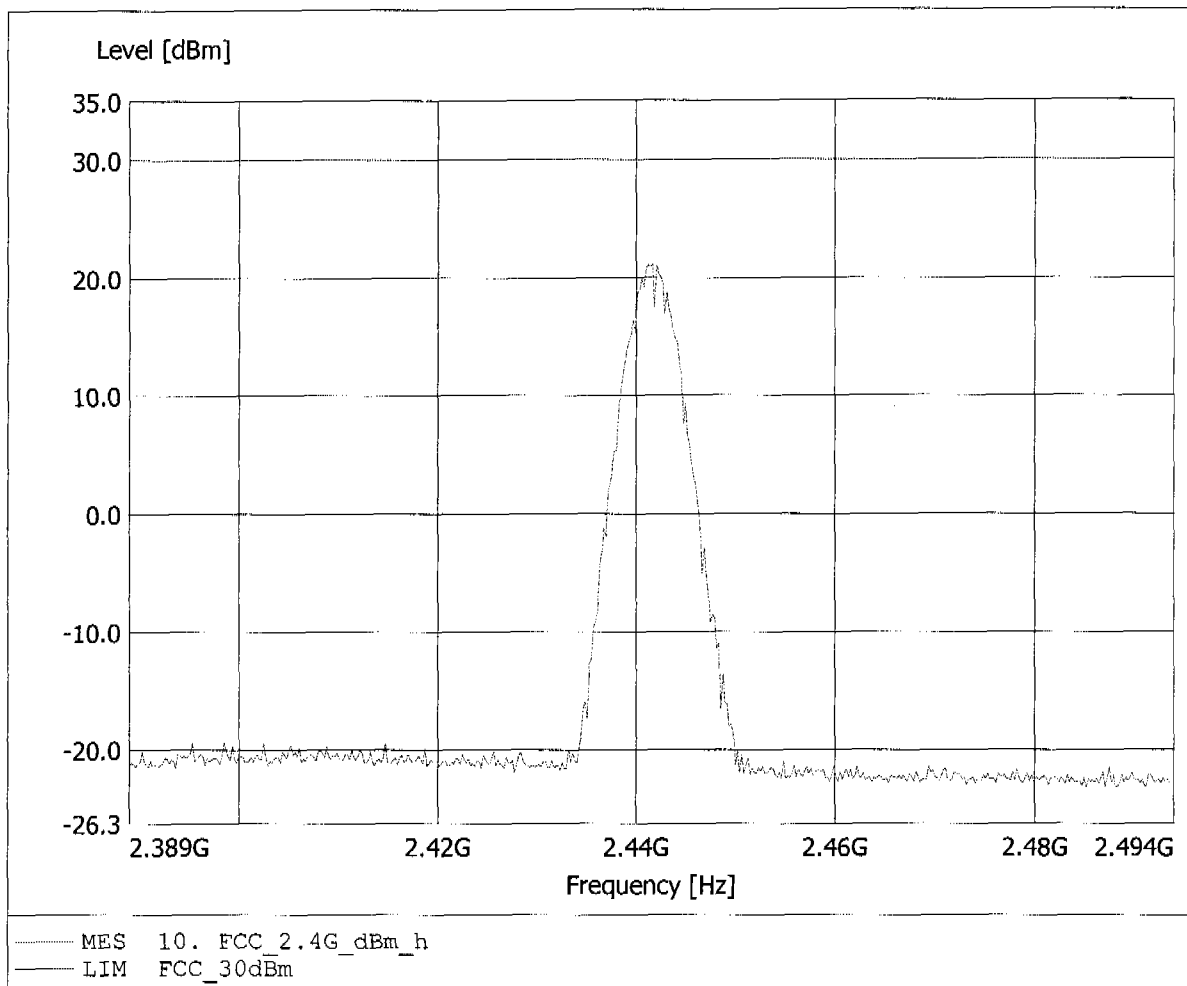


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 17.52dBm, RBW: 5MHz

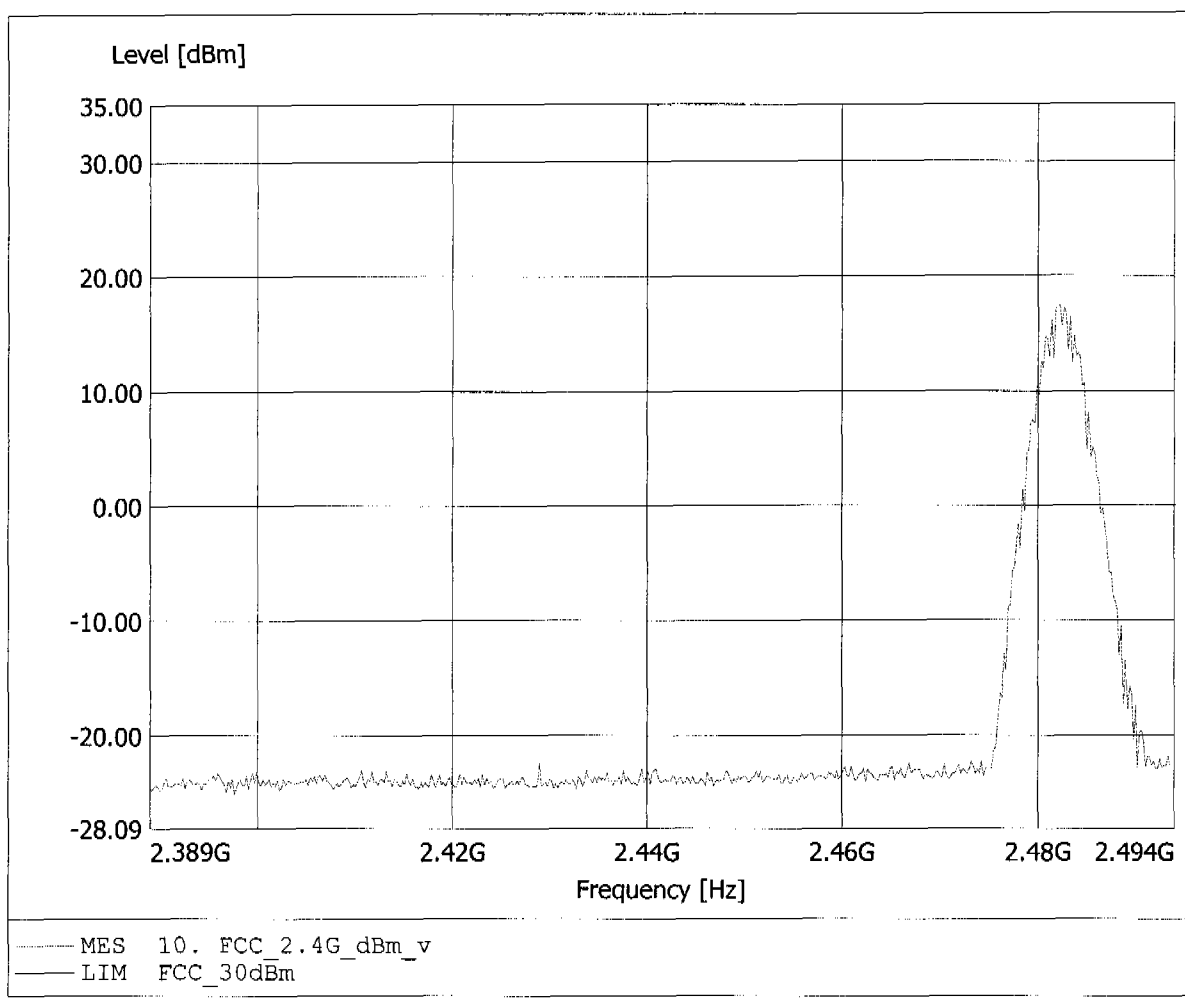


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 20.08dBm, RBW: 5MHz

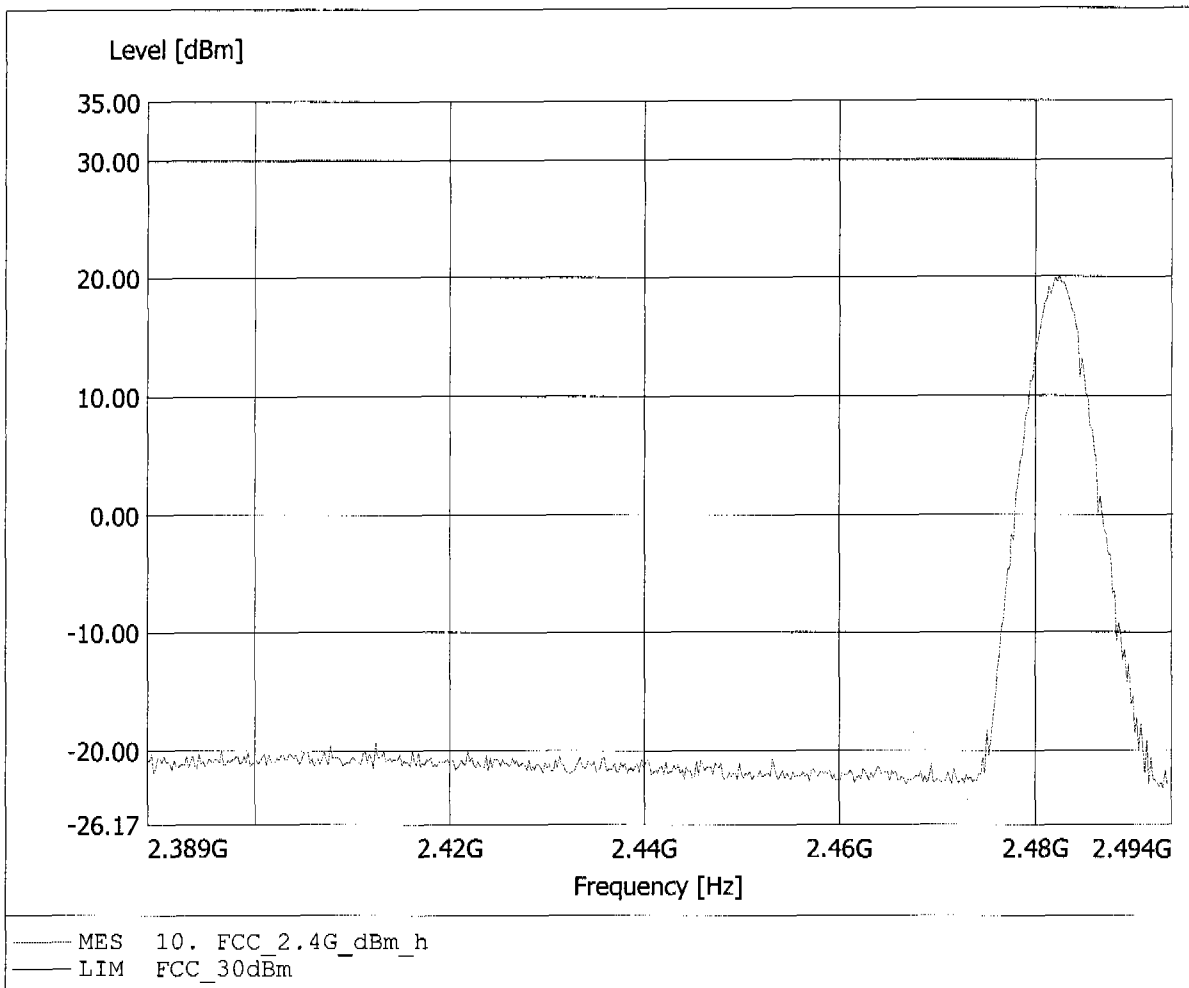


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 20.06dBm, RBW: 5MHz

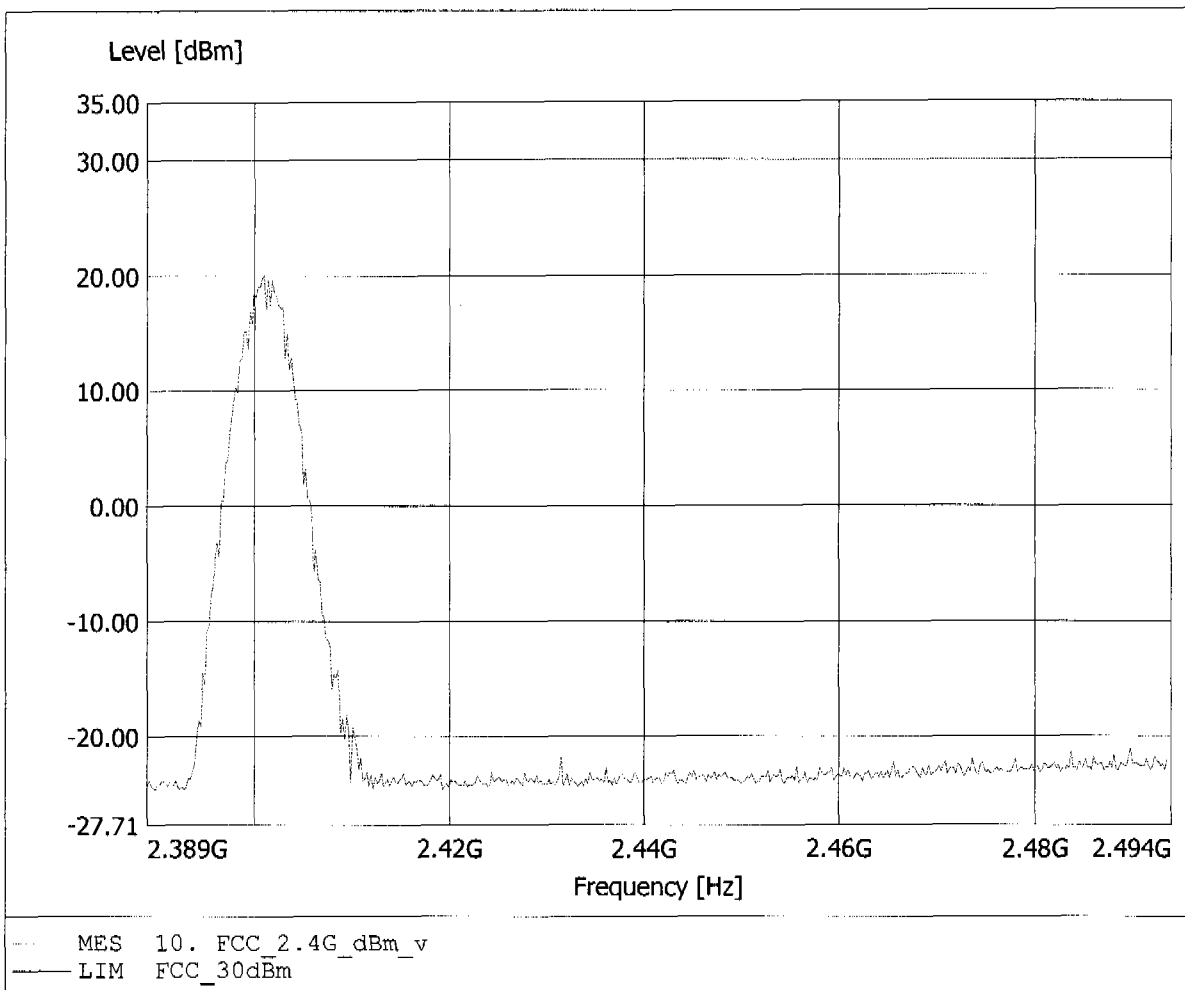


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 26.05dBm, RBW: 5MHz

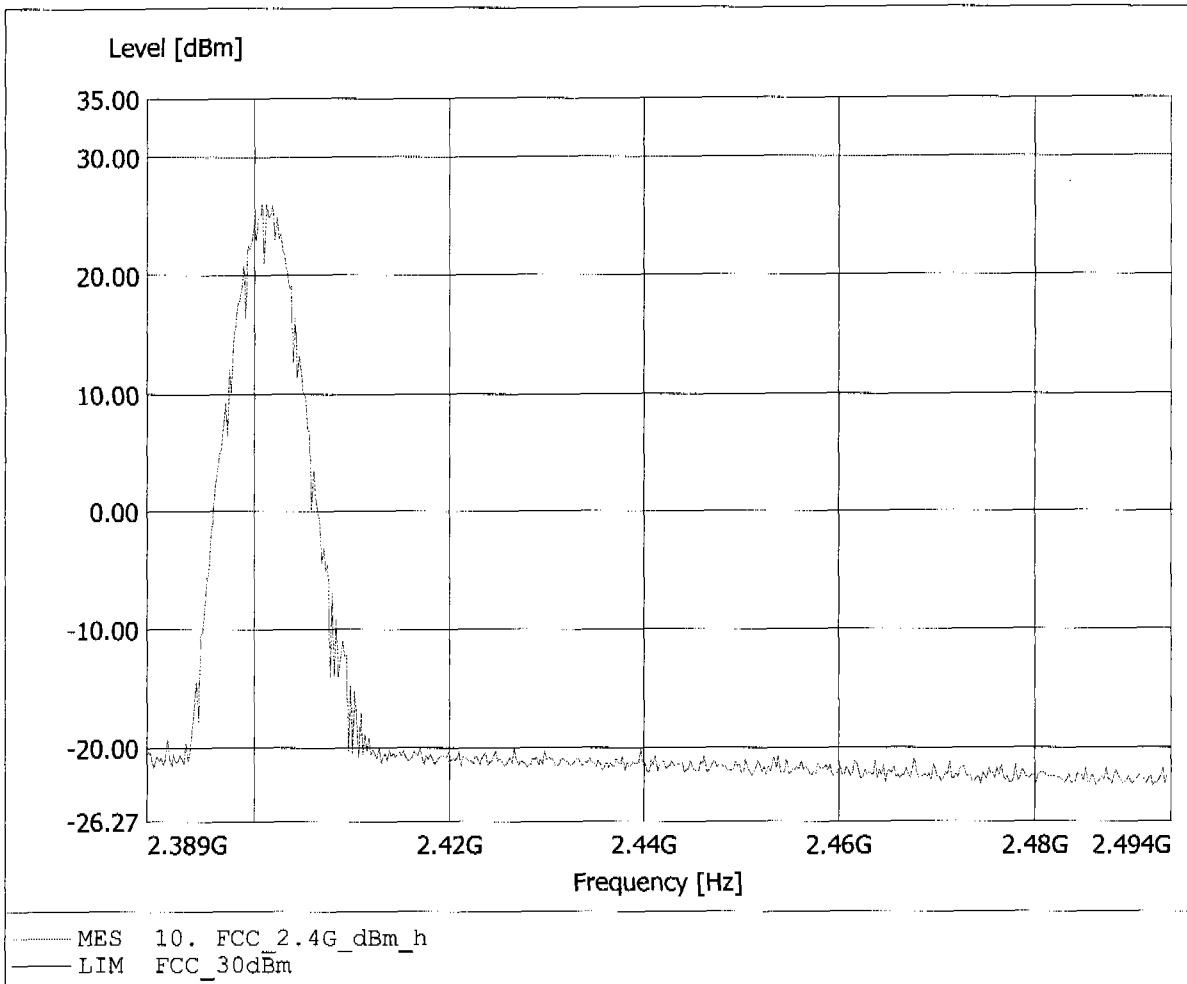


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:47
 Model: DW800 wireless system / Headset
 Approval Holder: Sennheiser Communications
 Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247
 Comment 1: Dist.: 3m, Ant.: BBHA9120D
 Comment 2: Freq: 2.442GHz, Pmax: 16.21dBm, RBW: 5MHz

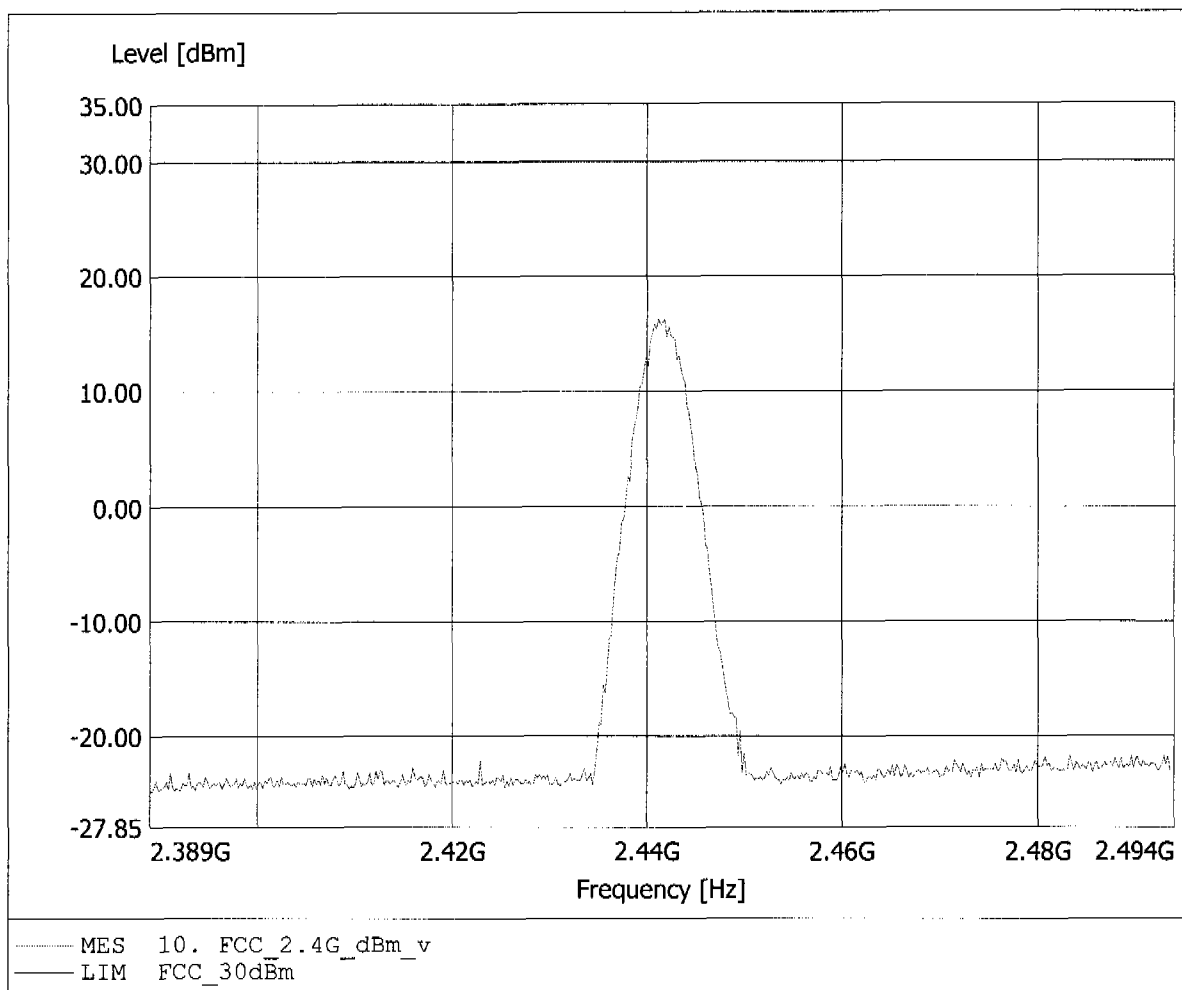


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 23.20dBm, RBW: 5MHz

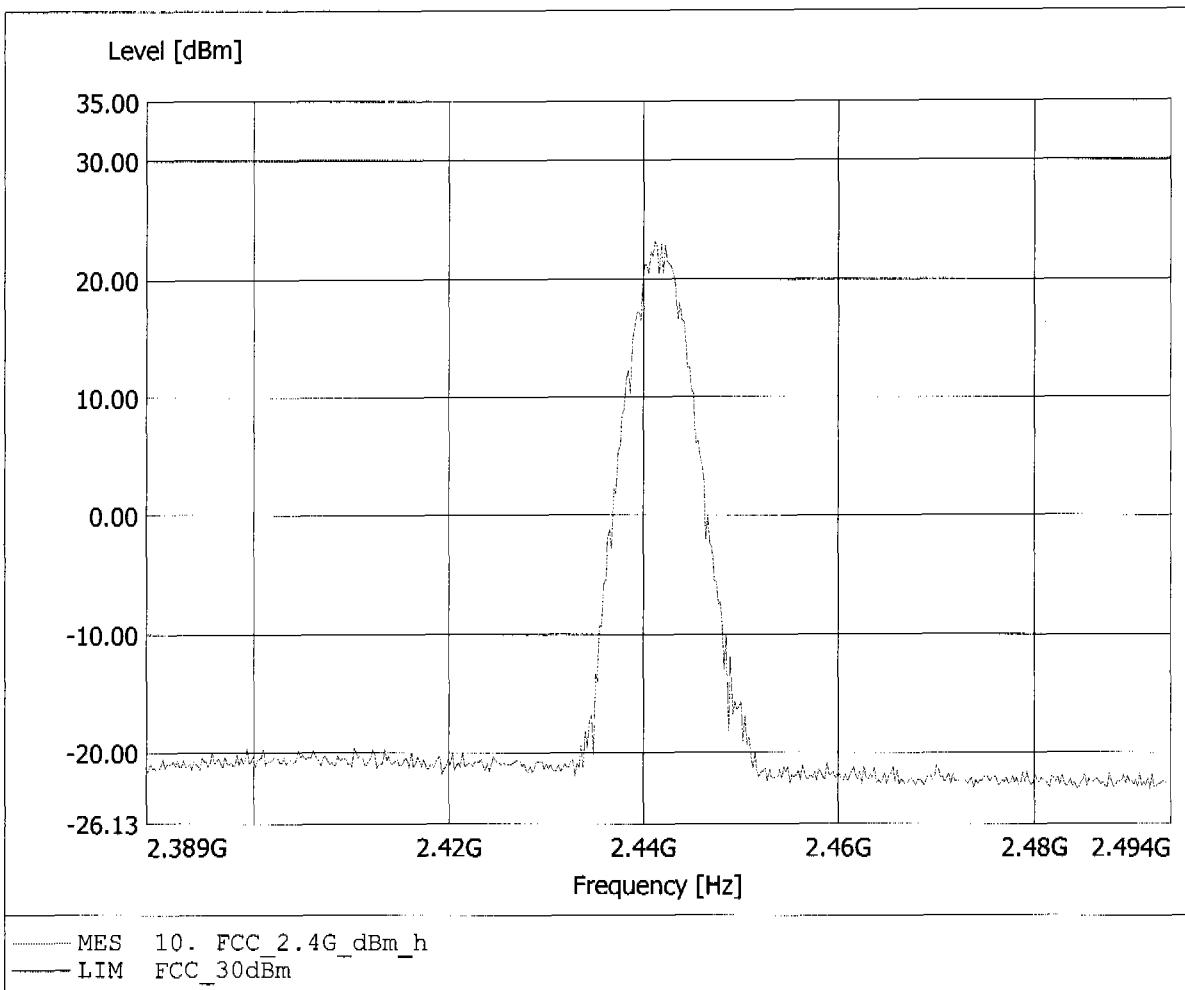


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 16.27dBm, RBW: 5MHz

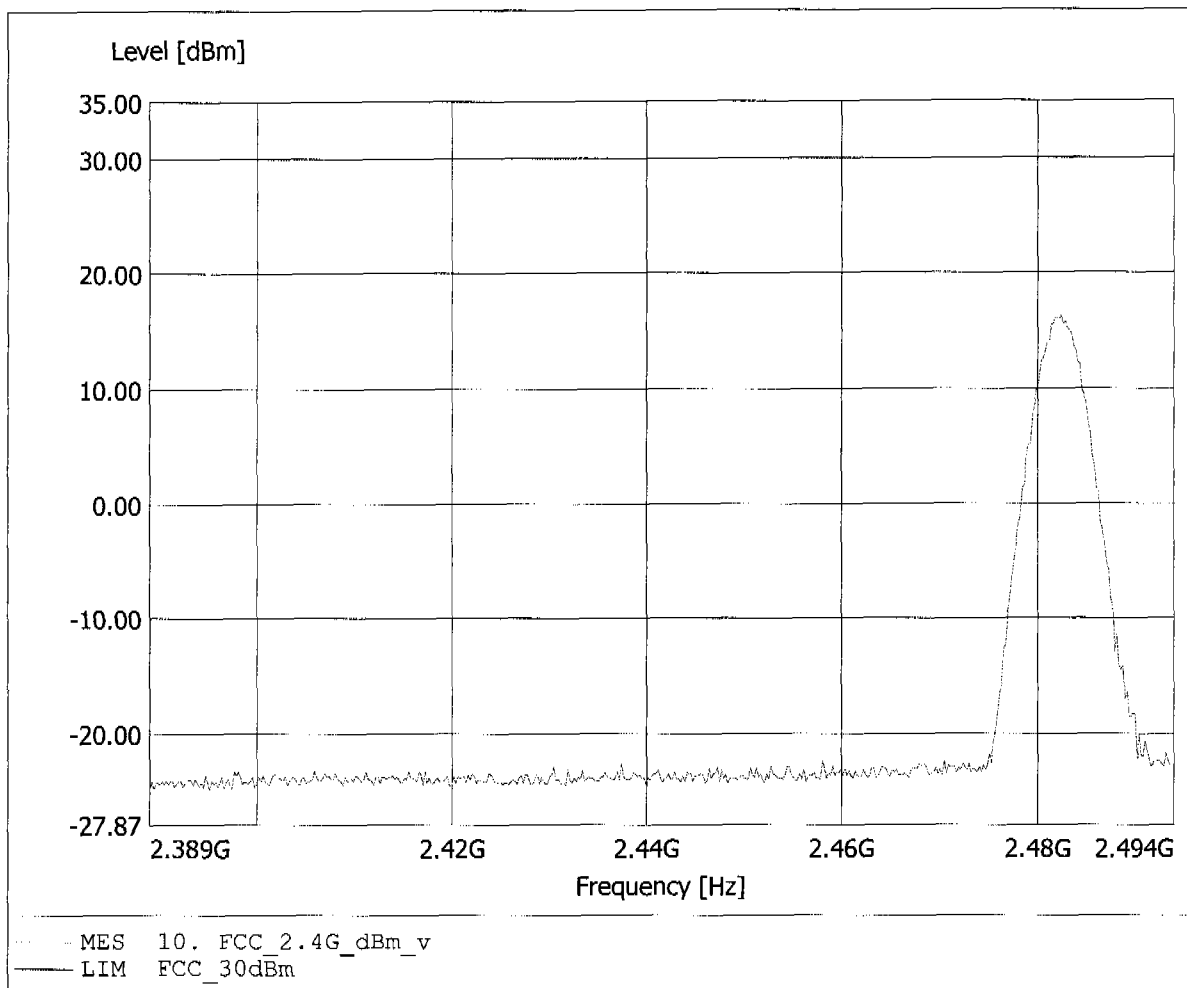

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:94
 Model: DW800 wireless system / Headset
 Approval Holder: Sennheiser Communications
 Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247
 Comment 1: Dist.: 3m, Ant.: BBHA9120D
 Comment 2: Freq: 2.482GHz, Pmax: 23.08dBm, RBW: 5MHz

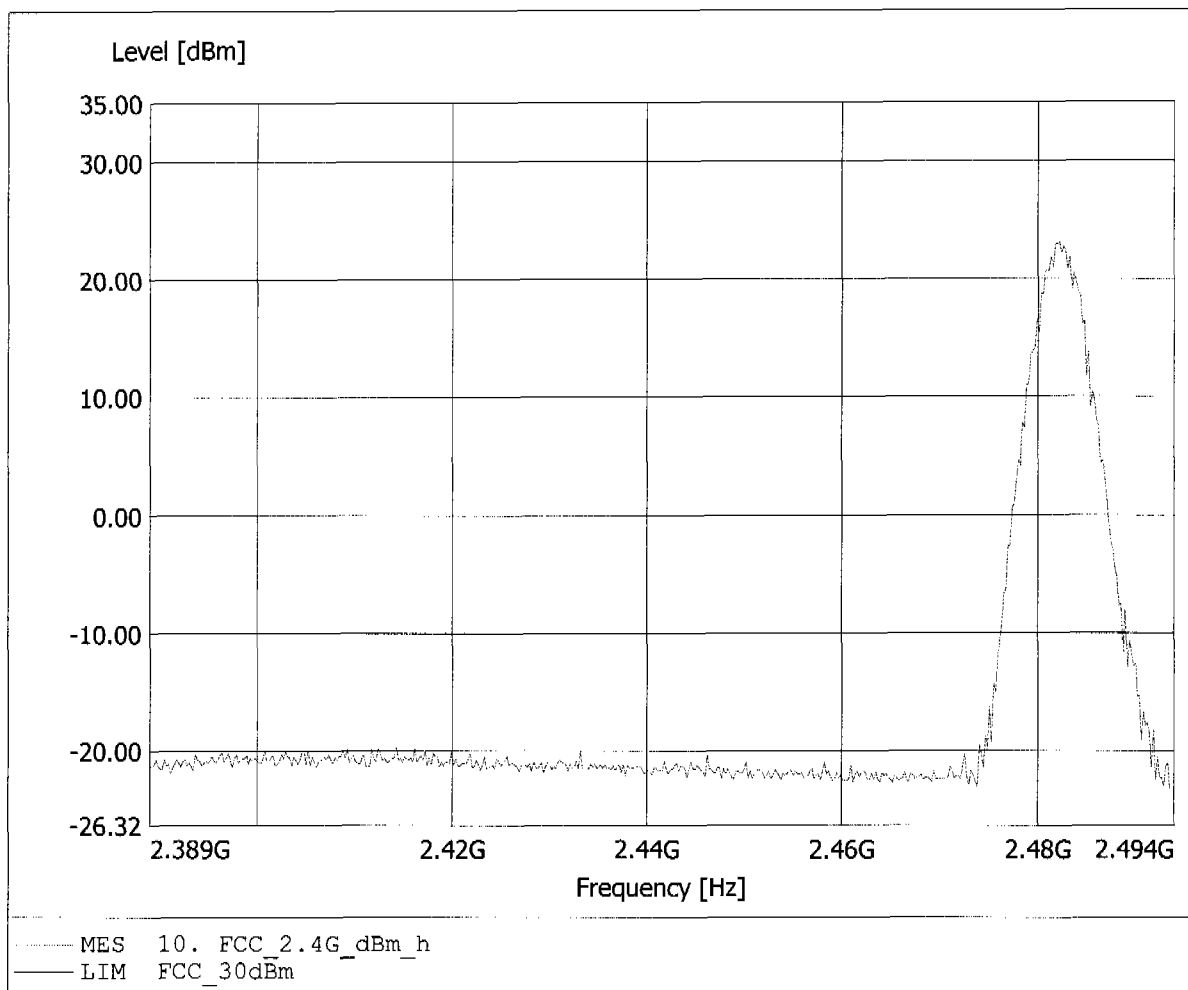




Appendix C

Spurious Emissions radiated - Transmitter operating


**Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Emax: 115.52dBµV/m, RBW: 100kHz

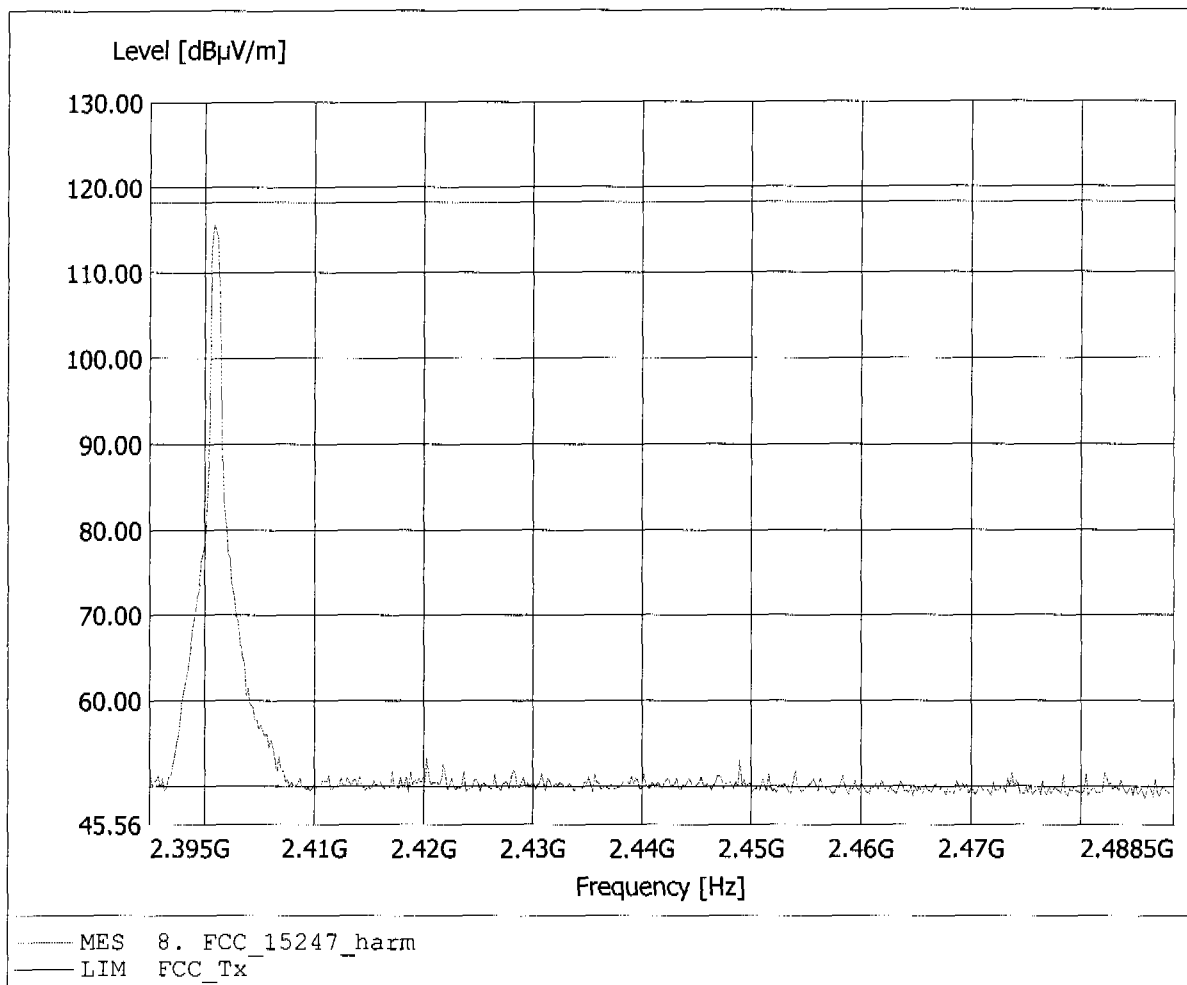




Delta 1 [T1] RBW 30 kHz RF Att 60 dB
 Ref Lvl -47.10 dB VBW 30 kHz
 30 dBm -1.08216433 MHz SWT 8.5 ms Unit dBm

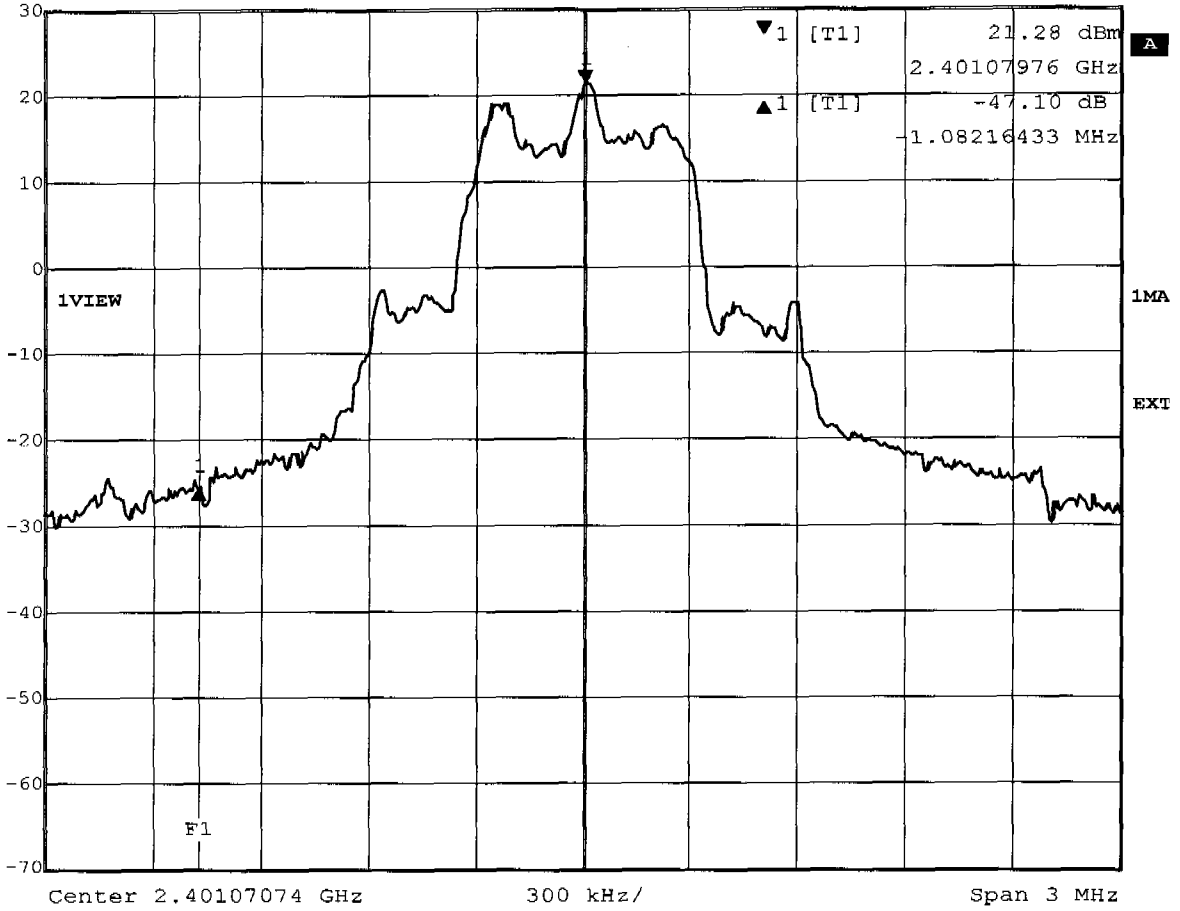

Title: Marker-Delta Method
 Comment A: DW800 wireless system
 Date: 14.JAN.2004 12:42:12




Delta 1 [T1] RBW 30 kHz RF Att 60 dB
 Ref Lvl -46.80 dB VBW 30 kHz
 30 dBm 1.22024048 MHz SWT 8.5 ms Unit dBm

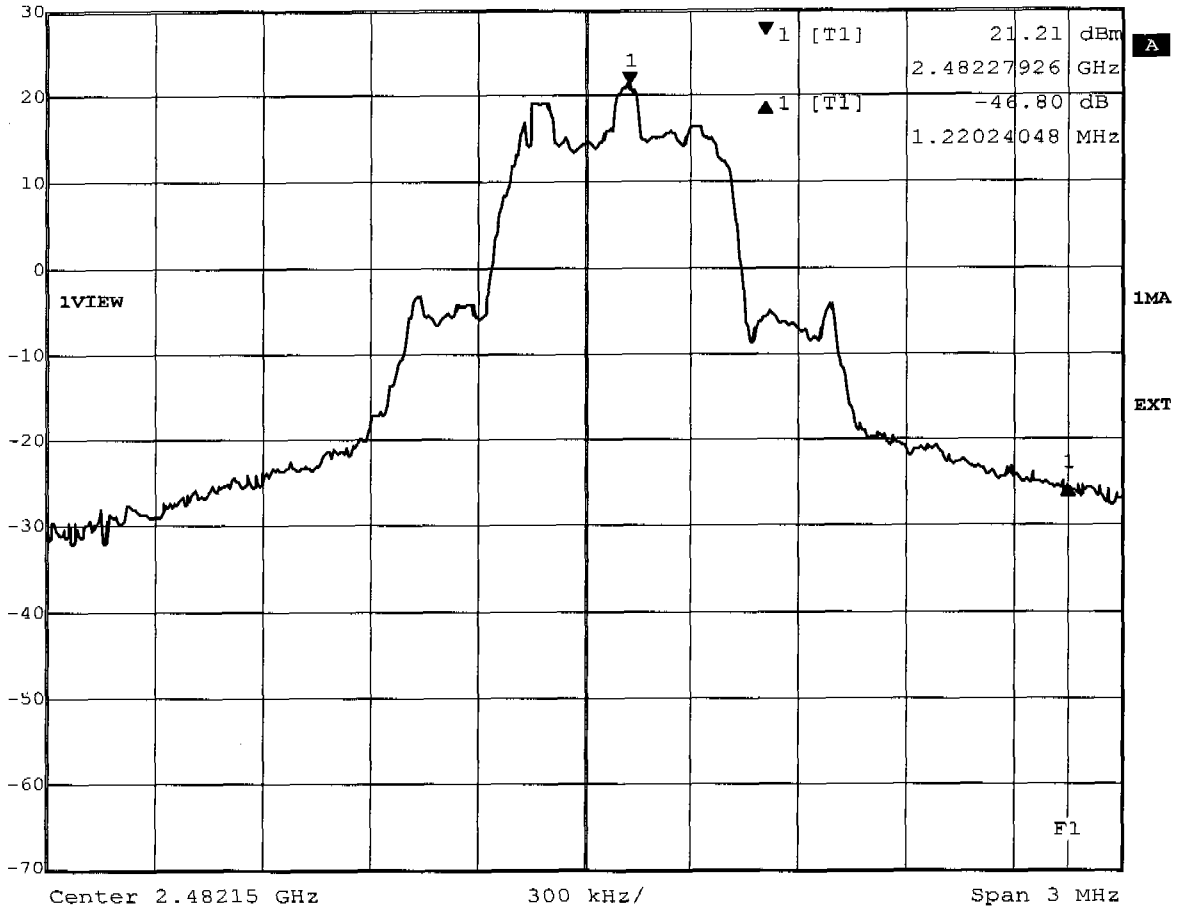

Title: Marker-Delta Method
 Comment A: DW800 wireless system
 Date: 14.JAN.2004 12:48:14


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 192.846MHz, Emax: 30.66dBµV/m, RBW: 100kHz

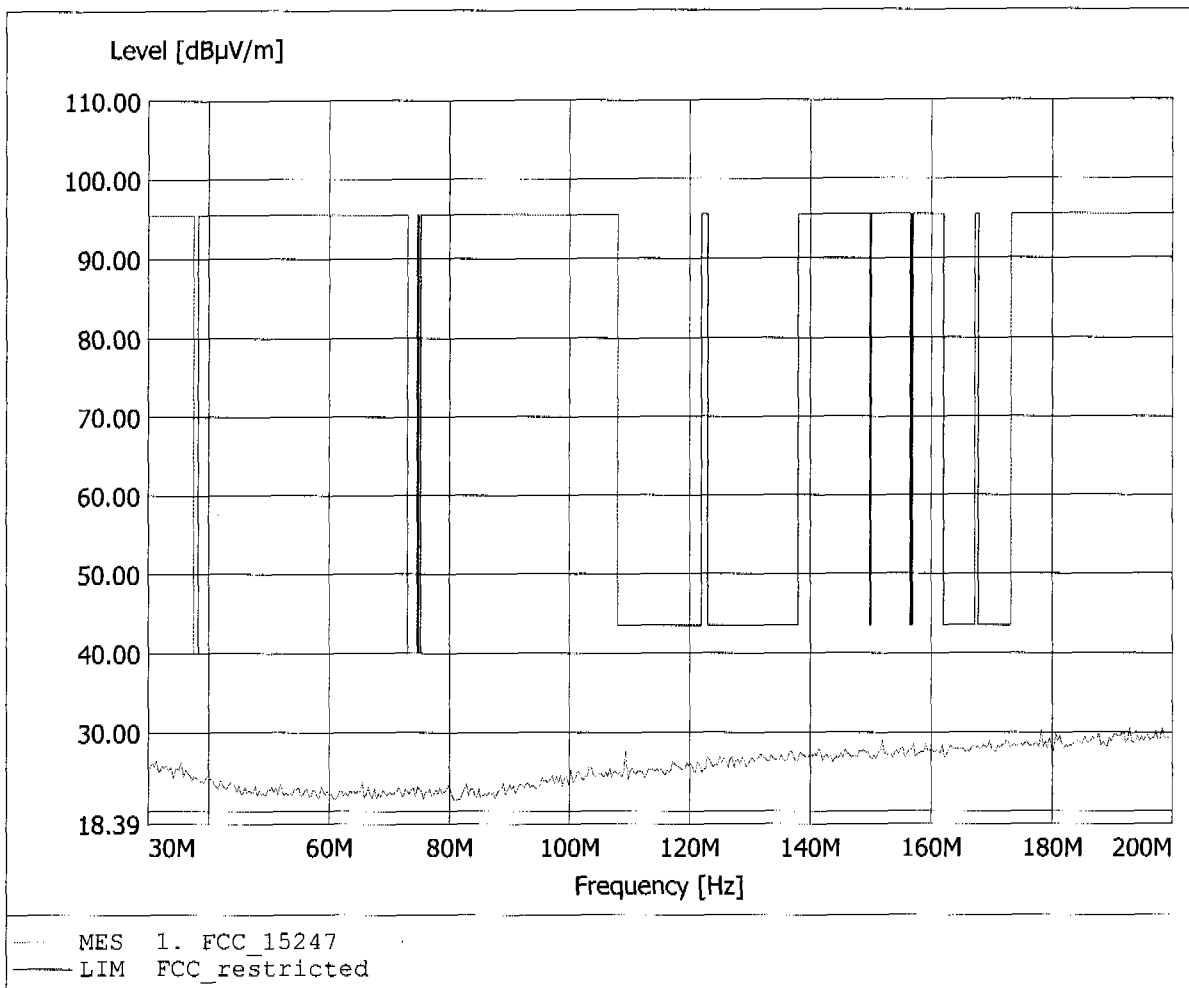


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 194.549MHz, Emax: 30.62dB μ V/m, RBW: 100kHz

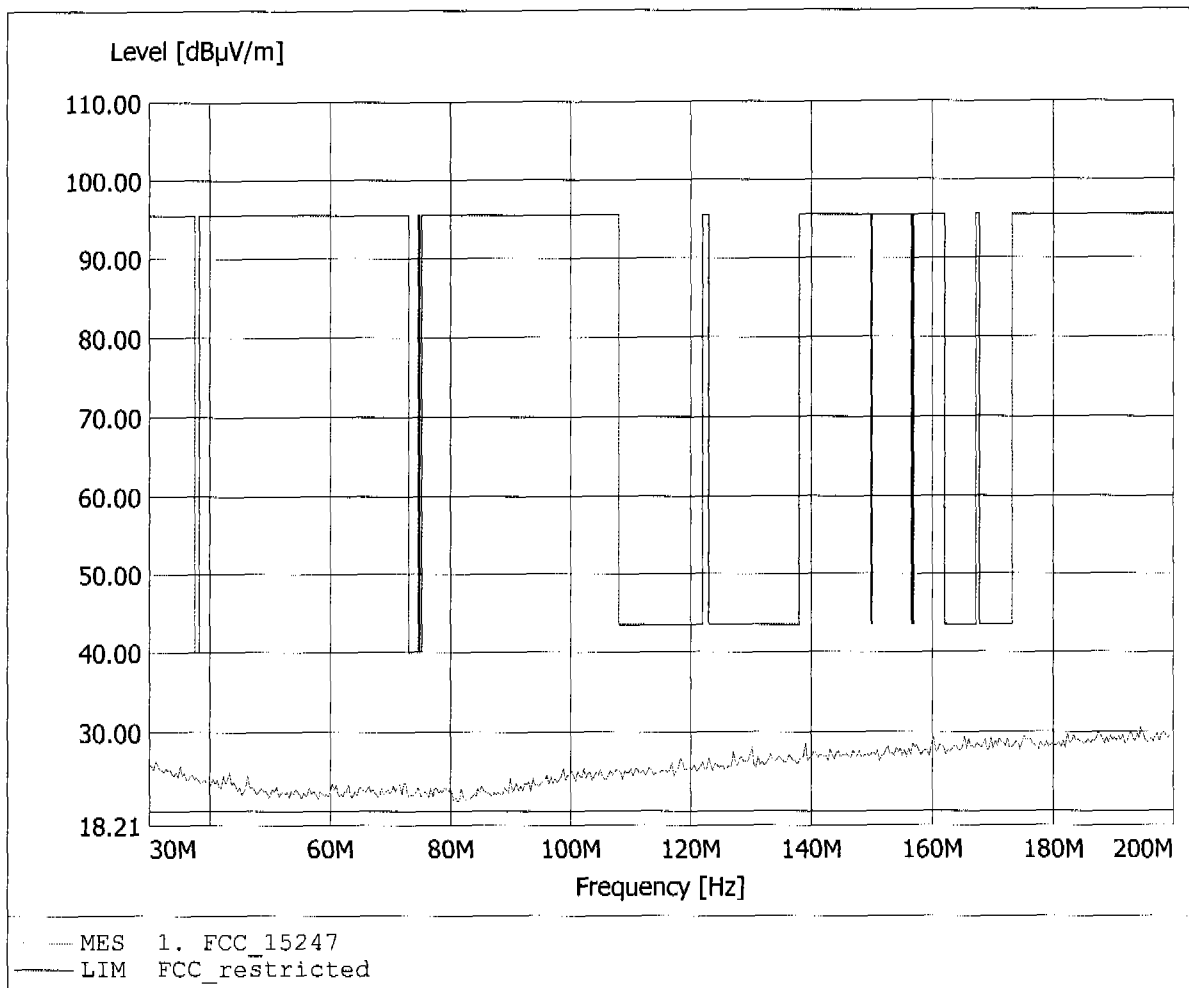


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 852.505MHz, Emax: 21.63dBµV/m, RBW: 100kHz

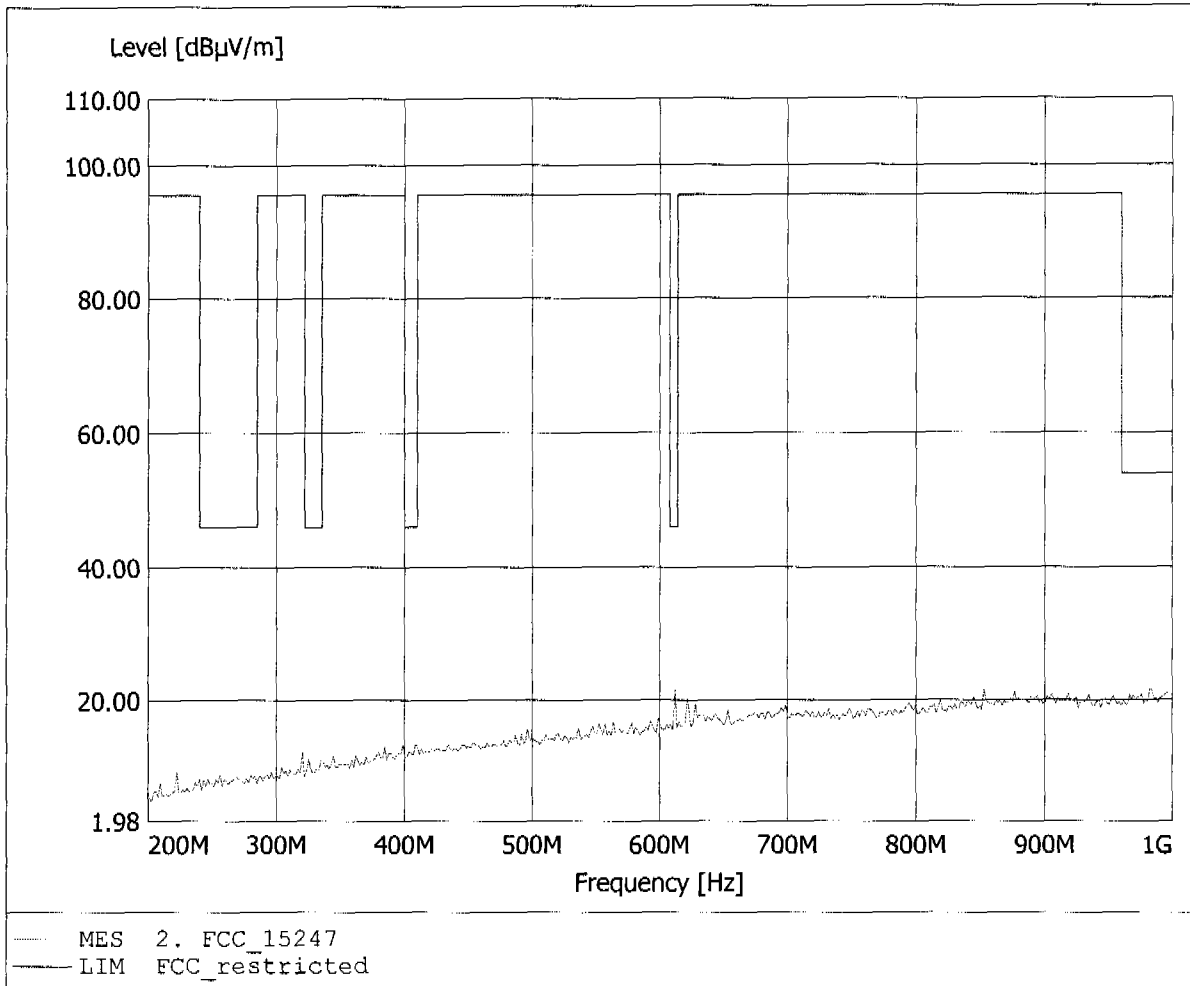


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 988.778MHz, Emax: 21.51dBµV/m, RBW: 100kHz

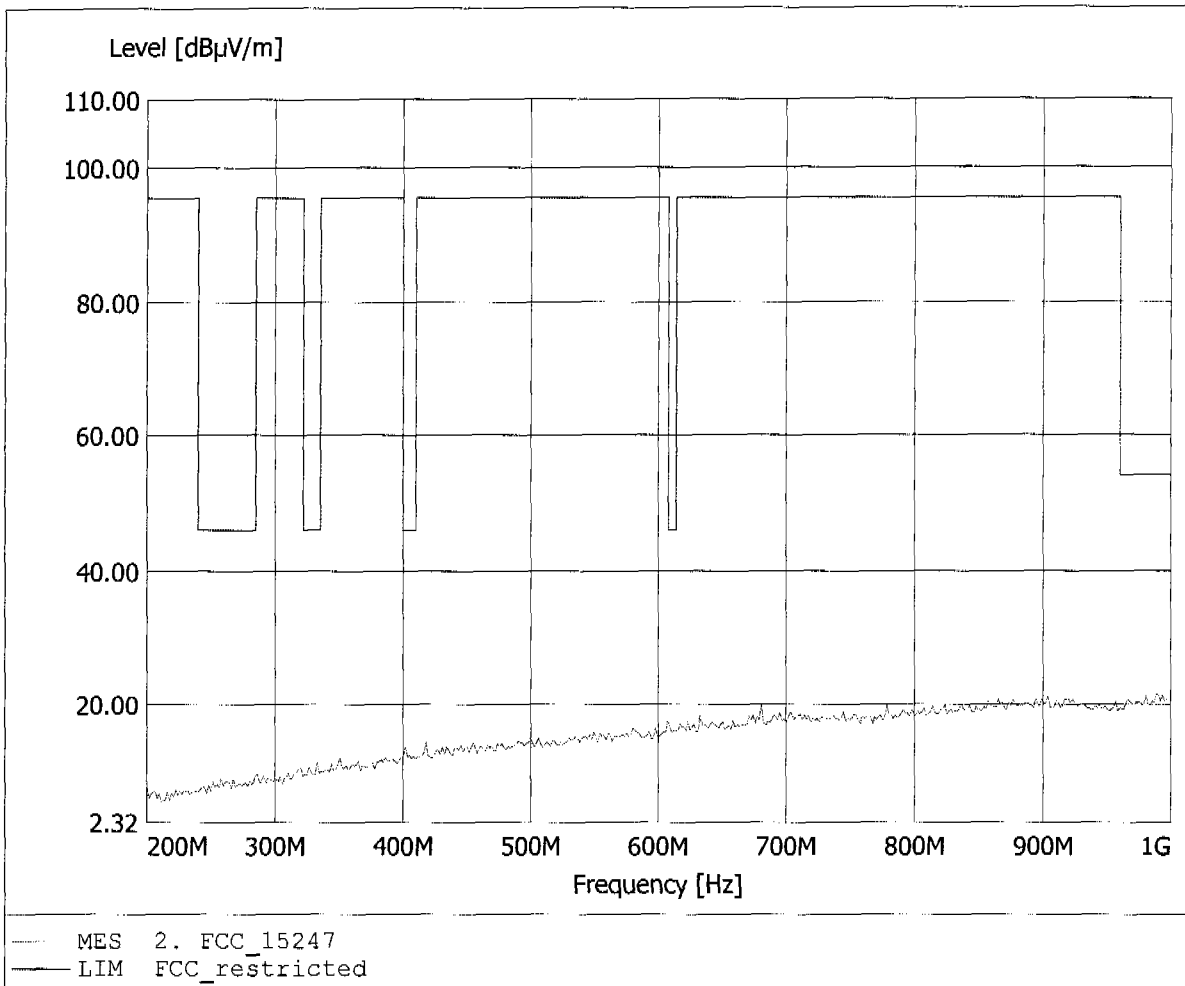

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**


EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 97.89dBµV/m, RBW: 1MHz

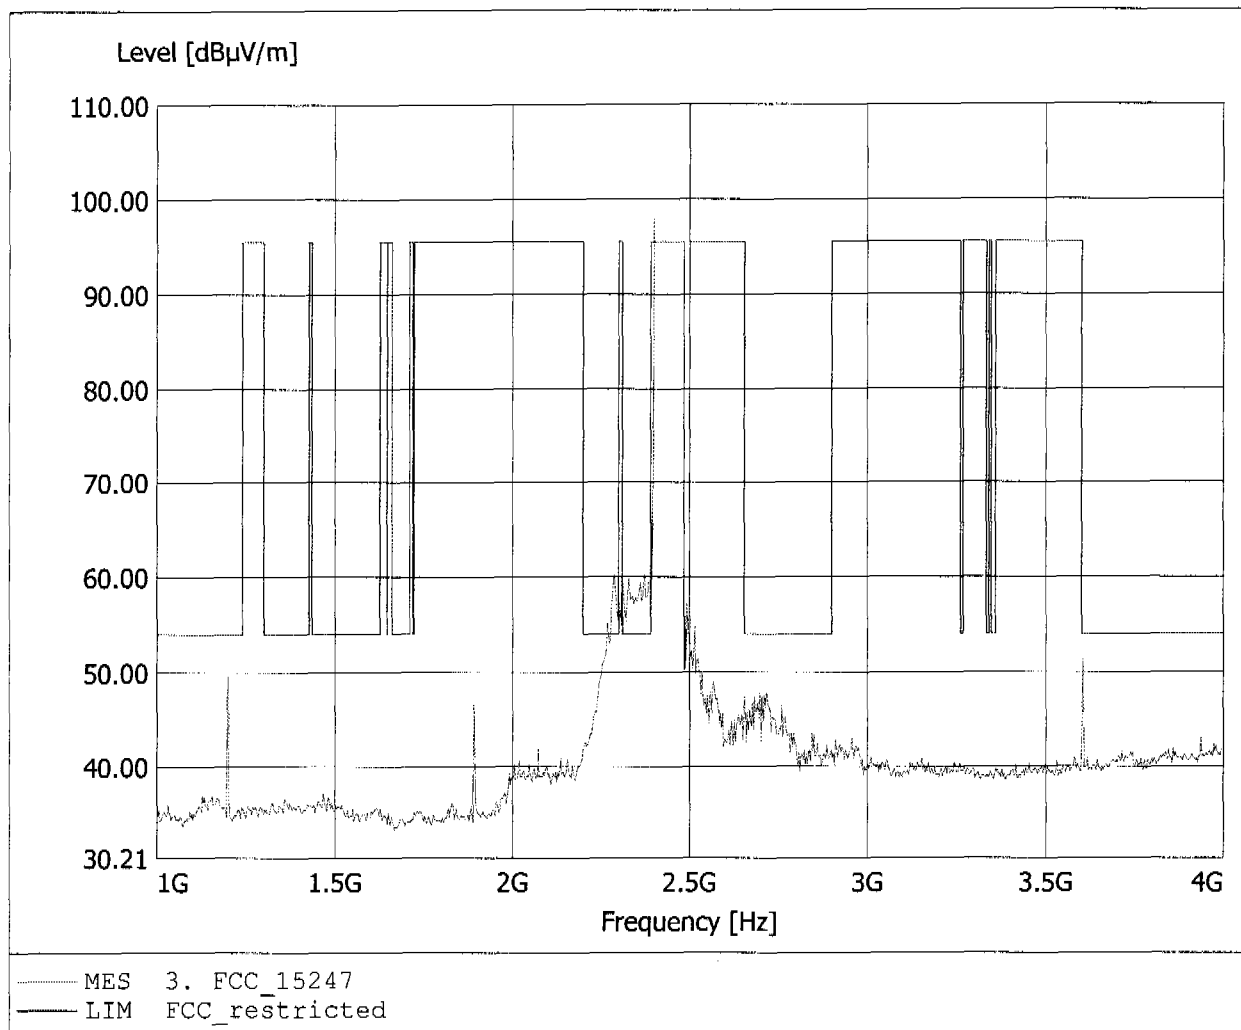

DA 00-705 / Marker Delta-Method:
The value measured with average detector may be reduced by the "delta" value according to Marker-Dela Method plot. Please see pages 2 and 3 of appendix C and pages 19-22 of TestRpt_1.


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 97.89dBµV/m, RBW: 1MHz

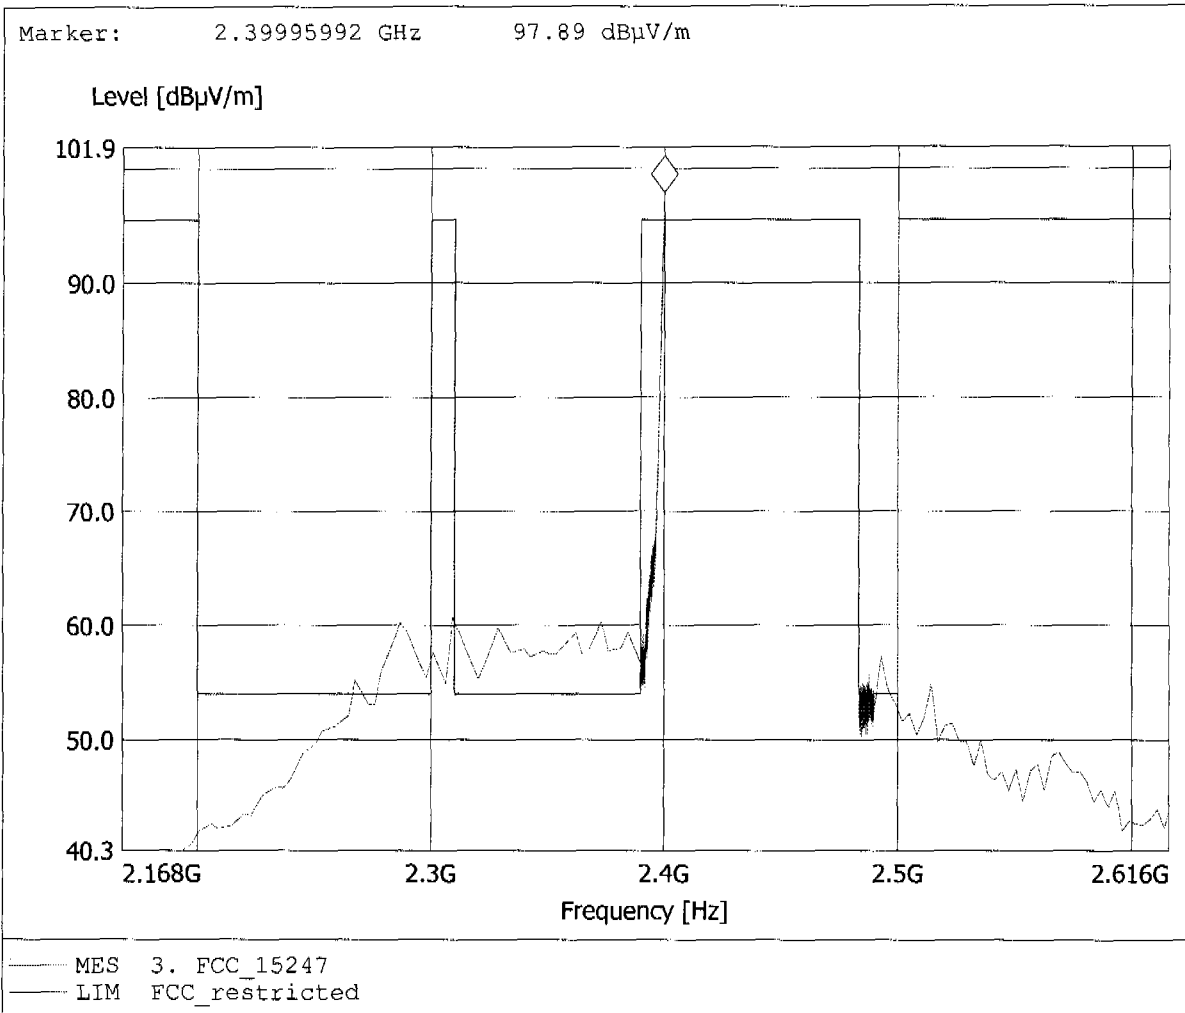


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
 Model: DW800 wireless system / Headset
 Approval Holder: Sennheiser Communications
 Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247, average detector
 Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
 Comment 2: Freq: 2.400GHz, Emax: 68.54dBµV/m, RBW: 1MHz

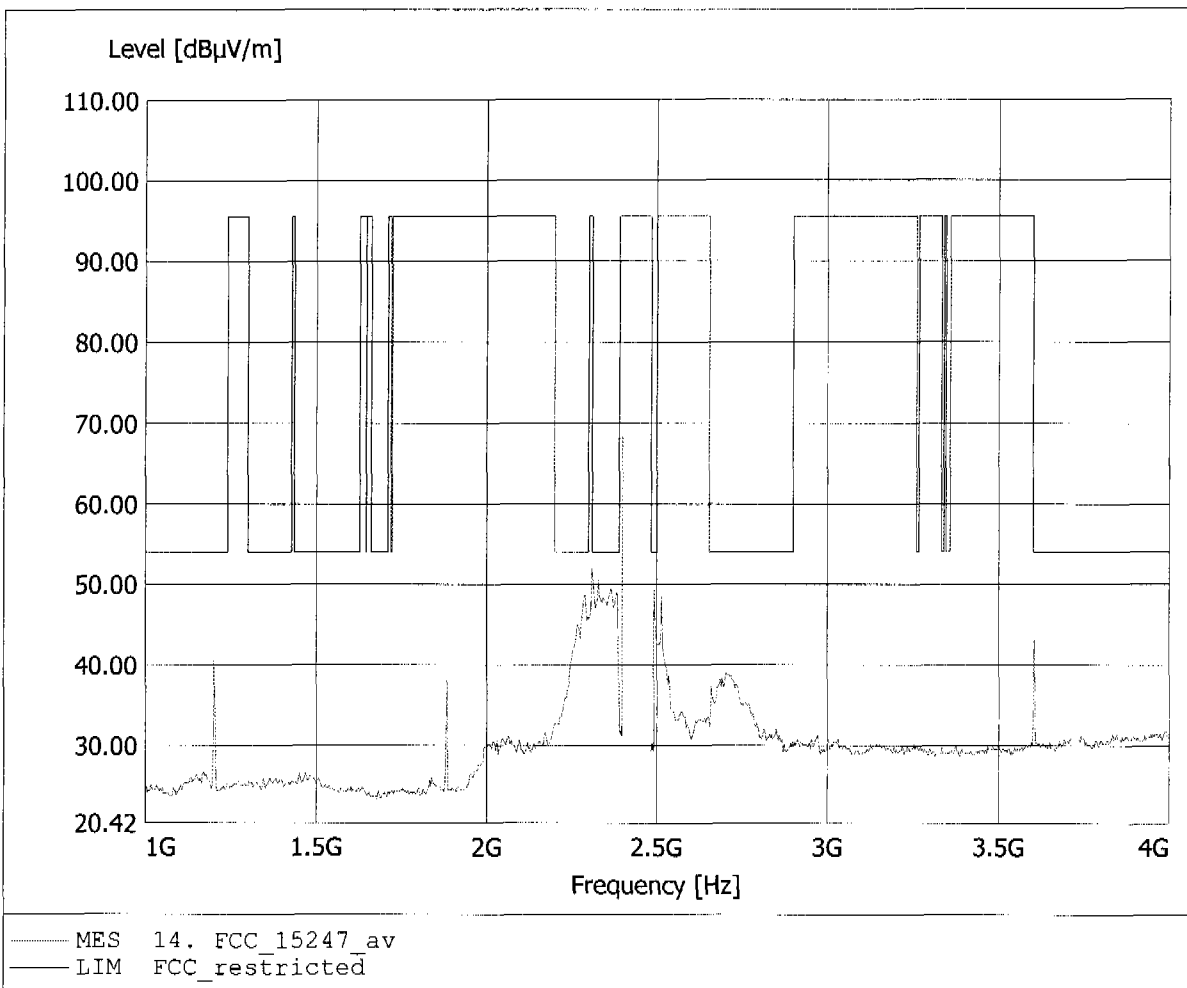


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 68.54dBµV/m, RBW: 1MHz

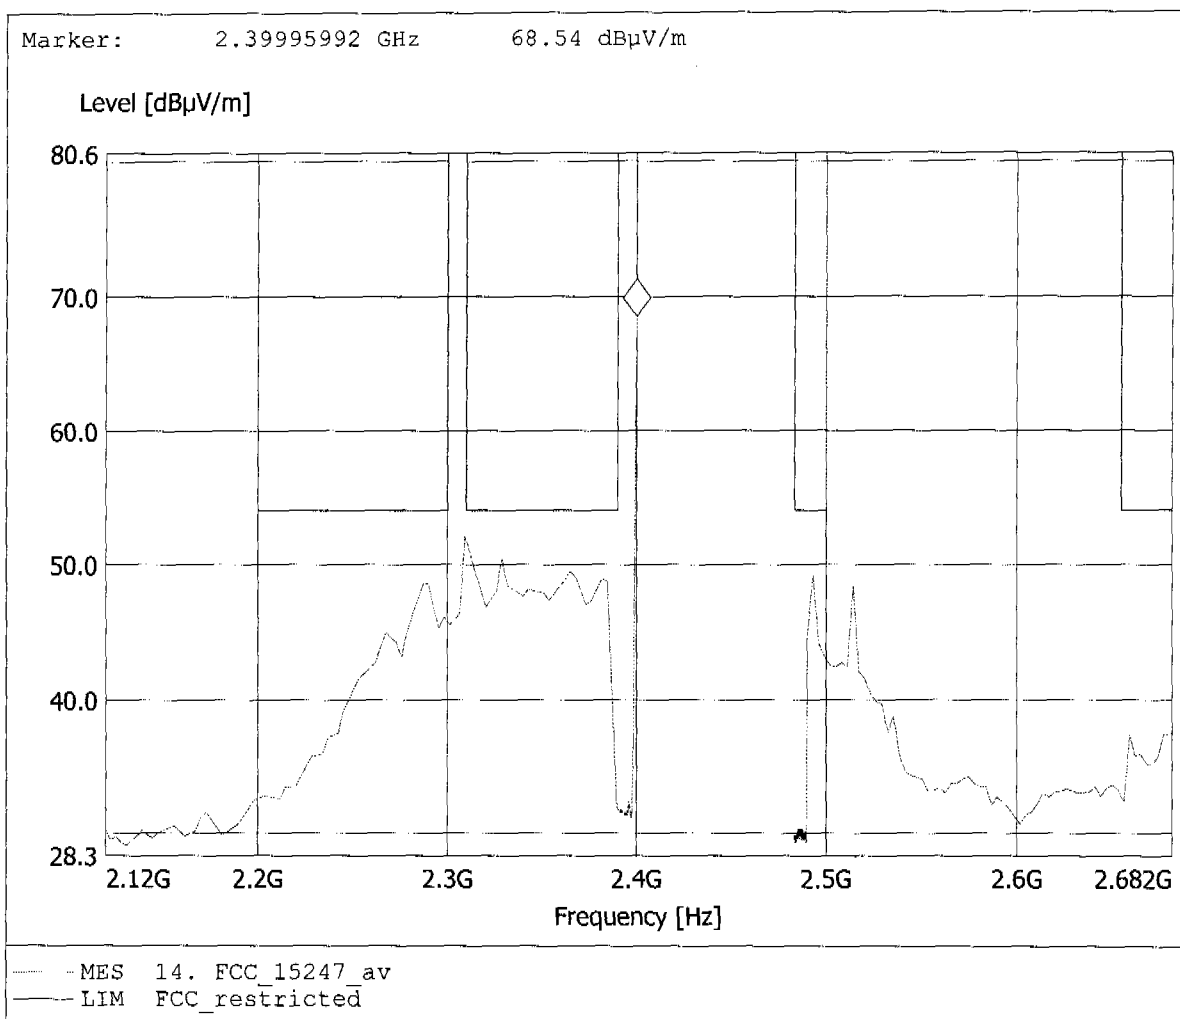


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 95.02dBuV/m, RBW: 1MHz

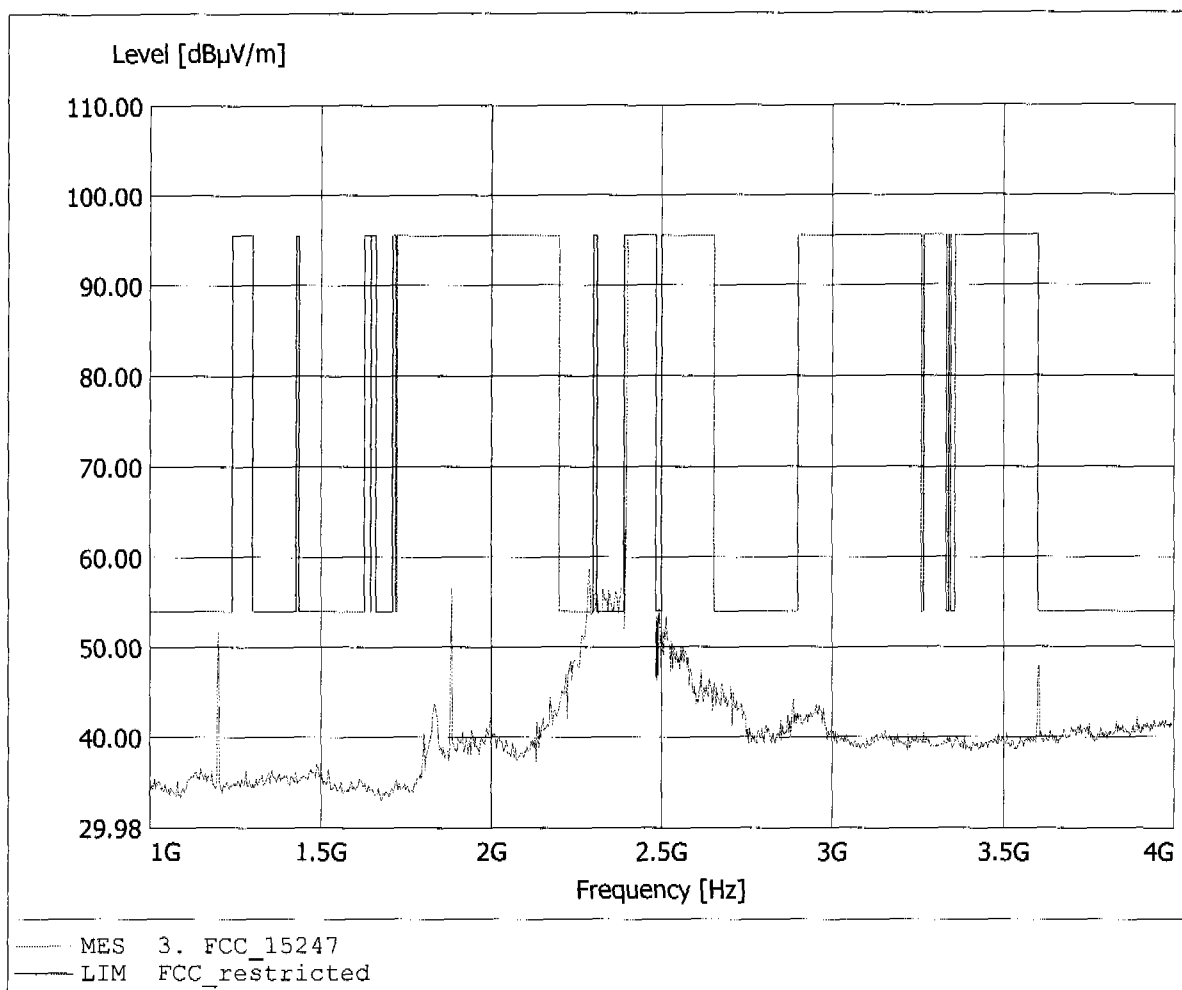


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 95.02dBµV/m, RBW: 1MHz

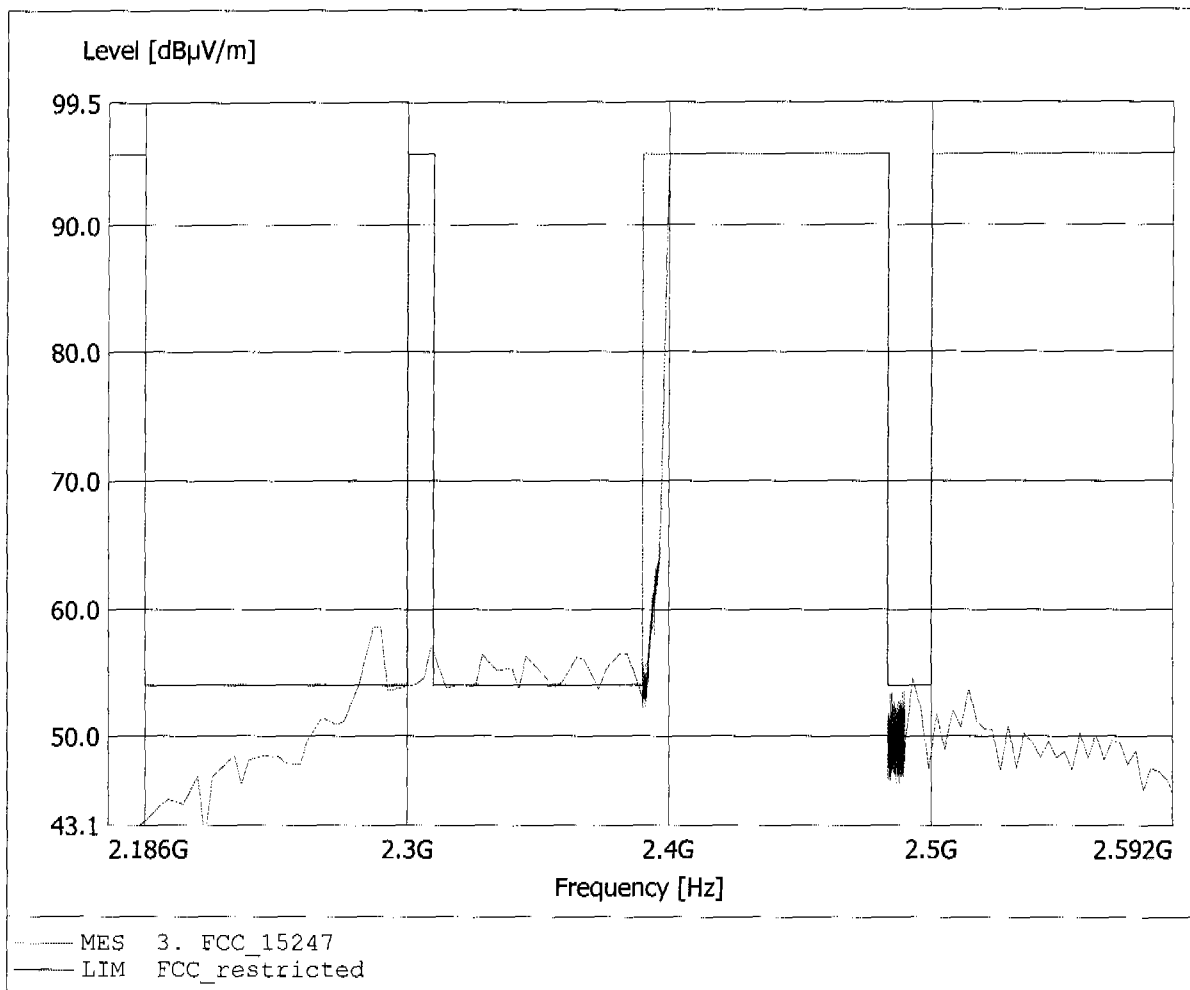


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 66.73dBµV/m, RBW: 1MHz

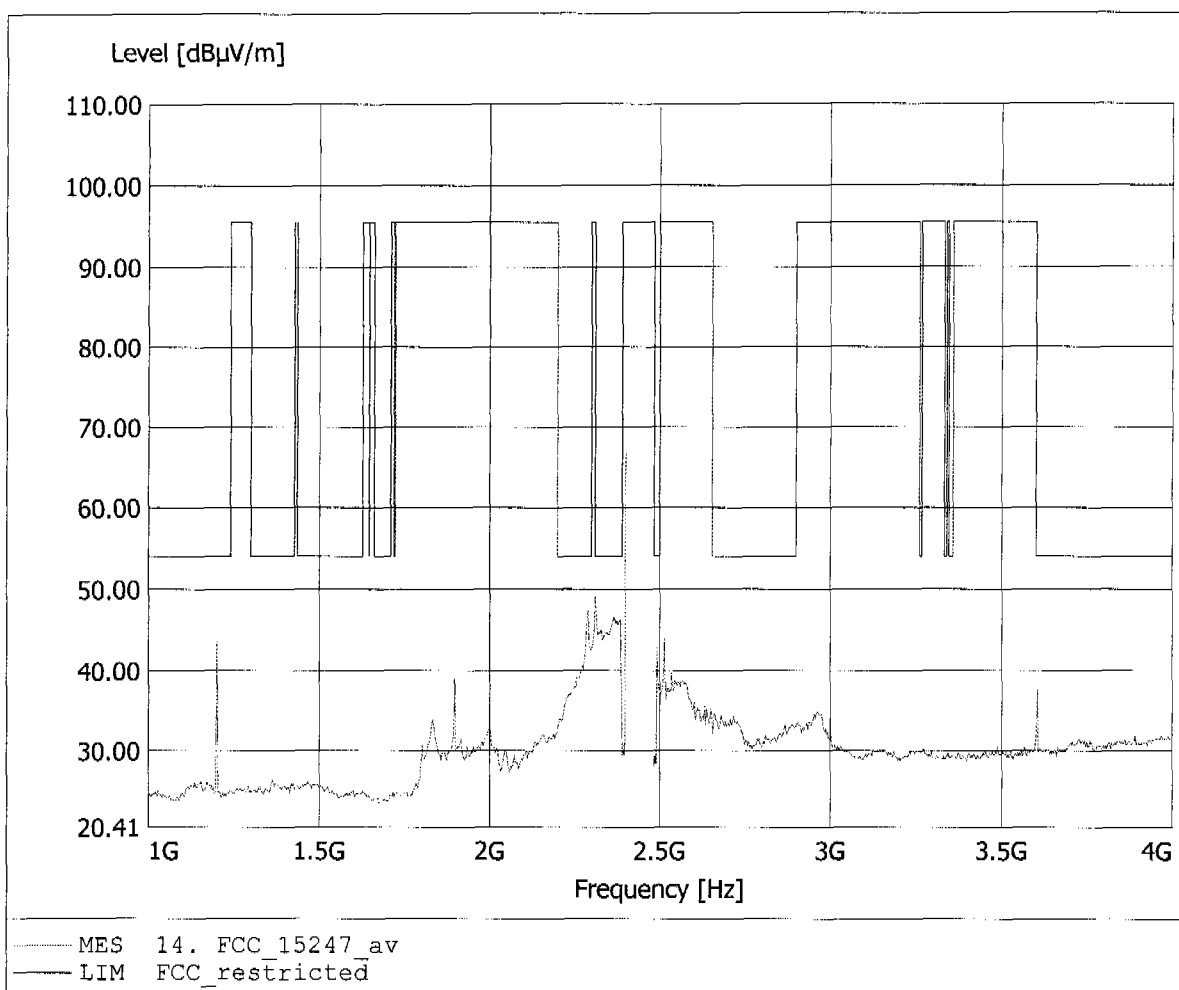


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 66.73dBµV/m, RBW: 1MHz

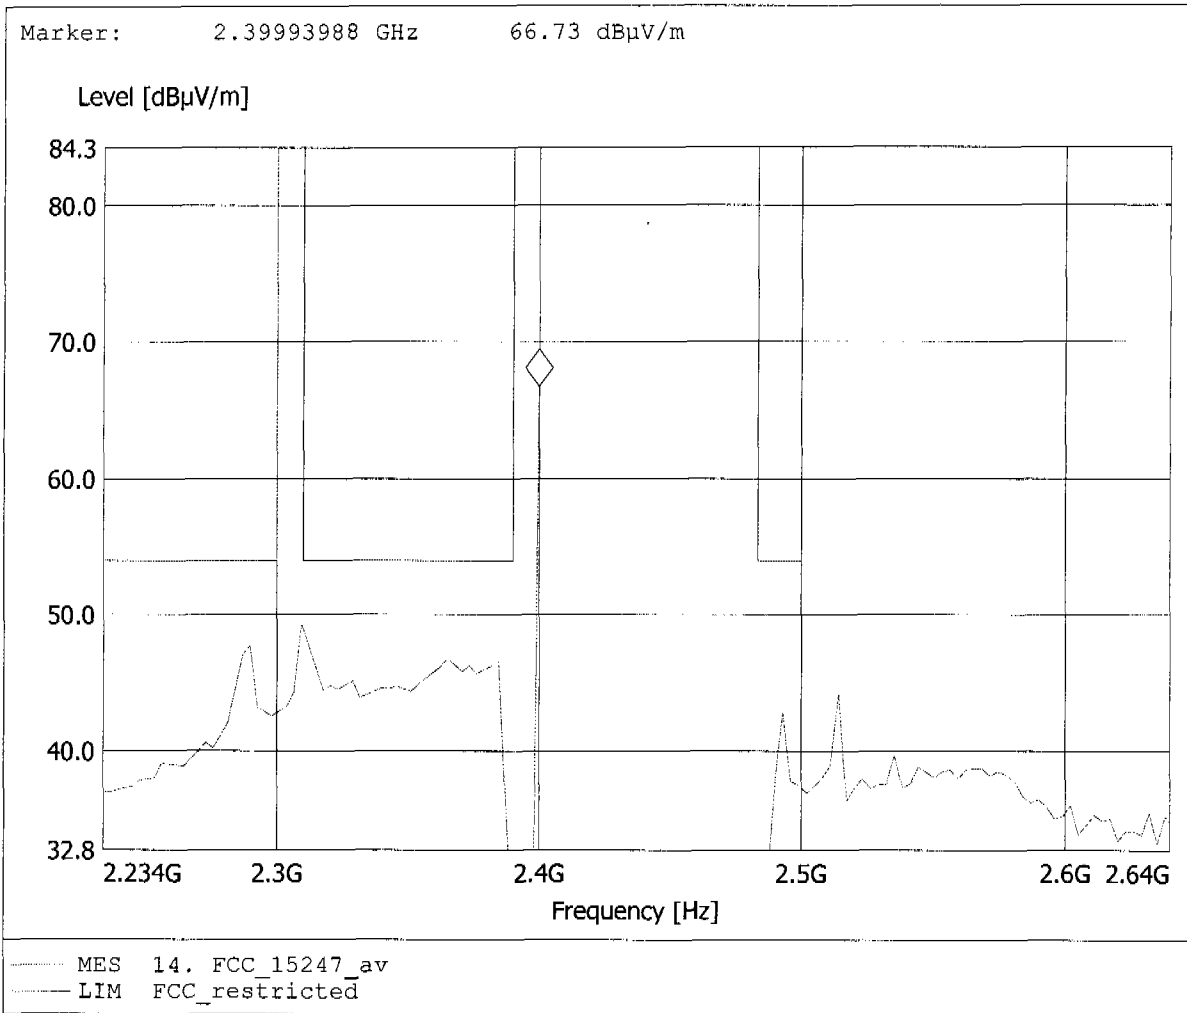


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.206GHz, Emax: 48.80dBµV/m, RBW: 1MHz

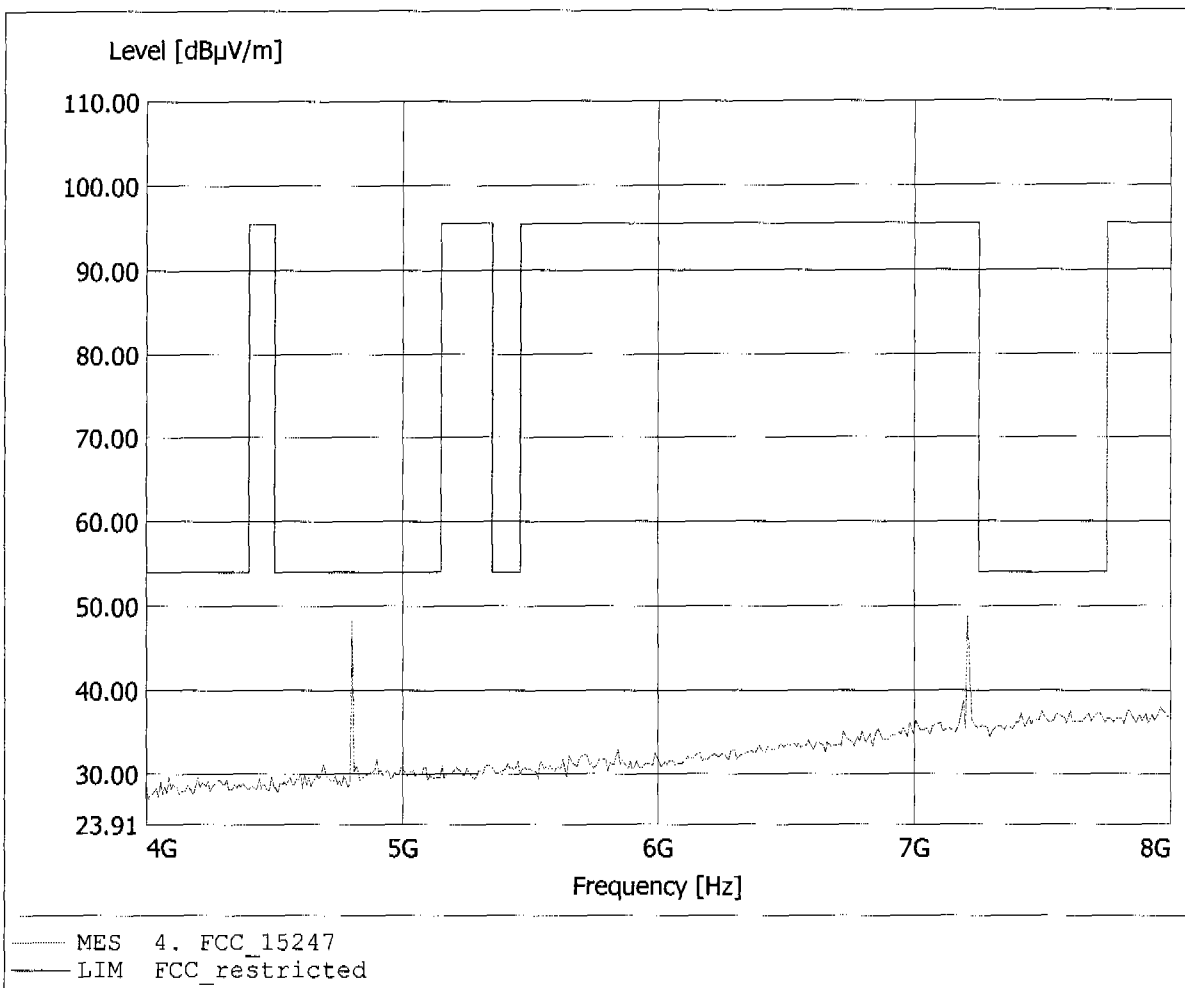


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 57.69dBµV/m, RBW: 1MHz

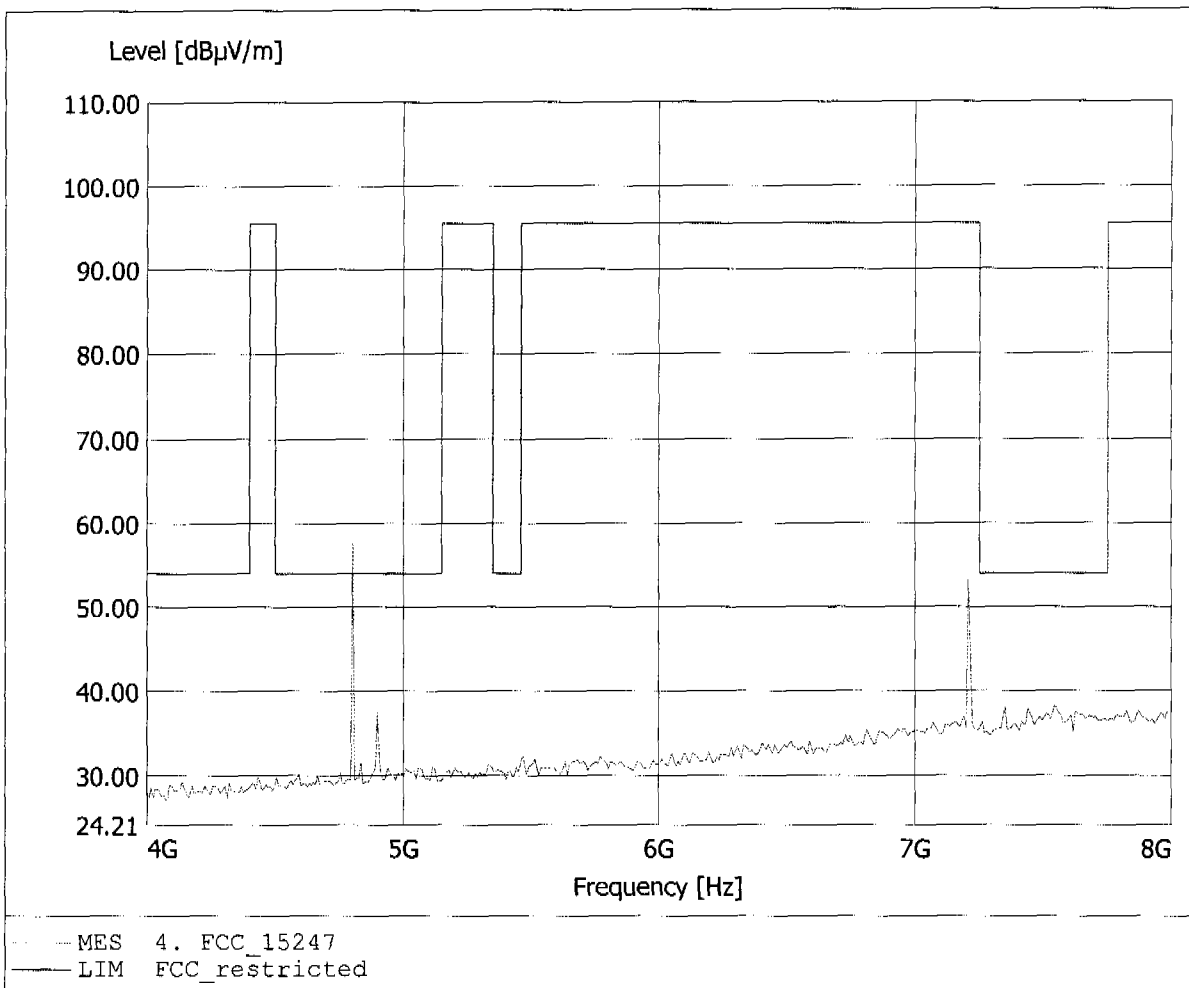


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 35.06dBµV/m, RBW: 1MHz

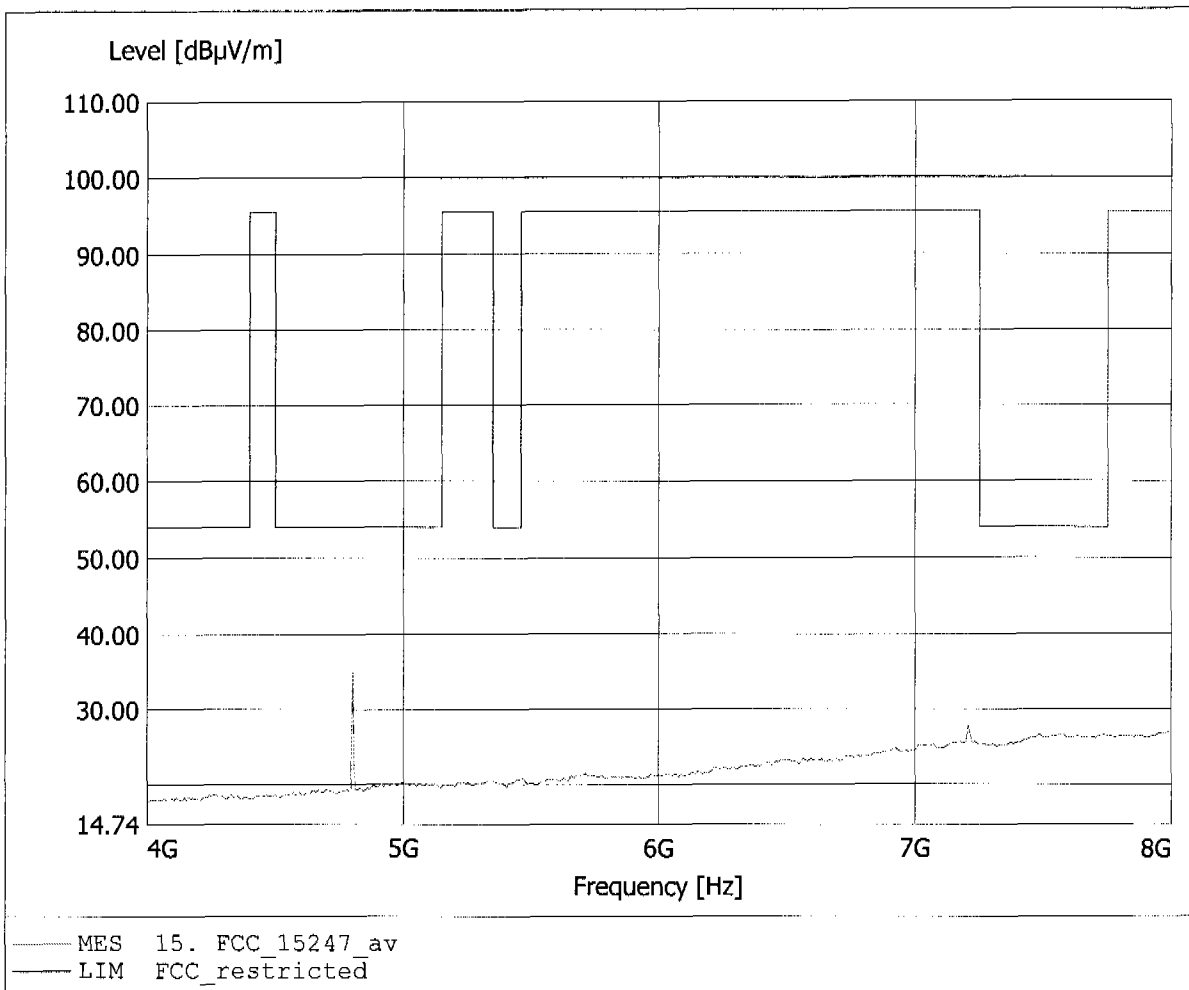


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.603GHz, Emax: 43.12dBµV/m, RBW: 1MHz

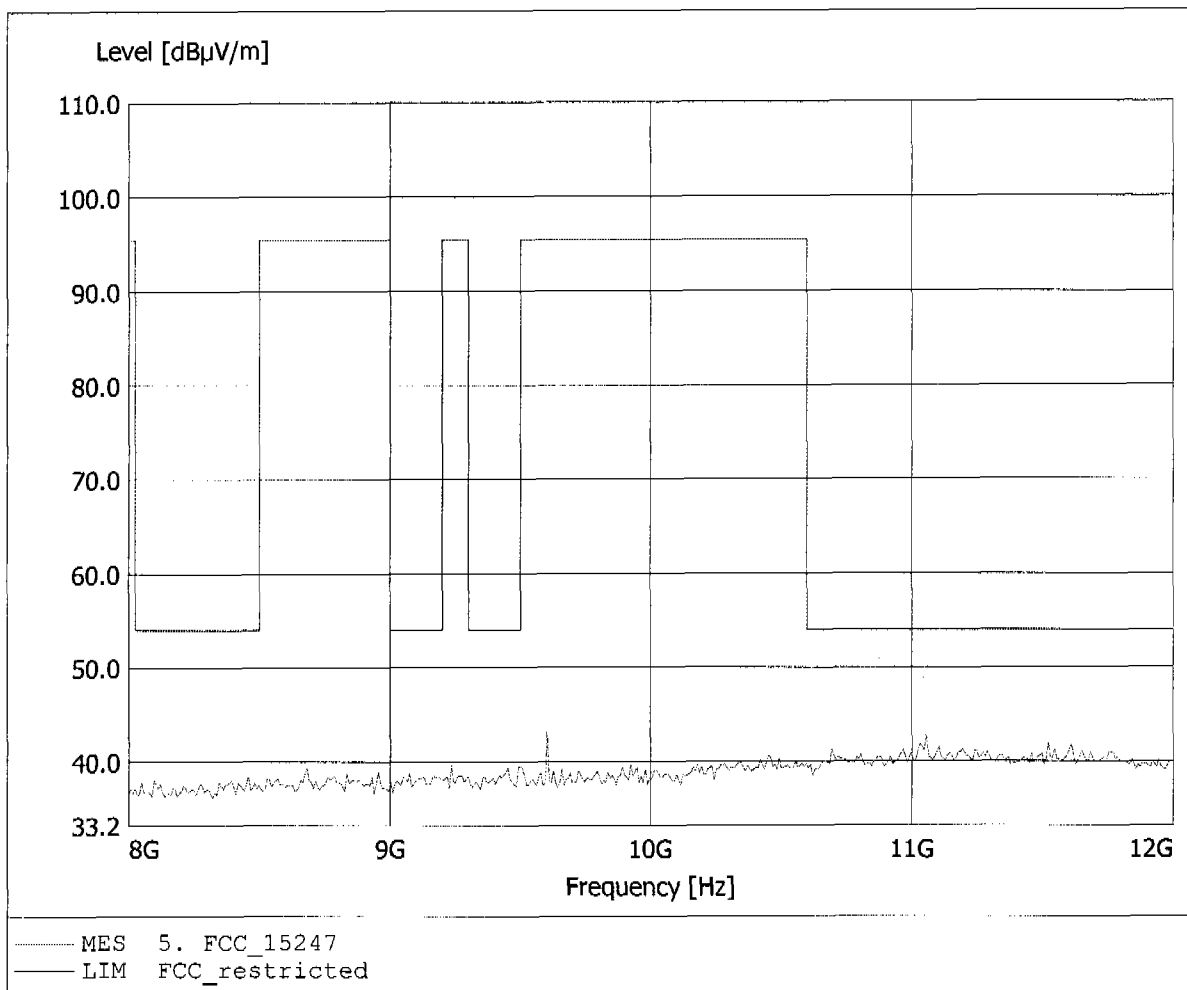


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.603GHz, Emax: 44.23dBµV/m, RBW: 1MHz

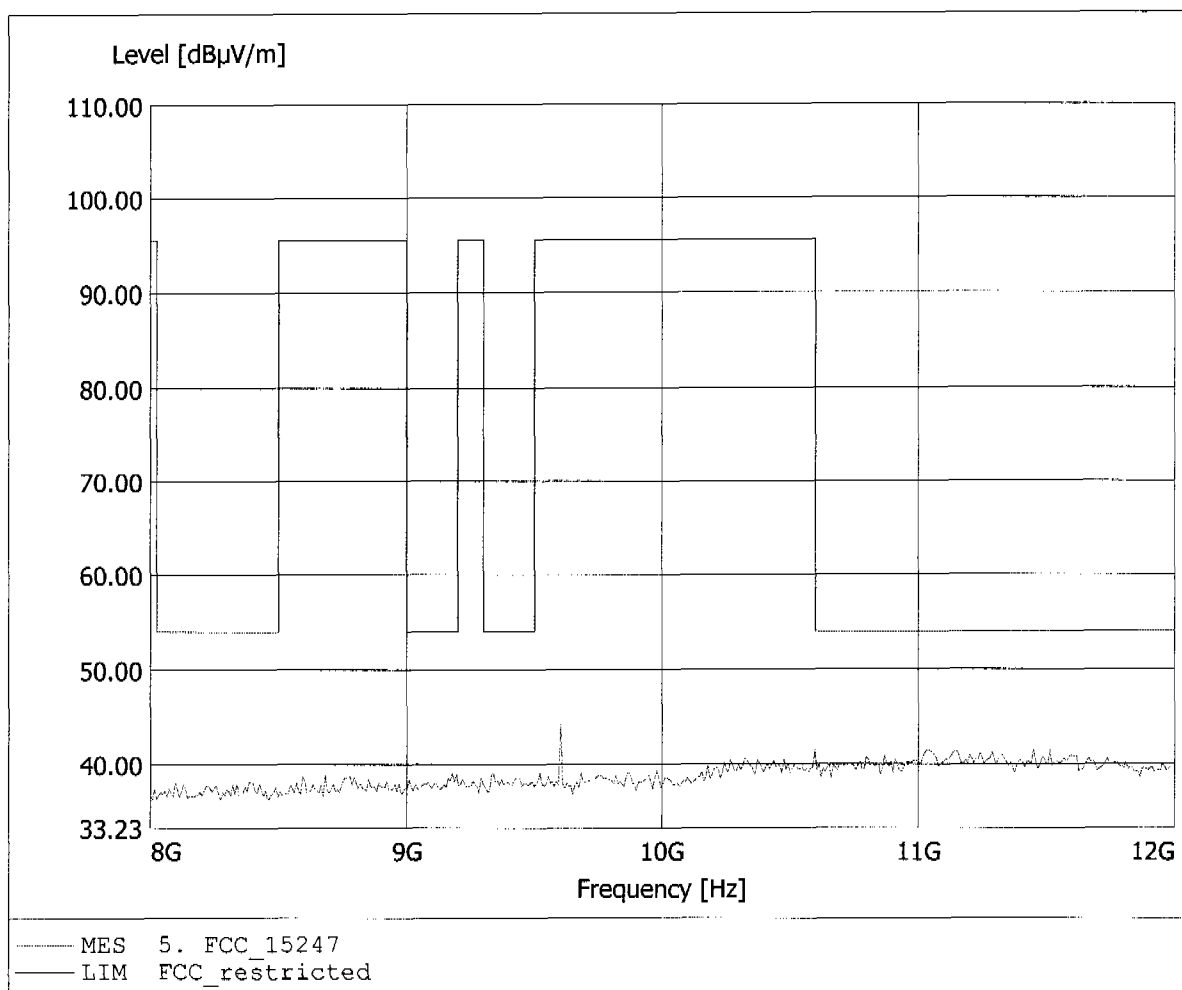


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.405GHz, Emax: 47.80dBuV/m, RBW: 1MHz

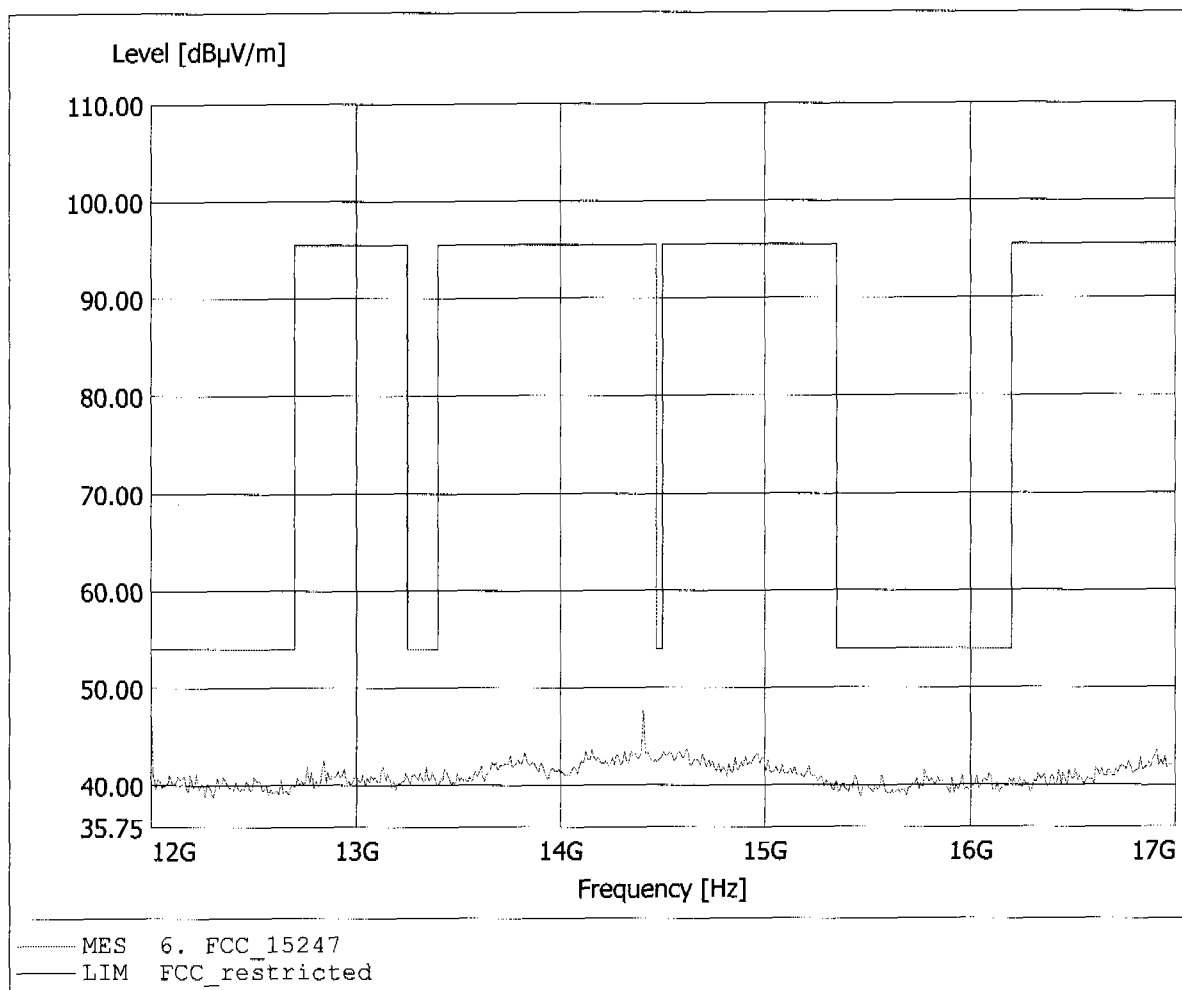


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.000GHz, Emax: 52.92dBµV/m, RBW: 1MHz

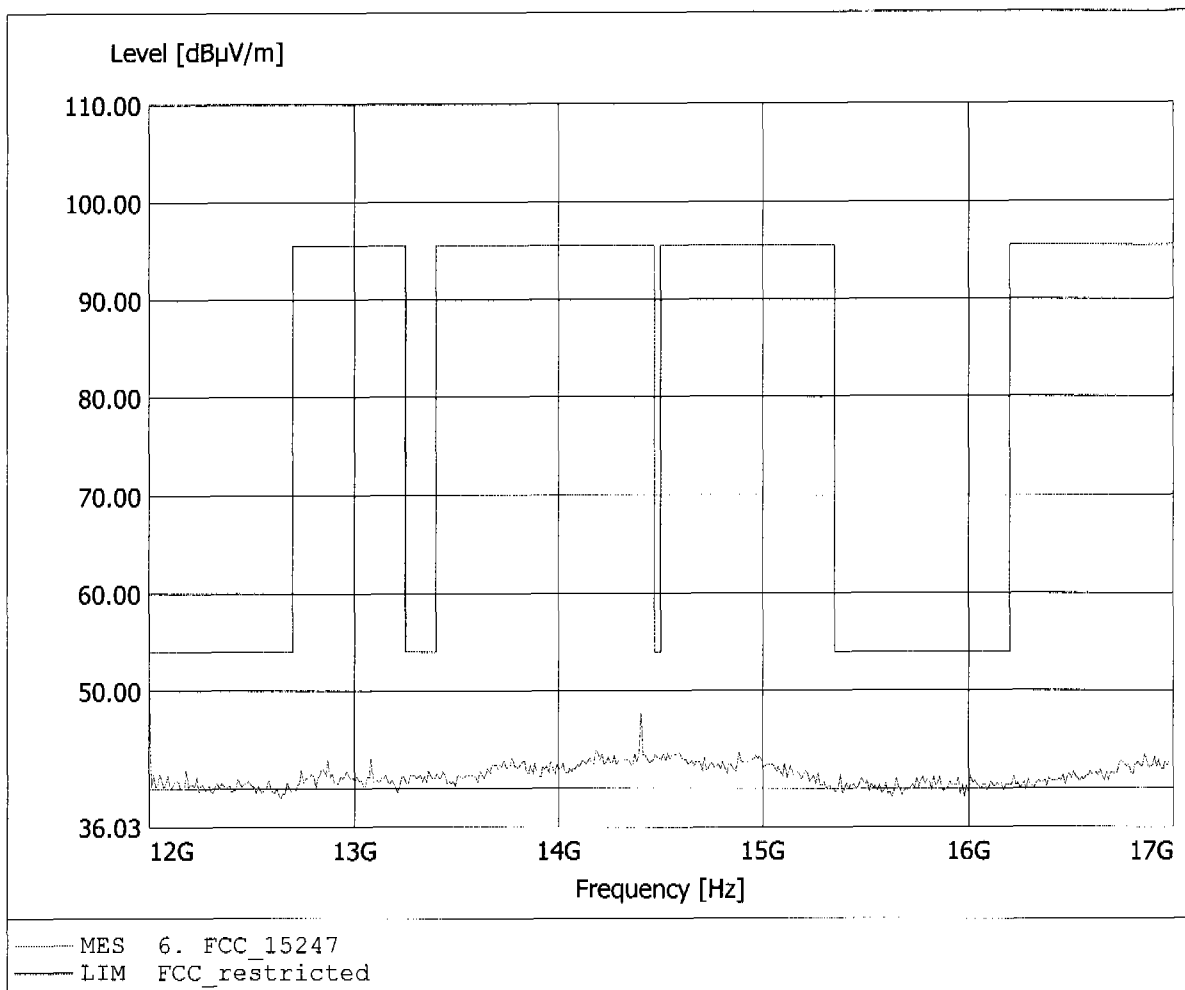


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
 Model: DW800 wireless system / Headset
 Approval Holder: Sennheiser Communications
 Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
 Test Site / Operator: ETS / Mr. Handrik
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: HL025, amplif.
 Comment 2: Freq: 17.038GHz, Emax: 44.87dBµV/m, RBW: 1MHz

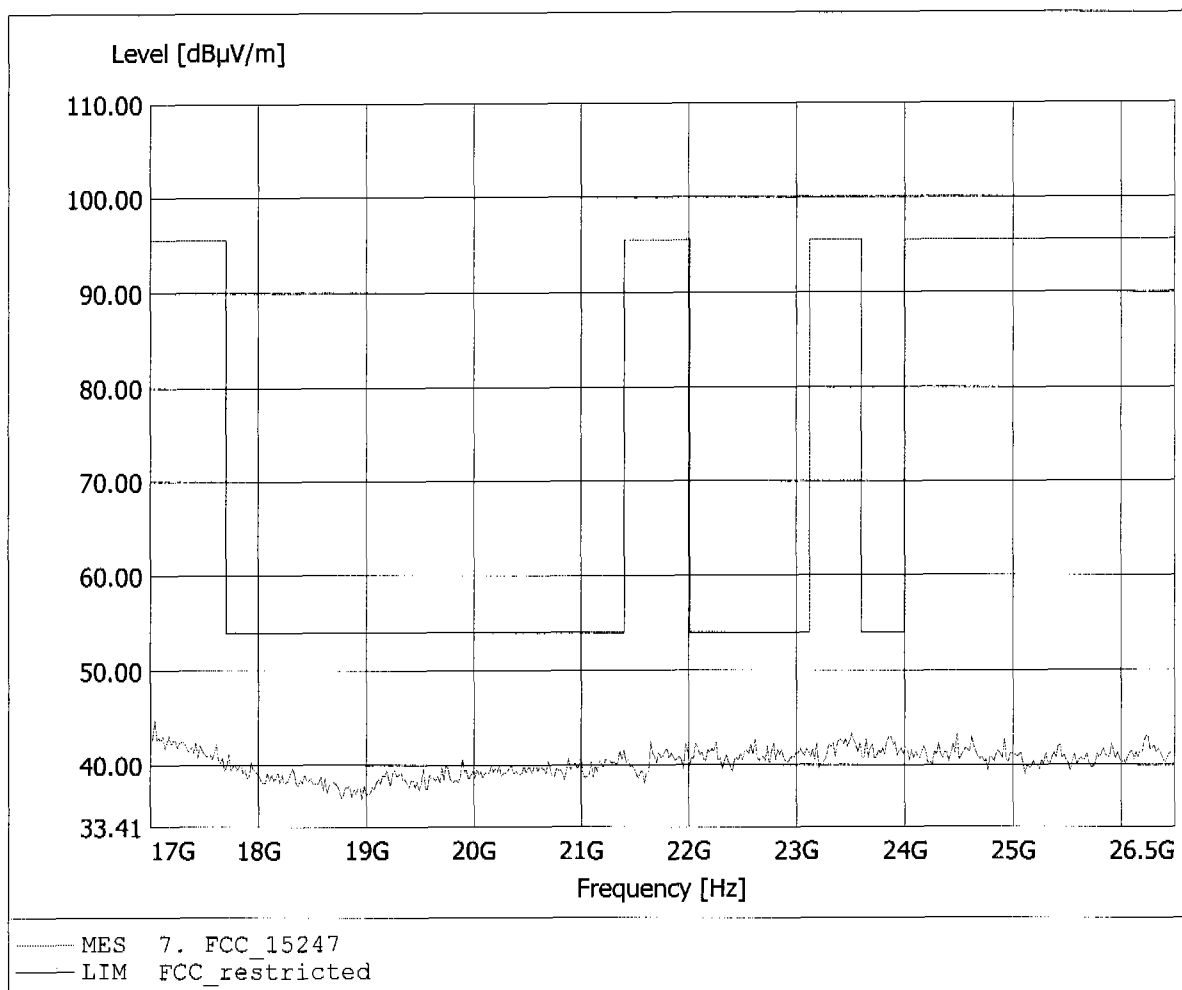


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.133GHz, Emax: 43.78dBµV/m, RBW: 1MHz

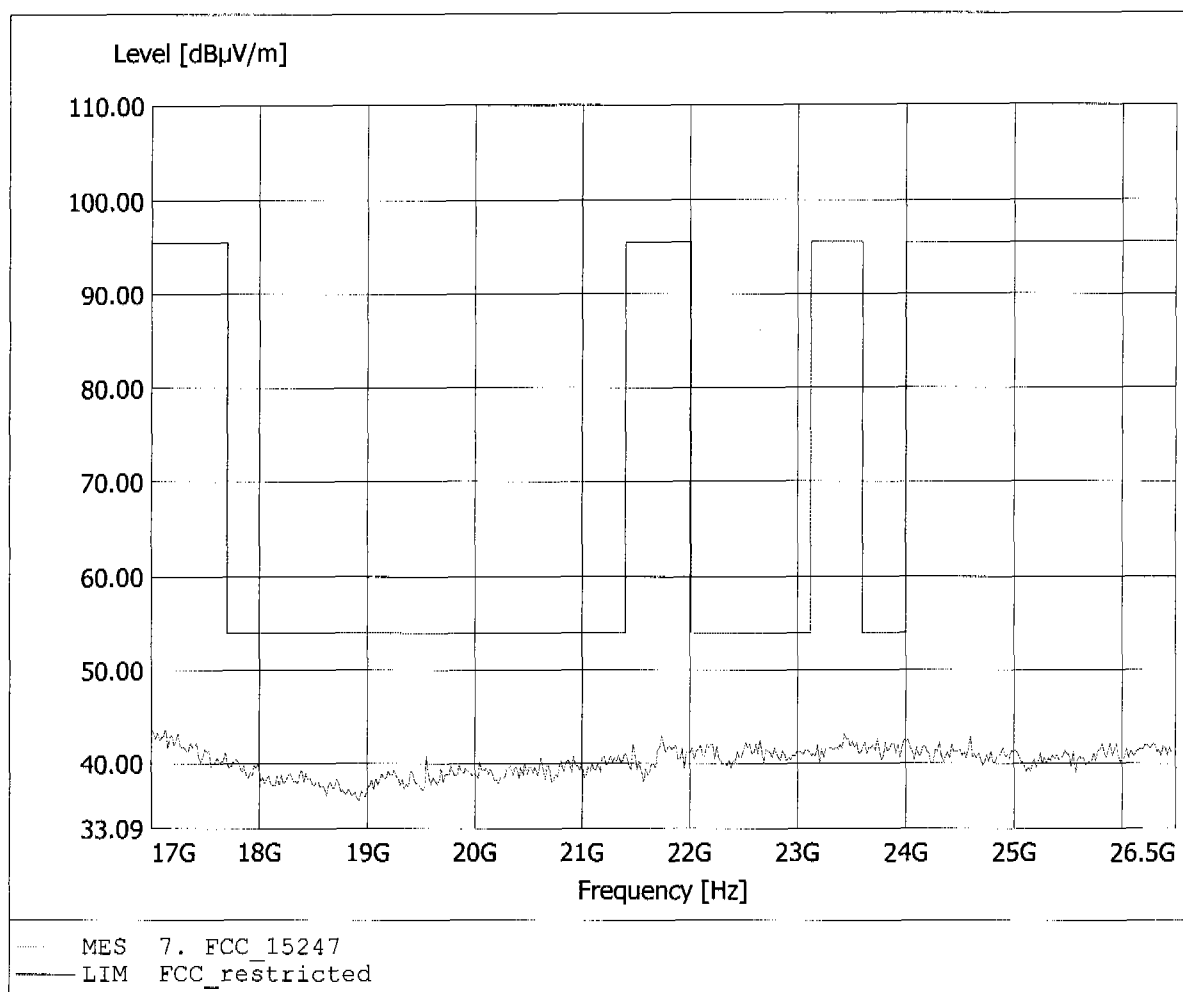


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 190.120MHz, Emax: 30.18dBµV/m, RBW: 100kHz

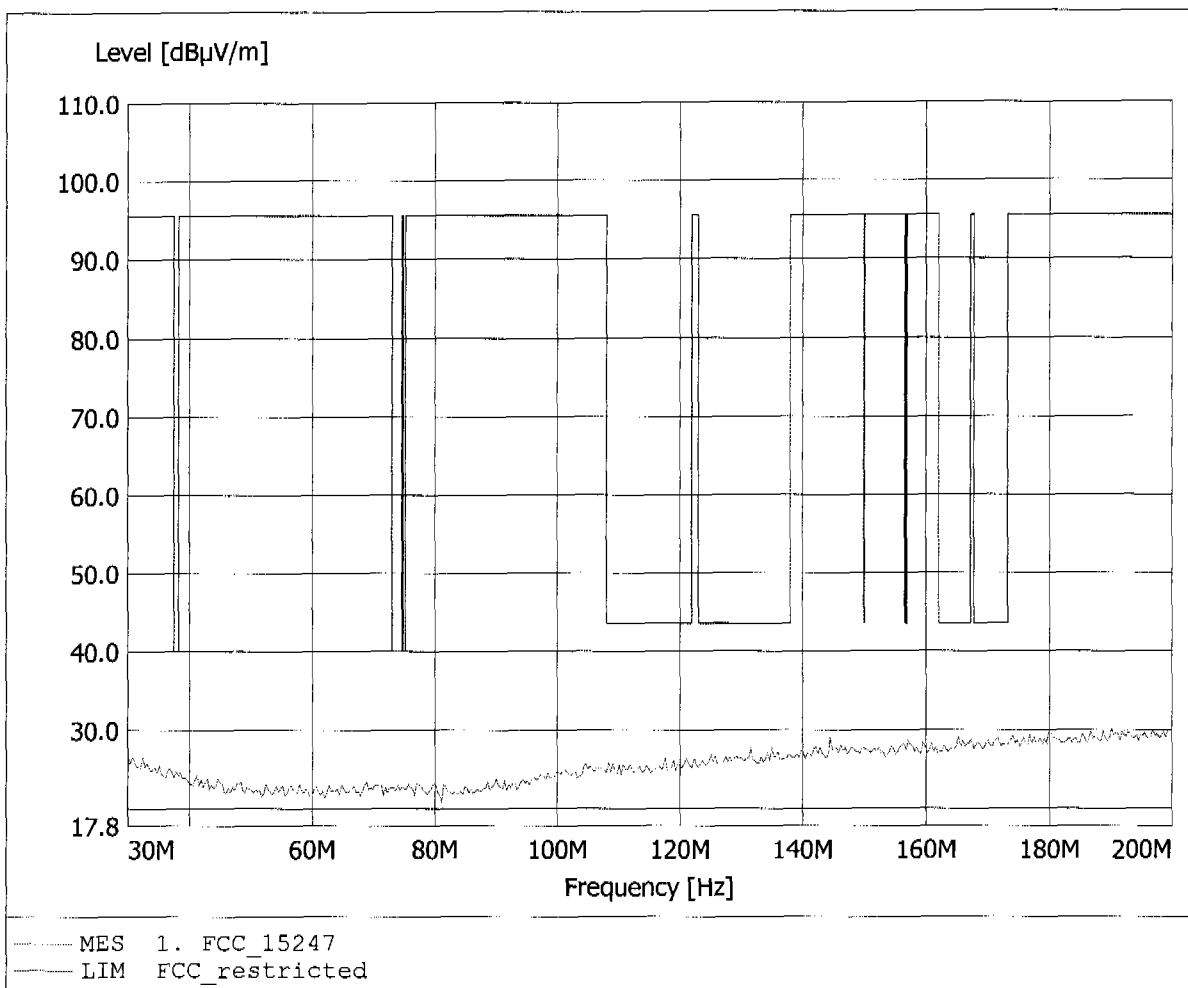


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 189.439MHz, Emax: 30.75dBµV/m, RBW: 100kHz

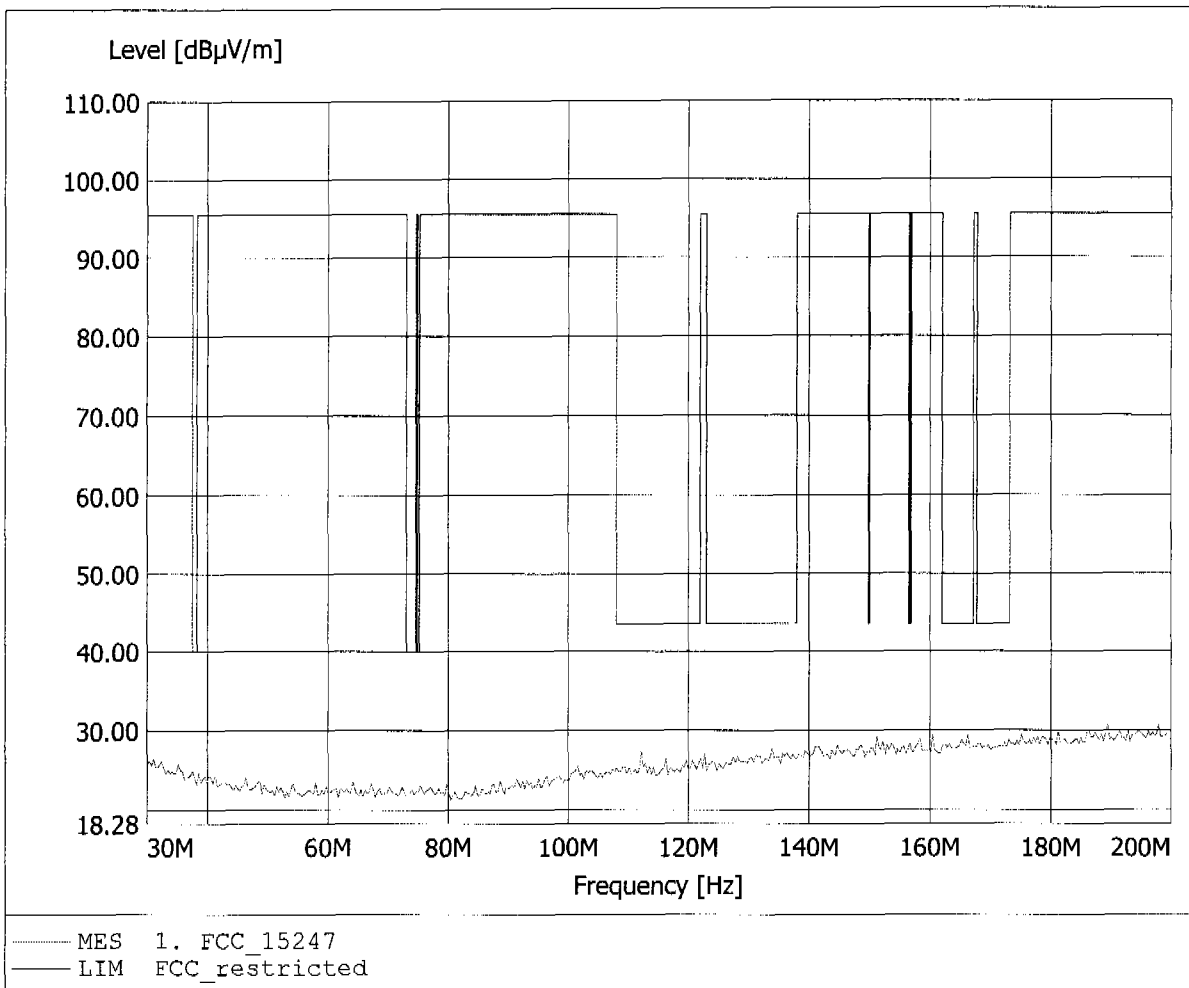


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 993.587MHz, Emax: 21.48dBuV/m, RBW: 100kHz

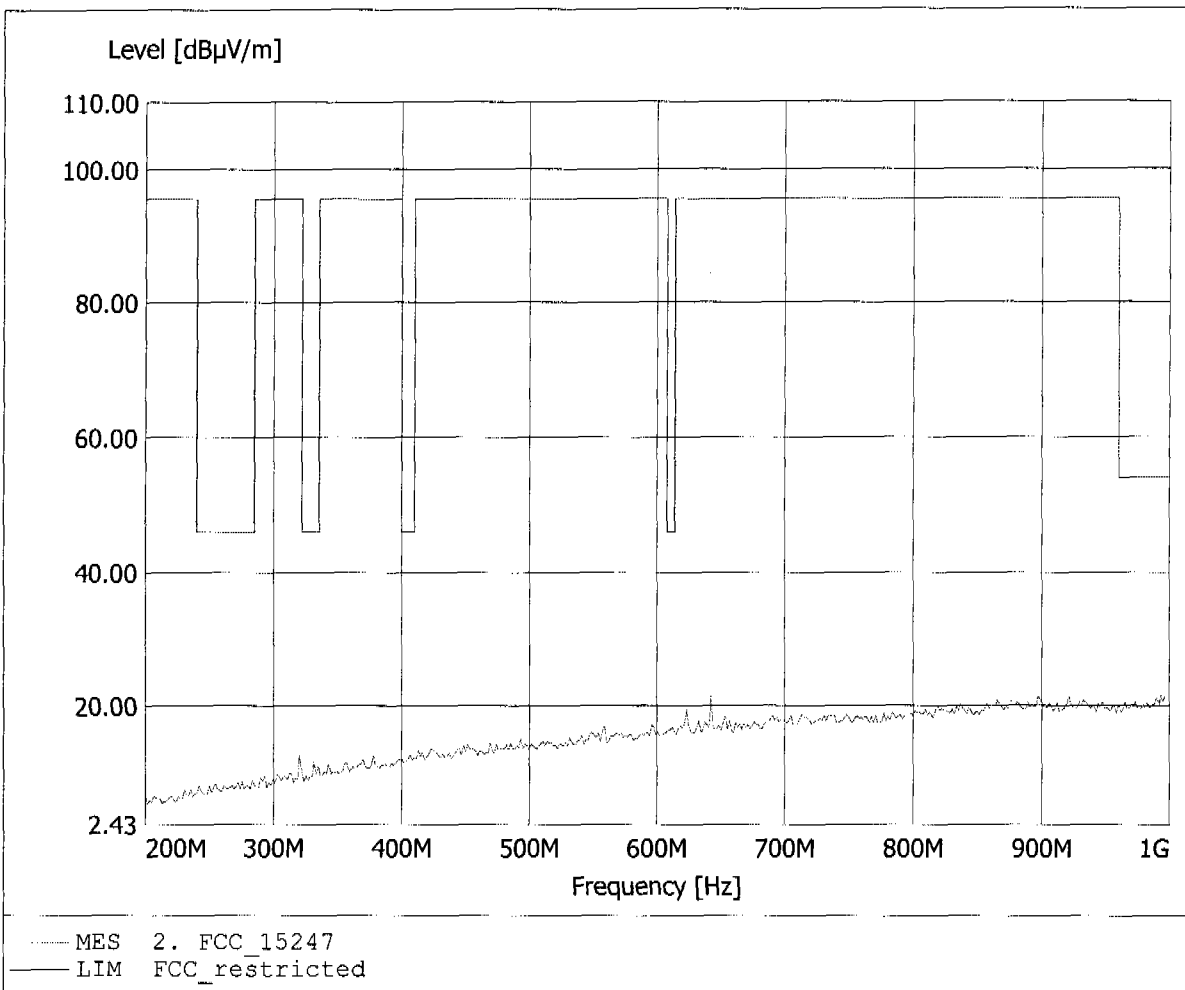


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 991.984MHz, Emax: 21.17dBµV/m, RBW: 100kHz

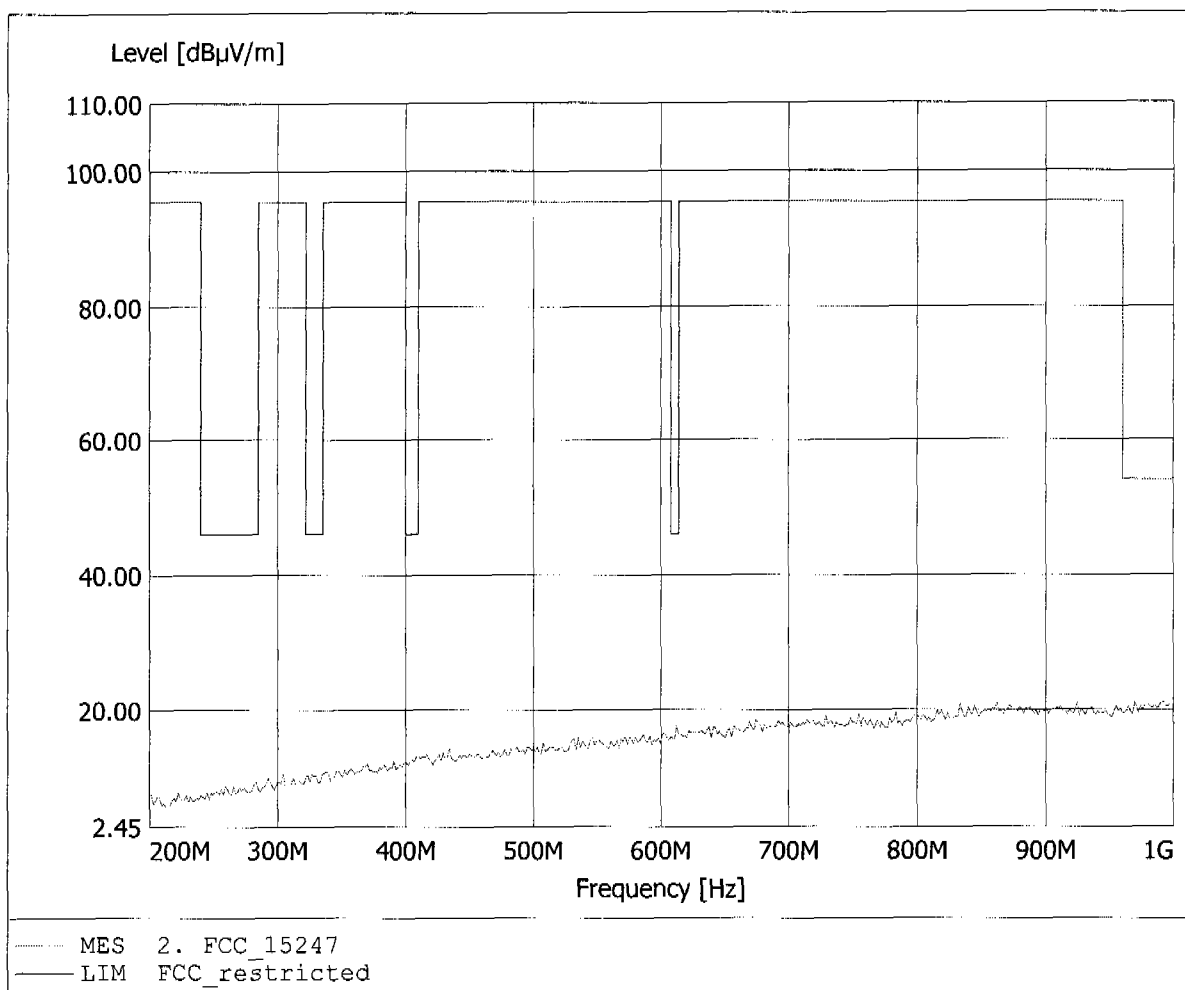


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.886GHz, Emax: 59.63dBµV/m, RBW: 1MHz

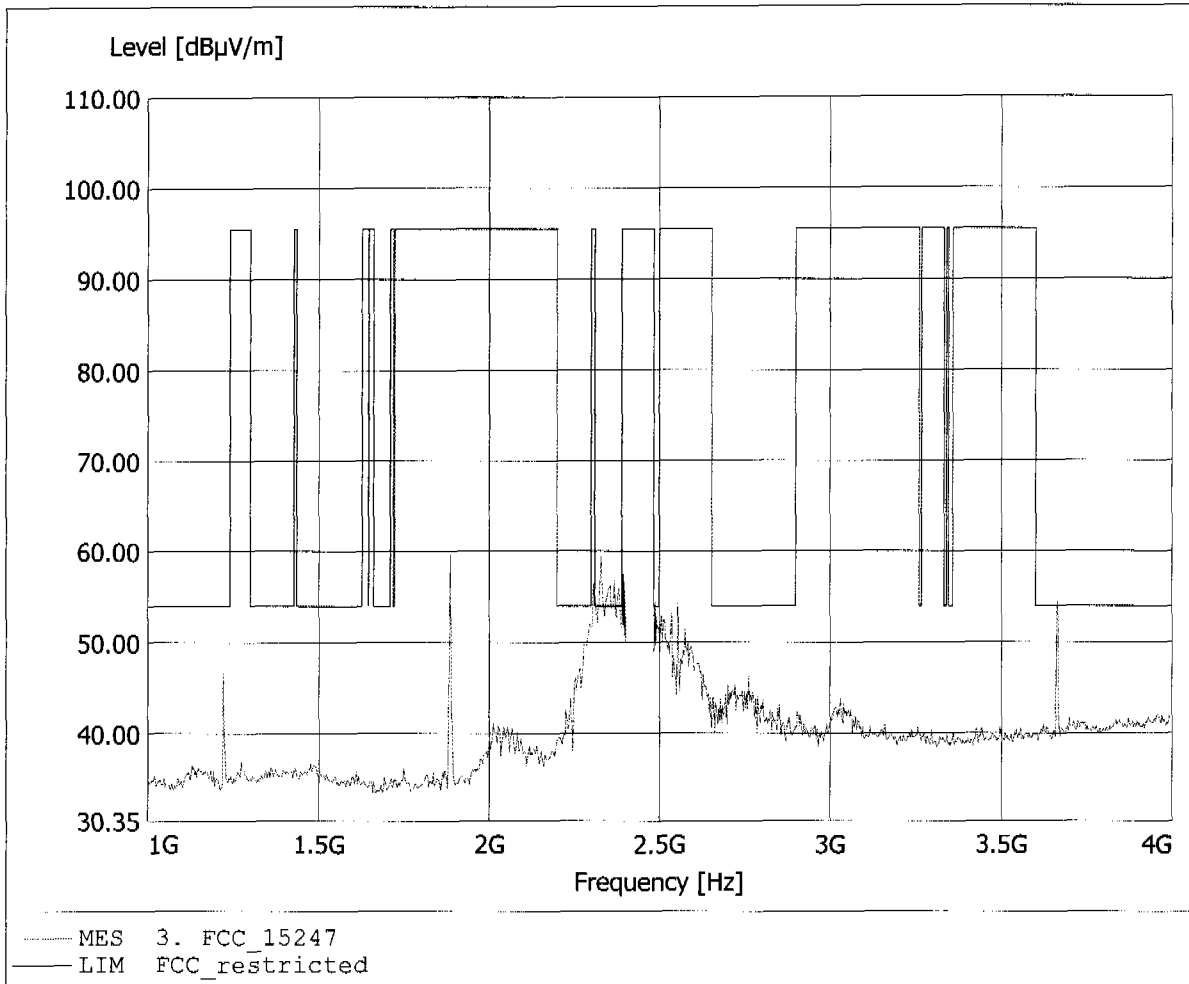


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.886GHz, Emax: 59.63dBµV/m, RBW: 1MHz

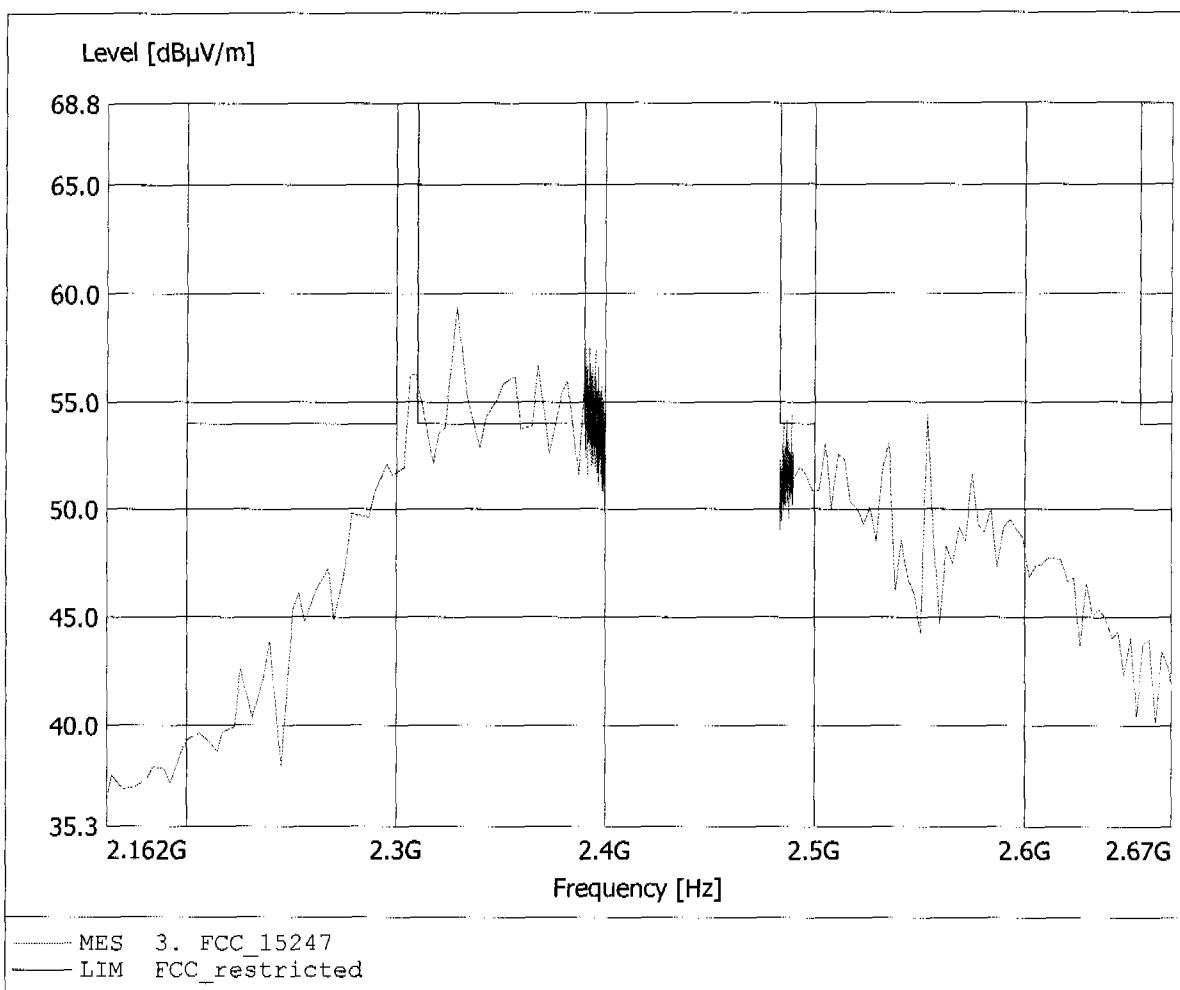


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.329GHz, Emax: 51.06dBµV/m, RBW: 1MHz

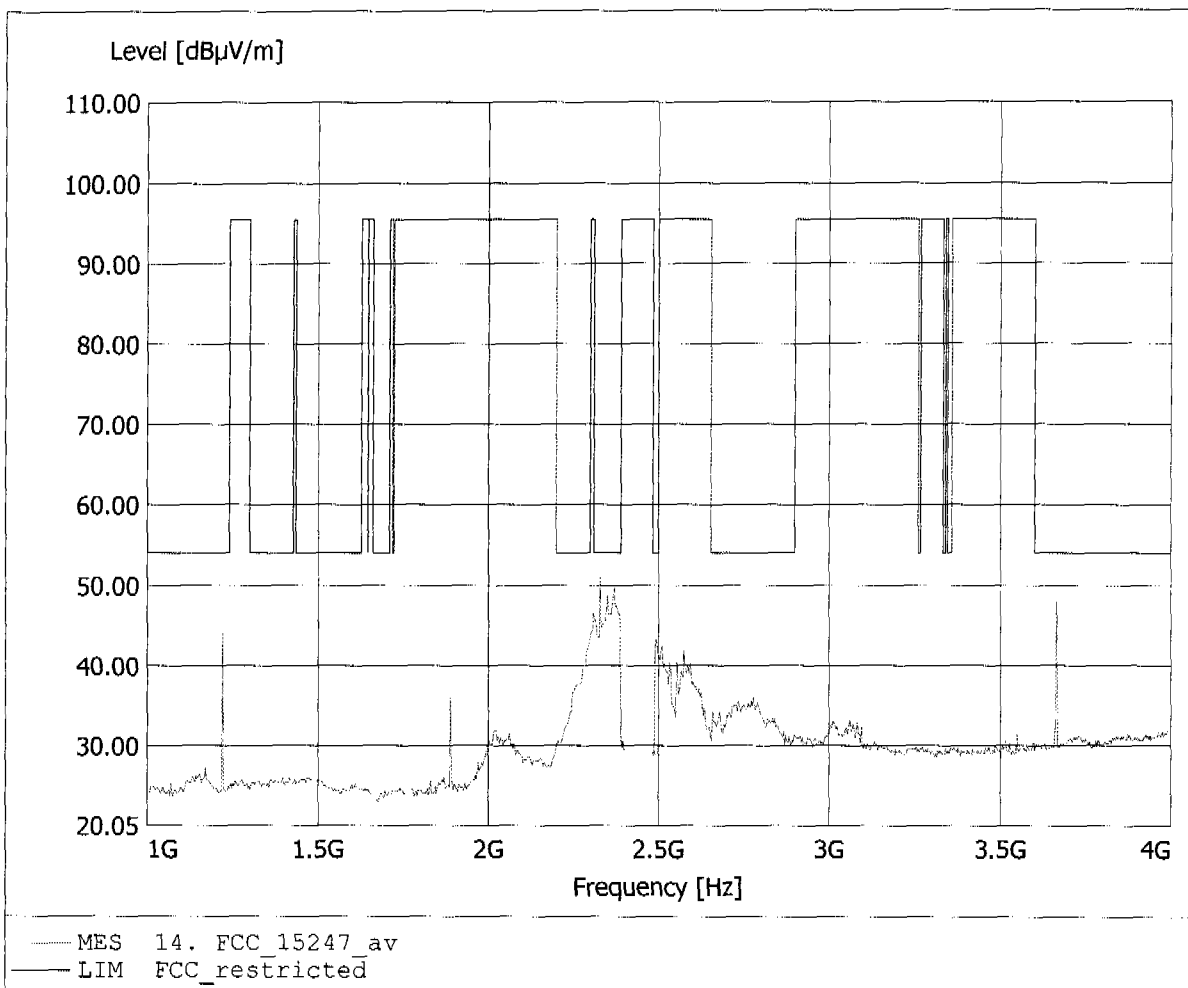


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.329GHz, Emax: 56.35dBµV/m, RBW: 1MHz

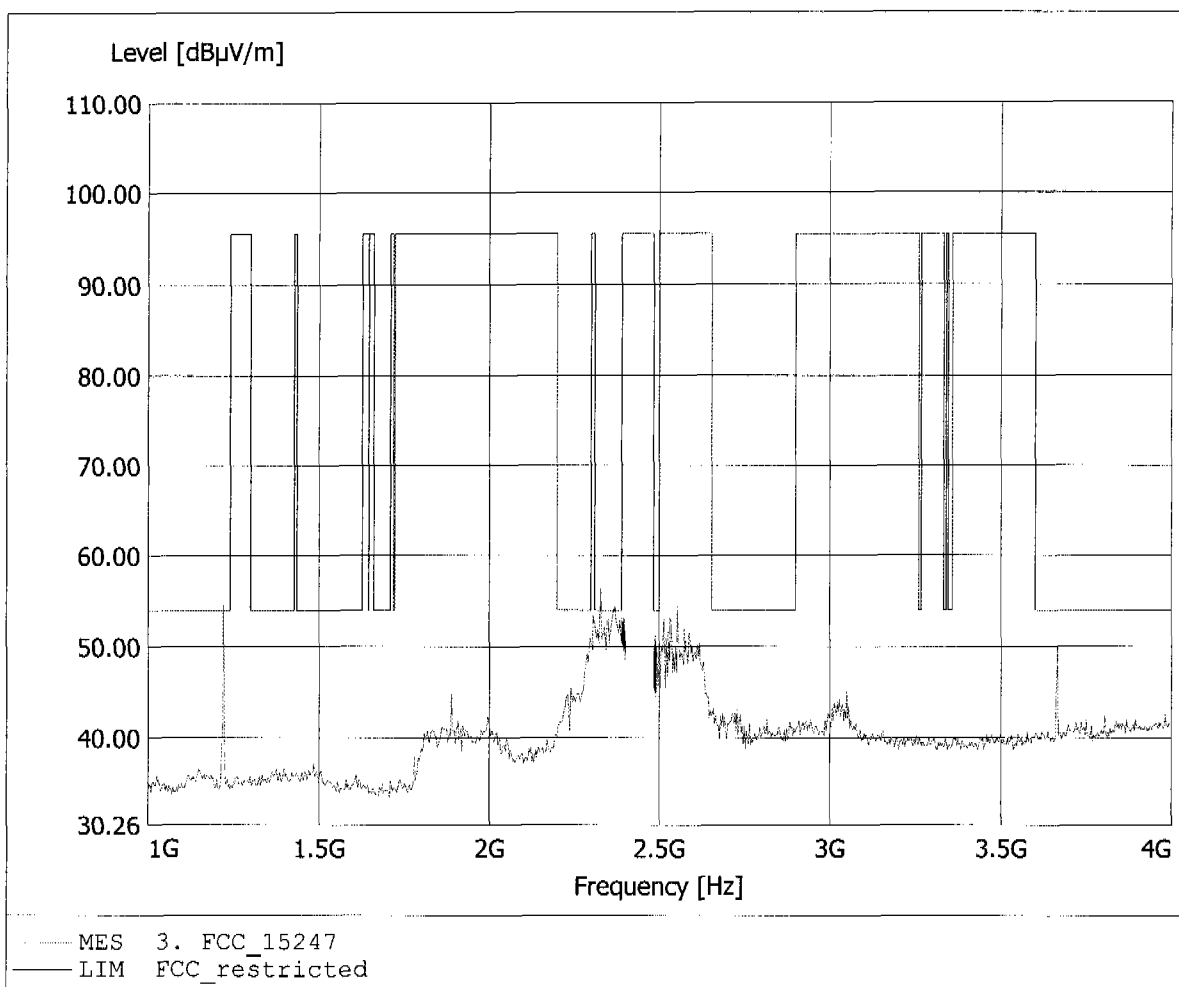


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.329GHz, Emax: 56.35dBµV/m, RBW: 1MHz

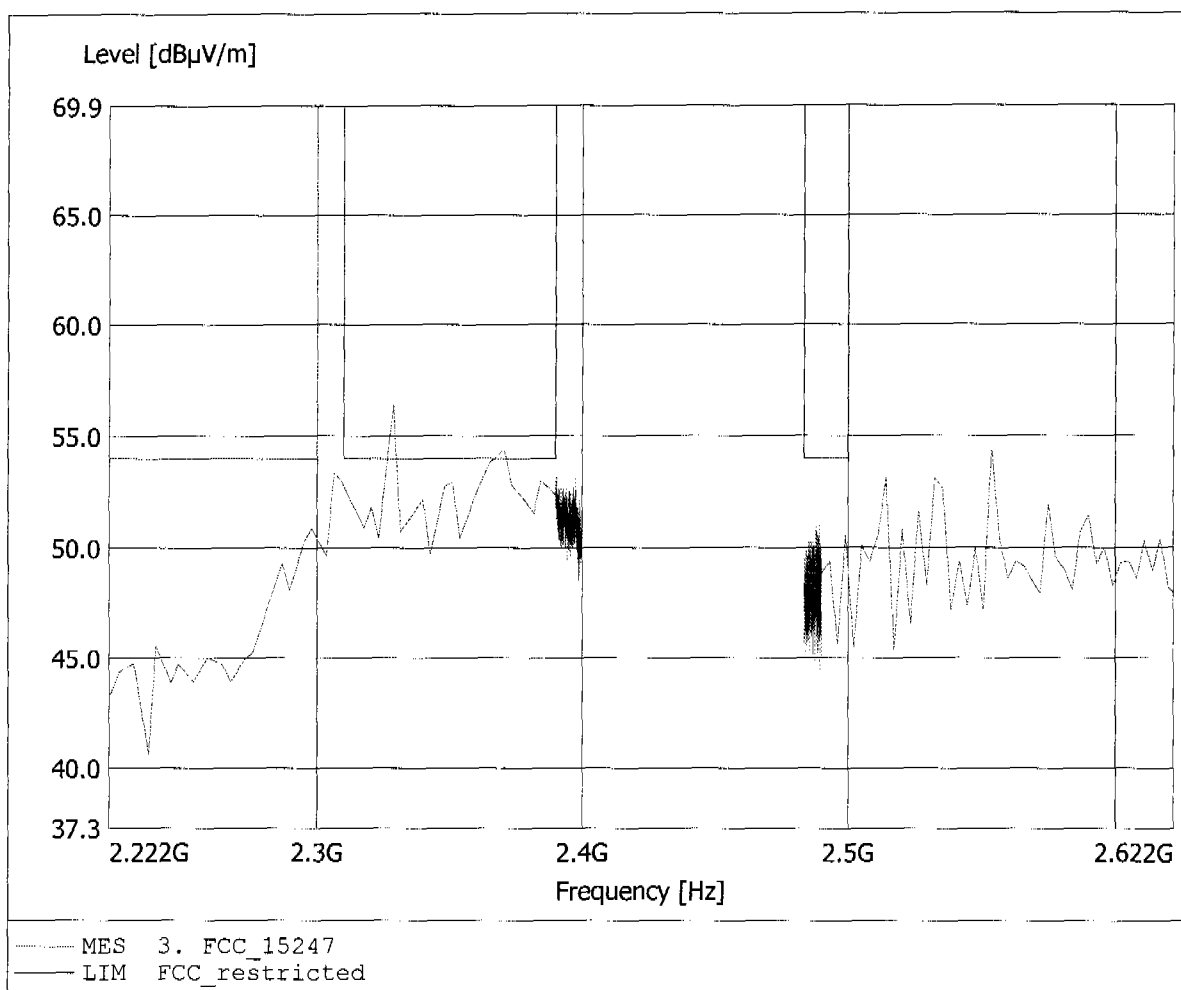


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.220GHz, Emax: 48.32dBµV/m, RBW: 1MHz

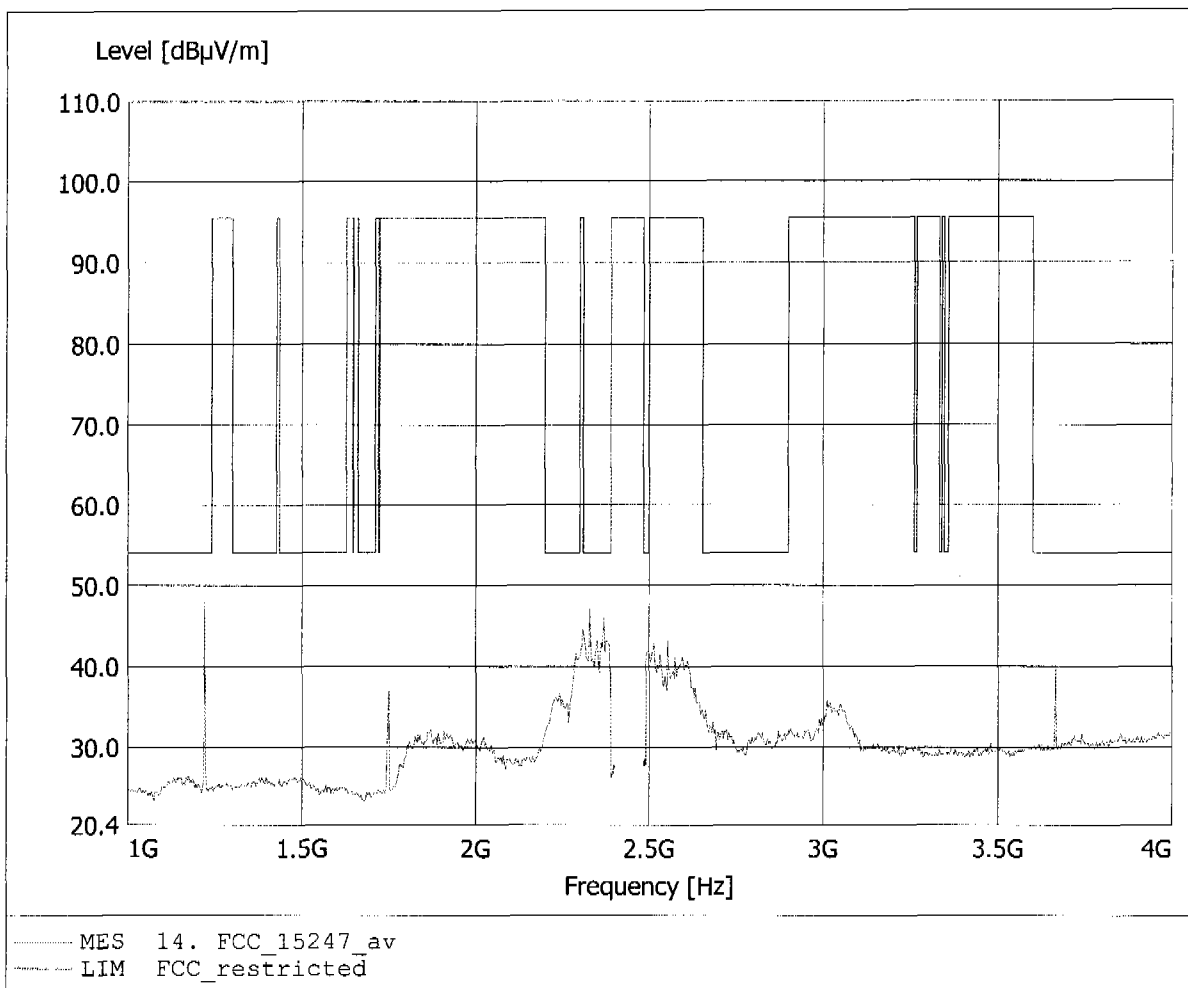


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 53.20dBuV/m, RBW: 1MHz

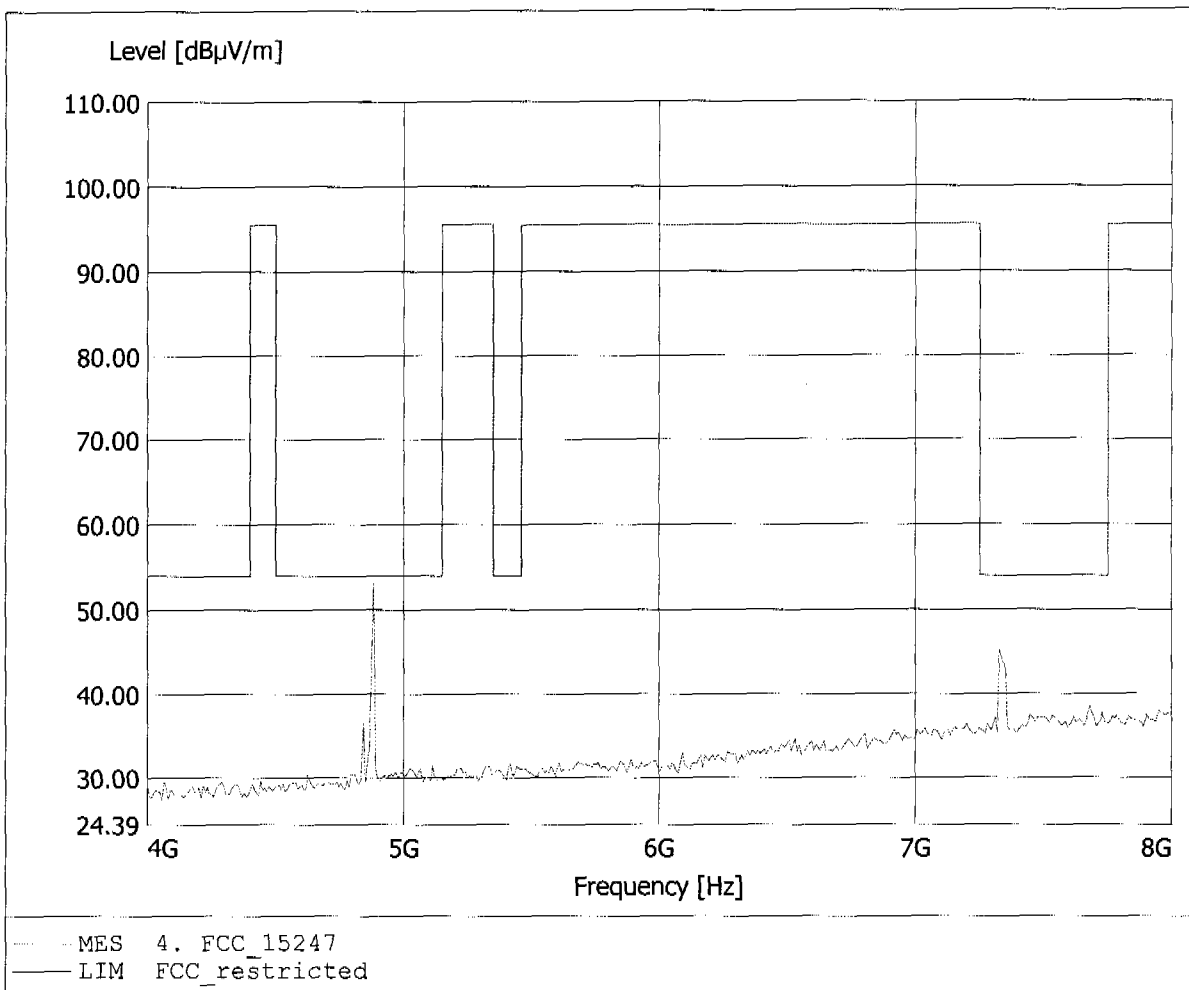


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 60.10dBµV/m, RBW: 1MHz

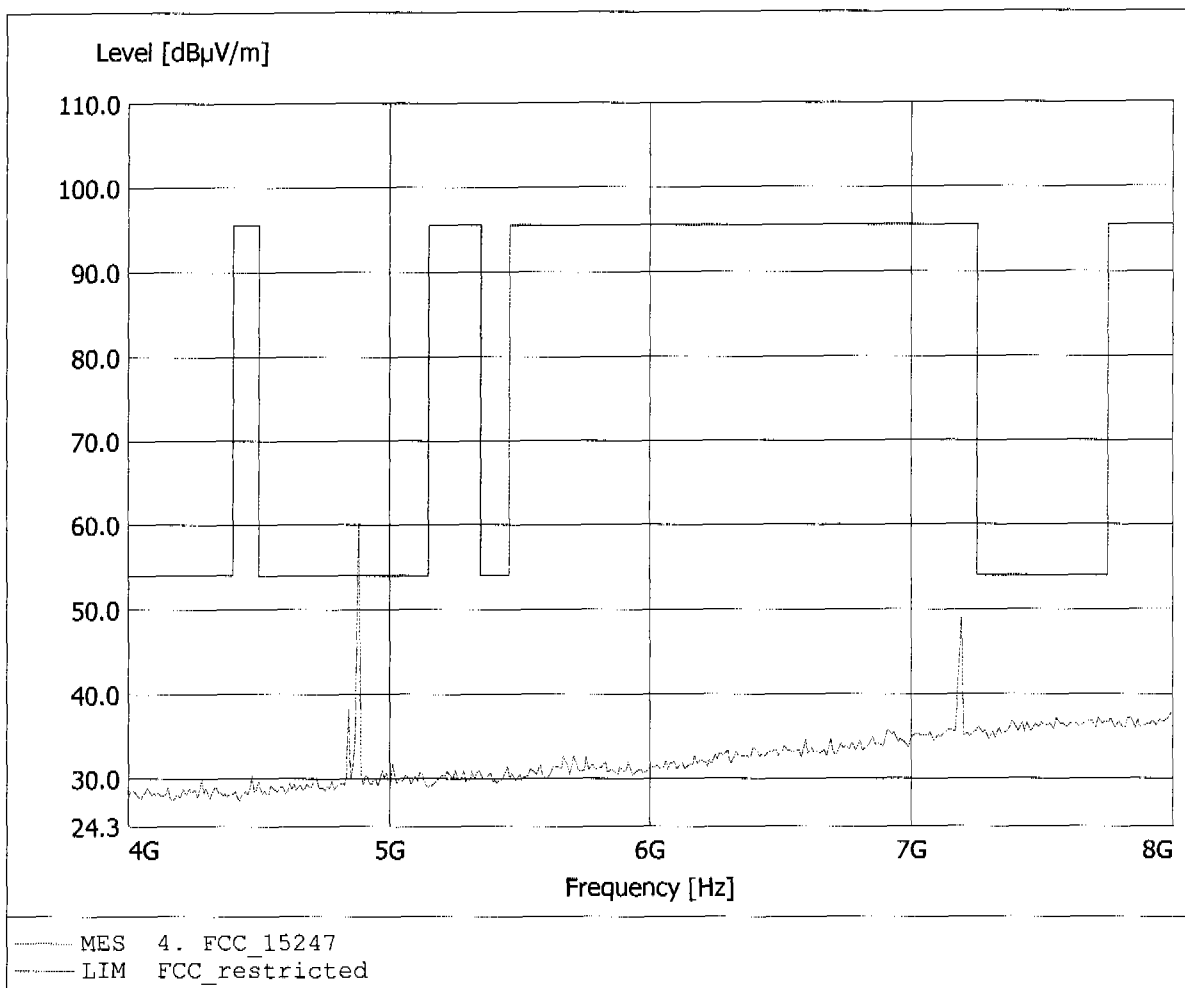


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.327GHz, Emax: 29.02dBuV/m, RBW: 1MHz

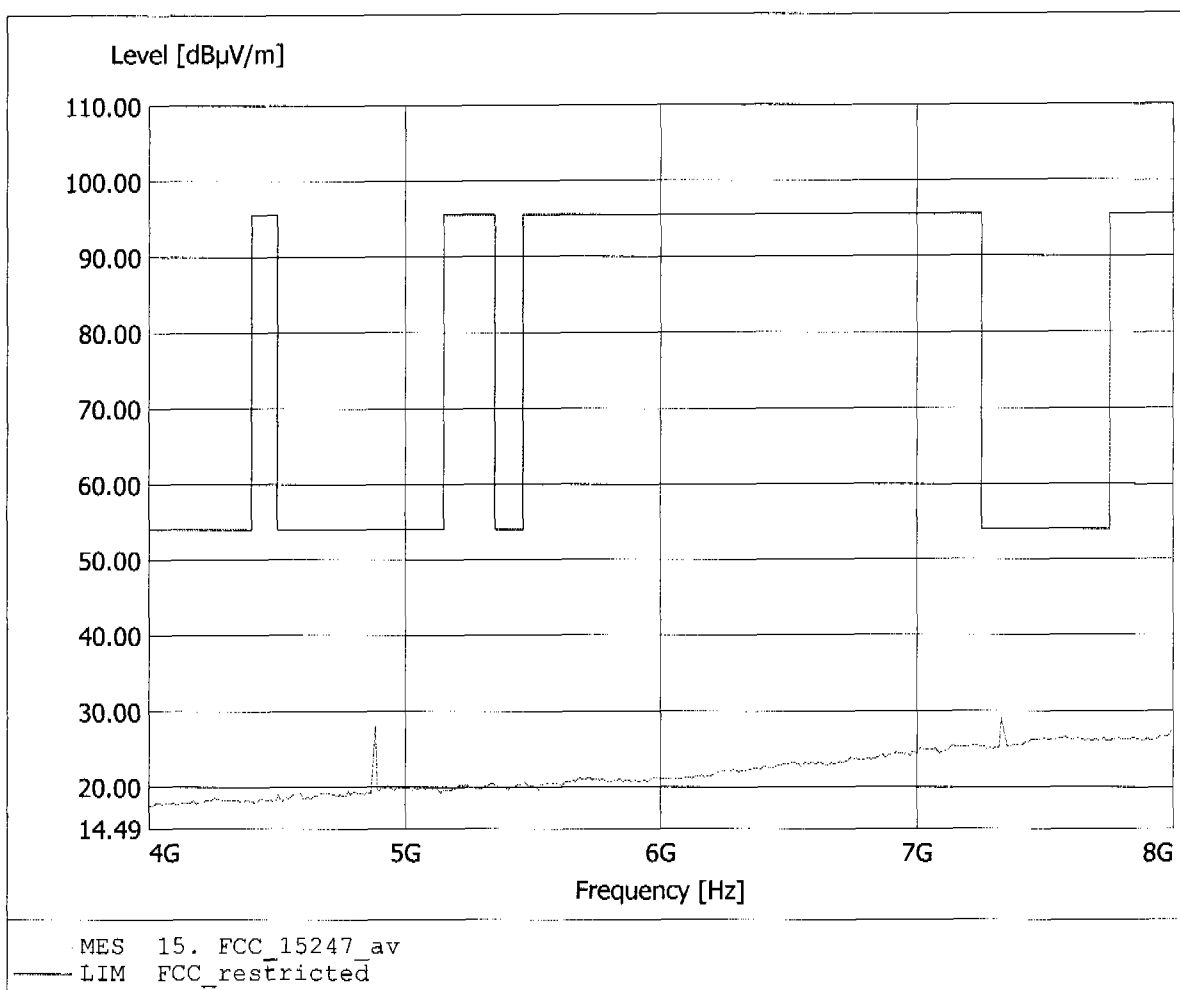


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.206GHz, Emax: 42.68dBuV/m, RBW: 1MHz

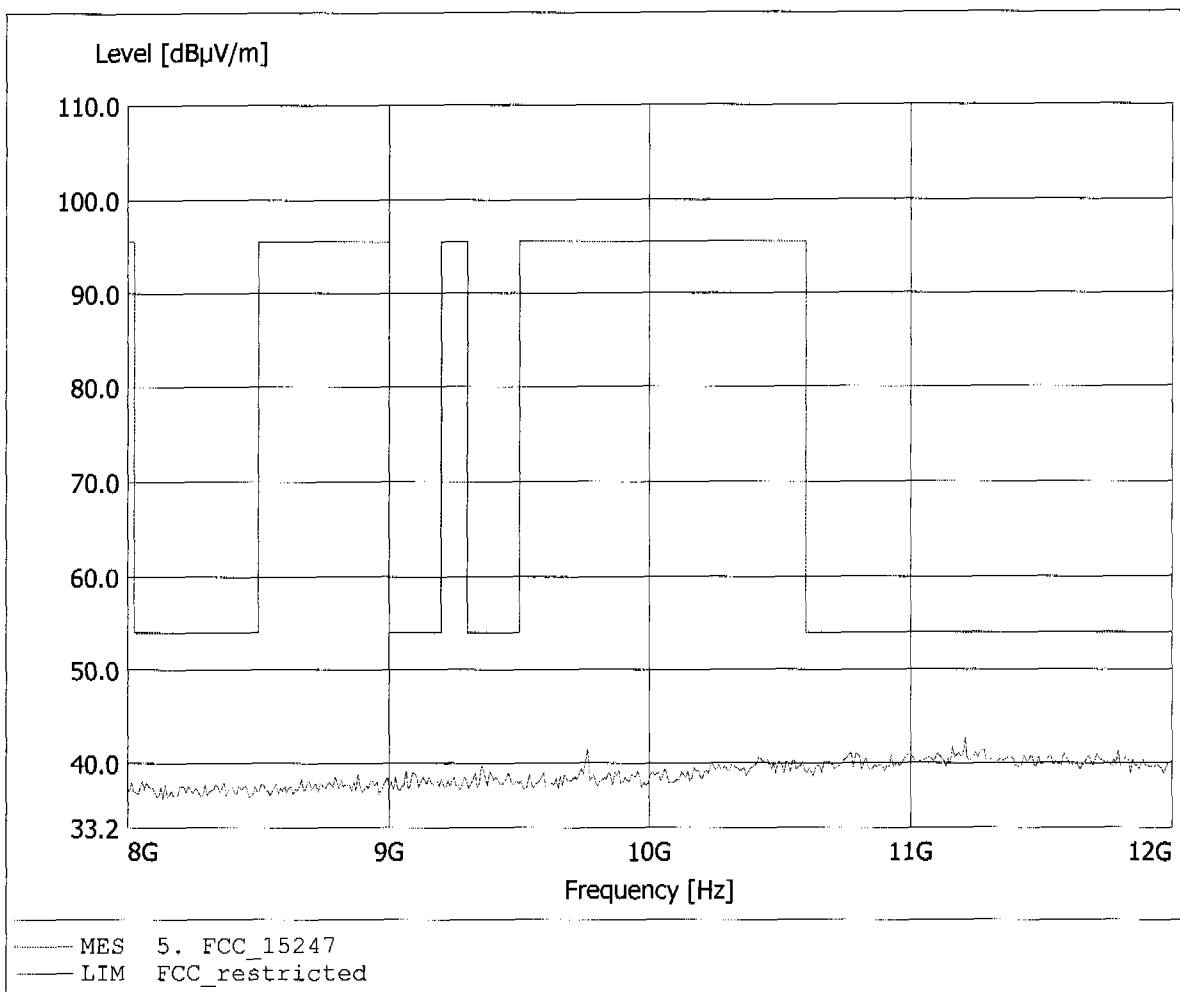


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 44.73dBµV/m, RBW: 1MHz

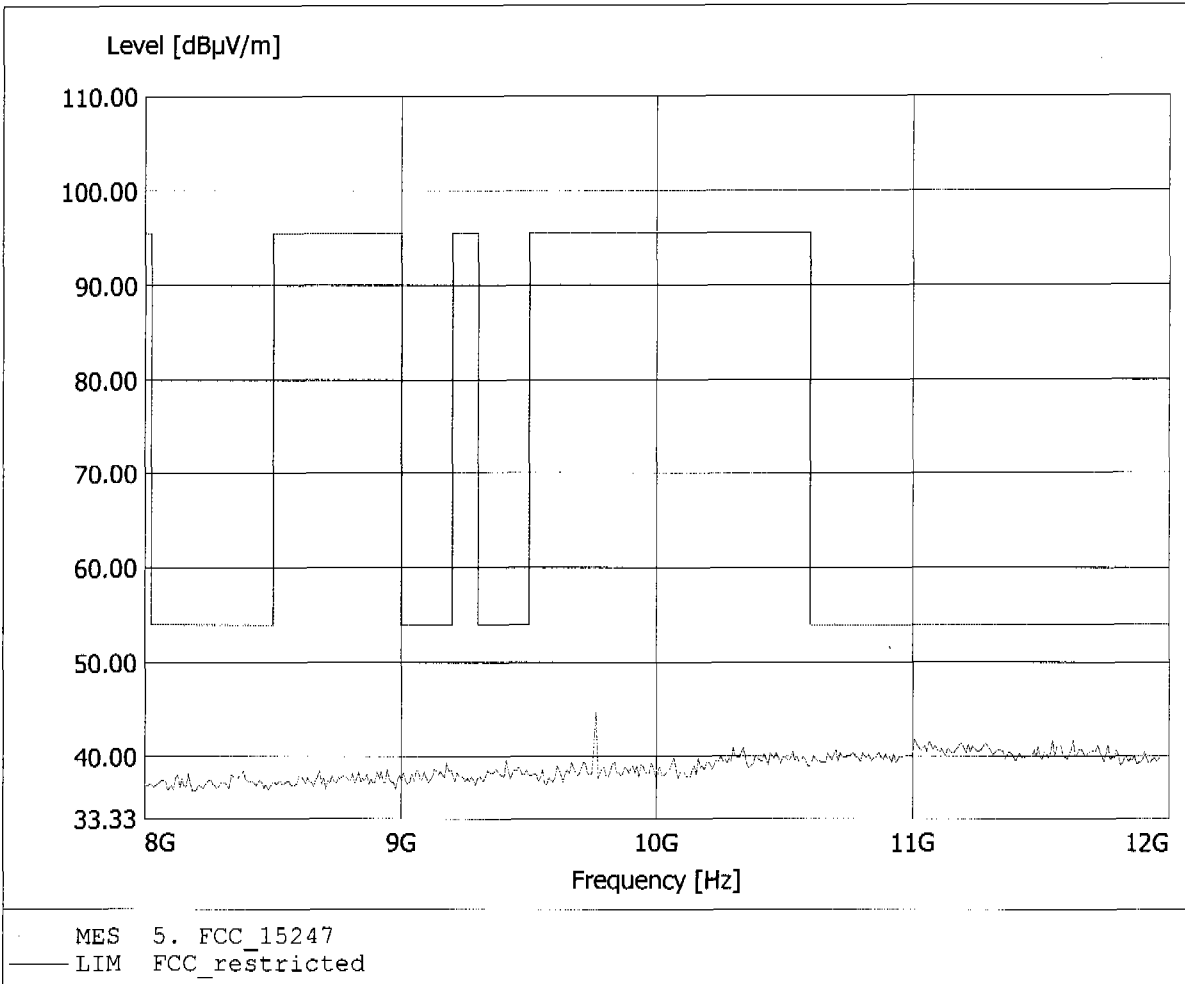


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.200GHz, Emax: 49.75dBµV/m, RBW: 1MHz

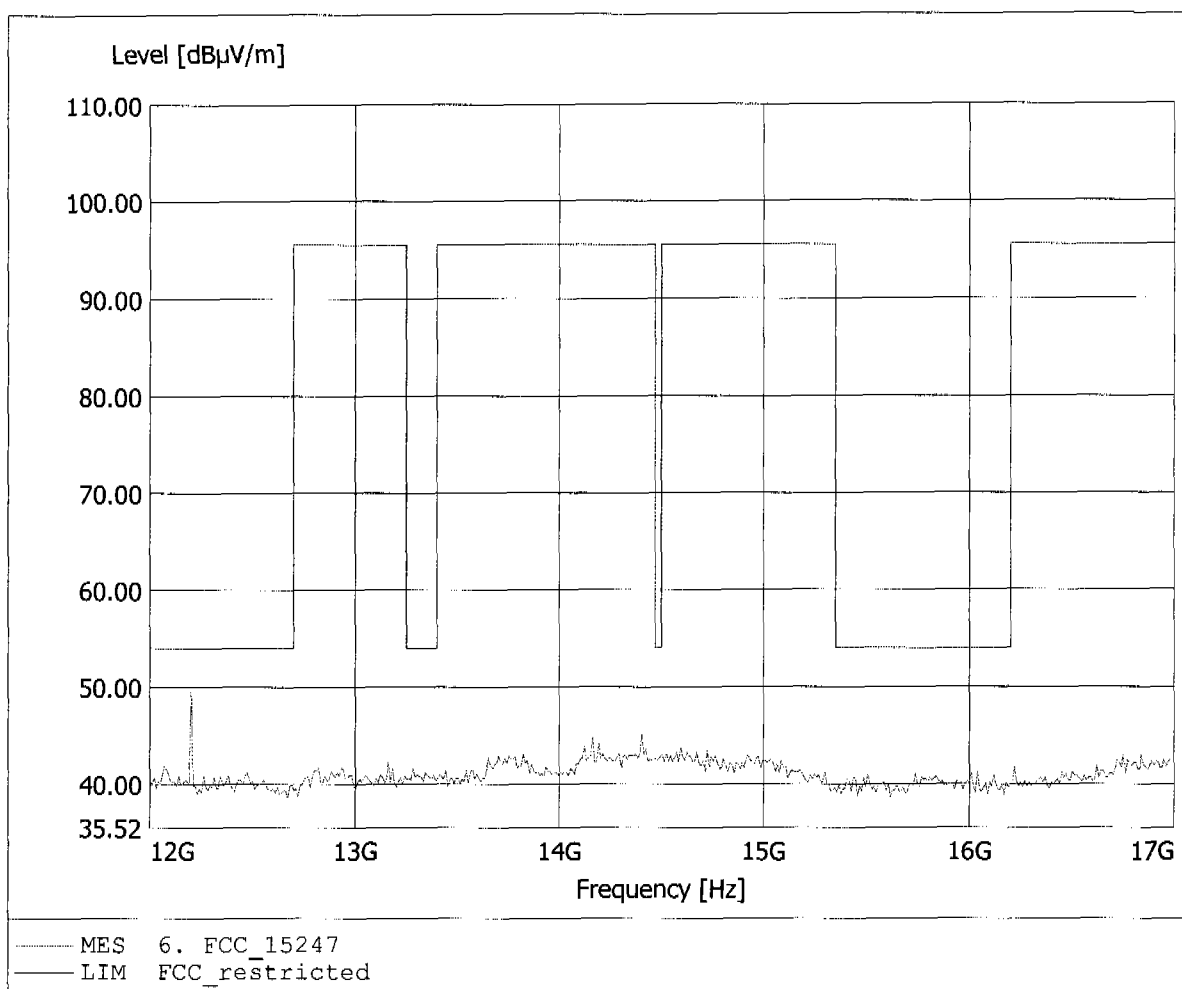


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.200GHz, Emax: 52.25dBµV/m, RBW: 1MHz

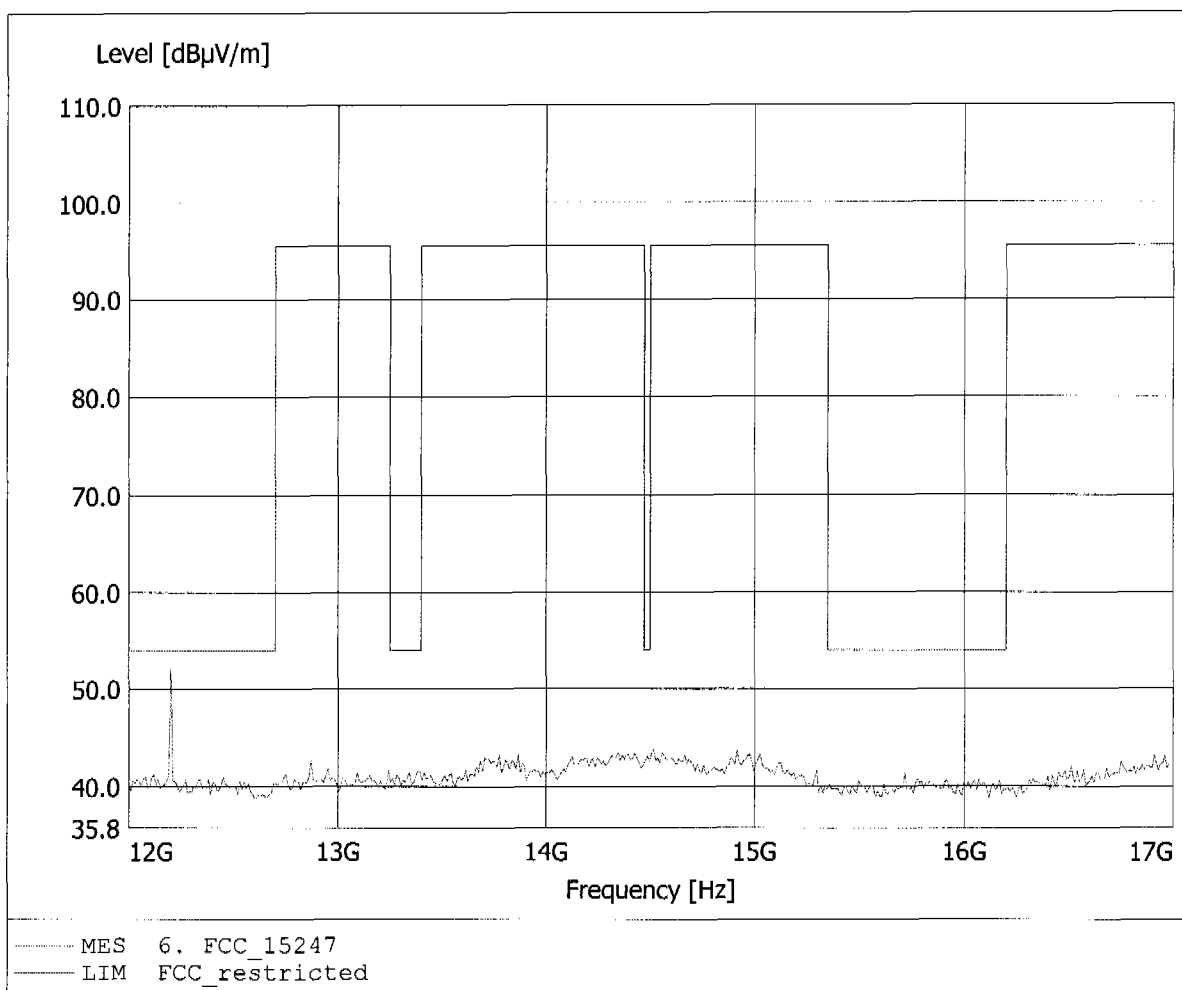


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 44.02dBµV/m, RBW: 1MHz

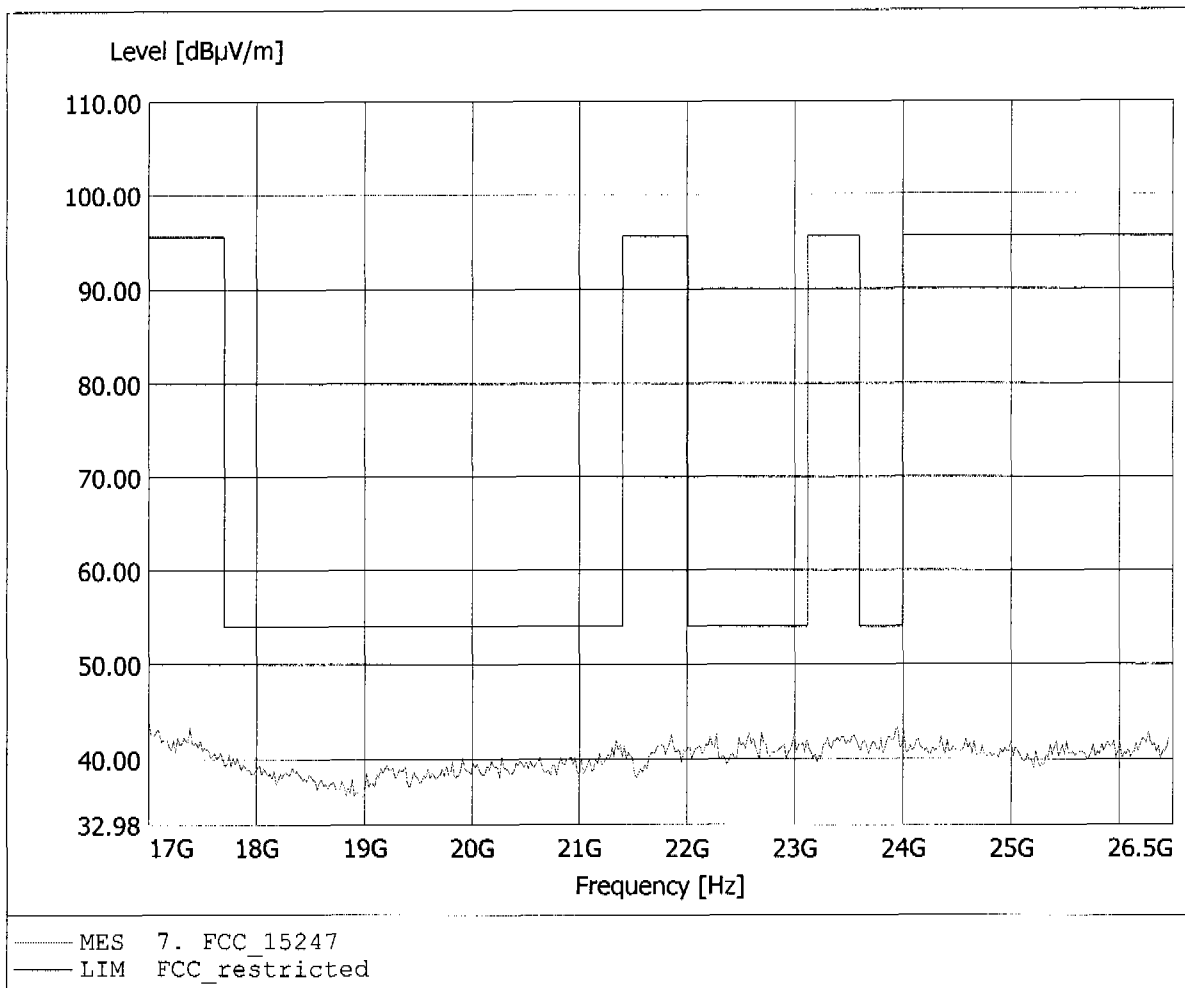


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
 Model: DW800 wireless system / Headset
 Approval Holder: Sennheiser Communications
 Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
 Test Site / Operator: ETS / Mr. Handrik
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: HL025, amplif.
 Comment 2: Freq: 17.019GHz, Emax: 43.92dBµV/m, RBW: 1MHz

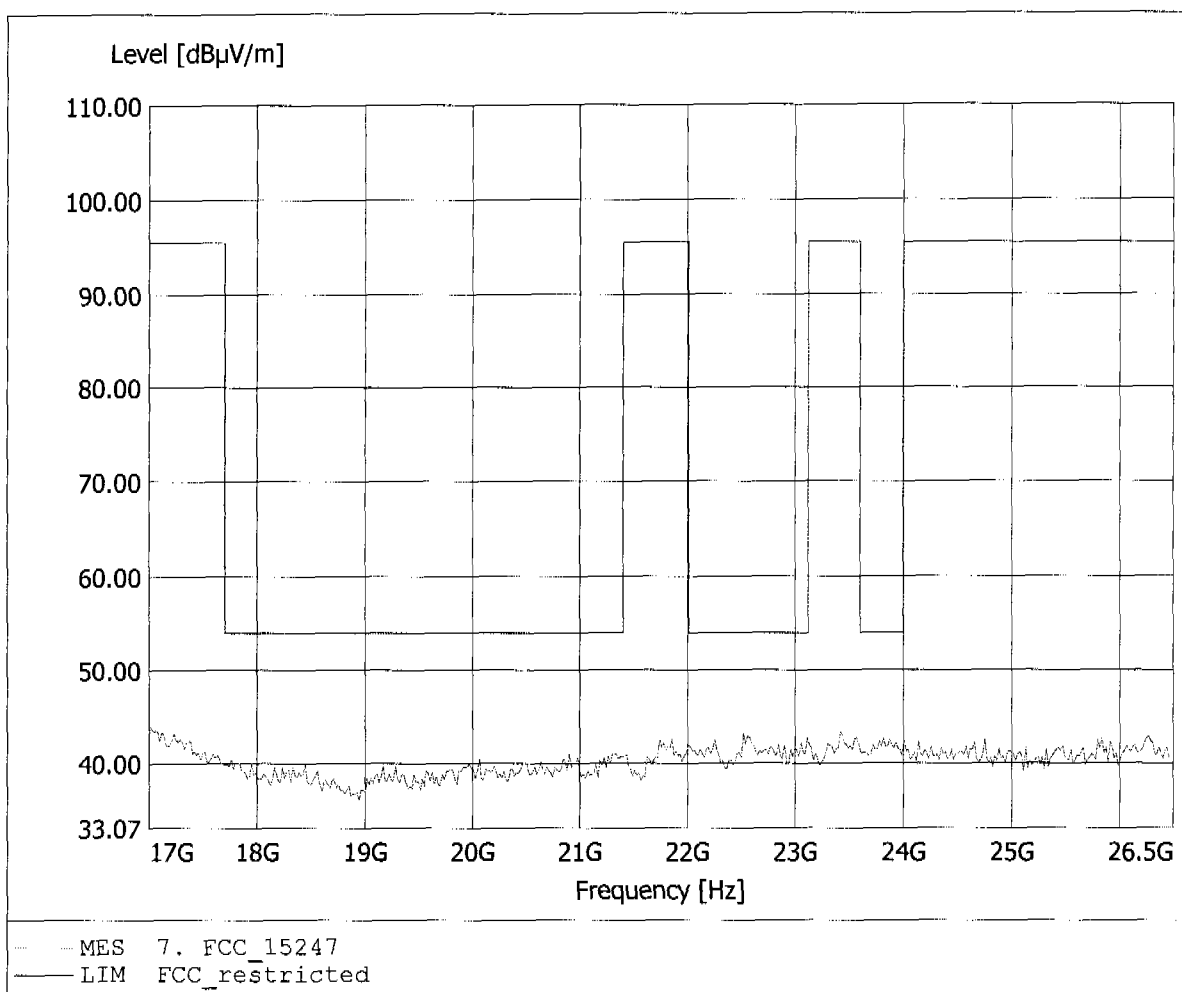


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 176.834MHz, Emax: 31.45dBµV/m, RBW: 100kHz

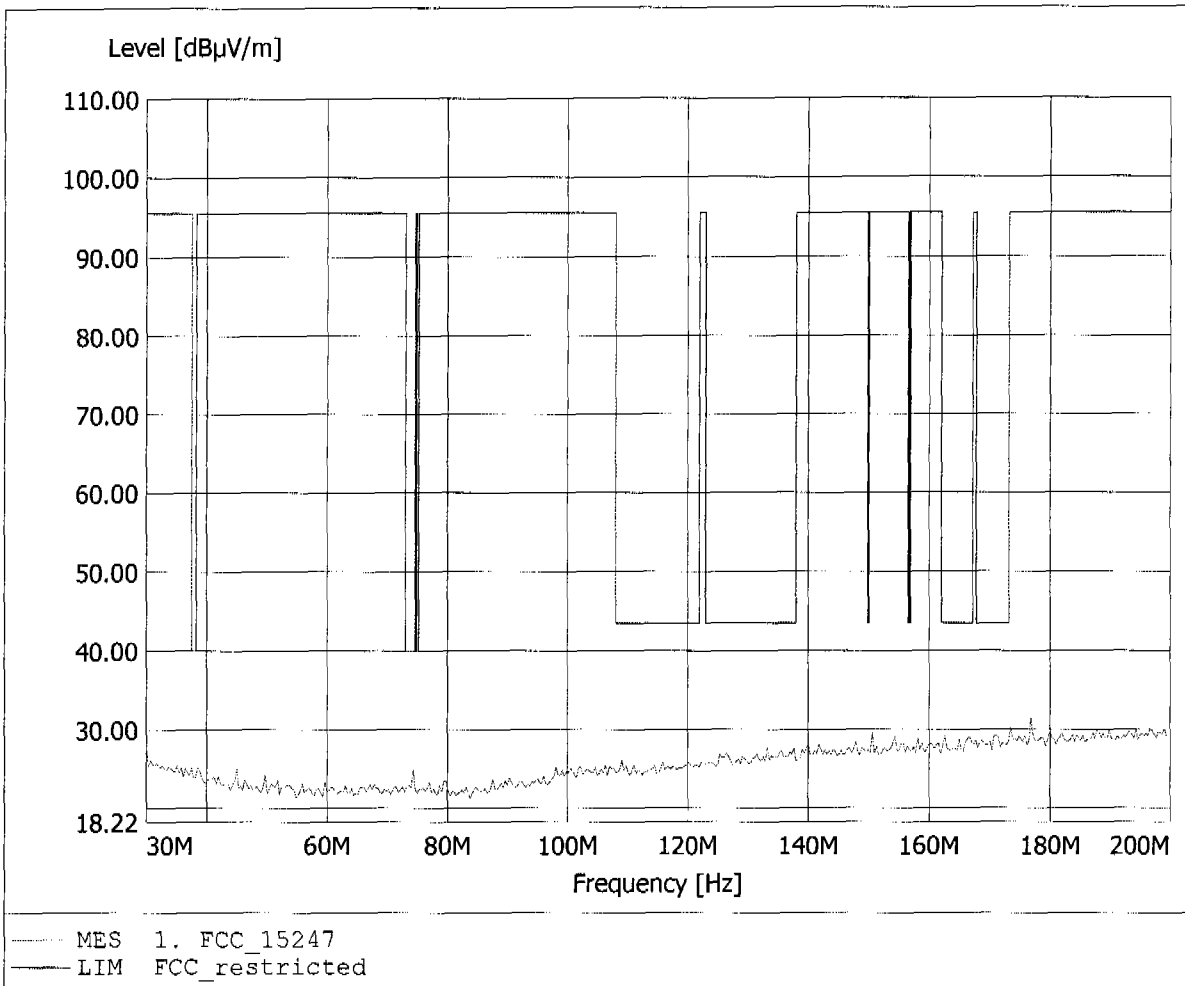


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.637MHz, Emax: 30.67dBµV/m, RBW: 100kHz

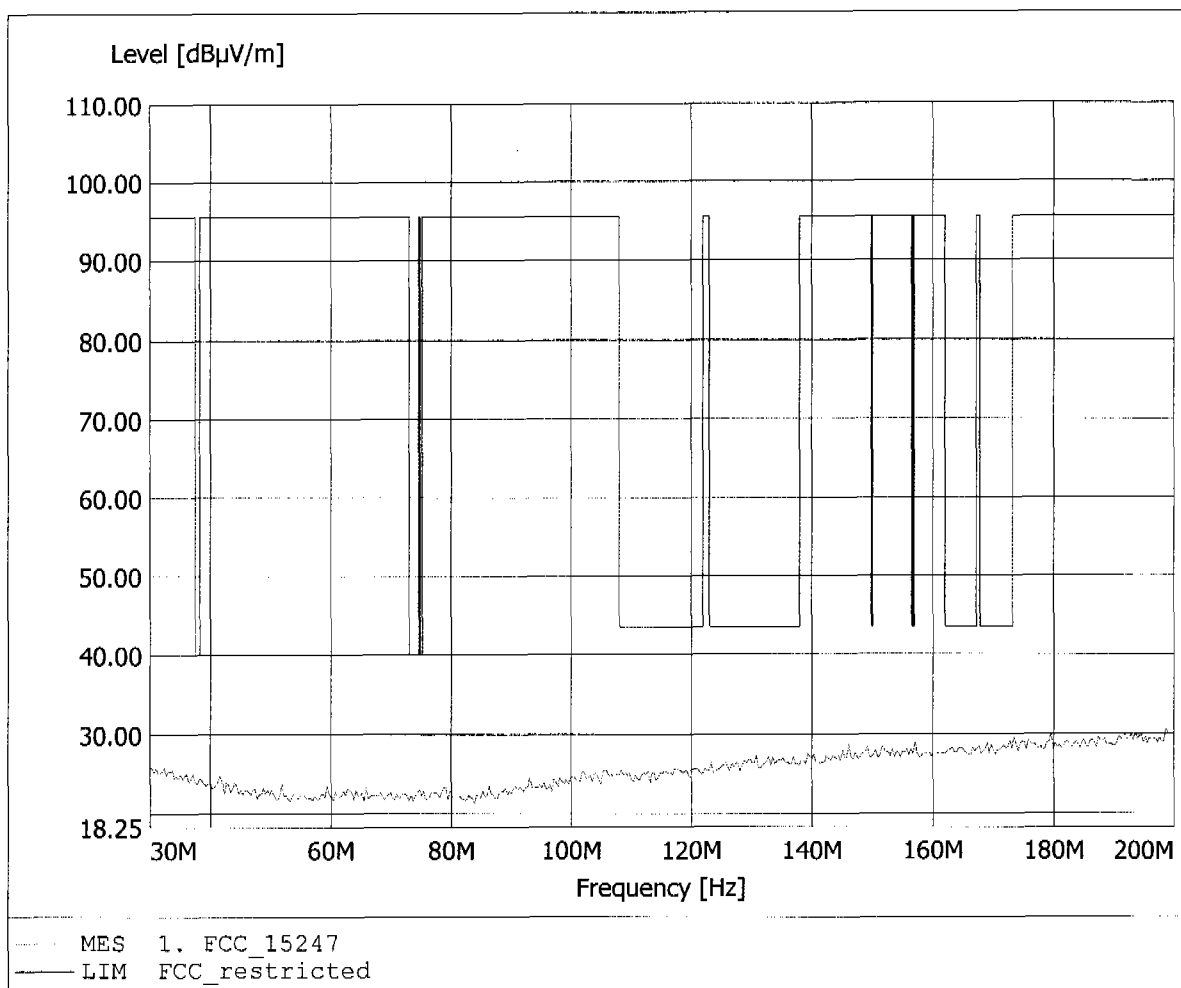


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 969.539MHz, Emax: 21.77dBµV/m, RBW: 100kHz

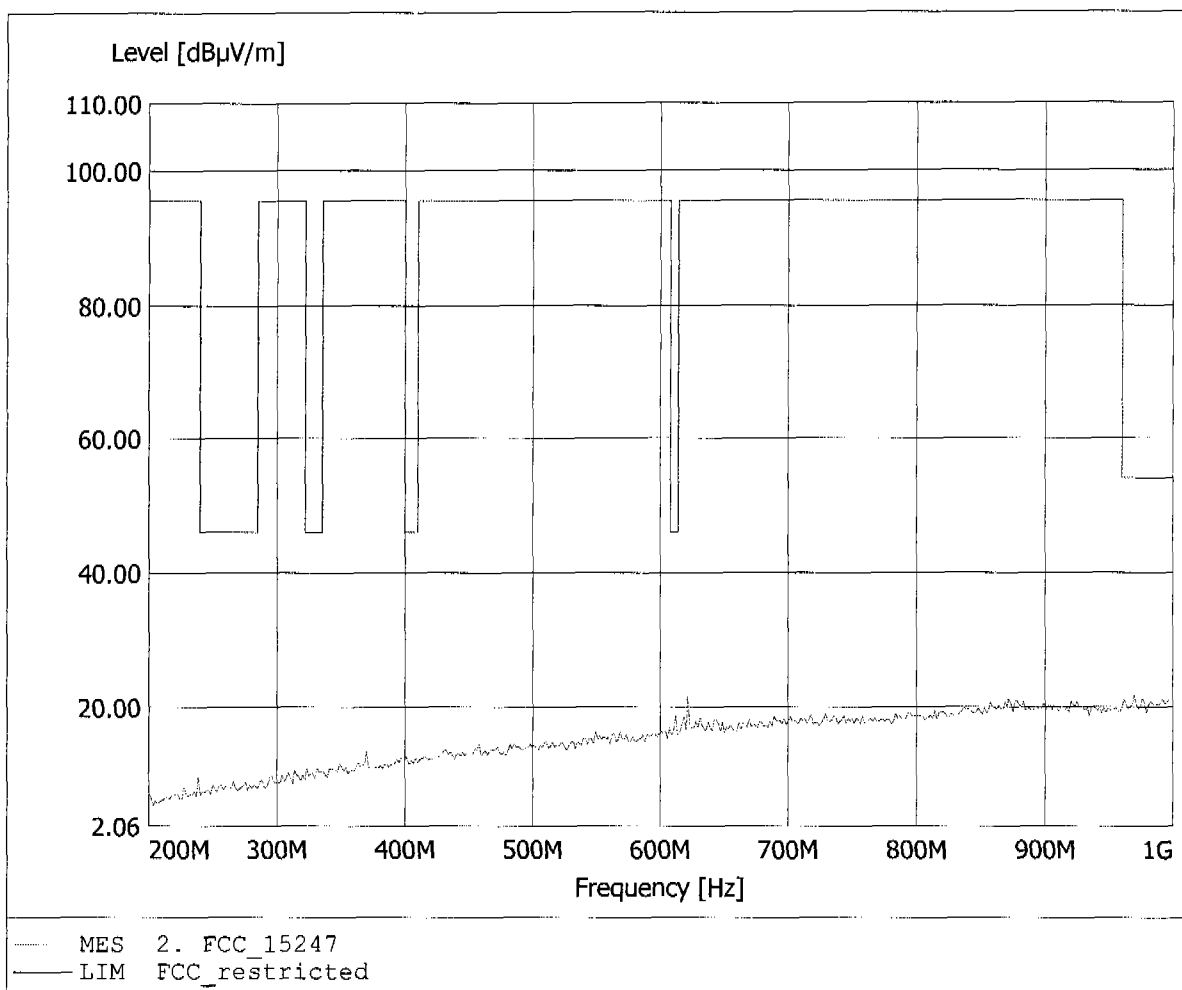


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 980.762MHz, Emax: 21.42dBµV/m, RBW: 100kHz

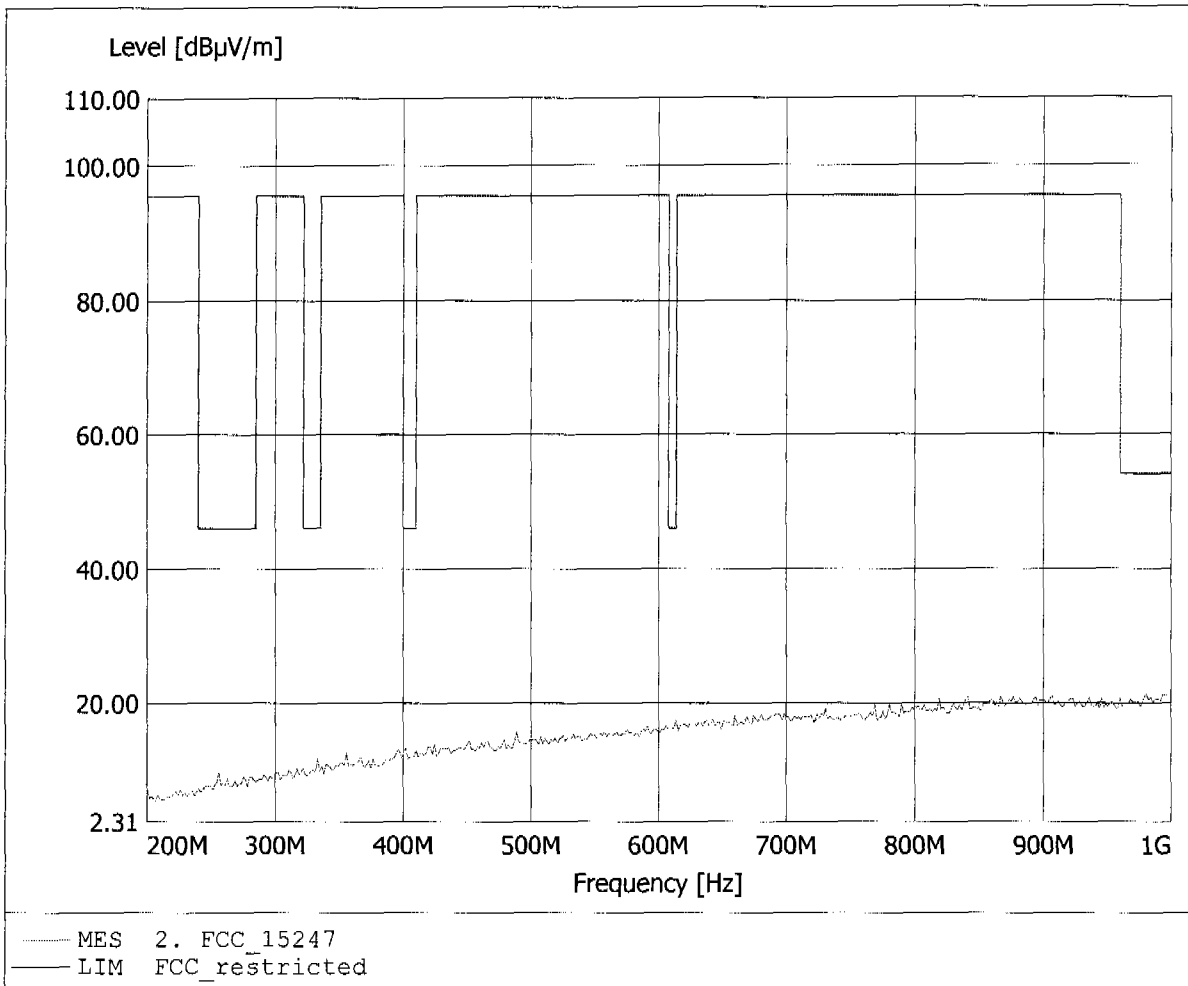

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**


EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 99.92dBµV/m, RBW: 1MHz

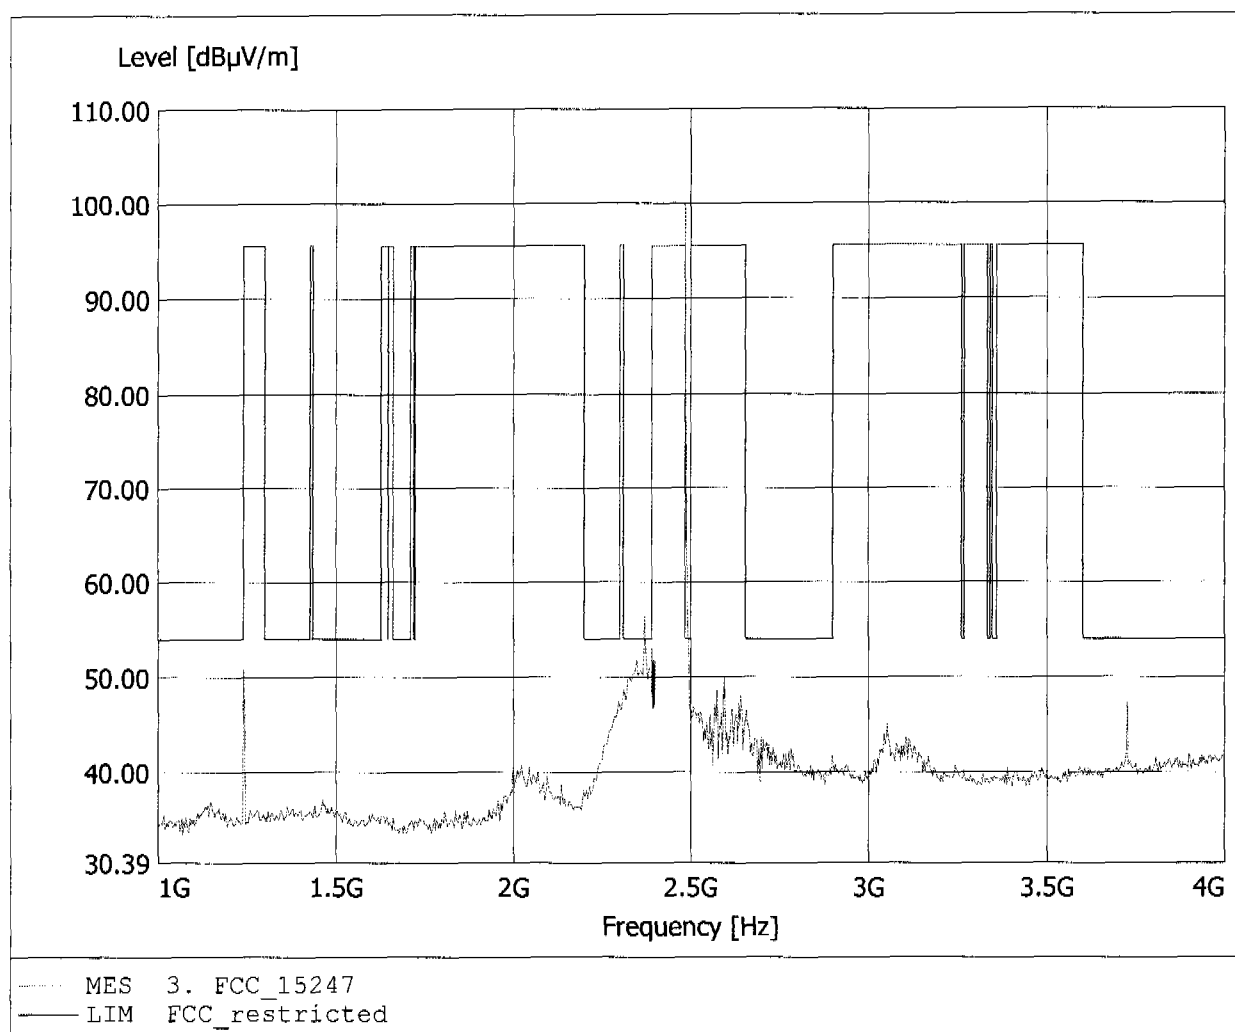

DA 00-705 / Marker Delta-Method:
The value measured with average detector may be reduced by the "delta" value according to Marker-Dela Method plot.
Please see pages 2 and 3 of appendix C and pages 19-22 of TestRpt_1.


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 99.92dBµV/m, RBW: 1MHz

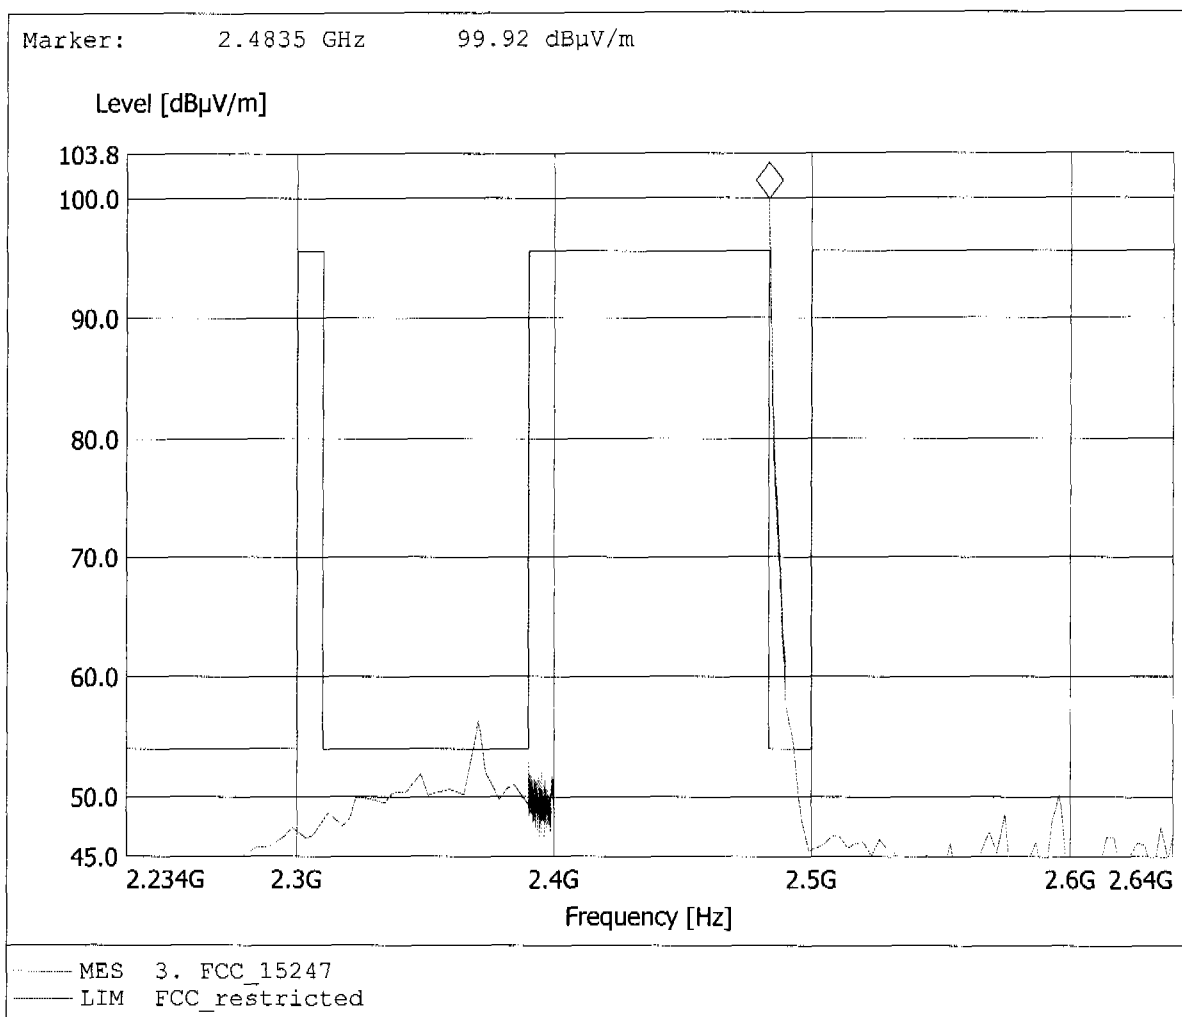

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**


EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 74.07dBµV/m, RBW: 1MHz

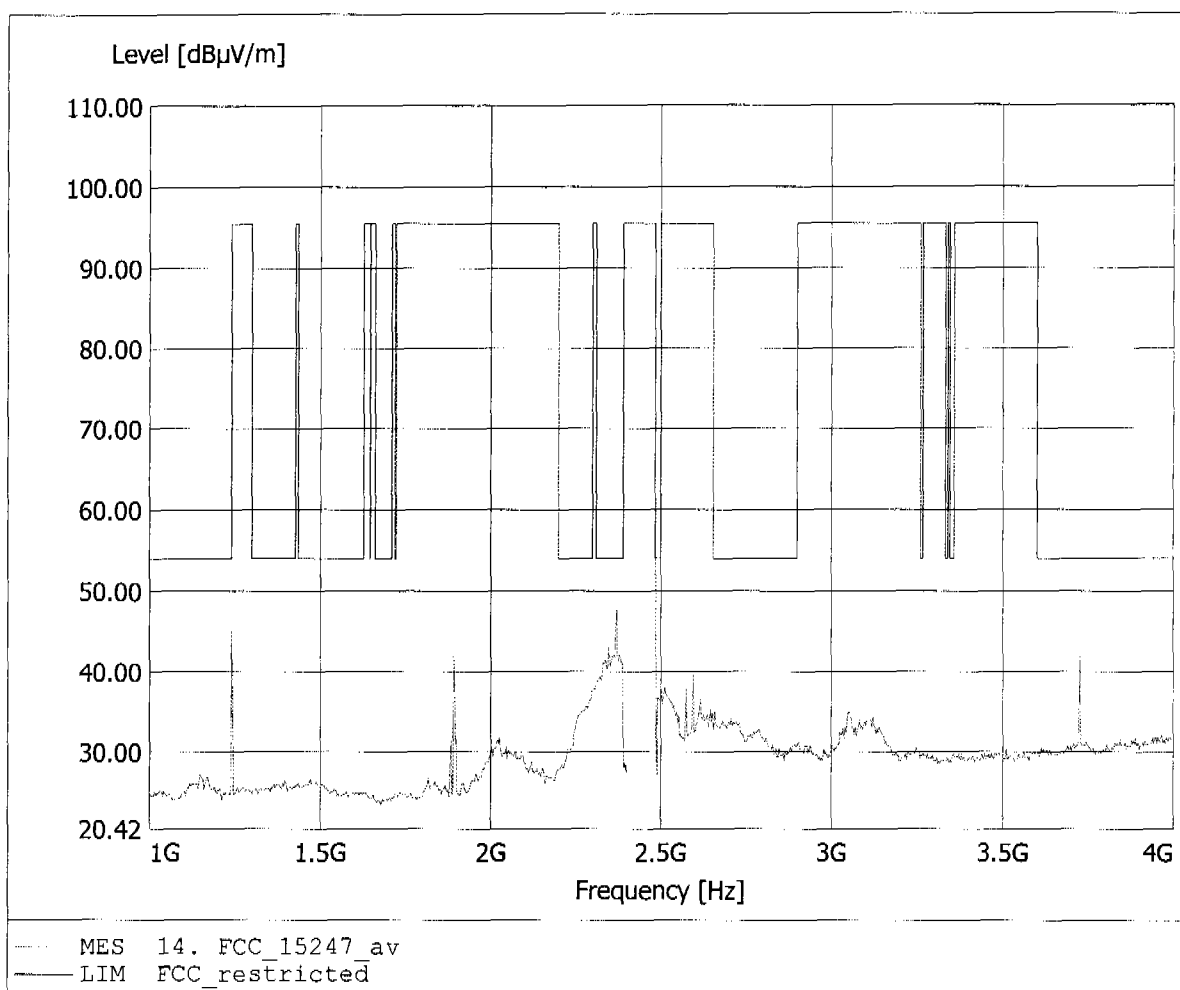

DA 00-705 / Marker Delta-Method:
The value measured with average detector may be reduced by the "delta" value according to Marker-Dela Method plot. Please see pages 2 and 3 of appendix C and pages 19-22 of TestRpt_1.


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 74.07dBµV/m, RBW: 1MHz

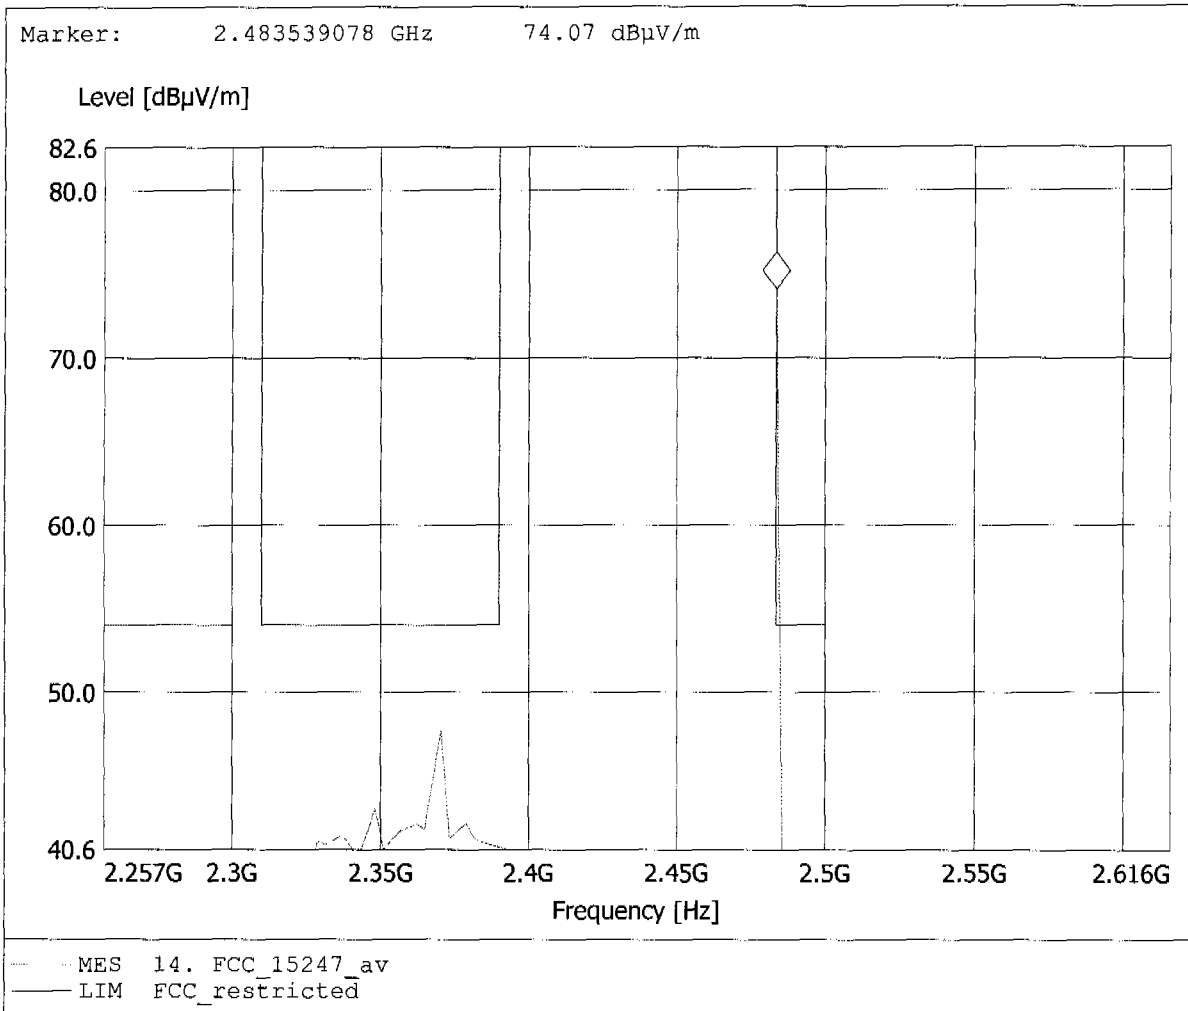

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**


EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 97.97dBµV/m, RBW: 1MHz

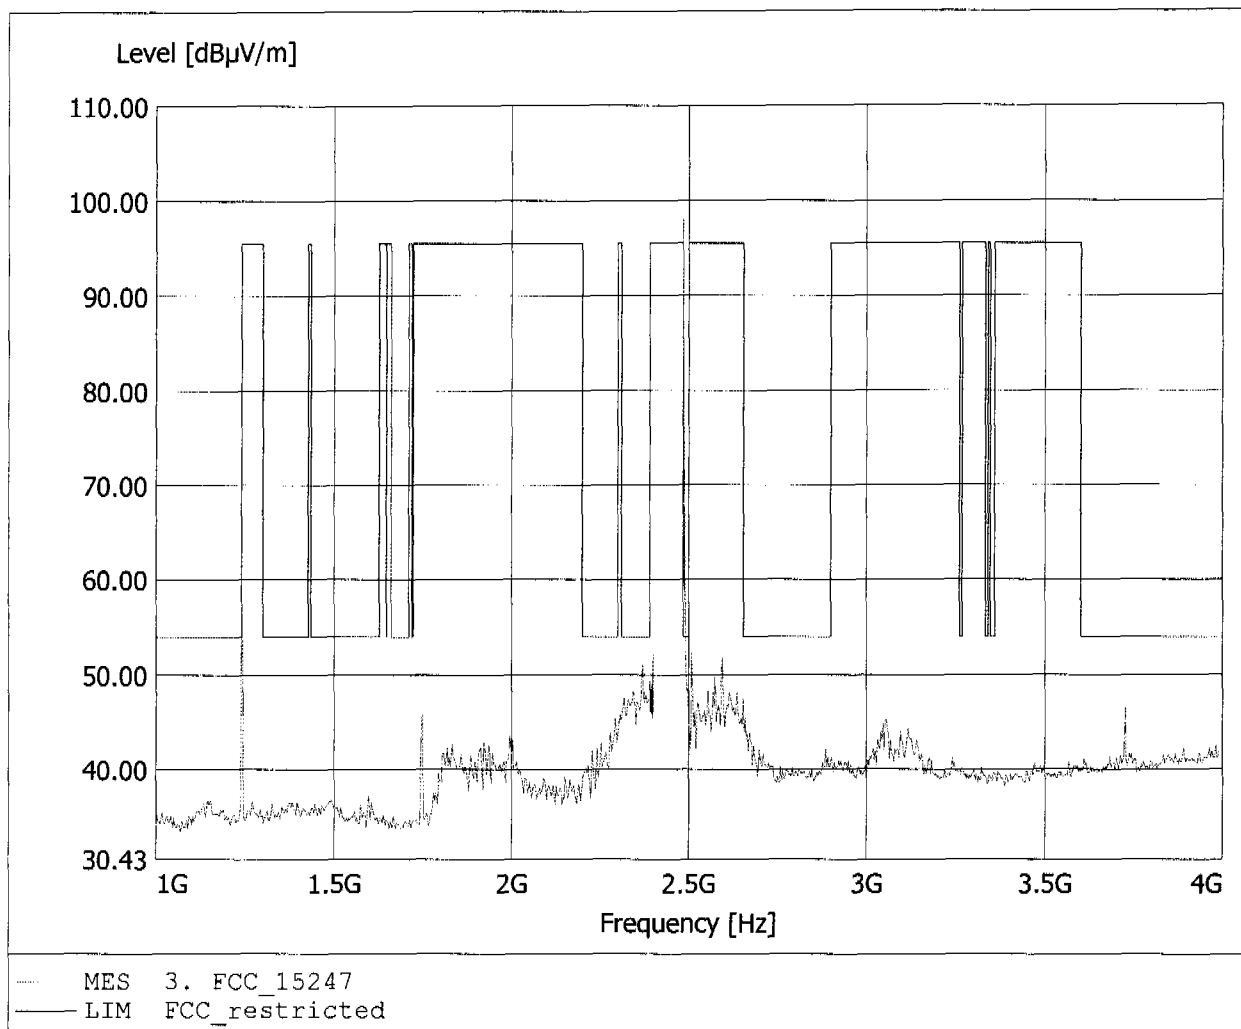

DA 00-705 / Marker Delta-Method:
The value measured with average detector may be reduced by the "delta" value according to Marker-Dela Method plot. Please see pages 2 and 3 of appendix C and pages 19-22 of TestRpt_1.


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 97.97dBµV/m, RBW: 1MHz

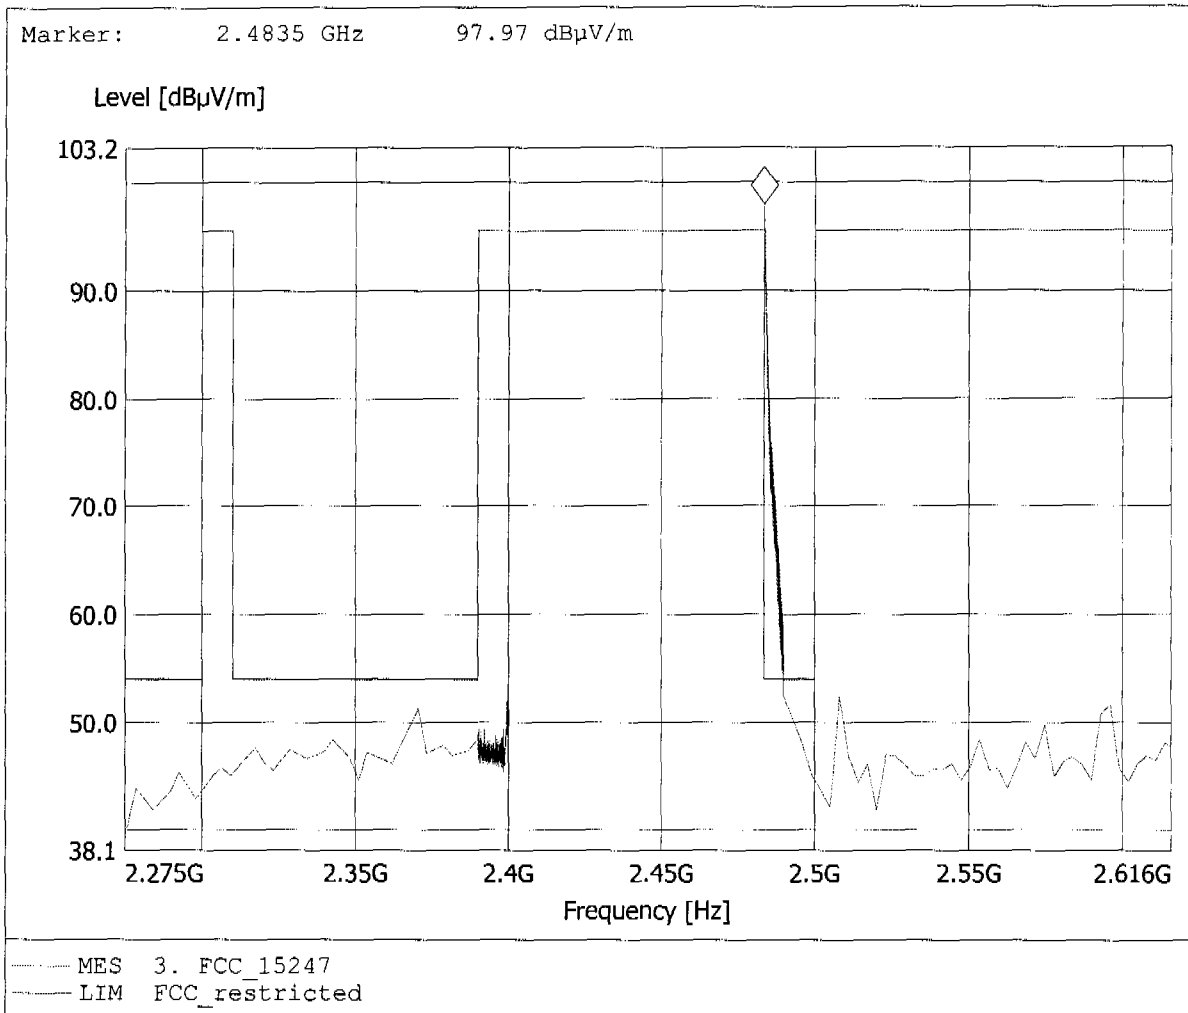

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 72.83dBµV/m, RBW: 1MHz

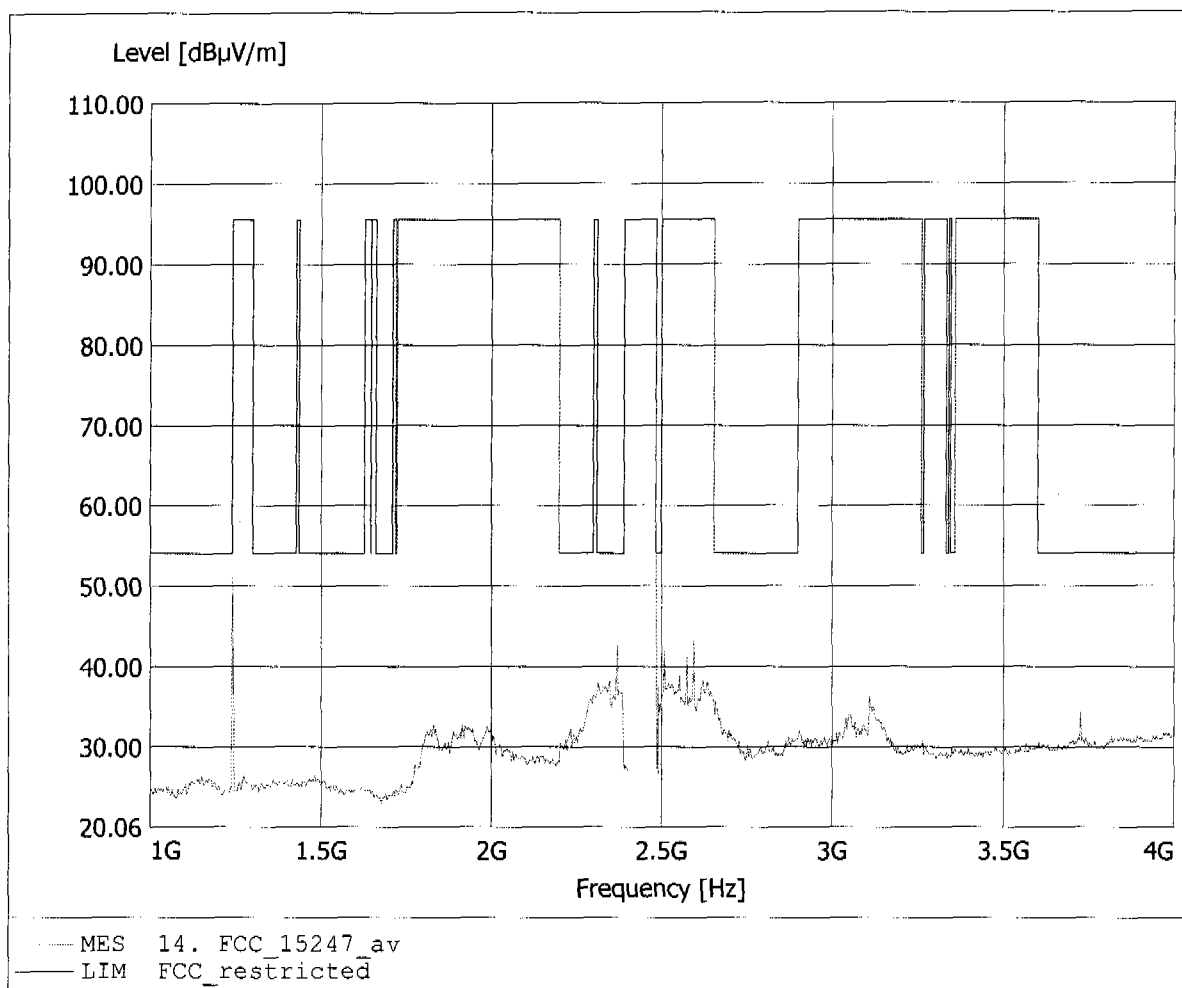


DA 00-705 / Marker Delta-Method:

The value measured with average detector may be reduced by the "delta" value according to Marker-Dela Method plot. Please see pages 2 and 3 of appendix C and pages 19-22 of TestRpt_1.


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 72.83dBµV/m, RBW: 1MHz

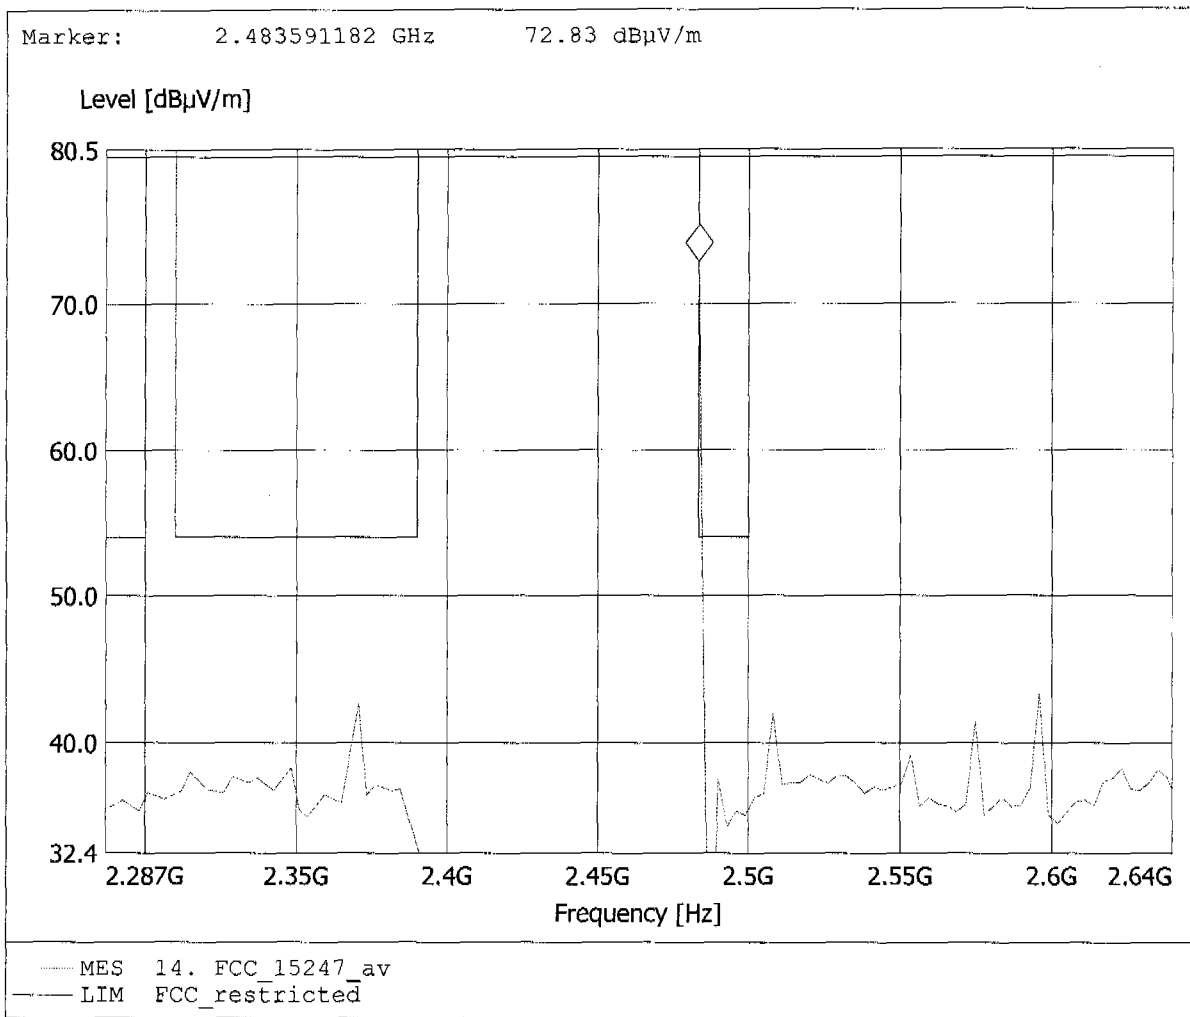


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 52.72dBµV/m, RBW: 1MHz

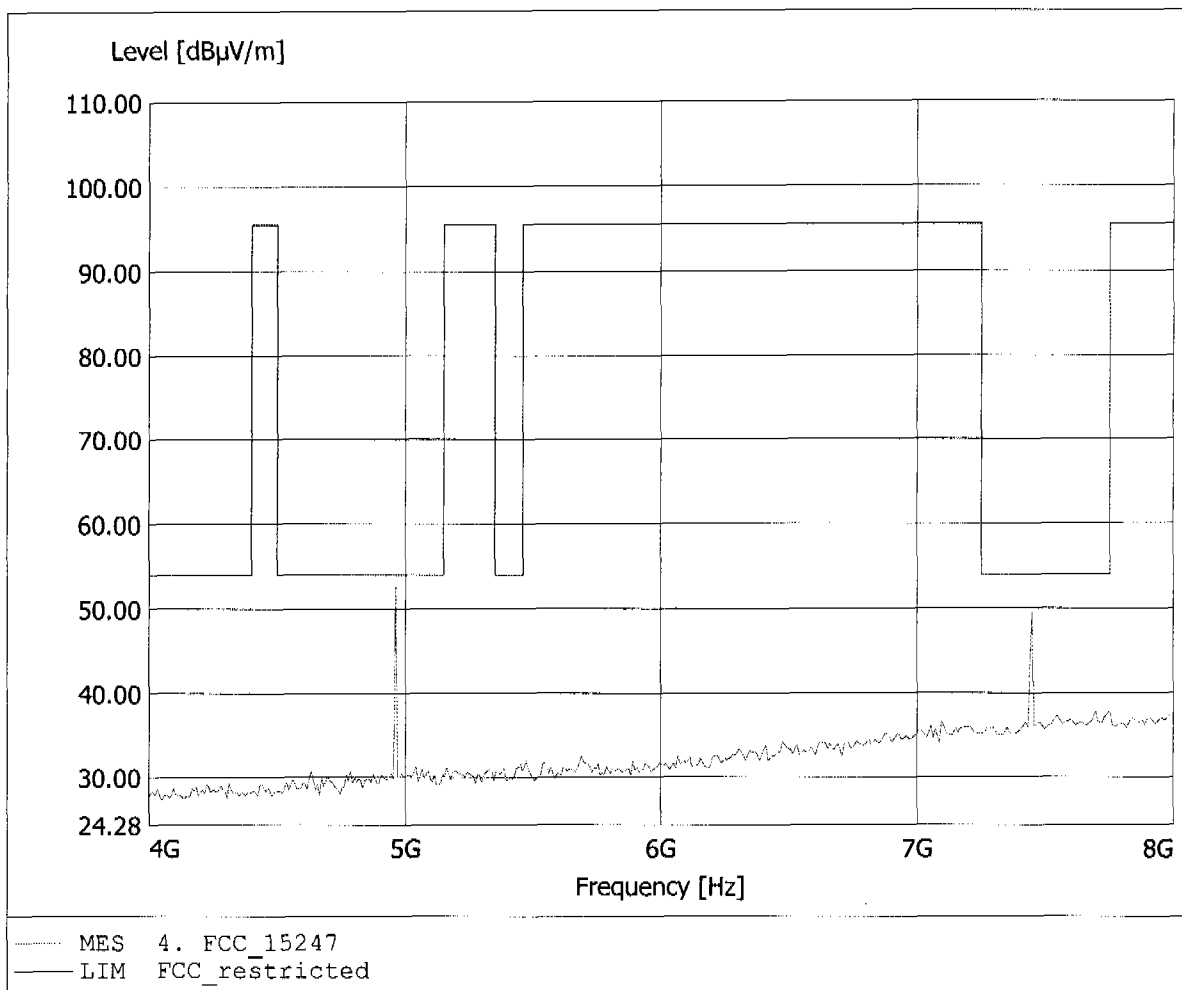


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 61.55dBuV/m, RBW: 1MHz

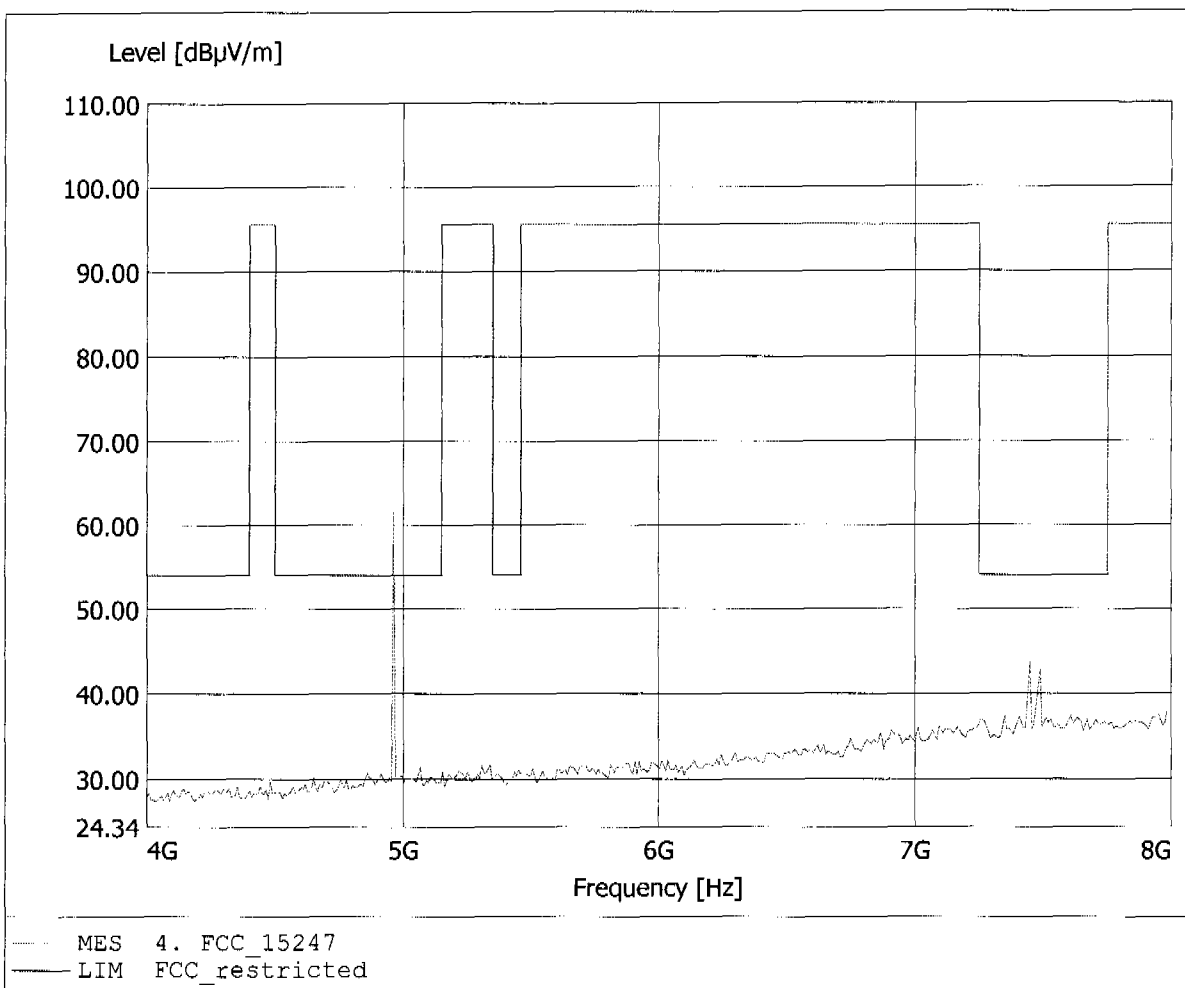


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 33.18dBµV/m, RBW: 1MHz

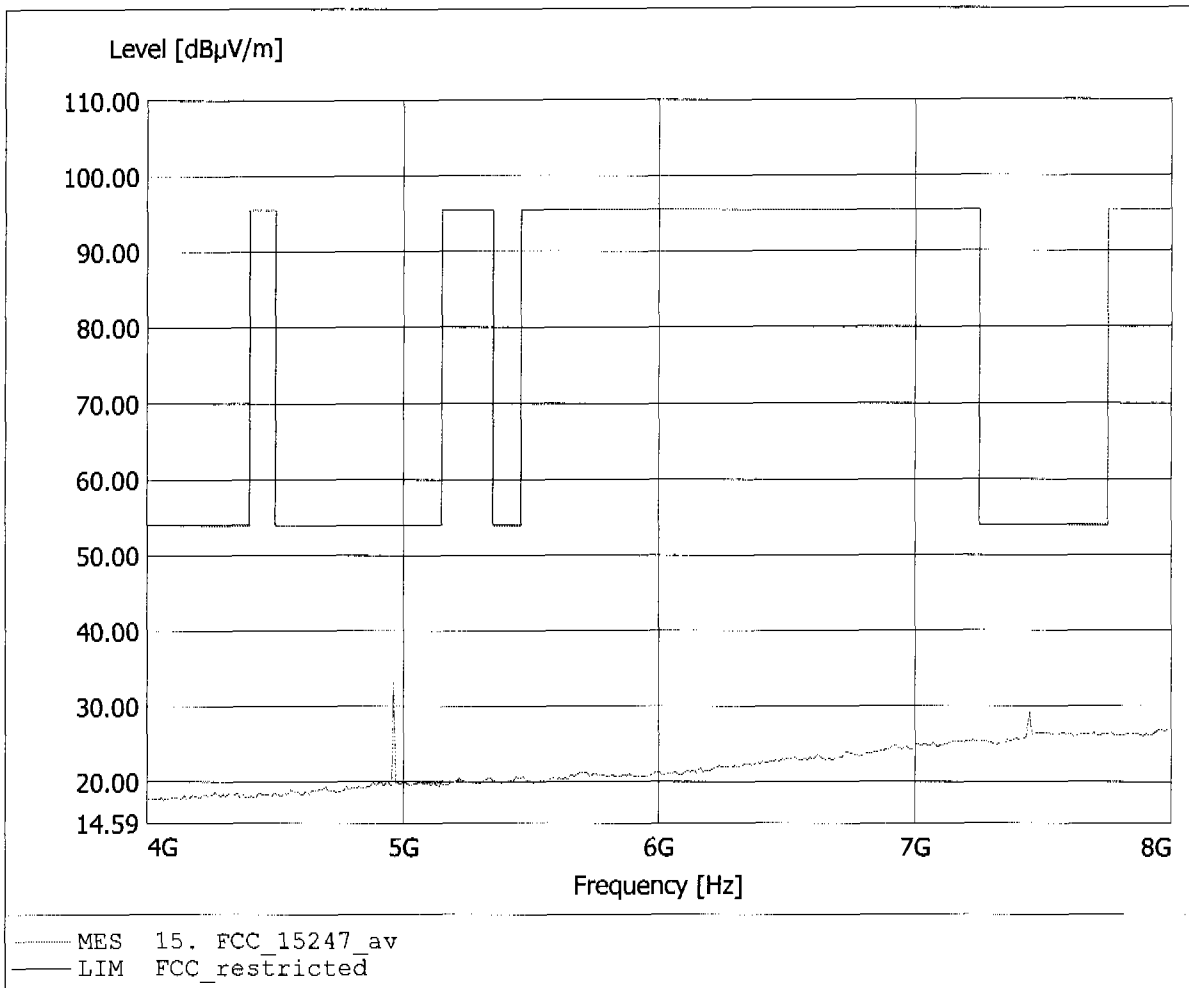


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.932GHz, Emax: 46.72dBµV/m, RBW: 1MHz

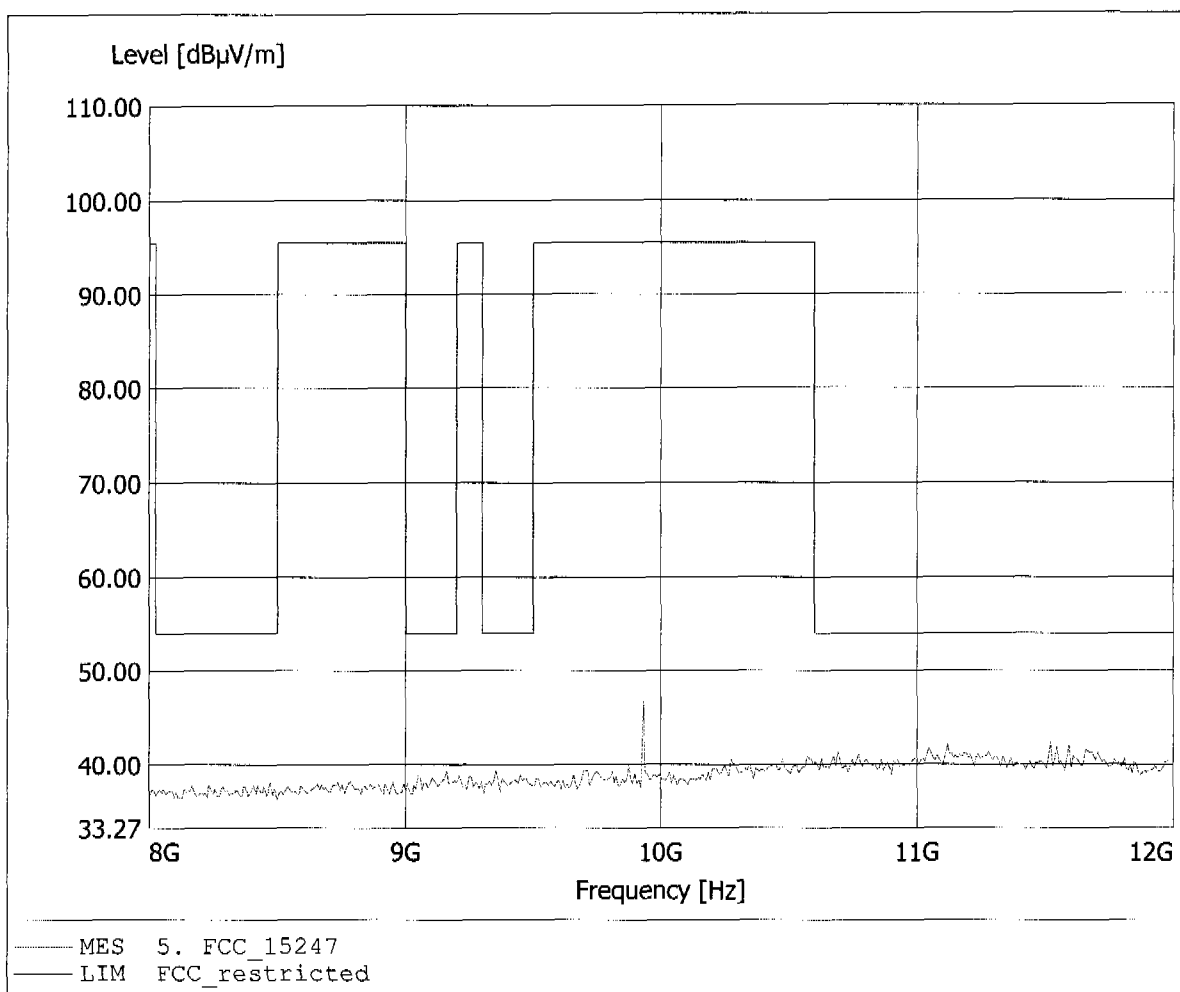


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.956GHz, Emax: 41.72dBµV/m, RBW: 1MHz

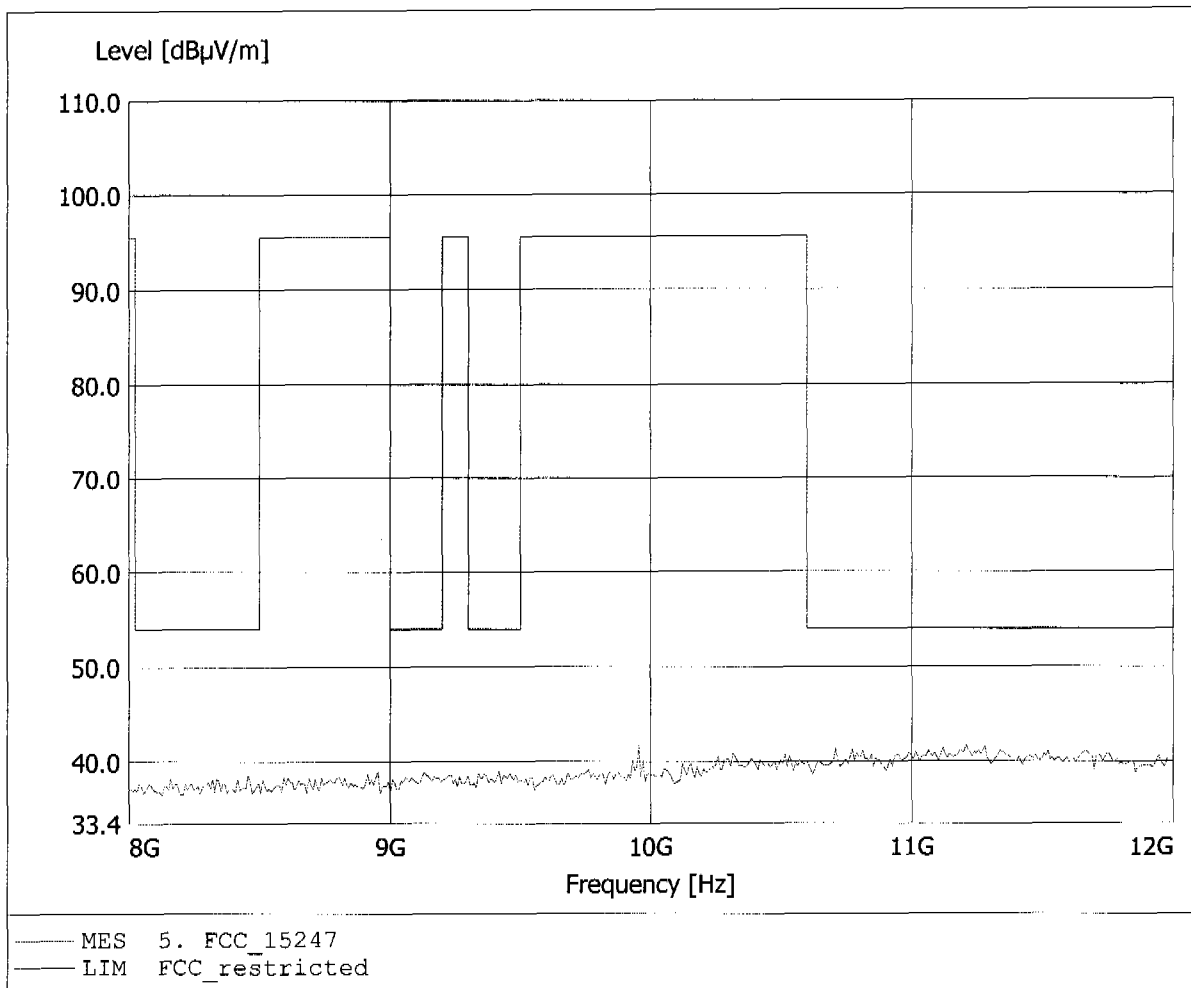


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
 Model: DW800 wireless system / Headset
 Approval Holder: Sennheiser Communications
 Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
 Test Site / Operator: ETS / Mr. Handrik
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
 Comment 2: Freq: 12.411GHz, Emax: 51.52dBµV/m, RBW: 1MHz

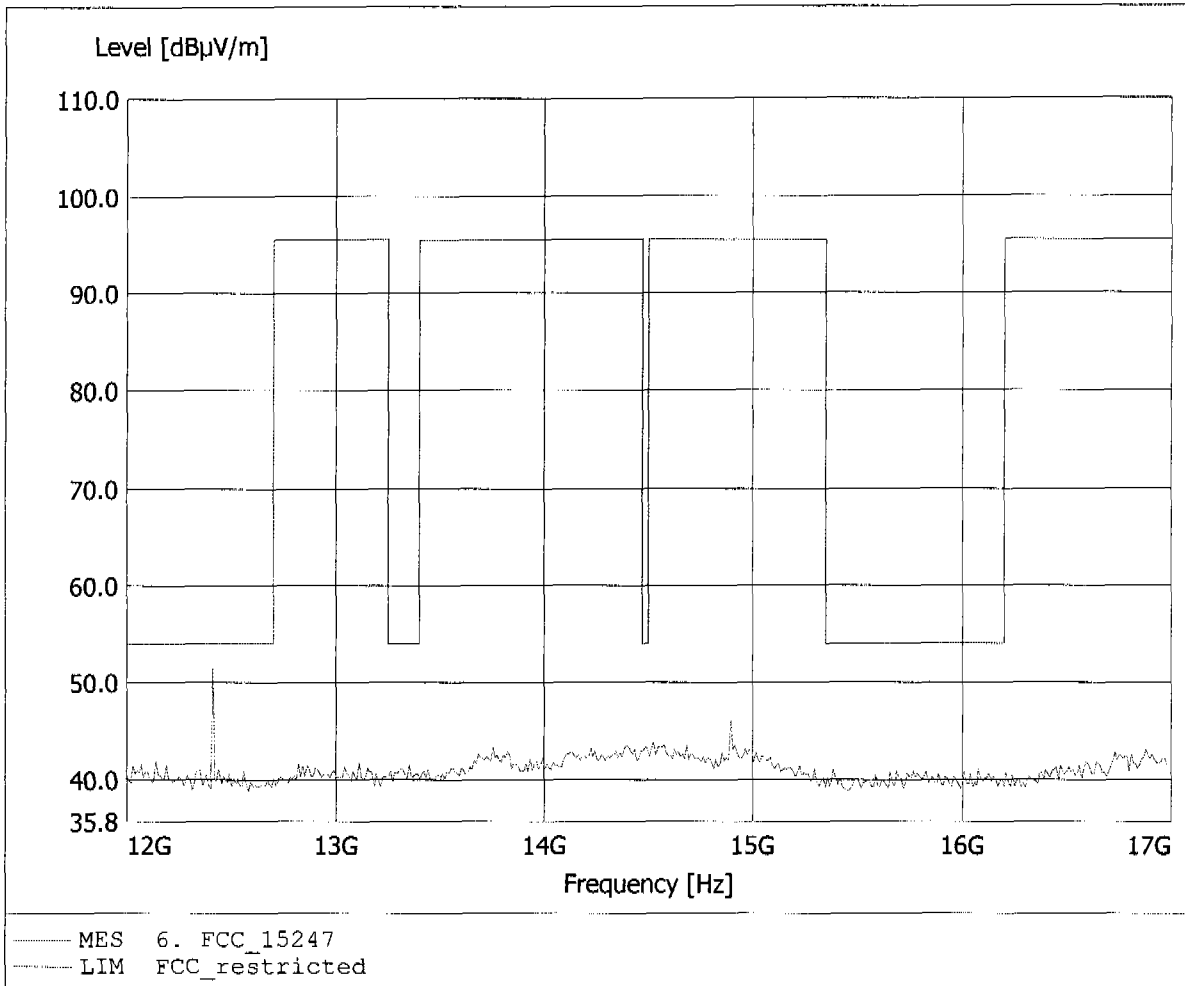


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.411GHz, Emax: 52.79dBµV/m, RBW: 1MHz

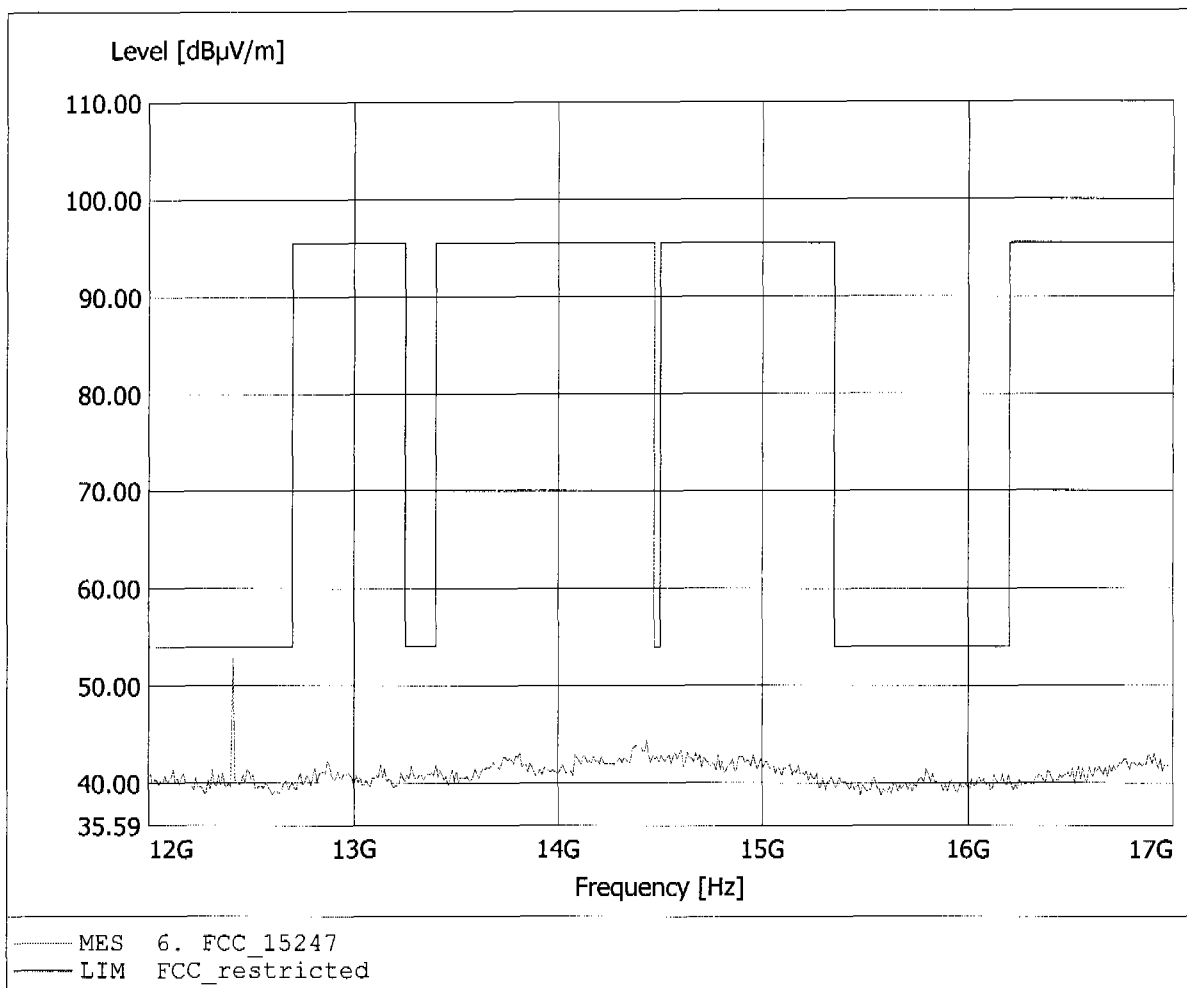

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Headset
Approval Holder: Sennheiser Communications
Operating Condition: Thom: 23°C / Unom: 3.6 V DC (rechargeable battery)
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 44.86dBµV/m, RBW: 1MHz

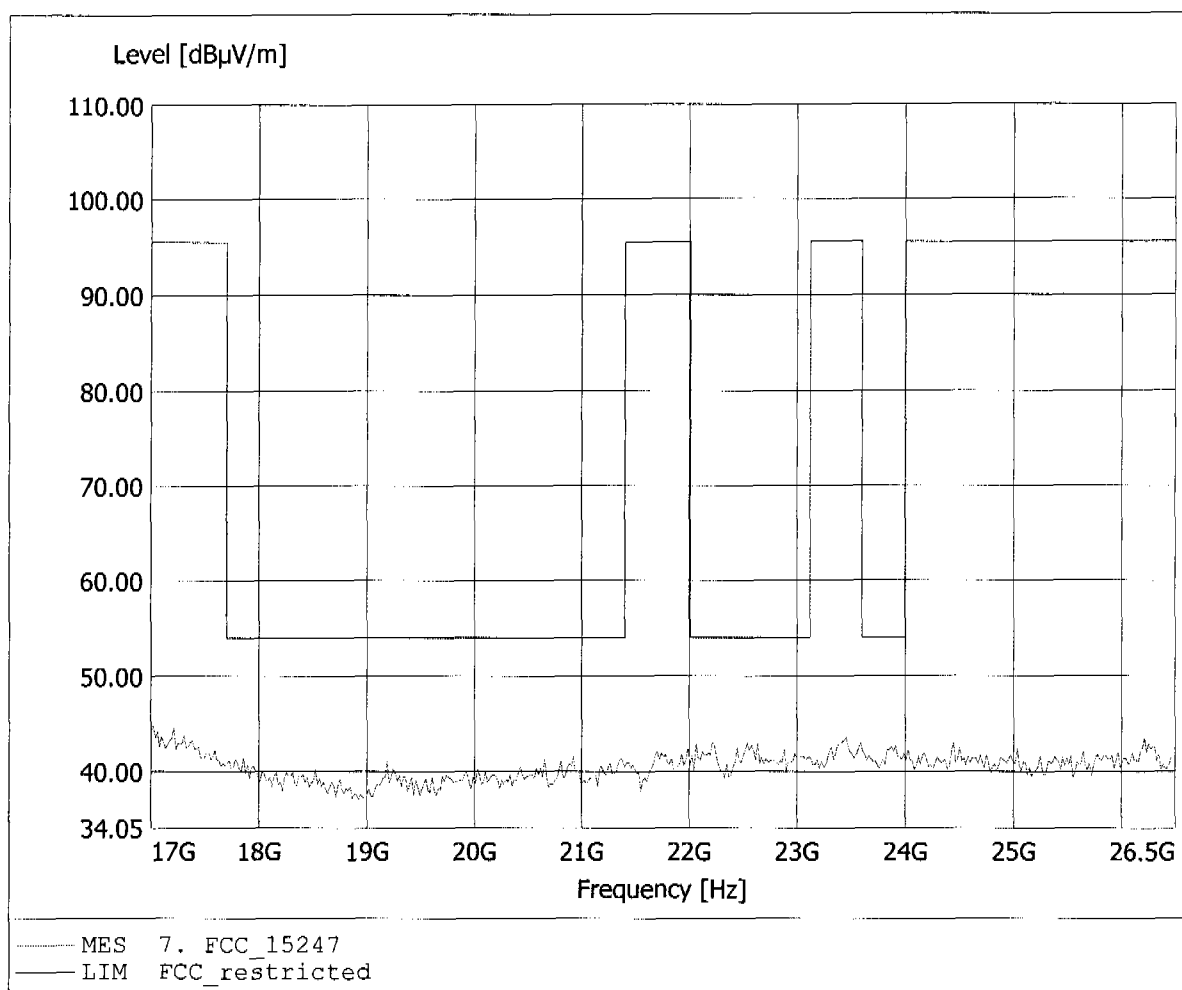

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
 Model: DW800 wireless system / Headset
 Approval Holder: Sennheiser Communications
 Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (rechargeable battery)
 Test Site / Operator: ETS / Mr. Handrik
 Test Specification: according to §15.247, peak detector
 Comment 1: Dist.: 3m, Ant.: HL025, amplif.
 Comment 2: Freq: 17.000GHz, Emax: 44.03dBµV/m, RBW: 1MHz

