

FCC Test Report

FCC ID : R3USCBT20
Product Description : True Wireless Gaming Earbuds
Model No. : SCBT20
Brand Name : EPOS
Applicant : DSEA A/S
Address : Kongebakken 9, DK-2765 Smørum, Denmark
Standard : 47 CFR FCC Part 15.247
Received Date : Jun. 05, 2020
Tested Date : Jun. 19 ~ Aug. 28, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	9
1.3	Test Setup Chart	9
1.4	The Equipment List	10
1.5	Test Standards	11
1.6	Reference Guidance	11
1.7	Deviation from Test Standard and Measurement Procedure.....	11
1.8	Measurement Uncertainty	11
2	TEST CONFIGURATION	12
2.1	Testing Facility.....	12
2.2	The Worst Test Modes and Channel Details	12
3	TRANSMITTER TEST RESULTS.....	13
3.1	Conducted Emissions.....	13
3.2	Unwanted Emissions into Restricted Frequency Bands	16
3.3	Unwanted Emissions into Non-Restricted Frequency Bands	35
3.4	Conducted Output Power	42
3.5	Number of Hopping Frequency	45
3.6	20dB and Occupied Bandwidth	49
3.7	Channel Separation.....	56
3.8	Number of Dwell Time.....	61
4	PHOTOGRAPHS OF EUT	66
5	TEST LABORATORY INFORMATION	67

Release Record

Report No.	Version	Description	Issued Date
FR060501AD	Rev. 01	Initial issue	Aug. 20, 2020
FR060501AD	Rev. 02	1. Updating antenna gain for BT. 2. Updating applicant's information.	Nov. 06, 2020
FR060501AD	Rev. 03	1. Adding antenna brand & model. 2. Updating charging box rating.	Dec. 07, 2020

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.383MHz 37.66 (Margin -10.55dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]:51.34MHz 29.71 (Margin -10.29dB) - PK	Pass
15.247(d)	Band Edge	Meet the requirement of limit	Pass
15.247(b)(1)	Conducted Output Power	Power [dBm]: 8.88	Pass
15.247(a)(1)(iii)	Number of Hopping Channels	Meet the requirement of limit	Pass
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass
15.247(a)(1)(iii)	Dwell Time	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	Data Rate
2400-2483.5	BR	2402-2480	0-78 [79]	1 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	2 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	3 Mbps

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.
 Note 2: Bluetooth BR uses a GFSK.
 Note 3: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK and 8DPSK.

1.1.2 Antenna Details

Ant. No.	Brand	Model	Type	Connector	Antenna Gain (dBi)
1	Cicent	TB011	Monopole	NA	-2.80

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	Battery 3.7Vdc
	Master earbud: Max charge current: 60mA , Max discharge current: 14mA
	Slave earbud: Max charge current: 60mA, Max discharge current: 4mA
	Chargebox: Max charge current: 560mA , Max discharge current: 200mA

1.1.4 Accessories

No.	Equipment	Description
1	Battery	Brand: Guangdong Mic Power New Energy Co. Ltd. Model: M1254S2 Rating: 3.7Vdc, 60mAh
2	USB cable	Brand: EPOS Model: EPUL57 Line: 0.57m shielded without core
3	Charging box	Brand: EPOS Model: SCBT20 Rating: 5V = 600mA
4	Bluetooth dongle	Brand: EPOS Model: SCBT16
5	USB-C to USB-A extension cable	Brand: SENNHEISER Model: TB011 Line: 1.35m shielded without core

1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	CBT	
Modulation Mode	Duty Cycle Of Test Signal (%)	Duty Factor (dB)
DH5	77.78%	1.09
3DH5	78.70%	1.04



1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)		
	2402	2441	2480
GFSK/1Mbps	default	default	default
$\pi/4$ -DQPSK /2Mbps	default	default	default
8DPSK/3Mbps	default	default	default

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Notebook	DELL	Latitude E5470	DoC	---
2	Adapter	Samsung	ETA-U90JWS	---	---

1.3 Test Setup Chart

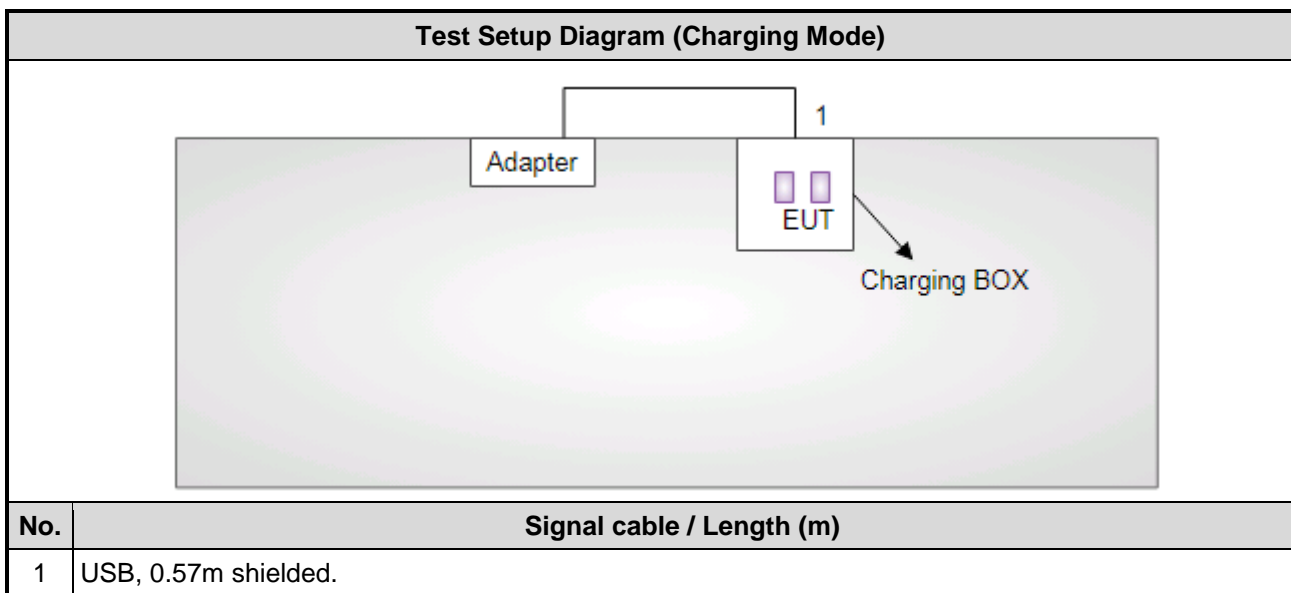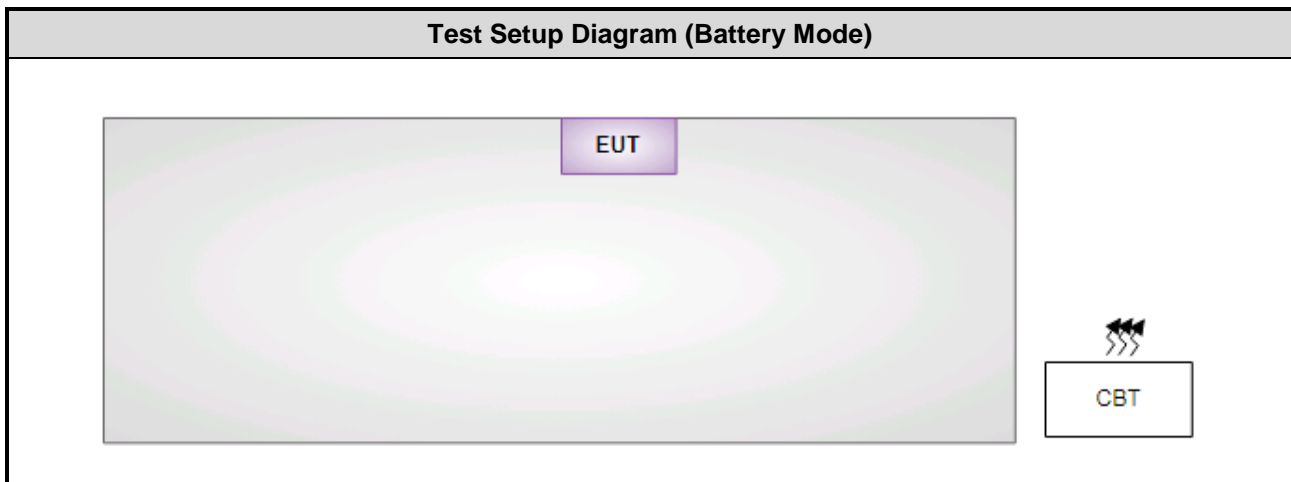

Note: The notebook is disconnected from EUT and removed from test table when EUT is set to transmit continuously.

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Test Date	Jul. 07, 2020				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Dec. 12, 2019	Dec. 11, 2020
LISN	R&S	ENV216	101579	Mar. 12, 2020	Mar. 11, 2021
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 22, 2019	Oct. 21, 2020
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Test Date	Jun. 19, 2020				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 17, 2019	Dec. 16, 2020
Receiver	R&S	ESR3	101657	Feb. 14, 2020	Feb. 13, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 12, 2019	Jul. 11, 2020
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 12, 2019	Dec. 11, 2020
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020
Preamplifier	EMC	EMC02325	980225	Jul. 09, 2019	Jul. 08, 2020
Preamplifier	Agilent	83017A	MY39501308	Oct. 08, 2019	Oct. 07, 2020
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020
RF Cable	EMC	EMC104-SM-SM-8000	181106	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 07, 2019	Oct. 06, 2020
LF cable 1M	EMC	EMCCFD400-NM-NM-1000	160502	Oct. 07, 2019	Oct. 06, 2020
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 07, 2019	Oct. 06, 2020
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Oct. 07, 2019	Oct. 06, 2020
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Test Date	Jun. 30 ~ Aug. 28, 2020				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Jan. 09, 2020	Jan. 08, 2021
Power Meter	Anritsu	ML2495A	1241002	Oct. 23, 2019	Oct. 22, 2020
Power Sensor	Anritsu	MA2411B	1207366	Oct. 23, 2019	Oct. 22, 2020
AC POWER SOURCE	APC	AFC-500W	F312060012	Dec. 02, 2019	Dec. 01, 2020
Measurement Software	--	SENSE-15247_FS	V5.10.1	NA	NA
Bluetooth Tester	R&S	CBT	100959	Oct. 18, 2019	Oct. 17, 2020
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.247
ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Radiated emission ≤ 1 GHz	± 3.41 dB
Radiated emission > 1 GHz	± 4.59 dB
Time	$\pm 0.1\%$

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corp.
Test Site	CO01-WS, 03CH01-WS, TH01-WS
Address of Test Site	No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate (Mbps)	Test Configuration
Conducted Emissions	Charging	---	---	2
Radiated Emissions ≤ 1GHz	8DPSK	2480	1 Mbps	1
	Charging	---	---	2
Radiated Emissions > 1GHz	GFSK	2402, 2441, 2480	1Mbps	1
	8DPSK	2402, 2441, 2480	3Mbps	
Conducted Output Power	GFSK	2402, 2441, 2480	1Mbps	1
	π/4 DQPSK	2402, 2441, 2480	2Mbps	
	8DPSK	2402, 2441, 2480	3Mbps	
Number of Hopping Channels	GFSK	2402~2480	1Mbps	1
	π/4 DQPSK	2402~2480	2Mbps	
	8DPSK	2402~2480	3Mbps	
Hopping Channel Separation 20dB and Occupied bandwidth	GFSK	2402, 2441, 2480	1Mbps	1
	π/4 DQPSK	2402, 2441, 2480	2Mbps	
	8DPSK	2402, 2441, 2480	3Mbps	
Dwell Time	GFSK	2402	1Mbps	1
	π/4 DQPSK	2402	2Mbps	
	8DPSK	2402	3Mbps	

NOTE:

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.
2. The EUT had been tested by following test configurations.
 - 1) Configuration 1 : Battery mode
 - 2) Configuration 2 : Charging mode

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup

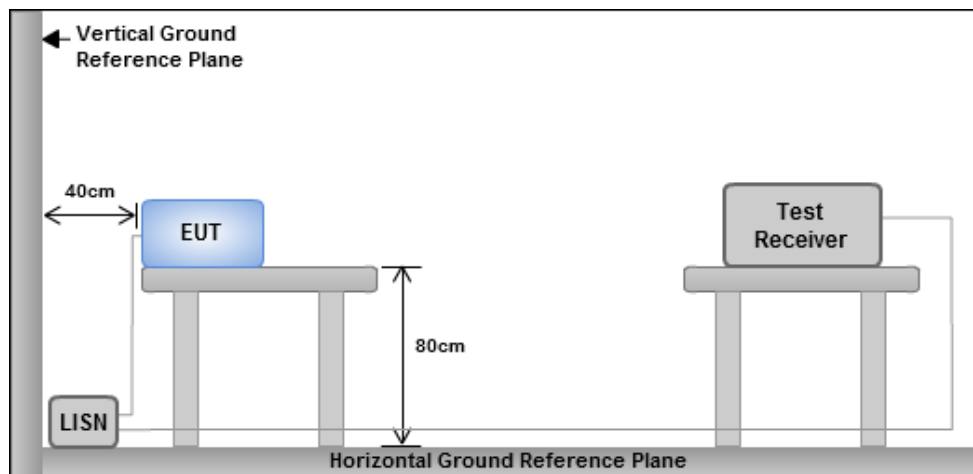


- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions


Ambient Condition	24°C / 59%	Tested By	Alex Tsai
-------------------	------------	-----------	-----------

Mode	Charging	Test Freq. (MHz)	---
Power Phase	Line		

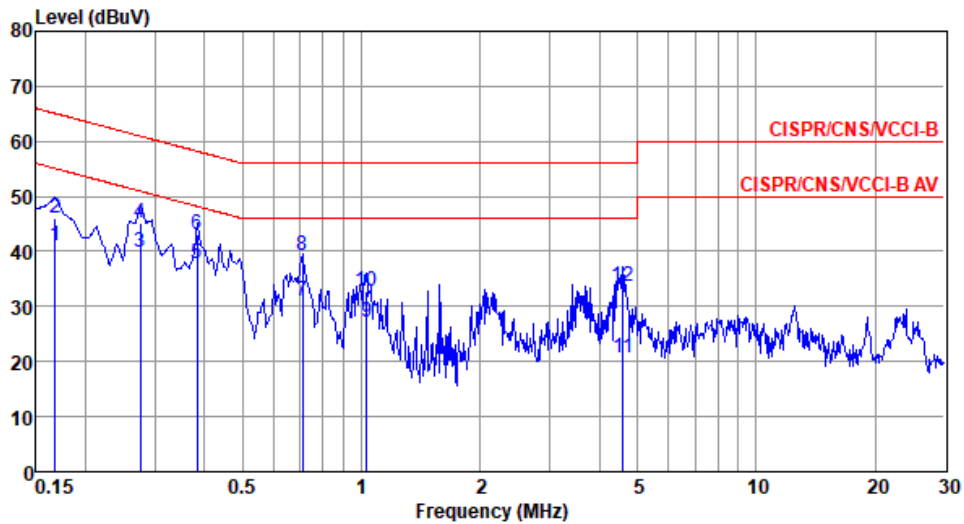

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.168	40.97	55.08	-14.11	31.11	9.64	0.05	Average
2	0.168	46.09	65.08	-18.99	36.23	9.64	0.05	QP
3	0.276	40.00	50.94	-10.94	30.08	9.63	0.07	Average
4	0.276	45.08	60.94	-15.86	35.16	9.63	0.07	QP
5*	0.383	37.66	48.21	-10.55	27.70	9.63	0.08	Average
6	0.383	43.02	58.21	-15.19	33.06	9.63	0.08	QP
7	0.708	31.07	46.00	-14.93	21.05	9.63	0.10	Average
8	0.708	39.40	56.00	-16.60	29.38	9.63	0.10	QP
9	1.032	27.19	46.00	-18.81	17.12	9.63	0.12	Average
10	1.032	32.67	56.00	-23.33	22.60	9.63	0.12	QP
11	4.598	20.59	46.00	-25.41	10.25	9.66	0.31	Average
12	4.598	33.73	56.00	-22.27	23.39	9.66	0.31	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

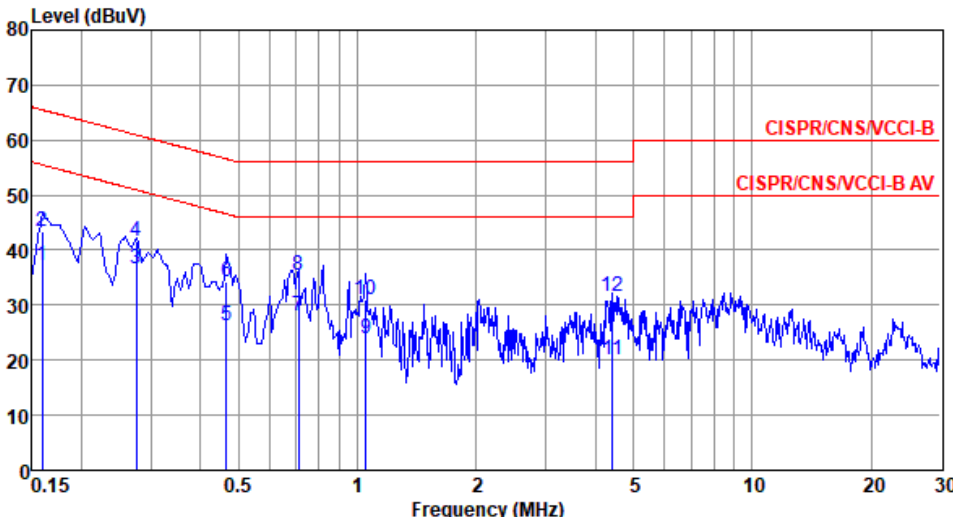Mode	Charging	Test Freq. (MHz)	---																																																																																																																																		
Power Phase	Neutral																																																																																																																																				
																																																																																																																																					
	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>LISN</th> <th>cable</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>factor</th> <th>loss</th> <th></th> </tr> <tr> <th></th> <th></th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>0.159</td><td>37.28</td><td>55.52</td><td>-18.24</td><td>27.44</td><td>9.66</td><td>0.05</td><td>Average</td></tr> <tr><td>2</td><td>0.159</td><td>43.39</td><td>65.52</td><td>-22.13</td><td>33.55</td><td>9.66</td><td>0.05</td><td>QP</td></tr> <tr><td>3*</td><td>0.276</td><td>36.54</td><td>50.94</td><td>-14.40</td><td>26.66</td><td>9.65</td><td>0.07</td><td>Average</td></tr> <tr><td>4</td><td>0.276</td><td>41.58</td><td>60.94</td><td>-19.36</td><td>31.70</td><td>9.65</td><td>0.07</td><td>QP</td></tr> <tr><td>5</td><td>0.466</td><td>26.31</td><td>46.58</td><td>-20.27</td><td>16.39</td><td>9.65</td><td>0.09</td><td>Average</td></tr> <tr><td>6</td><td>0.466</td><td>34.25</td><td>56.58</td><td>-22.33</td><td>24.33</td><td>9.65</td><td>0.09</td><td>QP</td></tr> <tr><td>7</td><td>0.708</td><td>28.08</td><td>46.00</td><td>-17.92</td><td>18.14</td><td>9.65</td><td>0.10</td><td>Average</td></tr> <tr><td>8</td><td>0.708</td><td>35.33</td><td>56.00</td><td>-20.67</td><td>25.39</td><td>9.65</td><td>0.10</td><td>QP</td></tr> <tr><td>9</td><td>1.049</td><td>24.02</td><td>46.00</td><td>-21.98</td><td>14.05</td><td>9.65</td><td>0.12</td><td>Average</td></tr> <tr><td>10</td><td>1.049</td><td>30.89</td><td>56.00</td><td>-25.11</td><td>20.92</td><td>9.65</td><td>0.12</td><td>QP</td></tr> <tr><td>11</td><td>4.430</td><td>20.18</td><td>46.00</td><td>-25.82</td><td>9.93</td><td>9.68</td><td>0.30</td><td>Average</td></tr> <tr><td>12</td><td>4.430</td><td>31.73</td><td>56.00</td><td>-24.27</td><td>21.48</td><td>9.68</td><td>0.30</td><td>QP</td></tr> </tbody> </table>	Freq	Level	Limit	Over	Read	LISN	cable	Remark	MHz	dBuV	Line	Limit	Level	factor	loss				dBuV	dB	dBuV	dB	dB		1	0.159	37.28	55.52	-18.24	27.44	9.66	0.05	Average	2	0.159	43.39	65.52	-22.13	33.55	9.66	0.05	QP	3*	0.276	36.54	50.94	-14.40	26.66	9.65	0.07	Average	4	0.276	41.58	60.94	-19.36	31.70	9.65	0.07	QP	5	0.466	26.31	46.58	-20.27	16.39	9.65	0.09	Average	6	0.466	34.25	56.58	-22.33	24.33	9.65	0.09	QP	7	0.708	28.08	46.00	-17.92	18.14	9.65	0.10	Average	8	0.708	35.33	56.00	-20.67	25.39	9.65	0.10	QP	9	1.049	24.02	46.00	-21.98	14.05	9.65	0.12	Average	10	1.049	30.89	56.00	-25.11	20.92	9.65	0.12	QP	11	4.430	20.18	46.00	-25.82	9.93	9.68	0.30	Average	12	4.430	31.73	56.00	-24.27	21.48	9.68	0.30	QP
Freq	Level	Limit	Over	Read	LISN	cable	Remark																																																																																																																														
MHz	dBuV	Line	Limit	Level	factor	loss																																																																																																																															
		dBuV	dB	dBuV	dB	dB																																																																																																																															
1	0.159	37.28	55.52	-18.24	27.44	9.66	0.05	Average																																																																																																																													
2	0.159	43.39	65.52	-22.13	33.55	9.66	0.05	QP																																																																																																																													
3*	0.276	36.54	50.94	-14.40	26.66	9.65	0.07	Average																																																																																																																													
4	0.276	41.58	60.94	-19.36	31.70	9.65	0.07	QP																																																																																																																													
5	0.466	26.31	46.58	-20.27	16.39	9.65	0.09	Average																																																																																																																													
6	0.466	34.25	56.58	-22.33	24.33	9.65	0.09	QP																																																																																																																													
7	0.708	28.08	46.00	-17.92	18.14	9.65	0.10	Average																																																																																																																													
8	0.708	35.33	56.00	-20.67	25.39	9.65	0.10	QP																																																																																																																													
9	1.049	24.02	46.00	-21.98	14.05	9.65	0.12	Average																																																																																																																													
10	1.049	30.89	56.00	-25.11	20.92	9.65	0.12	QP																																																																																																																													
11	4.430	20.18	46.00	-25.82	9.93	9.68	0.30	Average																																																																																																																													
12	4.430	31.73	56.00	-24.27	21.48	9.68	0.30	QP																																																																																																																													
<p>Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB). Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).</p>																																																																																																																																					

3.2 Unwanted Emissions into Restricted Frequency Bands

3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.

2. Radiated emission above 1GHz / Peak value
RBW=1MHz, VBW=3MHz and Peak detector

Radiated emission above 1GHz / Average value for harmonics


The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:

3.
$$20\log(\text{Duty cycle}) = 20\log \frac{1\text{s} / 1600 * 5}{100\text{ ms}} = -30.1\text{dB}$$


4. Radiated emission above 1GHz / Average value for other emissions
RBW=1MHz, VBW=1/T and Peak detector

3.2.3 Test Setup

Radiated Emissions below 1 GHz

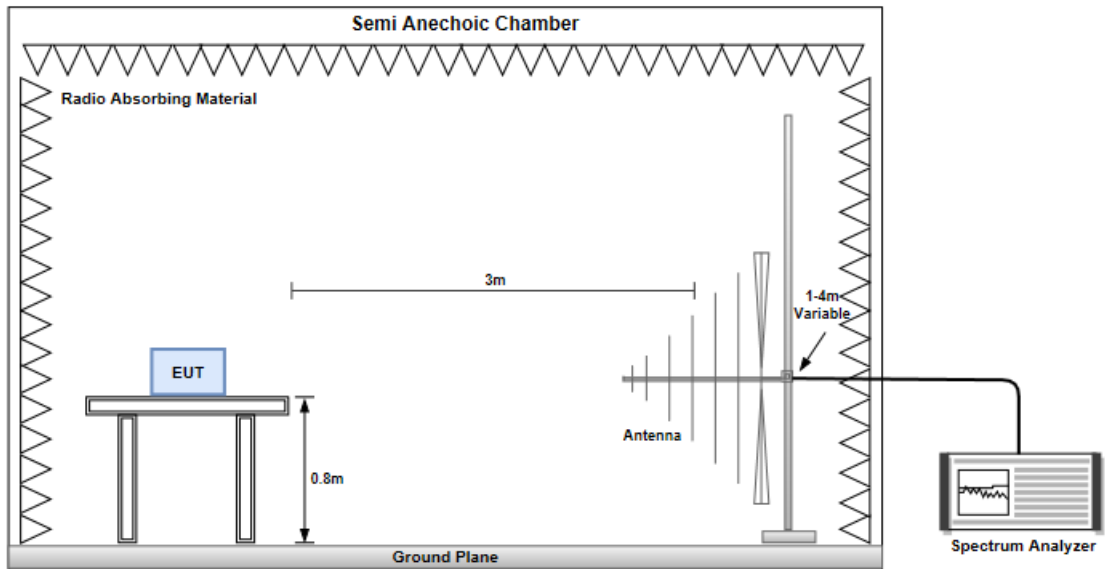


Radiated Emissions above 1 GHz

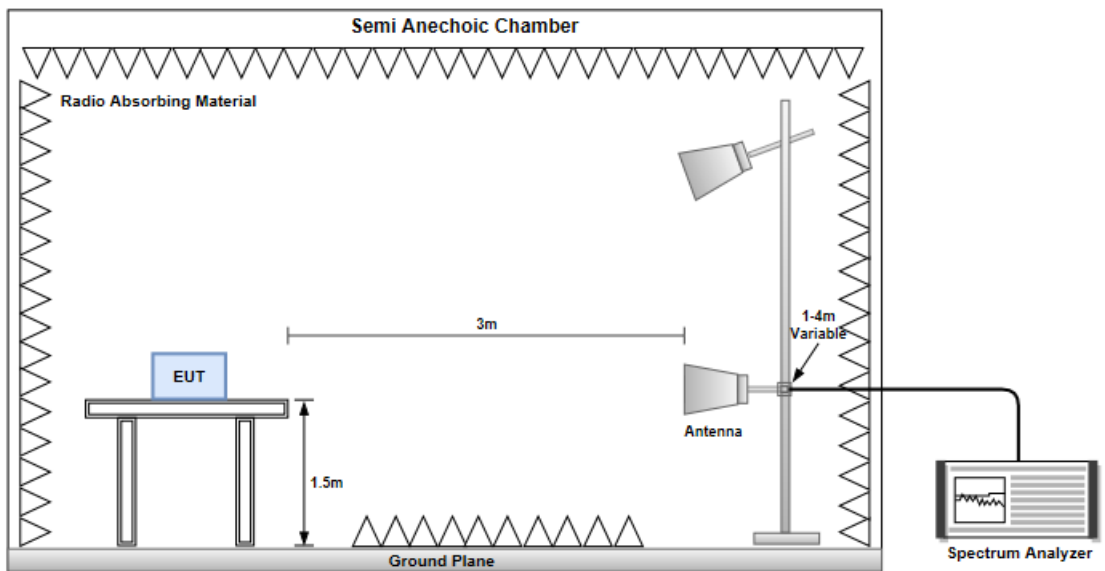


Test Configuration 1: Battery mode

3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

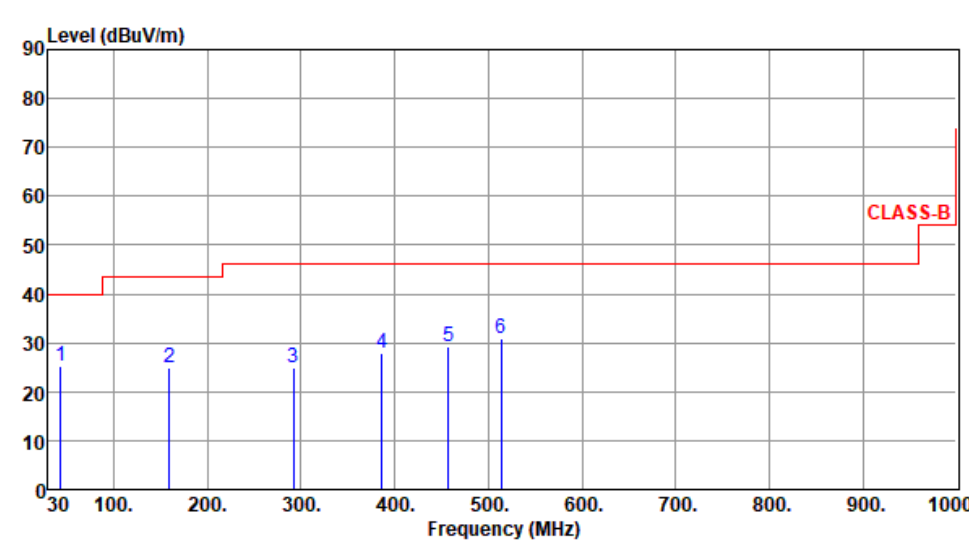Modulation	8DPSK	Test Freq. (MHz)	2480																																																																																																																																			
Polarization	Horizontal																																																																																																																																					
Test By :BRAD WU Temperature(°C):25 Humidity(%):65																																																																																																																																						
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red line represents the CLASS-B limit, which is constant at 40 dBuV/m until 100 MHz, then steps up to 45 dBuV/m at 200 MHz, and to 50 dBuV/m at 900 MHz. Six blue vertical lines indicate emission peaks at 43.58, 159.01, 291.90, 385.99, 457.77, and 514.03 MHz.</p>																																																																																																																																						
	<table border="1"> <thead> <tr> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> </tr> </thead> <tbody> <tr> <td>43.58</td> <td>159.01</td> <td>291.90</td> <td>385.99</td> <td>457.77</td> <td>514.03</td> </tr> <tr> <td>25.21</td> <td>24.79</td> <td>24.78</td> <td>28.05</td> <td>29.26</td> <td>31.02</td> </tr> <tr> <td>40.00</td> <td>43.50</td> <td>46.00</td> <td>46.00</td> <td>46.00</td> <td>46.00</td> </tr> <tr> <td>-14.79</td> <td>-18.71</td> <td>-21.22</td> <td>-17.95</td> <td>-16.74</td> <td>-14.98</td> </tr> <tr> <td>33.79</td> <td>33.51</td> <td>33.41</td> <td>34.18</td> <td>33.23</td> <td>33.87</td> </tr> <tr> <td>-8.58</td> <td>-8.72</td> <td>-8.63</td> <td>-6.13</td> <td>-3.97</td> <td>-2.85</td> </tr> <tr> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>Peak</td> </tr> <tr> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> </tr> <tr> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	1	2	3	4	5	6	43.58	159.01	291.90	385.99	457.77	514.03	25.21	24.79	24.78	28.05	29.26	31.02	40.00	43.50	46.00	46.00	46.00	46.00	-14.79	-18.71	-21.22	-17.95	-16.74	-14.98	33.79	33.51	33.41	34.18	33.23	33.87	-8.58	-8.72	-8.63	-6.13	-3.97	-2.85	Peak	Peak	Peak	Peak	Peak	Peak	---	---	---	---	---	---	---	---	---	---	---	---	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>43.58</td> <td>25.21</td> <td>40.00</td> <td>-14.79</td> <td>33.79</td> <td>-8.58</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>159.01</td> <td>24.79</td> <td>43.50</td> <td>-18.71</td> <td>33.51</td> <td>-8.72</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>291.90</td> <td>24.78</td> <td>46.00</td> <td>-21.22</td> <td>33.41</td> <td>-8.63</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>385.99</td> <td>28.05</td> <td>46.00</td> <td>-17.95</td> <td>34.18</td> <td>-6.13</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>457.77</td> <td>29.26</td> <td>46.00</td> <td>-16.74</td> <td>33.23</td> <td>-3.97</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>514.03</td> <td>31.02</td> <td>46.00</td> <td>-14.98</td> <td>33.87</td> <td>-2.85</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB				43.58	25.21	40.00	-14.79	33.79	-8.58	Peak	---	---	159.01	24.79	43.50	-18.71	33.51	-8.72	Peak	---	---	291.90	24.78	46.00	-21.22	33.41	-8.63	Peak	---	---	385.99	28.05	46.00	-17.95	34.18	-6.13	Peak	---	---	457.77	29.26	46.00	-16.74	33.23	-3.97	Peak	---	---	514.03	31.02	46.00	-14.98	33.87	-2.85	Peak	---	---
1	2	3	4	5	6																																																																																																																																	
43.58	159.01	291.90	385.99	457.77	514.03																																																																																																																																	
25.21	24.79	24.78	28.05	29.26	31.02																																																																																																																																	
40.00	43.50	46.00	46.00	46.00	46.00																																																																																																																																	
-14.79	-18.71	-21.22	-17.95	-16.74	-14.98																																																																																																																																	
33.79	33.51	33.41	34.18	33.23	33.87																																																																																																																																	
-8.58	-8.72	-8.63	-6.13	-3.97	-2.85																																																																																																																																	
Peak	Peak	Peak	Peak	Peak	Peak																																																																																																																																	
---	---	---	---	---	---																																																																																																																																	
---	---	---	---	---	---																																																																																																																																	
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB																																																																																																																																	
43.58	25.21	40.00	-14.79	33.79	-8.58	Peak	---	---																																																																																																																														
159.01	24.79	43.50	-18.71	33.51	-8.72	Peak	---	---																																																																																																																														
291.90	24.78	46.00	-21.22	33.41	-8.63	Peak	---	---																																																																																																																														
385.99	28.05	46.00	-17.95	34.18	-6.13	Peak	---	---																																																																																																																														
457.77	29.26	46.00	-16.74	33.23	-3.97	Peak	---	---																																																																																																																														
514.03	31.02	46.00	-14.98	33.87	-2.85	Peak	---	---																																																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																																																						

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical		

Test By :BRAD WU Temperature(°C):25 Humidity(%):65

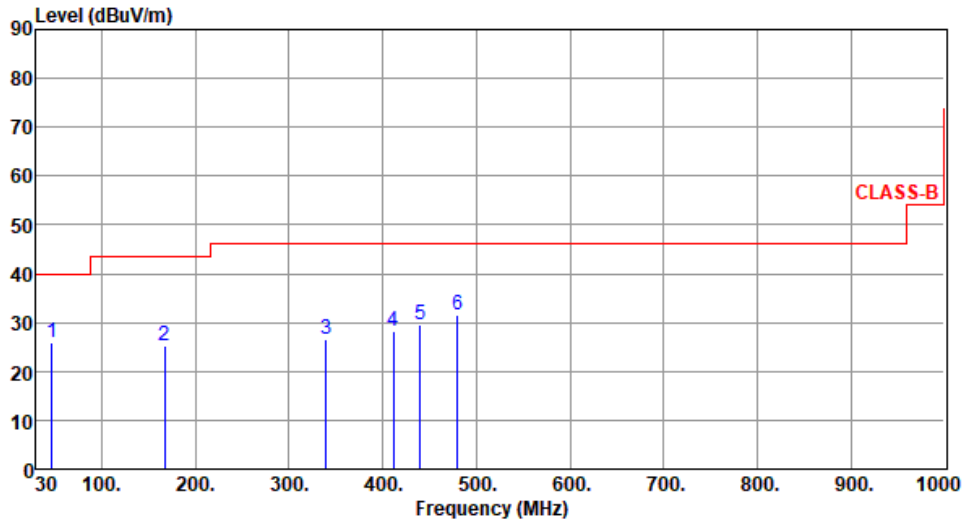

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	46.49	25.76	40.00	-14.24	34.32	-8.56	Peak	---	---
2	166.77	25.09	43.50	-18.41	34.08	-8.99	Peak	---	---
3	339.43	26.41	46.00	-19.59	33.66	-7.25	Peak	---	---
4	411.21	28.20	46.00	-17.80	33.72	-5.52	Peak	---	---
5	440.31	29.57	46.00	-16.43	33.96	-4.39	Peak	---	---
6	480.08	31.43	46.00	-14.57	34.97	-3.54	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.2.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

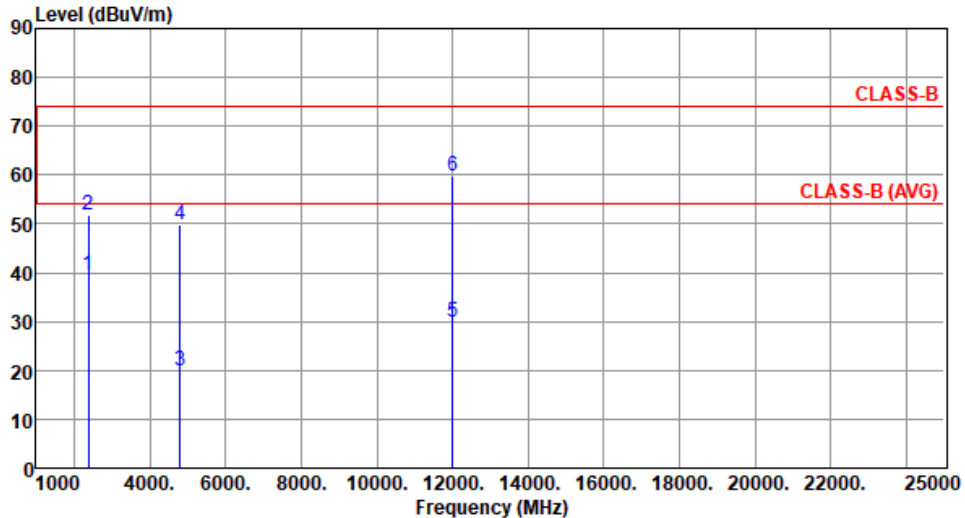Modulation	GFSK	Test Freq. (MHz)	2402						
Polarization	Horizontal								
Test By :BRAD WU Temperature(°C):24 Humidity(%):63									
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	39.48	54.00	-14.52	42.28	-2.80	Average	116	311
2	2390.00	51.86	74.00	-22.14	54.66	-2.80	Peak	116	311
3	4804.00	19.86	54.00	-34.14	16.33	3.53	Average	205	16
4	4804.00	49.96	74.00	-24.04	46.43	3.53	Peak	205	16
5	12010.00	29.81	54.00	-24.19	16.09	13.72	Average	100	52
6	12010.00	59.91	74.00	-14.09	46.19	13.72	Peak	100	52
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :BRAD WU Temperature(°C):24 Humidity(%):63

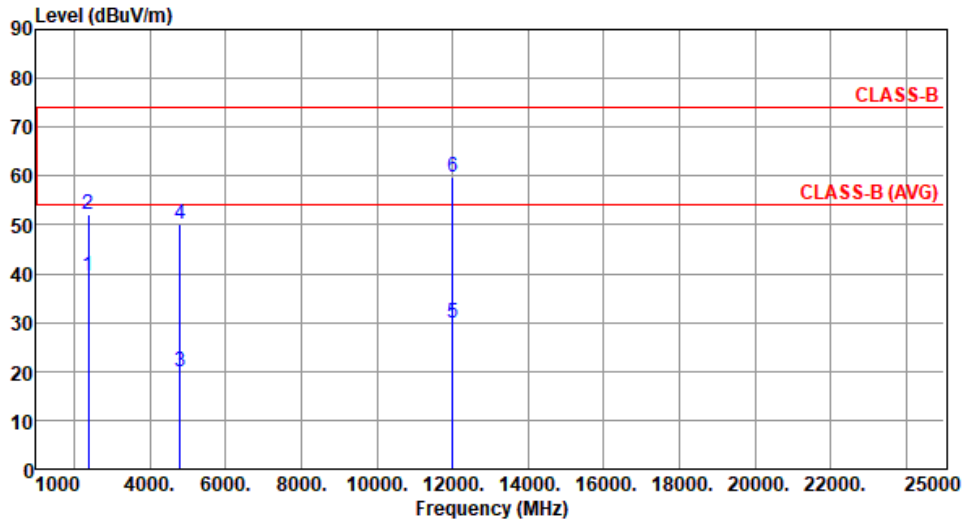

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.52	54.00	-14.48	42.32	-2.80	Average	146	199
2	2390.00	52.00	74.00	-22.00	54.80	-2.80	Peak	146	199
3	4804.00	20.06	54.00	-33.94	16.53	3.53	Average	215	104
4	4804.00	50.16	74.00	-23.84	46.63	3.53	Peak	215	104
5	12010.00	29.80	54.00	-24.20	16.08	13.72	Average	100	14
6	12010.00	59.90	74.00	-14.10	46.18	13.72	Peak	100	14


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal		

Test By :BRAD WU Temperature(°C):24 Humidity(%):63

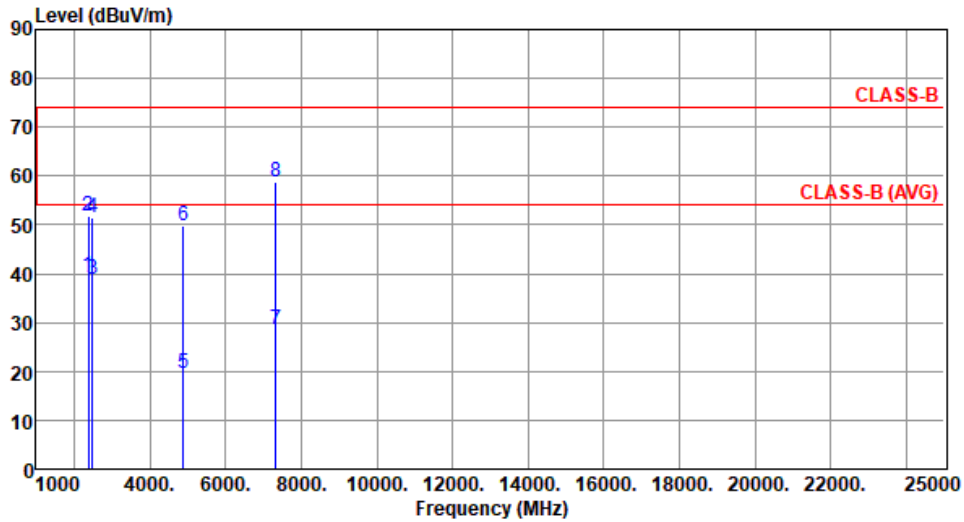

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.45	54.00	-14.55	42.25	-2.80	Average	115	310
2	2390.00	51.70	74.00	-22.30	54.50	-2.80	Peak	115	310
3	2483.50	38.80	54.00	-15.20	41.83	-3.03	Average	115	310
4	2483.50	51.48	74.00	-22.52	54.51	-3.03	Peak	115	310
5	4882.00	19.59	54.00	-34.41	15.96	3.63	Average	210	20
6	4882.00	49.69	74.00	-24.31	46.06	3.63	Peak	210	20
7	7323.00	28.56	54.00	-25.44	19.35	9.21	Average	212	358
8	7323.00	58.66	74.00	-15.34	49.45	9.21	Peak	212	358


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical		

Test By :BRAD WU Temperature(°C):24 Humidity(%):63

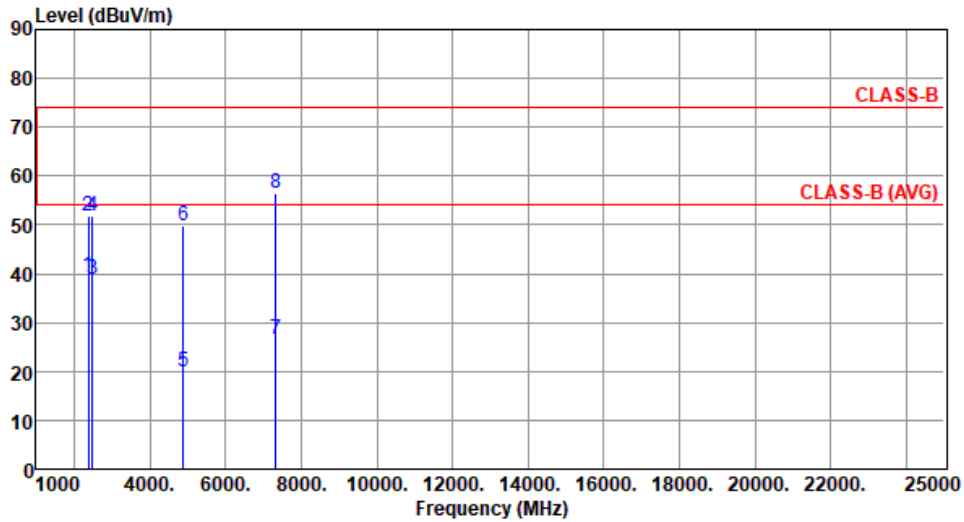

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.49	54.00	-14.51	42.29	-2.80	Average	132	206
2	2390.00	51.72	74.00	-22.28	54.52	-2.80	Peak	132	206
3	2483.50	38.90	54.00	-15.10	41.93	-3.03	Average	132	206
4	2483.50	51.68	74.00	-22.32	54.71	-3.03	Peak	132	206
5	4882.00	19.87	54.00	-34.13	16.24	3.63	Average	226	111
6	4882.00	49.97	74.00	-24.03	46.34	3.63	Peak	226	111
7	7323.00	26.52	54.00	-27.48	17.31	9.21	Average	195	299
8	7323.00	56.62	74.00	-17.38	47.41	9.21	Peak	195	299


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal		

Test By :BRAD WU Temperature(°C):24 Humidity(%):63

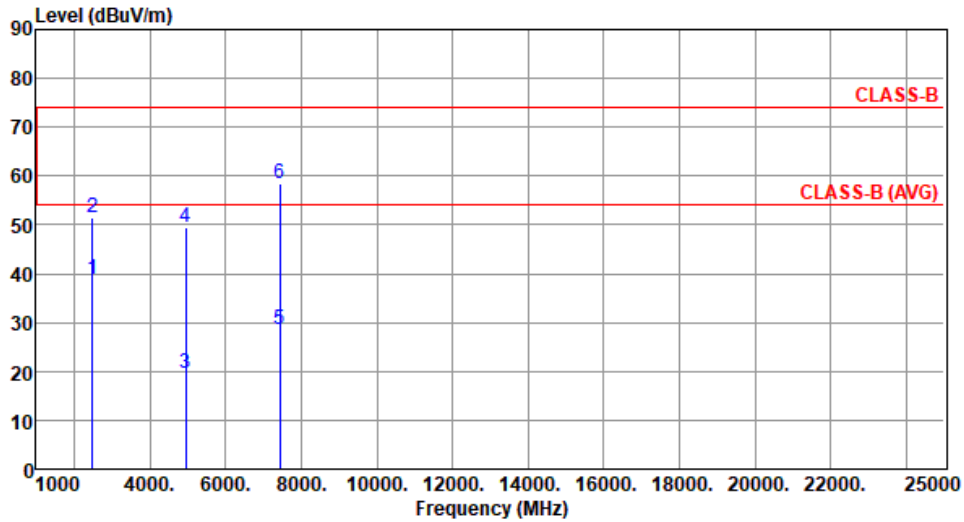

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	38.85	54.00	-15.15	41.88	-3.03	Average	116	304
2	2483.50	51.62	74.00	-22.38	54.65	-3.03	Peak	116	304
3	4960.00	19.45	54.00	-34.55	15.62	3.83	Average	205	15
4	4960.00	49.55	74.00	-24.45	45.72	3.83	Peak	205	15
5	7440.00	28.41	54.00	-25.59	19.20	9.21	Average	206	357
6	7440.00	58.51	74.00	-15.49	49.30	9.21	Peak	206	357


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		

Test By :BRAD WU Temperature(°C):24 Humidity(%):63

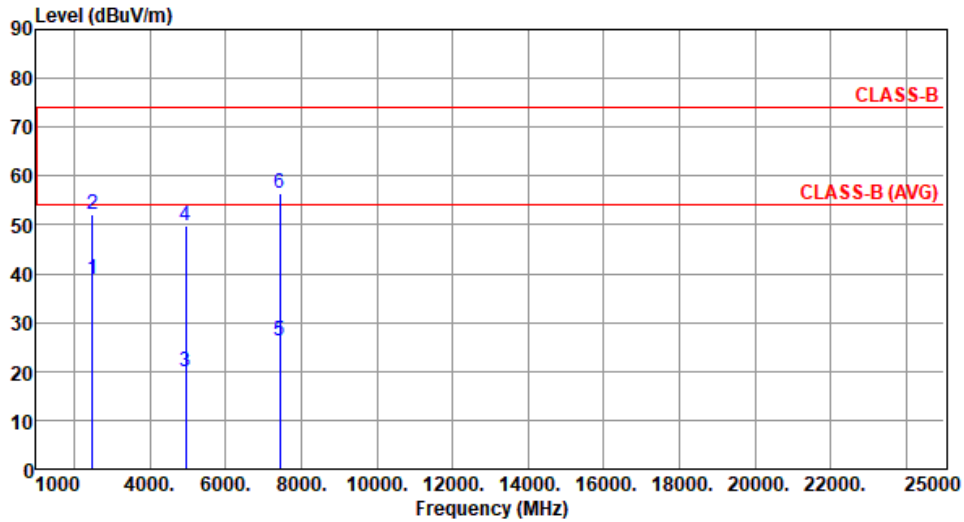


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	38.84	54.00	-15.16	41.87	-3.03	Average	124	226
2	2483.50	52.11	74.00	-21.89	55.14	-3.03	Peak	124	226
3	4960.00	19.79	54.00	-34.21	15.96	3.83	Average	214	106
4	4960.00	49.89	74.00	-24.11	46.06	3.83	Peak	214	106
5	7440.00	26.35	54.00	-27.65	17.14	9.21	Average	192	301
6	7440.00	56.45	74.00	-17.55	47.24	9.21	Peak	192	301

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK

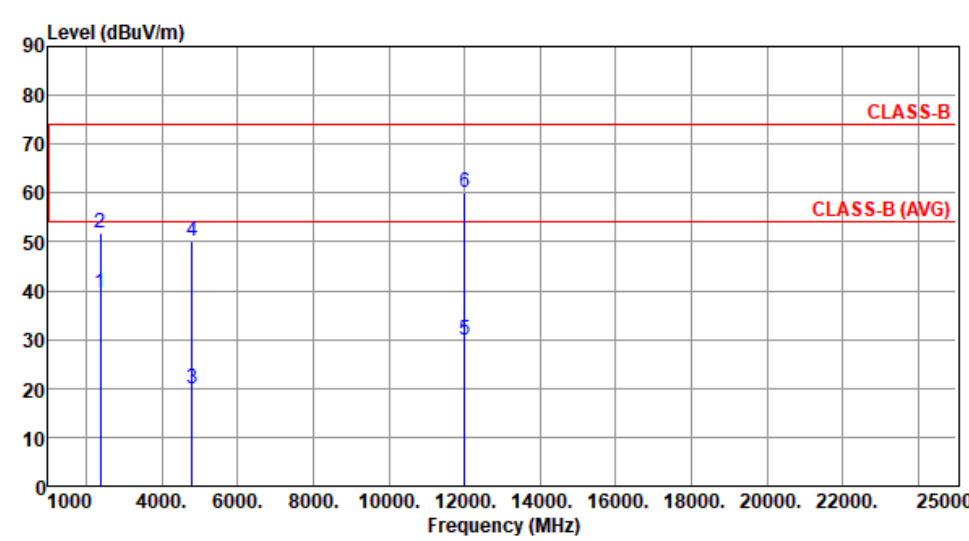Modulation	8DPSK	Test Freq. (MHz)	2402						
Polarization	Horizontal								
Test By :BRAD WU Temperature(°C):24 Humidity(%):63									
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	39.52	54.00	-14.48	42.32	-2.80	Average	115	310
2	2390.00	51.93	74.00	-22.07	54.73	-2.80	Peak	115	310
3	4804.00	20.02	54.00	-33.98	16.49	3.53	Average	201	14
4	4804.00	50.12	74.00	-23.88	46.59	3.53	Peak	201	14
5	12010.00	29.88	54.00	-24.12	16.16	13.72	Average	100	45
6	12010.00	59.98	74.00	-14.02	46.26	13.72	Peak	100	45
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :BRAD WU Temperature(°C):24 Humidity(%):63

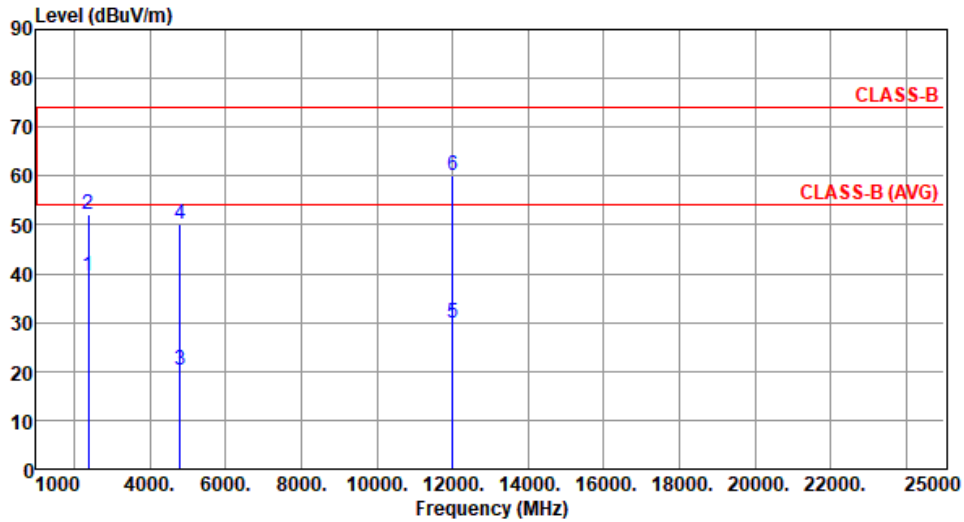

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.61	54.00	-14.39	42.41	-2.80	Average	145	201
2	2390.00	52.14	74.00	-21.86	54.94	-2.80	Peak	145	201
3	4804.00	20.12	54.00	-33.88	16.59	3.53	Average	211	103
4	4804.00	50.22	74.00	-23.78	46.69	3.53	Peak	211	103
5	12010.00	29.86	54.00	-24.14	16.14	13.72	Average	100	25
6	12010.00	59.96	74.00	-14.04	46.24	13.72	Peak	100	25


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Horizontal		

Test By :BRAD WU Temperature(°C):24 Humidity(%):63

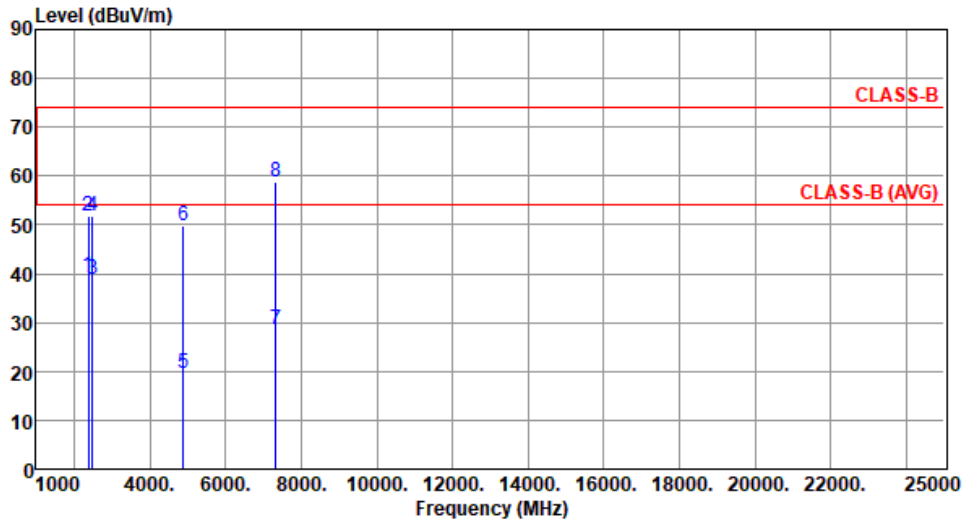

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.51	54.00	-14.49	42.31	-2.80	Average	114	308
2	2390.00	51.76	74.00	-22.24	54.56	-2.80	Peak	114	308
3	2483.50	38.92	54.00	-15.08	41.95	-3.03	Average	114	308
4	2483.50	51.65	74.00	-22.35	54.68	-3.03	Peak	114	308
5	4882.00	19.66	54.00	-34.34	16.03	3.63	Average	200	14
6	4882.00	49.76	74.00	-24.24	46.13	3.63	Peak	200	14
7	7323.00	28.62	54.00	-25.38	19.41	9.21	Average	204	355
8	7323.00	58.72	74.00	-15.28	49.51	9.21	Peak	204	355


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical		

Test By :BRAD WU Temperature(°C):24 Humidity(%):63

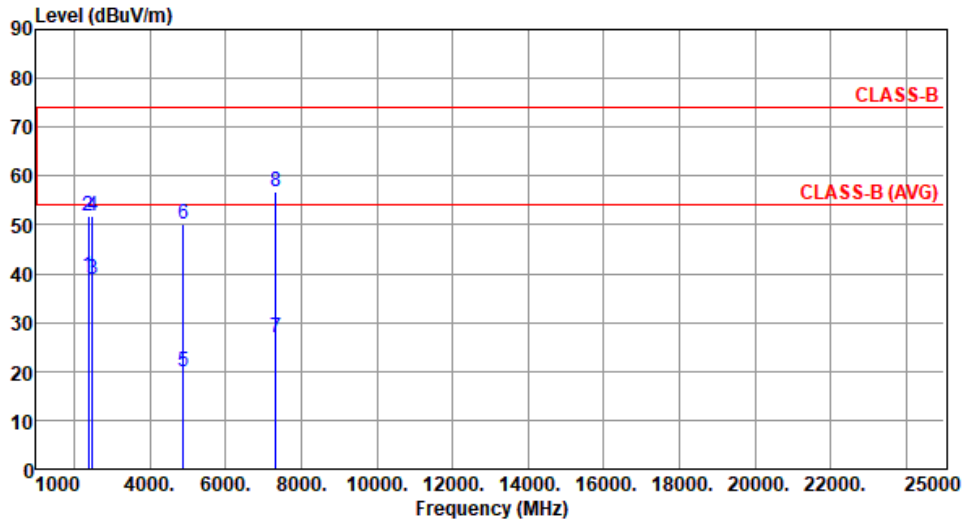

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.55	54.00	-14.45	42.35	-2.80	Average	128	202
2	2390.00	51.78	74.00	-22.22	54.58	-2.80	Peak	128	202
3	2483.50	38.96	54.00	-15.04	41.99	-3.03	Average	128	202
4	2483.50	51.74	74.00	-22.26	54.77	-3.03	Peak	128	202
5	4882.00	20.06	54.00	-33.94	16.43	3.63	Average	223	109
6	4882.00	50.16	74.00	-23.84	46.53	3.63	Peak	223	109
7	7323.00	26.74	54.00	-27.26	17.53	9.21	Average	196	302
8	7323.00	56.84	74.00	-17.16	47.63	9.21	Peak	196	302


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal		

Test By :BRAD WU Temperature(°C):24 Humidity(%):63

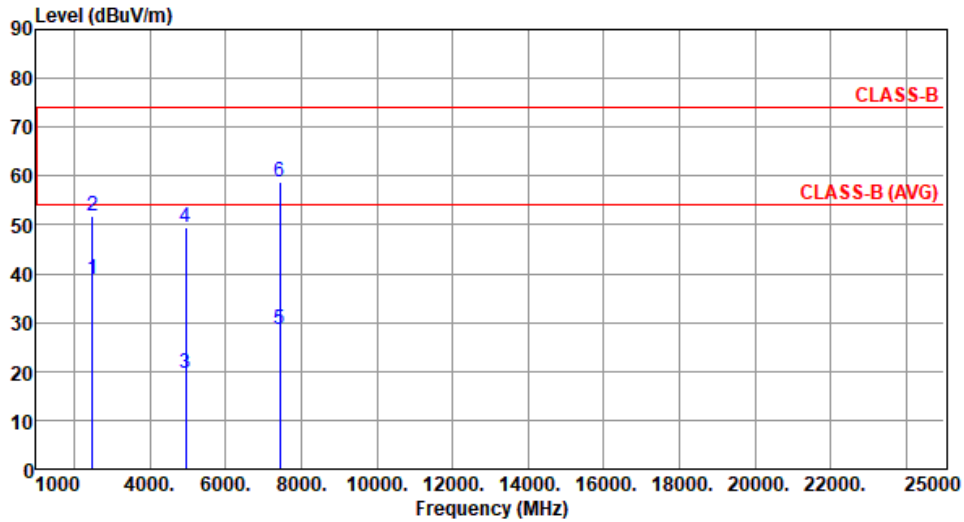

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	38.94	54.00	-15.06	41.97	-3.03	Average	115	303
2	2483.50	51.69	74.00	-22.31	54.72	-3.03	Peak	115	303
3	4960.00	19.54	54.00	-34.46	15.71	3.83	Average	202	11
4	4960.00	49.64	74.00	-24.36	45.81	3.83	Peak	202	11
5	7440.00	28.56	54.00	-25.44	19.35	9.21	Average	198	355
6	7440.00	58.66	74.00	-15.34	49.45	9.21	Peak	198	355


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical		

Test By :BRAD WU Temperature(°C):24 Humidity(%):63

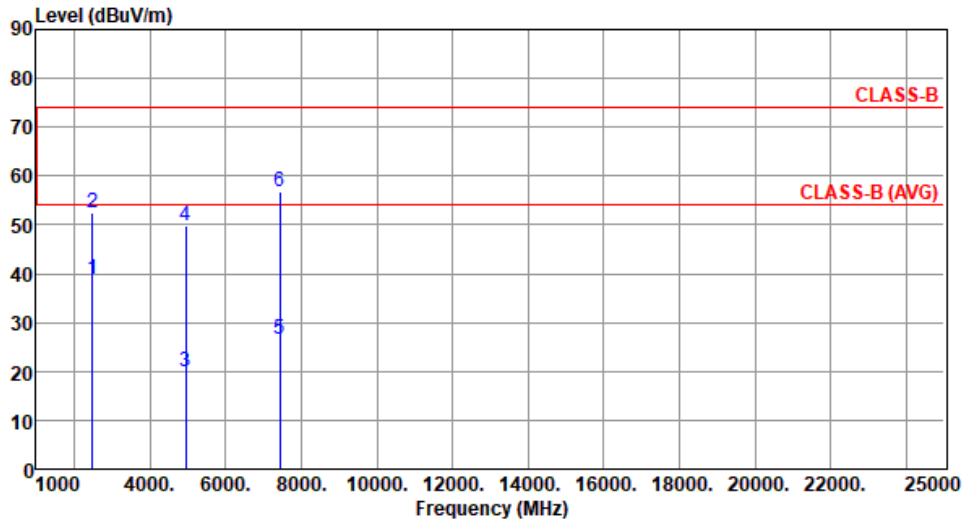

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	38.91	54.00	-15.09	41.94	-3.03	Average	125	224
2	2483.50	52.35	74.00	-21.65	55.38	-3.03	Peak	125	224
3	4960.00	19.85	54.00	-34.15	16.02	3.83	Average	206	110
4	4960.00	49.95	74.00	-24.05	46.12	3.83	Peak	206	110
5	7440.00	26.58	54.00	-27.42	17.37	9.21	Average	199	304
6	7440.00	56.68	74.00	-17.32	47.47	9.21	Peak	199	304


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Test Configuration 2: Charging mode


3.2.7 Transmitter Radiated Unwanted Emissions (Below 1GHz)

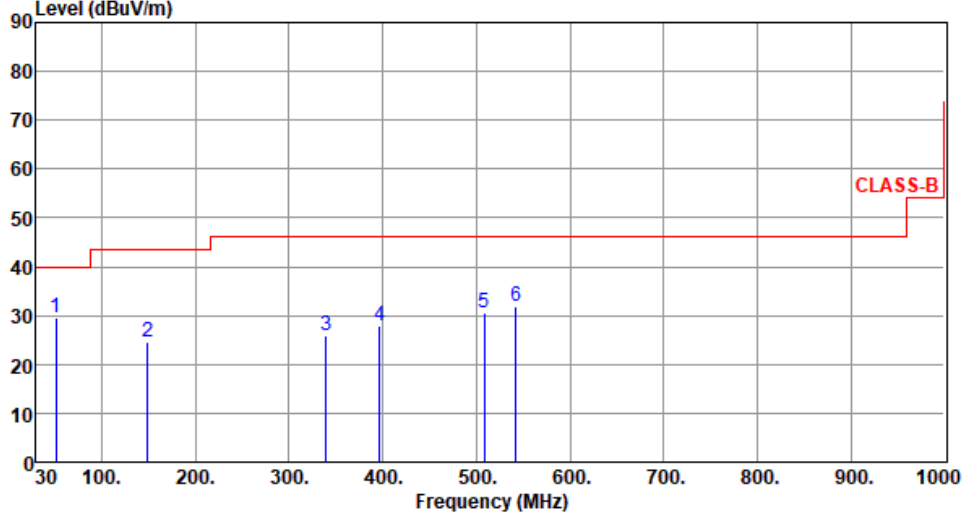Mode	Charging	Test Freq. (MHz)	-					
Polarization	Horizontal							
Test By :BRAD WU Temperature(°C):25 Humidity(%):65								
								
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	51.34	29.71	40.00	-10.29	38.51	-8.80	Peak	---
2	149.31	24.52	43.50	-18.98	33.30	-8.78	Peak	---
3	339.43	25.85	46.00	-20.15	33.10	-7.25	Peak	---
4	396.66	27.90	46.00	-18.10	33.74	-5.84	Peak	---
5	508.21	30.53	46.00	-15.47	33.55	-3.02	Peak	---
6	542.16	31.77	46.00	-14.23	34.43	-2.66	Peak	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
 Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Mode	Charging	Test Freq. (MHz)	-
Polarization	Vertical		

Test By :BRAD WU Temperature(°C):25 Humidity(%):65

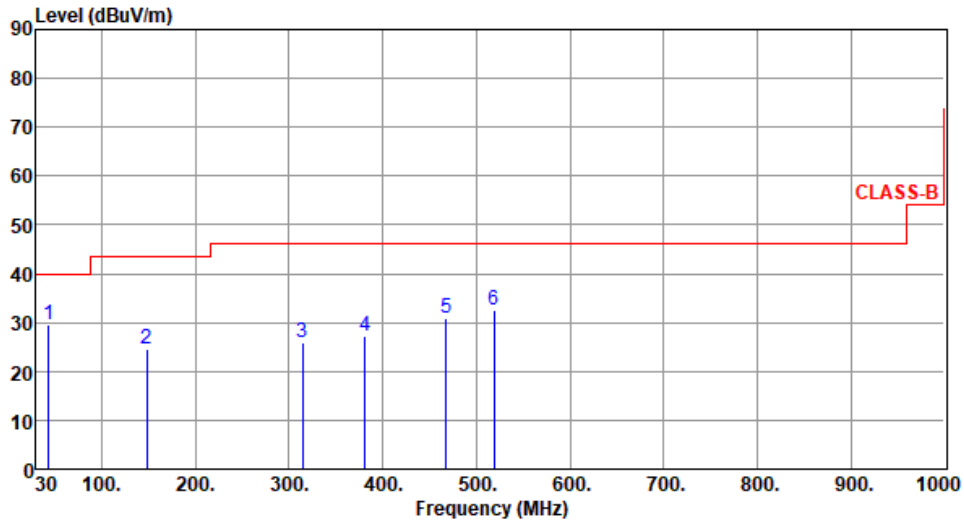

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	43.58	29.40	40.00	-10.60	37.98	-8.58	Peak	---	---
2	148.34	24.67	43.50	-18.83	33.49	-8.82	Peak	---	---
3	314.21	25.84	46.00	-20.16	33.84	-8.00	Peak	---	---
4	381.14	27.35	46.00	-18.65	33.60	-6.25	Peak	---	---
5	467.47	30.90	46.00	-15.10	34.64	-3.74	Peak	---	---
6	518.88	32.69	46.00	-13.31	35.44	-2.75	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.3 Unwanted Emissions into Non-Restricted Frequency Bands

3.3.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.3.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement



1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.3.3 Test Setup

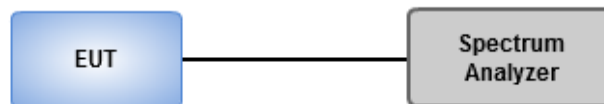


3.3.4 Unwanted Emissions into Non-Restricted Frequency Bands

Ambient Condition	24°C / 67%	Tested By	Aska Huang
--------------------------	------------	------------------	------------

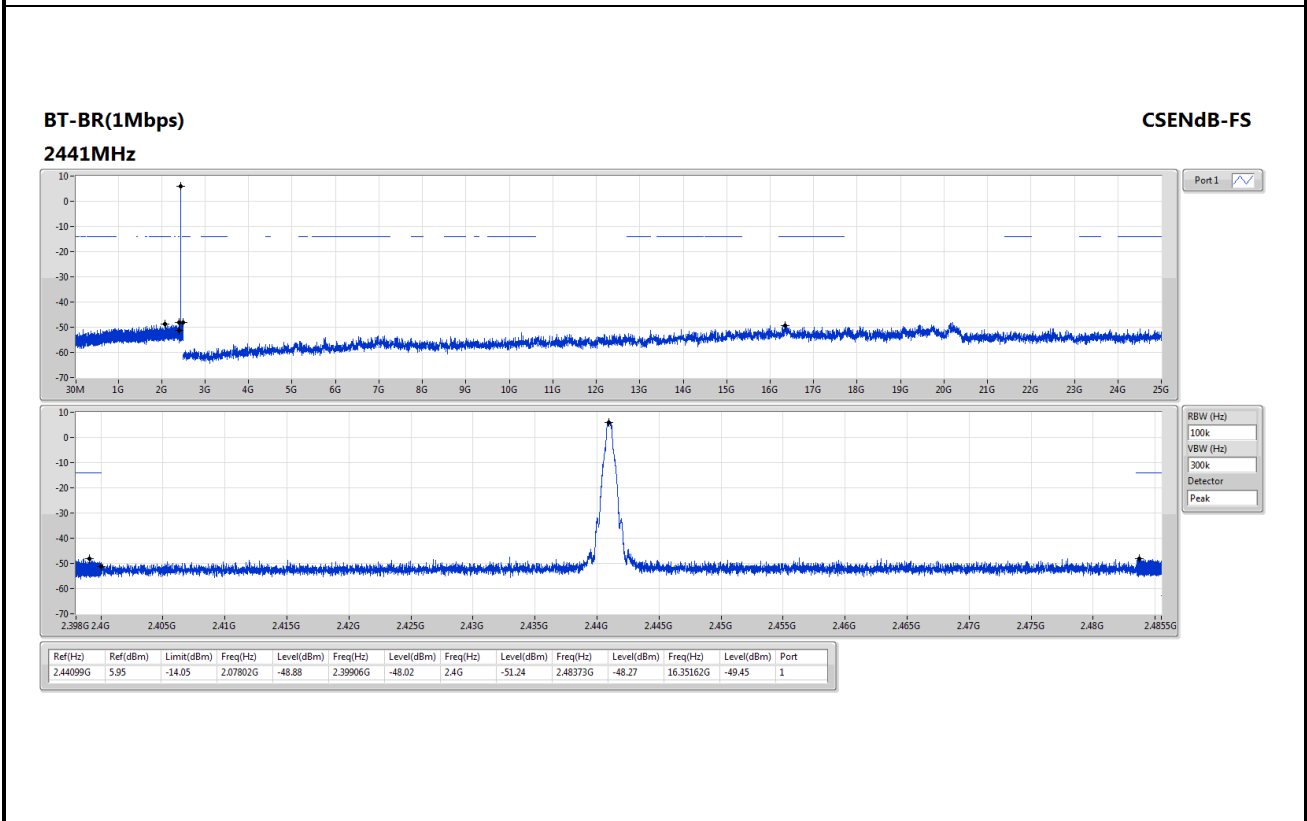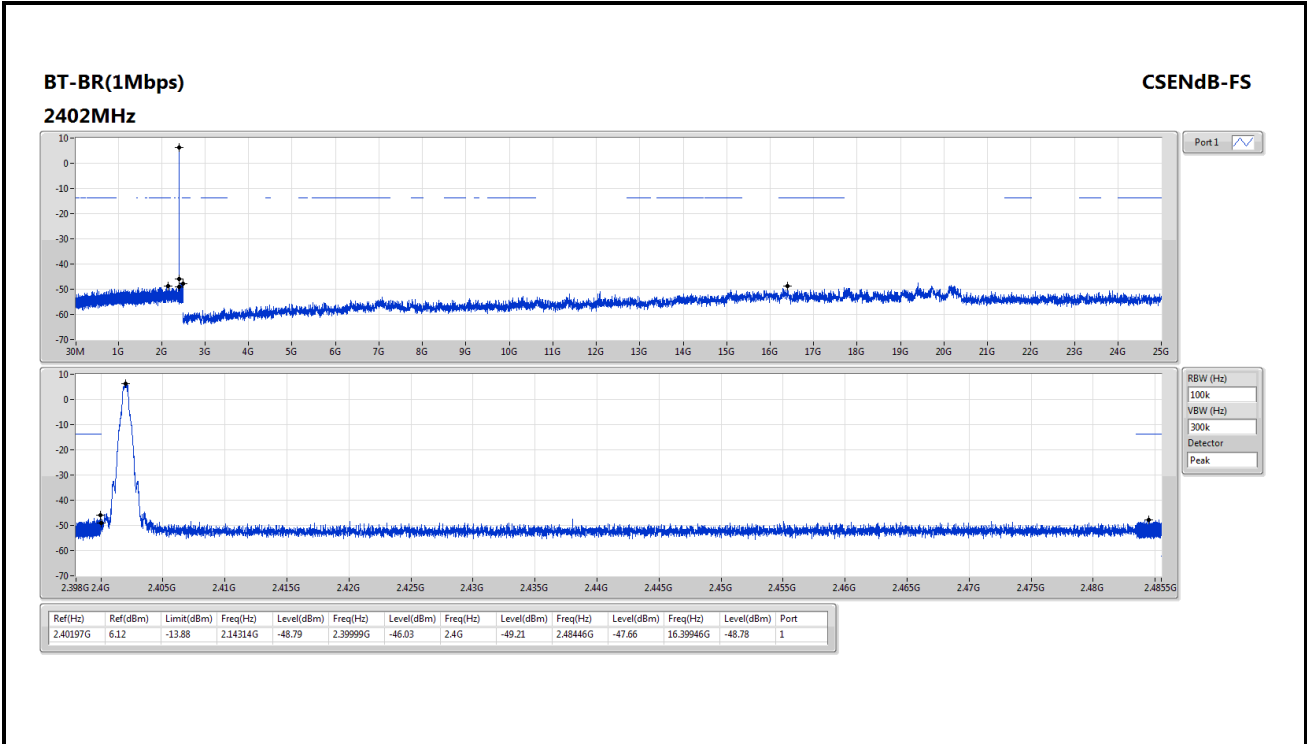


BT-BR(1Mbps)
2480MHz

CSENdB-FS

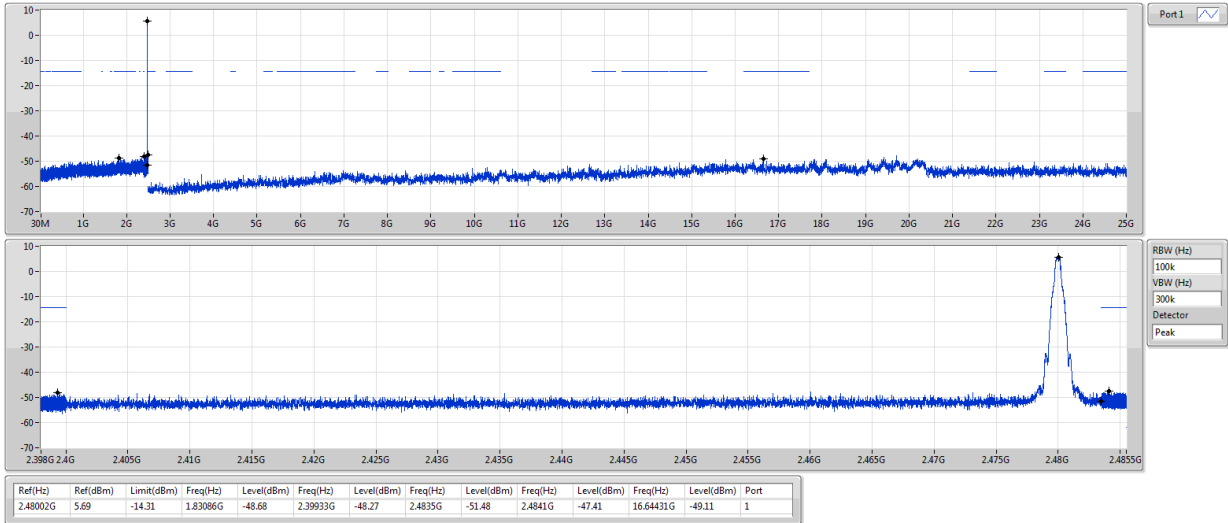

BT-EDR(2Mbps)
2402MHz


CSENdB-FS

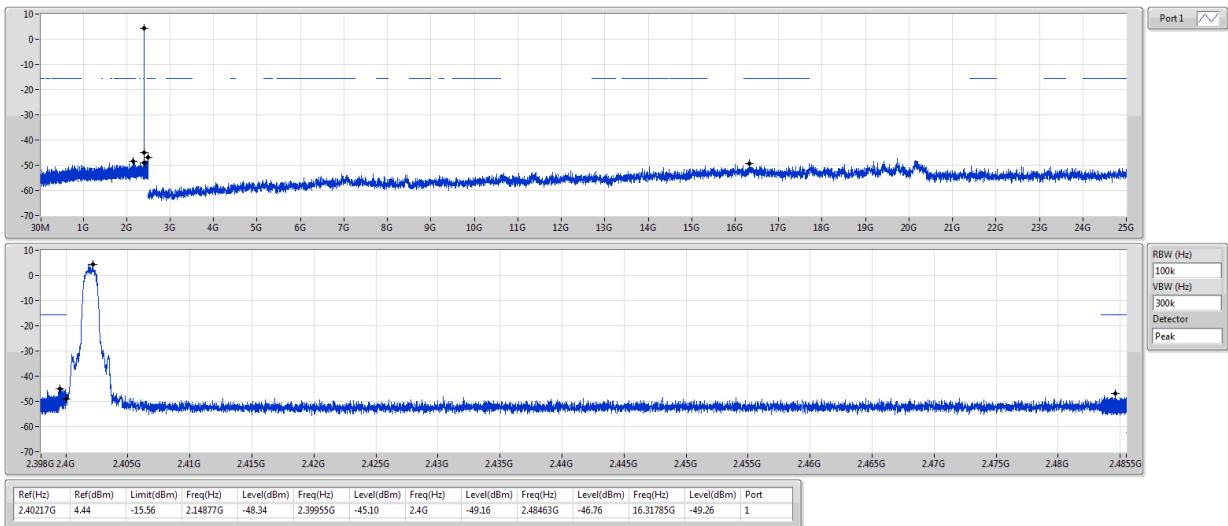

BT-EDR(2Mbps)

CSENdB-FS


2441MHz

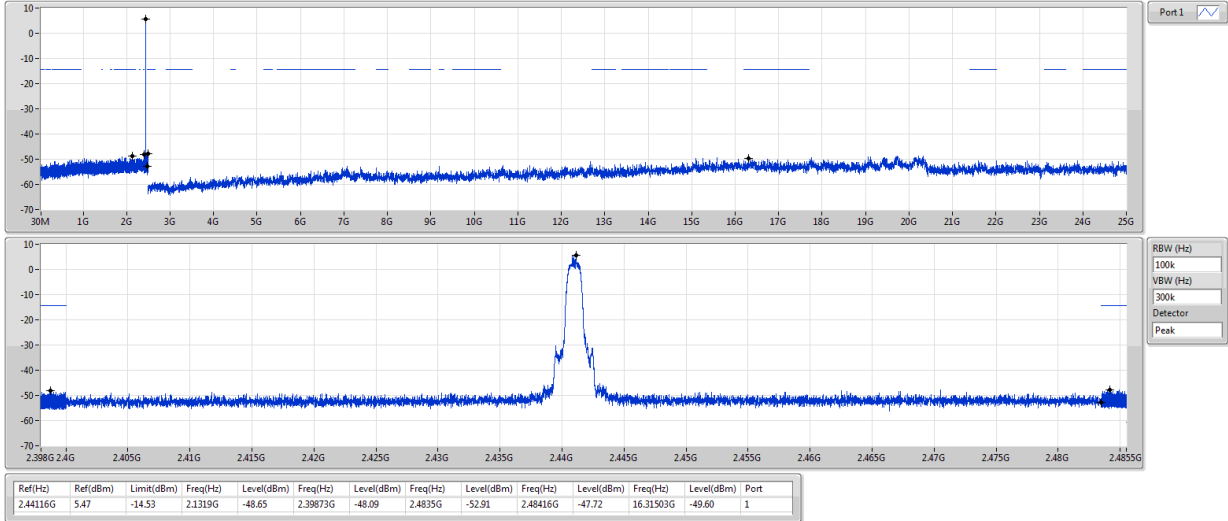

BT-EDR(2Mbps)

CSENdB-FS


2480MHz

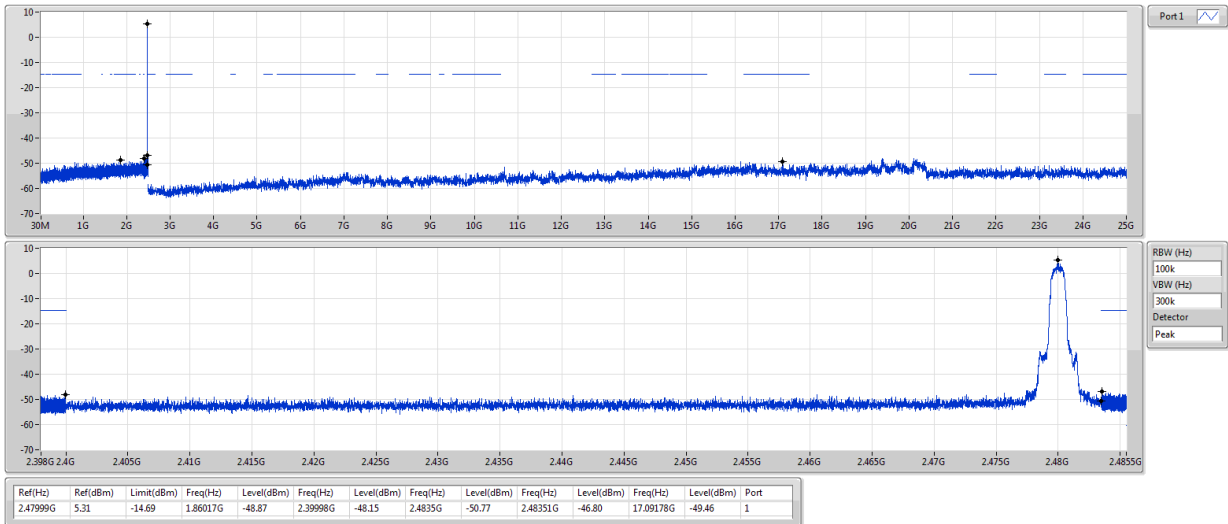

BT-EDR(3Mbps)

CSENdB-FS


2402MHz


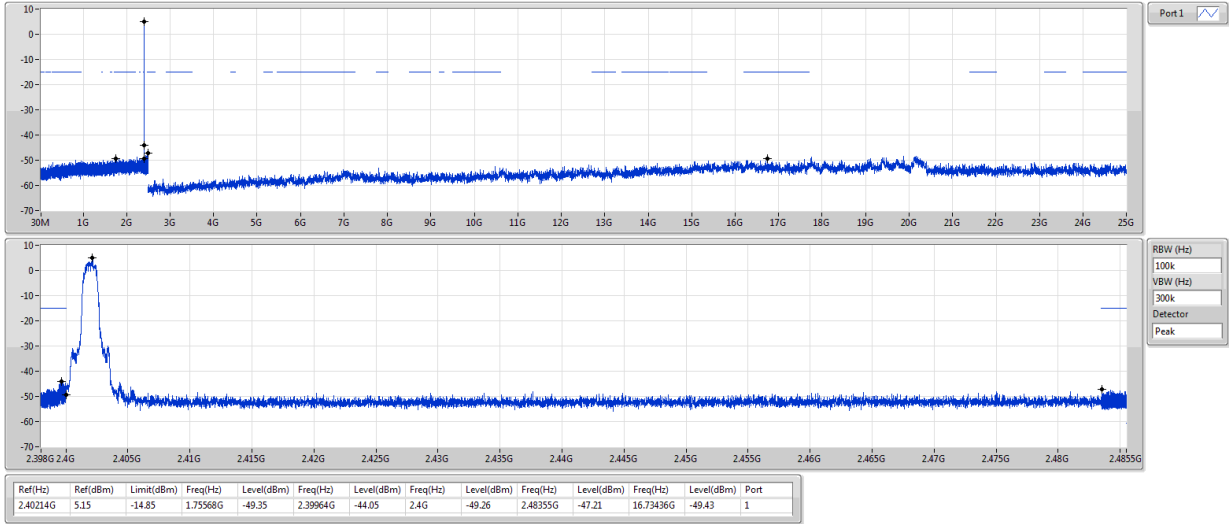


BT-EDR(3Mbps)

CSENdB-FS

2441MHz

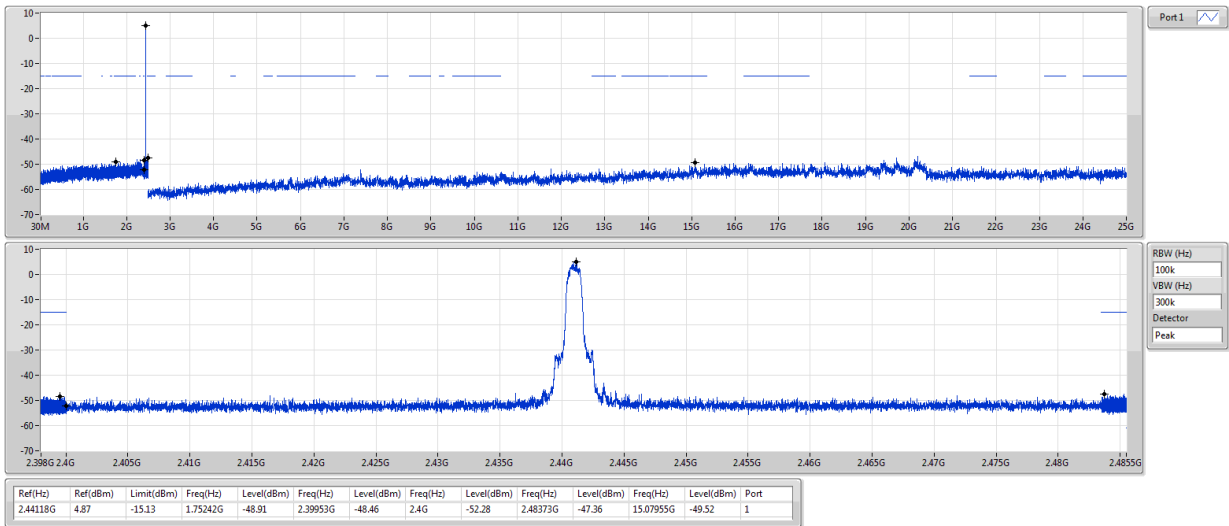


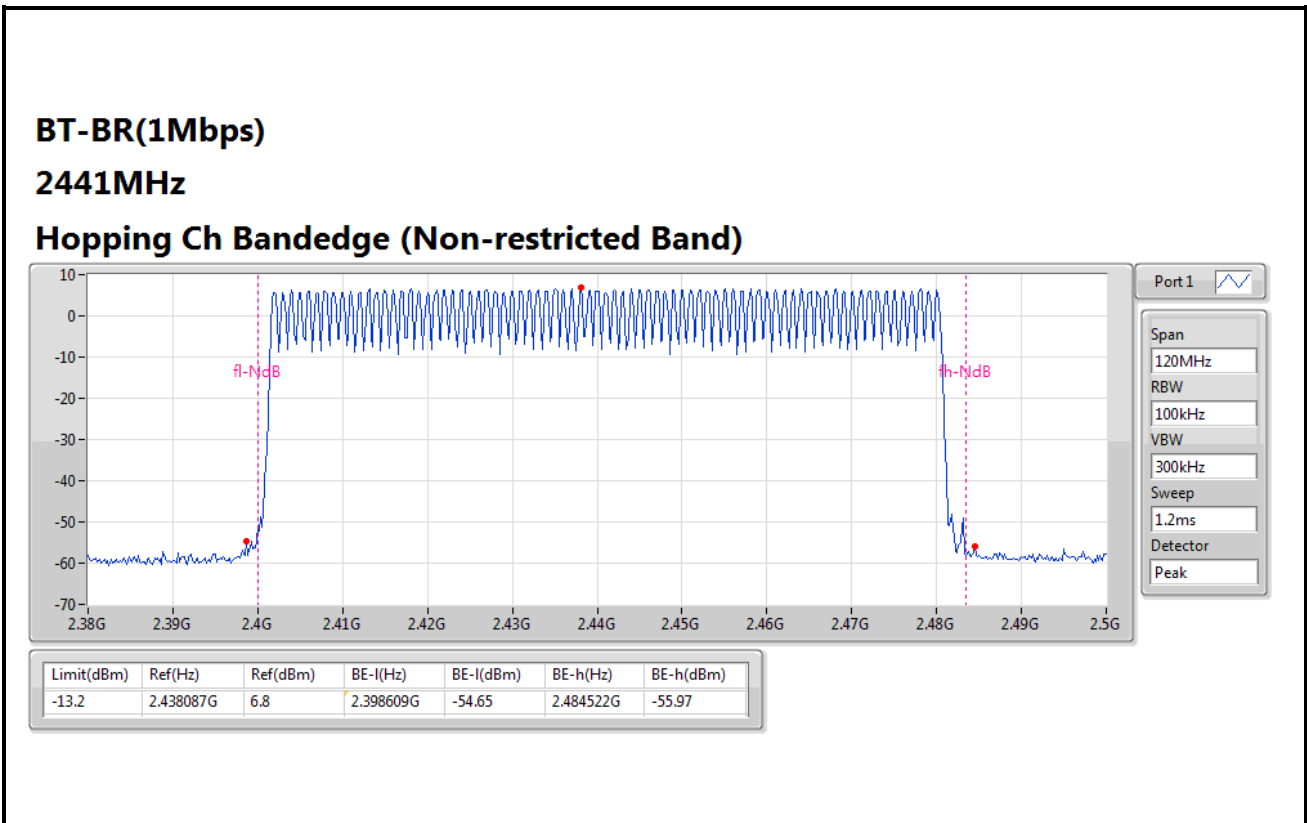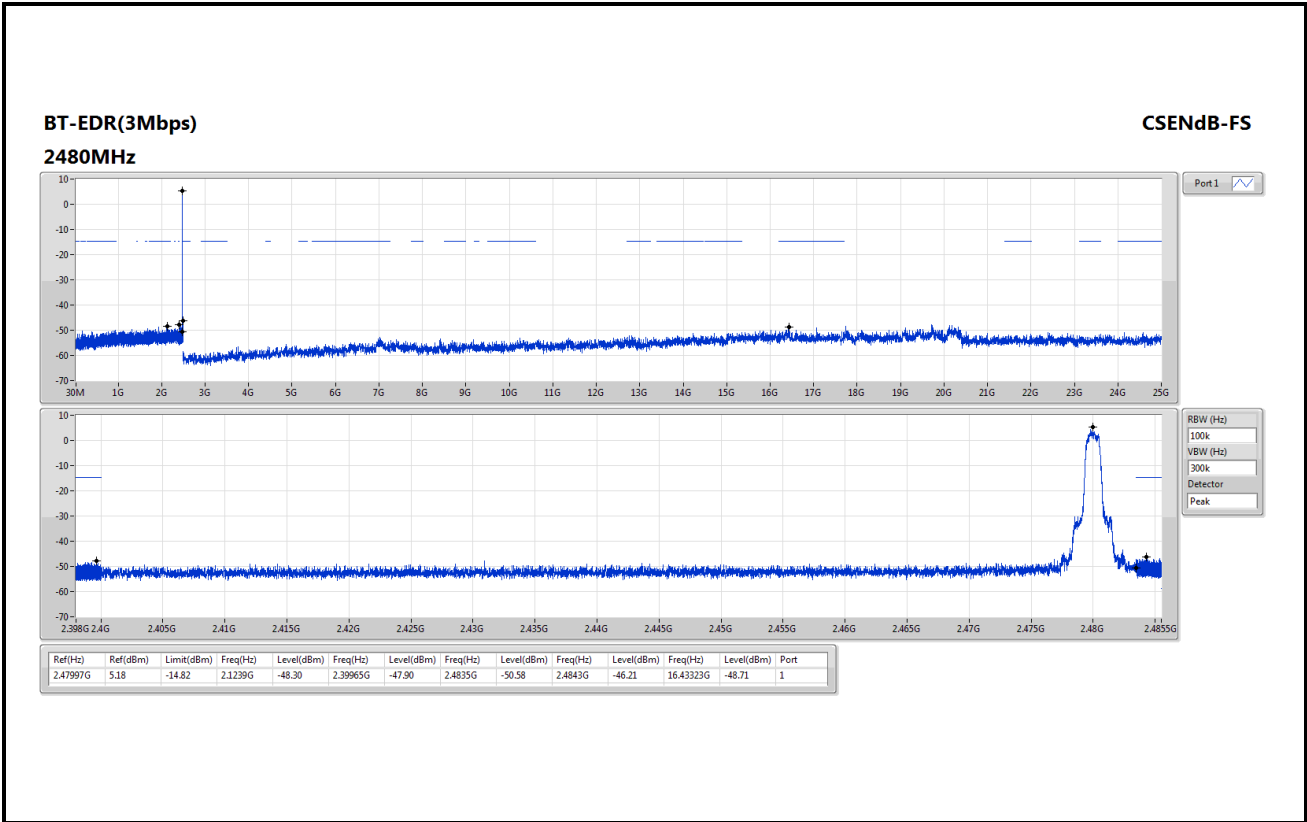

BT-EDR(2Mbps)

2441MHz


Hopping Ch Bandedge (Non-restricted Band)

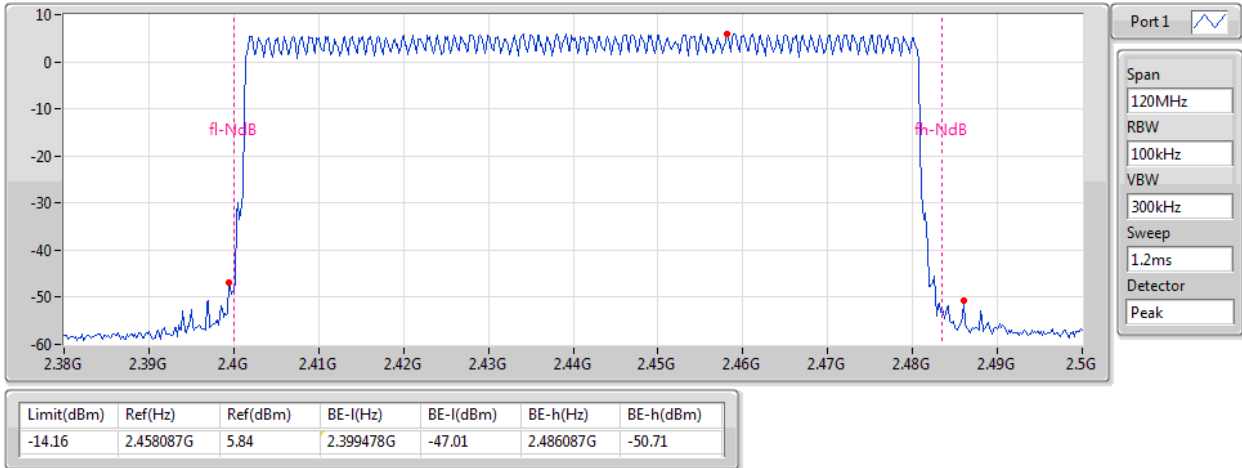

BT-EDR(3Mbps)

2441MHz

Hopping Ch Bandedge (Non-restricted Band)

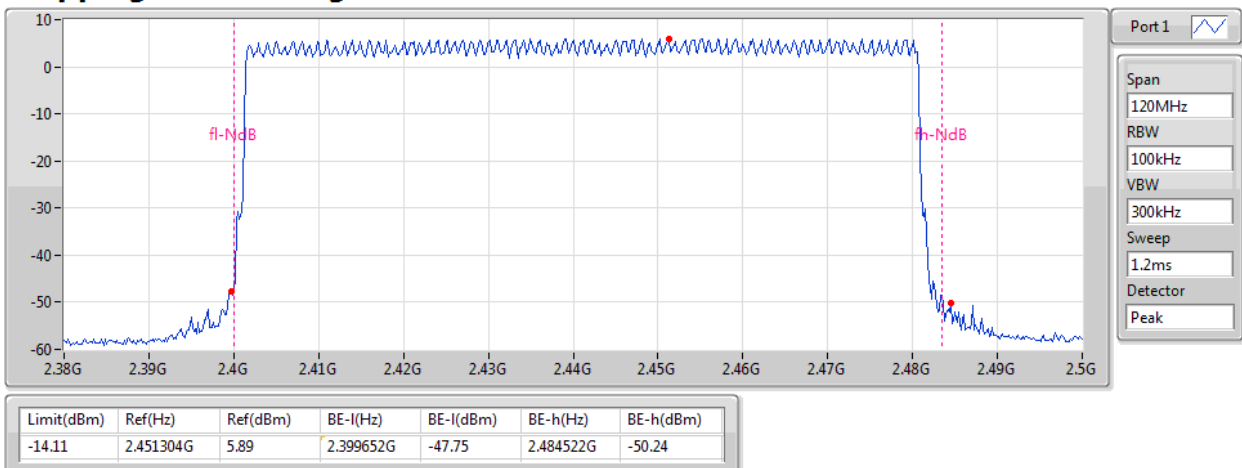

3.4 Conducted Output Power


3.4.1 Limit of Conducted Output Power

- 1 Watt
For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.
- 0.125 Watt
For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

3.4.2 Test Procedures

1. A wideband power meter is used for power measurement. Bandwidth of power sensor and meter is 50MHz
2. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

3.4.3 Test Setup

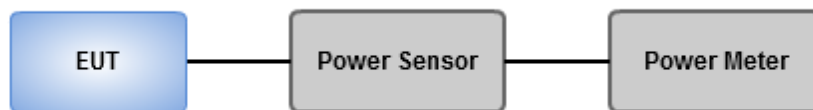

3.4.4 Test Result of Conducted Output Power

Ambient Condition	24°C / 67%	Tested By	Aska Huang
--------------------------	------------	------------------	------------

Summary of Peak Conducted Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	7.07	0.00509
BT-EDR(2Mbps)	8.62	0.00728
BT-EDR(3Mbps)	8.88	0.00773

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	-2.80	6.82	21.00
2441MHz	Pass	-2.80	7.02	21.00
2480MHz	Pass	-2.80	7.07	21.00
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	-2.80	8.50	21.00
2441MHz	Pass	-2.80	8.60	21.00
2480MHz	Pass	-2.80	8.62	21.00
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	-2.80	8.82	21.00
2441MHz	Pass	-2.80	8.82	21.00
2480MHz	Pass	-2.80	8.88	21.00

Summary of Conducted (Average) Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	7.03	0.00505
BT-EDR(2Mbps)	6.05	0.00403
BT-EDR(3Mbps)	6.09	0.00406

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	-2.80	6.77	-
2441MHz	Pass	-2.80	6.96	-
2480MHz	Pass	-2.80	7.03	-
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	-2.80	5.74	-
2441MHz	Pass	-2.80	5.92	-
2480MHz	Pass	-2.80	6.05	-
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	-2.80	5.75	-
2441MHz	Pass	-2.80	5.94	-
2480MHz	Pass	-2.80	6.09	-

Note: Average power is for reference only.

3.5 Number of Hopping Frequency


3.5.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

3.5.2 Test Procedures

1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
2. Allow trace to stabilize.

3.5.3 Test Setup

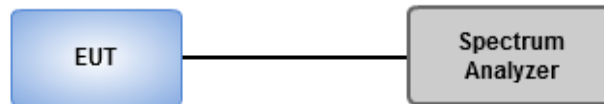

3.5.4 Test Result of Number of Hopping Frequency

Ambient Condition	24°C / 67%	Tested By	Aska Huang
--------------------------	------------	------------------	------------

Summary


Mode	Max-Hop No
2.4-2.4835GHz	-
BT-BR(1Mbps)	79
BT-EDR(2Mbps)	79
BT-EDR(3Mbps)	79

Result

Mode	Result	Hopping No	Limit
BT-BR(1Mbps)	-	-	-
2441MHz	Pass	79	15
BT-EDR(2Mbps)	-	-	-
2441MHz	Pass	79	15
BT-EDR(3Mbps)	-	-	-
2441MHz	Pass	79	15


BT-BR(1Mbps)
2441MHz

Hopping Ch

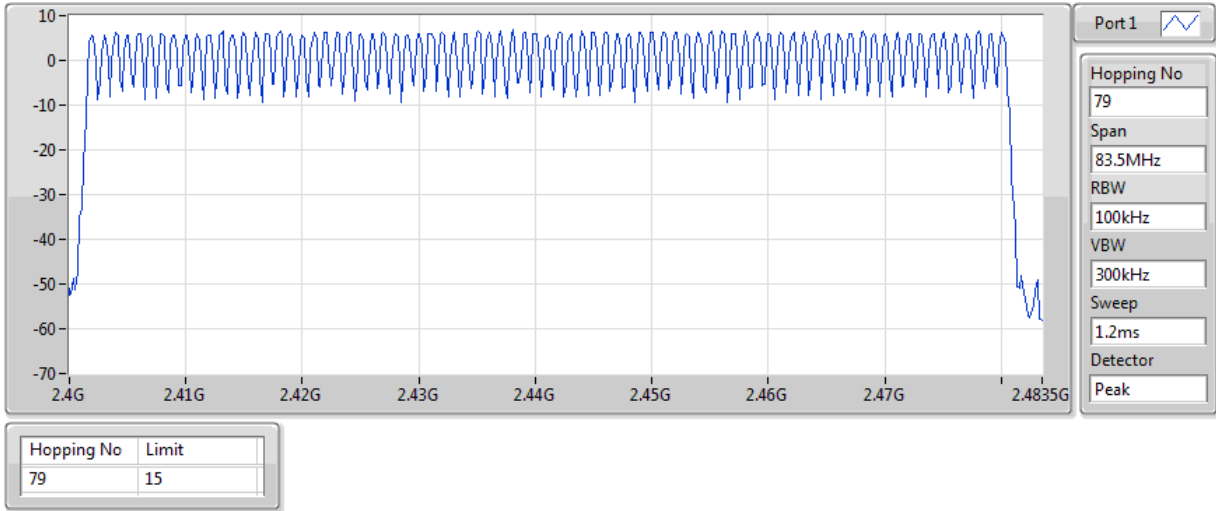


BT-EDR(2Mbps)
2441MHz

Hopping Ch

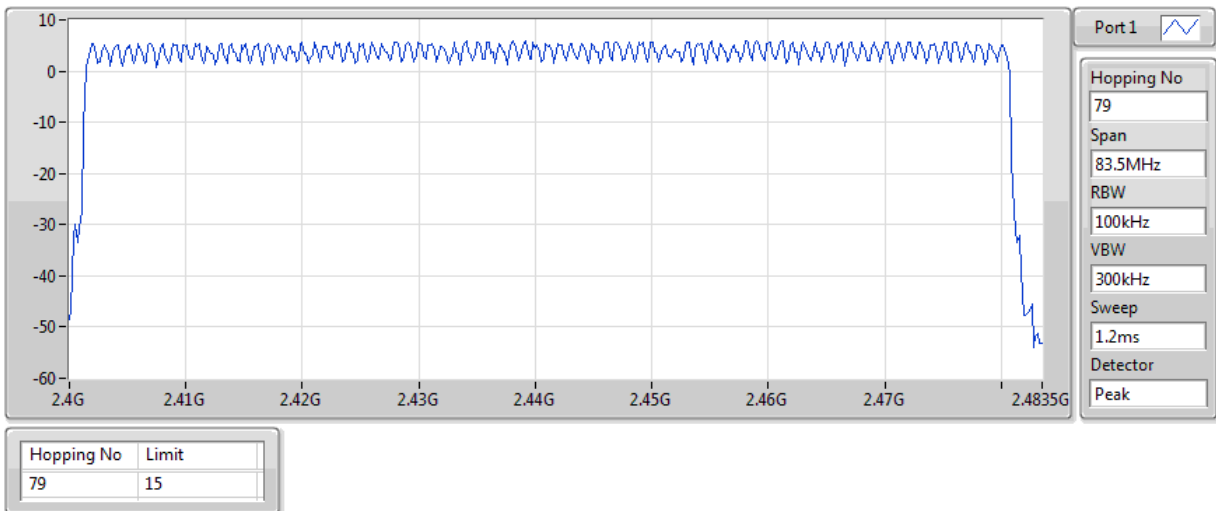

**BT-EDR(3Mbps)
2441MHz**

Hopping Ch

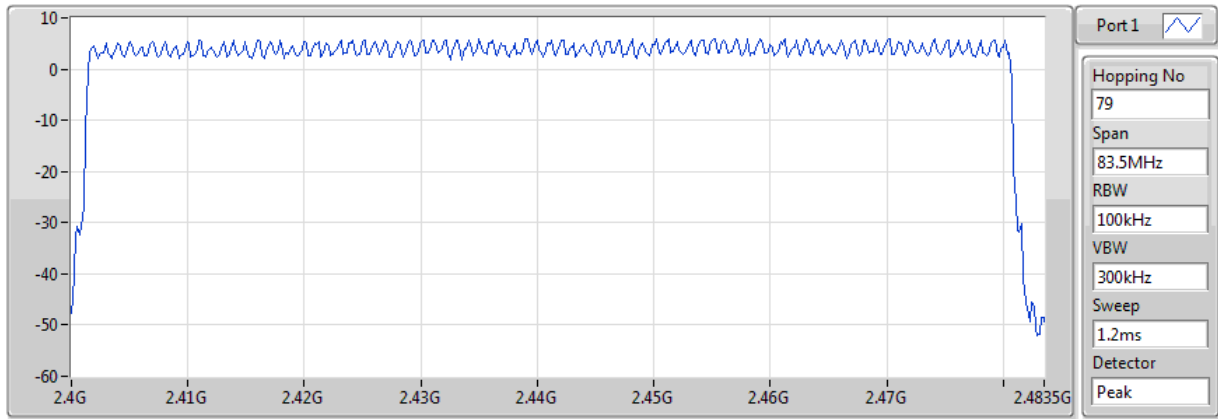

Hopping No	Limit
79	15

3.6 20dB and Occupied Bandwidth

3.6.1 Test Procedures


20dB Bandwidth

1. Set RBW=10kHz VBW= 30kHz for BT BR mode, RBW=20kHz, VBW=100kHz for other modes, Sweep time = Auto, Detector=Peak , Trace max hold
2. Allow trace to stabilize
3. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set RBW=10kHz VBW= 30kHz for BT BR mode, RBW=20kHz, VBW=100kHz for other modes, Sweep time = Auto, Detector=Sample , Trace max hold
2. Allow trace to stabilize
3. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

3.6.2 Test Setup

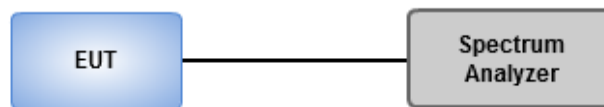

3.6.3 Test result of 20dB and Occupied Bandwidth

Ambient Condition	24°C / 67%	Tested By	Aska Huang
--------------------------	------------	------------------	------------

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-BR(1Mbps)	938.406k	871.201k	871KF1D	931.159k	865.412k
BT-EDR(2Mbps)	1.326M	1.192M	1M19G1D	1.326M	1.19M
BT-EDR(3Mbps)	1.337M	1.201M	1M20G1D	1.322M	1.198M

Max-N dB = Maximum 20dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 20dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	Inf	938.406k	865.412k
2441MHz	Pass	Inf	931.159k	871.201k
2480MHz	Pass	Inf	938.406k	865.412k
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.326M	1.192M
2441MHz	Pass	Inf	1.326M	1.19M
2480MHz	Pass	Inf	1.326M	1.192M
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.326M	1.198M
2441MHz	Pass	Inf	1.322M	1.201M
2480MHz	Pass	Inf	1.337M	1.201M

Port X-N dB = Port X 20dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

BT-BR(1Mbps)

EBW-FS


2402MHz

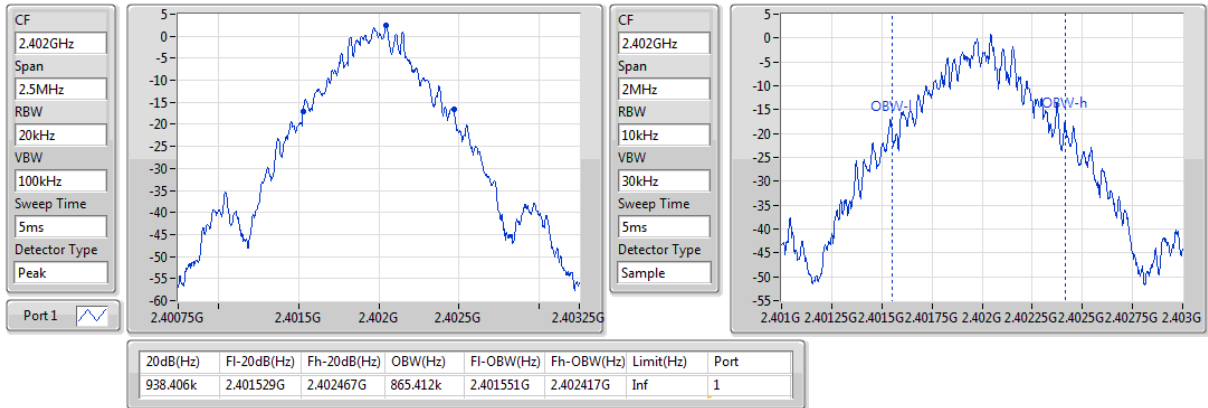

BT-BR(1Mbps)

EBW-FS


2441MHz

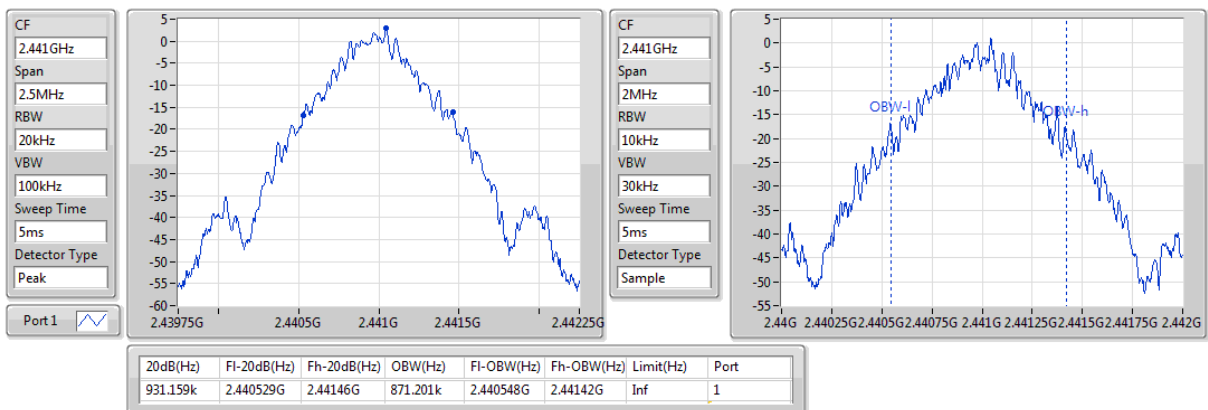

BT-BR(1Mbps)

EBW-FS


2480MHz

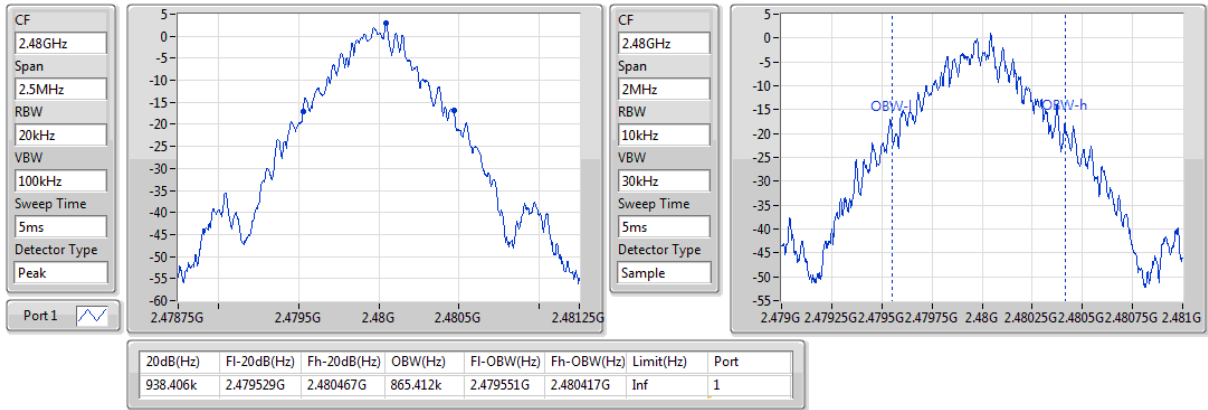

BT-EDR(2Mbps)

EBW-FS


2402MHz

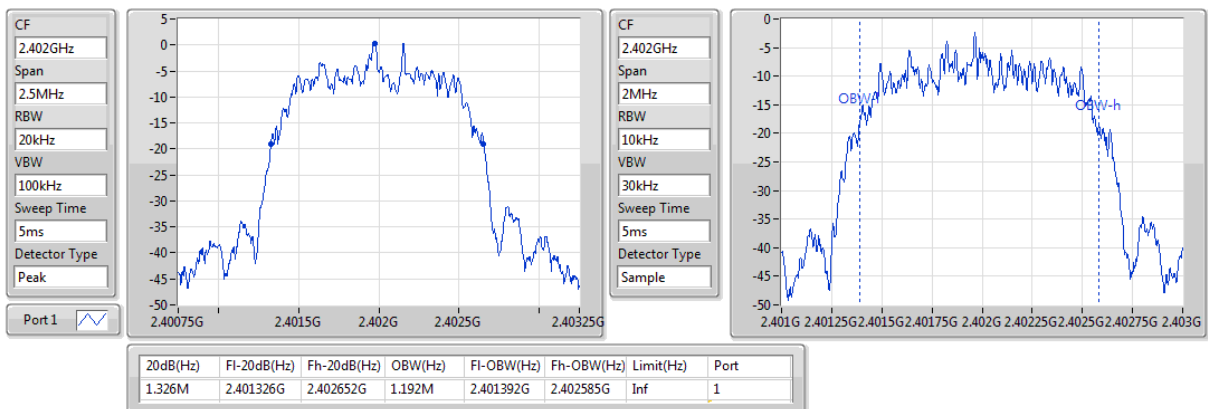

BT-EDR(2Mbps)

EBW-FS


2441MHz

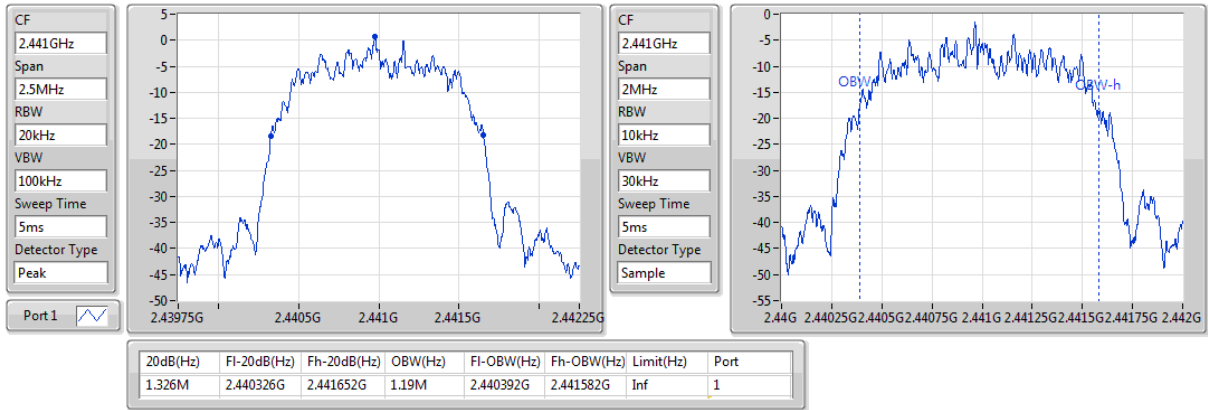

BT-EDR(2Mbps)

EBW-FS


2480MHz

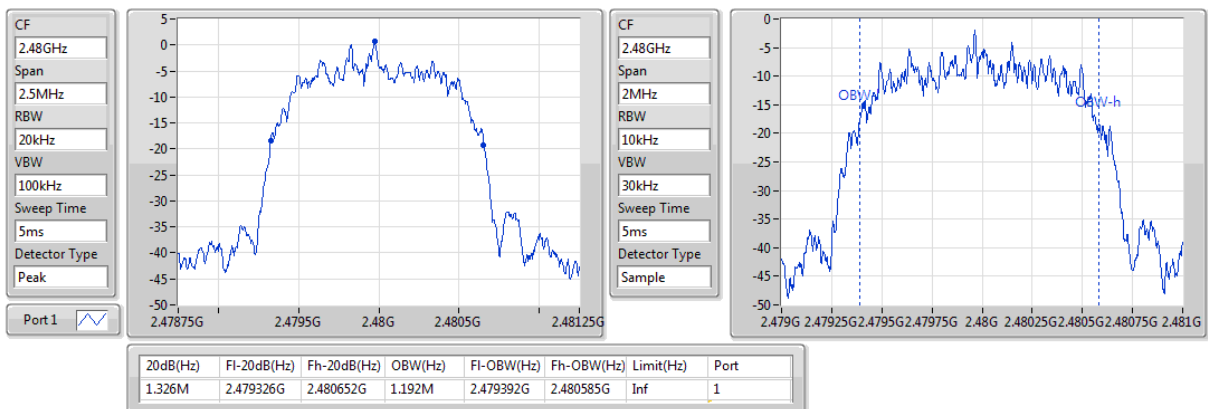

BT-EDR(3Mbps)

EBW-FS


2402MHz

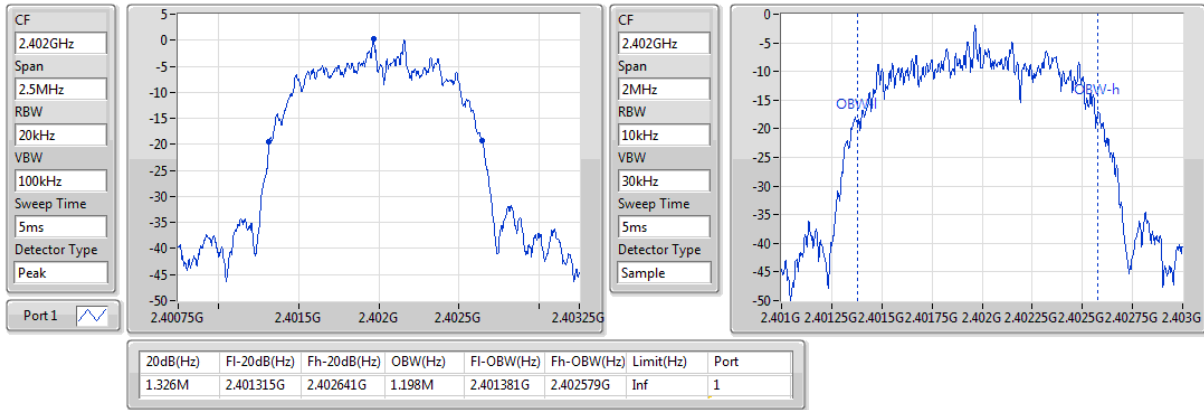

BT-EDR(3Mbps)

EBW-FS


2441MHz

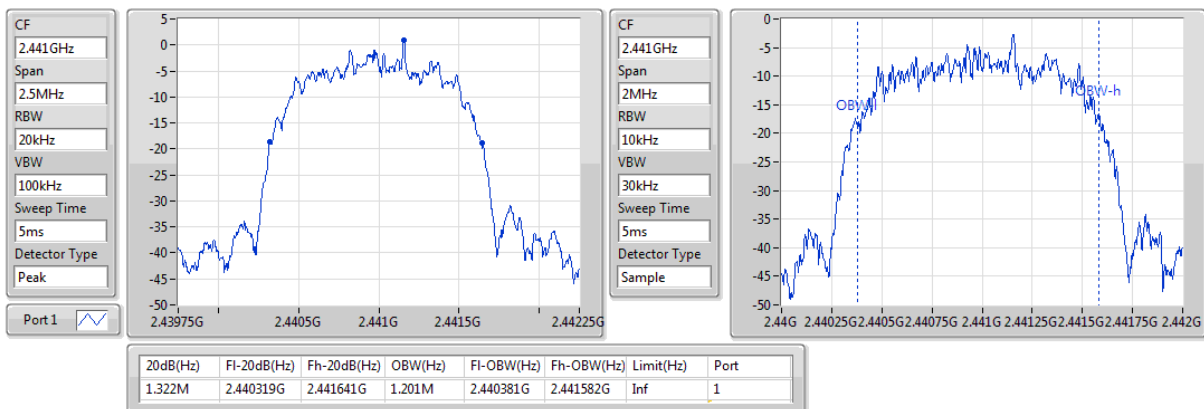

BT-EDR(3Mbps)

EBW-FS

2480MHz

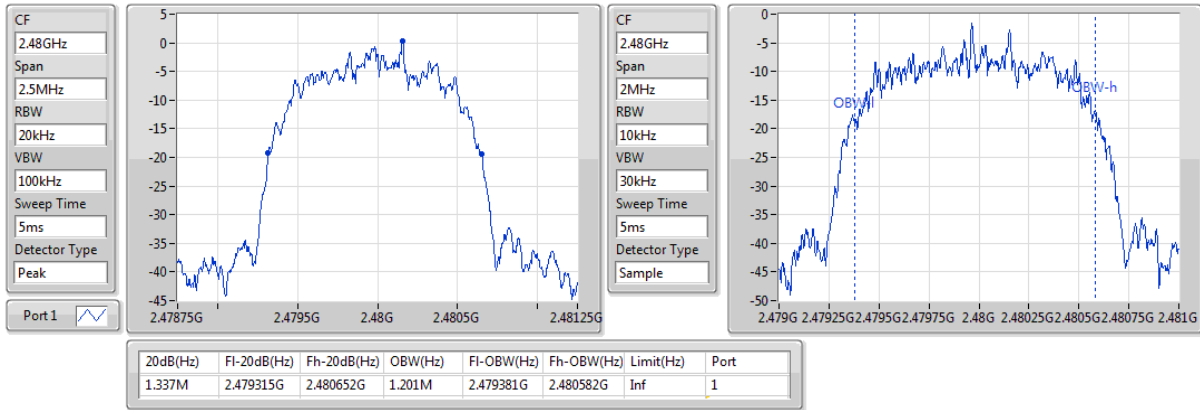

3.7 Channel Separation


3.7.1 Limit of Channel Separation

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.7.2 Test Procedures

1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak Trace max hold
2. Allow trace to stabilize
3. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

3.7.3 Test Setup

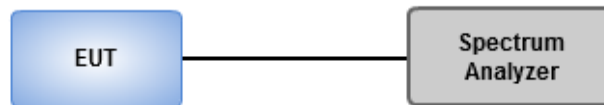

3.7.4 Test result of Channel Separation

Ambient Condition	24°C / 67%	Tested By	Aska Huang
--------------------------	------------	------------------	------------

Summary

Mode	Max-Space (Hz)	Min-Space (Hz)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	1.004348M	1M
BT-EDR(2Mbps)	1.004348M	1M
BT-EDR(3Mbps)	1M	1M


Result

Mode	Result	Fl (Hz)	Fh (Hz)	Ch.Space (Hz)	Limit (Hz)
BT-BR(1Mbps)	-	-	-	-	-
2402MHz	Pass	2.402043G	2.403048G	1.004348M	624.978396k
2441MHz	Pass	2.441043G	2.442043G	1M	620.151894k
2480MHz	Pass	2.479043G	2.480043G	1M	624.978396k
BT-EDR(2Mbps)	-	-	-	-	-
2402MHz	Pass	2.401978G	2.402978G	1M	883.116k
2441MHz	Pass	2.440978G	2.441978G	1M	883.116k
2480MHz	Pass	2.478974G	2.479978G	1.004348M	883.116k
BT-EDR(3Mbps)	-	-	-	-	-
2402MHz	Pass	2.401978G	2.402978G	1M	883.116k
2441MHz	Pass	2.440978G	2.441978G	1M	880.452k
2480MHz	Pass	2.478978G	2.479978G	1M	890.442k

BT-BR(1Mbps)

Channel Separation

2.402G/2.403GHz

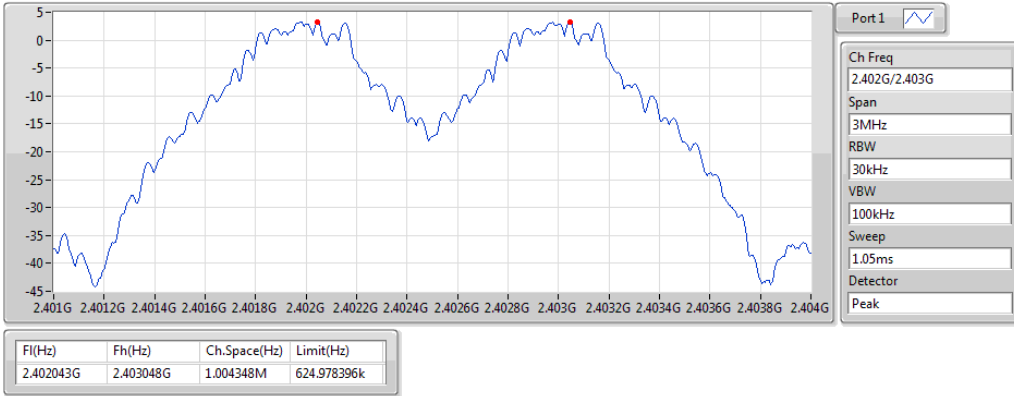

BT-BR(1Mbps)

Channel Separation


2.441G/2.442GHz



BT-BR(1Mbps)

Channel Separation


2.48G/2.479GHz

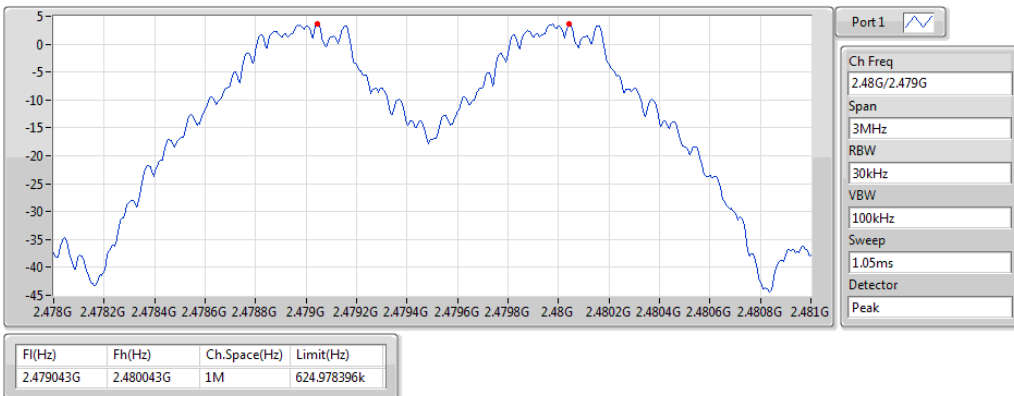

BT-EDR(2Mbps)

Channel Separation


2.402G/2.403GHz

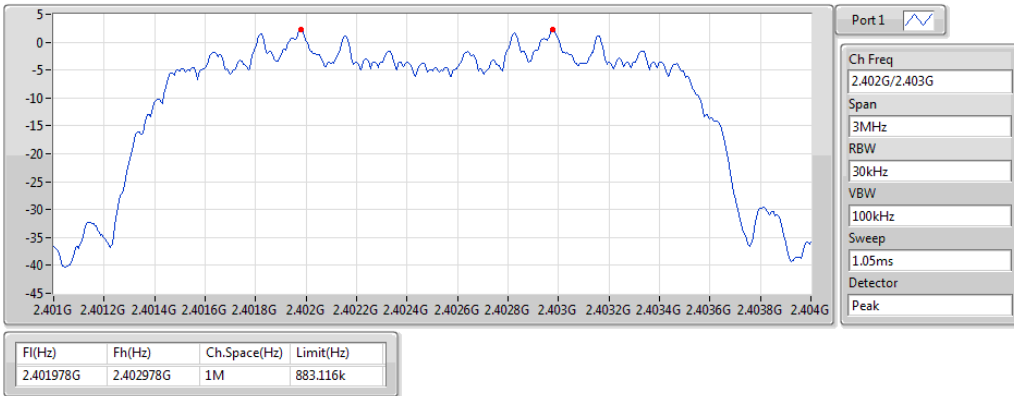

BT-EDR(2Mbps)

Channel Separation


2.441G/2.442GHz

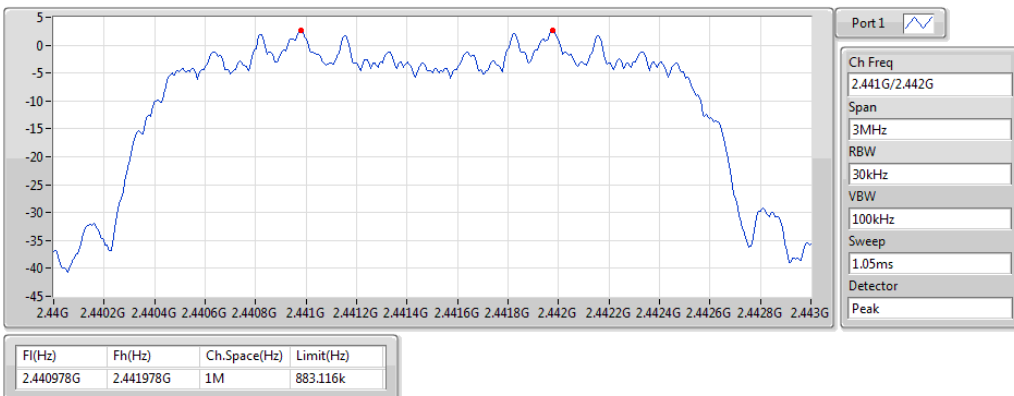

BT-EDR(2Mbps)

Channel Separation


2.48G/2.479GHz

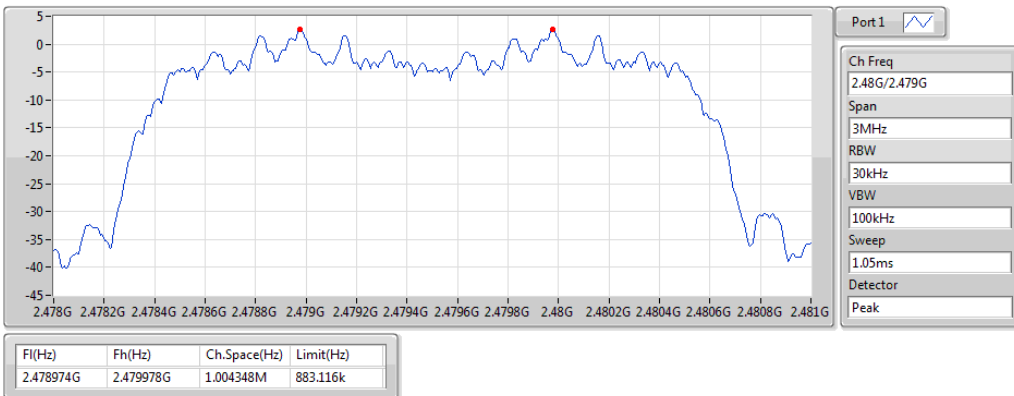

BT-EDR(3Mbps)

Channel Separation


2.402G/2.403GHz

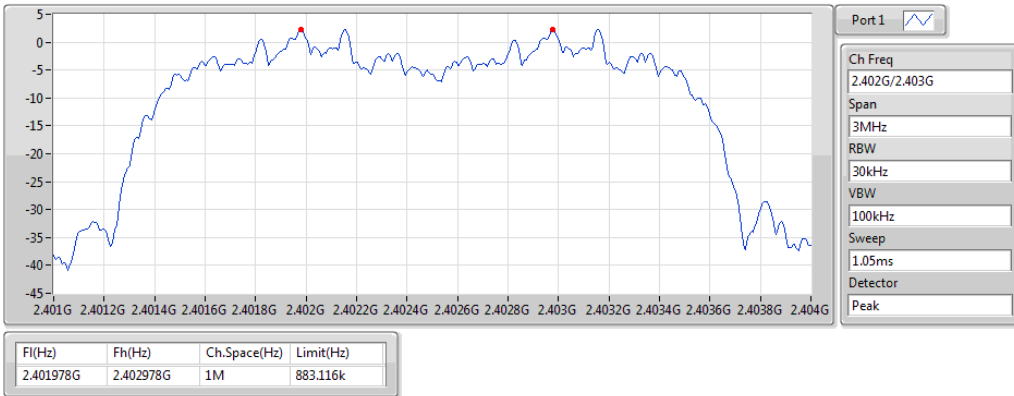

BT-EDR(3Mbps)

Channel Separation


2.441G/2.442GHz

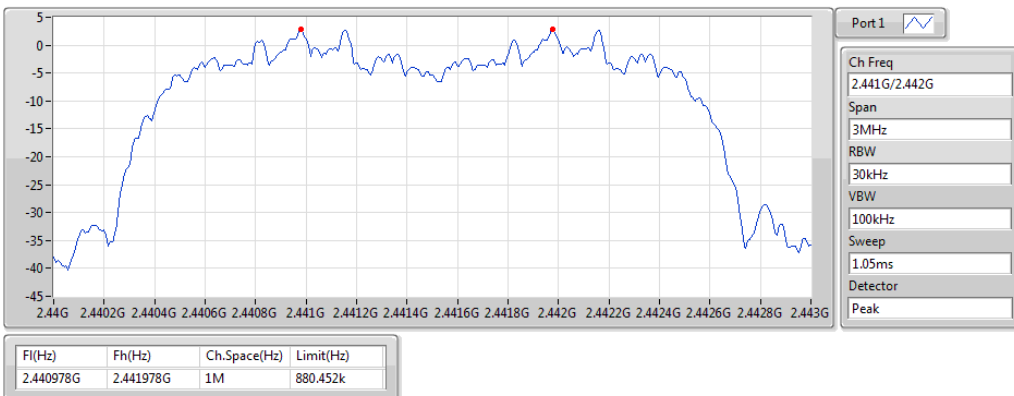

BT-EDR(3Mbps)

Channel Separation

2.48G/2.479GHz

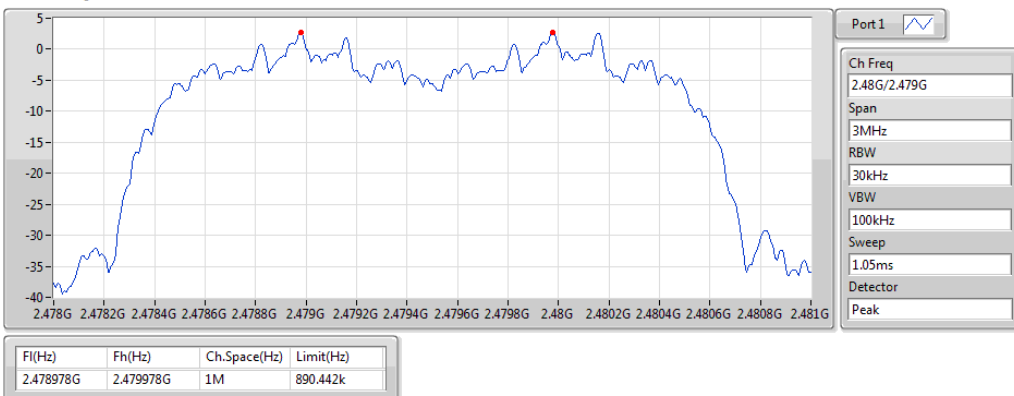

3.8 Number of Dwell Time


3.8.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.8.2 Test Procedures

1. Set RBW=100 kHz, VBW=300 kHz, Sweep time=5 ms, Detector=Peak, Span=0 Hz, Trace max hold.
2. Enable gating and trigger function of spectrum analyzer to measure burst on time.
3. Set RBW=100 kHz, VBW=300 kHz, Sweep time=5 s / 2 s, Detector=Peak, Span=0 Hz, Trace max hold.
4. Enable gating and trigger function of spectrum analyzer to measure burst on number of transmission.
5. Set RBW=100 kHz, VBW=300 kHz, Sweep time=31.6 s / 8 s, Detector=Peak, Span=0 Hz, Trace max hold.
6. Enable gating and trigger function of spectrum analyzer to measure burst on number of transmission of entire time cycle.

3.8.3 Test Setup

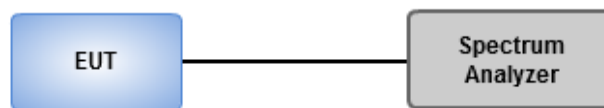

3.8.4 Test Result of Dwell Time

Ambient Condition	24°C / 67%	Tested By	Aska Huang
--------------------------	------------	------------------	------------

Result/ Non AFH mode

Mode	Result	Period (s)	Dwell (s)	Limit (s)	Tx On (ms)	Number of transmission in a 5 s
BT-BR(1Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	31.6	0.34754	0.4	2.89425	19
BT-EDR(2Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	31.6	0.34838	0.4	2.90125	19
BT-EDR(3Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	31.6	0.34847	0.4	2.90200	19

Note 1: Dwell time =Number of transmission in a 5 second x Tx On Time x 6.32

Note 2: DH5 was the worst mode.

Result/ AFH mode

Mode	Result	Period (s)	Dwell (s)	Limit (s)	Tx On (ms)	Number of transmission in a 2 s
BT-BR-AFH(1Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	8	0.30100	0.4	2.89425	26
BT-EDR-AFH(2Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	8	0.31334	0.4	2.90125	27
BT-EDR-AFH(3Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	8	0.31344	0.4	2.90225	27


Note 1: Dwell time =Number of transmission in a 2 second x Tx On Time x 4

Note 2: DH5 was the worst mode.

BT-BR(1Mbps)

Dwell


2402MHz

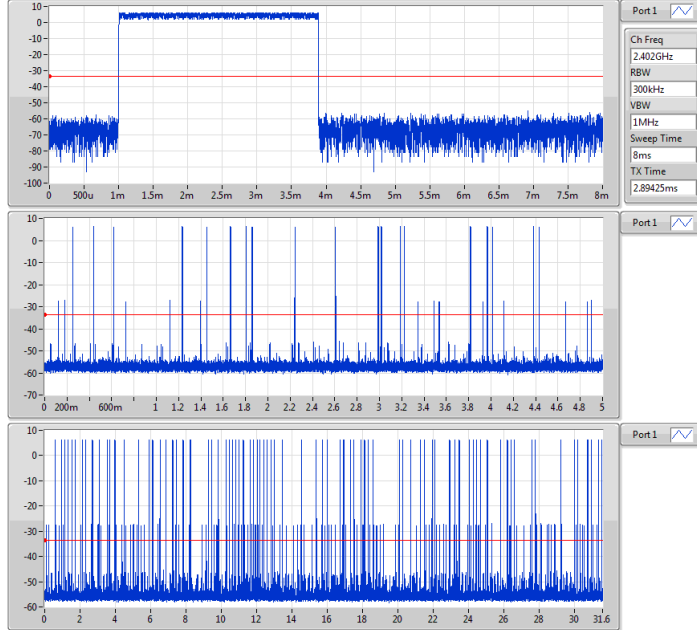

BT-EDR(2Mbps)

Dwell


2402MHz

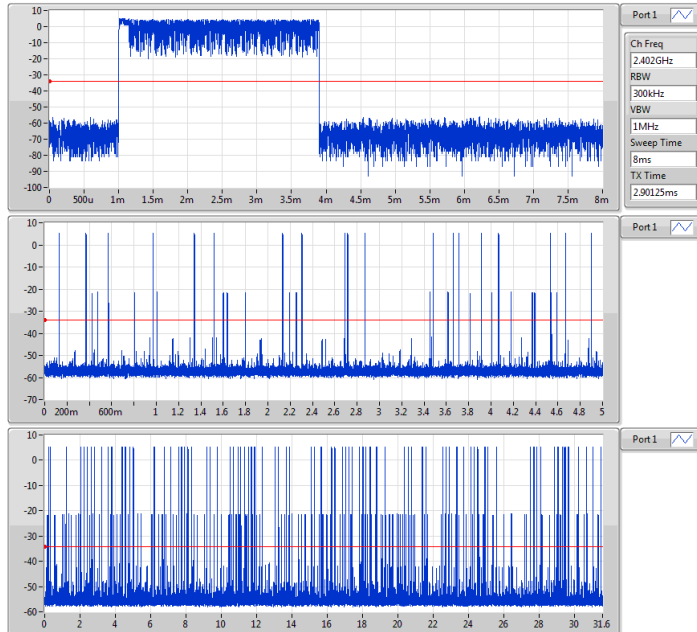

BT-EDR(3Mbps)

Dwell

2402MHz

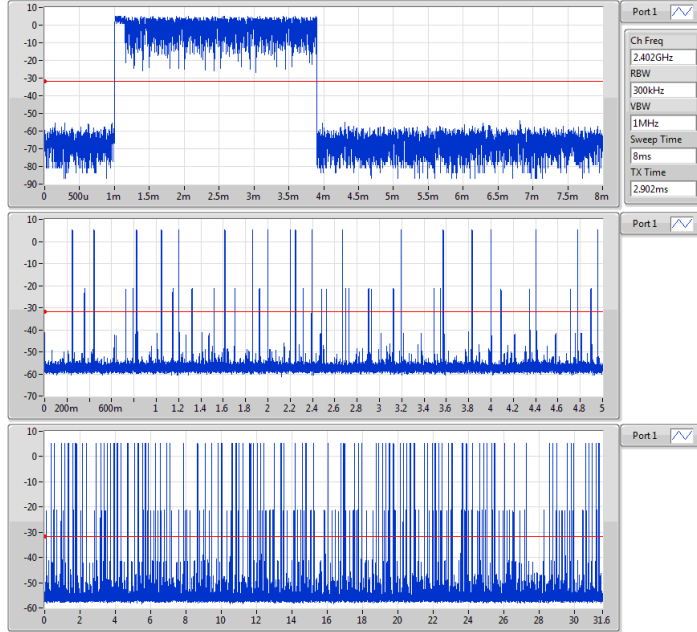

BT-BR-AFH(1Mbps)


Dwell

2402MHz



BT-EDR-AFH(2Mbps)
2402MHz

Dwell

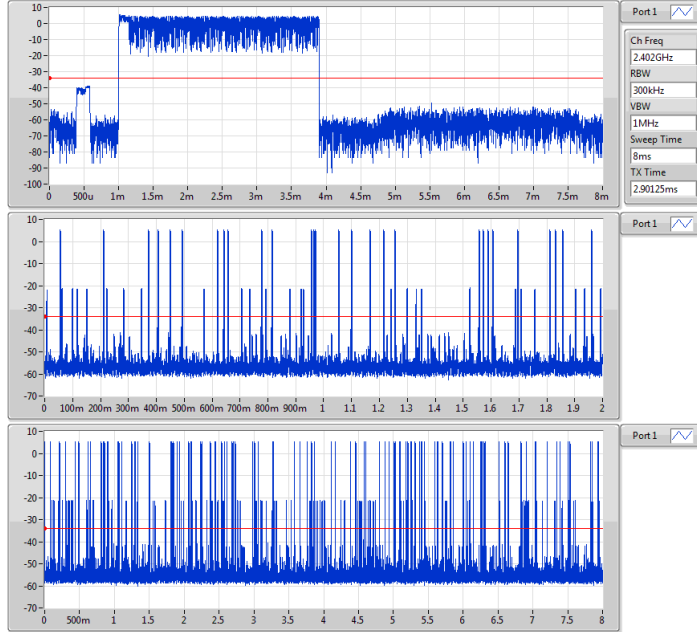

BT-EDR-AFH(3Mbps)
2402MHz

Dwell



4 Photographs of EUT

Please refer to Photographs of EUT, reference No. EP060501.

5 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==