


Appendix B

RF Power Output




Marker 1 [T1] RBW 3 MHz RF Att 60 dB
Ref Lvl 27.67 dBm VBW 3 MHz
37 dBm 1.85010982 GHz SWT 5 ms Unit dBm

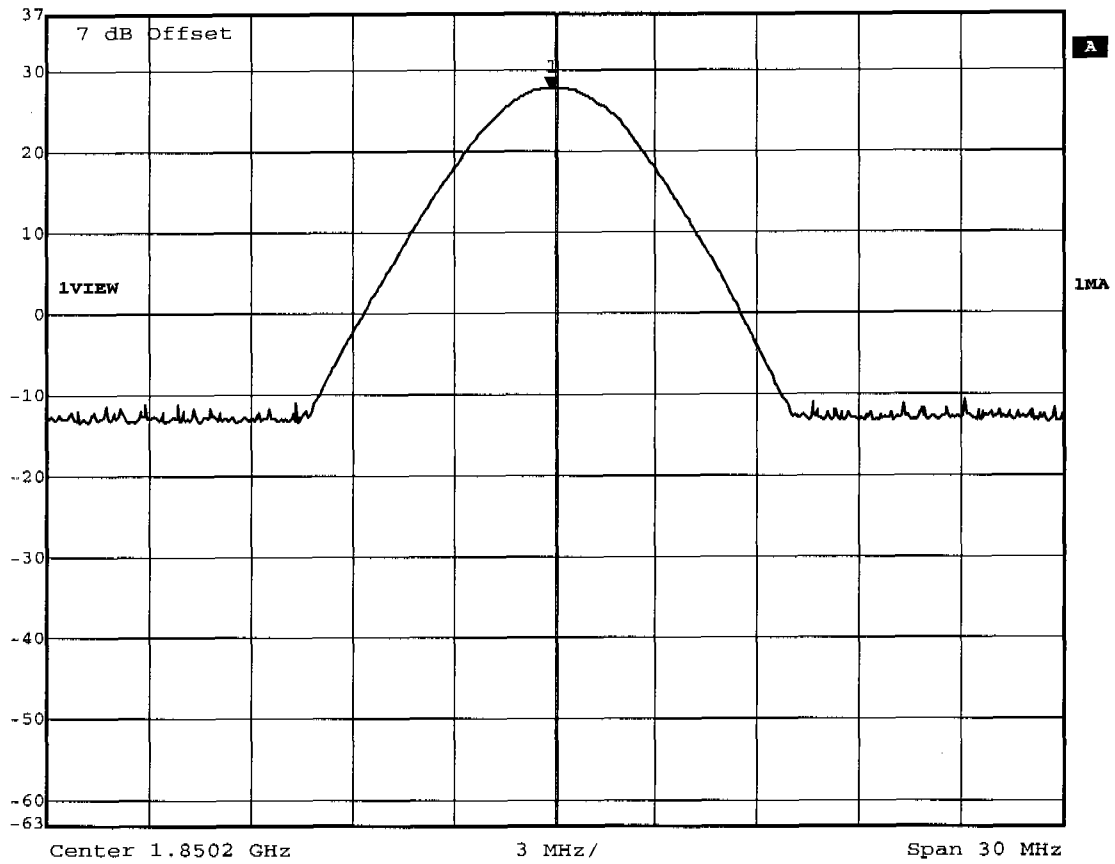

Title: Output Power Conducted Channel 512
Comment A: E-TRIP NA
Date: 28.APR.2004 09:22:47




Marker 1 [T1] RBW 3 MHz RF Att 60 dB
Ref Lvl 27.59 dBm VBW 3 MHz
37 dBm 1.88015030 GHz SWT 5 ms Unit dBm

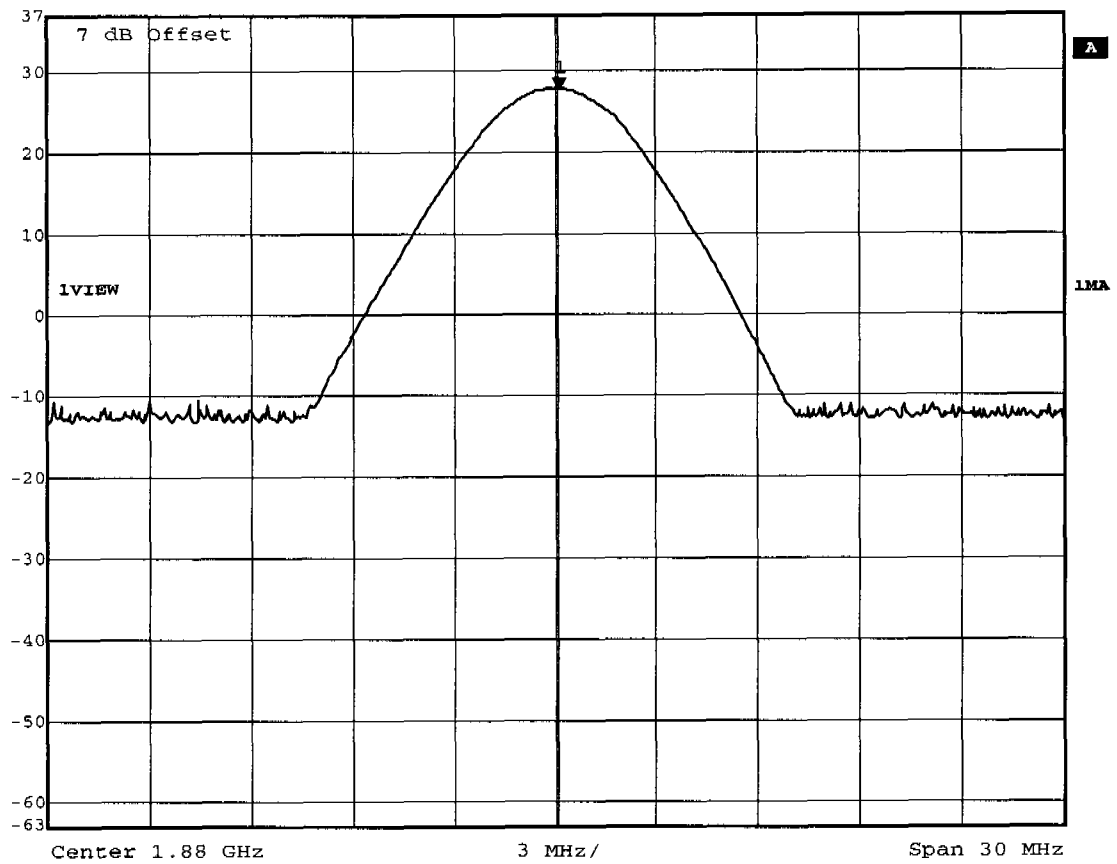

Title: Output Power Conducted Channel 661
Comment A: E-TRIP NA
Date: 28.APR.2004 09:24:21



Marker 1 [T1] RBW 3 MHz RF Att 60 dB
Ref Lvl 26.99 dBm VBW 3 MHz
37 dBm 1.90983006 GHz SWT 5 ms Unit dBm

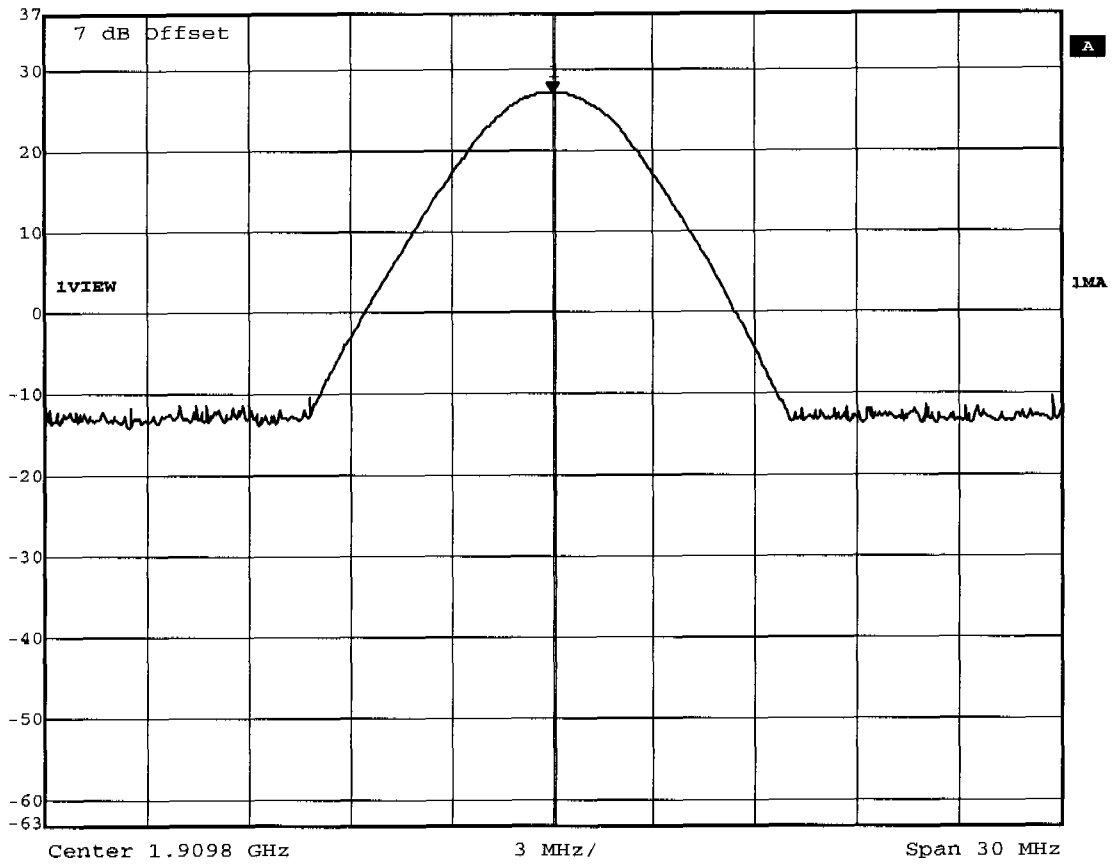

Title: Output Power Conducted Channel 810
Comment A: E-TRIP NA
Date: 28.APR.2004 09:26:03


Appendix C

Radiated Power

Equivalent Isotropically Radiated Power

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.850GHz, Pmax: 25.36dBm, RBW: 3MHz

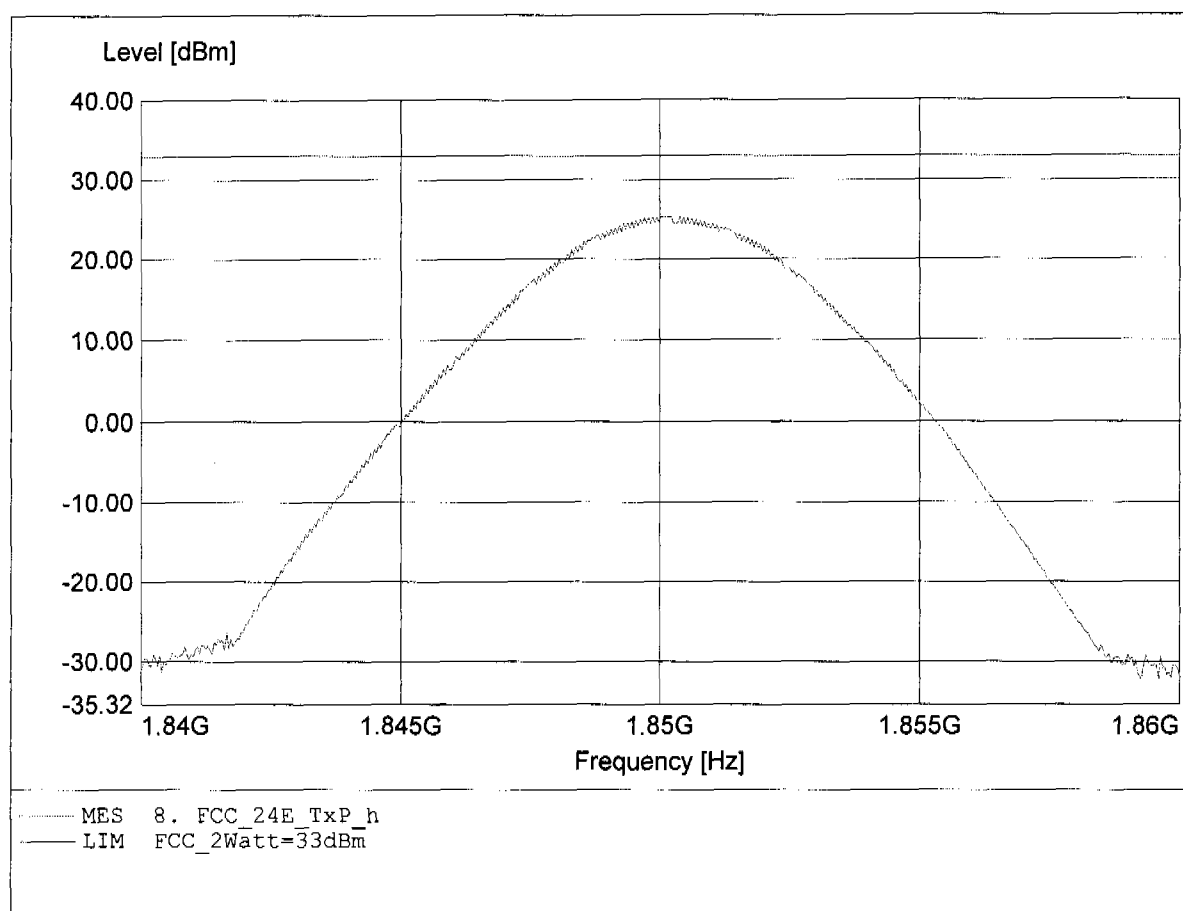

Equivalent Isotropically Radiated Power

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.850GHz, Pmax: 14.41dBm, RBW: 3MHz

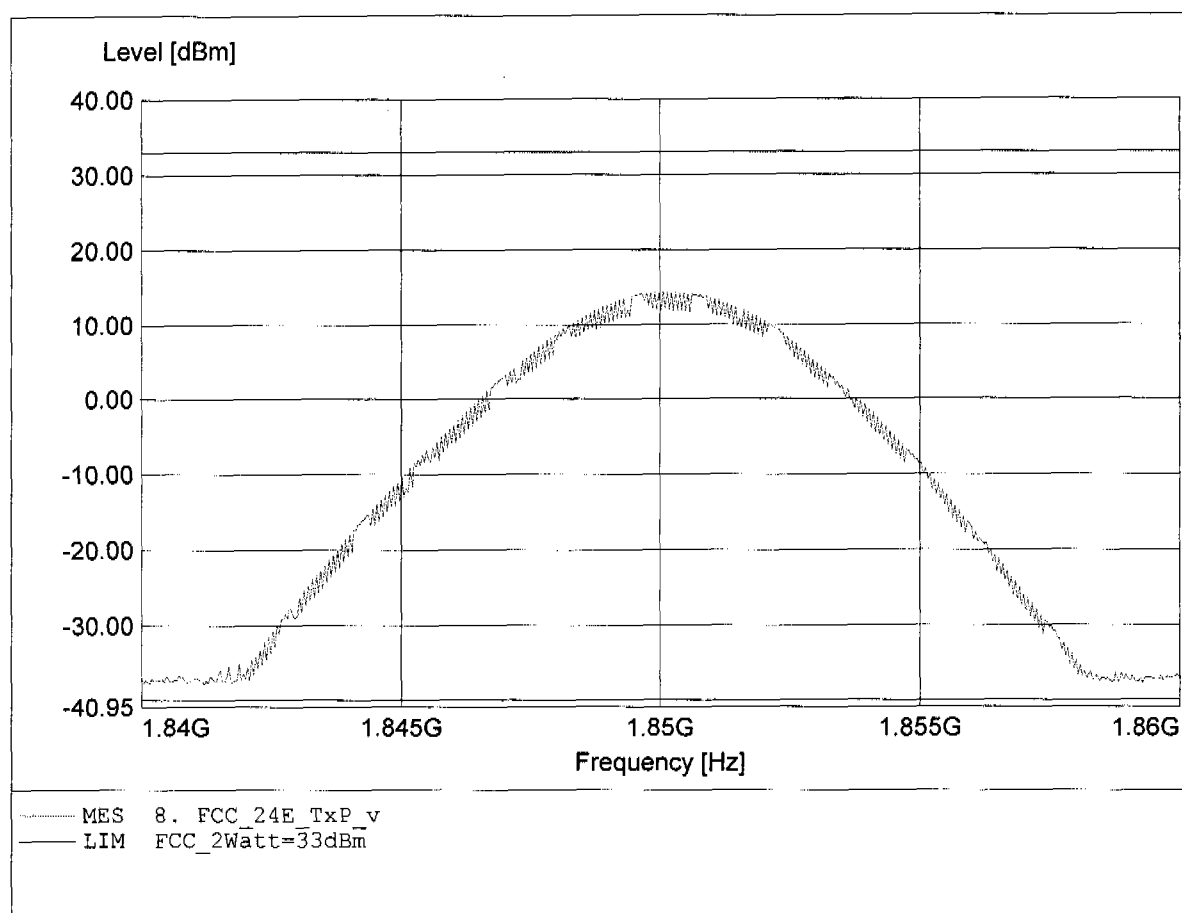

Equivalent Isotropically Radiated Power

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.880GHz, Pmax: 25.30dBm, RBW: 3MHz

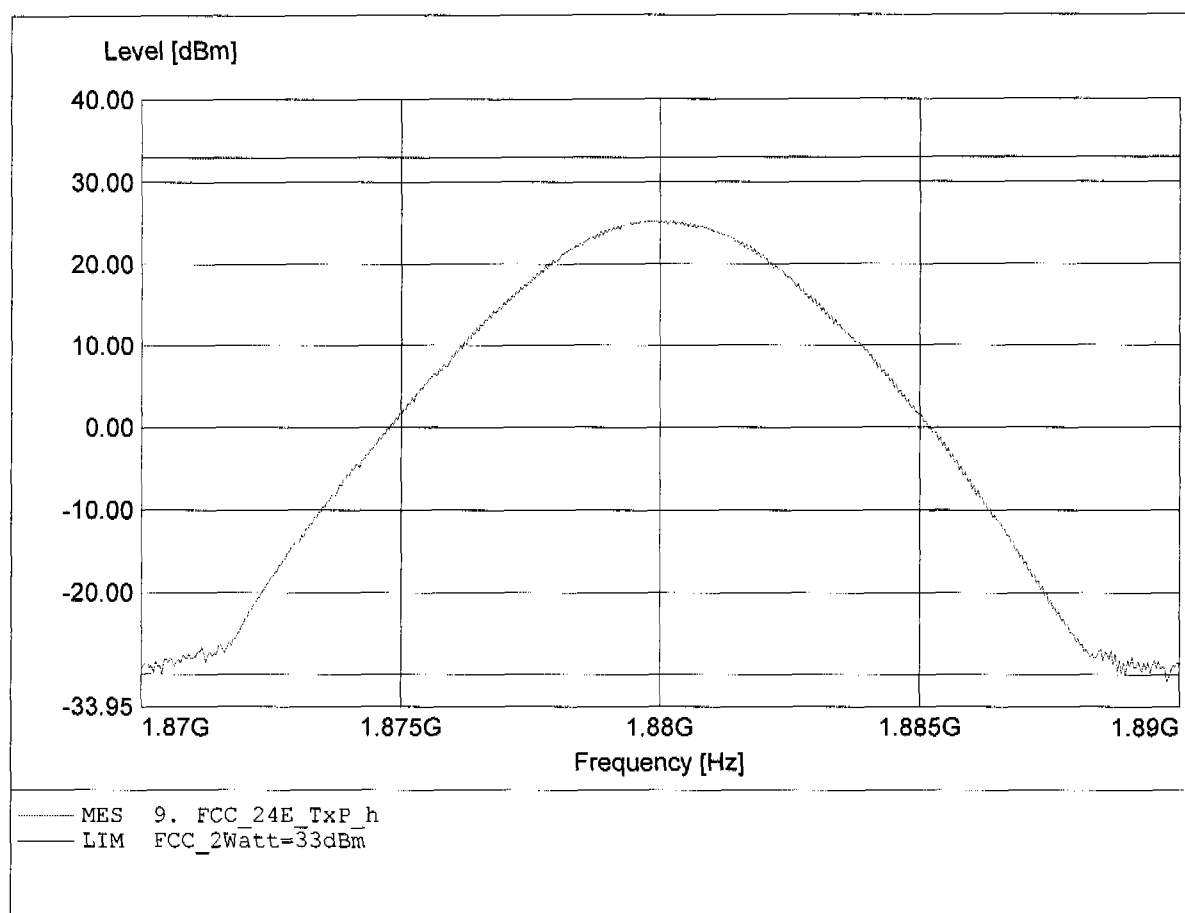

Equivalent Isotropically Radiated Power

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.880GHz, Pmax: 14.67dBm, RBW: 3MHz

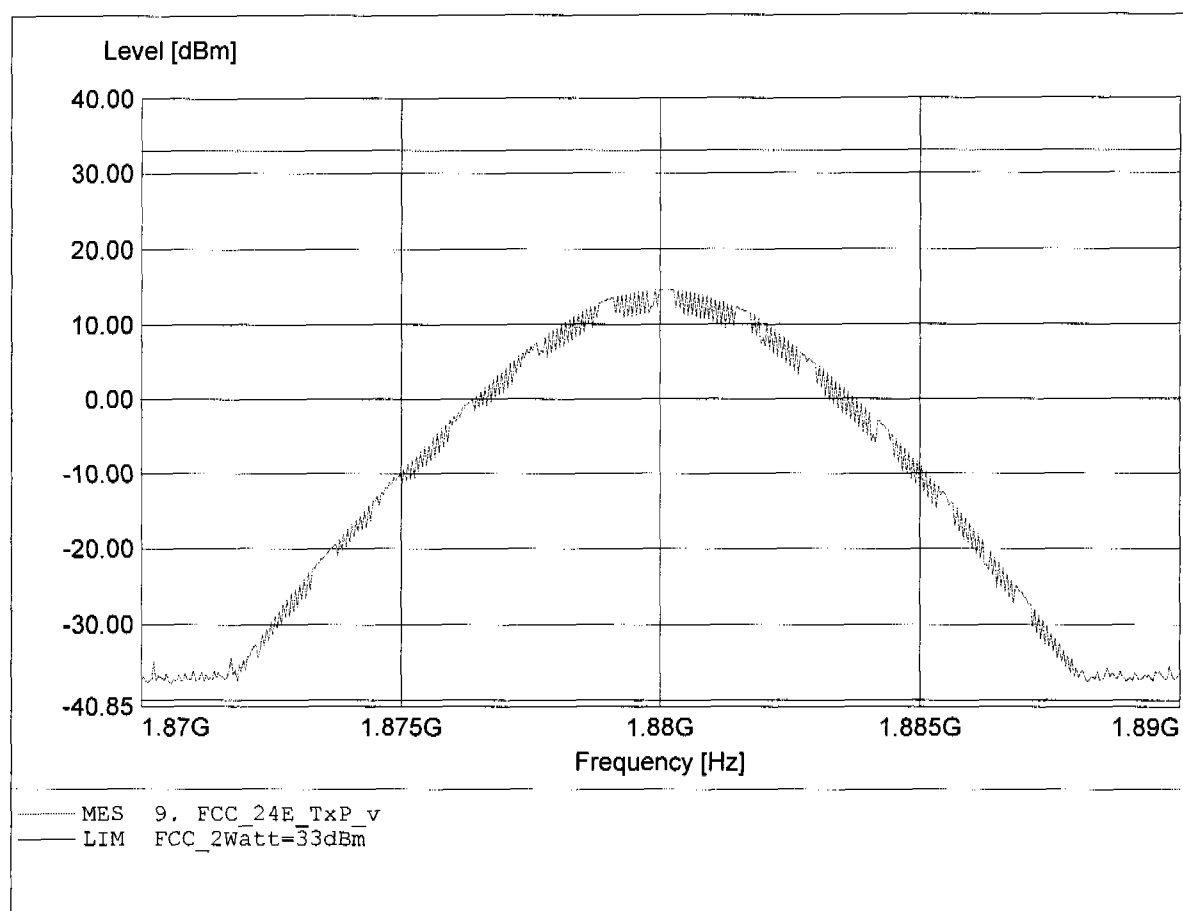

Equivalent Isotropically Radiated Power

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.910GHz, Pmax: 26.37dBm, RBW: 3MHz

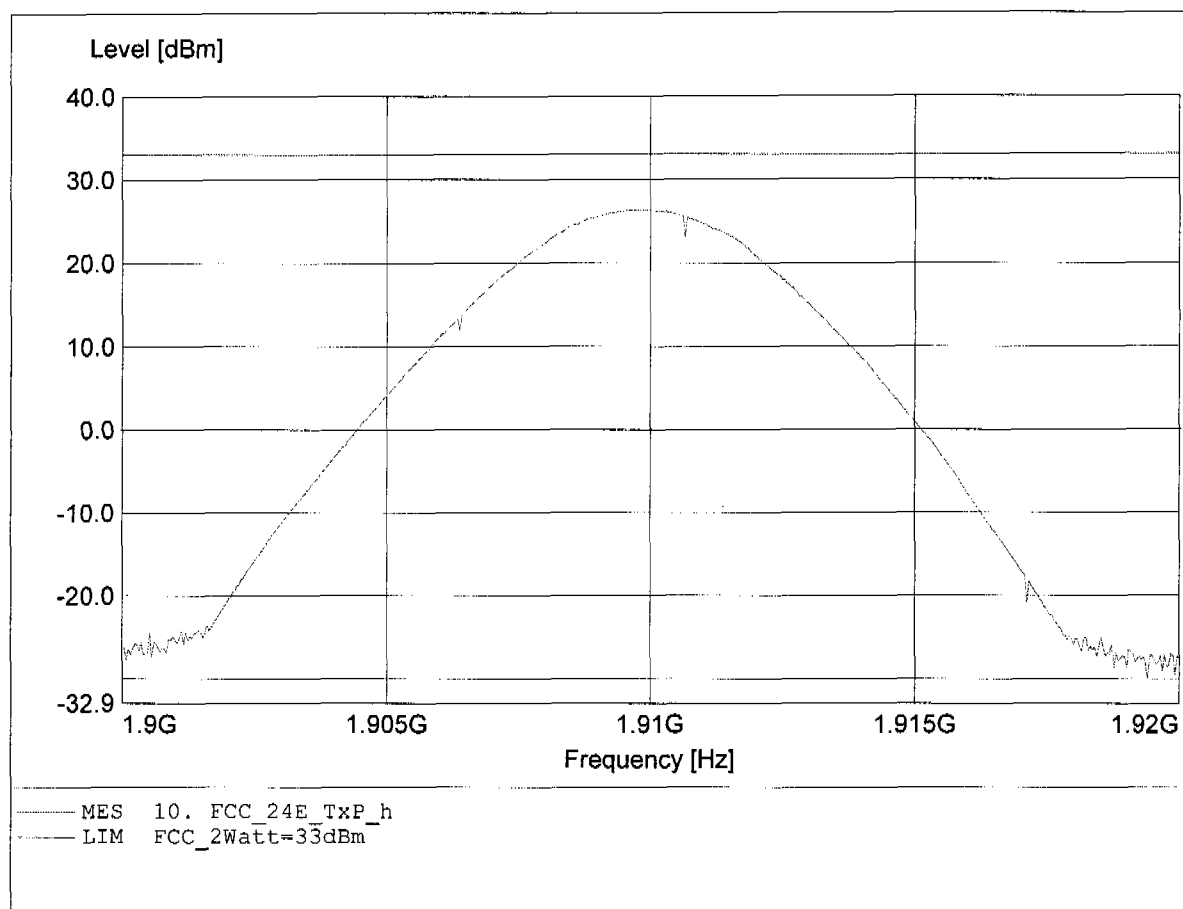

Equivalent Isotropically Radiated Power

FCC RULES PART 24 SUBPART E

Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagment / E-TRIP NA
Channel: 810
Temperature/ Voltage: Temp.:23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.910GHz, Pmax: 12.69dBm, RBW: 3MHz

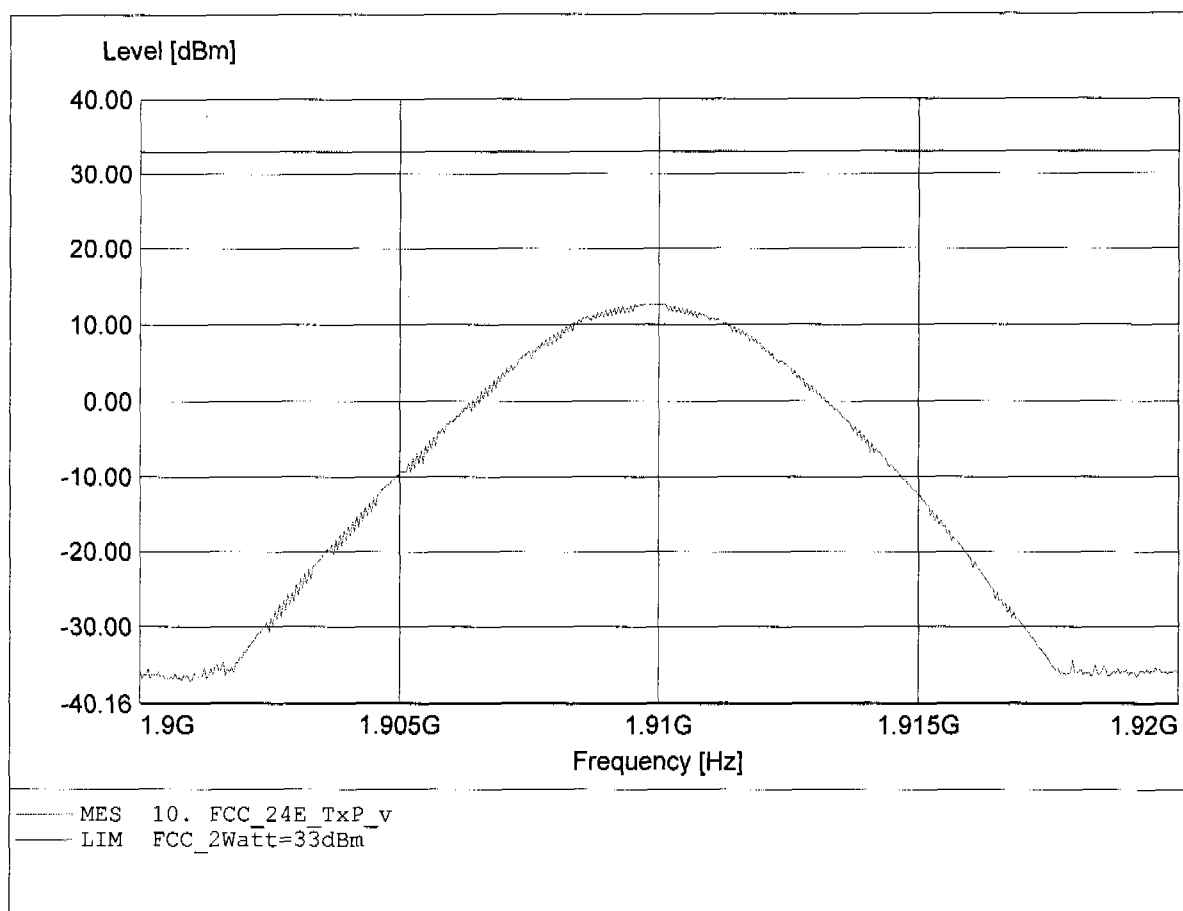


Appendix D

Occupied Bandwidth




Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl -40.45 dBm VBW 3 kHz
37 dBm 1.85070000 GHz SWT 280 ms Unit dBm

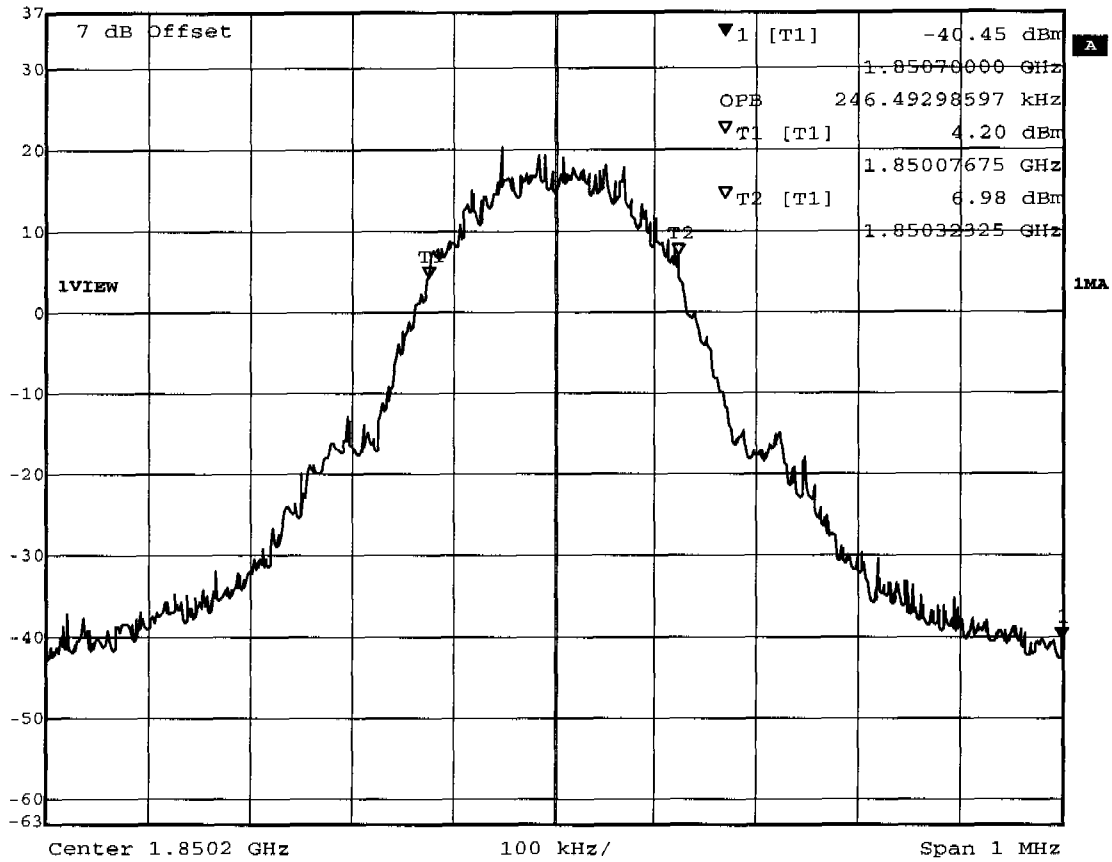

Title: Occupied Power Bandwidth Channel 512
Comment A: E-TRIP NA
Date: 28.APR.2004 09:32:56




Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl -41.82 dBm VBW 3 kHz
37 dBm 1.87950000 GHz SWT 280 ms Unit dBm

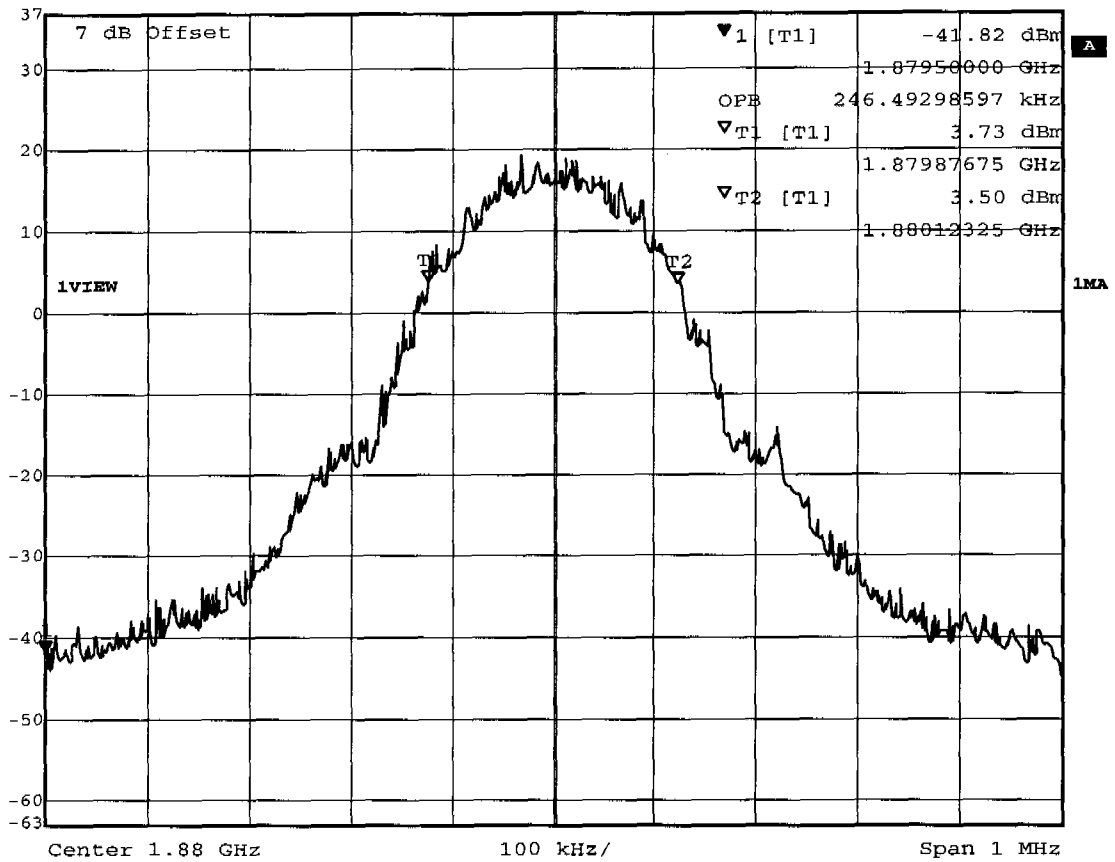

Title: Occupied Power Bandwidth Channel 661
Comment A: E-TRIP NA
Date: 28.APR.2004 09:47:17




Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl -44.31 dBm VBW 3 kHz
37 dBm 1.90930000 GHz SWT 280 ms Unit dBm

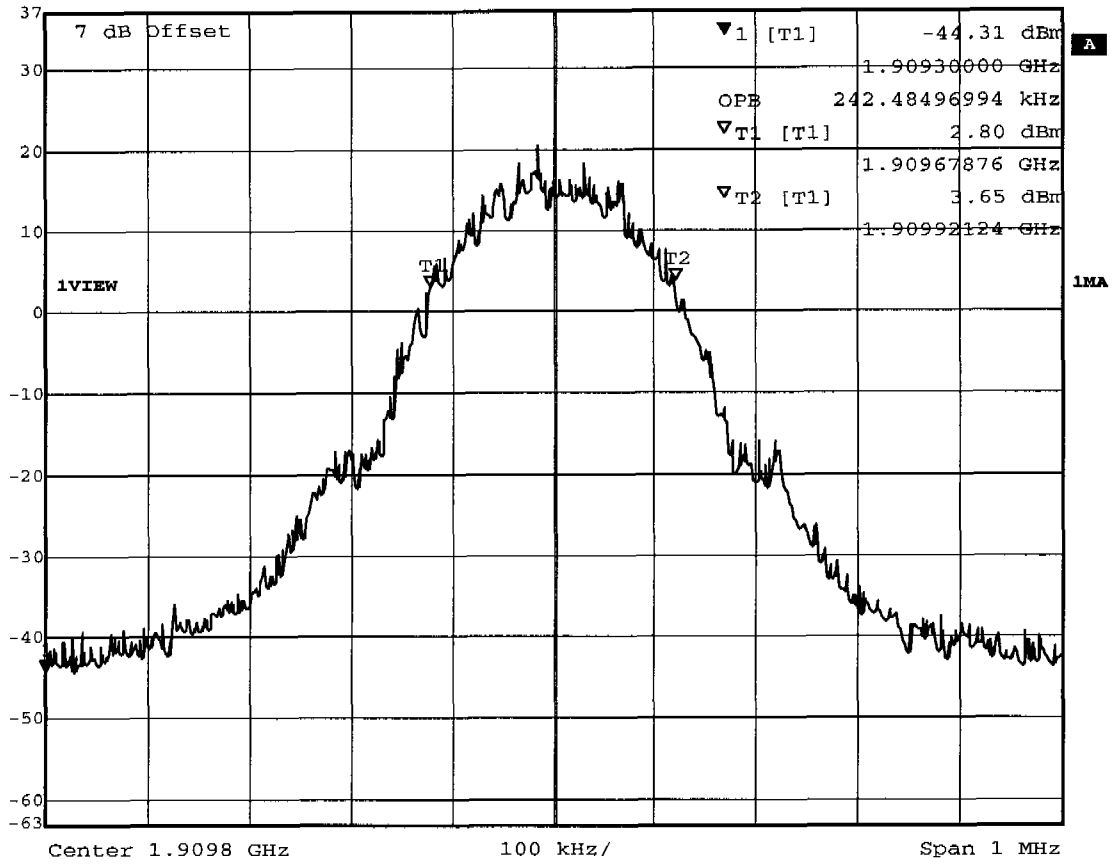

Title: Occupied Power Bandwidth Channel 810
Comment A: E-TRIP NA
Date: 28.APR.2004 09:49:02




Marker 1 [T1 ndB] RBW 3 kHz RF Att 60 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
37 dBm BW 316.63326653 kHz SWT 280 ms Unit dBm

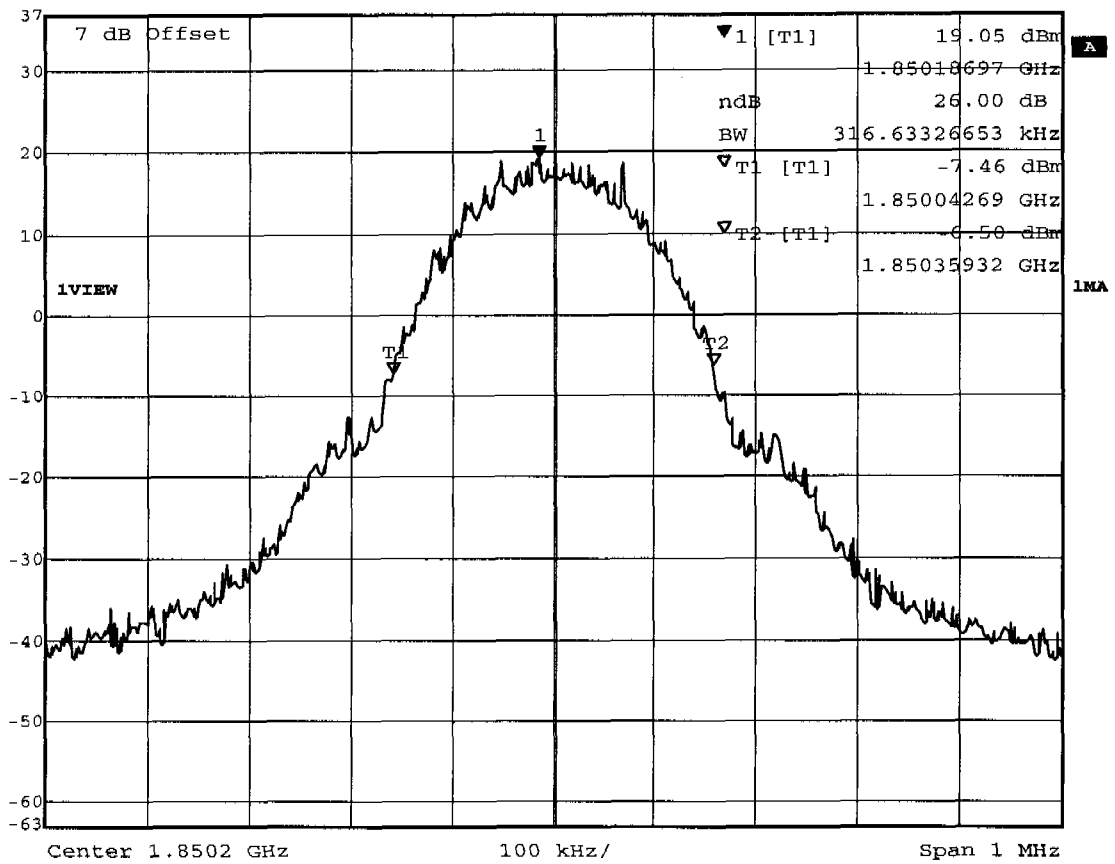

Title: -26 dBc Emission Bandwidth Channel 512
Comment A: E-TRIP NA
Date: 28.APR.2004 10:08:54




Marker 1 [T1 ndB] RBW 3 kHz RF Att 60 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
37 dBm BW 300.60120240 kHz SWT 280 ms Unit dBm

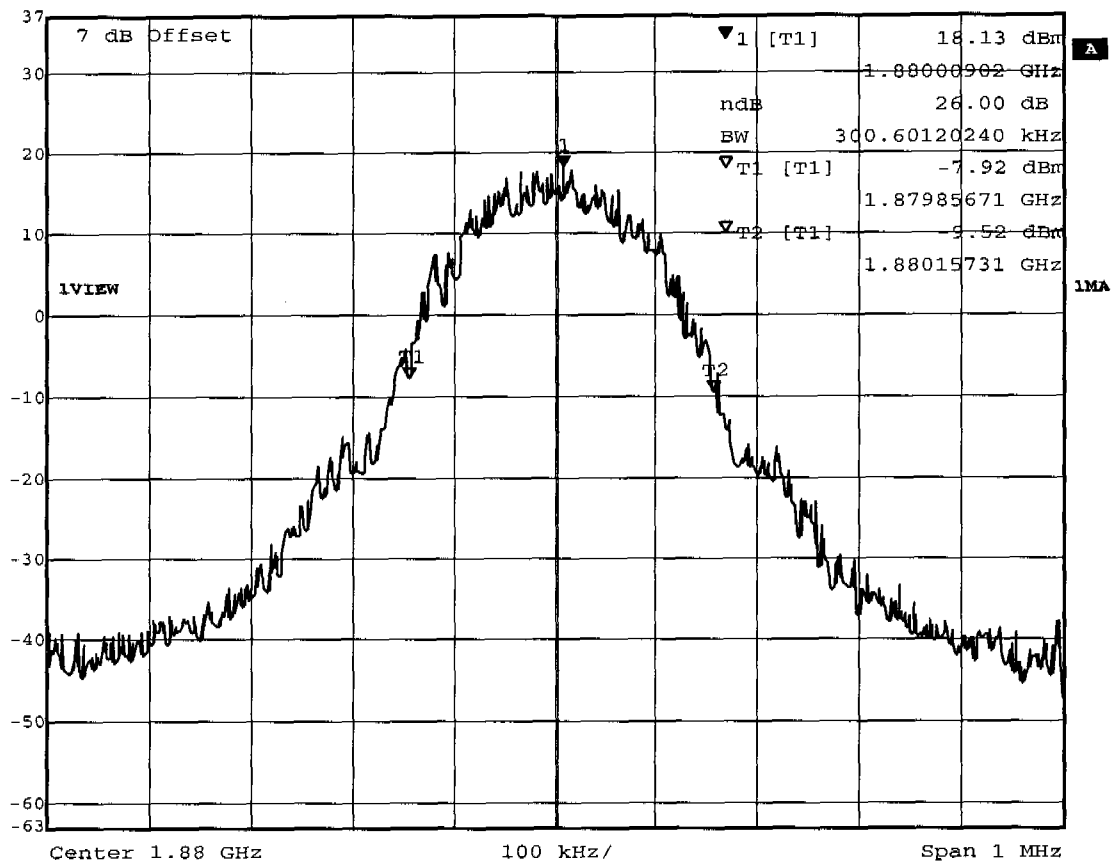

Title: -26 dBc Emission Bandwidth Channel 661
Comment A: E-TRIP NA
Date: 28.APR.2004 10:11:15



Marker 1 [T1 ndB] RBW 3 kHz RF Att 60 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
37 dBm BW 280.56112224 kHz SWT 280 ms Unit dBm

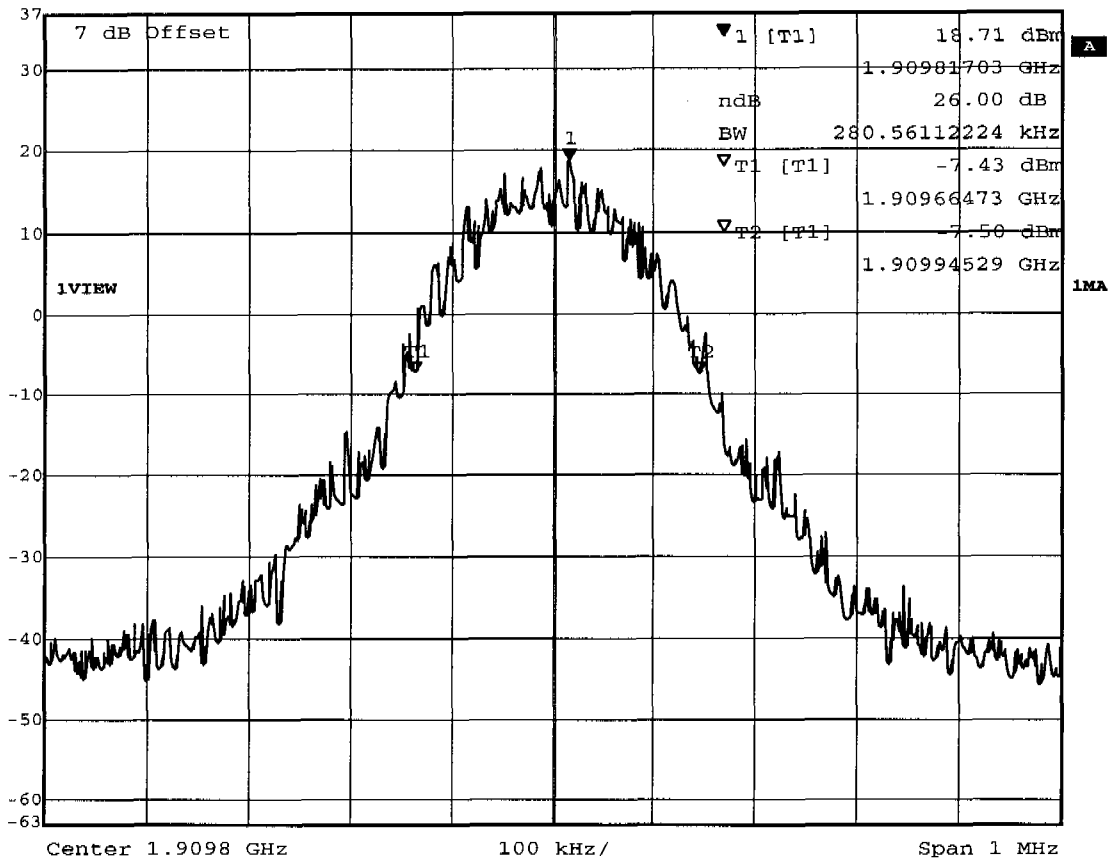


Title: -26 dBc Emission Bandwidth Channel 810
Comment A: E-TRIP NA
Date: 28.APR.2004 10:12:51

Appendix E

Field Strength of Spurious Radiation




Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl 27.58 dBm VBW 3 kHz
37 dBm 1.85011022 GHz SWT 560 ms Unit dBm

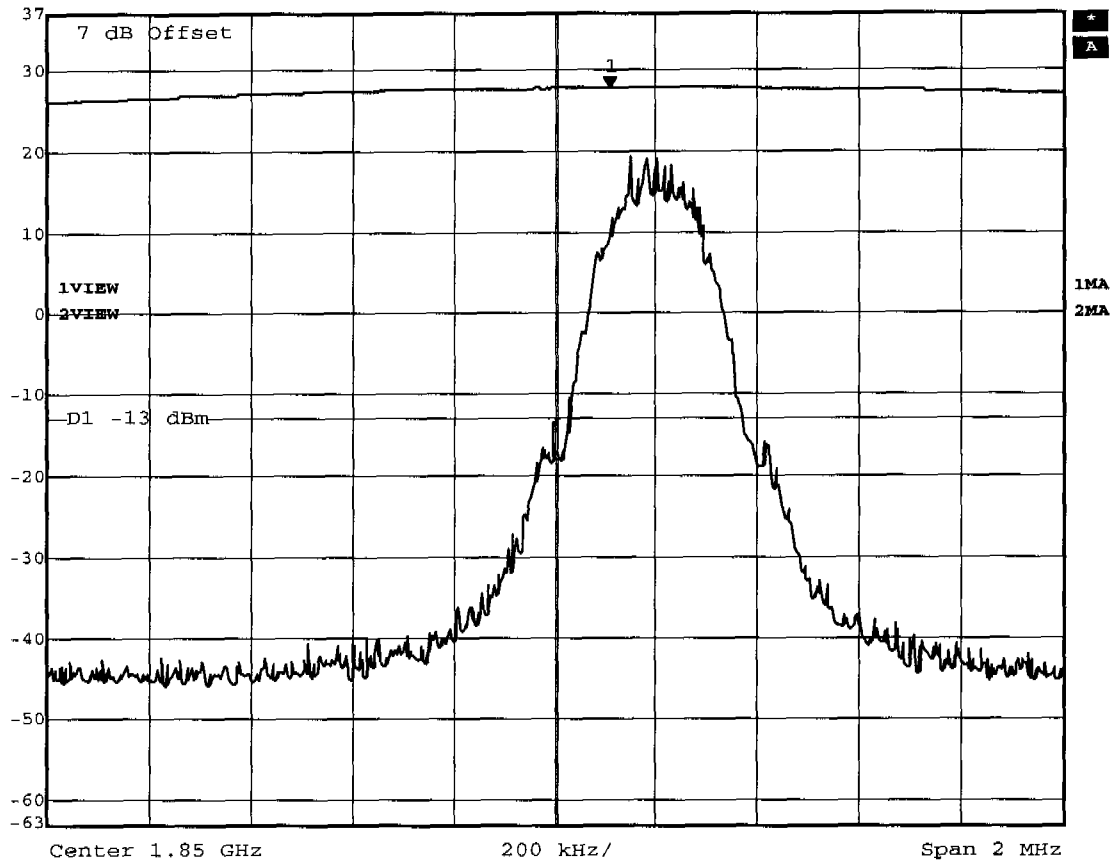

Title: Lower Band Edge
Comment A: E-TRIP NA
Date: 28.APR.2004 09:14:27



Marker 1 [T1] RBW 3 kHz RF Att 60 dB
Ref Lvl 26.99 dBm VBW 3 kHz
37 dBm 1.90985772 GHz SWT 560 ms Unit dBm

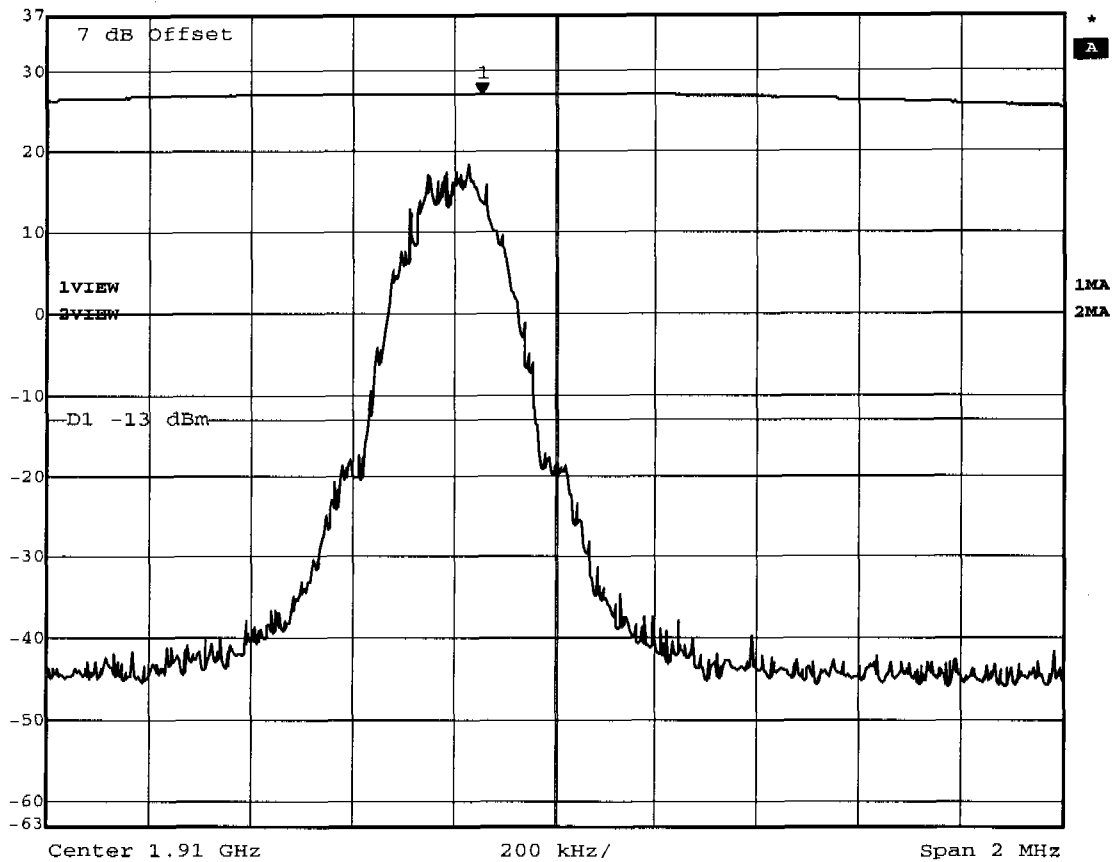


Title: Higher Band Edge
Comment A: E-TRIP NA
Date: 28.APR.2004 09:18:40

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 58.958MHz, Pmax: -48.53dBm, RBW: 1MHz

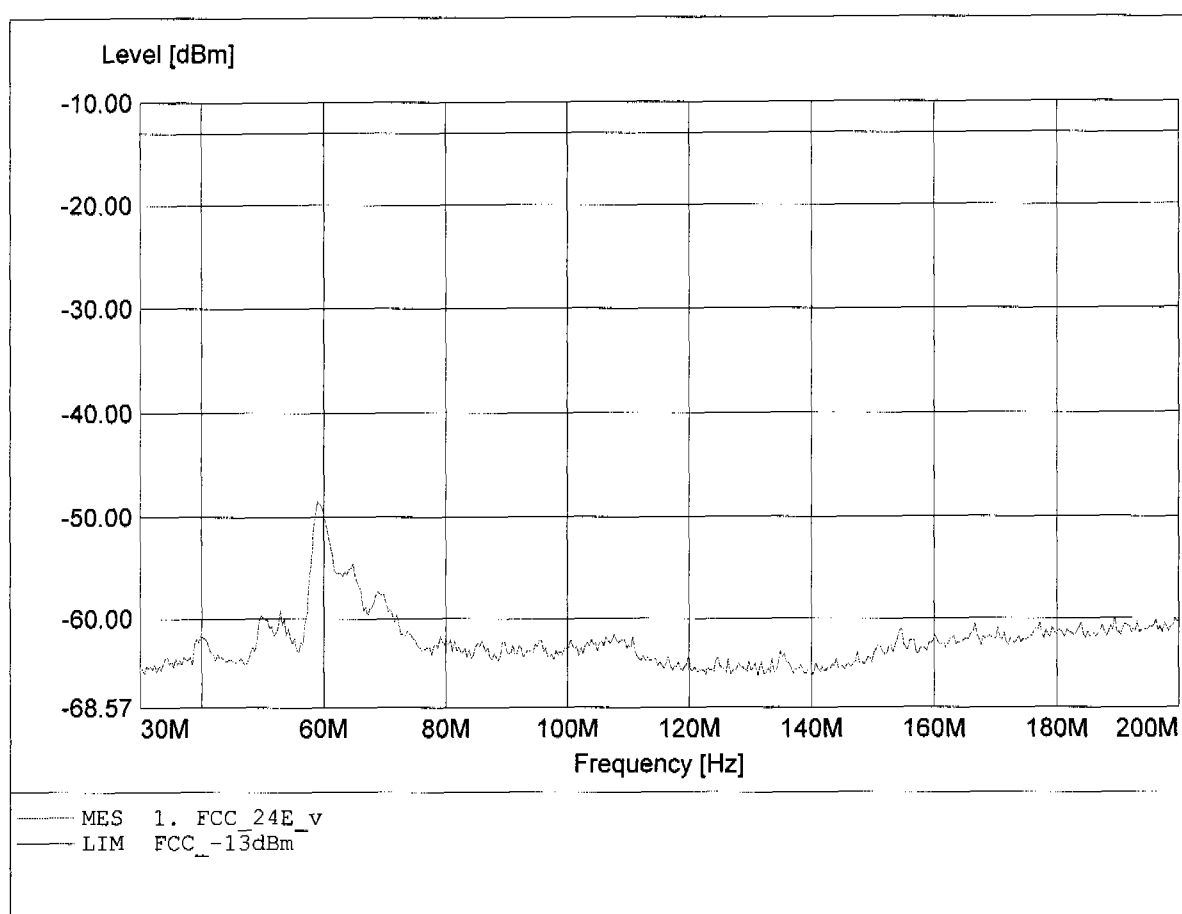

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 59.299MHz, Pmax: -58.65dBm, RBW: 1MHz

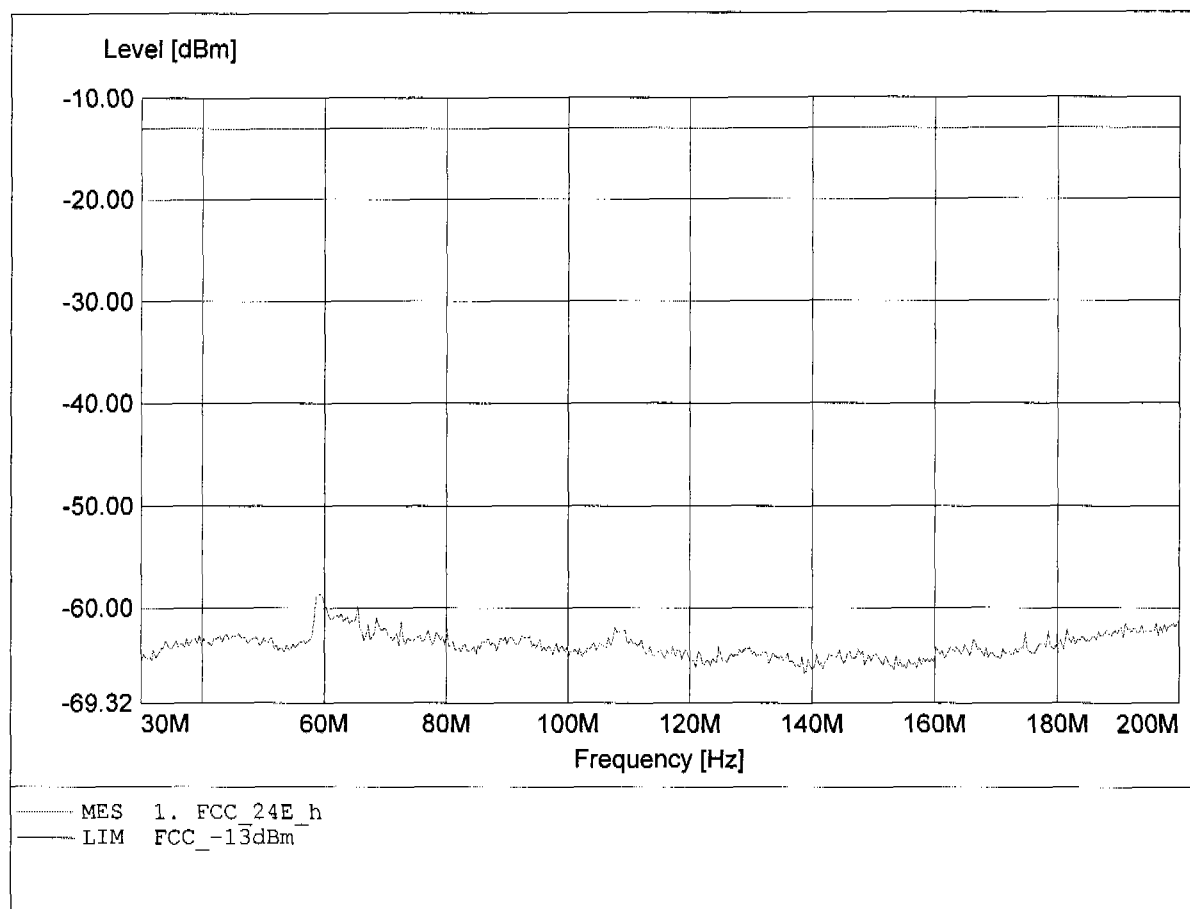

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 884.569MHz, Pmax: -46.41dBm, RBW: 1MHz

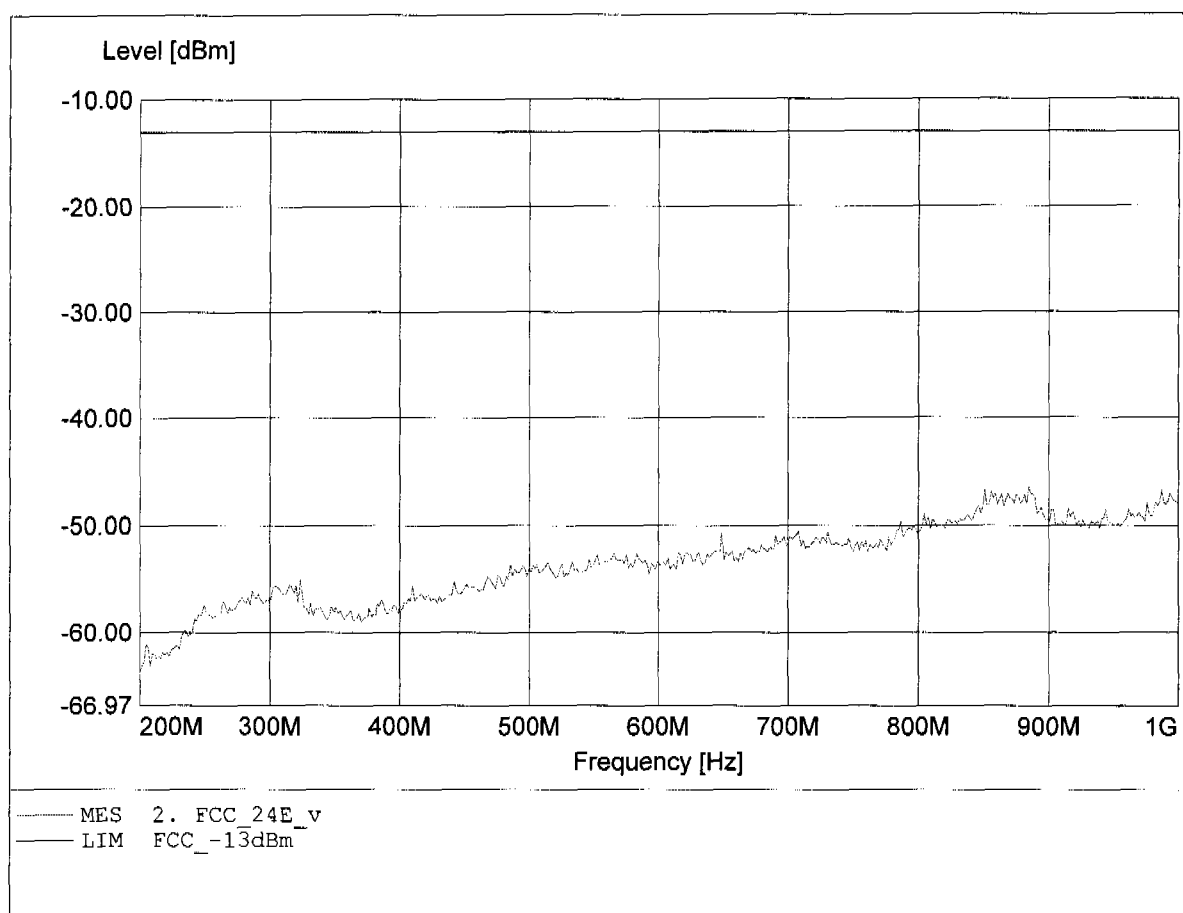

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 852.505MHz, Pmax: -45.60dBm, RBW: 1MHz

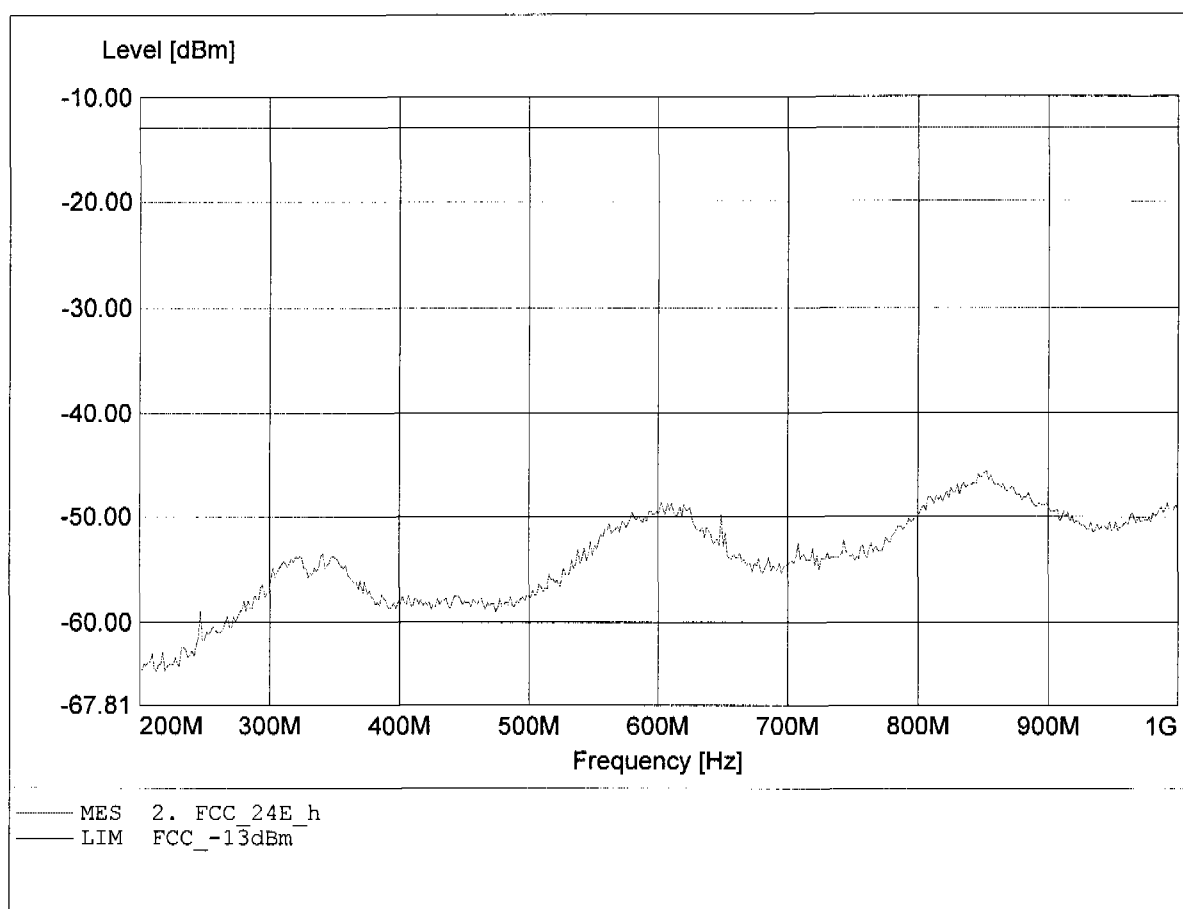

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.486GHz, Pmax: -29.67dBm, RBW: 1MHz/3kHz

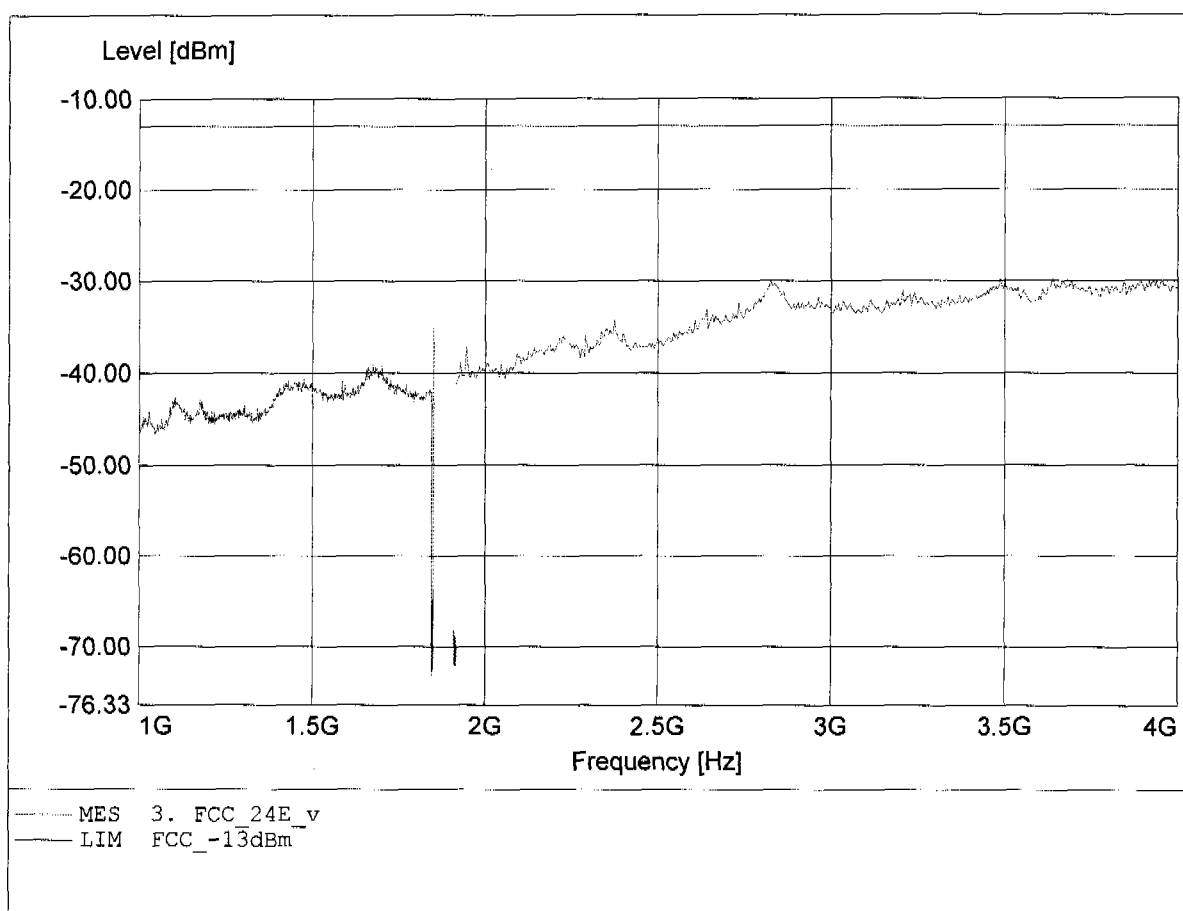

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.850GHz, Pmax: -21.54dBm, RBW: 1MHz/3kHz

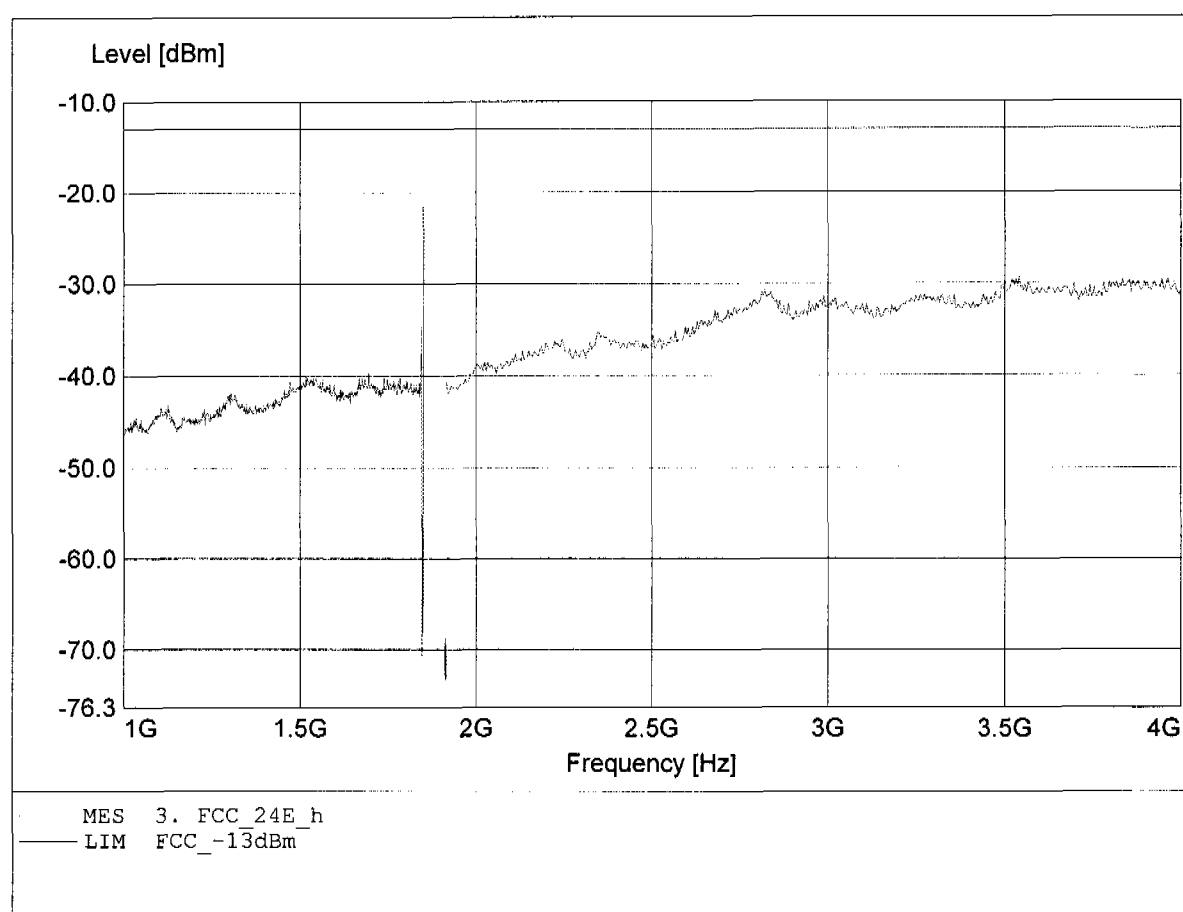

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.407GHz, Pmax: -38.34dBm, RBW: 1MHz

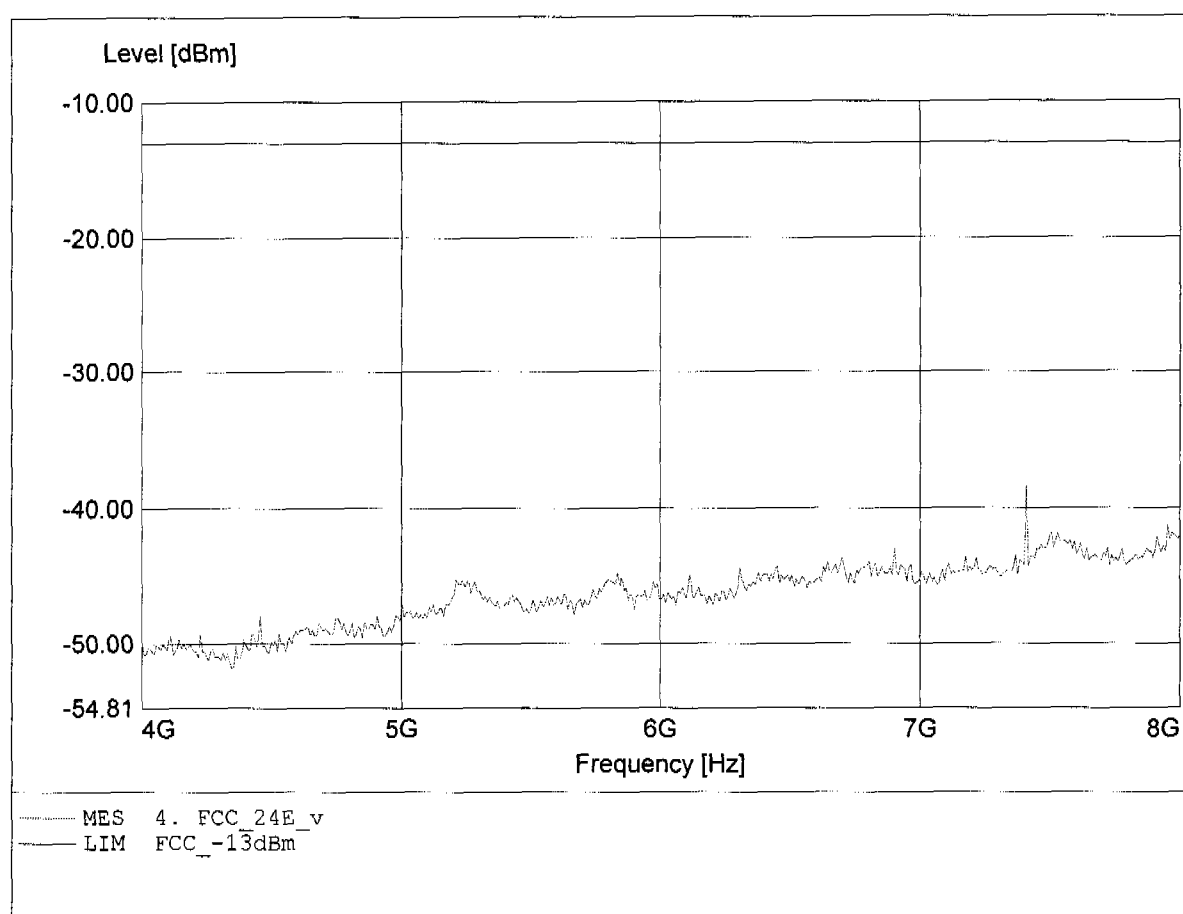

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.407GHz, Pmax: -38.63dBm, RBW: 1MHz

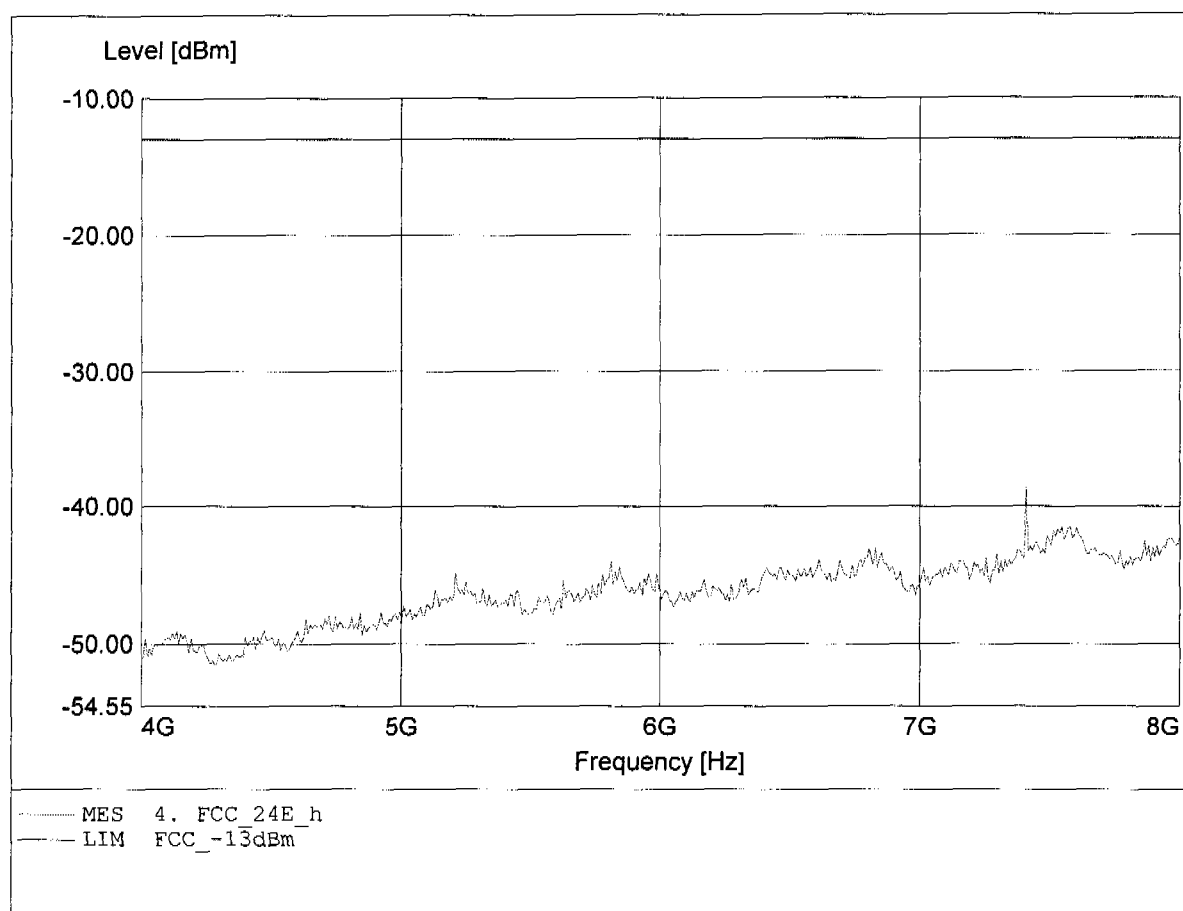

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.992GHz, Pmax: -36.03dBm, RBW: 1MHz

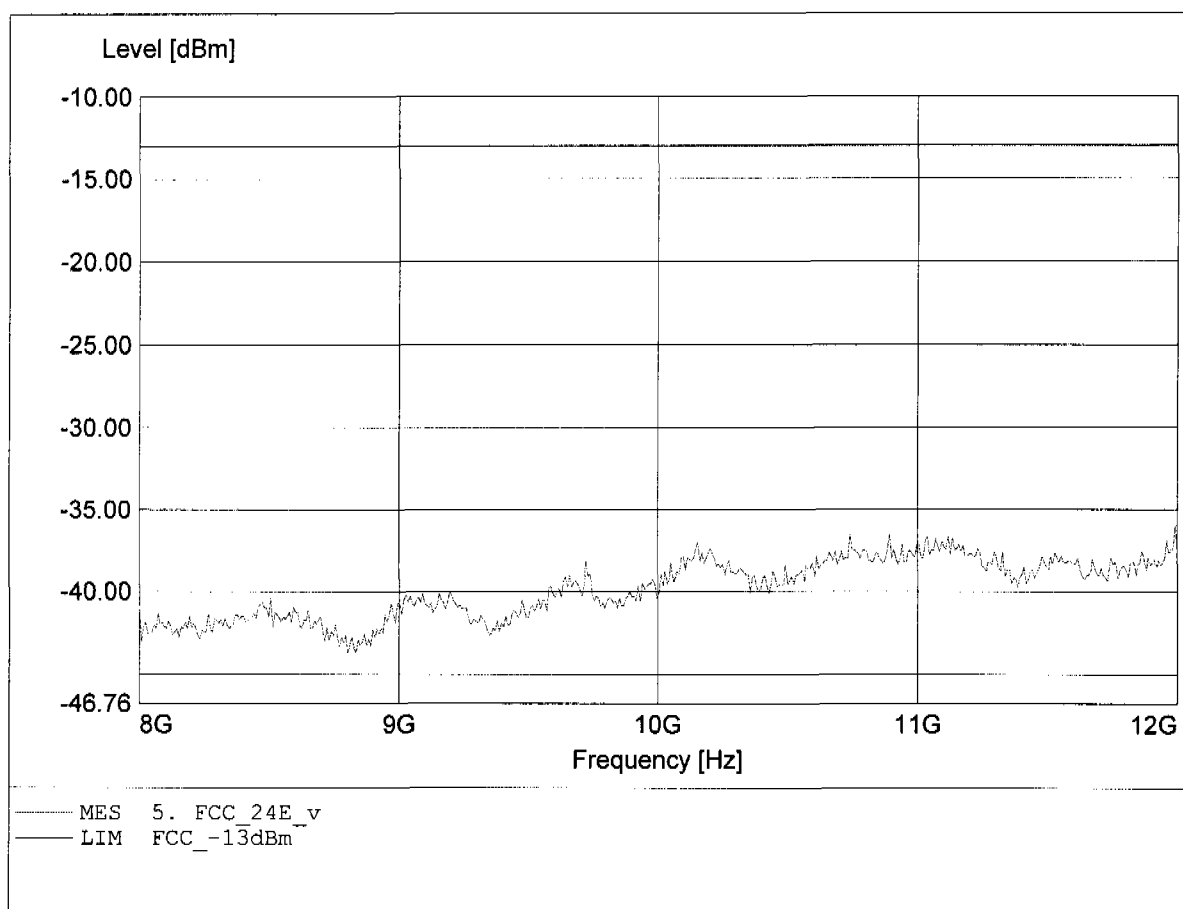

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagment / E-TRIP NA
Channel: 512
Temperature/ Voltage: Temp.:23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.102GHz, Pmax: -36.71dBm, RBW: 1MHz

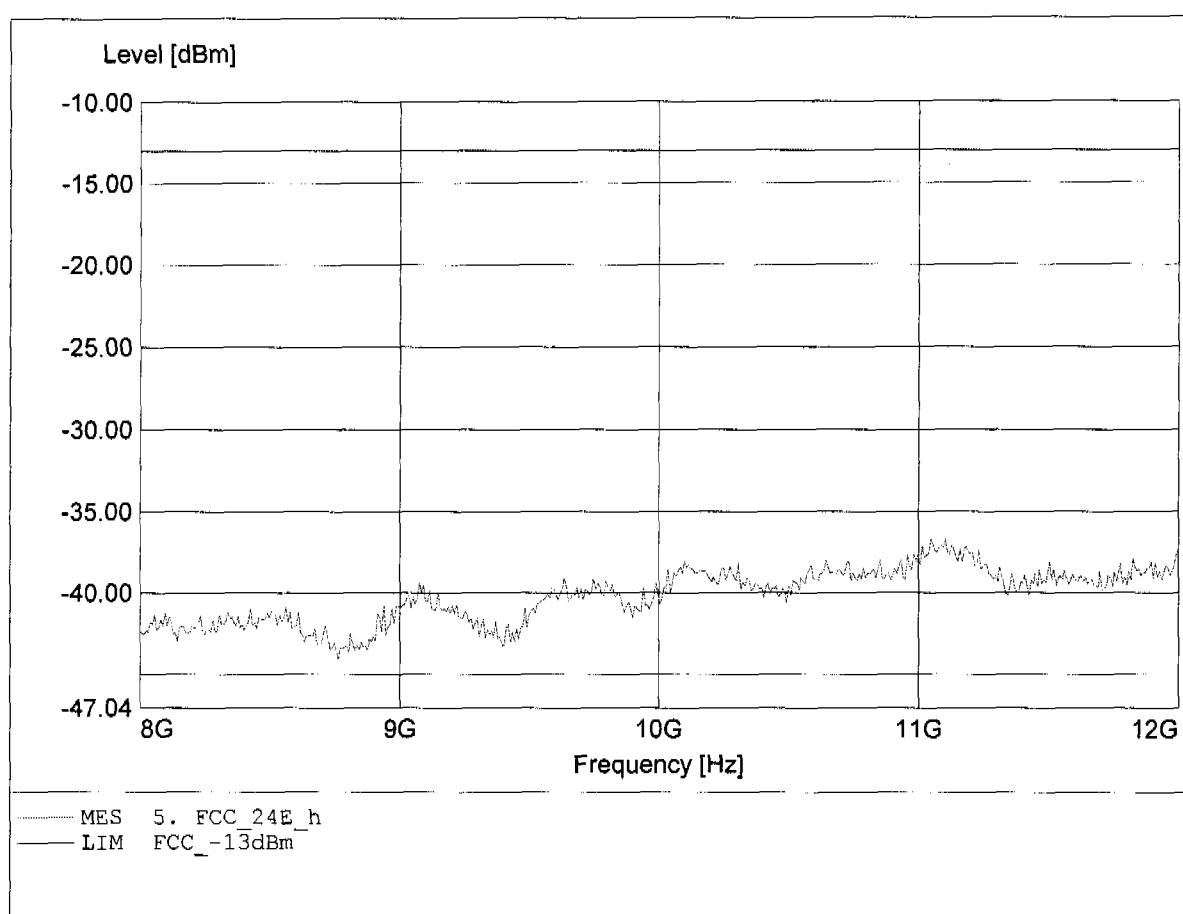

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.447GHz, Pmax: -25.21dBm, RBW: 1MHz

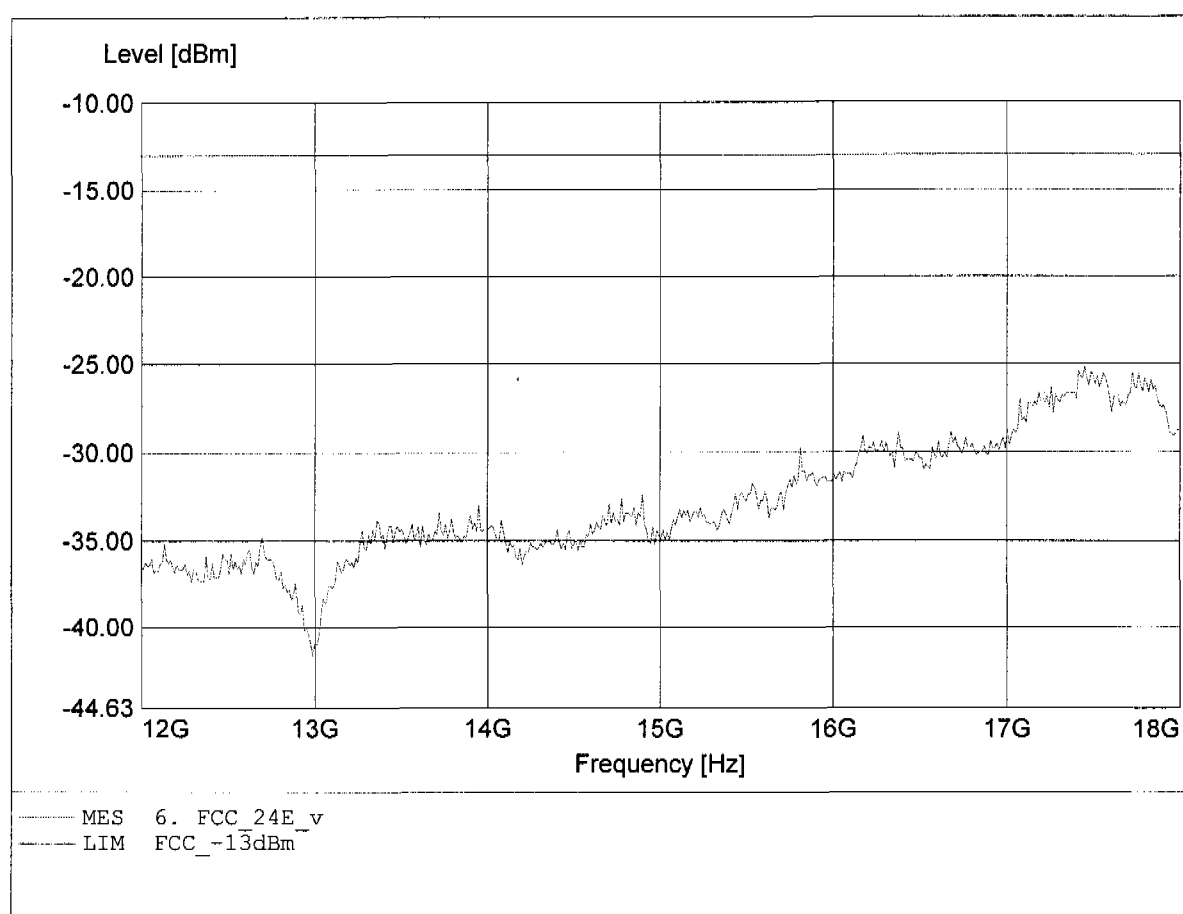

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.856GHz, Pmax: -25.85dBm, RBW: 1MHz

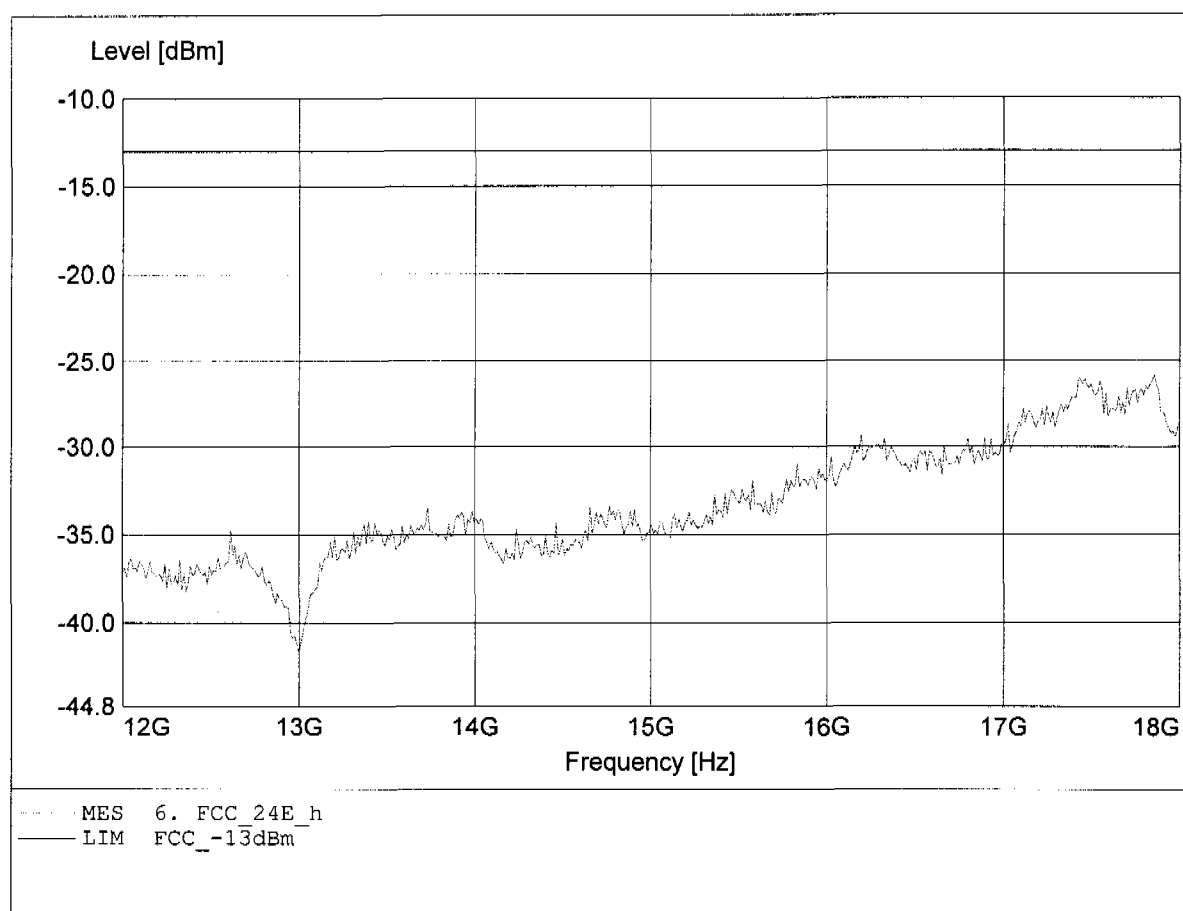

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagment / E-TRIP NA
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.967GHz, Pmax: -20.51dBm, RBW: 1MHz

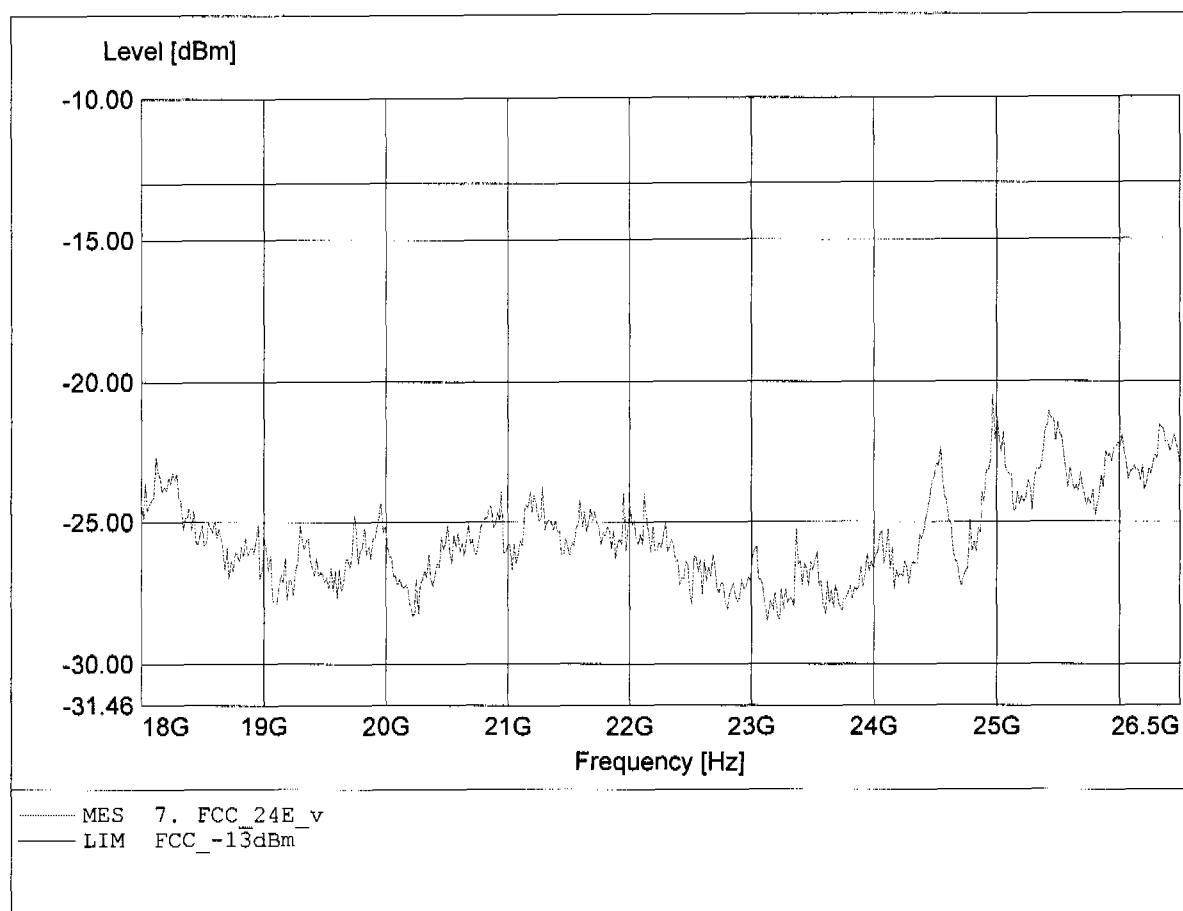

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 512
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 25.546GHz, Pmax: -20.98dBm, RBW: 1MHz

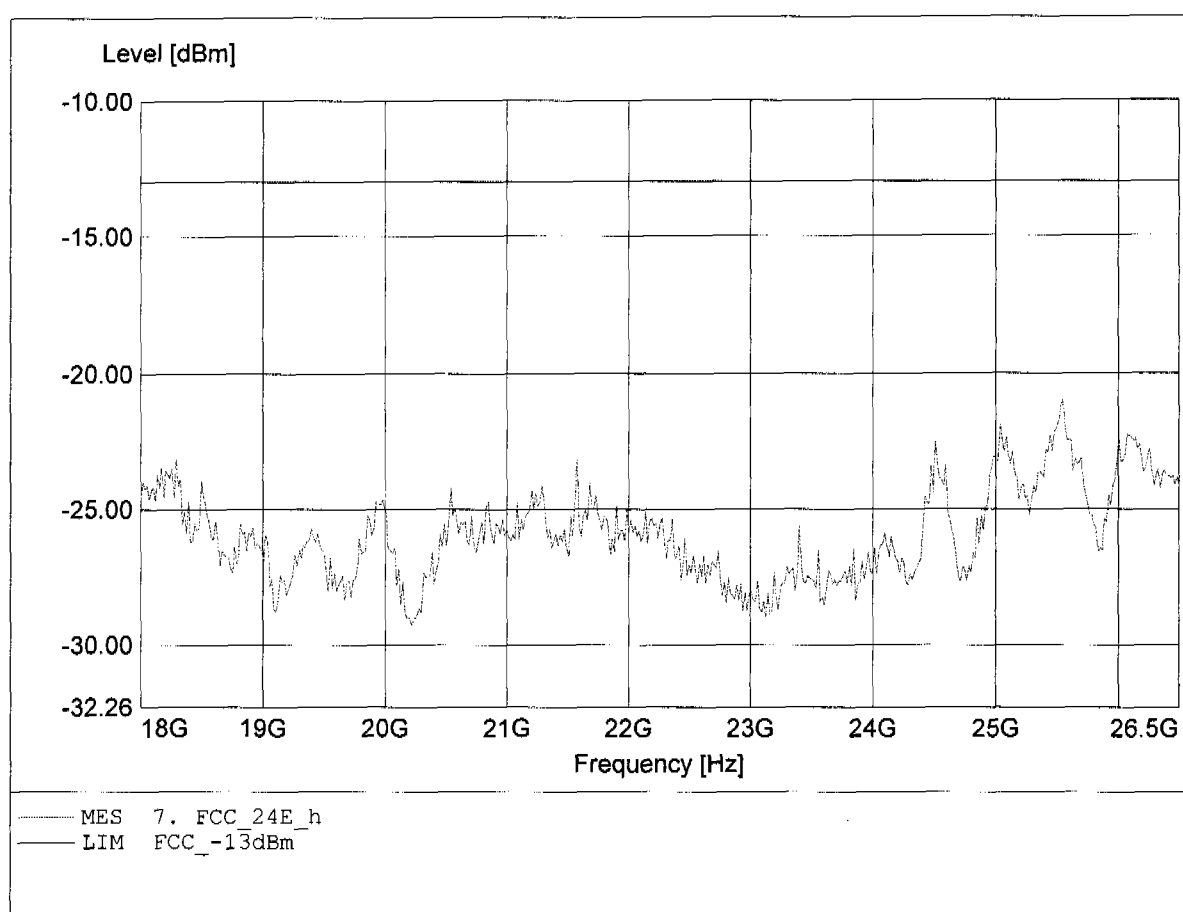

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 59.299MHz, Pmax: -48.34dBm, RBW: 1MHz

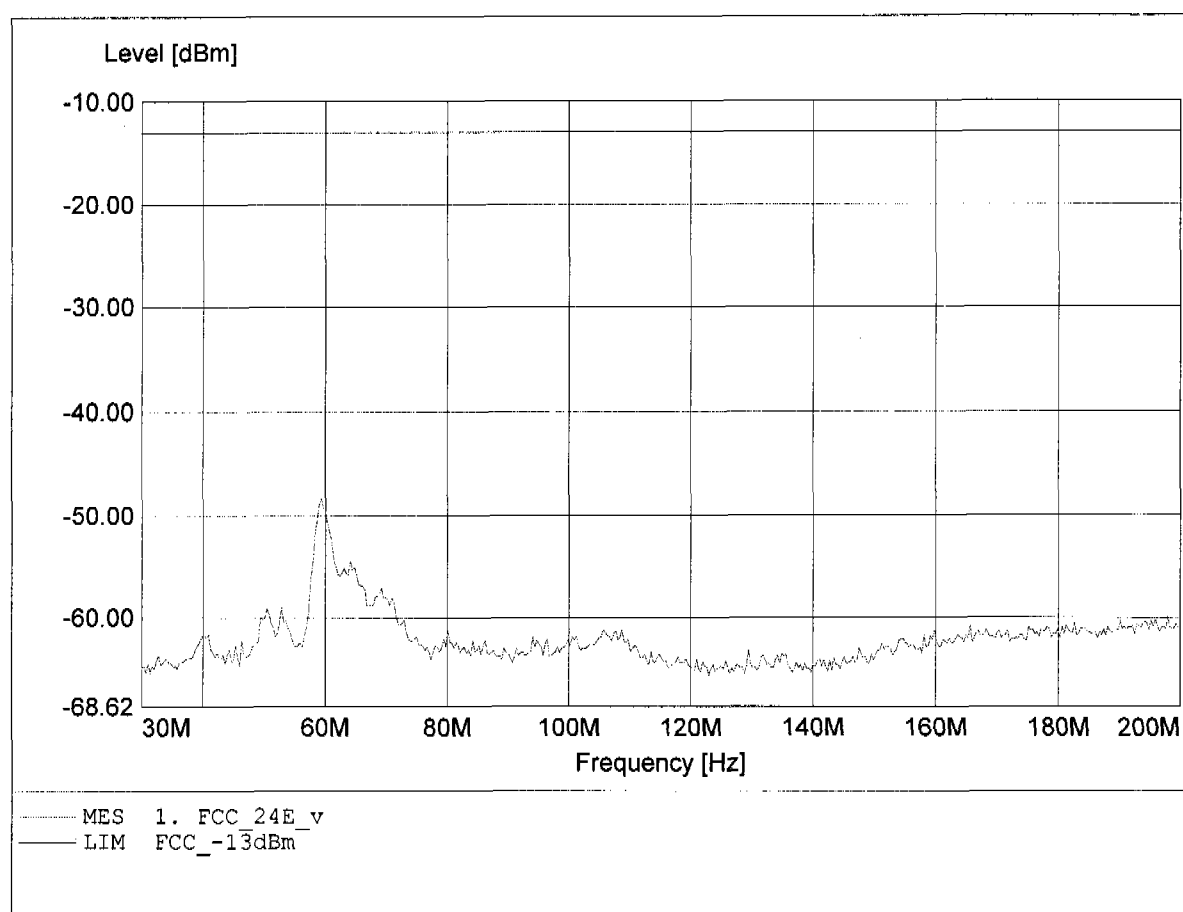

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.108GHz, Pmax: -23.12dBm, RBW: 1MHz

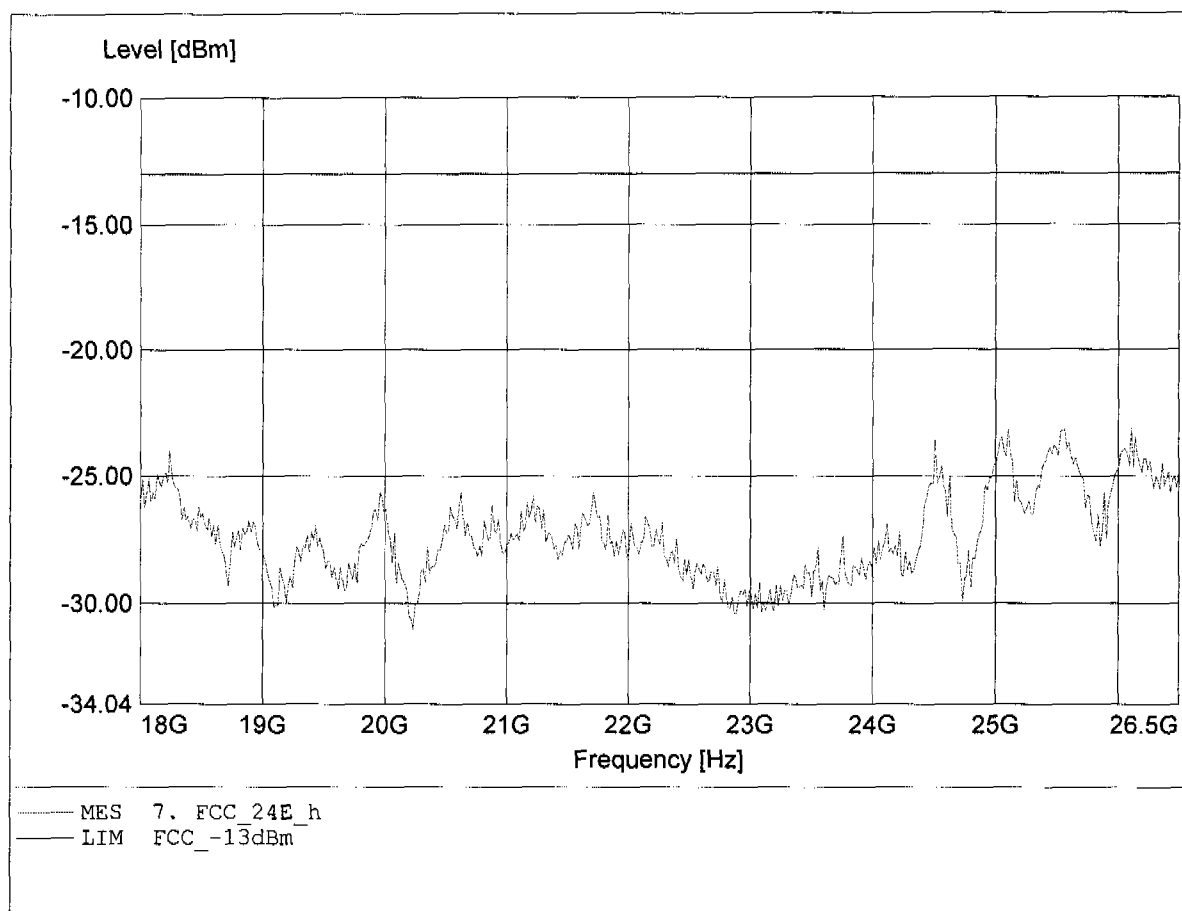

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagment / E-TRIP NA
Channel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 882.966MHz, Pmax: -46.75dBm, RBW: 1MHz

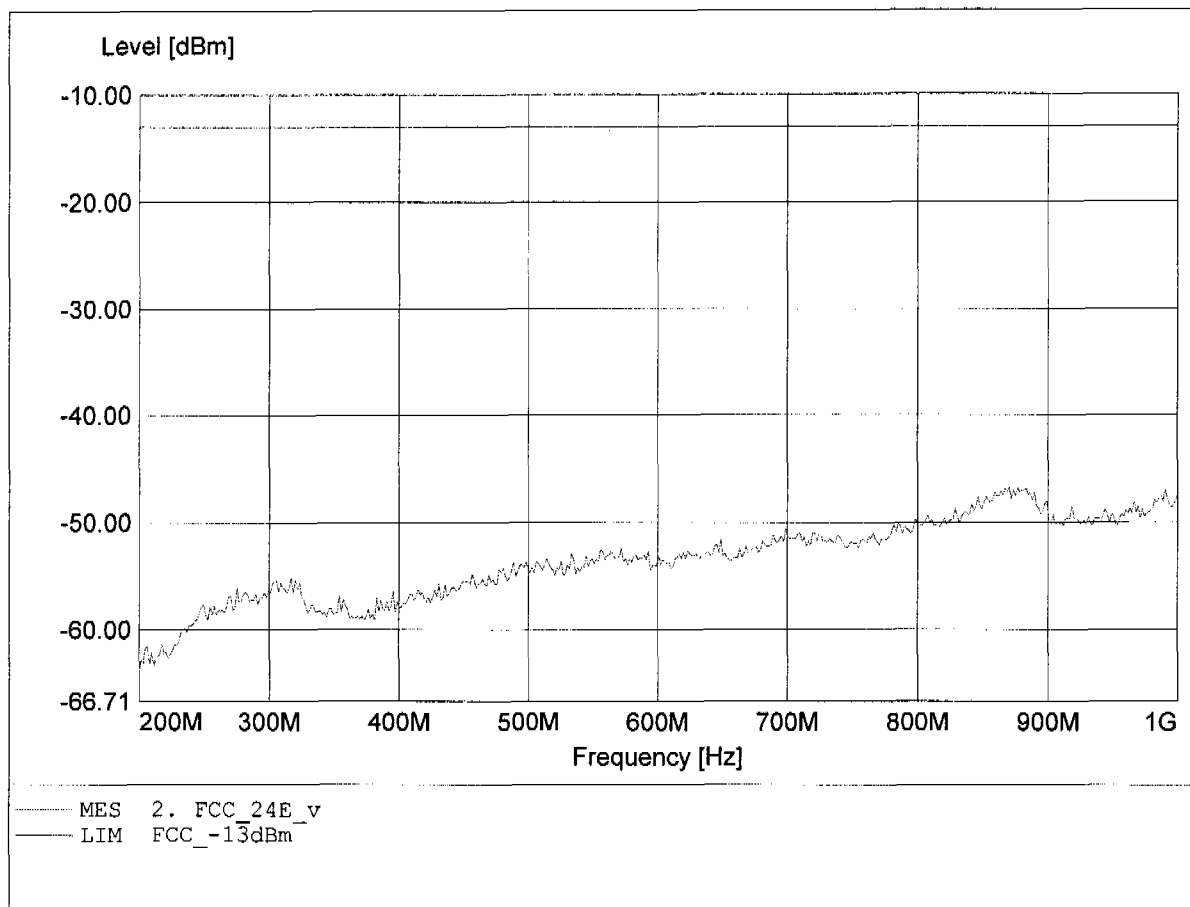

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 850.902MHz, Pmax: -44.81dBm, RBW: 1MHz

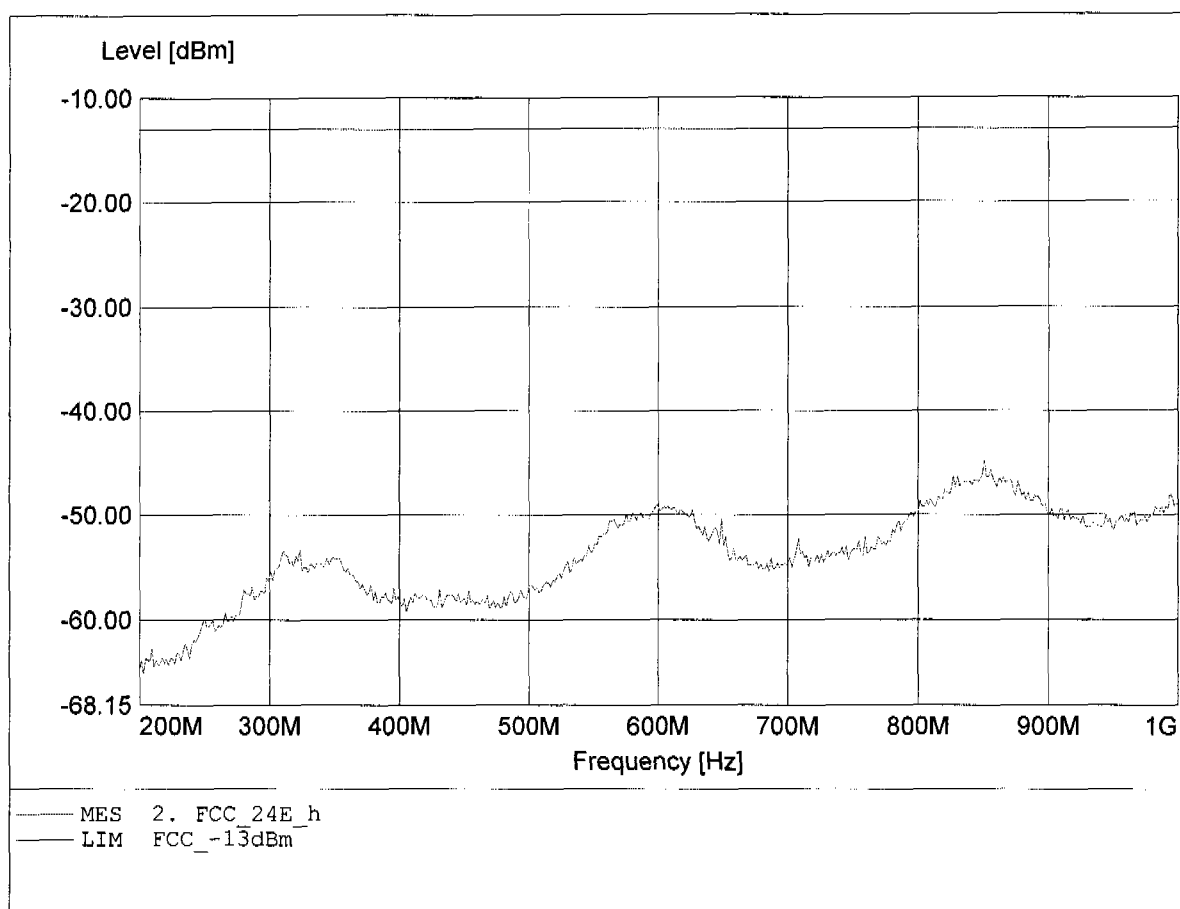

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.822GHz, Pmax: -29.53dBm, RBW: 1MHz/3kHz

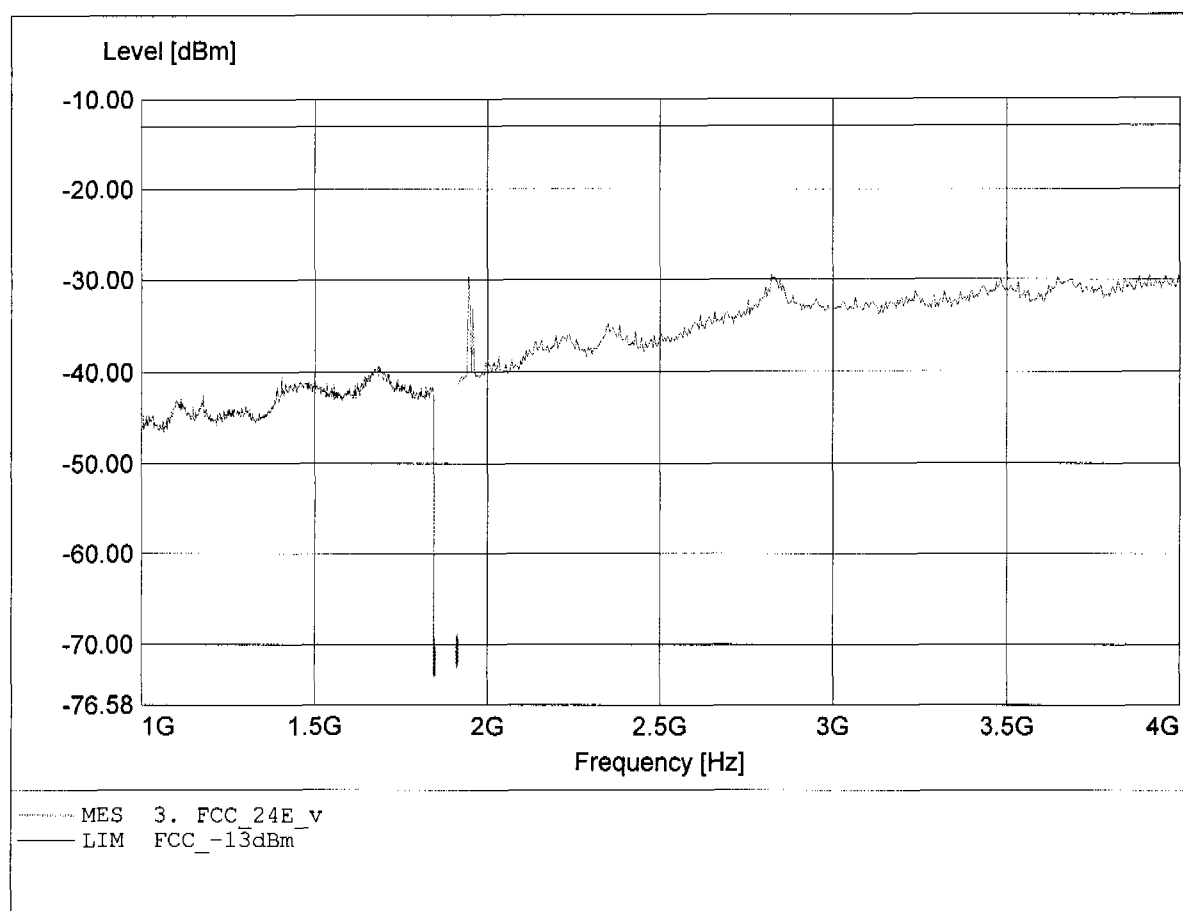

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.987GHz, Pmax: -29.31dBm, RBW: 1MHz/3kHz

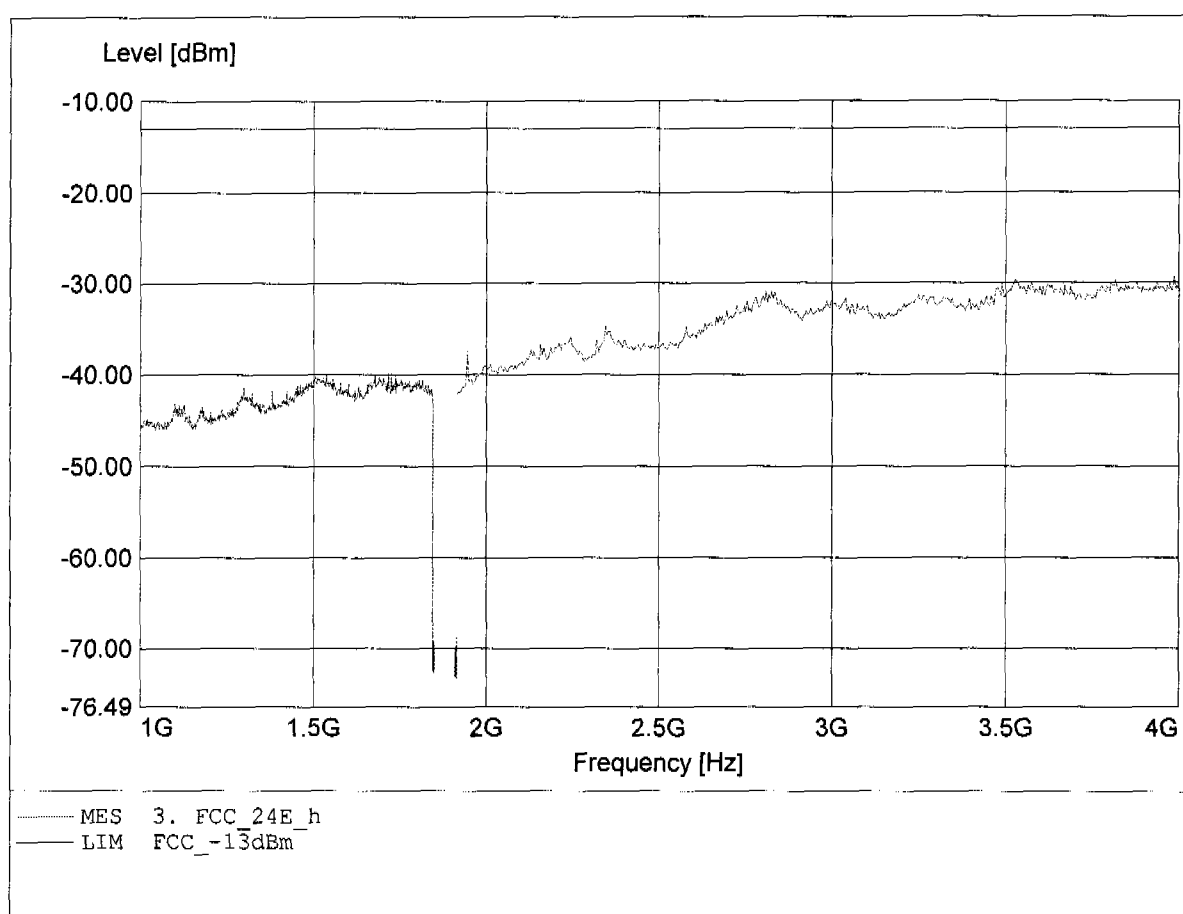

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.527GHz, Pmax: -39.11dBm, RBW: 1MHz

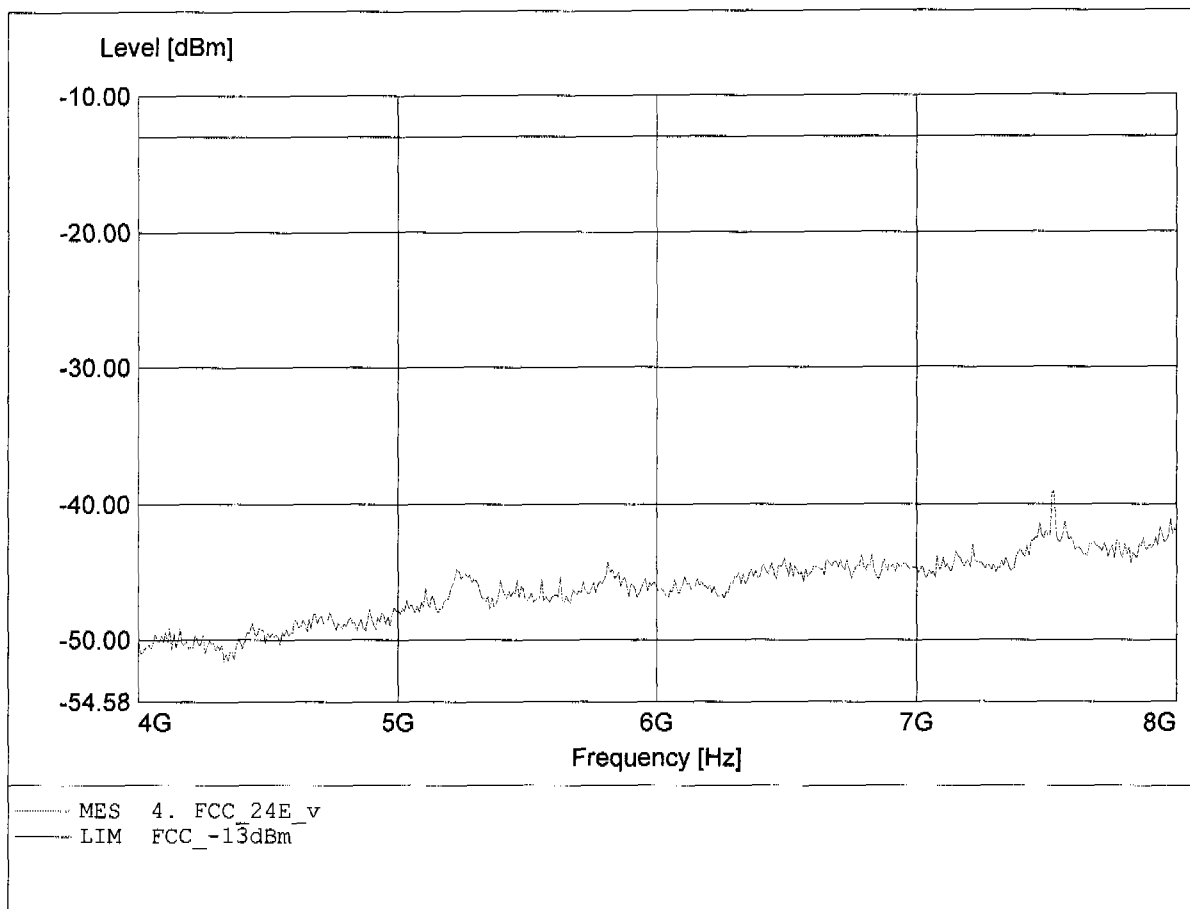

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 661
Temperature/ Voltage: Temp.:23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.527GHz, Pmax: -40.39dBm, RBW: 1MHz

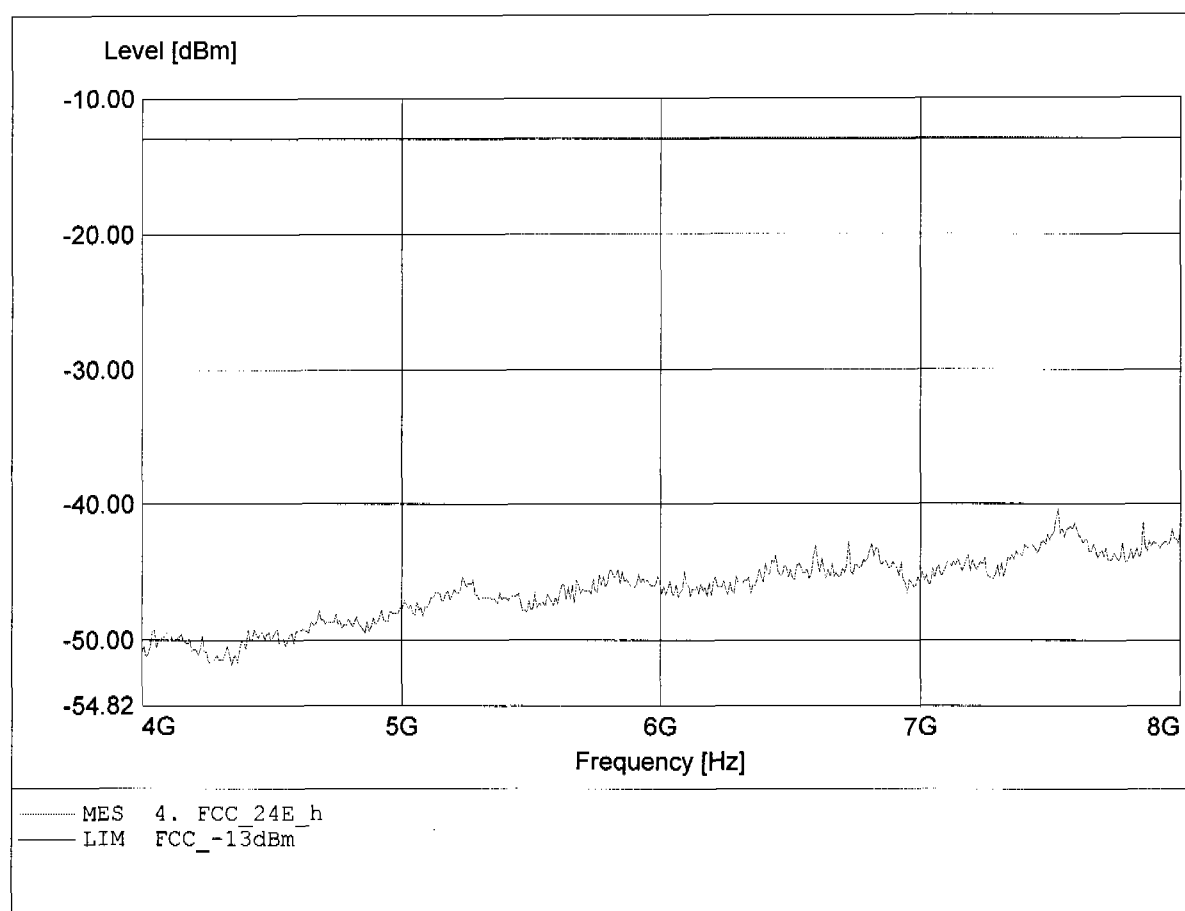

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.142GHz, Pmax: -36.67dBm, RBW: 1MHz

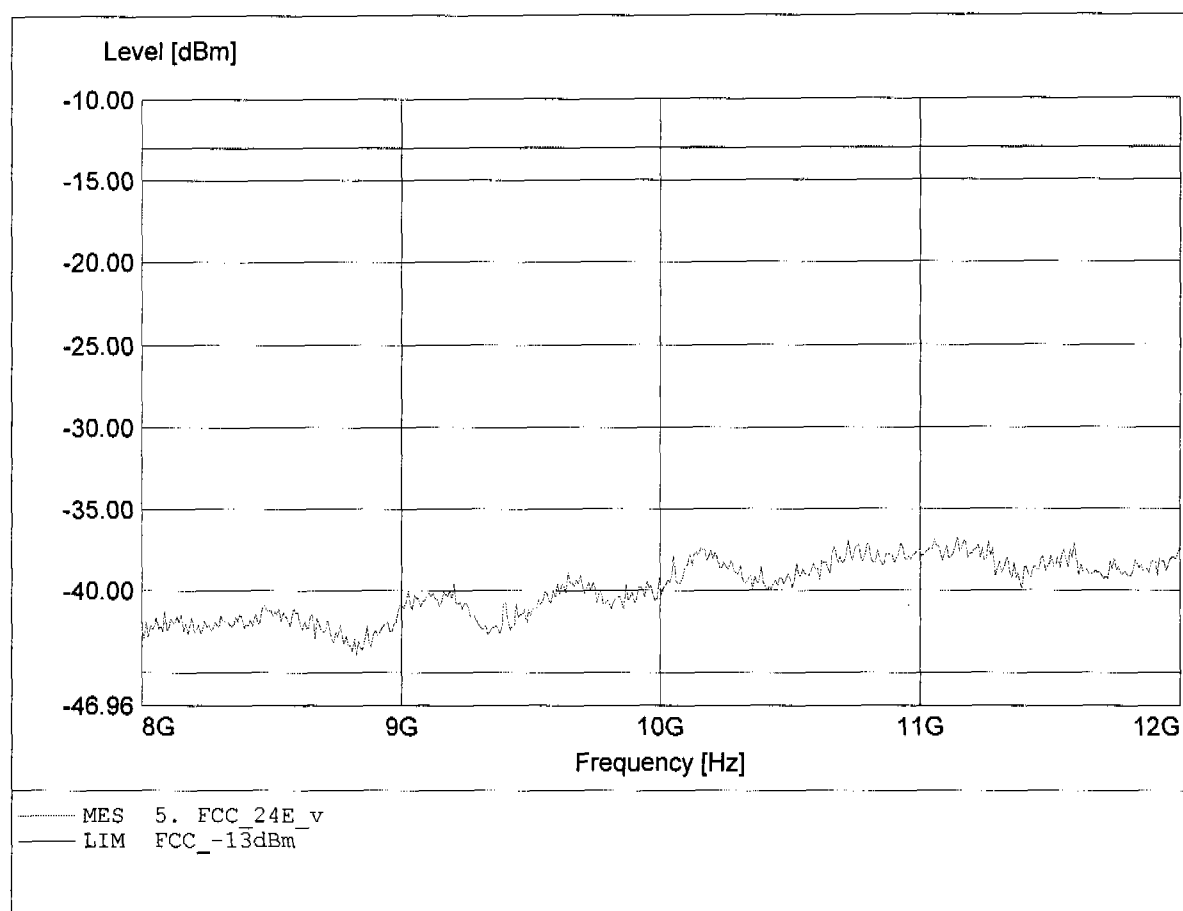

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagment / E-TRIP NA
Channel: 661
Temperature/ Voltage: Temp.:23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.118GHz, Pmax: -36.19dBm, RBW: 1MHz

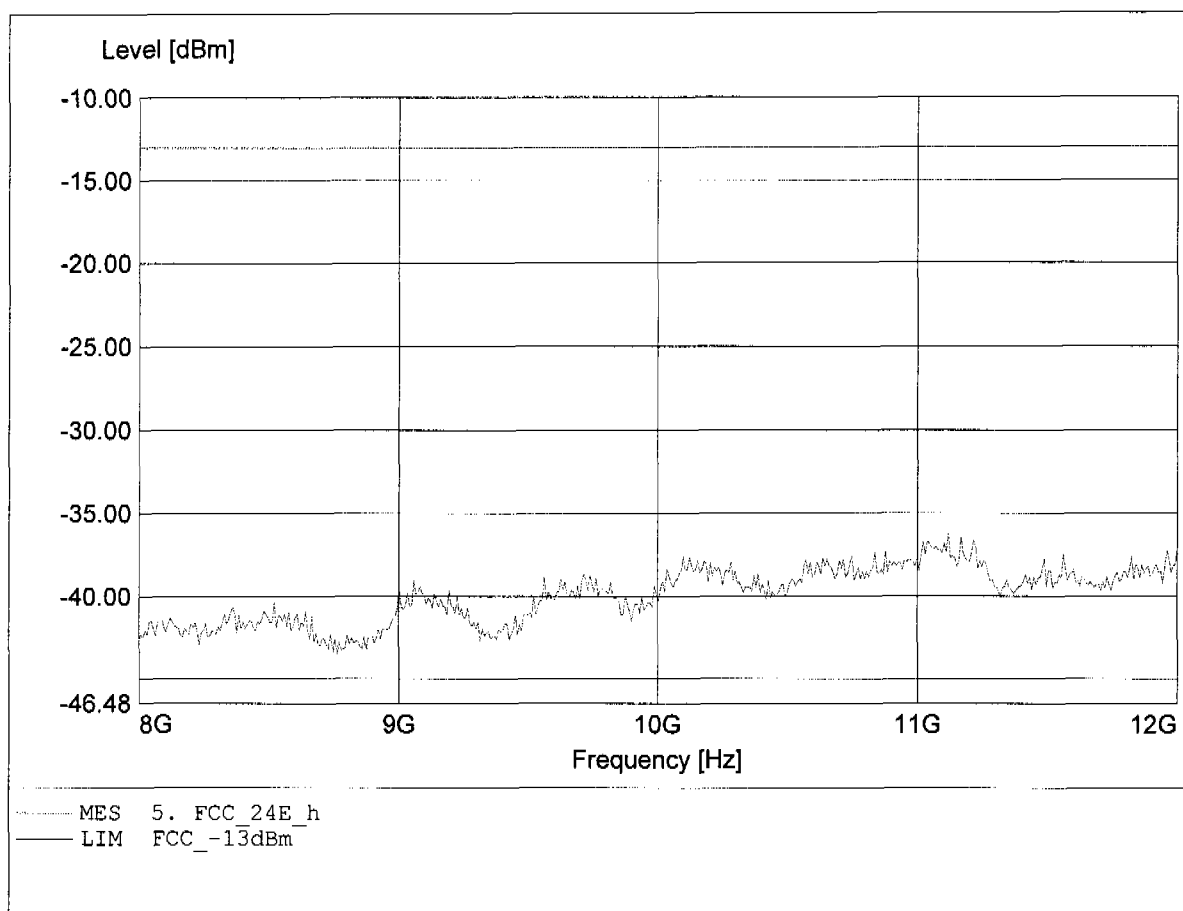

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.723GHz, Pmax: -25.33dBm, RBW: 1MHz

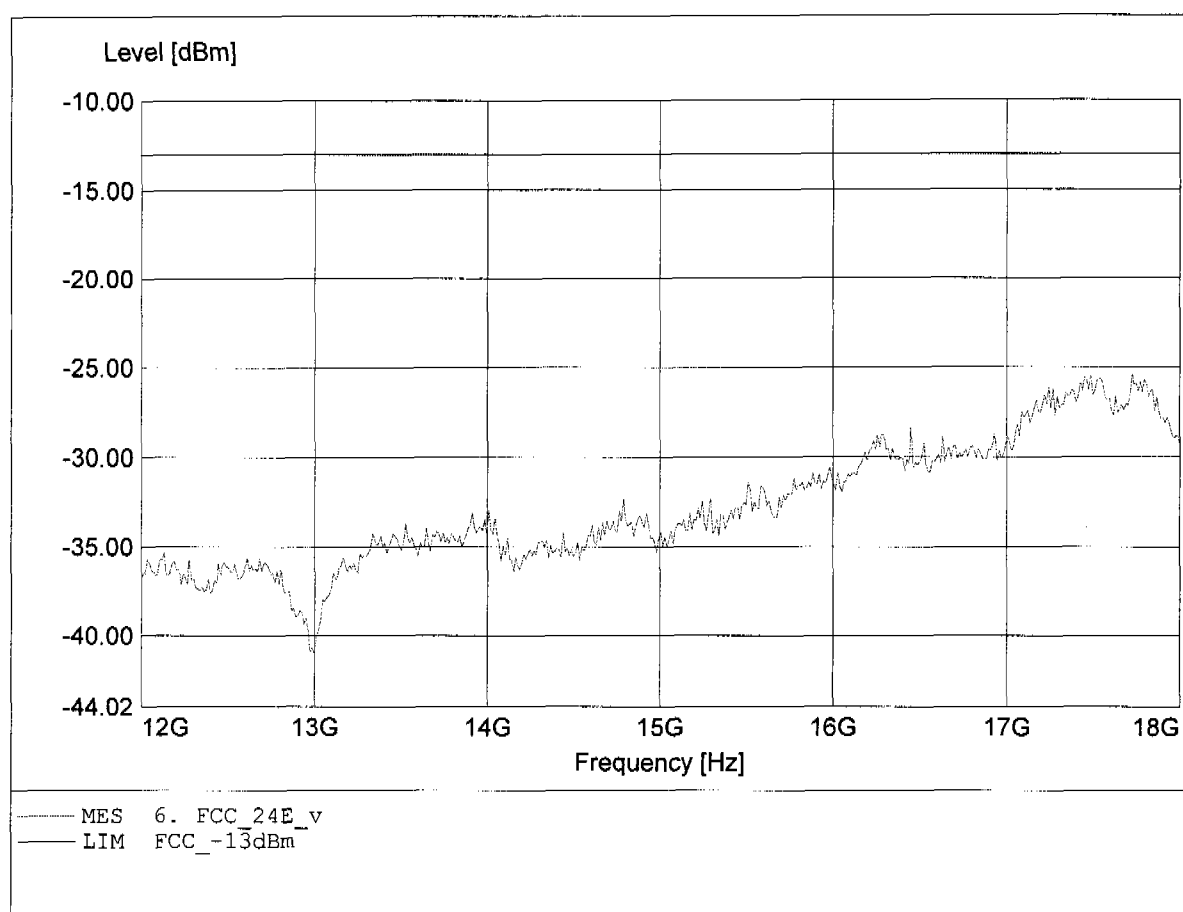

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.447GHz, Pmax: -25.30dBm, RBW: 1MHz

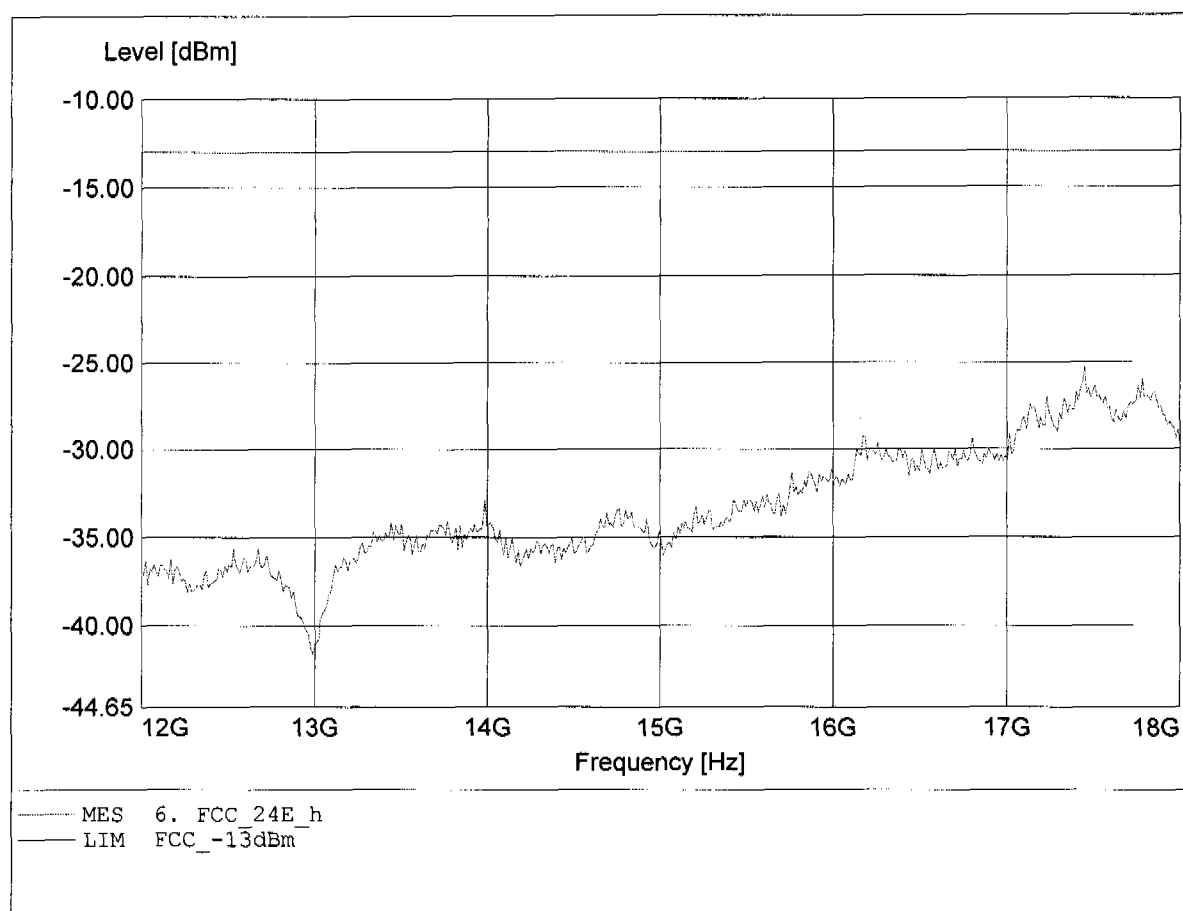

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 25.444GHz, Pmax: -22.70dBm, RBW: 1MHz

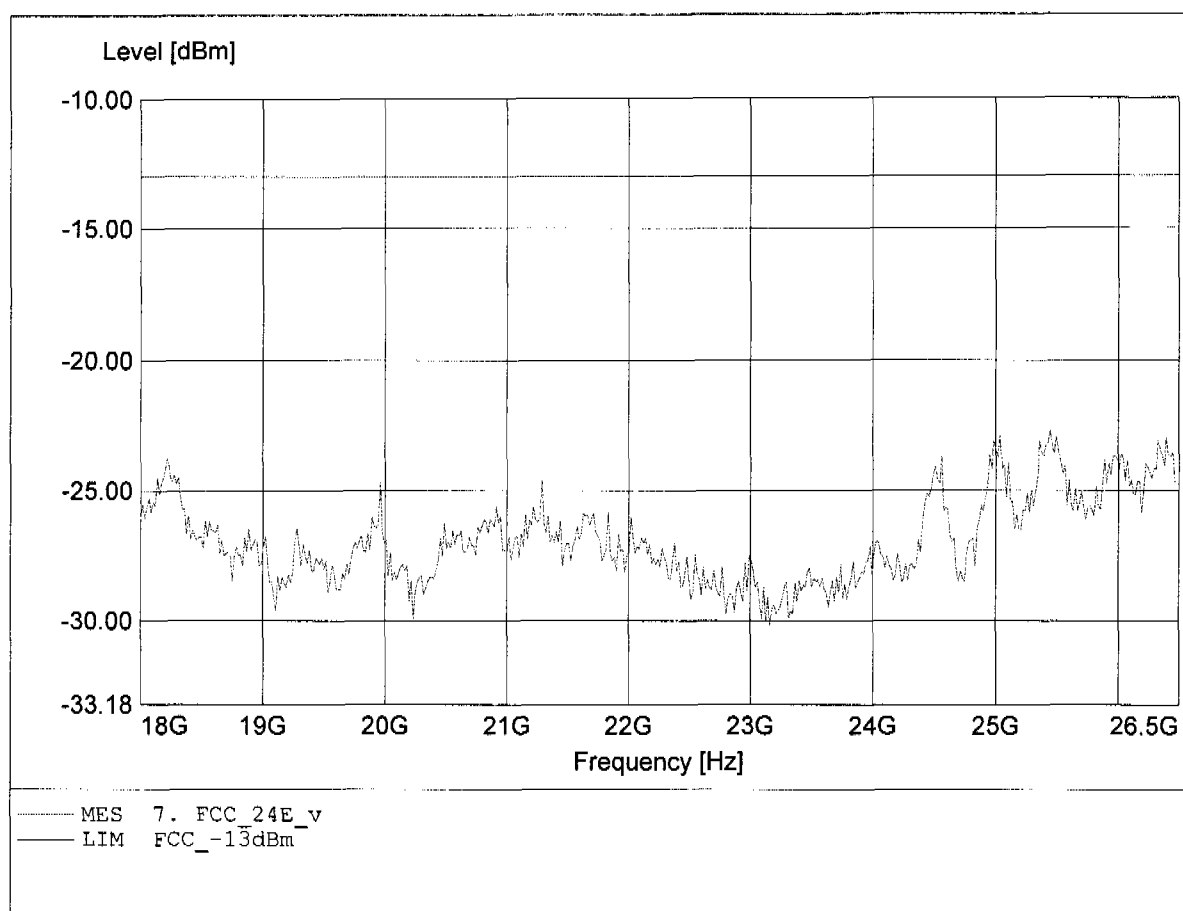

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 661
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 58.958MHz, Pmax: -58.52dBm, RBW: 1MHz

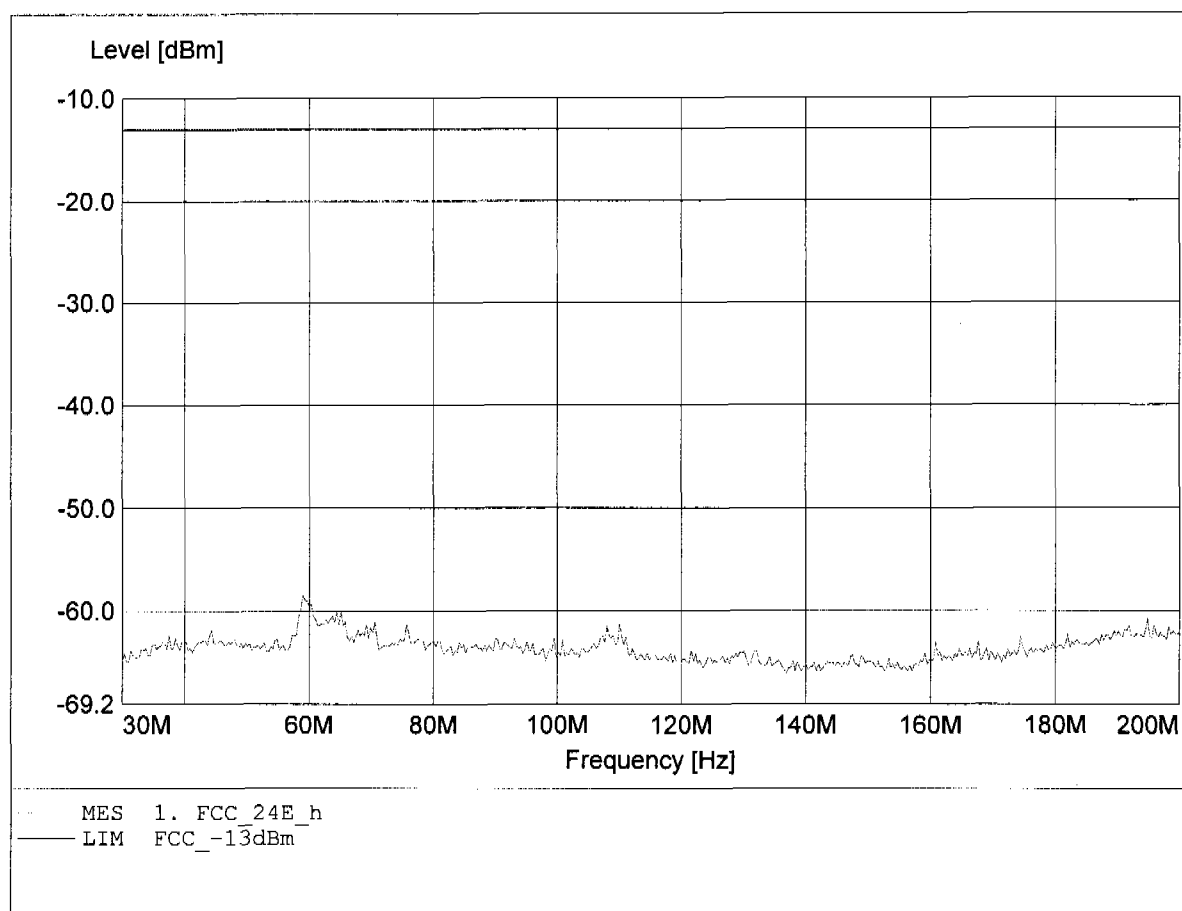

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagment / E-TRIP NA
Channel: 810
Temperature/ Voltage: Temp.:23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 59.639MHz, Pmax: -48.63dBm, RBW: 1MHz

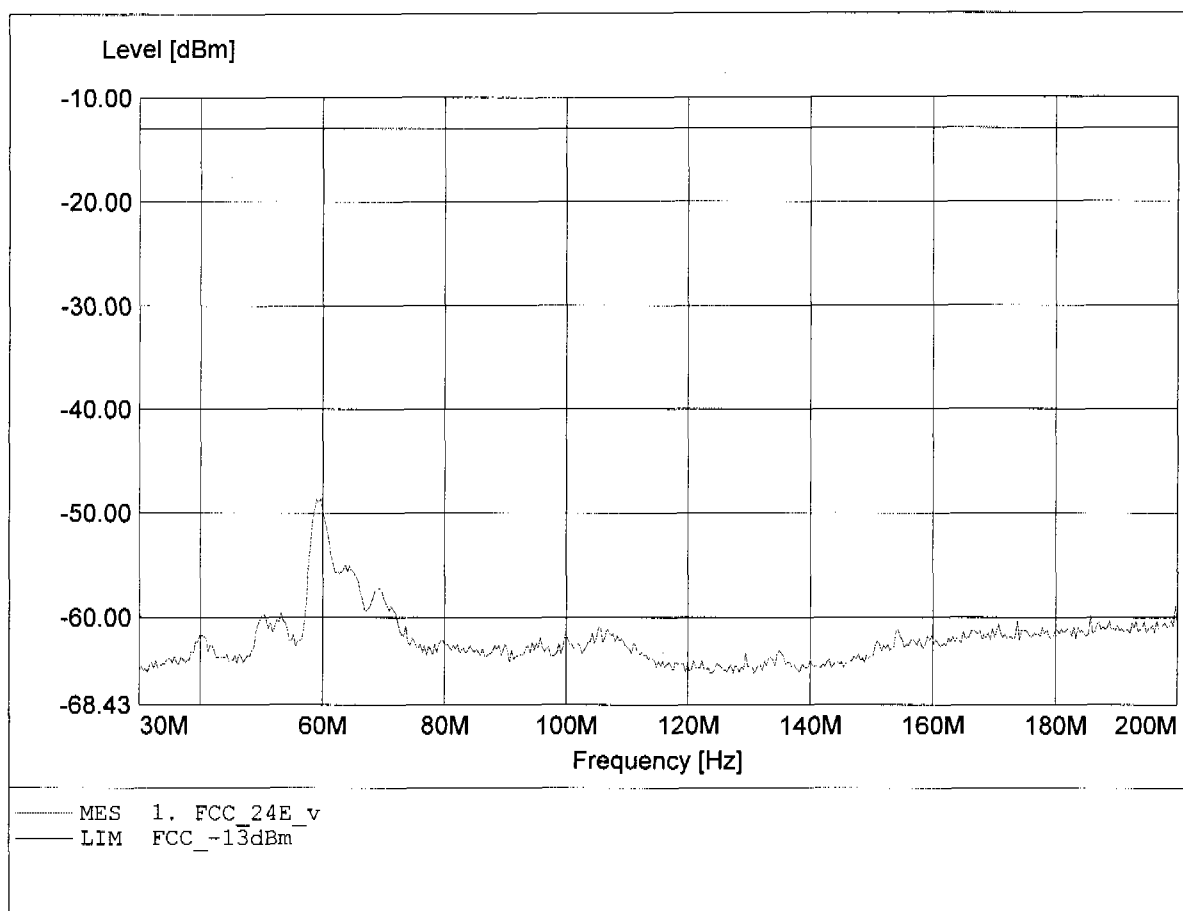

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 58.958MHz, Pmax: -57.75dBm, RBW: 1MHz

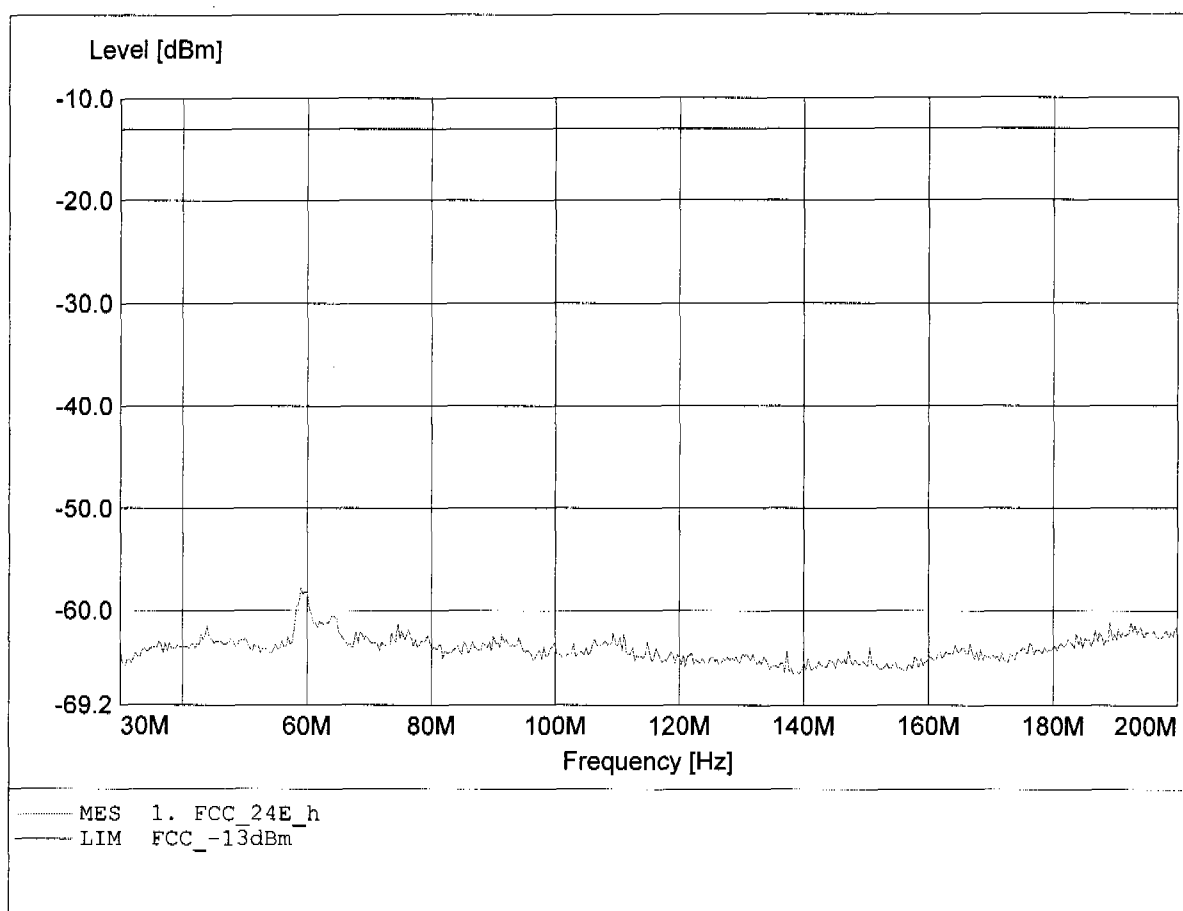

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 862.124MHz, Pmax: -46.30dBm, RBW: 1MHz

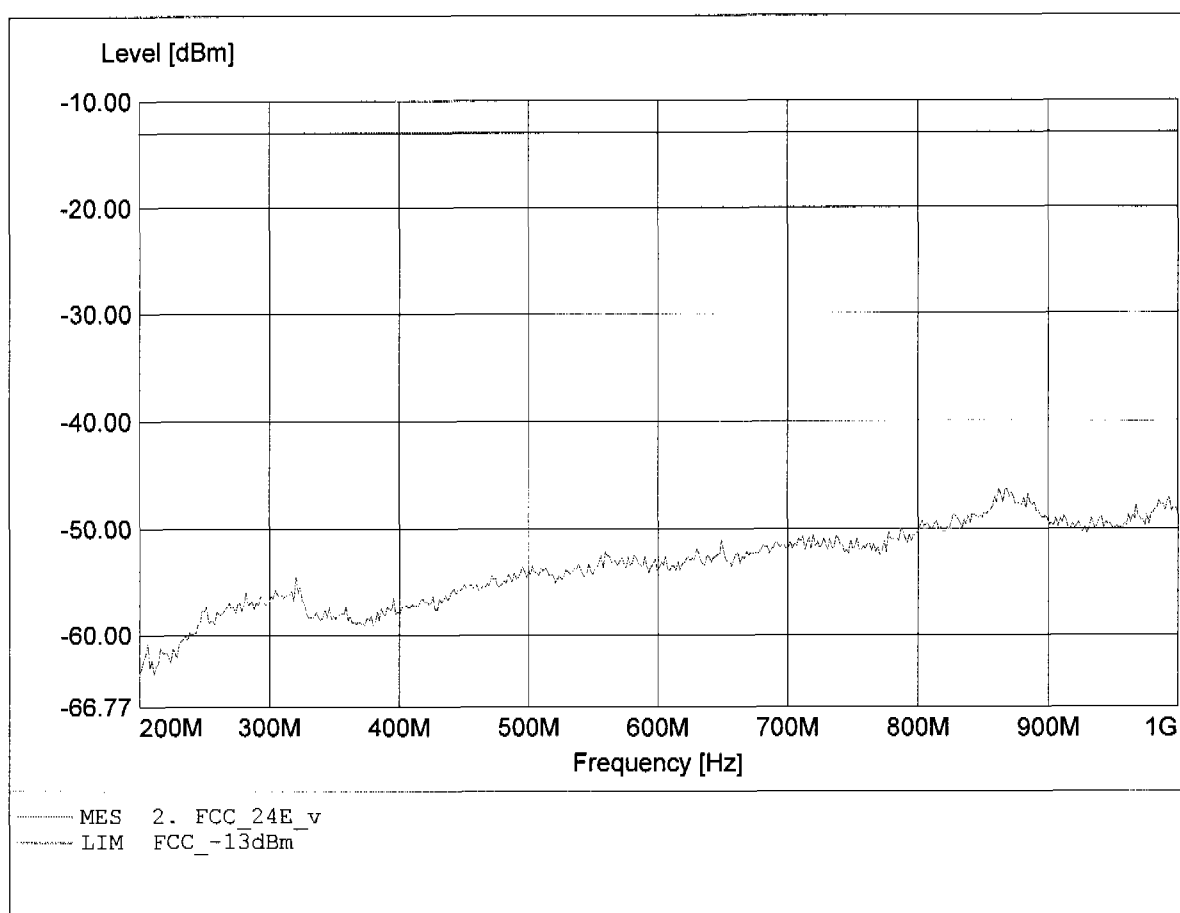

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagment / E-TRIP NA
Channel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 858.918MHz, Pmax: -45.20dBm, RBW: 1MHz

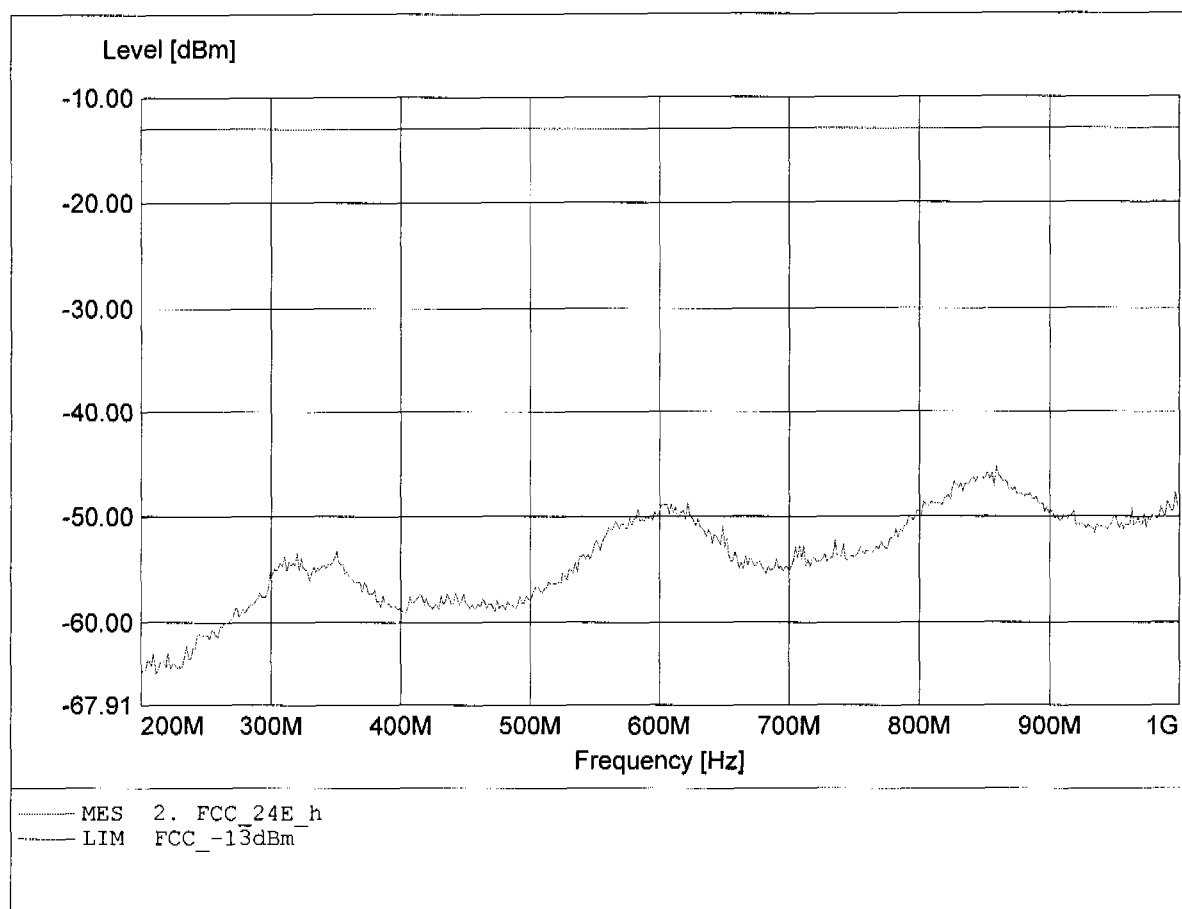

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.474GHz, Pmax: -28.63dBm, RBW: 1MHz/3kHz

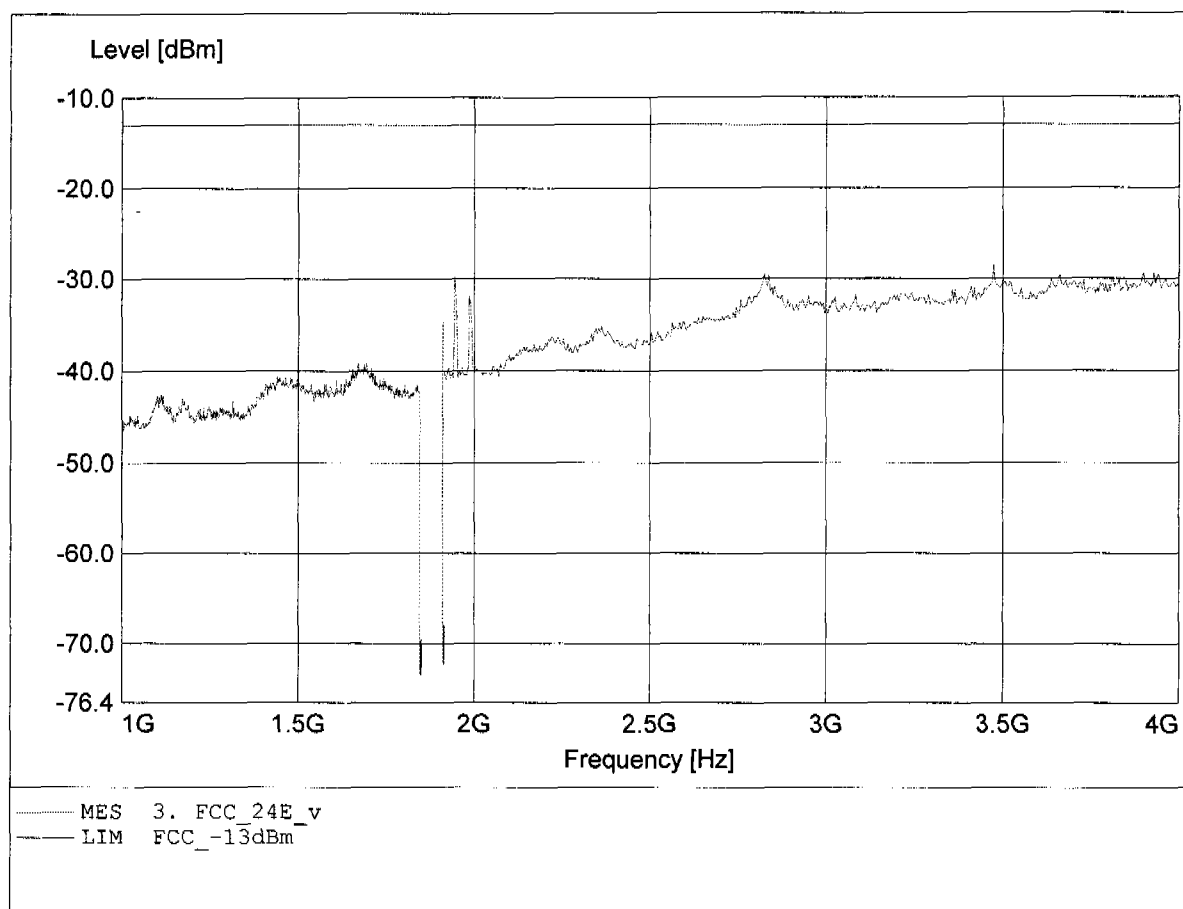

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 810
Temperature/ Voltage: Temp.:23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.910GHz, Pmax: -24.95dBm, RBW: 1MHz/3kHz

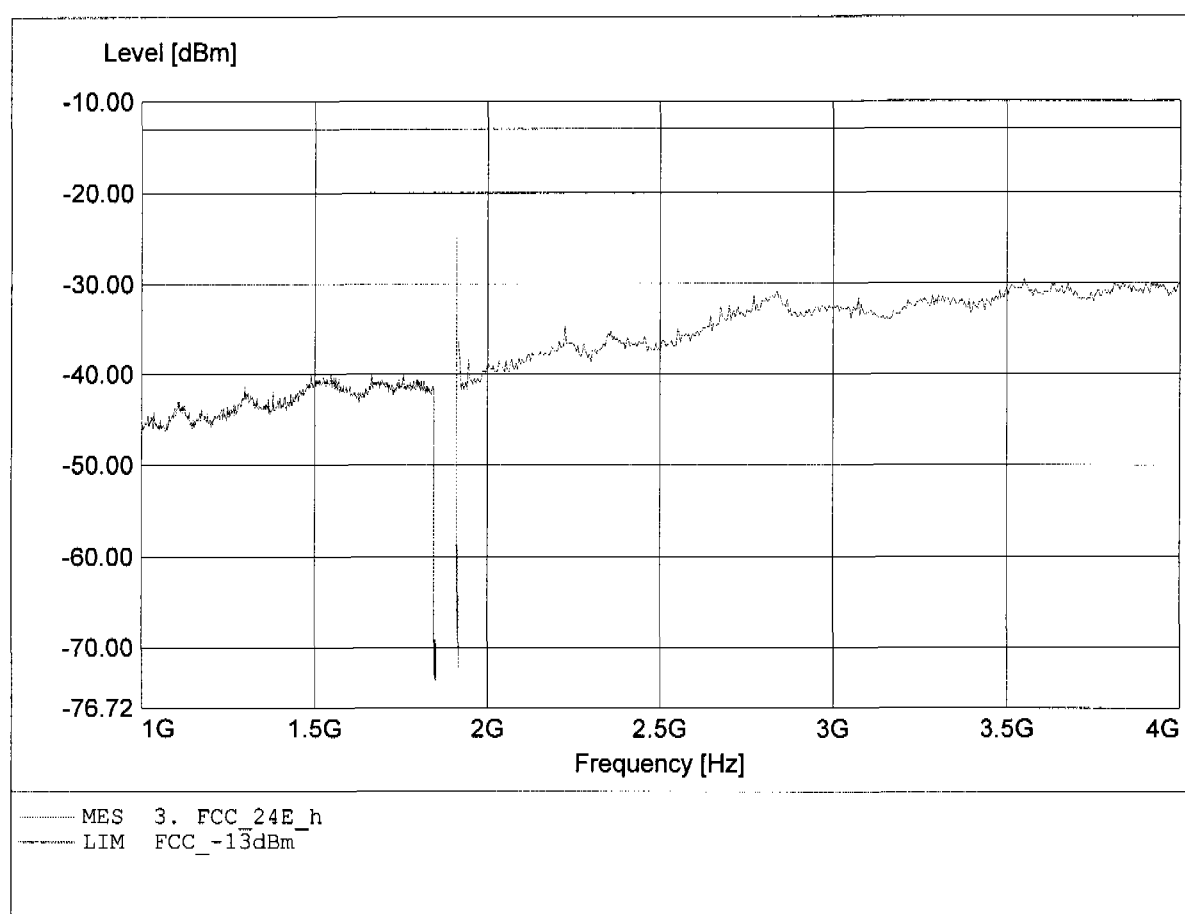

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.639GHz, Pmax: -40.15dBm, RBW: 1MHz

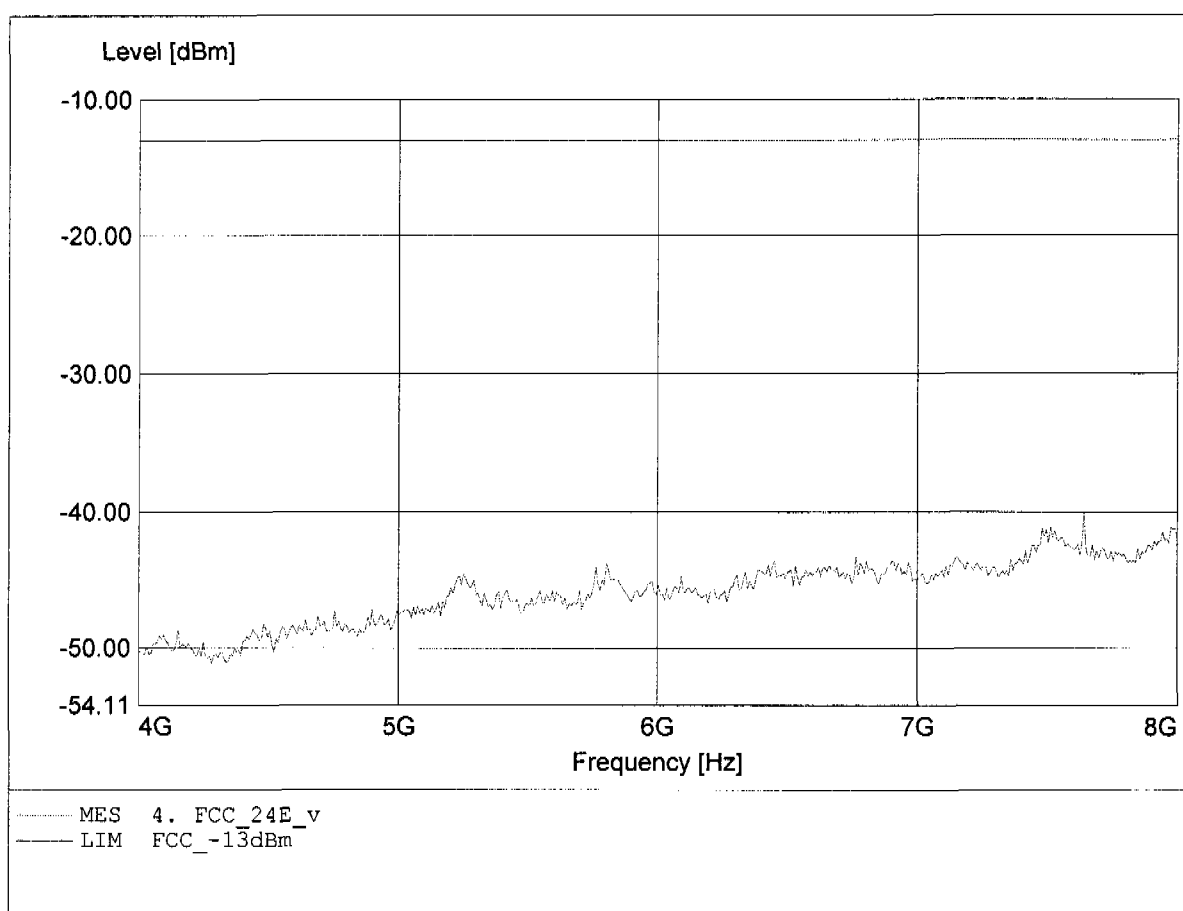

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.639GHz, Pmax: -37.68dBm, RBW: 1MHz

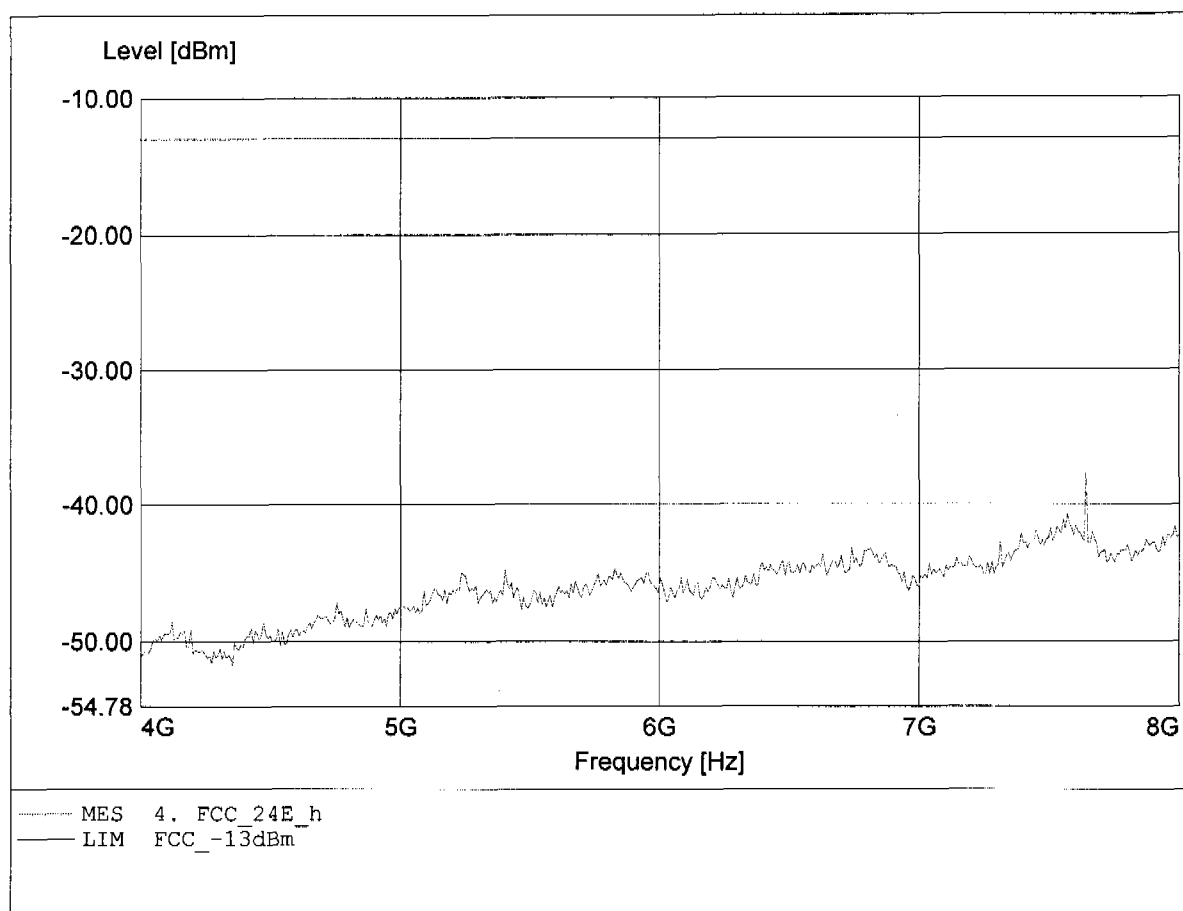

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagment / E-TRIP NA
Channel: 810
Temperature/ Voltage: Temp.:23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.886GHz, Pmax: -35.94dBm, RBW: 1MHz

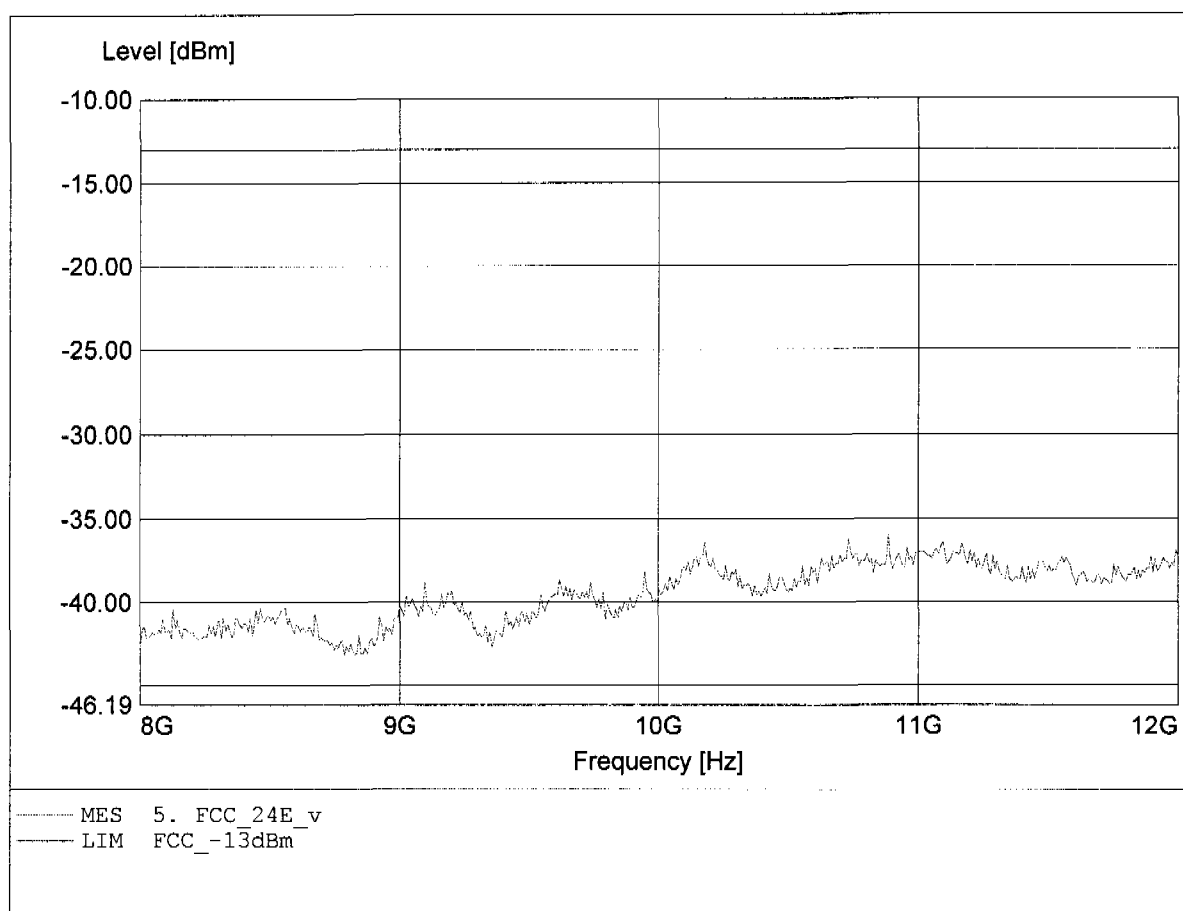

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.078GHz, Pmax: -36.26dBm, RBW: 1MHz

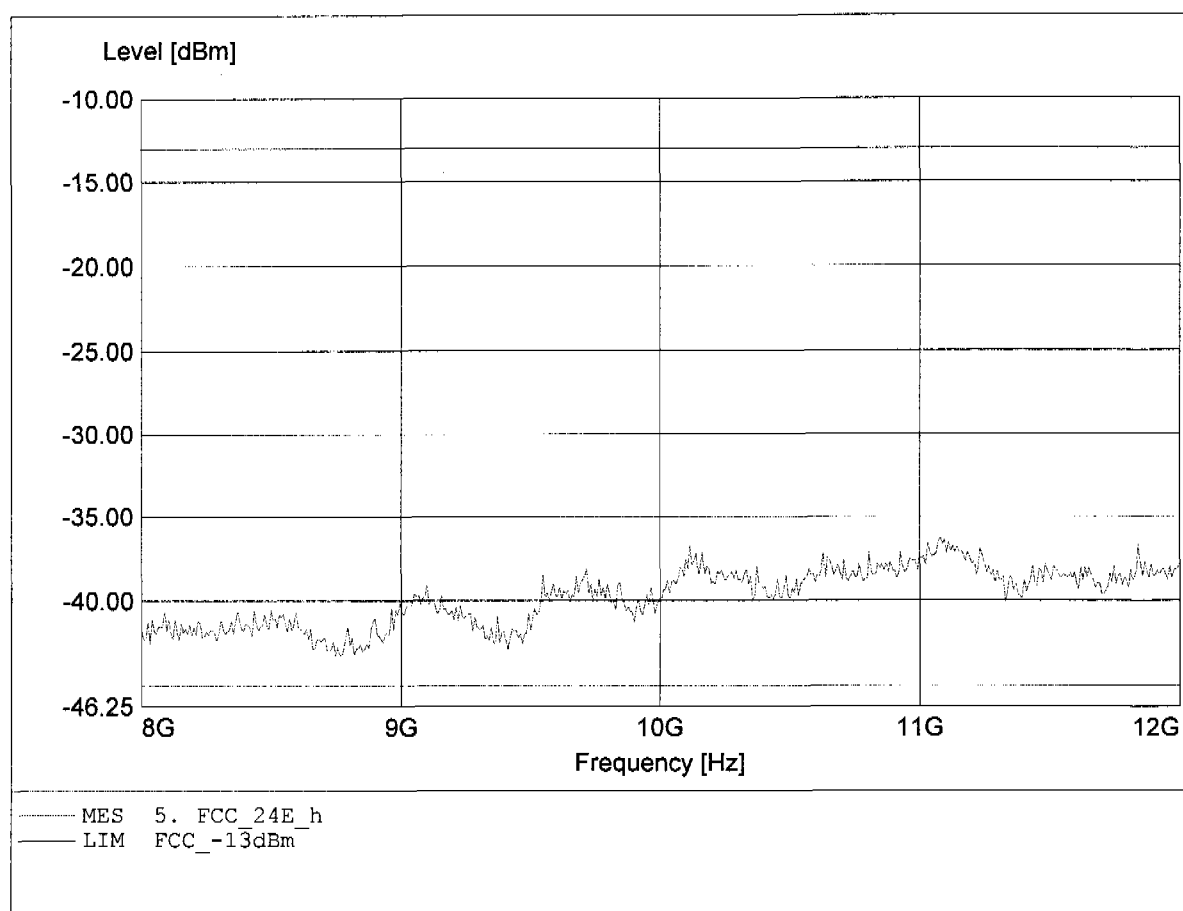

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 810
Temperature/ Voltage: Temp.:23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.507GHz, Pmax: -25.14dBm, RBW: 1MHz

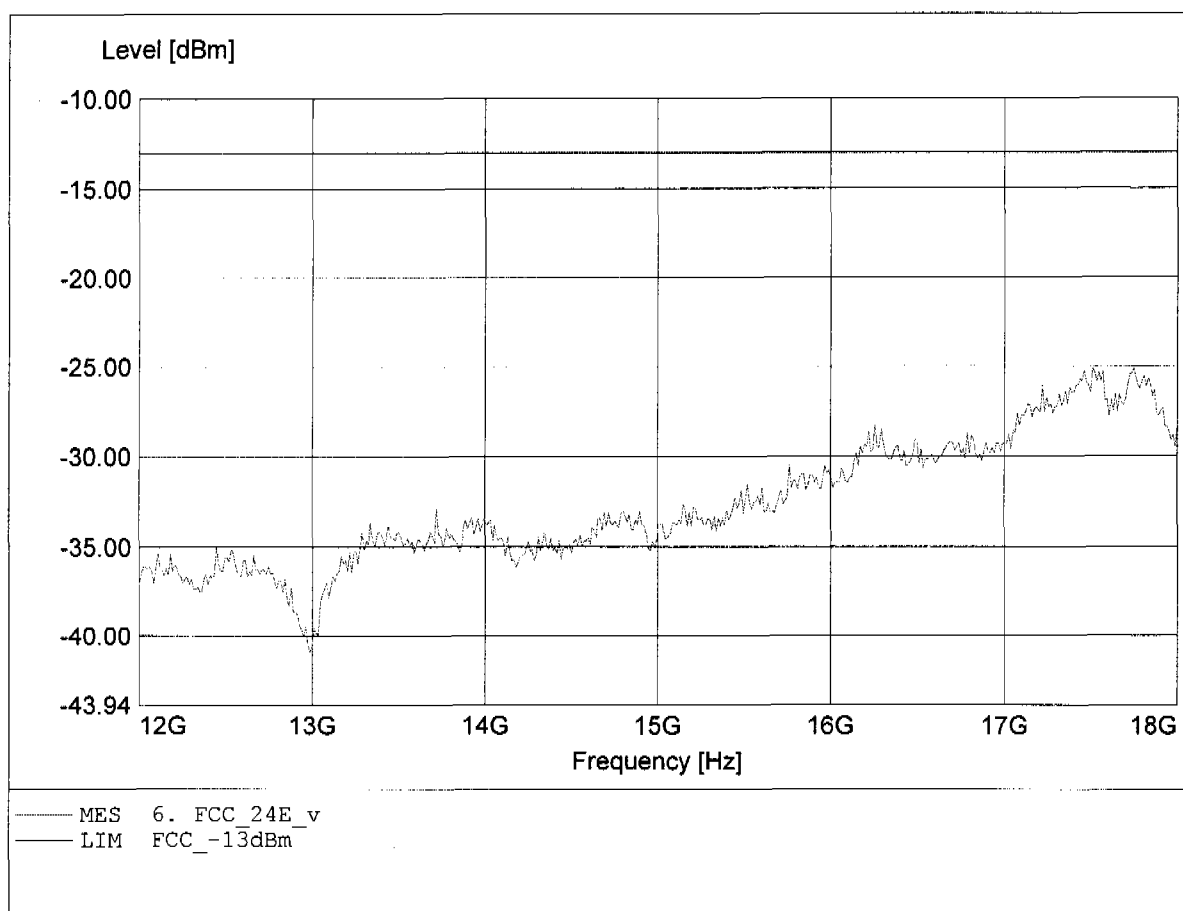

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.820GHz, Pmax: -25.86dBm, RBW: 1MHz

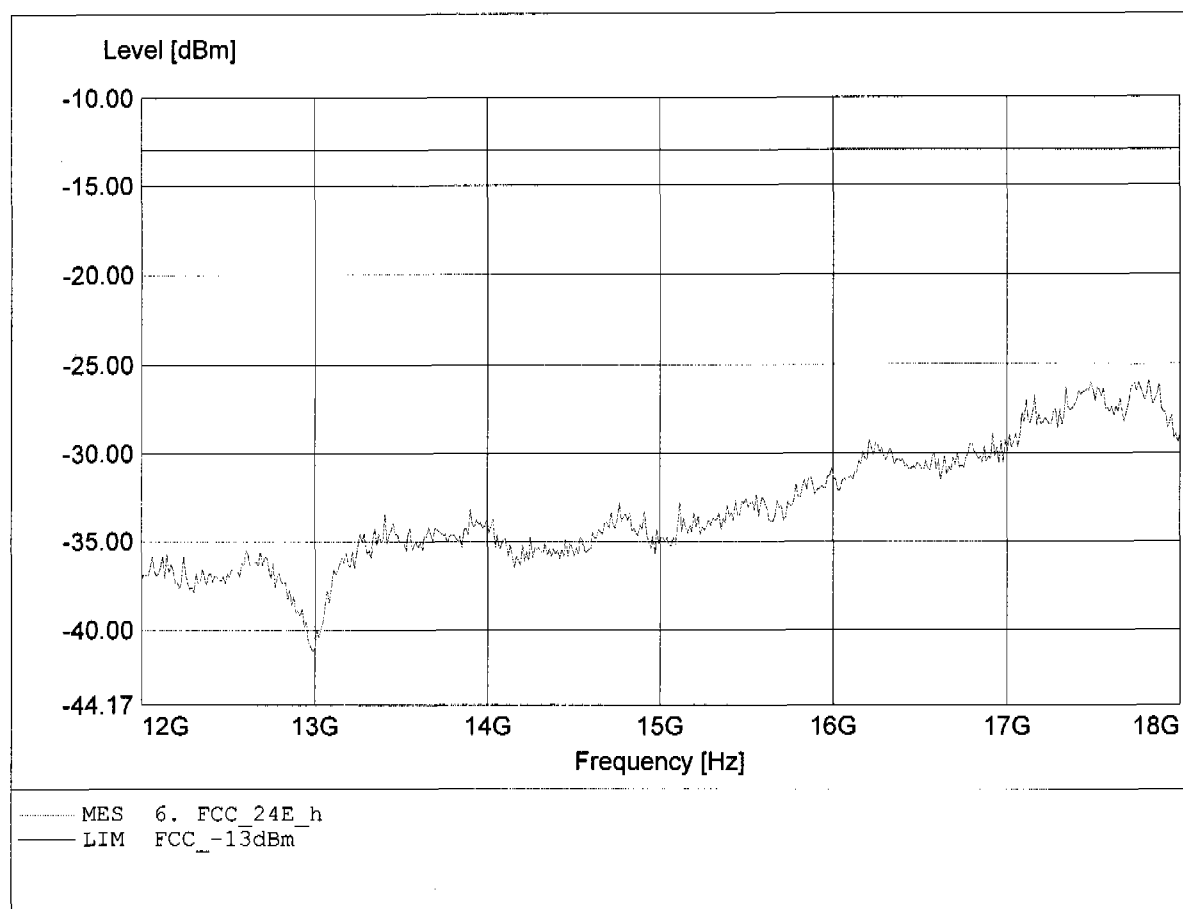

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagement / E-TRIP NA
Channel: 810
Temperature/ Voltage: Temp.: 23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 25.461GHz, Pmax: -20.97dBm, RBW: 1MHz

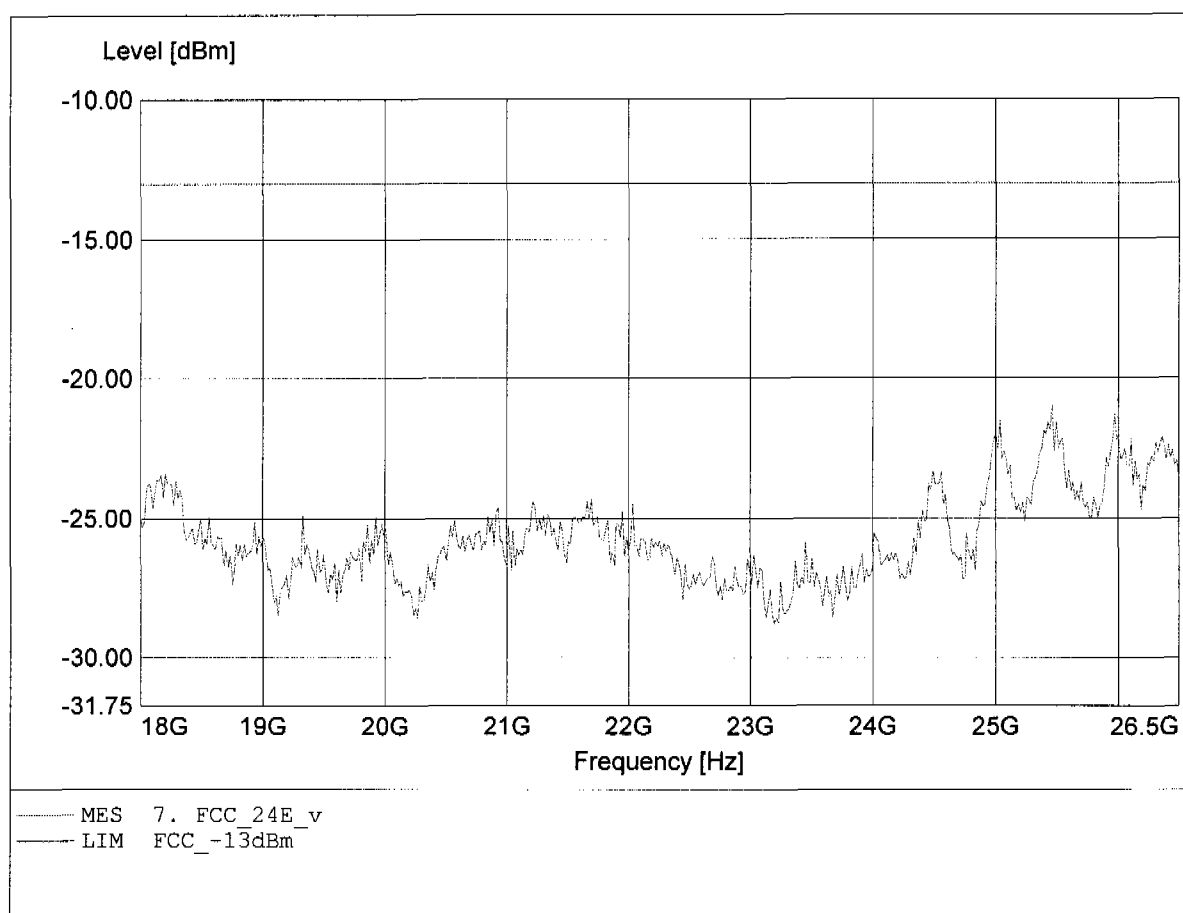

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E

Applicant: ELCON mobility GmbH
EUT/Model: Flottenmanagment / E-TRIP NA
Channel: 810
Temperature/ Voltage: Temp.:23°C, Unom.: 13,8 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 25.512GHz, Pmax: -21.71dBm, RBW: 1MHz

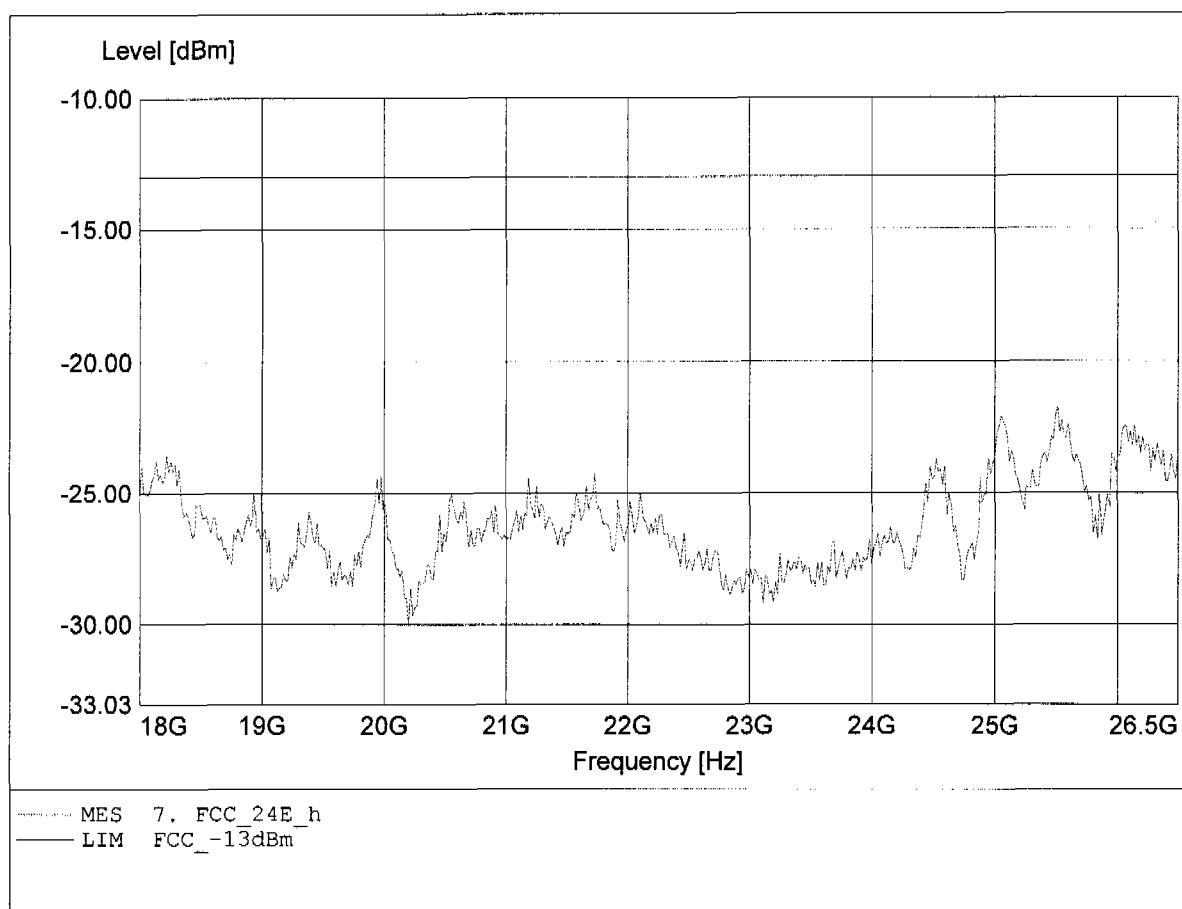

Appendix F

Line Conducted Emissions

Appendix G

Frequency Stability vs. Temperature

No diagrams
Refer to point 9.2

Appendix H

Frequency Stability vs. Voltage

No diagrams

Refer to point 10.2