

## FCC TEST REPORT(Bluetooth)

for

Meiloon Industrial Co., Ltd.

Active Loudspeaker

Model Number: EDGE SOUND DECK TR-100,  
EDGE SOUND DECK TR-200,  
ION SOUND BAR XT-100,  
ION SOUND BAR XT-200

FCC ID: R48- BARSKA

Prepared for : Meiloon Industrial Co., Ltd.  
Address : No.77, Lane 1775, Chuen-Ryh Road, 330 Taoyuan City, Taiwan

Prepared by : Keyway Testing Technology Co., Ltd.  
Address : Baishun Industrial Zone, Zhangmutou Town,  
Dongguan, Guangdong, China


Tel: 86-769-8718 2258  
Fax: 86-769-8718 1058

Report No. : 14KWE031189R  
Date of Test : Feb. 26~Mar. 03, 2014  
Date of Report : Mar. 04, 2014

## TABLE OF CONTENTS

Test Report Declaration	Page
1. TEST SUMMARY .....	4
2. GENERAL PRODUCT INFORMATION.....	4
2.1. Product Function.....	4
2.2. Description of Device (EUT).....	4
2.3. Difference between Model Numbers.....	4
2.4. Independent Operation Modes.....	4
2.5. Test Supporting System.....	4
3. TEST SITES.....	5
3.1. Test Facilities.....	5
3.2. List of Test and Measurement Instruments.....	6
4. TEST SET-UP AND OPERATION MODES.....	7
4.1. Principle of Configuration Selection.....	7
4.2. Block Diagram of Test Set-up.....	7
4.3. Test Operation Mode and Test Software.....	7
4.4. Special Accessories and Auxiliary Equipment.....	7
4.5. Countermeasures to Achieve EMC Compliance.....	7
5. EMISSION TEST RESULTS.....	8
5.1. Conducted Emission at the Mains Terminals Test.....	8
5.2. Radiated Emission Test.....	13
6. 20DB OCCUPY BANDWIDTH.....	19
6.1. Limits.....	19
6.2. Test setup.....	19
7. FREQUENCY SEPARATION.....	23
7.1. Limits.....	23
7.2. Test setup.....	23
8. MAXIMUM PEAK OUTPUT POWER.....	25
8.1. Limits.....	25
8.2. Test setup.....	25
9. NUMBER OF HOPPING FREQUENCY.....	26
9.1. Limits.....	26
9.2. Test setup.....	26
10. DWELL TIME.....	27
10.1. Limits.....	27
10.2. Test setup.....	27
11. BAND EDGE COMPLIANCE TEST.....	30
11.1. Limits.....	30
11.2. Test setup.....	30
12. ANTENNA REQUIREMENTS.....	35
12.1. Limits.....	35
12.2. Result.....	35
13. PHOTOGRAPHS OF TEST SET-UP.....	36
13.1. Set-up for Conducted Emission Test.....	36
13.2. Set-up for Radiated Emission Test.....	37
14. PHOTOGRAPHS OF THE EUT.....	38

# Keyway Testing Technology Co., Ltd.

<b>Applicant:</b>	Meiloon Industrial Co., Ltd.		
<b>Address:</b>	No.77, Lane 1775, Chuen-Ryh Road, 330 Taoyuan City, Taiwan		
<b>Manufacturer:</b>	BARSKA		
<b>Address:</b>	855 TOWNE CENTER DRIVE		
<b>Factor:</b>	MEIDA TECHNOLOGY (SUZHOU) CO., LTD		
<b>Address:</b>	No.5 Chun-Shen-Hu East Road, Xiang-Cheng District. Suzhou, China		
<b>E.U.T:</b>	Active Loudspeaker		
<b>Model Number:</b>	EDGE SOUND DECK TR-100, EDGE SOUND DECK TR-200, ION SOUND BAR XT-100, ION SOUND BAR XT-200		
<b>Trade Name:</b>	BARSKA	<b>Serial No.:</b>	-----
<b>Date of Receipt:</b>	Feb. 13, 2014	<b>Date of Test:</b>	Feb. 26~Mar. 03, 2014
<b>Test Specification:</b>	FCC Part 15, Subpart C: Oct. 1, 2013 ANSI C63.4:2009		
<b>Test Result:</b>	The equipment under test was found to be compliance with the requirements of the standards applied.		
<b>Issue Date: Mar. 04, 2014</b>			
Tested by:	Reviewed by:	Approved by:	
			
Andy Gao / Engineer	Jade Yang/ Supervisor	Chris Du / Manager	
<b>Other Aspects:</b>	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Keyway Testing Technology Co., Ltd.			

## 1. TEST SUMMARY

Test Items	Test Requirement	Result
Conducted Emissions	15.207	PASS
Radiated Emissions	15.205(a)/15.209 15.247(d)	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Emissions from out of band	15.247(d)	PASS
Antenna Requirement	15.203	PASS

## 2. GENERAL PRODUCT INFORMATION

### 2.1. Product Function

Refer to Technical Construction Form and User Manual.

### 2.2. Description of Device (EUT)

Product Name:	Active Loudspeaker
Model No.:	EDGE SOUND DECK TR-100, EDGE SOUND DECK TR-200, ION SOUND BAR XT-100, ION SOUND BAR XT-200
Operation Frequency:	2402~2480MHz
Channel numbers:	79 Channels
Channel separation:	1M
Modulation technology:	GFSK,Pi/4DQPSK,8DPSK(EDR 3Mbps)
Antenna Type:	Integral Antenna
Antenna gain:	1dBi
Power supply:	AC 100-240V~50-60Hz T2.5AL

### 2.3. Difference between Model Numbers

*Note: The products are different for the model number ,the Wooden exterior colors and sizes and the Power.*

### 2.4. Independent Operation Modes

The basic operation modes are:

#### 2.4.1. EUT work continues TX mode and frequency as below:

Modulation	Channel	Frequency
FHSS, Pi/4DQPSK, 8DPSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz

*Note: Bluetooth signal has 9 packages DH1, DH3, DH5, 2DH1, 2DH3, 2DH5, 3DH1, 3DH3, 3DH5, DH5 package is largest; we are testing DH5 in the report.*

### 2.5. Test Supporting System

None.

### 3. TEST SITES

#### 3.1. Test Facilities

Lab Qualifications : 944 Shielded Room built by ETS-Lindgren, USA

Date of completion: March 28, 2011

966 Chamber built by ETS-Lindgren, USA

Date of completion: March 28, 2011

Certificated by TUV Rheinland, Germany.

Registration No.: UA 50207153

Date of registration: July 13, 2011

Certificated by UL, USA

Registration No.: 100567-237

Date of registration: September 1, 2011

Certificated by Intertek

Registration No.: 2011-RTL-L1-31

Date of registration: October 11, 2011

Certificated by Industry Canada

Registration No.: 9868A

Date of registration: December 8, 2011

Certificated by FCC, USA

Registration No.: 370994

Date of registration: February 21, 2012

Certificated by CNAS China

Registration No.: CNAS L5783

Date of registration: August 8, 2012

Name of Firm : Keyway Testing Technology Co., Ltd.

Site Location : Baishun Industrial Zone, Zhangmutou Town,  
Dongguan, Guangdong, China

## 3.2. List of Test and Measurement Instruments

### 3.2.1. For conducted emission at the mains terminals test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	May 9,13	May 9,14
Artificial Mains Network	Rohde&Schwarz	ENV216	101315	May 9,13	May 9,14
Artificial Mains Network (AUX)	Rohde&Schwarz	ENV216	101314	May 9,13	May 9,14
RF Cable	FUJIKURA	3D-2W	944 Cable	May 9,13	May 9,14

### 3.2.2. For radiated emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	May 9,13	May 9,14
System Simulator	Agilent	E5515C	GB43130245	May 9,13	May 9,14
Power Splitter	Weinschel	1506A	NW425	May 9,13	May 9,14
Bilog Antenna	ETS-LINDGREEN	3142D	135452	May 20,13	May 20,14
Spectrum Analyzer	Agilent	E4411B	MY4511304	May 9,13	May 9,14
3m Semi-anechoic Chamber	ETS-LINDGREEN	966	KW01	May 9,13	May 9,14
Signal Amplifier	SONOMA	310	187016	May 9,13	May 9,14
Signal Amplifier	Agilent	8449B	3008A00251	May 9,13	May 9,14
RF Cable	IMRO	IMRO-400	966 Cable 1#	N/A	N/A
MULTI-DEVICE Controller	ETS-LINDGREEN	2090	126913	N/A	N/A
Horn Antenna	DAZE	ZN30701	11003	May 11,13	May. 11,14
Horn Antenna	SCHWARZBECK	BBHA9170	9170-068	May.11,13	May. 11,14
Spectrum Analyzer	Agilent	8593E	3911A04271	May 9,13	May 9,14
Spectrum Analyzer	Agilent	E4408B	MY44211125	May 9,13	May 9,14
Signal Amplifier	DAZE	ZN3380C	11001	May 9,13	May 9,14
High Pass filter	Micro	HPM50111	324216	May 9,13	May 9,14
Filter	COM-MW	ZBSF-C836.5-25-X	KW032	May 9,13	May 9,14
Filter	COM-MW	ZBSF-C1747.5-75-X2	KW035	May 9,13	May 9,14
Filter	COM-MW	ZBSF-C1880-60-X2	KW037	May 9,13	May 9,14
DC Power Supply	LongWei	PS-305D	010964729	May 9,13	May 9,14
Constant temperature and humidity box	GF	GTH-800-40-1P	MAA9906-005	May 9,13	May 9,14
Universal radio communication tester	Rohde&Schwarz	CMU200	3215420	May. 9,2013	May. 9,2014
Splitter	Agilent	11636B	0025164	May. 9,2013	May. 9,2014


## 4. TEST SET-UP AND OPERATION MODES

### 4.1. Principle of Configuration Selection

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

### 4.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators



*(EUT: Active Loudspeaker)*

### 4.3. Test Operation Mode and Test Software

None.

### 4.4. Special Accessories and Auxiliary Equipment

None.

### 4.5. Countermeasures to Achieve EMC Compliance

None.

## 5. EMISSION TEST RESULTS

### 5.1. Conducted Emission at the Mains Terminals Test

#### 5.1.1. Limit 15.209 limits

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

#### 5.1.2. Test Setup


The EUT was put on a wooden table which was 0.8 m high above the ground and connected to the AC mains through the Artificial Mains Network (AMN). Where the mains cable supplied by the manufacture was longer than 0.8 m, the excess was folded back and forth parallel to the cable at the centre so as to form a bundle no longer than 0.4 m.

The EUT was kept 0.4 m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during the conducted emission test.

The frequency range from 150 kHz to 30 MHz was investigated.

The bandwidth of the test receiver was set at 9 kHz.

Pretest for all mode, The test data of the worst case condition(s) was reported on the following page.

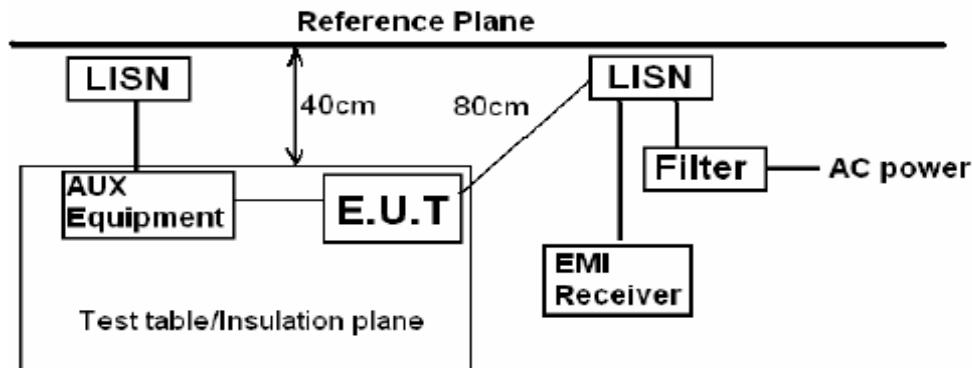

*Remark:*

*E.U.T: Equipment Under Test*

*LISN: Line Impedance Stabilization Network*

*Test table height=0.8m*

#### 5.1.3. Test Mode

Set EUT in TX mode.

**Test Data****Line (M/N: EDGE SOUND DECK TR-200)**

Freq	Level	Limit		Over Limit	Remark
		Line	dBuV		
	MHz	dBuV		dB	
1	0.170	42.02	54.94	-12.92	Average
2	0.170	48.23	64.94	-16.71	QP
3	0.199	36.75	53.67	-16.92	Average
4	0.199	43.10	63.67	-20.57	QP
5	0.310	34.83	49.97	-15.14	Average
6	0.310	36.10	59.97	-23.87	QP
7	0.400	35.54	47.86	-12.32	Average
8	0.400	42.15	57.86	-15.71	QP
9	1.141	31.52	46.00	-14.48	Average
10	1.141	40.10	56.00	-15.90	QP
11	1.242	33.63	46.00	-12.37	Average
12	1.242	43.18	56.00	-12.82	QP

**Neutral**

Freq	Level	Limit		Over Limit	Remark
		Line	dBuV		
	MHz	dBuV		dB	
1	0.170	43.47	54.94	-11.47	Average
2	0.170	51.34	64.94	-13.60	QP
3	0.200	40.46	53.62	-13.16	Average
4	0.200	46.90	63.62	-16.72	QP
5	0.310	35.10	49.97	-14.87	Average
6	0.310	37.40	59.97	-22.57	QP
7	0.396	36.17	47.95	-11.78	Average
8	0.396	43.05	57.95	-14.90	QP
9	0.853	29.69	46.00	-16.31	Average
10	0.853	36.60	56.00	-19.40	QP
11	1.276	34.91	46.00	-11.09	Average
12	1.276	42.12	56.00	-13.88	QP

## Line (M/N: EDGE SOUND DECK TR-100)

	Freq	Level	Limit	Over	
	MHz	dBuV	dBuV	dB	Remark
1	0.150	38.44	56.00	-17.56	Average
2	0.150	54.09	66.00	-11.91	QP
3	0.175	41.29	54.72	-13.43	Average
4	0.175	48.01	64.72	-16.71	QP
5	0.310	34.76	49.97	-15.21	Average
6	0.310	37.24	59.97	-22.73	QP
7	0.400	34.68	47.86	-13.18	Average
8	0.400	41.17	57.86	-16.69	QP
9	0.621	29.68	46.00	-16.32	Average
10	0.621	33.15	56.00	-22.85	QP
11	1.242	33.47	46.00	-12.53	Average
12	1.242	43.11	56.00	-12.89	QP

## Neutral

	Freq	Level	Limit	Over	
	MHz	dBuV	dBuV	dB	Remark
1	0.170	43.58	54.94	-11.36	Average
2	0.170	53.45	64.94	-11.49	QP
3	0.195	40.32	53.80	-13.48	Average
4	0.195	47.13	63.80	-16.67	QP
5	0.310	34.85	49.97	-15.12	Average
6	0.310	37.23	59.97	-22.74	QP
7	0.400	36.46	47.86	-11.40	Average
8	0.400	44.25	57.86	-13.61	QP
9	0.621	29.79	46.00	-16.21	Average
10	0.621	33.05	56.00	-22.95	QP
11	1.255	33.87	46.00	-12.13	Average
12	1.255	41.22	56.00	-14.78	QP

## Line (M/N: ION SOUND BAR XT-100)

	Freq	Level	Limit	Over	
	MHz	dBuV	dBuV	dB	Remark
1	0.150	39.05	56.00	-16.95	Average
2	0.150	52.24	66.00	-13.76	QP
3	0.170	40.66	54.94	-14.28	Average
4	0.170	48.13	64.94	-16.81	QP
5	0.310	34.93	49.97	-15.04	Average
6	0.310	37.28	59.97	-22.69	QP
7	0.400	37.39	47.86	-10.47	Average
8	0.400	45.19	57.86	-12.67	QP
9	0.621	29.77	46.00	-16.23	Average
10	0.621	34.36	56.00	-21.64	QP
11	1.236	33.53	46.00	-12.47	Average
12	1.236	43.06	56.00	-12.94	QP

## Neutral

	Freq	Level	Limit	Over	
	MHz	dBuV	dBuV	dB	Remark
1	0.150	42.12	56.00	-13.88	Average
2	0.150	54.06	66.00	-11.94	QP
3	0.165	42.97	55.21	-12.24	Average
4	0.165	52.16	65.21	-13.05	QP
5	0.310	34.55	49.97	-15.42	Average
6	0.310	37.12	59.97	-22.85	QP
7	0.396	39.04	47.95	-8.91	Average
8	0.396	46.26	57.95	-11.69	QP
9	1.276	34.12	46.00	-11.88	Average
10	1.276	44.26	56.00	-11.74	QP
11	2.900	25.75	46.00	-20.25	Average
12	2.900	36.12	56.00	-19.88	QP

## Line (M/N: ION SOUND BAR XT-200)

Freq	Level	Limit		Over Limit	Remark
		Line	dBuV		
	MHz			dB	
1	0.175	44.07	54.72	-10.65	Average
2	0.175	52.25	64.72	-12.47	QP
3	0.396	36.83	47.95	-11.12	Average
4	0.396	44.23	57.95	-13.72	QP
5	1.282	34.26	46.00	-11.74	Average
6	1.282	43.15	56.00	-12.85	QP

## Neutral

Freq	Level	Limit		Over Limit	Remark
		Line	dBuV		
	MHz			dB	
1	0.150	43.55	56.00	-12.45	Average
2	0.150	55.12	66.00	-10.88	QP
3	0.389	39.13	48.08	-8.95	Average
4	0.389	44.32	58.08	-13.76	QP
5	1.147	34.72	46.00	-11.28	Average
6	1.147	48.12	56.00	-7.88	QP

## 5.2. Radiated Emission Test

### 5.2.1. Limit 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		µV/m	dB(µV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average)	

### 5.2.2. Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 5.2.3. Test setup

The EUT was placed on a turn table which was 0.8 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.


The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz.

The frequency range from 30MHz to 10<sup>th</sup> harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

Notes:

1. Emission Level = Antenna Factor + Cable Loss + Meter Reading-Preamp Factor.
2. Measurement Uncertainty:  $\pm 3.2$  dB at a level of confidence of 95%.
3. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
4. For emissions below 1GHz, pretest for all mode, The test data of the worst case condition(s) was reported on the following pages.
- 5: During the test, pre-scan the GFSK, Pi/4DQPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.
- 6: Pre-scan below 1GHz for all model, The other test only show wost model in report.

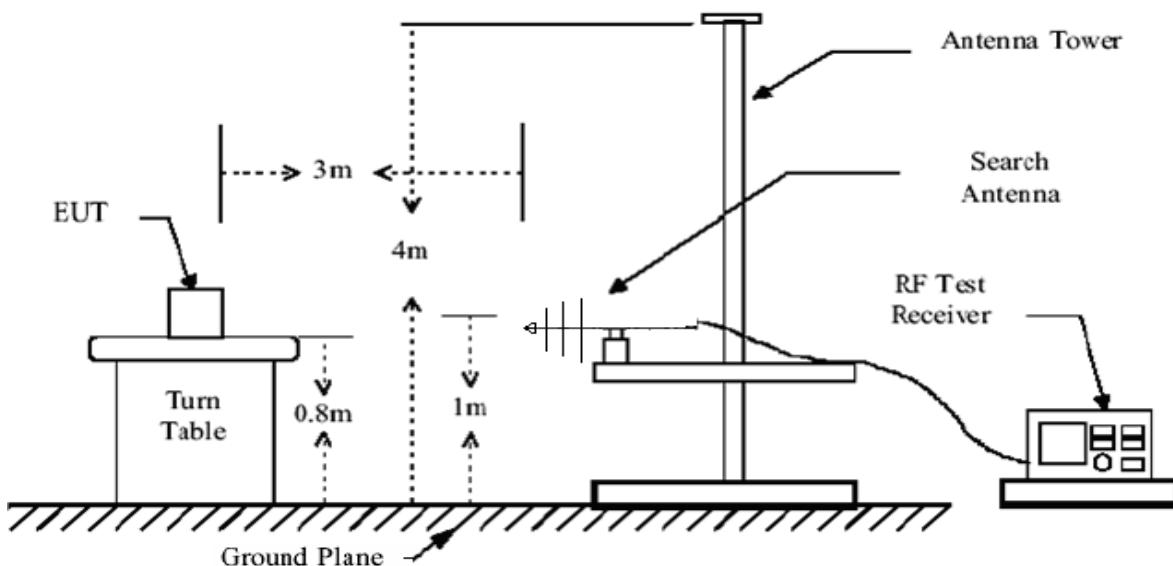

**Below 1GHz****BT Mode Horizontal polarizations (M/N: ION SOUND BAR XT-200)**

	Preamp Freq	Read Factor	Cable Loss	Antenna Factor	Limit Level	Line Level	Over Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	160.95	31.22	56.73	1.30	9.29	36.10	43.50	-7.40 QP
2	194.90	31.11	55.08	1.46	10.54	35.97	43.50	-7.53 QP
3	225.94	30.94	56.28	1.53	12.23	39.10	46.00	-6.90 QP
4	309.36	30.91	53.06	1.94	14.06	38.15	46.00	-7.85 QP
5	330.70	30.78	53.41	2.02	14.73	39.38	46.00	-6.62 QP
6	352.04	30.66	51.05	2.10	15.67	38.16	46.00	-7.84 QP

**BT Mode Vertical polarizations**

	Preamp Freq	Read Factor	Cable Loss	Antenna Factor	Limit Level	Line Level	Over Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	44.55	31.40	48.73	0.56	11.03	28.92	40.00	-11.08 QP
2	80.44	31.34	52.04	0.85	8.05	29.60	40.00	-10.40 QP
3	93.05	31.35	52.19	0.94	9.25	31.03	43.50	-12.47 QP
4	183.26	31.15	46.31	1.39	10.30	26.85	43.50	-16.65 QP
5	330.70	30.78	47.26	2.02	14.73	33.23	46.00	-12.77 QP
6	352.04	30.66	44.40	2.10	15.67	31.51	46.00	-14.49 QP

**BT Mode Horizontal polarizations (M/N: ION SOUND BAR XT-100)**

	Preamp Freq	Read Factor	Cable Loss	Antenna Factor	Limit Level	Line Level	Over Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	160.95	31.22	56.03	1.30	9.29	35.40	43.50	-8.10 QP
2	309.36	30.91	52.51	1.94	14.06	37.60	46.00	-8.40 QP
3	352.04	30.66	51.09	2.10	15.67	38.20	46.00	-7.80 QP

**BT Mode Vertical polarizations**

	Preamp Freq	Read Factor	Cable Loss	Antenna Factor	Limit Level	Line Level	Over Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	44.55	31.40	51.21	0.56	11.03	31.40	40.00	-8.60 QP
2	80.44	31.34	52.24	0.85	8.05	29.80	40.00	-10.20 QP
3	93.05	31.35	52.76	0.94	9.25	31.60	43.50	-11.90 QP

**BT Mode Horizontal polarizations (M/N: EDGE SOUND DECK TR-200)**

		Preamp Freq	Read Factor	Cable Loss	Antenna Factor	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1 !	160.95	31.22	59.28	1.30	9.29	38.65	43.50	-4.85	QP
2	309.36	30.91	54.18	1.94	14.06	39.27	46.00	-6.73	QP
3 !	330.70	30.78	55.31	2.02	14.73	41.28	46.00	-4.72	QP

**BT Mode Vertical polarizations**

		Preamp Freq	Read Factor	Cable Loss	Antenna Factor	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	82.38	31.35	53.35	0.85	8.26	31.11	40.00	-8.89	QP
2	99.84	31.35	55.16	0.94	9.59	34.34	43.50	-9.16	QP
3	136.70	31.20	56.97	1.12	8.37	35.26	43.50	-8.24	QP

**BT Mode Horizontal polarizations (M/N: EDGE SOUND DECK TR-100)**

		Preamp Freq	Read Factor	Cable Loss	Antenna Factor	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1 !	160.95	31.22	59.15	1.30	9.29	38.52	43.50	-4.98	QP
2 !	330.70	30.78	54.76	2.02	14.73	40.73	46.00	-5.27	QP
3	352.04	30.66	50.39	2.10	15.67	37.50	46.00	-8.50	QP

**BT Mode Vertical polarizations**

		Preamp Freq	Read Factor	Cable Loss	Antenna Factor	Limit Level	Line Level	Over Limit	Remark
		MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	83.35	31.35	49.94	0.94	8.37	27.90	40.00	-12.10	QP
2	93.05	31.35	52.89	0.94	9.25	31.73	43.50	-11.77	QP
3	175.50	31.17	50.78	1.39	10.27	31.27	43.50	-12.23	QP

## Above 1GHz

## GFSK 2402MHz Horizontal polarizations (M/N: ION SOUND BAR XT-200)

	Preamp	Read	CableAntenna		Limit	Over		
Freq	Factor	Level	Loss	Factor	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	4804.00	27.49	30.56	11.96	32.94	47.97	74.00	-26.03 Peak
2	5454.00	27.65	28.05	13.81	34.03	48.24	74.00	-25.76 Peak
3	9466.00	28.59	21.66	16.92	37.96	47.95	74.00	-26.05 Peak
4	11302.00	28.93	21.23	17.22	39.74	49.26	74.00	-24.74 Peak
5	12934.00	29.19	19.92	18.15	40.54	49.42	74.00	-24.58 Peak
6	16164.00	29.77	17.43	20.75	41.33	49.74	74.00	-24.26 Peak

## GFSK 2402MHz Vertical polarizations

	Preamp	Read	CableAntenna		Limit	Over		
Freq	Factor	Level	Loss	Factor	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	3771.00	26.89	33.47	10.21	31.05	47.84	74.00	-26.16 Peak
2	4804.00	27.49	29.71	11.96	32.94	47.12	74.00	-26.88 Peak
3	6321.00	27.76	25.50	16.60	35.64	49.98	74.00	-24.02 Peak
4	10537.00	28.85	21.77	17.07	39.22	49.21	74.00	-24.79 Peak
5	12951.00	29.19	20.11	18.17	40.58	49.67	74.00	-24.33 Peak
6	17728.00	30.39	15.40	22.01	45.27	52.29	74.00	-21.71 Peak

## GFSK 2441MHz Horizontal polarizations

	Preamp	Read	CableAntenna		Limit	Over		
Freq	Factor	Level	Loss	Factor	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	4882.00	27.53	31.25	12.14	33.11	48.97	74.00	-25.03 Peak
2	6763.00	27.85	22.44	16.60	36.57	47.76	74.00	-26.24 Peak
3	8140.00	28.14	22.17	16.69	36.51	47.23	74.00	-26.77 Peak
4	9619.00	28.65	21.65	16.93	38.10	48.03	74.00	-25.97 Peak
5	10588.00	28.86	21.83	17.08	39.25	49.30	74.00	-24.70 Peak
6	17473.00	30.29	13.48	21.77	45.35	50.31	74.00	-23.69 Peak

## GFSK 2441MHz Vertical polarizations

	Preamp	Read	Cable	Antenna		Limit	Over	
Freq	Factor	Level	Loss	Factor	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	4882.00	27.53	29.21	12.14	33.11	46.93	74.00	-27.07 Peak
2	5420.00	27.64	28.49	13.68	33.98	48.51	74.00	-25.49 Peak
3	7290.00	27.96	23.75	16.61	37.32	49.72	74.00	-24.28 Peak
4	9126.00	28.45	22.55	16.89	37.54	48.53	74.00	-25.47 Peak
5	14736.00	29.51	19.05	19.83	39.62	48.99	74.00	-25.01 Peak
6	16028.00	29.71	18.25	20.65	40.51	49.70	74.00	-24.30 Peak

## GFSK 2480MHz Horizontal polarizations

	Preamp	Read	Cable	Antenna		Limit	Over	
Freq	Factor	Level	Loss	Factor	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	4960.00	27.58	30.92	12.36	33.32	49.02	74.00	-24.98 Peak
2	6338.00	27.77	23.37	16.60	35.67	47.87	74.00	-26.13 Peak
3	8293.00	28.19	22.59	16.72	36.63	47.75	74.00	-26.25 Peak
4	12985.00	29.20	18.10	18.20	40.66	47.76	74.00	-26.24 Peak
5	14090.00	29.41	15.20	19.43	43.00	48.22	74.00	-25.78 Peak
6	17626.00	30.35	11.12	21.91	45.33	48.01	74.00	-25.99 Peak

## GFSK 2480MHz Vertical polarizations

	Preamp	Read	Cable	Antenna		Limit	Over	
Freq	Factor	Level	Loss	Factor	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	4960.00	27.58	30.40	12.36	33.32	48.50	74.00	-25.50 Peak
2	6865.00	27.87	22.99	16.60	36.84	48.56	74.00	-25.44 Peak
3	8633.00	28.29	22.77	16.80	36.96	48.24	74.00	-25.76 Peak
4	12424.00	29.08	20.64	17.73	39.49	48.78	74.00	-25.22 Peak
5	15280.00	29.59	19.43	20.18	38.44	48.46	74.00	-25.54 Peak
6	16776.00	30.01	13.68	21.17	44.06	48.90	74.00	-25.10 Peak

## 6. 20DB OCCUPY BANDWIDTH

### 6.1. Limits

According to FCC Section 15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth( $10 \times \log 1\% = 20\text{dB}$ )taking the RF output power

### 6.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

2. Set the spectrum analyzer:

Span: approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel  
 RBW  $\geq 1\%$  of the 20dB bandwidth

VBW  $\geq$  RBW

Sweep=auto

Detector function=peak

Trace=max hold


Test data:

	Channel Frequency (MHz)	20dB Bandwidth (MHz)	Result
GFSK	2402	1.092	Pass
	2441	1.098	Pass
	2480	1.092	Pass
Pi/4DQPSK	2402	1.116	Pass
	2441	1.116	Pass
	2480	1.122	Pass
8DPSK	2402	1.110	Pass
	2441	1.116	Pass
	2480	1.116	Pass


Test plot as follows:

## GFSK

2402MHz

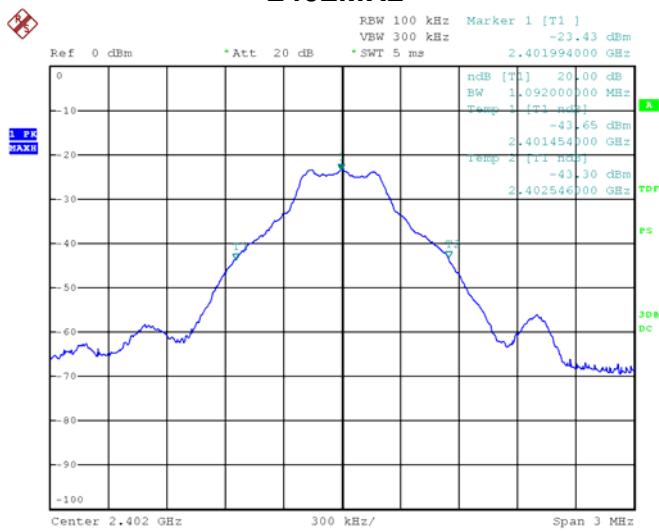

2441 MHz

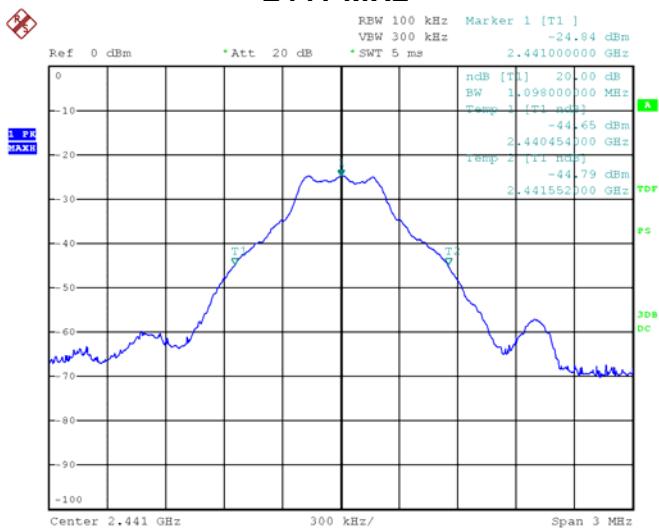


2480 MHz




Pi/4DQPSK

2402 MHz

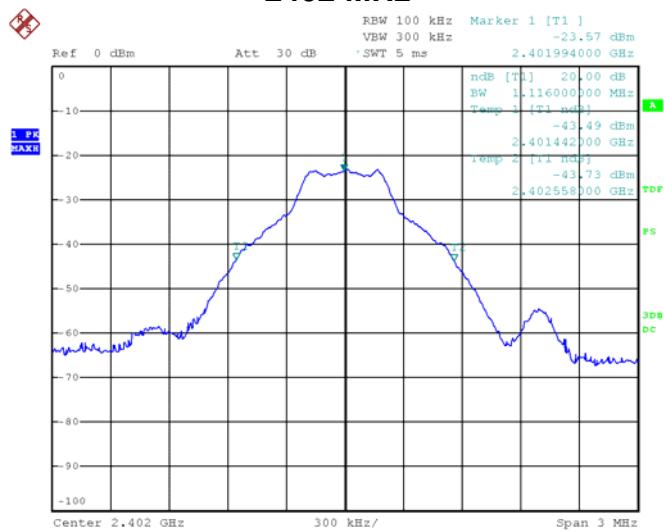


## 8DPSK


## 2402 MHz

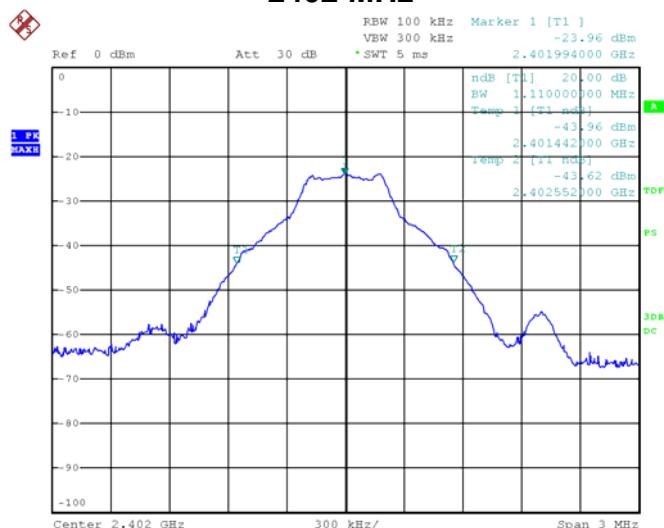

## 2441 MHz

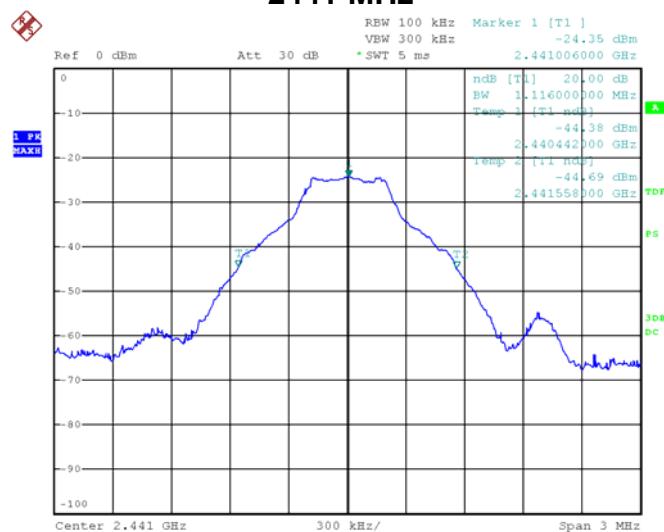

## 2480 MHz

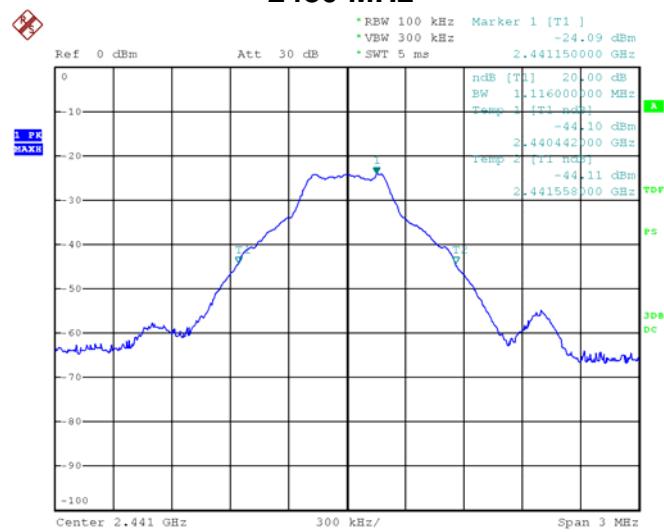

## 7. FREQUENCY SEPARATION

### 7.1. Limits

According to FCC Section 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

### 7.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

2. Set the spectrum analyzer:

Span: wide enough to capture the peaks of two adjacent channels

RBW  $\geq$  1% of the span

VBW  $\geq$  RBW

Sweep=auto

Detector function=peak

Trace=max hold

Test data:




	Separation (MHz)	Limit (MHz)	Result
GFSK	1.002	1.098	PASS
Pi/4DQPSK	0.990	1.122	PASS
8DPSK	1.014	1.116	PASS

Note: we pretest low, middle, high channel. The middle channel's data record in the report.

Note: Limit according to section 6

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	1098	1098
Pi/4QPSK	1122	1122
8DPSK	1116	1116

Test plot as follows:

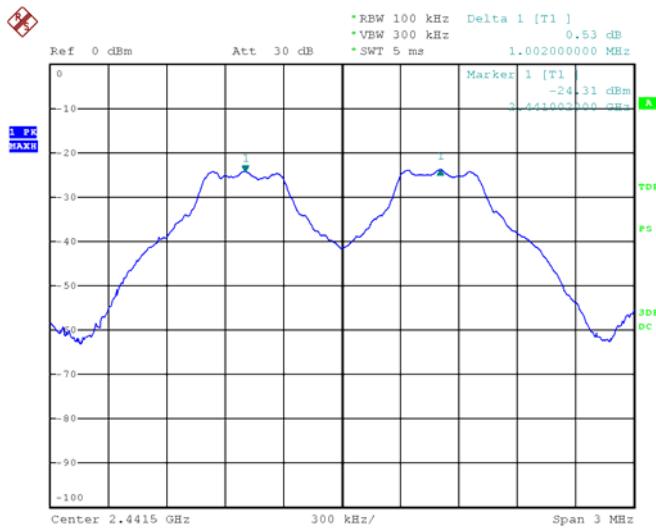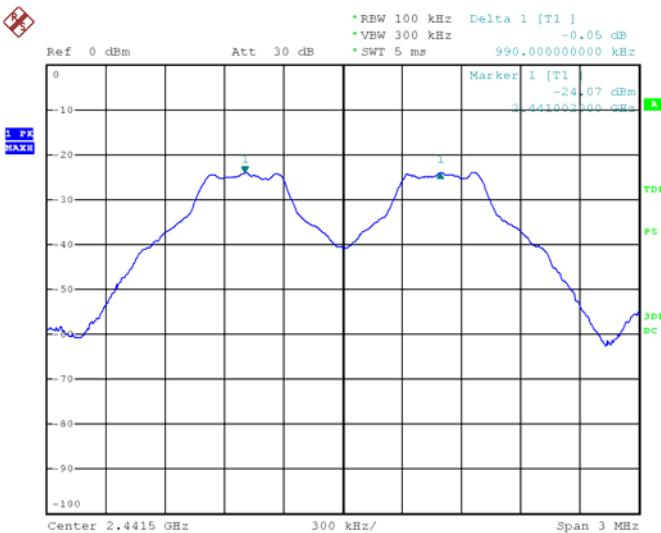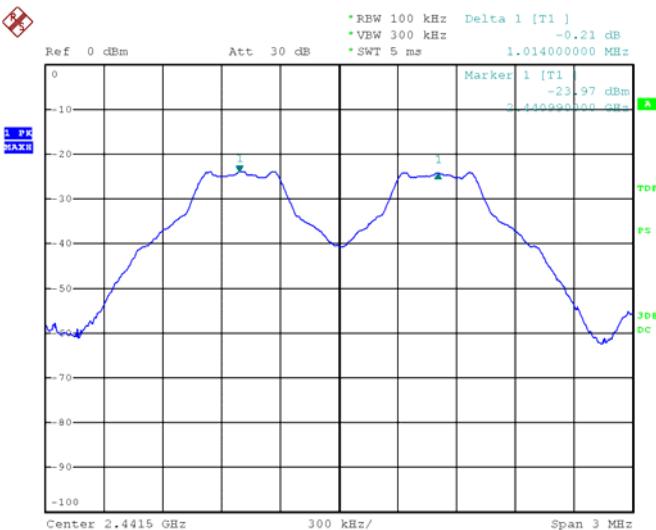**GFSK****Pi/4DQPSK****8DPSK**

## 8. MAXIMUM PEAK OUTPUT POWER

### 8.1. Limits

According to FCC Section 15.247(b)(1), For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### 8.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the power meter, during the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

Test data:

	Channel Frequency (MHz)	Peak output Power		Limit W	Result
		dBm	W		
GFSK	2402	1.04	0.00127	1.000	Pass
	2441	1.17	0.00131	1.000	Pass
	2480	1.64	0.00146	1.000	Pass
Pi/4DQPSK	2402	1.24	0.00133	1.000	Pass
	2441	0.93	0.00124	1.000	Pass
	2480	1.34	0.00136	1.000	Pass
8DPSK	2402	1.40	0.00138	1.000	Pass
	2441	1.46	0.00141	1.000	Pass
	2480	1.61	0.00145	1.000	Pass

## 9. NUMBER OF HOPPING FREQUENCY

### 9.1. Limits

According to FCC Section 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### 9.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

2. Set the spectrum analyzer:

Span: the frequency band of operation

RBW  $\geq$  1% of the span

VBW  $\geq$  RBW

Sweep=auto

Detector function=peak


Trace=max hold

Test data:

	Measured channel numbers	Limit	Result
GFSK	79	>15	PASS
Pi/4DQPSK			PASS
8DPSK			PASS

Test plot as follows:

GFSK/ Pi/4DQPSK/8DPSK

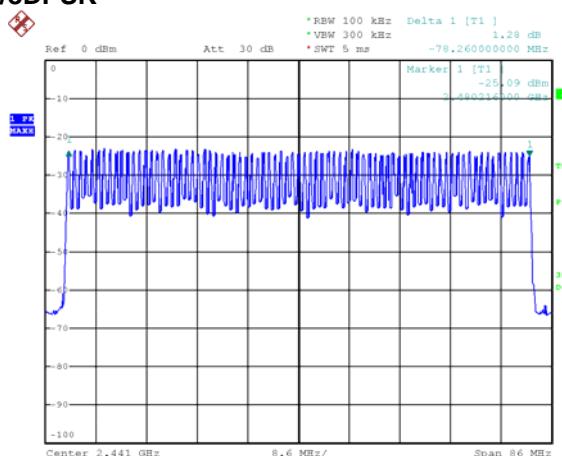

## 10.DWELL TIME

### 10.1. Limits

According to FCC Section 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 10.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

2. Set the spectrum analyzer:

Span= 0Hz

RBW =100 kHz

VBW = 300 kHz

Sweep=auto

Detector function=peak

Test data:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2402MHz 2441MHz 2480MHz	DH1/2-DH1/3-DH1	126.08	400	Pass
	DH3/2-DH3/3-DH3	262.40	400	Pass
	DH5/2-DH5/3-DH5	307.20	400	Pass

The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: 2402MHz/2441MHz/2480MHz as blow


DH1/2-DH1/3-DH1 time slot=0.394(ms)\*(1600/ (2\*79))\*31.6=126.08 ms

DH3/2-DH3/3-DH3 time slot=1.64(ms)\*(1600/ (4\*79))\*31.6=262.40ms


DH5/2-DH5/3-DH5 time slot=2.88(ms)\*(1600/ (6\*79))\*31.6=307.20ms

Test plot as follows:


GFSK/ Pi/4DQPSK  
DH1/2-DH1

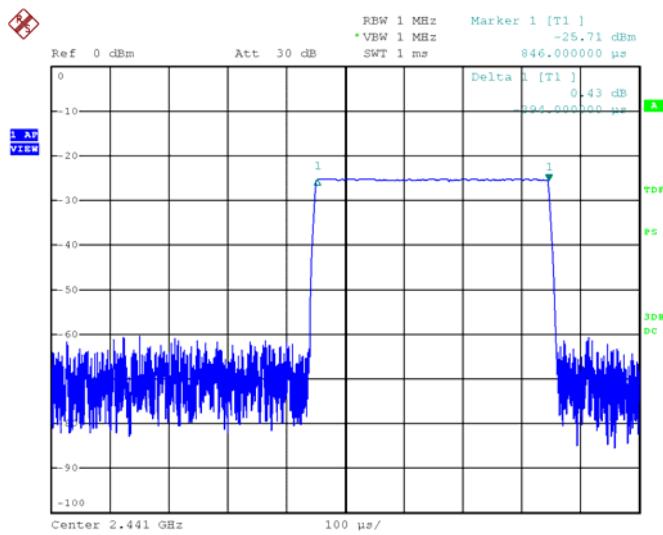


DH3/2-DH3

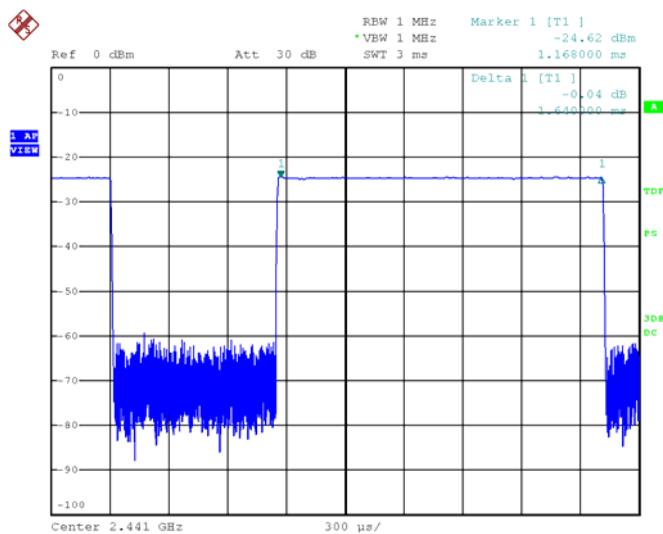


DH5/2-DH5

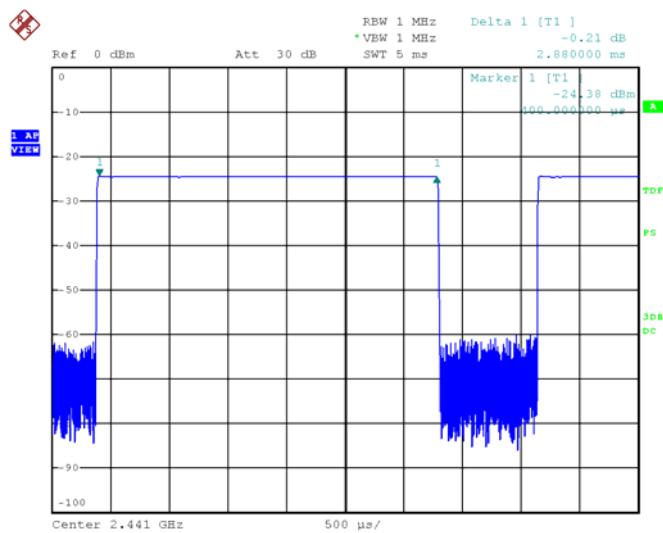


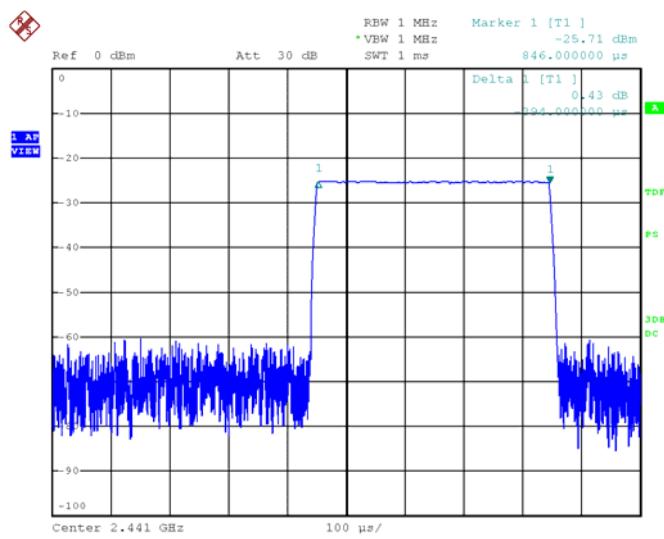8DPSK  
3-DH1

## 3-DH3

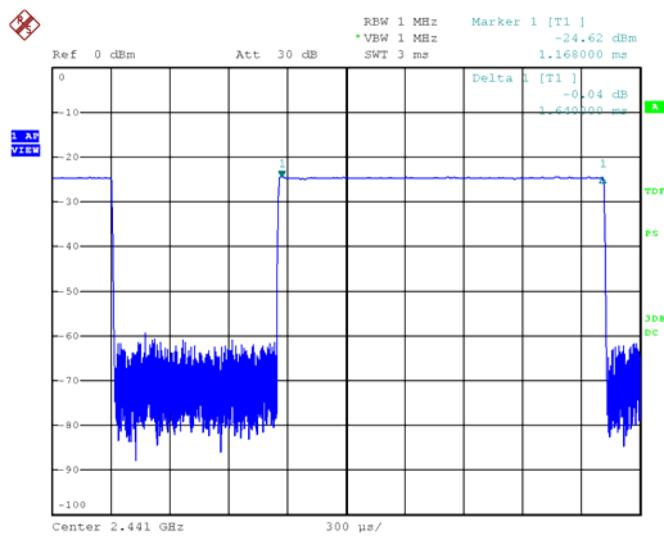

## 3-DH5

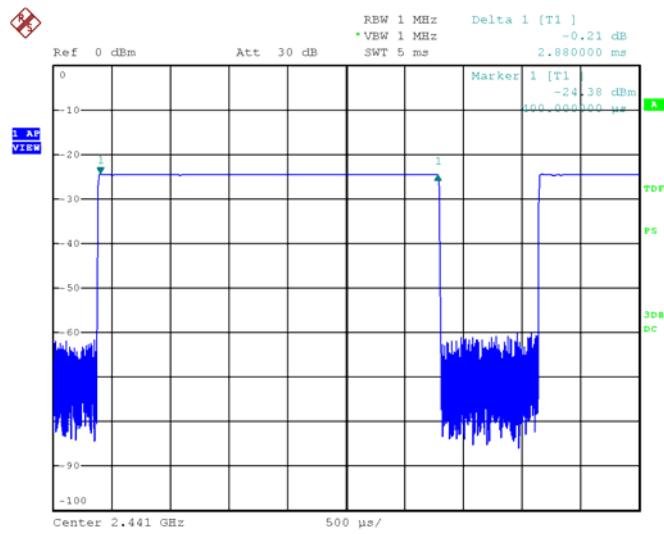

## 11. BAND EDGE COMPLIANCE TEST

### 11.1. Limits

According to FCC Section 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement

### 11.2. Test setup


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set to span from the lowest frequency generated in the device up to and including the tenth harmonic of the highest fundamental frequency

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure.


Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

Test plot as follows:


## GFSK

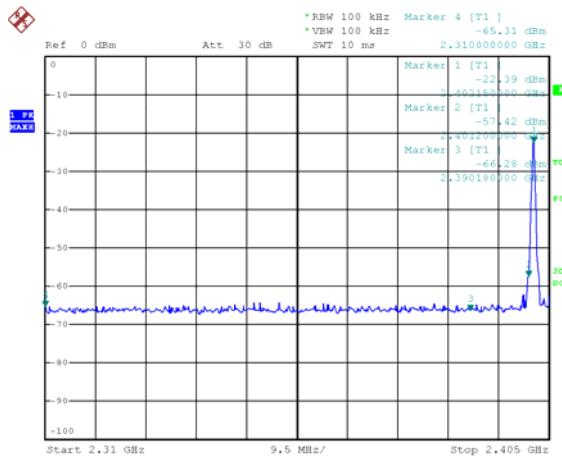


No-hopping mode

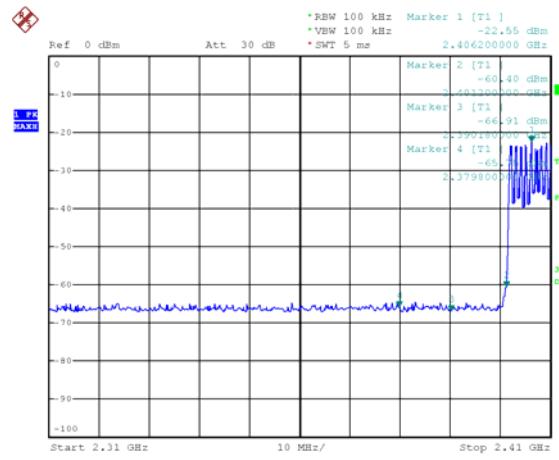

Hopping mode

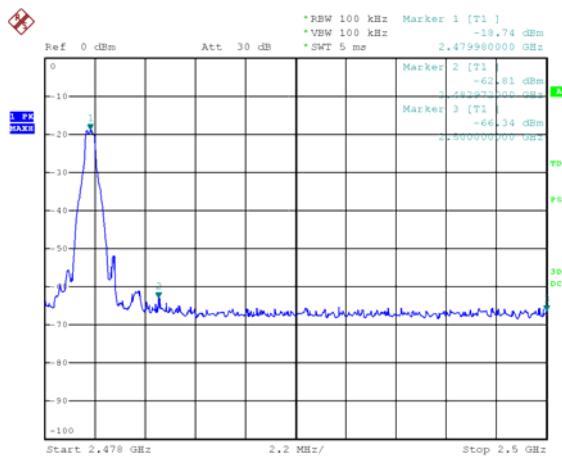


No-hopping mode

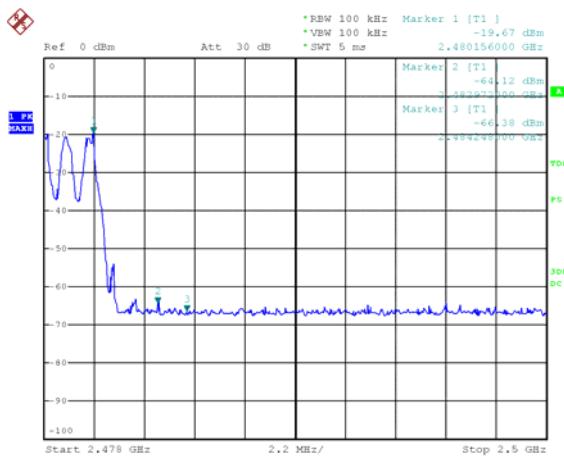


Hopping mode


## Pi/4DQPSK

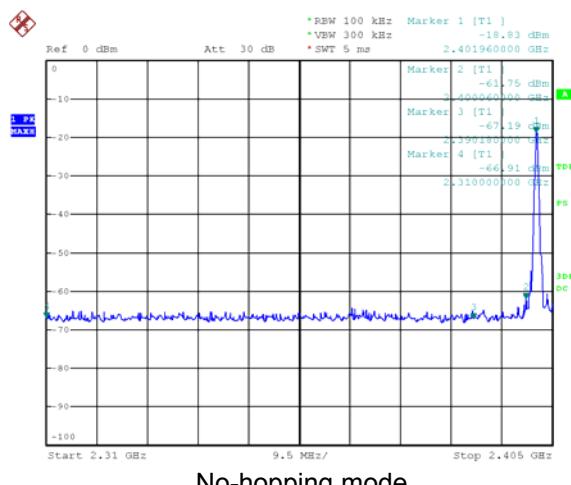


No-hopping mode

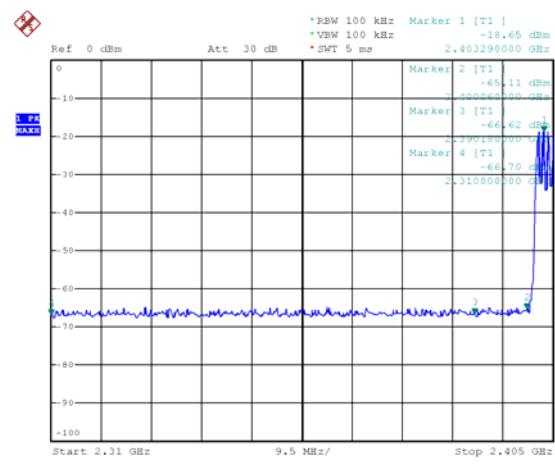

Hopping mode

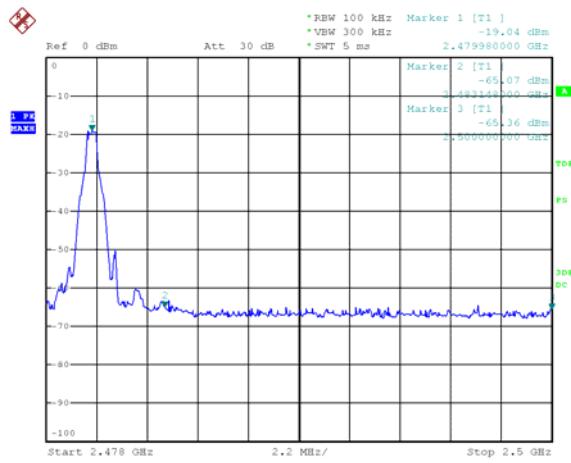


No-hopping mode

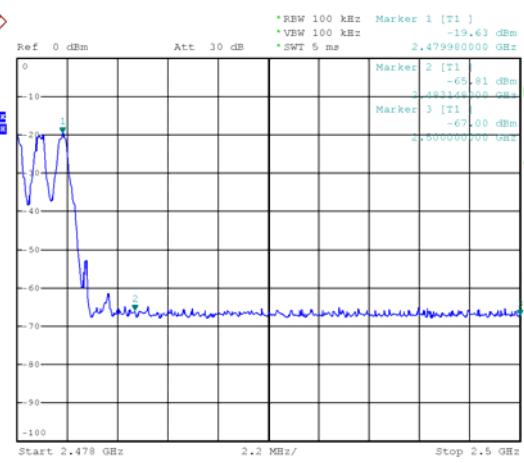

Hopping mode

## 8DPSK

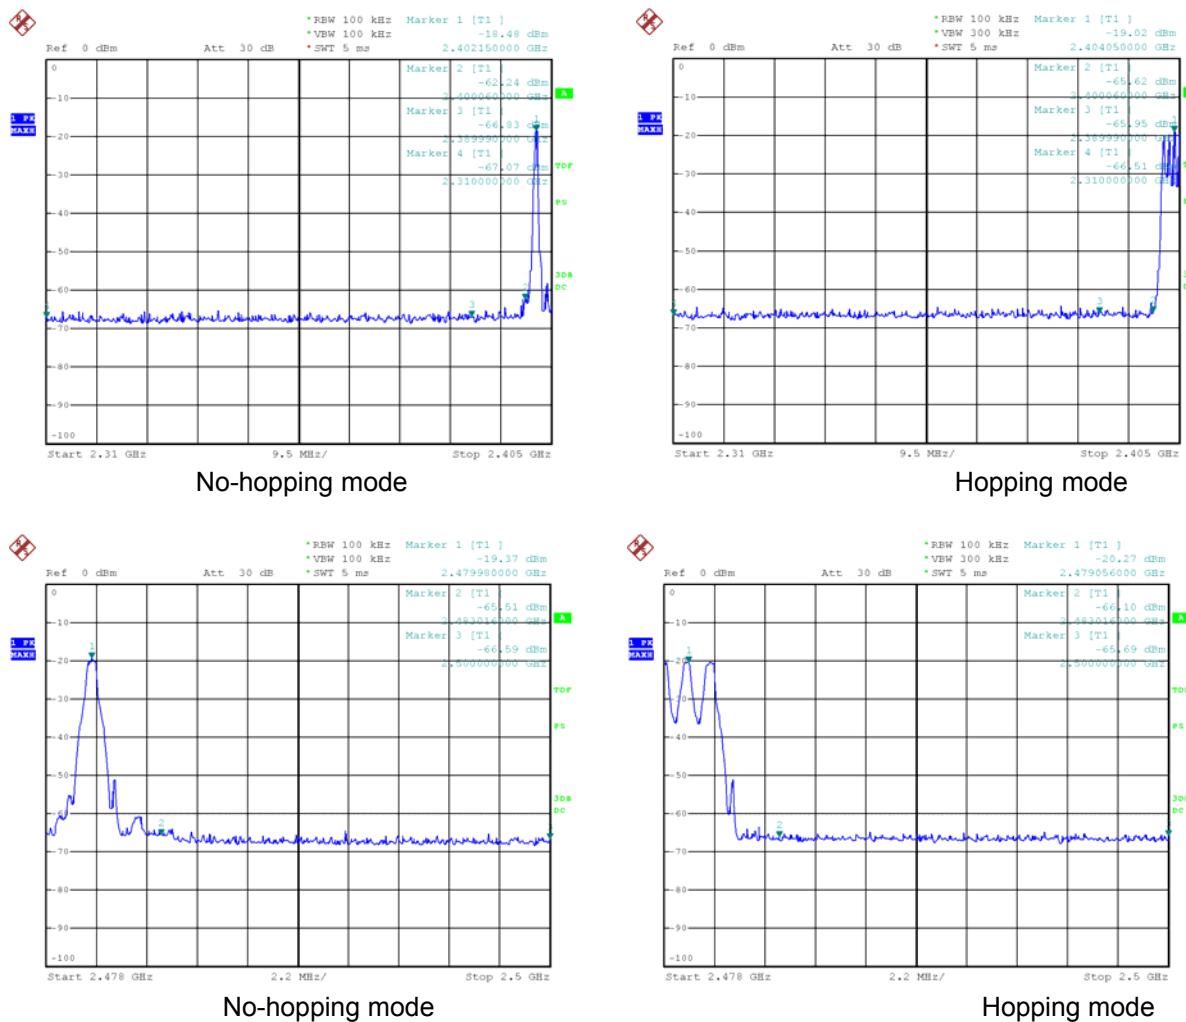

For radiated test as follows:

	Frequency (MHz)	Antenna polarization (H/V)	Emission	Band edge Limit		Result
			(dBuV/m)	PK	PK	
GFSK	<2400	H	46.36	74.00	54.00	Pass
	<2400	V	45.24	74.00	54.00	Pass
	>2483.5	H	46.12	74.00	54.00	Pass
	>2483.5	V	45.61	74.00	54.00	Pass
Pi/4DQPSK	<2400	H	45.21	74.00	54.00	Pass
	<2400	V	44.75	74.00	54.00	Pass
	>2483.5	H	44.13	74.00	54.00	Pass
	>2483.5	V	43.88	74.00	54.00	Pass
8DPSK	<2400	H	44.58	74.00	54.00	Pass
	<2400	V	44.32	74.00	54.00	Pass
	>2483.5	H	46.72	74.00	54.00	Pass
	>2483.5	V	45.56	74.00	54.00	Pass

If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

## 12. ANTENNA REQUIREMENTS

### 12.1. Limits

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 12.2. Result


The antennas used for this product are integral Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 1dBi.

## 13. PHOTOGRAPHS OF TEST SET-UP

### 13.1. Set-up for Conducted Emission Test



### 13.2. Set-up for Radiated Emission Test

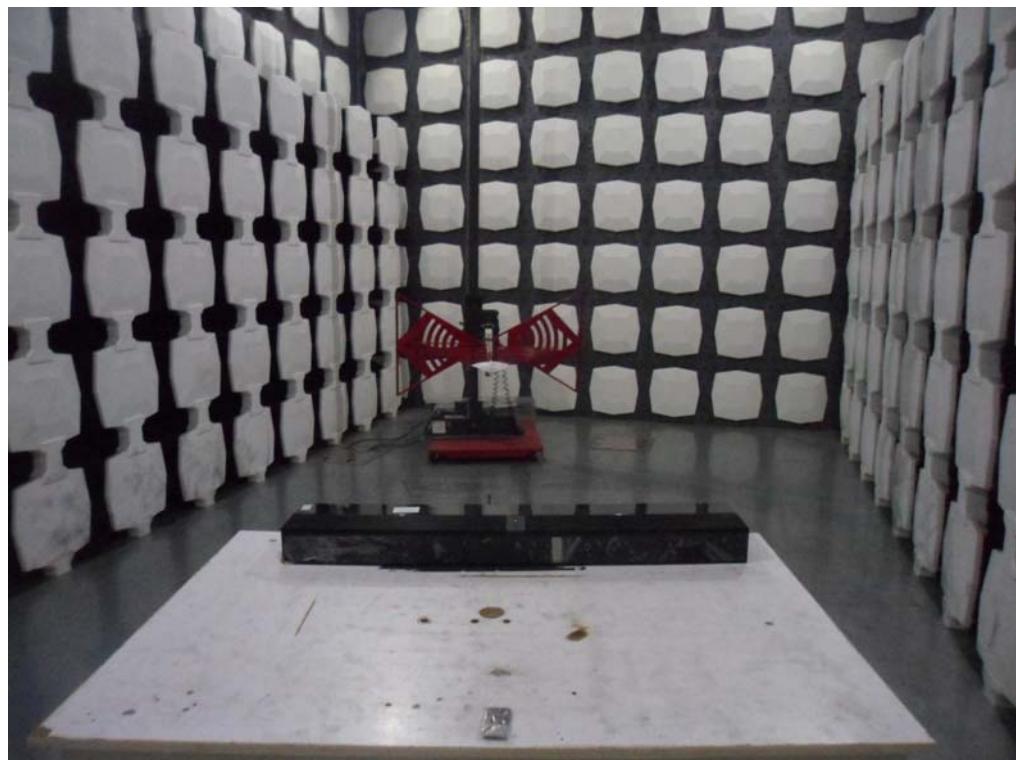


## 14. PHOTOGRAPHS OF THE EUT

M/N: EDGE SOUND DECK TR-100



M/N: ION SOUND BAR XT-200

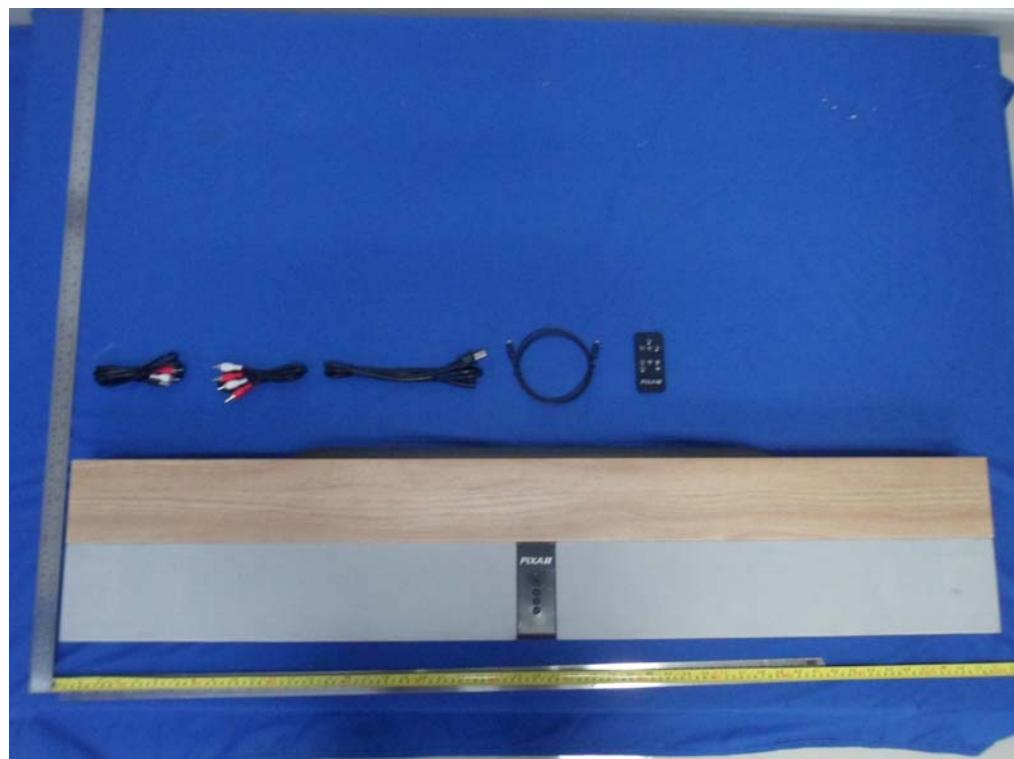


M/N: ION SOUND BAR XT-100







M/N: EDGE SOUND DECK TR-200








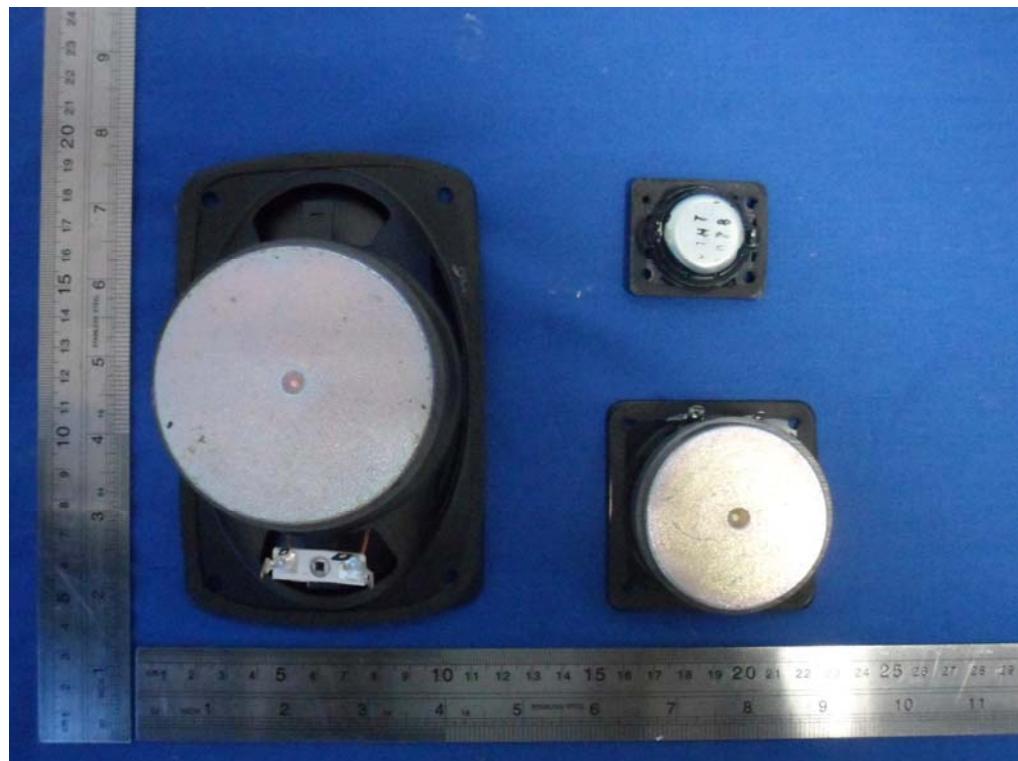

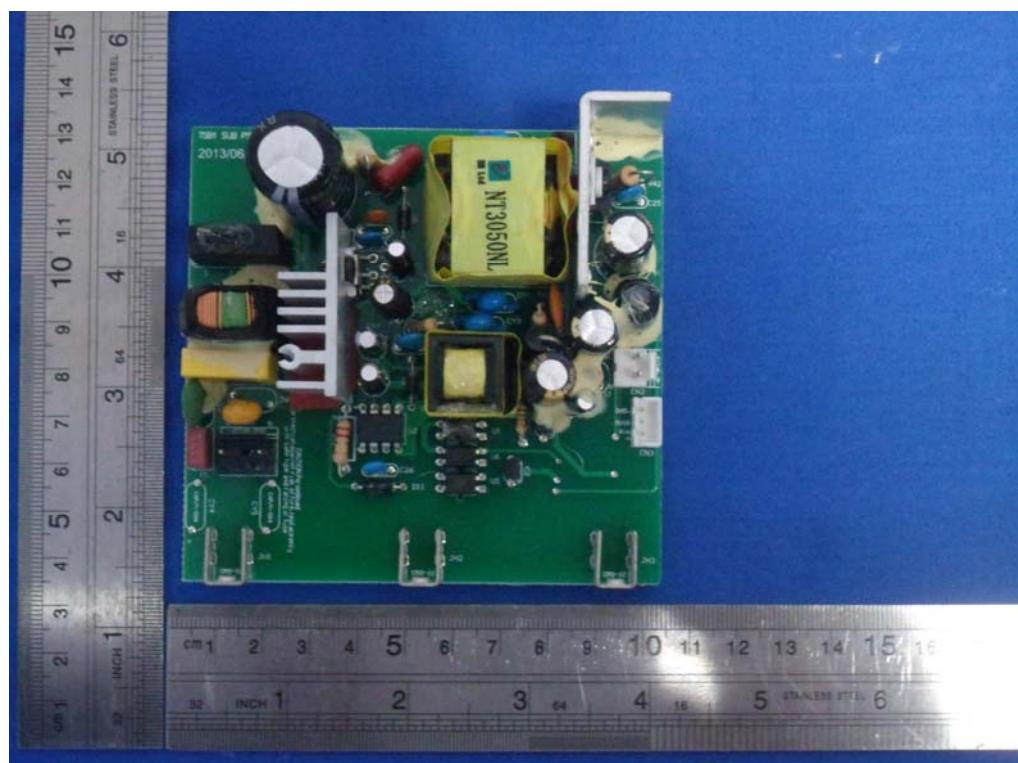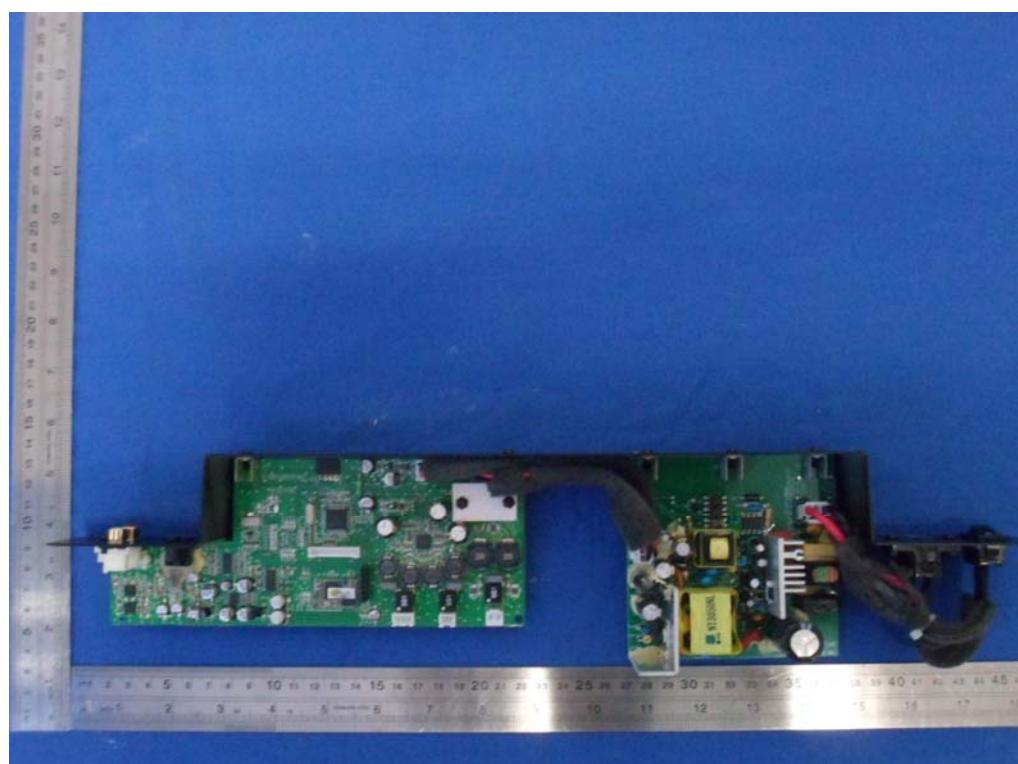

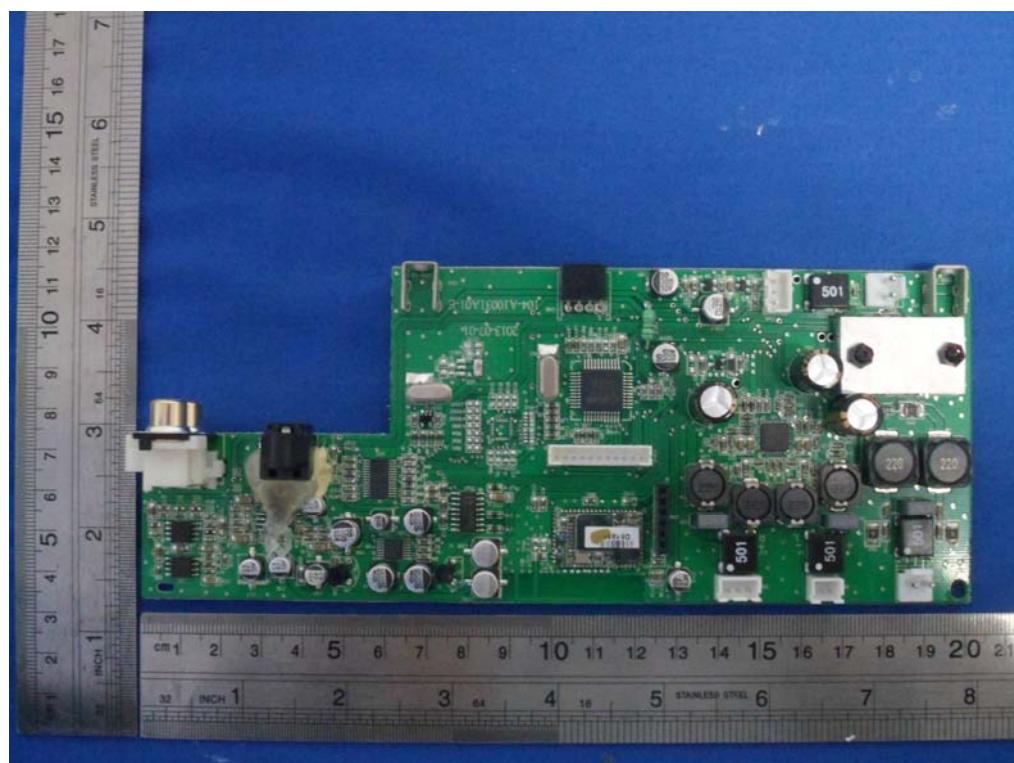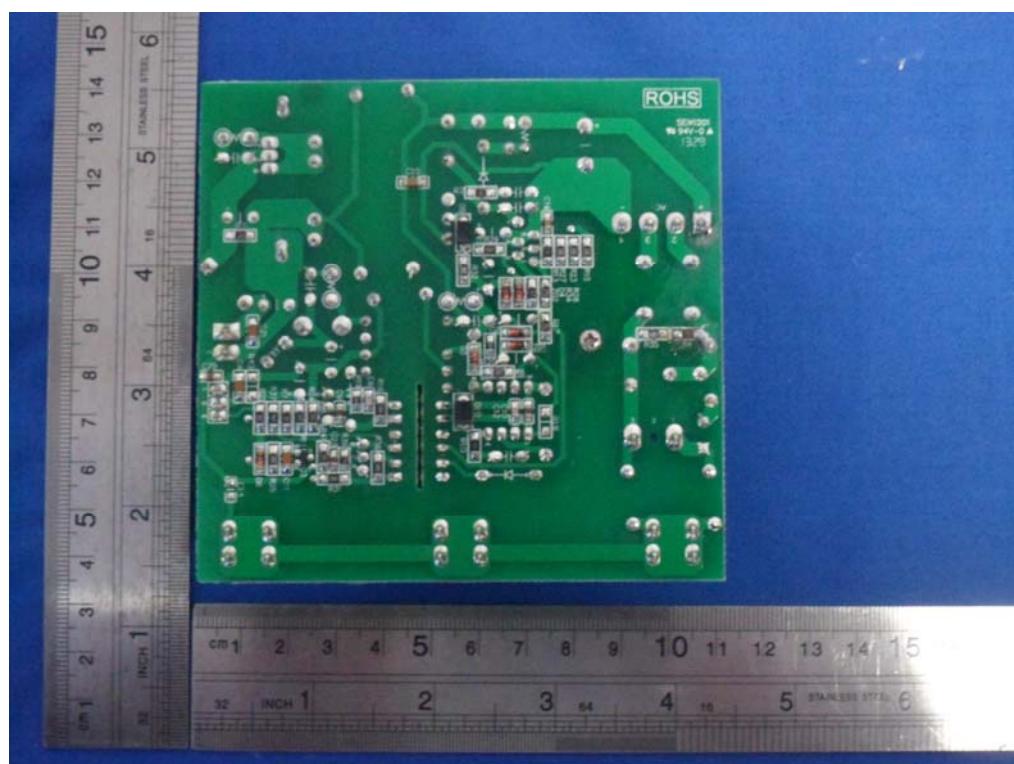

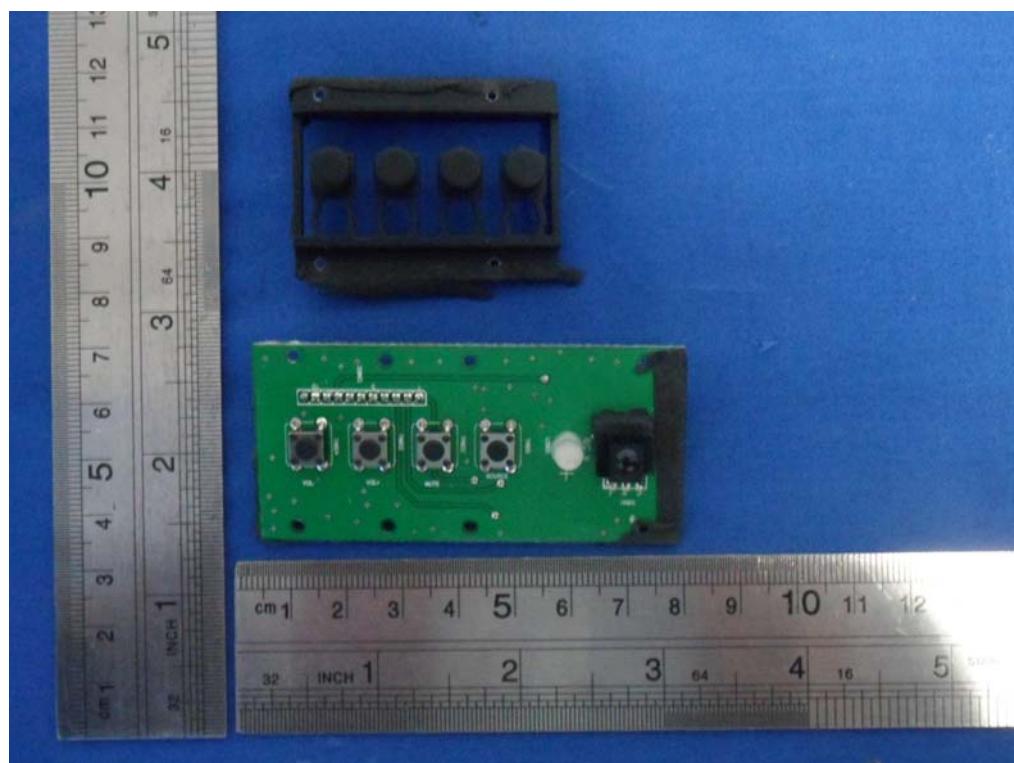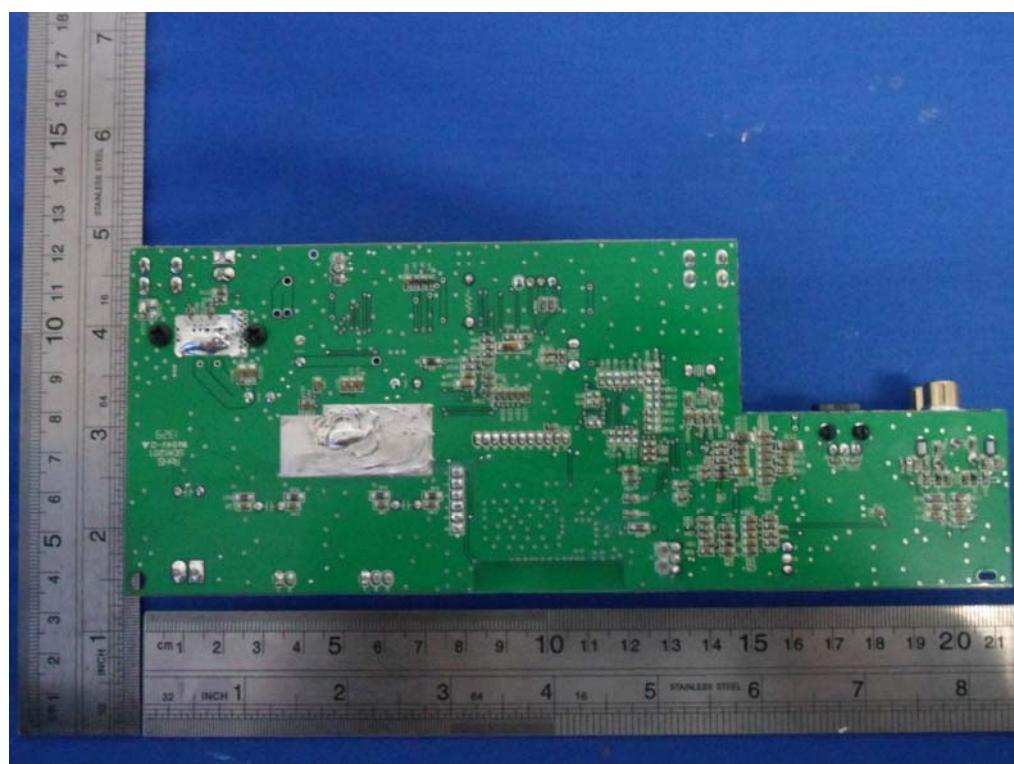

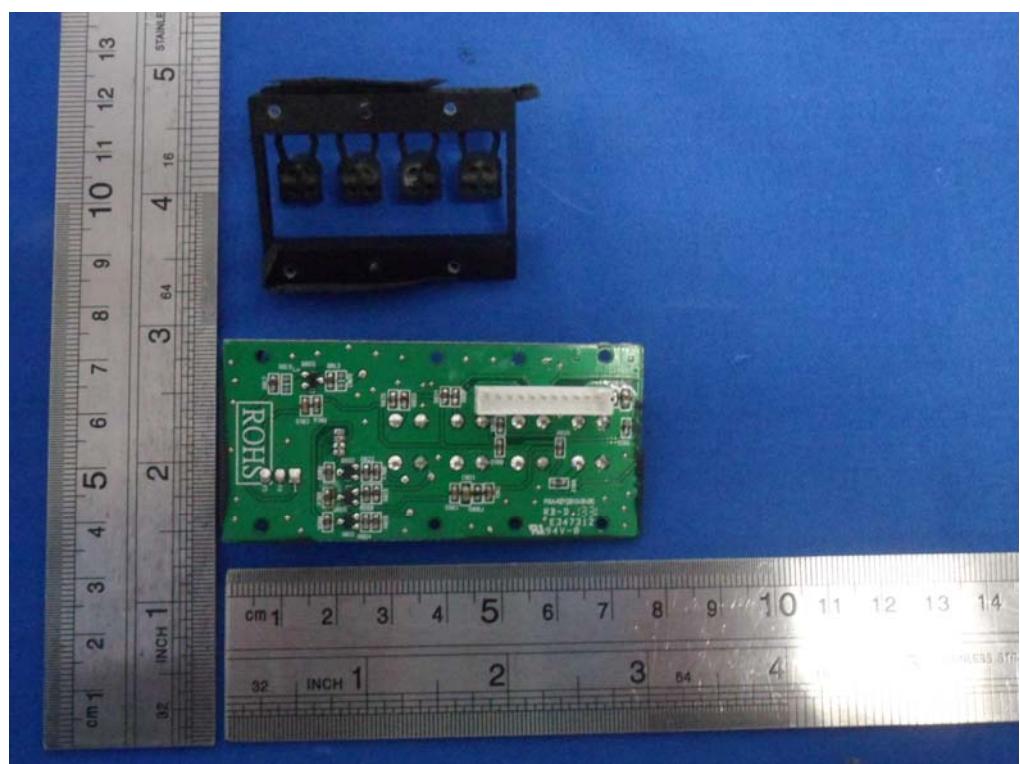

-----END-----