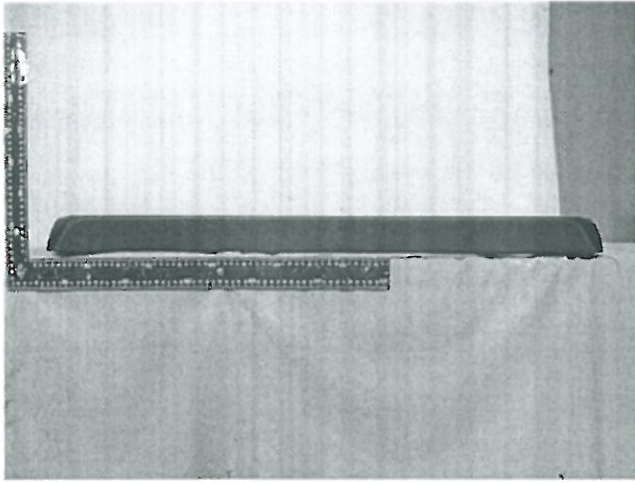


Prüfbericht-Nr.: 10052091 001 <i>Test Report No.:</i>	Auftrags-Nr.: 114036554 <i>Order No.:</i>	Seite 1 von 36 Page 1 of 36																								
Kunden-Referenz-Nr.: N/A <i>Client Reference No.:</i>	Auftragsdatum: 1-Jun-2015 <i>Order date:</i>																									
Auftraggeber: Meiloon, No. 99 ,Xing-fu Road, Taoyuan Dist., Taoyuan City ,Taiwan <i>Client:</i>																										
Prüfgegenstand: Soundbar for Subwoofer <i>Test item:</i>																										
Bezeichnung / Typ-Nr.: NS-SB515XXX <i>Identification / Type No.:</i>																										
Auftrags-Inhalt: FCC Part 15C/IC RSS-247 Test report (2.4GHz) <i>Order content:</i>																										
Prüfgrundlage: <i>Test specification:</i>																										
FCC 47CFR Part 15: Subpart C Section 15.247 RSS-247 (05-2015)																										
Wareneingangsdatum: 26-Jun-2015 <i>Date of receipt:</i>																										
Prüfmuster-Nr.: A000207643-002 <i>Test sample No.:</i> A000207643-002																										
Prüfzeitraum: 15-Jul-2015 - 21-Jul-2015 <i>Testing period:</i>																										
Ort der Prüfung: EMC/RF Laboratory Taipei <i>Place of testing:</i>																										
Prüflaboratorium: TÜV Rheinland Taiwan Ltd. <i>Testing laboratory:</i>																										
Prüfergebnis*: Pass <i>Test result*:</i>																										
geprüft von / tested by:  2015-07-28 Ryan W. T. Chen / Project Engineer <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 33%;">Datum</th> <th style="width: 33%;">Name / Stellung</th> <th style="width: 33%;">Unterschrift</th> </tr> <tr> <td><i>Date</i></td> <td><i>Name / Position</i></td> <td><i>Signature</i></td> </tr> </table> kontrolliert von / reviewed by:  2015-07-28 Rene Charton / Senior Project Manager <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 33%;">Datum</th> <th style="width: 33%;">Name / Stellung</th> <th style="width: 33%;">Unterschrift</th> </tr> <tr> <td><i>Date</i></td> <td><i>Name / Position</i></td> <td><i>Signature</i></td> </tr> </table>			Datum	Name / Stellung	Unterschrift	<i>Date</i>	<i>Name / Position</i>	<i>Signature</i>	Datum	Name / Stellung	Unterschrift	<i>Date</i>	<i>Name / Position</i>	<i>Signature</i>												
Datum	Name / Stellung	Unterschrift																								
<i>Date</i>	<i>Name / Position</i>	<i>Signature</i>																								
Datum	Name / Stellung	Unterschrift																								
<i>Date</i>	<i>Name / Position</i>	<i>Signature</i>																								
Sonstiges / Other: The model number: XXX can be blank, 0-9, a-z or A-Z																										
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>																										
Prüfmuster vollständig und unbeschädigt Test item complete and undamaged																										
<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 16.6%;">* Legende:</td> <td style="width: 16.6%;">1 = sehr gut</td> <td style="width: 16.6%;">2 = gut</td> <td style="width: 16.6%;">3 = befriedigend</td> <td style="width: 16.6%;">4 = ausreichend</td> <td style="width: 16.6%;">5 = mangelhaft</td> </tr> <tr> <td></td> <td>P(ass) = entspricht o.g. Prüfgrundlage(n)</td> <td>F(ail) = entspricht nicht o.g. Prüfgrundlage(n)</td> <td>N/A = nicht anwendbar</td> <td>N/T = nicht getestet</td> <td></td> </tr> <tr> <td>Legend:</td> <td>1 = very good</td> <td>2 = good</td> <td>3 = satisfactory</td> <td>4 = sufficient</td> <td>5 = poor</td> </tr> <tr> <td></td> <td>P(ass) = passed a.m. test specification(s)</td> <td>F(ail) = failed a.m. test specification(s)</td> <td>N/A = not applicable</td> <td>N/T = not tested</td> <td></td> </tr> </table>			* Legende:	1 = sehr gut	2 = gut	3 = befriedigend	4 = ausreichend	5 = mangelhaft		P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet		Legend:	1 = very good	2 = good	3 = satisfactory	4 = sufficient	5 = poor		P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested	
* Legende:	1 = sehr gut	2 = gut	3 = befriedigend	4 = ausreichend	5 = mangelhaft																					
	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet																						
Legend:	1 = very good	2 = good	3 = satisfactory	4 = sufficient	5 = poor																					
	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested																						
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>																										

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: *Passed*

5.1.2 PEAK OUTPUT POWER

RESULT: *Passed*

5.1.3 6dB BANDWIDTH AND 99% BANDWIDTH

RESULT: *Passed*

5.1.4 POWER DENSITY

RESULT: *Passed*

5.1.5 CONDUCTED SPURIOUS EMISSIONS AND FREQUENCY BAND EDGE MEASURED IN 100kHz BANDWIDTH

RESULT: *Passed*

5.1.6 SPURIOUS EMISSION

RESULT: *Passed*

5.2.1 MAINS CONDUCTED EMISSIONS

RESULT: *Passed*

6.1.1 ELECTROMAGNETIC FIELDS

RESULT: *Passed*

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS.....	4
2.	TEST SITES	5
2.1	TEST LABORATORY	5
2.2	TEST FACILITY.....	5
2.3	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.4	TRACEABILITY	7
2.5	CALIBRATION	7
2.6	MEASUREMENT UNCERTAINTY	7
3.	GENERAL PRODUCT INFORMATION.....	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	SYSTEM DETAILS AND RATINGS.....	8
3.3	INDEPENDENT OPERATION MODES.....	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	9
3.5	SUBMITTED DOCUMENTS.....	9
4.	TEST SET-UP AND OPERATION MODES.....	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	11
4.5	TEST SETUP DIAGRAM	11
5.	TEST RESULTS	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	13
5.1.1	<i>Antenna Requirement</i>	<i>13</i>
5.1.2	<i>Peak Output Power</i>	<i>14</i>
5.1.3	<i>6dB Bandwidth and 99% Bandwidth</i>	<i>17</i>
5.1.4	<i>Power Density</i>	<i>22</i>
5.1.5	<i>Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth.....</i>	<i>25</i>
5.1.6	<i>Spurious Emission</i>	<i>29</i>
5.2	MAINS EMISSIONS.....	30
5.2.1	<i>Mains Conducted Emissions.....</i>	<i>30</i>
6.	SAFETY HUMAN EXPOSURE	31

6.1	RADIO FREQUENCY EXPOSURE COMPLIANCE	31
6.1.1	Electromagnetic Fields.....	31
7.	PHOTOGRAPHS OF THE TEST SET-UP.....	32
8.	LIST OF TABLES	36
9.	LIST OF PHOTOGRAPHS.....	36

1. General Remarks

1.1 Complementary Materials

The following attachments are integral parts of this test report:

Appendix P: Photo Documentation internal view
(File Name: 10052091APPENDIX P)

Appendix D: Test Result of Radiated Emissions
(File Name: 10052091APPENDIX D)

Test Specifications

The following standards were applied.

Table 1: Applied Standard and Test Levels

Radio
NCC Low-power Radio-frequency Devices Technical Regulations LP0002(2011)(100年6月28日) FCC CFR47 Part 15: Subpart C Section 15.247 RSS-247 Issue 1 May 2015 ANSI C63.10:2013 KDB558074 D01 DTS Meas Guidance v02

2. Test Sites

2.1 Test Laboratory

TUV Rheinland Taiwan Ltd.
Taichung Branch Office

No.9, Lane 36, Minsheng Rd., Sec. 3, Daya District,
Taichung City 428
Taiwan (R.O.C.)

2.2 Test Facility

TUV Rheinland Taiwan Ltd.
Taipei Office

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

FCC RegistrationNo.: 365730
IC Canada Registration No.: 9465A-1
TAF Accredited NCC Test Lab. No.:0759
TAF ISO17025 Certification effective periods: 2013-Jul-1st to 2016-Jun-30th



Testing Laboratory
0759

2.3 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Last Calibration	Next Calibration
EMI Test Receiver	R&S	ESR7	101062	31-Aug-14	30-Aug-15
Bilog Antenna	TESEQ	CBL6111D	29802	4-Jul-14	3-Jul-16
Spectrum Analyzer	R&S	FSV 40	100921	17-Dec-14	16-Dec-15
Spectrum Analyzer	Agilent	N9010A	MY53470241	1-Apr-15	30-Mar-16
Horn Antenna	ETS-Lindgren	3117	138160	12-Jan-15	11-Jan-17
Horn Antenna (18GHz~40GHz)	COM-POWER	AH840	101031	30-Oct-13	29-Oct-15
Preamplifier (30MHz -1GHz)	HP	8447F	2805A03335	23-Aug-14	22-Aug-15
Preamplifier (18 GHz -40 GHz)	COM-POWER	PAM-840	461257	26-Aug-14	25-Aug-15
Pre-Amplifier (1GHz~18GHz)	EM Electronics	EM30180	60558	4-Nov-14	3-Nov-15
Loop Antenna	Schwarzbeck	FMZB 1513	1513-076	22-Oct-14	21-Oct-15
EMI Test Receiver	R&S	ESCI7	100797	28-Dec-14	27-Dec-15
Spectrum Analyzer	R&S	FSL3	101943	14-Sep-14	13-Sep-15
LISN (1 phase)	R&S	ENV216	101243	1-Jun-15	31-May-16
LISN	Rolf Heine	NNB-2/16Z	99080	26-Aug-14	25-Aug-15

2.4 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.5 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular schedule using in house standards or comparisons.

2.6 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements .

Table 3: Emission Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	± 1.5 dB
RF power density, conducted	± 3 dB
spurious emissions, conducted	± 3 dB
all emissions, radiated	± 6 dB
Temperature	± 1 °C
Humidity	± 5 %
DC and low frequency voltages	± 3 %

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a wireless speaker. It contains a Bluetooth 3.0 compatible module and 2.4GHz data transfer module enabling the user to communicate data through a Wireless interface.
This report refers to the 2.4GHz data transfer module
For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Table 4: Basic Information of EUT

Item	EUT information
Kind of Equipment	Soundbar
Type Designation	NS-SB515XXX
FCC ID	R48-SB515
Canada ID	7190A-SB515
Canada HVIN	NS-SB515

Table 5: Technical Specification of EUT

Technical Specification	Value
Operating Frequencies	2404 ~ 2479MHz
Channel Spacing	1 MHz
Channel number	76
Operation Voltage	20V
Modulation	FSK
Antenna gain	0.5 dBi

3.3 Independent Operation Modes

Basic operation modes are:

- A. Transmitting
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. Receiving
- C. Standby
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB SPI interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed in section 3.3 as appropriate.

The samples were used as follows:

Conducted: A000207643-002

Radiation: A000207643-002

Full test was applied on all test modes, but only worst case was shown

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:


Kind of Equipment	Manufacturer	Model Name	S/N
Laptop	HP	HSTNN-Q78C-3	CNF0339QBM

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

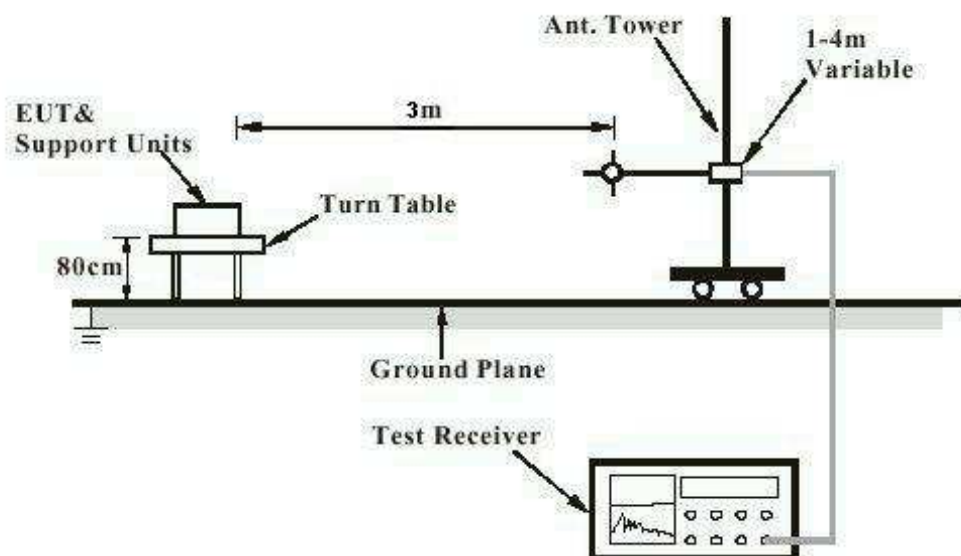

Note: Measurements above 1 GHz are done with a table height of 1.5m

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)


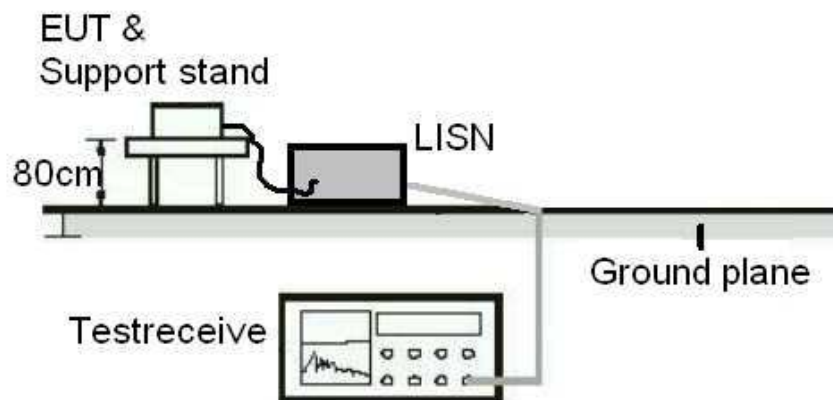


Diagram of Measurement Equipment Configuration for Conducted Transmitter Measurement

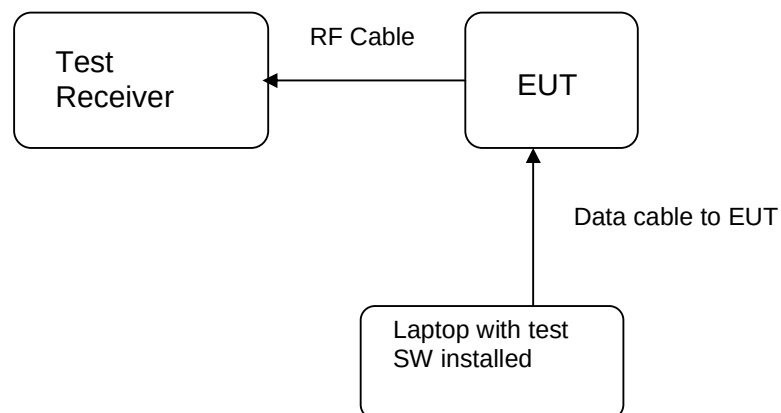

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Passed**

Test standard	:	LP0002(2011): 2.2, 3.10.1, (3) FCC Part 15.247(b)(4), Part 15.203 and RSS- Gen 8.3
Requirement	:	use of approved antennas only with directional gains that do not exceed 6 dBi

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 0.5 dBi. The antenna is a printed PCB trace with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

5.1.2 Peak Output Power

RESULT:

Passed

Test standard : LP0002(2011): 3.10.1, (2)
 FCC Part 15.247(b)(3), RSS-210 A8.4(4)
 Basic standard : ANSI C63.10:2013, KDB558074
 Limit : 1 Watt
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A

 Ambient temperature : 20-24 °C
 Relative humidity : 50-65 %
 Atmospheric pressure : 100-103 kPa


Table 6: Test result of Peak Output Power

Channel	Channel Frequency (MHz)	Output Power		Limit
		(dBm)	(W)	(W)
Low Channel	2404.5	2.23	0.0017	1
Middle Channel	2444.5	3.30	0.0021	1
High Channel	2479.5	2.74	0.0019	1


Pmax: 2.137 mW

Test Plot of Output Power


Low Channel

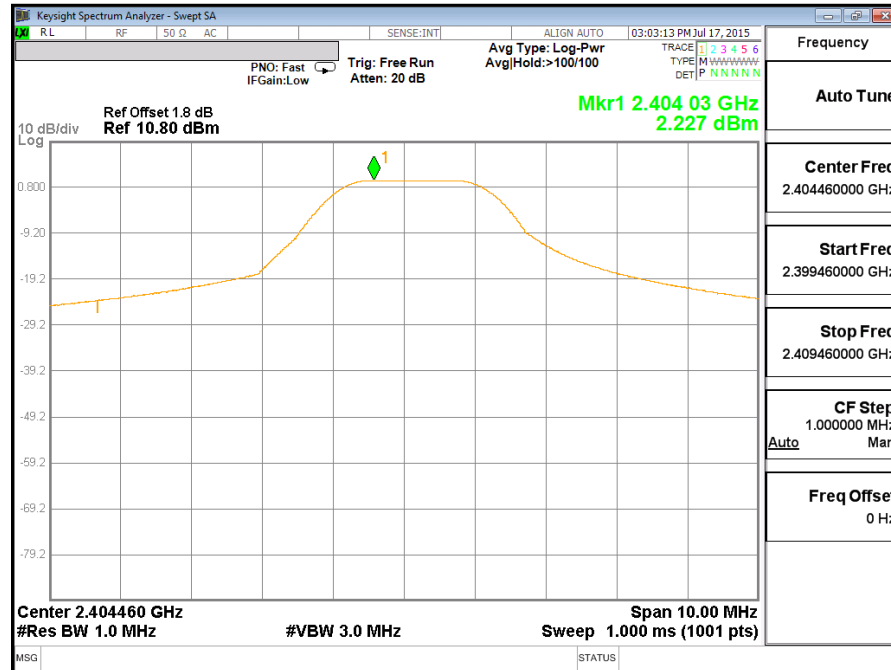

Middle Channel

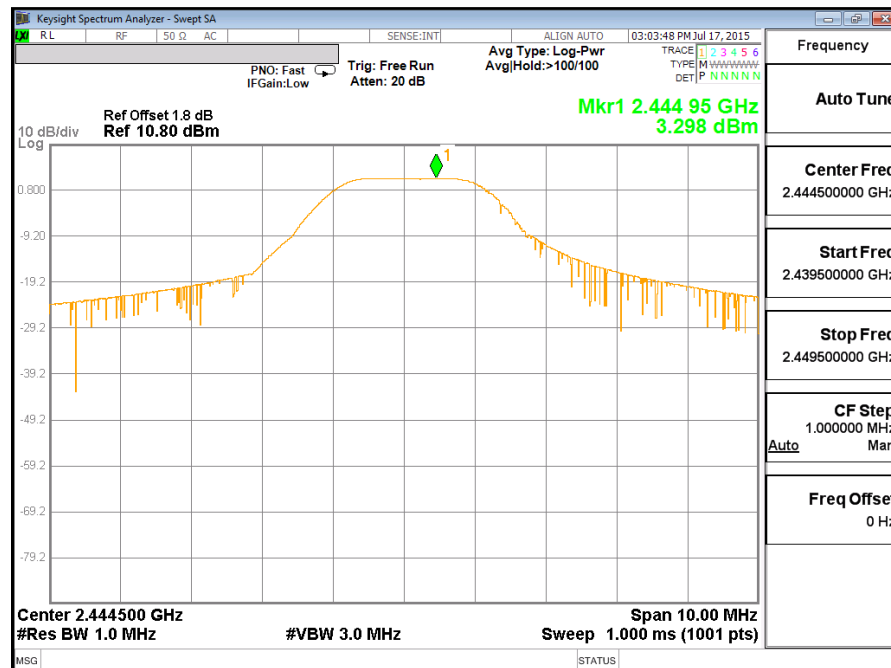

High Channel

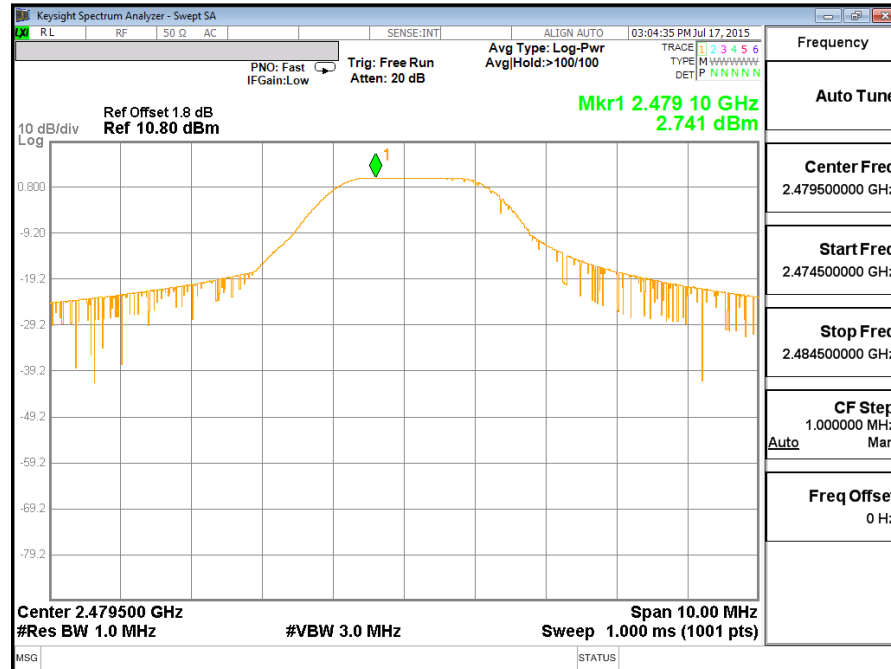

5.1.3 6dB Bandwidth and 99% Bandwidth**RESULT:****Passed**

Test standard : LP0002(2011): 3.10.1, (5)
FCC Part 15.247(a)(2), RSS-247 5.2(1)
Basic standard : ANSI C63.10:2013, KDB558074
Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A

Ambient temperature : 20-24°C
Relative humidity : 50-65%
Atmospheric pressure : 100-103 kPa

Table 7: Test result of 6dB Bandwidth


Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2404.5	984.6	>500	Pass
Mid Channel	2444.5	965.1	>500	Pass
High Channel	2479.5	983	>500	Pass

Table 8: Test result of 99% Bandwidth, GFSK modulation


Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2404.5	2.0641
Mid Channel	2444.5	2.0832
High Channel	2479.5	2.0723

Test Plot of 6dB Bandwidth


Low Channel

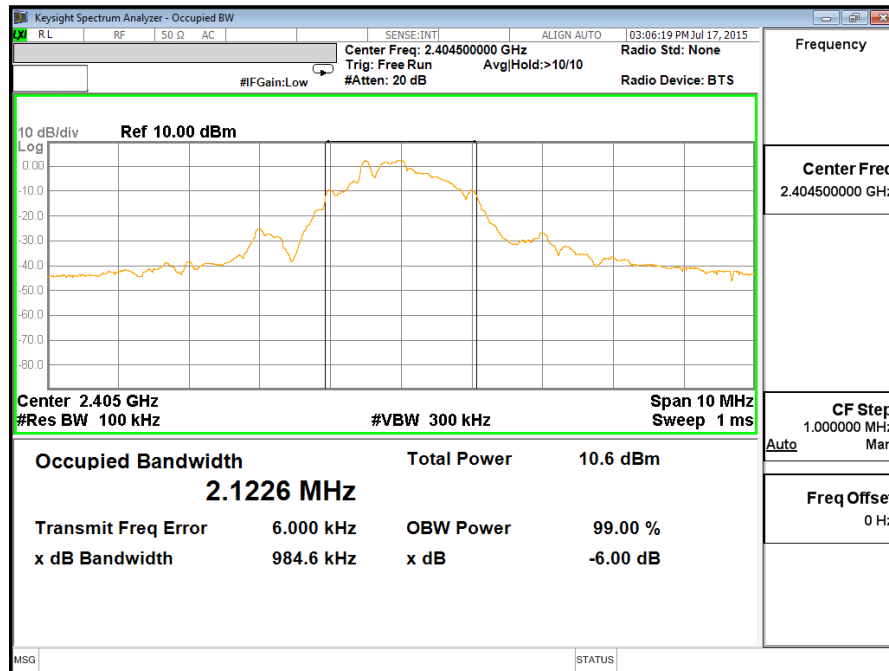

Middle Channel

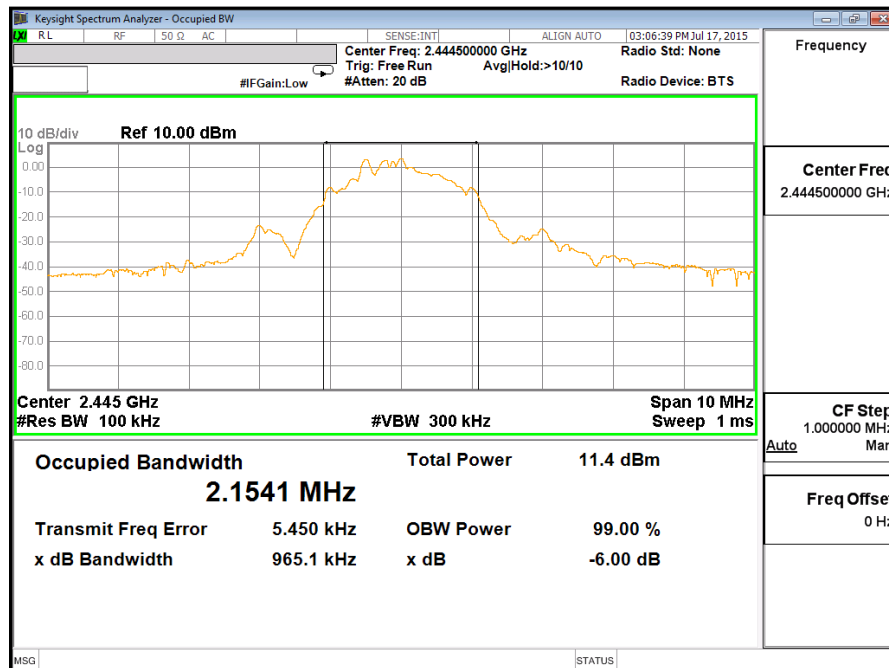


High Channel

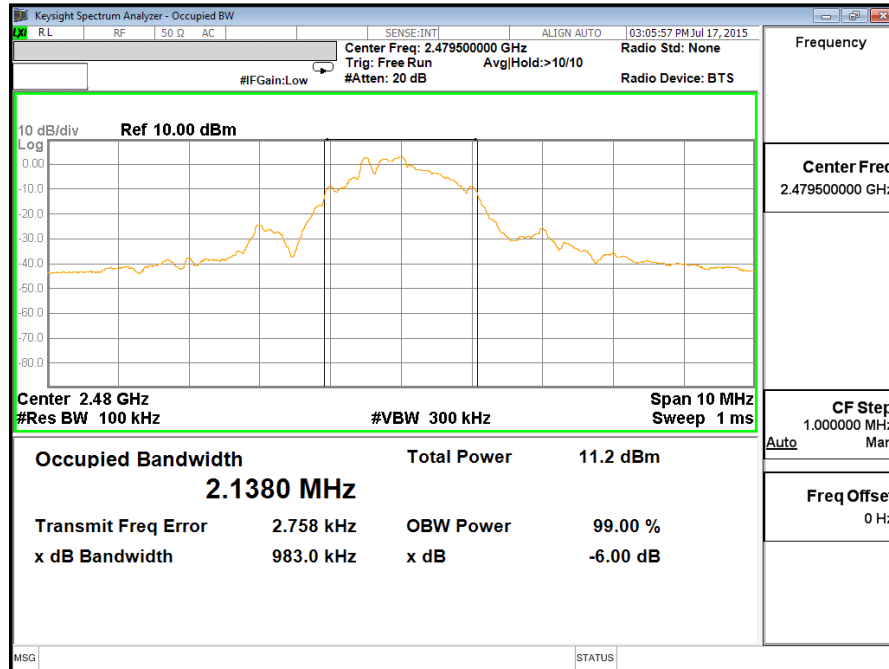


Test Plot of 99% Bandwidth


Low Channel

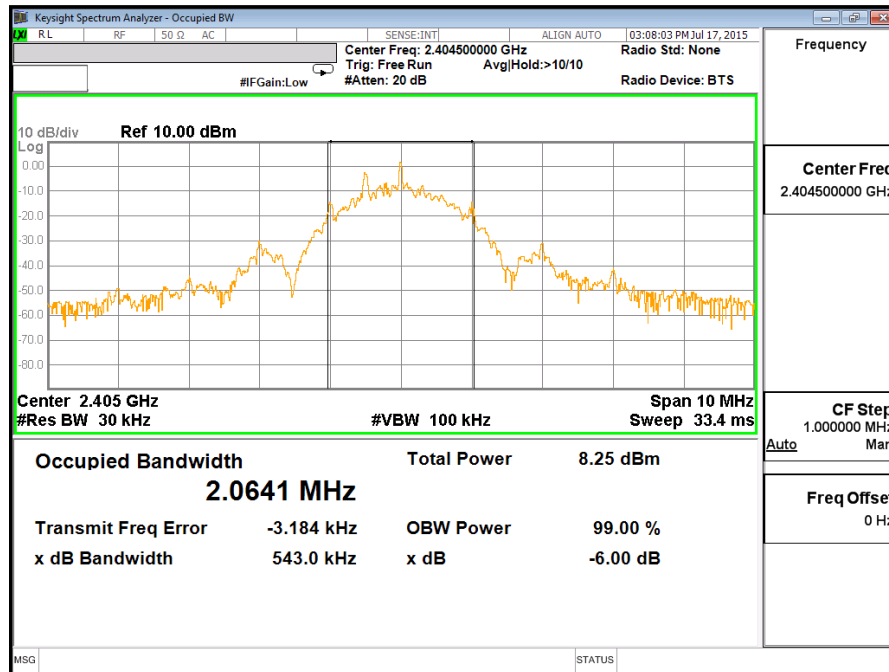

Middle Channel

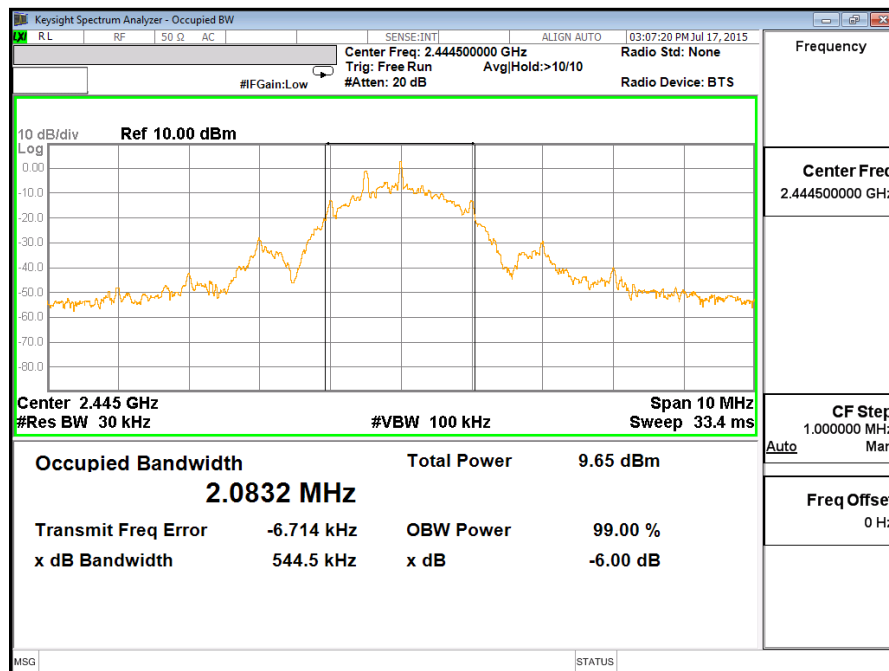

High Channel

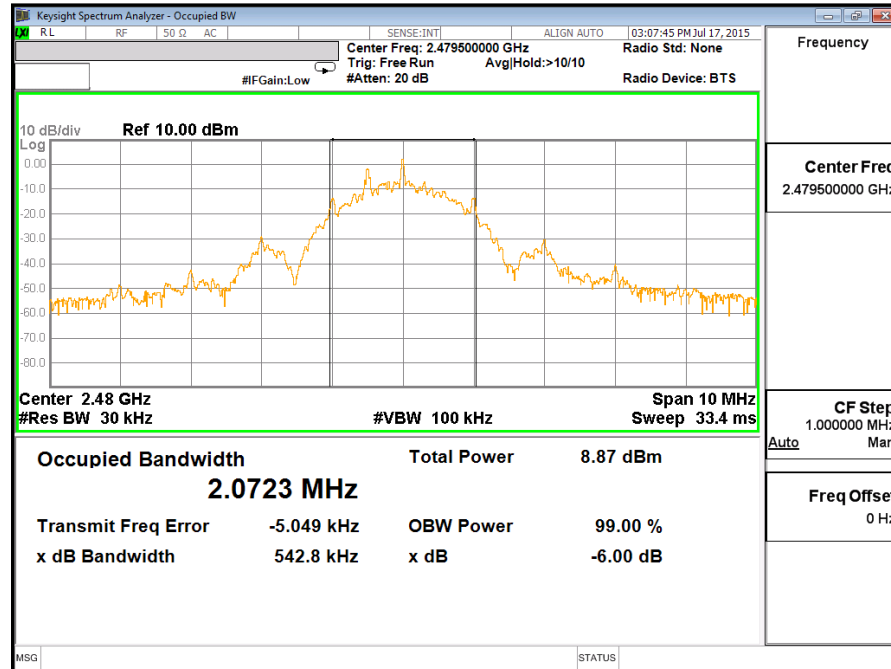

5.1.4 Power Density

RESULT:**Passed**

Test standard : LP0002(2011): 3.10.1, (6.2.2)
FCC Part 15.247(e) , RSS-247 5.2(2)
Basic standard : ANSI C63.10:2013, KDB558074
Kind of test site : Shielded room

Test setup


Test Channel : Low/ Middle/ High
Operation Mode : A
Ambient temperature : 20-24°C
Relative humidity : 50-65%
Atmospheric pressure : 100-103 kPa

Table 9: Test result of Power Density


Channel	Channel Frequency (MHz)	Power Density	Limit
		(dBm)	(dBm)
Low Channel	2404.5	-8.53	8
Middle Channel	2444.5	-7.49	8
High Channel	2479.5	-8.45	8


Test Plot of Power Density

Low Channel

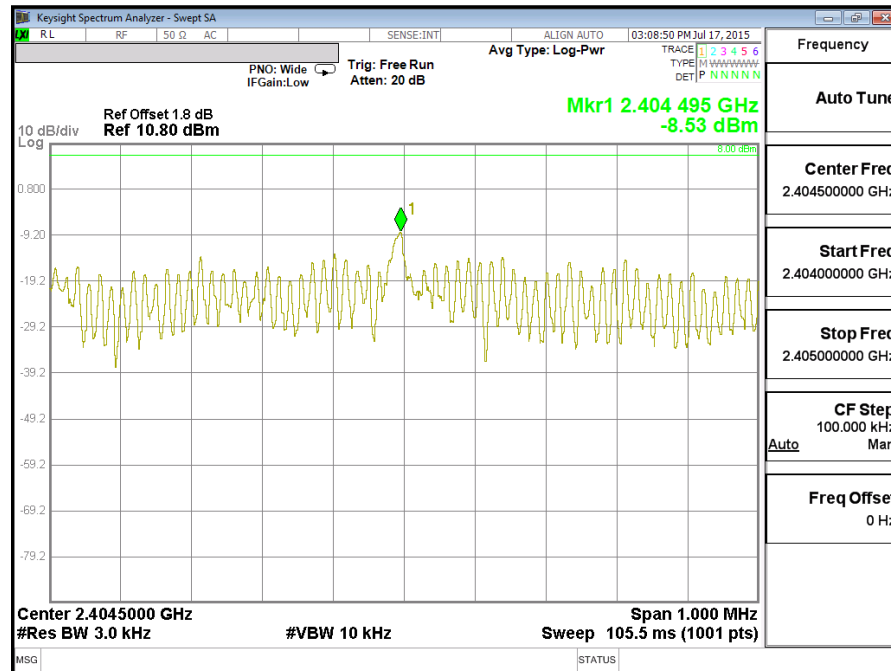

Middle Channel

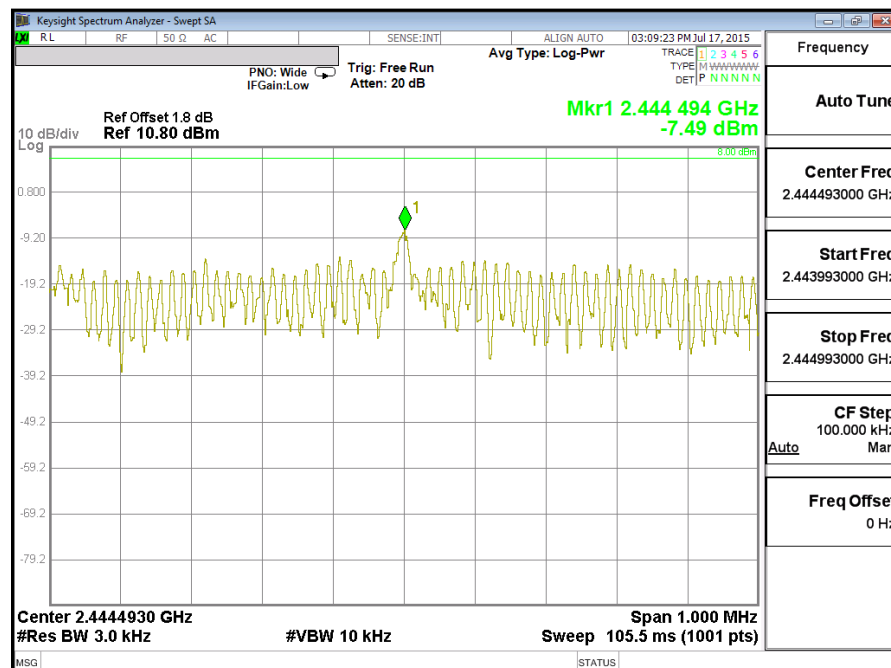

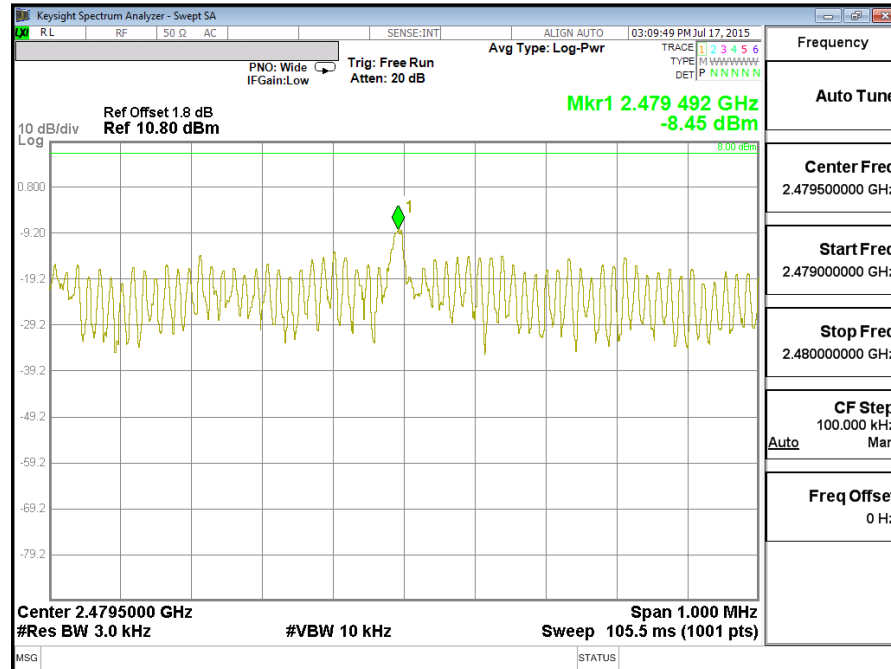

**5.1.5 Conducted spurious emissions and Frequency Band Edge
measured in 100kHz Bandwidth****RESULT:****Passed**

Test standard	:	LP0002(2011): 3.10.1, (5)
	:	FCC part 15.247(d), RSS-247 5.5
Basic standard	:	ANSI C63.10:2013, KDB558074
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power)
Kind of test site	:	Shielded room

Test setup


Test Channel	:	Low/ High
Operation mode	:	A
Ambient temperature	:	20-24°C
Relative humidity	:	50-65%
Atmospheric pressure	:	100-103 kPa

All emissions are more than 20dB below fundamental, details refer to following test plot, and compliance is achieved as well.


Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

Test Plot 100kHz Conducted Emissions


Low Channel

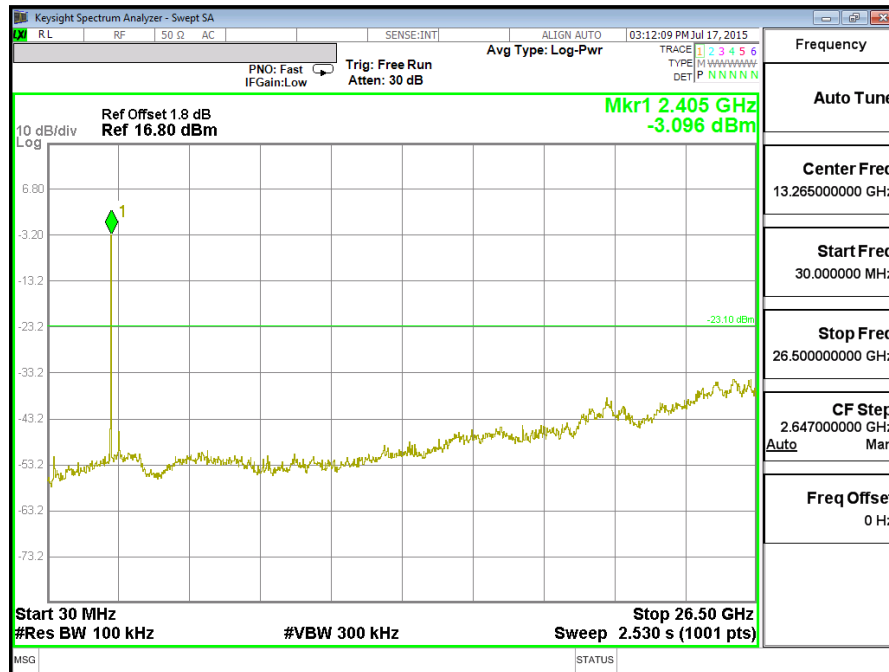

Middle Channel

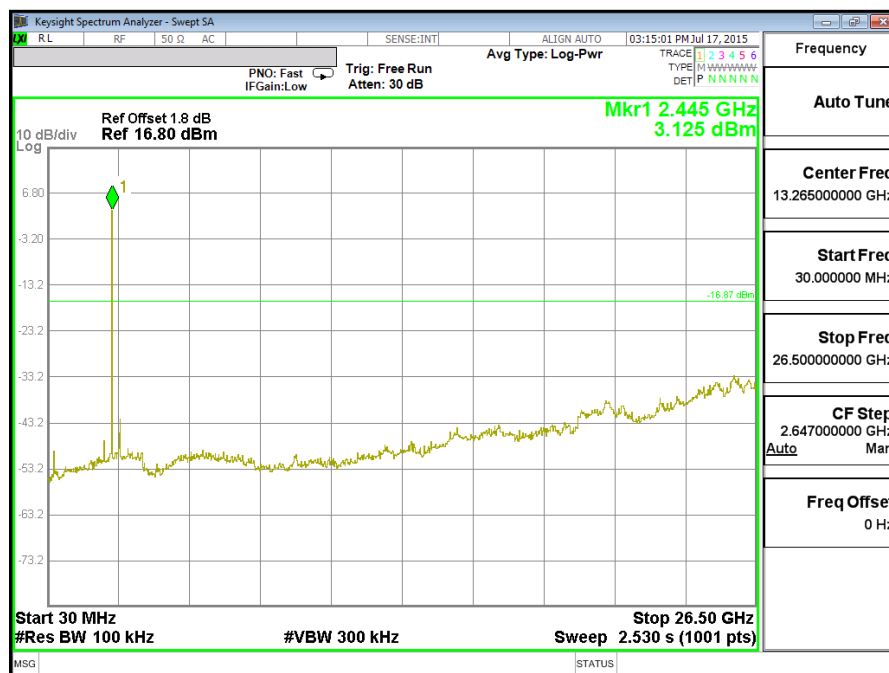


High Channel

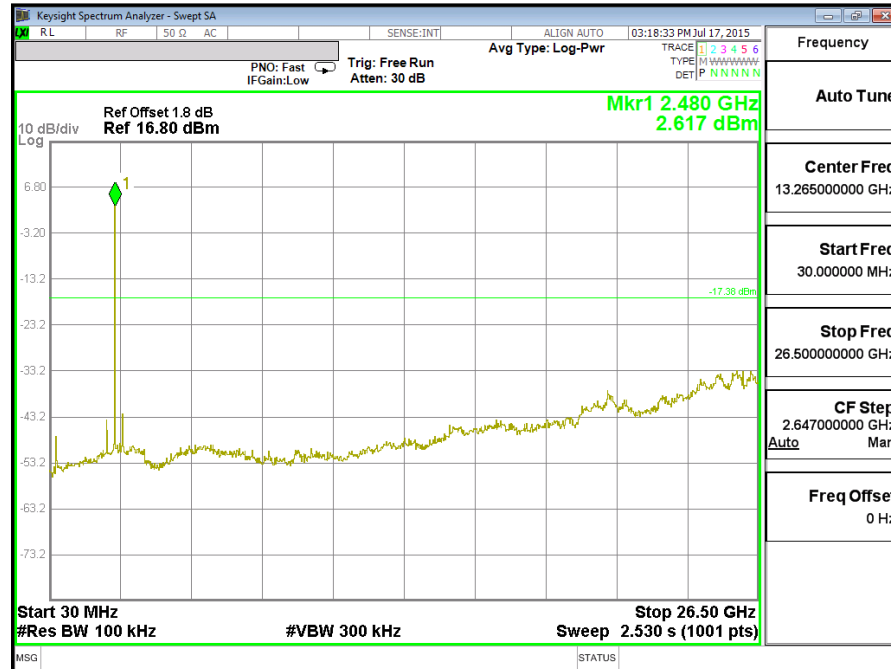


Test Plot 100kHz RBW of Band Edge

Low Channel

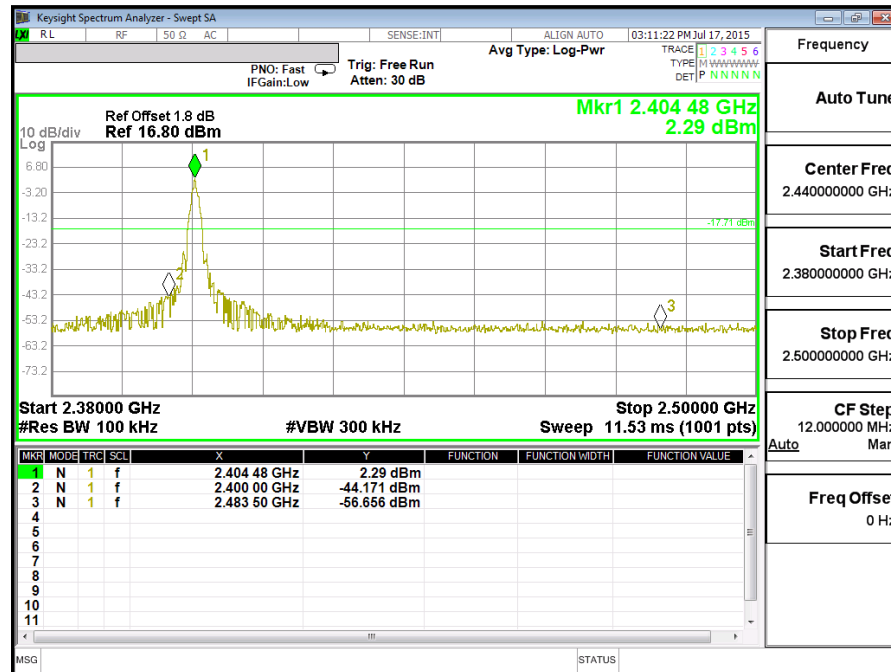

High Channel

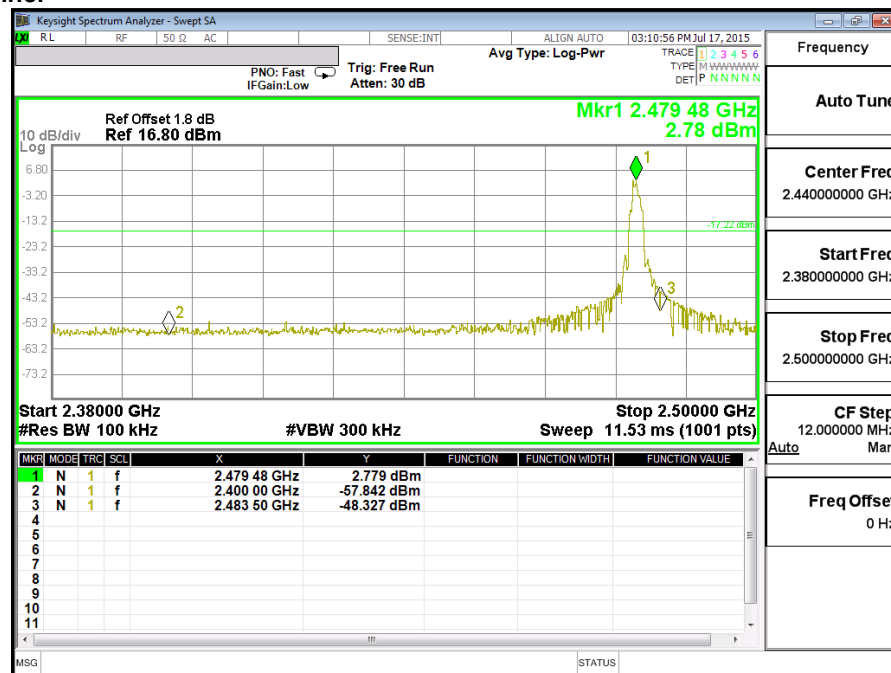

5.1.6 Spurious Emission

RESULT:**Passed**

Test standard	:	FCC part 15.247(d), FCC 15.205, FCC 15.209, RSS-210 2.2, RSS-247 5.5 and RSS-Gen 8.9 LP0002(2011): 3.10.1, (5)
Basic standard	:	ANSI C63.10: 2009
Limits	:	Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) and RSS-Gen i4, 8.9 (Table 6), must comply with the radiated emission limits specified in FCC 15.209(a) and RSS-Gen i4, 8.9 (Table 4 and 5). Radiated emissions which fall in the restricted bands, as defined in LP0002(2011): 2.7, must comply with the radiated emission limits specified in LP0002(2011): 2.8 Emission radiated outside the specified frequency bands must comply with the radiated emission limits specified in FCC 15.209(a) and FCC 15.249(a), RSS-Gen i4, 8.9 (Table 4 and 5) and RSS-210 A2.9(a). Emission radiated outside the specified frequency bands must comply with the radiated emission limits specified in LP0002(2011): 2.8
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A, B

Remark: Testing was carried out within frequency range 30MHz to the tenth harmonic.

For details refer to Appendix D.

Testing was carried out within frequency range 30MHz to the tenth harmonic. For details refer to Appendix D. The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report. Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

5.2 Mains Emissions

5.2.1 Mains Conducted Emissions

RESULT:**Passed**

Test standard	:	FCC Part 15.207 FCC Part 15.107 RSS-Gen 8.8 LP0002: 2.3
Limits	:	Mains Conducted emissions as defined in above test standards must comply with the mains conducted emission limits specified
Kind of test site	:	Shielded Room

Test setup

Test Channel	:	Middle
Operation mode	:	A

Remark: For details refer to Appendix D.

6. Safety Human exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:**Passed**


Test standard : FCC KDB Publication 447498 D01 v05

The maximum peak output power of the transmitter is 2.137 mW.
The separation between hand and antenna is more than 2mm.


Hence the EUT is excluded from SAR evaluation.
Please also refer to FCC KDB publication 447498 D01 v05: Mobile Portable RF Exposure

7. Photographs of the Test Set-Up


Photograph 1: Set-up for Spurious Emissions (Front View)

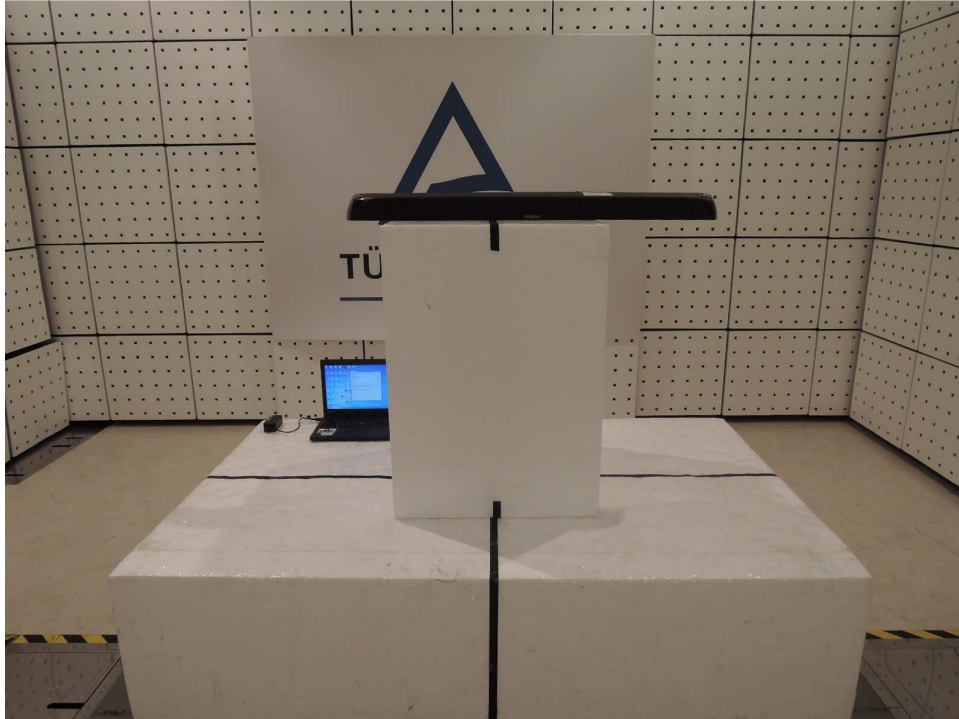

Photograph 2: Set-up for Spurious Emissions (Back View 1)

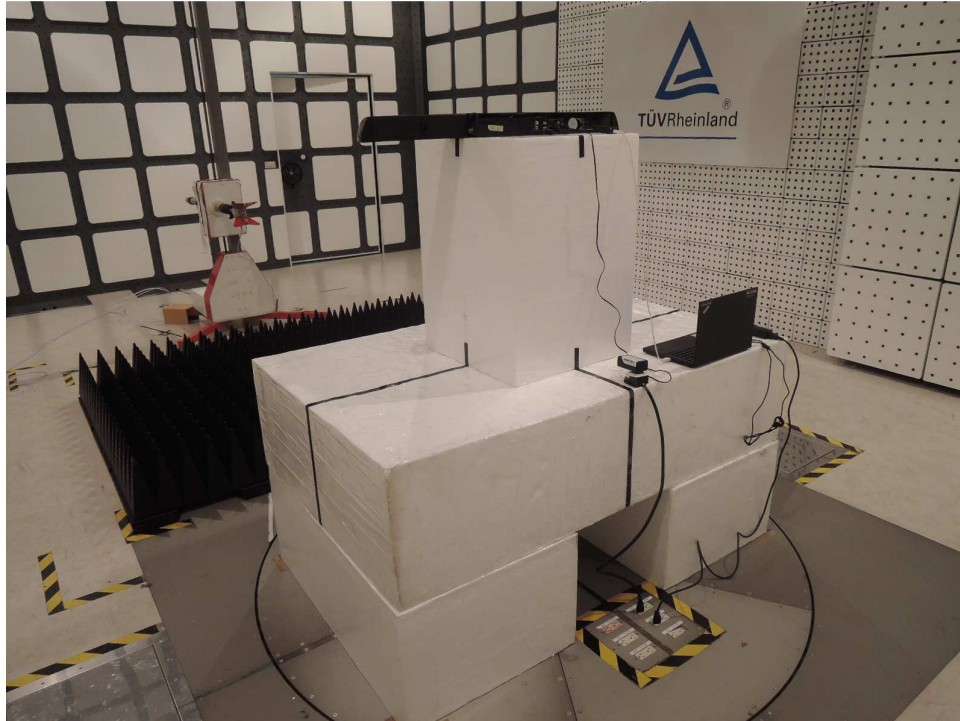


Photograph 3: Set-up for Spurious Emissions (Back View 2)

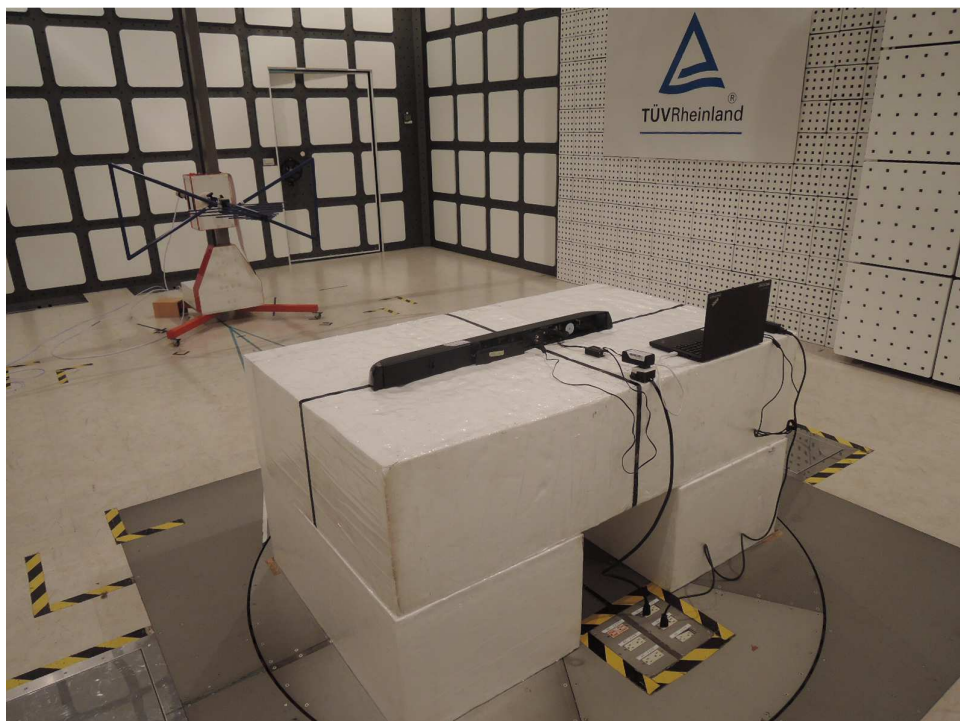

Photograph 4: Set-up for Conducted testing



Photograph 5: Set-up for for Mains Conducted testing Back

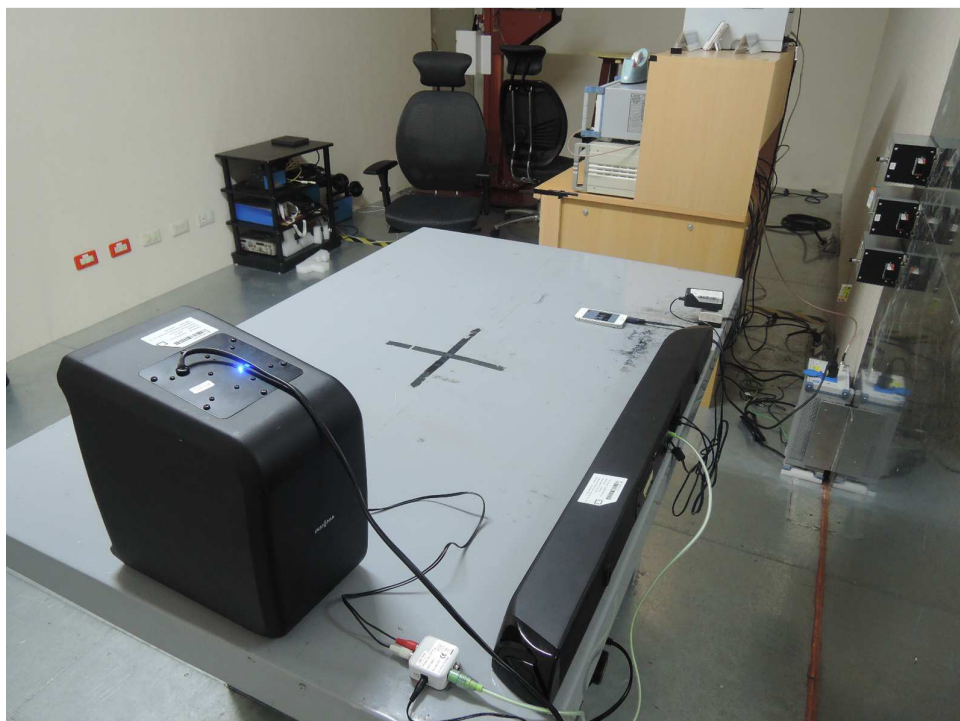

Photograph 6: Set-up for for Mains Conducted testing Front



8. List of Tables

Table 1: Applied Standard and Test Levels	4
Table 2: List of Test and Measurement Equipment	6
Table 3: Emission Measurement Uncertainty.....	7
Table 4: Basic Information of EUT	8
Table 5: Technical Specification of EUT	8
Table 6: Test result of Peak Output Power	14
Table 7: Test result of 6dB Bandwidth	17
Table 8: Test result of 99% Bandwidth, GFSK modulation	17
Table 8: Test result of Power Density	22

9. List of Photographs

Photograph 1: Set-up for Spurious Emissions (Front View).....	32
Photograph 2: Set-up for Spurious Emissions (Back View 1)	33
Photograph 3: Set-up for Spurious Emissions (Back View 2)	33
Photograph 4: Set-up for Conducted testing	34
Photograph 5: Set-up for for Mains Conducted testing Back	34
Photograph 6: Set-up for for Mains Conducted testing Front.....	35